



(11) **EP 1 977 106 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**30.09.2009 Bulletin 2009/40**

(21) Application number: **06742569.4**

(22) Date of filing: **12.04.2006**

(51) Int Cl.:  
**F02M 59/10** (2006.01) **F02M 63/00** (2006.01)  
**F01L 1/38** (2006.01) **F01L 9/02** (2006.01)  
**F01M 1/02** (2006.01) **F02M 55/02** (2006.01)  
**F02M 39/00** (2006.01) **F02M 41/04** (2006.01)

(86) International application number:  
**PCT/EP2006/003367**

(87) International publication number:  
**WO 2007/115580 (18.10.2007 Gazette 2007/42)**

(54) **LARGE UNIFLOW TWO-STROKE DIESEL ENGINE OF THE CROSSHEAD TYPE**

GROSSER ZWEITAKT-KREUZKOPF-DIESELMOTOR VOM GLEICHSTROMTYP

GROS MOTEUR DIESEL DEUX TEMPS A BALAYAGE CONTINU ET A CROSSE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI  
SK TR**

(43) Date of publication of application:  
**08.10.2008 Bulletin 2008/41**

(60) Divisional application:  
**09002173.4 / 2 071 177**

(73) Proprietor: **MAN B & W Diesel A/S  
2450 Copenhagen SV (DK)**

(72) Inventors:  
• **CHRISTENSEN, Henrik, Willads, Houmann  
DK-2860 Søborg (DK)**

• **RASMUSSEN, Niels, Hvidtfeldt  
DK-2300 Copenhagen S (DK)**  
• **FLARUP, Johannes  
DK-2720 Vanløse (DK)**

(74) Representative: **Nordic Patent Service  
Pilestræde 58  
1112 Copenhagen K (DK)**

(56) References cited:  
**EP-A1- 0 909 883 WO-A-20/04013487**  
**FR-A- 2 496 170 GB-A- 1 503 096**  
**JP-A- 11 241 660 JP-A- 59 020 560**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### FIELD OF THE INVENTION

**[0001]** The present invention relates to large slow running uniflow two-stroke diesel engines of the crosshead type, and in particular to the engine components that relate to fuel injection and the activation of the exhaust valves.

Such engines are known from documents EP 909 883 A1 and FR 2 496 170 A.

### BACKGROUND OF THE INVENTION

**[0002]** Large two-stroke diesel engines of the crosshead type are typically used for marine propulsion and as prime movers in power plants. Not only due to sheer size, these combustion engines are constructed differently from any other combustion engines. The two stroke principle and the use of heavy fuel oil with a viscosity up to 700cSt at 50°C (the oil does not flow at room temperatures) make them a class of their own in the engine world.

**[0003]** In many conventional engines of this type exhaust gas valves and the fuel injection system are driven with a rotating cam coupled directly to the engine crankshaft. Two-stroke engines use scavenge ports to control the inlet of air into the cylinders, and consequently the inlet timing is rigidly linked to crank angle.

Fuel consumption, reliability and power output requirements for this type of engine are extremely high. In the recent past, environmental requirements have lead to a demand for a reduction in exhaust gas emissions. In order to fulfill these sometimes contradicting requirements it was considered necessary to have flexible control over the fuel injection timing and dosage as well as full and flexible control over the opening and closing timing and the degree of opening of the exhaust valves as opposed to the conventional rotating cam driven exhaust valves and fuel injectors.

**[0004]** A large uniflow two-stroke diesel engine of the crosshead type is known in the form of the MC-C engine series of MAN B&W Diesel®. This engine is provided with a camshaft that extends in a camshaft housing along the length of the engine. The camshaft is provided with cams for fuel injection and with cams for exhaust valve actuation.

**[0005]** There is one fuel cam for each cylinder on the camshaft. Each fuel cam acts on a fuel pump of the piston type (one piston pump for each cylinder) with a variable displacement for regulation of the amount of fuel injected in each engine cycle. The outlet of the piston pumps is connected via a high-pressure conduit to the inlet of the injectors associated with the cylinder concerned. Rate shaping (e.g. the profile and timing of the amount or pressure of the fuel injected over a period of time in the engine cycle) is only possible via the cam profile and the characteristics of the injector, both of which cannot be readily

changed after the engine has been constructed.

**[0006]** There is one exhaust cam for each cylinder on the camshaft. The exhaust cams act on a so-called "hydraulic push rod". The opening profile of the exhaust valve, e.g. the timing of opening of the exhaust valve, the timing of closing the exhaust valve and the extend of opening the exhaust valve are all fixed during construction of the engine and cannot be readily changed thereafter.

**[0007]** The emission requirements applying to large two-stroke diesel engines that are operated in oceangoing vessels are determined by an international organization named IMO. Furthermore, local authorities may state local demands. These emission requirements are steadily becoming more restrictive, not always in a fully predictable manner. The tolerated emission levels may depend on the distance to shore. Thus the engine can be allowed to do operate with higher emission levels at open sea as compared to coastline operation.

**[0008]** In order to be able to meet present and future emission levels, electronically controlled engines were developed during the 80s and 90s of the 20th century.

**[0009]** The ME engine range by MAN B&W Diesel A/S® are large two stroke diesel engines of the crosshead type with electro-hydraulically controlled exhaust valves and electro-hydraulically activated fuel injection. The hydraulic system is operated with oil from the engine lubrication system. The lubrication oil system is operated with a 3 to 4 bar low pressure pump. Another pump of a high pressure type delivers lubrication oil at about 200 bar to a common rail. The lubrication oil from the common rail is directed via a hydraulic valve to a fuel oil booster that boosts the 200 bar pressure in the common rail up to the required 800 to 1000 bar in the fuel line. The fuel line is heated to ensure that the fuel oil can flow and has the appropriate viscosity. The lubrication oil from the common rail is directed via a timing valve to a hydraulic exhaust valve actuator to operate the exhaust valve.

**[0010]** The fuel system uses a hydraulic fluid, which is in this engine identical with the lubrication oil, from a hydraulic power system to drive pressure boosters that provide high high-pressure fuel (heavy fuel oil) to the injectors. One pressure booster is provided per cylinder. The high pressure side of the pressure booster pressurizes the fuel to the required level of approximately 80.0 to 1000 Bar. The electronically controlled hydraulic proportional valves allow for a rate shaping and timing of the injected fuel. Changing the rate shaping and timing is therefore very easy also long after the engine has been constructed and may even be applied during engine operation directly in response to changing conditions, such as load or running speed.

**[0011]** A hydraulic cylinder type actuator is mounted on each of the exhaust valves and provided with high-pressure hydraulic medium from a high-pressure hydraulic supply system via an electronic controlled valve. The exhaust valve is urged in the closing direction by a gas spring. The timing of the opening movement of the ex-

haust valve and the closing movement of the exhaust valve as well as the extend of the opening of the exhaust valve can be controlled with the electronic controlled valve. Changing the exhaust valve timing and opening extend is therefore very easy also long after the engine is being constructed.

**[0012]** Both the fuel injection and the exhaust valve actuation are controlled by a programmable controller with suitable software.

**[0013]** The electronically controlled type of engine has therefore a greater amount of freedom in its settings which renders it easier to meet the many and often contradicting requirements that are posed on an engine. Operators of these engines require a high specific output, high fuel efficiency and high reliability at low construction costs. Emission requirements often limit the maximum combustion pressures and temperatures and other aspects that increase fuel efficiency and power output. This makes the task to determine the optimum operating settings for such an engine very demanding for the engineers that develop this type of engines. The increased freedom in the engine settings, and the increased flexibility of changing these engine settings during the operation of the engine or during the lifetime of the engine gives the electronically controlled engine a significant advantage over the camshaft engine.

**[0014]** However, the installation costs of the electronically controlled fuel injection and exhaust valve actuation are relatively high, and relatively independent of the engine size. This means that the costs for these components does not follow the usual pattern of increasing cost with increasing engine size that is typical for most of the other components of these engines. In practice this means that the very largest of these engines with a piston diameter of more than approximately 90 cm are less expensive to construct with electronically controlled fuel injection and exhaust system, whilst the smaller of these engines with a piston diameter below approximately 60 cm are significantly more expensive when they are fitted with a electronic fuel injection and exhaust valve actuating system as opposed to a camshaft operated model.

**[0015]** A competitive and low production cost for the smaller bore engines is of paramount importance to their success on the market. Thus, there is a desire for large two-stroke diesel engines with a piston diameter below approximately 60 cm that provide the necessary freedom and flexibility in operation settings for meeting the requirements in output, fuel consumption, reliability and emission restrictions at a cost level that is competitive with conventional camshaft engines.

**[0016]** In this respect, there is also a need for reducing the costs and complexity as well as improving the reliability of the hydraulic systems that are associated with electronic fuel control systems for large two-stroke diesel engines.

## DISCLOSURE OF THE INVENTION

**[0017]** On this background, it is an object of the present invention to provide a large uniflow two-stroke diesel engine of the crosshead type that can fulfill the above indicated desire.

**[0018]** This object is achieved in accordance with claim 1 by providing a large uniflow two-stroke diesel engine of the crosshead type comprising a plurality of cylinders with at least one exhaust valve per cylinder, one or more fuel injectors per cylinder, a source of high pressure fluid, a volume of said high pressure fluid in which potential energy is accumulated by compression and/or an accumulator in which potential energy is accumulated by compression, at least one electronically controlled hydraulic valve, wherein the fuel injection is primarily driven by said accumulated potential energy and the fuel injection is controlled by said at least one hydraulic valve, said engine further comprises at least one camshaft provided with cams for actuation of the at least one exhaust valve associated with each of the cylinders, hydraulic piston pumps, said hydraulic piston pumps being driven by respective cams on said camshaft, a hydraulic actuator per exhaust valve for moving said exhaust valve in the opening direction, a hydraulic conduit per exhaust valve for connecting the hydraulic piston pumps with the hydraulic actuators, and a resilient member per exhaust valve for urging the exhaust valve in the closing direction.

**[0019]** The inventors of the present application have realized that the advantages of the electronically controlled engine are biased towards the fuel injection aspect. Electronic fuel injection offers a great amount of flexibility for determining the optimum operating parameters for the engine, also in view of fulfilling present emission requirements and being flexible with respect to future emission requirements that an engine may need to comply with during a later stage of its lifetime. Separating the hydraulic pressure from the exhaust valve actuating system makes selection of the fuel injection pressure more free, thereby improving the possibilities for obtaining the ideal injection pressure under all circumstances. Further, the presently available electronically controlled exhaust valve actuating systems use a substantial amount of hydraulic power, thereby deteriorating the overall fuel efficiency of the engine.

**[0020]** Due to the exhaust valves being camshaft operated, the overall hydraulic power need is reduced when compared with engines with electronically controlled injection and valve actuation. This makes it possible to cover the hydraulic power needs with smaller pumps that are available as industrial standard in the form of electric driven pumps. Such electrically driven pumps represent a significant cost down when compared to the installation costs for large hydraulic pumps that are driven by power take off from the crankshaft of the engine.

**[0021]** Preferably, the high pressure fluid is a medium different from the fuel, and separated from the fuel. In this case, the high pressure fluid and the fuel are separated.

rated by at least one piston device per cylinder, and said high pressure fluid displaces during the fuel injection said piston device and said piston device in turn displaces the fuel into the combustion chamber inside the cylinder concerned.

**[0022]** The piston device can be a pressure booster and said piston device preferably comprises a piston with a large effective area facing the high-pressure hydraulic fluid and a small effective area facing the fuel. This allows the use of a hydraulic medium which is operated at a pressure that is significantly lower than the injection pressure.

**[0023]** Preferably, the volume of high pressure fluid is contained in a feed conduit that extends along the length of the engine. The feed conduit may include a plurality of compression chambers distributed along the length of the engine; said compression chambers are provided with an enlarged volume for said a high-pressure hydraulic fluid in order to enable a substantial amount of potential energy to be accumulated by compression of the hydraulic fluid itself. With this feature, the use of membrane type accumulators can be avoided, which is an advantage since membrane type of accumulators tend to be prone to failures.

**[0024]** Preferably, one compression chamber is provided for supplying one pair of neighboring cylinders with high-pressure hydraulic fluid.

**[0025]** The engine comprises a camshaft housing, in which the camshaft and said feed conduit are received. Thus, the feed conduit is accommodated in a place where it is shielded from damage and the camshaft housing protects persons in the vicinity of the feed conduit from the dangers of a bursting feed conduit filled with high-pressure fluid.

**[0026]** Preferably, the compression chambers are at least partially disposed inside said camshaft housing. Thus, the compression chambers do not clutter the engine.

**[0027]** The compression chambers may share at least one wall with said camshaft housing, so that the amount of material for the construction of the engine is reduced.

**[0028]** Preferably, the compression chambers are formed by machining a recess in a solid block of metal, in order to ensure that the compression chambers can resist the high and fluctuating pressure to which they are exposed during their lifetime.

**[0029]** The source of high pressure fluid may be one or more electrically driven high pressure pumps. The use of electrically driven high pressure pumps facilitates the engine start, since there will be no need for separate startup pumps for the fuel system.

**[0030]** Preferably, one hydraulic valve controls the fuel injection to two or more engine cylinders. Thus, the number of electronically controlled hydraulic valves that are needed to build the engine is reduced. This reduction of required control capacity is especially relevant for smaller engines sensitive to size independent cost.

**[0031]** According to a preferred embodiment the high-

pressure hydraulic fluid is the fuel. In this embodiment, the volume of high-pressure hydraulic fluid is preferably contained in a common rail.

**[0032]** The hydraulic valves that are used to control the injection are preferably proportional valves. The hydraulic valves are controlled by said one or more computers. The one or more computers are configured to adapt timing and/or rate shape of the fuel injection to the operating conditions of the engine. This feature renders it easier to optimize engine performance with respect to power output, reliability, responsiveness and emissions.

**[0033]** The one or more computers may be configured to advance the timing of the fuel injection when the engine load is decreasing. Thus, the maximum combustion pressure can be maintained at a high level during low load conditions.

**[0034]** Preferably, the rate of fuel injection can be modulated during the fuel injection in order to obtain a desired injection profile. This feature allows for increased freedom in the engine settings and thereby renders it easier to optimize engine performance with respect to power output, reliability, responsiveness and emissions.

**[0035]** The engine may further comprise a cylinder lubrication system that is also controlled by said one or more computers. In this case; the high pressure hydraulic fluid may also power said cylinder lubrication system. An electronically controlled cylinder lubrication system allows quick adaptation to changes in the fuel quality used. Thereby, a substantial amount of cylinder oil, which poses the second largest variable operating cost after the fuel consumption, can be saved when the engine is operating on a higher quality fuels (e.g. fuels with a low sulfur content).

**[0036]** Preferably, the high-pressure conduits that connect the hydraulic piston pump to the valve actuator can be depressurized by electronically controlled valve means for allowing the exhaust valve to commence its return stroke in advance of the return stroke timing as defined by the respective cam on the camshaft. Thus, some flexibility in exhaust valve actuation is obtained, rendering, thereby increasing the amount of freedom in engine operation settings.

**[0037]** Preferably, the high-pressure conduits that connect the hydraulic piston pump to the valve actuator can be selectively obstructed by electronic valve means for delaying the return stroke until after the return stroke timing as defined by the respective cam on the camshaft. Thus, some flexibility in exhaust valve actuation is obtained, thereby increasing the amount of freedom in engine operation settings. The one or more computers may be configured to control the advanced or delayed timing of the closing of the exhaust valve in relation to the operating conditions of the engine.

**[0038]** The camshaft can be provided with a mechanism for adjusting its angular position relative to the angular position of the crankshaft, said mechanism preferably being controlled by said one of more computers to vary the timing of the opening and closing of the exhaust

valves. Thus, some flexibility in exhaust valve actuation is obtained, rendering, thereby increasing the amount of freedom in engine operation settings.

**[0039]** Further objects, features, advantages and properties of the large uniflow two-stroke diesel engine of the crosshead type according to the invention will become apparent from the detailed description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0040]** In the following detailed portion of the present description, the invention will be explained in more detail with reference to the exemplary embodiments shown in the drawings, in which:

Fig. 1 is a cross-sectional view of an engine according to the present invention as viewed from the front of the engine,

Fig. 2 cross-sectional view of one cylinder section of the engine shown in Fig. 1 viewed from the side of the engine,

Fig. 3 is a view on a detail of Fig. 1,

Fig. 4 is a view on a detail of Fig. 2,

Fig. 5 is an elevated perspective view on the engine of Fig. 1,

Fig. 6 is a detail of Fig. 5,

Fig. 7 shows a cross sectional detail of the exhaust valve actuating system of the engine of Fig. 1 at a first position along the camshaft,

Fig. 7A shows a cross sectional detail of the valve actuating system of the engine of Fig. 1 at a second position along the camshaft,

Fig. 7B is a cross sectional view through the camshaft housing in a plane that is parallel with the longitudinal axis of the camshaft,

Fig. 7C is a perspective view on a detail of the camshaft housing,

Fig. 8 is a diagrammatic representation of the fuel injection system and the valve actuating system of the engine of Fig. 1,

Fig. 9 is a graph showing a rate shaping profile of the fuel injection of the engine according to Fig. 1,

Fig. 10 is an elevated perspective view on the engine of Fig. 1 in another embodiment,

Fig. 11 shows a detail of Fig. 10, and

Fig. 12 is a diagrammatic representation of the fuel injection system according to the embodiment of Fig. 10.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

**[0041]** Fig. 1 and 2 show an engine 1 according to a preferred embodiment of the invention in cross sectional view from the front and for one cylinder from the side of the engine. The engine 1 is a uniflow low-speed two-stroke crosshead diesel engine of the crosshead type, which may be a propulsion engine in a ship or a prime

mover in a power plant. These engines have typically from 3 up to 14 cylinders in line. The engine 1 is built up from a bedplate 2 with the main bearings for the crankshaft 3.

**[0042]** The crankshaft 3 is of the semi-built type. The semi-built type is made from forged or cast steel throws that are connected with the main journals by shrink fit connections.

**[0043]** The bedplate 2 can be made in one part or be divided into sections of suitable size in accordance with production facilities. The bedplate consists of high, welded, longitudinal girders and welded cross girders with cast steel bearing supports - alternatively the bedplate can be of cast design. The oil pan, which is integrated into the bedplate in the cast design, collects the return oil from the forced lubricating and cooling oil system.

**[0044]** The connecting rod 8 is made of forged or cast steel and provided with bearing caps (for the crosshead and crankpin bearings). The crosshead and crankpin bearing caps are secured to the connecting rod 8 by studs and nuts which are tightened by hydraulic jacks. The crosshead bearing 22 consists of a set of thin-walled steel shells, lined with bearing metal. The crankpin bearing is provided with thin-walled steel shells, lined with bearing metal. Lubrication oil is supplied through ducts (not visible in the Figs.) in the crosshead 22 and connecting rod 8.

**[0045]** The main bearings consist of thin walled steel shells lined with bearing metal. The bottom shell can, by means of special tools, and hydraulic tools for lifting the crankshaft, be rotated out and in. The shells are kept in position by a bearing cap (not shown).

**[0046]** A welded design A-shaped frame box 4 is mounted on the bedplate. The frame box can be of cast or welded design. On the exhaust side, it is provided with relief valves for each cylinder while, on the camshaft side, it is provided with a large hinged door for each cylinder. The crosshead guides are integrated in the frame box.

**[0047]** A cylinder frame 5 is mounted on top of the frame box 4. Staybolts (not shown) connect the bedplate 2 to the cylinder frame 5 and keep the structure together. The staybolts are tightened with hydraulic jacks.

**[0048]** The cylinder frame 5 is cast in one or more pieces with integrated camshaft housing 25, or it is a welded design. The camshaft housing 25 is welded/bolted thereto or integrally formed with the cylinder frame (as shown).

**[0049]** The cylinder frame 5 is provided with access covers for cleaning the scavenge air space and for inspection of scavenge ports and piston rings from the camshaft side. Together with the cylinder liner 6 it forms the scavenge air space. The scavenge air receiver 9, is bolted with its open side to the cylinder frame 5. At the bottom of the cylinder frame there is a piston rod stuffing box, which is provided with sealing rings for scavenge air, and with oil scraper rings which prevent oil from coming up into the scavenge air space.

**[0050]** The piston 13 includes a piston crown and piston skirt. The piston crown is made of heat-resistant steel and has four ring grooves which are hard-chrome plated

on both the upper and lower surfaces of the grooves.

**[0051]** The piston rod 14 is connected to the crosshead 22 with four screws. The piston rod 14 has a central bore (not visible in the drawings) which, in conjunction with a cooling oil pipe, forms the inlet and outlet for cooling oil for the piston 13.

**[0052]** The crosshead 22 is of forged steel and is provided with cast steel guide shoes with white metal on the running surface. A telescopic pipe (not visible) for oil inlet and the pipe for oil outlet are mounted on the top of the guide shoes.

**[0053]** The cylinder liners 6 are of the uniflow type and are carried by the cylinder frame 5. The cylinder liners 6 are made of alloyed cast iron and are suspended in the cylinder frame 5 by means of a low situated flange. The uppermost part of the liner is surrounded by cast iron cooling jacket. The cylinder liners 6 have scavenge ports 7 and drilled holes (not shown) for cylinder lubrication.

**[0054]** The camshaft 28 is embedded in bearing shells lined with white metal in the camshaft housing 25. The camshaft 28 is made in one piece with, exhaust cams, indicator cams, thrust disc and chain wheel shrunk onto the shaft. The exhaust cams are of steel, with a hardened roller race. They can be adjusted and dismantled hydraulically.

**[0055]** The cylinders 6 is of the uniflow type and has scavenge air ports 7 located in an airbox 5', which from a scavenge air receiver 9 (Fig. 1), is supplied with scavenge air pressurized by a turbocharger 10 (Fig. 1).

**[0056]** The air intake to the turbocharger 10 takes place directly from the engine room through an intake silencer (not shown) of the turbocharger. From the turbocharger 10, the air is led via a charging air pipe (not shown), air cooler (not shown) and scavenge air receiver 9 to the scavenge ports 7 of the cylinder liners 6.

**[0057]** The engine is fitted with one or more turbochargers arranged on the aft end of the engine for 4-9 cylinder engines and on the exhaust side for 10 or more cylinder engines.

**[0058]** The engine is provided with electrically-driven scavenge air blowers (not shown). The suction side of the blowers is connected to the scavenge air space after the air cooler. Between the air cooler and the scavenge air receiver, non-return valves (not shown) are fitted which automatically close when the auxiliary blowers supply the air. The auxiliary blowers assist the turbocharger compressor at low and medium load conditions.

**[0059]** An exhaust valve 11 as shown in greater detail in Fig. 3 is mounted centrally in the top of the cylinder in a cylinder cover 12. At the end of the expansion stroke the exhaust valve 11 opens before the engine piston 13 passes down past the scavenge air ports 7, whereby the combustion gases in the combustion chamber 15 above the piston 13 flow out through an exhaust passage 16 opening into an exhaust receiver 17 and the pressure in the combustion chamber 15 is relieved. The exhaust valve 11 closes again during the upward movement of the piston 13. The exhaust valve 11 is driven upwards

by a pneumatic spring 20.

**[0060]** The exhaust valve 11 is opened by means of the camshaft 28 that is disposed within a camshaft housing 25 that extends along the length of the engine adjacent to the cylinder frame 5. A high-pressure feed conduit 30 of the hydraulic system associated with the fuel injection system (which will be described in greater detail below) is also disposed in the camshaft housing 25. The feed conduit 30 extends substantially along with a whole length of the engine. Since the feed conduit 30 is disposed inside the camshaft housing, there is no need for using a double walled feed conduit 30 that is otherwise required for protecting engine operators in case the highly pressurized feed conduit 30 ruptures.

**[0061]** Figs. 3 and 4 illustrate the top of the cylinder liner 6, the cylinder cover 12 and the exhaust valve housing. The cylinder cover 12 is of forged steel, made in one piece, and has bores for cooling water. It has a central bore for the exhaust valve 11 and bores for two or three fuel injectors 23, a safety valve (not shown), a starting valve (not shown) and indicator valve (not shown). Each cylinder cover 12 is equipped with two or three fuel injectors 23, one starting valve, one safety valve, and one indicator valve. The opening of the fuel injectors 23 is controlled by the fuel oil high pressure created by the fuel boosters (described in further detailed below), and the fuel injector 23 is closed by a spring. An automatic vent slide (not shown) allows circulation of fuel oil through the fuel injector and through the high pressure pipes that connect the fuel injectors 23 to the fuel boosters, and prevents the combustion chamber 15 from being filled up with fuel oil in the event that the spindle of the injector 23 is sticking when the engine 1 is stopped. Oil from the vent slide and other drains is led away in a closed system.

**[0062]** The exhaust valve housing is of cast iron and arranged for water cooling. The housing is provided with a bottom piece of steel with hardfacing metal welded onto the seat. The bottom piece is water cooled. The valve spindle itself is made of heat resistant steel with hardfacing metal welded onto the seat. The exhaust valve housing is provided with a spindle guide. The exhaust valve housing is tightened to the cylinder cover 12 with studs and nuts. A hydraulic exhaust valve actuator 21 is mounted on top of the exhaust valve housing. When pressurized, the hydraulic actuator 21 urges the exhaust valve in the downward (opening) direction. The hydraulic actuator 21 comprises a piston in a cylinder with a pressure chamber therein above the piston. The exhaust valve housing also includes an air spring 20 that urges the exhaust valve spindle 11 upward (in the closing direction). The air spring 20 includes a spring piston with a spring chamber disposed below the spring piston in a cylinder in the exhaust valve housing.

**[0063]** The hydraulic exhaust valve actuator 21 of each exhaust valve is connected via a pressure pipe 35 to a piston pump 37 (Fig. 6). There is one piston pump 37 and one exhaust valve 11 per cylinder in the present embodiment, but there could be more than one piston pumps

or more than one exhaust valve per cylinder (not shown).

**[0064]** As shown in Fig. 7, the piston pump 37 is mounted on a roller guide housing 46. The roller 42 follows the respective cam 29 on the camshaft 28. The piston pump 37 is thus activated by the camshaft 28.

**[0065]** Fig. 5 is a perspective view of the engine with several components are removed for illustration purposes. The camshaft 28 is driven by a chain drive 26 that connects the camshaft 28 to the crankshaft 3. The chain drive 26 is provided with a chain tightener (not shown) and guide bars (not shown) to support the long chain lengths. According to a variation of the present embodiment, the chain drive powers the hydraulic pumps (not shown) for the high-pressure hydraulics of the engine. The chain may also serve to drive second order counter-balance weights. As an alternative to a chain drive, the camshaft can be driven by a transmission with gears (not shown).

**[0066]** Fig. 6 shows a section of Fig. 5 with the camshaft housing 25 and the cylinders 6 in greater detail. In this figure it can be seen that conduits 31 branch off from the feed conduit 30. The conduits 31 connect the feed conduit 30 to the pressure boosters 39 via distributor blocks 40 with hydraulic control valves 41. The distributor blocks 40 are mounted on the top plate of the camshaft housing 25.

**[0067]** The piston pumps 37 that are actuated by cams 29 of the camshaft 28 are also disposed on the top plate 25' of the camshaft housing 25. The piston pumps 37 are connected to the hydraulic exhaust valve actuators 21 via pressure pipes 35.

**[0068]** Each cylinder 6 is provided with two or three injectors 23 each connected with conduits (not shown in Fig. 6 but with ref. numeral 51 in Fig. 8) to the port or ports of the pressure booster 39.

**[0069]** Each distributor block 40 carries two proportional control valves 41 that controls the connection of the port on top of the distributor block 40 with the return conduit (65 in Fig. 8) and feed conduit 30 in camshaft housing 25. A pressure booster 39 is mounted on top of each distributor block 40 and is in communication with the port on top of the distributor block 40. Thus, the distributor blocks 40 serve as a mechanical support for the hydraulically activated fuel pressure booster 39.

**[0070]** Fig. 7A, 7C and 7C show a compression chamber housing 68 in detail in different cross-sectional views and in a perspective view. The compression chambers 67 provide an enlarged volume for storing potential energy in the hydraulic fluid to ensure that the necessary hydraulic oil peak flow is available during the whole fuel injection step.

**[0071]** In the present embodiment one compression chamber housing 68 with two compression chambers 67 is provided for a pair of neighboring cylinders 6. However, there could be fewer or more compression chambers per cylinder.

**[0072]** The compression chambers 68 are fed with a high-pressure hydraulic fluid from the feed conduit 30 via

locally branched off conduits 31. The connection between conduits 31 and conduit 30 is realized by means of a connection block 30' that is mounted on the bottom of the camshaft housing 25.

**[0073]** The compression chamber housing 68 is formed as an integral part of the top plate of the camshaft housing 25. The top plate of the camshaft housing 25 is longitudinally divided into sections. One such type of section being a metal slab with two cylindrical compression chambers 67 formed therein, the slab thereby also forming the compression chamber housing 68. This top plate also carries the distributor blocks 40 on top of which the pressure boosters 39 are placed. The longitudinal axis of the cylindrical compression chambers 67 is arranged in parallel with the longitudinal axis of the camshaft 28. The compression chambers 67 are manufactured by machining two parallel bores in the solid slab of metal. The compression chambers 67 are sealed off by circular locking plates 69 that are bolted to the compression chamber housing 68. Upwardly directed bores (not shown) through the compression chamber housing 68 connect to the compression chambers 67 to the distributor blocks 40. Since the distributor blocks are mounted directly on top of the compression chamber housing 68, the path that the high-pressure hydraulic fluid has to travel from the compression chambers 67 to the distributor blocks 40 is very short.

**[0074]** The other type of top plate of the camshaft housing 25 (which is shown in cross-sectional view in Fig. 7) carries the piston pumps 37.

**[0075]** The two types of camshaft housing top plates are alternately distributed along the length of the camshaft housing 25. There is a longitudinal overlap at the transition between the two types of top plates, and the top plates are bolted together at this overlap.

**[0076]** Fig. 8 shows the fuel injection system diagrammatically. The fuel is delivered from the fuel delivery installation 73 to the pressure boosters 39. The fuel delivery installation 73 is not shown in detail in the drawings.

**[0077]** The fuel delivery installation 73 is so arranged that both diesel oil and heavy fuel oil can be used. From a service tank the fuel is led to an electrically driven supply pump by means of which a pressure of approximately 4 bar can be maintained in the low pressure part of the fuel circulating system, thus avoiding gasification of the fuel in a venting box in the temperature ranges applied. From the low pressure part of the fuel system the fuel oil is led to an electrically-driven circulating pump, which pumps the fuel oil through a heater and a full flow filter situated immediately before the inlet to the engine 1, where the fuel is distributed to the respective pressure boosters 39.

**[0078]** The fuel injection is performed by the electronically controlled pressure boosters 39 one per cylinder. The boosters multiply the pressure from the low-pressure (where the hydraulic fluid is applied) side to the high pressure side (the fuel side) by a fixed ratio.

**[0079]** The fuel boosters 39 are powered by pressurized hydraulic fluid, which may be the engine lubrication

oil. A pressure pump 60 delivers high pressure hydraulic fluid, typically a few hundred bar, via feed conduit 30 to the cylinders. If the hydraulic fluid is engine lubrication oil, the pressure pump 60 is not the engine lubrication pump which operates at a much lower pressure. Return fluid is transported from the cylinders via conduit 65 to the tank 61 from which the pump 60 draws its fluid.

**[0080]** Compression chambers 67 are provided for each pair of cylinders (in case the engine has an odd number of cylinders, one of the cylinder may be served by a single compression chamber). A conduit 69 connects the compression chamber 67 to two proportional control valves 41 and to two on/off valves 55. According to a variation of this embodiment (not shown) gas filled membrane type accumulators are used instead of or in addition to compression chambers.

**[0081]** Each cylinder 6 of the engine 1 is associated with an electronic control unit 99 which receives general synchronizing and control signals and transmits electronic control signals to the proportional control valves 41, among others, through wires 59. There may be one control unit 99 per cylinder, or several cylinders may be associated with the same control unit (not shown). The control units 99 may also receive signals from an overall control unit (not shown) common to all the cylinders.

**[0082]** The control unit 99 calculates the timing, the rate shaping and the amount of the fuel injection, in accordance with the operating conditions of the engine. Hereto, the control unit receives information about the rotational position of the crankshaft, the rotational speed of the crank shaft (which could be derived by the control unit 99 from the rotational position signal), ambient temperature, load, temperatures of various engine fluids. The control units also adapt the timing of the fuel injection for reversing the engine. The movement of the spool in the proportional control valve 41 is controlled by the control unit 99 in a feedback control loop. The feedback control loop can alternatively be included in the proportional control valve 41 itself. The opening profile of the proportional valve 41 is matched to a desired opening profile that has been predetermined for optimal rate shaping and is stored in the control unit 99.

**[0083]** In their rest position the proportional control valves 41 connect the pressure chamber at the low pressure side of the pressure boosted to tank. When the control unit 99 sends a signal to start the fuel injection for a given cylinder, one of the proportional control valves 41 opens to a certain extend and connects thereby the low pressure side of the pressure booster 39 to the compression chamber 67 via conduit 69.

The pressure in the low pressure side of the pressure booster is multiplied, typically to reach an injection pressure between approximately 400 and 1500 bar. A feed conduit 51 transports the high pressure fuel to the fuel injectors 23 which atomizes the fuel by injecting it in the combustion chamber 15 via its nozzles.

**[0084]** The control unit 99 also controls the on/off valves 55 that control the supply of high pressure fluid to

the cylinder lubricators 57. Based upon the operating conditions and on the position the crankshaft, the control unit 99 determines when and how much lubrication oil is pumped into the cylinders. In their rest position the on/off valves 55 connect the cylinder lubricators 57 to tank 61. When a given on/off valve 55 receives a signal from the control unit 99 to pump lubrication oil into a particular cylinder, the on/off valves 55 opens up to thereby connect the cylinder lubricator 57 to compression chamber 67 via conduit 69 and the cylinder lubricator will commence pumping lubrication oil into the cylinder. The control unit 99 determines the amount of lubrication oil that is pumped into the cylinder via the length of the activation of the on/off valve 55.

**[0085]** Fig. 9 shows an exemplary rate shaping profile of a fuel injection step. The pressure rise is intentionally smooth and slow, to obtain a long period with a substantially even and high combustion pressure, which under full load is placed close to the maximum allowable combustion pressure.

**[0086]** Figs. 10 and 11 show another embodiment of the invention, in which the electronic fuel injection is of the so-called common rail type. In this system there is no separate hydraulic fluid, but instead the fuel is kept at high pressure and the energy for the injection is stored by compressing the fuel. The common rail has been divided into sections 95 that are associated with two cylinders each. This arrangement has the advantage that the common rail is much better at adapting to the torsional movements of the engine 1 during engine operation that the else would deform a very long uninterrupted common rail tube and could expose it to fatigue.

**[0087]** Fig. 12 shows the common rail injection system diagrammatically. The engine is typically operated with heavy fuel oil (HFO) (both water emulsified and non-water emulsified). The emulsification takes place in a separate emulsification unit (not shown). The fuel for the operation of the engine is stored in a heated tank 129. HFO has a viscosity of 500 to 700 cSt at 50°C and cannot flow at room temperature. The HFO in the tank is kept at about 50°C at all times, i.e. also during engine stops. Typically ships with the present type of engine are provided with generator sets (Genset), i.e. smaller diesel engines that provide electrical power and heat for the ship and for the main engine during stops of the main engine. From the heated tank 129 the HFO is lead to a filter or centrifuge 130 and to a preheater 131. The temperature of the HFO leaving the preheater 131 is controlled in accordance with the operating status and the grade of HFO. During engine stops, when the HFO is circulated at low pressure through the hydraulic system, the temperature of the HFO is kept in the range of 45 to 60 °C. During engine operation the temperature of the HFO leaving the preheater 131, is kept between 90 and 150 °C, depending on the viscosity of the HFO. A sensor (not shown) measures the viscosity of the HFO just downstream of the preheater 131 (or another suitable place). The temperature of the HFO leaving the preheater 131 is typically controlled to result



in a viscosity at the measuring point in the range of 10 to 20 cSt.

**[0088]** A forked intermediate conduit 132 connects the preheater to both a high pressure fuel pump 133 and an auxiliary low pressure circulation pump 134. Non-return valves 135 are disposed in the conduits downstream of each pump to prevent back-suction.

**[0089]** During engine operation the high pressure fuel pump 133 is driven by gearwheel 136 on the crankshaft 3 via a gearwheel 137. Hereby, the high pressure fuel pump 133 produces a nominal pressure of 1000 to 1500 bar, but the pressure may fluctuate between 600 and 2000 bar in dependence of the operating conditions.

**[0090]** During engine stops the auxiliary low pressure circulation pump 134 is driven by an electric motor 138. Hereby, a pressure of about 3 to 10 bar is delivered for circulating the HFO through the hydraulic system during engine stops.

**[0091]** The common fuel rail 140 extends along all cylinders and the connections to the cylinders 6 that are not shown in Fig. 12 are symbolized by the short upward lines that extend from the common rail. The common rail does not need to be formed by one long tube extending along the full length of the engine. Instead, the common rail could be divided into interconnected sections that each cover a few cylinders, as shown in Fig. 10 and 11.

**[0092]** A pair of neighboring cylinders is provided with HFO through a supply conduit 141 that branches off from the common rail 140 and leads to an inlet port of the proportional control valve 125. The supply conduit 141 is provided with a number of fluid accumulators 142 that deliver most of the fluid volume when the proportional control valve 125 opens and are post-fed from the common rail 140 while the proportional control valve 125 is closed.

**[0093]** A feed conduit 120 connects one of the two outlet ports of the proportional control valve 125 to the injectors 23 of one of the two neighboring cylinders. Another feed conduit 124 connects the other one of the two outlet ports of the proportional control valve 125 to the injectors 23 of the other one of the two neighboring cylinders. The proportional control valve 125 also has two tank ports connected to the return conduit 143 for return HFO.

**[0094]** The proportional control valve 125 is a solenoid driven spool valve with three main positions. The solenoid 144 receives a control signal from control unit 99 via wire 128. According to another embodiment (not shown) the solenoid 44 is connected to the valve housing via insulating spacers.

**[0095]** In the center position, in which the solenoid 144 is not active, the inlet port of the proportional control valve 125 is closed and the two outlet ports of the proportional control valve 125 are connected to the return conduit 143.

**[0096]** When the solenoid is activated to urge the valve spool to the left (left as in Fig. 12) the inlet port of the proportional control valve is connected to feed conduit 120, so that the injectors 23 inject fuel into combustion

chamber 15 on the one of the two cylinders associated with the control valve 125. In this position pressure conduit 124 is connected to return conduit 143.

**[0097]** When the solenoid 44 is activated to urge the valve spool to the right (right as in Fig. 12) the inlet port of the proportional control valve 125 is connected to the feed conduit 124, and high pressure HFO is passed to the feed conduit 124 so that the injectors 23 inject fuel into combustion chamber 15 of the other one of the two cylinders associated with the proportional control valve 125. In this position pressure conduit 120 is connected to return conduit 143.

**[0098]** The fuel injection timing, the volume of fuel injected and the shape of the injection pattern is controlled with the proportional valve 125.

**[0099]** According to a not shown variation of the present embodiment, one proportional control valve with fewer ports and only two positions is used to control the fuel injection for one cylinder. In this variation, the proportional control valve will connect the feed conduit to the low-pressure circuit in its rest position and connect the feed conduit to the common rail in the other of its two positions.

**[0100]** In accordance with another not shown variation of this embodiment a common rail in its true ends, without the gas filled membrane accumulators 142 and 148.

**[0101]** According to a further preferred embodiment, (not shown) the flow of fuel from the common fuel rail to the injectors is controlled by an on/off type valve.

**[0102]** A conventional fuel limiter 146 is placed in both feed conduits 120, 124, to avoid excessive amounts of HFO entering the cylinder should the proportional control valve 125 erroneously open up too long.

**[0103]** The pressure in the return line 143 is kept to an overpressure of a few bar to avoid penetration of air into the hydraulic system and to prevent the water contained in the water emulsified HFO from forming vapor bubbles. A pressure control valve 147 at the downstream end to the return conduit 143 ensures that a predetermined minimum overpressure is maintained in the return conduit 143. The overpressure in the return conduit 143 is preferably 3 to 10 bar. An accumulator or expansion vessel 148 is connected to the return conduit 143 to absorb pressure fluctuations that can occur when the proportional control valve 125 changes position.

**[0104]** A second return conduit 149 connects the outlet port of the injectors 23 to return conduit 43. Downstream of pressure control valve 147 the return conduit 143 feeds the used HFO to the preheater 131 to complete the cycle.

**[0105]** The conduits that transport the HFO from the outlet of the preheater 131 to the common rail 140 and from the common rail 140 via the proportional control valve 125 to the injectors 23 are provided with heating means symbolized by heating coils. The conduits can be heated along their full length by e.g. steam tracing with or electric heating elements. The heating of these conduits serves to reduce heat loss of the hot HFO when it moves downstream from the preheater. During engine operation the

temperature of the HFO in the conduits towards the injectors and hydraulic valve actuators is kept close to 150°C, depending however on the viscosity of the HFO used. Adjacent conduits that run parallel for part of their length, such as feed conduit 120 and feed conduit 124 can be provided with a common heating means (not shown).

**[0106]** Return lines 143 and 149 are also provided with heating means of the same type as described above. The temperature of the HFO in the return lines is less critical and the heating means are calibrated to ensure that the temperature of the HFO does not fall below 50°C.

**[0107]** During engine stops the HFO is circulated through the hydraulic system by circulation pump 134 (at relatively low pressures of 3 to 10 bar) to avoid air being trapped in the hydraulic system and to avoid local cooling and hardening of the HFO.

**[0108]** According to a variation (not shown) of the above embodiments the high-pressure conduits 35 that connect the hydraulic piston pump 37 to the valve actuator 21 can be depressurized by electronically controlled valve means (controlled by a control unit 99) for allowing the exhaust valve to commence its return stroke in advance of the return stroke timing as defined by the respective cam on the camshaft.

**[0109]** According to a further variation (not shown) of the above embodiments, the high-pressure conduits 35 that connect the hydraulic piston pump 37 to the valve actuator 21 can be selectively obstructed by electronic valve means (controlled by a control unit 99) for delaying the return stroke until after the return stroke timing as defined by the respective cam on the camshaft.

**[0110]** The one or more control units 99 can be configured to control the advanced or delayed timing of the closing of the exhaust valve in relation to the operating conditions of the engine.

**[0111]** According to yet another variation (not shown) of the above embodiments, the camshaft 28 is provided with a electro hydraulic mechanism for adjusting the angular position of the camshaft 28 relative to the angular position of the crankshaft 3. The mechanism is controlled by said one of more control units 99 to vary the timing of the opening and closing of the exhaust valves.

**[0112]** Although the preferred embodiment only show an engine with the cylinders arranged in line, the invention can also be used with other cylinder arrangements like a V- or U-configuration.

**[0113]** The term "comprising" as used in the claims does not exclude other elements or steps. The term "a" or "an" as used in the claims does not exclude a plurality.

**[0114]** The reference signs used in the claims shall not be construed as limiting the scope.

**[0115]** Although the present invention has been described in detail for purpose of illustration, it is understood that such detail is solely for that purpose, and variations can be made therein by those skilled in the art without departing from the scope of the invention.

## Claims

1. A large uniflow two-stroke diesel engine of the cross-head type comprising a plurality of cylinders with at least one exhaust valve per cylinder, one or more fuel injectors per cylinder, a source of high pressure fluid, a volume of said high pressure fluid in which potential energy is accumulated by compression, at least one electronically controlled hydraulic valve, wherein the fuel injection is primarily driven by said accumulated potential energy and the fuel injection is controlled by said at least one hydraulic valve, said engine further comprises at least one camshaft provided with cams for actuation of the at least one exhaust valve associated with each of the cylinders, hydraulic piston pumps, said hydraulic piston pumps being driven by respective cams on said camshaft, a hydraulic actuator per exhaust valve for moving said exhaust valve in the opening direction, a hydraulic conduit per exhaust valve for connecting the hydraulic piston pumps with the hydraulic actuators, a resilient member per exhaust valve for urging the exhaust valve in the closing direction, wherein said volume of high pressure fluid is contained in a feed conduit that extends along the length of the engine in a camshaft housing, in which the camshaft and said feed conduit are received.
2. An engine according to claim 1, wherein said high pressure fluid is a medium different from the fuel, and separated from the fuel.
3. An engine according to claim 2, wherein the high pressure fluid and the fuel are separated by at least one piston device per cylinder, and said high pressure fluid displaces during the fuel injection said piston device and said piston device in turn displaces the fuel into the combustion chamber inside the cylinder concerned.
4. An engine according to claim 3, wherein the piston device is a pressure booster and said piston device preferably comprises a piston with a large effective area facing the high-pressure hydraulic fluid and a small effective area facing the fuel.
5. An engine according to any of claims 2 to 4, wherein said feed conduit includes a plurality of compression chambers distributed along the length of the engine, said compression chambers are provided with an enlarged volume for said a high-pressure hydraulic fluid in order to enable a substantial amount of potential energy to be accumulated by compression of the hydraulic fluid itself.
6. An engine according to claim 5, wherein one compression chamber is provided for supplying one pair of neighboring cylinders with high-pressure hydraulic

lic fluid.

7. An engine according to claim 6, wherein said compression chambers are at least partially disposed inside said camshaft housing. 5
8. An engine according claim 7, wherein said compression chambers share at least part of one wall with said camshaft housing, preferably, the compression chambers share or form a part of the top plate of the camshaft housing. 10
9. An engine according to any of claims 5 to 8, said compression chambers are formed by machining a cavity in a solid block of metal. 15
10. An engine according to any of claims 1 to 9, wherein said source of high pressure fluid includes one or more electrically driven high pressure pumps. 20
11. An engine according to any of claims 1 to 10, wherein one hydraulic valve controls the fuel injection to two or more engine cylinders. 25
12. An engine according to claim 1, wherein the high-pressure hydraulic fluid is the fuel. 30
13. An engine according to claim 12, wherein said volume of high-pressure hydraulic fluid is contained in a common rail. 35
14. An engine according to any of claims 1 to 13, wherein hydraulic valves are proportional valves. 40
15. An engine according to any of claims 1 to 14, wherein the hydraulic valves are controlled by said one or more computers. 45
16. An engine according to claim 15, wherein said one or more computers are configured to adapt timing and/or rate shape of the fuel injection to the operating conditions of the engine. 50
17. An engine according to claim 16, wherein said one or more computers are configured to advance the timing of the fuel injection when the engine load is decreasing. 55
18. An engine according to claim 15 or 16, wherein the rate of fuel injection can be modulated during the fuel injection in order to obtain a desired injection profile.
19. An engine according to any of claims 1 to 18, further comprising a cylinder lubrication system that is also controlled by said one or more computers.
20. An engine according to claim 19, wherein said high

pressure hydraulic fluid also powers said cylinder lubrication system.

21. An engine according to any of claims 1 to 20, wherein said high-pressure conduits that connect the hydraulic piston pump to the valve actuator can be depressurized by electronically controlled valve means for allowing the exhaust valve to commence its return stroke in advance of the return stroke timing as defined by the respective cam on the camshaft.
22. An engine according to any of claims 1 to 21, wherein said high-pressure conduits that connect the hydraulic piston pump to the valve actuator can be selectively obstructed by electronic valve means for delaying the return stroke until after the return stroke timing as defined by the respective cam on the camshaft.
23. An engine according to claim 21 or 22, wherein said one or more computers are configured to control the advanced or delayed timing of the closing of the exhaust valve in relation to the operating conditions of the engine.
24. An engine according to any of claims 1 to 23, wherein said camshaft is provided with a mechanism for adjusting its angular position relative to the angular position of the crankshaft, said mechanism preferably being controlled by said one of more computers to vary the timing of the opening and closing of the exhaust valves.

## Patentansprüche

1. Großer gleichstromiger Zweitakt-Dieselmotor des Kreuzkopftyps, umfassend mehrere Zylinder mit zumindest einem Abgasventil pro Zylinder, eine oder mehrere Kraftstoffeinspritzeinrichtungen pro Zylinder, eine Quelle für Hochdruckfluid, ein Volumen des Hochdruckfluides, in dem potentielle Energie durch Kompression akkumuliert ist, zumindest ein elektrisch gesteuertes Hydraulikventil, wobei die Kraftstoffeinspritzung hauptsächlich durch die akkumulierte potentielle Energie betrieben wird und die Kraftstoffeinspritzung durch das zumindest eine Hydraulikventil gesteuert wird, wobei der Motor ferner zumindest eine Nockenwelle umfasst, die mit Nocken zur Betätigung des zumindest einen Abgasventils versehen ist, das jedem der Zylinder zugeordnet ist, hydraulische Kolbenpumpen, wobei die hydraulischen Kolbenpumpen durch jeweilige Nocken an der Nockenwelle betrieben werden, einen Hydraulikaktuators pro Abgasventil zur Bewegung des Abgasventils in der Öffnungsrichtung, eine Hydraulikleitung pro Abgasventil zur Verbindung der hydraulischen Kolbenpumpen mit den Hydraulikaktuatoren,

- ein nachgiebiges Element pro Abgasventil zum Drängen des Abgasventils in die Schließrichtung, wobei das Volumen des Hochdruckfluides in einer Zufuhrleitung enthalten ist, die sich entlang der Länge des Motors in einem Nockenwellengehäuse erstreckt, in dem die Nockenwelle und die Zufuhrleitung aufgenommen sind.
2. Motor nach Anspruch 1, wobei das Hochdruckfluid ein Medium ist, das von dem Kraftstoff verschieden und von dem Kraftstoff getrennt ist.
  3. Motor nach Anspruch 2, wobei das Hochdruckfluid und der Kraftstoff durch zumindest eine Kolbenvorrichtung pro Zylinder getrennt sind und das Hochdruckfluid während der Kraftstoffeinspritzung die Kolbenvorrichtung verstellt und die Kolbenvorrichtung ihrerseits den Kraftstoff in den Brennraum innerhalb des betroffenen Zylinders verdrängt.
  4. Motor nach Anspruch 3, wobei die Kolbenvorrichtung ein Druckverstärker ist und die Kolbenvorrichtung bevorzugt einen Kolben mit einer großen effektiven Fläche, die zu dem Hochdruck-Hydraulikfluid weist, und eine kleine effektive Fläche umfasst, die zu dem Kraftstoff weist.
  5. Motor nach einem der Ansprüche 2 bis 4, wobei die Zufuhrleitung mehrere Kompressionskammern aufweist, die entlang der Länge des Motors verteilt sind, wobei die Kompressionskammern mit einem vergrößerten Volumen für das Hochdruck-Hydraulikfluid versehen sind, um zu ermöglichen, dass ein wesentlicher Betrag an potentieller Energie durch Kompression des Hydraulikfluids selbst akkumuliert werden kann.
  6. Motor nach Anspruch 5, wobei eine Kompressionskammer zur Belieferung eines Paares benachbarter Zylinder mit Hochdruck-Hydraulikfluid versehen ist.
  7. Motor nach Anspruch 6, wobei die Kompressionskammern zumindest teilweise innerhalb des Nockenwellengehäuses angeordnet sind.
  8. Motor nach Anspruch 7, wobei die Kompressionskammern zumindest teilweise eine Wand mit dem Nockenwellengehäuse teilen, wobei die Kompressionskammern bevorzugt einen Teil der oberen Platte des Nockenwellengehäuses teilen oder bilden.
  9. Motor nach einem der Ansprüche 5 bis 8, wobei die Kompressionskammern durch spanabhebendes Bearbeiten eines Hohlraumes in einem massiven Metallblock geformt sind.
  10. Motor nach einem der Ansprüche 1 bis 9, wobei die Quelle für Hochdruckfluid eine oder mehrere elektrisch betriebene Hochdruckpumpen umfasst.
  11. Motor nach einem der Ansprüche 1 bis 10, wobei ein Hydraulikventil die Kraftstoffeinspritzung für zwei oder mehr Motorzylinder steuert.
  12. Motor nach Anspruch 1, wobei das Hochdruck-Hydraulikfluid der Kraftstoff ist.
  13. Motor nach Anspruch 12, wobei das Volumen von Hochdruck-Hydraulikfluid in einer Common Rail enthalten ist.
  14. Motor nach einem der Ansprüche 1 bis 13, wobei die Hydraulikventile Proportionalventile sind.
  15. Motor nach einem der Ansprüche 1 bis 14, wobei die Hydraulikventile durch den einen oder die mehreren Computer gesteuert sind.
  16. Motor nach Anspruch 15, wobei der eine oder die mehreren Computer derart ausgebildet sind, um eine zeitliche Steuerung und/oder Ratenform der Kraftstoffeinspritzung an die Betriebsbedingungen des Motors anzupassen.
  17. Motor nach Anspruch 16, wobei der eine oder die mehreren Computer derart ausgebildet sind, um die zeitliche Steuerung der Kraftstoffeinspritzung nach früh zu verstellen, wenn die Motorlast abnimmt.
  18. Motor nach einem der Ansprüche 15 oder 16, wobei die Rate der Kraftstoffeinspritzung während der Kraftstoffeinspritzung moduliert werden kann, um ein gewünschtes Einspritzprofil zu erhalten.
  19. Motor nach einem der Ansprüche 1 bis 18, ferner mit einem Zylinderschmiersystem, das auch durch den einen oder die mehreren Computer gesteuert ist.
  20. Motor nach Anspruch 19, wobei das Hochdruck-Hydraulikfluid auch das Zylinderschmiersystem betreibt.
  21. Motor nach einem der Ansprüche 1 bis 20, wobei die Hochdruckleitungen, die die hydraulische Kolbenpumpe mit dem Ventilaktuator verbinden, durch elektrisch gesteuerte Ventilmittel druckgemindert werden können, um zu ermöglichen, dass das

Abgasventil seinen Rückstellhub vor der zeitlichen Steuerung des Rückstellhubes, wie durch die jeweilige Nocke an der Nockenwelle definiert ist, beginnt.

22. Motor nach einem der Ansprüche 1 bis 21, wobei die Hochdruckleitungen, die die hydraulische Kolbenpumpe mit dem Ventilaktuator verbinden, durch ein elektrisches Ventilmittel selektiv behindert werden können, um den Rückstellhub bis nach der zeitlichen Steuerung des Rückstellhubes, wie durch die jeweilige Nocke an der Nockenwelle definiert ist, zu verzögern.
23. Motor nach einem der Ansprüche 21 oder 22, wobei der eine oder die mehreren Computer derart ausgebildet sind, um die nach früh verstellte oder verzögerte zeitliche Steuerung des Schließens des Abgasventils in Verbindung mit den Betriebsbedingungen des Motors zu steuern.
24. Motor nach einem der Ansprüche 1 bis 23, wobei die Nockenwelle mit einem Mechanismus zum Einstellen ihrer Winkelposition relativ zu der Winkelposition der Kurbelwelle versehen ist, wobei der Mechanismus bevorzugt durch den einen oder die mehreren Computer gesteuert wird, um die zeitliche Steuerung des Öffnens und Schließens der Abgasventile zu variieren.

#### Revendications

1. Gros moteur diesel deux temps à balayage continu du type à crosse comprenant une pluralité de cylindres présentant au moins une soupape d'échappement par cylindre, un ou plusieurs injecteur(s) de carburant par cylindre, une source de fluide haute pression, un volume du fluide haute pression dans lequel de l'énergie potentielle s'accumule par compression, au moins une vanne hydraulique contrôlée électroniquement, dans lequel l'injection de carburant est essentiellement pilotée par l'énergie potentielle accumulée et l'injection de carburant est contrôlée par la vanne hydraulique, le moteur comprenant en outre au moins un arbre à cames présentant des cames pour actionner la soupape d'échappement associée à chacun des cylindres, des pompes à pistons hydrauliques, les pompes à pistons hydrauliques étant pilotées par des cames respectives de l'arbre à cames, un actionneur hydraulique par soupape d'échappement pour déplacer la soupape d'échappement dans le sens ouvert, un conduit hydraulique par soupape d'échappement pour connecter les pompes à pistons hydrauliques aux actionneurs hydrauliques, un membre résilient par soupape d'échappement pour pousser la soupape d'échappement dans le sens fermé, dans lequel le volume de fluide haute pression est contenu dans

un conduit d'alimentation qui s'étend le long de la longueur du moteur dans un logement d'arbre à cames, dans lequel l'arbre à cames et le conduit d'alimentation sont reçus.

2. Moteur selon la revendication 1, dans lequel le fluide haute pression est un élément différent du carburant, et il est séparé du carburant.
3. Moteur selon la revendication 2, dans lequel le fluide haute pression et le carburant sont séparés par au moins un dispositif de piston par cylindre, et le fluide haute pression déplace le dispositif de piston lors de l'injection de carburant et le dispositif de piston déplace à son tour le carburant dans la chambre de combustion dans le cylindre concerné.
4. Moteur selon la revendication 3, dans lequel le dispositif de piston est un amplificateur de pression et le dispositif de piston comprend de préférence un piston présentant une grande surface utile en regard du fluide hydraulique haute pression et une petite surface utile en regard du carburant.
5. Moteur selon l'une quelconque des revendications 2 à 4, dans lequel le conduit d'alimentation comprend une pluralité de chambres de compression réparties le long de la longueur du moteur, les chambres de compression présentant un volume augmenté pour le fluide hydraulique haute pression afin de permettre à une quantité sensible d'énergie potentielle de s'accumuler par compression dans le fluide hydraulique.
6. Moteur selon la revendication 5, dans lequel une chambre de compression est prévue pour fournir du fluide hydraulique haute pression à une paire de cylindres voisins.
7. Moteur selon la revendication 6, dans lequel les chambres de compression sont au moins partiellement disposées à l'intérieur du logement de l'arbre à cames.
8. Moteur selon la revendication 7, dans lequel les chambres de compression partagent au moins une partie d'une paroi avec le logement de l'arbre à cames, de préférence, les chambres de compression partagent ou forment une partie de la plaque supérieure du logement de l'arbre à cames.
9. Moteur selon l'une quelconque des revendications 5 à 8, les chambres de compression sont formées en usinant une cavité dans un bloc solide de métal.
10. Moteur selon l'une quelconque des revendications 1 à 9, dans lequel la source du fluide haute pression comprend une ou plusieurs pompe(s) à haute pres-

sion pilotée(s) électriquement.

11. Moteur selon l'une quelconque des revendications 1 à 10, dans lequel une vanne hydraulique contrôle l'injection de carburant vers deux ou plusieurs cylindres du moteur. 5
12. Moteur selon la revendication 1, dans lequel le fluide hydraulique haute pression est le carburant. 10
13. Moteur selon la revendication 12, dans lequel le volume de fluide hydraulique haute pression est contenu dans un rail commun.
14. Moteur selon l'une quelconque des revendications 1 à 13, dans lequel les vannes hydrauliques sont des vannes proportionnelles. 15
15. Moteur selon l'une quelconque des revendications 1 à 14, dans lequel les vannes hydrauliques sont contrôlées par un ou plusieurs ordinateur(s). 20
16. Moteur selon la revendication 15, dans lequel le ou les ordinateurs sont configurés pour adapter le délai et/ou le débit de l'injection de carburant aux conditions de fonctionnement du moteur. 25
17. Moteur selon la revendication 16, dans lequel le ou les ordinateurs sont configurés pour avancer le délai de l'injection de carburant lorsque la charge du moteur diminue. 30
18. Moteur selon la revendication 15 ou 16, dans lequel le débit de l'injection de carburant peut être modulé pendant l'injection de carburant afin d'obtenir un profil d'injection souhaité. 35
19. Moteur selon l'une quelconque des revendications 1 à 18, comprenant en outre un système de lubrification de cylindre qui est également contrôlé par le ou les ordinateurs. 40
20. Moteur selon la revendication 19, dans lequel le fluide hydraulique haute pression alimente également le système de lubrification de cylindre. 45
21. Moteur selon l'une quelconque des revendications 1 à 20, dans lequel les conduits haute pression qui connectent la pompe à pistons hydraulique à l'actionneur de vanne peuvent être dépressurisés par des moyens de vannes contrôlées électroniquement pour permettre à la soupape d'échappement de commencer sa course de retour en avance sur le délai de course de retour défini par la came respective de l'arbre à cames. 50 55
22. Moteur selon l'une quelconque des revendications 1 à 21, dans lequel les conduits haute pression qui

connectent la pompe à pistons hydraulique à l'actionneur de vanne peuvent être sélectivement obstrués par les moyens de vannes électroniques afin de retarder la course de retour jusqu'après le délai de course de retour défini par la came respective de l'arbre à cames.

23. Moteur selon la revendication 21 ou 22, dans lequel le ou les ordinateurs sont configurés pour contrôler le délai avancé ou retardé de la fermeture de la soupape d'échappement en fonction des conditions de fonctionnement du moteur.
24. Moteur selon l'une quelconque des revendications 1 à 23, dans lequel l'arbre à cames présente un mécanisme pour ajuster sa position angulaire par rapport à la position angulaire de l'arbre à cames, le mécanisme étant de préférence contrôlé par le ou les ordinateurs afin de faire varier le délai de l'ouverture et de la fermeture des soupapes d'échappement.

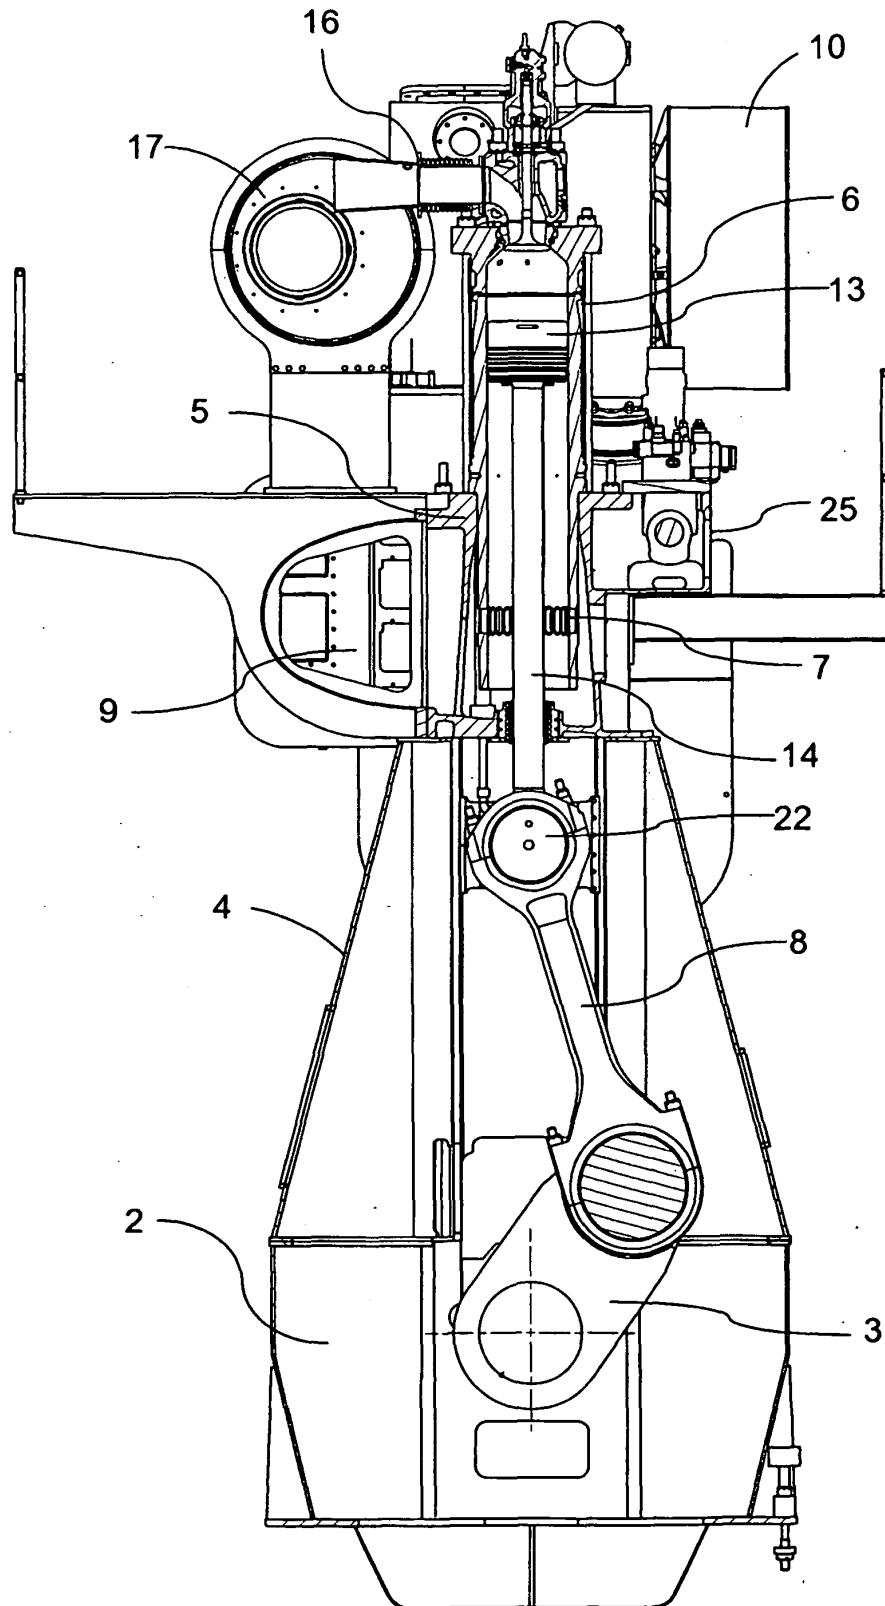


Fig. 1

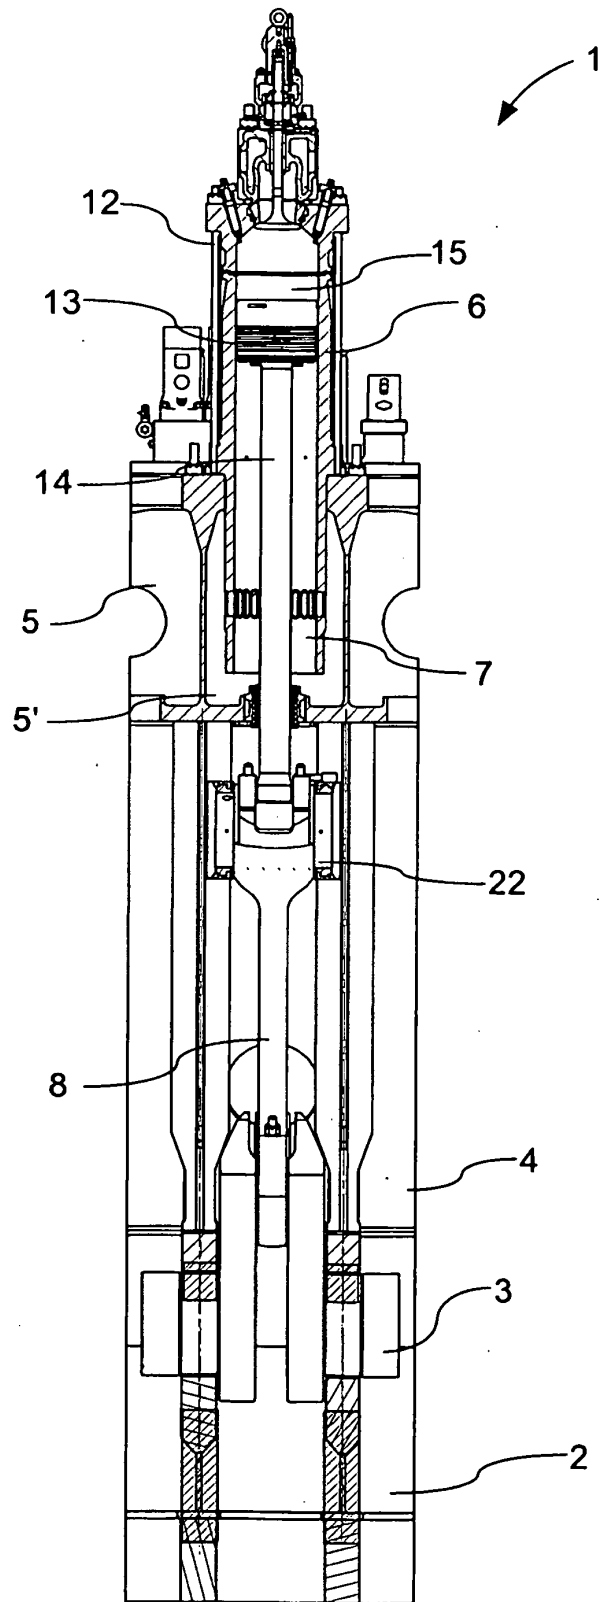


Fig. 2



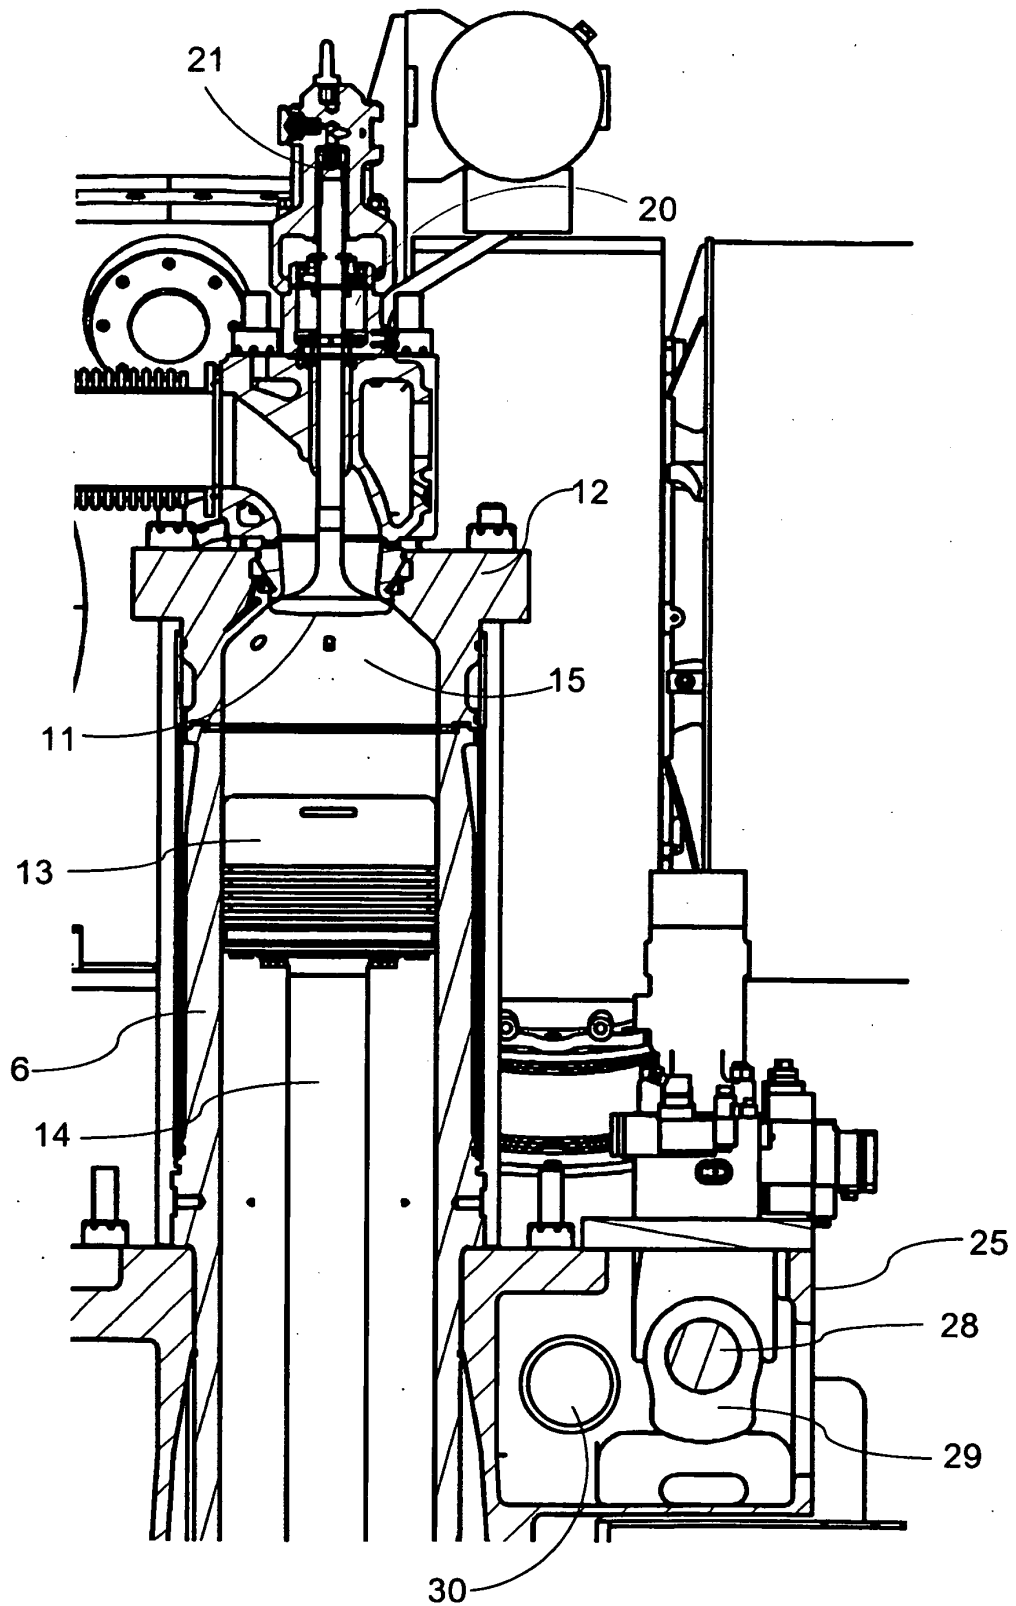


Fig. 3

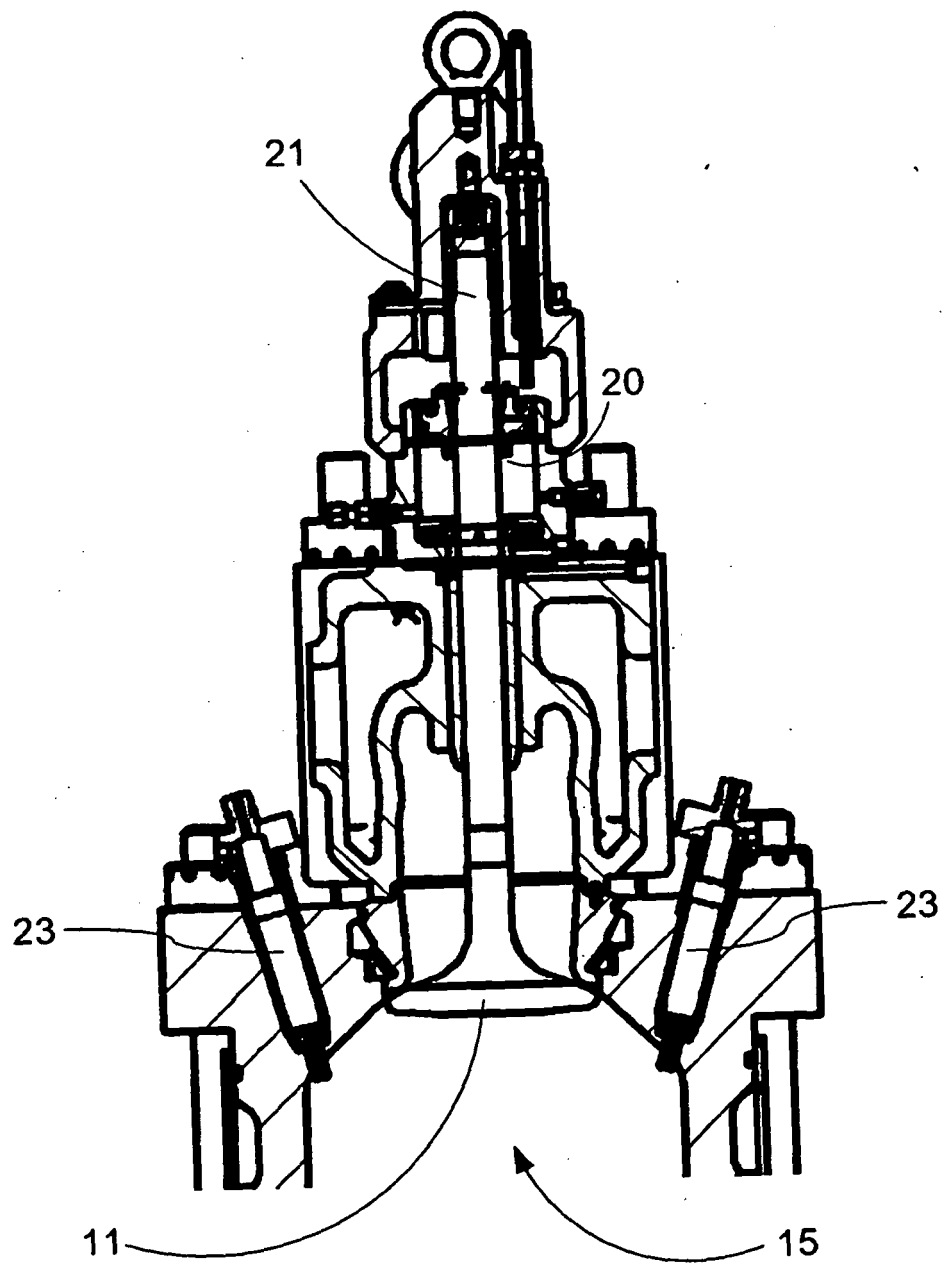


Fig. 4

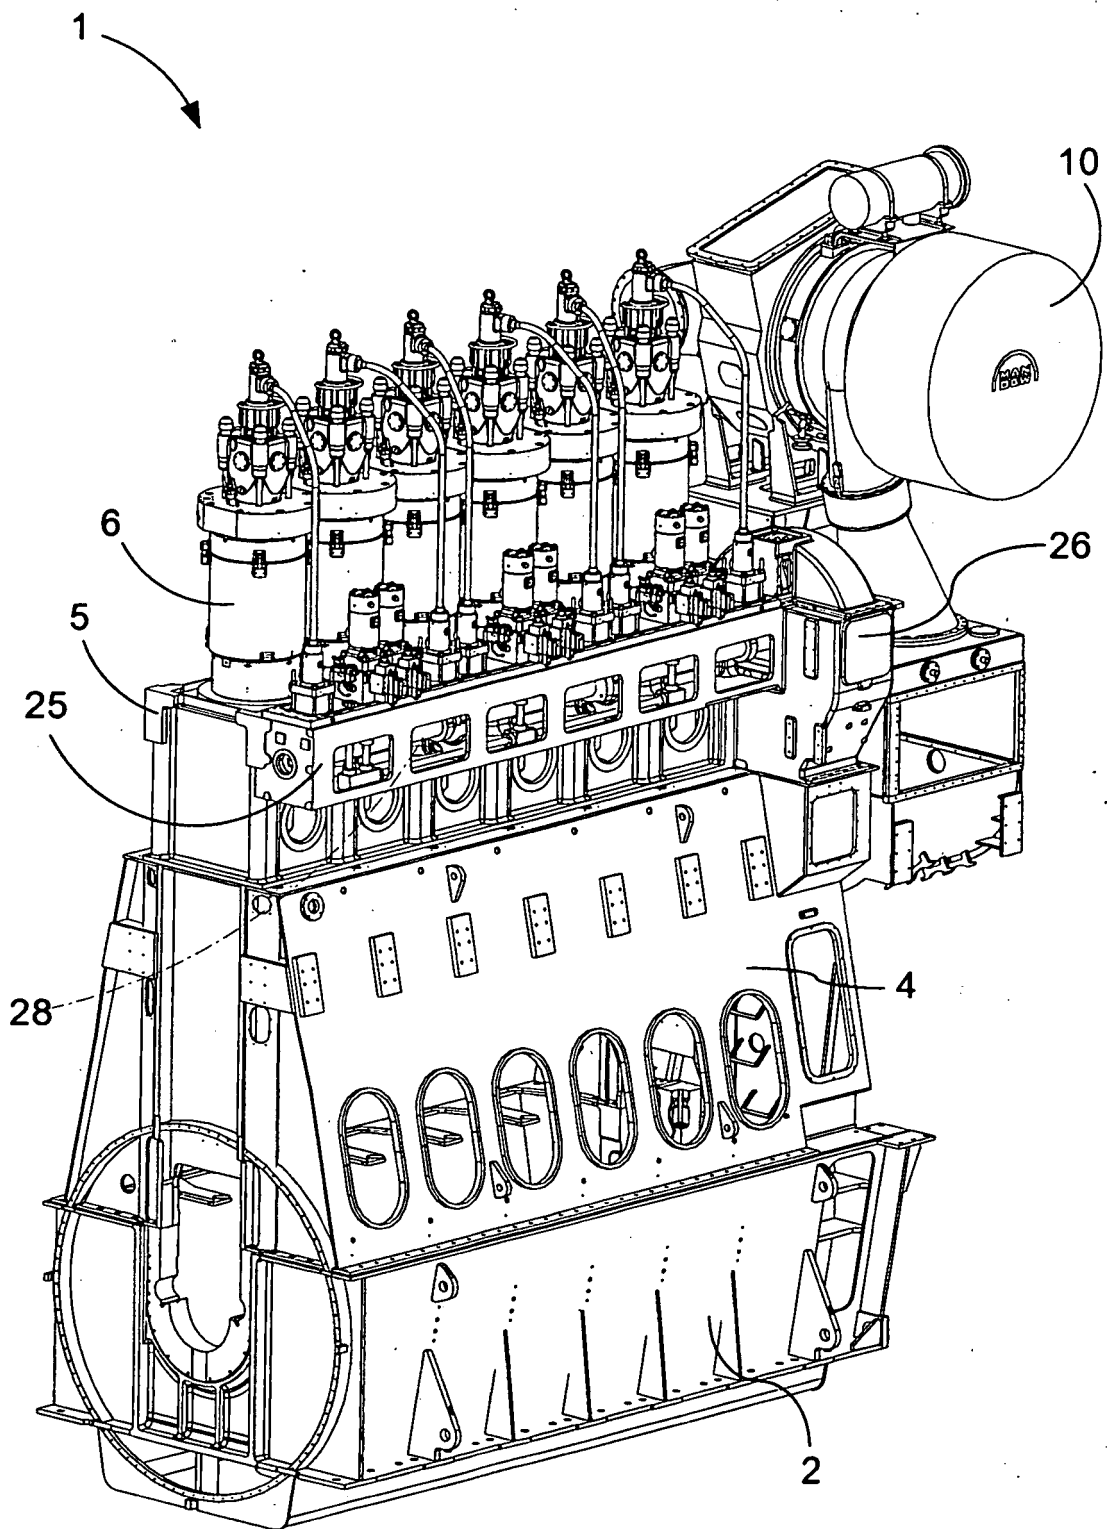


Fig. 5

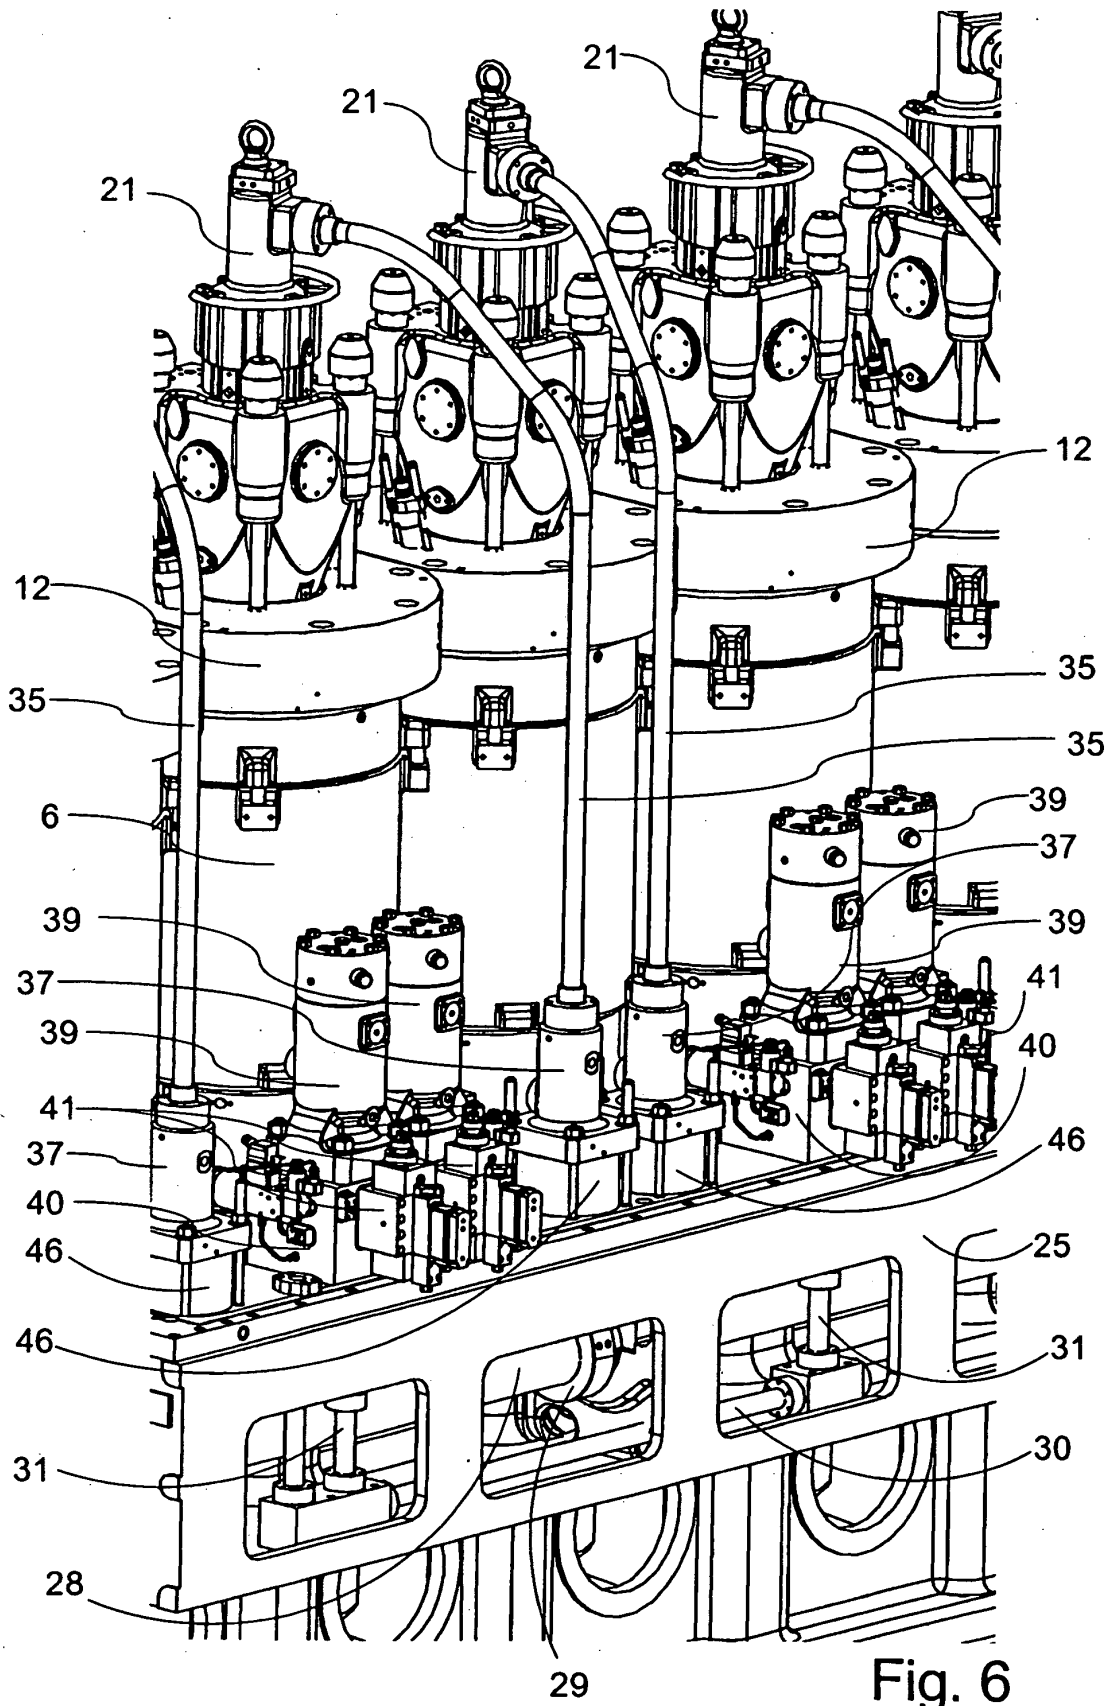


Fig. 6

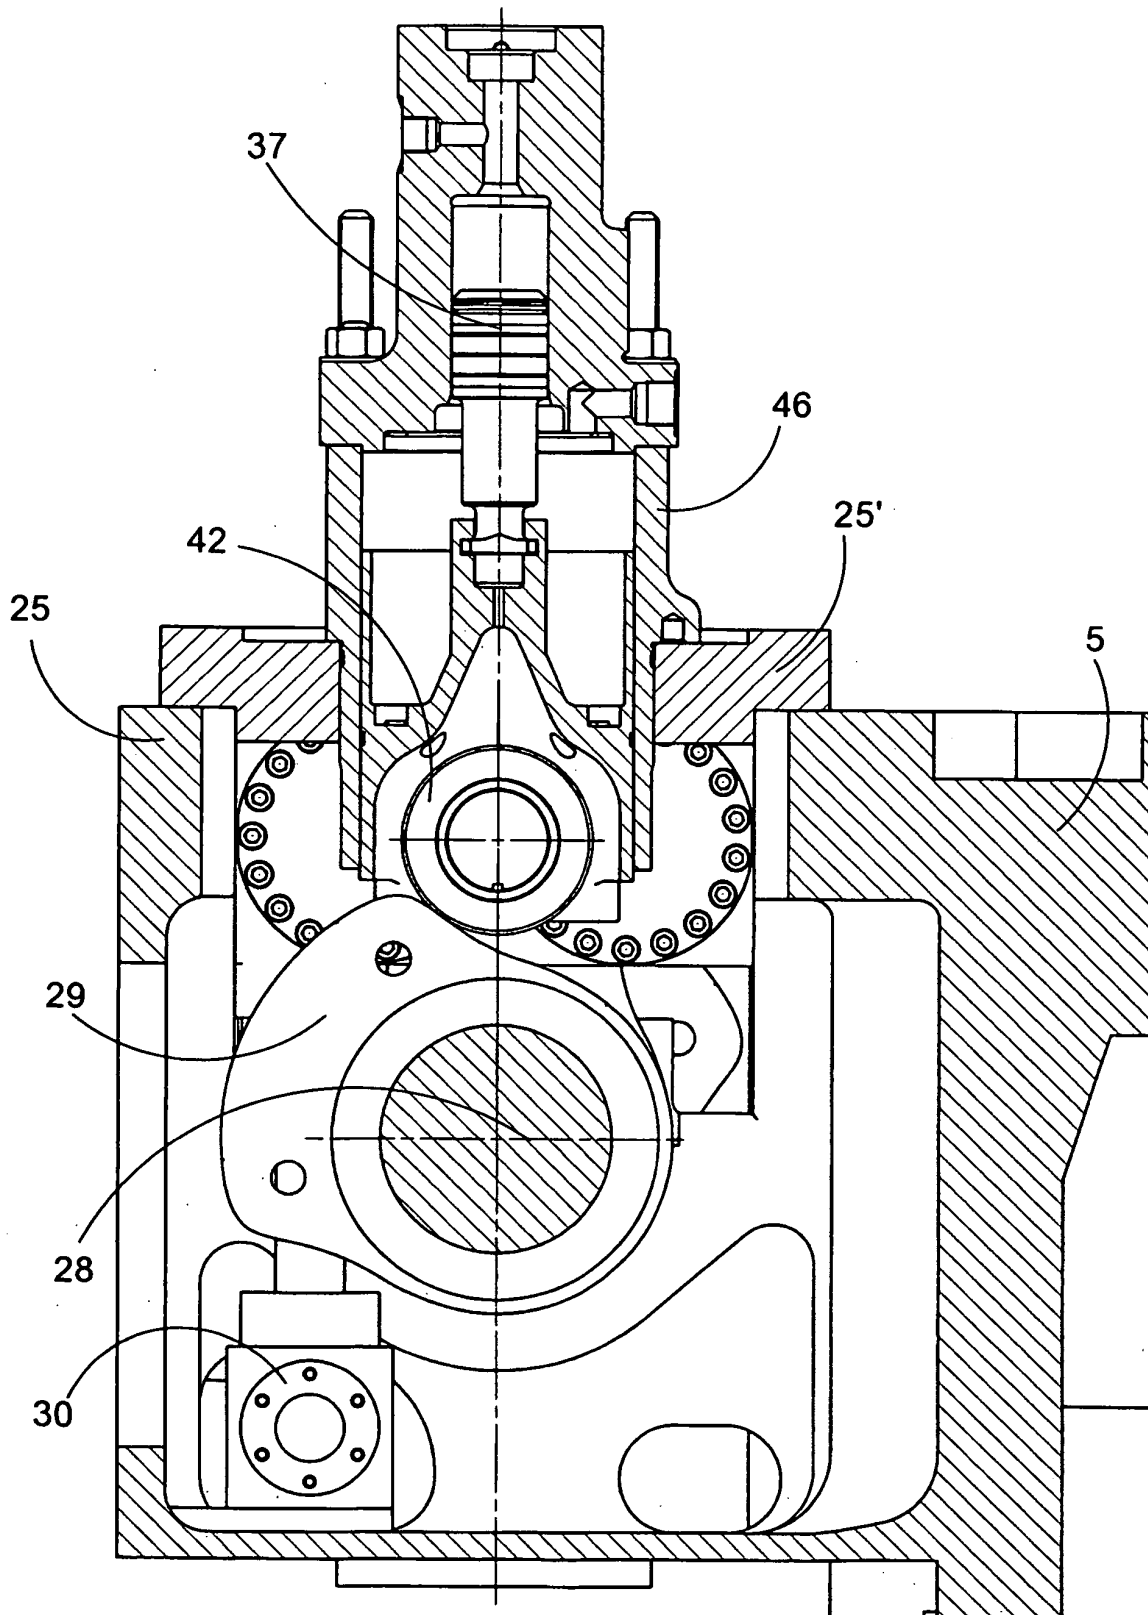
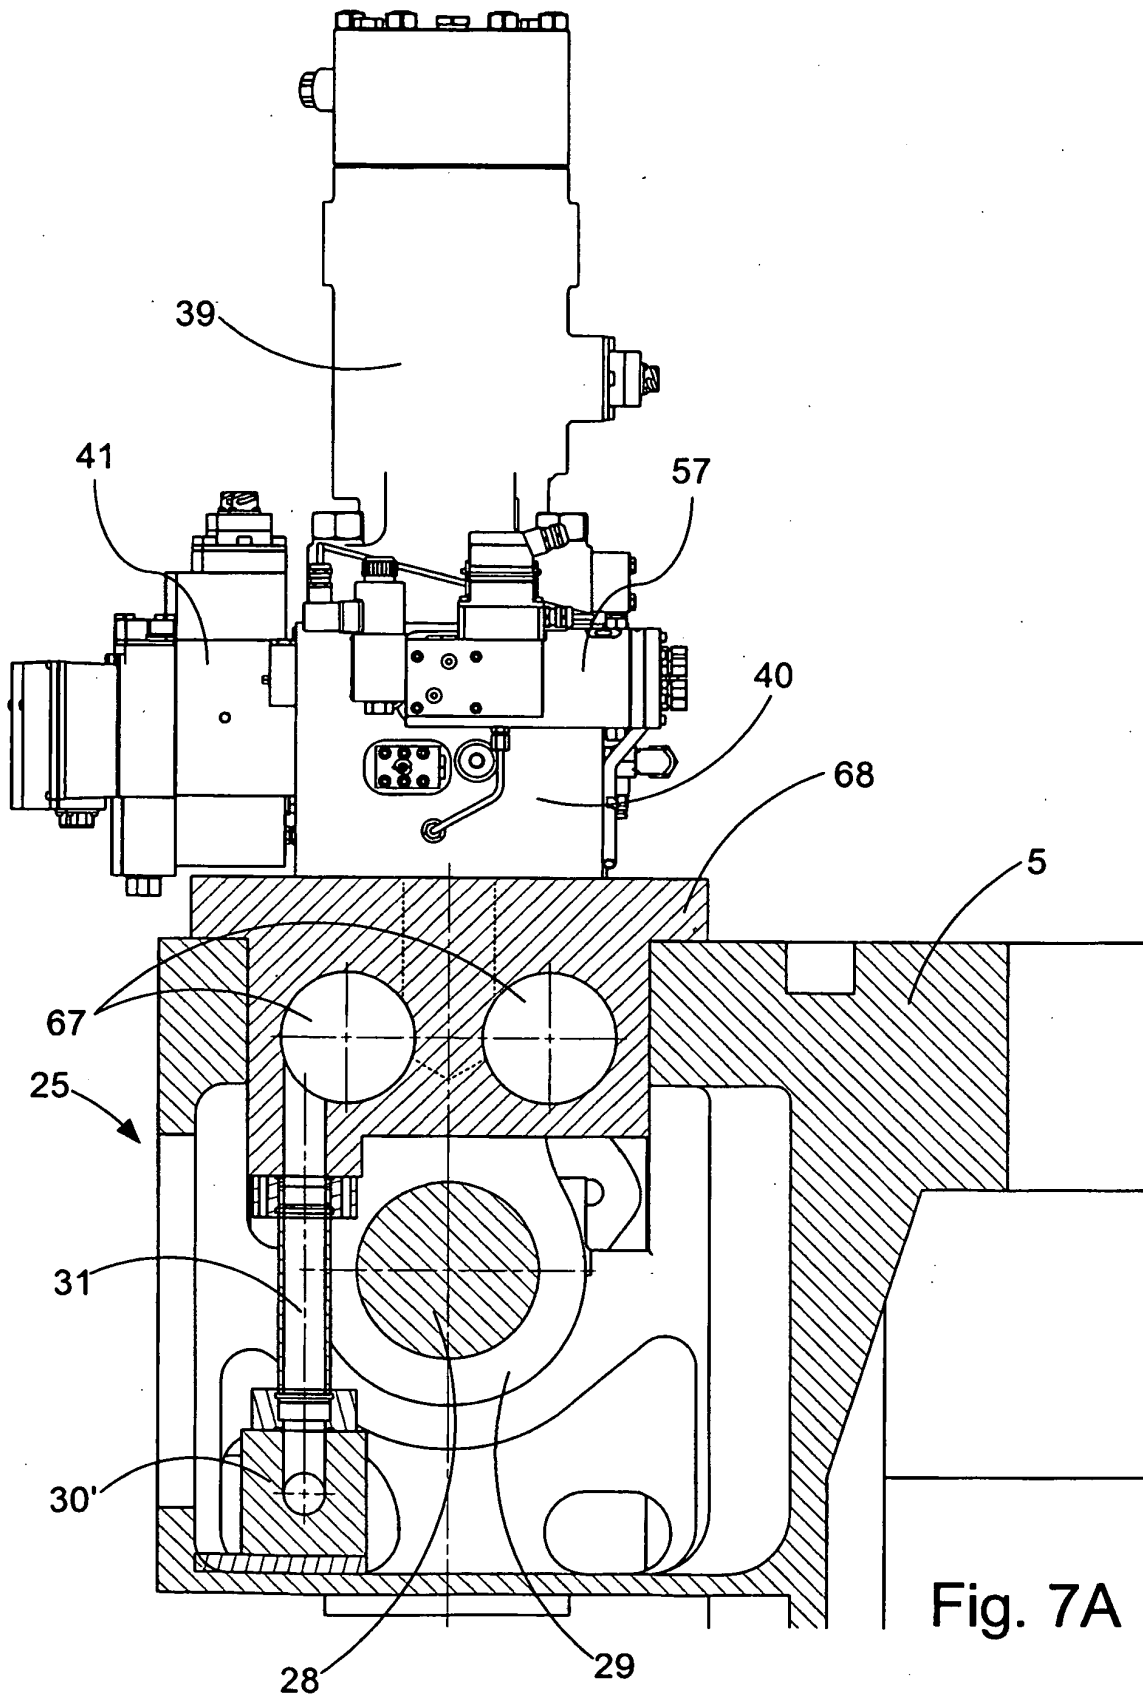


Fig. 7



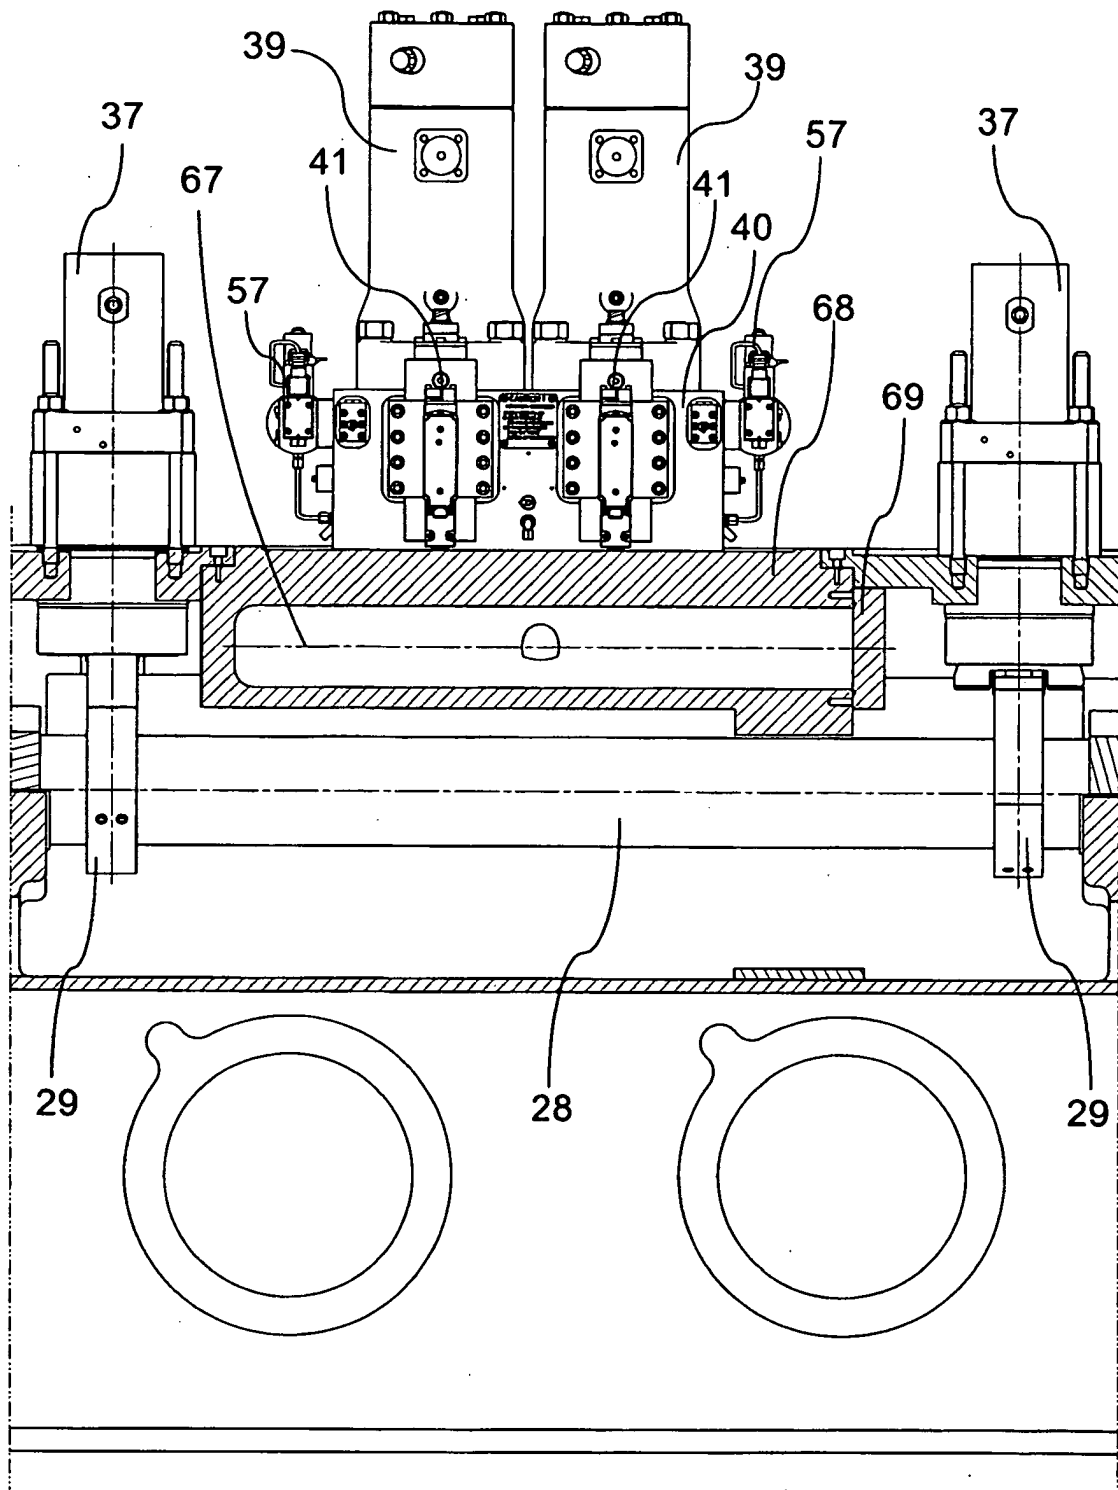


Fig. 7B

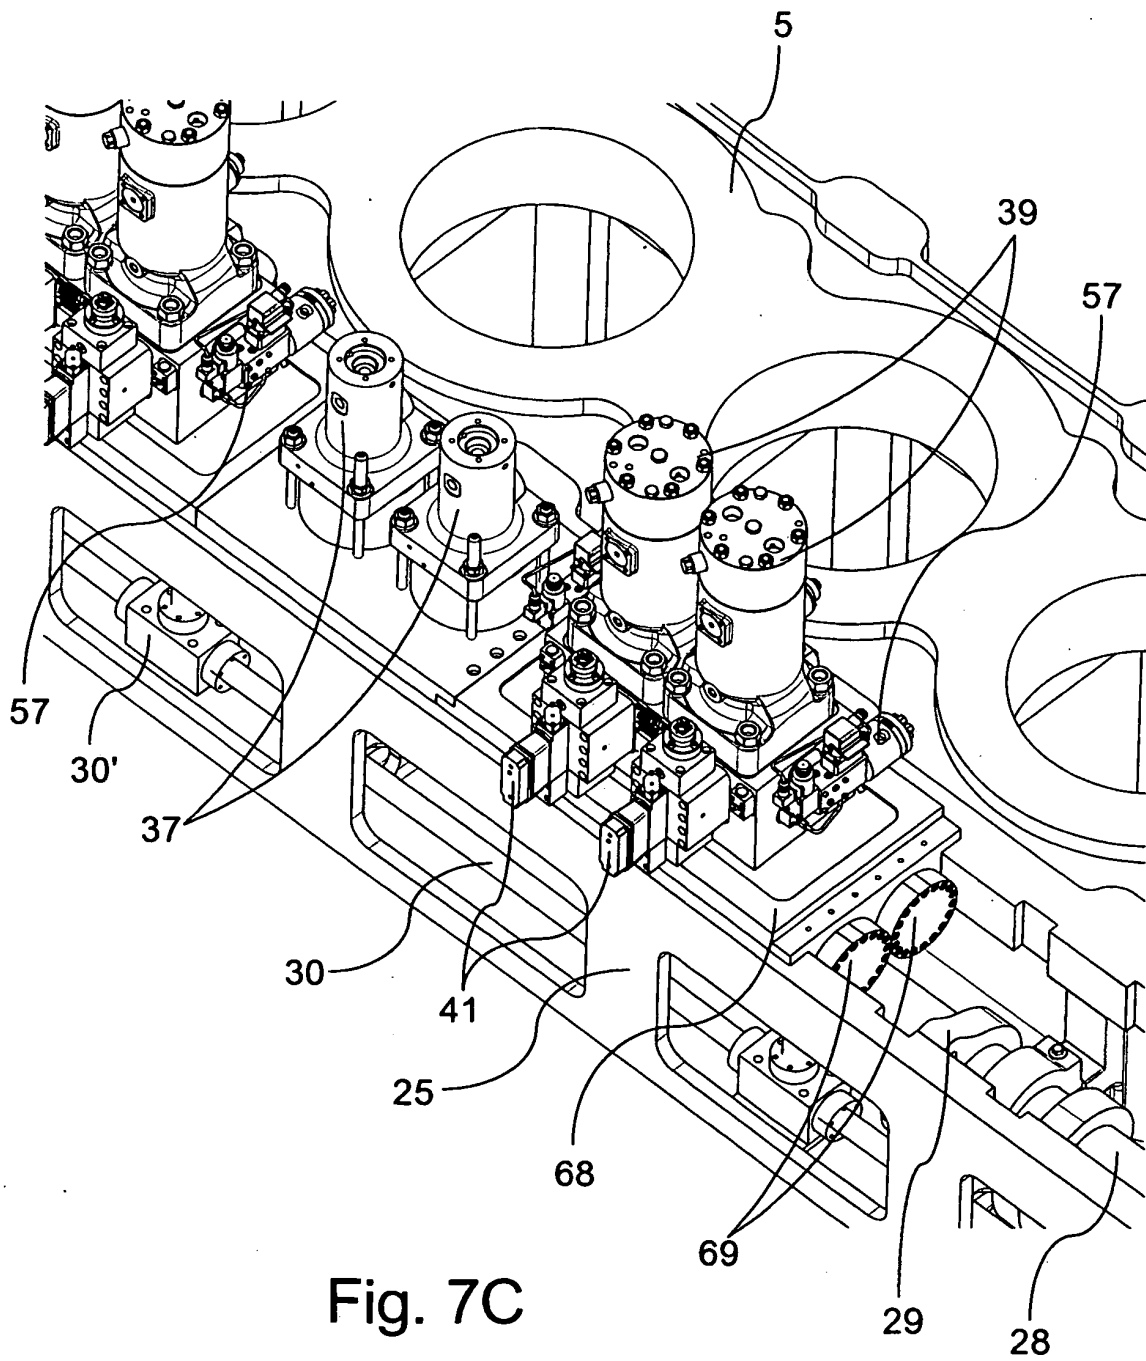


Fig. 7C



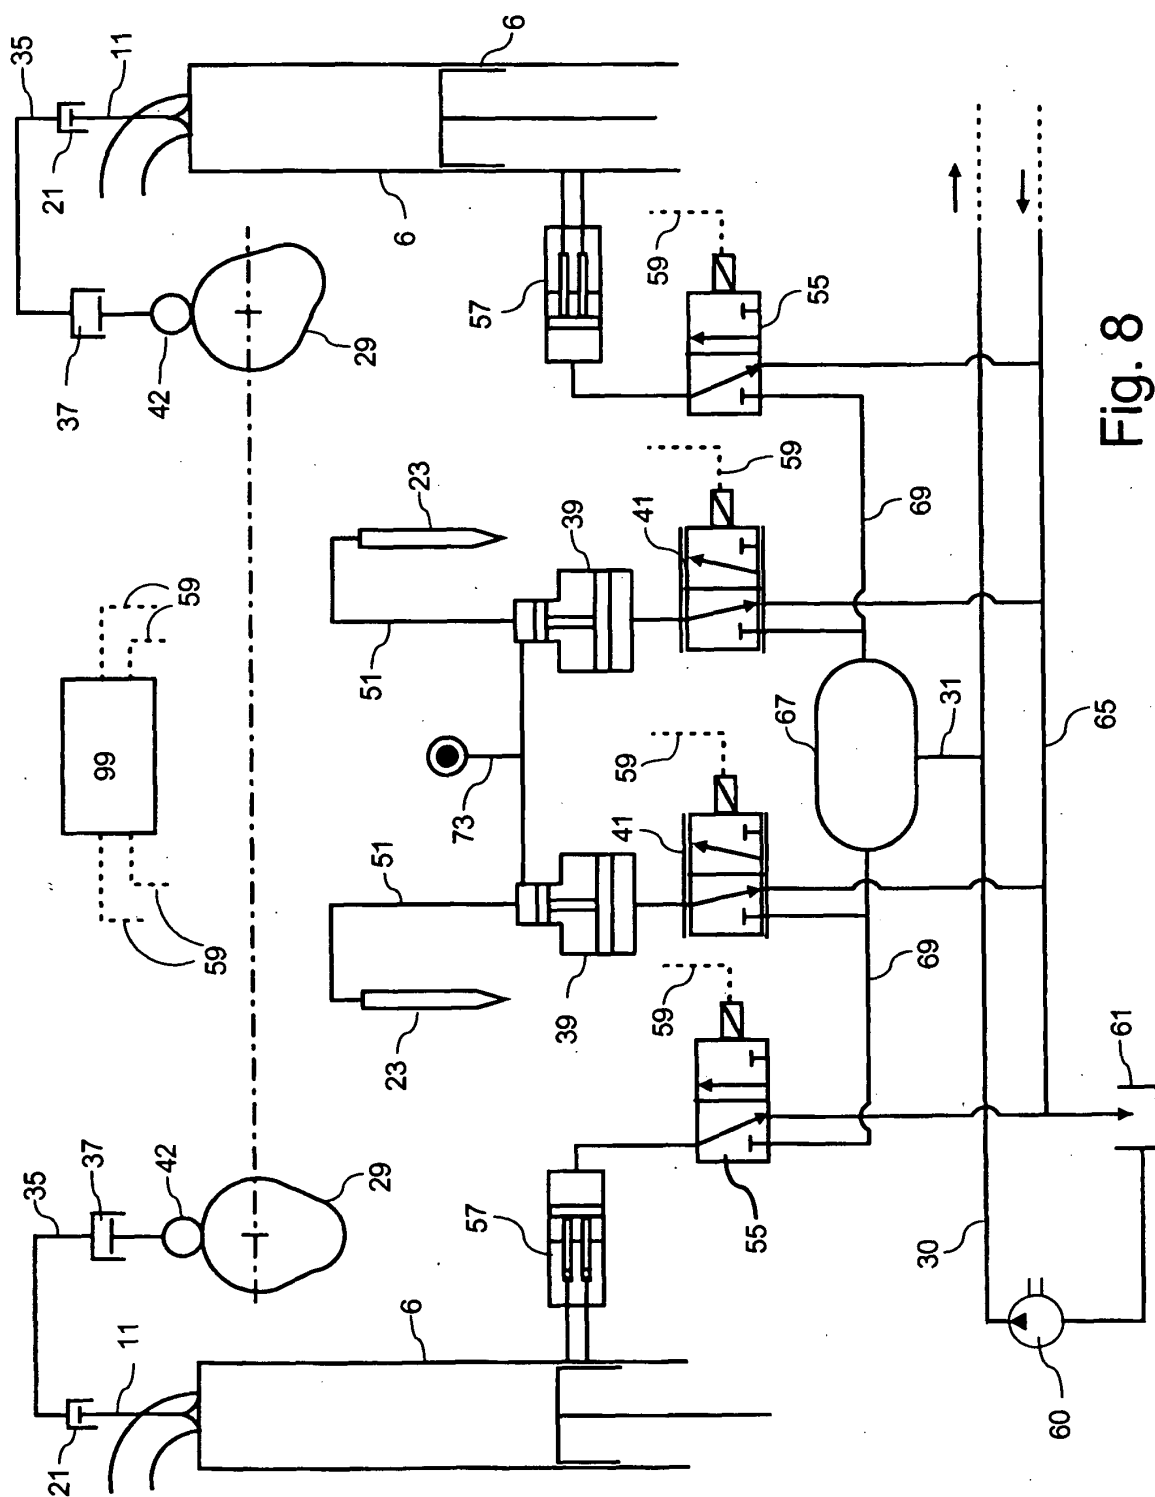


Fig. 8

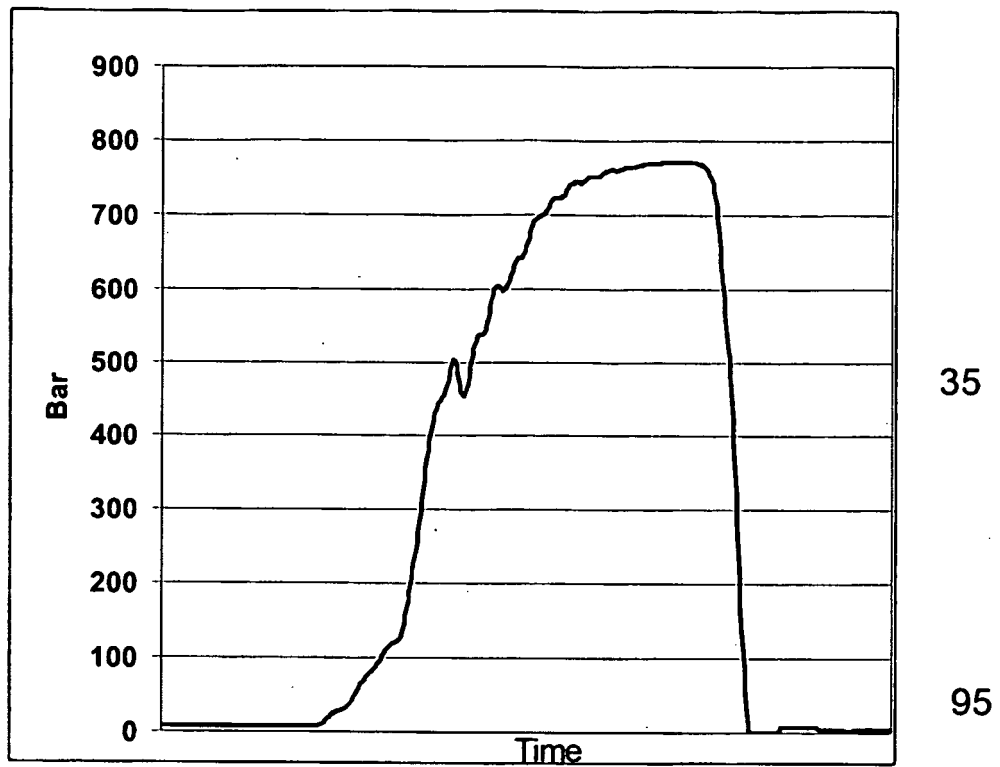


Fig. 9

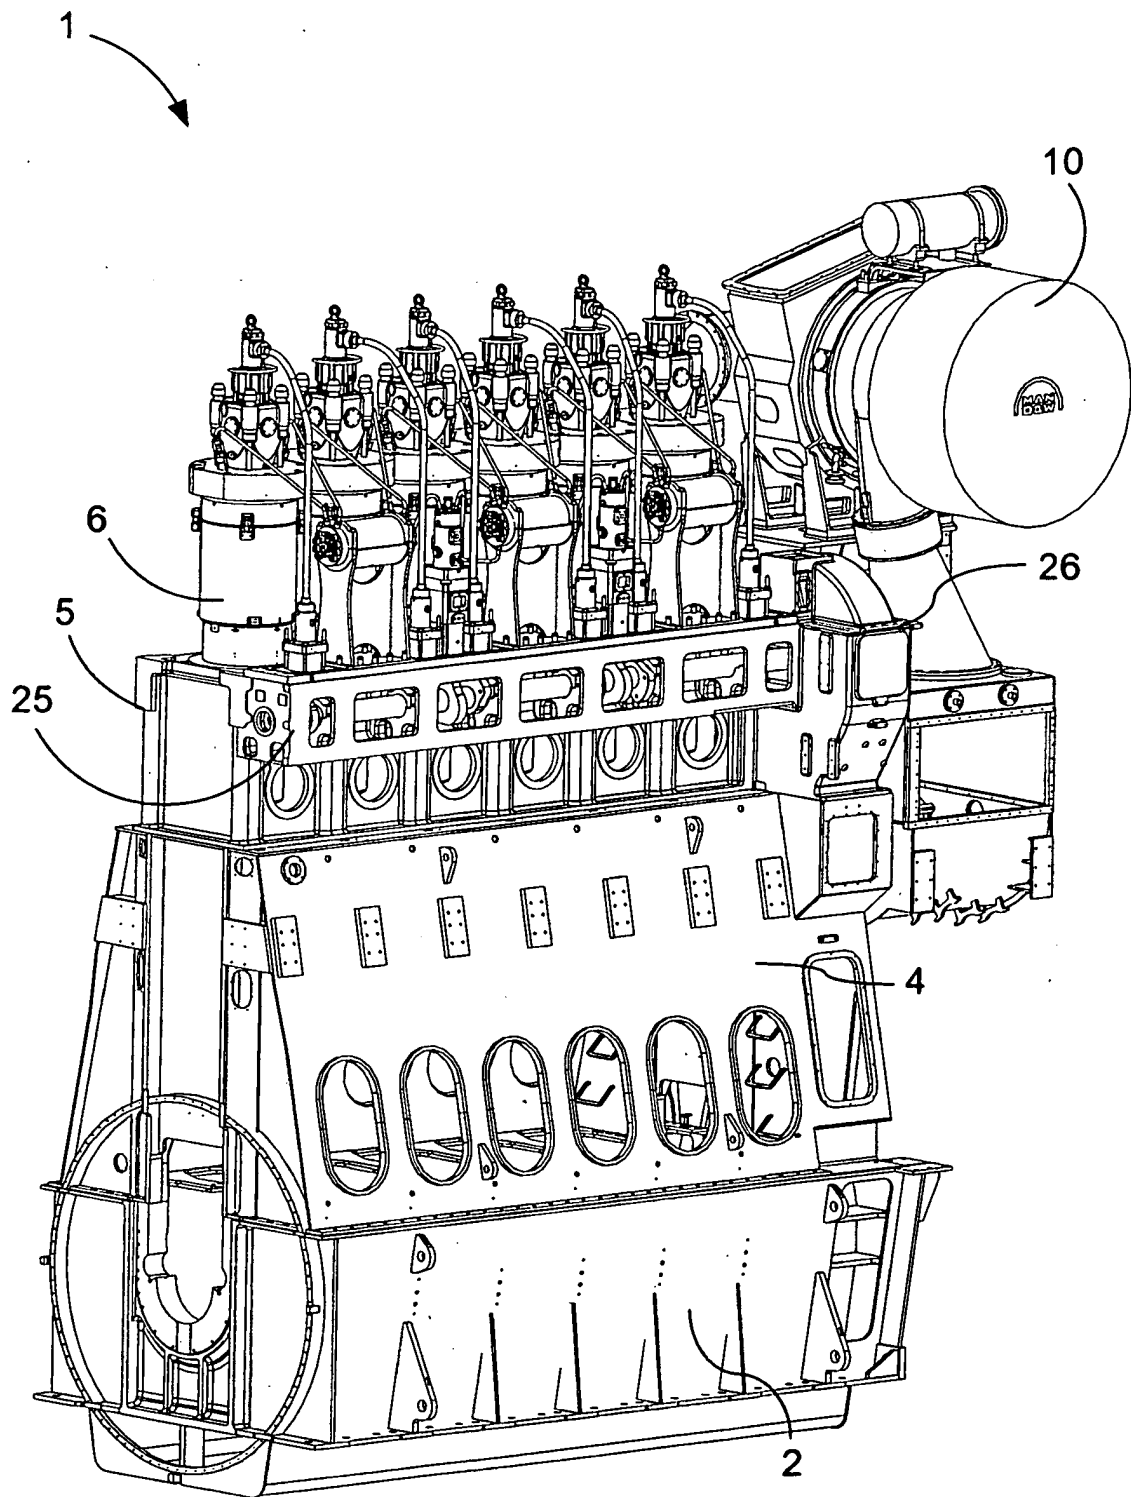


Fig. 10

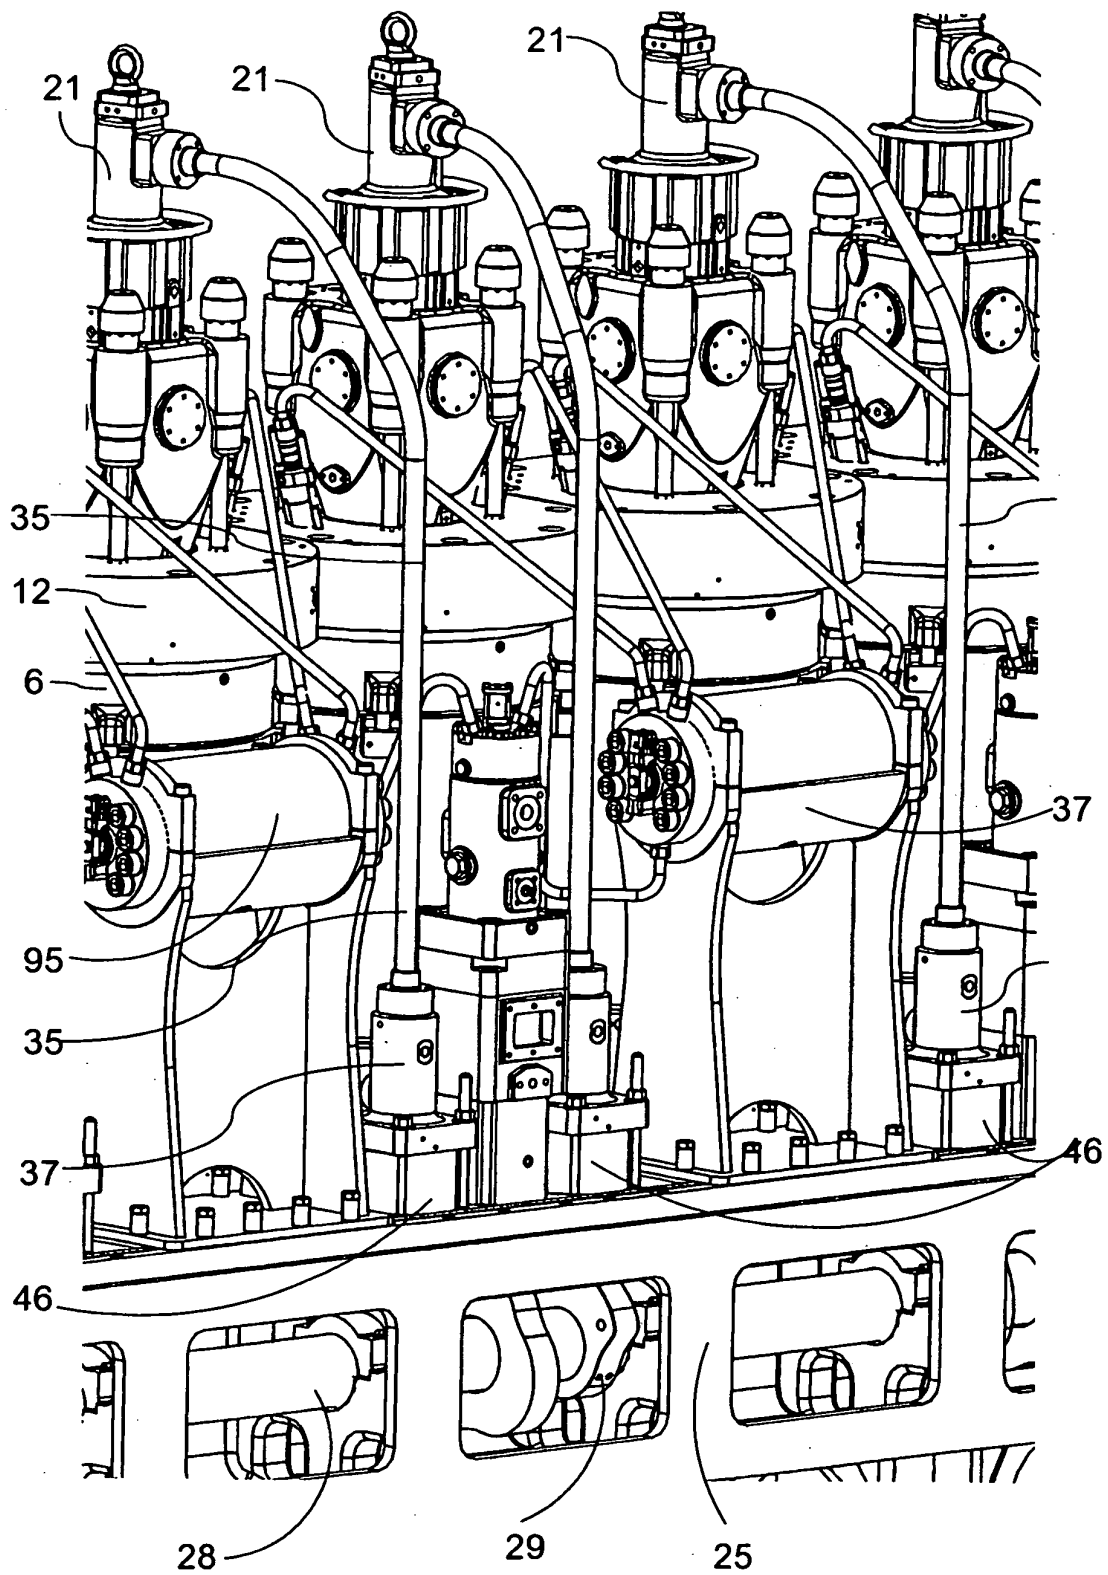


Fig. 11

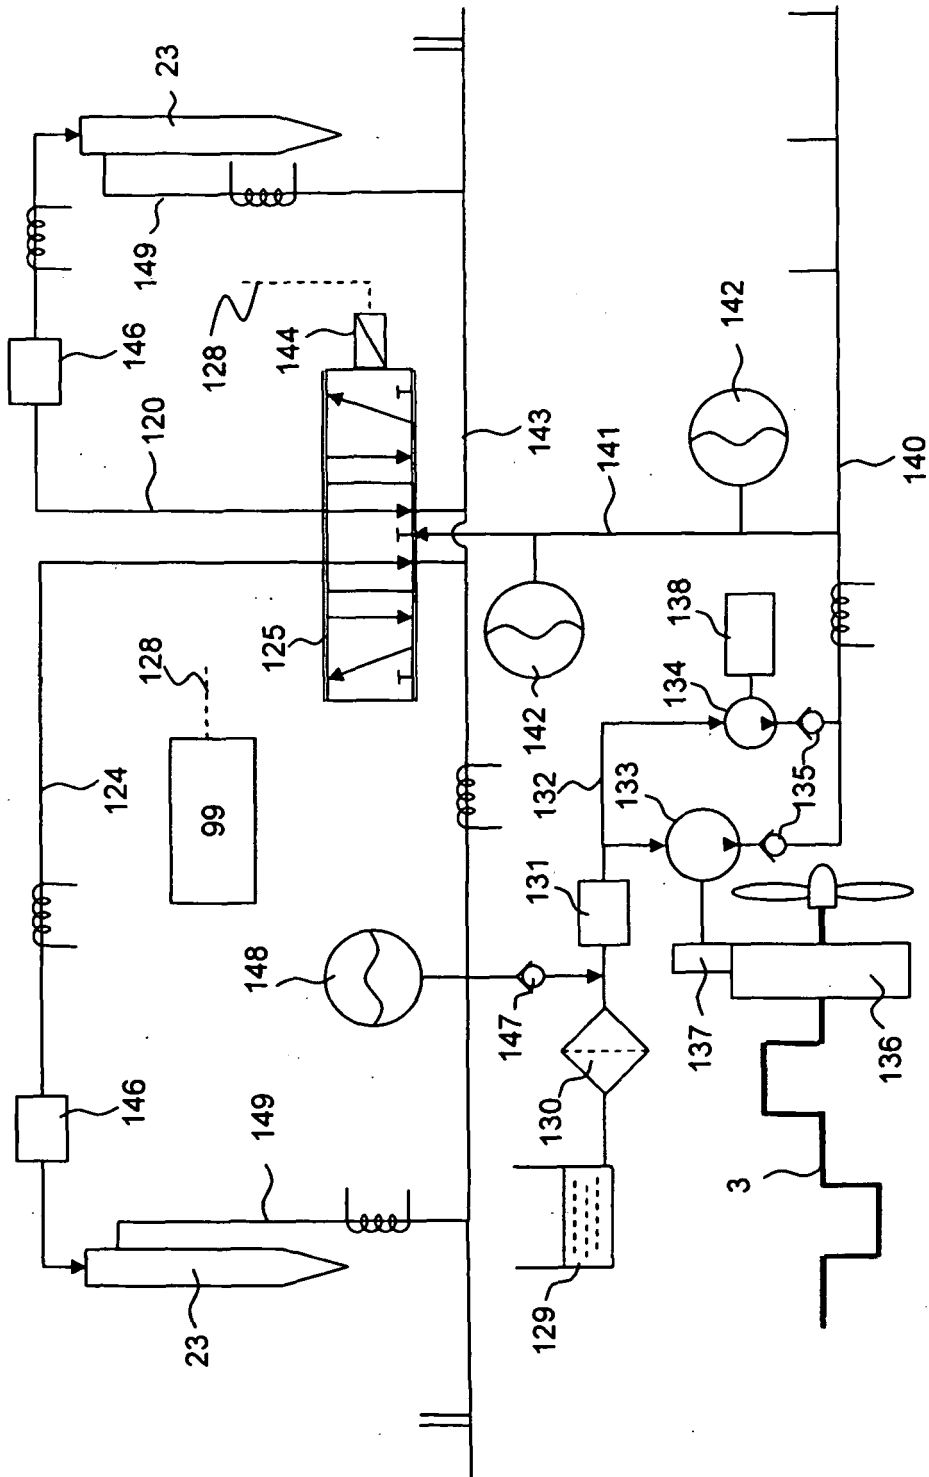


Fig. 12

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- EP 909883 A1 [0001]
- FR 2496170 A [0001]