

May 28, 1974

TOMOJI MURATA ET AL


Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 1

FIG. 1

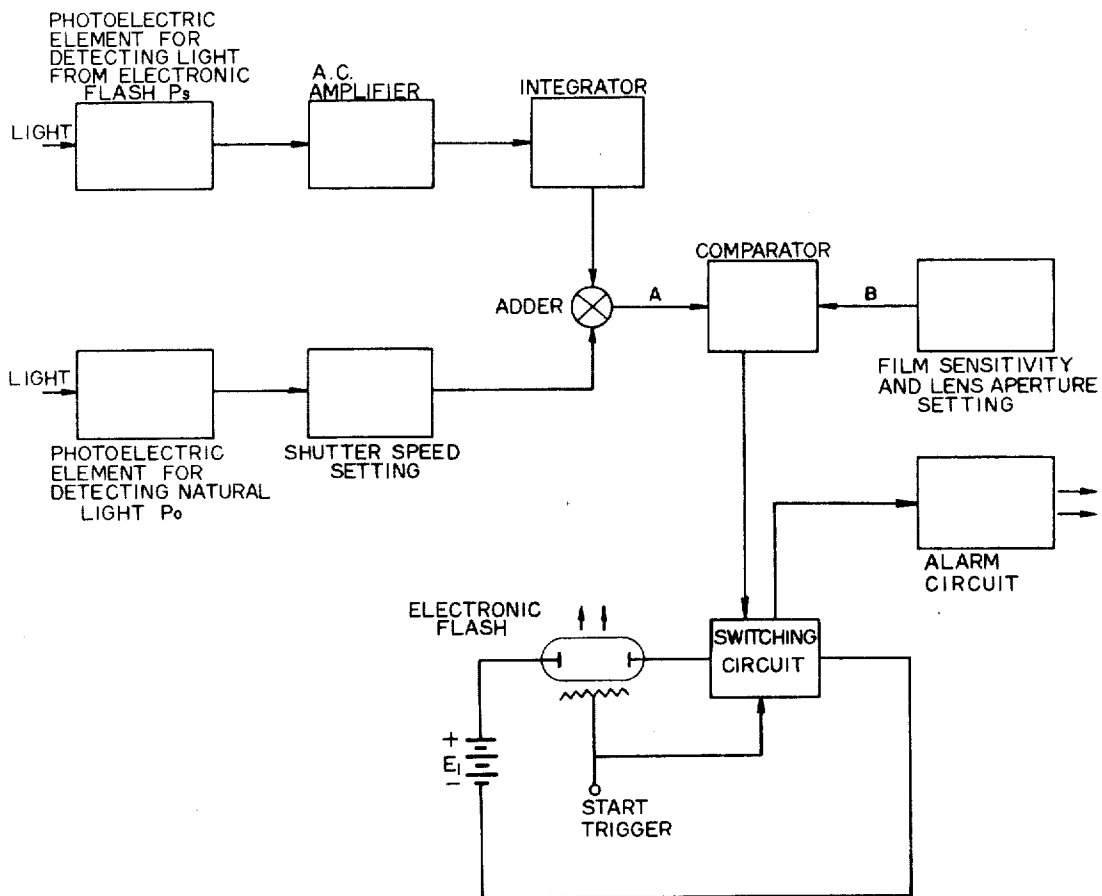

INVENTORS
TOMOJI MURATA
SADAO YAMAOKA

BY *Mullin & Siegel*

ATTYS

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 2

FIG. 2


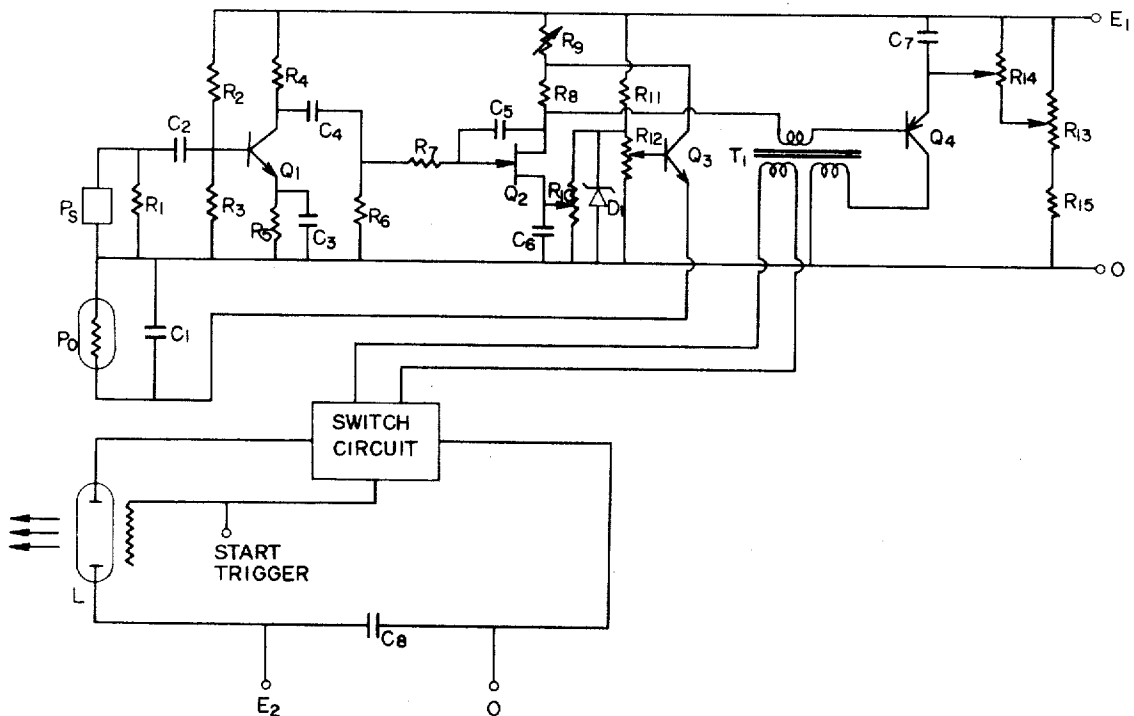


FIG. 3

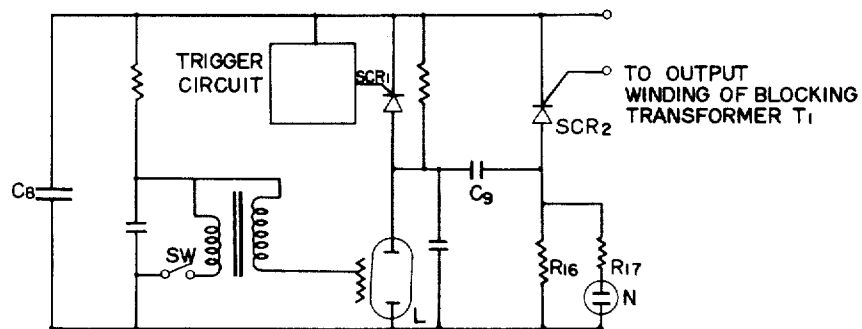

INVENTORS
TOMOJI MURATA
SADAO YAMAOKA

BY *Mullen & Siegel*
Attys

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 3

FIG. 4


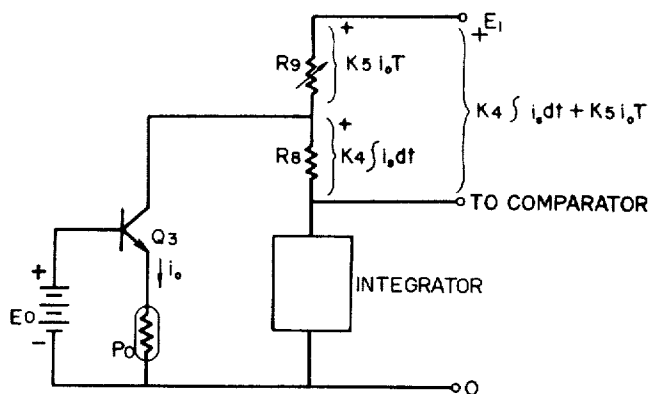


FIG. 5

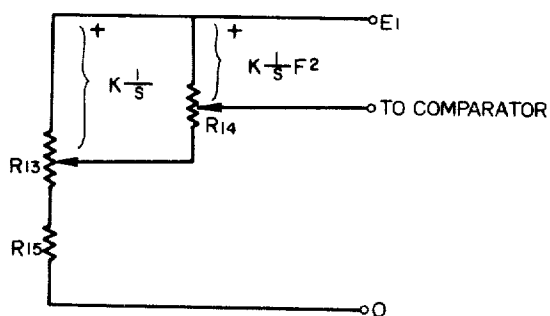

INVENTORS
TOMOJI MURATA
SADAO YAMAOKA

BY *Mullen & Angel*
ATTYS

May 28, 1974

TOMOJI MURATA ET AL


Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 4

FIG. 6

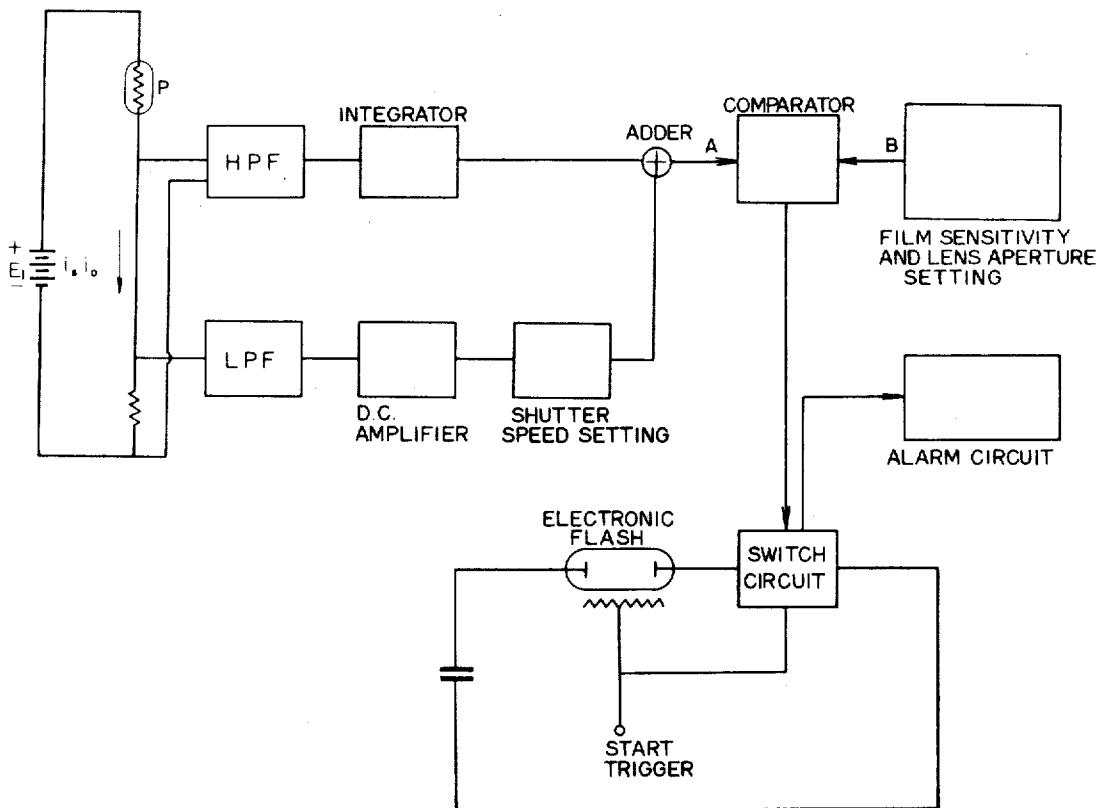

INVENTORS
TOMOJI MURATA
SADAO YAMAOKA

BY *Mullen & Siegel*
Attys

May 28, 1974

TOMOJI MURATA ET AL


Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 5

FIG. 7

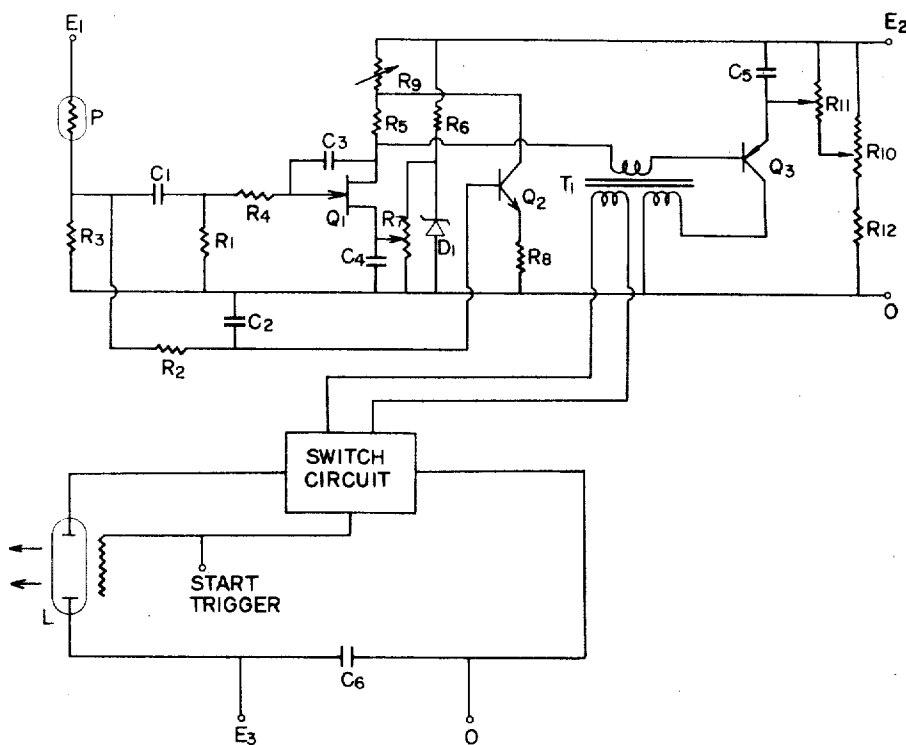

INVENTORS
TOMOJI MURATA
SADAO YAMAOKA

BY *Mullen & Siegel*
ATTYS

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 6

FIG. 8


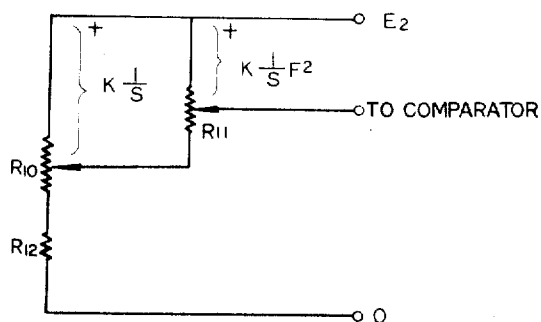


FIG. 9

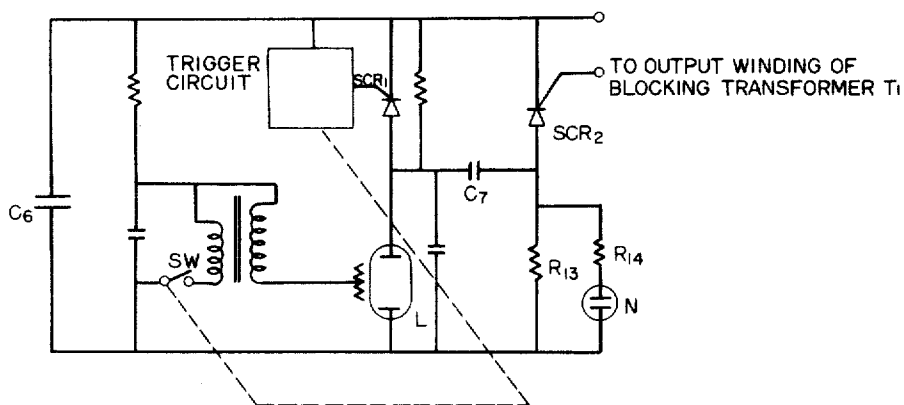

INVENTORS

TOMOJI MURATA
SADAO YAMAOKA

BY *Muller & Siegel*
Attys

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 7

FIG. 10

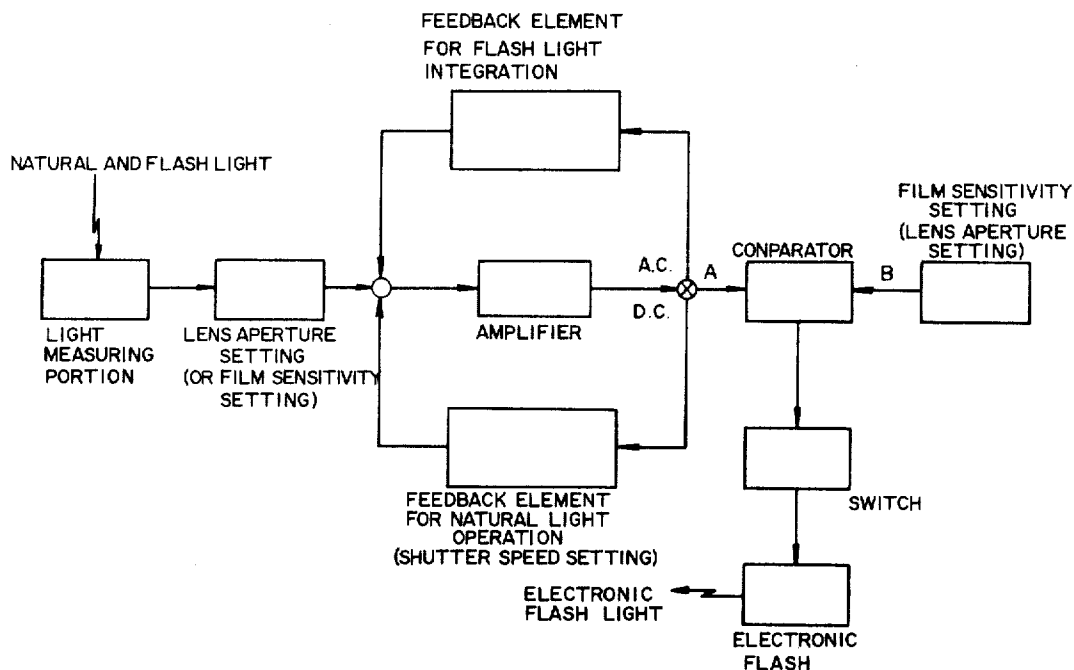


FIG. 11


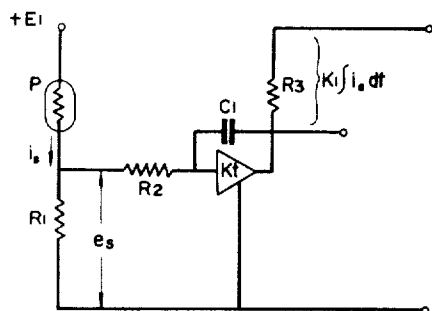


FIG. 12

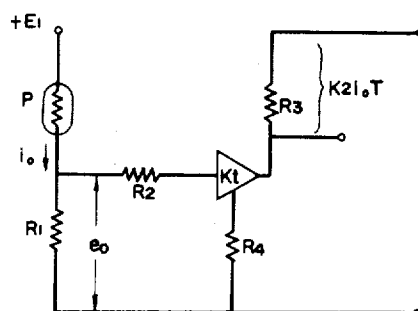

INVENTORS

TOMOJI MURATA
SADAO YAMAOKA

BY *Mullin & Siegel*
Attys

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 8

FIG.13


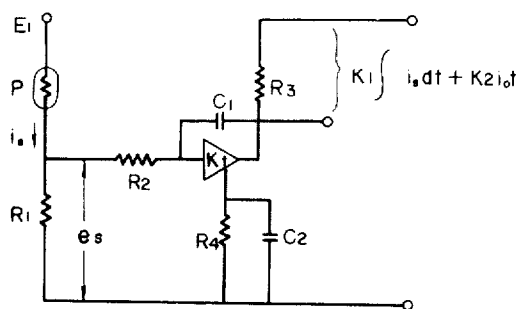


FIG.14

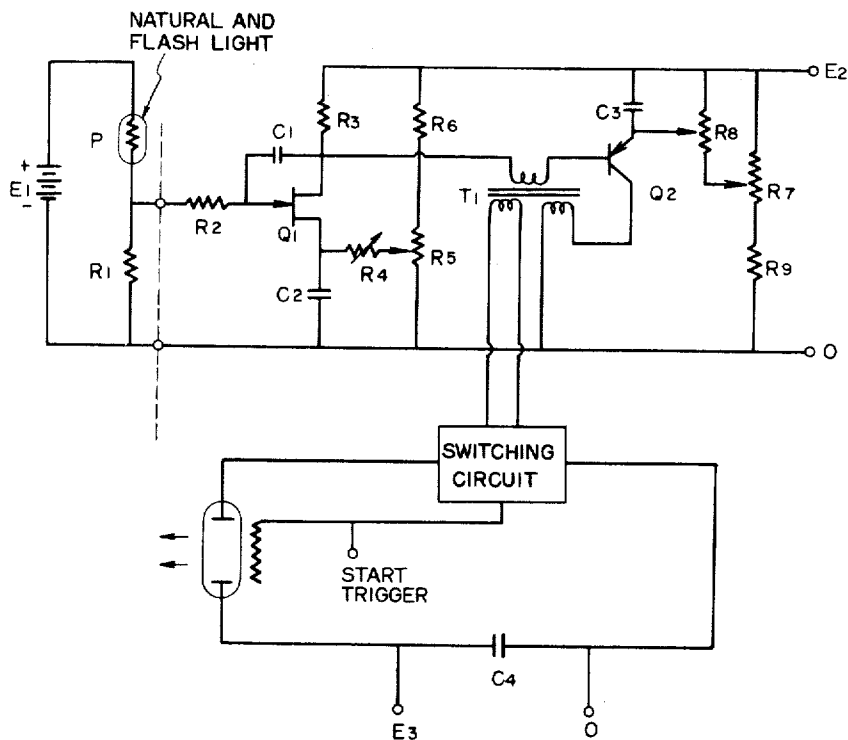

INVENTORS

TOMOJI MURATA
SADAO YAMAOKA

BY *Mullen & Siegel*

Attys

May 28, 1974

TOMOJI MURATA ET AL

Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 9

FIG.15


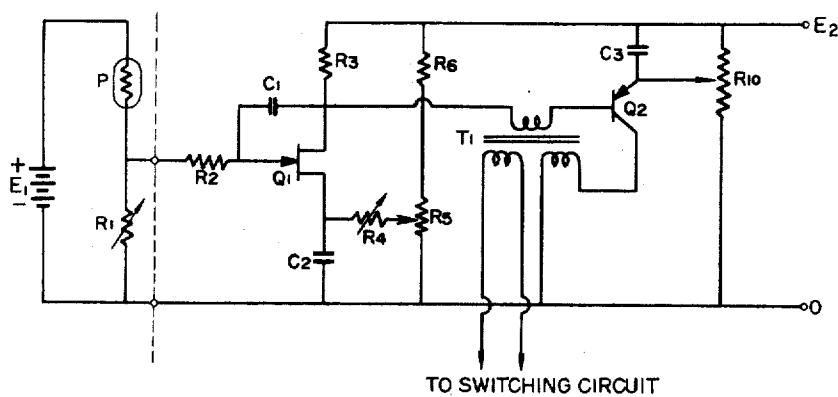


FIG.16

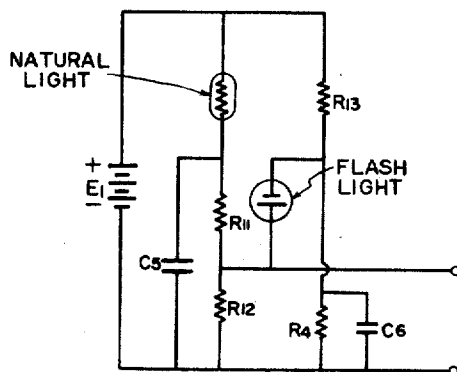

INVENTORS

TOMOJI MURATA

SADAO YAMAOKA

BY *Mullen & Siegel*

Attys

May 28, 1974

TOMOJI MURATA ET AL


Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 10

FIG.17

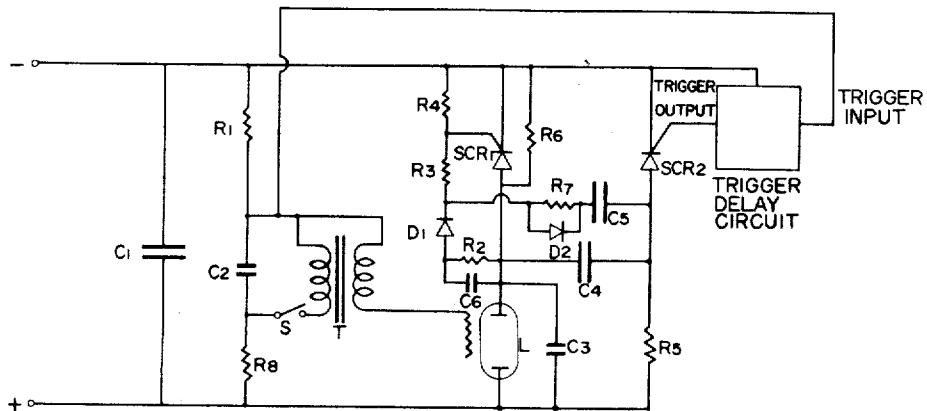

INVENTORS

TOMOJI YAMAOKA

SADAO YAMAOKA

BY *Mullen & Siegel*

Attys

May 28, 1974

TOMOJI MURATA ET AL


Re. 28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Original Filed April 18, 1968

11 Sheets-Sheet 11

FIG. 18

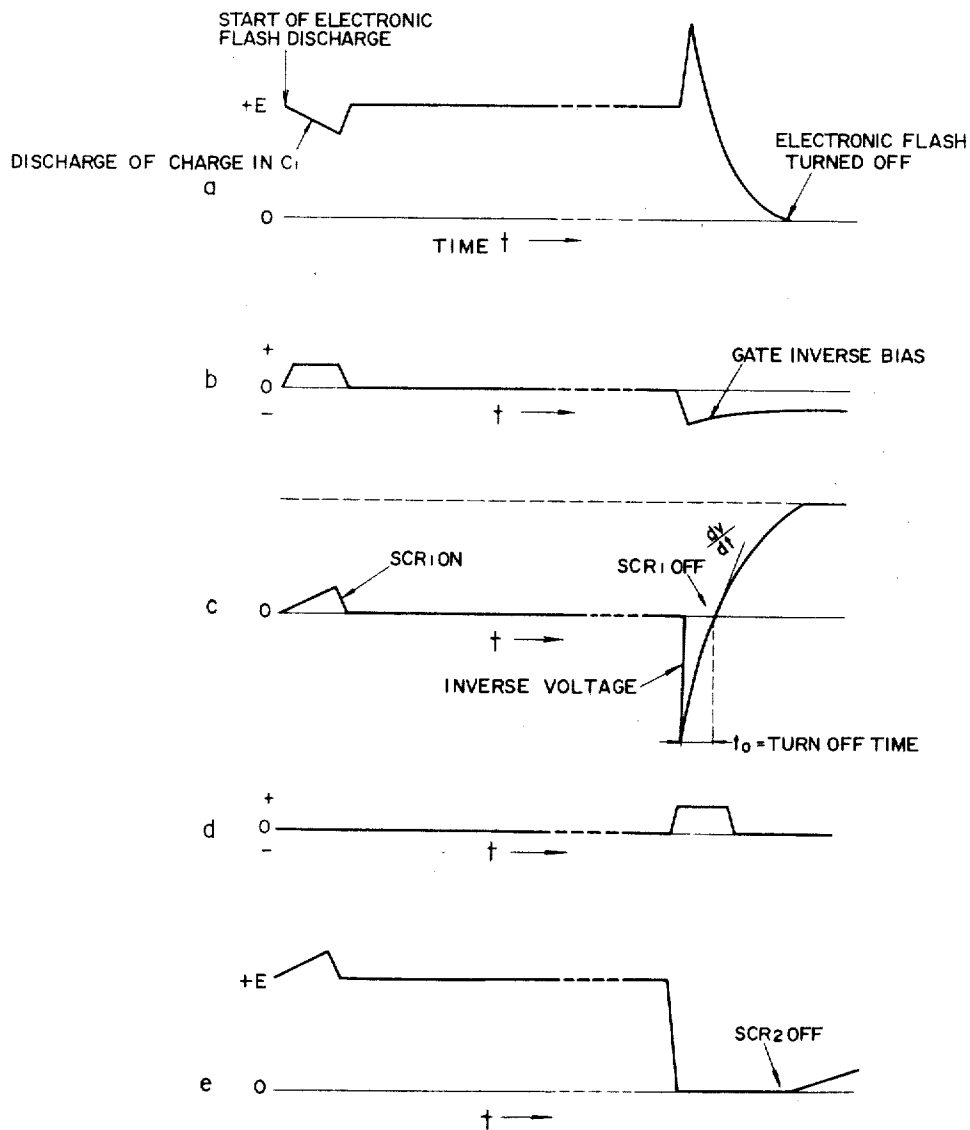

INVENTORS

TOMOJI YAMAOKA

SADAO YAMAOKA

BY *Mullen & Siegel*

Att'ys

1

28,025

AUTOMATIC CONTROL DEVICE FOR ELECTRONIC FLASH

Tomoji Murata, 2306 Kanaoka-chou, Sakai, Osaka, Japan,
and Sadao Yamaoka, 33-2 Nakanogawa-chou, Toyo-
kawa, Aichi, Japan

Original No. 3,591,829, dated July 6, 1971, Ser. No.
722,287, Apr. 18, 1968. Application for reissue Apr.
11, 1972, Ser. No. 243,095

Claims priority, application Japan, Apr. 20, 1967,
42/25,351; June 27, 1967, 42/41,126; Aug. 7,
1967, 42/50,649; Aug. 21, 1967, 42/53,637

Int. Cl. H01j 39/12; H05b 41/36

U.S. Cl. 315-151

19 Claims

Matter enclosed in heavy brackets [] appears in the
original patent but forms no part of this reissue specifi-
cation; matter printed in italics indicates the additions
made by reissue.

ABSTRACT OF THE DISCLOSURE

A device for automatic control of the quantity of light
from an electronic flash, by comparing the brightness of a
photographic object with the quantity of light required for
particular photographing conditions including the degree
of lens aperture selected and the sensitivity of the film
used. The brightness of the photographic object is meas-
ured as the sum of the natural light brightness and the
brightness due to electronic flash, and as soon as the sum
brightness thus measured reaches the required quantity of
light, a stop signal is given. Thereby, the electronic flash
is controlled, and at the same time signal is given for the
sufficient brightness of the photographic object.

This invention relates to a device for automatic control
of the quantity of light from electronic flash, responsive
to the brightness of the respective photographic object in
view of settings of the sensitivity of film, the degree of lens
aperture, and shutter speed. More particularly, the present
invention relates to an automatic controlling device for
the quantity of light from electronic flash, which is capa-
ble of electronic flash photographing with or without the
daylight by measuring both the natural or daylight com-
ponent and the electronic flash component of the bright-
ness of the photographic object.

With known automatic devices for controlling the quan-
tity of light, it has been extremely difficult to carry out
electronic flash photographing in the daylight, because
only the light beams from electronic flash is measured by
a photoelectric means, for determining the quantity of
light, and hence, in measuring the brightness including the
electronic flash light and natural light, there has been a
considerably large error for the daylight brightness com-
parable with the electronic flash brightness.

Therefore, an object of the present invention is to obvi-
ate such difficulty of the known devices for controlling the
quantity of light for photographing by providing an auto-
matic device for controlling the quantity of light from
electronic flash and for giving an alarm for the daylight
sufficient for eliminating the need of electronic flash, which
device, for instance, includes two photoelectric elements
to measure the brightness of each photographic object in
two separate quantities, i.e., one due to daylight and an-
other due to electronic flash, respectively, so that the
actual brightness of the object can be achieved by adding
the above two quantities for regulating the quantity of
light from the electronic flash, as well as for generating
alarm signal in cases where the daylight is sufficient for
successful photographing without necessitating the use of
the electronic flash.

Another object of the present invention is to provide an
automatic device for controlling the quantity of light from

2

the electronic flash and for giving an alarm when the day-
light is bright enough to eliminate the need of electronic
flash. The device includes a photoelectric element for
measuring the overall brightness of each photographic ob-
ject owing to both the natural daylight and electronic
flash; a discriminating means adapted to separate the DC
component of the output from the photoelectric element,
representative of the intensity of slowly changing daylight
component of the object brightness, from the remaining
AC component of said photoelectric element output, rep-
resentative of the intensity of rapidly varying electronic
flash component thereof; an integrator-amplifier adapted
to integrate the thus discriminated AC component to pro-
duce an output representing quantity of light from the
electronic flash and to amplify the DC component; an
adder to add the thus integrated electronic flash com-
ponent and the daylight component so as to produce a
brightness output; a reference means for producing a
reference output representing the sum of settings on film
sensitivity, degree of lens aperture, etc.; a comparator to
compare said brightness output with said reference output,
so as to produce a control output; a control means to regu-
late the quantity of light from said electronic flash in re-
sponse to said control output; and an alarm means for
giving an alarm when said daylight quantity is too high to
use said electronic flash.

A further object of the present invention is to provide a
device for automatically controlling the quantity of light
from electronic flash, which device includes a photoelec-
tric element adapted to determine the overall brightness of
each photographic object; an integrator adapted to inte-
grate AC component of the output from said photoelec-
tronic element, representing rapidly varying electronic
flash component of said photoelectric element output, and
to amplify DC component of said output, representing
slowly varying daylight component thereof, so that said
integrator produces an integrated output representing the
sum of a quantity proportional to the electronic flash light
quantity and another quantity proportional to the daylight
quantity as modified by a selected shutter speed; a refer-
ence means for producing a reference output representing
one or more settings on film sensitivity, degree of lens
aperture, etc.; a comparator for comparing said integrated
output and said reference output to produce a control out-
put; and a control means for controlling the quantity of
light from said electronic flash, responsive to said control
output.

Another object of the present invention is to provide an
automatic device for controlling the quantity of light from
the electronic flash of any of the aforesaid types, which
device includes a switch circuit consisting of SCR switch
elements for regulating said quantity of light from elec-
tronic flash, having a starting unit and a bias unit for pro-
viding reverse bias to quicken the turnoff operation there-
of. According to the present invention, the switch circuit
is connected in series with the electronic flash, so that the
duration of light emanating from the electronic flash can
be controlled by regulating the switching time of said
switch circuit. To insure satisfactory operation at high
speed, the switch circuit should have a high interrupting
capacity to deal with the high loss during such high speed
switching operation. On the other hand, as well known to
those skilled in the art, the instantaneous peak current in
an SCR can be several ten times as large as the maximum
mean forward current, and in the case of electronic flash
circuit, the duration of current flowing through the SCR,
if used, is very short with comparatively long noncon-
ducting periods between succeeding operations. Accord-
ingly, a small capacity SCR can be used in the electronic
flash circuit. Since the small capacity SCR has difficulty in
turning off a large current, in the device of the invention,

a counterbias means is provided to shorten the switching time down to two-thirds—one-third of that without it.

Other objects and a fuller understanding of the present invention may be had by referring to the following description, taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a block diagram of a control device embodying the present invention;

FIG. 2 is a circuit diagram of the control device;

FIG. 3 is a circuit diagram of a switch circuit with an alarm means, usable in the control device;

FIG. 4 is a simplified circuit diagram of a means for measuring the quantity of light of daylight or natural light brightness;

FIG. 5 is a schematic diagram of a circuit for setting the film sensitivity, the degree of lens aperture, and the like;

FIG. 6 is a block diagram similar to FIG. 1 but showing another control device according to the present invention;

FIG. 7 is a circuit diagram of the control device of FIG. 6;

FIGS. 8 and 9 are diagrams similar to FIGS. 5 and 3 respectively but showing a setting circuit and a switch circuit usable in the device of FIG. 6;

FIG. 10 is a block diagram of another embodiment of the present invention;

FIG. 11 is a circuit diagram of a computing means for electronic flash light;

FIG. 12 is a circuit diagram of another computing means for daylight or natural light;

FIG. 13 is a circuit diagram of an integrator of quantity of light, actually used in the device of FIG. 10;

FIGS. 14 and 15 are circuit diagrams of the device of FIG. 10;

FIG. 16 is a circuit diagram of a different light measuring means, usable in the control device according to the present invention;

FIG. 17 is a circuit diagram of switching means usable in any of the aforesaid control devices; and

FIG. 18 is a graph showing curves representing operation of various circuit elements in the device according to the present invention.

Like parts and elements are designated by like numerals and symbols throughout the drawings.

The quantity of light to be emanated from an electronic flash for successful photographing is determined in the following manner, in the control device according to the present invention. For the sake of simplicity, it is assumed in the following derivation of equations that separate photoelectric elements are used for electronic flash light and for daylight or natural light. However, it is apparent to those skilled in the art that by using a suitable discriminator means, the quantity of light for both the electronic flash and natural light can be determined with only one photoelectric element.

If the overall brightness of the photographic object is assumed to have a value B_0 due to daylight or natural light and another value B_s due to electronic flash light, then the quantity of light delivered to a photoelectric element P_s for electronic flash is equal to $K_1(B_s + B_0)$, K_1 being a constant. Accordingly, the total output current from the photoelectric element P_s is

$$(i_s + i_o = K_2(B_s + B_0)),$$

wherein K_2 is another constant,

i_s is a photoelectric current generated by light from the electronic flash, and

i_o is a photoelectric current generated by natural light. The photoelectric current i_o generated by natural light can be considered as a direct current, because the natural light intensity varies only very slowly. Hence, by passing the output current from the photoelectric element P_s through an AC amplifier, the DC component i_o thereof can be eliminated, so as to produce an amplified AC

component $K_3 i_s$, K_3 being a constant. By integrating the thus separated AC component for the time period corresponding to each energization of the electronic flash, the following output can be achieved.

$$K_4 \int i_s dt \quad (K_4 \text{ being a constant})$$

On the other hand, another photoelectric element P_o for natural light has the same output ($i_s + i_o$) as that of the preceding element P_s . Upon bypassing the AC component, by means of a capacitor, the DC component, representing the brightness due to the natural light, can be separated and delivered as an output quantity $K_5 i_o$ (K_5 being a constant).

It is apparent to those skilled in the art that by using a suitable combination of high-pass and low-pass filters, the aforesaid two photoelectric elements P_s and P_o can be replaced with only one photoelectric element P , to achieve the same output quantities $K_4 \int i_s dt$ and $K_5 i_o$.

The proper quantity of light to be expressed to a film is generally given by the following equation.

$$(\int B_s dt + B_o T) / F^2 = K / S$$

Here,

F represents the degree of lens aperture,

T the shutter speed selected,

S the sensitivity of the film used, and

K a constant.

Accordingly, the following relation should be satisfied for successful photographing.

$$(K_4 \int i_s dt + K_5 i_o T) / F^2 = K / S$$

Rearranging,

$$K_4 \int i_s dt = KF^2 / S - K_5 i_o T$$

The last mentioned equation gives the quantity of light to be generated by an electronic flash for successful photographing.

Now, referring to FIG. 1, the AC component of the output from a photoelectric element P_s for detecting light from an electronic flash is amplified by an AC amplifier for separating the DC component thereof and for amplifying the AC component. Then the AC component is integrated by an integrator to deliver an output quantity proportional only to the magnitude of the AC component. On the other hand, the AC component of the output from another photoelectric element P_o for detecting natural light is bypassed by a suitable capacitor, so that the remaining DC component of the output from P_o is delivered as another output quantity $B_o T$, incorporating the shutter speed setting. The two output quantities are added by an adder to produce a brightness output A , which is applied to a comparator.

Another input quantity to the comparator is an output B , which is equal to KF^2 / S and represents the settings of the degree of lens aperture and the film sensitivity, as defined above.

If the quantity of light from the electronic flash increases to raise the level of the brightness output A delivered to the comparator, until it coincides with the setting output B representing the film sensitivity and the degree of lens aperture, then the condition of $A=B$ is achieved and a stop signal is delivered to a switch circuit to turn it off. Thereby, proper quantity of light for the given setting can be achieved.

If there is a very strong natural light available, which is sufficient for successful photographing without energizing the electronic flash, for a given shutter speed T , then the condition of $A \geq B$ is established, so that the comparator generates a stop signal before energization of the electronic alarm, to actuate the alarm circuit. Thereby, the alarm is given to notify that the electronic flash need not be energized.

In FIG. 2, the output from the photoelectric element P , for detecting light from the electronic flash is connected to an AC amplifier, which consists of a transistor Q_1 , re-

sistors R_2 , R_3 , R_4 , R_5 , capacitors C_2 , and C_3 . The output from the AC amplifier is applied to an integrator comprising a field effect transistor Q_2 , resistors R_6 , R_7 , R_8 , R_{10} , capacitors C_5 , and C_6 . An electric quantity, representative of the quantity of natural light, can be produced by a circuit including a photoelectric element P_0 , a transistor Q_3 , resistors R_9 , R_{11} , R_{12} , and a capacitor C_1 . A Zener diode D_1 is connected to the base of the transistor Q_3 to maintain the base voltage at a constant level E_0 . The shutter speed setting is represented by regulating the resistance value of the resistor R_9 , which is a rheostat type. By connecting, in series, the resistor R_9 of the integrator associated with the electronic flash to the resistor R_9 associated with the natural light, the brightness output A can be produced.

FIG. 4 shows the details of the natural light detecting circuit of an adder circuit, in which a constant standard voltage E_0 is applied across the base of the transistor Q_3 having the photoelectric element P_0 connected to the emitter thereof. Then, the differential voltage between the base and the emitter of the transistor is small, and a substantially constant voltage E_0 is applied across the photoelectric element P_0 , regardless of the resistance variation of the element P_0 . If the photoelectric element P_0 has the performance characteristics $K''/B_0=R$, wherein K'' is a constant, B_0 is the brightness at the element, and R is the internal resistance of the element, then the emitter current i_0 can be given by $i_0=E_0/R=E_0B_0/K''$. In this case, the collector current i_0' is approximately the same as the emitter current i_0 , namely $i_0' \approx i_0$. If the resistance value of the variable resistor R_9 is so adjusted as to represent the shutter speed T according to the relation of

$$R_9=K_5T,$$

then the voltage across the resistor R_9 represents the quantity of light due to natural light, which is given by

$$K_5i_0'T=K_5i_0T=K'B_0T. \quad (K' \text{ being a constant})$$

If the resistance value of R_8 is selected to be very large, as compared with R_9 , or $R_9 \gg R_8$, then only R_8 acts as the effective load resistor of the integrator and R_9 becomes negligible as the load resistor. Thus, the voltage across the resistor R_8 is given by $\overline{K_4}i_0dt$, which represents the quantity of light of the electronic flash. Accordingly, the brightness output terminals across the resistors R_8 and R_9 receive a voltage given by

$$K_4i_0dt+K_5i_0T.$$

Referring back to FIG. 2, a comparator is connected to the brightness output terminals through a blocking transformer T_1 , which comparator comprises a transistor Q_4 , a capacitor C_7 , and variable resistors R_{13} , R_{14} for setting the film sensitivity and the degree of lens aperture. In FIG. 5, if the resistor R_{14} is assumed to be not acting as a load of the resistor R_{13} , then the output voltage across the slider of the resistor R_{14} is determined by the position of each slider of the resistors R_{13} and R_{14} . By adjusting the sliders of the linearly variable resistors R_{13} and R_{14} , it is possible to produce a setting output KR^2/S at the output terminal, which is the slider of the resistor R_{14} .

In FIG. 2, a capacitor C_7 is charged with the setting output voltage, and the voltage across the capacitor C_7 is continuously compared with the brightness output voltage, appearing across the resistors R_8 and R_9 connected in series, which varies according to the formula

$$(K_4i_0dt+K_5i_0T).$$

When the brightness output voltage across the resistors R_8 and R_9 becomes the same as the setting voltage across the capacitor C_8 , the transistor Q_4 of the comparator is blocked, so that a stop signal pulse is generated at the output winding of the transformer T_1 , which is then delivered to a switch circuit.

FIG. 3 shows the construction of the switch circuit for clamping the electronic flash L. When a start switch SW of the electronic flash is closed, the electronic flash L is actuated, and at the same time, a trigger circuit actuates the trigger SCR₁ to bring it into conductive state. Upon application of the stop signal pulse from the transformer T_1 to an SCR₂ of the switch circuit, the SCR₂ becomes conductive to bypass the current of the electronic flash L through a capacitor C_9 . Thus, the SCR₁ becomes nonconductive, and when the capacitor C_9 is charged in the reverse direction, the electronic flash L is turned off. Thus, the desired quantity of light is obtained from the electronic flash L.

There is provided an alarm neon tube N across a resistor R_{16} through another resistor R_{17} . If the quantity of natural light is sufficient for photographing, or if the brightness output exceeds the setting output representing the film sensitivity S and the degree F of the lens aperture, without actuating the electronic flash L, the comparator generates the stop signal pulse continuously, to make the SCR₂ conductive. The resistance value of the resistors R_{16} and R_{17} is selected to be high enough not to maintain the SCR₂ conductive when the stop signal pulse is removed. Thus, the SCR₂ becomes conductive only when the stop signal pulse is applied thereto. In other words, the voltage is intermittently applied across the resistor R_{17} to flash the neon tube N. As a result, the flashing of the neon tube N gives an alarm informing that the electronic flash L need not be actuated.

As described in the foregoing, according to the present invention, the natural light component and the electronic flash light component of the brightness of the photographic object are measured separately, so that accurate exposure control can be insured. On the other hand, known exposure control systems for electronic flash photographing measure only the electronic flash component of the brightness even in daylight. Moreover, when the daylight is sufficient for particular photographing conditions, the alarm signal is given to indicate that the electronic flash need not be actuated, so that proper application of the electronic flash is insured.

Referring to FIG. 6, illustrating the block diagram of another embodiment of the present invention, a portion of the output from a photoelectric element P is applied to a high-pass filter HPF and then integrated by an integrator, to produce an integrator output, which is proportionate only to the quantity of light from an electronic flash. The remaining portion of the output from the photoelectric element P is applied to a low-pass filter LPF and then amplified by a DC amplifier, to produce an amplifier output through a means for setting shutter speed. The output from the shutter speed setting means represents a quantity B_0T which is proportionate only to the quantity of natural light. An adder is provided to take the sum A of the integrator output and the shutter speed setting means output, so as to apply the thus achieved sum to a comparator. The sum A corresponds to the brightness output of the preceding embodiment, described in detail hereinbefore referring to FIGS. 1 to 5.

A setting output B, which represents a quantity KF^2/S , indicative of the film sensitivity and the degree of lens aperture is applied to the comparator, so that the setting output B may be compared with the brightness output A, in the same manner as in the preceding embodiment.

In FIG. 7 showing the circuitry of the device of FIG. 6, the output from the photoelectric element P is taken as the voltage across a resistor R_3 connected in series to the element P. A high-pass filter HPF consists of a capacitor C_1 and a resistor R_1 . An integrator is formed by a field effect transistor Q_1 , resistors R_4 , R_5 , R_6 , R_7 and capacitors C_3 , C_4 . A Zener diode D_1 is used to maintain the bias voltage of the field transistor Q_1 at a constant level. A resistor R_2 and a capacitor C_2 constitute the low-pass filter LPF, while a transistor Q_2 and resistors R_8 ,

R_9 form the detector of natural light. The resistor R_9 is of rheostat type and acts as a means for setting the shutter speed indication, and the series connection of the resistors R_5 and R_9 contributes to produce the sum of the electronic flash light component and the natural light component of the photographic object brightness, i.e. a brightness output A.

To determine the natural light component of the brightness the resistor R_9 connected in series to the transistor Q_2 has a high resistance value, so that it does not act as the load of the low pass filter. Then, the voltage across the resistor R_9 is approximately the same as the output voltage from the low-pass filter. If the resistance value R of the photoelectric element P has the characteristics of $Ra1/B_0$, wherein B_0 is the brightness at the photographic element, the emitter voltage E_e is given by the following equation.

$$E_e = E_1 R_3 / (R + R_3) = E_1 R_3 / R.$$

Here,

E_1 represents the voltage applied to the photoelectric element, and

R_3 represents the resistance value of the resistor R_3 , which is negligibly small, as compared with R , i.e. $R_3 \ll R$.

In this case, the collector current is about the same as the emitter current, and hence, the collector current i_o' can be given by the following equation.

$$i_o' = i_e = (R_3 E_1 / R) / R_8 = K_6 / R$$

$$K_6 = R_3 E_1 / R_8$$

If the shutter speed T is so selected as to establish $R_9 = K_5 T$, wherein R_9 is the resistance value of the variable resistor connected in series to the transistor Q_2 , then the voltage across the resistor R_9 is given by

$$K_1' = K_5 i_o T = K' B_0 T \quad (K' \text{ being a constant}).$$

The above voltage across R_9 represents the quantity of natural light.

If the resistance value of R_5 is selected to be for larger than R_9 , so as to establish the relation of $R_9 \ll R_5$, then the resistor R_5 acts as the load resistor of the integrator, while R_9 becomes negligible as the load of the integrator. Thus, the voltage across R_5 becomes $K_4 \int i_o dt$ representing the quantity of light from the electronic flash. Accordingly, the output voltage across the resistors R_9 and R_5 connected in series becomes $(K_4 \int i_o dt + K_5 i_o T)$, which is the brightness output.

In FIG. 7, a comparator comprises a transistor Q_3 , a capacitor C_5 , and a blocking transformer T_1 . The film sensitivity and the degree of lens aperture are set by regulating the sliders on the resistors R_{10} and R_{11} , respectively.

The circuitry for setting the film sensitivity and the lens aperture degree is shown in FIG. 8. If the resistor R_{11} is assumed not to act as a load of the resistor R_{10} , the output from the resistor R_{11} is determined by the position of sliders of each resistor. If the sliders of the linearly variable resistors R_{10} and R_{11} are so set as to represent K/S and F^2 , respectively, then the output from the resistor R_{11} represents the function KF^2/S , or the setting output, as in the case of the preceding embodiment.

A capacitor C_5 is provided to store the setting output KF^2/S from the resistor R_{11} as a voltage across the capacitor. The brightness output $(K_4 \int i_o dt + K_5 i_o T)$, appearing across the resistors R_5 and R_9 connected in series, is compared with the aforesaid setting output KF^2/S , stored in the capacitor C_5 , so that if the two outputs coincide, the comparator is blocked and produces a stop signal pulse at the secondary differential winding of the transformer T_1 . The stop signal pulse actuates the switch circuit.

In FIG. 9, when an electronic flash starting switch SW is closed, the electronic flash L is energized, and at the same time, the trigger circuit is actuated to make a silicon controlled rectifier SCR_1 conductive. If the stop pulse signal from the comparator, indicating the coincidence of the setting and brightness outputs, is delivered to another

silicon controlled rectifier SCR_2 ; and the current in the electronic flash L is shifted to a path through a capacitor C_7 and SCR_2 , and hence the SCR_1 is blocked. Accordingly, as the capacitor C_7 is charged in the opposite polarity, the electronic flash L is deenergized. Thus, the quantity of light from the electronic flash is controlled, by stopping it at any desired moment.

A neon tube N is connected across a resistor R_{13} through another resistor R_{14} , for alarm purpose. When the brightness output reaches the same level as the setting output without energizing the electronic flash, or when the natural light is sufficient for the desired photographing without actuating the electronic flash, the stop signal pulse is continuously delivered from the comparator to the SCR_2 . In this case, due to the high resistance value of the resistors R_{13} and R_{14} , the SCR_2 cannot remain conductive after the stop signal pulse is removed. In other words, the SCR_2 is conductive only when the stop signal pulse is applied thereto. Thus, an intermittent voltage is applied across the resistor R_{14} to ignite the neon tube N . As a result, the flashing of the neon tube N indicates that the electronic flash need not be energized.

As described in the foregoing, according to the present invention, both the natural light component and flash light component of the brightness of the photographic object can be detected by a single photoelectric element, and then the output from the photoelectric element is divided into the flash component and natural light component the latter component, incorporating the shutter speed setting, so that the exposure to the electronic flash can be controlled more accurately than by any known automatic methods of measuring only the flash light quantity. Moreover, when the natural light is sufficient for satisfactory photographing under certain photographing conditions, an alarm is given to indicate that the electronic flash need not be energized. Thus, successful flash photographing is insured with and without daylight.

FIG. 10 shows a block diagram of another embodiment of the present invention, in which an integrator capable of both integration and simple amplification is used. A photoelectric element in the light measuring portion receives light from the photographic object, including the natural light and flash light components. The output current from the photoelectric element is modified by the setting of the sensitivity of the film used or lens aperture degree selected, and then applied to an integrator at the amplifier portion thereof. The AC component of the output from the amplifier is fed back to its input side through a feedback element for integration of the flash light component, while the DC component of said output is fed back to the input side of the amplifier through another feedback element for natural light. Thus, at the output side of the amplifier, an output representing the quantity of flash light is provided. At the same time, another output representing the quantity of natural light, as modified by the aforesaid setting is also delivered to the output side of the amplifier. The two output quantities are added to form a brightness output A, representing both the natural light and the flash light components of the object brightness, which is then applied to a comparator. A setting output B, representing the film sensitivity or the degree of lens aperture, is also applied to the comparator, so as to be made reference to the brightness output A. When the quantity of light from the object is increased by the electronic flash, until the brightness output A coincides with the setting output B, a stop signal pulse is generated at the comparator, which is then dispatched to a switch circuit, to turn it off. Thus, the quantity of light from the electronic flash is controlled at a desired level. In the illustrated embodiment, the degree of lens aperture or the sensitivity of film used is incorporated in the light measuring portion on one side of the comparator. However, it is also possible to incorporate both the lens aperture setting and the film sensitivity setting in the setting

output B to be applied to the comparator from the opposite end thereof.

FIG. 11 illustrates a circuit for integrating the electronic flash light. The voltage e_s across a resistor R_1 , produced by an electric current i_s from the photoelectric element P and representing the quantity of the electronic flash light, is given by

$$e_s = i_s R_1.$$

A capacitor C_1 and a resistor R_2 constitute an integrator for integrating the quantity of the electronic flash light, which delivers the integrated value as a voltage E_A across a resistor R_3 .

$$E_A = -(1/C_1 R_2) \int e_s dt = -(R_1/C_1 R_2) \int i_s dt = K_1 \int i_s dt \quad (15)$$

$$(here, K_1 = -(R_1/C_1 R_2)).$$

FIG. 12 shows a circuit for computing natural light quantity, in which the voltage e_o across a resistor R_1 , produced by an electric current i_o from the photoelectric element and representing the natural light quantity, is given by

$$e_o = i_o R_1.$$

It is fed back through another resistor for natural light feedback. Accordingly, the DC output voltage E_D is given as follows.

$$E_D = K_1 e_o / (1 - \beta K_1) = K_1 i_o R_1 / (1 - \beta K_1) = i_o R_2 / (1/K_1 - \beta). \quad (30)$$

Here,

K_1 : voltage gain, without feedback

β : feedback ratio, $\beta = R_4/R_3$.

Assuming that $1/K_1$ is negligible as compared with β , i.e. $\beta \gg 1/K_1$, the DC output can be given by

$$E_D = -i_o R_1 / \beta = -i_o R_3 R_1 / R_4 = i_o K_2 / R_4.$$

Here, $K_2 = -R_3 R_1$.

Thus, the amplification factor of this circuit becomes K_2/R_4 . By setting the quantity $1/R_4$ as the shutter speed setting value T, one obtains

$$E_D = K_2 i_o T.$$

FIG. 13 shows a circuit to be used for integrating and amplifying the quantity of light, from each photographic object, in which the circuits of FIGS. 11 and 12 are incorporated. A capacitor C_2 is connected in parallel with the resistor R_4 is for bypassing the AC component to the ground, so as to prevent the AC component from being fed back. Thus, only the DC component is fed back for synthesis. The voltage E_2 across the resistor R_3 represents the sum of the DC output E_D and AC output E_A , which sum can be given by

$$E_2 = E_A + E_D = K_1 \int i_s dt + K_2 i_o T \quad (1)$$

On the other hand, the proper quantity of light at the film surface is given by

$$(1/F^2) (\int B_s dt + B_o T) = K/S$$

wherein,

B, represents the brightness of the photographic object, due to the electronic flash,

B_o the brightness of the same, due to natural light,

F the degree of lens aperture,

T the shutter speed,

S the film sensitivity, and

K a constant.

By rearranging,

$$\int B_s dt + B_o T = KF^2/S \quad (2)$$

If K_2 and K_2 are so chosen as to satisfy the relations of $B_s = K_1 i_s$ and $B_o = K_2 i_o$, then the equation (1) can be equated with the equation (2).

Thus, the output voltage E_2 can be given by

$$E_2 = K_1 \int i_s dt + K_2 i_o T = KF^2/S \quad (3)$$

By rearranging,

$$K_1 \int i_s dt = KF^2/S - K_2 i_o T$$

The last mentioned equation represents the quantity of light to be emanated by the electronic flash.

By rearranging the equation (3),

$$S(K_1 \int i_s dt + K_2 i_o T) = KF^2 \quad (4)$$

$$(K_1 \int i_s dt + K_2 i_o T)/F^2 = K/S \quad (5)$$

FIGS. 14 and 15 show circuitry embodying the present invention. In FIG. 14, a load resistor R_1 is connected in series with the photoelectric element P to deliver an output voltage proportional to the magnitude of the output current from the photoelectric element. A field transistor Q_1 , resistors R_2 , R_3 , R_4 , R_5 , and capacitors C_1 , C_2 constitute an integrator for the quantity of light. Resistors R_5 and R_6 act to provide the bias voltage to the field transistor Q_1 , under the conditions that the current flowing through the resistors R_5 and R_6 is sufficiently large, as compared with the current through the field transistor Q_1 . A capacitor C_2 serves to bypass the AC component of the output current from the photoelectric element, so that the AC component is not fed back. By properly selecting the values of resistors R_1 , R_2 and the capacitor C_1 , an integral $K_1 \int i_s dt$ can be achieved, which represents the quantity of light from the electronic flash. The variable resistor R_4 serves for setting the shutter speed, and the output voltage $K_2 i_o T$ can represent the quantity of natural light if the values of resistors R_1 , R_3 and R_4 are properly selected. As a result, the voltage across the resistor R_3 gives the following sum.

$$K_1 \int i_s dt + K_2 i_o T$$

A comparator in this embodiment comprises a transistor Q_2 , a capacitor C_2 and a blocking transformer T_1 , while the variable resistors R_7 and R_8 are for setting the film sensitivity and the degree of lens aperture, respectively. If the resistors R_7 and R_8 are so selected as to represent the linear functions K/S and F^2 by properly positioning the sliders, respectively, then the output voltage from the resistor R_8 can represent a function KF^2/S corresponding to the thus selected positions of the sliders of the two variable resistors. A capacitor C_3 is provided for storing the output voltage KF^2/S , generated at the variable resistor R_8 .

When the output voltage at the resistor R_3 , which is given by $(K_1 \int i_s dt + K_2 i_o T)$ increases and coincides with the voltage across the capacitor C_3 , which is KF^2/S , then the comparator is blocked. Then, the output winding of the blocking transformer T_1 generates a stop signal pulse, which is delivered to a switch circuit to turn it off. Thus, the electronic flash is deenergized, so as to attain a desired quantity of light therefrom.

In the circuit of FIG. 15, the resistance of a resistor R_1 in series with the photoelectric element P is made variable in order to represent either the film sensitivity S or the lens aperture degree F. In other words, either one of S and F of the right hand side term KF^2/S of the equation (3), which is given as the voltage across the capacitor C_3 in the circuit of FIG. 14, is now shifted, so that the capacitor C_3 of FIG. 15 will store the right-hand side term of the equations (4) or (5), i.e. KF^2 or K/S .

Table 1 shows the manner in which the shutter speed T, film sensitivity S and the lens aperture degree F are set according to the equations (3), (4), and (5), respectively in the embodiment.

TABLE 1

Setting method (equation)	R ₁	R ₄	Output voltage of R ₁	R ₇	R ₈	R ₁₀	Voltage across C ₃
I (3).....	Fixed	$\frac{1}{T}$	$K_1 f_1 dt + K_2 I_0 T$	$\frac{K}{S}$	F ²	-----	$K F^2 / S$
II (3).....	do.	$\frac{1}{T}$	$K_1 f_1 dt + K_2 I_0 T$	F ²	$\frac{K}{S}$	-----	$K F^2 / S$
III (4).....	S.....	$\frac{1}{T}$	$S(K_1 f_1 dt + K_2 I_0 T)$	-----	$K F^2$	-----	$K F^2$
IV (5).....	$\frac{1}{F^2}$	$\frac{1}{T}$	$\frac{1}{F^2}(K_1 f_1 dt + K_2 I_0 T)$	-----	$\frac{K}{S}$	-----	$\frac{K}{S}$

FIG. 16 illustrates another circuit usable for measuring the light, which has a pair of separate elements for detecting the natural light and the electronic flash light, respectively. This detecting circuit can be replaced with that portion of the circuit of FIG. 14 or 15, which is to the left of the chain line thereof. An element having a P-N junction with the photoelectric effect, such as a photocell, a solar battery cell, or a phototransistor, can be used for each or either one of the detecting elements, so as to prevent interference between the two detecting elements by using a reverse bias by taking advantage of the rectifying characteristics of such P-N junction elements. At the same time, it is made easier to achieve linear relations between the output current and the natural light or electronic flash light.

As described in the foregoing, according to the present invention, a light quantity integrating circuit is provided, which is adapted to integrate the AC component of the light quantity, i.e. the electronic flash light component thereof, and to merely amplify the D.C. component, i.e. the natural light component. Moreover, the amplification factor of the integrator can be varied regardless of the integrating function thereof for the AC component. With such characteristics of the integrator, it is made possible to vary the shutter speed in accordance with the amplification factor, so that the natural light quantity can be easily measured. The fact that the output of the integrator is the sum of the quantities of the natural light and the electronic flash light is particularly advantageous for the control purposes. In this integrator, the setting of the film sensitivity and the degree of lens aperture can be carried out by adjusting the output from the light detecting elements. Furthermore, the sensitivity of the light detecting elements can be easily adjusted, because the integrating and amplifying functions of the integrator are independent with each other, even when the sensitivities of separate light detecting elements for the natural and electronic flash light are modified separately.

FIG. 17 shows a switch circuit usable in the control device according to the present invention and FIG. 18 shows the operating characteristics of such a switch circuit. The turnoff section of the switch circuit includes a pair of silicon controlled rectifiers SCR₁ and SCR₂. The SCR₂ facilitates the commutation of the SCR₁. When a switch SW is closed to actuate a high voltage trigger transformer T, a high voltage pulse is delivered to an actuating electrode of the electronic flash L, so as to start the electronic flash L by discharging a capacitor C₃ connected in parallel with the electronic flash L. When the voltage across the capacitor C₃ drops as it discharges, an electric current flows through a circuit including a capacitor C₆, a diode D₁, and a resistor R₃ and reaches the gate of the SCR as a positive gate current. Thus, the SCR₁ is made conductive. Hence, the electronic flash L is maintained as energized. Such starting operation is illustrated in FIG. 18.

The turn-off-operation of the switch circuit will now be described. Before the SCR₁ is turned off, a capacitor C₄ is charged through resistors R₅ and R₆ in the polarity as shown in FIG. 17. Another capacitor C₅ is also charged through resistors R₅, R₇, R₃, R₄. A trigger delay circuit is actuated as soon as the switch S is closed, to generate a delayed pulse. When this delayed pulse is applied to the gate

of the SCR₂, to make it conductive, the capacitor C₄ is discharged, so that a reverse current flows through the SCR₁ to turn it off. At the same time, with the SCR₂ made conductive, the charge in the capacitor C₅ is discharged through resistors R₄, R₂, and the diode D₁, to apply a reverse bias to the SCR₁. The timing of the application of such reverse bias is determined by the capacity of the discharge circuit of capacitor C₅ and the time constant of the resistors therein, and the reverse bias is applied to the SCR₁ even after the application of starting voltage is initiated. Thus, the du/dt characteristics are improved and the turnoff time is shortened. Accordingly, the conductive period of the SCR₂, which is necessary to turn off the SCR₁, can be also shortened, and hence, the current carrying capacity of SCR₂ can be small.

Behaviors of various currents and voltages during this turnoff operation are depicted in the curves of FIG. 18. When the commutation capacitor C₄ is charged to the power source voltage E, the current through the SCR₂ is interrupted, and the SCR₂ itself is blocked. A resistor R₂ is provided to facilitate the discharge of the capacitor C₆, while the resistor R₇ is to recharge the capacitor C₅ in the polarity as shown in FIG. 17, after the electronic flash L is turned off.

As described in the foregoing, according to the present invention, there is provided a switch circuit to be closed upon firing of the electronic flash, which has a simpler circuit construction than that of any known switching circuit including a trigger circuit to be triggered to make the switch circuit conductive. With the shortened turnoff time, the silicon controlled rectifiers to be used in this switch circuit can be of a very inexpensive type, and hence the switching circuit can be made at low cost.

Although the present invention has been described with a certain degree of particularity, it is understood that the present disclosure has been made only by way of example and that numerous changes or modifications in the details of construction and the combination and arrangement of parts may be resorted to without departing from the spirit and the scope of the invention as hereinafter claimed.

We claim:

1. An automatic control circuit for determining the duration of light emitted by an electronic flash unit, said control circuit comprising photoelectric means positioned to receive light reflected from an object illuminated by natural light and by flash light from the electronic flash unit, electric filter means coupled to said photoelectric means and operative to furnish at a first output thereof a first component representative of the reflected natural light and at a second output thereof a second component representative of the reflected flash light, integrating circuit means coupled to the second output of said electric filter means for integrating said second component, an adding circuit coupled to said integrating circuit means and to the first output of said electric filter means and operative to produce an output voltage proportional to the sum of said first component and the integration of said second component, circuit means to provide a reference voltage proportional to the exposure as established by the sensitivity of the film in the associated camera and the size of the lens aperture, a comparator coupled to said adding

circuit and to said circuit means and operative to produce a control signal when the difference between said output voltage and said reference voltage reaches a predetermined value, and a firing circuit coupled to said comparator and to the electronic flash unit for terminating the flash produced thereby upon reception of said control signal.

2. The automatic control circuit set forth in claim 1, wherein said photoelectric means includes a first photoelectric element and a second photoelectric element, and said electric filter means includes first and second filter portions respectively coupled to said first and second photoelectric elements, said first filter portion being operative to pass only said first component and said second filter portion being operative to pass only said second component.

3. The automatic control circuit set forth in claim 1, wherein said photoelectric means consists of a single photoelectric element.

4. The automatic control circuit set forth in claim 1, wherein said firing circuit includes a capacitor coupled in parallel with said electronic flash unit and operative to fire said electronic flash unit by discharging therethrough, a starting section having a silicon controlled rectifier coupled to said capacitor and being conductive in response to the discharge of said capacitor to close a switchable circuit through the electronic flash unit, a reverse bias section for applying a reverse bias to said silicon controlled rectifier upon reapplication with a predetermined time delay determined by a capacity and a resistance, and a pair of diodes preventing mutual interference between said starting section and said reverse bias section.

5. The automatic control circuit set forth in claim 1, and further comprising an indicating means coupled to said comparator and being operative to provide an alerting signal when said output voltage exceeds said reference voltage.

6. An automatically controlled flash illuminating network comprising means including a photosensitive element for producing a control signal in response to a predetermined amount of light incident on said photosensitive element, a storage capacitor, a first semiconductor switching device including a control electrode and two main current carrying electrodes, a flash tube coupled in series with said first semiconductor switching device, said series circuit comprising said first semiconductor switching device and said flash tube being connected in parallel to said storage capacitor, means for firing said flash tube and applying a closing trigger signal to the control electrode of said first semiconductor switching device, a commutation capacitor, means for charging said commutation capacitor, a second semiconductor switching device including a control electrode and two main current carrying electrodes, said device being actuatable to a closed condition in response to said control signal and coupled in series with said commutation capacitor across the main electrodes of said first semiconductor switching device whereby to apply a reverse voltage between said first semiconductor switching device main electrodes to open said first semiconductor switching device in response to the said closing of the said second semiconductor switching device.

7. The network of claim 6 including means for applying a reverse bias to the control electrode of said first semiconductor switching device in response to the closing of said second semiconductor switching device.

8. The network of claim 7 wherein said means for applying a reverse bias comprises a reverse biasing capacitor and impedance means series coupled between a main electrode of said second semiconductor switching device and the control electrode of said first semiconductor switching device.

9. The network of claim 8 wherein said impedance means comprises resistor means.

10. The network of claim 6 wherein said means for applying a closing trigger signal to said first semiconductor

switching device includes impedance means connected with said flash tube and a control electrode of said first semiconductor switching device for causing a closing trigger signal to be applied to said control electrode of said first semiconductor switching device in response to the firing of said flash tube.

11. The network of claim 10 wherein said impedance means comprises an impedance element and a capacitor element connected in series across said storage capacitor, said capacitor element being connected across said flash tube.

12. The network of claim 11 wherein said impedance means comprises at least one resistor.

13. An automatically controlled flash illuminating network comprising a storage capacitor, a first semiconductor switching device including a control electrode and two main current carrying electrodes, an electronic flash tube connected in series with said first semiconductor switching device, said series circuit comprising said first semiconductor switching device and said flash tube being connected in parallel to said storage capacitor, means including a photosensitive element for producing a control signal in response to a predetermined amount of light incident on said photosensitive element, a second semiconductor switching device including a control electrode and two main current carrying electrodes actuatable to a closed condition in response to said control signal, means including a commutation capacitor interconnecting corresponding main electrodes of said first and second semiconductor switching devices, means connecting said commutation capacitor across said storage capacitor whereby the closing of said second semiconductor switching device applies the voltage of said commutation capacitor as a reverse voltage across said first semiconductor switching device, means responsive to the closing of said second semiconductor switching device for applying a reverse bias to the control electrode of said first semiconductor switching device and including a capacitor coupled between the control electrode of said first semiconductor switching device and a main electrode of said second semiconductor switching device, means for applying a closing trigger signal to the control electrode of said first semiconductor switching device, including a capacitor shunting said flash tube and coupled to the control electrode of said first semiconductor switching device, and diode means coupled with said first semiconductor switching device trigger means and said means for applying a reverse bias.

14. The network of claim 13 wherein each of said semiconductor switching devices is a silicon controlled rectifier.

15. An automatically controlled flash illuminating network comprising means including a photosensitive element for producing a control signal in response to a predetermined amount of light incident on said photosensitive element, a storage capacitor, a first switching device including a control electrode and two main current carrying electrodes, a flash tube coupled in series with said switching device, said series circuit comprising said first switching device and said flash tube being connected in parallel to said storage capacitor, means for firing said flash tube and applying a closing trigger signal to the control electrode of said first switching device, a commutation capacitor, means for charging said commutation capacitor, a second semiconductor switching device including a control electrode and two main current carrying electrodes, said device being actuatable to a closed condition in response to said control signal and coupled in series with said commutation capacitor across the main electrodes of said first switching device whereby to apply a reverse voltage between said first switching device main electrodes to open said first switching device in response to the said closing of the said second switching device.

16. An automatically controlled flash illuminating network comprising a D.C. voltage source, a switching device, an electronic flash tube for producing light energy of extremely short duration, said flash tube being coupled in

15

series with said switching device across said voltage source, means for firing said flash tube and closing said switching device, sensing means including photosensitive means for producing an electrical signal which is a function of the total value of the light incident on said photosensitive means, means including a commutation capacitor connected to be charged by said network, and means responsive to said sensing means at a predetermined value of said electrical signal and operable with said commutation capacitor to apply a reverse voltage to said switching device for opening said switching device in response to a predetermined amount of light incident in said photosensitive means to extinguish said flash tube thereby terminating light energy from said flash tube.

17. A network as defined in claim 16 wherein the last-named means includes a second switching device actuable to a closed condition when said electrical signal is at a predetermined value and coupled in series with said commutation capacitor and said first switching device whereby to apply a reverse voltage across said first switching device to open said first switching device in response to the said closing of said second switching device.

18. A network as defined in claim 17 wherein said D.C. voltage source includes main storage capacitor means

16

for discharging through said flash tube and said first-named switching device.

19. A network as defined in claim 17 wherein said first switching device includes two main electrodes, and said second switching device and said commutation capacitor are connected in series across the main electrodes of said first switching device.

References Cited

The following references, cited by the Examiner, are of record in the patented file of this patent or the original patent.

UNITED STATES PATENTS

3,392,284	7/1968	Cain	323—22	SC
3,350,604	10/1967	Erickson	315—151	
3,464,332	9/1969	Davison et al.	95—10	

HERMAN KARL SAALBACH, Primary Examiner

L. J. DAHL, Assistant Examiner

U.S. Cl. X.R.

95—10 R; 250—214; 315—159, 241 P