Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2700580 A1 2009/05/14

(21) 2 700 580

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2008/08/20
(87) Date publication PCT/PCT Publication Date: 2009/05/14
(85) Entrée phase nationale/National Entry: 2010/03/23
(86) N° demande PCT/PCT Application No.: US 2008/073731
(87) N° publication PCT/PCT Publication No.: 2009/061542
(30) Priorité/Priority: 2007/11/09 (US11/983,445)

(51) Cl.Int./Int.Cl. *E21B 43/04* (2006.01), *E21B 17/02* (2006.01), *E21B 33/10* (2006.01)

(71) Demandeur/Applicant:
EXXONMOBIL UPSTREAM RESEARCH COMPANY, US

(72) Inventeurs/Inventors:
YEH, CHARLES S., US;
HAEBERLE, DAVID C., US;
BARRY, MICHAEL D., US;
HECKER, MICHAEL T., US;
LONG, TED A., US

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : PROCEDES DE GRAVILLONNAGE DES CREPINES
(54) Title: GRAVEL PACKING METHODS

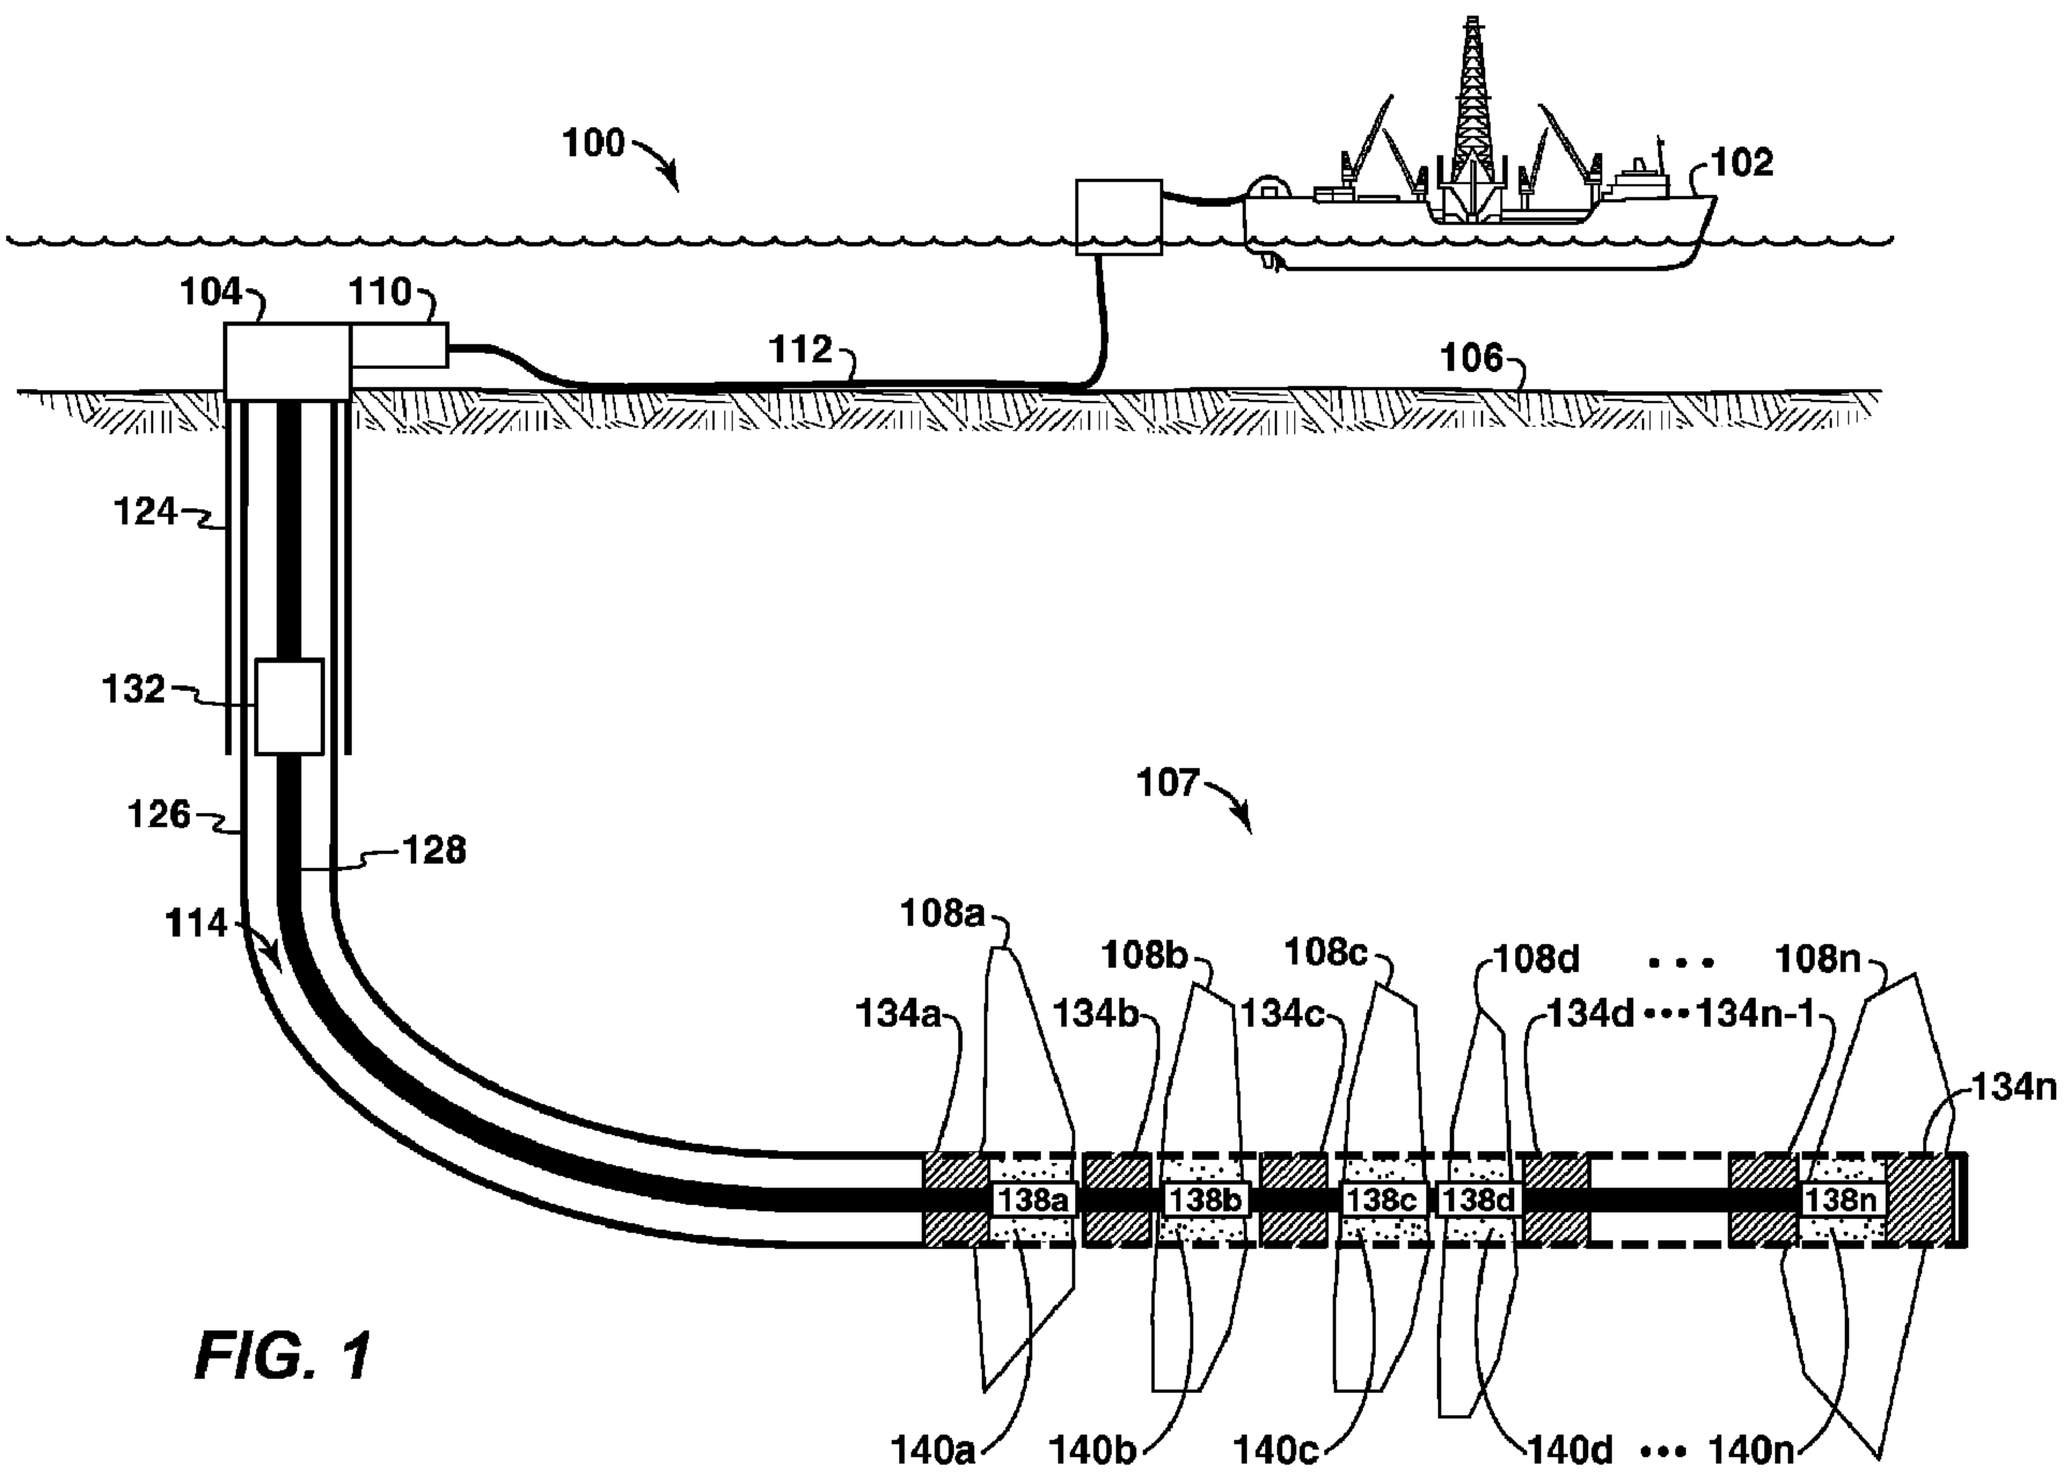

FIG. 1

(57) Abrégé/Abstract:
A method associated with the production of hydrocarbons is described. The method includes drilling a wellbore using a drilling fluid, conditioning the drilling fluid, running a production string in the wellbore and gravel packing an interval of the wellbore with a

CA 2700580 A1 2009/05/14

(21) 2 700 580

(13) A1

(57) Abrégé(suite)/Abstract(continued):
carrier fluid. The production string includes a joint assembly comprising a main body portion having primary and secondary fluid flow paths, wherein the main body portion is attached to a load sleeve assembly at one end and a torque sleeve assembly at the opposite end, the load sleeve assembly having at least one transport conduit and at least one packing conduit disposed therethrough. The main body portion may include a sand control device, a packer, or other well tool for use in a downhole environment. The joint assembly also includes a coupling assembly having a manifold region in fluid flow communication with the second fluid flow path of the main body portion and facilitating the make-up of first and second joint assemblies with a single connection.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
14 May 2009 (14.05.2009)

PCT

(10) International Publication Number
WO 2009/061542 A1

(51) International Patent Classification:
E21B 41/02 (2006.01)

(21) International Application Number:
PCT/US2008/073731

(22) International Filing Date: 20 August 2008 (20.08.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/983,445 9 November 2007 (09.11.2007) US

(71) Applicant *(for all designated States except US)*: **EXXONMOBIL UPSTREAM RESEARCH COMPANY** [US/US]; CORP-URC-SW-341, P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **YEH, Charles, S.** [US/US]; 9511 Merlins Oaks Court, Spring, TX 77379 (US). **HAEBERLE, David, C.** [US/US]; 14215 Spyglen Lane, Cypress, TX 77429 (US). **BARRY, Michael, D.** [US/US]; 251 North Maple Glade Circle, The Woodlands, TX 77382 (US). **HECKER, Michael, T.** [US/US]; 16211 Castle Grove Court, Tomball, TX 77377 (US). **LONG, Ted, A.** [US/US]; 3806 West Wisteria Circle, Sugarland, TX 77479 (US).

(74) Agents: **MCARTHUR, Douglas, W.** et al.; Exxonmobil Upstream Research Company, CORP-URC-NW-358, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

[Continued on next page]

(54) Title: GRAVEL PACKING METHODS

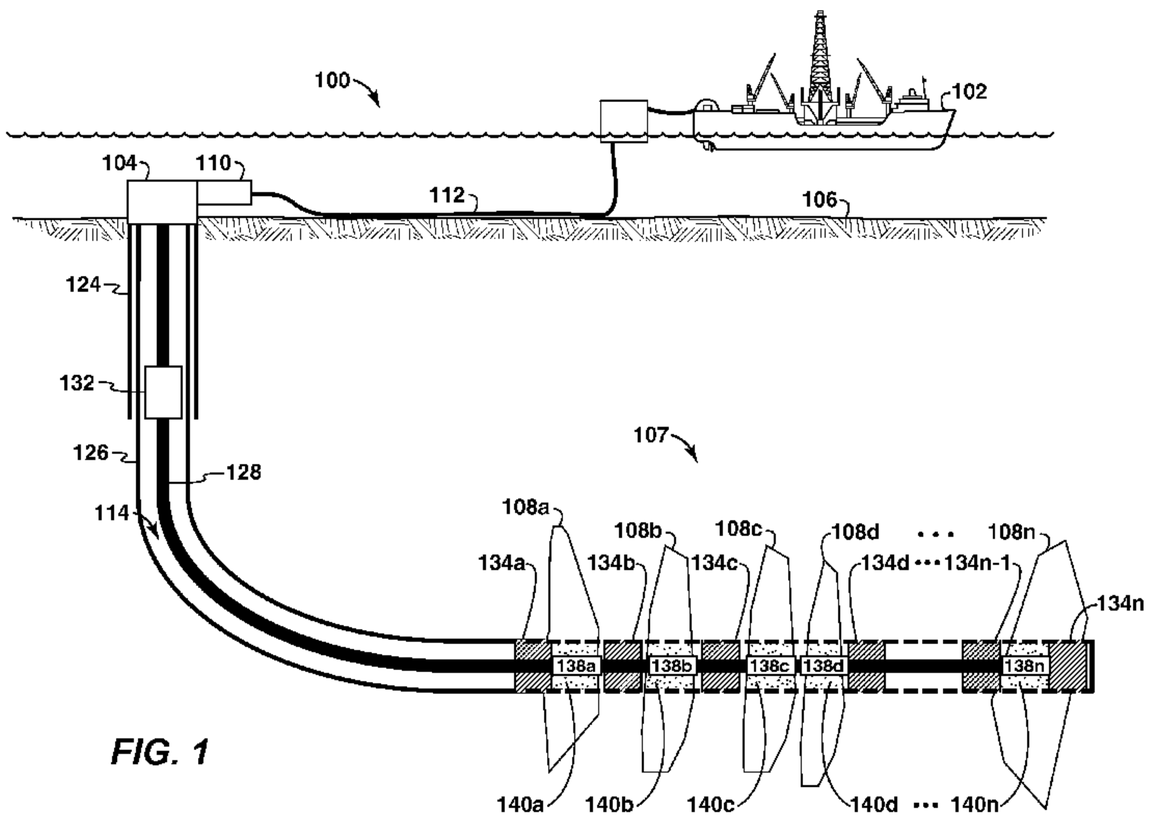

FIG. 1

(57) Abstract: A method associated with the production of hydrocarbons is described. The method includes drilling a wellbore using a drilling fluid, conditioning the drilling fluid, running a production string in the wellbore and gravel packing an interval of the wellbore with a carrier fluid. The production string includes a joint assembly comprising a main body portion having primary and secondary fluid flow paths, wherein the main body portion is attached to a load sleeve assembly at one end and a torque sleeve assembly at the opposite end, the load sleeve assembly having at least one transport conduit and at least one packing conduit disposed therethrough. The main body portion may include a sand control device, a packer, or other well tool for use in a downhole environment. The joint assembly also includes a coupling assembly having a manifold region in fluid flow communication with the second fluid flow path of the main body portion and facilitating the make-up of first and second joint assemblies with a single connection.

WO 2009/061542 A1

WO 2009/061542 A1

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report*

GRAVEL PACKING METHODS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 11/983,445, entitled "Gravel Packing Methods," filed on 09 November 2007. Each of these applications is hereby incorporated by reference in its entirety.

FIELD OF THE INVENTION

[0002] This invention relates generally to an apparatus and method for use in wellbores and associated with the production of hydrocarbons. More particularly, this invention relates to a joint assembly and related system and method for coupling joint assemblies including wellbore tools.

BACKGROUND

[0003] This section is intended to introduce various aspects of the art, which may be associated with exemplary embodiments of the present techniques. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present techniques. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

[0004] The production of hydrocarbons, such as oil and gas, has been performed for numerous years. To produce these hydrocarbons, a production system may utilize various devices, such as sand screens and other tools, for specific tasks within a well. Typically, these devices are placed into a wellbore completed in either a cased-hole or open-hole completion. In cased-hole completions, a casing string is placed in the wellbore and perforations are made through the casing string into subterranean formations to provide a flow path for formation fluids, such as hydrocarbons, into the wellbore. Alternatively, in open-hole completions, a production string is positioned inside the wellbore without a casing string. The formation fluids flow through the annulus between the subsurface formation and the production string to enter the production string.

[0005] However, when producing hydrocarbons from some subterranean formations, it becomes more challenging because of the location of certain subterranean formations. For example, some subterranean formations are located in ultra-deep water, at depths that extend the reach of drilling operations, in high pressure/temperature reservoirs, in long intervals, in formations with high production rates, and at remote locations. As such, the location of the subterranean formation may present problems that increase the individual well cost dramatically. That is, the cost of accessing the subterranean formation may result in fewer wells being completed for an economical field development. Further, loss of sand control may result in sand production at surface, downhole equipment damage, reduced well productivity and/or loss of the well. Accordingly, well reliability and longevity become design

considerations to avoid undesired production loss and expensive intervention or workovers for these wells.

[0006] Typically, sand control devices are utilized within a well to manage the production of solid material, such as sand. The sand control device may have slotted openings or may be wrapped by a screen. As an example, when producing formation fluids from subterranean formations located in deep water, it is possible to produce solid material along with the formation fluids because the formations are poorly consolidated or the formations are weakened by downhole stress due to wellbore excavation and formation fluid withdrawal. Accordingly, sand control devices, which are usually installed downhole across these formations to retain solid material, allow formation fluids to be produced without the solid materials above a certain size.

[0007] However, under the harsh environment in a wellbore, sand control devices are susceptible to damage due to high stress, erosion, plugging, compaction/subsidence, etc. As a result, sand control devices are generally utilized with other methods to manage the production of sand from the subterranean formation.

[0008] One of the most commonly used methods to control sand is a gravel pack. Gravel packing a well involves placing gravel or other particulate matter around a sand control device coupled to the production string. For instance, in an open-hole completion, a gravel pack is typically positioned between the wall of the wellbore and a sand screen that surrounds a perforated base pipe. Alternatively, in a cased-hole completion, a gravel pack is positioned between a perforated casing string and a sand screen that surrounds a perforated base pipe. Regardless of the completion type, formation fluids flow from the subterranean formation into the production string through the gravel pack and sand control device.

[0009] During gravel packing operations, inadvertent loss of a carrier fluid may form sand bridges within the interval to be gravel packed. For example, in a thick or inclined production interval, a poor distribution of gravel (i.e. incomplete packing of the interval resulting in voids in the gravel pack) may occur with a premature loss of liquid from the gravel slurry into the formation. This fluid loss may cause sand bridges to form in the annulus before the gravel pack has been completed. To address this problem, alternate flowpaths, such as shunt tubes, may be utilized to bypass sand bridges and distribute the gravel evenly through the intervals. For further details of such alternate flowpaths, see U.S. Pat. Nos. 4,945,991; 5,082,052; 5,113,935; 5,333,688; 5,515,915; 5,868,200; 5,890,533; 6,059,032; 6,588,506; and International Application Publication No. WO 2004/094784; which are incorporated herein by reference.

[0010] While the shunt tubes assist in forming the gravel pack, the use of shunt tubes may limit the methods of providing zonal isolation with gravel packs because the shunt

tubes complicate the use of a packer in connection with sand control devices. For example, such an assembly requires that the flow path of the shunt tubes be un-interrupted when engaging a packer. If the shunt tubes are disposed exterior to the packer, they may be damaged when the packer expands or they may interfere with the proper operation of the packer. Shunt tubes in eccentric alignment with the well tool may require the packer to be in eccentric alignment, which makes the overall diameter of the well tool larger and non-uniform. Existing designs utilize a union type connection, a timed connection to align the multiple tubes, a jumper shunt tube connection between joint assemblies, or a cylindrical cover plate over the connection. These connections are expensive, time-consuming, and/or difficult to handle on the rig floor while making up and installing the production tubing string.

[0011] Concentric alternate flow paths utilizing smaller-diameter, round shunt tubes are preferable, but create other design difficulties. Concentric shunt tube designs are complicated by the need for highly precise alignment of the internal shunt tubes and the basepipe of the packer with the shunt tubes and basepipe of the sand control devices. If the shunt tubes are disposed external to the sand screen, the tubes are exposed to the harsh wellbore environment and are likely to be damaged during installation or operation. The high precision requirements to align the shunt tubes make manufacture and assembly of the well tools more costly and time consuming. Some devices have been developed to simplify this make-up, but are generally not effective.

[0012] Some examples of internal shunt devices are the subject of U.S. Patent Application Publication Nos. 2005/0082060, 2005/0061501, 2005/0028977, and 2004/0140089. These patent applications generally describe sand control devices having shunt tubes disposed between a basepipe and a sand screen, wherein the shunt tubes are in direct fluid communication with a crossover tool for distributing a gravel pack. They describe the use of a manifold region above the make-up connection and nozzles spaced intermittently along the shunt tubes. However, these devices are not effective for completions longer than about 3,500 feet.

[0013] Accordingly, the need exists for a method and apparatus that provides alternate flow paths for a variety of well tools, including, but not limited to sand control devices, sand screens, and packers to gravel pack different intervals within a well, and a system and method for efficiently coupling the well tools.

[0014] Other related material may be found in at least U.S. Patent No. 5,476,143; U.S. Patent No. 5,588,487; U.S. Patent No. 5,934,376; U.S. Patent No. 6,227,303; U.S. Patent 6,298,916; U.S. Patent No. 6,464,261; U.S. Patent No. 6,516,882; U.S. Patent No. 6,588,506; U.S. Patent No. 6,749,023; U.S. Patent No. 6,752,207; U.S. Patent No. 6,789,624; U.S. Patent No. 6,814,139; U.S. Patent No. 6,817,410; U.S. Patent No. 6,883,608; International Application Publication No. WO 2004/094769; U.S. Patent

Application Publication No. 2004/0003922; U.S. Patent Application Publication No. 2005/0284643; U.S. Patent Application Publication No. 2005/0205269; and "Alternate Path Completions: A Critical Review and Lessons Learned From Case Histories With Recommended Practices for Deepwater Applications," G. Hurst, et al. SPE Paper No. 86532-MS.

[0015] This application contains subject matter related to U. S. Patent Application No. 11,983,447, filed 09 November 2007, entitled "Wellbore Method and Apparatus for Completion, Production and Injection", Attorney Docket No. 2006EM170/2; and International Patent Application No. PCT/US07/23672, entitled "Wellbore Method and Apparatus for Completion, Production and Injection", filed 09 November 2007, Attorney Docket No. 2006EM170 ("Related Applications"). This application is commonly owned with the Related Applications and shares at least one common inventor.

SUMMARY

[0016] In one embodiment of the present invention, a method of gravel packing a well is provided. The method includes drilling a wellbore through the subterranean formation using a drilling fluid; conditioning the drilling fluid; running a production string to a depth in the wellbore with the conditioned drilling fluid, wherein the production string includes a plurality of joint assemblies, and wherein at least one joint assembly disposed within the conditioned drilling fluid. At least one of the joint assemblies includes a load sleeve assembly having an inner diameter, at least one transport conduit and at least one packing conduit, wherein both the at least one transport conduit and the at least one packing conduit are disposed exterior to the inner diameter, the load sleeve operably attached to a main body portion of one of the plurality of joint assemblies; a torque sleeve assembly having an inner diameter and at least one conduit, wherein the at least one conduit is disposed exterior to the inner diameter, the torque sleeve operably attached to a main body portion of one of the plurality of joint assemblies; a coupling assembly having a manifold region, wherein the manifold region is configured be in fluid flow communication with the at least one transport conduit and at least one packing conduit of the load sleeve assembly, wherein the coupling assembly is operably attached to at least a portion of the joint assembly at or near the load sleeve assembly; and a sand screen disposed along at least a portion of the joint assembly between the load sleeve and the torque sleeve and around an outer diameter of the joint assembly; and gravel packing an interval of the wellbore with a carrier fluid.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The foregoing and other advantages of the present techniques may become apparent upon reviewing the following detailed description and drawings in which:

[0018] FIG. 1 is an exemplary production system in accordance with certain aspects of the present techniques;

[0019] FIGs. 2A-2B are exemplary embodiments of conventional sand control devices utilized within wellbores;

[0020] FIGs. 3A-3C are a side view, a section view, and an end view of an exemplary embodiment of a joint assembly utilized in the production system of FIG. 1 in accordance with certain aspects of the present techniques;

[0021] FIGs. 4A-4B are two cut-out side views of exemplary embodiments of the coupling assembly utilized with the joint assembly of FIGs. 3A-3C and the production system of FIG. 1 in accordance with certain aspects of the present techniques;

[0022] FIGs. 5A-5B are an isometric view and an end view of an exemplary embodiment of a load sleeve assembly utilized as part of the joint assembly of FIGs. 3A-3C, the coupling assembly of FIGs. 4A-4B, and in the production system of FIG. 1 in accordance with certain aspects of the present techniques;

[0023] FIG. 6 is an isometric view of an exemplary embodiment of a torque sleeve assembly utilized as part of the joint assembly of FIGs. 3A-3C, the coupling assembly of FIGs. 4A-4B, and in the production system of FIG. 1 in accordance with certain aspects of the present techniques;

[0024] FIG. 7 is an end view of an exemplary embodiment of a nozzle ring utilized in the joint assembly of FIGs. 3A-3C in accordance with certain aspects of the present techniques;

[0025] FIG. 8 is an exemplary flow chart of a method of assembly of the joint assembly of FIGs. 3A-3C in accordance with aspects of the present techniques;

[0026] FIG. 9 is an exemplary flow chart of a method of producing hydrocarbons from a subterranean formation utilizing the joint assembly of FIGs. 3A-3C and the production system of FIG. 1 in accordance with aspects of the present techniques;

[0027] FIG. 10 is an exemplary flow chart of a method of gravel packing a well in a subterranean formation utilizing the joint assembly of FIGs. 3A-3C in accordance with certain aspects of the present techniques;

[0028] FIGs. 11A-11J are illustrations of an exemplary embodiment of the method of FIG. 10 utilizing the joint assembly of FIGs. 3A-3C in accordance with certain aspects of the present techniques; and

[0029] FIGs. 12A-12C are illustrations of exemplary open-hole completions using the methods of FIGs. 10 and 11A-11J and the joint assembly of FIGs. 3A-3C in accordance with certain aspects of the present techniques.

DETAILED DESCRIPTION

[0030] In the following detailed description section, the specific embodiments of the present techniques are described in connection with preferred embodiments. However, to the extent that the following description is specific to a particular embodiment or a particular

use of the present techniques, this is intended to be for exemplary purposes only and simply provides a description of the exemplary embodiments. Accordingly, the invention is not limited to the specific embodiments described below, but rather, it includes all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

[0031] Although the wellbore is depicted as a vertical wellbore, it should be noted that the present techniques are intended to work in a vertical, horizontal, deviated, or other type of wellbore. Also, any directional description such as 'upstream,' 'downstream,' 'axial,' 'radial,' etc. should be read in context and is not intended to limit the orientation of the wellbore, joint assembly, or any other part of the present techniques.

[0032] Some embodiments of the present techniques may include one or more joint assemblies that may be utilized in a completion, production, or injection system to enhance well completion, e.g., gravel pack, and/or enhance production of hydrocarbons from a well and/or enhance the injection of fluids or gases into the well. Some embodiments of the joint assemblies may include well tools such as sand control devices, packers, cross-over tools, sliding sleeves, shunted blanks, or other devices known in the art. Under some embodiments of the present techniques, the joint assemblies may include alternate path mechanisms for utilization in providing zonal isolation within a gravel pack in a well. In addition, well apparatuses are described that may be utilized in an open or cased-hole completion. Some embodiments of the joint assembly of the present techniques may include a common manifold or manifold region providing fluid communication through a coupling assembly to a joint assembly, which may include a basepipe, shunt tubes, packers, sand control devices, intelligent well devices, cross-coupling flow devices, in-flow control devices, and other tools. As such, some embodiments of the present techniques may be used for design and manufacture of well tools, well completions for flow control, monitoring and management of the wellbore environment, hydrocarbon production and/or fluid injection treatments.

[0033] The coupling assembly of some embodiments of the present techniques may be used with any type of well tool, including packers and sand control devices. The coupling assembly of the present techniques may also be used in combination with other well technologies such as smart well devices, cross-coupling flow techniques, and in-flow control devices. Some embodiments of the coupling assembly of the present techniques may provide a concentric alternate flow path and a simplified coupling interface for use with a variety of well tools. The coupling assembly may also form a manifold region and may connect with a second well tool via a single threaded connection. Further, some embodiments of the coupling assembly may be used in combination with techniques to provide intermittent gravel packing and zonal isolation. Some of these techniques are taught

in U.S. applications having serial numbers 60/765,023 and 60/775,434, which are hereby incorporated by reference.

[0034] Turning now to the drawings, and referring initially to FIG. 1, an exemplary production system **100** in accordance with certain aspects of the present techniques is illustrated. In the exemplary production system **100**, a floating production facility **102** is coupled to a subsea tree **104** located on the sea floor **106**. Through this subsea tree **104**, the floating production facility **102** accesses one or more subsurface formations, such as subsurface formation **107**, which may include multiple production intervals or zones **108a-108n**, wherein number "n" is any integer number, having hydrocarbons, such as oil and gas. Beneficially, well tools, such as sand control devices **138a-138n**, may be utilized to enhance the production of hydrocarbons from the production intervals **108a-108n**. However, it should be noted that the production system **100** is illustrated for exemplary purposes and the present techniques may be useful in the production or injection of fluids from any subsea, platform or land location.

[0035] The floating production facility **102** may be configured to monitor and produce hydrocarbons from the production intervals **108a-108n** of the subsurface formation **107**. The floating production facility **102** may be a floating vessel capable of managing the production of fluids, such as hydrocarbons, from subsea wells. These fluids may be stored on the floating production facility **102** and/or provided to tankers (not shown). To access the production intervals **108a-108n**, the floating production facility **102** is coupled to a subsea tree **104** and control valve **110** via a control umbilical **112**. The control umbilical **112** may be operatively connected to production tubing for providing hydrocarbons from the subsea tree **104** to the floating production facility **102**, control tubing for hydraulic or electrical devices, and a control cable for communicating with other devices within the wellbore **114**.

[0036] To access the production intervals **108a-108n**, the wellbore **114** penetrates the sea floor **106** to a depth that interfaces with the production intervals **108a-108n** at different depths within the wellbore **114**. As may be appreciated, the production intervals **108a-108n**, which may be referred to as production intervals **108**, may include various layers or intervals of rock that may or may not include hydrocarbons and may be referred to as zones. The subsea tree **104**, which is positioned over the wellbore **114** at the sea floor **106**, provides an interface between devices within the wellbore **114** and the floating production facility **102**. Accordingly, the subsea tree **104** may be coupled to a production tubing string **128** to provide fluid flow paths and a control cable (not shown) to provide communication paths, which may interface with the control umbilical **112** at the subsea tree **104**.

[0037] Within the wellbore **114**, the production system **100** may also include different equipment to provide access to the production intervals **108a-108n**. For instance, a surface

casing string **124** may be installed from the sea floor **106** to a location at a specific depth beneath the sea floor **106**. Within the surface casing string **124**, an intermediate or production casing string **126**, which may extend down to a depth near the production interval **108**, may be utilized to provide support for walls of the wellbore **114**. The surface and production casing strings **124** and **126** may be cemented into a fixed position within the wellbore **114** to further stabilize the wellbore **114**. Within the surface and production casing strings **124** and **126**, a production tubing string **128** may be utilized to provide a flow path through the wellbore **114** for hydrocarbons and other fluids. Along this flow path, a subsurface safety valve **132** may be utilized to block the flow of fluids from the production tubing string **128** in the event of rupture or break above the subsurface safety valve **132**. Further, sand control devices **138a-138n** are utilized to manage the flow of particles into the production tubing string **128** with gravel packs **140a-140n**. The sand control devices **138a-138n** may include slotted liners, stand-alone screens (SAS); pre-packed screens; wire-wrapped screens, sintered metal screens, membrane screens, expandable screens and/or wire-mesh screens, while the gravel packs **140a-140n** may include gravel, sand, incompressible particles, or other suitable solid, granular material. Some embodiments of the joint assembly of the present techniques may include a well tool such as one of the sand control devices **138a-138n** or one of the packers **134a-134n**.

[0038] The sand control devices **138a-138n** may be coupled to one or more of the packers **134a-134n**, which may be herein referred to as packer(s) **134** or other well tools. Preferably, the coupling assembly between the sand control devices **138a-138n**, which may be herein referred to as sand control device(s) **138,** and other well tools should be easy to assemble on the floating production facility **102**. Further, the sand control devices **138** may be configured to provide a relatively uninterrupted fluid flow path through a basepipe and a secondary flow path, such as a shunt tube or double-walled pipe.

[0039] The system may utilize a packer **134** to isolate specific zones within the wellbore annulus from each other. The joint assemblies may include a packer **134**, a sand control device **138** or other well tool and may be configured to provide fluid communication paths between various well tools in different intervals **108a-108n**, while preventing fluid flow in one or more other areas, such as a wellbore annulus. The fluid communication paths may include a common manifold region. Regardless, the packers **134** may be utilized to provide zonal isolation and a mechanism for providing a substantially complete gravel pack within each interval **108a-108n**. For exemplary purposes, certain embodiments of the packers **134** are described further in U.S. application serial numbers 60/765,023 and 60/775,434 the portions of which describing packers are herein incorporated by reference.

[0040] FIGs. 2A-2B are partial views of embodiments of conventional sand control devices jointed together within a wellbore. Each of the sand control devices **200a** and **200b** may include a tubular member or base pipe **202** surrounded by a filter medium or sand screen **204**. Ribs **206** may be utilized to keep the sand screens **204** a specific distance from the base pipes **202**. Sand screens may include multiple wire segments, mesh screen, wire wrapping, a medium to prevent a predetermined particle size and any combination thereof. Shunt tubes **208a** and **208b**, which may be collectively referred to as shunt tubes **208**, may include packing tubes **208a** or transport tubes **208b** and may also be utilized with the sand screens **204** for gravel packing within the wellbore. The packing tubes **208a** may have one or more valves or nozzles **212** that provide a flow path for the gravel pack slurry, which includes a carrier fluid and gravel, to the annulus formed between the sand screen **204** and the walls of the wellbore. The valves may prevent fluids from an isolated interval from flowing through the at least one jumper tube to another interval. For an alternative perspective of the partial view of the sand control device **200a**, a cross sectional view of the various components along the line AA is shown in FIG. 2B. It should be noted that in addition to the external shunt tubes shown in FIGs 2A and 2B, which are described in U.S. Patent Nos. 4,945,991 and 5,113,935, internal shunt tubes, which are described in U.S. Patent Nos. 5,515,915 and 6,227,303, may also be utilized.

[0041] While this type of sand control device is useful for certain wells, it is unable to isolate different intervals within the wellbore. As noted above, the problems with the water/gas production may include productivity loss, equipment damage, and/or increased treating, handling and disposal costs. These problems are further compounded for wells that have a number of different completion intervals and where the formation strength may vary from interval to interval. As such, water or gas breakthrough in any one of the intervals may threaten the remaining reserves within the well. The connection of the present technique facilitates efficient alternate path fluid flow technology in a production string **128**. Some embodiments of the present techniques provide for a single fixed connection between the downstream end of a first well tool and the upstream end of a second well tool. This eliminates the costly and time-consuming practice of aligning shunt tubes or other alternate flow path devices while eliminating the need for eccentric alternate flow paths. Some embodiments of the present techniques also eliminate the need to make timed connections of primary and secondary flow paths. Accordingly, to provide the zonal isolation within the wellbore **114**, various embodiments of sand control devices **138**, coupling assemblies and methods for coupling the sand control devices **138** to other well tools are discussed below and shown in FIGs. 3-9.

[0042] FIGs. 3A-3C are a side view, a sectional view, and an end view of an exemplary embodiment of a joint assembly **300** utilized in the production system **100** of FIG. 1.

Accordingly, FIGs. 3A-3C may be best understood by concurrently viewing FIG. 1. The joint assembly **300** may consist of a main body portion having a first or upstream end and a second or downstream end, including a load sleeve assembly **303** operably attached at or near the first end, a torque sleeve assembly **305** operably attached at or near the second end, a coupling assembly **301** operably attached to the first end, the coupling assembly **301** including a coupling **307** and a manifold region **315**. Additionally, the load sleeve assembly **303** includes at least one transport conduit and at least one packing conduit (see FIG. 5) and the torque sleeve includes at least one conduit (not shown).

[0043] Some embodiments of the joint assembly **300** of the present techniques may be coupled to other joint assemblies, which may include packers, sand control devices, shunted blanks, or other well tools via the coupling assembly **301**. It may require only a single threaded connection and be configured to form an adaptable manifold region **315** between the coupled well tools. The manifold region **315** may be configured to form an annulus around the coupling **307**. The joint assembly **300** may include a primary fluid flow assembly or path **318** through the main body portion and through an inner diameter of the coupling **307**. The load sleeve assembly **303** may include at least one packing conduit and at least one transport conduit, and the torque sleeve assembly **305** may include at least one conduit, but may not include a packing conduit (see FIGs. 5 and 6 for exemplary embodiments of the transport and packing conduits). These conduits may be in fluid flow communication with each other through an alternate fluid flow assembly or path **320** of the joint assembly **300** although the part of the fluid flow assembly **320** in fluid flow communication with the packing conduits of the load sleeve assembly **303** may terminate before entering the torque sleeve assembly, or may terminate inside the torque sleeve assembly **305**. The manifold section **315** may facilitate a continuous fluid flow through the alternate fluid flow assembly or path **320** of the joint assembly **300** without requiring a timed connection to line-up the openings of the load sleeve assembly **303** and torque sleeve assembly **305** with the alternate fluid flow assembly **320** during make-up of the production tubing string **128**. A single threaded connection makes up the coupling assembly **301** between joint assemblies **300**, thereby reducing complexity and make-up time. This technology facilitates alternate path flow through various well tools and allows an operator to design and operate a production tubing string **128** to provide zonal isolation in a wellbore **114** as disclosed in U.S. application serial numbers 60/765,023 and 60/775,434. The present technology may also be combined with methods and tools for use in installing an open-hole gravel pack completion as disclosed in U.S. patent publication no. US2007/0068675, which is hereby incorporated by reference, and other wellbore treatments and processes.

[0044] Some embodiments of the joint assembly of the present techniques comprise a load sleeve assembly **303** at a first end, a torque sleeve assembly **305** at a second end, a basepipe **302** forming at least a portion of the main body portion, a coupling **307**, a primary flow path **320** through the coupling **307**, a coax sleeve **311**, and an alternate flow path **320** between the coupling **307** and coax sleeve **311**, through the load sleeve assembly **303**, along the outer diameter of the basepipe **302**, and through the torque sleeve assembly **305**. The torque sleeve assembly **305** of one joint assembly **300** is configured to attach to the load sleeve assembly **303** of a second assembly through the coupling assembly **301**, whether the joint assembly **300** includes a sand control device, packer, or other well tool.

[0045] Some embodiments of the joint assembly **300** preferably include a basepipe **302** having a load sleeve assembly **303** positioned near an upstream or first end of the basepipe **302**. The basepipe **302** may include perforations or slots, wherein the perforations or slots may be grouped together along the basepipe **302** or a portion thereof to provide for routing of fluid or other applications. The basepipe **302** preferably extends the axial length of the joint assembly and is operably attached to a torque sleeve **305** at a downstream or second end of the basepipe **302**. The joint assembly **300** may further include at least one nozzle ring **310a-310e** positioned along its length, at least one sand screen segment **314a-314f** and at least one centralizer **316a-316b**. As used herein, the term “sand screen” refers to any filtering mechanism configured to prevent passage of particulate matter having a certain size, while permitting flow of gases, liquids and small particles. The size of the filter will generally be in the range of 60-120 mesh, but may be larger or smaller depending on the specific environment. Many sand screen types are known in the art and include wire-wrap, mesh material, woven mesh, sintered mesh, wrap-around perforated or slotted sheets, Schlumberger’s MESHRITE™ and Reslink’s LINESLOT™ products. Preferably, sand screen segments **314a-314f** are disposed between one of the plurality of nozzle rings **310a-310e** and the torque sleeve assembly **305**, between two of the plurality of nozzle rings **310a-310e**, or between the load sleeve assembly **303** and one of the plurality of nozzle rings **310a-310e**. The at least one centralizer **316a-316b** may be placed around at least a portion of the load ring assembly **303** or at least a portion of one of the plurality of nozzle rings **310a-310e**.

[0046] As shown in FIG. 3B, in some embodiments of the present techniques, the transport and packing tubes **308a-308i**, (although nine tubes are shown, the invention may include more or less than nine tubes) preferably have a circular cross-section for withstanding higher pressures associated with greater depth wells. The transport and packing tubes **308a-308i** may also be continuous for the entire length of the joint assembly **300**. Further, the tubes **308a-308i** may preferably be constructed from steel, more

preferably from lower yield, weldable steel. One example is 316L. One embodiment of the load sleeve assembly **303** is constructed from high yield steel, a less weldable material. One preferred embodiment of the load sleeve assembly **303** combines a high strength material with a more weldable material prior to machining. Such a combination may be welded and heat treated. The packing tubes **308g-308i** (although only three packing tubes are shown, the invention may include more or less than three packing tubes) include nozzle openings **310** at regular intervals, for example, every approximately six feet, to facilitate the passage of flowable substances, such as a gravel slurry, from the packing tube **308g-308i** to the wellbore **114** annulus to pack the production interval **108a-108n**, deliver a treatment fluid to the interval, produce hydrocarbons, monitor or manage the wellbore. Many combinations of packing and transport tubes **308a-308i** may be used. An exemplary combination includes six transport tubes **308a-308f** and three packing tubes **308g-308i**.

[0047] The preferred embodiment of the joint assembly **300** may further include a plurality of axial rods **312a-312n**, wherein 'n' can be any integer, extending parallel to the shunt tubes **308a-308n** adjacent to the length of the basepipe **302**. The axial rods **312a-312n** provide additional structural integrity to the joint assembly **300** and at least partially support the sand screen segments **314a-314f**. Some embodiments of the joint assembly **300** may incorporate from one to six axial rods **312a-312n** per shunt tube **308a-308n**. An exemplary combination includes three axial rods **312** between each pair of shunt tubes **308**.

[0048] In some embodiments of the present techniques the sand screen segments **314a-314f** may be attached to a weld ring (not shown) where the sand screen segment **314a-314f** meets a load sleeve assembly **303**, nozzle ring **310**, or torque sleeve assembly **305**. An exemplary weld ring includes two pieces joined along at least one axial length by a hinge and joined at an opposite axial length by a split, clip, other attachment mechanism, or some combination. Further, a centralizer **316** may be fitted over the body portion (not shown) of the load sleeve assembly **303** and at the approximate midpoint of the joint assembly **300**. In one preferred embodiment, one of the nozzle rings **310a-310e** comprises an extended axial length to accept a centralizer **316** thereon. As shown in FIG. 3C, the manifold region **315** may also include a plurality of torque spacers or profiles **309a-309e.**

[0049] FIGs. 4A-4B are cut-out views of two exemplary embodiments of a coupling assembly **301** utilized in combination with the joint assembly **300** of FIGs. 3A-3B and in the production system **100** of FIG. 1. Accordingly, FIGs. 4A-4B may be best understood by concurrently viewing FIGs. 1 and 3A-3B. The coupling assembly **301** consists of a first well tool **300a**, a second well tool **300b**, a coax sleeve **311**, a coupling **307**, and at least one torque spacer **309a**, (although only one is shown in this view, there may be more than one as shown in FIG. 3C) .

[0050] Referring to FIG. 4A, one preferred embodiment of the coupling assembly **301** may comprise a first joint assembly **300a** having a main body portion, a primary fluid flow path **318** and an alternate fluid flow path **320**, wherein one end of the well tool **300a** or **300b** is operably attached to a coupling **307**. The embodiment may also include a second well tool **300b** having primary **318** and alternate **320** fluid flow paths wherein one end of the well tool **300** is operably attached to a coupling **307**. Preferably, the primary fluid flow path **318** of the first and second well tools **300a** and **300b** are in substantial fluid flow communication via the inner diameter of the coupling **307** and the alternate fluid flow path **320** of the first and second well tools **300a** and **300b** are in substantial fluid flow communication through the manifold region **315** around the outer diameter of the coupling **307**. This embodiment further includes at least one torque spacer **309a** fixed at least partially in the manifold region **315**. The at least one torque spacer **309a** is configured to prevent tortuous flow and provide additional structural integrity to the coupling assembly **301**. The manifold region **315** is an annular volume at least partially interfered with by the at least one torque spacer **309a**, wherein the inner diameter of the manifold region **315** is defined by the outer diameter of the coupling **307** and the outer diameter of the manifold region **315** may be defined by the well tools **300** or by a sleeve in substantially concentric alignment with the coupling **307**, called a coax sleeve **311**. In one exemplary embodiment, the manifold region **315** may have a length **317** of from about 8 inches to about 18 inches, preferably from about 12 inches to about 16 inches, or more preferably about 14.4 inches.

[0051] Referring now to FIG. 4B, some embodiments of the coupling assembly **301** of the present techniques may comprise at least one alternate fluid flow path **320** extending from an upstream or first end of the coupling assembly **301**, between the coax sleeve **311** and coupling **307** and through a portion of a load sleeve assembly **303**. Preferably, the coupling **307** is operably attached to the upstream end of a basepipe **302** by a threaded connection. The coax sleeve **311** is positioned around the coupling **307**, forming a manifold region **315**. The attachment mechanism may comprise a threaded connector **410** through the coax sleeve **311**, through one of the at least one torque profiles or spacers **309a** and into the coupling **307**. There may be two threaded connectors **410a-410n**, wherein 'n' may be any integer, for each torque profile **309a-309e** wherein one of the threaded connectors **410a-410n** extends through the torque profile **309a-309e** and the other terminates in the body of the torque profile **309a-309e**.

[0052] In some embodiments of the present techniques, the volume between the coax sleeve **311** and the coupling **307** forms the manifold region **315** of the coupling assembly **301**. The manifold region **315** may beneficially provide an alternate path fluid flow connection between a first and second joint assembly **300a** and **300b**, which may include a

packer, sand control device, or other well tool. In a preferred embodiment, fluids flowing into the manifold region **315**, may follow a path of least resistance when entering the second joint assembly **300b**. The torque profiles or spacers **309a-309e** may be at least partially disposed between the coax sleeve **311** and the coupling **307** and at least partially disposed in the manifold region **315**. The coupling **307** may couple the load sleeve assembly **303** of a first joint assembly **300a** to the torque sleeve assembly **305** of a second well tool **300b**. Beneficially, this provides a more simplified make-up and improved compatibility between joint assemblies **300a** and **300b** which may include a variety of well tools.

[0053] It is also preferred that the coupling **307** operably attaches to the basepipe **302** with a threaded connection and the coax sleeve **311** operably attaches to the coupling **307** with threaded connectors. The threaded connectors **410a-410n**, wherein 'n' may be any integer, pass through the torque spacers or profiles **309a- 309e**. The torque profiles **309a-309e** preferably have an aerodynamic shape, more preferably based on NACA (National Advisory Committee for Aeronautics) standards. The number of torque profiles **309a-309e** used may vary according to the dimensions of the coupling assembly **301**, the type of fluids intended to pass therethrough and other factors. One exemplary embodiment includes five torque spacers **309a-309e** spaced equally around the annulus of the manifold region **315**. However, it should be noted that various numbers of torque spacers **309a-309e** and connectors may be utilized to practice the present techniques.

[0054] In some embodiments of the present techniques the torque spacers **309a-309e** may be fixed by threaded connectors **410a-410n** extending through the coax sleeve **311** into the torque spacers **309a-309e**. The threaded connectors **410a-410n** may then protrude into machined holes in the coupling **307**. As an example, one preferred embodiment may include ten (10) threaded connectors **410a-410e**, wherein two connectors pass into each aerodynamic torque spacer **309a-309e**. Additionally, one of the connectors **410a-410e** may pass through the torque spacer **309a-309e** and the other of the two connectors **410a-410i** may terminate in the body of the torque spacer **309a-309e**. However, other numbers and combinations of threaded connectors may be utilized to practice the present techniques.

[0055] Additionally, the torque spacers or profiles **309a-309e** may be positioned such that the more rounded end is oriented in the upstream direction to create the least amount of drag on the fluid passing through the manifold region **315** while at least partially inhibiting the fluid from following a tortuous path. In one preferred embodiment, sealing rings such as o-rings and backup rings **412** may be fitted between the inner lip of the coax sleeve **311** and a lip portion of each of the torque sleeve assembly **305** and the load sleeve assembly **303**.

[0056] FIGs. 5A-5B are an isometric view and an end view of an exemplary embodiment of a load sleeve assembly **303** utilized in the production system **100** of FIG. 1, the joint

assembly **300** of FIGs. 3A-3C, and the coupling assembly **301** of FIGs. 4A-4B in accordance with certain aspects of the present techniques. Accordingly, FIGs. 5A-5B may be best understood by concurrently viewing FIGs. 1, 3A-3C, and 4A-4B. The load sleeve assembly **303** comprises an elongated body **520** of substantially cylindrical shape having an outer diameter and a bore extending from a first end **504** to a second end **502**. The load sleeve assembly **303** may also include at least one transport conduit **508a-508f** and at least one packing conduit **508g-508i**, (although six transport conduits and three packing conduits are shown, the invention may include more or less such conduits) extending from the first end **504** to the second end **502** to form openings located at least substantially between the inner diameter **506** and the outer diameter wherein the opening of the at least one transport conduit **508a-508f** is configured at the first end to reduce entry pressure loss (not shown).

[0057] Some embodiments of the load sleeve assembly of the present techniques may further include at least one opening at the second end **502** of the load sleeve assembly configured to be in fluid communication with a shunt tube **308a-308i**, a double-walled basepipe, or other alternate path fluid flow mechanism. The first end **504** of the load sleeve assembly **303** includes a lip portion **510** adapted and configured to receive a backup ring and/or an o-ring **412**. The load sleeve assembly **303** may also include a load shoulder **512** to permit standard well tool insertion equipment on the floating production facility or rig **102** to handle the load sleeve assembly **303** during screen running operations. The load sleeve assembly **303** additionally may include a body portion **520** and a mechanism for operably attaching a basepipe **302** to the load sleeve assembly **303**.

[0058] In some embodiments of the present techniques, the transport and packing conduits **508a-508i** are adapted at the second end **502** of the load sleeve assembly **303** to be operably attached, preferably welded, to shunt tubes **308a-308i**. The shunt tubes **308a-308i** may be welded by any method known in the art, including direct welding or welding through a bushing. The shunt tubes **308a-308i** preferably have a round cross-section and are positioned around the basepipe **302** at substantially equal intervals to establish a concentric cross-section. The transport conduits **508a-508f** may also have a reduced entry pressure loss or smooth-profile design at their upstream opening to facilitate the fluid flow into the transport tubes **308a-308f**. The smooth profile design preferably comprises a "trumpet" or "smiley face" configuration. As an example, one preferred embodiment may include six transport conduits **508a-508f** and three packing conduits **508g-508i**. However, it should be noted that any number of packing and transport conduits may be utilized to practice the present techniques.

[0059] In some embodiments of the load sleeve assembly **303** a load ring (not shown) is utilized in connection with the load sleeve assembly **303**. The load ring is fitted to the

basepipe **302** adjacent to and on the upstream side of the load sleeve assembly **303**. In one preferred embodiment the load sleeve assembly **303** includes at least one transport conduit **508a-508f** and at least one packing conduit **508g-508i**, wherein the inlets of the load ring are configured to be in fluid flow communication with the transport and packing conduits **508a-508i**. As an example, alignment pins or grooves (not shown) may be incorporated to ensure proper alignment of the load ring and load sleeve assembly **303**. A portion of the inlets of the load ring are shaped like the mouth of a trumpet to reduce entry pressure loss or provide a smooth-profile. Preferably, the inlets aligned with the transport conduits **508a-508f** incorporate the "trumpet" shape, whereas the inlets aligned with the packing conduits **508g-508i** do not incorporate the "trumpet" shape.

[0060] Although the load ring and load sleeve assembly **303** function as a single unit for fluid flow purposes, it may be preferable to utilize two separate parts to allow a basepipe seal to be placed between the basepipe **302** and the load sleeve assembly **303** so the load ring can act as a seal retainer when properly fitted to the basepipe **302**. In an alternate embodiment, the load sleeve assembly **303** and load ring comprise a single unit welded in place on the basepipe **302** such that the weld substantially restricts or prevents fluid flow between the load sleeve assembly **303** and the basepipe **302**.

[0061] In some embodiments of the present techniques, the load sleeve assembly **303** includes beveled edges **516** at the downstream end **502** for easier welding of the shunt tubes **308a-308i** thereto. The preferred embodiment also incorporates a plurality of radial slots or grooves **518a-518n**, in the face of the downstream or second end **502** to accept a plurality of axial rods **312a-312n**, wherein 'n' can be any integer. An exemplary embodiment includes three axial rods **312a-312n** between each pair of shunt tubes **308a-308i** attached to each load sleeve assembly **303**. Other embodiments may include none, one, two, or a varying number of axial rods **312a-312n** between each pair of shunt tubes **308a-308i**.

[0062] The load sleeve assembly **303** is preferably manufactured from a material having sufficient strength to withstand the contact forces achieved during screen running operations. One preferred material is a high yield alloy material such as S165M. The load sleeve assembly **303** may be operably attached to the basepipe **302** utilizing any mechanism that effectively transfers forces from the load sleeve assembly **303** to the basepipe **302**, such as by welding, clamping, latching, or other techniques known in the art. One preferred mechanism for securing the load sleeve assembly **303** to the basepipe **302** is a threaded connector, such as a torque bolt, driven through the load sleeve assembly **303** into the basepipe **302**. Preferably, the load sleeve assembly **303** includes radial holes **514a-514n**, wherein 'n' can be any integer, between its downstream end **502** and the load shoulder **512** to receive the threaded connectors. For example, there may be nine holes

514a-514i in three groups of three spaced substantially equally around the outer circumference of the load sleeve assembly **303** to provide the most even distribution of weight transfer from the load sleeve assembly **303** to the basepipe **302**. However, it should be noted that any number of holes may be utilized to practice the present techniques.

[0063] The load sleeve assembly **303** preferably includes a lip portion **510**, a load shoulder **512,** and at least one transport and one packing conduit **508a-508i** extending through the axial length of the load sleeve assembly **303** between the inner and outer diameter of the load sleeve assembly **303**. The basepipe **302** extends through the load sleeve assembly **303** and at least one alternate fluid flow path **320** extends from at least one of the transport and packing conduits **508a-508n** down the length of the basepipe **302**. The basepipe **302** is operably attached to the load sleeve assembly **303** to transfer axial, rotational, or other forces from the load sleeve assembly **303** to the basepipe **302**. Nozzle openings **310a-310e** are positioned at regular intervals along the length of the alternate fluid flow path **320** to facilitate a fluid flow connection between the wellbore **114** annulus and the interior of at least a portion of the alternate fluid flow path **320**. The alternate fluid flow path **320** terminates at the transport or packing conduit (see FIG. 6) of the torque sleeve assembly **305** and the torque sleeve assembly **305** is fitted over the basepipe **302**. A plurality of axial rods **312a-312n** are positioned in the alternate fluid flow path **320** and extend along the length of the basepipe **302**. A sand screen **314a-314f**, is positioned around the joint assembly **300** to filter the passage of gravel, sand particles, and/or other debris from the wellbore **114** annulus to the basepipe **302**. The sand screen may include slotted liners, stand-alone screens (SAS); pre-packed screens; wire-wrapped screens, sintered metal screens, membrane screens, expandable screens and/or wire-mesh screens.

[0064] Referring back to FIG. 4B, in some embodiments of the present techniques, the joint assembly **300** may include a coupling **307** and a coax sleeve **311**, wherein the coupling **307** is operably attached (e.g. a threaded connection, welded connection, fastened connection, or other connection type known in the art) to the basepipe **302** and has approximately the same inner diameter as the basepipe **302** to facilitate fluid flow through the coupling assembly **301**. The coax sleeve **311** is positioned substantially concentrically around the coupling **307** and operably attached (e.g. a threaded connection, welded connection, fastened connection, or other connection type known in the art) to the coupling **307**. The coax sleeve **311** also preferably comprises a first inner lip at its second or downstream end, which mates with the lip portion **510** of the load sleeve assembly **303** to prevent fluid flow between the coax sleeve **311** and the load sleeve assembly **303**. However, it is not necessary for loads to be transferred between the load sleeve assembly **303** and the coax sleeve **311**.

[0065] FIG. 6 is an isometric view of an exemplary embodiment of a torque sleeve assembly **305** utilized in the production system **100** of FIG. 1, the joint assembly **300** of FIGs. 3A-3C, and the coupling assembly **301** of FIGs. 4A-4B in accordance with certain aspects of the present techniques. Accordingly, FIG. 6 may be best understood by concurrently viewing FIGs. 1, 3A-3C, and 4A-4B. The torque sleeve assembly **305** may be positioned at the downstream or second end of the joint assembly **300** and includes an upstream or first end **602**, a downstream or second end **604**, an inner diameter **606,** at least one transport conduit **608a-608i**, positioned substantially around and outside the inner diameter **606**, but substantially within an outside diameter. The at least one transport conduit **608a-608f** extends from the first end **602** to the second end **604**, while the at least one packing conduit **608g-608i** may terminate before reaching the second end **604**.

[0066] In some embodiments, the torque sleeve assembly **305** has beveled edges **616** at the upstream end **602** for easier attachment of the shunt tubes **308** thereto. The preferred embodiment may also incorporate a plurality of radial slots or grooves **612a-612n**, wherein 'n' may be any integer, in the face of the upstream end **602** to accept a plurality of axial rods **312a-312n**, wherein 'n' may be any integer. For example, the torque sleeve may have three axial rods **312a-312c** between each pair of shunt tubes **308a-308i** for a total of 27 axial rods attached to each torque sleeve assembly **305**. Other embodiments may include none, one, two, or a varying number of axial rods **312a-312n** between each pair of shunt tubes **308a-308i**.

[0067] In some embodiments of the present techniques the torque sleeve assembly **305** may preferably be operably attached to the basepipe **302** utilizing any mechanism that transfers force from one body to the other, such as by welding, clamping, latching, or other means known in the art. One preferred mechanism for completing this connection is a threaded fastener, for example, a torque bolt, through the torque sleeve assembly **305** into the basepipe **302**. Preferably, the torque sleeve assembly includes radial holes **614a-614n**, wherein 'n' may be any integer, between the upstream end **602** and the lip portion **610** to accept threaded fasteners therein. For example, there may be nine holes **614a-614i** in three groups of three, spaced equally around the outer circumference of the torque sleeve assembly **305**. However, it should be noted that other numbers and configurations of holes **614a-614n** may be utilized to practice the present techniques.

[0068] In some embodiments of the present techniques the transport and packing conduits **608a-608i** are adapted at the upstream end **602** of the torque sleeve assembly **305** to be operably attached, preferably welded, to shunt tubes **308a-308i**. The shunt tubes **308a-308i** preferably have a circular cross-section and are positioned around the basepipe **302** at substantially equal intervals to establish a balanced, concentric cross-section of the

joint assembly **300**. The conduits **608a-608i** are configured to operably attach to the downstream ends of the shunt tubes **308a-308i**, the size and shape of which may vary in accordance with the present teachings. As an example, one preferred embodiment may include six transport conduits **608a-608f** and three packing conduits **608g-608i**. However, it should be noted that any number of packing and transport conduits may be utilized to achieve the benefits of the present techniques.

[0069] In some embodiments of the present techniques, the torque sleeve assembly **305** may include only transport conduits **608a-608f** and the packing tubes **308g-308i** may terminate at or before they reach the second end **604** of the torque sleeve assembly **305**. In a preferred embodiment, the packing conduits **608g-608i** may terminate in the body of the torque sleeve assembly **305**. In this configuration, the packing conduits **608g-608i** may be in fluid communication with the exterior of the torque sleeve assembly **305** via at least one perforation **618**. The perforation **618**may be fitted with a nozzle insert and a back flow prevention device (not shown). In operation, this permits a fluid flow, such as a gravel slurry, to exit the packing tube **608g-608i** through the perforation **618**, but prevents fluids from flowing back into the packing conduit **608g-608i** through the perforation **618**.

[0070] In some embodiments, the torque sleeve assembly **305** may further consist of a lip portion **610** and a plurality of fluid flow channels **608a-608i**. When a first and second joint assembly **300a** and **300b** (which may include a well tool) of the present techniques are connected, the downstream end of the basepipe **302** of the first joint assembly **300a** may be operably attached (e.g. a threaded connection, welded connection, fastened connection, or other connection type) to the coupling **307** of the second joint assembly **300b**. Also, an inner lip of the coax sleeve **311** of the second joint assembly **300b** mates with the lip portion **610** of the torque sleeve assembly **305** of the first joint assembly **300a** in such a way as to prevent fluid flow from inside the joint assembly **300** to the wellbore annulus **114** by flowing between the coax sleeve **311** and the torque sleeve assembly **305**. However, it is not necessary for loads to be transferred between the torque sleeve assembly **305** and the coax sleeve **311**.

[0071] FIG. 7 is an end view of an exemplary embodiment of one of the plurality of nozzle rings **310a-310e** utilized in the production system **100** of FIG. 1 and the joint assembly **300** of FIGs. 3A-3C in accordance with certain aspects of the present techniques. Accordingly, FIG. 7 may be best understood by concurrently viewing FIGs. 1 and 3A-3C. This embodiment refers to any or all of the plurality of nozzle rings **310a-310e**, but will be referred to hereafter as nozzle ring **310**. The nozzle ring **310** is adapted and configured to fit around the basepipe **302** and shunt tubes **308a-308i**, . Preferably, the nozzle ring **310** includes at least one channel **704a-704i** to accept the at least one shunt tube **308a-308i**.

Each channel **704a-704i** extends through the nozzle ring **310** from an upstream or first end to a downstream or second end. For each packing tube **308g-308i**, the nozzle ring **310** includes an opening or hole **702a-702c**. Each hole, **702a-702c** extends from an outer surface of the nozzle ring toward a central point of the nozzle ring **310** in the radial direction. Each hole **702a-702c** interferes with or intersects, at least partially, the at least one channel **704a-704c** such that they are in fluid flow communication. A wedge (not shown) may be inserted into each hole **702a-702c** such that a force is applied against a shunt tube **308g-308i** pressing the shunt tube **308g-308i** against the opposite side of the channel wall. For each channel **704a-704i** having an interfering hole **702a-702c**, there is also an outlet **706a-706c** extending from the channel wall through the nozzle ring **310**. The outlet **706a-706c** has a central axis oriented perpendicular to the central axis of the hole **702a-702c**. Each shunt tube **308g-308i** inserted through a channel having a hole **702a-702c** includes a perforation in fluid flow communication with an outlet **706a-706c** and each outlet **706a-706c** preferably includes a nozzle insert (not shown).

[0072] FIG. 8 is an exemplary flow chart of the method of manufacture of the joint assembly **300** of FIGs. 3A-3C, which includes the coupling assembly **301** of FIGs. 4A-4B, the load sleeve assembly **303** of FIGs. 5A-5B and the torque sleeve assembly **305** of FIG. 6, and is utilized in the production system **100** of FIG. 1, in accordance with aspects of the present techniques. Accordingly, the flow chart **800**, may be best understood by concurrently viewing FIGs. 1, 3A-3C, 4A-4B, 5A-5B, and 6. It should be understood that the steps of the exemplary embodiment can be accomplished in any order, unless otherwise specified. The method comprises operably attaching a load sleeve assembly **303** having transport and packing conduits **508a-508i** to the main body portion of the joint assembly **300** at or near the first end thereof, operably attaching a torque sleeve assembly **305** having at least one conduit **608a-608i** to the main body portion of the joint assembly **300** at or near the second end thereof, and operably attaching a coupling assembly **301** to at least a portion of the first end of the main body portion of the joint assembly **300**, wherein the coupling assembly **301** includes a manifold region **315** in fluid flow communication with the packing and transport conduits **508a-508i** of the load sleeve assembly **303** and the at least one conduit **608a-608i** of the torque sleeve assembly **305**.

[0073] In some embodiments of the present techniques, the individual components are provided **802** and pre-mounted on or around **804** the basepipe **302**. The coupling **307** is attached **816** and the seals are mounted **817**. The load sleeve assembly **303** is fixed **818** to the basepipe **302** and the sand screen segments **314a-314n** are mounted. The torque sleeve assembly **305** is fixed **828** to the basepipe **302**, the coupling assembly **301** is assembled **830**, and the nozzle openings **310a-310e** are completed **834**. The torque sleeve

assembly may have transport conduits **608a-608f**, but may or may not have packing conduits **608g-608i**.

[0074] In a preferred method of manufacturing the joint assembly **300**, the seal surfaces and threads at each end of the basepipe **302** are inspected for scratches, marks, or dents before assembly **803**. Then the load sleeve assembly **303**, torque sleeve assembly **305**, nozzle rings **310a-310e**, centralizers **316a-316d**, and weld rings (not shown) are positioned **804** onto the basepipe **302**, preferably by sliding. Note that the shunt tubes **308a-308i** are fitted to the load sleeve assembly **303** at the upstream or first end of the basepipe **302** and the torque sleeve assembly **305** at the downstream or second end of the basepipe **302**. Once these parts are in place, the shunt tubes **308a-308i** are tack or spot welded **806** to each of the load sleeve assembly **303** and the torque sleeve assembly **305**. A non-destructive pressure test is performed **808** and if the assembly passes **810**, the manufacturing process continues. If the assembly fails, the welds that failed are repaired **812** and retested **808**.

[0075] Once the welds have passed the pressure test, the basepipe **302** is positioned to expose an upstream end and the upstream end is prepared for mounting **814** by cleaning, greasing, and other appropriate preparation techniques known in the art. Next, the sealing devices, such as back-up rings and o-rings, may be slid **814** onto the basepipe **302**. Then, the load ring may be positioned over the basepipe **302** such that it retains the position of the sealing devices **814**. Once the load ring is in place, the coupling **307** may be threaded **815** onto the upstream end of the basepipe **302** and guide pins (not shown) are inserted into the upstream end of the load sleeve assembly **303**, aligning the load ring therewith **816**. The manufacturer may then slide the load sleeve assembly **303** (including the rest of the assembly) over the backup ring and o-ring seals **817** such that the load sleeve **303** is against the load ring, which is against the coupling **307**. The manufacturer may then drill holes into the basepipe **302** through the apertures **514a-514n**, wherein 'n' may be any integer, of the load sleeve assembly **303** and mount torque bolts **818** to secure the load sleeve assembly **303** to the basepipe **302**. Then, axial rods **312a-312n** may be aligned parallel with the shunt tubes **308a-308i** and welded **819** into pre-formed slots in the downstream end of the load sleeve assembly **303**.

[0076] Once the axial rods **312a-312n** are properly secured, screen sections **314a-314f** may be mounted **820** utilizing a sand screen such as ResLink's LineSlot™ wire wrap sand screen. The sand screen will extend from the load sleeve assembly **303** to the first nozzle ring **310a**, then from the first nozzle ring **310a** to the second nozzle ring **310b**, the second nozzle ring **310b** to the centralizer **316a** and the third nozzle ring **310c**, and so on to the torque sleeve assembly **305** until the shunt tubes **308a-308i** are substantially enclosed along

the length of the joint assembly **300**. The weld rings may then be welded into place so as to hold the sand screens **314a-314f** in place. The manufacturer may check the screen to ensure proper mounting and configuration **822**. If a wire wrap screen is used, the slot opening size may be checked, but this step can be accomplished prior to welding the weld rings. If the sand screens **314a-314f** check out **824**, then the process continues, otherwise, the screens are repaired or the joint assembly **300** is scrapped **826**. The downstream end of basepipe **302** is prepared for mounting **827** by cleaning, greasing, and other appropriate preparation techniques known in the art. Next, the sealing devices, such as back-up rings and o-rings, may be slid onto the basepipe **302**. Then the torque sleeve assembly **305** may be fixedly attached **828** to the basepipe **302** in a similar manner to the load sleeve assembly **303**. Once the torque sleeve assembly **305** is attached, the sealing devices may be installed between the basepipe **302** and torque sleeve assembly **305** and a seal retainer (not shown) may be mounted and tack welded into place. Note that the steps of fixing the torque sleeve assembly **305** and installing the seals may be conducted before the axial rods **312** are welded into place **819**.

[0077] The coax sleeve **311** may be installed **830** at this juncture, although these steps may be accomplished at any time after the load sleeve assembly **303** is fixed to the basepipe **302**. The o-rings and backup rings (not shown) are inserted into an inner lip portion of the coax sleeve **311** at each end of the coax sleeve **311** and torque spacers **309a-309e** are mounted to an inside surface of the coax sleeve **311** utilizing short socket head screws with the butt end of the torque spacers **309a-309e** pointing toward the upstream end of the joint assembly **300**. Then the manufacturer may slide the coax sleeve **311** over the coupling **307** and replace the socket head screws with torque bolts **410** having o-rings, wherein at least a portion of the torque bolts **410** extend through the coax sleeve **311**, the torque spacer **309a-309e**, and into the coupling **307**. However, in one preferred embodiment, a portion of the torque bolts **410** terminate in the torque spacer **309a-309e** and others extend through the torque spacer **309a-309e** into the coupling **307**.

[0078] Any time after the sand screens **314a-314f** are installed, the manufacturer may prepare the nozzle rings **310a-310e**. For each packing shunt tube **308g-308i**, a wedge (not shown) is inserted into each hole **702a-702c** located around the outer diameter of the nozzle ring **310a-310e** generating a force against each packing shunt tube **308g-308i**. Then, the wedge is welded into place. A pressure test may be conducted **832** and, if passed **834**, the packing shunt tubes **308g-308i** are perforated **838** by drilling into the tube through an outlet **706a-706c**. In one exemplary embodiment, a 20mm tube may be perforated by a 8mm drill bit. Then a nozzle insert and a nozzle insert housing (not shown) are installed **840** into each

outlet **706a-706c**. Before shipment, the sand screen is properly packaged and the process is complete.

[0079] FIG. 9 is an exemplary flow chart of the method of producing hydrocarbons utilizing the production system **100** of FIG. 1 and the joint assembly **300** of FIG. 3A-3C, in accordance with aspects of the present techniques. Accordingly, this flow chart, which is referred to by reference numeral **900**, may be best understood by concurrently viewing FIGs. 1 and 3A-3C. The process generally comprises making up **908** a plurality of joint assemblies **300** into a production tubing string in accordance with the present techniques as disclosed herein, disposing the string into a wellbore **910** at a productive interval and producing hydrocarbons **916** through the production tubing string.

[0080] In a preferred embodiment, an operator may utilize the coupling assembly **301** and joint assembly **300** in combination with a variety of well tools such as a packer **134**, a sand control device **138**, or a shunted blank. The operator may gravel pack **912** a formation or apply a fluid treatment **914** to a formation using any variety of packing techniques known in the art, such as those described in U.S. Provisional Application Numbers 60/765,023 and 60/775,434. Although the present techniques may be utilized with alternate path techniques, they are not limited to such methods of packing, treating or producing hydrocarbons from subterranean formations.

[0081] In another preferred embodiment of a method for producing hydrocarbons, the joint assembly **300** may be used in a method of drilling and completing a gravel packed well as described in patent publication no. US2007/0068675 (the '675 app), which is hereby incorporated by reference in its entirety. FIG. 10 is an illustrative flow chart of the method of the '675 app using the joint assembly **300**. As such, FIG. 10 may be best understood with reference to FIG. 3. The flow chart **1001** begins at **1002**, then provides a step **1004** of drilling a wellbore through a subterranean formation with a drilling fluid, conditioning (filtering) the drilling fluid **1006**, running the gravel packing assembly tools to depth in a wellbore with the conditioned drilling fluid **1008**, and gravel packing an interval of the wellbore with a carrier fluid **1010**. The process ends at **1012**. Note that the gravel packing assembly tools may include the joint assembly **300** of the present invention in addition to other tools such as open hole packers, inflow control devices, shunted blanks, etc.

[0082] The carrier fluid may be one of a solids-laden oil-based fluid, a solids-laden non-aqueous fluid, and a solids-laden water-based fluid. In addition, the conditioning of the drilling fluid may remove solid particles larger than approximately one-third the opening size of the sand control device or larger than one-sixth the diameter of the gravel pack particle size. Further, the carrier fluid may be chosen to have favorable rheology for effectively displacing the conditioned fluid and may be any one of a fluid viscosified with HEC polymer,

a xanthan polymer, a visco-elastic surfactant (VES), and any combination thereof. The use of visco-elastic surfactants as a carrier fluid for gravel packing has been disclosed in at least U.S. Patent No. 6,883,608, the portions of which dealing with gravel packing with VES are hereby incorporated by reference.

[0083] FIGs. 11A-11J illustrate the process of FIG. 10 in combination with the joint assembly of FIG. 3. As such, FIGs. 11A-11J may be best understood with reference to FIGs. 3 and 10. FIG. 11A illustrates a system **1100** having a joint assembly **300** disposed in a wellbore **1102**, the joint assembly **300** having a screen **1104** with alternate path technology **1106** (e.g. shunt tubes). The system **1100** consists of a wellscreen **1104**, shunt tubes **1106**, a packer **1110** (the process may be used with an open-hole or cased hole packer), and a crossover tool **1112** with fluid ports **1114** connecting the drillpipe **1116**, washpipe **1118** and the annulus of the wellbore **1102** above and below the packer **1110**. This wellbore **1102** consists of a cased section **1120** and a lower open-hole section **1122**. Typically, the gravel pack assembly is lowered and set in the wellbore **1102** on a drillpipe **1116**. The NAF **1124** in the wellbore **1102** had previously been conditioned over 310 mesh shakers (not shown) and passed through a screen sample (not shown) 2-3 gauge sizes smaller than the gravel pack screen **1104** in the wellbore **1102**.

[0084] As illustrated in FIG. 11B, the packer **1110** is set in the wellbore **1102** directly above the interval to be gravel packed **1130**. The packer **1110** seals the interval from the rest of the wellbore **1102**. After the packer **1110** is set, the crossover tool **1112** is shifted into the reverse position and neat gravel pack fluid **1132** is pumped down the drillpipe **1116** and placed into the annulus between the casing **1120** and the drillpipe **1116**, displacing the conditioned oil-based fluid **1124**. The arrows **1134** indicate the flowpath of the fluid. The neat fluid **1132** may be a solids free water based pill or other balanced viscosified water based pill.

[0085] Next, as illustrated in FIG. 11C, the crossover tool **1112** is shifted into the circulating gravel pack position. Conditioned NAF **1124** is then pumped down the annulus between the casing **1120** and the drillpipe **1116** pushing the neat gravel pack fluid **1132** through the washpipe **1118**, out the screens **1104**, sweeping the open-hole annulus **1136** between the joint assemblies **300** and the open-hole **1122** and through the crossover tool **1112** into the drillpipe **1116**. The arrows **1138** indicate the flowpath through the open-hole **1122** and the alternate path tools **1106** in the wellbore **1102**.

[0086] The step illustrated in FIG. 11C may alternatively be performed as shown in the FIG. 11C', which may be referred to as the "reverse" of FIG. 11C. In FIG. 11C', the conditioned NAF **1124** is pumped down the drillpipe **1116**, through the crossover tool **1112** and out into the annulus of the wellbore **1102** between the joint assemblies **300** and the

casing **1120** as shown by the arrows **1140**. The flow of the NAF **1124** forces the neat fluid **1132** to flow down the wellbore **1102** and up the washpipe **1118**, through the crossover tool **1112** and into the annulus between the drillpipe **1116** and the casing **1120** as shown by the arrows **1142**.

[0087] As illustrated in FIG. 11D, once the open-hole annulus **1136** between the joint assemblies **300** and the open-hole **1122** has been swept with neat gravel pack fluid **1132**, the crossover tool **1112** is shifted to the reverse position. Conditioned NAF **1124** is pumped down the annulus between the casing **1120** and the drillpipe **1116** causing a reverse-out by pushing NAF **1124** and dirty gravel pack fluid **1144** out of the drillpipe **1116**. Note that the steps illustrated in FIG. 11D may be reversed in a manner similar to the steps in FIGs. 11C and 11C'. For example, the NAF **1124** may be pumped down the drillpipe **1116** through the crossover tool **1112** pushing NAF **1124** and dirty gravel pack fluid **1144** up the wellbore **1102** by sweeping it through the annulus between the drillpipe **1116** and the casing **1120**.

[0088] Next, as illustrated in FIG. 11E, while the crossover tool **1112** remains in the reverse position, a viscous spacer **1146**, neat gravel pack fluid **1132** and gravel pack slurry **1148** are pumped down the drillpipe **1116**. The arrows **1150** indicate direction of fluid flow of fluid while the crossover tool **1112** is in the reverse position. After the viscous spacer **1146** and 50% of the neat gravel pack fluid **1132** are in the annulus between the casing **1120** and drillpipe **1116**, the crossover tool **1112** is shifted into the circulating gravel pack position.

[0089] Next, as illustrated in FIG. 11F, the appropriate amount of gravel pack slurry **1148** to pack the open-hole annulus **1136** between the joint assemblies **300** and the open-hole **1122** is pumped down the drillpipe **1116**, with the crossover tool **1112** in the circulating gravel pack position. The arrows **1155** indicate direction of fluid flow of fluid while the crossover tool **1112** is in the gravel pack position. The pumping of the gravel pack slurry **1148** down the drillpipe **1116**, forces the neat gravel pack fluid **1132** to leak off through the screens **1104**, up the washpipe **1118** and into the annulus between the casing **1120** and the drillpipe **1116**. This leaves behind a gravel pack **1160**. Conditioned NAF **1124** returns are forced up through the annulus between the casing **1120** and the drillpipe **1116** as the neat gravel pack fluid **1132** enters the annulus between the casing **1120** and the drillpipe **1116**.

[0090] As illustrated in FIG. 11G, the gravel pack slurry **1148** is then pumped down the drillpipe **1116** by introducing a completion fluid **1165** into the drillpipe **1116**. The gravel pack slurry **1148** displaces the conditioned NAF (not shown) out of the annulus between the casing **1120** and the drillpipe **1116**. Next, more gravel pack **1160** is deposited in the open-hole annulus **1136** between the joint assembly tools **300** and the open-hole **1122**. If a void **1170** in the gravel pack (e.g. below a sand bridge **1160**) forms as shown in FIG. 11G, then gravel pack slurry **1148** is diverted into the shunt tubes **1106** of the joint assembly tool **300**

and resumes packing the open-hole annulus **1136** between the alternate path tools **300** and the open-hole **1122** and below the sand bridge **1170**. The arrows **1175** illustrate the fluid flow of the gravel pack slurry down the drillpipe **1116** through the crossover tool **1112** into the annulus of the wellbore below the packer **1110**. The gravel pack slurry **1148** then flows through the shunt tubes **1106** of the joint assembly tool **300** and fills any voids 1170 in the openhole annulus **1136**. The arrows **1175** further indicate the fluid flow of the neat gravel pack fluid **1132** through the screens **1104** and up the washpipe **1118** through the crossover tool **1112** in the annulus between the casing **1120** and the drillpipe **1116**.

[0091] FIG. 11H illustrates a wellbore **1102** immediately after fully packing the annulus between the screen **1104** and casing **1120** below the packer **1110**. Once the screen **1104** is covered with gravel pack **1160** and the shunt tubes **1106** of the joint assemblies **300** are full of sand, the drillpipe **1116** fluid pressure increases, which is known as a screenout. The arrows **1180** illustrate the fluid flowpath as the gravel pack slurry **1148** and the neat gravel pack fluid **1132** is displaced by completion fluid **1165**.

[0092] As illustrated in FIG. 11I, after a screenout occurs, the crossover tool **1112** is shifted to the reverse position. A viscous spacer **1146** is pumped down the annulus between the drillpipe **1116** and the casing **1120** followed by completion fluid **1165** down the annulus between the casing **1120** and the drillpipe **1116**. Thus, creating a reverse-out by pushing the remaining gravel pack slurry **1148** and neat gravel pack fluid **1132** out of the drillpipe **1116**.

[0093] Finally, as shown in FIG. 11J, the fluid in the annulus between the casing **1120** and the drillpipe **1116** (not shown) has been displaced with completion brine **1165**, and the crossover tool **1112** (not shown), washpipe **1118** (not shown), and drillpipe **1116** (not shown) are pulled out of the wellbore **1102** leaving behind a fully-packed well interval below the packer **1110**.

[0094] In one exemplary embodiment, an intelligent well system or device may be run down the basepipe **302** for use during production after removal of the washpipe **1118**. For example, the intelligent well assembly may be run inside the basepipe **302** and attached to the joint assembly **300** through seals between the intelligent well device and the bore of a packer assembly. Such intelligent well systems are known in the art. Such a system may include a smart well system, a flexible profile completion, or other system or combination thereof.

[0095] Referring back to the steps illustrated in FIGs. 11F and 11G, when the gravel pack fluid **1132** leaks off into the screen **1104** and up the washpipe **1118** it is desirable to control the profile of the fluid leakoff. In an openhole completion, fluid leakoff into the formation is limited due to the mud filter cake (not shown) formed on the wellbore **1102**

during the drilling phase **1004**. In a cased-hole completion, fluid leakoff into the formation is quickly reduced as the perforation tunnels (not shown) are packed with gravel **1160**.

[0096] It has been desired to keep slurry **1148** flowing down the annulus between the wellbore **1102** and the screen **1104** and pack the gravel **1160** in a bottom-up manner. Various methods of controlling the profile of fluid leakoff into the screen **1104** have been proposed, including control of the annulus between the washpipe **1118** and the basepipe **302** (e.g., ratio of washpipe outer diameter (OD) to basepipe inner diameter (ID) greater than 0.8) and baffles (not shown) on the washpipe **1118** (U.S. Pat. No. 3,741,301 and U.S. Pat. No. 3,637,010).

[0097] In conventional gravel packing screens the space between the screen **1104** and the basepipe **302** is about in the range of 2-5 millimeters (mm), which is smaller than the annulus between washpipe **1118** and basepipe **302** (e.g., 6-16 mm). Therefore, the annulus between the washpipe **1118** and the basepipe **302** has been historically the design focus to manage fluid leakoff. In very long intervals (e.g. more than 3,500 feet), the restricted annulus between the washpipe **1118** and basepipe **302** may impose more significant friction loss for fluid leakoff, which is necessary to form a gravel pack **1160** in the wellbore **1102**. In certain applications, the washpipe **1118** is equipped with additional devices, e.g., releasing collet to shift sleeves for setting packers. Depending on the type and number of these additional devices, they may result in extra friction loss along the annular fluid leakoff paths.

[0098] Placing the shunt tubes **1106** or **308a-308n** inside of the screen **1104** or **314a-314f** increases the spacing between the screen **1104** and the basepipe **302**, e.g., from about 2-5 mm to about 20 mm. The total outside diameter is comparable to the alternate path screen with external shunt tubes. The size of basepipe **302** remains the same. However, the extra space between the screen **1104** and the basepipe **302** reduces the overall friction loss of fluid leakoff and promotes the top-down gravel packing sequence by the shunt tubes **1106**.

[0099] Referring now to FIGs. 3A-3C and 9, another benefit of having the shunt tubes **1106** below the wire-wrapped screen **1104** is the increased flow area into the screens **1104** during production **916**. The screen **1104** OD may be increased to about 7.35" compared to the same size basepipe with conventional shunt tubes (screen outer diameter of about 5.88"). In other words, the screen OD of the present invention is increased by about 25 percent (%). Using the screens **1104** with the increased OD in accordance with the present invention further beneficially decreases the amount of gravel and fluid required to pack the openhole by the screen annulus.

[0100] The joint assembly **300** may further be beneficially combined with other tools in a production string in a variety of application opportunities as shown in FIGs. 12A-12C, which

may be best understood with reference to FIGs. 3A-3C. FIGs. 12A-12C are exemplary embodiments of zonal isolation techniques such as those disclosed in international application no. PCT/US06/47997, which is hereby incorporated by reference. FIG. 12A is an illustration of the joint assembly **300** in an exemplary application of isolating bottom water. In a subterranean formation **1200** having intervals **1202a-1202c** (similar to production intervals **108a-108n**) include a water zone **1202c**. In such a case an isolation packer **1204a** may be set above the water zone **1202c** and a blank pipe **1205** may be placed in the water zone **1202c** to isolate the annulus. The productive intervals **1202a-1202b** may then be packed with gravel **1206a-1206b** using the joint assemblies **300a-300b** and another open hole packer **1204b**. Such an approach allows an operator to drill the entire reservoir section and avoid costly plug back or sidetrack operations.

[0101] FIG. 12B illustrates the use of the joint assembly **300** and a shunted blank to beneficially isolate a mid-water zone. A subterranean formation **1220** having intervals **1222a-1222c** includes a water or gas zone **1222b**. Joint assemblies **300a** and **300b** along with isolation packers **1224a-1224b** and shunted blank pipe **1226** may be configured and run to straddle the water or gas zone **1222b**. Then, the packers **1224a-1224b** may be set and a gravel pack **1228a** may be deposited in the top zone **1222a**, then a gravel pack **1228b** may be deposited in the bottom zone **1222c**.

[0102] Referring specifically to the shunted blank **1226**, such joints may be installed above the joint assembly **300** to provide a buffer and ensure that any sand bridge formed during gravel packing operations stays below the shunt entrance before the shunt packing is complete. A blank shunt joint **1226** may include a non-perforated basepipe **302**, axial rods **312**, shunt tubes **308** (there will generally be the same number of shunt tubes **308** in a shunted blank **1226** as would be found in a joint assembly **300**, but the shunted blank **1226** would only include transport tubes, not packing tubes), and circumferential wire-wrap **314** around both axial rods **312** and shunt tubes **308**. In order to hold back the sand bridge growth, the sand bridge is desired to fill the entire annulus around the basepipe **302** and shunt tubes **308** in the blank shunt joint **1226**. If the same wire-wrap **314** as in the gravel pack screen is used, the annulus between the basepipe **302** and wire-wrap **314** may not be packed and will provide a fluid leakoff "short-circuit" to accelerate the sand bridge build-up. If the wire-wrap **314** is removed, other means of supporting shunt tubes **308** is required to maintain the overall integrity of the joint **1226**. One exemplary method includes wrapping wire **314** with a slot size greater than the gravel size to allow a gravel or sand bridge to be packed between the basepipe **302** and the wire-wrap **314**. An example is that the slot size is 3-5 times of the gravel size. Thus, the sand bridge build-up rate is depressed and the required number of blank shunt joints **1226** is minimized while maintaining integrity.

[0103] FIG. 12C illustrates the use of the joint assembly **300** of the present invention with shunted blanks **1226** to complete a stacked pay application, such as those found in the Gulf of Mexico. A subterranean formation **1250** may include intervals or zones **1252a-1252e** which include multiple water or gas zones **1252b** and **1252d**. Joint assemblies **300a-300c** along with isolation packers **1254a-1254d** and shunted blank pipe segments **1226a-1226b** may be configured or spaced out as necessary and run to isolate or straddle the water or gas zones **1252b** and **1252d**. Then, the packers **1254a-1254d** may be set and a gravel pack **1256a** may be deposited in the top zone **1252a**, another gravel pack **1256b** deposited in zone **1252c**, and another gravel pack **1256c** may be deposited in the bottom zone **1252e**. This operation may be beneficially accomplished without the need for casing or cementing of the wellbore and allows completion operations to be conducted in a single operation rather than completing the various intervals separately.

[0104] Beneficially, the use of packers along with the joint assembly **300** in a gravel pack provides flexibility in isolating various intervals from unwanted gas or water production, while still being able to protect against sand production. Isolation also allows for the use of inflow control devices (Reslink's ResFlow™ and Baker's EQUALIZER™) to provide pressure control for individual intervals. It also provides flexibility to install flow control devices (i.e. chokes) that may regulate flow between formations of varying productivity or permeability. Further, an individual interval may be gravel packed without gravel packing intervals that do not need to be gravel packed. That is, the gravel packing operations may be utilized to gravel pack specific intervals, while other intervals are not gravel packed as part of the same process. Finally, individual intervals may be gravel packed with different size gravel than the other zones to improve well productivity. Thus, the size of the gravel may be selected for specific intervals.

[0105] Additional benefits of the present invention include the capability to increase the treatable length of alternate path systems from about 3,500 feet for prior art devices to at least about 5,000 feet and possibly over 6,000 feet for the present invention. This is made possible by at least the increased pressure capacity and frictional pressure drop of fluid flowing through the devices. Testing revealed that the joint assembly of the present invention is capable of handling a working pressure of up to about 6,500 pounds per square inch (psi) as compared to a working pressure of about 3,000 psi for conventional alternate path devices. The present invention also beneficially allows more simplified connection make-up at the rig site and decreases challenges associated with incorporating openhole zonal isolation packers into the screen assembly due to eccentric screen designs while limiting the exposure to damage of the shunt tubes, basepipe during screen running operations. In addition, the larger screen size allows an effective gravel pack to be deposited using less fluid than with a smaller diameter screen and the larger externally

positioned screen presents a larger profile for hydrocarbons to flow into the string during production.

TEST RESULTS

[0106] The performance of at least one embodiment of the present invention was tested to ensure compliance and performance qualifications were met or exceeded. Significant testing was conducted on both components and full-scale prototypes to verify screen functionality. Tests targeted flow capacity, erosion, pressure integrity, mechanical integrity, gravel packing, and rig handling. At the conclusion of qualification testing, the joint assemblies **300** (e.g. Internal Shunt Alternate Path devices) met or exceeded all design requirements.

Flow Capacity

[0107] Initial tests were run to determine the size and number of round shunt tubes **308** required to fully pack a 5,000 ft openhole section at a rate of 4 - 5 bbl/min through the shunt tubes **308**. Base gel, of known rheology suitable for Alternate Path® gravel packing, was pumped through 100-ft lengths of various sized round shunt tubes **308** to determine the friction loss through each tube. Six 20mm x 16mm (OD X ID) shunt tubes yielded frictional response comparable to the two 1.5 x 0.75-in transport tubes in the current "two-by-two" Alternate Path system. Although larger shunt tubes **308** reduce the pressure drop and thus the pressure requirements for the joint assemblies **300**, the outer diameter of the joint assembly **300** becomes too large for the desired application.

Erosion

[0108] A physical model was built to determine erosion effects of pumping ceramic proppant through the manifold **315** located at each connection. The slurry was pumped at the proposed field pumping rates of 5 barrels per minute (bbl/min). The manifold **315** inlets and outlets were misaligned to represent the worst case field scenario when two joint assemblies **300a-300b** are coupled together. One hundred fifty-two thousand (152,000) lbs of 30/50 ceramic proppant, the amount of proppant required to fully pack 5,000 ft of 9-7/8 in openhole by screen annulus with 50 percent excess, were pumped at 2-4 PPA (pounds of proppant added) and 5 bbl/min through the system. No erosion was observed in the manifold **315**, but an unacceptable pressure drop through the manifold **315** was measured. Computational fluid dynamics (CFD) models were calibrated using the experimental data from the physical test and used to optimize the manifold **315** redesign. Based on results of the modeling, the length of the manifold **317** was extended and subsequent testing revealed a 50 percent reduction in pressure drop. One hundred twenty-seven thousand (127,000) lbs of 30/50 ceramic proppant was pumped through the redesigned system at 4 PPA and 4-5 bbl/min to verify no erosion concerns with the new design.

[0109] While packing through the shunt tubes **308a-308i**, gravel is deposited around the screens **314** through the packing tubes **308g-308i**. A test was developed to determine the erosional effects of pumping slurry through the nozzle outlets **706**. The physical model, consisting of a single packing tube **308g** with six nozzle outlets **706**, simulated pumping the entire gravel pack through the top two to three joints **300a-300c** of shunted screen at 5 bbl/min with one of the three nozzle outlets **706** at each nozzle ring **310** plugged. Thirty-eight thousand six hundred (38,600) lbs of 30/50 ceramic proppant were pumped through the apparatus. Flow rate and proppant concentration were measured through each nozzle outlet **706**. The tungsten carbide nozzles **706** showed minimal erosion.

Pressure Integrity

[0110] Throughout all the physical testing, friction pressure drops were measured through the shunt system **308a-308i** and manifold section **315** in order to establish a baseline friction pressure through each joint assembly **300**. The test revealed that at 4 bbl/min, 6,000 psi would be required to pump through the entire 5,000 ft of shunt tubes, therefore, the pressure integrity of the shunt system must be rated higher than 6,000 psi. Individual shunt tubes welded to an end ring were designed and pressure tested to 10,000 psi. The manifold seals required a specially designed seal stack to withstand the 10,000 psi test. The entire system was pressure tested to 10,000 psi at ambient temperatures and 180ºF. Six thousand five hundred (6,500) psi was held at 170ºF for a period of eight hours simulating the pumping of an entire gravel pack job through the shunt tubes.

Mechanical Integrity

[0111] Burst and collapse testing of the sand control screen **314** was required to evaluate the behavior of the new, higher axial rib wires **312** (support structure for the wrap wire). A burst condition exists when an inside the screen fluid loss pill is placed in an overbalanced condition during a completion or workover operation. Burst tests were performed on samples of 9-gauge sand control screen **314**. Strain gauges were placed along the length of the assembly. The screen **314** was installed in a test fixture and a carbonate pill was placed inside the screen **314**. Pressure was applied to the inside of the screen **314** until excessive strain was observed in the screen **314**. Final burst pressures exceeded 2,400 psi, and upon examination of the screens **314**, no gaps larger than 12-gauge were found in the samples. Sand control was maintained in all cases, and the pill remained intact at the end of each test.

[0112] While a true collapse condition where the screen **314** is completely plugged is unlikely, the screens **314** were tested to ensure the top screen joint could withstand the elevated pressures while pumping through the shunt system and at the time of final screen out. Collapse testing was performed by placing a ¼ in thick layer of 30/50 ceramic proppant around the circumference of a 9-gauge joint assembly **300**. The proppant was held in place

with an impermeable barrier adhered to the joint assembly **300**. The joint assembly **300** was placed inside a test fixture, and pressure was applied to the outside of the screen **314**. Initial collapse test results led to a torque sleeve **305** modification and increase in the number of axial wires **312** from 18 to 27. Final testing after incorporating all of the enhancements yielded a collapse pressure of 5,785 psi. Collapse resulted in a screen indentation, but sand control was maintained. Finite Element Analysis (FEA) was conducted to validate the physical testing and to specify mechanical property requirements for shunt tubes **308** and wrap wire **314**.

Gravel Packing

[0113] A horizontal test fixture (10-in ID) was used to test the packing functionality of the joint assembly **300**. The prototype consisted of two joints **300a** and **300b** (11.3 and 14.5 ft respectively) made up together with a manifold section **315**. Each screen joint **300a-300b** contained two nozzle rings **310a-310d** with one of the three nozzles **706a-706c** in each nozzle ring **310** intentionally plugged. The uphole end of the test fixture was blocked, simulating either a sand bridge or an openhole packer, forcing all the slurry through the shunt tubes **308**. The slurry consisted of base gel with 4 PPA 30/50 ceramic proppant. Rates were limited to 1 bbl/min during the test due to test fixture pressure constraints at the time of screen out.

[0114] Gravel pack tests were run using the prototype screens, both with and without 3-1/2-in washpipe inside the basepipe **302**. A 100-percent gravel pack was achieved. Fluid was then flowed back through the gravel pack at a rate of 15.7 gal/min through the 25.8 ft of screen, equivalent to 25,000 B/D through 1,200-ft screen. The gravel pack remained intact, leaving no exposed screen **314**.

Rig Handling

[0115] Full length prototype joint assemblies **300** were taken to a rig site to evaluate the ease of handling and make-up of the screen joints **300** with 140,000 lbs of buoyed weight below the screen joints **300**. After a safety briefing and a short equipment orientation, the rig crew, who had previously never seen the screens, ran the screens at a rate of 12 joints per hour, compared to the typical five joints per hour rate for the current "two-by-two" Alternate Path® system. One test joint of the screen was axially loaded to 408,000 lbs, simulating 5,000 ft of screen with 230,000 lbs of overpull. A post-test slot size inspection indicated less than 0.5-gauge change in slot width.

[0116] It should also be noted that the coupling mechanism for these packers and sand control devices may include sealing mechanisms as described in U.S. Patent No. 6,464,261; Intl. Patent Application Pub. No. WO2004/046504; Intl. Patent Application Pub. No. WO2004/094769; Intl. Patent Application Pub. No. WO2005/031105; Intl. Patent Application Pub. No. WO2005/042909; U.S. Patent Application Pub. No. 2004/0140089; U.S. Patent

Application Pub. No. 2005/0028977; U.S. Patent Application Pub. No. 2005/0061501; and U.S. Patent Application Pub. No. 2005/0082060.

[0117] In addition, it should be noted that the shunt tubes utilized in the above embodiments may have various geometries. The selection of shunt tube shape relies on space limitations, pressure loss, and burst/collapse capacity. For instance, the shunt tubes may be circular, rectangular, trapezoidal, polygons, or other shapes for different applications. One example of a shunt tube is ExxonMobil's AllPAC® and AllFRAC®. Moreover, it should be appreciated that the present techniques may also be utilized for gas breakthroughs as well.

[0118] While the present techniques of the invention may be susceptible to various modifications and alternate forms, the exemplary embodiments discussed above have been shown only by way of example. However, it should again be understood that the invention is not intended to be limited to the particular embodiments disclosed herein. Indeed, the present techniques of the invention include all alternatives, modifications, and equivalents falling within the true spirit and scope of the invention as defined by the following appended claims.

Attorney Docket No. 2007EM321

CLAIMS

What we claim is:

1. A method of producing hydrocarbons from a subterranean formation comprising:

drilling a wellbore through the subterranean formation using a drilling fluid;

conditioning the drilling fluid;

running a production string to a depth in the wellbore with the conditioned drilling fluid, wherein the production string includes a plurality of joint assemblies, wherein at least one joint assembly disposed within the conditioned drilling fluid comprises:

a load sleeve assembly having an elongated body comprising an outer wall providing an outer diameter and an inner wall providing an inner diameter and defining a bore through the load sleeve assembly, wherein the load sleeve assembly further includes at least one transport conduit and at least one packing conduit, wherein both the at least one transport conduit and the at least one packing conduit are disposed exterior to the inner diameter and interior to the outer diameter, and wherein the load sleeve is operably attached to a main body portion of one of the plurality of joint assemblies;

a torque sleeve assembly having an elongated body comprising an outer wall providing an outer diameter and an inner wall providing an inner diameter and defining a bore through the torque sleeve assembly, wherein the torque sleeve assembly further includes at least one conduit, wherein the at least one conduit is disposed exterior to the inner diameter and interior to the outer diameter, and wherein the torque sleeve is operably attached to a main body portion of one of the plurality of joint assemblies;

a coupling assembly having a manifold region, wherein the manifold region is configured to be in fluid flow communication with the at least one transport conduit and at least one packing conduit of the load sleeve assembly during at least a portion of gravel packing operations, wherein the coupling assembly is operably attached to at least a portion of the joint assembly at or near the load sleeve assembly; and

a sand screen disposed along at least a portion of the joint assembly between the load sleeve and the torque sleeve and around an outer diameter of the joint assembly; and

gravel packing an interval of the wellbore with a carrier fluid.

2. The method of claim 1, further comprising displacing the drilling fluid with the carrier fluid after running the production string.

3. The method of claim 2, wherein the displacement is one of forward circulation and reverse circulation.

4. The method of claim 1, wherein the drilling fluid is one of a solids-laden oil-based fluid, a solids-laden non-aqueous fluid, and a solids-laden water-based fluid.

5. The method of claim 1 wherein the carrier fluid is the drilling fluid.

6. The method of claim 5, wherein the conditioning of the drilling fluid removes solid particles larger than approximately one-third the opening size of the sand screen.

7. The method of claim 1, wherein the carrier fluid is chosen to have favorable rheology for effectively displacing the conditioned fluid and the carrier fluid is one of fluid viscosified with HEC polymer, xanthan polymer, visco-elastic surfactant, and any combination thereof.

8. The method of claim 1, wherein the length of the manifold region is at least about 12 inches to at least about 16 inches long.

9. The method of claim 1, the joint assembly further comprising exit nozzles spaced about six feet apart along an axial length of the joint assembly.

10. The method of claim 1, wherein at least one of the plurality of joint assemblies may be operably connected to a production tool selected from the group consisting of a packer, an in-flow control device, a shunted blank, an intelligent well device, a straddle assembly, a sliding sleeve, a crossover tool, and a cross-coupling flow device.

11. The method of claim 1, wherein the sand screen is at least one of slotted liners, stand-alone screens (SAS); pre-packed screens; wire-wrapped screens, membrane screens, sintered metal screens, expandable screens, and wire-mesh screens.

12. The method of claim 1, wherein the interval is at least about four thousand feet long.

13. The method of claim 1, wherein the interval is at least about five thousand feet long.

14. The method of claim 1, wherein the joint assembly is configured to withstand a friction pressure of at least about six thousand pounds per square inch.

15. The method of claim 1, wherein the main body portion of the joint assembly includes a basepipe having an outer diameter and the spacing between the sand screen and the basepipe is from about 18 millimeters (mm) to about 22 mm.

16. The method of claim 15, utilizing a washpipe positioned inside the basepipe, wherein the space between the washpipe and the basepipe is from about 6 millimeters (mm) to about 16 mm.

17. The method of claim 15, further comprises shunt tubes having a circular cross section and extending axially along the basepipe along the main body portion of the joint assembly, wherein the shunt tubes are substantially continuous along an axial length of the joint assembly from the load sleeve to the torque sleeve.

18. A method of producing hydrocarbons from a well comprising:

disposing a production string having at least two joint assemblies and at least one packer within an open-hole section of a wellbore adjacent to a subsurface reservoir, wherein the at least two joint assemblies comprises:

a load sleeve assembly having an elongated body comprising an outer wall providing an outer diameter and an inner wall providing an inner diameter and defining a bore through the load sleeve assembly, wherein the load sleeve assembly further includes at least one transport conduit and at least one packing conduit, wherein both the at least one transport conduit and the at least one packing conduit are disposed exterior to the inner diameter and interior to the outer diameter, and wherein the load sleeve is operably attached to a main body portion of one of the plurality of joint assemblies;

a torque sleeve assembly having an elongated body comprising an outer wall providing an outer diameter and an inner wall providing an inner diameter and defining a bore through the torque sleeve assembly, wherein the torque sleeve assembly further includes at least one conduit, wherein the at least one conduit is disposed exterior to the inner diameter and interior to the outer diameter, and wherein the torque sleeve is operably attached to a main body portion of one of the plurality of joint assemblies;

a coupling assembly having a manifold region, wherein the manifold region is configured to be in fluid flow communication with the at least one transport conduit and at least one packing conduit of the load sleeve assembly, wherein the coupling assembly is operably attached to at least a portion of the joint assembly at or near the load sleeve assembly; and

a sand screen disposed along at least a portion of the joint assembly between the load sleeve and the torque sleeve and around an outer diameter of the joint assembly;

setting the at least one packer within the open-hole section;

gravel packing at least one of the at least two joint assemblies in a first interval of the subsurface reservoir above the at least one packer; ~~and~~

gravel packing at least another of the at least two joint assemblies in a second interval of the subsurface reservoir below the at least one packer by passing a carrier fluid with gravel through the at least one packer; and

producing hydrocarbons from the wellbore by passing hydrocarbons through the at least two joint assemblies.

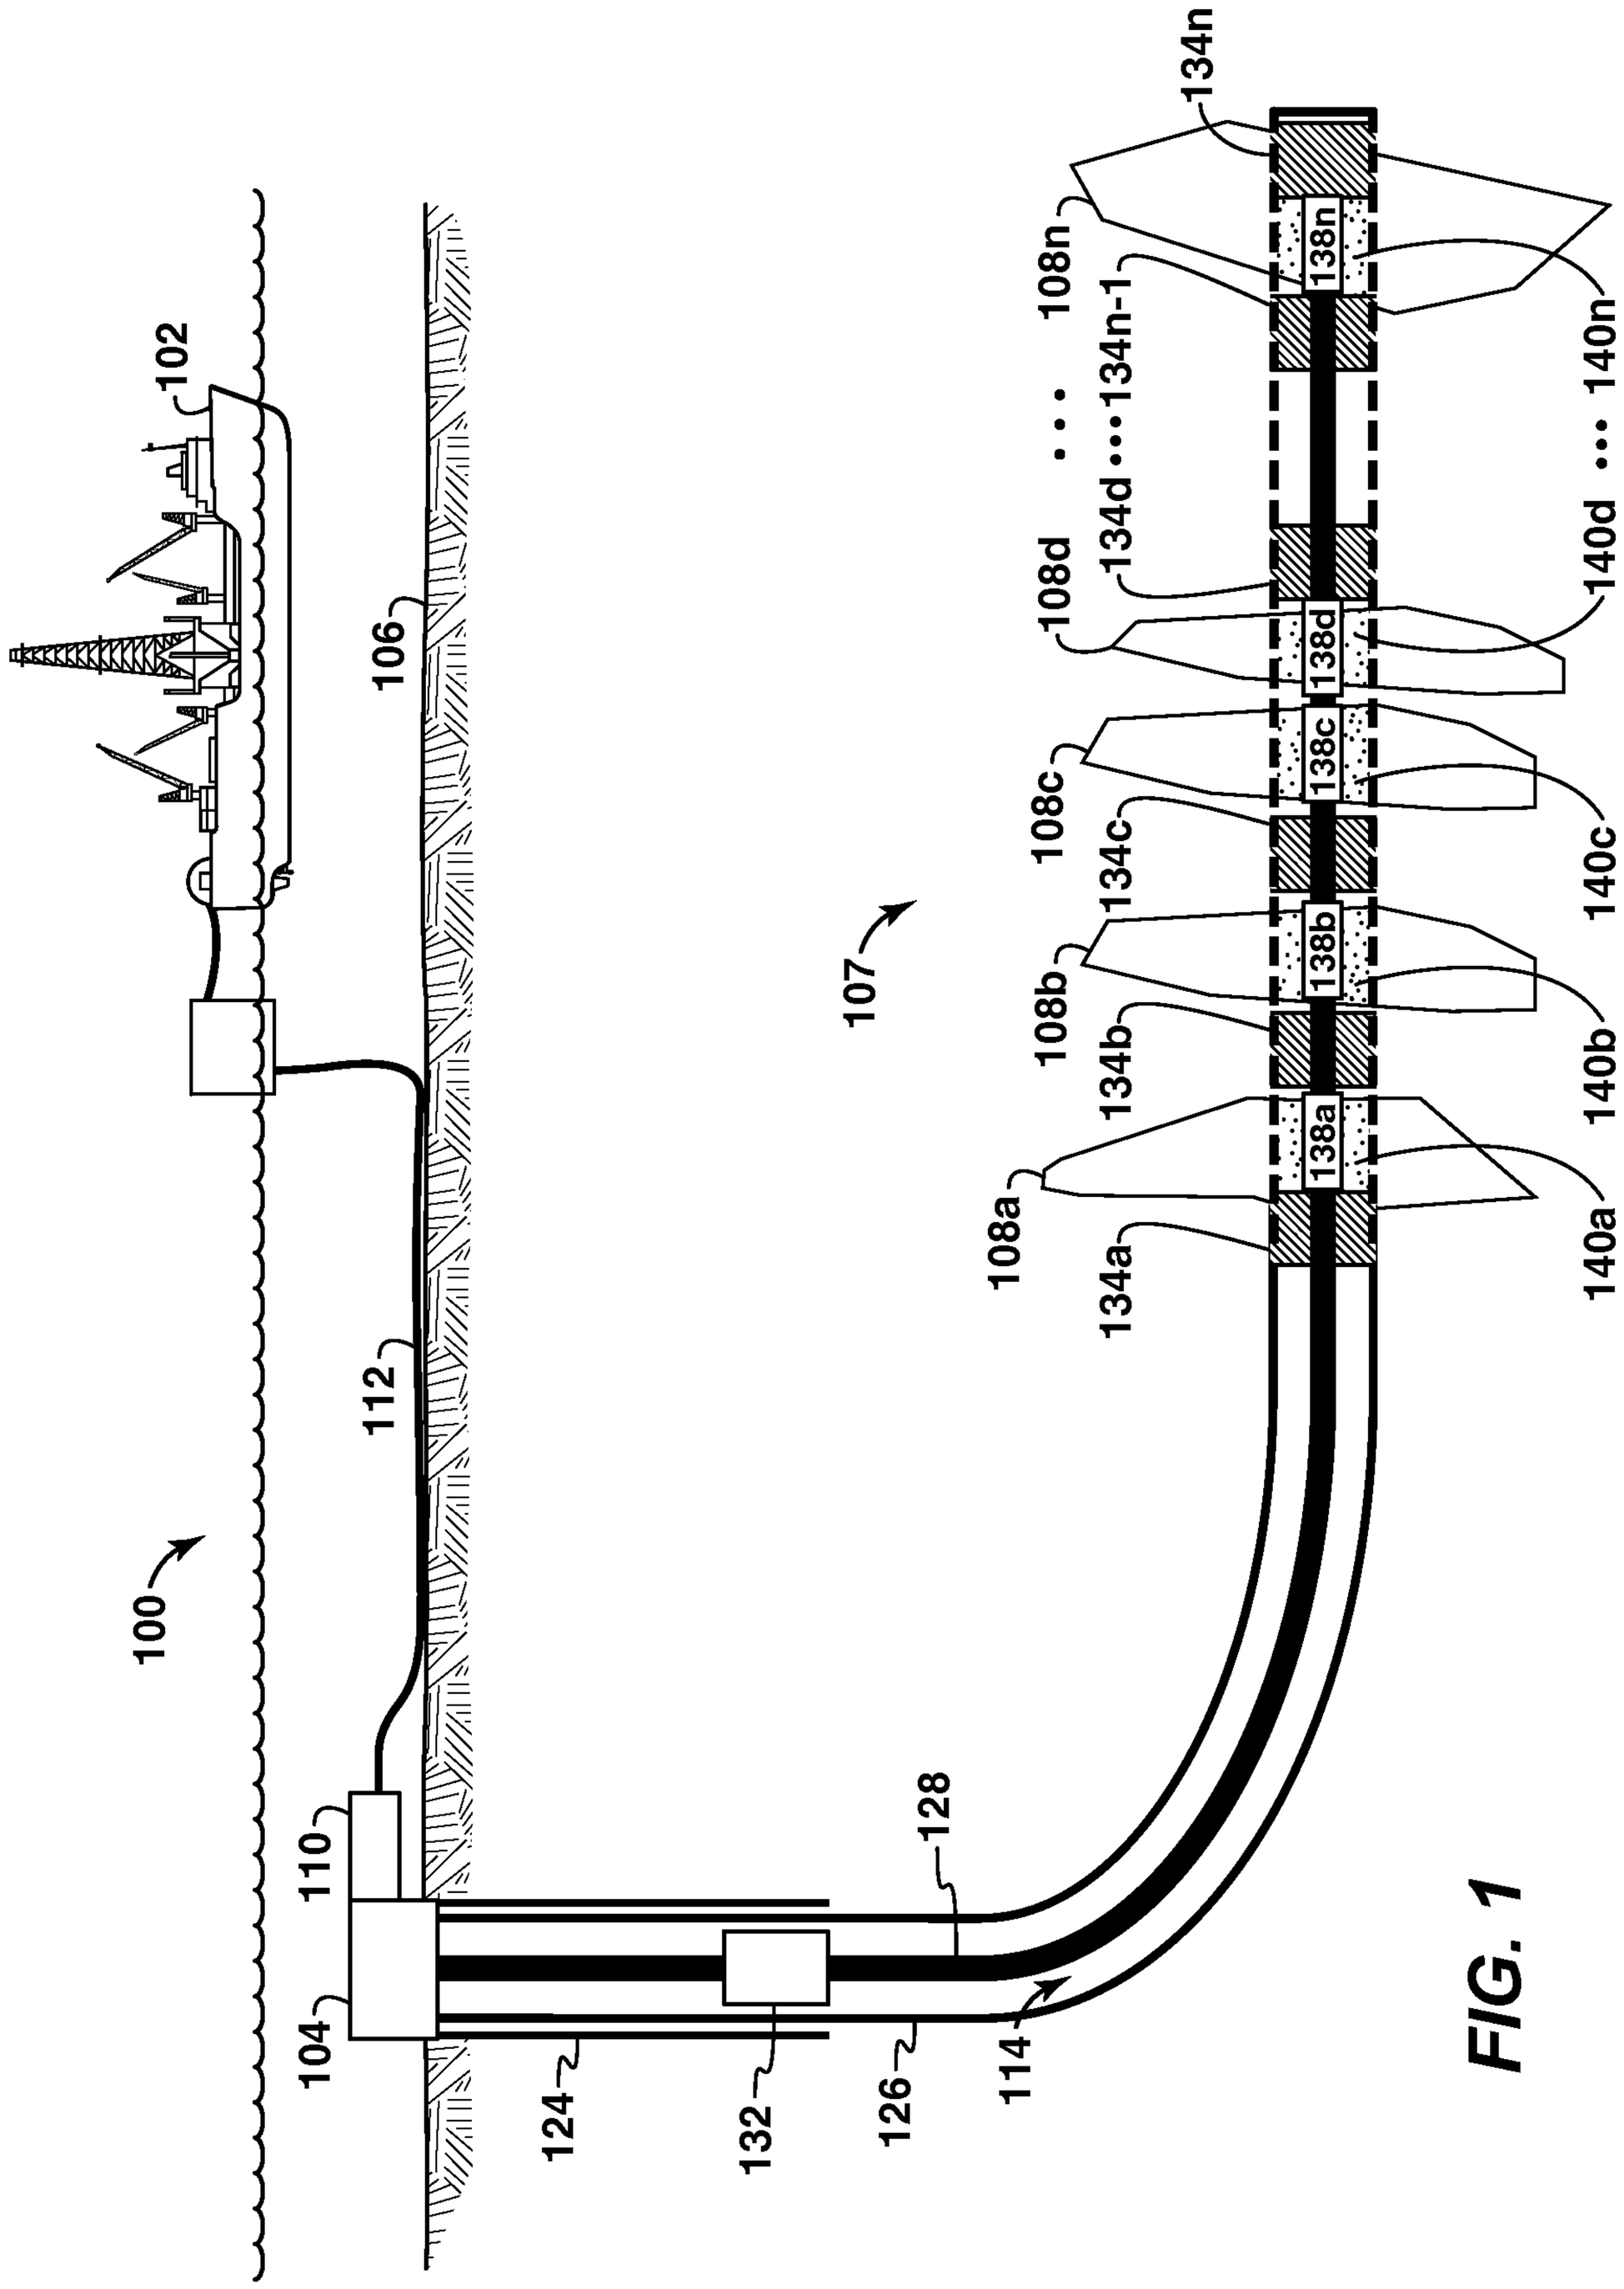
100
102
104
106
107
108a
108b
108c
108d
108n
110
112
114
124
126
128
132
134a
134b
134c
134d
134n
134n-1
138a
138b
138c
138d
138n
140a
140b
140c
140d
140n

FIG. 1

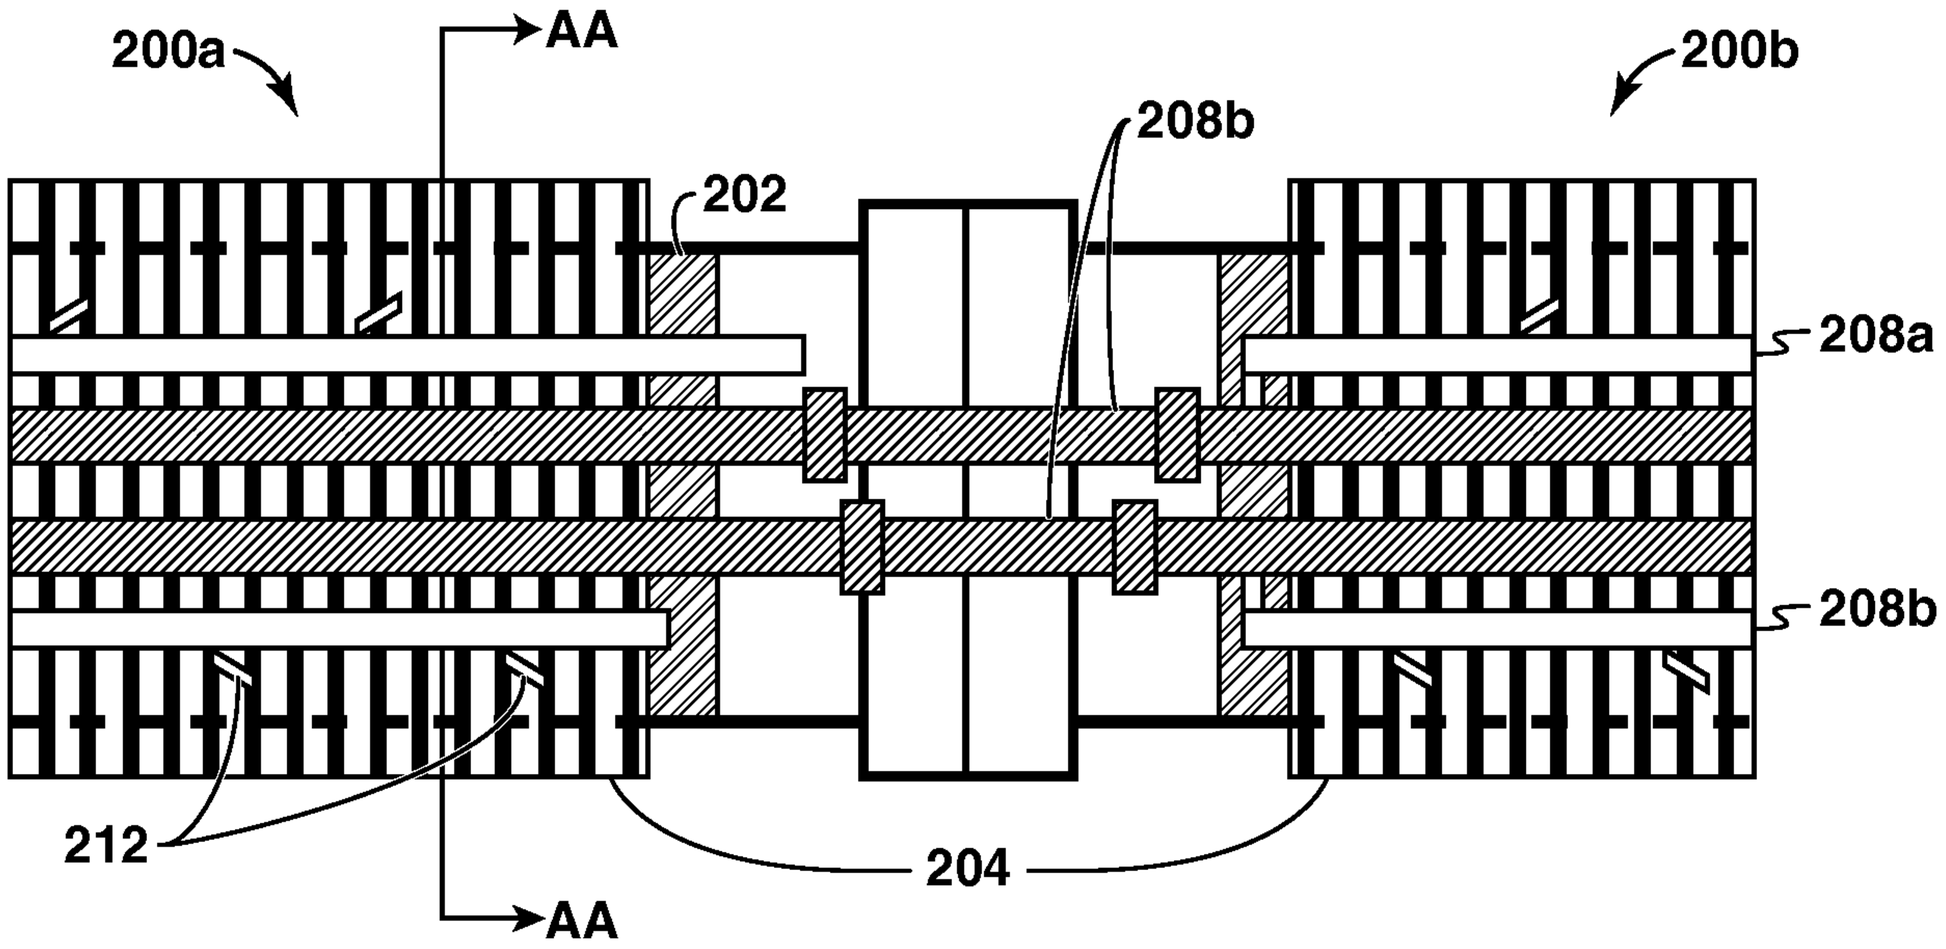
200a
AA
202
208b
200b
208a
208b
212
204
AA

FIG. 2A

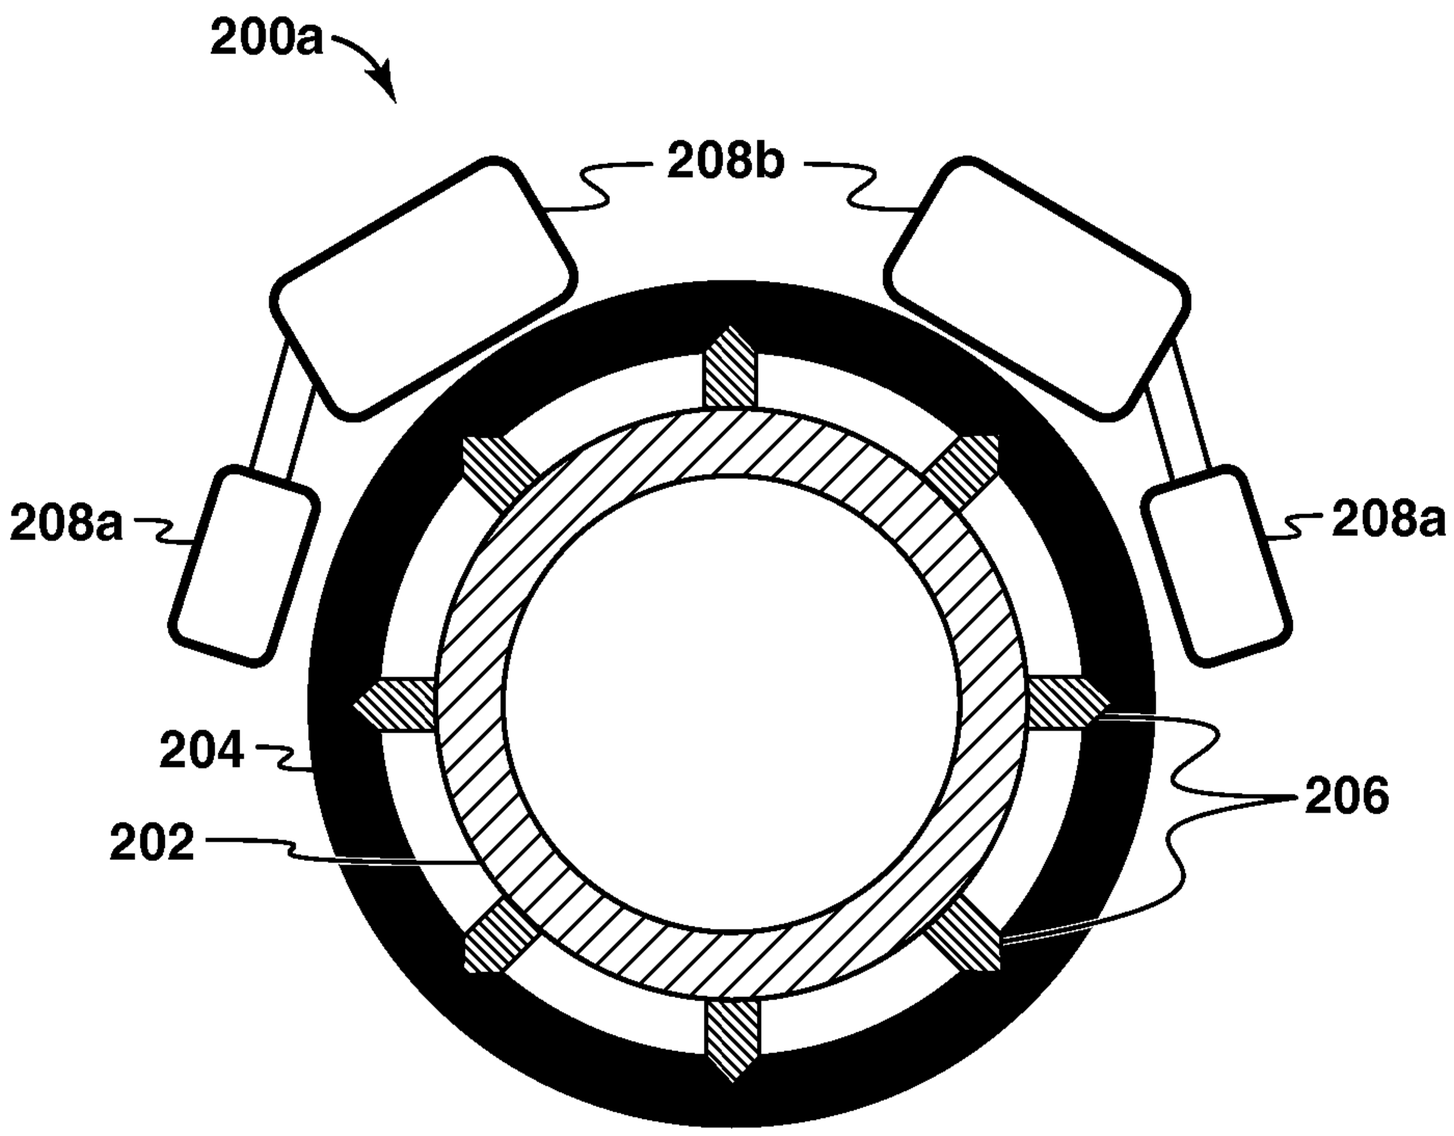
200a
208b
208a
208a
204
206
202

FIG. 2B

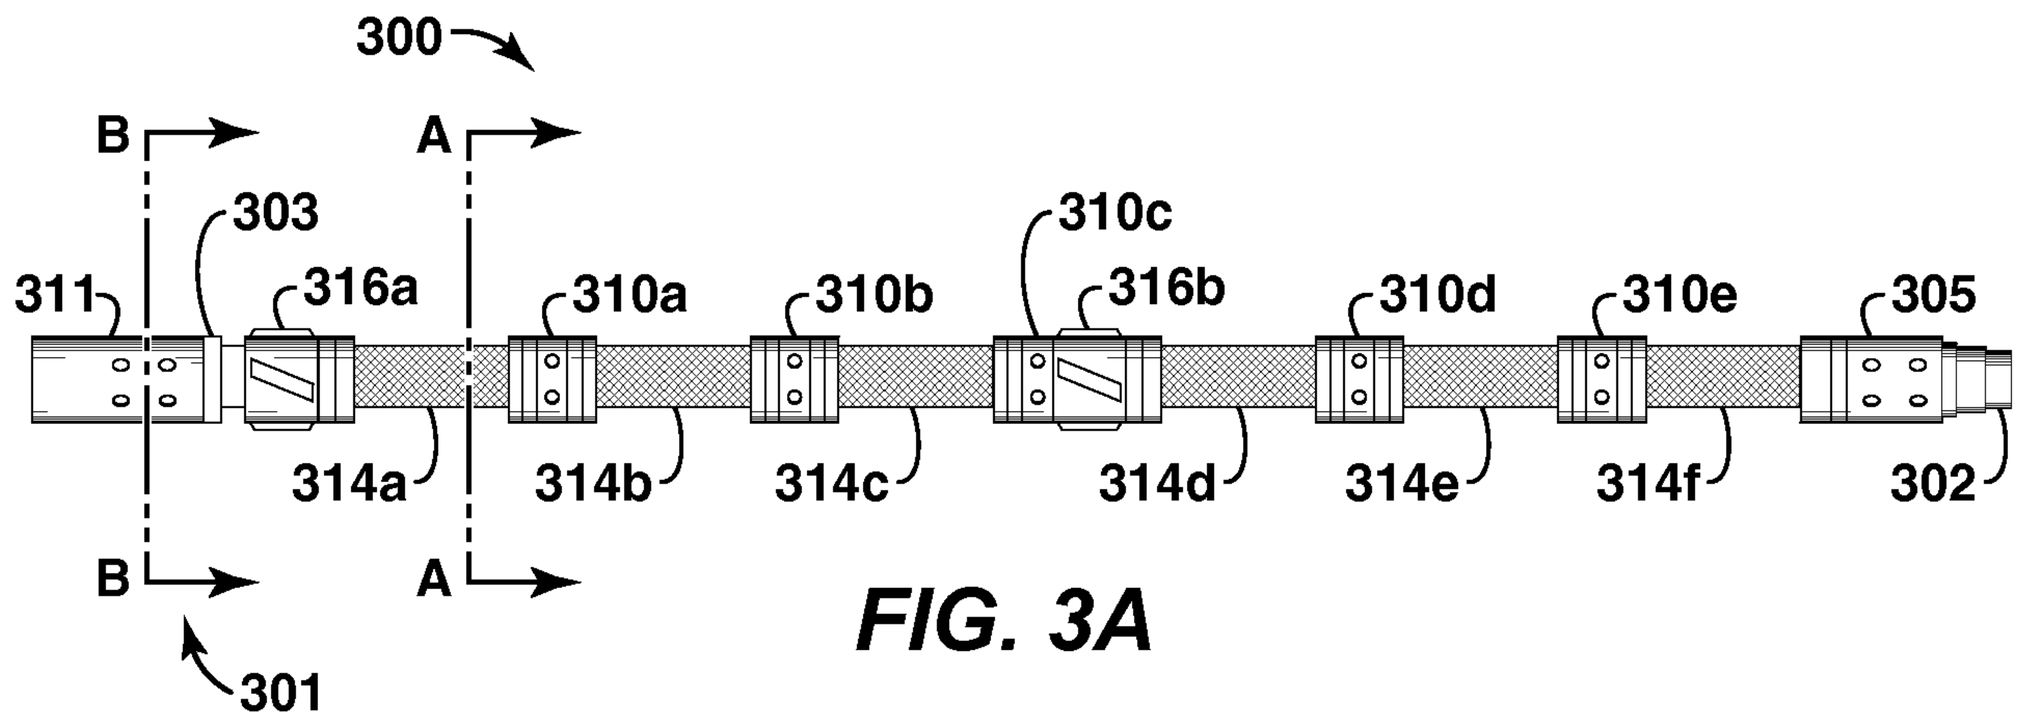

FIG. 3A

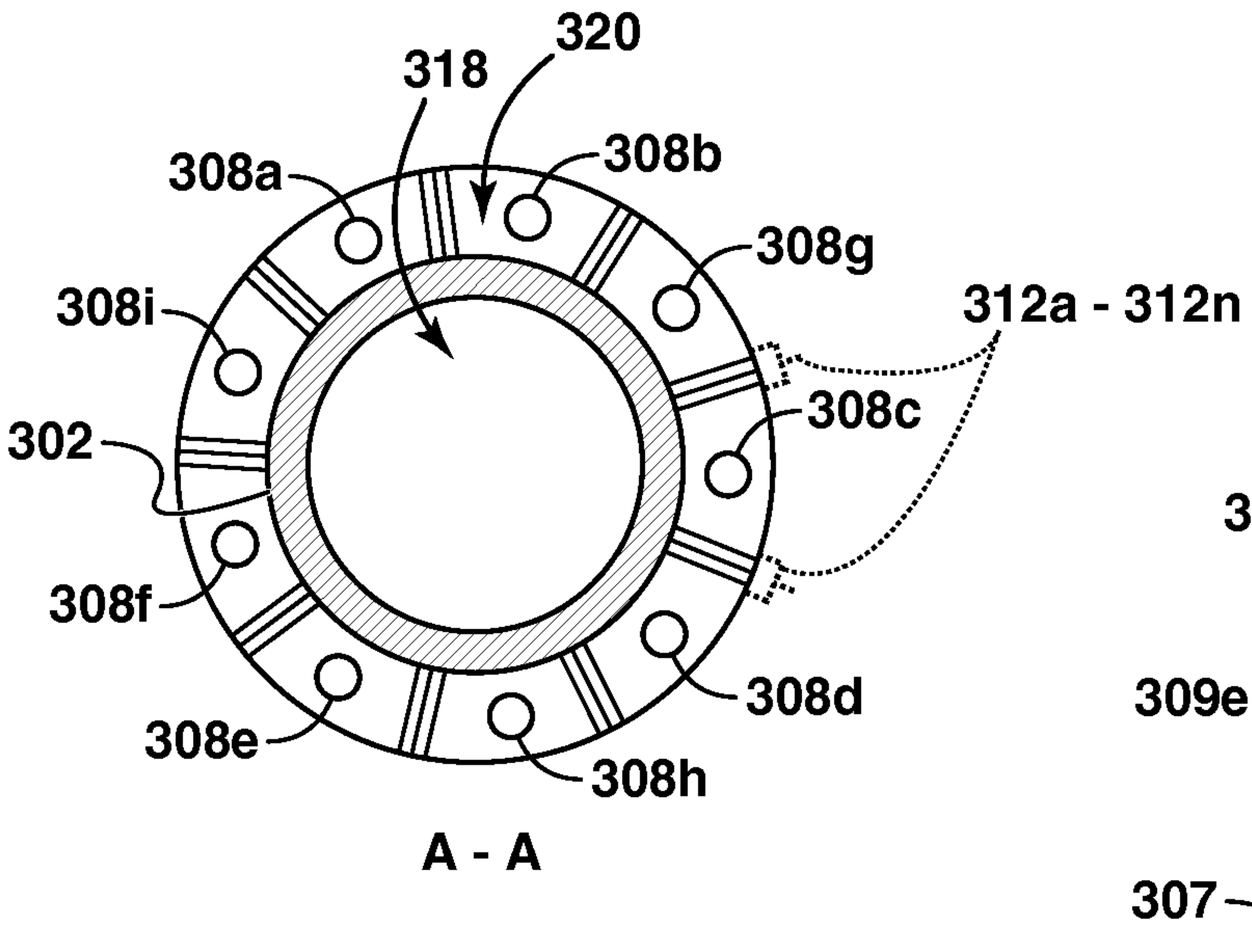

FIG. 3B

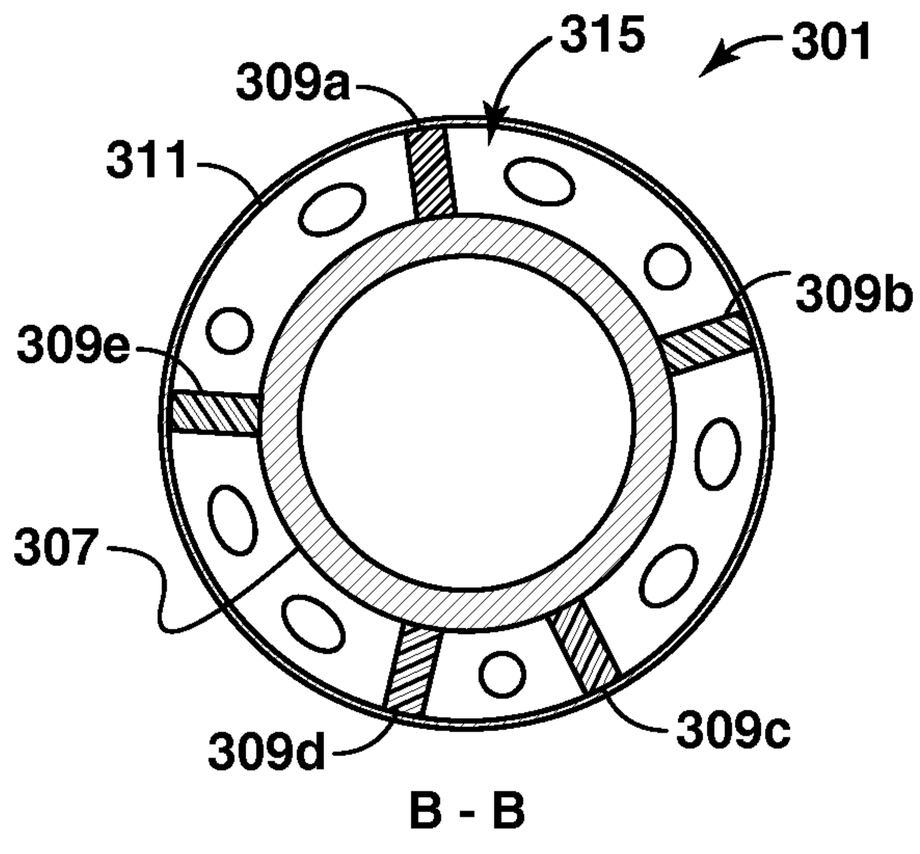

FIG. 3C

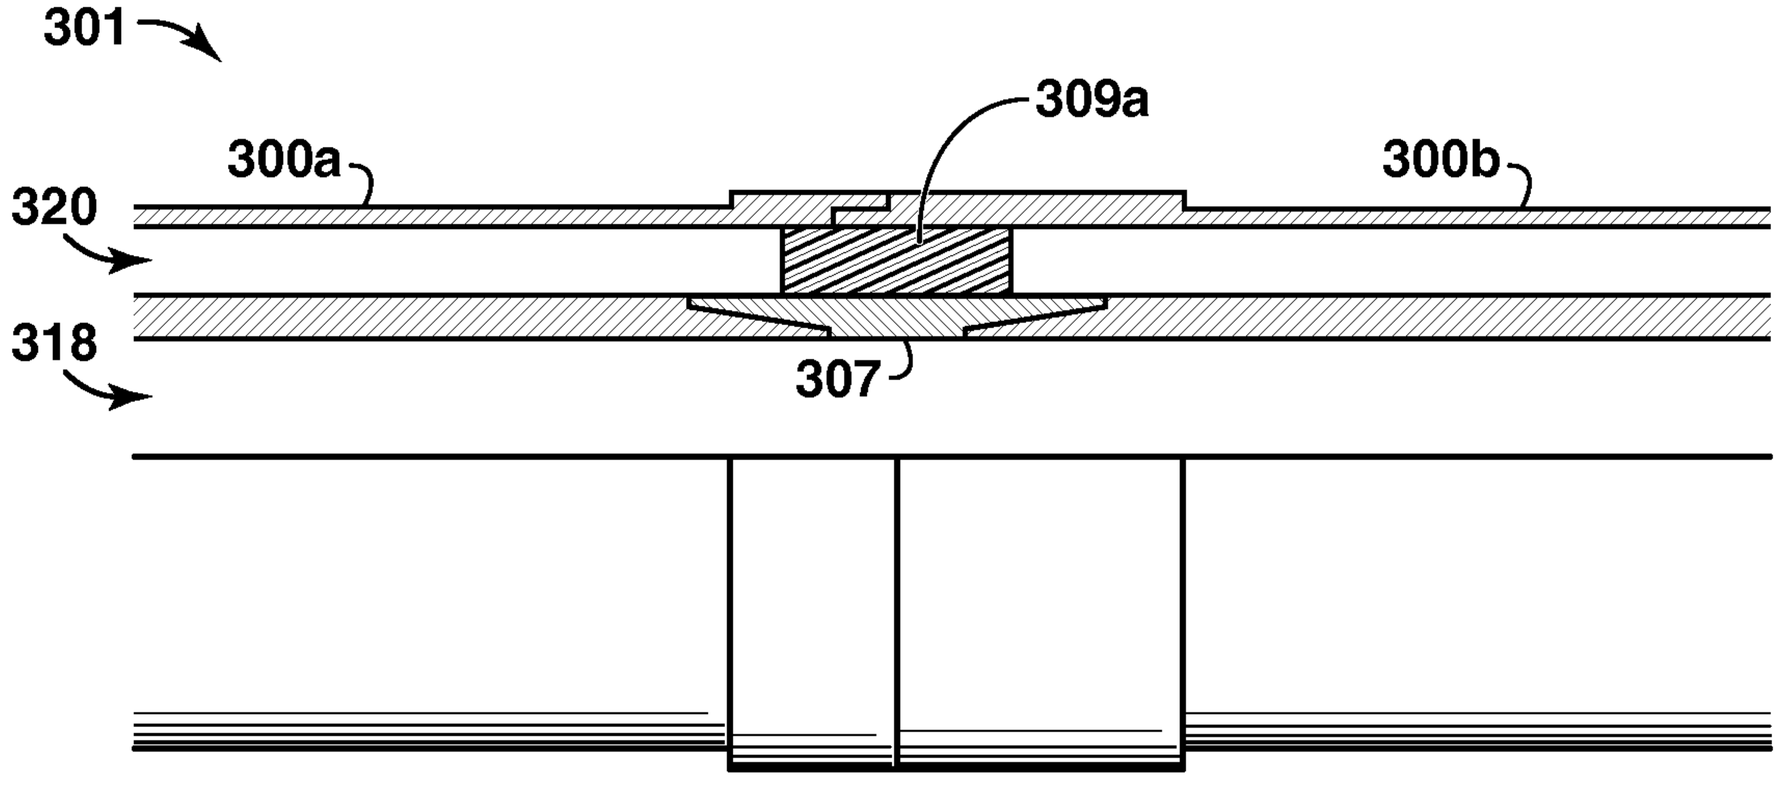

FIG. 4A

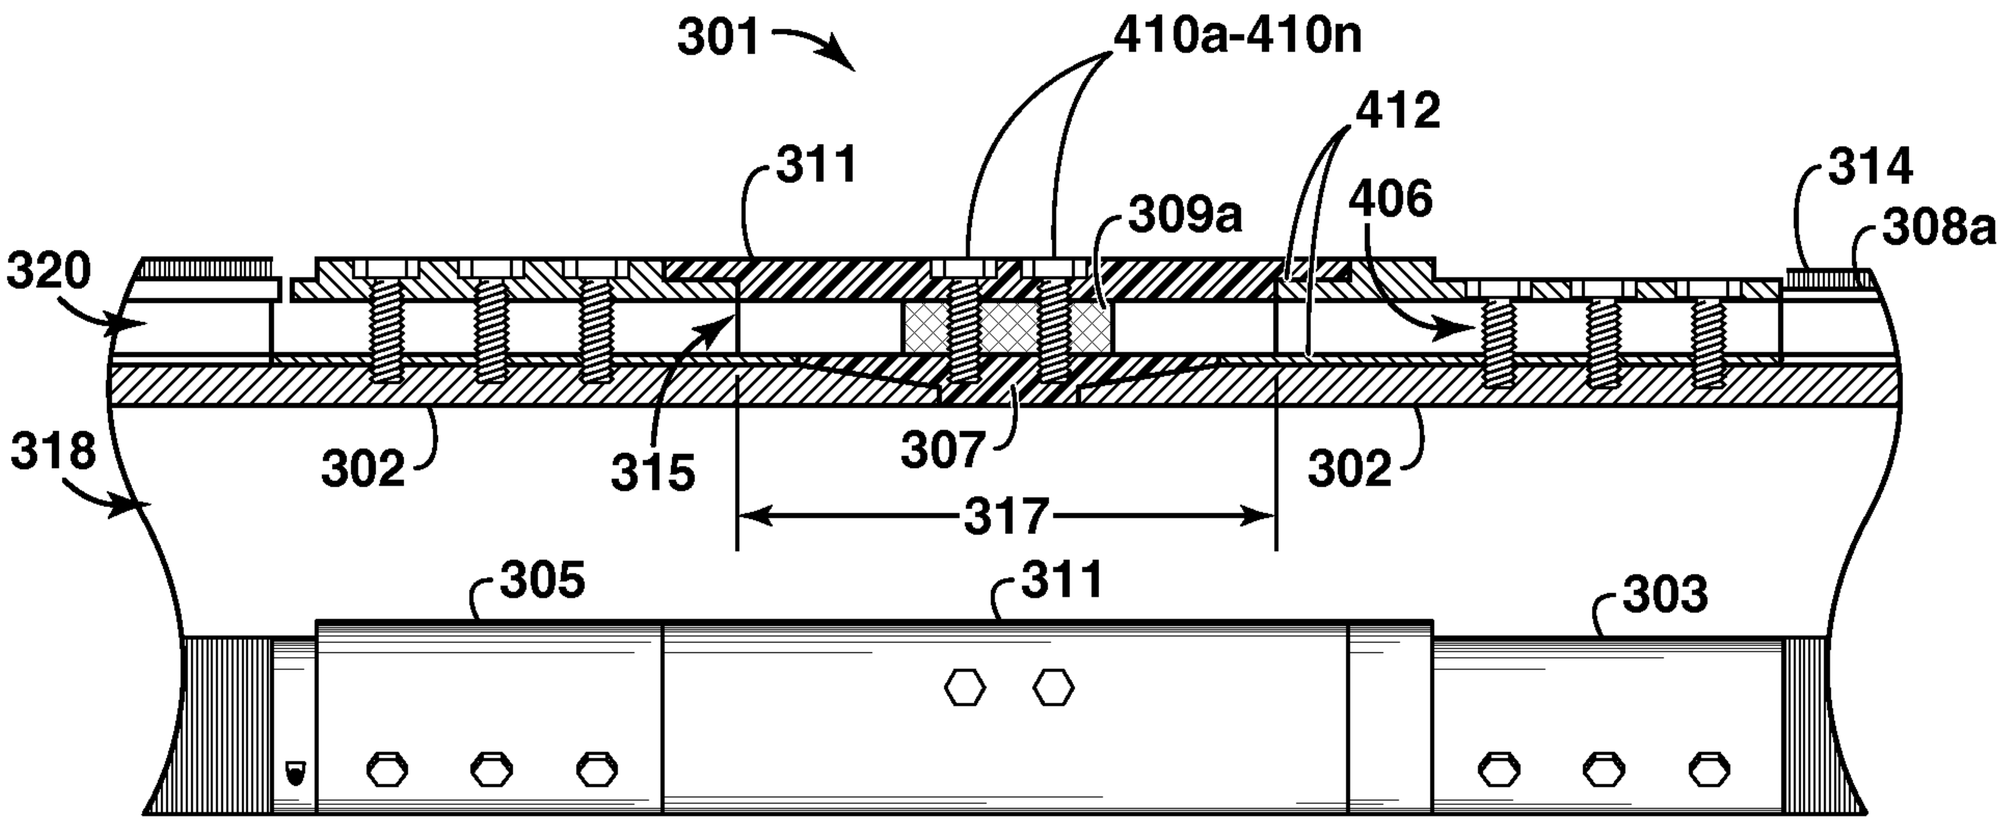

FIG. 4B

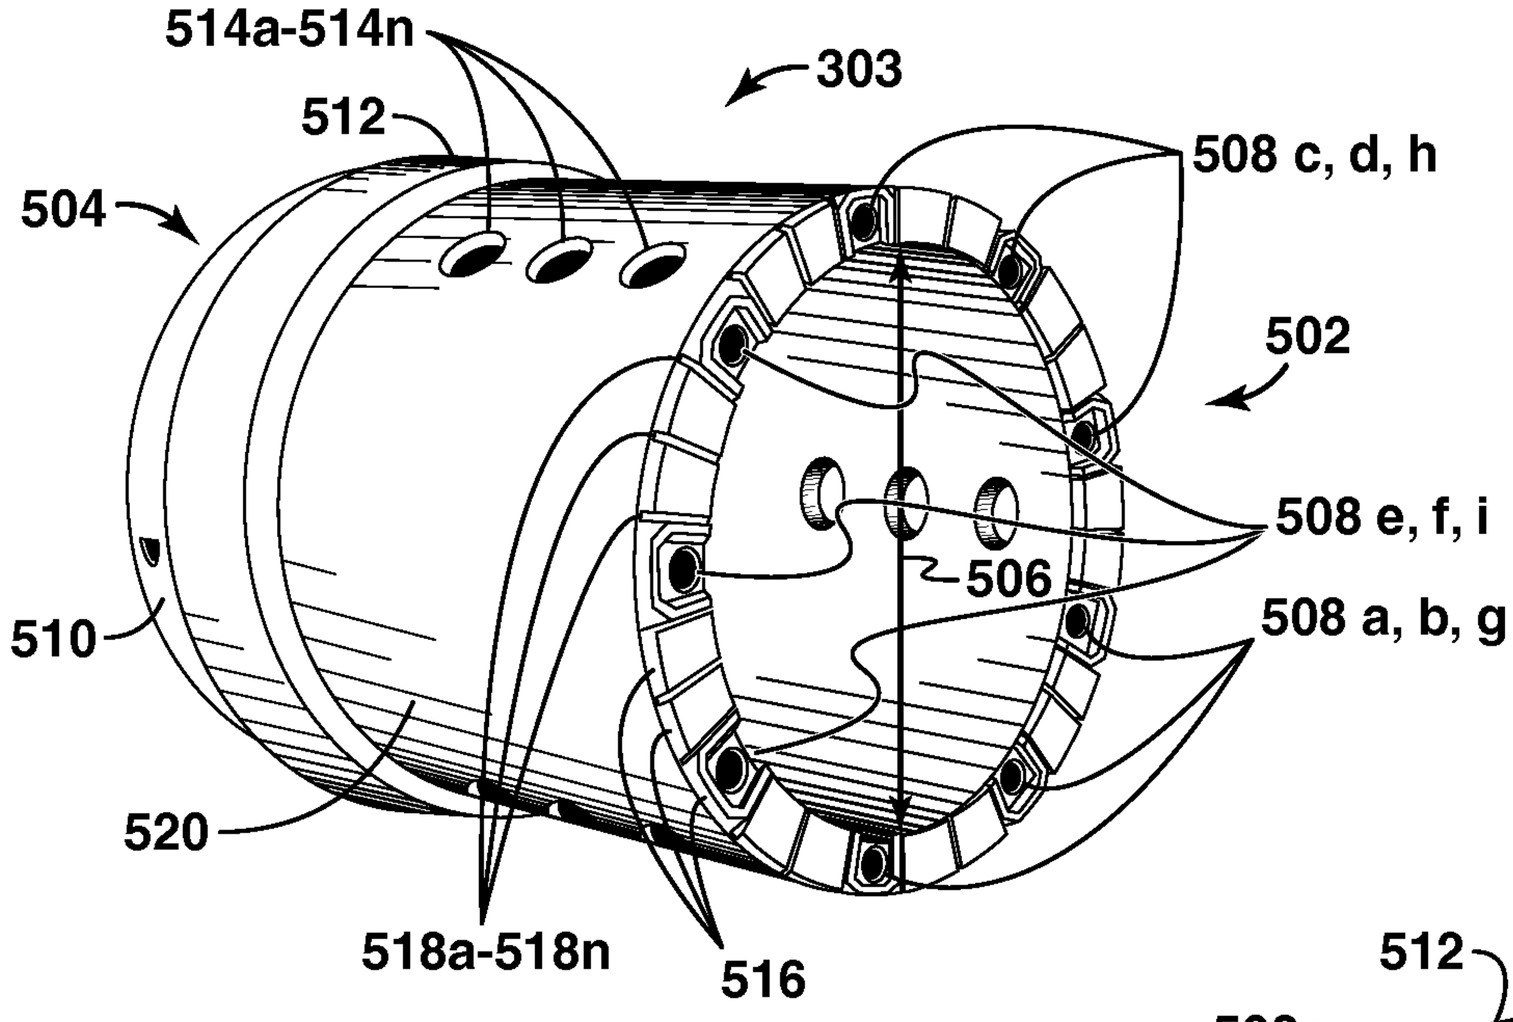

FIG. 5A

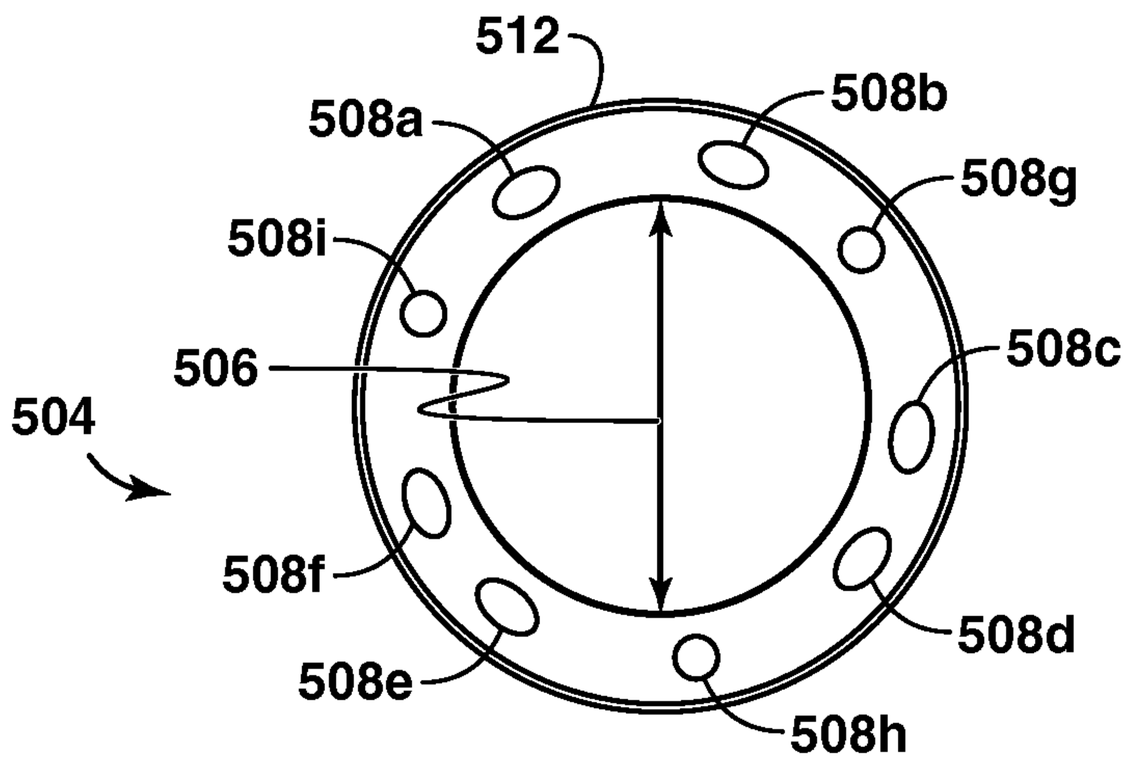

FIG. 5B

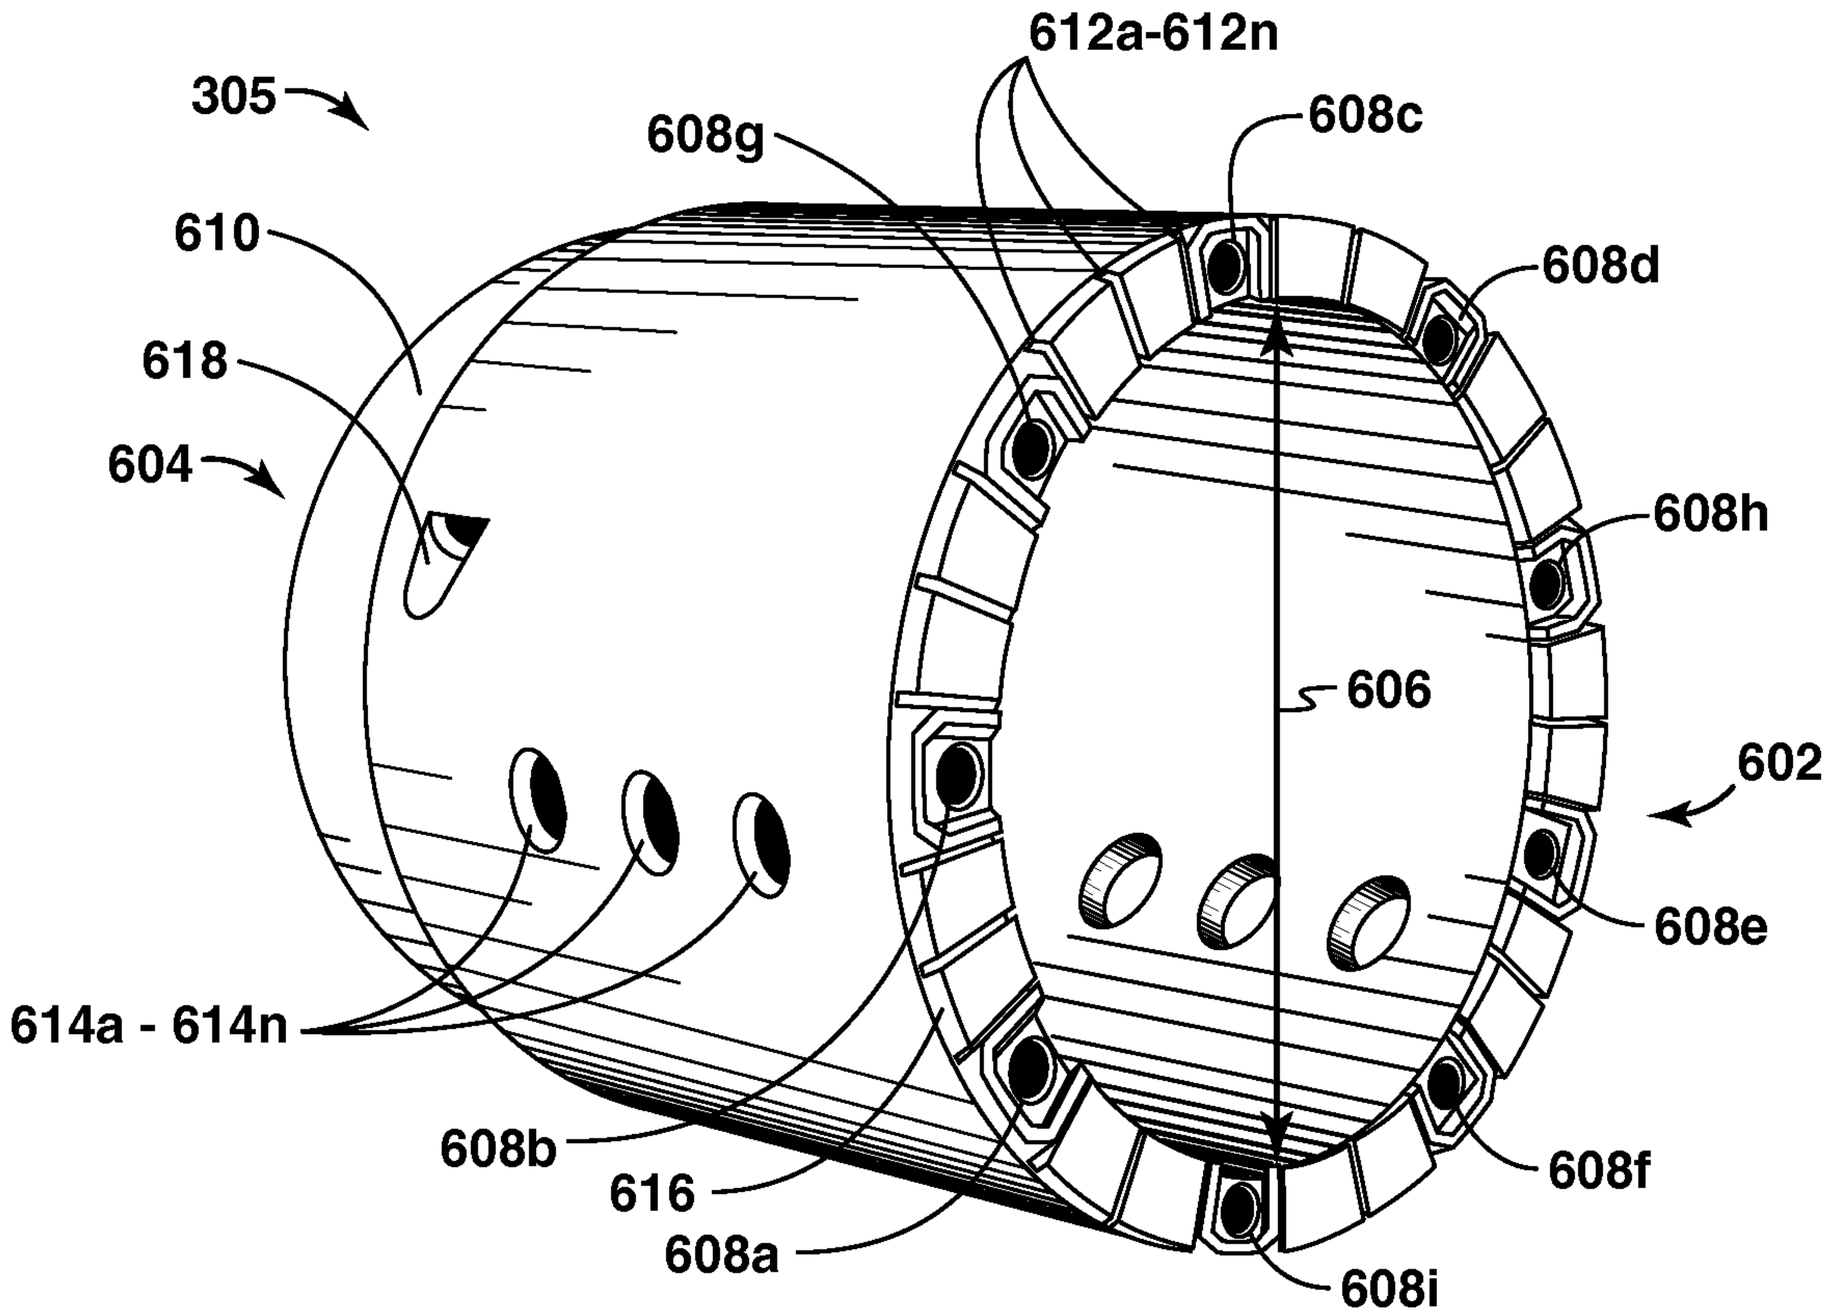
612a-612n
305
608g
608c
610
608d
618
604
608h
606
602
614a - 614n
608e
608b
608f
616
608a
608i

FIG. 6

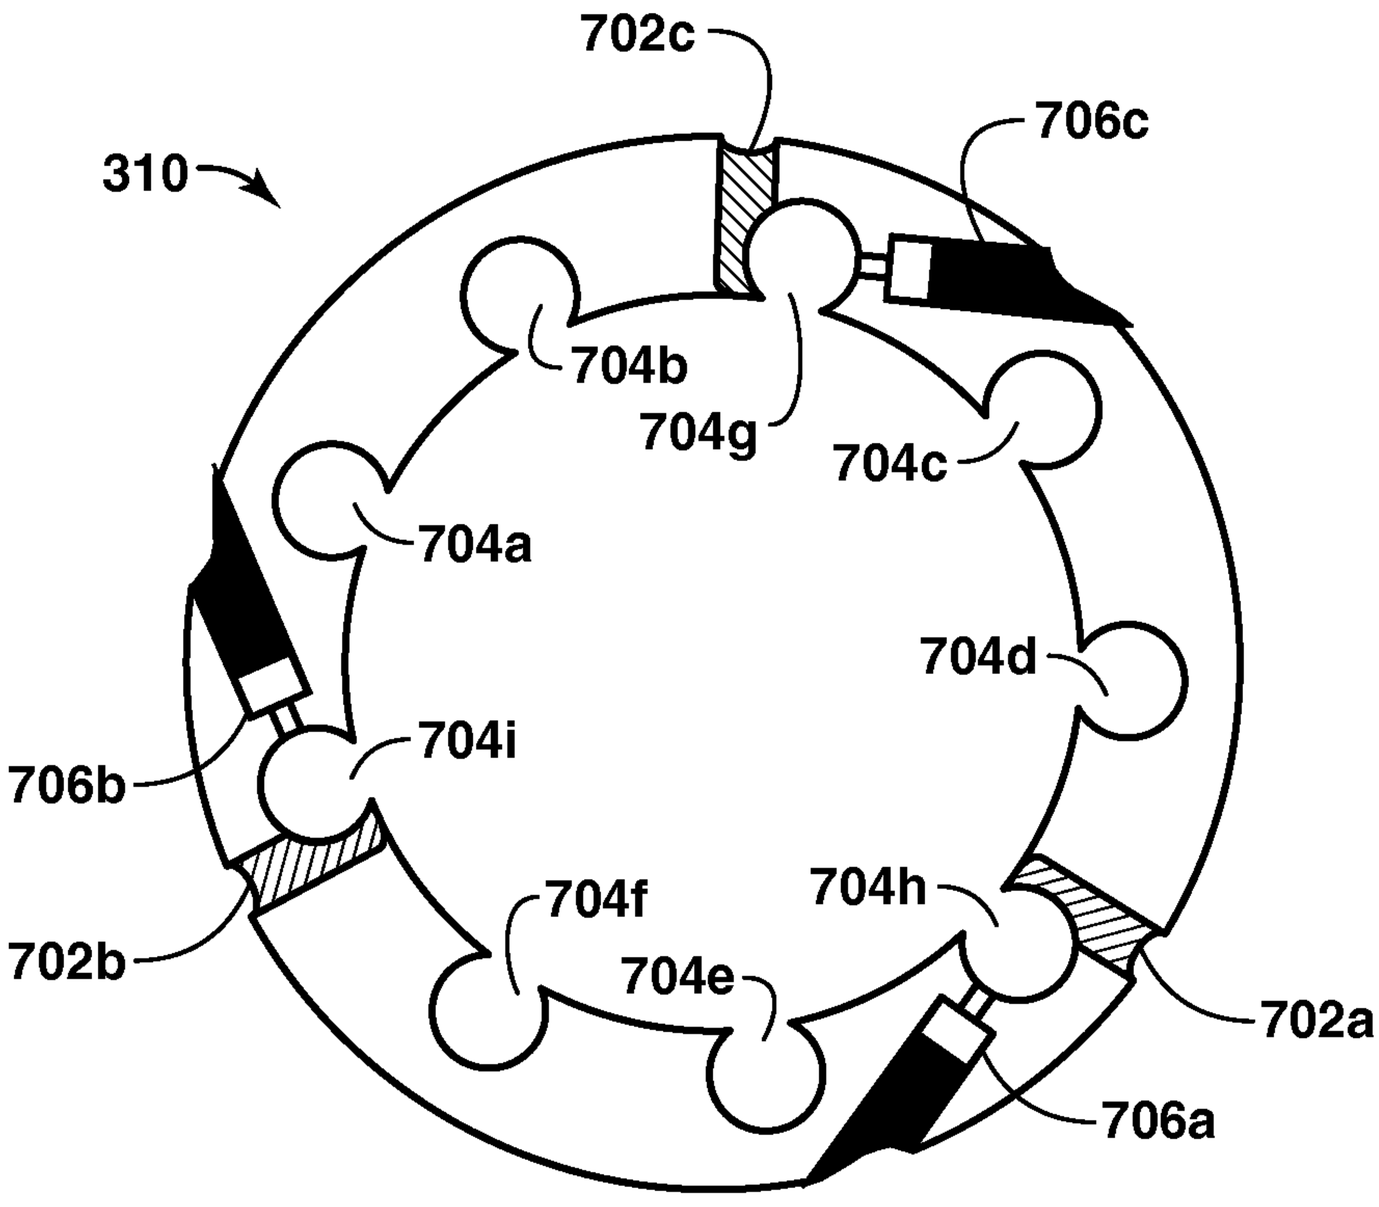
702c
706c
310
704b
704g
704c
704a
704d
704i
706b
704f
704h
702b
704e
702a
706a

FIG. 7

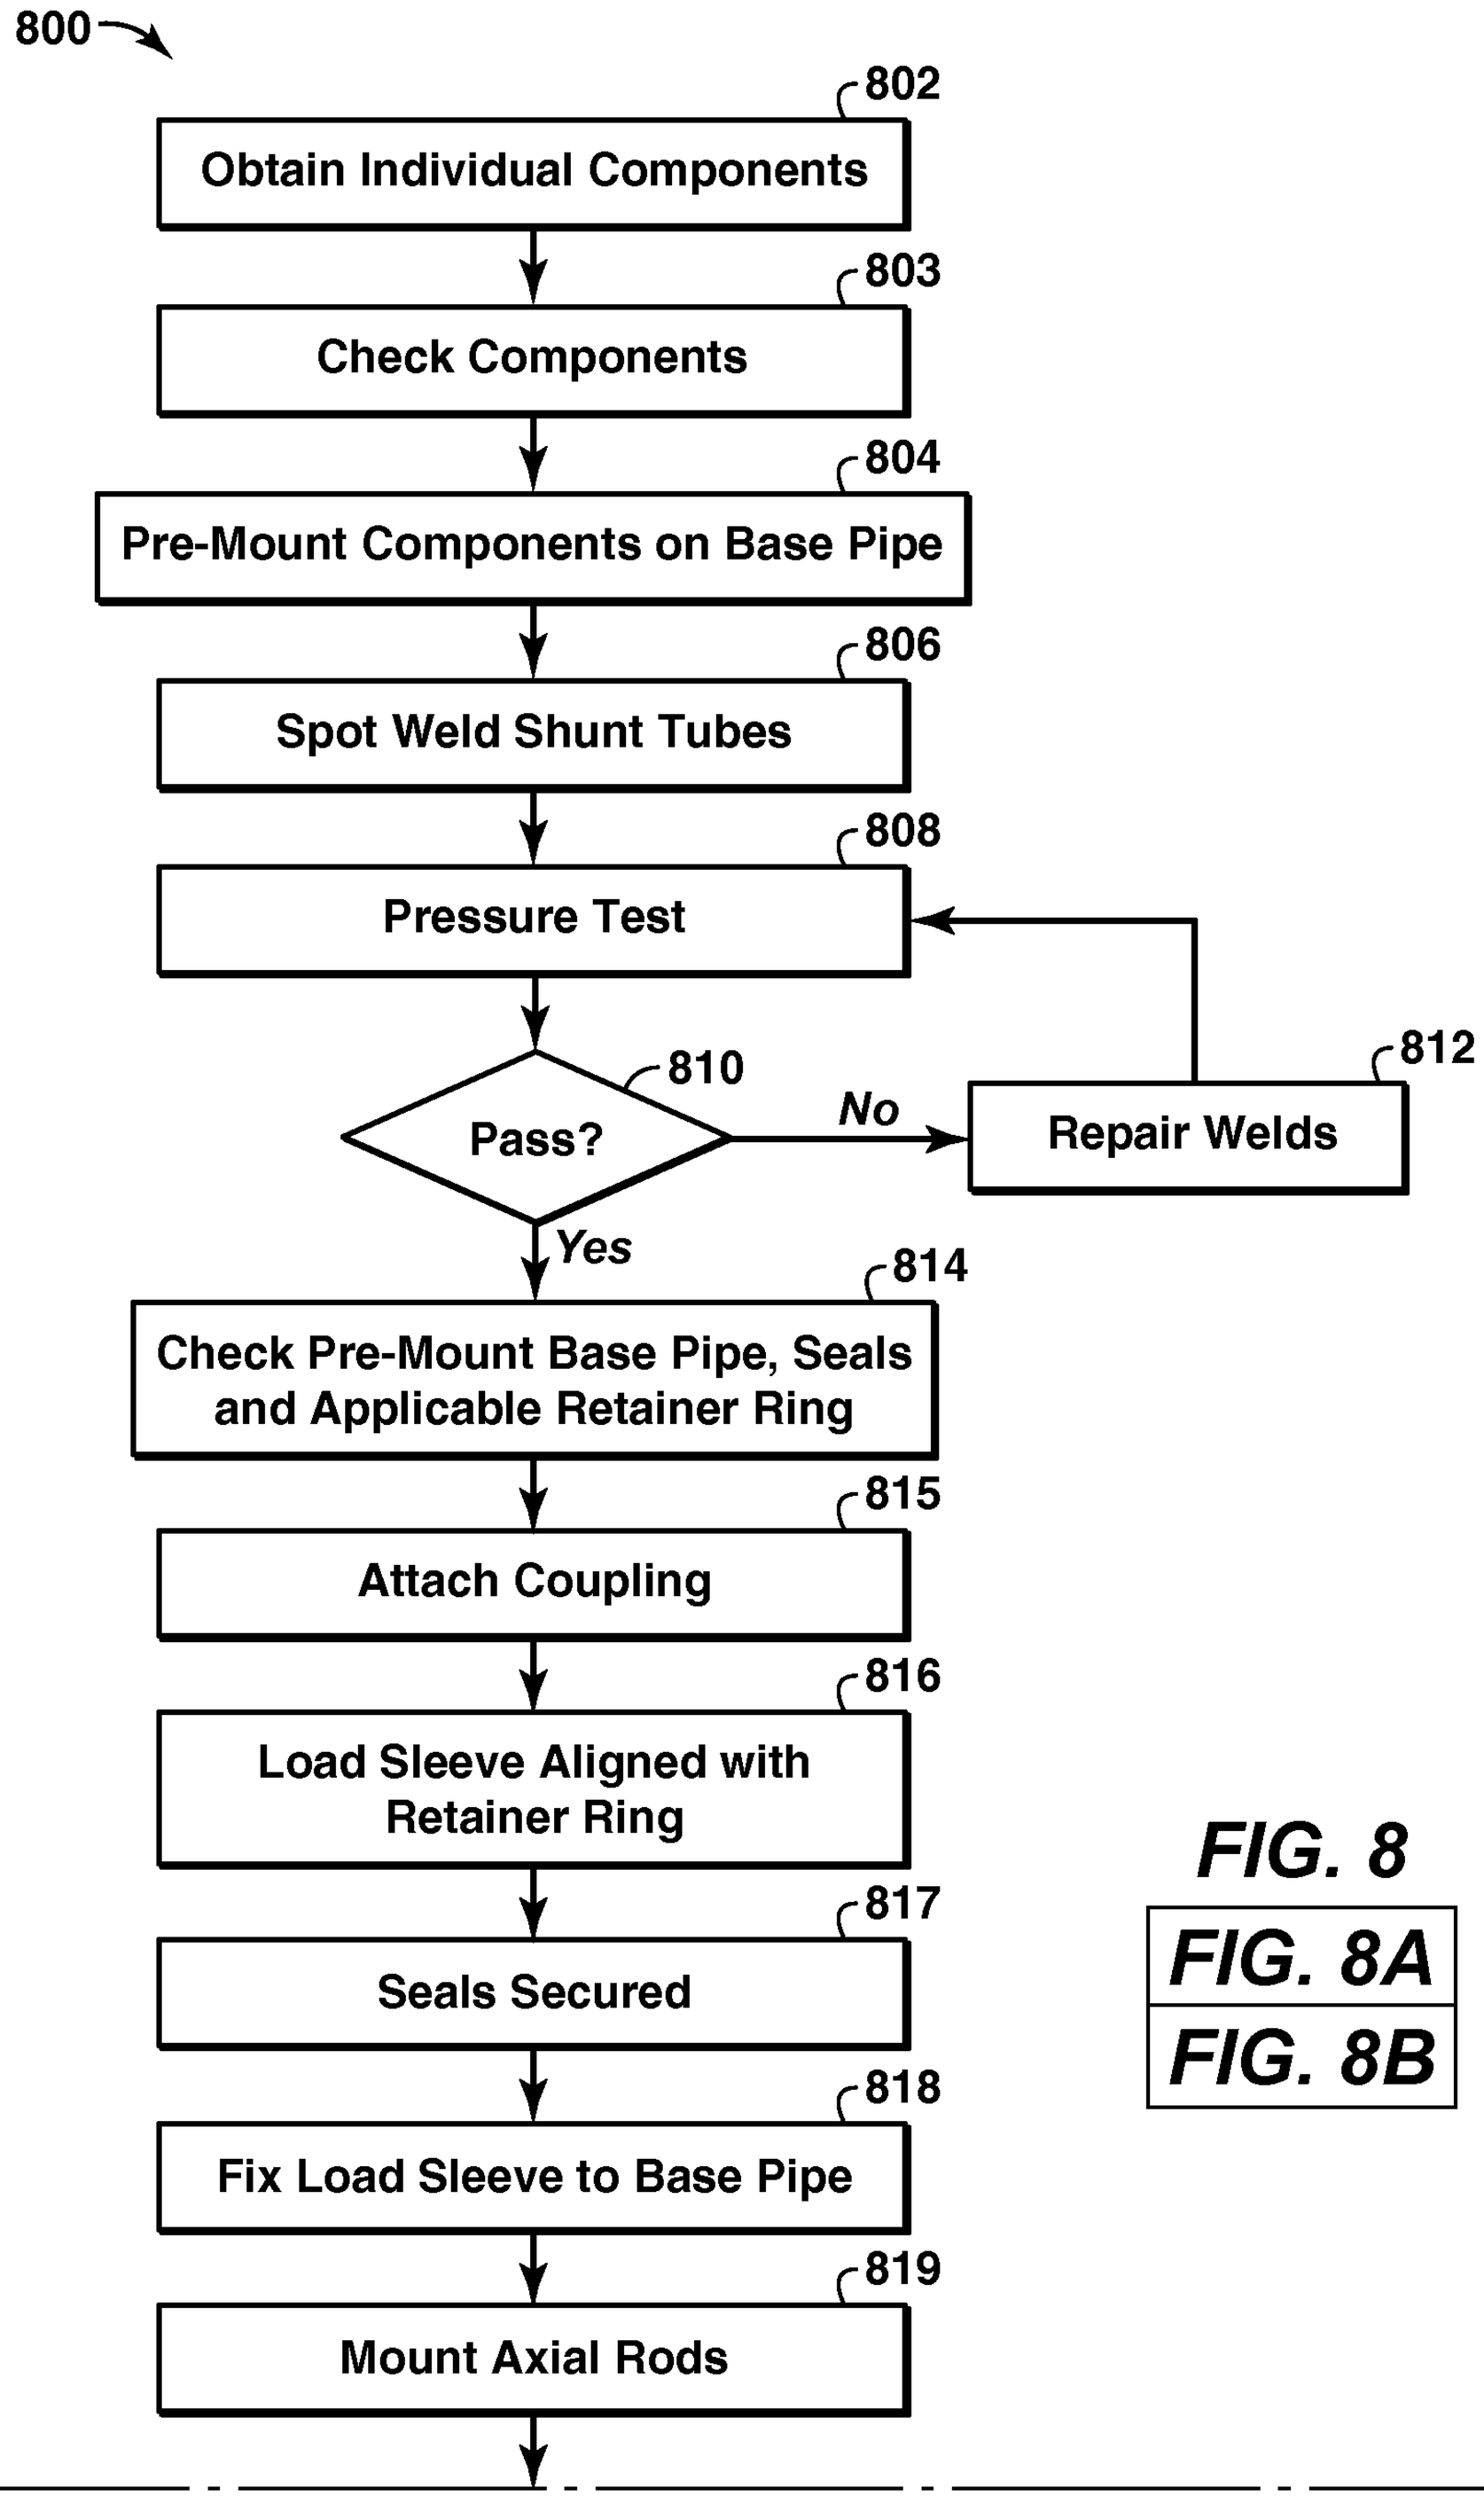

FIG. 8

FIG. 8A

FIG. 8B

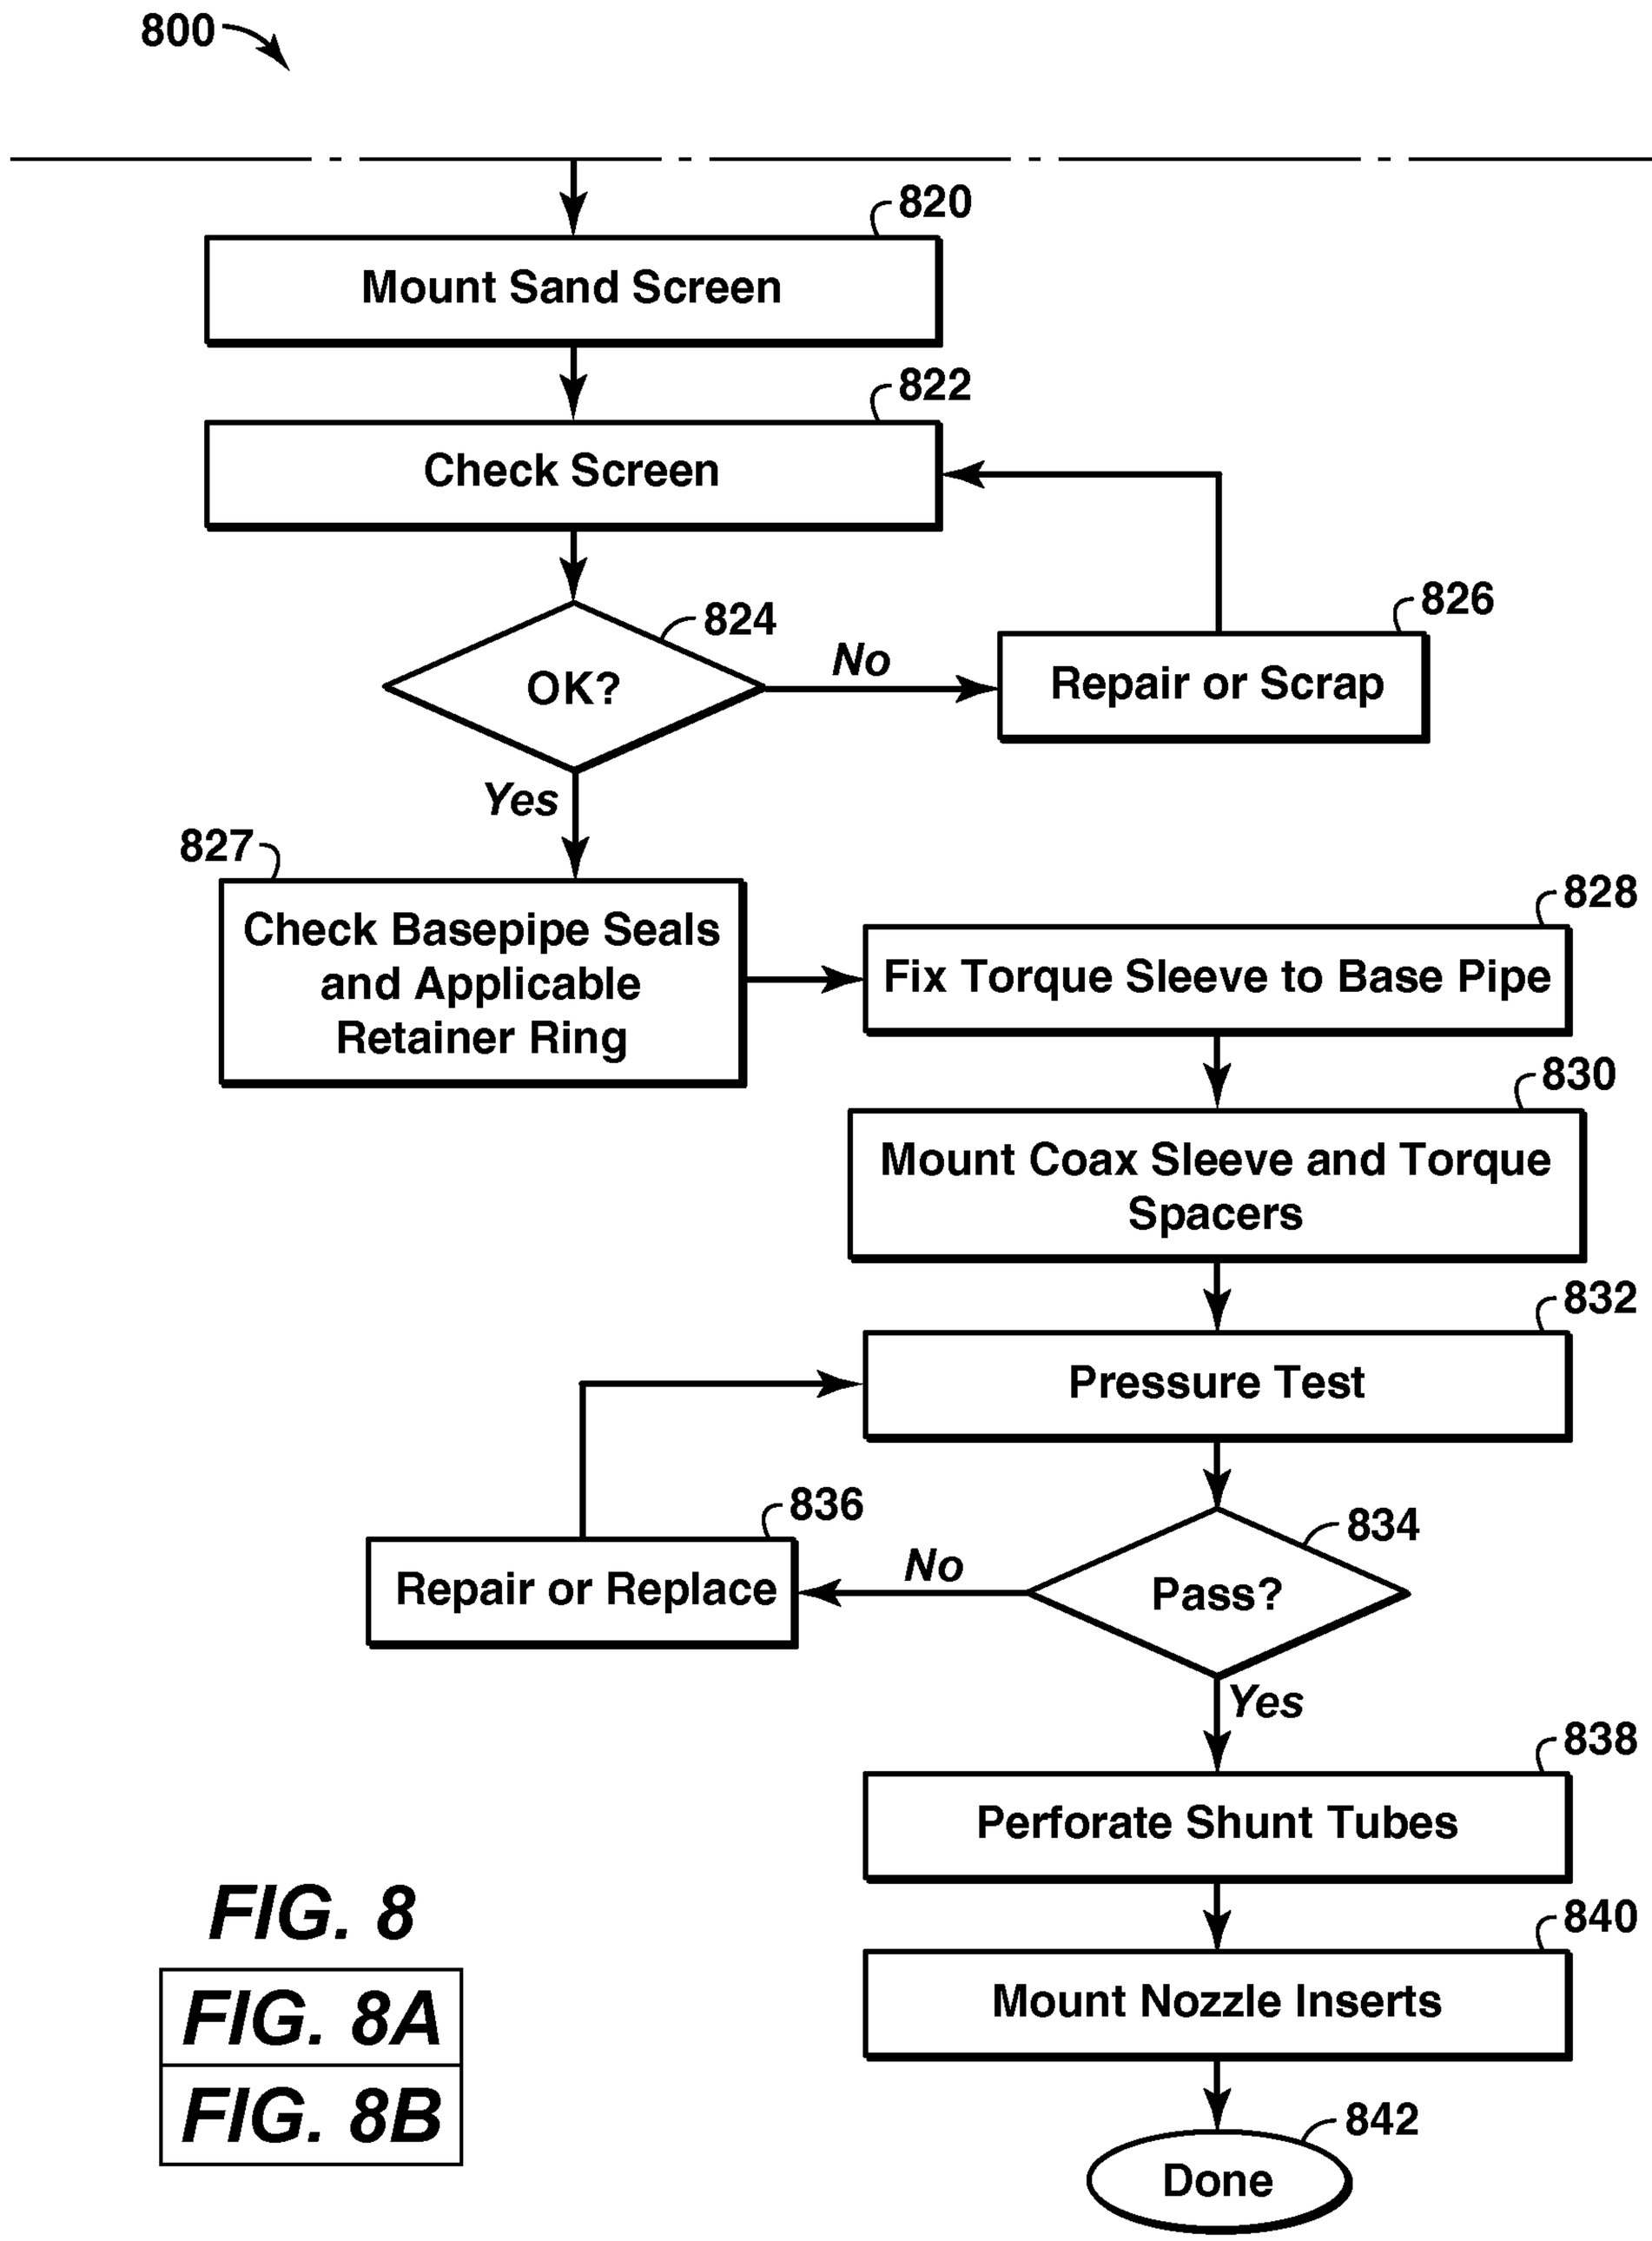

FIG. 8

FIG. 8A

FIG. 8B

FIG. 8B

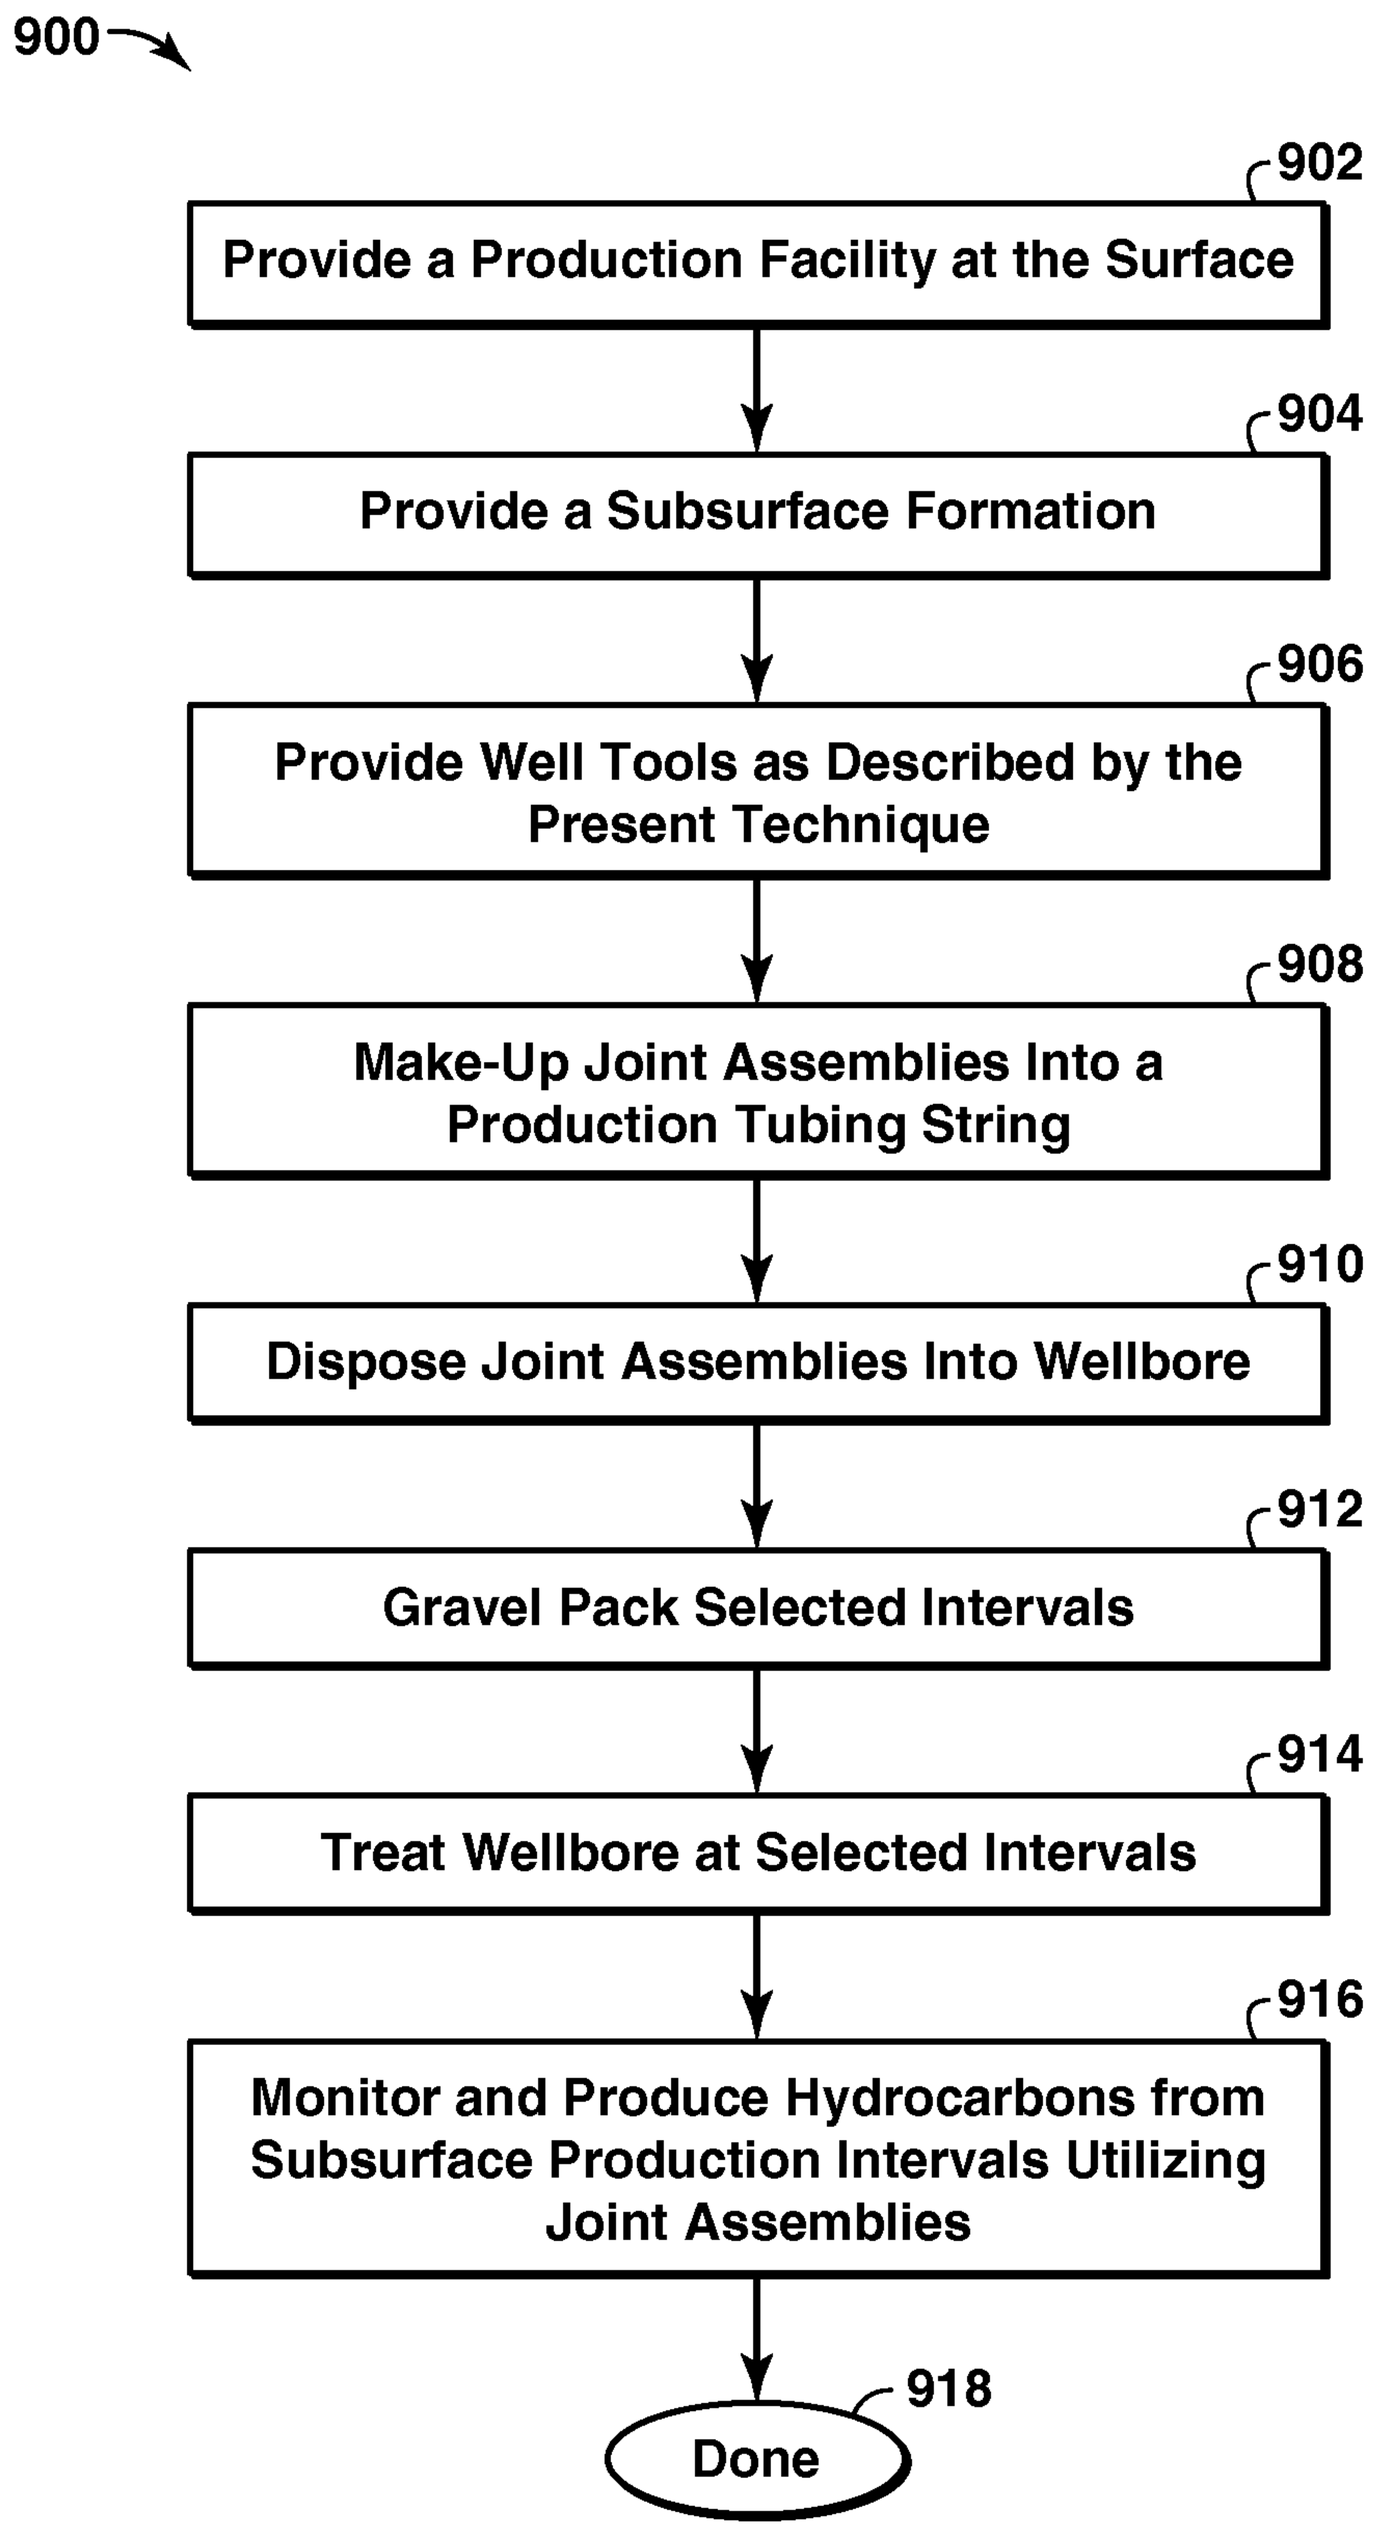
900
902
Provide a Production Facility at the Surface
904
Provide a Subsurface Formation
906
Provide Well Tools as Described by the Present Technique
908
Make-Up Joint Assemblies Into a Production Tubing String
910
Dispose Joint Assemblies Into Wellbore
912
Gravel Pack Selected Intervals
914
Treat Wellbore at Selected Intervals
916
Monitor and Produce Hydrocarbons from Subsurface Production Intervals Utilizing Joint Assemblies
918
Done

FIG. 9

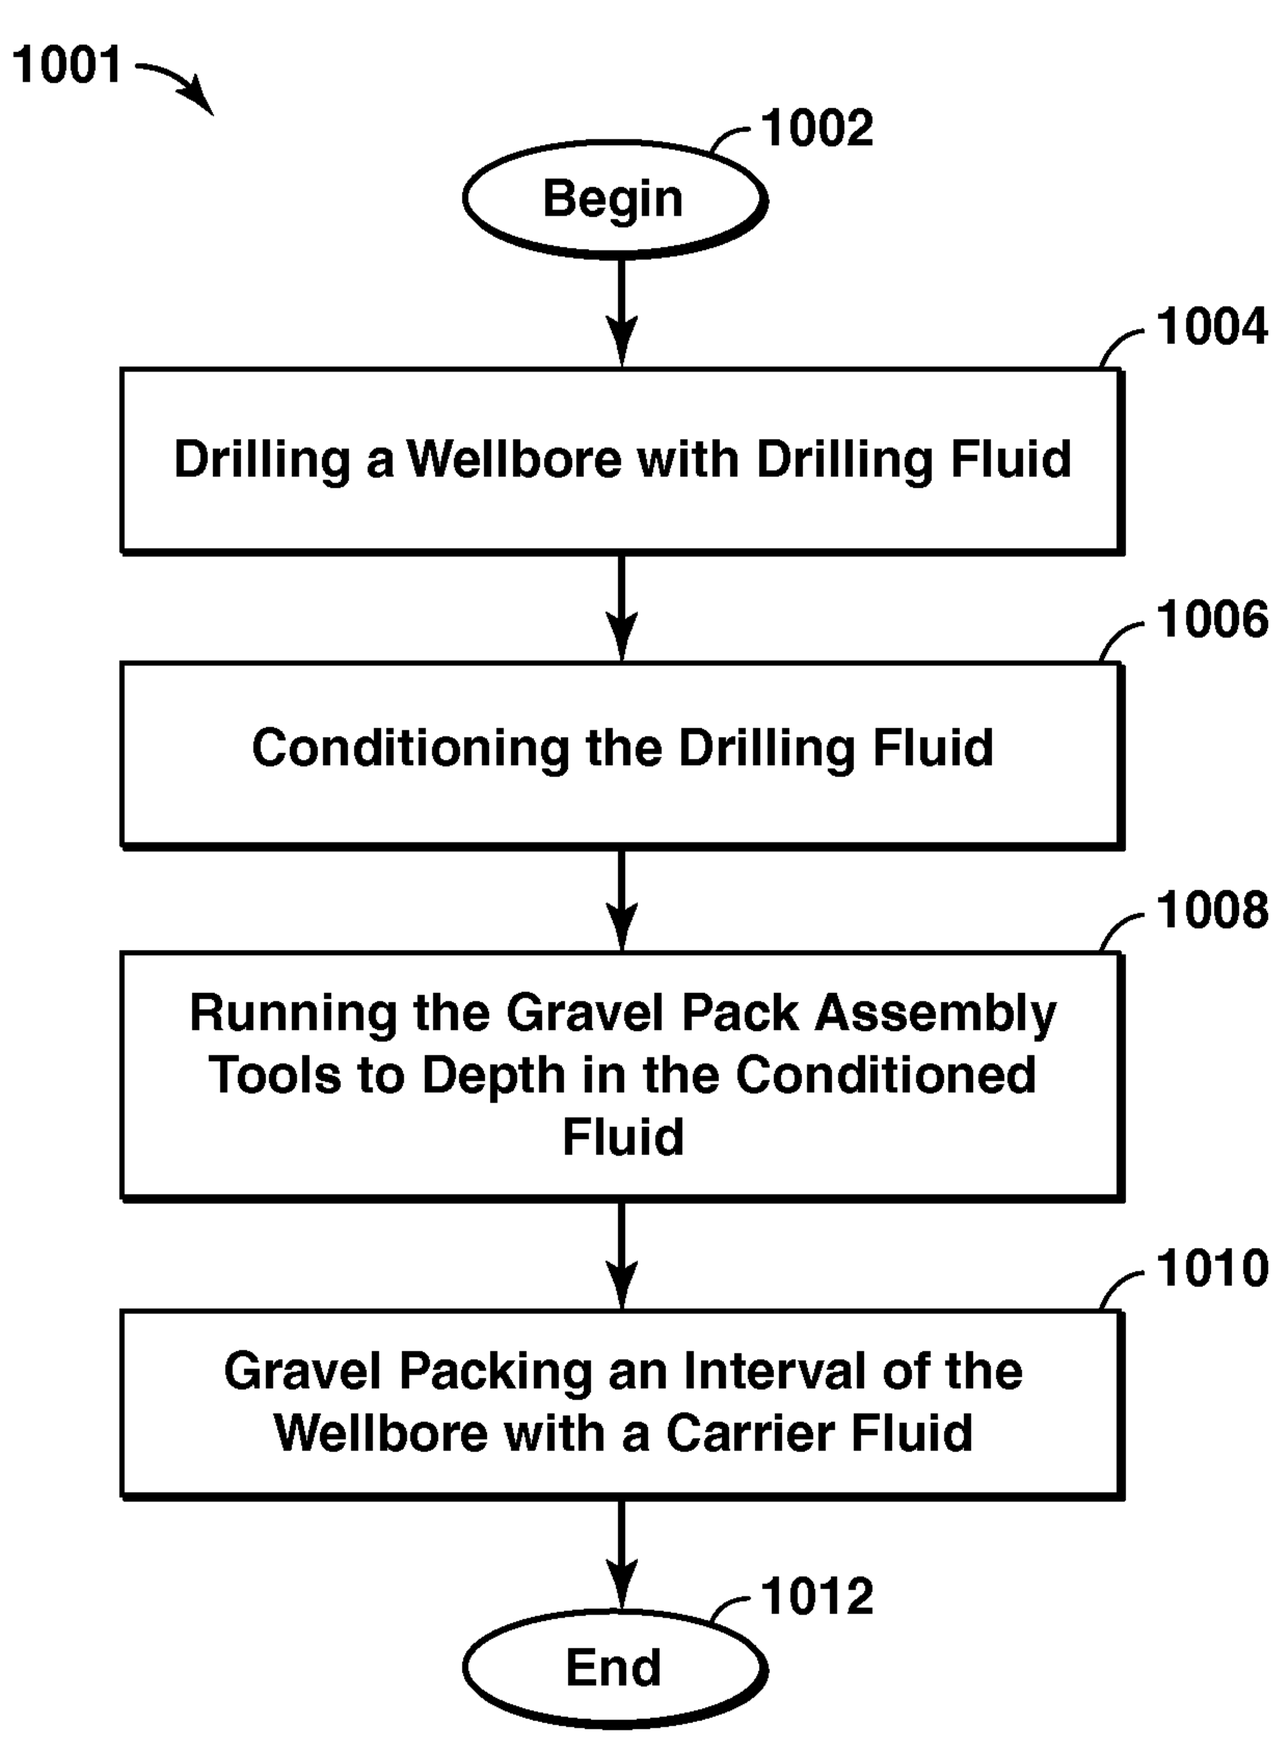
1001
1002
Begin
1004
Drilling a Wellbore with Drilling Fluid
1006
Conditioning the Drilling Fluid
1008
Running the Gravel Pack Assembly Tools to Depth in the Conditioned Fluid
1010
Gravel Packing an Interval of the Wellbore with a Carrier Fluid
1012
End

FIG. 10

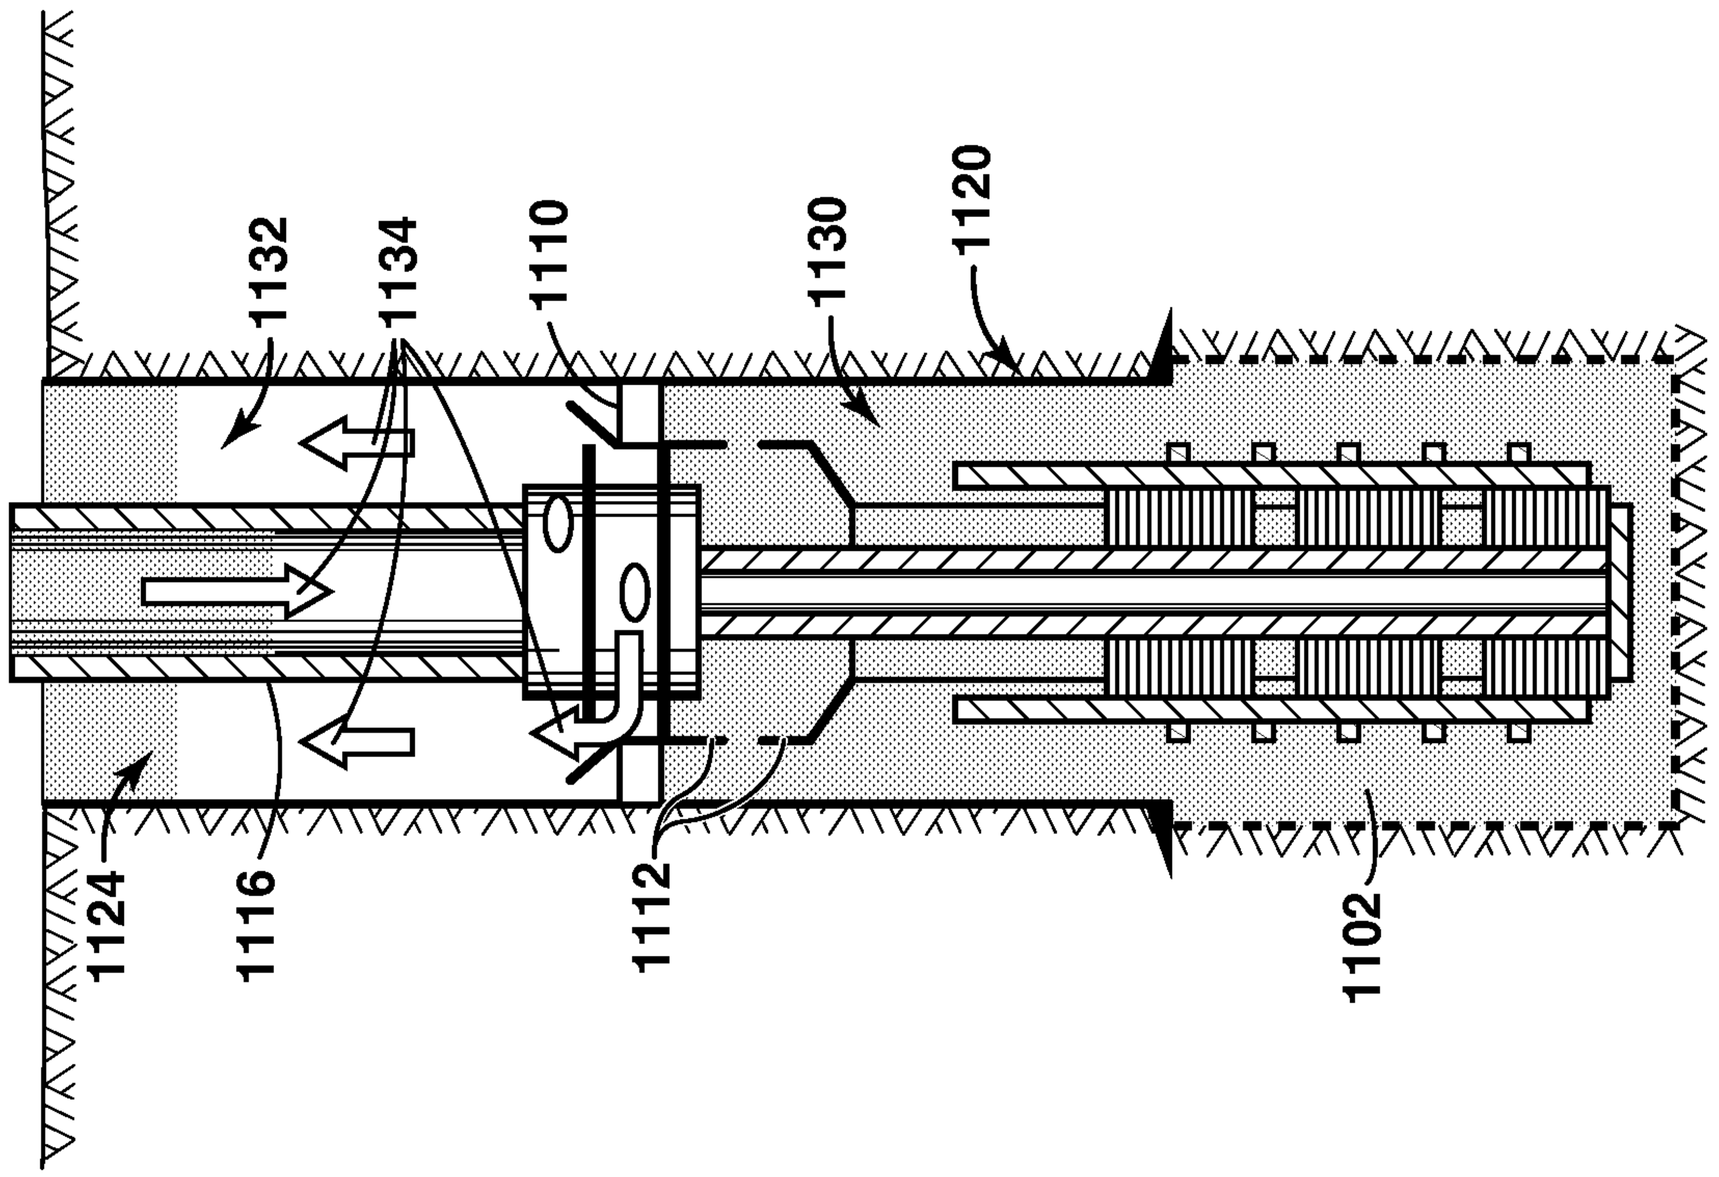

FIG. 11B

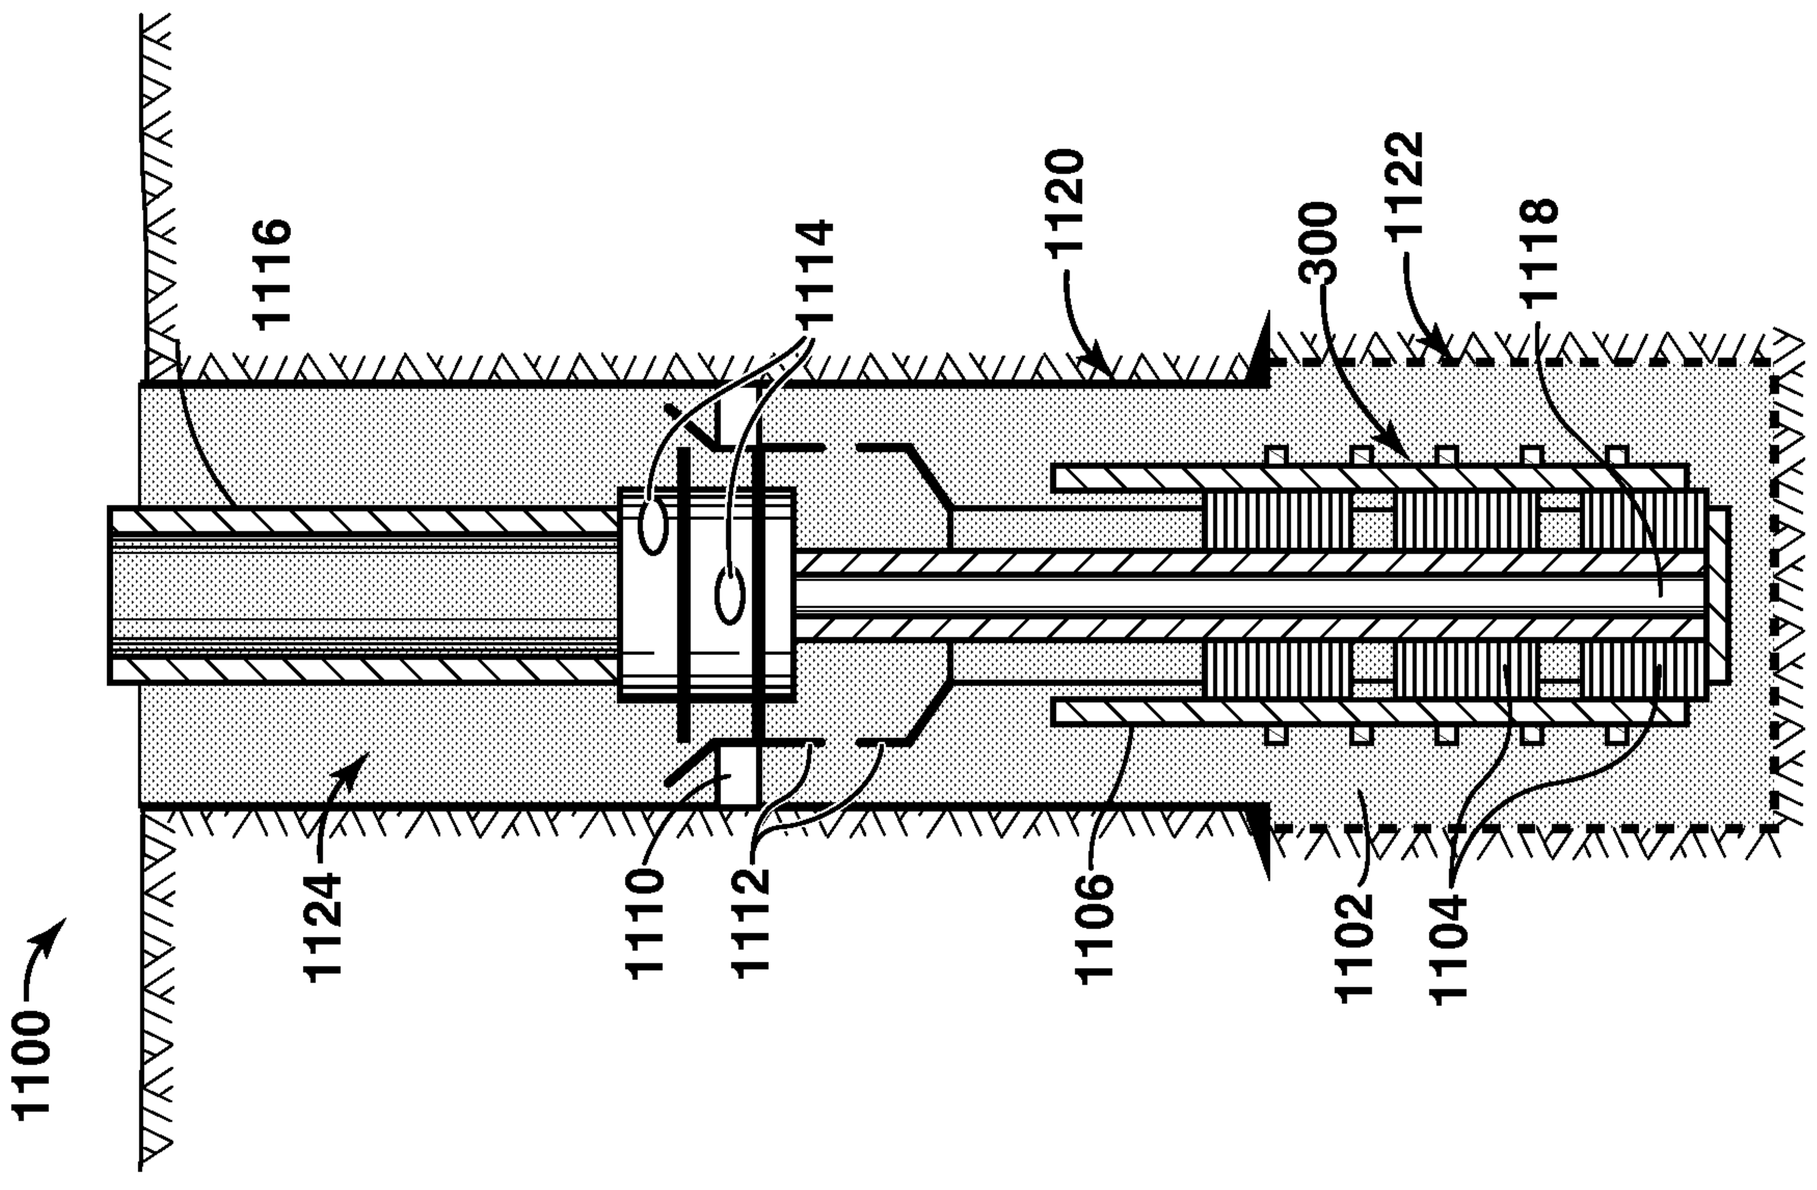

FIG. 11A

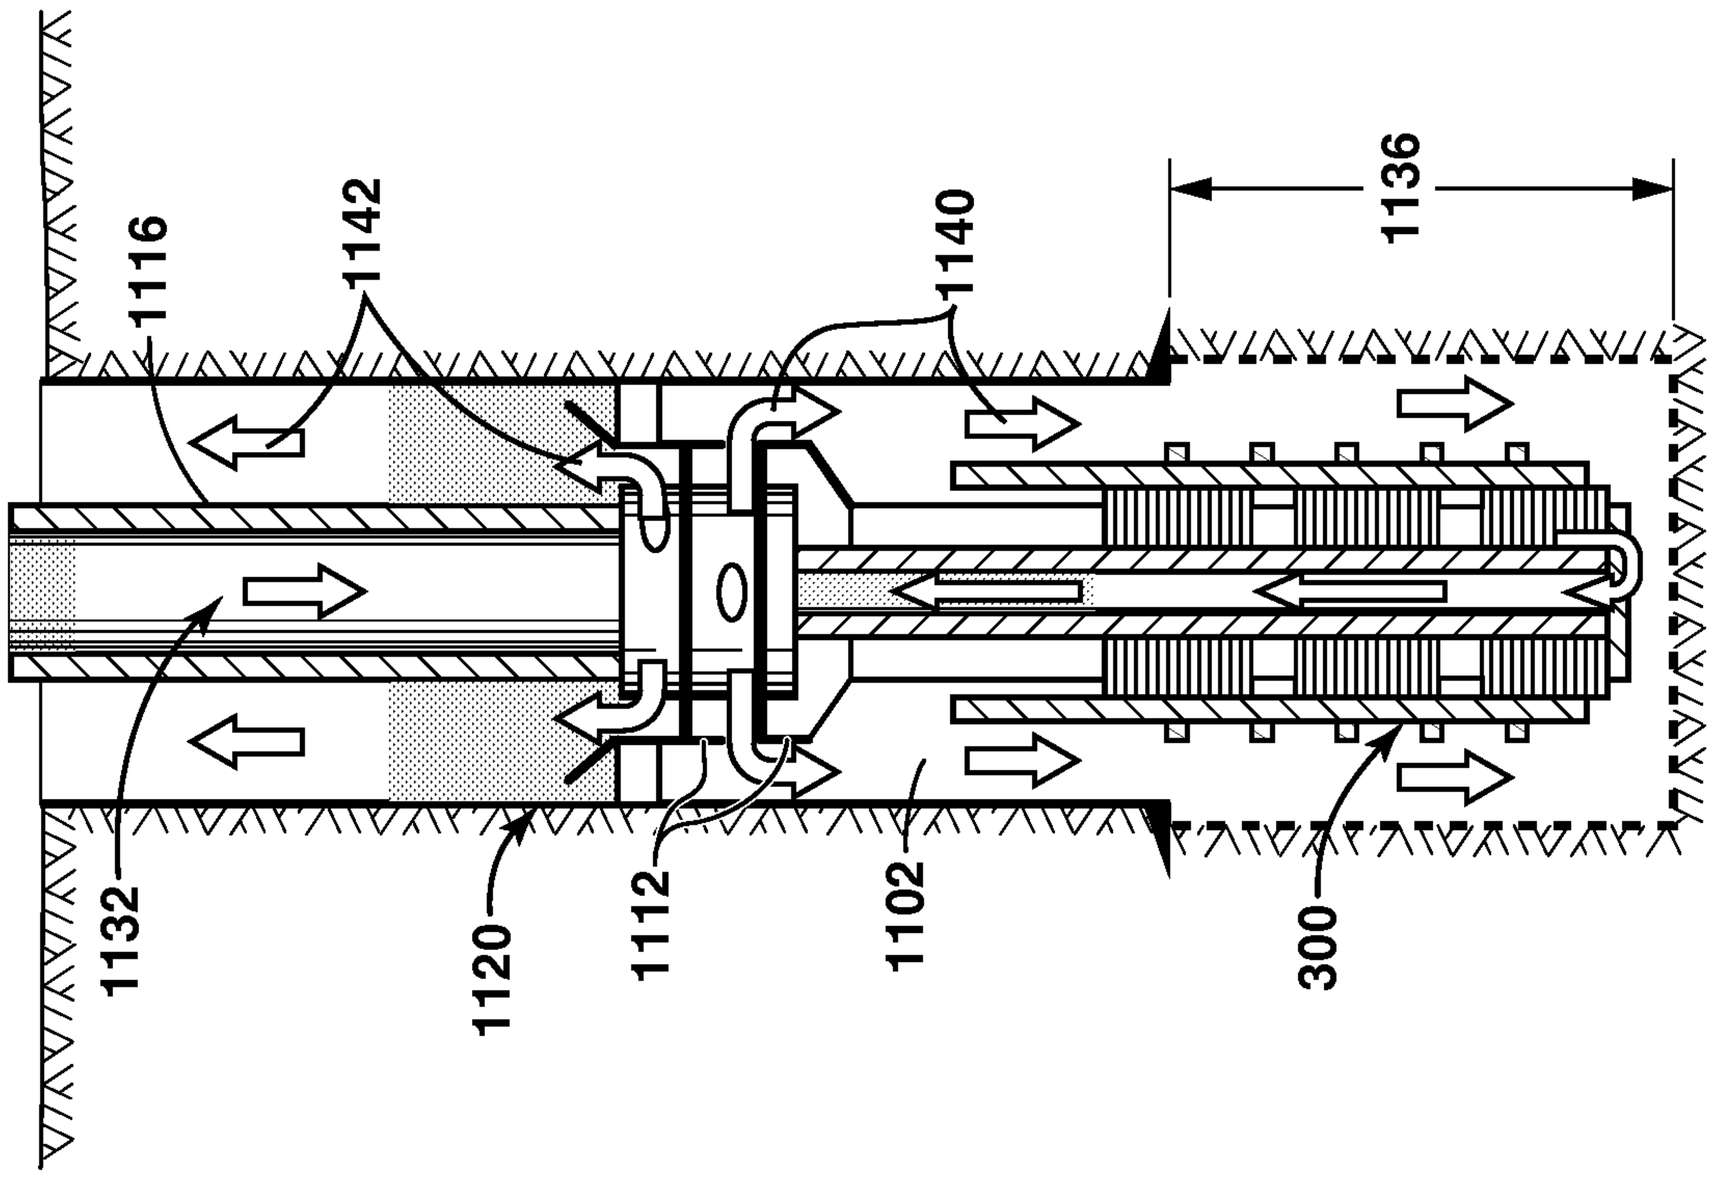

FIG. 11C'

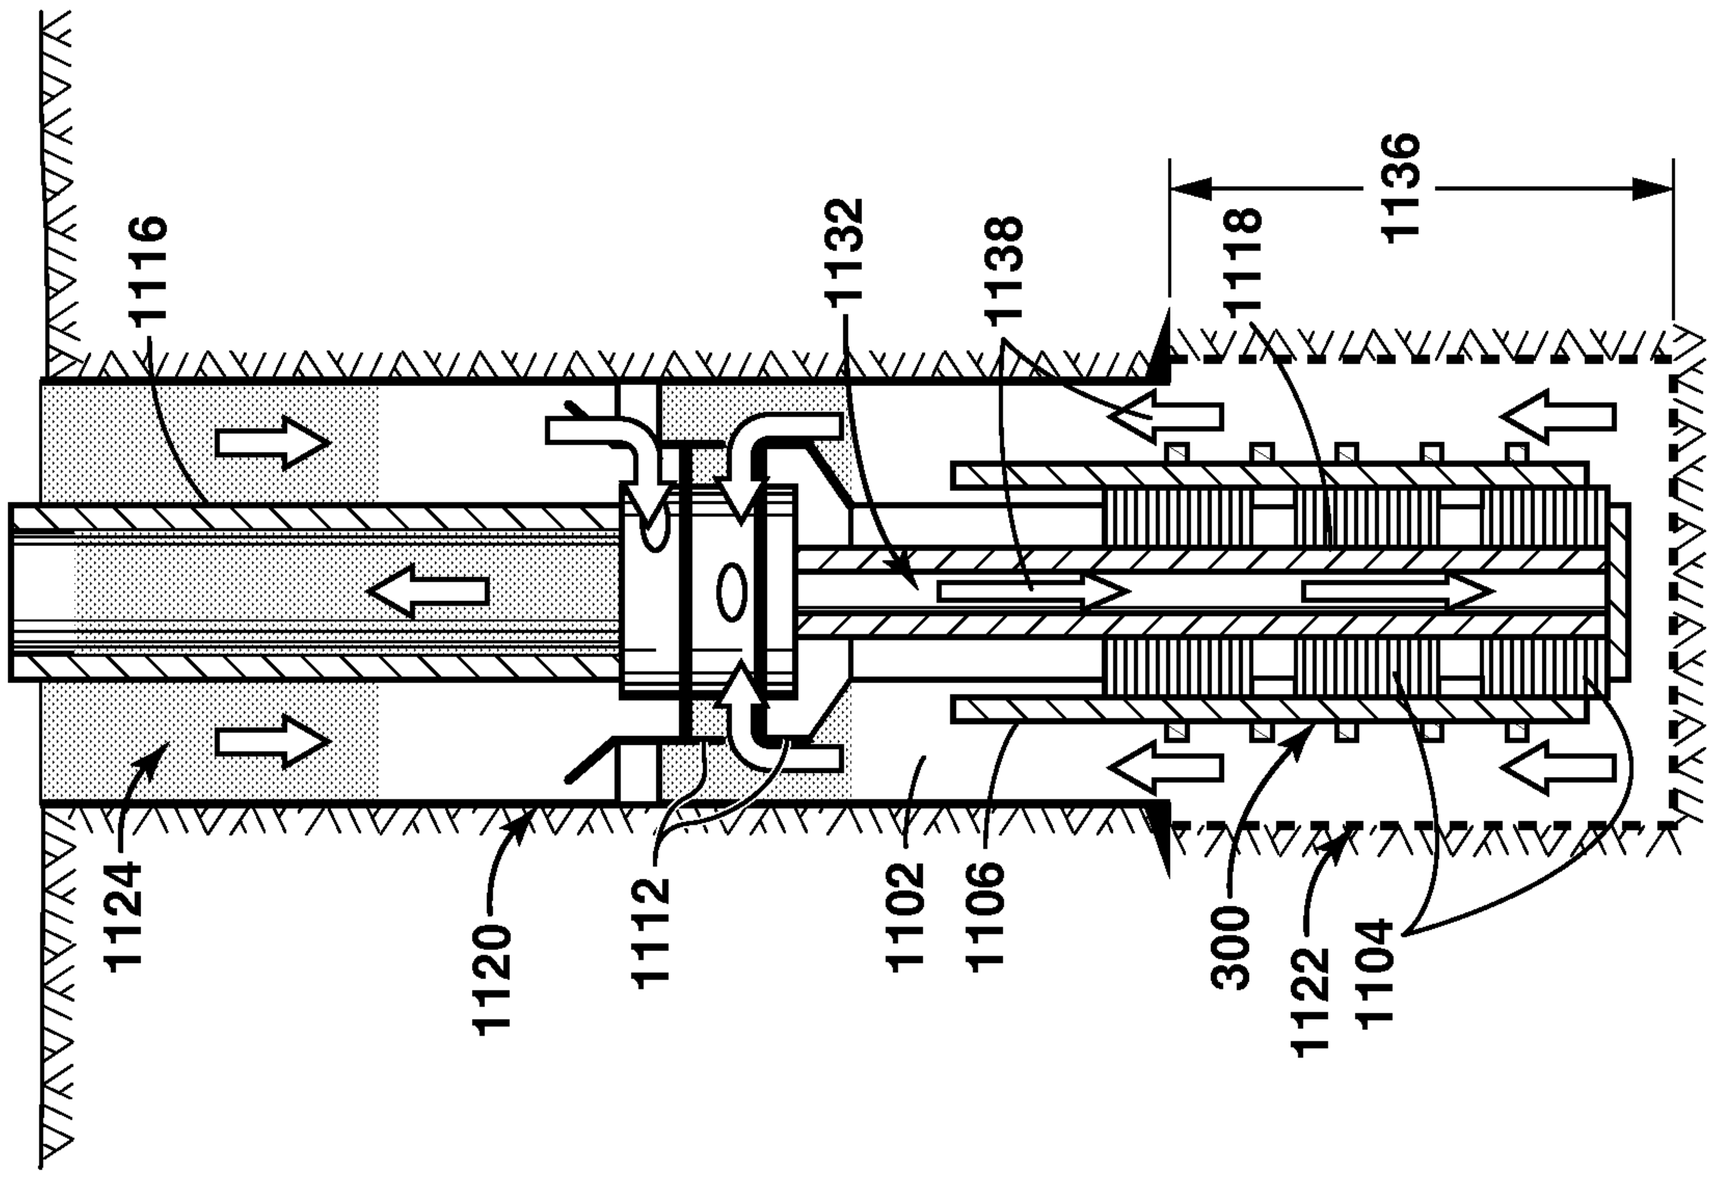

FIG. 11C

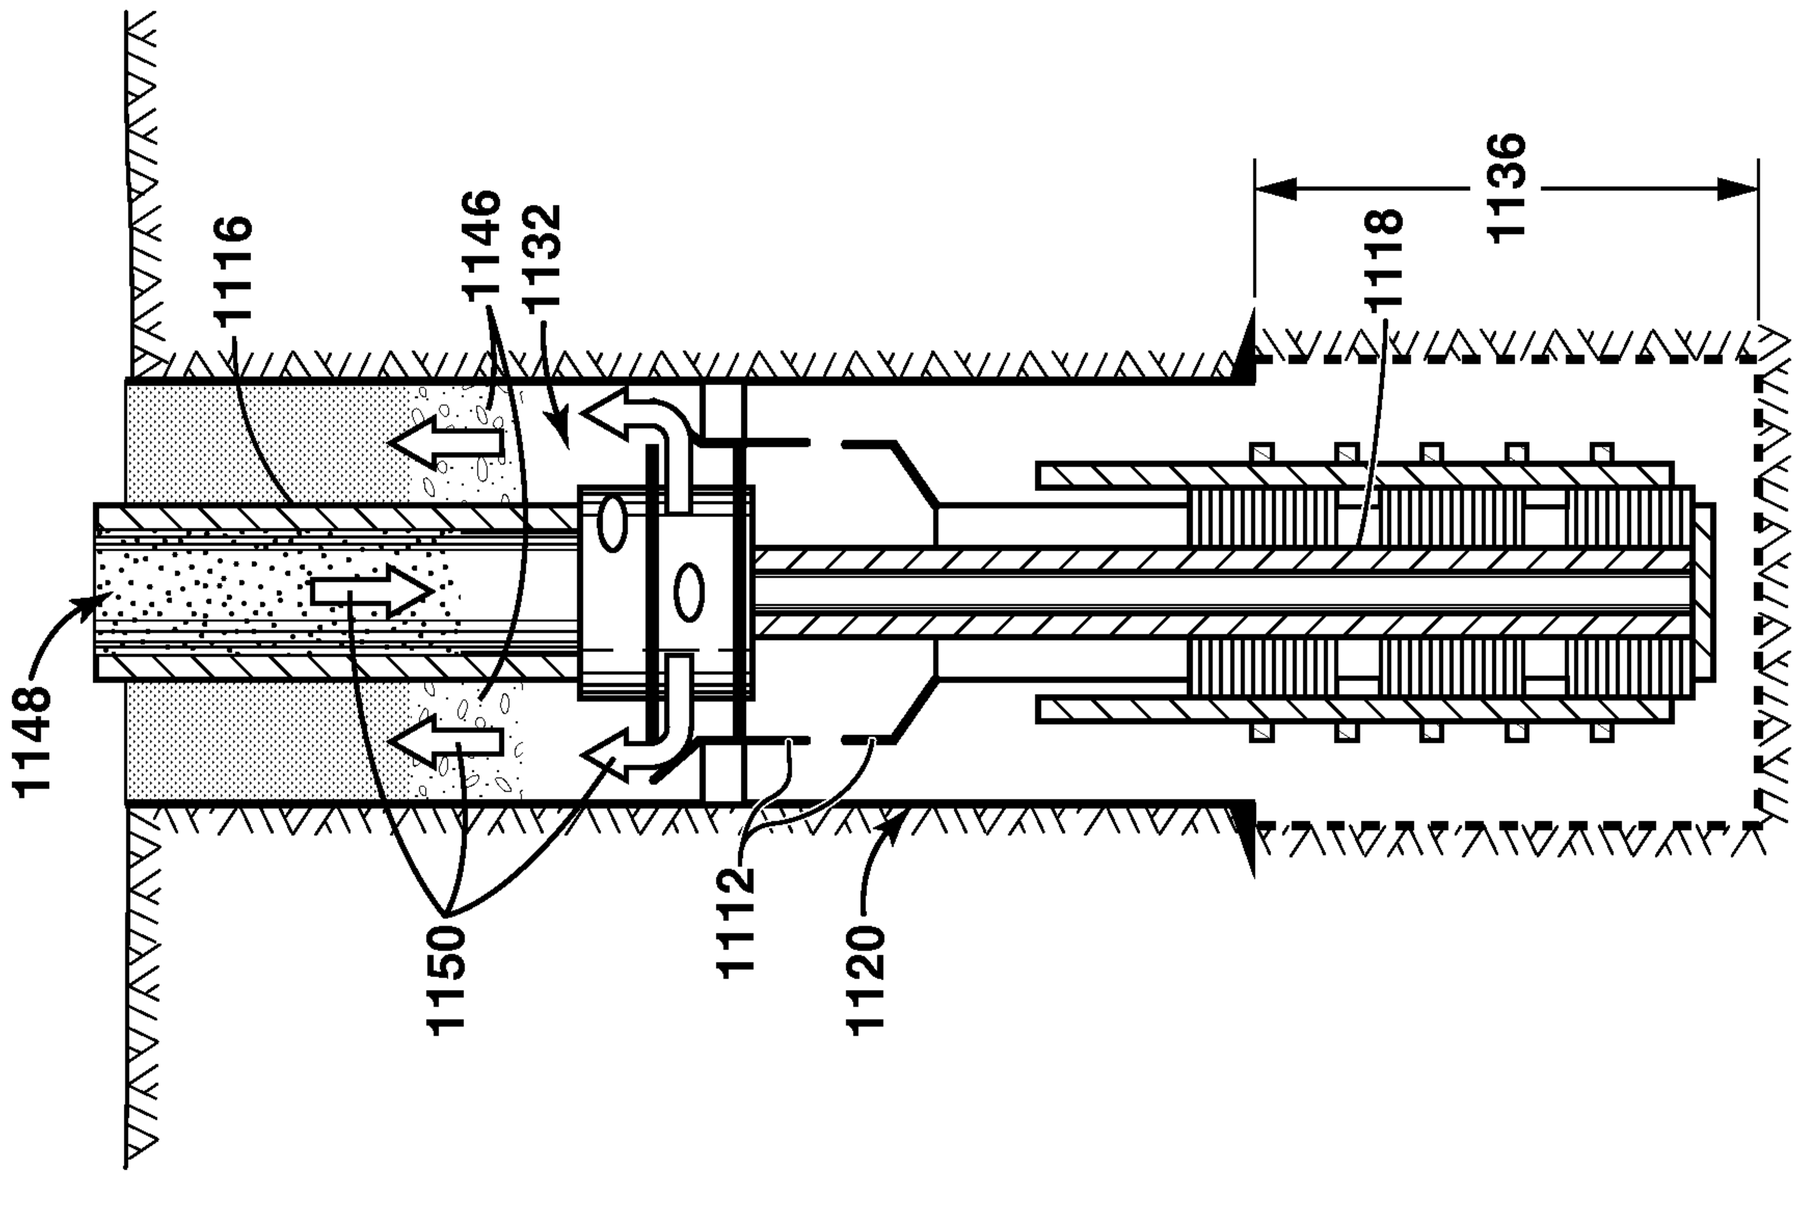

FIG. 11E

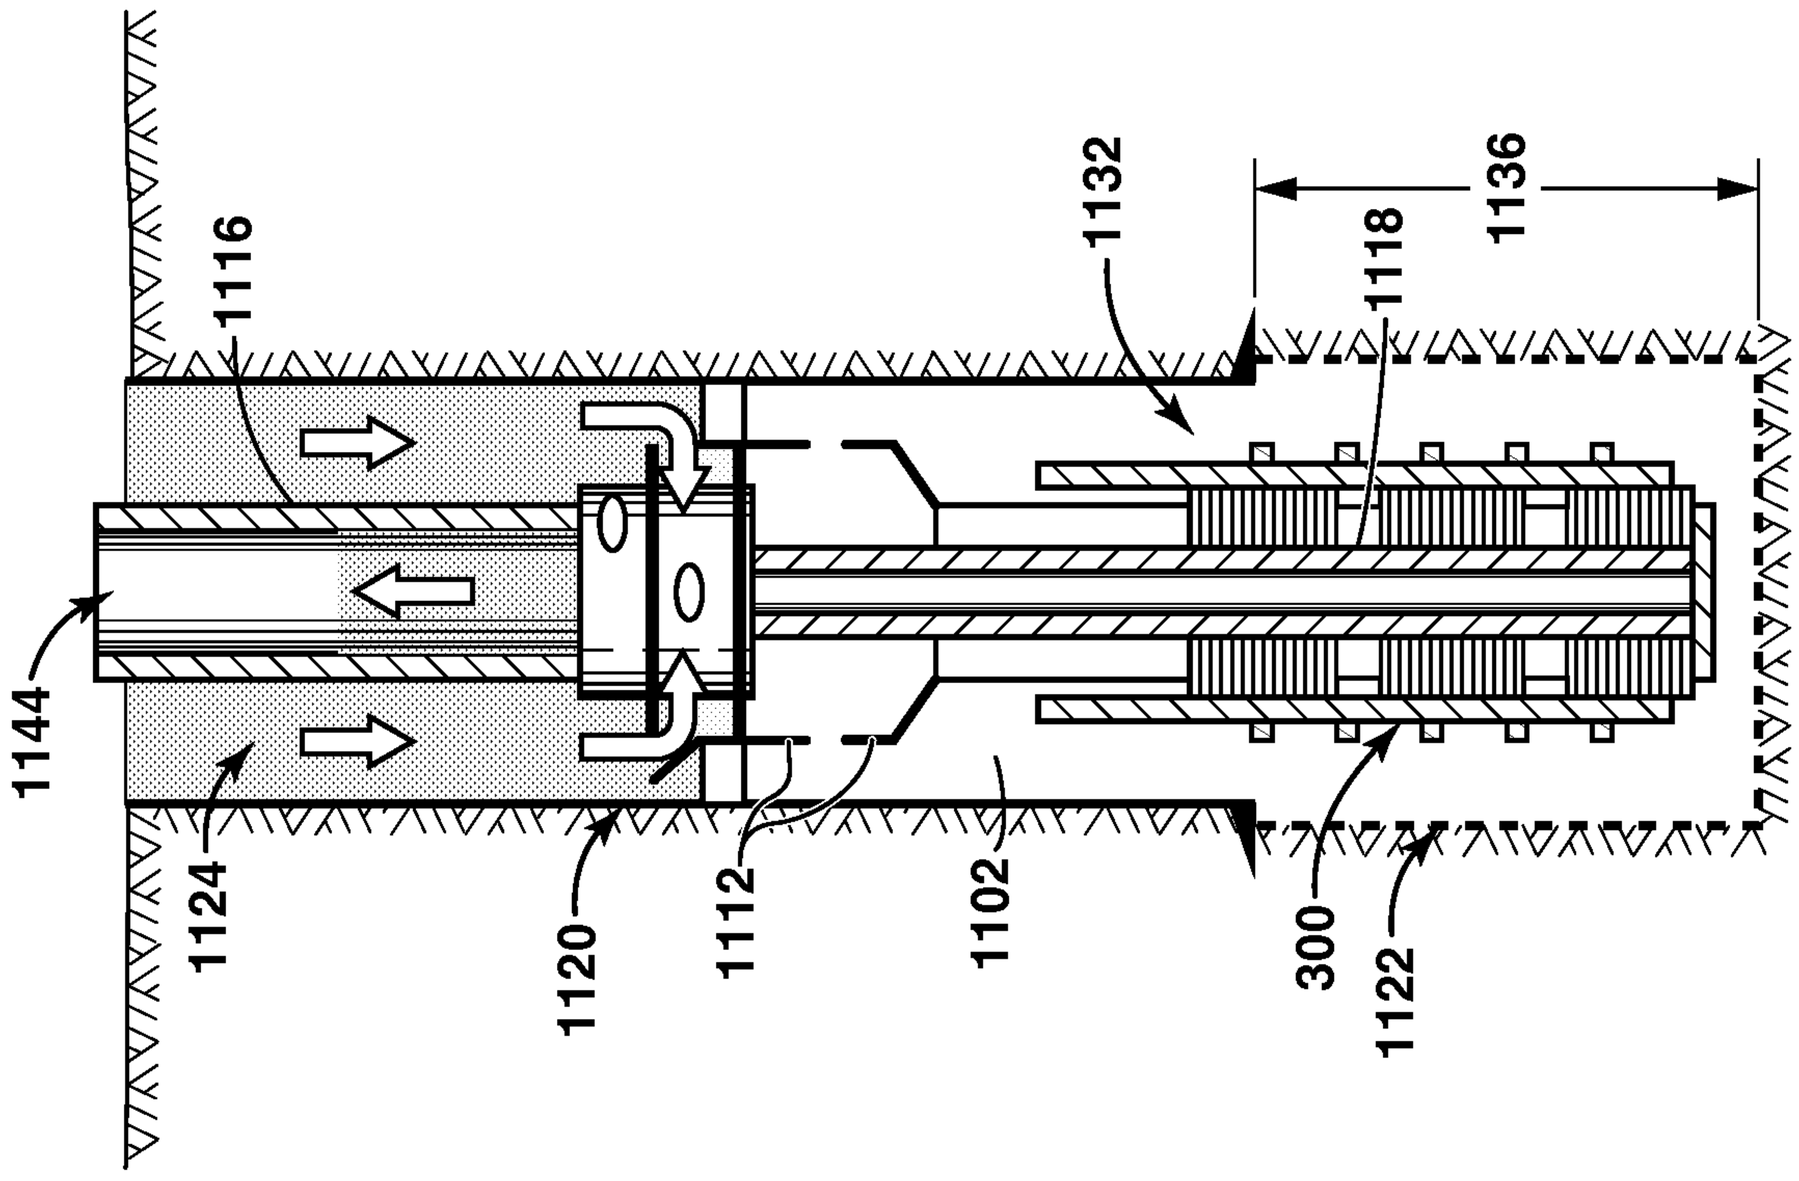

FIG. 11D

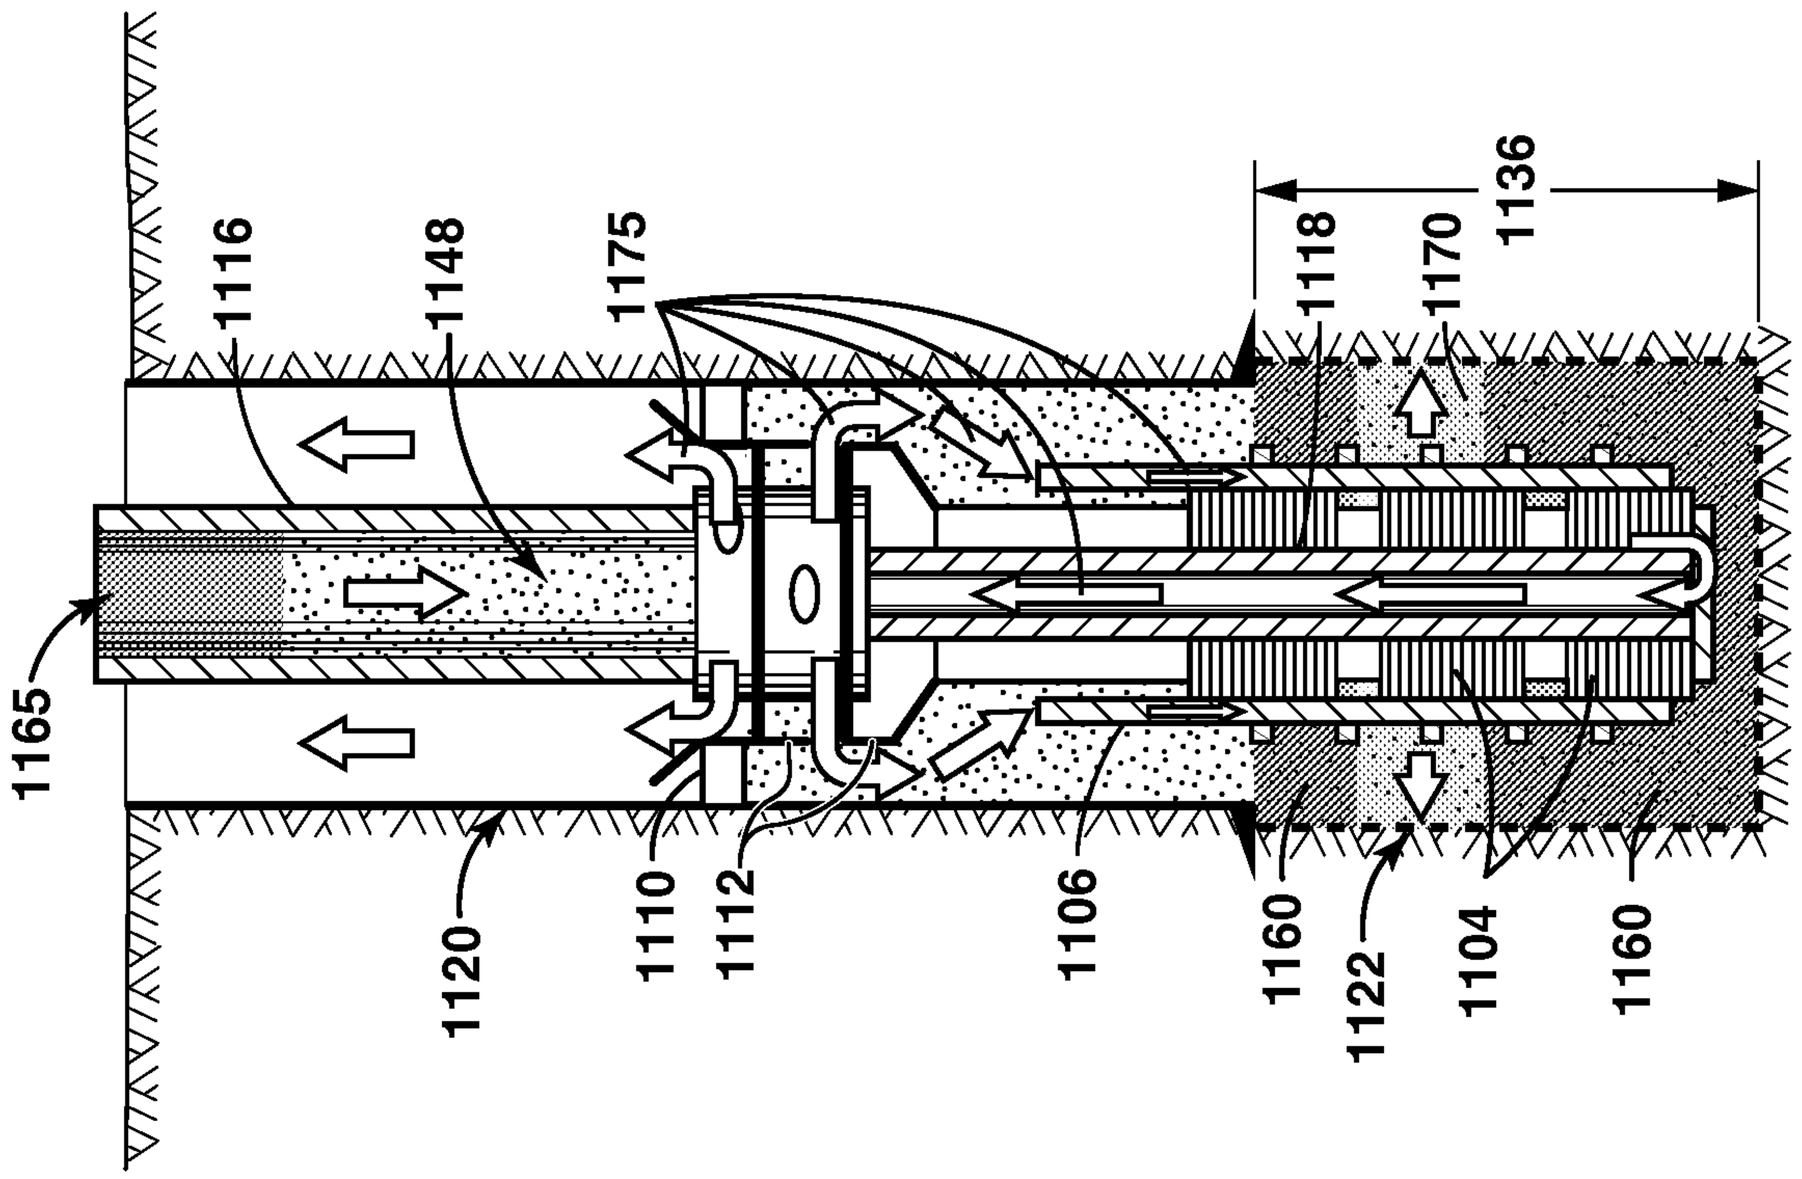

FIG. 11G

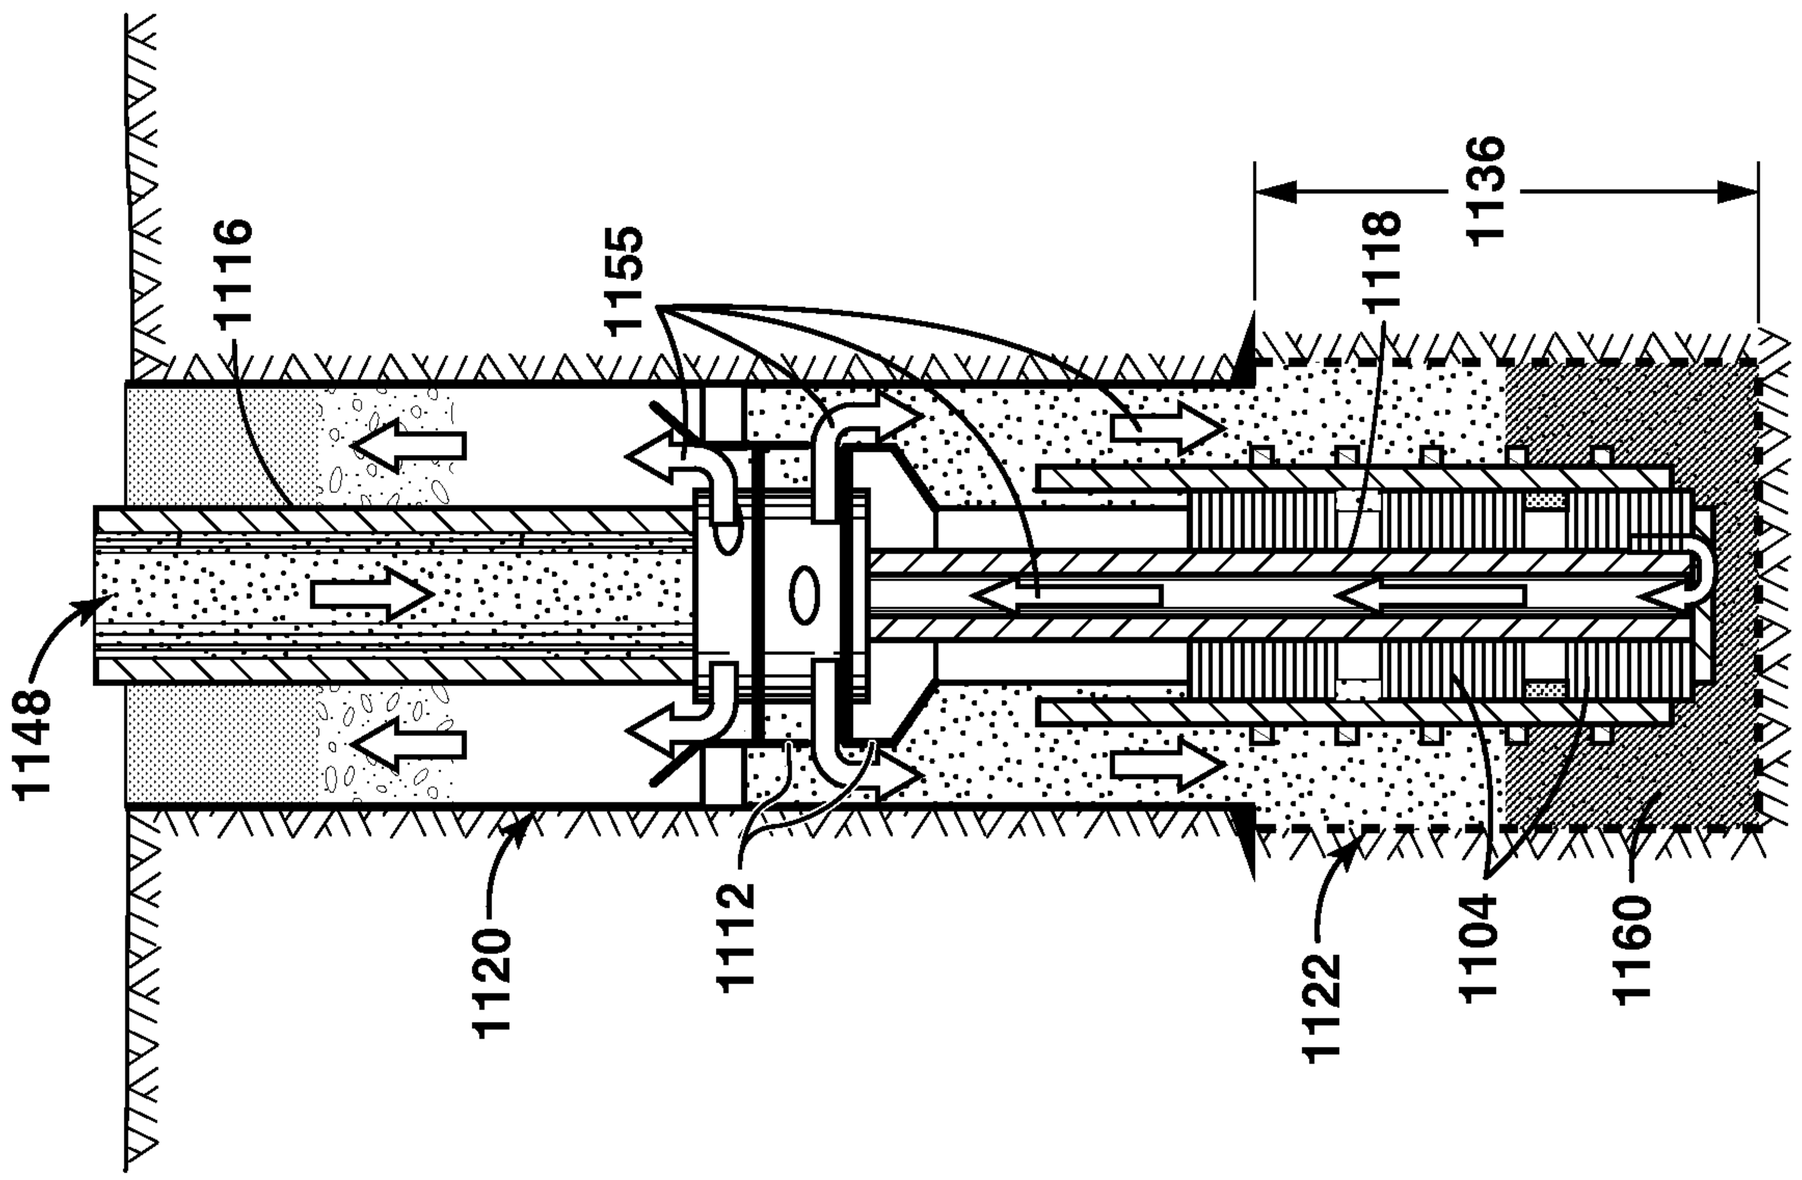

FIG. 11F

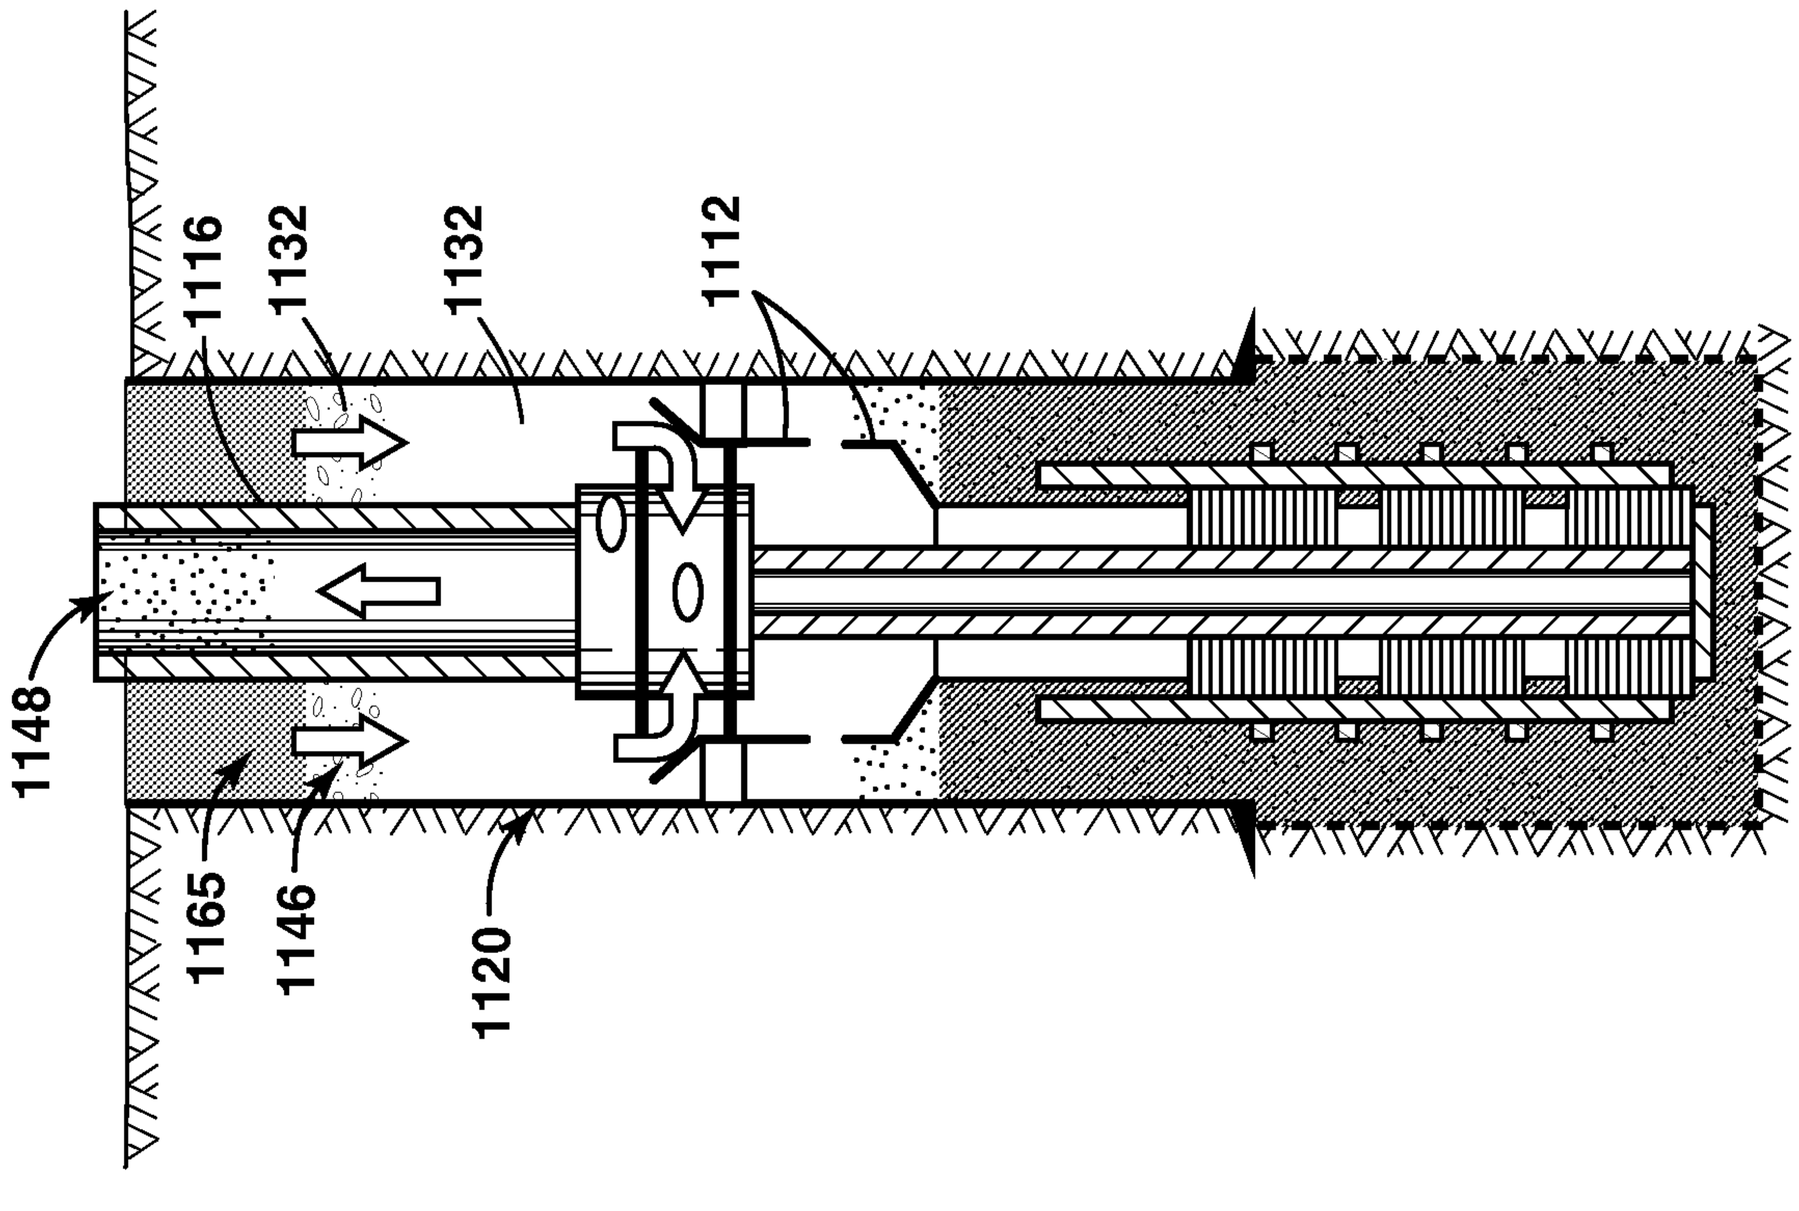

FIG. 11I

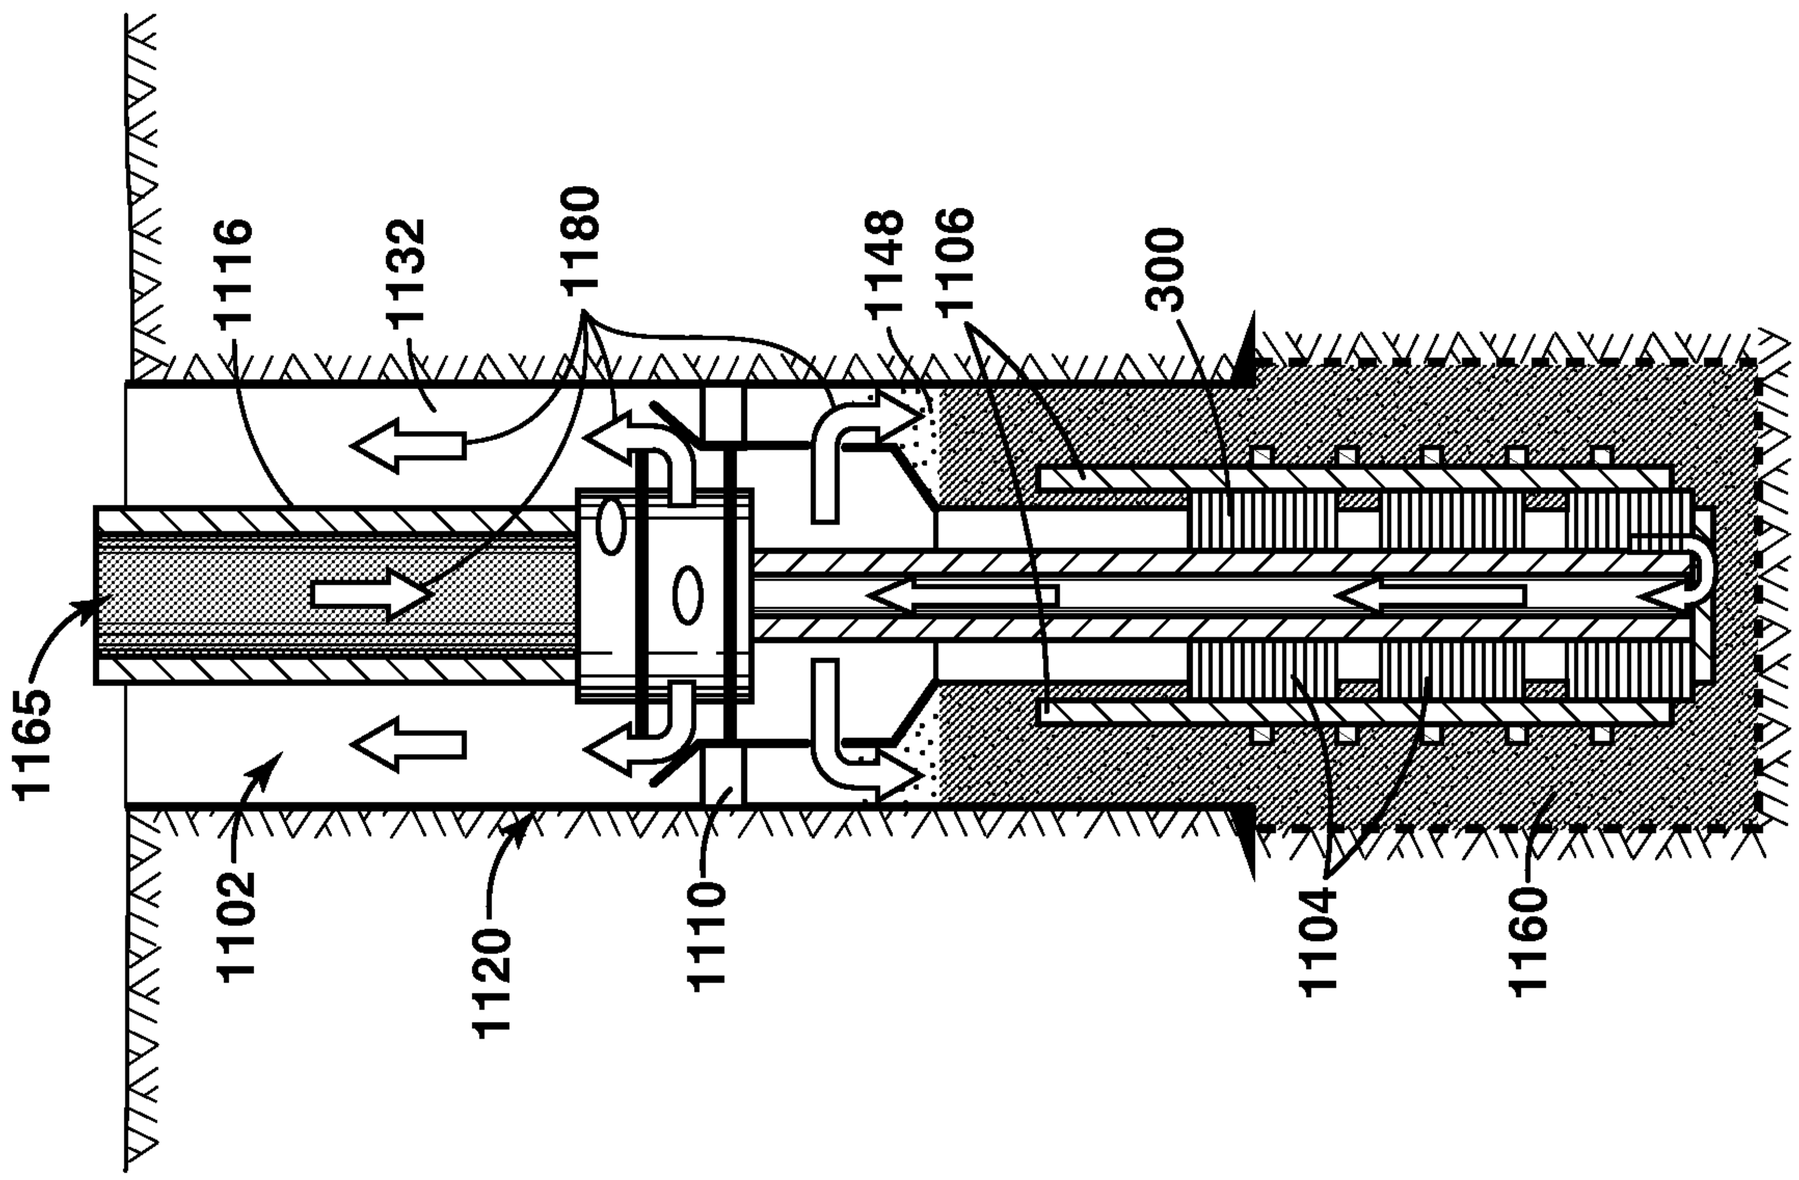

FIG. 11H

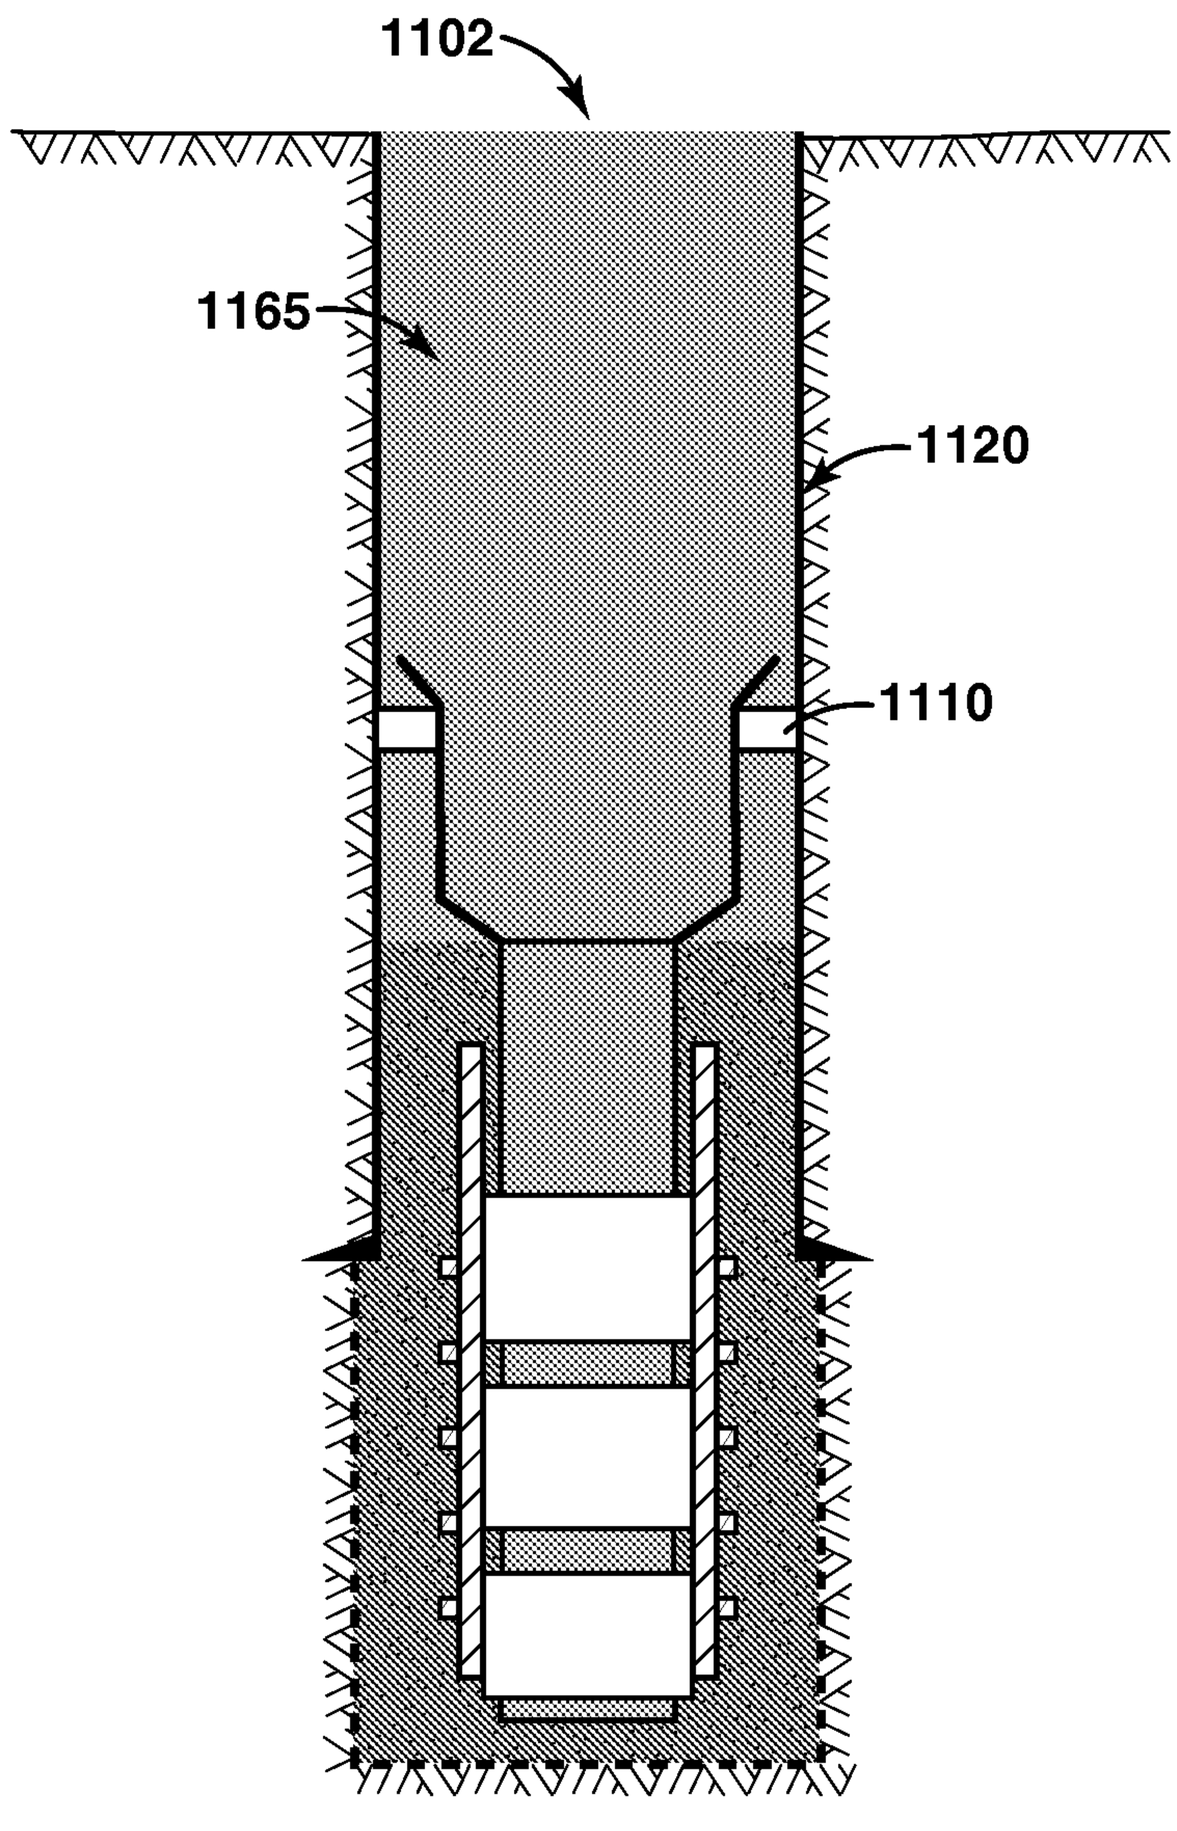

FIG. 11J

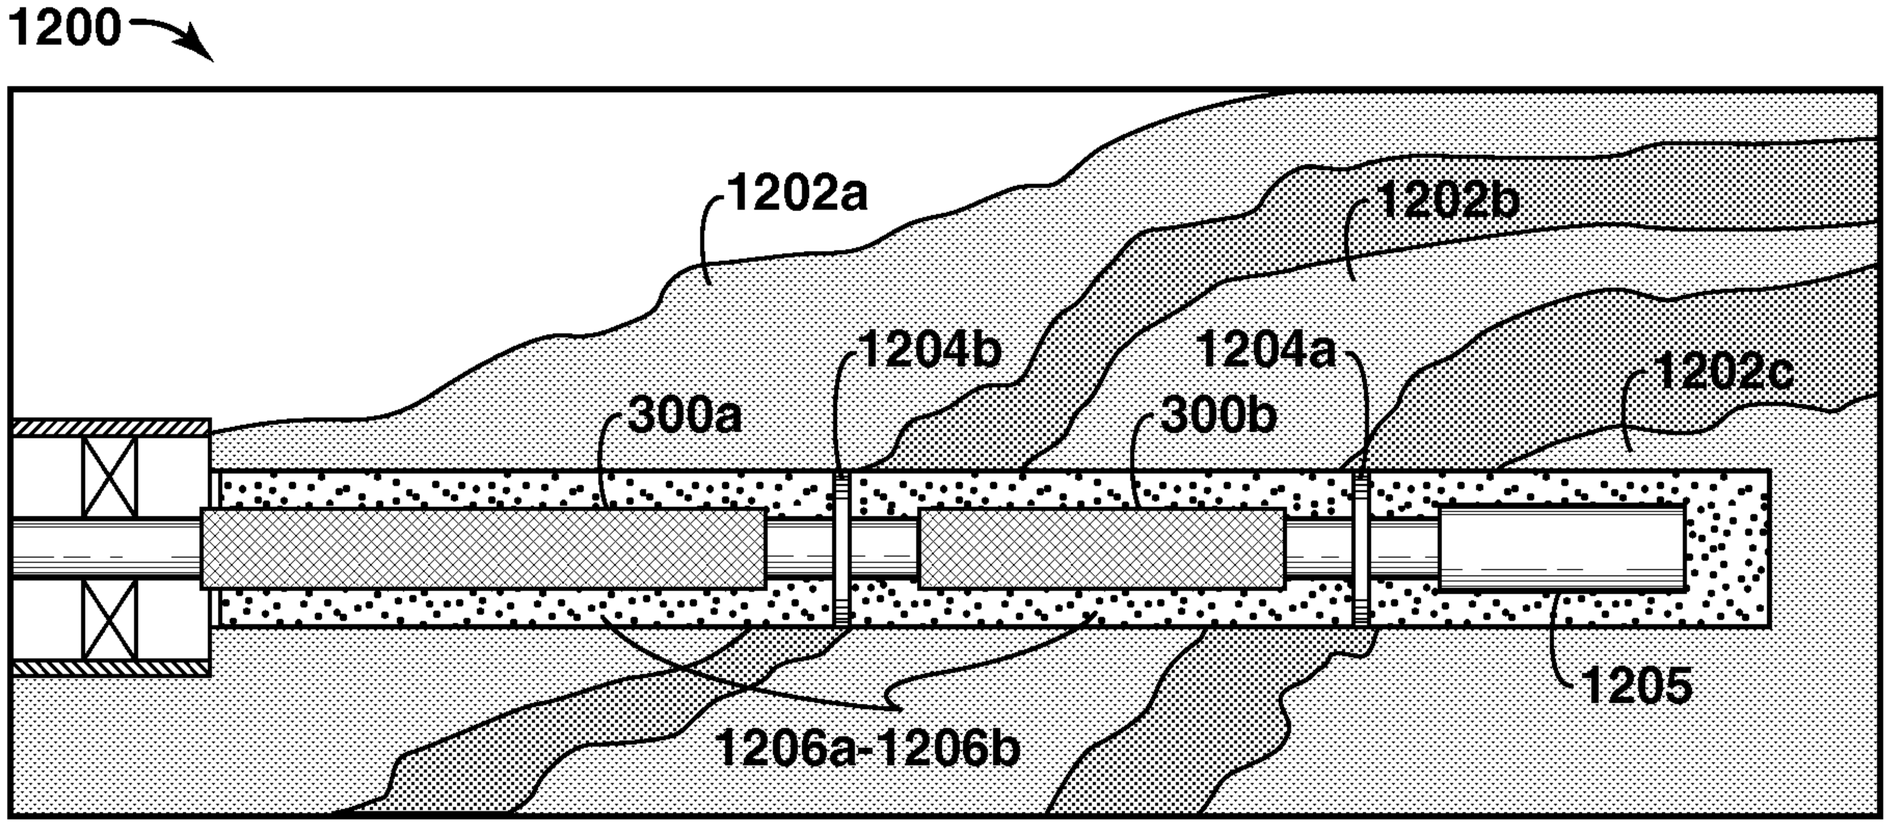

FIG. 12A

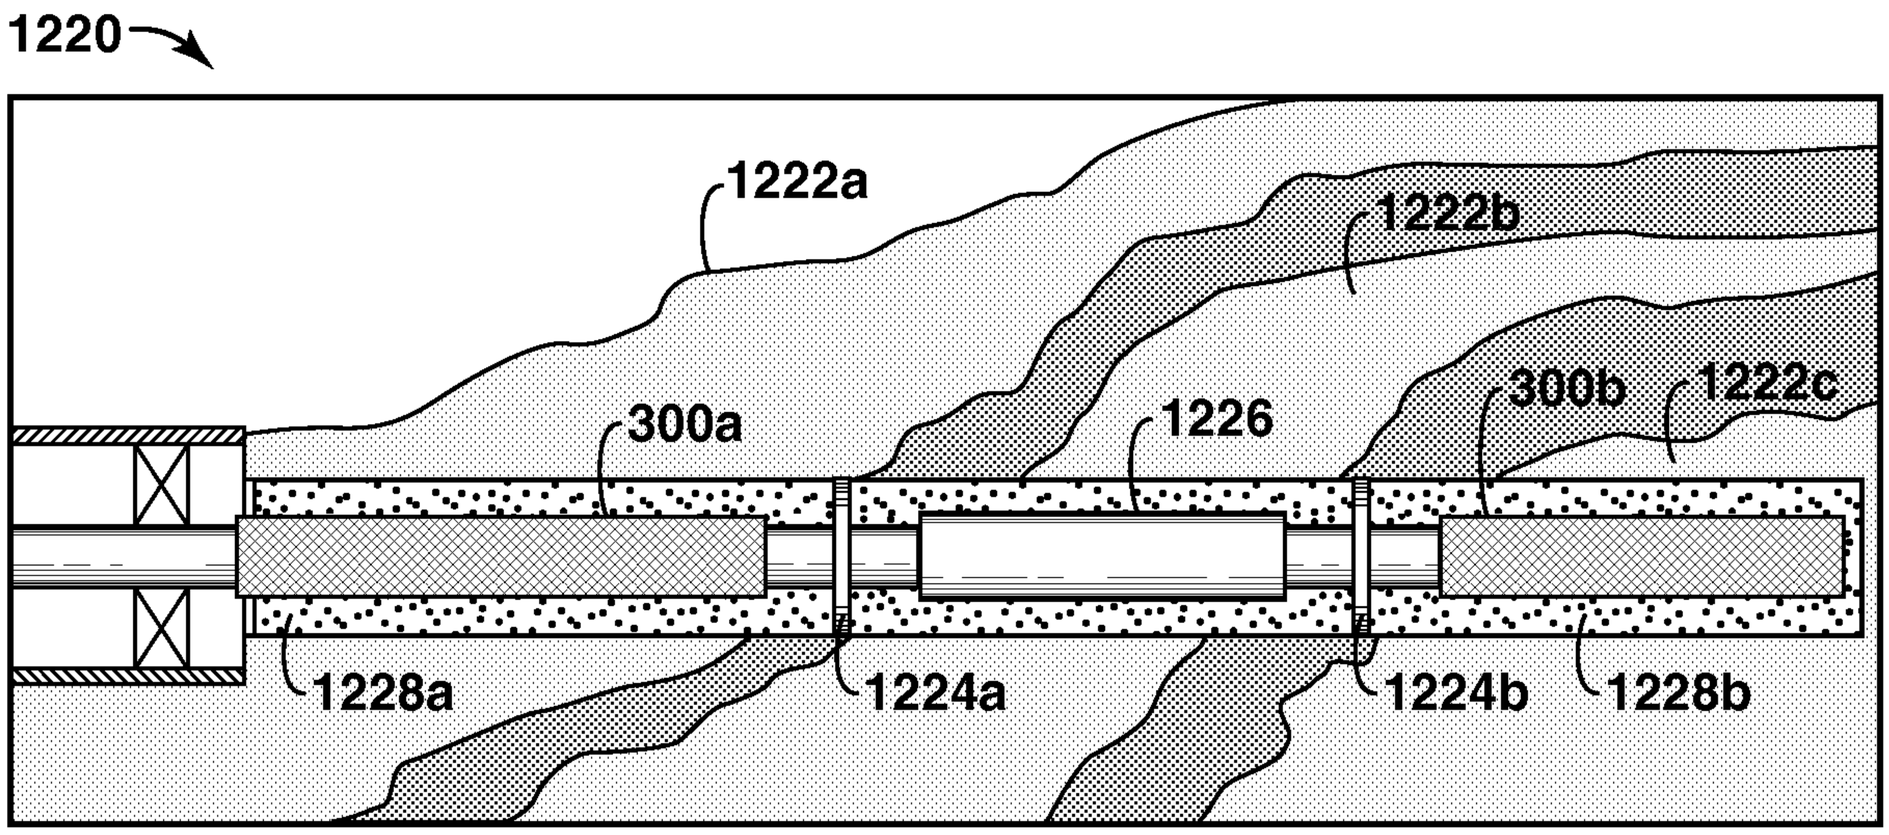

FIG. 12B

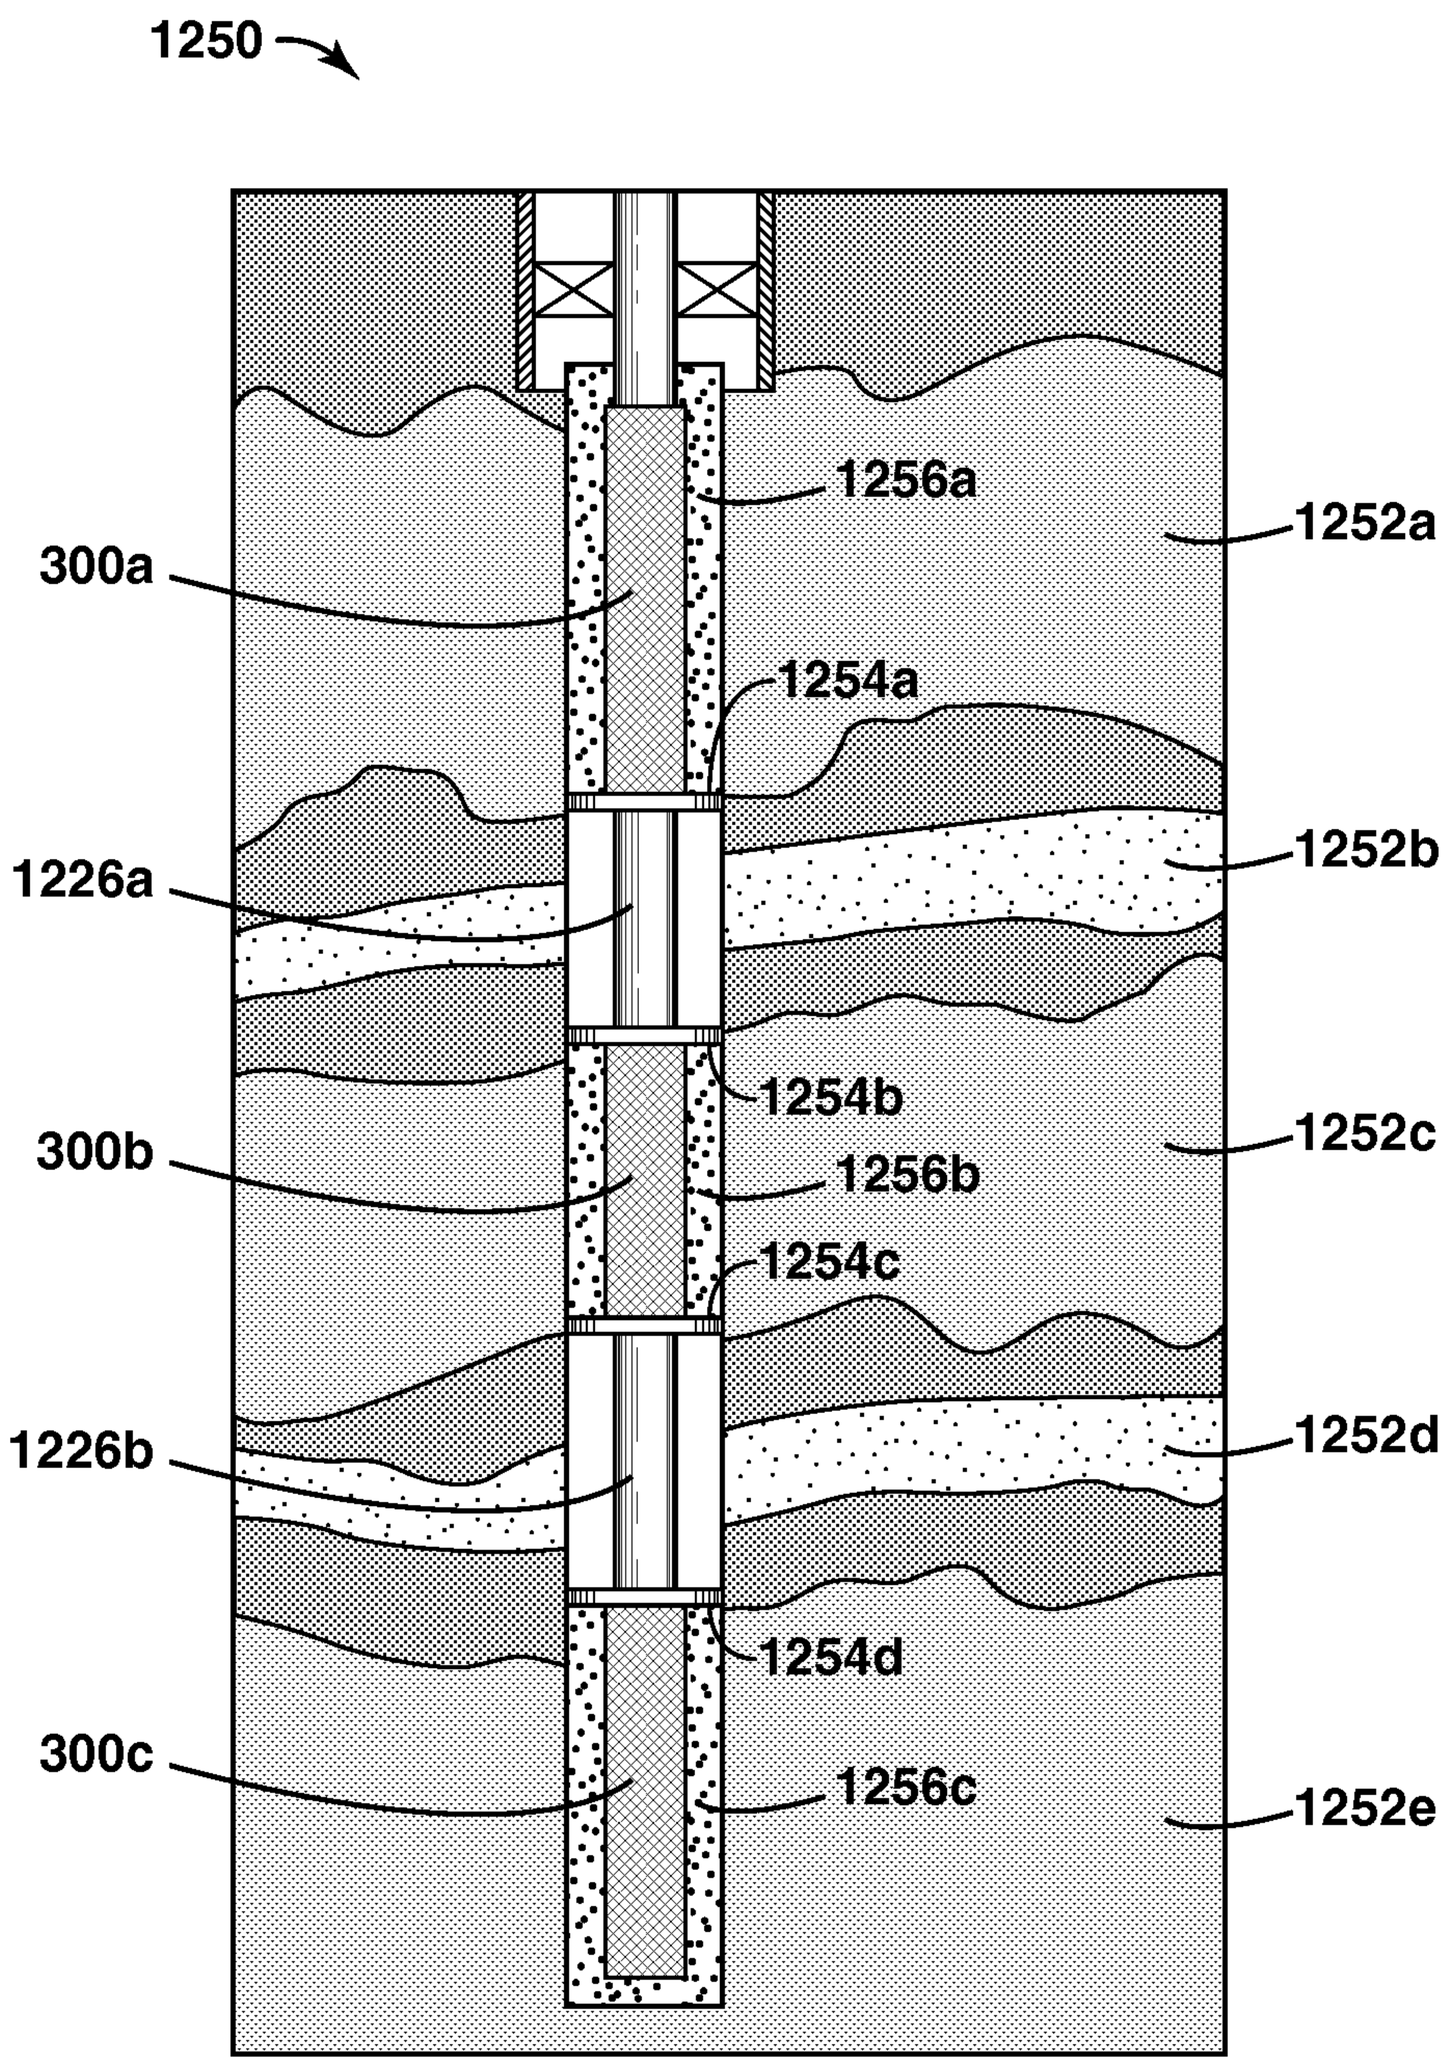
1250
1256a
1252a
300a
1254a
1226a
1252b
1254b
1252c
300b
1256b
1254c
1226b
1252d
1254d
300c
1256c
1252e

FIG. 12C

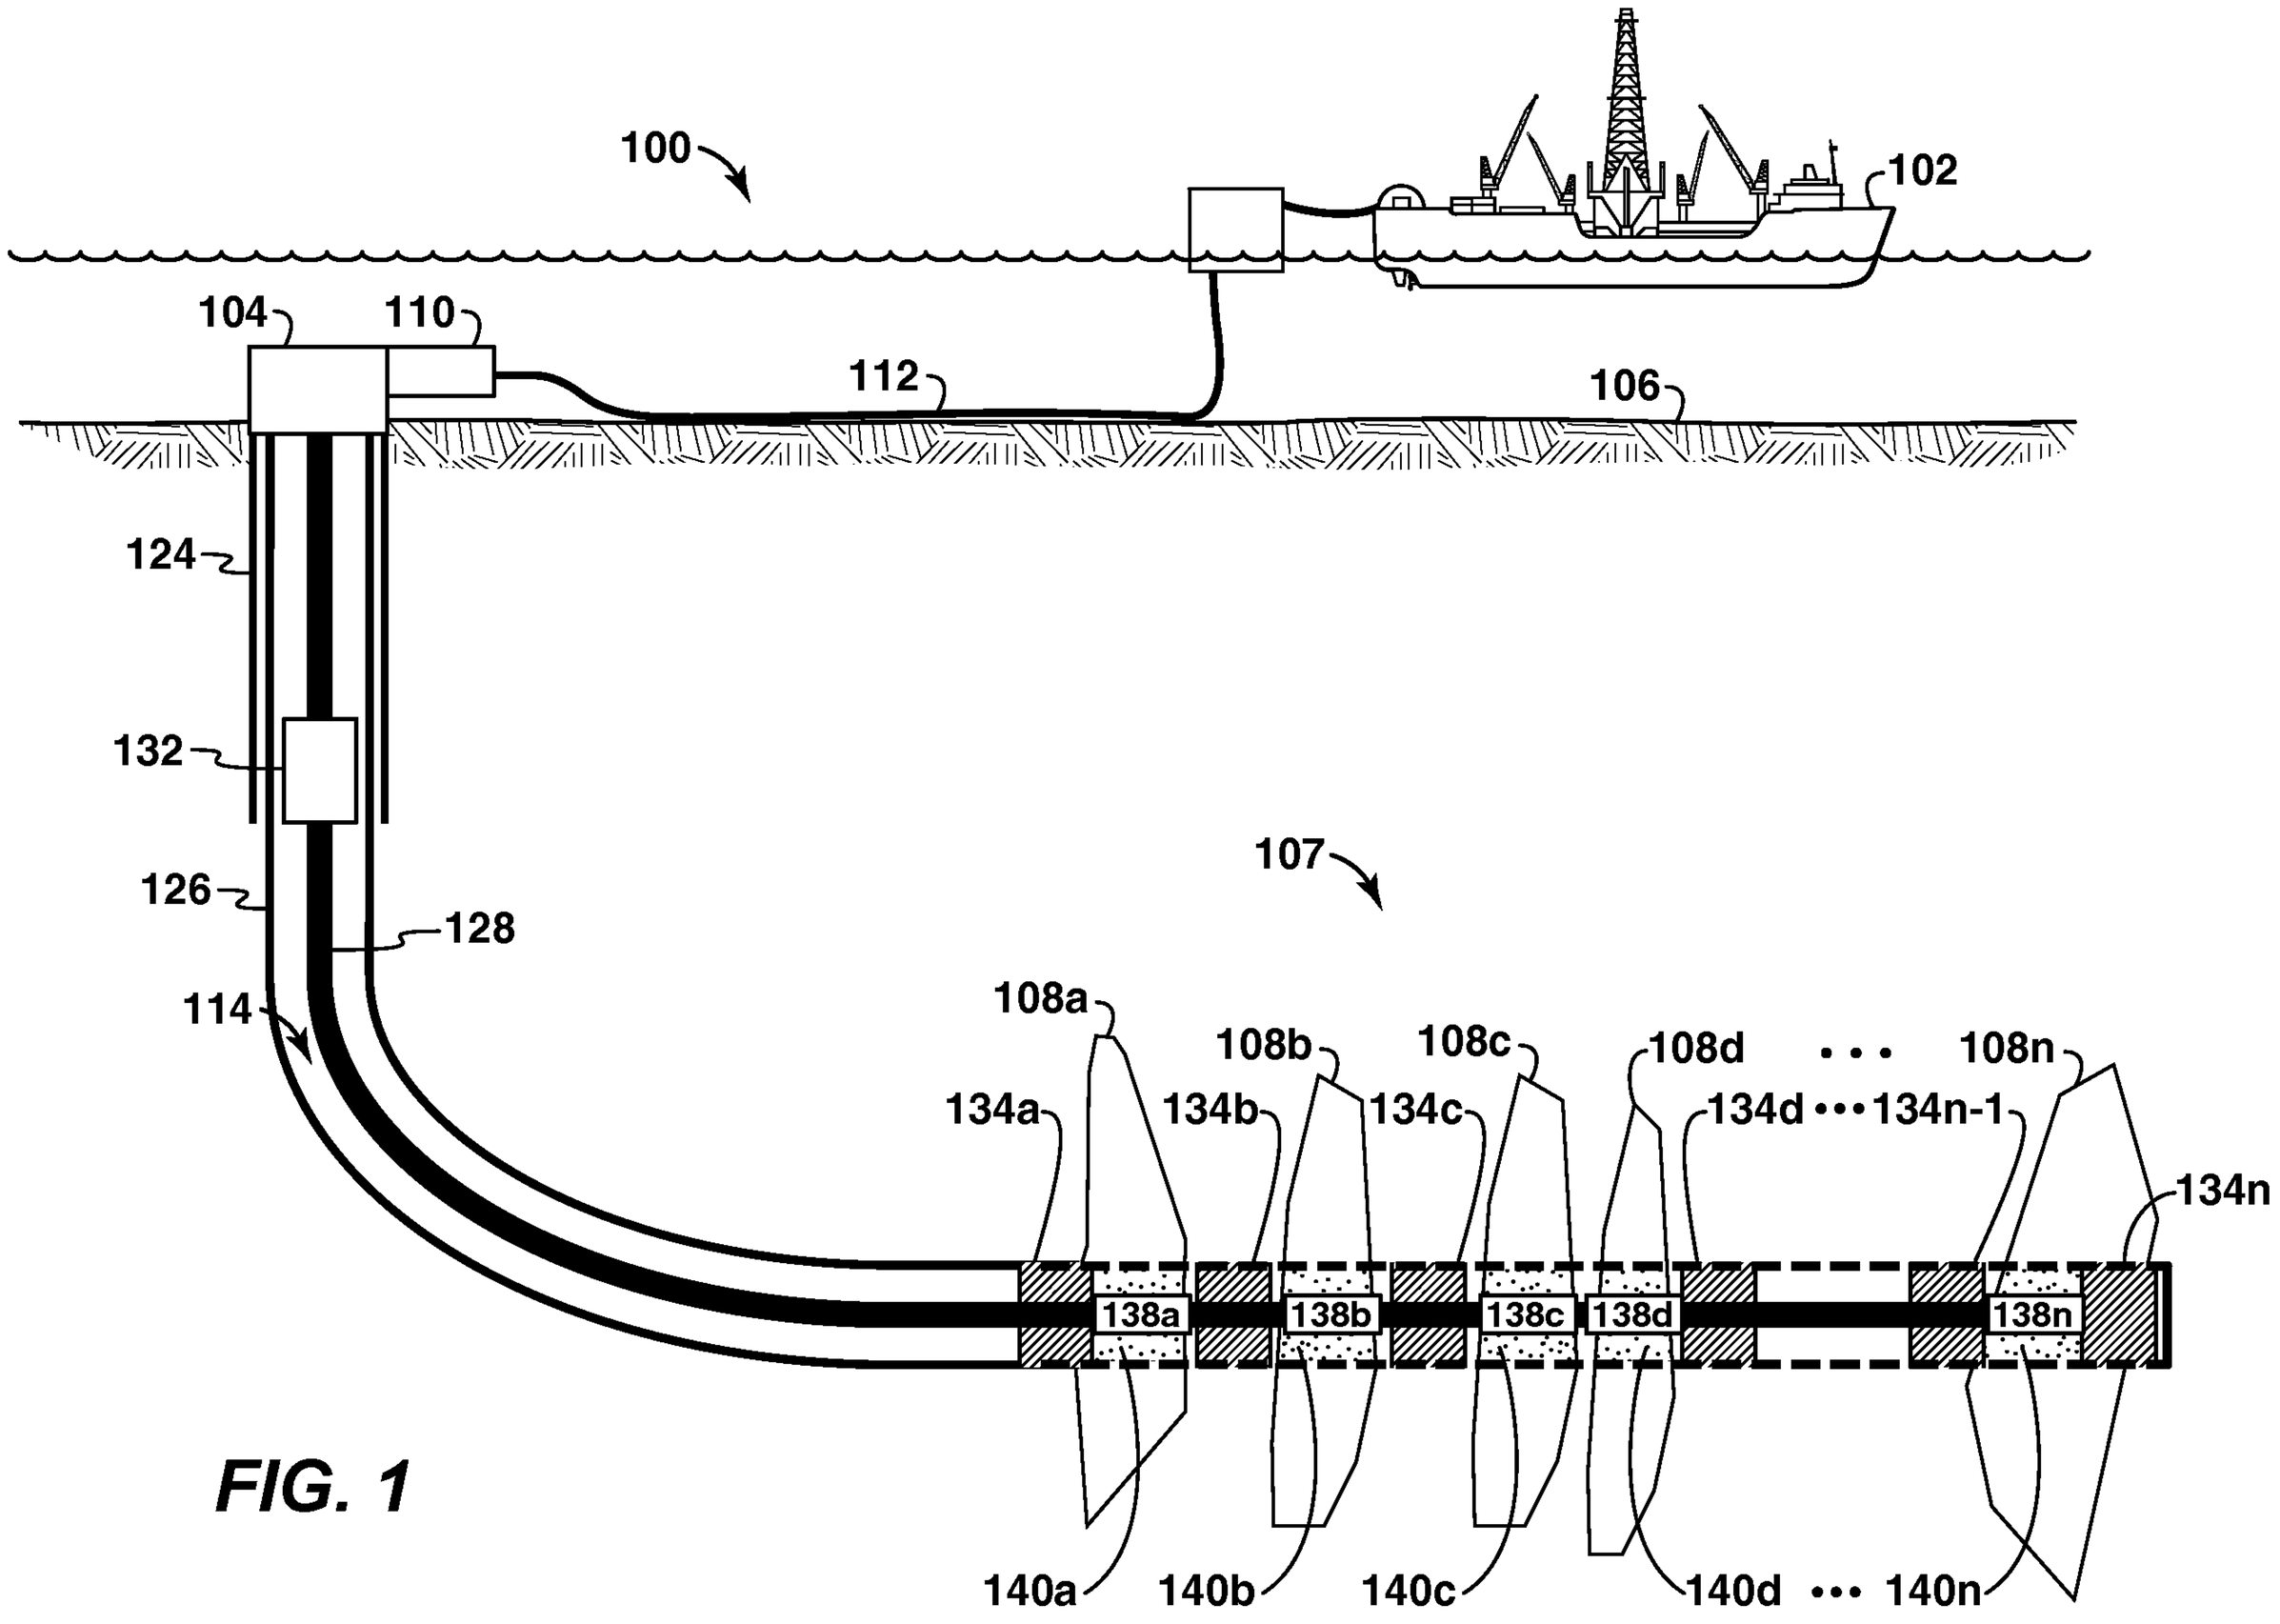
100
102
104
110
112
106
124
132
126
128
114
107
108a
108b
108c
108d
108n
134a
134b
134c
134d
134n-1
134n
138a
138b
138c
138d
138n
140a
140b
140c
140d
140n

FIG. 1