



(51) International Patent Classification:

G01R 31/28 (2006.01) G01R 31/317 (2006.01)
G01R 19/165 (2006.01)

(21) International Application Number:

PCT/US2016/062594

(22) International Filing Date:

17 November 2016 (17.11.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/998,261 23 December 2015 (23.12.2015)

US

(71) Applicant: INTEL IP CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, California 95054 (US).

(72) Inventors: WENSKE, Holger; Auenstr. 181, 85354 Freising (DE). HENZLER, Stephan; Lothringerstr. 4a, 81667 Munich (DE).

(74) Agents: PARKER, Wesley E. et al.; 1211 SW 5th Avenue, Suite 1500-1900, Portland, Oregon 97204 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: APPARATUSES, METHODS, AND SYSTEMS FOR DETECTION OF A CURRENT LEVEL

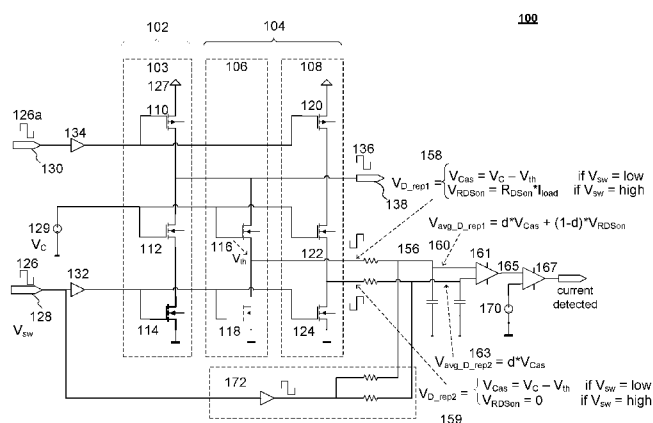


Figure 1

(57) Abstract: Embodiments include apparatuses, systems, and methods including a switching converter having an output stage including a power switch or first switching device to convert an input switching signal to an output switching signal and a sensor stage including a second switching device and a third switching device. In embodiments, the sensor stage may be coupled to receive the output switching signal from the first switching device and to substantially replicate a condition of the first switching device to generate a continuous signal rather than a switched signal. In embodiments, the continuous signal may allow detection of a current level. In some embodiments, the current level may indicate an overcurrent event. A digital post-processing circuit may be coupled to the switching device to count a number of overcurrent events according to various embodiments. Other embodiments may also be described and claimed.

APPARATUSES, METHODS, AND SYSTEMS FOR DETECTION OF A CURRENT LEVEL

Related Application

5 This application claims priority to U.S. Patent Application 14/998,261, entitled "APPARATUSES, METHODS, AND SYSTEMS FOR DETECTION OF A CURRENT LEVEL," filed December 23, 2015.

Field

10 Embodiments of the present invention relate generally to the technical field of electronic circuits, and more particularly to detection of overcurrent conditions in an electronic circuit.

Background

15 The background description provided herein is for the purpose of generally presenting the context of the disclosure. Work of the presently named inventors, to the extent it is described in this background section, as well as aspects of the description that may not otherwise qualify as prior art at the time of filing, are neither expressly nor impliedly admitted as prior art against the present disclosure. Unless otherwise indicated herein, the approaches described in this section are not prior art to the claims in the present disclosure and are not
20 admitted to be prior art by inclusion in this section.

 Detection of current conditions, e.g., overcurrent conditions for high-speed switching devices, can be problematic. Previous solutions have used fast comparators to assist in monitoring an instantaneous voltage of a power switch. Such comparators may be enabled during a conducting phase of the power switch
25 and may make a decision during the active time of the power switch. For high speed switching converters, however, a comparator may need to be very fast which can result in high current consumption. Timing also needs to be accurate. For switching frequencies, e.g., above 100 megahertz (MHz), typical solutions may not be feasible. Accordingly, converters of this speed often lack overcurrent
30 protection.

Brief Description of the Drawings

 Embodiments will be readily understood by the following detailed description in conjunction with the accompanying drawings. To facilitate this description, like reference numerals designate like structural elements.

Embodiments are illustrated by way of example and not by way of limitation in the figures of the accompanying drawings.

Figure 1 illustrates an example switching converter including a circuit for detecting an overcurrent event in accordance with various embodiments.

5 **Figure 2** illustrates an example post-processing circuit for counting the overcurrent event of the switching converter of **Figure 1**, in accordance with various embodiments.

Figure 3 illustrates an example system in accordance with various embodiments.

10

Detailed Description

In the following detailed description, reference is made to the accompanying drawings that form a part hereof wherein like numerals designate like parts throughout, and in which is shown by way of illustration embodiments that may be practiced. It is to be understood that other embodiments may be
15 utilized and structural or logical changes may be made without departing from the scope of the present disclosure. Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of embodiments is defined by the appended claims and their equivalents.

Various operations may be described as multiple discrete actions or
20 operations in turn, in a manner that is most helpful in understanding the claimed subject matter. However, the order of description should not be construed as to imply that these operations are necessarily order dependent. In particular, these operations may not be performed in the order of presentation. Operations described may be performed in a different order than the described embodiment.
25 Various additional operations may be performed and/or described operations may be omitted in additional embodiments.

For the purposes of the present disclosure, the phrases “A and/or B” and “A or B” mean (A), (B), or (A and B). For the purposes of the present disclosure, the phrase “A, B, and/or C” means (A), (B), (C), (A and B), (A and C), (B and C), or
30 (A, B, and C).

The description may use the phrases “in an embodiment,” or “in embodiments,” which may each refer to one or more of the same or different embodiments. Furthermore, the terms “comprising,” “including,” “having,” and the

like, as used with respect to embodiments of the present disclosure, are synonymous.

As used herein, the term “circuitry” may refer to, be part of, or include an Application Specific Integrated Circuit (ASIC), an electronic circuit, a processor
5 (shared, dedicated, or group), and/or memory (shared, dedicated, or group) that execute one or more software or firmware programs, a combinational logic circuit, and/or other suitable hardware components that provide the described functionality. As used herein, “computer-implemented method” may refer to any method executed by one or more processors, a computer system having one or
10 more processors, a mobile device such as a smartphone (which may include one or more processors), a tablet, a laptop computer, a set-top box, a gaming console, and so forth.

Embodiments described herein include a circuit to generate a continuous signal from a switched signal. In some embodiments, the circuit may be included
15 in a switching converter such as a direct current-to-direct current (DCDC) converter to detect a current level and in some cases, an overcurrent event, associated with an output switching signal. In some embodiments, the switching converter may switch at a frequency greater than 100 megahertz (MHz). In various other embodiments, switching converter 100 may switch at a frequency,
20 such as for example, smaller than 20 MHz. An output stage of the circuit includes a power switching device or first switching device to convert an input switching signal to an output switching signal and a sensor stage including a second switching device and a third switching device. The sensor stage may be coupled to the output stage to receive the output switching signal from the first switching
25 device and to substantially replicate the first switching device or a condition of the first switching device to provide a continuous signal. The continuous signal is representative of an amplitude of the output switching signal to allow detection of an overcurrent event.

In embodiments, the continuous signal may not be pulsed with a switching
30 frequency of the power switching device. Accordingly, the continuous signal may be provided continuously and not only during an on-phase of the power switching device. In order to determine if an overcurrent event has occurred, a comparator may receive the continuous signal from a subtractor to compare the continuous signal to a reference voltage. The comparator may then provide its results to a

processing circuit that may count a number of overcurrent events in order to flag an overcurrent condition. The processing circuit may also count a number of measurement cycles that may occur without occurrence of overcurrent events.

Figure 1 illustrates a switching converter 100 including a circuit for
5 detecting an overcurrent event in accordance with various embodiments. In
embodiments, switching converter 100 may include an output stage circuit 102
("output stage 102") and a sensor stage circuit ("sensor stage 104") for detecting
an overcurrent event produced by output stage 102. In embodiments, output
stage 102 and sensor stage 104 may include a combination of switching devices
10 that may include transistors, such as for example, p-channel metal-oxide-
semiconductor field-effect transistors (p-channel MOSFET or PMOS switch) and
n-type metal-oxide-semiconductor field-effect transistors (n-channel MOSFET or
NMOS switch) in accordance with various embodiments. Accordingly, as
illustrated in the embodiment, output stage 102 may include, for example, PMOS
15 power switch 110, NMOS power cascode switch 112, and NMOS power switch
114, which collectively may be referred to as power switching device 103.
Cascode voltage supply V_c (129) may supply a voltage to NMOS power cascode
switch 112.

In embodiments, output stage 102 may convert an input switching signal
20 126 to an output switching signal 136 to be provided at output terminal 138. Note
that in embodiments, input switching signal 126 may be input at terminal 128 and
may include an NMOS switching signal. In embodiments, PMOS switching signal
126a may be logically derived from input switching signal 126. In embodiments,
an NMOS driver 132 may be coupled to input terminal 128 to receive and amplify
25 input switching signal 126. In the embodiment, PMOS driver 134 may be coupled
to input terminal 130 to amplify PMOS switching signal 126a. In embodiments, a
slopes of PMOS switching signal 126a may be time shifted so that an active
phase of input switching signal 126 and PMOS switching signal 126a may not
overlap in order avoid a direct current flowing from a supply voltage 127 via
30 PMOS power switch 110, NMOS power cascode switch 112, and NMOS power
switch 114 to ground during a transition.

In the embodiment shown, a pair of replica switching devices may include a
first replica switching device 106 and a second replica switching device 108. In
embodiments, the pair of replica switching devices (e.g., first replica switching

device 106 and second replica switching device 108) may be coupled to output stage 102 to receive output switching signal 136 and to substantially replicate power switching device 103 to provide a continuous signal 165 (rather than a signal that is pulsed with the switching frequency of the power switching device) that may be a smooth signal that may be representative of an amplitude of output switching signal 136. First replica switching device 106 may include a first NMOS replica cascode switch 116 and a first NMOS replica switch 118 which, in the embodiment, may be replica switches of respective NMOS power cascode switch 112 and NMOS power switch 114 of the power switching device 103. In the embodiment, second replica switching device 108 may include a PMOS replica switch 120, a second NMOS replica cascode switch 122, and a second NMOS replica switch 124. In embodiments, PMOS replica switch 120 may be a replica switch of PMOS power switch 110, while second NMOS replica cascode switch 122, and second NMOS replica cascode switch 124 may also be replica switches of respective NMOS power cascode switch 112 and NMOS power switch 114.

Accordingly, in embodiments, replica switches of first replica switching device 106 and of second replica switching device 108 may be coupled in parallel with corresponding switches of power switching device 103. Note that in embodiments, the replica switches of first replica switching device 106 and of second replica switching device 108 may be significantly smaller than corresponding switches of power switching device 103. In embodiments, first replica switching device 106 and second replica switching device 108 both have a characteristic parameter which may be scaled down by a same factor as compared to a corresponding characteristic parameter of power switching device 103.

In embodiments, first replica switching device 106 may receive a portion of a current load associated with input switching signal 126 that is to be converted to output switching signal 136 while second replica switching device 108 may not receive a portion of the current load. Thus, in embodiments, second replica switching device 108 may be unloaded. In embodiments, first replica switching device 106 may receive the portion of the current load depending upon a size ratio of first replica switching device 106 to power switching device 103. As shown in **Figure 1** at 158, in embodiments, an output signal or drain voltage V_{D_rep1} of first replica switching device 106 may be given by a cascode source voltage V_{cas} while

a switching voltage V_{sw} is low. In embodiments, the drain voltage V_{D_rep1} may be given by a voltage drop of first replica switching device 106, V_{RDSon} , while a switching voltage V_{sw} is high. Thus:

$$(1) \quad V_{D\_rep1} = \begin{cases} V_{Cas} = V_C - V_{th} & \text{if } V_{sw} = \text{low} \\ V_{RDSon} = R_{DSon} * I_{load} & \text{if } V_{sw} = \text{high} \end{cases}$$

- 5 Note that in embodiments, V_{th} may be a threshold voltage of first NMOS replica cascode switch 116 and as shown in **Figure 1**, cascode voltage supply 129 may supply V_C . Current load may be represented by I_{load} , while a resistance of first replica switching device 106 may be represented by R_{DSon} . Accordingly, in
10 not take a portion of the current load, i.e., $I_{load} = 0$, drain voltage V_{D_rep2} of second replica switching device 108 of may be given by:

$$(2) \quad V_{D\_rep2} = \begin{cases} V_{Cas} = V_C - V_{th} & \text{if } V_{sw} = \text{low} \\ V_{RDSon} = 0 & \text{if } V_{sw} = \text{high} \end{cases}$$

- In embodiments, as shown in **Figure 1**, output signals V_{D_rep1} and V_{D_rep2} may be provided to a filter 156. Accordingly, after filtering, average output
15 voltages or average drain voltages of first and second replica switching devices 106 and 108 may be generated. In embodiments, average drain voltages $V_{avg\_D\_rep1}$ and $V_{avg\_D\_rep2}$ may be determined where a high voltage may be given by cascode source voltage V_{Cas} for each of first replica switching device 106 and second replica switching device 108. In embodiments, a low voltage may be
20 given by V_{RDSon} for first replica switching device 106 or ground potential for second replica switching device 108. Thus, in embodiments, where $0 \leq d \leq 1$ and d may be the duty cycle of the switching signal, an average drain voltage $V_{avg\_D\_rep1}$ of first replica switching device 106 may be given by:

$$25 \quad (3) \quad V_{avg\_D\_rep1} = d * V_{Cas} + (1 - d) * V_{RDSon}$$

In embodiments, average drain voltage $V_{avg\_D\_rep2}$ of second replica switching device 108 may be given by:

$$(4) \quad V_{\text{avg\_D\_rep2}} = d \cdot V_{\text{Cas}}$$

Note that in embodiments, d may be a high time of, e.g. output switching signal 136, divided by a period time of switching frequency. Note that the high time may be substantially equal to an on-time of PMOS power switch 110. In the embodiment, NMOS power switch 114 may be on while PMOS power switch 110 is off, i.e., in embodiments, a duty cycle of NMOS power switch 114 may be $(1 - d)$. In embodiments, average drain voltages $V_{\text{avg\_D\_rep1}}$ and $V_{\text{avg\_D\_rep2}}$ may be shown at respective locations 160 and 163 of **Figure 1**.

Next, in embodiments, a subtractor, such as for example, an operational amplifier 161, may be coupled to output terminals of first and second replica switching devices 106 and 108 to output a difference between $V_{\text{avg\_D\_rep1}}$ and $V_{\text{avg\_D\_rep2}}$. Accordingly, as shown below, equation (4) may be subtracted from equation (3) so that the difference, $V_{\text{avg\_subtr}}$, may remain:

$$(5) \quad V_{\text{avg\_subtr}} = V_{\text{avg\_D\_rep1}} - V_{\text{avg\_D\_rep2}} = (1 - d) \cdot V_{\text{RDSon}}$$

Accordingly, in embodiments, after filtering and subtraction, unimportant influences such as ground bounce, cascode voltage, and a variation of input switching signal 126, may be substantially eliminated. In embodiments, the difference $V_{\text{avg\_subtr}}$ may be continuous signal 165 that may be provided to a comparator 167 to be compared to a reference voltage 170 to detect a presence or absence of the overcurrent event.

Note that in embodiments, a common mode voltage of average drain voltages $V_{\text{avg\_D\_rep1}}$ and $V_{\text{avg\_D\_rep2}}$ may range from 0 to cascode source voltage V_{Cas} , depending on the duty cycle. Thus, in embodiments, the difference $V_{\text{avg\_subtr}}$ between $V_{\text{avg\_D\_rep1}}$ and $V_{\text{avg\_D\_rep2}}$ may be difficult for operational amplifier 161 to process. Accordingly, in embodiments, a common mode adaption circuit 172 may be coupled to output terminals of first and second replica switching devices 106 and 108 to add a common mode adaption voltage of two substantially identical signals with inverted duty cycles to drain voltages $V_{\text{D\_rep1}}$ and $V_{\text{D\_rep2}}$ to keep the common mode voltages in a substantially proper range. In embodiments, a high voltage of drain voltages $V_{\text{D\_rep1}}$ or $V_{\text{D\_rep2}}$, may be chosen so that a switching

amplitude may be nearly eliminated and only a needed signal remains. For example:

Without common mode adaptation (for example $I_{DS}=0 \Rightarrow V_{RDSon}=0$):

$$(6) \quad V_{avg\_cm\_subtr} = (V_{avg\_D\_rep1} + V_{avg\_D\_rep2})/2 = d \cdot V_{Cas}$$

With common mode adaption (where the high common mode adaption voltage, $V_{cm\_adapt\_high}$, may be chosen to be equal to V_{Cas}):

$$(7) \quad V_{avg\_cm\_adapt} = (1 - d) \cdot V_{Cas}$$

Thus, $V_{avg\_cm\_subtr}$, the difference between $V_{avg\_D\_rep1}$ and $V_{avg\_D\_rep2}$ is:

$$(8) \quad V_{avg\_cm\_subtr} = d \cdot V_{Cas} + (1 - d) \cdot V_{Cas} = V_{Cas}$$

15

Note that in embodiments, if resistors are used to add common mode adaption voltage, there may be a division factor to be considered, e.g. 0.5 for resistors of a same value.

Referring now to **Figure 2**, a post-processing circuit such as digital post-processing circuit 200 may be coupled to receive the determination from an output terminal of comparator 167 and to count the overcurrent event. In embodiments, digital post-processing circuit 200 may also count measurement intervals without overcurrent events or, in other words, overcurrent event-free cycles. In embodiments, each time a high current or overcurrent event is detected, a first counter, such as for example, up/down counter 204, may be decremented. In embodiments, once up/down counter 204 reaches zero, a tolerated or maximum number of overcurrent events may have been reached and digital post-processing circuit 200 may flag an overcurrent condition. In embodiments, the overcurrent condition may persist for a predefined time. There may be a wait time after flagging of an overcurrent event and output stage 102 may be deactivated to avoid damage in embodiments. This time may be determined by setting up/down counter 204 to a wait time. An existence of overcurrent event-free cycles 206, however, may trigger a reset of a second counter, down counter 202. Accordingly, in embodiments, down counter 202 may count a number of

overcurrent event-free cycles, as defined by an overcurrent event free cycles number 206. In embodiments, once a predefined number of overcurrent event-free cycles may be reached, up/down counter 204 may be reset to the number of tolerated overcurrent events.

5 **Figure 3** illustrates an example computer system that may be suitable for use to practice selected aspects of the present disclosure. As shown, computer 300 may include one or more processors or processor cores 302, and a system memory 304. For the purpose of this application, including the claims, the term “processor” refers to a physical processor, and the terms “processor” and
10 “processor cores” may be considered synonymous, unless the context clearly requires otherwise. Additionally, computer 300 may include switching device 301, mass storage devices 306 (such as diskette, hard drive, compact disc read only memory (CD-ROM) and so forth), input/output devices 308 (such as display, keyboard, cursor control, remote control, gaming controller, image capture device,
15 and so forth), and communication interfaces 310 (such as network interface cards, modems, infrared receivers, radio receivers (e.g., Bluetooth), and so forth). The elements may be coupled to each other via system bus 312, which may represent one or more buses. In the case of multiple buses, they may be bridged by one or more bus bridges (not shown).

20 In embodiments, switching device 301 may be coupled to system bus 312 or may be included within one or more of elements 302 – 310. In embodiments, switching device 301 may include switching converter 100 of **Figure 1** and may be coupled to a digital post-processing circuit, such as for example, digital post-processing circuit 200 of **Figure 2**. In embodiments, switching device 301 may
25 include an output stage including a power switching device to convert an input switching signal to an output switching signal and a sensor stage including a pair of replica switching devices. In embodiments, the sensor stage may be coupled to the output stage to receive the output switching signal from the power switching device and substantially replicate the power switching device to provide a
30 continuous signal that is representative of amplitude of the output switching signal.

 Note that in embodiments, communication interfaces 310 may include a one or more communications chips and may enable wired and/or wireless communications for the transfer of data to and from the computing device 300. In embodiments, communication interfaces 310 may include a transceiver

including a transmitter and receiver or a communications chip including the transceiver. In some embodiments, switching converter 100 and/or digital post-processing circuit 200 may be coupled to provide a current to a power amplifier that may drive a radiofrequency (RF) antenna. In embodiments, switching
5 converter 100 may be coupled to or included in an envelope tracking circuit or other circuit to track a varying level of current. The term "wireless" and its derivatives may be used to describe circuits, devices, systems, methods, techniques, communications channels, etc., that may communicate data through the use of modulated electromagnetic radiation through a non-solid medium. The
10 term does not imply that the associated devices do not contain any wires, although in some embodiments they might not.

The communication interfaces 310 may implement any of a number of wireless standards or protocols, including but not limited to IEEE 702.20, Long Term Evolution (LTE), LTE Advanced (LTE-A), General Packet Radio Service
15 (GPRS), Evolution Data Optimized (Ev-DO), Evolved High Speed Packet Access (HSPA+), Evolved High Speed Downlink Packet Access (HSDPA+), Evolved High Speed Uplink Packet Access (HSUPA+), Global System for Mobile Communications (GSM), Enhanced Data rates for GSM Evolution (EDGE), Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), Digital
20 Enhanced Cordless Telecommunications (DECT), Worldwide Interoperability for Microwave Access (WiMAX), Bluetooth, derivatives thereof, as well as any other wireless protocols that are designated as 3G, 4G, 5G, and beyond. The communication interfaces 310 may include a plurality of communication chips. For instance, a first communication chip may be dedicated to shorter range
25 wireless communications such as Wi-Fi and Bluetooth, and a second communication chip may be dedicated to longer range wireless communications such as GPS, EDGE, GPRS, CDMA, WiMAX, LTE, Ev-DO, and others.

The elements may be coupled to each other via system bus 312, which may represent one or more buses. In the case of multiple buses, they may be
30 bridged by one or more bus bridges (not shown). Each of these elements may perform its conventional functions known in the art. The number, capability and/or capacity of these elements 302 - 310 may vary, depending on whether computer 300 is used as a mobile device, a stationary device or a server. When use as mobile device, the capability and/or capacity of these elements 302 - 310

may vary, depending on whether the mobile device is a smartphone, a computing tablet, an ultrabook or a laptop. Otherwise, the constitutions of elements 302-310 are known, and accordingly will not be further described.

Some non-limiting Examples are provided below.

5 Example 1 is a switching converter including an output stage including a first switching device to convert an input switching signal to an output switching signal; and a sensor stage including a second switching device and a third switching device, the sensor stage coupled to the output stage to receive the output switching signal from the first switching device and substantially replicate a
10 condition of the first switching device to provide a continuous signal, wherein the continuous signal is representative of the output switching signal to allow detection of a current level.

Example 2 is the switching converter of Example 1, wherein the detection of the current level is to allow detection of an overcurrent event.

15 Example 3 is the switching converter of Example 1, wherein the second switching device and the third switching device are replica devices of the first switching device and are coupled in parallel to the first switching device.

Example 4 is the switching converter of Example 1, wherein the second switching device and the third switching device have a characteristic parameter
20 scaled down by a same factor as compared to a corresponding characteristic parameter of the first switching device.

Example 5 is the switching converter of Example 4, wherein the second switching device has substantially a same drain-source voltage as the first switching device while the first switching device and the second switching device
25 are on.

Example 6 is the switching converter of Example 1, further comprising a subtractor to determine a difference between filtered outputs of the second and third switching devices to produce a difference signal from which an overcurrent event can be derived.

30 Example 7 is the switching converter of Example 6, further comprising a comparator coupled to an output terminal of the subtractor to compare the difference signal to a reference signal to detect the overcurrent event.

Example 8 is the switching converter of Example 7, further comprising a digital post-processor circuit coupled to an output terminal of the comparator to count an occurrence of the overcurrent event.

Example 9 is the switching converter of Example 1, wherein the input
5 switching signal is inverted and further comprising a circuit to add a filtered version of the inverted input switching signal to the continuous signal.

Example 10 is the switching converter of any one of Examples 1 – 9, wherein the switching converter switches at a frequency greater than 100 megahertz (MHz).

10 Example 11 is the switching converter of any one of Examples 1 – 9, wherein the switching converter switches at a frequency smaller than 20 megahertz (MHz).

Example 12 circuit to detect a current level of an output switching signal, comprising: a first circuit portion including a first replica switching device; a second
15 circuit portion including a second replica switching device, wherein the first and second replica switching devices comprise replica devices of a switching device of a switching converter generating the current level of the output switching signal, wherein the first and second replica switching devices simulate a condition of the switching device to produce a first continuous signal and a second continuous
20 signal; and a subtractor, coupled to receive the first and second continuous signals from the first and second circuit portions to generate a difference signal that corresponds to a difference between the first and second continuous signals, wherein the difference signal is representative of the current level of the output switching signal.

25 Example 13 is the circuit of Example 12, further comprising a comparator, coupled to the subtractor to receive the difference signal from the subtractor and compare the difference signal to a reference signal to detect an overcurrent event.

Example 14 is the circuit of Example 12, wherein the first replica switching device is to receive a portion of a current load associated with an input switching
30 signal that is converted to the output switching signal by the switching converter.

Example 15 is the circuit of Example 12, wherein the first and the second replica switching device are coupled to a voltage supply.

Example 16 is the circuit of Example 12, wherein the second replica switching device is to switch without receiving a portion of the current load

associated with an input switching signal that is converted to the output switching signal by the switching converter.

Example 17 is the circuit of Example 12, wherein the switching device, first replica switching device, and second replica switching device comprise
5 transistors.

Example 18 is the circuit of any one of Examples 12 – 17, wherein the first and second replica switching devices include metal–oxide–semiconductor field-effect transistor (MOSFET) cascode amplifier devices.

Example 19 is the circuit of any one of Examples 12 – 18, further
10 comprising a common mode adaptation circuit, coupled to output terminals of the first and second replica switching devices, to keep a common mode voltage in a defined range.

Example 20 is a system, comprising: a processor; a memory coupled to the processor; and a transceiver coupled to the processor and the memory and
15 operated by the processor, wherein the transceiver includes: a switching converter coupled to receive an input switching signal, wherein the switching converter includes: an output stage including a first switching device to convert the input switching signal to an output switching signal; and a sensor stage, including a second switching device and a third switching device, coupled to receive the
20 output switching signal from the first switching device and to substantially replicate the first switching device to provide first and second output signals associated with the output switching signal; a comparator coupled to receive a continuous signal corresponding to a difference between the first and second output signals and compare the continuous signal to a reference voltage to
25 determine whether an overcurrent event has occurred; and a post-processing circuit coupled to receive the determination from an output terminal of the comparator and to count the overcurrent event if the overcurrent event has occurred.

Example 21 is the system of Example 20, further comprising an operational
30 amplifier coupled to first and second output terminals of the sensor stage to receive the first and second output signals and provide the continuous current to the comparator.

Example 22 is the system of any of one of Examples 20 and 21, wherein the post-processing circuit to flag the overcurrent event as an overcurrent condition when a threshold number of overcurrent events has been reached.

Example 23 is a switching converter, comprising: first means for converting
5 an input switching signal to an output switching signal; and second means for substantially replicating a condition of the first means to provide a continuous signal representative of the output switching signal to allow detection of an overcurrent event.

Example 24 is the switching converter of Example 23, further comprising
10 third means to measure a number of overcurrent event-free cycles.

Example 25 is the switching converter of Example 23, further comprising means to count a number of occurrences of the overcurrent event.

Example 26 is a system, comprising: a radio-frequency (RF) antenna; a power amplifier coupled to the RF antenna to drive the RF antenna; and a
15 switching converter coupled to the power amplifier to provide an output switching signal to the power amplifier to allow the power amplifier to drive the RF antenna, wherein the switching converter includes: an output stage including a first switching device to convert an input switching signal to the output switching signal; and a sensor stage including a second switching device and a third
20 switching device, the sensor stage coupled to the output stage to receive the output switching signal and to substantially replicate the first switching device to generate a continuous signal, wherein the continuous signal is representative of an amplitude of the output switching signal to detect an overcurrent event.

Example 27 is the system of Example 26, further comprising a digital post-
25 processing circuit coupled to the sensor stage to receive a determination of the overcurrent event.

Example 28 is the system of Example 27, wherein the digital post-processing circuit is to count a number of overcurrent events and flag an overcurrent condition when a threshold is reached.

30 Although certain embodiments have been illustrated and described herein for purposes of description, this application is intended to cover any adaptations or variations of the embodiments discussed herein. Therefore, it is manifestly intended that embodiments described herein be limited only by the claims. Where the disclosure recites "a" or "a first" element or the equivalent thereof, such

- disclosure includes one or more such elements, neither requiring nor excluding two or more such elements. Further, ordinal indicators (e.g., first, second, or third) for identified elements are used to distinguish between the elements, and do not indicate or imply a required or limited number of such elements, nor do they
- 5 indicate a particular position or order of such elements unless otherwise specifically stated.

Claims

What is claimed is:

1. A switching converter, comprising:
 - 5 an output stage including a first switching device to convert an input switching signal to an output switching signal; and
 - a sensor stage including a second switching device and a third switching device, the sensor stage coupled to the output stage to receive the output switching signal from the first switching device and substantially replicate a
 - 10 condition of the first switching device to provide a continuous signal, wherein the continuous signal is representative of the output switching signal to allow detection of a current level.
2. The switching converter of claim 1, wherein the detection of the current level is to allow detection of an overcurrent event.
- 15 3. The switching converter of claim 1, wherein the second switching device and the third switching device comprise replica devices of the first switching device and are coupled in parallel to the first switching device.
4. The switching converter of claim 1, wherein the second switching device and the third switching device have a characteristic parameter scaled down by a
- 20 same factor as compared to a corresponding characteristic parameter of the first switching device.
5. The switching converter of claim 4, wherein the second switching device has substantially a same drain-source voltage as the first switching device while the first switching device and the second switching device are on.
- 25 6. The switching converter of claim 1, further comprising a subtractor to determine a difference between filtered outputs of the second and third switching devices to produce a difference signal from which an overcurrent event is derived.
7. The switching converter of claim 6, further comprising a comparator coupled to an output terminal of the subtractor to compare the difference signal to
- 30 a reference signal to detect the overcurrent event.
8. The switching converter of claim 7, further comprising a digital post-processor circuit coupled to an output terminal of the comparator to count an occurrence of the overcurrent event.

9. The switching converter of claim 1, wherein the input switching signal is inverted and further comprising a circuit to add a filtered version of the inverted input switching signal to the continuous signal.
10. The switching converter of any one of claims 1 – 9, wherein the switching
5 converter switches at a frequency greater than 100 megahertz (MHz).
11. The switching converter of any one of claims 1 – 9, wherein the switching converter switches at a frequency smaller than 20 megahertz (MHz).
12. A circuit to detect a current level of an output switching signal, comprising:
a first circuit portion including a first replica switching device;
10 a second circuit portion including a second replica switching device,
wherein the first and second replica switching devices comprise replica devices of a switching device of a switching converter generating the current level of the output switching signal, wherein the first and second replica switching devices simulate a condition of the switching device to produce a first continuous signal
15 and a second continuous signal; and
a subtractor, coupled to receive the first and second continuous signals from the first and second circuit portions to generate a difference signal that corresponds to a difference between the first and second continuous signals, wherein the difference signal is representative of the current level of the output
20 switching signal.
13. The circuit of claim 12, further comprising a comparator, coupled to the subtractor to receive the difference signal from the subtractor and compare the difference signal to a reference signal to detect an overcurrent event.
14. The circuit of claim 12, wherein the first replica switching device is to
25 receive a portion of a current load associated with an input switching signal that is converted to the output switching signal by the switching converter.
15. The circuit of claim 12, wherein the first and the second replica switching device are coupled to a voltage supply.
16. The circuit of claim 12, wherein the second replica switching device is to
30 switch without receiving a portion of the current load associated with an input switching signal that is converted to the output switching signal by the switching converter.
17. The circuit of claim 12, wherein the switching device, first replica switching device, and second replica switching device comprise transistors.

18. The circuit of any one of claims 12 – 17, wherein the first and second replica switching devices include metal–oxide–semiconductor field-effect transistor (MOSFET) cascode amplifier devices.

19. The circuit of any one of claims 12 – 18, further comprising a common mode adaptation circuit, coupled to output terminals of the first and second replica switching devices, to keep a common mode voltage in a defined range.

20. A system, comprising:
a processor;
a memory coupled to the processor; and
10 a transceiver coupled to the processor and the memory and operated by the processor, wherein the transceiver includes:
a switching converter coupled to receive an input switching signal, wherein the switching converter includes:
an output stage including a first switching device to convert
15 the input switching signal to an output switching signal; and
a sensor stage, including a second switching device and a third switching device, coupled to receive the output switching signal from the first switching device and to substantially replicate the first switching device to provide first and second output signals associated
20 with the output switching signal;
a comparator coupled to receive a continuous signal corresponding to a difference between the first and second output signals and compare the continuous signal to a reference voltage to determine whether an overcurrent event has occurred; and
25 a post-processing circuit coupled to receive the determination from an output terminal of the comparator and to count the overcurrent event if the overcurrent event has occurred.

21. The system of claim 20, further comprising an operational amplifier coupled to first and second output terminals of the sensor stage to receive the first and second output signals and provide the continuous current to the comparator.

22. The system of any of one of claims 20 and 21, wherein the post-processing circuit to flag the overcurrent event as an overcurrent condition when a threshold number of overcurrent events has been reached.


23. A switching converter, comprising:

first means for converting an input switching signal to an output switching signal; and

second means for substantially replicating a condition of the first means to provide a continuous signal representative of the output switching signal to allow
5 detection of an overcurrent event.

24. The switching converter of claim 23, further comprising third means to measure a number of overcurrent event-free cycles.

25. The switching converter of claim 23, further comprising means to count a number of occurrences of the overcurrent event.

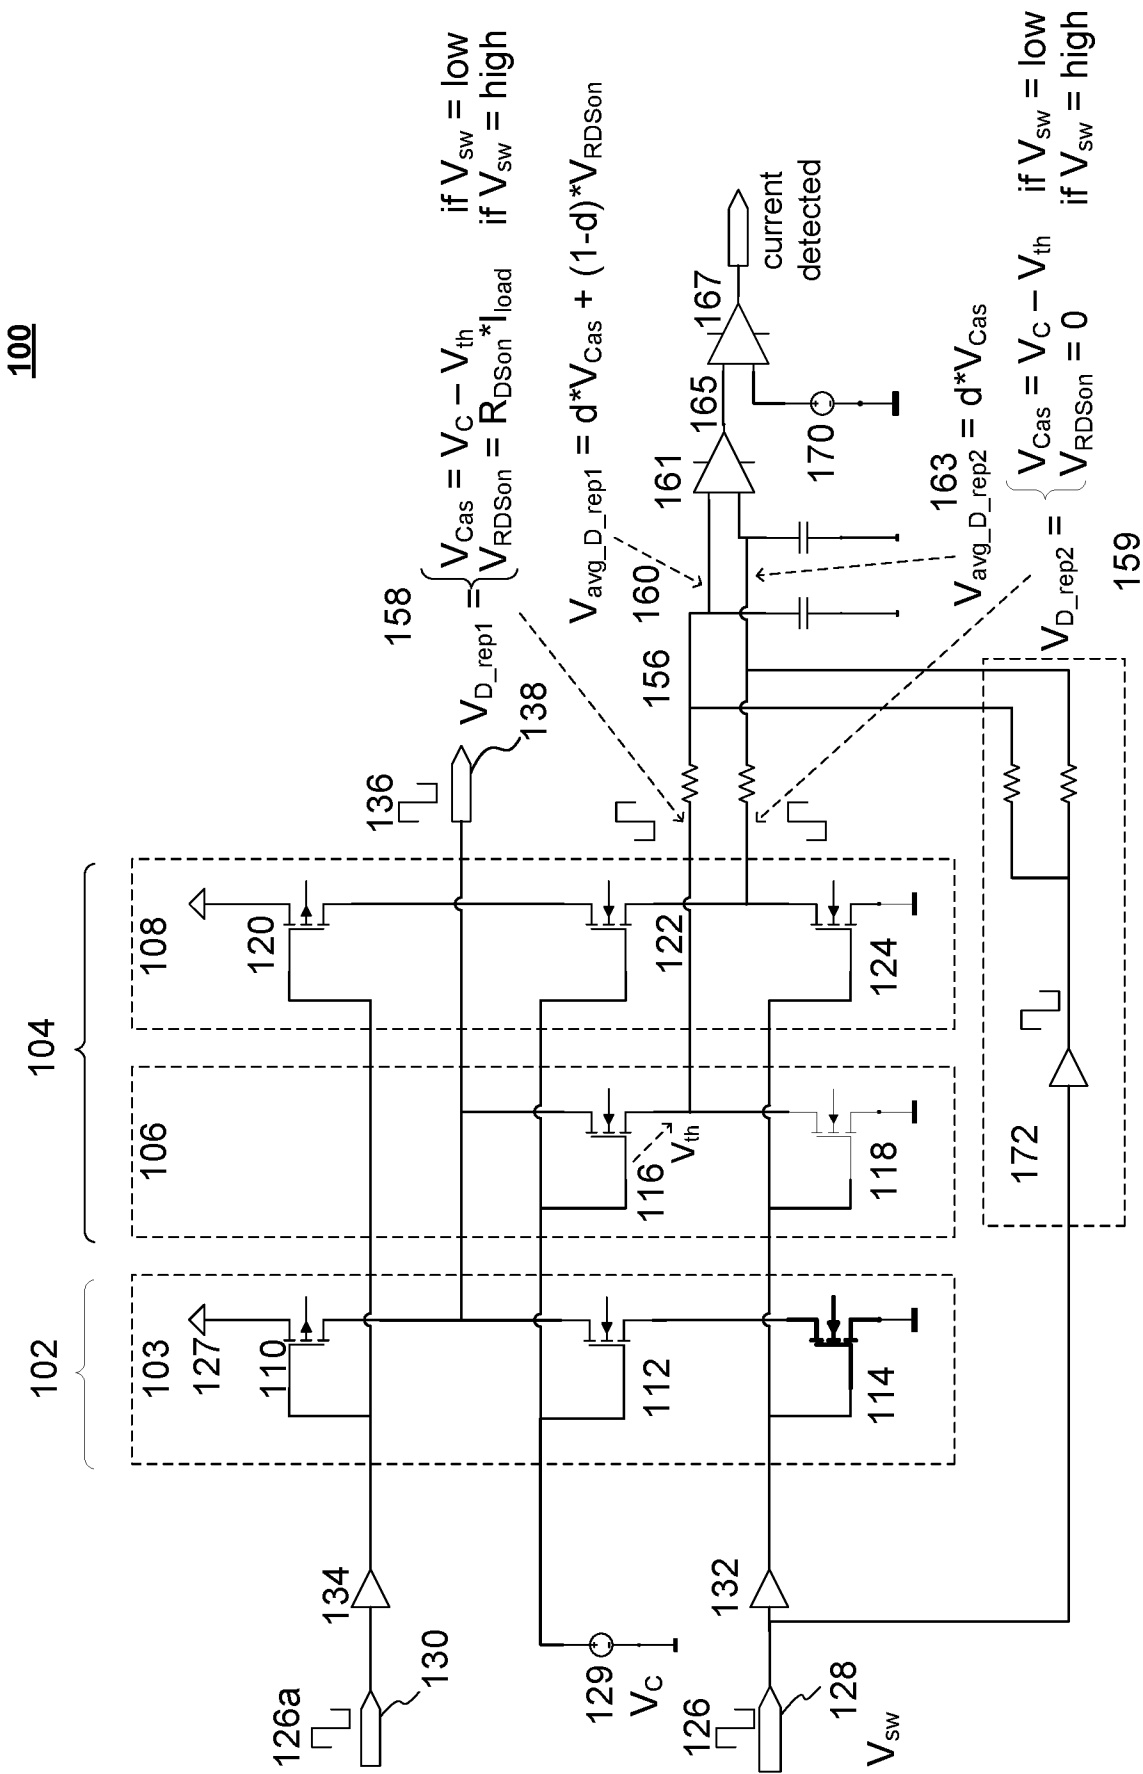

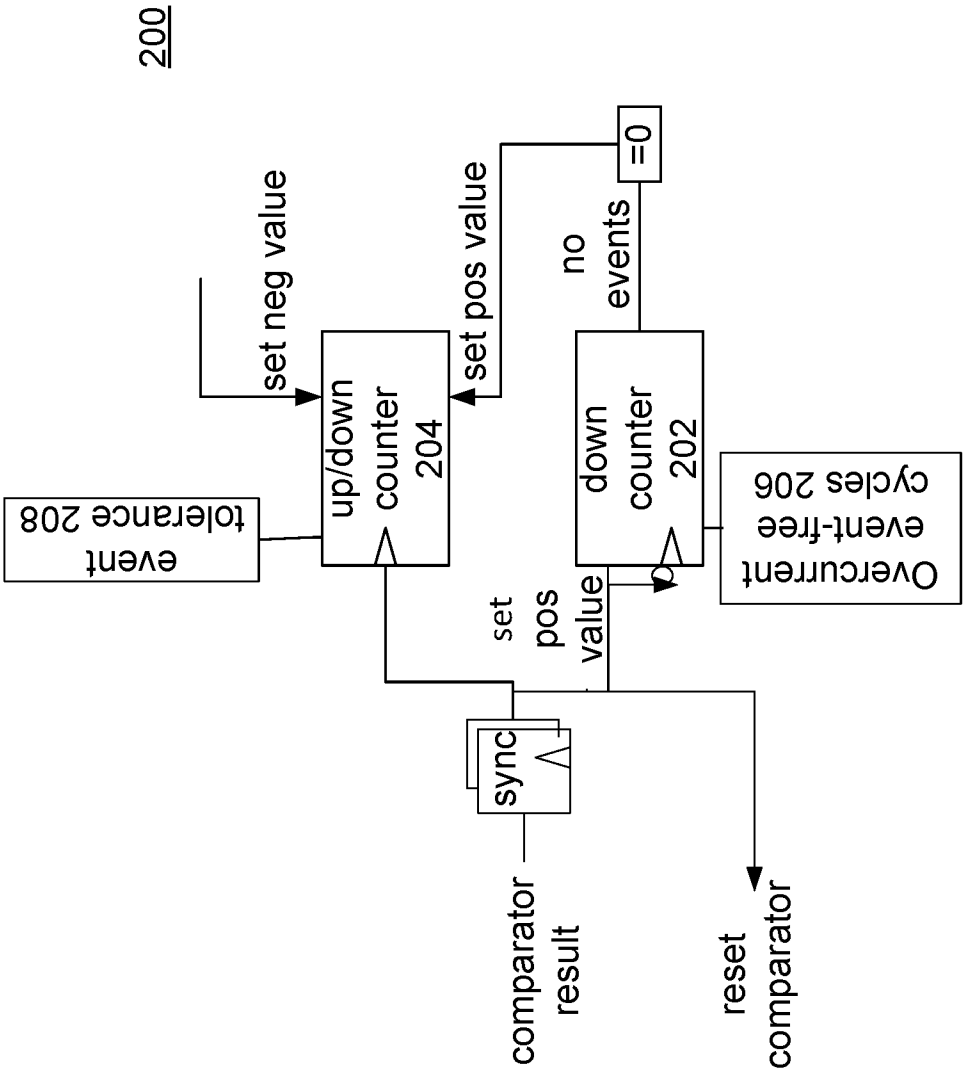


Figure 2

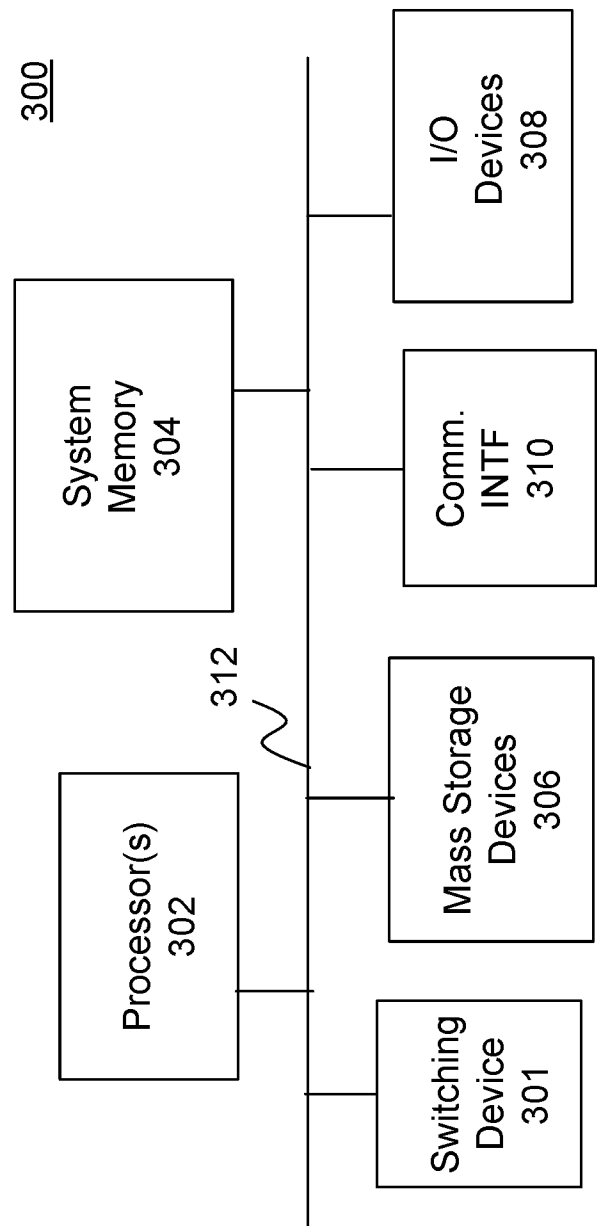


Figure 3

A. CLASSIFICATION OF SUBJECT MATTER**G01R 31/28(2006.01)i, G01R 19/165(2006.01)i, G01R 31/317(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01R 31/28; G01R 31/26; H02M 3/158; H02M 3/04; G01R 31/40; H02M 3/157; G01R 27/02; G05F 1/656; G01R 31/02; G01R 31/08; G01R 19/165; G01R 31/317

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: overcurrent, sensor, switching, converter, subtractor, replica, comparator

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015-0288277 A1 (DELTA ELECTRONICS (SHANGHAI) CO., LTD.) 08 October 2015 See claims 1,2 and figure 2.	1-18, 20-25
A	US 6255842 B1 (HASHIMOTO) 03 July 2001 See column 4, lines 28-37 and claims 2-5.	1-18, 20-25
A	US 2006-0158158 A1 (EBERLEIN) 20 July 2006 See claims 1-22 and figure 2.	1-18, 20-25
A	US 7199589 B2 (GALVANO et al.) 03 April 2007 See claims 1-22 and figure 1.	1-18, 20-25
A	US 2015-0236586 A1 (INFINEON TECHNOLOGIES AG) 20 August 2015 See claims 1-23 and figure 1.	1-18, 20-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 February 2017 (24.02.2017)

Date of mailing of the international search report

27 February 2017 (27.02.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Yeon Kyung

Telephone No. +82-42-481-3325



INTERNATIONAL SEARCH REPORTInternational application No.
PCT/US2016/062594**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 19
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/062594

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0288277 A1	08/10/2015	CN 104980043 A TW 201539953 A	14/10/2015 16/10/2015
US 6255842 B1	03/07/2001	GB 2336217 A GB 2336217 B JP 3184539 B2 KR 10-2000-0070650 A WO 99-28756 A1	13/10/1999 19/06/2002 09/07/2001 25/11/2000 10/06/1999
US 2006-0158158 A1	20/07/2006	EP 1681761 A1 US 7202694 B2	19/07/2006 10/04/2007
US 7199589 B2	03/04/2007	EP 1624559 A1 EP 1624559 B1 US 2006-0055380 A1	08/02/2006 20/10/2010 16/03/2006
US 2015-0236586 A1	20/08/2015	CN 104852559 A DE 102015102101 A1 US 9543838 B2	19/08/2015 20/08/2015 10/01/2017