

[54] **ANODE BASKET VIBRATOR**
 [75] Inventor: **Donald A. Chiz**, Midlothian, Ill.
 [73] Assignee: **GTE Automatic Electric Laboratories Incorporated**, Northlake, Ill.
 [22] Filed: **Jan. 9, 1974**
 [21] Appl. No.: **432,015**

3,804,732 4/1974 Goodkin 204/222 X

Primary Examiner—Peter Feldman
Assistant Examiner—Alan Cantor


[52] U.S. Cl. **259/1 R**, 173/170, 204/222, 204/287, 259/72
 [51] Int. Cl. **B01f 11/00**
 [58] Field of Search 204/222, 223, 279, 286, 204/287; 259/1 R, 72, DIG. 43; 173/169, 170 X

[57] **ABSTRACT**

Vibrator assembly for compacting the particulate anode material in the anode basket of a "soluble anode" electroplating system. The assembly includes a pneumatically actuated vibrator connected by a rigid arm to contact means adapted to be placed in contact with the basket. Actuation of the vibrator causes the basket to be agitated in a manner which produces uniform settling of the anode material.


[56] **References Cited**
UNITED STATES PATENTS
 3,571,874 3/1971 Arx 173/169 X

3 Claims, 1 Drawing Figure

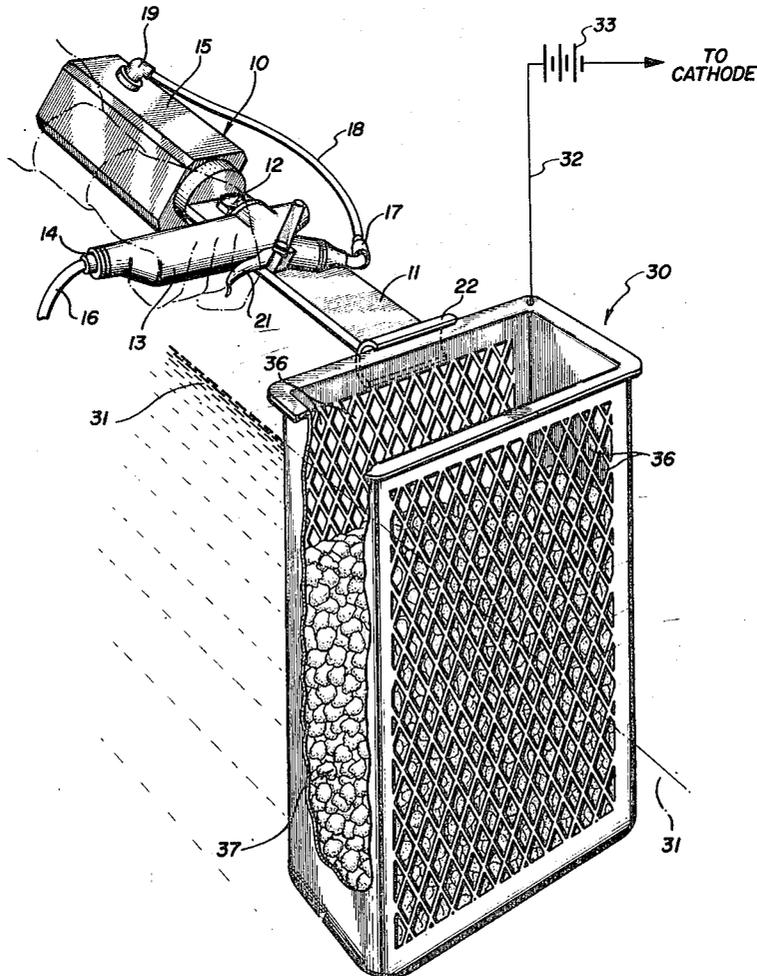

PATENTED JAN 28 1975

3,862,745

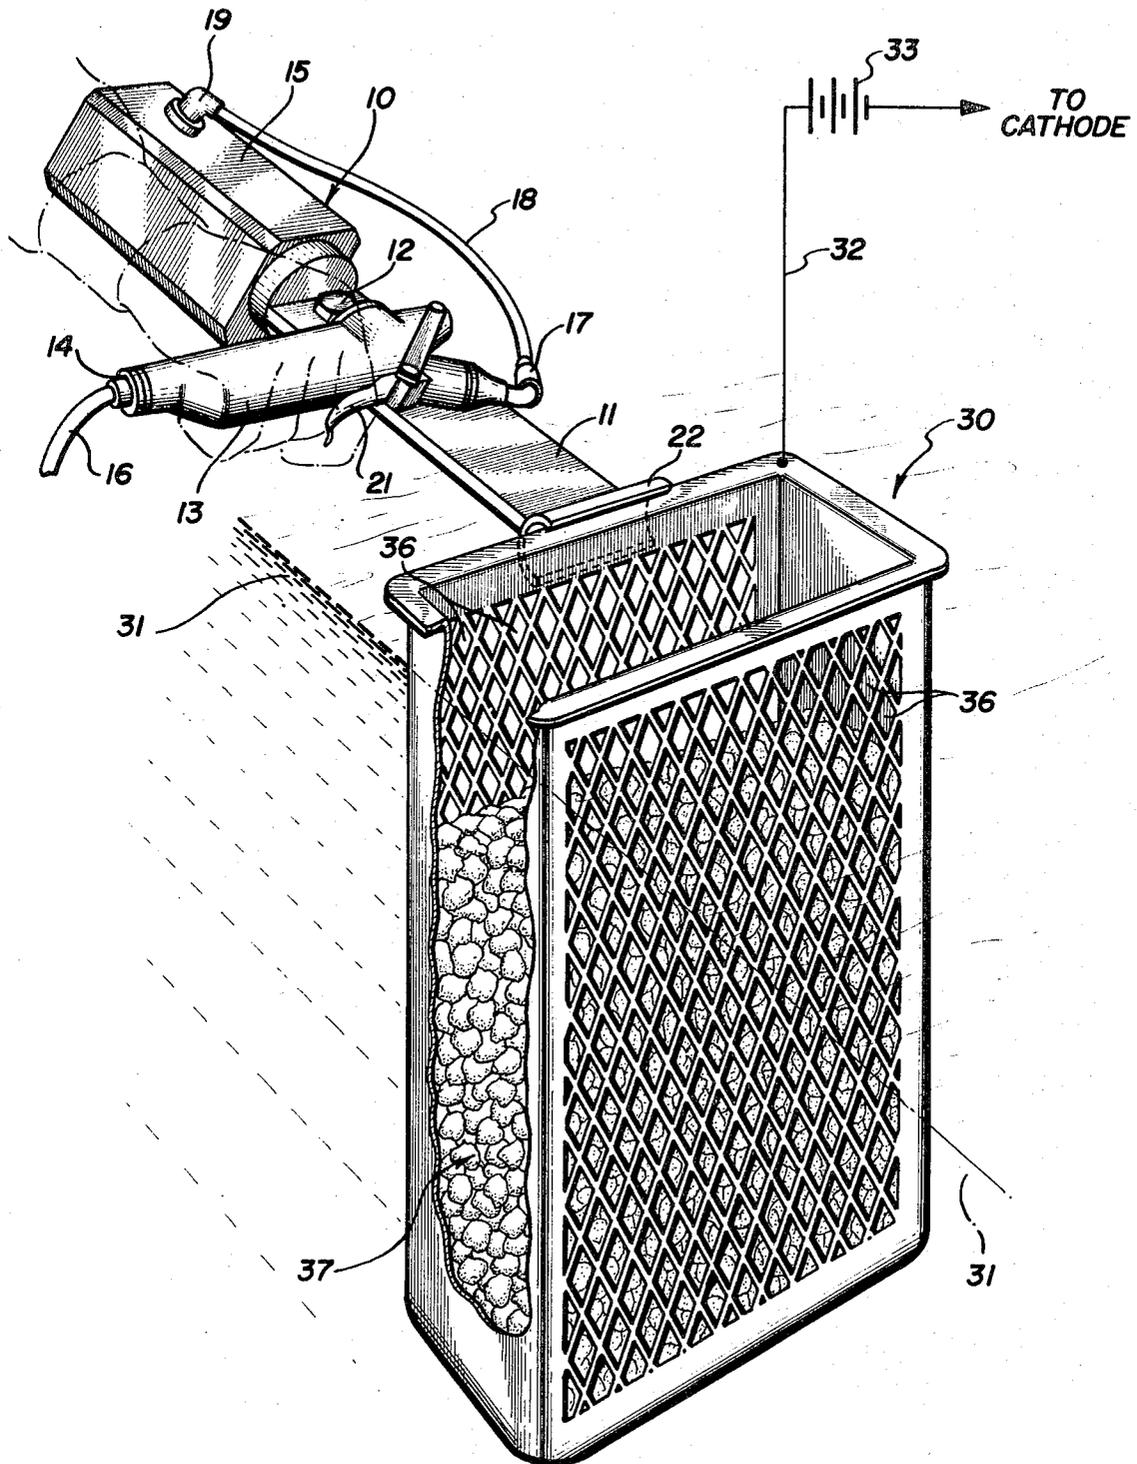

ANODE BASKET VIBRATOR

This application relates to apparatus for use in electroplating systems, and more particularly to vibrator apparatus useful for vibrating baskets of anode material in a "soluble anode" system of electroplating.

In electroplating, the article to be plated is immersed in a suitable electrolyte solution and an electrical current is passed through the electrolyte between the article, which is used as an electrical cathode, and a suitable anode. The passage of the current causes the article to be electroplated with a desired metal or alloy finish. Electroplating systems in general use can be divided into two categories, known as the soluble anode system and the "insoluble anode" system.

In the soluble anode system, there is used an anode having the same general composition as the metal or alloy which is to be deposited on the electroplated article. In this system, the anode material is dissolved by electrochemical action to replenish continuously the metallic content of the electrolyte which is consumed as a result of plating on the article. The anode in a soluble anode system serves the dual function of completing the electrical circuit and at the same time replenishing the metallic content of the electrolyte solution. In this type of operation, it is obvious that the anode is consumed and must be replaced periodically as necessary.

In the insoluble anode system, the anode material is different from the metal which is being electrodeposited. In this operation, the anode does not dissolve to any significant extent in the electrolyte and the metallic content of the electrolyte is maintained by periodic additions of suitable metal salts. The anode in an insoluble anode system serves only to complete the electrical circuit and is not itself consumed.

In the typical operation of a soluble anode system, with which this invention is concerned, it is common practice to employ as an anode a composite structure including a basket which is electrically conductive but chemically inert to the action of the electrolyte. The basket, containing a quantity of appropriate soluble anode material, preferably in the form of small pieces which are in electrical contact with each other and with the electrically conductive basket, is suspended in the electrolyte from an electrically conductive support bar. The electrolyte gains access to and contacts the anode material contained therein through openings provided in the basket. In the operation of the system, the soluble anode material is gradually consumed and is replaced as necessary at appropriate intervals.

A problem which is commonly encountered in the use of soluble anode systems employing an electrically conductive basket as described stems from the fact that the individual pieces of anode material gradually decrease in size during the operation of the process, leaving voids in the anode mass due to bridging of the individual anode pieces. Such bridging prevents the anode material from settling to the bottom of the basket as it is consumed, and thus prevents the formation of sufficient room for the addition of new anode material to the basket. The variable quantity of anode material in contact with the electrolyte which results from bridging of the individual anode pieces also results in poor plating uniformity. In order to overcome this problem, it is conventional practice to agitate the anode basket sufficiently to cause the anode pieces to settle to the bottom

thereof, in order to permit proper refilling of the anode basket. In the past, this agitation of the basket for settling of the anode material has been done manually, typically by bouncing the basket or hitting it with a suitable object in order to cause settling of the anode material. These procedures are at best haphazard and rarely achieve the uniformly settled anode mass which is conducive to the best plating uniformity. In addition, striking the basket for settling its contents often results in physical damage to the basket.

In accordance with the invention, there is provided a pneumatically driven portable vibrator apparatus which is designed to contact the rim or other appropriate part of the basket or a bar from which the basket is suspended. The apparatus vibrates the basket and produces uniform settling of the anode material, thereby enhancing the uniformity of the electroplating results. In addition, the apparatus can be used to settle the contents of the anode basket without damage to the basket and without removing the basket from the plating tank or draining the electrolyte solution from the tank. The apparatus thus enhances both the efficiency and the quality of results achieved in the electroplating process.

The invention will be better understood from the following detailed description thereof, taken in conjunction with the accompanying drawing, which depicts the vibrator apparatus in position against the rim of an anode basket as it might be used for settling of the anode material contained therein. Alternatively, the vibrator apparatus can be placed on an anode support bar (not shown) from which the basket is suspended. When the vibrator is actuated, the induced vibration is transmitted to the basket and contents thereby causing settling of the anode material.

As shown in the drawing, the vibrator apparatus 10 of the invention comprises an elongated arm 11 suitably made of a rectangular bar of steel having sufficient thickness to insure rigidity. At one end of arm 11, there is provided a pneumatically actuated vibrator 15 which is attached by suitable means, such as bolt 12, to arm 11. Vibrator 15 is of a type which produces a reciprocating motion along the longitudinal axis of arm 11 to which it is attached. Suitable devices of this type are available commercially and any of them can be used in the invention, provided that vibratory force exerted by the vibrator produces sufficient agitation of the anode basket to cause settling of the contents.

Fastened to arm 11 at a point between the ends thereof is air gun 13 which is provided with an inlet 14 for compressed gas, such as air, supplied through hose 16. Connected to the outlet 17 of the air gun is a conduit 18 which conveys the compressed gas emitted by the gun to the inlet 19 of vibrator 15, whereby the vibrator is actuated in conventional fashion. Air gun 13 is suitably provided with a control trigger 21 which actuates valve means (not shown) within the gun to cause the compressed gas to flow through the gun to the vibrator as described. Advantageously, the air gun has an elongated barrel which is arranged in approximately perpendicular fashion relative to arm 11, thus providing a convenient hand-hold for the hand of a user, as shown in phantom outline.

At the end of arm 11 opposite the point of connection of vibrator 15, there is provided appropriate means for contacting the anode support bar or a portion of the basket to be vibrated. Typical contact means which can

be used for this purpose include a split bushing or nipple 22 placed adjacent an appropriate portion of the basket, such as its rim, whereby the vibrating effect of the apparatus is transmitted to the basket.

In a typical application of the apparatus of the invention, as shown in the drawing, the vibrator 10 is used in conjunction with an electrically conductive basket 30 which is suspended by means not shown in a bath 31 of an electrolyte. The basket is electrically connected via line 32 to the positive side of a suitable power supply represented schematically by battery 33. The negative side of the power supply is connected to the cathode, which is typically the article to be plated (not shown) and which is immersed in another section of the electrolyte bath 31.

Basket 30 is provided with suitable openings 36 in its side walls to permit ready access of the electrolyte solution to the interior of the basket. As shown, the interior of the basket contains a supply of suitable anode material 37 in particulate form which is gradually consumed as the electroplating operation proceeds.

In order to compact the anode material in the basket before filling with fresh anode material or at other appropriate intervals, the basket is shaken down with the apparatus of the invention. To accomplish this result, the user, grasping the apparatus by the barrel of air gun 13, places bushing 22 adjacent the rim of basket 30 and pulls trigger 21. The stream of compressed gas which enters vibrator 15 causes a vibratory force to be applied to the edge of the basket, thus producing the desired settling of the anode contents.

It will be seen that the invention provides a simple, inexpensive, yet highly effective apparatus for achieving uniformity of plating results in an electroplating operation of the soluble anode type in which an anode basket is used. In addition, use of the invention eliminates damage to the anode baskets which has commonly occurred in the past as a result of striking the bas-

ket for settling the contents.

The foregoing detailed description has been given for clearness of understanding only, and no unnecessary limitations should be understood therefrom as modifications will be obvious to those skilled in the art.

What is claimed:

1. Portable apparatus for vibrating an electrically conductive anode basket containing a supply of particulate anode material in an electroplating process, said apparatus comprising:

- an elongated rigid arm;
- a pneumatic gun mounted on said arm between the ends thereof, said gun having inlet means for supplying a stream of compressed fluid to said gun, outlet means for said stream of compressed fluid and valve means for controlling the flow of said compressed fluid through said gun;
- pneumatically actuated vibrator means connected to one of said ends of said arm, whereby actuation of said vibrator means produces a vibratory motion along the longitudinal axis of said arm;
- conduit means leading from said outlet means of said air gun to said vibrator means for supplying a stream of compressed fluid to said vibrator means for the actuation thereof; and
- contact means connected to the other said end of said arm adapted to bear against said anode basket and to impart vibrational movement to the contents thereof when said vibrator means is actuated.

2. The apparatus of claim 1 in which said air gun is contained in an elongated housing arranged generally perpendicularly to said arm, thereby affording a handhold for the user of said apparatus.

3. The apparatus of claim 2 in which said elongated housing is provided with a trigger for actuating the valve means of said gun.

* * * * *

40

45

50

55

60

65