

(51) International Patent Classification:
H04B 7/02 (2006.01)(21) International Application Number:
PCT/EP2012/058344(22) International Filing Date:
7 May 2012 (07.05.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11305734.3 10 June 2011 (10.06.2011) EP(71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DOETSCH, Uwe** [DE/DE]; Rotenbergstrasse 43, 74392 Freudental (DE). **DOLL, Mark** [DE/DE]; Linzer Str. 97, 70469 Stuttgart (DE). **SCHREIBER, Gerhard** [DE/DE]; Hindenburgstr. 61/2, 70825 Korntal-Münchingen (DE).(74) Agent: **KLEINBUB, Oliver**; Alcatel-Lucent Deutschland AG, Intellectual Property & Standards, Lorenzstrasse 10, 70435 Stuttgart (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: METHOD FOR RECEIVING UPLINK RADIO FREQUENCY SIGNALS IN A RADIO COMMUNICATION SYSTEM, MASTER UNIT AND SLAVE UNIT THEREOF

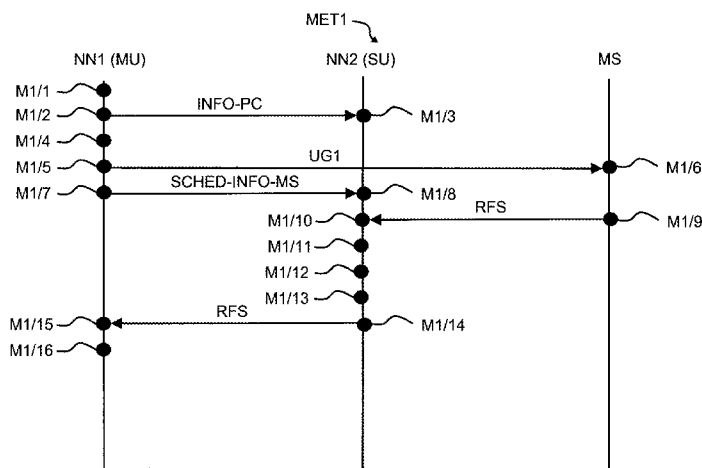


FIG. 3

(57) Abstract: The invention relates to a method (MET1) for receiving uplink radio frequency signals (RFS) in a radio communication system. The radio communication system comprises at least one antenna system for a reception of the uplink radio frequency signals (RFS), a slave unit (SU) connected to the at least one antenna system, and a master unit (MU) controlling the slave unit (SU). The method (MET1) comprises the steps of receiving (M1/10) at the at least one antenna system the uplink radio frequency signals (RFS), verifying (M1/13), whether a characteristic parameter of the received uplink radio frequency signals (RFS) fulfills a predefined criterion, and controlling (M1/14) a forwarding of the received uplink radio frequency signals (RFS) to the master unit (MU) depending on a fulfillment of the predefined criterion. The invention further relates to the master unit (MU) for use in the radio communication system, to a slave unit (SU) for use in the radio communication system, to a radio network controller comprising the master unit (MU), to a base station comprising the master unit (MU) and/or the slave unit (SU) and to a remote radio head comprising the slave unit (SU).



Published:

— *with international search report (Art. 21(3))*

METHOD FOR RECEIVING UPLINK RADIO FREQUENCY SIGNALS IN A RADIO COMMUNICATION SYSTEM, MASTER UNIT AND SLAVE UNIT THEREOF

5 FIELD OF THE INVENTION

The invention relates to wireless communications and, more particularly but not exclusively, to cooperative multipoint reception in a radio communication system.

BACKGROUND

- 10 Current cellular mobile communication systems, like the 3GPP LTE system (LTE = Long-Term Evolution), rely on MIMO antenna techniques (MIMO = Multiple Input Multiple Output) in order to achieve high spectral efficiency. Furthermore, a frequency re-use of one is often applied to make full use of the available scarce system bandwidth. This leads to a strong imbalance of
- 15 achievable user rates throughout the cell. Additionally, the inter-cell interference becomes the dominating limit for cellular system performance. Techniques like CoMP (CoMP = Coordinated multi-point) deal with this problem. In CoMP several distributed antenna arrays belonging to a same base station or to different base stations are grouped to form a so-called
- 20 cooperation cluster of an extended coverage area with an overlap of several radio cells. The cooperation cluster allows for a simultaneous downlink transmission from the distributed antenna arrays to a mobile station or for a simultaneous uplink reception at the antenna arrays for radio frequency signals transmitted in an uplink direction from the mobile
- 25 station. This allows forming distributed MIMO systems over the entire cooperation cluster, which is also referred to as network MIMO. Receiving uplink radio frequency signals at two or more antenna arrays from a mobile station, forwarding the received uplink radio frequency signals from one or more slave units associated with the two or more
- 30 antenna arrays to a master unit and performing a superposition of the

uplink radio frequency signals at the master unit may improve an overall system performance of the radio communication system because of an increased SINR (SINR = Signal to Interference-plus-Noise Ratio) in comparison to receiving the uplink radio frequency signals via a single antenna array and recovering the data from the single received uplink radio frequency signals.

SUMMARY

The way of processing uplink radio frequency signals received by a radio communication systems effects bandwidths of transmission links between network nodes of the radio communication system, effects time delays for data handling of uplink data and effects processing capacities at the network nodes of the radio communication system.

It is an object of the invention to reduce CAPEX (CAPEX = CAPital EXpenditure) such as installation costs and OPEX (OPEX = Operational expenditure) such as energy consumption for operating a radio communication system.

The object is achieved by a method for receiving uplink radio frequency signals in a radio communication system, wherein the radio communication system comprises at least one antenna system for a reception of the uplink radio frequency signals, a first slave unit connected to the at least one antenna system, and a master unit controlling the first slave unit, and wherein the method comprises the steps of receiving at the at least one antenna system the uplink radio frequency signals, verifying, whether a characteristic parameter of the received uplink radio frequency signals fulfills a predefined criterion and controlling a forwarding of the received uplink radio frequency signals to the master unit depending on a fulfillment of the predefined criterion. The object is further achieved by a master unit for use in a radio communication system, by a first slave unit for use in a

radio communication system, by a radio network controller comprising the master unit, by a base station comprising the master unit and/or the first slave unit and by a remote radio head comprising the first slave unit.

The master unit may be for example a master unit of a cooperative cluster
5 of several antenna systems performing a multipoint reception such as applied in CoMP or the master unit may be located in a base station controlling for example a single slave unit located for example in a remote radio head or in an active antenna array.

The method offers a first benefit of requiring less transmission capacity on
10 transmission links between the master unit and the one or several slave units. This means, that the radio communication system may be planned and installed with smaller transmission capacity on transmission links between the master unit and the one or several slave units than without the invention and thereby reduces the installation costs.

15 The method offers a second benefit of reacting to short-term changes such as fast fading on a transmission channel from a mobile station to the at least one antenna system and avoiding a transmission of radio frequency signals from the one or several slave units of a so-called cooperation cluster to the master unit of the cooperation cluster, which may not improve
20 significantly a reception quality of the radio frequency signals or which may arrive too late in case of time-sensitive services such as interactive gaming or VoIP (VoIP = Voice over Internet Protocol). Thereby, transmission power for forwarding the received uplink radio frequency signals to the master unit and processing power for processing the forwarded received uplink radio
25 frequency signals can be reduced. Most benefit can be realized in particular for data-intensive services such as video conferencing or video upload requested by a user of the mobile station.

The verifying step may be done for an overall signal received at two or more antenna elements of the at least one antenna system or the verifying step may be done separately for each antenna element of the at least one antenna system receiving the uplink radio frequency signals such as in a case of an active antenna array.

The predefined criterion may depend on one or several of the following parameters such as a transport format of the uplink radio frequency signals on a radio link from the mobile station to the at least one antenna system, and/or unused transmission resources on a connection from the first slave unit to the master unit, and/or required transmission resources on the connection from the first slave unit to the master unit for the uplink radio frequency signals, and/or quality of a channel estimation algorithm performed at the first slave unit, and/or a location of a mobile station transmitting the uplink radio frequency signals within a coverage area of the at least one antenna system, and/or velocity of the mobile station transmitting the uplink radio frequency signals.

In a preferred embodiment, the method further comprises the steps of determining at the master unit the predefined criterion for the characteristic parameter, transmitting from the master unit to the first slave unit information of the predefined criterion, and verifying at the first slave unit, whether the characteristic parameter fulfills the predefined criterion.

The preferred embodiment provides a benefit of centrally controlling within the cooperation cluster, which radio frequency signals should be superimposed at the master unit and therefore should be transmitted from the one or several slave units to the master unit.

In a further preferred embodiment, the determining step is based on a prediction of the predefined criterion before the uplink radio frequency signals are forwarded to the master unit or before the uplink radio

frequency signals are received from a second one of the at least one antenna system assigned to the master unit. The further preferred embodiment provides a benefit of configuring the predefined criterion at the one or several slave units in advance before any radio frequency signals of the mobile station are transmitted from the mobile station to the cooperation cluster. The prediction of the predefined criterion may be based for example on long-term measurements providing indications for average path losses between a specific location of the mobile station and the two or more antenna system of the cooperation cluster and affected for example by long-term impacts such as reflections incurred by obstacles on a transmission path of the uplink radio frequency signals between the mobile station and the antenna arrays of the cooperation cluster. The obstacles may be for buildings, tunnels, hills, etc.

In an even further preferred embodiment, a second one of the at least one antenna system is connected to a network node comprising the master unit and the method further comprises the steps of determining at the master unit an offset value of the predefined criterion, receiving at the master unit the uplink radio frequency signals via the second one of the at least one antenna system, determining at the master unit a value of the characteristic parameter of the uplink radio frequency signals received via the second one of the at least one antenna system, and the predefined criterion is determined based on the value of the characteristic parameter and based on the predefined offset value. This allows determining the predefined criterion more suitable to a current condition of the multipoint reception by taking into account a current reception quality of the first one of the uplink radio frequency signals which have been directly received at the master unit via the second one of the at least one antenna system connected to the network node comprising the master unit and without a reception of uplink

radio frequency signals at the master unit forwarded from the slave unit.

Thereby, in a best case, the reception quality of the first one of the uplink radio frequency signals is already sufficient to recover information elements of the received uplink radio frequency signals such as user data bits of the service error-free and a forwarding of further uplink radio frequency signals from the one or several slave units to the master unit is not required.

- 5 In a further alternative embodiment, a second one of the at least one antenna system is connected to a network node comprising the master unit and the method further comprises the steps of determining at the master unit and at the first slave unit an offset value of the predefined criterion, receiving at the master unit the uplink radio frequency signals via the second one of the at least one antenna system, determining at the master unit a value of the characteristic parameter of the uplink radio frequency signals received via the second one of the at least one antenna system, transmitting the value of the characteristic parameter from the master unit to the first slave unit, and determining at the first slave unit the predefined criterion based on the value of the characteristic parameter and based on the predefined offset value. The further alternative embodiment is similar to the above mentioned embodiment with the difference, that not the predefined criterion is transmitted from the master unit to the first slave unit but the value of the characteristic parameter determined at the master unit and that the first slave unit determines the predefined criterion based on the offset value configured at the first slave unit and based on the value of the characteristic parameter determined at the master unit and received from the master unit.

25 In a first alternative embodiment, the characteristic parameter is a service type of the received uplink radio frequency signals, the predefined criterion is a predefined delay class of the received uplink radio frequency signals

and the predefined delay class depends on a transmission time delay of the uplink frequency signals from a mobile station via the first slave unit to the master unit. The first alternative embodiment allows blocking for a delay sensitive service such as a video conference those uplink radio frequency signals at the slave units, which would arrive too late at the master unit for a superposition with other uplink radio frequency signals directly received at the master unit or at other slave units with a smaller transmission time delay. A transmission time from the mobile station via the slave unit to the master unit may depend on a length of a transmission path from the slave unit to the master unit or on a remaining processing capacity at the slave unit for processing and forwarding the received uplink radio frequency signals.

In a second alternative embodiment, the characteristic parameter is a reception quality of the received uplink radio frequency signals and the predefined criterion is a predefined reception signal quality. Preferably, the predefined reception signal quality is a signal-to-interference and noise ratio threshold value, a signal-to-interference ratio threshold value, or a signal-to-noise ratio threshold value.

According to a further preferred embodiment, the method further comprises the steps of determining at the first slave unit the reception quality of the received uplink radio frequency signals, transmitting information of the reception quality from the first slave unit to the master unit, verifying at the master unit, whether a reception of the uplink radio frequency signals via the first slave unit is required for recovering information transmitted by the uplink radio frequency signals, and transmitting from the master unit to the first slave unit, if the reception of the uplink radio frequency signals via the first slave unit is required, a request for transmitting the received uplink radio frequency signals from the first slave unit to the master unit. The

- further preferred embodiment may be applied for services with less stringent time delay requirements, because at a first sub-step a measurement result of the reception quality of the received uplink radio frequency signals is transmitted from the first slave unit to the master unit and not until a second sub-step the received uplink radio frequency signals itself are transmitted from the first slave unit to the master unit, if the master unit has requested such a transmission. Thereby, the master unit is able to control for each received uplink radio frequency signals, whether the received uplink radio frequency signals should be transmitted from the first slave unit to the master unit and should be used for a superposition at the master unit or the received uplink radio frequency signals should be discarded at the first slave unit. In addition, this allows distributing a measurement process and a decision making process for the received uplink radio frequency signals across the first slave unit and the master unit.
- Further advantageous features of the invention are defined and are described in the following detailed description of the invention.

BRIEF DESCRIPTION OF THE FIGURES

- The embodiments of the invention will become apparent in the following detailed description and will be illustrated by accompanying figures given by way of non-limiting illustrations.
- Figure 1 shows a block diagram of a radio communication network according to a first embodiment of the invention.
- Figure 2 shows a block diagram of a radio communication network according to a second embodiment of the invention.
- Figure 3 shows a flow diagram of a method in accordance to the first or the second embodiment of the invention.
- Figure 4 shows a flow diagram of a method in accordance to a further embodiment of the invention.

Figure 5 shows a flow diagram of a method in accordance to an even further embodiment of the invention.

Figure 6 shows a block diagram of a master unit according to the embodiments of the invention.

- 5 Figure 7 shows a block diagram of a slave unit according to the embodiments of the invention.

DESCRIPTION OF THE EMBODIMENTS

- Figure 1 shows a radio communication system RCS1 comprising a radio access network RAN1 according to a first embodiment of the invention. The
10 core network of the radio communication system RCS1 and connections of the radio communication system RCS1 to further radio communication systems, to the Internet or to fixed line communications systems are not shown for simplification.

- The radio communication system RCS1 may be for example a 3GPP LTE
15 radio communication network using OFDM (OFDM = Orthogonal Frequency Division Multiplexing). In further alternatives, the radio communication system RCS1 may for example a WiMAX radio communication network (WiMAX = Worldwide Interoperability for Microwave Access) based on the IEEE 802.16 standard family (IEEE =
20 Institute of Electrical and Electronics Engineers), or a WLAN (WLAN = Wireless Local Area Network) based on the IEEE 802.11 standard family. The radio access network RAN1 comprises exemplarily a first base station RAN1-BS1, a second base station RAN1-BS2 and a transmission path L between the first base station RAN1-BS1 and the second base station
25 RAN1-BS2. The transmission path L may be for example an X2 interface such as used in 3GPP LTE.

The term "base station" may be considered synonymous to and/or referred to as a base transceiver station, Node B, enhanced Node B, access point

etc. and may describe equipment that provides wireless connectivity via one or more radio links to one or more mobile stations.

Further base stations, further connections between the base stations, and connections between the base stations and network nodes of the core

5 network are not shown for simplification.

The first base station RAN1-BS1 comprises for example a master unit BS-MU, a first remote radio head RRH1 with active elements such as a power amplifier (RRH = remote radio head), a first transmission path BS1-L1

10 between the first base station RAN1-BS1 and the first RRH RRH1, and a first antenna system BS1-AS located next to the first base station RAN1-BS without active elements and directly connected to the first base station RAN1-BS. Alternatively, the first base station RAN1-BS1 comprises more than one RRH and/or more than one antenna system directly connected to the first base station RAN1-BS.

15 The first antenna system BS1-AS may comprise for example two antenna elements. Alternatively the first antenna system BS1-AS may comprise more than two antenna elements such as four antenna elements.

The first transmission path BS1-L1 may be for example based on the CPRI standard (CPRI = Common Public Radio Interface).

20 The first RRH RRH1 comprises a first slave unit RRH-SU and a second antenna system RRH1-AS connected to the first slave unit RRH-SU. The second antenna system RRH1-AS may comprise for example two antenna elements and may be a passive antenna array or an active antenna array. Alternatively the second antenna system RRH1-AS may comprise more than

25 two antenna elements such as four antenna elements.

The first antenna system BS1-AS provides wireless coverage for a first radio cell BS-Cell-1 and the second antenna system RRH1-AS provides wireless coverage for a second radio cell RRH-Cell-2.

The term "radio cell" may be considered synonymous to and/or referred to as cell, radio sector, sector etc.

The second base station RAN1-BS2 comprises a second slave unit BS-SU and a third antenna system BS2-AS connected to the second slave unit BS-SU. The third antenna system BS2-AS may comprise two antenna elements and provides wireless coverage for a third radio cell BS-Cell-3. In further alternatives, the second base station RAN1-BS2 may comprise more than one antenna system and the third antenna system BS2-AS may comprise more than two antenna elements such as four antenna elements.

10 The first slave unit RRH-SU and the second slave unit BS-SU are controlled by the master unit BS-MU.

The first radio cell BS-Cell-1, the second radio cell RRH-Cell-2 and the third radio cell RRH-Cell-3 are configured to be parts of a cooperative cluster CC.

15 The term "cooperative cluster" may be considered synonymous to and/or referred to as cooperative set, cooperation set, CoMP cluster, cluster etc. and may describe two or more antenna elements of a radio communication system that cooperate for a joint reception of uplink radio frequency signals from one or more mobile stations.

20 Preferably, the antenna arrays respectively the radio cells belonging to the cooperative cluster CC may be selected based on distributed self-configuration algorithms executed at the base stations RAN1-BS1, RAN1-BS2 of the radio communication system RCS1. The self-configuration algorithms may be based for example on long term measurements for
25 pathlosses between mobile stations located within the coverage areas of the radio cells BS-Cell-1, RRH-Cell-2 and RRH-Cell-3 and the antenna systems BS1-AS, RRH1-AS and BS2-AS of the radio communication system RCS1.

In an alternative, the cooperative cluster CC may be configured by an O&M network node (O&M = Operation and Maintenance) of the radio communication system RCS1 (not shown in Figure 1 for simplification).

5 A mobile station RAN1-MS may be located within an overall coverage area of the cooperative cluster CC.

In an uplink direction from the mobile station RAN1-MS to the radio access network RAN1, all the radio cells or a subset of the radio cells BS-Cell-1, RRH-Cell-2, RRH-Cell-3 of the cooperative cluster CC may receive in a multipoint reception mode via an uplink MIMO transmission (MIMO =
10 multiple input multiple output) or an uplink SIMO transmission (SIMO = single input multiple output) uplink radio frequency signals from the mobile station RAN1-MS.

The term "mobile station" may be considered synonymous to, and may hereafter be occasionally referred to, as a mobile unit, mobile user, access
15 terminal, user equipment, subscriber, user, remote station etc. The mobile station RAN1-MS may be for example a cellular telephone, a portable computer, a pocket computer, a hand-held computer, a personal digital assistant or a car-mounted mobile device.

If for example the first slave unit RRH-SU receives uplink radio frequency
20 signals from the mobile station RAN1-MS via the corresponding second antenna system RRH1-AS, the received uplink radio frequency signals are forwarded from the first RRH RRH1 to the first base station RAN1-BS1 via the first transmission path BS1-L1, if a characteristic parameter of the uplink radio frequency signals received at the first RRH RRH1 fulfils a predefined
25 criterion.

In a same way, the second base station RAN1-BS2 forwards received uplink radio frequency signals to the first base station RAN1-BS1, if the

characteristic parameter of the uplink radio frequency signals received at the second base station RAN1-BS2 fulfils the predefined criterion.

More detailed descriptions of methods of the present invention applied within the radio communication system RCS1 are given with respect to

5 Figure 3 to Figure 5.

Figure 2 shows a radio communication system RCS2 comprising a radio access network RAN2 according to a second embodiment of the invention.

The core network of the radio communication system RCS2 and
10 connections of the radio communication system RCS2 to further radio communication systems, to the Internet or to fixed line communications systems are not shown for simplification.

The radio communication system RCS2 may be for example a 3GPP UMTS radio communication network using OFDM (OFDM = Orthogonal

15 Frequency Division Multiplexing). In a further alternative, the radio communication system RCS2 may for example a 3GPP HSUPA radio communication network (HSUPA = high speed uplink packet access).

The radio access network RAN2 comprises exemplarily a radio network controller RNC, a first base station RAN2-BS1, a first transmission path

20 RNC-L1 between the first base station RAN2-BS1 and the radio network controller RNC, a second base station RAN2-BS2 and a second transmission path RNC-L2 between the second base station RAN2-BS2 and the radio network controller RNC.

The first transmission path RNC-L1 and the second transmission path RNC-
25 L2 may be for example an Iub interface such as used in 3GPP UMTS.

The term "radio network controller" may be considered synonymous to and/or referred to as a base station controller, RNC, BSC etc. and may

describe equipment that controls one or more base stations of a radio access network.

Further radio network controllers and further base stations of the radio access network RAN2 are not shown for simplification.

- 5 The radio network controller RNC comprises a master unit RNC-MU for controlling slave units BS-SU1, BS-SU2 of the first and the second base station RAN2-BS1, RAN2-BS2.

The first base station RAN2-BS1 comprises a first slave unit BS-SU1 and a first antenna system RAN2-BS1-AS connected to the first slave unit BS-SU1. The first antenna system RAN2-BS1-AS may comprise for example one
10 antenna element for providing wireless coverage for a first radio cell BS-Cell-1. Alternatively, the first antenna system RAN2-BS1-AS may comprise more than one antenna element and the first antenna system RAN2-BS1-AS may be a passive antenna array or an active antenna array.

- 15 In a further alternative, the first base station RAN2-BS1 may comprise more than one antenna system for providing wireless coverage to more than one radio cell.

The second base station RAN2-BS2 comprises a second slave unit BS-SU2 and a second antenna system RAN2-BS2-AS connected to the second slave
20 unit BS-SU2. The second antenna system RAN2-BS2-AS may comprise for example one antenna element for providing wireless coverage for a second radio cell BS-Cell-2. Alternatively, the second antenna system RAN2-BS2-AS may comprise more than one antenna element and the second antenna system RAN2-BS2-AS may be a passive antenna array or an active antenna
25 array.

In a further alternative, the second base station RAN2-BS2 may comprise more than one antenna system for providing wireless coverage to more than one radio cell.

A mobile station RAN2-MS may be in an overlap region of the first radio cell BS-Cell-1 and the second radio cell BS-Cell-2 and may be in a so-called soft handover state such as applied in a UMTS FDD transmission mode (FDD = Frequency Division Duplex). This means, that the mobile station RAN2-MS simultaneously communicates with the first and the second base station RAN2-BS1, RAN2-BS2 and the first and the second base station RAN2-BS1, RAN2-BS2 transmit on a downlink dedicated channel same information to the mobile station RAN2-MS. In the uplink direction from the mobile station RAN2-MS to the radio access network RAN2, the first and the second base station RAN2-BS1, RAN2-BS2 receive uplink radio frequency signals from the mobile station RAN2-MS.

If the first slave unit BS-SU1 receives uplink radio frequency signals from the mobile station RAN2-MS via the corresponding first antenna system RAN2-BS1-AS, the received uplink radio frequency signals are forwarded from the first slave unit BS-SU1 to the master unit RNC-MU via the first transmission path RNC-L1, if a characteristic parameter of the received uplink radio frequency signals at the first slave unit BS-SU1 fulfils a predefined criterion. In a same way, the second slave unit BS-SU2 forwards received uplink radio frequency signals to the master unit RNC-MU, if the characteristic parameter of the received uplink radio frequency signals fulfils the predefined criterion at the second slave unit BS-SU2.

Alternatively, if the first and the second radio cell BS-Cell-1, BS-Cell-2 may belong to a same base station, the same base station may comprise a master unit and the first and the second slave unit BS-SU1, BS-SU2 and the mobile station RAN2-MS may be in a so-called softer handover state, a similar internal predefined criterion may be applied for the characteristic parameter of received uplink radio frequency signals for forwarding the

received uplink radio frequency signals from the first and the second slave unit BS-SU1, BS-SU2 to the master unit.

If both, the uplink radio frequency signals received at the first antenna system RAN2-BS1-AS and the uplink radio frequency signals received at the second antenna system RAN2-BS2-AS do not fulfil the predefined criterion, the radio network controller RNC does not receive any uplink radio frequency signals within a predefined time frame. In such a case, the radio network controller RNC may resolve such a situation by temporally lowering the predefined criterion for both, the first and the second slave unit BS-SU1, BS-SU2 for example for a short time interval such as one or several TTIs (TTI = transmit time interval) as applied in 3GPP LTE.

A more detailed description of the method applied within the radio communication system RCS2 is given with respect to Figure 3 to Figure 5.

Referring to Figure 3 a flow diagram of a method MET1 in accordance to the first and the second embodiments of the invention is shown. The number of the steps for performing the method MET1 is not critical, and as can be understood by those skilled in the art, that the number of the steps and the order of the steps may vary without departing from the scope of the invention.

The flow diagram is shown between a first network node NN1 comprising the master unit MU, a second network node NN2 comprising the slave unit SU, and a mobile station MS. According to the first embodiment of Figure 1, the first network node NN1 may be the first base station RAN1-BS1, the master MU may be the master unit BS-MU, the second network node NN2 may be one of the first RRH RRH1 or the second base station RAN1-BS2, the slave unit SU may be one of the slave units RRH-SU, BS-SU and the mobile station MS may be the mobile station RAN1-MS. According to the second

embodiment of Figure 2, the first network node NN1 may be the radio network controller RNC, the master MU may be the master unit RNC-MU, the second network node NN2 may be one of the first base station RAN2-BS1 or the second base station RAN2-BS2, the slave unit SU may be one of the slave units BS-SU1, BS-SU2 and the mobile station MS may be the mobile station RAN2-MS.

In a first step M1/1, the predefined criterion of the characteristic parameter may be determined at the master unit MU. In an alternative, the predefined criterion may be determined at the O&M network node of the radio communication system RCS1, RCS2 and may be transmitted from the O&M network node to the master unit MU.

Preferably, the characteristic parameter may be a reception quality of the received uplink radio frequency signals and the predefined criterion may be a predefined reception signal quality.

The predefined reception signal quality may be for example an SINR threshold value *SINR_threshold* given for example in dB and the reception quality of the received uplink radio frequency signals may a slave SINR measurement value *SINR_slave_measure* to be measured at a network node comprising the slave unit SU.

In a first alternative, the predefined reception signal quality may be an SIR threshold value (SIR = signal-to-interference ratio; also known as the carrier-to-interference ratio) *SIR_threshold* given for example in dB and the reception quality of the received uplink radio frequency signals may a slave SIR measurement value *SIR_slave_measure* to be measured at the network node comprising the slave unit SU.

In a second alternative, the predefined reception signal quality may be an SNR threshold value (SNR = signal-to-noise ratio) *SNR_threshold* given for example in dB and the reception quality of the received uplink radio

frequency signals may a slave SNR measurement value

SNR_slave_measure to be measured at the network node comprising the slave unit SU.

- 5 In a third alternative, the predefined reception signal quality may be a received signal power threshold value for example in μW and the reception quality of the received uplink radio frequency signals may a signal power of the received uplink radio frequency signals to be measured at the network node comprising the slave unit SU.

- 10 A predefined algorithm for the predefined reception signal quality may use as a first input parameter a transport format to be used for the uplink radio frequency signals on a radio link from the mobile station MS to a corresponding antenna system of the slave unit SU. If for example a transport format with lower code rate is chosen by the master unit MU the predefined algorithm may determine a smaller SINR threshold value
- 15 *SINR_threshold* in comparison to a case, where a transport format with higher code rate is chosen.

- In addition or alternatively, the predefined algorithm may use as a second input parameter a free resources value *FRV* for example in GBit/s (GBit/s = Gigabit per second) representing unused transmission resources on a
- 20 corresponding transmission path BS1-L1, BS1-L2, L, RNC-L1, RNC-L2 from the slave unit SU to the master unit MU. If for example the free resources value is *FRV* = 5 GBit/s a larger SINR threshold value *SINR_threshold* will be determined in comparison to a case, where the free resources value is *FRV* = 7 GBit/s.

- 25 In addition or alternatively, the predefined algorithm may use as a third input parameter a required resources value *RRV* for example in GBit/s (GBit/s = Gigabit per second) representing transmission resources to be required on the corresponding transmission path BS1-L1, BS1-L2, L, RNC-

L1, RNC-L2 from the slave unit SU to the master unit MU for a specific service type. If for example the required resources value is $RRV = 1 \text{ GBit/s}$ a smaller SINR threshold value $SINR_threshold$ will be determined in comparison to a case, where the required resources value is

5 $RRV = 1.5 \text{ GBit/s}$.

In addition or alternatively, the predefining algorithm may use as a fourth input parameter information about a quality of a channel estimation algorithm to be applied at the slave unit SU. Different manufactures of the slave units usually implement different proprietary channel estimation

10 algorithms. By applying for example a learning algorithm at the master unit MU, the master unit MU may determine a condition, when all uplink radio frequency signals received from a slave unit cannot be used for recovering data contained within the uplink radio frequency signals due to the quality of the channel estimation algorithm.

15 In addition or alternatively, the predefining algorithm may use as a fifth input parameter information about a location of the mobile station MS within the overall coverage area of the cooperative cluster CC. If the location of the mobile station MS allows for a line-of-sight transmission of the uplink radio frequency signals RFS from the mobile station MS to the slave unit SU of the cooperative cluster a higher predefined criterion may be configured for the slave unit SU in comparison to the case with a non-

20 line-of-sight transmission of the uplink radio frequency signals RFS from the mobile station MS to the slave unit SU.

In addition or alternatively, the predefining algorithm may use as a sixth

25 input parameter information about a velocity of the mobile station MS within the overall coverage area of the cooperative cluster CC. If the velocity of the mobile station MS is for example in a range of a velocity of a pedestrian a higher predefined criterion may be configured for the slave

unit SU in comparison to the case with a velocity in a range of a velocity of a car driving through a city.

- Alternatively, the characteristic parameter may be a service type of the radio frequency signals to be received and the predefined criterion may be a predefined delay class. Each service type such as background service (e.g. file upload, email transmission), VoIP service or gaming service may be assigned a delay class, which is one of a group of delay classes. The group of delay classes may comprise for example a first delay class FAST for a transmission time delay from the mobile station MS via one of the slave units to the master unit MU below a first predefined value, a second delay class AVERAGE for the transmission time delay between the first predefined value and a second predefined value above the first predefined value and a third delay class SLOW for the transmission time delay above the second predefined value. The background service may be assigned for example the third delay class SLOW, the VoIP service may be assigned for example the second delay class MIDDLE and the gaming service may be assigned for example the first delay class FAST (see Table 1).

Service type	Assigned delay class
Background	SLOW
VoIP	MIDDLE
Gaming	FAST

Table 1

- The predefining algorithm for predefining at the master unit MU for the slave unit SU one delay class out of the group of delay classes may use as an input parameter the transmission time delay of the uplink radio

frequency signals from the mobile station MS via the slave unit SU to the master unit MU.

Exemplarily according to Figure 1, the master unit MU may predefine the first delay class FAST for the first slave unit RRH-SU because an average transmission time delay from the mobile station MS via the first slave unit RRH-SU to the master unit BS-MU is below the first predefined value and the third delay class SLOW to the second slave unit BS-SU because an average transmission time delay from the mobile station MS via the second slave unit BS-SU to the master unit BS-MU is above the second predefined value (see Table 2). The average transmission time delay may depend on a distance between the network node comprising the slave unit and the network node comprising the master unit and may depend on a processing load at the network node comprising the slave unit for processing and forwarding the received uplink radio frequency signals to the network node comprising the master unit.

Slave unit	Predefined delay class
RRH-SU	FAST
BS-SU	SLOW

Table 2

Alternatively, the predefining algorithm may apply in addition one or several of the input parameters as given above according to the predefining algorithm for the predefined reception signal quality.

20

In a next step M1/2, the master unit MU transmits to the slave unit SU information INFO-PC related to the predefined criterion. Exemplarily, the master unit MU may transmit the SINR threshold value *SINR_threshold* to the slave unit SU.

- In a further step M1/3, the slave unit SU receives the information INFO-PC. The steps M1/1 to M1/3 may be performed before any communication between the radio access network RAN1 and the mobile station RAN1-MS or between the radio access network RAN2 and the mobile station RAN2-MS takes place. This means, that the criterion may be predefined by a prediction using the predefining algorithm as described above before any uplink radio frequency signals are received via the slave unit SU or are directly received at the master unit MU via an antenna system assigned and directly connected to the network node such as the base station RAN1-BS1 comprising the master unit BS-MU.
- In a next step M1/4, if the master unit MU has received a mobile-originated service request from the mobile station MS or a mobile-terminated service request for the mobile station MS such as an incoming voice call (not shown in Figure 3 for simplification), the master unit MU may decide about uplink radio resources for a transmission of radio frequency signals from the mobile station MS to the cooperative cluster CC. The uplink radio resources may be for example a resource unit (two PRB: physical resource block in 3GPP LTE) of 1 ms length of time and a group of 12 adjacent frequency subcarriers such as applied in 3GPP LTE. If frequency hopping is applied, a frequency switching to a further group of 12 adjacent frequency subcarriers is applied after 0.5 ms of the 1 ms length of time (after half length of time of the resource unit).
- In a further step M1/5, the master unit MU transmit one uplink grant UG1 to the mobile station MS. An uplink grant comprises information such as a code rate for coding the uplink radio frequency signals at the mobile station MS, a type of modulation for modulating the uplink radio frequency signals at the mobile station MS and a set of frequency subcarriers to be used by

the mobile station MS for the transmission of the uplink radio frequency signals.

In a next step M1/6, the mobile station MS receives the uplink grant UG1 from the master unit MU.

- 5 In a further step M1/7, which may be applied preferably in parallel to the step M1/5, the master unit MU transmits scheduling information SCHED-INFO-MS to the slave unit SU. The scheduling information SCHED-INFO-MS may comprise the same information as comprised in the uplink grant UG1 and may further comprise information about CAZAC (constant
- 10 amplitude zero auto-correlation) sequence or so-called Zadoff-Chu sequence to be applied by the mobile station MS. The CAZAC sequence is applied to uplink pilots to be transmitted simultaneously with the uplink data within the uplink radio frequency signals from the mobile station MS to the cooperative cluster CC. The scheduling information SCHED-INFO-MS
- 15 allows the slave unit SU to identify, in which frequency range the uplink frequency signals can be detected and which CAZAC sequence is applied to the uplink pilots. The scheduling information SCHED-INFO-MS may further comprise information of the assigned delay class depending on the service type of the service running at the mobile station MS.
- 20 In a next step M1/8, the slave unit SU receives the scheduling information SCHED-INFO-MS from the master unit MU.

- In an alternative, the information elements of the scheduling information SCHED-INFO-MS may be added to the one or several uplink grants UG1, UG2, UG3 and the one or several uplink grants UG1, UG2, UG3 are not
- 25 only forwarded by the slave unit SU to the mobile station MS but also processed at the slave unit SU in such a way, that the information elements for identifying which received radio frequency signal belongs to which mobile station are extracted and stored at the slave unit SU.

In a further alternative, the information INFO-PC related to the predefined criterion and the scheduling information SCHED-INFO-MS may be transmitted in a single message from the master unit MU to the slave unit SU.

- 5 In a next step M1/9, the mobile station MS transmits uplink radio frequency signals RFS to the second network node NN2 comprising the slave unit SU. The uplink radio frequency signals comprise a data unit of several information bits, CRC bits (CRC = cyclic redundancy check) and parity bits. In a further step M1/10, the second network node NN2 comprising the
- 10 slave unit SU receives the uplink radio frequency signals RFS via an assigned and connected antenna system (e.g. the first RRH RRH1 receives the uplink radio frequency signals from the mobile station RAN1-MS via the second antenna system RRH1-AS; see Figure 1).
- In a next step M1/11, a receiver of the second network node NN2
- 15 comprising the slave unit SU identifies the uplink radio frequency signals RFS by using the scheduling information SCHED-INFO-MS and may store the received uplink radio frequency signals RFS in a memory such as a memory element of an FPGA (FPGA = Field-programmable Gate Array). In a further step M1/12, which may be performed preferably in parallel to
- 20 the step M1/11, a value of the characteristic parameter of the received uplink radio frequency signals RFS such as the slave SINR measurement value *SINR_slave_measure* may be determined, if the characteristic parameter is an SINR. The slave SINR measurement value *SINR_slave_measure* may be determined for example by a common
- 25 channel estimation algorithm of a receiver of the first RRH RRH1 such as an MMSE receiver (MMSE = minimum mean squared error).

In a next step M1/13, the slave unit SU verifies, whether the characteristic parameter of the received uplink radio frequency signals RFS fulfils the predefined criterion.

If the predefined criterion is a predefined reception signal quality,

- 5 exemplarily, the slave unit SU compares the slave SINR measurement value *SINR_slave_measure* with the SINR threshold value *SINR_threshold* provided by the master unit MU.

If the slave SINR measurement value *SINR_slave_measure* is equal or larger than the SINR threshold value *SINR_threshold*, the method MET1

- 10 may be continued with a further step M1/9.

If the slave SINR measurement value *SINR_slave_measure* is smaller than the SINR threshold value *SINR_threshold*, the received radio frequency signals RFS are not forwarded to the master unit MU and the method MET1 may be continued by repeating the step M1/9 to M1/13 for further uplink

15 radio frequency signals.

If the predefined criterion is the predefined delay class of the received uplink radio frequency signals the slave unit may apply for example following exemplarily look-up table 3, for the verification, whether to

- 20 forward the received radio frequency signals RFS to the master unit MU or to discard the received radio frequency signals RFS at the slave unit SU.

Assigned delay class	Predefined delay class	Forwarding (F) or discarding (D)
FAST	FAST	F
FAST	MIDDLE	D
FAST	SLOW	D
MIDDLE	FAST	F
MIDDLE	MIDDLE	F
MIDDLE	SLOW	D
SLOW	FAST	F
SLOW	MIDDLE	F
SLOW	SLOW	F

Table 3

If according to a first example the assigned delay class for the service of the mobile station MS is equal to FAST and the slave unit SU has been configured a predefined delay class equal to SLOW, the slave unit SU

5 decides to discard the received radio frequency signals RFS. If according to a second example the assigned delay class is equal to MIDDLE and the slave unit SU has been configured a predefined delay class equal to MIDDLE, the slave unit SU decides to forward the radio frequency signals RFS to the master unit MU. If according to a third example the assigned

10 delay class is equal to SLOW and the slave unit SU has been configured a predefined delay class equal to FAST, the slave unit SU decides to forward the radio frequency signals RFS to the master unit MU.

In the further step M1/14, the slave unit SU controls a forwarding of the

15 received uplink radio frequency signals RFS from the second network node NN2 to the first network node NN1 comprising the master unit MU

depending on a fulfilment of the predefined criterion verified by the step M1/13.

If the predefined criterion is fulfilled, the received uplink radio frequency signals RFS are forwarded to the network node comprising the master unit
5 MU and if the predefined criterion is not fulfilled, the received uplink radio frequency signals RFS are discarded at the network node comprising the slave unit SU. Thereby, the stored uplink radio frequency signals RFS may be queried from the memory.

The radio frequency signals RFS may be forwarded in a common form of
10 I/Q samples in a frequency domain after an FFT (FFT = Fast Fourier Transformation) per antenna element. Only I/Q samples of those antenna elements will be forwarded, which fulfil the predefined criterion.

In an alternative, the radio frequency signals RFS may be forwarded in a common form of soft bits per antenna system comprising one or several
15 antenna elements after a pre-processing of received uplink radio frequency signals at a network node comprising the antenna system for generating the soft bits.

The forwarded I/Q samples or the forwarded soft bits may comprise an information header with information identifying the I/Q samples like a
20 range of PRB numbers, a frame and a subframe number.

In a next step M1/15, the second network NN2 comprising the master unit MU receives the forwarded uplink radio frequency signals RFS.

In a further step M1/16, an MMSE receiver of the second network node NN2 may perform a common superposition such as an MMSE combining
25 of the forwarded uplink radio frequency signals RFS with one or several further uplink radio frequency signals obtained directly from an antenna system assigned to the master unit MU and/or obtained from a further slave

unit to recover the information bits of the data unit belonging to a specific mobile station service.

Figure 4 shows schematically a block diagram of a method MET2 for
5 multipoint reception according to a further embodiment of the invention.
The elements in Figure 4 that correspond to elements of Figure 3 have been designated by same reference numerals.

In addition to the steps M1/2 to M1/16 of the method MET1, the method MET2 may further comprises steps M2/1 to M2/7.

- 10 In a further step M2/1, an offset value of the predefined criterion may be predefined at the master unit MU and preferably also at the slave unit SU.
The offset value may be individually determined for each slave unit or may be equally determined for each slave unit controlled by the master unit MU.
In further alternatives, the offset value may be only predefined and
15 configured at the master unit MU or the offset value may be only predefined at the master unit MU and may be transmitted from the master unit MU to the slave unit SU or the offset value may be predefined at the O&M network node and may be transmitted from the O&M network node to the master unit MU and preferably also to the slave unit SU.
20 The offset value may be for example an SINR value $SINR_window$ in dB, if the predefined criterion is the predefined reception signal quality provided by the SINR threshold value $SINR_threshold$.

The two dots in Figure 4 represent the steps M1/5 to M1/8, which are not shown in Figure 4 for simplification.

- 25 In the steps M1/9, M1/10 first uplink radio frequency signals RFS1 are transmitted from the mobile station MS to the slave unit SU and are received at the slave unit SU.

In a next step M2/2, the second network node NN2 receives the first uplink radio frequency signals RFS1 via a directly assigned and collocated antenna system (e.g. the master unit BS-MU receives the first uplink radio frequency signals RFS1 from the mobile station RAN1-MS via the first antenna system

5 BS1-AS, which belongs to the base station RAN1-BS1; see Figure 1).

In a further step M2/3, the master unit MU preferably may store the received first uplink radio frequency signals RFS1 in a memory such as a memory element of an FPGA.

In a next step M2/4, a value of the characteristic parameter of the received
10 first uplink radio frequency signals RFS1 such as a master SINR measurement value *SINR_master_measure* may be determined by the first network node NN1, if the characteristic parameter is an SINR. This means, that the value of the characteristic parameter is determined without any superposition of the first uplink radio frequency signals at the master unit
15 MU by using only the uplink radio frequency signals RFS1 directly received at the first network node NN1. The value of the characteristic parameter of the received first uplink radio frequency signals RFS1 depends on a distance between the mobile station RAN1-MS and the first antenna system BS1-AS (see Figure 1) and depends on a transmission characteristic of the first
20 uplink radio frequency signals RFS1. The transmission characteristic is for example impacted by a number of antenna elements of an antenna system of the mobile station MS and thereby impacted, whether the mobile station MS is able to transmit the first uplink radio frequency signals RFS1 in a directed or in an undirected way.

25 The master SINR measurement value *SINR_master_measure* may be obtained for example by a common channel estimation algorithm of a receiver of the first network node NN1 (see Figure 1) such as an MMSE receiver.

In a further optional step M2/5, the master unit MU may determine the predefined criterion such as the predefined reception signal quality provided by the SINR threshold value *SINR_threshold* by using for example following equation:

5
$$SINR_threshold = SINR_master_measure - SINR_window \quad (1)$$

In the step M1/2, the master unit MU transmits to the slave unit SU either the information INFO-PC of the predefined criterion such as the SINR threshold value *SINR_threshold* or information INFO-VAL-CP of the value of the characteristic parameter of the received first uplink radio frequency signals RFS1 such as the master SINR measurement value *SINR_master_measure*.

10

In a further step M2/6, if the slave unit SU has received the information INFO-VAL-CP of the value of the characteristic parameter of the received first uplink radio frequency signals RFS1, the slave unit SU determines the predefined criterion based on the value of the characteristic parameter of the received first uplink radio frequency signals RFS1 and based on the offset value configured at the slave unit SU by using for example an equation identical to the equation (1).

15

Then a further processing of the first uplink radio frequency signals RFS1 is performed similar to the method MET1 by the steps M1/13 to M1/16.

20

If by repeating the step M1/9 second uplink radio frequency signals RFS2 are transmitted from the mobile station MS to the network nodes NN1, NN2 of the slave unit SU and the master unit MU, the method MET2 may be continued according to a first alternative by receiving and storing the second uplink radio frequency signals RFS2 at the second network node NN2 comprising the slave unit SU by repeating the steps M1/10 and M1/11 and by receiving and storing the second uplink radio frequency signals RFS2 at the first network node NN1 comprising the master unit MU

25

by repeating the steps M2/2 and M2/3. Then according to the first alternative, the slave unit SU may process the second received uplink radio frequency signals RFS2 with a same predefined criterion as applied for the first received uplink radio frequency signals RFS1 and the master unit MU may not determine a second predefined criterion to be applied for the second received uplink radio frequency signals RFS2 as shown in Figure 4. According to a second alternative embodiment (not shown in Figure 4), the steps M1/6 to M1/7 and M2/2 to M2/6 may be repeated for the second received uplink radio frequency signals RFS2. This means contrary to the first alternative embodiment, that the predefined criterion is not reused for processing the second received uplink radio frequency signals RFS2 and that the master unit MU determines a second value of the characteristic parameter of the received second uplink radio frequency signals RFS2 and that the second value of the characteristic parameter of the received second uplink radio frequency signals RFS2 or a second predefined criterion based on the second value of the characteristic parameter of the received second uplink radio frequency signals RFS2 is transmitted from the master unit MU to the slave unit SU for verifying at the slave unit SU in the repeated step M1/13, whether a second value of the characteristic parameter determined at the slave unit SU and obtained from the second uplink radio frequency signals RFS received at the slave unit SU fulfil the second predefined criterion. The second alternative embodiment allows continuously adapting the predefined criterion to a fast-varying channel quality of the radio link between the mobile station RAN1-MS and the cooperation cluster CC (see Figure 1).

The three dots in Figure 4 represent the steps M1/11 to M1/13, which are not shown in Figure 4 for simplification.

Figure 5 shows schematically a block diagram of a method MET3 for multipoint reception according to an even further embodiment of the invention. The elements in Figure 5 that correspond to elements of Figure 3 and Figure 4 have been designated by same reference numerals.

- 5 In addition to the steps M1/1, M1/4 to M1/12, and M1/14 to M1/16 of the method MET1 and the steps M2/2 and M2/3 of the method MET2 the method MET3 may further comprises steps M3/1 to M3/5.

The two dots in Figure 5 represent the steps M1/5 to M1/8, which are not shown in Figure 5 for simplification.

- 10 In a further step M3/1 after the step M1/12, the slave unit SU transmits to the master unit MU information INFO-RC of the reception quality such as the value of the characteristic parameter of the uplink radio frequency signals RFS received at the slave unit SU. The information INFO-RC of the reception quality may be for example the slave SINR measurement value
- 15 *SINR_slave_measure*, if the characteristic parameter is an SINR.

In a next step M3/2, the master unit MU receives the information INFO-RC of the reception quality.

- In a further step M3/3, the master unit MU verifies, whether a reception of the first uplink radio frequency signals via the slave unit SU is required for recovering the information (e.g. the data block) transmitted by the first
- 20 uplink radio frequency signals RFS1.

Such verification may be done for example by following sub-steps:

- If a reception quality of the first uplink radio frequency signals directly received at the master unit MU and not received via one of the slave units is
- 25 already sufficient for recovering error-free the information transmitted by the first uplink radio frequency signals RFS1, no superposition with further first uplink radio frequency signals received via one of the slave units is required.

- If a reception quality of the first uplink radio frequency signals directly received at the master unit MU and not received via one of the slave units is not sufficient for recovering error-free the information transmitted by the first uplink radio frequency signals RFS1, the master unit MU may perform a
- 5 ranking of the reception quality of the first uplink radio frequency signals RFS1 at the slave units and the master unit MU may only select one or a subset of the slave units with a highest reception quality of the ranking. The selection of one or several slave units may depend on a missing reception power to be required for recovering error-free the information transmitted
- 10 by the first uplink radio frequency signals RFS1.
- In the following it is assumed, that the reception quality of the slave unit SU has been selected and identified by the master unit MU as one of the highest reception qualities of all reception qualities received from the slave units controlled by the master unit MU.
- 15 In a next step M3/4, the master unit MU transmits to the slave unit SU a request REQ for transmitting the first uplink radio frequency signals RFS1 received and stored at the slave unit SU to the master unit MU.
- In a further step M3/5, the slave unit SU receives the request REQ from the master unit MU.
- 20 The method MET3 is continued with the steps M1/14 to M1/16.
- All steps of the method MET3 may be repeated for every uplink radio frequency signal transmitted from the mobile station MS and received at the master unit MU and the slave unit SU such as shown in Figure 5 for the second uplink radio frequency signals RFS2.
- 25 The three dots in Figure 5 shown between the steps M2/2 and M1/15 according to the master unit MU represent the steps M2/3, M3/2, M3/3, and M3/4, which are repeated for processing the second received uplink

radio frequency signals RFS2 and are not shown in Figure 5 for simplification.

The three dots in Figure 5 shown between the steps M1/10 and M1/14 according to the slave unit SU represent the steps M1/11, M1/12, which
5 are repeated for processing the second received uplink radio frequency signals RFS2 and are not shown in Figure 5 for simplification.

With respect to all three exemplarily methods MET1, MET2, and MET3 the predefined criterion is selected dependent on an overall reception quality of
10 the uplink radio frequency signals received from the mobile station MS and/or dependent on a service type of the service running at the mobile station MS regarding a transmission time delay for the uplink radio frequency signals. This means, that the predefined criterion may specifically
15 selected for each mobile station transmitting the radio frequency signals and for each slave unit receiving the radio frequency signals.

The methods MET1, MET2, and MET3 may be used for a multipoint reception using several antenna systems or may be used for a single-point reception using a single antenna system. In both cases, if the characteristic
20 parameter of the received uplink radio frequency signals does not fulfil the predefined criterion at all antenna systems for the multipoint reception or at the single antenna system for the single-point reception, the master unit will not receive any uplink radio frequency signals for recovering a data unit contained in the uplink radio frequency signals and the radio
25 communication system may request a retransmission for the data unit by transmitting further uplink radio frequency signals containing the data unit.

Figure 6 shows a functional block diagram of a master unit MU. The master unit MU may be part for example of a baseband processing block of a

base station or of a base station interface of a radio network controller. The master unit MU may comprise a determining block MU-DET-B for determining the predefined criterion for the characteristic parameter of the uplink radio frequency signals, for determining preferably the offset value
5 of the predefined criterion, and for determining preferably the value of the characteristic parameter of the uplink radio frequency signals. The master unit MU may further comprise an interface MU-IF for external communication for providing information INFO-PC related to the predefined criterion such as the predefined criterion itself or the offset value
10 of the predefined criterion, preferably the scheduling information SCHED-INFO-MS, preferably the information INFO-VAL-CP of the value of the characteristic parameter of the received first uplink radio frequency signals, and preferably the request REQ to the slave unit SU. The interface MU-IF is further used for receiving the information INFO-RC of the reception quality
15 of the uplink radio frequency signals RFS received at the slave unit SU such as the slave SINR measurement value *SINR_slave_measure* for a passive antenna array of the slave unit SU or a first slave SINR measurement value *SINR1_slave_measure* for a first antenna element of an active antenna array of the slave unit SU and a second slave SINR measurement value
20 *SINR2_slave_measure* for a second antenna element of the active antenna array of the slave unit SU.

The master unit MU may further comprise a verification block MU-VER-B for verifying, whether the reception of the first uplink radio frequency signals via the slave unit SU is required for recovering the information (e.g. the
25 data block) transmitted by the first uplink radio frequency signals RFS1. The master unit MU may further comprise a memory block MU-MEM-B for storing the predefined criterion related to the slave unit SU and related to the mobile station MS and preferably related to the service type running at

the mobile station MS, for storing preferably the offset value of the predefined criterion related to the slave unit SU and related to the mobile station MS and for storing preferably the uplink radio frequency signals directly received via an antenna system connected to the network node comprising the master unit MU.

Figure 7 shows a functional block diagram of a slave unit SU. The slave unit SU may be part for example of a baseband processing block of a base station or of a baseband processing block of an RRH with base band functionalities shifted from the baseband processing block of the base station to the baseband processing block of the RRH.

The slave unit SU may comprise a verification block SU-VER-B for verifying, whether the characteristic parameter of the received uplink radio frequency signals fulfils the predefined criterion and whether the received uplink radio frequency signals shall be transmitted to the master unit MU or the received uplink radio frequency signals shall be discarded.

The slave unit SU may further comprise an interface SU-IF for external communication for controlling a forwarding of the received uplink radio frequency signals to the network node comprising the master unit MU by using a single control command COMMAND to a forwarding unit of the network node of the slave unit SU for forwarding uplink radio frequency signals received at a passive antenna system comprising one or several antenna elements or by using for example a first control command COMMAND1 for forwarding uplink radio frequency signals received at a first antenna element of an active antenna array and a second control command COMMAND2 for forwarding uplink radio frequency signals received at a second antenna element of an active antenna array and preferably for providing the information INFO-RC of the reception quality of

the uplink radio frequency signals RFS received at the slave unit SU such as the slave SINR measurement value *SINR_slave_measure* for a passive antenna array of the slave unit SU or a first slave SINR measurement value *SINR1_slave_measure* for a first antenna element of an active antenna array of the slave unit SU and a second slave SINR measurement value *SINR2_slave_measure* for a second antenna element of the active antenna array of the slave unit SU.

The interface SU-IF is further used for receiving information INFO-PC related to the predefined criterion such as the predefined criterion itself or the offset value of the predefined criterion, for receiving preferably the scheduling information SCHED-INFO-MS, for receiving preferably the information INFO-VAL-CP of the value of the characteristic parameter of the received first uplink radio frequency signals, and for receiving preferably the request REQ.

The slave unit SU may further comprise a determining block SU-DET-B for determining the value of the characteristic parameter of the received uplink radio frequency signals RFS. The slave unit SU may further comprise a memory block SU-MEM-B for storing the predefined criterion related to the slave unit SU and related to the mobile station MS and preferably related to the service type running at the mobile station MS, for storing preferably the offset value of the predefined criterion related to the slave unit SU and related to the mobile station MS and for storing preferably the uplink radio frequency signals received via an antenna system assigned to the slave unit SU.

25

Moreover, embodiments may provide a computer program having a program code for performing parts of the steps of the above methods

MET1, MET2, MET3 when the computer program is executed on a computer or processor.

- A person of skill in the art would readily recognize that steps of various above-described methods MET1, MET2, MET3 can be performed by
- 5 programmed computers. Herein, some embodiments are also intended to cover program storage devices, e.g., digital data storage media, which are machine or computer readable and encode machine-executable or computer-executable programs of instructions, wherein said instructions perform some or all of the steps of said above-described methods. The
- 10 program storage devices may be, e.g., digital memories, magnetic storage media such as magnetic disks and magnetic tapes, hard drives, or optically readable digital data storage media. The embodiments are also intended to cover computers programmed to perform said steps of the above-described methods.
- 15 The description and drawings merely illustrate the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements that, although not explicitly described or shown herein, embody the principles of the invention and are included within its spirit and scope. Furthermore, all examples recited herein are
- 20 principally intended expressly to be only for pedagogical purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor(s) to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and
- 25 embodiments of the invention, as well as specific examples thereof, are intended to encompass equivalents thereof.

Functional blocks denoted as "means for ..." (performing a certain function) shall be understood as functional blocks comprising circuitry that

is adapted for performing a certain function, respectively. Hence, a "means for s.th." may as well be understood as a "means being adapted or suited for s.th.". A means being adapted for performing a certain function does, hence, not imply that such means necessarily is performing said function (at
5 a given time instant).

The functions of the various elements shown in the Figures, including any functional blocks labeled as "means", "means for receiving", "means for verifying", "means for determining", "means for transmitting", "means for performing", "means for scheduling", may be provided through the use of
10 dedicated hardware, such as "a receiver", "a verifier", "a determiner", "a transmitter", "a performer or a processor", "a scheduler", as well as hardware capable of executing software in association with appropriate software. When provided by a processor, the functions may be provided by a single dedicated processor, by a single shared processor, or by a plurality
15 of individual processors, some of which may be shared. Moreover, explicit use of the term "processor" or "controller" should not be construed to refer exclusively to hardware capable of executing software, and may implicitly include, without limitation, digital signal processor (DSP) hardware, network processor, application specific integrated circuit (ASIC), field programmable
20 gate array (FPGA), read only memory (ROM) for storing software, random access memory (RAM), and non volatile storage. Other hardware, conventional and/or custom, may also be included. Similarly, any switches shown in the Figures are conceptual only. Their function may be carried out through the operation of program logic, through dedicated logic, through
25 the interaction of program control and dedicated logic, or even manually, the particular technique being selectable by the implementer as more specifically understood from the context.

It should be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principles of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudo code, and the like

5 represent various processes which may be substantially represented in computer readable medium and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

CLAIMS

1. A method (MET1, MET2, MET3) for receiving uplink radio frequency signals (RFS, RFS1, RFS2) in a radio communication system (RCS1, RCS2), said radio communication system (RCS1, RCS2) comprises at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS) of a cooperative cluster (CC) for a multipoint reception of said uplink radio frequency signals (RFS, RFS1, RFS2), a first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) assigned to a first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS), and a master unit (MU, BS-MU, RNC-MU) controlling said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU), said method (MET1, MET2, MET3) comprising the step of receiving (M1/10) at said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS) said uplink radio frequency signals (RFS, RFS1, RFS2),
- characterized in that** said method further comprises the steps of:
- verifying (M1/13) at said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU), whether a characteristic parameter of said received uplink radio frequency signals (RFS, RFS1, RFS2) fulfills a predefined reception signal quality, and
 - controlling (M1/14) at said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) a forwarding of said received uplink radio frequency signals (RFS, RFS1, RFS2) to said master unit (MU, BS-MU, RNC-MU) depending on a fulfillment of said predefined reception signal quality.
2. Method (MET1, MET2, MET3) according to claim 1, wherein said verifying step is performed separately for each antenna element of said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-

- AS, RAN2-BS1-AS, RAN2-BS2-AS), if said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS) is an active antenna array or wherein said verifying step is performed once only for said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS), if said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS) is a passive antenna system.
- 5
3. Method (MET1, MET2, MET3) according to any of the preceding claims, wherein said predefined reception signal quality depends on at least one of the following:
- 10
- transport format of said uplink radio frequency signals (RFS, RFS1, RFS2) on a radio link from a mobile station (MS) to said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS),
- 15
- unused transmission resources on a connection from said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) to said master unit (MU, BS-MU, RNC-MU),
 - required transmission resources on said connection from said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) to said master unit (MU, BS-MU, RNC-MU) for said uplink radio frequency signals,
- 20
- quality of a channel estimation algorithm performed at said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU),
 - location of a mobile station (RAN1-MS) transmitting said uplink radio frequency signals (RFS, RFS1, RFS2) within a coverage area of said first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS),
- 25
- velocity of the mobile station (RAN1-MS) transmitting said uplink radio frequency signals (RFS, RFS1, RFS2).

4. Method (MET1, MET2) according to any of the preceding claims,
wherein said method (MET1, MET2) further comprises the steps of:
- determining (M1/1, M2/5) at said master unit (MU, BS-MU, RNC-MU)
said predefined reception signal quality for said characteristic
5 parameter, and
- transmitting (M1/2) from said master unit (MU, BS-MU, RNC-MU) to
said at least one first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU)
information of said predefined reception signal quality.
5. Method (MET1) according to claim 4, wherein said determining step
10 (M1/1) is based on a prediction of said predefined reception signal
quality before said uplink radio frequency signals (RFS) are forwarded to
said master unit (MU, BS-MU, RNC-MU) or before said uplink radio
frequency signals (RFS) are received from a second one of said at least
two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-
15 BS2-AS) assigned to said master unit (MU, BS-MU, RNC-MU).
6. Method (MET2) according to any of the preceding claims 1 to 4,
wherein a second one (BS1-AS) of said at least two antenna systems is
connected to a network node (BS1-AS) comprising said master unit (MU,
BS-MU), wherein said method (MET2) further comprises the steps of:
20 - predefining (M2/1) at said master unit (MU, BS-MU) an offset value of
said predefined reception signal quality,
- receiving (M2/2) at said master unit (MU, BS-MU) said uplink radio
frequency signals (RFS1) via said second one (BS1-AS) of said at least
two antenna systems,
25 - determining (M2/4) at said master unit (MU, BS-MU) a value of said
characteristic parameter of said uplink radio frequency signals (RFS1)
received via said second one (BS1-AS) of said at least two antenna

systems, and

wherein said predefined reception signal quality is determined based on said value of said characteristic parameter and based on said predefined offset value.

- 5 7. Method (MET1) according to any of the preceding claims 1 to 3,
wherein a second one (BS1-AS) of said at least two antenna systems is
connected to a network node (BS1-AS) comprising said master unit (MU,
BS-MU), wherein said method (MET1) further comprises the steps of:
- 10 - predefining at said master unit (MU, BS-MU) and at said first slave unit
(SU, RRH-SU, BS-SU1) an offset value of said predefined reception
signal quality,
- receiving (M2/2) at said master unit (MU, BS-MU) said uplink radio
frequency signals (RFS1) via said second one (BS1-AS) of said at least
two antenna systems,
- 15 - determining (M2/4) at said master unit (MU, BS-MU) a value of said
characteristic parameter of said uplink radio frequency signals (RFS1)
received via said second one (BS1-AS) of said at least two antenna
systems,
- transmitting (M1/2) said value of said characteristic parameter from
- 20 said master unit (MU, BS-MU) to said first slave unit (SU, RRH-SU, BS-
SU1), and
- determining (M2/6) at said first slave unit (SU, RRH-SU, BS-SU1) said
predefined reception signal quality based on said value of said
characteristic parameter and based on said predefined offset value.
- 25 8. Method (MET3) according to any of the preceding claims 1 to 3 ,
wherein said method (MET3) further comprises the steps of:
- determining (M1/12) said reception quality of said received uplink

- radio frequency signals (RFS1, RFS2) at a network node (RRH1, RAN1-BS2, RAN2-BS1, RAN2-BS2) comprising said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU),
- transmitting (M3/1) information (INFO-RC) of said reception quality to
5 said master unit (MU, BS-MU, RNC-MU),
 - verifying (M3/3) at said master unit (MU, BS-MU, RNC-MU), whether a further reception of said uplink radio frequency signals (RFS1, RFS2) from said network node (RRH1, RAN1-BS2, RAN2-BS1, RAN2-BS2) is required for recovering information transmitted by said uplink radio
10 frequency signals (RFS1, RFS2), and
 - transmitting (M3/4) from said master unit (MU, BS-MU, RNC-MU) to said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) a request (REG) for forwarding said received uplink radio frequency signals (RFS1, RFS2) to said master unit (MU, BS-MU, RNC-MU), if said reception of
15 said uplink radio frequency signals (RFS1, RFS2) is required.
9. Method (MET1, MET2, MET3) according to claim 1, wherein said predefined reception signal quality is either of the following:
- a signal-to-interference-and-noise ratio threshold value,
 - a signal-to-interference ratio threshold value,
 - 20 - a signal-to-noise ratio threshold value,
 - received signal power threshold value.
10. Method (MET1) according to any of the preceding claims 1 to 5, wherein a further characteristic parameter of said received uplink radio frequency signals (RFS) is a service type of said received uplink radio
25 frequency signals (RFS), wherein a further predefined criterion is a predefined delay class of said received uplink radio frequency signals (RFS) and wherein said predefined delay class depends on a

transmission time delay of said uplink radio frequency signals (RFS) from a mobile station (MS) via said first slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) to said master unit (MU, BS-MU, RNC-MU).

11. A master unit (MU, BS-MU, RNC-MU) for controlling a slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) in a radio communication system (RCS1, RCS2) receiving uplink radio frequency signals (RFS, RFS1, RFS2) at a cooperative cluster (CC) of at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS),
characterized in that said master unit (MU, BS-MU, RNC-MU) comprising:
- means (MU-DET-B) for determining a predefined reception signal quality for a characteristic parameter of said uplink radio frequency signals (RFS, RFS1, RFS2), said predefined criterion is applied by said slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) for controlling a forwarding to said master unit (MU, BS-MU, RNC-MU) of said uplink radio frequency signals (RFS, RFS1, RFS2) received at a first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS), and
 - means (MU-COM-B, MU-IF) for initiating a transmission to said slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) of information (INFO-PC) of said predefined reception signal quality.

12. A slave unit (SU, RRH-SU, BS-SU1, BS-SU2, BS-SU) for being controlled by a master unit (MU, BS-MU, RNC-MU) in a radio communication system (RCS1, RCS2) receiving uplink radio frequency signals (RFS, RFS1, RFS2) at a cooperative cluster (CC) of at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS),
characterized in that said slave unit (SU, RRH-SU, BS-SU1, BS-SU2,


BS-SU) comprising:


- means (SU-VER-B) for verifying, whether a characteristic parameter of said uplink radio frequency signals (RFS, RFS1, RFS2) received at a first one of said at least two antenna systems (BS1-AS, BS2-AS, RRH1-AS, RAN2-BS1-AS, RAN2-BS2-AS) fulfills a predefined reception signal quality, and
- means (SU-CON-B) for controlling a forwarding of said received uplink radio frequency signals (RFS, RFS1, RFS2) to said master unit (MU, BS-MU, RNC-MU) depending on a fulfillment of said predefined reception signal quality.

13. A radio network controller (RNC) comprising a master unit (MU, RNC-MU) according to claim 11.

14. A base station (RAN1-BS, RAN1-BS2, RAN2-BS, RAN2-BS2) comprising at least one antenna system (BS1-AS, BS2-AS, RAN2-BS1-AS, RAN2-BS2-AS) and at least one of the following: a master unit (MU, BS-MU) according to claim 11, a slave unit (SU, BS-SU1, BS-SU2, BS-SU) according to claim 12.

15. A remote radio head (RRH1) comprising an antenna system (RRH1-AS) and a slave unit (RRH-SU) according to claim 12.

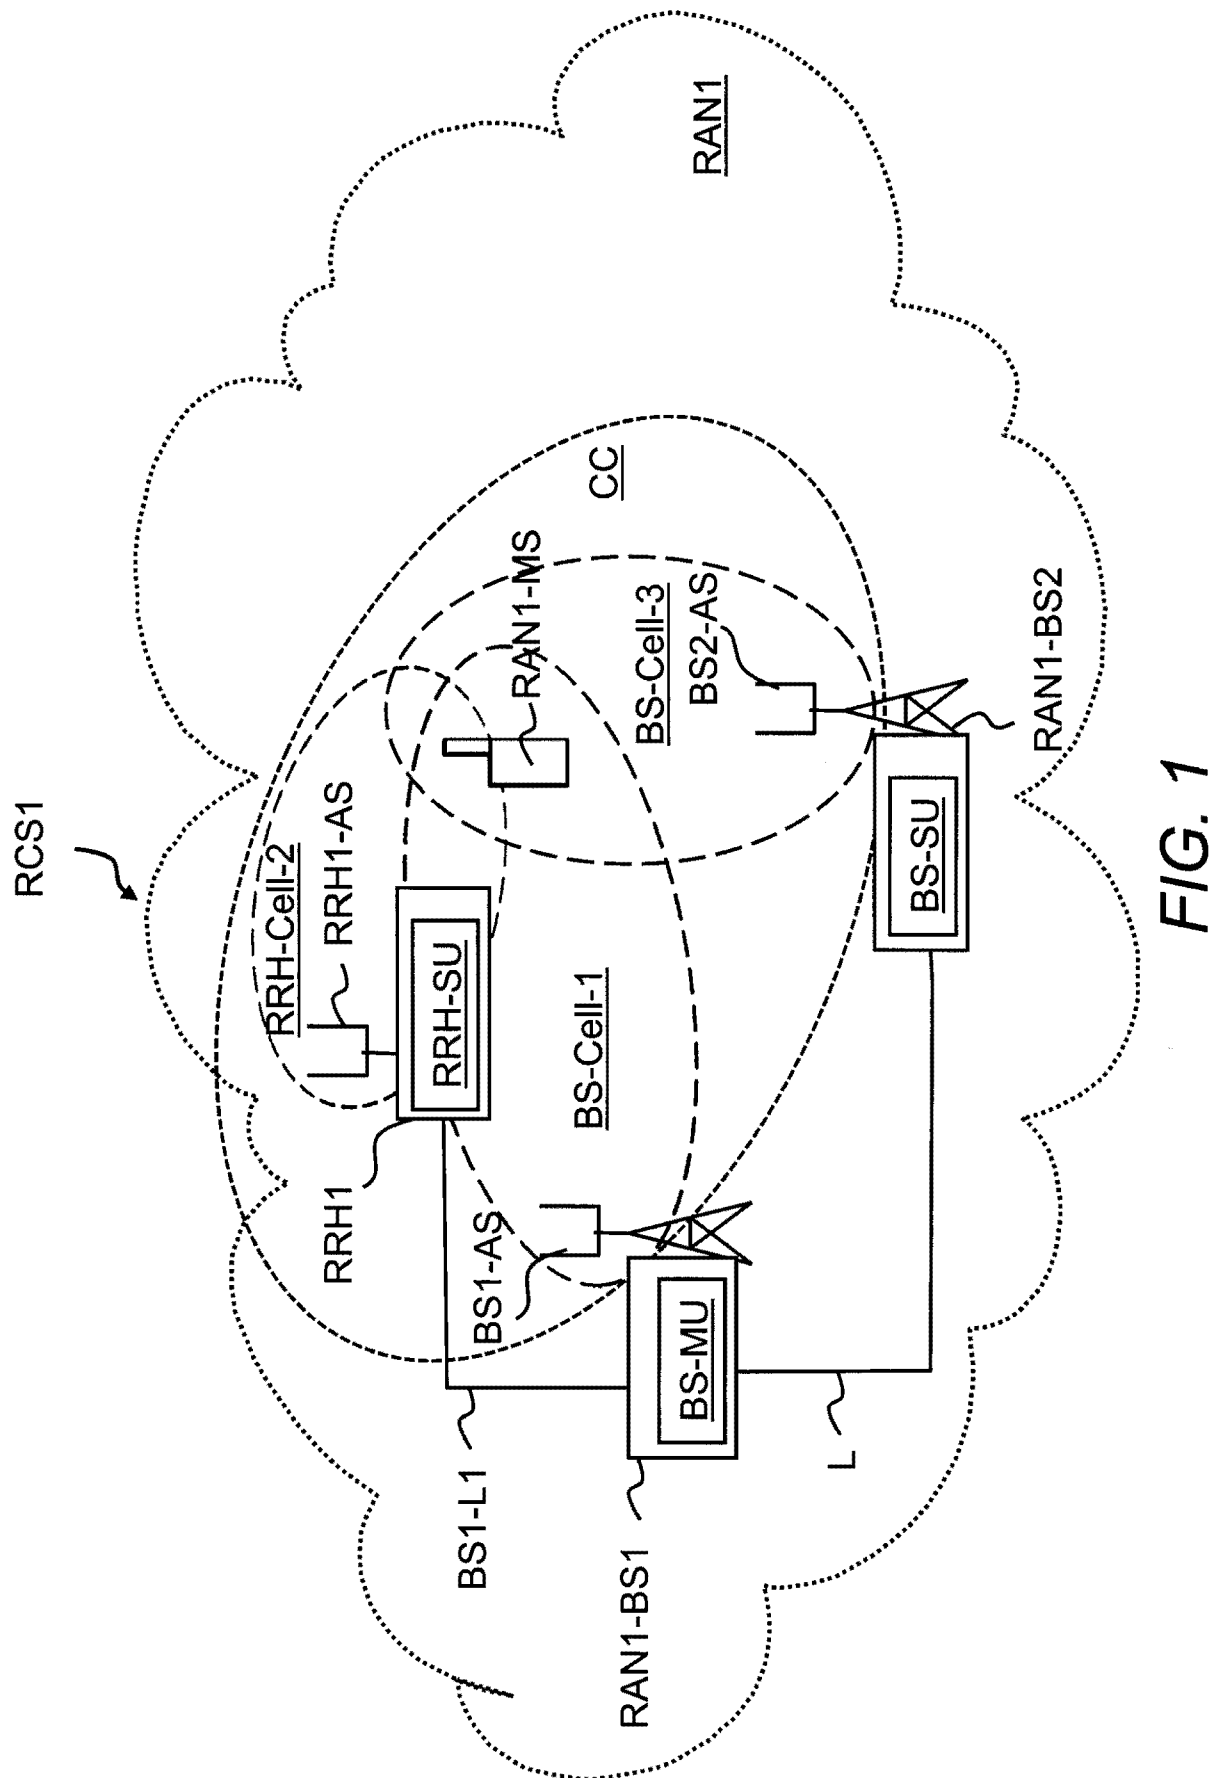

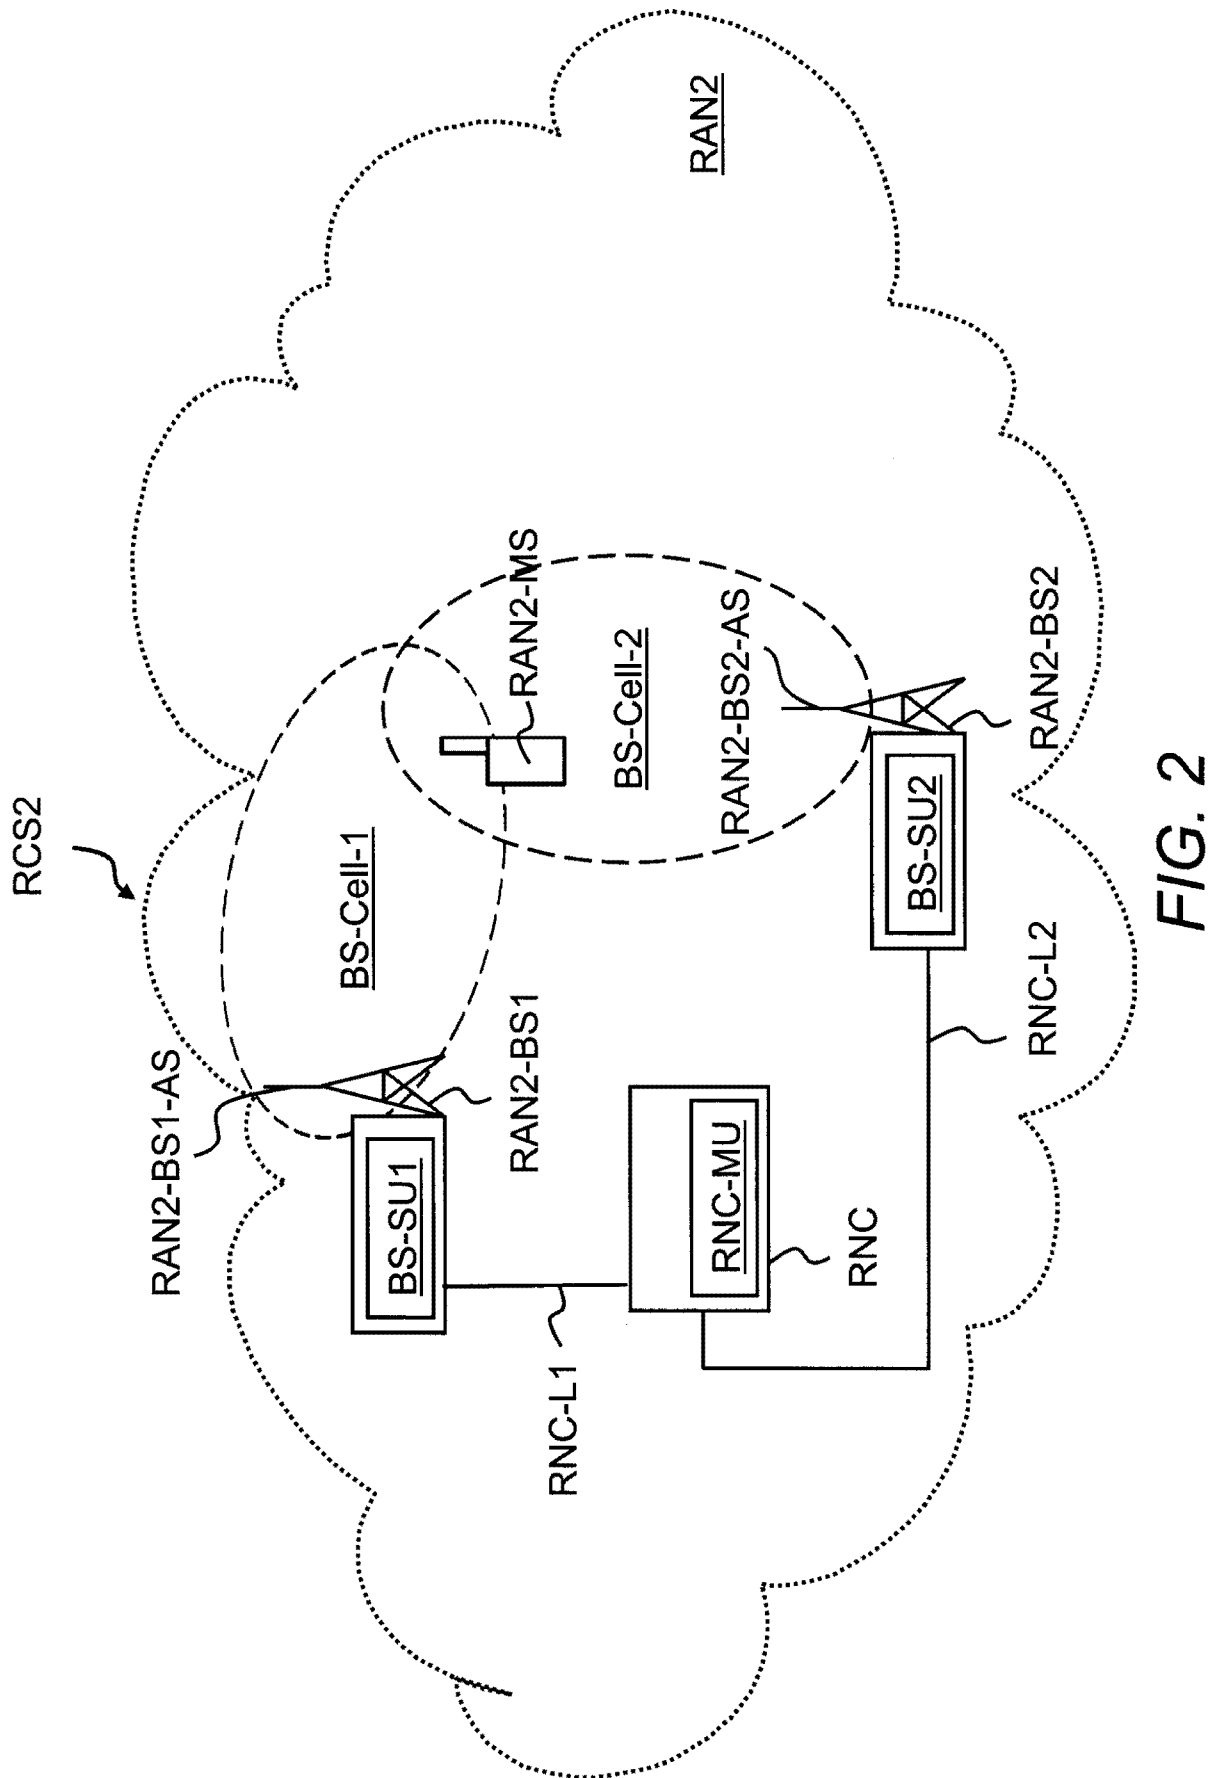

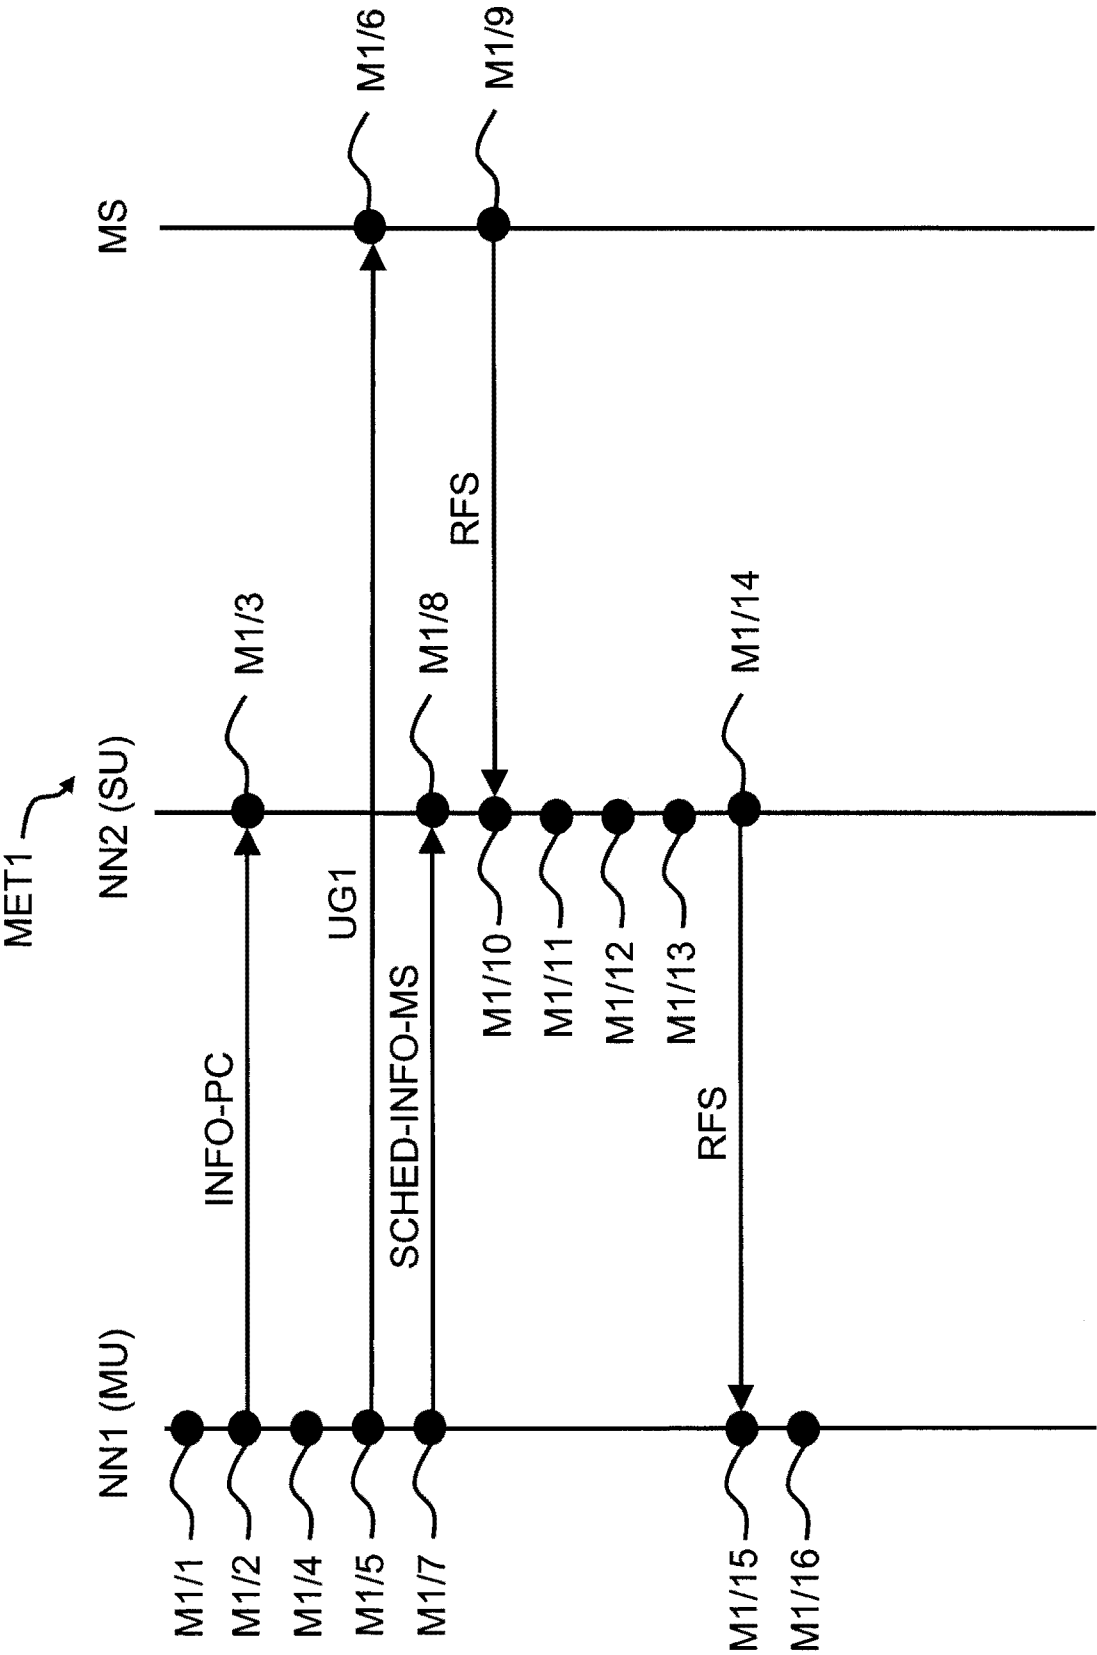


FIG. 3

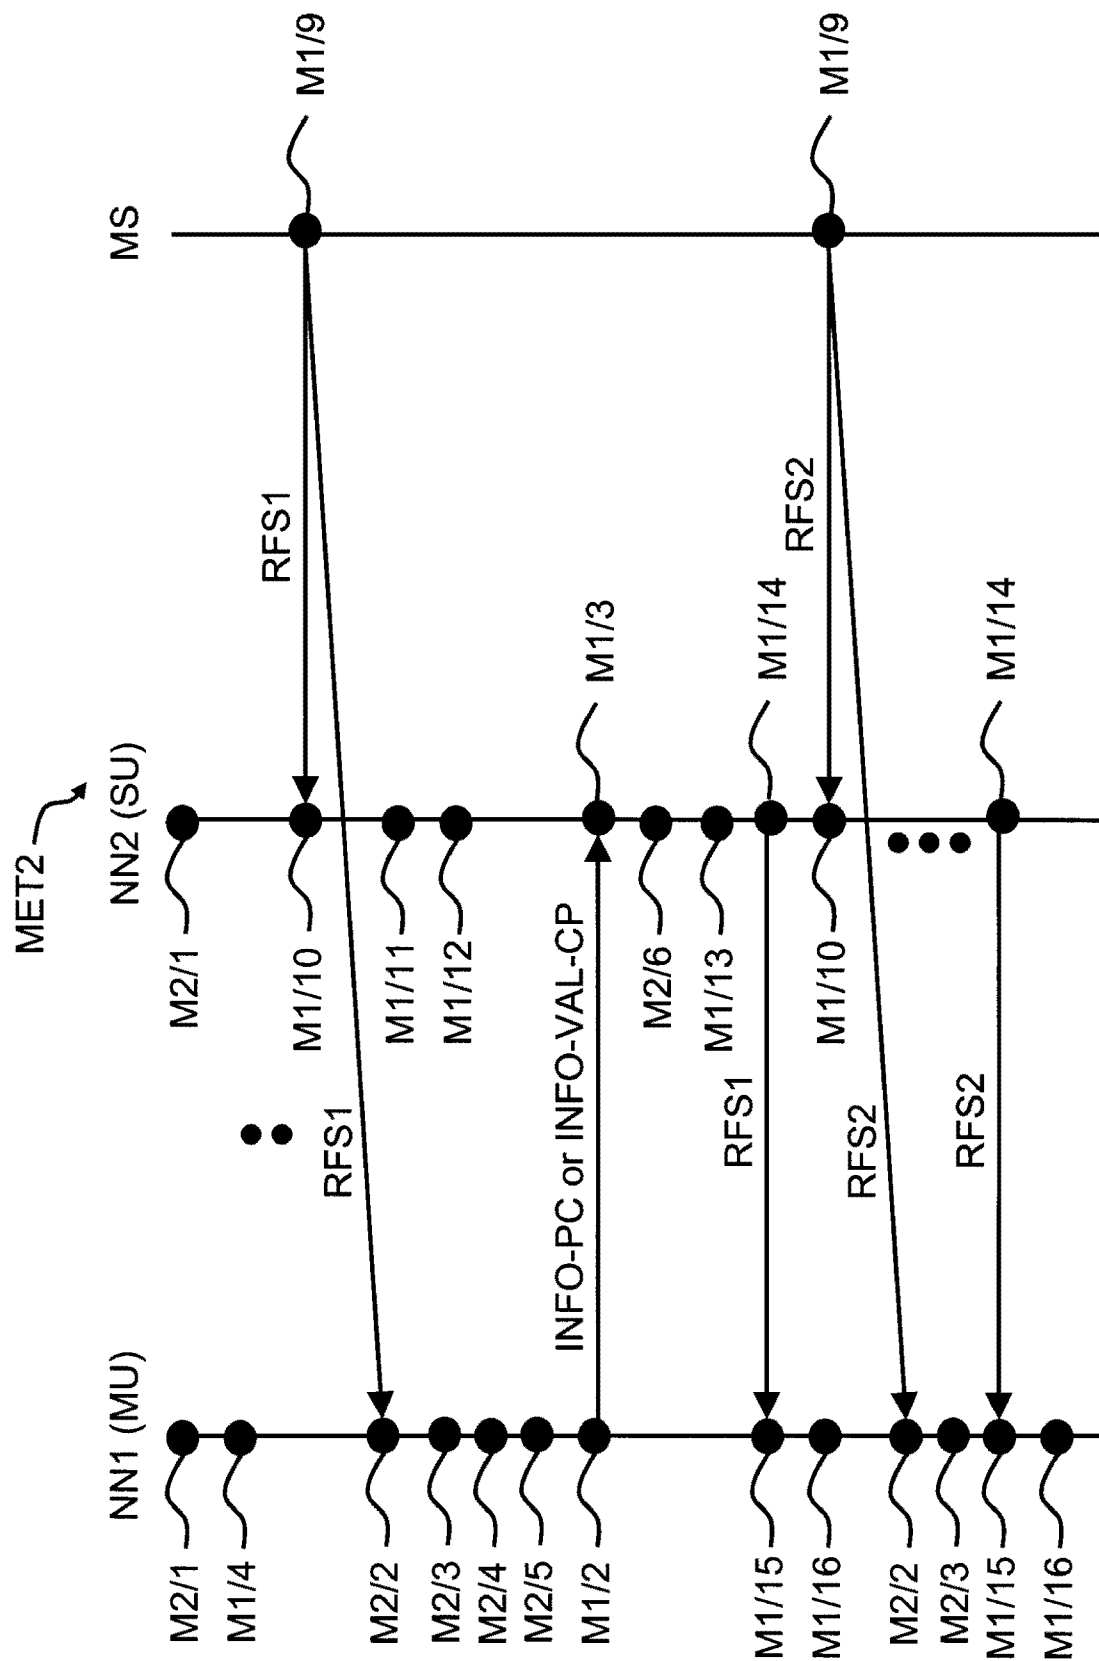


FIG. 4

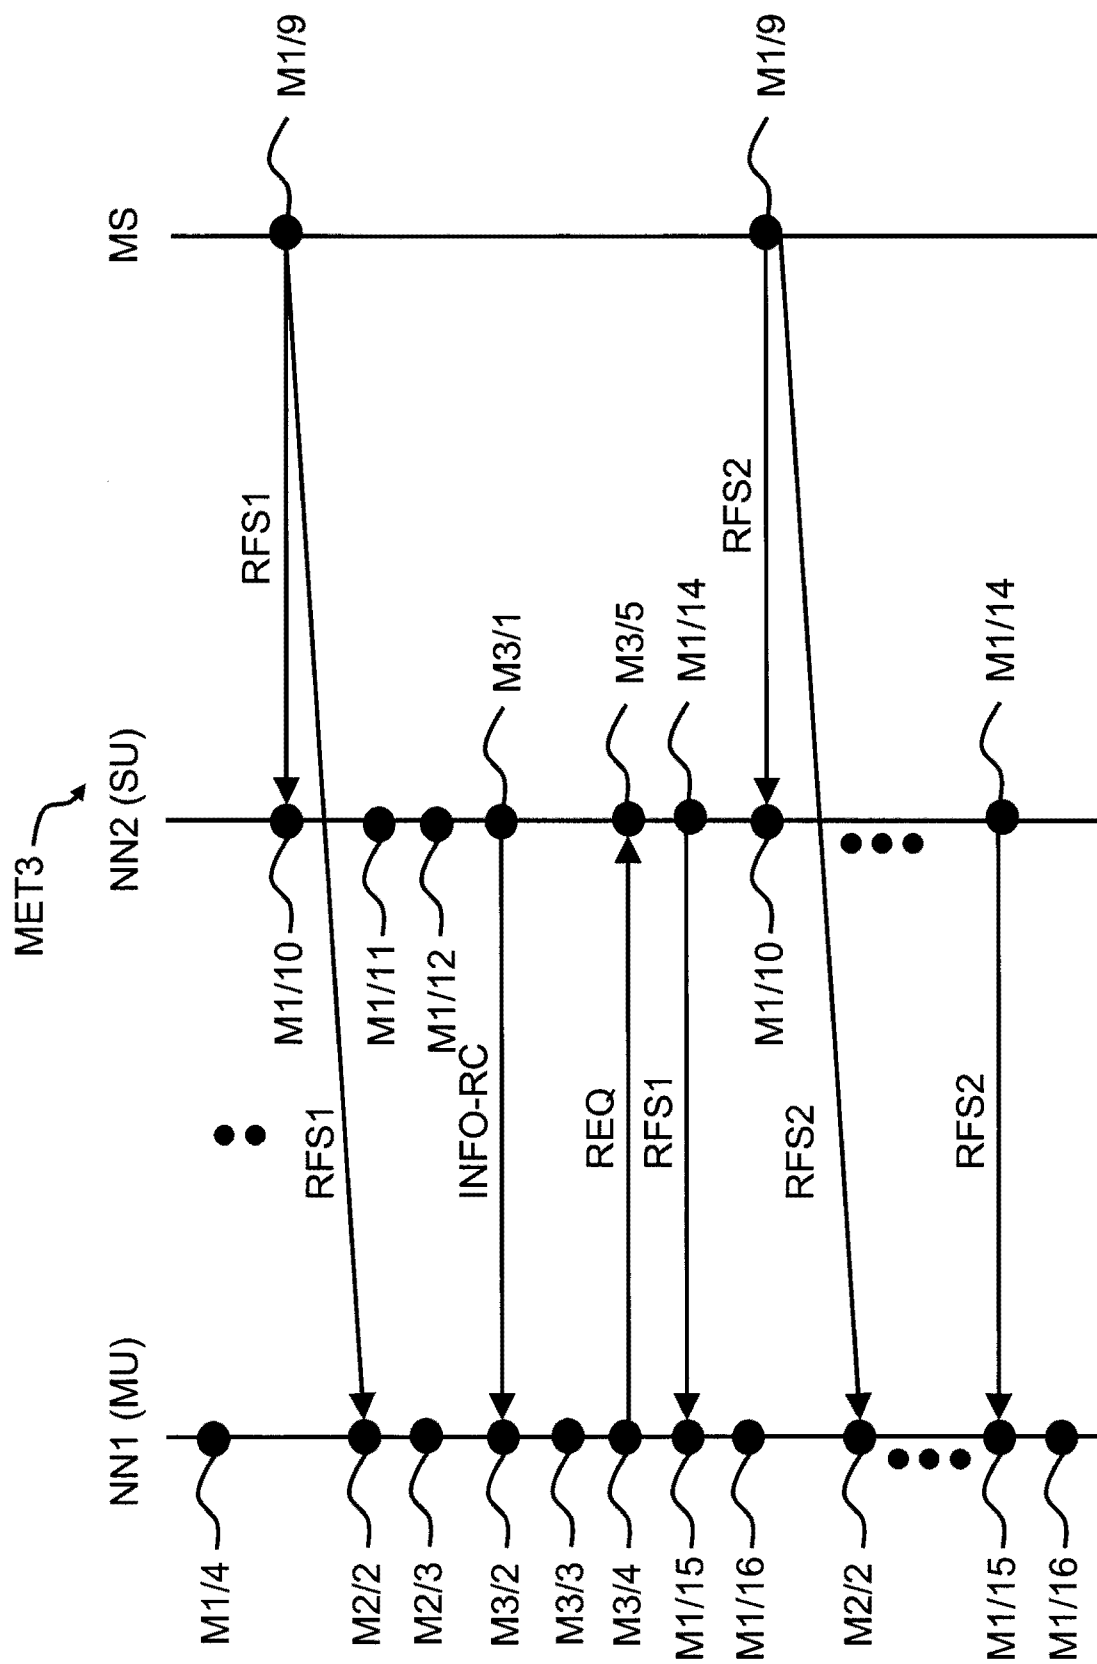


FIG. 5

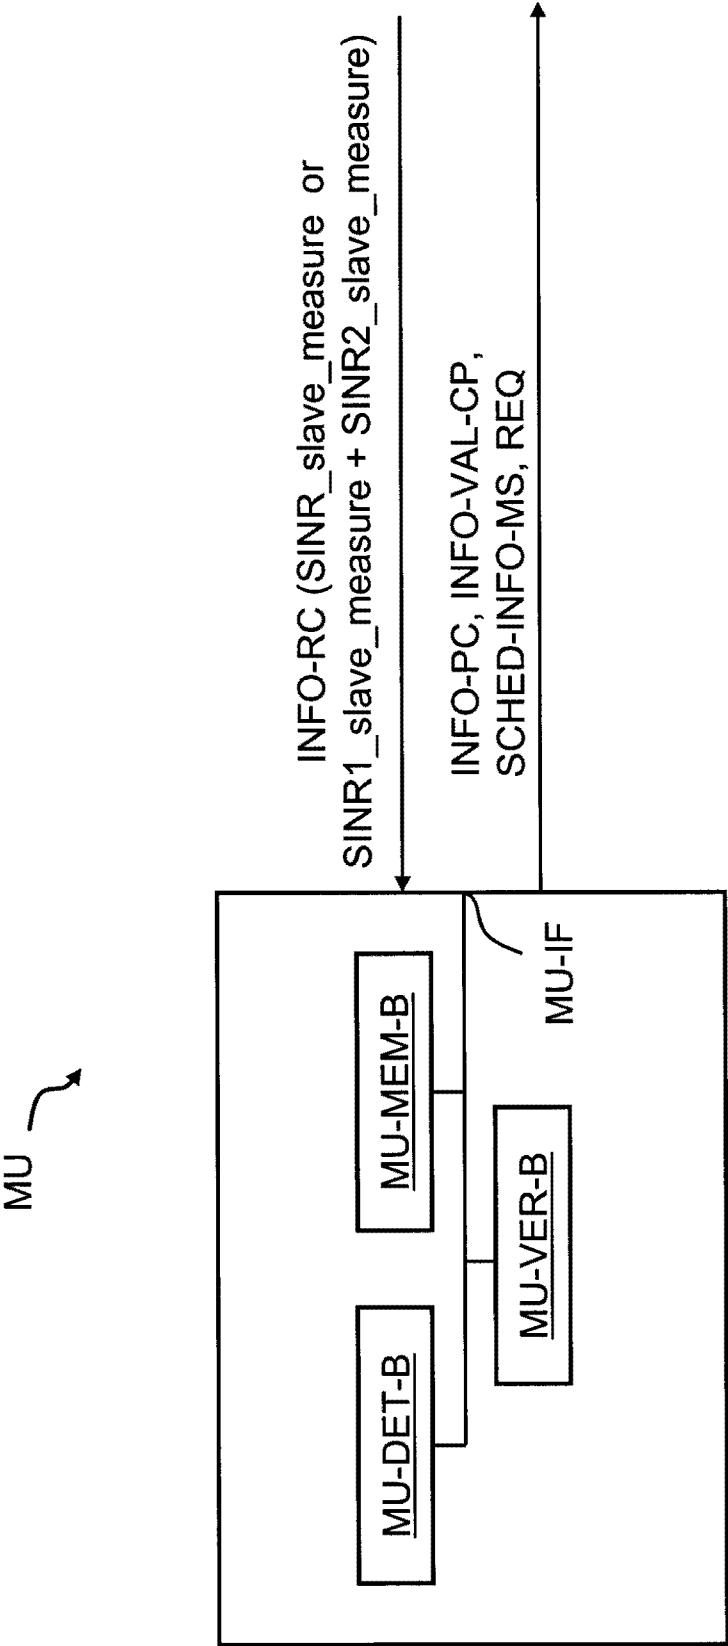


FIG. 6

SU ↗

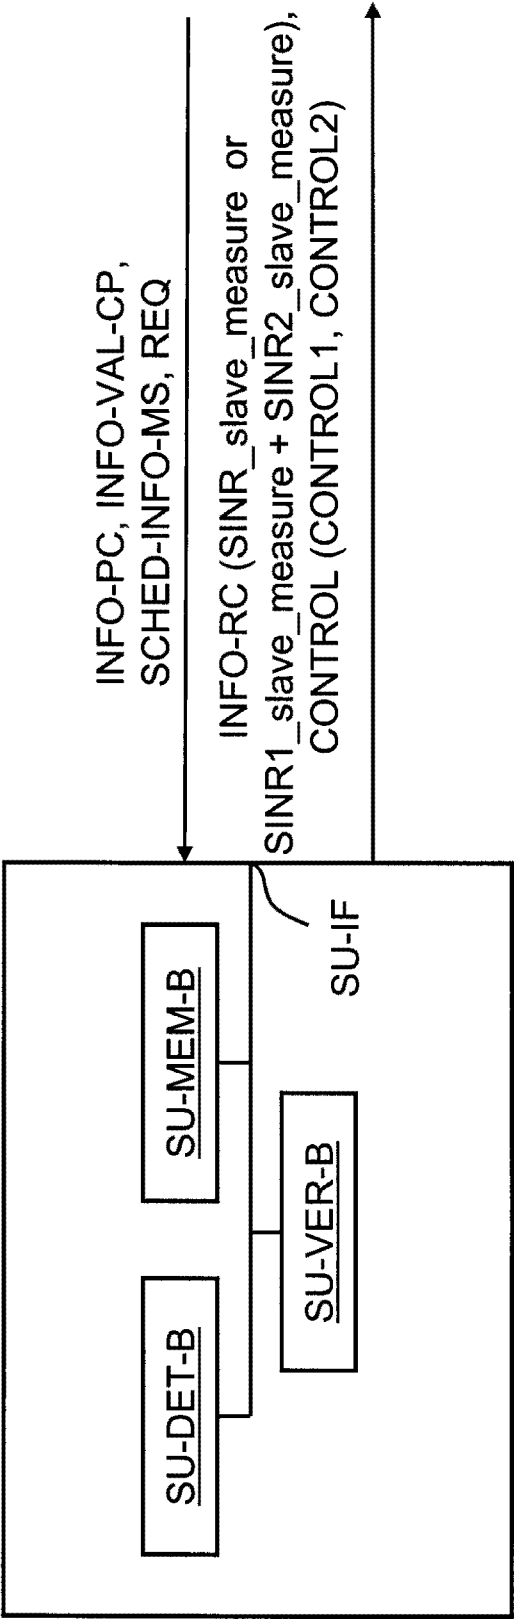


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/058344

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H04B7/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 246 992 A1 (ALCATEL LUCENT [FR]) 3 November 2010 (2010-11-03) abstract paragraph [0014] - paragraph [0077] -----	1-15
X	WO 2010/124726 A1 (ERICSSON TELEFON AB L M [SE]; HOYMANN CHRISTIAN [DE]; MEYER MICHAEL [D]) 4 November 2010 (2010-11-04) page 7, line 30 - page 8, line 28 page 21, line 15 - page 22, line 18 page 28, line 10 - page 30, line 7 -----	1,11,12
A	WO 2010/034528 A1 (ERICSSON TELEFON AB L M [SE]; HOYMANN CHRISTIAN [DE]; LARSSON PETER [S]) 1 April 2010 (2010-04-01) page 1, line 21 - page 2, line 14 page 8, line 21 - page 14, line 2 page 16, line 30 - page 20, line 12 ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 May 2012

Date of mailing of the international search report

30/05/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Baas, Gert-Jan

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/058344

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 337 416 A (FUJITSU LTD [JP]) 17 November 1999 (1999-11-17) abstract page 8, line 13 - page 13, line 4 page 14, line 25 - page 15, line 7 -----	1-15
A	WO 96/18277 A1 (ERICSSON TELEFON AB L M [SE]; CHAMBERT GEORGE [SE]) 13 June 1996 (1996-06-13) page 3, line 1 - page 5, line 34 -----	1-15
A	US 2010/067604 A1 (BHADRA SANDEEP [US] ET AL) 18 March 2010 (2010-03-18) paragraph [0014] - paragraph [0042] -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/058344

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2246992	A1	03-11-2010	CN 102422554 A 18-04-2012
		EP 2246992 A1 03-11-2010	
		KR 20120014004 A 15-02-2012	
		US 2012039208 A1 16-02-2012	
		WO 2010124938 A1 04-11-2010	
WO 2010124726	A1	04-11-2010	CA 2761688 A1 04-11-2010
		CN 102460989 A 16-05-2012	
		EP 2425541 A1 07-03-2012	
		WO 2010124726 A1 04-11-2010	
WO 2010034528	A1	01-04-2010	CN 102405604 A 04-04-2012
		EP 2340617 A1 06-07-2011	
		JP 2012503912 A 09-02-2012	
		US 2011218010 A1 08-09-2011	
		US 2011263271 A1 27-10-2011	
		WO 2010034528 A1 01-04-2010	
		WO 2010034571 A1 01-04-2010	
GB 2337416	A	17-11-1999	CN 1301472 A 27-06-2001
		CN 1444412 A 24-09-2003	
		DE 69920904 D1 11-11-2004	
		DE 69920904 T2 03-02-2005	
		EP 1078545 A1 28-02-2001	
		GB 2337416 A 17-11-1999	
		JP 2002515713 A 28-05-2002	
		US 6965772 B1 15-11-2005	
		WO 9959365 A1 18-11-1999	
WO 9618277	A1	13-06-1996	AU 698017 B2 22-10-1998
		AU 4274996 A 26-06-1996	
		CN 1168757 A 24-12-1997	
		DE 69532534 D1 11-03-2004	
		DE 69532534 T2 16-12-2004	
		EP 0796544 A1 24-09-1997	
		FI 972364 A 04-06-1997	
		JP H10510404 A 06-10-1998	
		SE 516723 C2 19-02-2002	
		SE 9404275 A 09-06-1996	
		US 5867791 A 02-02-1999	
		WO 9618277 A1 13-06-1996	
US 2010067604	A1	18-03-2010	NONE