



(51) International Patent Classification:

G10L 19/012 (2013.01) G10L 19/008 (2013.01)

(21) International Application Number:

PCT/EP2019/067037

(22) International Filing Date:

26 June 2019 (26.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/691,069 28 June 2018 (28.06.2018) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (PUBL) [SE/SE]; 164 83 Stockholm (SE).

(72) Inventors: JANSSON, Fredrik; Ripvägen 7, 172 37 SUNDBYBERG (SE). JANSSON TOFTGÅRD, Tomas; Apelgatan 20A, 75435 Uppsala (SE).

(74) Agent: ERICSSON; Torshamnsgatan 21-23, 164 80 STOCKHOLM (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ADAPTIVE COMFORT NOISE PARAMETER DETERMINATION

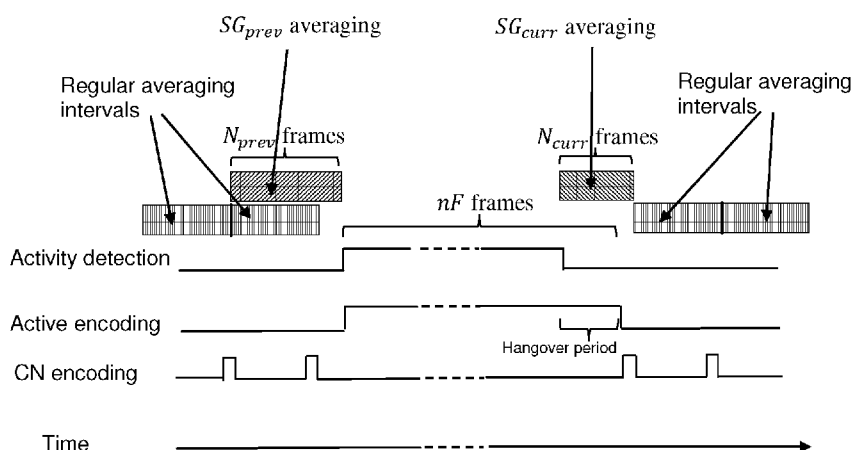


FIG. 6

(57) **Abstract:** A method for generating a comfort noise (CN) parameter is provided. The method includes receiving an audio input; detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN parameter CN_{used} ; and providing the CN parameter CN_{used} to a decoder. The CN parameter CN_{used} is calculated based at least in part on the current inactive segment and a previous inactive segment.



ADAPTIVE COMFORT NOISE PARAMETER DETERMINATION

TECHNICAL FIELD

[001] Disclosed are embodiments related to comfort noise (CN) generation.

BACKGROUND

[002] Although the capacity in telecommunication networks is continuously increasing, it is still of great interest to limit the required bandwidth per communication channel. In mobile networks, less transmission bandwidth for each call means that the mobile network can service a larger number of users in parallel. Lowering the transmission bandwidth also yields lower power consumption in both the mobile device and the base station. This translates to energy and cost saving for the mobile operator, while the end user will experience prolonged battery life and increased talk-time.

[003] One such method for reducing the transmitted bandwidth in speech communication is to exploit the natural pauses in the speech. In most conversations only one talker is active at a time thus the speech pauses in one direction will typically occupy more than half of the signal. The way to use this property of a typical conversation to decrease the transmission bandwidth is to employ a Discontinuous Transmission (DTX) scheme, where the active signal coding is discontinued during speech pauses. DTX schemes are standardized for all 3GPP mobile telephony standards, i.e. 2G, 3G and VoLTE. It is also commonly used in Voice over IP systems.

[004] During speech pauses it is common to transmit a very low bit rate encoding of the background noise to allow for a Comfort Noise Generator (CNG) in the receiving end to fill the pauses with a background noise having similar characteristics as the original noise. The CNG makes the sound more natural since the background noise is maintained and not switched on and off with the speech. Complete silence in the inactive segments (i.e. speech pauses) is perceived as annoying and often leads to the misconception that the call has been disconnected.

[005] A DTX scheme further relies on a Voice Activity Detector (VAD), which indicates to the system whether to use the active signal encoding methods in or the low rate background noise encoding in active respectively inactive segments. The system may be

generalized to discriminate between other source types by using a (Generic) Sound Activity Detector (GSAD or SAD), which not only discriminates speech from background noise but also may detect music or other signal types which are deemed relevant.

[006] Communication services may be further enhanced by supporting stereo or multichannel audio transmission. In these cases, a DTX/CNG system also needs to consider the spatial characteristics of the signal in order to provide a pleasant sounding comfort noise.

[007] A common CN generation method, e.g. used in all 3GPP speech codecs, is to transmit information on the energy and spectral shape of the background noise in the speech pauses. This can be done using significantly less number of bits than the regular coding of speech segments. At the receiver side the CN is generated by creating a pseudo-random signal and then shaping the spectrum of the signal with a filter based on information received from the transmitting side. The signal generation and spectral shaping can be done in the time or the frequency domain.

SUMMARY

[008] In a typical DTX system, the capacity gain comes from the fact that the CN is encoded with fewer bits than the regular encoding. Part of this saving in bits comes from the fact that the CN parameters are normally sent less frequently than the regular coding parameters. This normally works well since the background noise character is not changing as fast as e.g. a speech signal. The encoded CN parameters are often referred to as a “SID frame” where SID stands for Silence Descriptor.

[009] A typical case is that the CN parameters are sent every 8th speech encoder frame (one speech encoder frame is typically 20 ms) and these are then used in the receiver until the next set of CN parameters is received (see FIG. 2). One solution to avoid undesired fluctuations in the CN is to sample the CN parameters during all 8 speech encoder frames and then transmit an average or some other way to base the parameters on all 8 frames as shown in FIG. 3.

[0010] In the first frame in a new inactive segment (i.e. directly after a speech burst), it may not be possible to use an average taken over several frames. Some codecs, like the 3GPP EVS codec, are using a so-called hangover period preceding inactive segments. In this

hangover period, the signal is classified as inactive but active coding is still used for up to 8 frames before inactive encoding starts. One reason for this is to allow averaging of the CN parameters during this period (see FIG. 4). If the active period has been short, the length of the hangover period is shorted or even omitted completely in order not to let a short active sound burst trigger a much longer hangover period and thereby giving an unnecessary increase of the active transmission periods (see FIG. 5).

[0011] An issue with the above solution is that the first CN parameter set cannot always be sampled over several speech encoder frames but will instead be sampled in fewer or even only one frame. This can lead to a situation where inactive segments start with a CN that is different in the beginning and then changes and stabilizes when the transmission of the averaged parameters commences. This may be perceived as annoying for the listener, especially if it occurs frequently.

[0012] In embodiments of the present invention, a CN parameter is typically determined based on signal characteristics over the period between two consecutive CN parameter transmissions while in an inactive segment. The first frame in each inactive segment is however treated differently: here the CN parameter is based on signal characteristics of the first frame of inactive coding, typically a first SID frame, and any hangover frames, and also signal characteristics of the last-sent SID frame and any inactive frames after that in the end of the previous inactive segment. Weighting factors are applied such that the weight for the data from the previous inactive segment is decreasing as a function of the length of the active segment in-between. The older the previous data is, the less weight it gets.

[0013] Embodiments of the present invention improve the stability of CN generated in a decoder, while being agile enough to follow changes in the input signal.

[0014] According to a first aspect, a method for generating a comfort noise (CN) parameter is provided. The method includes receiving an audio input; detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN parameter

CN_{used} ; and providing the CN parameter CN_{used} to a decoder. The CN parameter CN_{used} is calculated based at least in part on the current inactive segment and a previous inactive segment.

[0015] In some embodiments, calculating the CN parameter includes calculating $CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$,

where:

CN_{curr} refers to a CN parameter from a current inactive segment;

CN_{prev} refers to a CN parameter from a previous inactive segment;

T_{prev} refers to a time-interval parameter related to CN_{prev} ;

T_{curr} refers to a time-interval parameter related to CN_{curr} ; and

T_{active} refers to a time-interval parameter of an active segment between the previous inactive segment and the current inactive segment.

[0016] In some embodiments, the function $f(\cdot)$ is defined as a weighted sum of functions $g_1(\cdot)$ and $g_2(\cdot)$ such that the CN parameter CN_{used} is given by:

$$CN_{used} = W_1(T_{active}, T_{curr}, T_{prev}) * g_1(CN_{curr}, T_{curr}) + W_2(T_{active}, T_{curr}, T_{prev}) * g_2(CN_{prev}, T_{prev})$$

where $W_1(\cdot)$ and $W_2(\cdot)$ are weighting functions. In some embodiments, $W_1(\cdot)$ and $W_2(\cdot)$ sum to unity such that $W_2(T_{active}, T_{curr}, T_{prev}) = 1 - W_1(T_{active}, T_{curr}, T_{prev})$. In some embodiments, the functions $g_1(\cdot)$ represents an average over the time period T_{curr} and the function $g_2(\cdot)$ represents an average over the time period T_{prev} . In some embodiments, the weighting functions $W_1(\cdot)$ and $W_2(\cdot)$ are functions of T_{active} alone, such that $W_1(T_{active}, T_{curr}, T_{prev}) = W_1(T_{active})$ and $W_2(T_{active}, T_{curr}, T_{prev}) = W_2(T_{active})$. In some embodiments, $0 < W_1(\cdot) \leq 1$ and $0 < 1 - W_2(\cdot) \leq 1$, and wherein as the time T_{active} approaches infinity, $W_1(\cdot)$ converges to 1 and $W_2(\cdot)$ converges to 0 in the limit.

[0017] In some embodiments, the function $f(\cdot)$ is defined such that the CN parameter CN_{used} is given by

$$CN_{used} = \frac{W_1(T_{active}) * \sum_{i=0}^{N_{curr}-1} CN_{curr}(i) + W_2(T_{active}) * \sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{W_1(T_{active}) * N_{curr} + W_2(T_{active}) * N_{prev}}$$

where N_{curr} represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} ; and where $W_1(T_{active})$ and $W_2(T_{active})$ are weighting functions.

[0018] According to a second aspect, a method for generating a comfort noise (CN) side-gain parameter is provided. The method includes receiving an audio input, wherein the audio input comprises multiple channels; detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN side-gain parameter $SG(b)$ for a frequency band b ; and providing the CN side-gain parameter $SG(b)$ to a decoder. The CN side-gain parameter $SG(b)$ is calculated based at least in part on the current inactive segment and a previous inactive segment.

[0019] In some embodiments, calculating the CN side-gain parameter $SG(b)$ for a frequency band b , includes calculating

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

where:

$SG_{curr}(b, i)$ represents a side gain value for frequency band b and frame i in current inactive segment;

$SG_{prev}(b, j)$ represents a side gain value for frequency band b and frame j in previous inactive segment;

N_{curr} represents the number of frames in the sum from current inactive segment;

N_{prev} represents the number of frames in the sum from previous inactive segment;

$W(k)$ represents a weighting function; and

nF represents the number of frames in the active segment between the current segment and the previous inactive segment, corresponding to T_{active} .

[0020] In some embodiments, $W(k)$ is given by $W(k) =$

$$\begin{cases} \frac{0.8*(1500-k)}{1500} + 0.2, & k < 1500 \\ 0.2, & k \geq 1500 \end{cases}.$$

[0021] According to a third aspect, a method for generating comfort noise (CN) is provided. The method includes receiving a CN parameter CN_{used} generated according to any one of the embodiments of the first aspect, and generating comfort noise based on the CN parameter CN_{used} .

[0022] According to a fourth aspect, a method for generating comfort noise (CN) is provided. The method includes receiving a CN side-gain parameter $SG(b)$ for a frequency band b generated according to any one of the embodiments of the second aspect, and generating comfort noise based on the CN parameter $SG(b)$.

[0023] According to a fifth aspect, a node for generating a comfort noise (CN) parameter is provided. The node includes a receiving unit configured to receive an audio input; a detecting unit configured to detect, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; a calculating unit configured to calculate, as a result of detecting, with the VAD, the current inactive segment in the audio input, a CN parameter CN_{used} ; and a providing unit configured to provide the CN parameter CN_{used} to a decoder. The CN parameter CN_{used} is calculated by the calculating unit based at least in part on the current inactive segment and a previous inactive segment.

[0024] In some embodiments, the calculating unit is further configured to calculate the CN parameter CN_{used} by calculating $CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$,

where:

CN_{curr} refers to a CN parameter from a current inactive segment;

CN_{prev} refers to a CN parameter from a previous inactive segment;

T_{prev} refers to a time-interval parameter related to CN_{prev} ;

T_{curr} refers to a time-interval parameter related to CN_{curr} ; and

T_{active} refers to a time-interval parameter of an active segment between the previous inactive segment and the current inactive segment.

[0025] According to a sixth aspect, a node for generating a comfort noise (CN) side-gain parameter is provided. The node includes a receiving unit configured to receive an audio input, wherein the audio input comprises multiple channels; a detecting unit configured to detect, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; a calculating unit configured to calculate, as a result of detecting, with the VAD, the current inactive segment in the audio input, a CN side-gain parameter $SG(b)$ for a frequency band b ; and a providing unit configured to provide the CN side-gain parameter $SG(b)$ to a decoder. The CN side-gain parameter $SG(b)$ is calculated based at least in part on the current inactive segment and a previous inactive segment

[0026] In some embodiments, the calculating unit is further configured to calculate the CN side-gain parameter $SG(b)$ for a frequency band b , by calculating

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

where:

$SG_{curr}(b, i)$ represents a side gain value for frequency band b and frame i in current inactive segment;

$SG_{prev}(b, j)$ represents a side gain value for frequency band b and frame j in previous inactive segment;

N_{curr} represents the number of frames in the sum from current inactive segment;

N_{prev} represents the number of frames in the sum from previous inactive segment;

$W(k)$ represents a weighting function; and

nF represents the number of frames in the active segment between the current segment and the previous inactive segment, corresponding to T_{active} .

[0027] According to a seventh aspect, a node for generating comfort noise (CN) is provided. The node includes a receiving unit configured to receive a CN parameter CN_{used} generated according to any one of the embodiments of the first aspect; and a generating unit configured to generate comfort noise based on the CN parameter CN_{used} .

[0028] According to an eighth aspect, a node for generating comfort noise (CN) is provided. The node includes a receiving unit configured to receive a CN side-gain parameter $SG(b)$ for a frequency band b generated according to any one of the embodiments of the second aspect; and a generating unit configured to generate comfort noise based on the CN parameter $SG(b)$.

[0029] According to a ninth aspect, a computer program is provided, comprising instructions which when executed by processing circuitry of a node causes the node to perform the method of any one of the embodiments of the first and second aspects.

[0030] According to a tenth aspect, a carrier is provided, containing the computer program of any of the embodiments of the ninth aspect, wherein the carrier is one of an electronic signal, an optical signal, a radio signal, and a computer readable storage medium.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] The accompanying drawings, which are incorporated herein and form part of the specification, illustrate various embodiments.

[0032] FIG. 1 illustrates a DTX system according to one embodiment.

[0033] FIG. 2 is a diagram illustrating CN parameter encoding and transmission according to one embodiment.

[0034] FIG. 3 is a diagram illustrating averaging according to one embodiment.

[0035] FIG. 4 is a diagram illustrating averaging with a hangover period according to one embodiment.

[0036] FIG. 5 is a diagram illustrating averaging with no hangover period according to one embodiment.

[0037] FIG. 6 is a diagram illustrating side gain averaging according to one embodiment.

[0038] FIG. 7 is a flow chart illustrating a process according to one embodiment.

[0039] FIG. 8 is a flow chart illustrating a process according to one embodiment.

[0040] FIG. 9 is a flow chart illustrating a process according to one embodiment.

[0041] FIG. 10 is a diagram showing functional units of a node according to one embodiment.

[0042] FIG. 11 is a diagram showing functional units of a node according to one embodiment.

[0043] FIG. 12 is a block diagram of a node according to one embodiment.

DETAILED DESCRIPTION

[0044] In many cases, e.g. a person standing still with his mobile telephone, the background noise characteristics will be stable over time. In these cases it will work well to use the CN parameters from the previous inactive segment as a starting point in the current inactive segment, instead of relying on a more unstable sample taken in a shorter period of time in the beginning of the current inactive segment.

[0045] There are, however, cases where background noise conditions may change over time. The user can move from one location to another, e.g. from a silent office out to a noisy street. There might also be things in the environment that change even if the telephone user is not moving, e.g. a bus driving by on the street. This means that it might not always work well to base the CN parameters on signal characteristics from the previous inactive segment.

[0046] FIG. 1 illustrates a DTX system 100 according to some embodiments. In DTX system 100, an audio signal is received as input. System 100 includes three modules, a Voice Activity Detector (VAD), a Speech/Audio Coder, and a CNG Coder. The VAD module makes a speech/noise decision (e.g. detecting active or inactive segments, such as segments of active speech or no speech). If there is speech, the speech/audio coder will code the audio signal and send the result to be transmitted. If there is no speech, the CNG Coder will generate comfort noise parameters to be transmitted.

[0047] Embodiments of the present invention aim to adaptively balance the above-mentioned aspects for an improved DTX system with CNG. In embodiments, a comfort noise

parameter CN_{used} may be determined as follows based on a function $f(\cdot)$:

$$CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$$

In the equation above, the variables referenced have the following meanings:

CN_{used}	CN parameter used for CN generation
CN_{curr}	CN parameters from a current inactive segment
CN_{prev}	CN parameters from a previous inactive segment
T_{prev}	Time-interval parameter for determination of CN parameters of a previous inactive segment
T_{curr}	Time-interval parameter for determination of CN parameters of a current inactive segment
T_{active}	Time-interval parameter of an active segment in between the previous and current inactive segments

[0048] In one embodiment, the function $f(\cdot)$ is defined as a weighted sum of functions $g_1(\cdot)$ and $g_2(\cdot)$ of CN_{curr} and CN_{prev} , i.e.

$$CN_{used} = W_1(T_{active}, T_{curr}, T_{prev}) * g_1(CN_{curr}, T_{curr}) + W_2(T_{active}, T_{curr}, T_{prev}) * g_2(CN_{prev}, T_{prev})$$

where $W_1(\cdot)$ and $W_2(\cdot)$ are weighting functions.

[0049] The functions $g_1(\cdot)$ and $g_2(\cdot)$ may for example, in an embodiment, be an average over the time periods T_{curr} and T_{prev} respectively. In embodiments, typically $\sum W_i = 1$.

[0050] In some embodiments, the weighting between previous and current CN parameter averages may be based only on the length of the active segment, i.e. on T_{active} . For example, the following equation may be used:

$$CN_{used} = W(T_{active}) * \frac{\sum_{i=0}^{N_{curr}-1} CN_{curr}(i)}{N_{curr}} + (1 - W(T_{active})) * \frac{\sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{N_{prev}}$$

In the equation above, the additional variables referenced have the following meanings:

N_{curr} Number of frames used in current average, corresponds to T_{curr}

N_{prev} Number of frames used in previous average, corresponds to T_{prev}

$W(t)$ Weighting function, $0 < W(t) \leq 1$, $W(\infty) = 1$

[0051] An averaging of the parameter CN is done by using both an average taken from the current inactive segment and an average taken from the previous segment. These two values are then combined with weighting factors based on a weighting function that depends, in some embodiments, on the length of the active segment between the current and the previous inactive segment such that less weight is put on the previous average if the active segment is long and more weight if it is short.

[0052] In another embodiment, the weights are additionally adapted based on T_{prev} and T_{curr} . This may, for example, mean that a larger weight is given the previous CN parameters because the T_{curr} period is too short to give a stable estimate of the long-term signal characteristics that can be represented by the CNG system. An example of an equation corresponding to this embodiment follows:

$$CN_{used} = \frac{W_1(T_{active}) * \sum_{i=0}^{N_{curr}-1} CN_{curr}(i) + W_2(T_{active}) * \sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{W_1(T_{active}) * N_{curr} + W_2(T_{active}) * N_{prev}}$$

In the equation above, the additional variables referenced have the following meanings:

N_{curr} Number of frames used in current average, corresponds to T_{curr}

N_{prev} Number of frames used in previous average, corresponds to T_{prev}

$W_1(t)$, $W_2(t)$ Weighting functions

[0053] An established method for encoding a multi-channel (e.g. stereo) signal is to create a mix-down (or downmix) signal of the input signals, e.g. mono in the case of stereo

input signals and determine additional parameters that are encoded and transmitted with the encoded downmix signal to be utilized for an up-mix at the decoder. In the stereo DTX case a mono signal may be encoded and generated as CN and stereo parameters will then be used create a stereo signal from the mono CN signal. The stereo parameters are typically controlling the stereo image in terms of e.g. sound source localization and stereo width.

[0054] In the case with a non-fixed stereo microphone, e.g. mobile telephone or a headset connected to the mobile phone, the variation in the stereo parameters may be faster than the variation in the mono CN parameters.

[0055] To illustrate this with an example: turning your head 90 degrees can be done very fast but moving from one type of background noise environment to another will take a longer time. The stereo image will in many cases be continuously changing since it is hard to keep your mobile telephone or headset in the same position for any longer period of time. Because of this, embodiments of the present invention can be especially important for stereo parameters.

[0056] One example of a stereo parameter is the side gain SG . A stereo signal can be split into a mix-down signal DMX and a side signal S :

$$DMX(t) = L(t) + R(t)$$

$$S(t) = L(t) - R(t)$$

where $L(t)$ and $R(t)$ refer, respectively, to the Left and Right audio signal. The corresponding up-mix would then be:

$$L(t) = \frac{DMX(t) + S(t)}{2}$$

$$R(t) = \frac{DMX(t) - S(t)}{2}$$

[0057] In order to save bits for transmission of an encoded stereo signal, some components $\hat{S}(t)$ of the side signal S might be predicted from the DMX signal by utilizing a side gain parameter SG according to:

$$\hat{S}(t) = SG \cdot DMX(t)$$

A minimized prediction error $E(t) = \left(\hat{S}(t) - S(t) \right)^2$ can be obtained by:

$$SG = \frac{\langle S(t), DMX(t) \rangle}{\langle DMX(t), DMX(t) \rangle}$$

where $\langle \cdot, \cdot \rangle$ denotes an inner product between the signals (typically frames thereof).

[0058] Side gains may be determined in broad-band from time domain signals, or in frequency sub-bands obtained from downmix and side signals represented in a transform domain, e.g. the Discrete Fourier Transform (DFT) or Modified Discrete Cosine Transform (MDCT) domains, or by some other filterbank representation. If a side gain in the first frame of CNG would be significantly based on a previous inactive segment, and differ significantly from the following frames, the stereo image would change drastically in the beginning of an inactive segment compared to the slower pace during the rest of the inactive segment. This would be perceived as annoying by the listener, especially if it is repeated every time a new inactive segment (i.e. speech pause) starts.

[0059] The following formula shows one example of how embodiments of the present invention can be used to obtain CN side-gain parameters from frequency divided side gain parameters.

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

In the equation above, the variables referenced have the following meanings:

- $SG(b)$ Side gain value to be used in CN generation for frequency band b
- $SG_{curr}(b, i)$ Number of frames used in previous average, corresponds to T_{prev}
- $SG_{prev}(b, j)$ Side gain value for frequency band b and frame j in previous inactive segment
- N_{curr} Number of frames in the sum from current inactive segment
- N_{prev} Number of frames in the sum from previous inactive segment
- $W(k)$ Weighting function. In some embodiments:

$$W(k) = \begin{cases} \frac{0.8 * (1500 - k)}{1500} + 0.2, & k < 1500 \\ 0.2, & k \geq 1500 \end{cases}$$

nF Number of frames in active segment between current and previous inactive segment, corresponds to T_{active}

[0060] FIG. 6 shows a schematic picture of how the side-gain averaging is done, according to an embodiment. Note that the combined weighted average is typically only used in the first frame of each interactive segment.

[0061] Note that N_{curr} and N_{prev} can differ from each other and from time to time. N_{prev} will in addition to the frames of the last transmitted CN parameters also include the inactive frames (so-called no-data frames) between the last CN parameter transmission and the first active frames. An active frame can of course occur anytime, so this number will vary. N_{curr} will include the number of frames in the hangover period plus the first inactive frame which may also vary if the length of the hangover period is adaptive. N_{curr} may not only include consecutive hangover frames, but may in general represent the number of frames included in the determination of current CN parameters.

[0062] Note that changing the number of frames used in the average is just one way of changing the length of the time-interval on which the parameters are calculated. There are also other ways of changing the length of time-interval on which a parameter is based upon. For example, related to CN generation, the frame length in Linear Predictive Coding (LPC) analysis could also be changed.

[0063] FIG. 7 illustrates a process 700 for generating a comfort noise (CN) parameter.

[0064] The method includes receiving an audio input (step 702). The method further includes detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input (step 704). The method further includes, as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN parameter CN_{used} (step 706). The method further includes providing the CN parameter CN_{used} to a decoder (step 708). The CN parameter CN_{used} is calculated based at least in part on the current inactive segment and a

previous inactive segment (step 710).

[0065] In some embodiments, calculating the CN parameter CN_{used} includes calculating $CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$, where CN_{curr} refers to a CN parameter from a current inactive segment; CN_{prev} refers to a CN parameter from a previous inactive segment; T_{prev} refers to a time-interval parameter related to CN_{prev} ; T_{curr} refers to a time-interval parameter related to CN_{curr} ; and T_{active} refers to a time-interval parameter of an active segment between the previous inactive segment and the current inactive segment.

[0066] In some embodiments, the function $f(\cdot)$ is defined as a weighted sum of functions $g_1(\cdot)$ and $g_2(\cdot)$ such that the CN parameter CN_{used} is given by:

$$CN_{used} = W_1(T_{active}, T_{curr}, T_{prev}) * g_1(CN_{curr}, T_{curr}) + \\ W_2(T_{active}, T_{curr}, T_{prev}) * g_2(CN_{prev}, T_{prev})$$

where $W_1(\cdot)$ and $W_2(\cdot)$ are weighting functions. In some embodiment, $W_1(\cdot)$ and $W_2(\cdot)$ sum to unity such that $W_2(T_{active}, T_{curr}, T_{prev}) = 1 - W_1(T_{active}, T_{curr}, T_{prev})$. In some embodiments, the functions $g_1(\cdot)$ represents an average over the time period T_{curr} and the function $g_2(\cdot)$ represents an average over the time period T_{prev} . In some embodiments, the weighting functions $W_1(\cdot)$ and $W_2(\cdot)$ are functions of T_{active} alone, such that $W_1(T_{active}, T_{curr}, T_{prev}) = W_1(T_{active})$ and $W_2(T_{active}, T_{curr}, T_{prev}) = W_2(T_{active})$. In some embodiments,

$$g_1(CN_{curr}, T_{curr}) = \frac{\sum_{i=0}^{N_{curr}-1} CN_{curr}(i)}{N_{curr}} \text{ and } g_2(CN_{prev}, T_{prev}) = \frac{\sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{N_{prev}}, \text{ where } N_{curr}$$

represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} .

[0067] In some embodiments, $0 < W_1(\cdot) \leq 1$ and $0 < 1 - W_2(\cdot) \leq 1$, and as the time T_{active} approaches infinity, $W_1(\cdot)$ converges to 1 and $W_2(\cdot)$ converges to 0 in the limit. In

embodiments, the function $f(\cdot)$ is defined such that the CN parameter CN_{used} is given by

$$CN_{used} = \frac{W_1(T_{active}) * \sum_{i=0}^{N_{curr}-1} CN_{curr}(i) + W_2(T_{active}) * \sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{W_1(T_{active}) * N_{curr} + W_2(T_{active}) * N_{prev}}$$

where N_{curr} represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} ; and where $W_1(T_{active})$ and $W_2(T_{active})$ are weighting functions.

[0068] FIG. 8 illustrates a process 800 for generating a comfort noise (CN) side-gain parameter. The method includes receiving an audio input, wherein the audio input comprises multiple channels (step 802). The method further includes detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input (step 804). The method further includes, as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN side-gain parameter $SG(b)$ for a frequency band b (step 806). The method further includes providing the CN side-gain parameter $SG(b)$ to a decoder (step 808). The CN side-gain parameter $SG(b)$ is calculated based at least in part on the current inactive segment and a previous inactive segment (step 810).

[0069] In some embodiments, calculating the CN side-gain parameter $SG(b)$ for a frequency band b , includes calculating

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

where $SG_{curr}(b, i)$ represents a side gain value for frequency band b and frame i in current inactive segment; $SG_{prev}(b, j)$ represents a side gain value for frequency band b and frame j in previous inactive segment; N_{curr} represents the number of frames in the sum from current

inactive segment; N_{prev} represents the number of frames in the sum from previous inactive segment; $W(k)$ represents a weighting function; and nF represents the number of frames in the active segment between the current segment and the previous inactive segment, corresponding to T_{active} .

[0070] In some embodiments, $W(k)$ is given by

$$W(k) = \begin{cases} \frac{0.8 * (1500 - k)}{1500} + 0.2, & k < 1500 \\ 0.2, & k \geq 1500 \end{cases}$$

[0071] FIG. 9 illustrates a processes 900 and 910 for generating comfort noise (CN). According to process 900, the process includes a step of receiving a CN parameter CN_{used} where the CN parameter CN_{used} is generated according to any one of the embodiments herein disclosed for generating a comfort noise (CN) parameter (step 902) and a step of generating comfort noise based on the CN parameter CN_{used} (step 904). According to process 910, the process includes a step of receiving a CN side-gain parameter SG(b) for a frequency band b where the CN side-gain parameter SG(b) for a frequency band b is generated according to any one of the embodiments herein disclosed for generating a CN side-gain parameter SG(b) for a frequency band b (step 912) and a step of generating comfort noise based on the CN parameter SG(b) (step 914).

[0072] FIG. 10 is a diagram showing functional units of node 1002 (e.g. an encoder/decoder) for generating a comfort noise (CN) parameter, according to an embodiment.

[0073] The node 1002 includes a receiving unit 1004 configured to receive an audio input; a detecting unit 1006 configured to detect, with a Voice Activity Detector (VAD), a current inactive segment in the audio input; a calculating unit 1008 configured to calculate, as a result of detecting, with the VAD, the current inactive segment in the audio input, a CN parameter CN_{used} ; and a providing unit 1010 configured to provide the CN parameter CN_{used} to a decoder. The CN parameter CN_{used} is calculated by the calculating unit based at least in part on the current inactive segment and a previous inactive segment.

[0074] FIG. 11 is a diagram showing functional units of node 1002 (e.g. an

encoder/decoder) for generating a comfort noise (CN) side gain parameter, according to an embodiment. Node 1002 includes a receiving unit 1104 configured to receive a CN parameter CN_{used} according to any one of the embodiments discussed with regard to FIG. 7 and a generating unit 1104 configured to generate comfort noise based on the CN parameter CN_{used} . In embodiments, the receiving unit is configured to receive a CN side-gain parameter SG(b) for a frequency band b according to any one of the embodiments discussed with regard to FIG. 8 and the generating unit is configured to generate comfort noise based on the CN parameter SG(b).

[0075] FIG. 12 is a block diagram of node 1002 (e.g., an encoder/decoder) for generating a comfort noise (CN) parameter and/or for generating comfort noise (CN), according to some embodiments. As shown in FIG. 12, node 1002 may comprise: processing circuitry (PC) or data processing apparatus (DPA) 1202, which may include one or more processors (P) 1255 (e.g., a general purpose microprocessor and/or one or more other processors, such as an application specific integrated circuit (ASIC), field-programmable gate arrays (FPGAs), and the like); a network interface 1248 comprising a transmitter (Tx) 1245 and a receiver (Rx) 1247 for enabling node 1002 to transmit data to and receive data from other nodes connected to a network 1210 (e.g., an Internet Protocol (IP) network) to which network interface 1248 is connected; and a local storage unit (a.k.a., “data storage system”) 1208, which may include one or more non-volatile storage devices and/or one or more volatile storage devices. In embodiments where PC 1202 includes a programmable processor, a computer program product (CPP) 1241 may be provided. CPP 1241 includes a computer readable medium (CRM) 1242 storing a computer program (CP) 1243 comprising computer readable instructions (CRI) 1244. CRM 1242 may be a non-transitory computer readable medium, such as, magnetic media (e.g., a hard disk), optical media, memory devices (e.g., random access memory, flash memory), and the like. In some embodiments, the CRI 1244 of computer program 1243 is configured such that when executed by PC 1202, the CRI causes node 1002 to perform steps described herein (e.g., steps described herein with reference to the flow charts). In other embodiments, node 1002 may be configured to perform steps described herein without the need for code. That is, for example, PC 1202 may consist merely of one or more ASICs. Hence, the features of the embodiments described herein may be implemented in hardware and/or software.

[0076] While various embodiments of the present disclosure are described herein, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of the present disclosure should not be limited by any of the above-described exemplary embodiments. Moreover, any combination of the above-described elements in all possible variations thereof is encompassed by the disclosure unless otherwise indicated herein or otherwise clearly contradicted by context.

[0077] Additionally, while the processes described above and illustrated in the drawings are shown as a sequence of steps, this was done solely for the sake of illustration. Accordingly, it is contemplated that some steps may be added, some steps may be omitted, the order of the steps may be re-arranged, and some steps may be performed in parallel.

CLAIMS:

1. A method for generating a comfort noise (CN) parameter, the method comprising:

receiving an audio input;

detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input;

as a result of detecting, with the VAD, the current inactive segment in the audio input,

calculating a CN parameter CN_{used} ; and

providing the CN parameter CN_{used} to a decoder,

wherein the CN parameter CN_{used} is calculated based at least in part on the current inactive segment and a previous inactive segment.

2. The method of claim 1, wherein calculating the CN parameter CN_{used} comprises calculating $CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$,

where:

CN_{curr} refers to a CN parameter from the current inactive segment;

CN_{prev} refers to a CN parameter from the previous inactive segment;

T_{prev} refers to a time-interval parameter related to CN_{prev} ;

T_{curr} refers to a time-interval parameter related to CN_{curr} ; and

T_{active} refers to a time-interval parameter of an active segment between the previous inactive segment and the current inactive segment.

3. The method of claim 2, wherein the function $f(\cdot)$ is defined as a weighted sum of functions $g_1(\cdot)$ and $g_2(\cdot)$ such that the CN parameter CN_{used} is given by:

$$CN_{used} = W_1(T_{active}, T_{curr}, T_{prev}) * g_1(CN_{curr}, T_{curr}) + \\ W_2(T_{active}, T_{curr}, T_{prev}) * g_2(CN_{prev}, T_{prev})$$

where $W_1(\cdot)$ and $W_2(\cdot)$ are weighting functions.

4. The method of claim 3, wherein $W_1(\cdot)$ and $W_2(\cdot)$ sum to unity such that $W_2(T_{active}, T_{curr}, T_{prev}) = 1 - W_1(T_{active}, T_{curr}, T_{prev})$.

5. The method of any one of claims 3-4, wherein the functions $g_1(\cdot)$ represents an average over the time period T_{curr} and the function $g_2(\cdot)$ represents an average over the time period T_{prev} .

6. The method of any one of claims 3-5, wherein the weighting functions $W_1(\cdot)$ and $W_2(\cdot)$ are functions of T_{active} alone, such that $W_1(T_{active}, T_{curr}, T_{prev}) = W_1(T_{active})$ and $W_2(T_{active}, T_{curr}, T_{prev}) = W_2(T_{active})$.

7. The method of claim 5, wherein $0 < W_1(\cdot) \leq 1$ and $0 < 1 - W_2(\cdot) \leq 1$, and wherein as the time T_{active} approaches infinity, $W_1(\cdot)$ converges to 1 and $W_2(\cdot)$ converges to 0 in the

limit.

8. The method of claim 2, wherein the function $f(\cdot)$ is defined such that the CN parameter CN_{used} is given by

$$CN_{used} = \frac{W_1(T_{active}) * \sum_{i=0}^{N_{curr}-1} CN_{curr}(i) + W_2(T_{active}) * \sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{W_1(T_{active}) * N_{curr} + W_2(T_{active}) * N_{prev}}$$

where N_{curr} represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} ; and where $W_1(T_{active})$ and $W_2(T_{active})$ are weighting functions.

9. A method for generating a comfort noise (CN) side-gain parameter, the method comprising:

receiving an audio input, wherein the audio input comprises multiple channels;

detecting, with a Voice Activity Detector (VAD), a current inactive segment in the audio input;

as a result of detecting, with the VAD, the current inactive segment in the audio input, calculating a CN side-gain parameter $SG(b)$ for a frequency band b ; and

providing the CN side-gain parameter $SG(b)$ to a decoder,

wherein the CN side-gain parameter $SG(b)$ is calculated based at least in part on the current inactive segment and a previous inactive segment.

10. The method of claim 9, wherein calculating the CN side-gain parameter $SG(b)$ for the frequency band b comprises calculating

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

where:

$SG_{curr}(b, i)$ represents a side gain value for frequency band b and frame i in the current inactive segment;

$SG_{prev}(b, j)$ represents a side gain value for frequency band b and frame j in the previous inactive segment;

N_{curr} represents the number of frames in the sum from the current inactive segment;

N_{prev} represents the number of frames in the sum from the previous inactive segment;

$W(k)$ represents a weighting function; and

nF represents the number of frames in an active segment between the current inactive segment and the previous inactive segment, corresponding to T_{active} .

11. The method of claim 10, wherein $W(k)$ is given by

$$W(k) = \begin{cases} \frac{0.8 * (1500 - k)}{1500} + 0.2, & k < 1500 \\ 0.2, & k \geq 1500 \end{cases}$$

12. A method for generating comfort noise (CN), the method comprising:

receiving a CN parameter CN_{used} generated according to any one of claims 1-8; and

generating comfort noise based on the CN parameter CN_{used} .

13. A method for generating comfort noise (CN), the method comprising

receiving a CN side-gain parameter $SG(b)$ for a frequency band b generated according to any one of claims 9-11; and

generating comfort noise based on the CN parameter $SG(b)$.

14. A node for generating a comfort noise (CN) parameter, the node comprising:

a receiving unit configured to receive an audio input;

a detecting unit configured to detect, with a Voice Activity Detector (VAD), a current inactive segment in the audio input;

a calculating unit configured to calculate, as a result of detecting, with the VAD, the current inactive segment in the audio input, a CN parameter CN_{used} ; and

a providing unit configured to provide the CN parameter CN_{used} to a decoder,

wherein the CN parameter CN_{used} is calculated by the calculating unit based at least in part on the current inactive segment and a previous inactive segment.

15. The node of claim 14, wherein the calculating unit is further configured to calculate

the CN parameter CN_{used} by calculating $CN_{used} = f(T_{active}, T_{curr}, T_{prev}, CN_{curr}, CN_{prev})$,

where:

CN_{curr} refers to a CN parameter from a current inactive segment;

CN_{prev} refers to a CN parameter from a previous inactive segment;

T_{prev} refers to a time-interval parameter related to CN_{prev} ;

T_{curr} refers to a time-interval parameter related to CN_{curr} ; and

T_{active} refers to a time-interval parameter of an active segment between the previous inactive segment and the current inactive segment.

16. The node of claim 15, wherein the function $f(\cdot)$ is defined as a weighted sum of functions $g_1(\cdot)$ and $g_2(\cdot)$ such that the CN parameter CN_{used} is given by:

$$CN_{used} = W_1(T_{active}, T_{curr}, T_{prev}) * g_1(CN_{curr}, T_{curr}) + \\ W_2(T_{active}, T_{curr}, T_{prev}) * g_2(CN_{prev}, T_{prev})$$

where $W_1(\cdot)$ and $W_2(\cdot)$ are weighting functions.

17. The node of claim 16, wherein $W_1(\cdot)$ and $W_2(\cdot)$ sum to unity such that $W_2(T_{active}, T_{curr}, T_{prev}) = 1 - W_1(T_{active}, T_{curr}, T_{prev})$.

18. The node of any one of claims 16-17, wherein the functions $g_1(\cdot)$ represents an

average over the time period T_{curr} and the function $g_2(\cdot)$ represents an average over the time period T_{prev} .

19. The node of any one of claims 16-18, wherein the weighting functions $W_1(\cdot)$ and $W_2(\cdot)$ are functions of T_{active} alone, such that $W_1(T_{active}, T_{curr}, T_{prev}) = W_1(T_{active})$ and $W_2(T_{active}, T_{curr}, T_{prev}) = W_2(T_{active})$.

20. The node of claim 19, wherein

$$g_1(CN_{curr}, T_{curr}) = \frac{\sum_{i=0}^{N_{curr}-1} CN_{curr}(i)}{N_{curr}}$$

and

$$g_2(CN_{curr}, T_{curr}) = \frac{\sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{N_{prev}}$$

where N_{curr} represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} .

21. The node of claim 20, wherein $0 < W_1(\cdot) \leq 1$ and $0 < 1 - W_2(\cdot) \leq 1$, and wherein as the time T_{active} approaches infinity, $W_1(\cdot)$ converges to 1 and $W_2(\cdot)$ converges to 0 in the limit.

22. The node of claim 15, wherein the function $f(\cdot)$ is defined such that the CN parameter CN_{used} is given by

$$CN_{used} = \frac{W_1(T_{active}) * \sum_{i=0}^{N_{curr}-1} CN_{curr}(i) + W_2(T_{active}) * \sum_{k=0}^{N_{prev}-1} CN_{prev}(k)}{W_1(T_{active}) * N_{curr} + W_2(T_{active}) * N_{prev}}$$

where N_{curr} represents the number of frames corresponding to the time-interval parameter T_{curr} and N_{prev} represents the number of frames corresponding to the time-interval parameter T_{prev} ; and where $W_1(T_{active})$ and $W_2(T_{active})$ are weighting functions.

23. A node for generating a comfort noise (CN) side-gain parameter, the node comprising:

a receiving unit configured to receive an audio input, wherein the audio input comprises multiple channels;

a detecting unit configured to detect, with a Voice Activity Detector (VAD), a current inactive segment in the audio input;

a calculating unit configured to calculate, as a result of detecting, with the VAD, the current inactive segment in the audio input, a CN side-gain parameter $SG(b)$ for a frequency band b ; and

a providing unit configured to provide the CN side-gain parameter $SG(b)$ to a decoder,

wherein the CN side-gain parameter $SG(b)$ is calculated based at least in part on the current inactive segment and a previous inactive segment

24. The node of claim 23, wherein the calculating unit is further configured to calculate the CN side-gain parameter $SG(b)$ for a frequency band b by calculating

$$SG(b) = \frac{\sum_{i=0}^{N_{curr}-1} SG_{curr}(b, i) + W(nF) * \sum_{j=0}^{N_{prev}-1} SG_{prev}(b, j)}{N_{curr} + W(nF) * N_{prev}}$$

where:

$SG_{curr}(b, i)$ represents a side gain value for frequency band b and frame i in current inactive segment;

$SG_{prev}(b, j)$ represents a side gain value for frequency band b and frame j in previous inactive segment;

N_{curr} represents the number of frames in the sum from current inactive segment;

N_{prev} represents the number of frames in the sum from previous inactive segment;

$W(k)$ represents a weighting function; and

nF represents the number of frames in the active segment between the current segment and the previous inactive segment, corresponding to T_{active} .

25. The node of claim 24, wherein $W(k)$ is given by

$$W(k) = \begin{cases} \frac{0.8 * (1500 - k)}{1500} + 0.2, & k < 1500 \\ 0.2, & k \geq 1500 \end{cases}$$

26. A node for generating comfort noise (CN), the node comprising:

a receiving unit configured to receive a CN parameter CN_{used} generated according to any one of claims 1-8; and

a generating unit configured to generate comfort noise based on the CN parameter CN_{used} .

27. A node for generating comfort noise (CN), the node comprising:

a receiving unit configured to receive a CN side-gain parameter $SG(b)$ for a frequency band b generated according to any one of claims 9-11; and

a generating unit configured to generate comfort noise based on the CN parameter $SG(b)$.

28. A computer program comprising instructions which when executed by processing circuitry of a node causes the node to perform the method of any one of claims 1-11.

29. A carrier containing the computer program of claim 28, wherein the carrier is one of an electronic signal, an optical signal, a radio signal, and a computer readable storage medium.

1/12

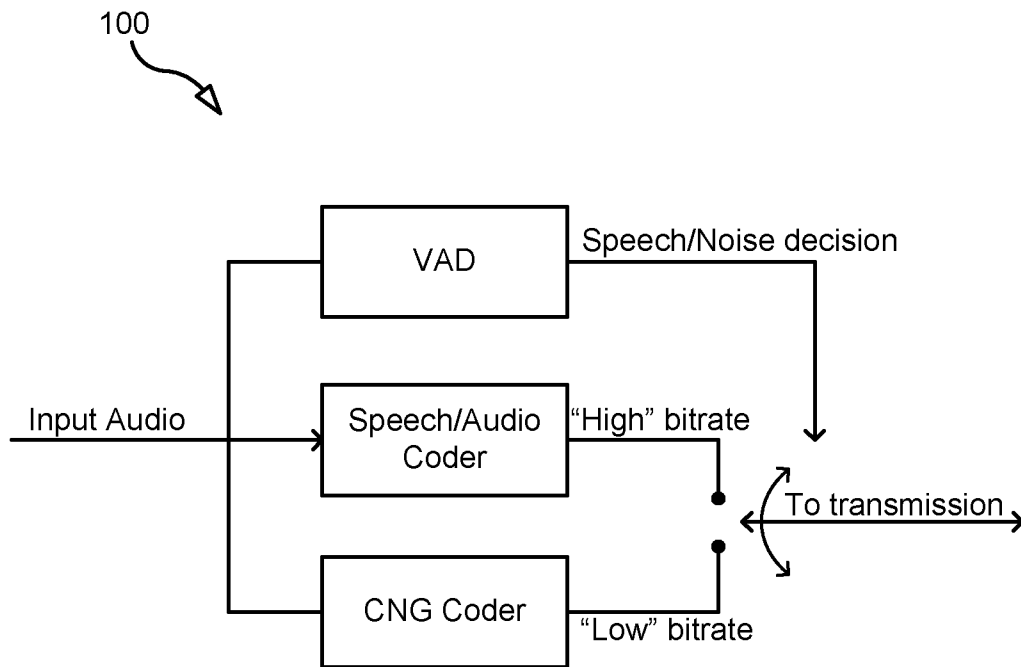


FIG. 1

2/12

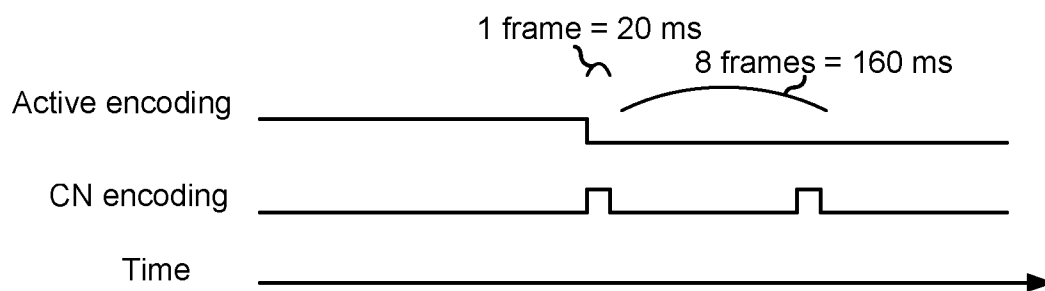


FIG. 2

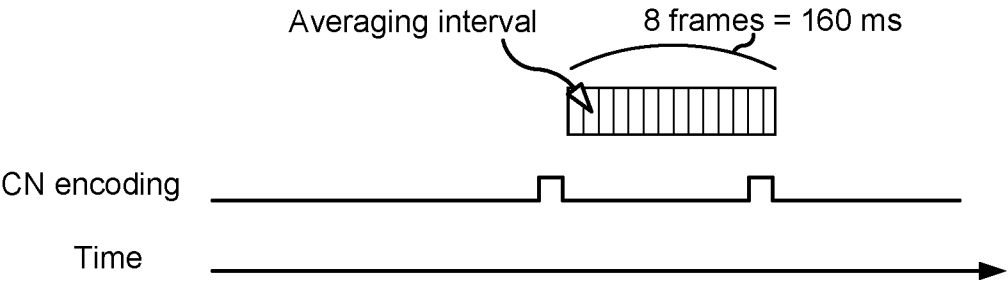


FIG. 3

4/12

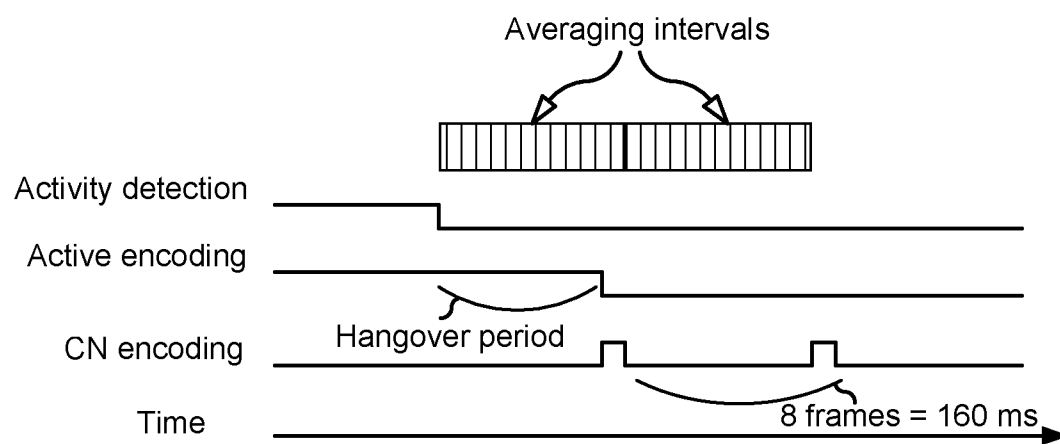


FIG. 4

5/12

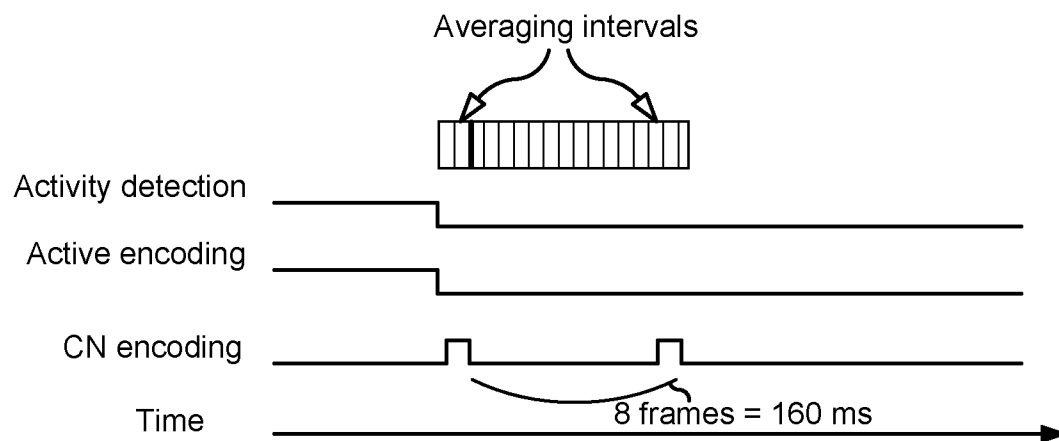


FIG. 5

6/12

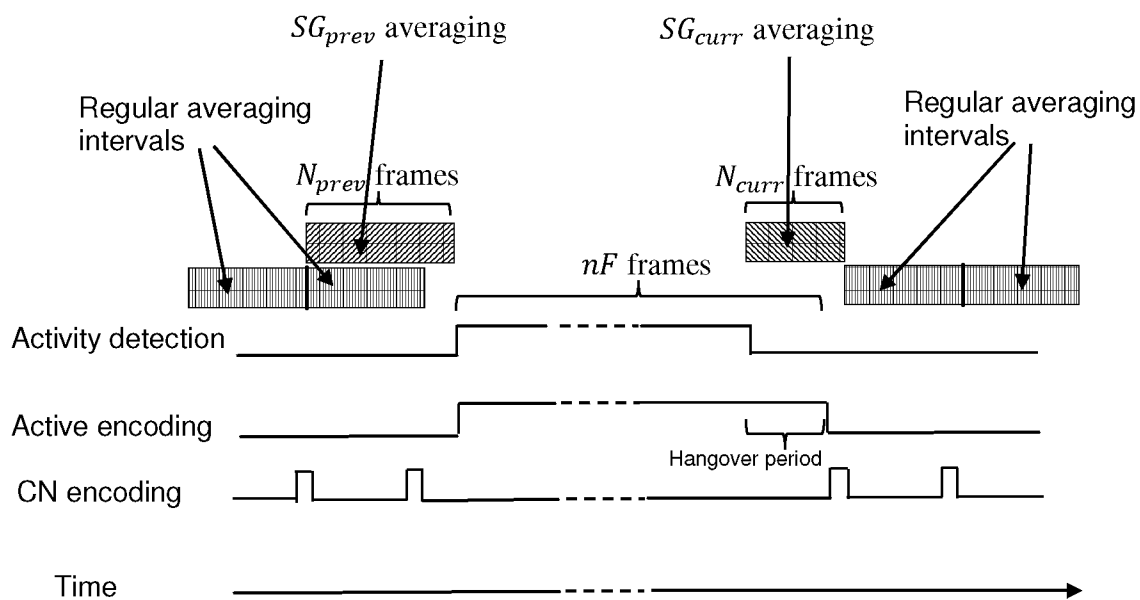


FIG. 6

7/12

700

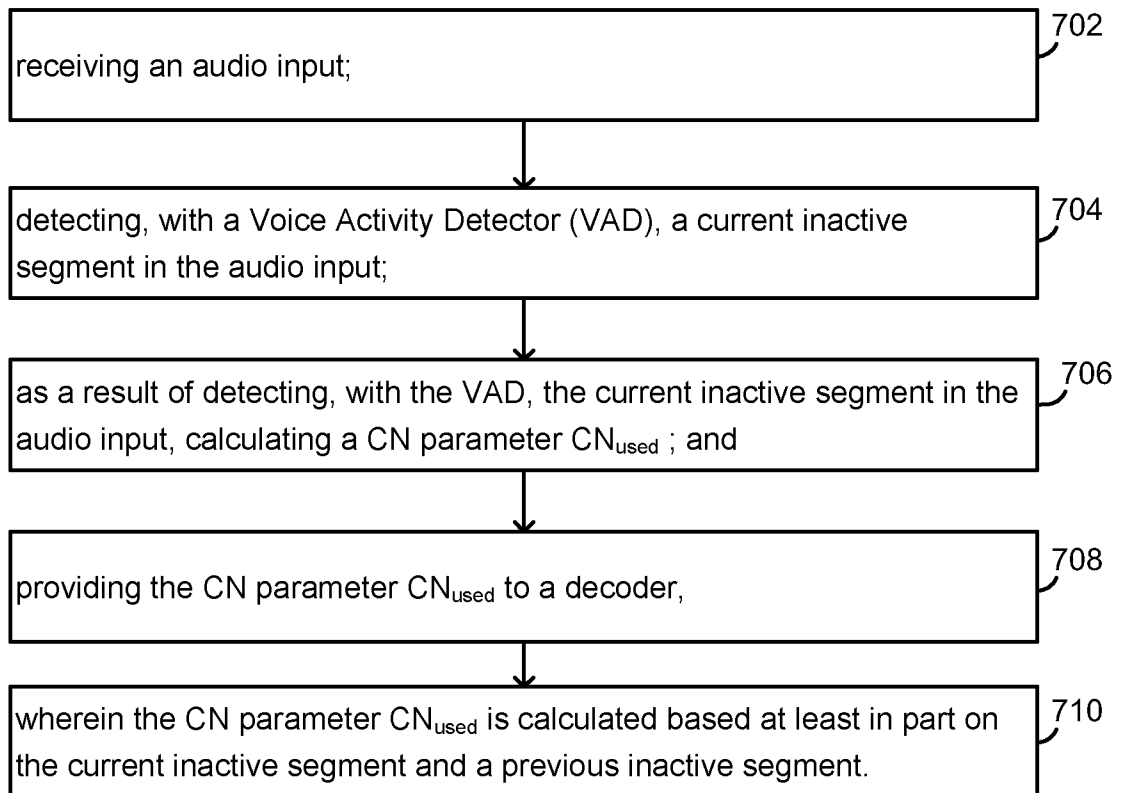


FIG. 7

8/12

800

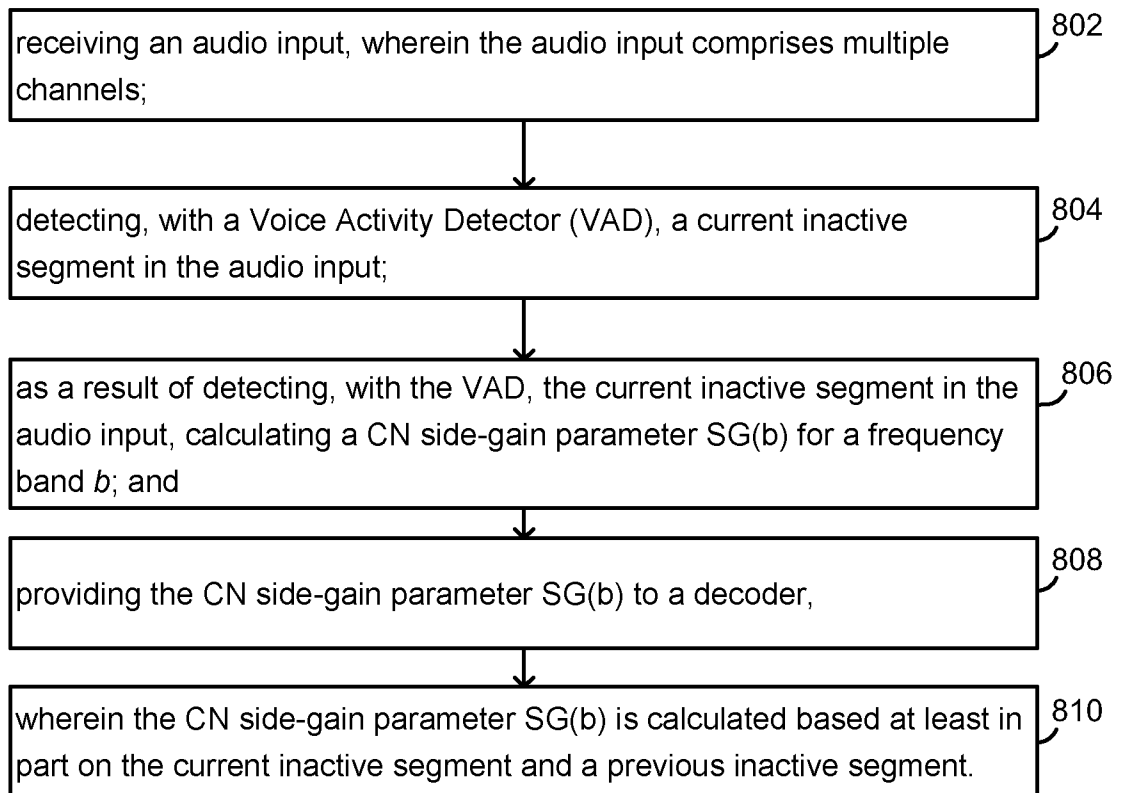


FIG. 8

9/12

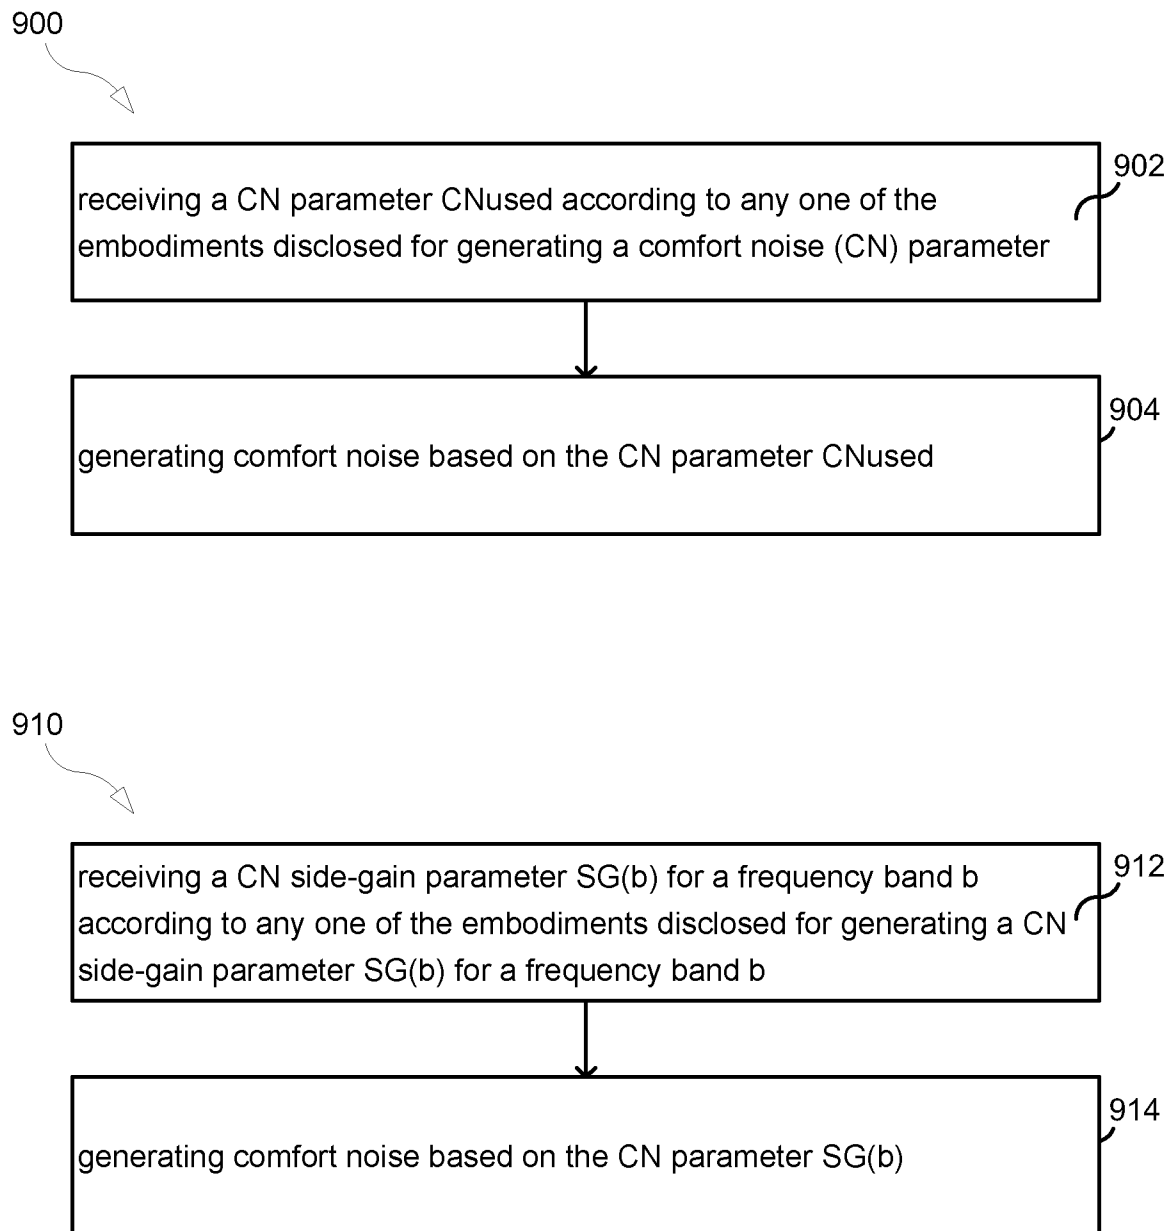


FIG. 9

10/12

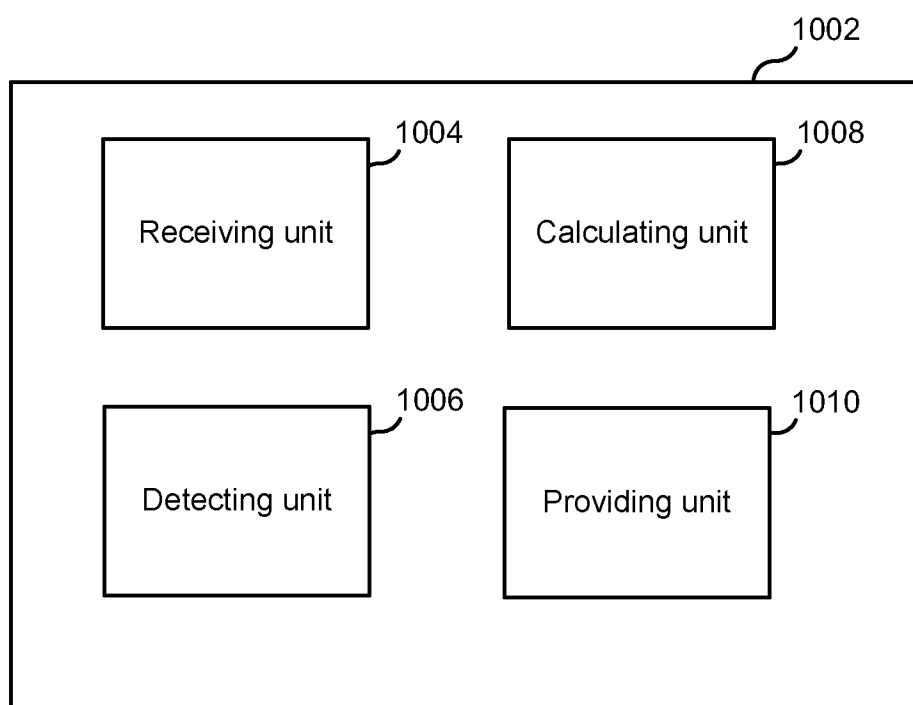


FIG. 10

11/12

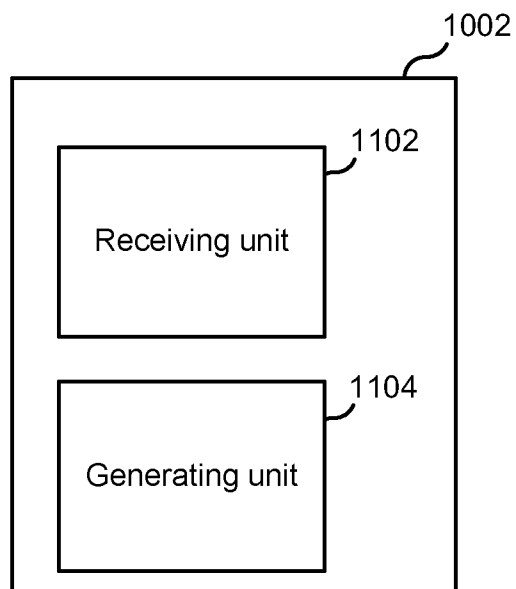


FIG. 11

12/12

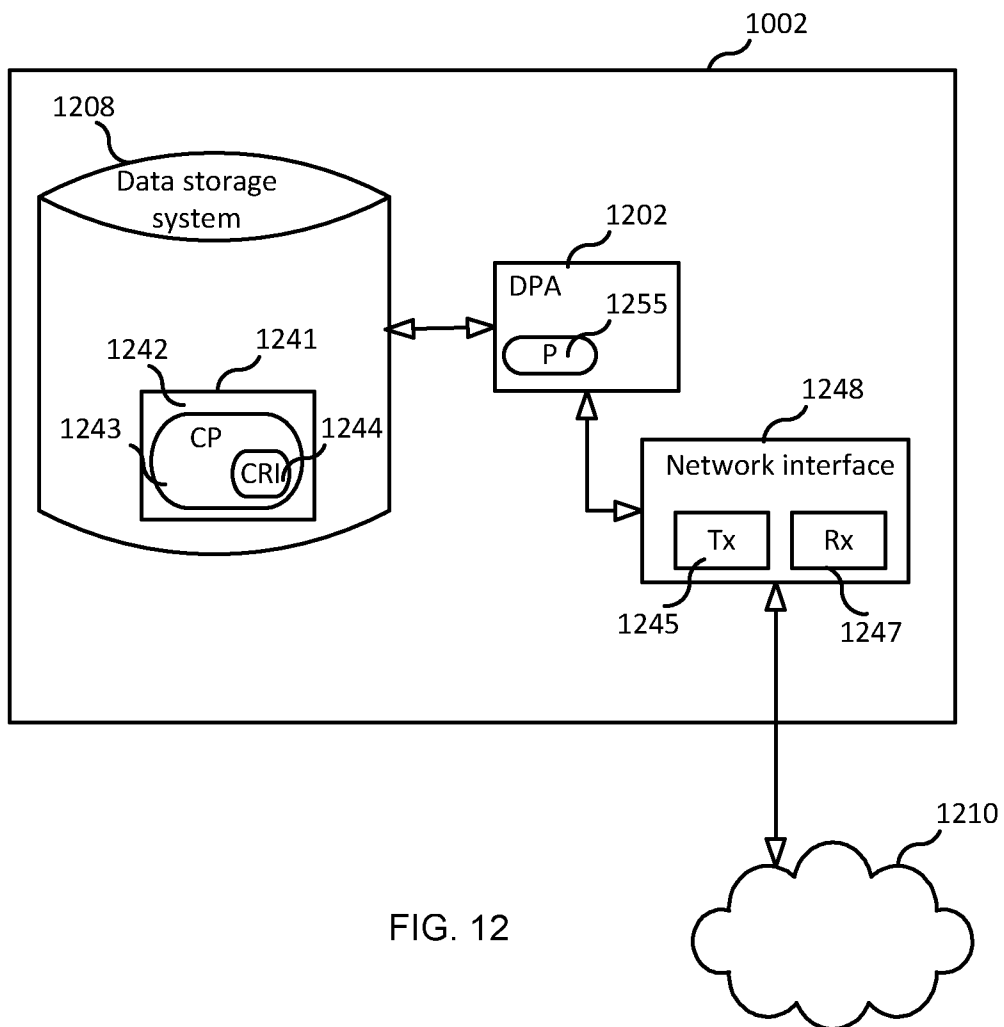


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2019/067037

A. CLASSIFICATION OF SUBJECT MATTER

INV. G10L19/012

ADD. G10L19/008

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2017/352354 A1 (JANSSON TOFTGÅRD TOMAS [SE]) 7 December 2017 (2017-12-07)	1,12,14, 26,28,29
Y	paragraph [0002] - paragraph [0006]; figure 1	9,13,23, 27
A	paragraph [0012] - paragraph [0017] paragraph [0052] - paragraph [0053]; figure 3	2-8,10, 11, 15-22, 24,25

X	US 2010/280823 A1 (SHLOMOT EYAL [US] ET AL) 4 November 2010 (2010-11-04)	1,12,14, 26,28,29
Y	paragraph [0005] - paragraph [0008] paragraph [0188] - paragraph [0196]	9,13,23, 27
A		2-8,10, 11, 15-22, 24,25

-/-		



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

3 September 2019

Date of mailing of the international search report

11/09/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Virette, David

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2019/067037

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/027716 A1 (RAJENDRAN VIVEK [US] ET AL) 31 January 2008 (2008-01-31)	1,12,14, 26,28,29
Y	paragraph [0003] - paragraph [0006]	9,13,23, 27
A	paragraph [0079]	
	paragraph [0087] - paragraph [0089]	2-8,10,
	paragraph [0105] - paragraph [0106]	11,
	paragraph [0113]	15-22, 24,25

Y	US 2017/047072 A1 (ERIKSSON ANDERS K [SE]) 16 February 2017 (2017-02-16)	9,13,23, 27
	paragraph [0002] - paragraph [0006]	
	paragraph [0051]	
	paragraph [0060] - paragraph [0061]	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/067037

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2017352354	A1	07-12-2017	
		AU 2013314636 A1	19-03-2015
		BR 112015002826 A2	22-05-2018
		CA 2884471 A1	20-03-2014
		CL 2015000540 A1	31-07-2015
		CN 104584120 A	29-04-2015
		DK 2823479 T3	12-10-2015
		EP 2823479 A1	14-01-2015
		EP 2927905 A1	07-10-2015
		ES 2547457 T3	06-10-2015
		ES 2642574 T3	16-11-2017
		HK 1206861 A1	15-01-2016
		HU E027963 T2	28-11-2016
		JP 5793636 B2	14-10-2015
		JP 2015525896 A	07-09-2015
		KR 20150054716 A	20-05-2015
		MA 37890 A1	30-12-2016
		MX 340634 B	19-07-2016
		PH 12014502232 A1	15-12-2014
		PL 2927905 T3	29-12-2017
		PT 2823479 E	08-10-2015
		RU 2658544 C1	22-06-2018
		RU 2014150326 A	10-07-2016
		SG 11201500595T A	29-04-2015
		US 2015235648 A1	20-08-2015
		US 2016293170 A1	06-10-2016
		US 2017352354 A1	07-12-2017
		WO 2014040763 A1	20-03-2014
US 2010280823	A1	04-11-2010	
		CN 101335000 A	31-12-2008
		EP 2224428 A1	01-09-2010
		KR 20100105733 A	29-09-2010
		RU 2010130664 A	10-05-2012
		US 2010280823 A1	04-11-2010
		US 2010324917 A1	23-12-2010
		WO 2009117967 A1	01-10-2009
US 2008027716	A1	31-01-2008	
		BR PI0715063 A2	28-05-2013
		CA 2657420 A1	07-02-2008
		EP 2047457 A2	15-04-2009
		HU E042959 T2	29-07-2019
		JP 4995913 B2	08-08-2012
		JP 2009545779 A	24-12-2009
		KR 20090033461 A	03-04-2009
		RU 2009107181 A	10-09-2010
		US 2008027716 A1	31-01-2008
		WO 2008016942 A2	07-02-2008
US 2017047072	A1	16-02-2017	
		EP 3105755 A1	21-12-2016
		EP 3244404 A1	15-11-2017
		ES 2687617 T3	26-10-2018
		MX 353120 B	20-12-2017
		US 2017047072 A1	16-02-2017
		WO 2015122809 A1	20-08-2015