



(72) Schilling, Donald L., US


(73) InterDigital Technology Corporation, US

(51) Int.Cl.⁶ H04B 1/69, H04B 1/16, H04B 1/04

(30) 1994/06/28 (08/266,769) US

(54) **SYSTEME ET PROCEDE A SPECTRE ETALE A COMMANDE
DE PHASE**

(54) **PHASED ARRAY SPREAD SPECTRUM SYSTEM AND METHOD**

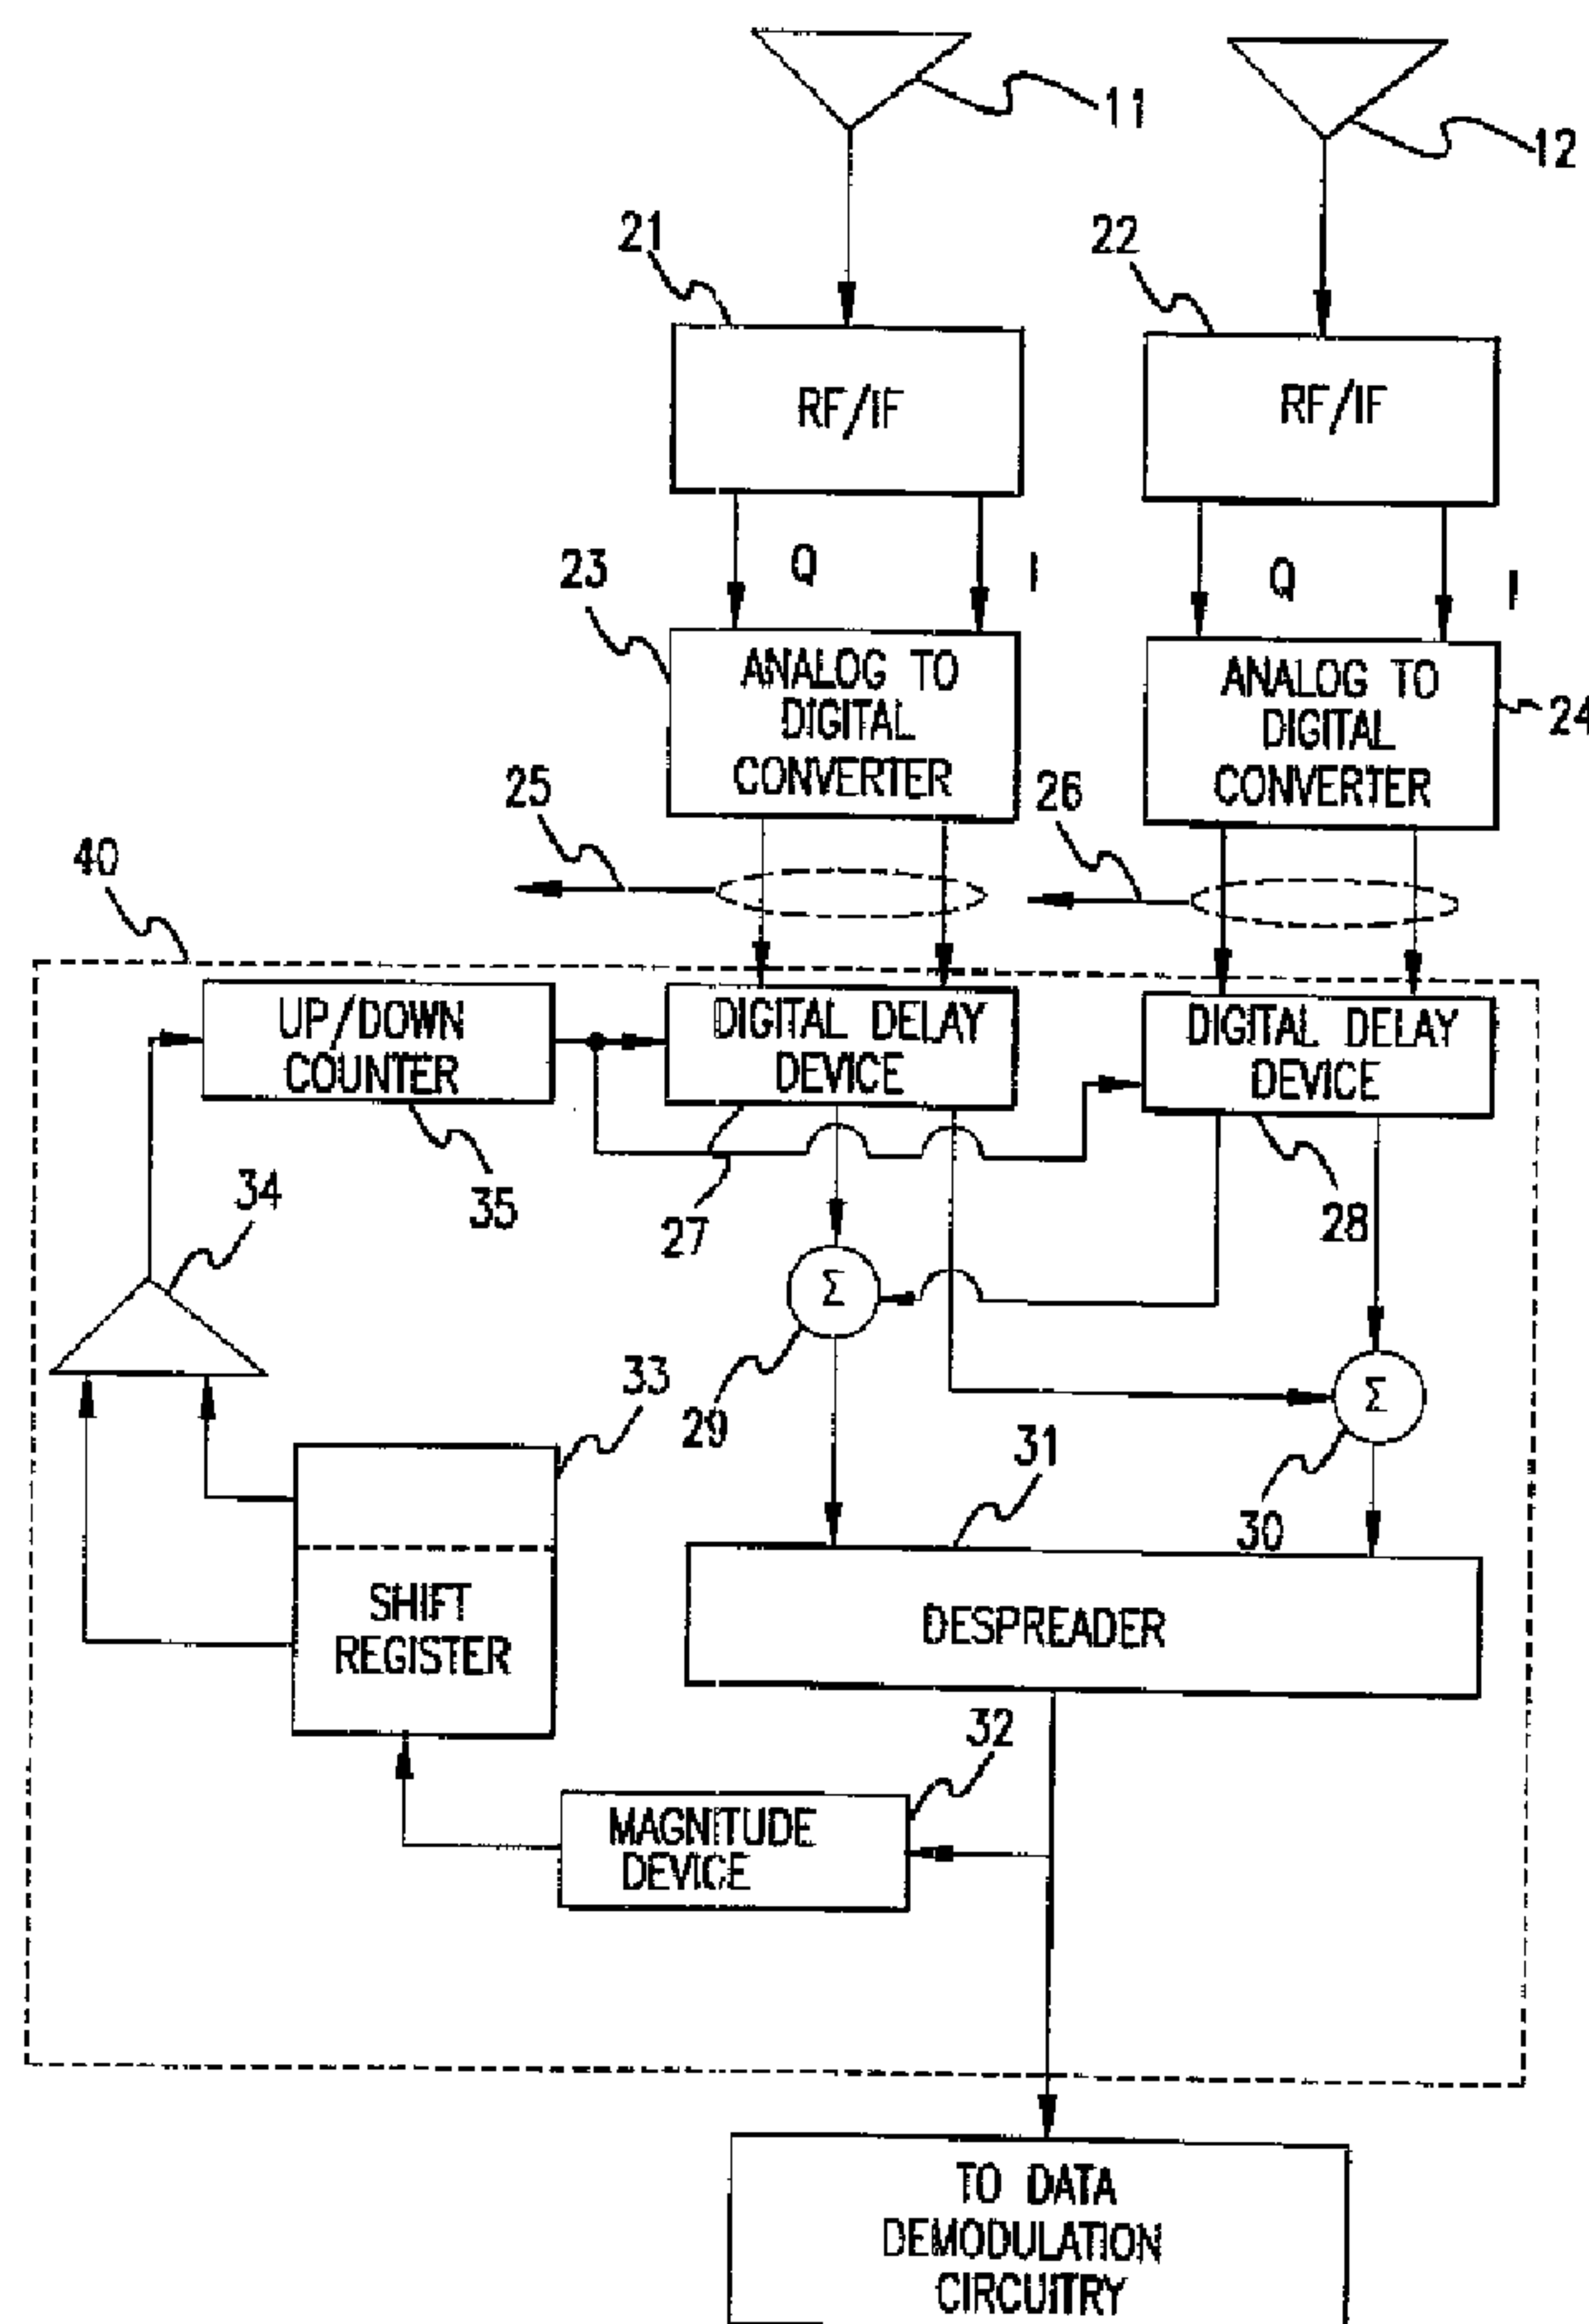

(57) Un système à spectre étalé à commande de phase maximise l'intensité d'un signal à spectre étalé se propageant par trajets multiples. Une section RF/FI (21) reçoit une pluralité de signaux à spectre étalé. Une section RF/FI (22) reçoit une pluralité de versions synchronisées de la pluralité de signaux à spectre étalé.

(57) A phased array spread-spectrum system maximizes signal strength of a spread-spectrum signal with multipath. RF/IF section (21) receives a plurality of spread-spectrum signals. RF/IF section (22) receives a plurality of phased versions of the plurality of spread-spectrum signals. Digital delay devices (27, 28) delay the



(11) (21) (C) **2,193,843**
(86) 1995/06/16
(87) 1996/01/11
(45) 2000/11/14

Des dispositifs numériques de temporisation (27, 28) retardent, d'une pluralité de temporisation par rapport à leurs versions synchronisées, les signaux à spectre étalé reçus. Des additionneurs (29, 30) combinent, sous forme d'une pluralité de signaux mixtes, les signaux à spectre étalé temporisés et leurs versions synchronisées. Un désétaleur (31) désétale les signaux mixtes sous forme d'une pluralité de signaux désétalés. Un dispositif d'amplitude (32) génère une pluralité de valeurs d'amplitude à partir des signaux désétalés. Un registre à décalage (33) mémorise une pluralité de valeurs d'amplitude précédente et de valeurs d'amplitude actuelle précédemment et actuellement produites par le dispositif d'amplitude (32). Un comparateur (34) compare les valeurs d'amplitude précédente aux valeurs d'amplitude actuelle et produit une pluralité de signaux de comparaison. Les dispositifs numériques de temporisation (27, 28), réagissant à ces signaux de comparaison, allongent ou raccourcissent la pluralité de temporisations.

received spread-spectrum signals with respect to their phased versions by a plurality of delays. Summers (29, 30) combine the delayed spread-spectrum signals and their phased versions as a plurality of combined signals. Despreader (31) despreads the combined signals as a plurality of despread signals. Magnitude device (32) generates a plurality of magnitude values from the despread signals. Shift register (33) stores a plurality of previous-magnitude values and present-magnitude values previously and presently generated by the magnitude device (32). Comparator (34) compares the previous-magnitude values to the present-magnitude values and outputs a plurality of comparison signals. Digital delay devices (27, 28), responsive to the comparison signals, lengthen or shorten the plurality of delays.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:H01Q 3/22, 3/24, 3/26, H01S 3/16, 3/28,
H04B 15/00, H04K 1/00, 1/10, H04L
27/30

A1

(11) International Publication Number:

WO 96/00991

(43) International Publication Date:

11 January 1996 (11.01.96)

(21) International Application Number: PCT/US95/08562

(22) International Filing Date: 16 June 1995 (16.06.95)

(30) Priority Data:

08/266,769

28 June 1994 (28.06.94)

US

(71) Applicant: INTERDIGITAL TECHNOLOGY CORPORA-
TION [US/US]; Suite 802, 913 Market Street, Wilmington,
DE 19801 (US).(72) Inventor: SCHILLING, Donald, L.; Hoffstot Lane, Sands
Point, NY 11050 (US).(74) Agent: NEWMAN, David, B., Jr.; David Newman & Asso-
ciates, P.C., Centennial Square, P.O. Box 2728, La Plata,
MD 20646-2728 (US).(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH,
CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG,
KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT,
UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES,
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent
(BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD,
TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published


With international search report.

2193843

(54) Title: PHASED ARRAY SPREAD SPECTRUM SYSTEM AND METHOD

(57) Abstract

A phased array spread-spectrum system maximizes signal strength of a spread-spectrum signal with multipath. RF/IF section (21) receives a plurality of spread-spectrum signals. RF/IF section (22) receives a plurality of phased versions of the plurality of spread-spectrum signals. Digital delay devices (27, 28) delay the received spread-spectrum signals with respect to their phased versions by a plurality of delays. Summers (29, 30) combine the delayed spread-spectrum signals and their phased versions as a plurality of combined signals. Despreader (31) despreads the combined signals as a plurality of despread signals. Magnitude device (32) generates a plurality of magnitude values from the despread signals. Shift register (33) stores a plurality of previous-magnitude values and present-magnitude values previously and presently generated by the magnitude device (32). Comparator (34) compares the previous-magnitude values to the present-magnitude values and outputs a plurality of comparison signals. Digital delay devices (27, 28), responsive to the comparison signals, lengthen or shorten the plurality of delays.

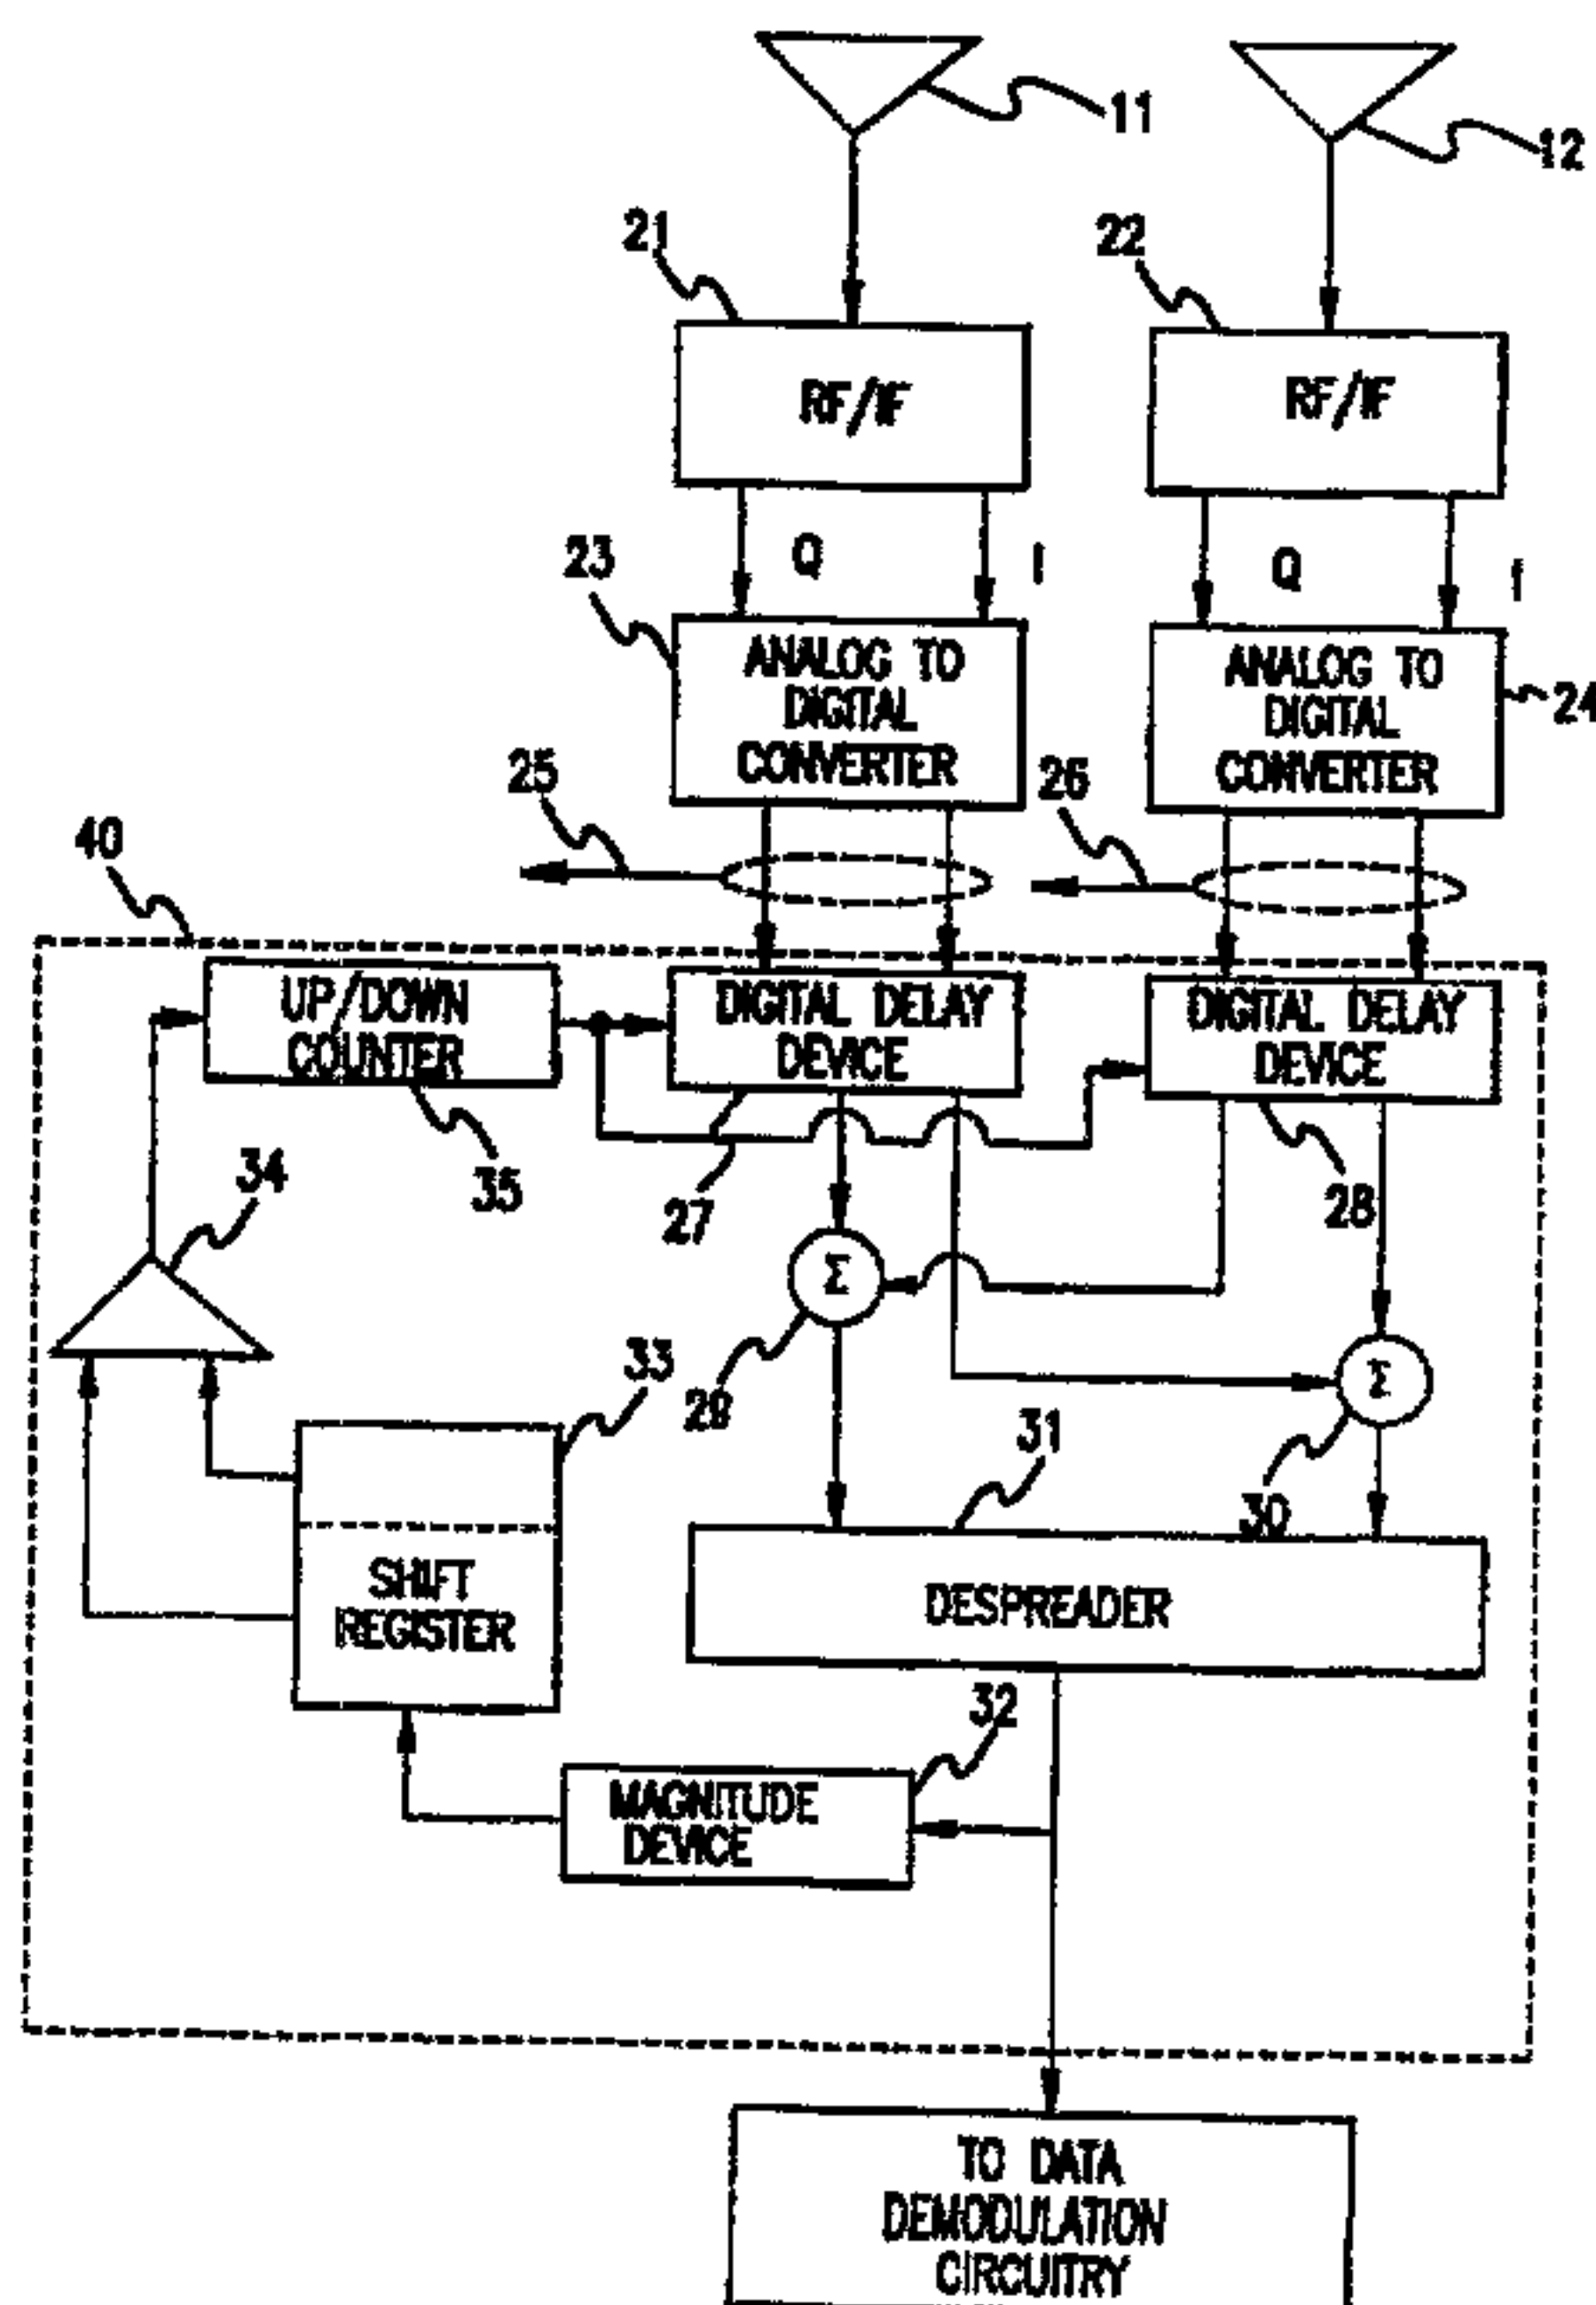

-1-

PHASED ARRAY SPREAD SPECTRUM
SYSTEM AND METHOD

BACKGROUND OF THE INVENTION

5 The present invention relates to spread-spectrum communications and more particularly to a method and apparatus for enhancing communications by using phased array principles for increasing signal-to-noise ratio for a spread spectrum signal with multipath arriving at a receiver.

DESCRIPTION OF THE RELEVANT ART

10 Achieving sufficient signal strength when a received signal comes from two paths is a problem when communicating with spread-spectrum modulation in a multipath environment. The received signal from the two paths may have phase cancellation, yielding no reception, or reception with an
15 unacceptable error rate.

Phased arrays, as is well known in the art, require N antenna elements for distinguishing up to N-1 signals arriving at the phased array from different paths or directions. This concept of spatial diversity is well
20 developed in antenna theory.

SUMMARY OF THE INVENTION

A general object of the invention is an improved system and method for receiving spread-spectrum signals in a multipath environment.

25 Another object of the invention is to increase the received signal-to-noise ratio or reduce the probability of error of a spread-spectrum signal arriving from two or more paths.

Another object of the invention is to receive a
30 plurality of spread-spectrum signals arriving at the antenna from a multiplicity of different directions, independent of the number of antenna elements.

2193843

-2-

According to the present invention, as embodied and broadly described herein, a phased array spread-spectrum system is provided comprising receiving means, delaying means, combining means, despreading means, generating means, storing means, and comparing means. The receiving means receives a plurality of spread-spectrum signals and a plurality of phased versions of the plurality of spread-spectrum signals. Typically, the plurality of spread-spectrum signals is received by a first plurality of receivers coupled to a first antenna, and the plurality of phased versions of the plurality of spread-spectrum signals is received by a second plurality of receivers coupled to a second antenna. The plurality of received spread-spectrum signals and the plurality of phased versions of the plurality of spread-spectrum signals are digitized. The delaying means can delay the plurality of received spread-spectrum signals with respect to the plurality of phased versions of the plurality of spread-spectrum signals by a plurality of delays. The plurality of received spread-spectrum signals consequently becomes a plurality of delayed signals.

The combining means combines the plurality of delayed signals and the plurality of phased versions of the plurality of spread-spectrum signals as a plurality of combined signals. An in-phase component of each delayed signal is combined with an in-phase component of each phased version of each spread-spectrum signal, respectively. A quadrature-phase component of each delayed signal is combined with a quadrature-phase component of each phased version of each spread-spectrum signal, respectively.

The despreading means despreads the plurality of combined signals as a plurality of despread signals. This may be accomplished using a plurality of product detectors with a plurality of chipping sequences matched to the plurality of received spread-spectrum signals, respectively,

-3-

or a plurality of matched filters having a plurality of impulse functions matched to the plurality of chipping sequences of the plurality of received spread-spectrum signals, respectively.

5 The generating means generates from the plurality of despread signals a plurality of magnitude values. Each magnitude value may be an absolute value, or the square of the in-phase component and quadrature-phase component of the despread signal.

10 The storing means stores a plurality of previous-magnitude values previously generated by the generating means and a plurality of present-magnitude values presently generated by the generating means. The plurality of previous-magnitude values and the plurality of present-magnitude values, respectively, are compared by the
15 comparing means. In response to the result of this comparison, the comparing means outputs a plurality of comparison signals. The delaying means may change any or all of the plurality of delays based on the plurality of
20 comparison signals, respectively.

 The present invention also includes a method for maximizing the signal strength of a plurality of spread-spectrum signals with multipath comprising the steps of receiving the plurality of spread-spectrum signals and a
25 plurality of phased versions of the plurality of spread-spectrum signals. The received plurality of spread-spectrum signals is delayed with respect to the plurality of phased versions of the spread-spectrum signals by a plurality of delays, to generate a plurality of delayed signals. The
30 plurality of delayed signals and the plurality of phased versions of the plurality of spread-spectrum signals are combined as a plurality of combined signals, and the plurality of combined signals is despread as a plurality of despread signals, respectively.

2193843

-4-

The method includes generating a plurality of magnitude values from the plurality of despread signals, and storing a plurality of previous-magnitude values and a plurality of present-magnitude values. The plurality of previous-magnitude values and the plurality of present-magnitude values are compared, and a plurality of comparison signals is output based on this comparison. Using the plurality of comparison signals, the plurality of delays is changed. The step of generating the plurality of magnitude values is a way of locating a maximum. Other procedures for locating a maximum or equivalent may be used.

Additional objects and advantages of the invention are set forth in part in the description which follows, and in part are obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention also may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate preferred embodiments of the invention and, together with the description, serve to explain the principles of the invention.

FIG. 1 is a block diagram illustrating the general concept of the invention;

FIG. 2 shows two multipath signals being received by a user;

FIG. 3 is a block diagram for adjusting a phase between two receivers;

FIG. 4 is a block diagram for adjusting a phase for a plurality of spread-spectrum signals; and

-5-

FIG. 5 is a block diagram for adjusting a phase between two sets of receivers for a plurality of spread-spectrum signals.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Reference now is made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals indicate like elements throughout the several views.

10 Handset

 The present invention provides a unique phased array spread-spectrum system comprising receiving means, delaying means, combining means, despreading means, generating means, storing means, and comparing means. The delaying means is
15 coupled between the receiving means and the combining means. The despreading means is coupled between the combining means and the generating means. The storing means is coupled between the generating means and the comparing means, and the comparing means is coupled to the delaying means.

20 The receiving means of FIG. 1 receives a spread-spectrum signal and a phased version of the spread-spectrum signal. The term "phased version" as used herein includes a version of the spread-spectrum signal having a phase
25 different from the received spread-spectrum signal, and/or a version of the spread-spectrum signal having a time delay with respect to the received spread-spectrum signal. The different phase and/or time delay arises, as shown in FIG. 2, from the spread-spectrum signal 15 and the phased version of the spread-spectrum signal 16 arriving from different
30 paths, such as bouncing off different buildings 17, 18. The phased array spread-spectrum system may be implemented at a base station or, as shown in FIG. 2, at a remote subscriber unit (RSU) such as a handset 19. The phase change occurs

-6-

upon each reflection, since a first spread-spectrum signal 15 has one reflection and a second ray, such as the phased version of the spread-spectrum signal 16, has two reflections. As a result of the difference in time between the two signals, the multipath signals can undergo phase cancellation and cause a fade. The phased array spread-spectrum system of FIG. 1 delays or phase shifts one of the two antennas 11, 12 enough to steer the beam from the two antennas to either building, or ray path having maximum signal strength.

Typically, the receiving means, as shown in FIG. 1, includes a first antenna 11 and a second antenna 12. The spread-spectrum signal $d(t)g(t)\cos\omega_0 t$ is received with a first receiver coupled to the first antenna 11, and the phased version of the spread-spectrum signal $d(t-\tau)g(t-\tau)\cos\omega_0(t-\tau)$ is received with a second receiver coupled to the second antenna 12. The first receiver and the second receiver include radio frequency (RF) and intermediate frequency (IF) amplifiers and filters, as appropriate. The received spread-spectrum signal and the phased version of the spread-spectrum signal may be digitized.

The delaying means, shown in FIG. 1 as a delay device 13, can delay the received spread-spectrum signal with respect to the phased version of the spread-spectrum signal by a delay. The received spread-spectrum signal consequently becomes a delayed signal, with the delay approximately equal to a delay of the phased version of the spread-spectrum signal. A preferred embodiment employs digital signal processing. Accordingly, the delaying means would include a digital delay device such as a shift register. Alternatively, analog circuitry would employ an analog delay device, or a phase shifter.

Although illustrated with two antennas, the receiving means may include additional antennas for enhanced performance. The delaying means would have appropriate

2193843

-7-

delaying circuits to accommodate the multiple antennas.

The combining means, shown in FIG. 1 as a combiner 14, combines the delayed signal and the phased version of the spread-spectrum signal as a combined signal. The delayed signal and the phased version of the spread-spectrum signal have approximately the same phase or time delay. Thus, an in-phase component of the delayed signal combines with an in-phase component of the phased version of the spread-spectrum signal, and a quadrature-phase component of the delayed signal combines with a quadrature-phase component of the phased version of the spread-spectrum signal.

The despreading means despreads the combined signal as a despread signal. This may be accomplished using a product detector with a chipping sequence matched to the received spread-spectrum signal, or a matched filter such as a surface acoustic wave (SAW) device having an impulse function matched to the chipping sequence of the received spread-spectrum signal. Product detectors, digital signal processors and SAW devices for despreading spread-spectrum signals are well known in the art.

The generating means generates a magnitude value from the despread signal. The magnitude value may be an absolute value, the square of the in-phase component and quadrature-phase component of the despread signal, or other metric of the despread signal for determining a relative signal strength value. A magnitude value currently being generated by the generating means is referred to herein as a present-magnitude value. A magnitude value previously generated by the generating means is referred to herein as a previous-magnitude value. The invention is taught with the previous-magnitude value being generated just before the present-magnitude value, although a previous-magnitude value may be separated in time and other magnitude values from the present magnitude value. Also, more than one previous-magnitude value may be used. The concept of the present

2193843

-8-

invention is taught with one previous-magnitude value.

The storing means stores the previous-magnitude value previously generated by the generating means and the present-magnitude value presently generated by the generating means. In a digital implementation, the storing means might be embodied as a shift register or, equivalently, as gates for performing the storing function. In an analog implementation, the storing means might be embodied as two or more capacitors for storing the previous-magnitude value and the present-magnitude value.

The previous-magnitude value and the present-magnitude value are compared by the comparing means. In response to this comparison, the comparing means outputs a comparison signal. The comparing means, for example, may output a comparison signal to increase the delay τ of the delaying means, if the present-magnitude value were greater than the previous-magnitude value; conversely, the comparing means may output a comparison signal to decrease the delay τ of delaying means, if the present-magnitude value were less than the previous-magnitude value. The delaying means changes the first delay based on the comparison signal. If a plurality of previous-magnitude values were used, then a scheme may be implemented with the comparing means to weight the plurality of previous-magnitude values.

The present invention provides improvement if the delay τ is less than the time of a chip T_c . The present invention works an in-close multipath. For far-out multipath, noise is produce. Thus, the present invention finds applications in building or within areas where $\tau < T_c$. For $\tau > T_c$ a RAKE system should be used.

In the exemplary arrangement shown in FIG. 3, the receiving means is embodied as the first antenna 11, a first RF/IF section 21, a first analog-to-digital converter 23, the second antenna 12, a second RF/IF section 22, and a second analog-to-digital converter 24. The first RF/IF

2193843

-9-

section 21 is coupled between the first antenna 11 and the first analog-to-digital converter 23. The second RF/IF section 22 is coupled between the second antenna 12 and the second analog-to-digital converter 24. Typically, the first RF/IF section 11 generates an in-phase component and a quadrature-phase component of the received spread-spectrum signal. The second RF/IF section 12 generates an in-phase component and quadrature-phase component of the phased-version of the spread-spectrum signal.

As illustratively shown in FIG. 3, the outputs of the first analog-to-digital converter 23 and the second analog-to-digital converter 24 may go to other sections for processing different channels of the spread spectrum signal 25, 26.

The delaying means is embodied as a first digital delay device 27. The delaying means additionally may include a second digital delay device 28. The first digital delay device 27 is coupled to the first analog-to-digital converter 23. If a second digital delay device 28 were employed, then the second digital delay device 28 is coupled to the second analog-to-digital converter 24.

The combining means is embodied as a first summer 29 and a second summer 30. The first summer 29 is coupled to the first digital-delay device 27 and to the second digital-delay device 28. The second summer 30 is coupled to the first digital-delay device 27 and to the second digital-delay device 28. If the second digital delay device 28 were not employed, then the first summer 29 is coupled to the first digital-delay device 27 and to the second analog-to-digital converter 24, and the second summer 30 is coupled to the first digital-delay device 27 and to the second analog-to-digital converter 24.

The despreading means is embodied as a despreader 31. The despreader 31 may be embodied as a product device coupled to an appropriate chipping-sequence generator and

2193843

-10-

synchronization circuitry for despreading the received spread spectrum signal. Alternatively, the despreader 31 may be a digital signal processor which includes the appropriate product devices, or a matched filter having an impulse response matched to the chipping sequence of the received spread spectrum signal. As is well known in the art, a surface acoustic wave (SAW) device having an impulse response matched to the chipping sequence may be employed.

The generating means is embodied as a magnitude device 32. The magnitude device 32 is coupled to the despreader 31. Normally, the despreader 31 is coupled to additional circuitry for demodulating data embedded in the received spread spectrum signal.

The storing means is embodied as a shift register 33. The shift register 33 is coupled to the magnitude device 32. The storing means alternatively may be embodied as a plurality of gates, registers, or other circuitry for storing magnitude values.

The comparing means may be embodied as a comparator 34 and an up/down counter 35. The comparator 34 typically has two inputs coupled to the shift register 33. The up/down counter 35 is coupled to the output of the comparator 34 and to the first digital-delay device 27 and/or the second digital-delay device 28.

The first antenna 11 receives the spread-spectrum signal which is amplified by the first RF/IF section 21. The first RF/IF section 21 outputs an in-phase component and a quadrature-phase component to the first analog-to-digital converter 23. The first analog-to-digital converter 23 converts the in-phase component and the quadrature-phase component to a digitized in-phase component and a digitized quadrature-phase component. These components may be processed by modules similar to the phase compensation circuitry 40, by coupling to the outputs of the first analog-to-digital converter 23 at the outputs 25, 26.

2193843

-11-

Similarly, a phased version of the spread-spectrum signal is received by the second antenna 12 and then amplified and filtered by the second RF/IF section 22. The second RF/IF section 22 has outputs for an in-phase component and a quadrature-phase component which are fed to the second analog-to-digital converter 24. The outputs 26 of the second analog-to-digital converter can go to modules similar to the phase compensation circuitry 40 for processing different chipping sequences. For example, a spread spectrum signal may have a plurality of spread-spectrum channels, with each spread-spectrum channel defined by a different chipping sequence. Accordingly, each module 40 would be used for a corresponding spread-spectrum channel, for processing with that particular chipping sequence.

The first digital-delay device 27 delays the digitized spread-spectrum signal by a first delay. The output of the first digital-delay device 27 is the first delayed signal. The second digital-delay device 28 delays the digitized phased version of the spread-spectrum signal by a second delay. The output of the second digital-delay device 28 is a second delayed signal. The second digital-delay device 28 is optional, and is not required for use of the present invention. If the second digital-delay device 28 were not employed, then the term "second delayed signal" refers to the digitized phased version of the spread-spectrum signal, outputted from the second analog-to-digital converter 24.

The first summer 29 combines the quadrature-phase components of the first delayed signal from the first digital-delay device 27, with the second delayed signal from the second digital-delay device 28. The output of the first summer 29 is a first combined signal.

The second summer 30 combines an in-phase component from the first digital-delay device 27, with an in-phase component from the second digital-delay device 28.

-12-

Accordingly, the in-phase components of the first delayed signal and the second delayed signal are combined as a second combined signal.

5 The despreading device 31 despreads the first combined signal and the second combined signal as a despread in-phase signal and a despread quadrature-phase signal. The despread in-phase signal and the despread quadrature-phase signal can be processed by further processing devices, not shown, for demodulating data embedded in the received spread-spectrum
10 signal.

 The magnitude device 32 generates a magnitude value from the despread in-phase signal and the despread quadrature-phase signal. The magnitude value may be an absolute value determined from the despread in-phase signal
15 and the despread quadrature-phase signal, or a square of the despread in-phase signal plus a square of the despread quadrature-phase signal. Other metrics may be used for accomplishing the same function of determining a relative signal strength value. The function of the magnitude value
20 is to compare the signal strength of a present-magnitude value with a previous-magnitude value.

 The shift register 33 stores the previous-magnitude value and the present-magnitude value in order that a comparison may be made by the comparator 34. The comparator
25 34, when comparing the previous-magnitude value with the present-magnitude value, outputs a comparison signal. The comparison signal can control the up/down counter 35 to increase or decrease a delay of the first digital-delay device 27. Optionally, the up/down counter 35 may increase
30 or decrease a second delay of the second digital-delay device 28.

 The present invention also includes a method for maximizing signal strength of a spread-spectrum signal with multipath comprising the steps of receiving the spread-
35 spectrum signal and a phased version of the spread-spectrum

2193843

-13-

signal. The in-phase and quadrature-phase components of the received spread-spectrum signal are delayed with respect to the in-phase and quadrature-phase components of the phased version of the spread-spectrum signal by a delay, to generate a delayed signal. The in-phase component and the quadrature-phase component of the delayed signal and the in-phase component and the quadrature-phase component of the phased version of the spread-spectrum signal are combined, respectively, as the in-phase component and quadrature-phase component of a combined signal, and the combined signal is despread as an in-phase component and a quadrature-phase component of a despread signal.

The method includes generating a magnitude value from the in-phase component and the quadrature-phase component of the despread signal, and storing a previous-magnitude value and a present-magnitude value. The previous-magnitude value and the present-magnitude value are compared, and a comparison signal is output based on this comparison. Using the comparison signal, the delay is changed.

Base Station

The present invention may be extended to the base station, with the unique phased array spread-spectrum system processing a plurality of spread-spectrum signals. In this embodiment, the receiving means receive a plurality of spread-spectrum signals and a plurality of phased versions of the plurality of spread-spectrum signals. As shown in Fig. 2, the different phases and/or time delays arise from the spread-spectrum signal 15 and the phased version of the spread-spectrum signal 16 arriving from different paths, such as bouncing off different buildings 17, 18. Typically, the receiving means, as shown in Figs. 3, 4, and 5, includes the first antenna 11 and second antenna 12. The receiving means may further include appropriate RF and IF amplifiers and filters. The received plurality of spread-spectrum

-14-

signals and the received plurality of phased versions of the plurality of spread-spectrum signals may be digitized.

The delaying means, shown in Fig. 4 as delay device 121, delay device 122, . . . , delay device 123, can delay the received plurality of spread-spectrum signals, with respect to the received plurality of phased versions of the plurality of spread-spectrum signals, by a plurality of delays, respectively. The received plurality of spread-spectrum signals consequently become a plurality of delayed signals, with the delay for each of the plurality of delayed signals approximately equal to a delay of the respective phased version of the received spread-spectrum signal. A preferred embodiment would include digital signal processing. Accordingly, the delay means would include a digital delay device such as a shift register. Alternatively, analog circuitry would employ an analog delay device, or phase shifter.

The combining means, shown in Fig. 4 as a combiner 14, combines the plurality of delayed signals and the plurality of phased versions of the plurality of spread-spectrum signals as a combined signal. The output of the combining means may include appropriate RF circuitry and/or IF circuitry 124.

Each of the plurality of the delayed signals, and each of the respective phased versions of the plurality of spread-spectrum signals, respectively, have the same phase or time delay. Thus, an in-phase component of the delayed signal combines with an in-phase component of the phased version of a spread-spectrum signal, and a quadrature-phase component of the delayed signal combines with a quadrature-phase component of the phased version of the spread-spectrum signal.

The despreading means despreads the combined signal as a plurality of despread signals. This may be accomplished, as shown in Fig. 4, using a plurality of despreading

-15-

devices, 131, 132, . . . , 133. Each despreading device may be implemented using a product detector or mixer with a chipping sequence matched to the received spread-spectrum signal for a particular channel. Alternatively, the
5 despreader may be implemented using a matched filter, such as surface acoustic wave device, having an impulse function matched to the chipping sequence of the received spread-spectrum signal for the particular channel. Product
10 detectors, mixers, digital signal processors and SAW devices for despreading spread-spectrum signal are well known in the art.

The controller means changes the plurality of delays of the delay means, in response to the plurality of despread signals. The controlling means, as illustrated in Fig. 4,
15 is embodied as a plurality of control circuitry 141, 142, . . . , 143. The controlling means outputs a plurality of comparison signals to the plurality of delay devices 121, 122, . . . , 123.

The controlling means may include generating means, storing means, and comparing means. The generating means
20 can generate a plurality of magnitude values from the plurality of despread signals. The storing means stores a plurality of previous-magnitude values and a plurality of present-magnitude values generated by the generating means.
25 The comparing means compares the plurality of previous-magnitude values with the plurality of present-magnitude values, and outputs a plurality of comparison signals. An embodiment of the generating means storing means and comparing means is illustrated in FIG. 3.

In response to the plurality of comparison signals, the delay means changes the plurality of delays, respectively. Fig. 4 broadly illustrates how the control circuitry 141,
30 142, . . . , 143 is coupled to the delay device 121, 122, . . . , 123, respectively. As apparent to one skilled to the art,
35

-16-

the control circuitry shown in Fig. 4 may be implemented using circuitry in Fig. 3 for each spread spectrum channel.

Fig. 5 illustrates an alternative embodiment, with a signal delay device 13 coupled to the antenna 11. Also shown is an RF/IF amplifier 21 coupled through the delay device 13 to the antenna 11, and an RF/IF amplifier 22 coupled to the antenna 12. In Fig. 5 each spread spectrum channel, defined by chipping sequences $g_1(t)$, $g_2(t)$, . . . , $g_k(t)$, is despread by the plurality of despreaders 151, 152, . . . , 153 for the plurality of spread-spectrum signals. Similarly, the plurality of phased versions of the plurality of spread-spectrum signals are despread by the plurality of despreaders 161, 162, . . . , 163, using chipping sequences $g_1(t)$, $g_2(t)$, . . . , $g_k(t)$.

The delay device 13 delays the plurality of spread-spectrum signals with respect to the received plurality of phased versions of the plurality of spread-spectrum signals by a delay, thereby generating the plurality of delayed signals.

The combiner 153 combines the plurality of delayed signals and the plurality of phased versions of the spread-spectrum signals as a combined signal. In response to the combined signal, the control circuitry 166 changes the delay of the delay device 13.

In use, the phased array spread-spectrum system and method may be used at a base station or a remote unit. A spread-spectrum signal being received by the phased array spread spectrum system and method is received by the first antenna 11 and the second antenna 12, processed by the first and second RF/IF sections 21, 22, and converted to a digital form by first analog-to-digital converter 23 and second analog-to-digital converter 24. Preferably, digital signal processing is used and may be embodied in an application-specific integrated circuit (ASIC). The digitized spread-

2193843

-17-

spectrum signal from the first analog-to-digital converter 23 is preferably delayed with respect to the digitized phased version of the spread-spectrum signal from the second analog-to-digital converter 24. The first digital-delay device 27 is adjusted by an up/down counter 35 until the phase and/or time delay between the digitized spread-spectrum signal, and the digitized phased version of the spread-spectrum signal, are more closely aligned. The alignment accrues due to the variations of the up/down counter 35 in response to comparisons by the comparator 34 of a present-magnitude value and a previous-magnitude value stored in register 33.

Thus, the spread-spectrum signal and a phased version of the spread-spectrum signal are received, processed to an intermediate frequency or base band, and digitized. In-phase and quadrature-phase components are used and delayed and added. The resulting in-phase component and quadrature-phase component are then despread. The magnitude of the despread spread-spectrum signal is then taken; this represents the power or signal strength of the desired signal. The present-magnitude value and the previous-magnitude value are input to the shift register 33 and compared by the comparator 34. The comparator 34 tells the up/down counter 35 to count as an increase or decrease, i.e., up or down, thereby controlling the delay. Thus, an increase in count might increase the delay, whereas a decrease in count would decrease the delay. Various control algorithms may be used with the up/down counter 35, for more efficiency.

The phased array spread-spectrum system steers an antenna beam formed by the first antenna 11 and the second antenna 12 in the direction of the strongest multipath. This function can be performed continually, so as to be continually looking for the optimal multipath. This beam steering can be done at a base station and at a handset,

-18-

i.e, a remote subscriber unit.

5 It will be apparent to those skilled in the art that various modifications can be made to the base station phased array spread spectrum system and method of the instant invention without departing from the scope or spirit of the invention, and it is intended that the present invention cover modifications and variations of the base station phased array spread spectrum system and method provided they come within the scope of the appended claims and their
10 equivalents.

CLAIMS

1. A phased array spread spectrum system comprising:

a first antenna for receiving a plurality of spread-spectrum signals;

a first plurality of analog-to-digital converters, coupled to said first antenna, for digitizing the plurality of spread-spectrum signals, respectively;

a first plurality of digital-delay devices, coupled to said first plurality of analog-to-digital converters, for delaying the digitized plurality of spread-spectrum signals by a first plurality of delays, thereby generating a first plurality of delayed signals;

a second antenna for receiving a phased version of the plurality of spread-spectrum signals;

a second plurality of analog-to-digital converters, coupled to said second antenna, for digitizing the phased version of the plurality of spread-spectrum signals;

a second plurality of digital-delay devices, coupled to said second plurality of analog-to-digital converters, for delaying the digitized phased version of the plurality of spread-spectrum signals by a second plurality of delays, thereby generating a second plurality of delayed signals;

a first plurality of summers, coupled to said first plurality of digital-delay devices and to said second plurality of digital-delay devices, for combining quadrature components of the first plurality of delayed signals and quadrature components of the second plurality of delayed signals, as a first plurality of combined signals, respectively;

a second plurality of summers, coupled to said first plurality of digital-delay

devices and to said second plurality of digital-delay devices, for combining in-phase components of the first plurality of delayed signals and in-phase components of the second plurality of delayed signals, as a second plurality of combined signals;

5

a plurality of despreading devices, coupled to said first plurality of summers and to said second plurality of summers, for despreading the first plurality of combined signals and the second plurality of combined signals, as a plurality of despread quadrature signals and a plurality of in-phase signals, respectively;

10

a plurality of magnitude devices, coupled to said plurality of despreading devices, for generating a plurality of magnitude values of the plurality of despread quadrature signals and the plurality of despread in-phase signals;

a plurality of shift registers, coupled to said plurality of magnitude devices, for storing a plurality of previous-magnitude values and a plurality of present-magnitude values;

15

a plurality of comparators, each of said plurality of comparators having a least two inputs coupled to each of said plurality of shift registers, and responsive to comparing the plurality of previous-magnitude values with the plurality of present-magnitude values, for generating a plurality of comparison signals; and

20

a plurality of counters, coupled to said plurality of comparators and to said first plurality of digital-delay devices and to said second plurality of digital-delay devices, responsive to the plurality of comparison signals, for changing the first plurality of delays of said first plurality of digital-delay devices.

-21-

2. The phased array spread-spectrum system as set forth in claim 1 wherein said plurality of counters, responsive to the plurality of comparison signals, changes the second plurality of delays of said second plurality of digital-delay devices.

5

3. A phased array spread-spectrum system comprising:

means for receiving a plurality of spread-spectrum signals and a plurality of phased versions of the plurality of spread-spectrum signals;

10

means for delaying the plurality of spread-spectrum signals with respect to the plurality of phased versions of the plurality of spread-spectrum signals by a plurality of delays, thereby generating a plurality of delayed signals;

means for combining the plurality of delayed signals and the plurality of phased versions of the spread-spectrum signals, as a plurality of combined signals;

15

means for despreading the plurality combined signals as a plurality of despread signals;

means for generating a plurality of magnitude values from the plurality of despread signals;

20

means for storing a plurality of previous-magnitude values and a plurality of present-magnitude values, generated from said generating means; and

means for comparing the plurality of previous-magnitude values with the plurality of present-magnitude values, and for outputting a plurality of comparison signals, with said delaying means responsive to the plurality of comparison signals for changing a

-22-

plurality of delays of said delaying means.

5 4. The phased array spread-spectrum system as set forth in claim 3, said receiving means including:

 a first antenna for receiving the plurality of spread-spectrum signals;

 a first plurality of analog-to-digital converters, coupled to said first antenna, for digitizing the plurality of spread-spectrum signals;

10 a second antenna for receiving the plurality of phased versions of the plurality of spread-spectrum signals; and

 a second plurality of analog-to-digital converters, coupled to said second antenna, for digitizing the plurality of phased versions of the plurality of spread-spectrum signals.

15 5. The phased array spread-spectrum system as set forth in claim 3, wherein said delaying means includes a plurality of digital-delay devices, coupled to said receiving means, for delaying the plurality of phased versions of the plurality of spread-spectrum signals by a second plurality of delays, thereby generating a second plurality of delayed signals.

20 6. The phased array spread-spectrum system as set forth in claim 3, wherein said delaying means includes:

 a first plurality of digital-delay devices, coupled to said receiving means, for

-23-

delaying the plurality of spread-spectrum signals by a first plurality of delays, thereby generating a first plurality of delayed signals;

5 a second plurality of digital-delay devices, coupled to said receiving means, for delaying the plurality of phased versions of the plurality of spread-spectrum signals by a plurality of second delays, thereby generating a second plurality of delayed signals; and

wherein said combining means combines the first plurality of delayed signals and the second plurality of delayed signals as the plurality of combined signals.

10 7. The phased array spread-spectrum system as set forth in claim 3, wherein said combining means includes:

15 a first plurality of summers, coupled to said delaying means, for combining a plurality of quadrature components of the plurality of delayed signals, as a first plurality of combined signals;

a second plurality of summers, coupled to said delaying means, for combining in-phase components of the plurality of delayed signals, as a second plurality of combined signals;

20 wherein said despreading means despreads the first plurality of combined signals and the second plurality of combined signals as a first plurality of despread signals and as a second plurality of despread signals, respectively; and

wherein said generating means generates the plurality of magnitude values from the first plurality of despread signals and the second plurality of despread signals.

8. The phased array spread-spectrum system as set forth in claim 3, wherein said despread-
ing means includes a plurality of despread-
ing devices, coupled to said combining
means, for despread-
ing the plurality of combined signals as the plurality of despread signals.

5

9. The phased array spread-spectrum system as set forth in claim 7, wherein said despread-
ing means includes a plurality of despread-
ing devices, coupled to said first plurality
of summers and to said second plurality of summers, for despread-
ing the first plurality of
combined signals and the second plurality of combined signals, as a plurality of despread
quadrature signals and a plurality of despread in-phase signals, respectively.

10

10. The phased array spread-spectrum system as set forth in claim 3, wherein said
generating means includes a plurality of magnitude devices, coupled to said despread-
ing means, for generating the plurality of magnitude values of the plurality of despread signals.

15

11. The phased array spread-spectrum system as set forth in claim 3, wherein said
storing means includes a plurality of shift registers, coupled to said generating means, for
storing the plurality of previous-magnitude values and the plurality of present-magnitude
values.

20

12. The phased array spread-spectrum system as set forth in claim 3, wherein said
comparing means includes:

-25-

5 a plurality of comparators, each comparator having at least two inputs coupled to said storing means, said plurality of comparators responsive to comparing the plurality of previous-magnitude values with the plurality of present-magnitude values, for outputting the plurality of comparison signals; and

a plurality of counters, coupled to said plurality of comparators, respectively, and to said delaying means, said plurality of comparators responsive to the plurality of comparison signals, for changing the plurality of delays.

10 13. The phased array spread-spectrum system as set forth in claim 9, wherein said generating means includes a plurality of magnitude devices, coupled to said plurality of despreading devices, for generating a plurality of magnitude values from the plurality of despread quadrature signals and the plurality of despread in-phase signals.

15 14. The phased array spread-spectrum system as set forth in claim 13, wherein said comparing means includes:

20 a plurality of comparators, each comparator having at least two inputs coupled to a shift register of a plurality of shift registers, said plurality of comparators responsive to comparing the plurality of previous-magnitude values with the plurality of present-magnitude values, for outputting the plurality of comparison signals; and

a plurality of counters, coupled to said plurality of comparators and to a first plurality of digital delay devices and to a second plurality of digital delay devices,

-26-

respectively, responsive to the plurality of comparison signals, for changing a first plurality of delays of said first plurality of digital delay devices, respectively.

5

15. A method for receiving a spread-spectrum signal comprising the steps of :

receiving a plurality of spread-spectrum signals;

receiving a plurality of phased versions of the plurality of spread-spectrum signals;

10

delaying at least the plurality of spread-spectrum signals with respect to the plurality of phased versions of the plurality of spread-spectrum signals by a plurality of delays, thereby generating a plurality of delayed signals;

combining the plurality of delayed signals and the plurality of phased versions of the plurality of spread-spectrum signals, as a plurality of combined signals;

15

despreading the plurality of combined signals as a plurality of despread signals;

generating a plurality of magnitude values of the plurality of despread signals;

storing the plurality of magnitude values as a plurality of present-magnitude values;

20

comparing a plurality of previous-magnitude values with the plurality of present-magnitude values;

outputting, in response to comparing the plurality of previous-magnitude values with the plurality of present-magnitude values, a plurality of comparison signals; and

changing, in response to the plurality of comparison signals, the plurality of

-27-

delays.

16. A phased array spread-spectrum system comprising:

a first antenna for receiving a plurality of spread-spectrum signals;

a first delay device, coupled to said first antenna, for delaying the plurality of spread-spectrum signals by a first delay, thereby generating a first plurality of delayed signals;

a second antenna for receiving a phased version of the plurality of spread-spectrum signals and producing a second plurality of spread-spectrum signals;

a first plurality of despreading devices, coupled to said first delay device, for despreading the first plurality of delayed signals as a first plurality of despread signals;

a second plurality of despreading devices, coupled to said second antenna, for despreading the second plurality of signals as a second plurality of despread signals;

a combiner, coupled to said first plurality of despreading devices and to said second plurality of despreading devices, for combining the first plurality of despread signals and the second plurality of despread signals, as a combined signal;

a magnitude device, coupled to said combiner, for generating a magnitude value of the combined signal;

a shift register, coupled to said magnitude device, for storing a previous-magnitude value and a present-magnitude value;

a comparator, having at least two inputs coupled to said shift register, and

-28-

responsive to comparing the previous-magnitude value with the present-magnitude value, for generating a comparison signal; and

5 a counter, coupled to said comparator and to said first delay device, responsive to the comparison signal, for changing the first delay of said first delay device.

17. A phased array spread-spectrum system comprising:

10 means for receiving a plurality of spread-spectrum signals and a plurality of phased versions of the plurality of spread-spectrum signals, respectively;

means for delaying the plurality of spread-spectrum signals with respect to the plurality of phased versions of the plurality of spread-spectrum signals by a time delay, thereby generating a plurality of delayed signals;

15 first means for despreding the plurality of delayed signals as a first plurality of despread signals;

second means for despreding the plurality of phased versions of the plurality of spread-spectrum signals as a second plurality of despread signals;

20 means for combining the first plurality of despread signals and the second plurality of despread signals, as a combined signal;

means for generating a plurality of magnitude values from the combined signal;

means for storing a previous-magnitude value and a present-magnitude value, generated from said generating means; and

means for comparing the previous-magnitude value with the present-magnitude

-29-

value, and for outputting a comparison signal, with said delaying means, responsive to the comparison signal, for changing the time delay.

5 18. The phased array spread-spectrum as set forth in claim 17, wherein said receiving means includes:

 a first antenna for receiving the plurality of spread-spectrum signals;

 a first plurality of analog-to-digital converters, coupled to said first antenna,
10 for digitizing the plurality of spread-spectrum signals;

 a second antenna for receiving the plurality of phased versions of the plurality
of spread-spectrum signals; and

 a second plurality of analog-to-digital converters, coupled to said second
antenna, for digitizing the plurality of phased versions of the plurality of spread-spectrum
15 signals.

 19. The phased array spread-spectrum system as set forth in claim 17, wherein said
delaying means includes a digital-delay device, coupled to said receiving means, for delaying
the plurality of spread-spectrum signals by a first delay, thereby generating a first plurality
20 of delayed signals.

 20. The phased array spread-spectrum system as set forth in claim 17, wherein said
delaying means includes:

-30-

a first digital-delay device, coupled to said receiving means, for delaying the plurality of spread-spectrum signals by a first delay, thereby generating a first plurality of delayed signals;

5

a second digital-delay device, coupled to said receiving means, for delaying the phase plurality of phased versions of the plurality of spread-spectrum signals by a second delay, thereby generating a second plurality of delayed signals; and

10

wherein said first despreading means despreads the first plurality of delayed signals and said second despreading means despreads the second plurality of delayed signals.

21. The phased array spread-spectrum system as set forth in claim 17, wherein said combining means includes:

15

a first summer, coupled to said first and second despreading means, for combining a plurality of quadrature components of the first and second plurality of despread signals, as a first combined signal;

20

a second summer, coupled to said first and second despreading means, for combining a plurality of in-phase components of the first and second plurality of despread signals, as a second combined signal; and

wherein said generating means generates a magnitude value from the first combined signal.

-31-

22. The phased array spread-spectrum system as set forth in claim 20, wherein said first despread means includes a plurality of despread devices, coupled to said receiving means, for despread the plurality of delayed signals, as a first plurality of despread in-phase signals and a first plurality of despread quadrature signals.

23. The phased array spread-spectrum system as set forth in claim 17, wherein said generating means includes a magnitude device, coupled to said combining means, for generating the magnitude value of the combined signal.

24. The phased array spread-spectrum system as set forth in claim 17 wherein said storing means includes a shift register, coupled to said generating means, for storing the previous-magnitude value and the present-magnitude value.

25. The phased array spread-spectrum system as set forth in claim 17, wherein said comparing means includes:

a comparator, having a least two inputs coupled to said storing means, said comparator responsive to comparing the previous-magnitude value with the present-magnitude value, for outputting the comparison signal; and

a counter, coupled to said comparator and to said delaying means, said counter responsive to the comparison signal, for changing the time delay of said delaying means.

-32-

26. A method for receiving a spread-spectrum signal comprising the steps of:

receiving a plurality of spread-spectrum signals;

receiving a plurality of phased versions of the plurality of spread-spectrum
5 signals;

delaying at least the plurality of spread-spectrum signals with respect to the
plurality of phased versions of the plurality of spread-spectrum signals by a time delay,
thereby generating a plurality of delayed signals;

10 despreading the plurality of delayed signals as a first plurality of despread
signals;

despreading the plurality of phased versions of the plurality of spread-spectrum
signals as a second plurality of despread signals;

15 combining the first plurality of despread signals and the second plurality of
despread signals, as a combined signal;

generating a magnitude value of the combined signal;

storing the magnitude value as a present-magnitude value;

comparing a previous-magnitude value with the present-magnitude value;

20 outputting, in response to comparing the previous-magnitude value with the
present-magnitude value, a comparison signal; and

changing, in response to the comparison signal, the time delay.

-33-

27. The phased array spread-spectrum system as set forth in claim 1 wherein for each of the first plurality of digital delay devices in response to the present-magnitude value exceeding the previous-magnitude value associated with that digital delay device increasing
5 that digital delay devices' delay and in response to the previous-magnitude value exceeding the present-magnitude value associated with that digital delay device decreasing that digital delay devices' delay.

10 28. The phase array spread-spectrum system as set forth in claim 3 wherein for each of the delayed spread-spectrum signals in response to the present-magnitude value exceeding the previous-magnitude value associated with that delayed spread-spectrum signal increasing that delayed spread-spectrum signal's delay and in response to the previous-magnitude value exceeding the present-magnitude value associated with that spread-
15 spectrum signal decreasing that delayed spread-spectrum signal's delay.

20 29. The method as set forth in claim 15 wherein for each said delayed signal, in response to the present-magnitude value exceeding the previous-magnitude value associated with that delayed signal increasing that delayed signal's delay and in response to the previous-magnitude value exceeding the present-magnitude value associated with that delayed signal decreasing that delayed signal's delay.

30. The phased array spread-spectrum system as set forth in claim 17 wherein for each said delayed signal, in response to the present-magnitude value exceeding the previous-magnitude value associated with that delayed signal increasing that delayed signal's delay and
5 in response to the previous-magnitude value exceeding the present-magnitude value associated with that delayed signal decreasing that delayed signal's delay.

31. The method as set forth in claim 26 wherein for each of the delayed signals,
10 in response to the present-magnitude value exceeding the previous-magnitude value increasing that delayed signal's time delay and in response to the previous-magnitude value exceeding the present-magnitude value decreasing that delayed signal's time delay.

15

20

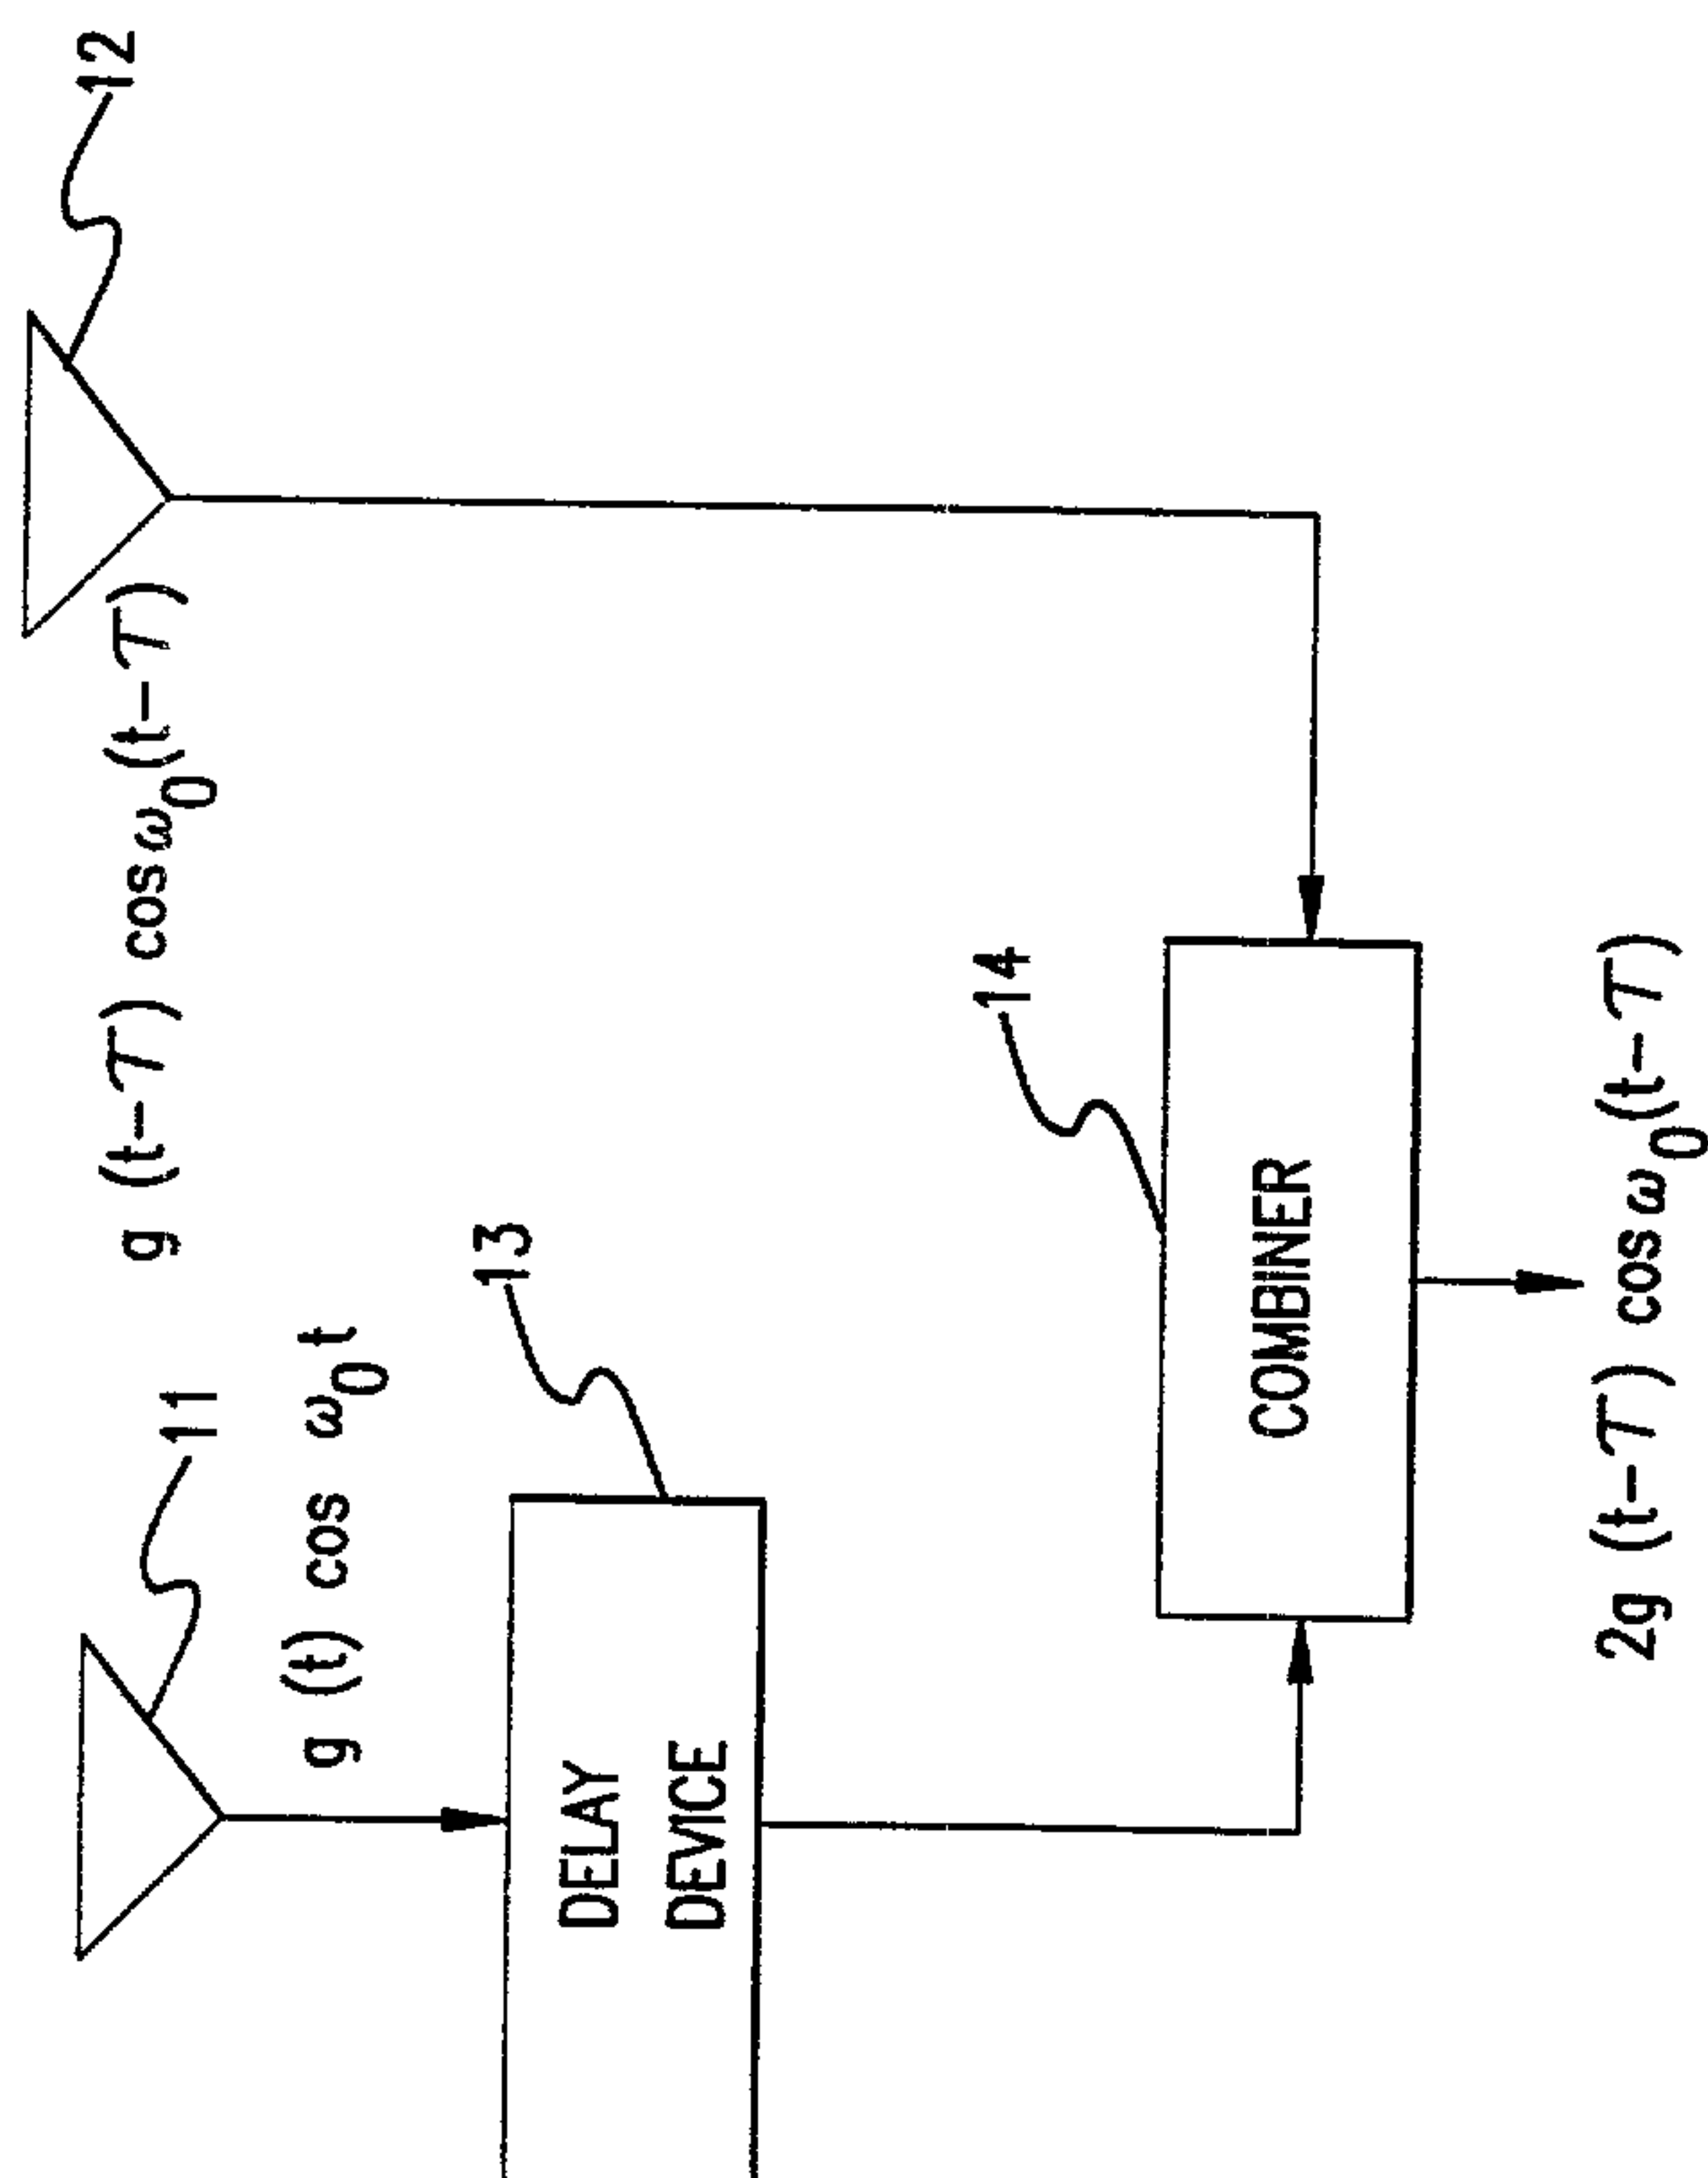


FIG. 1

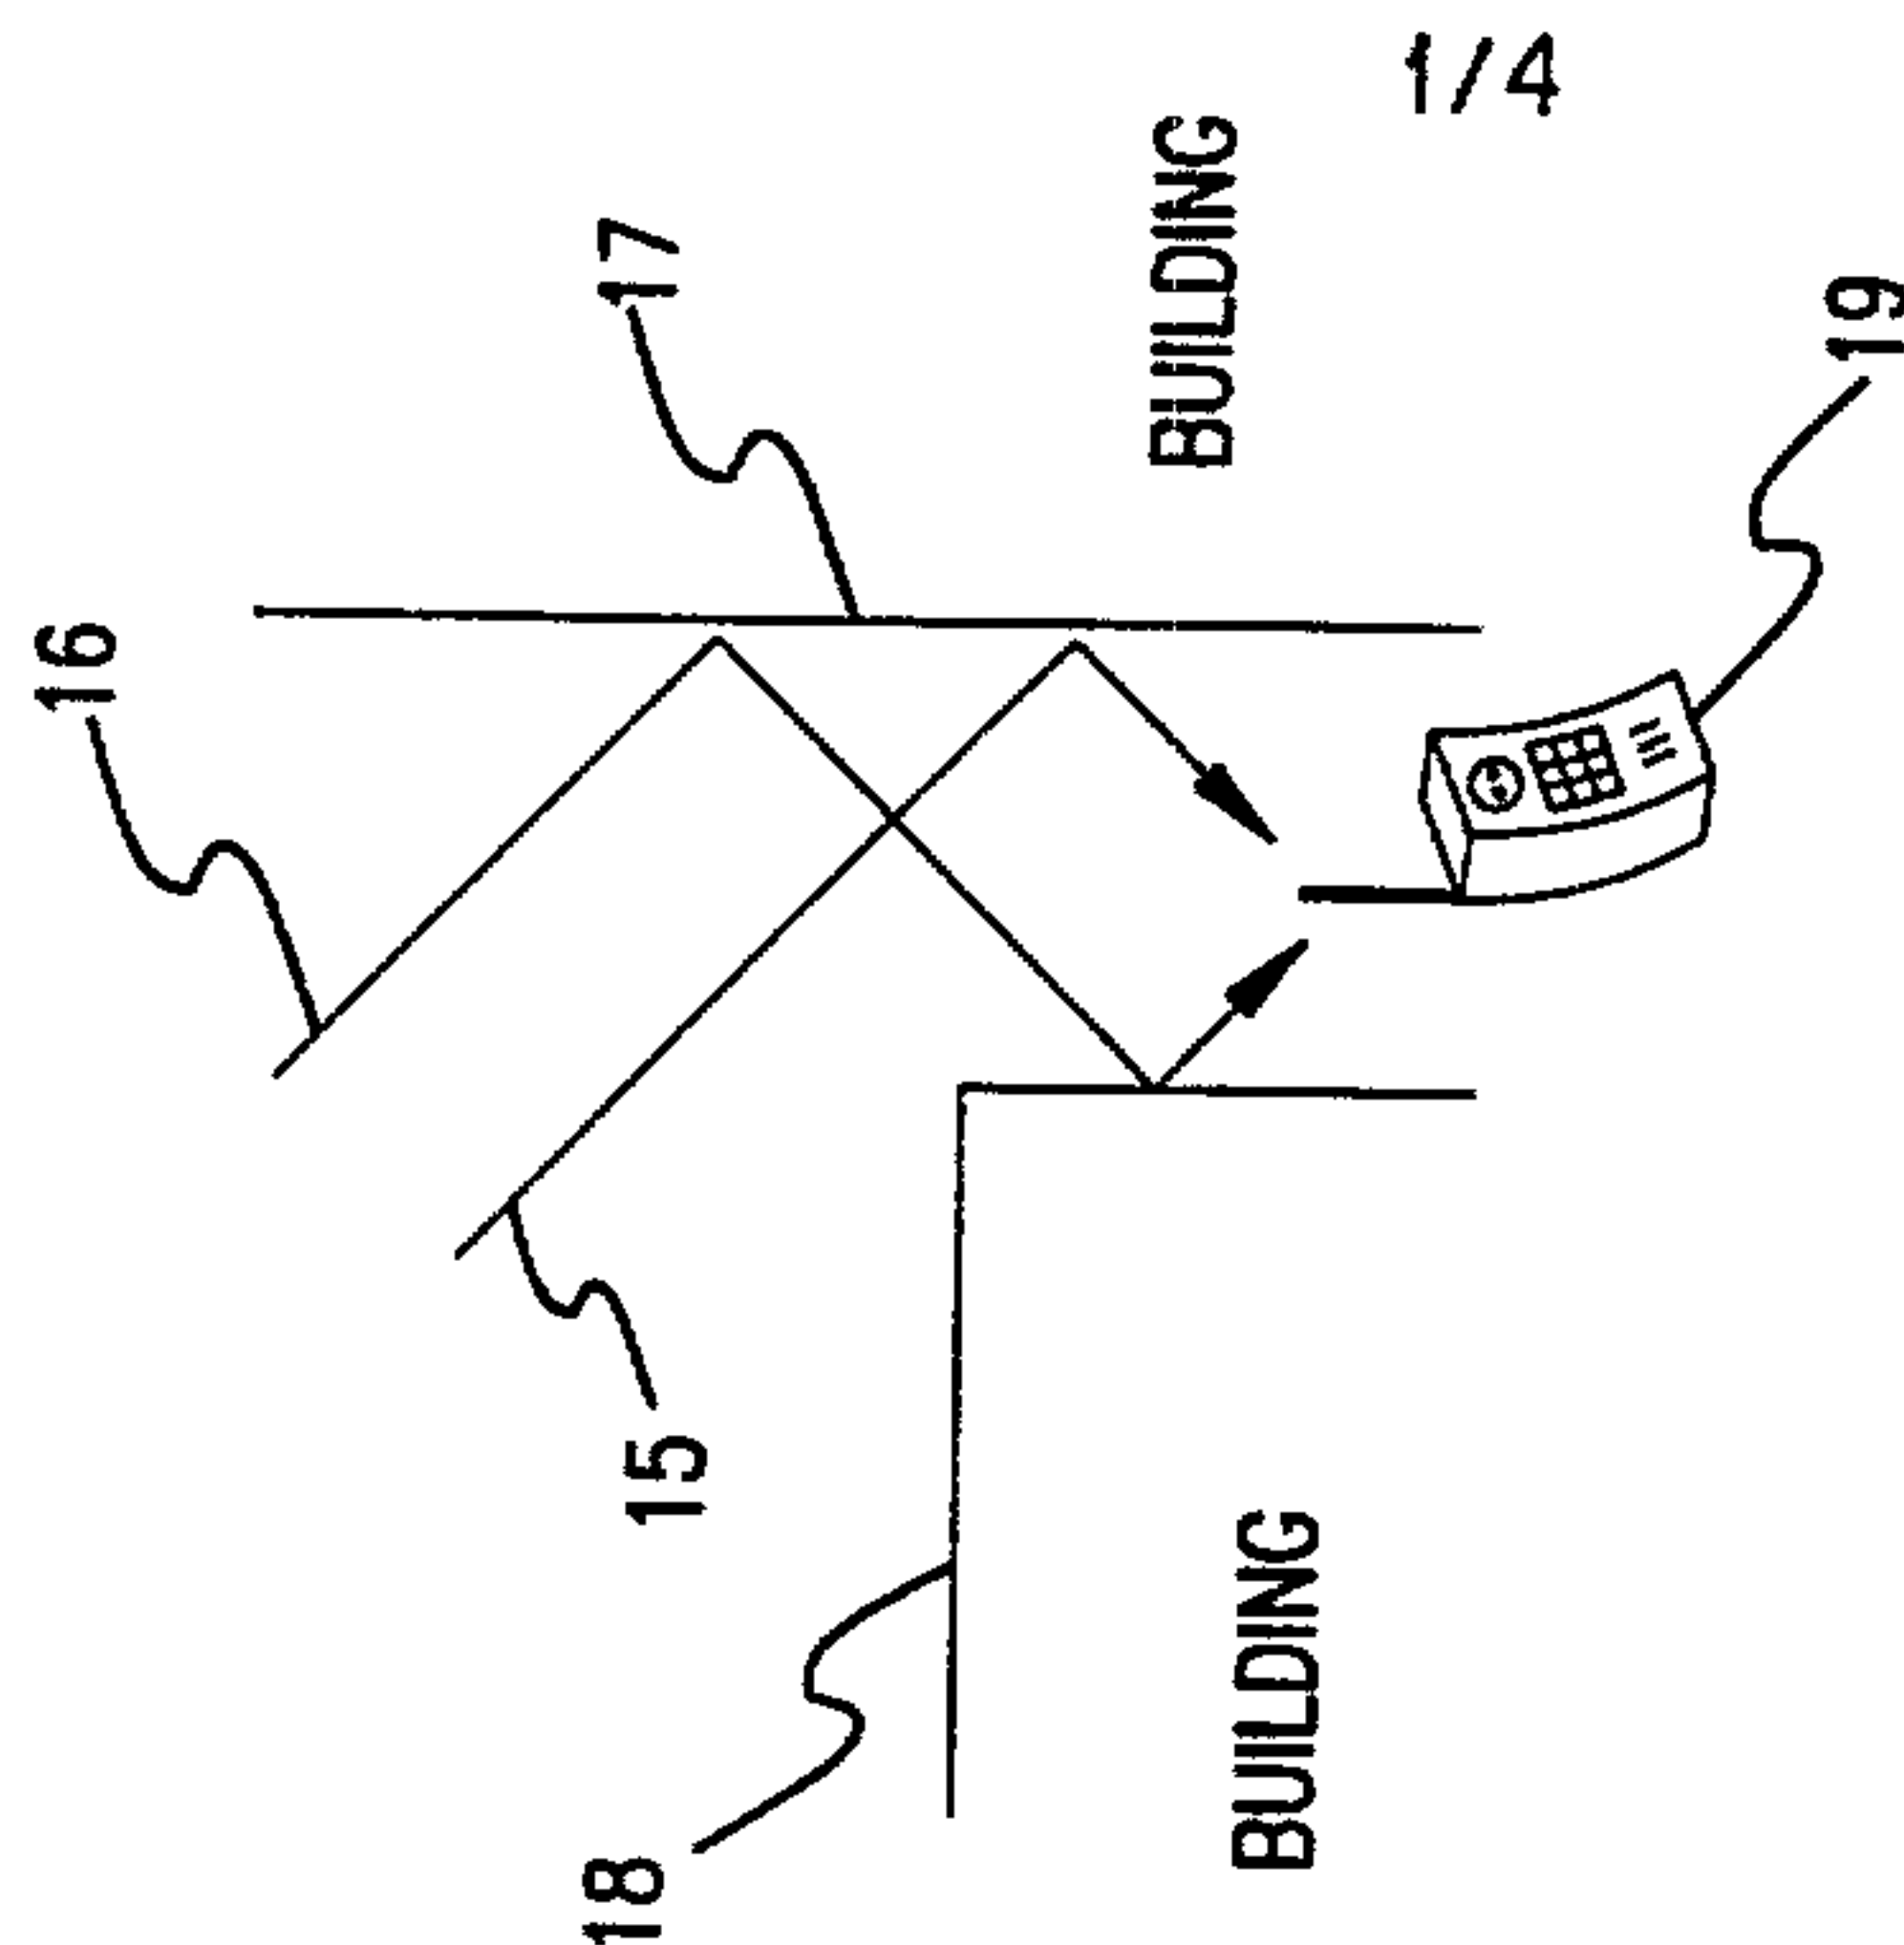


FIG. 2

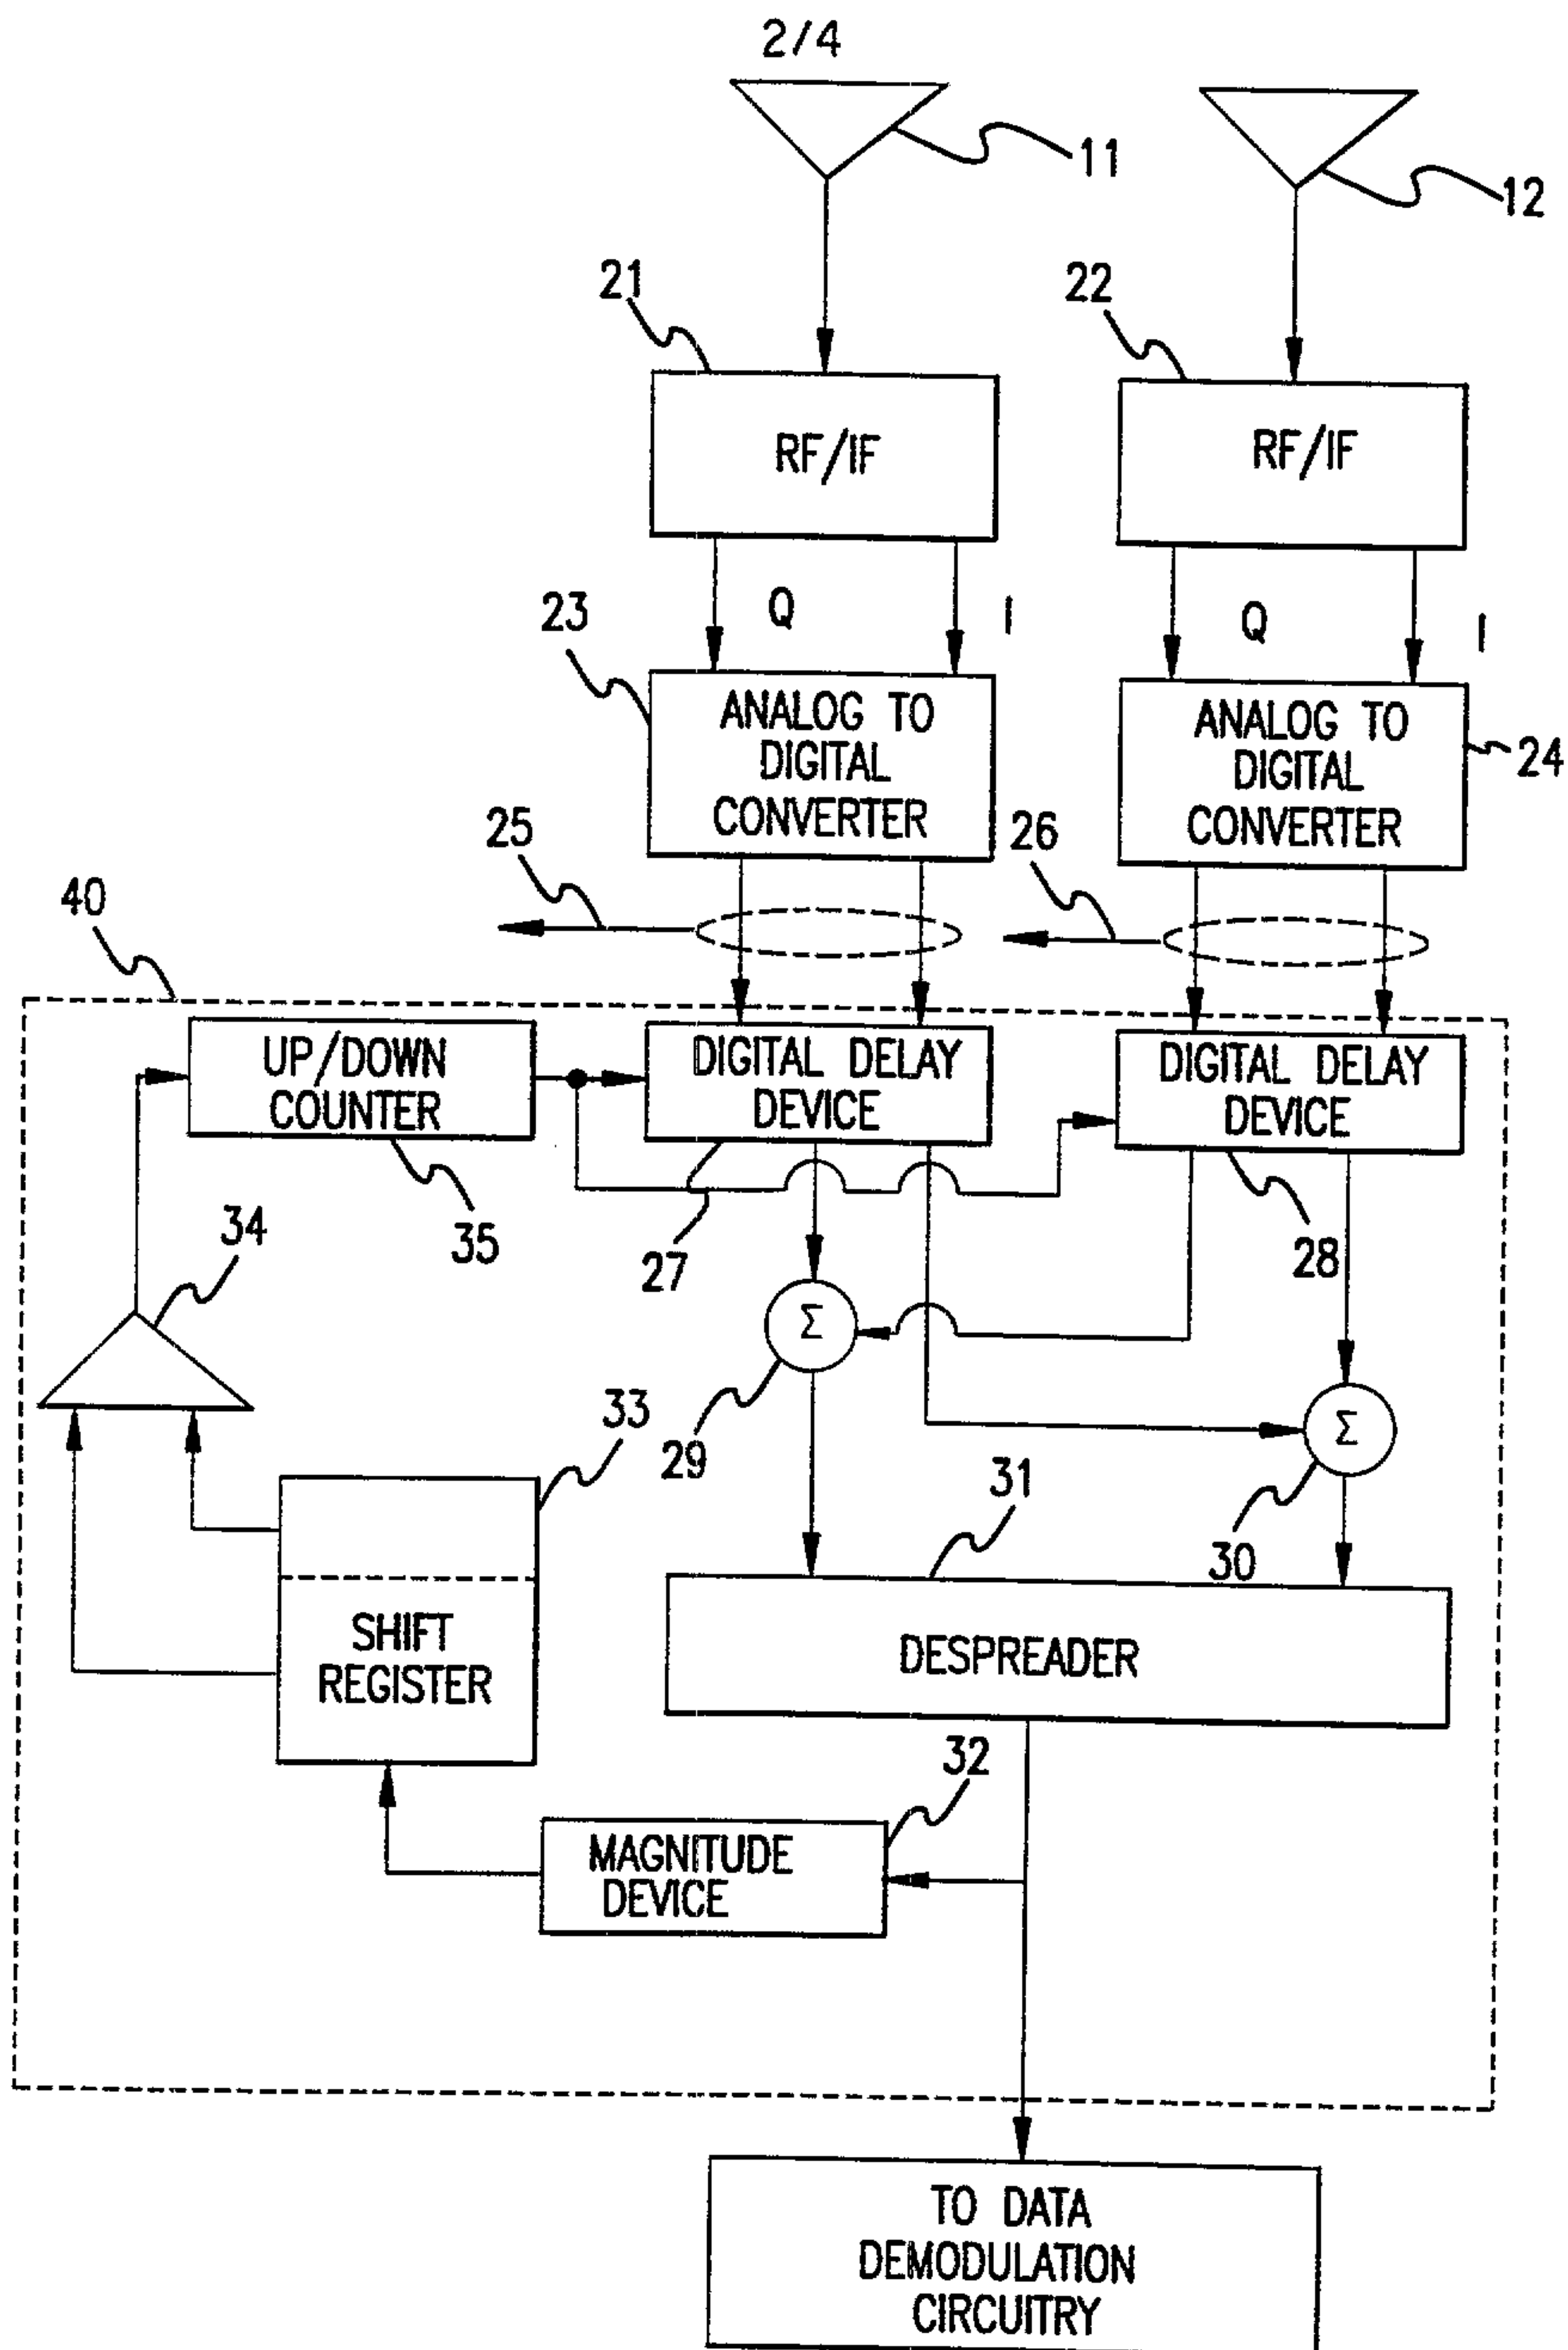


FIG. 3

2193843

3/4

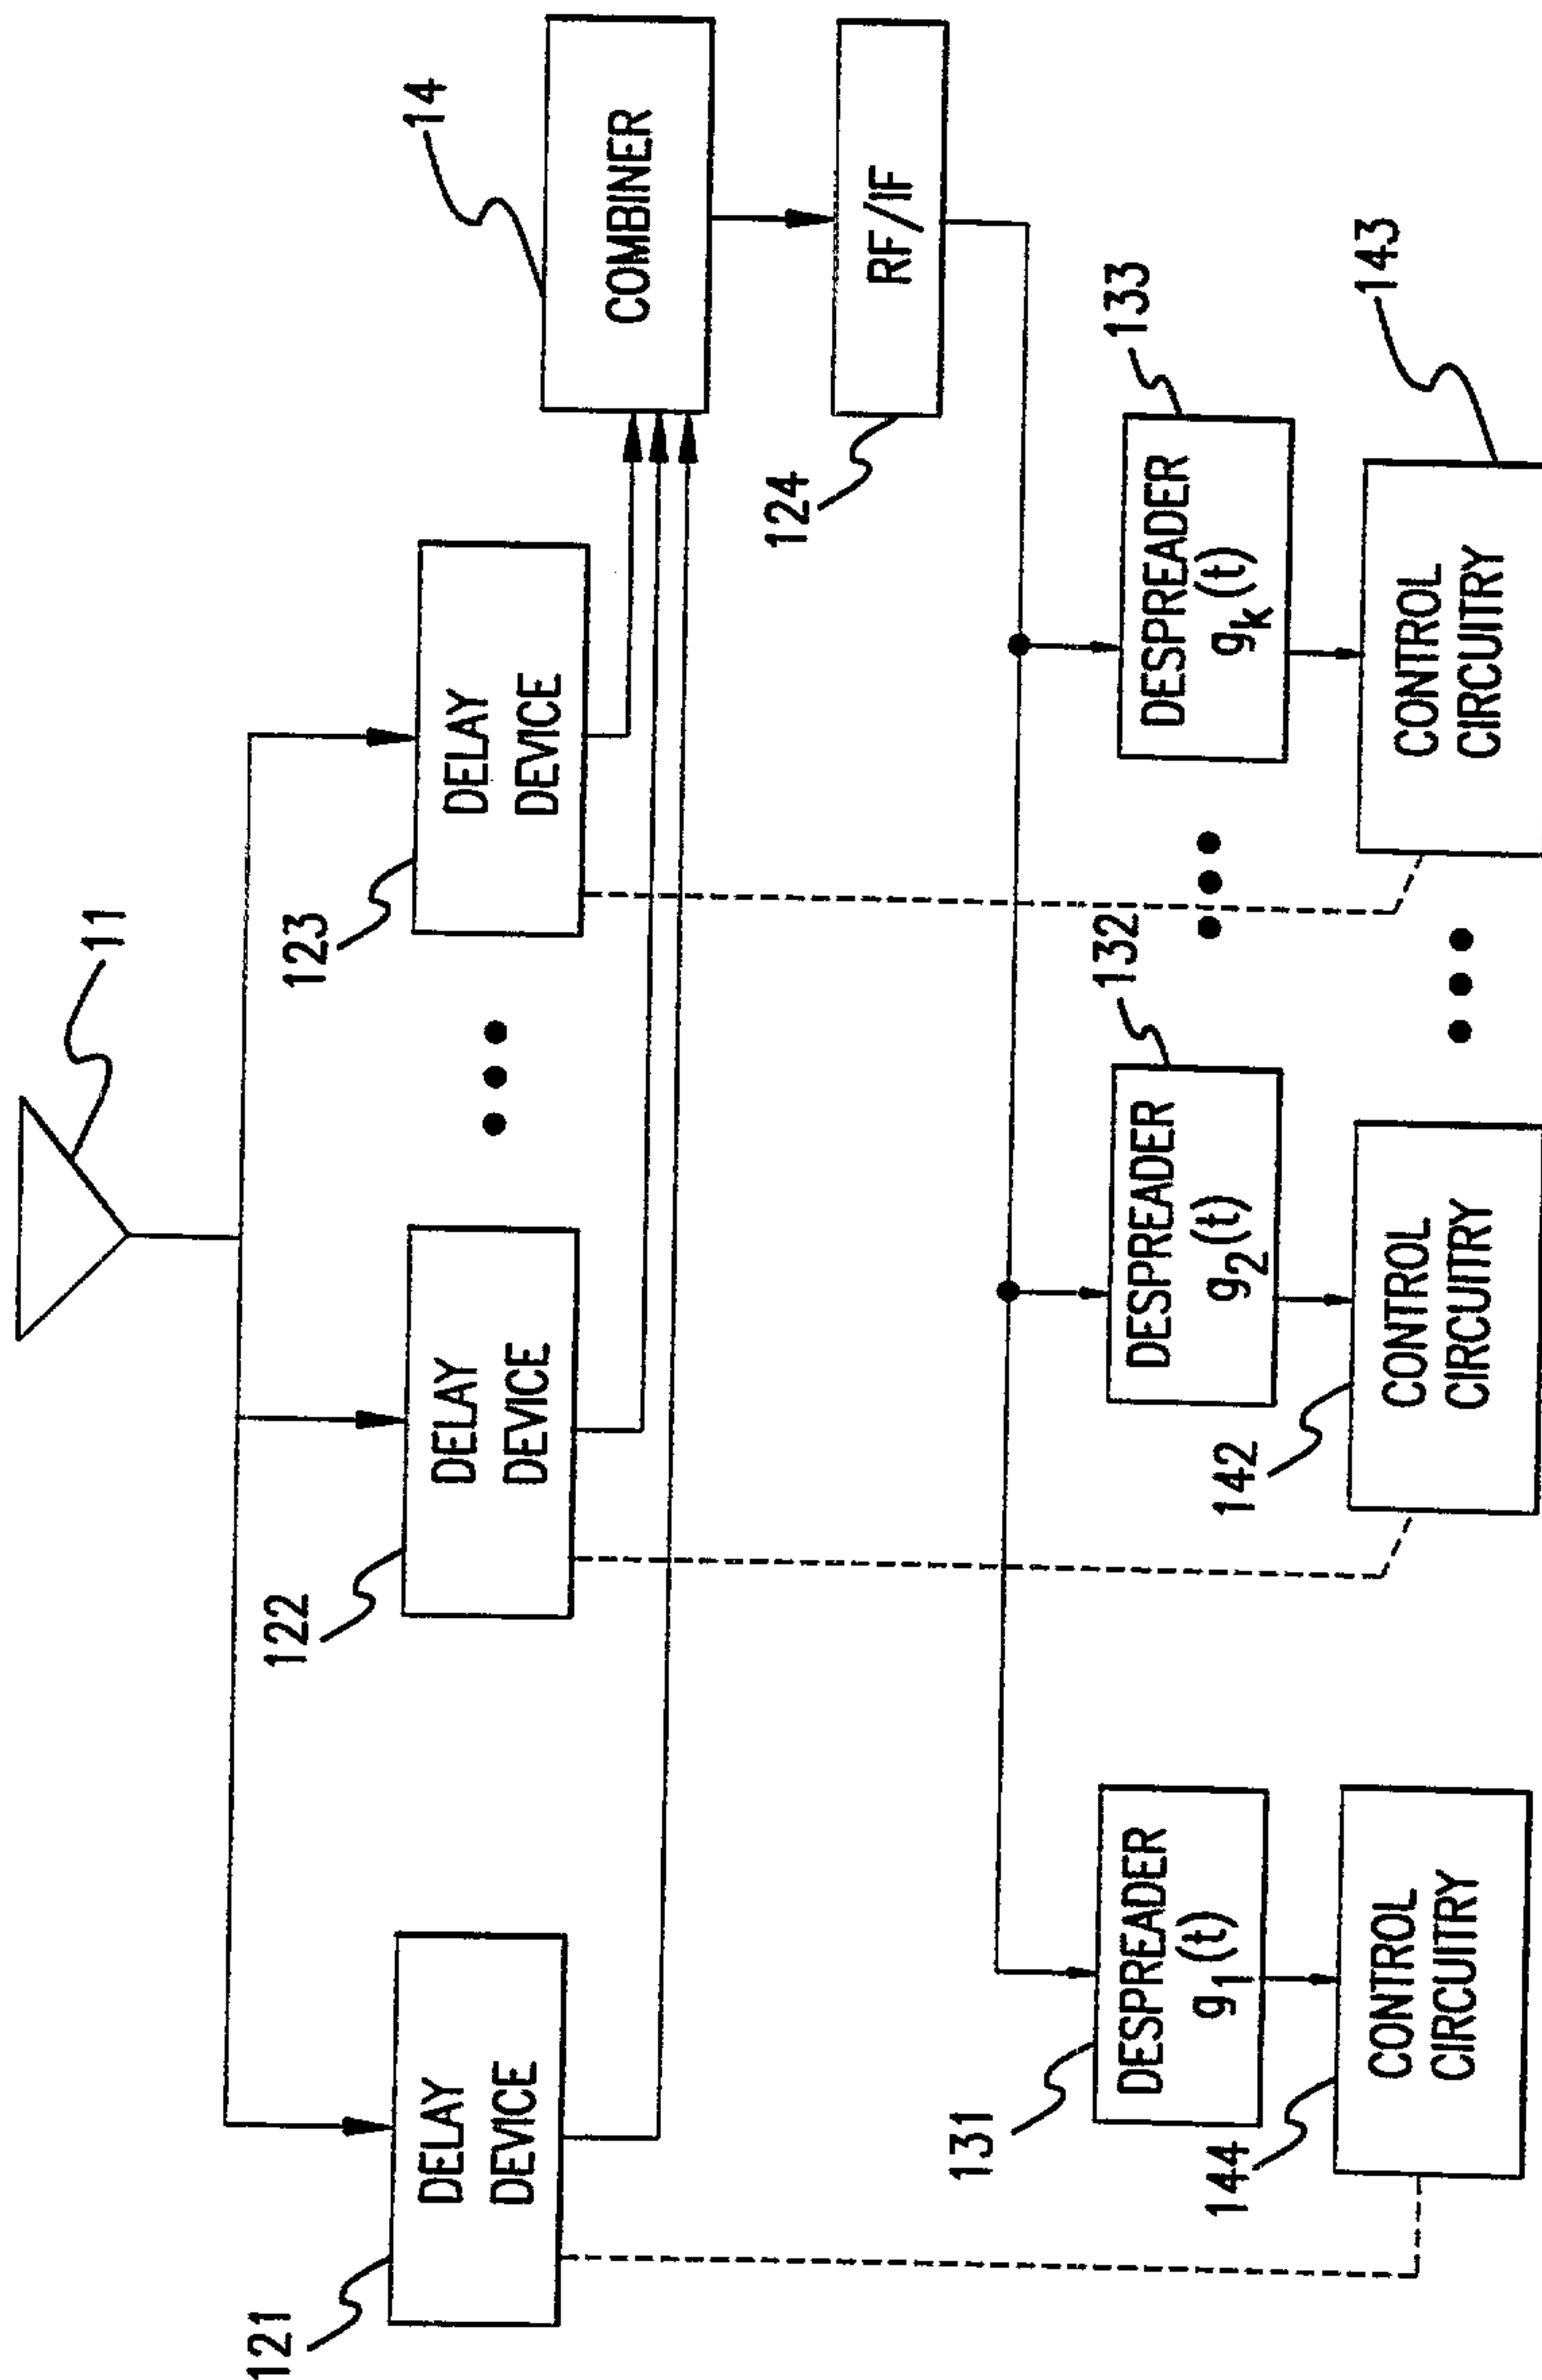


FIG. 4

