

(51) International Patent Classification:
G01S 19/39 (2010.01)(21) International Application Number:
PCT/US2012/028671(22) International Filing Date:
11 March 2012 (11.03.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/466,065 22 March 2011 (22.03.2011) US(71) Applicant (for all designated States except US):
TRIMBLE NAVIGATION LIMITED [US/US]; 935
Stewart Drive, Sunnyvale, CA 94085 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEANDRO,**
Leandro [BR/DE]; Robert-koch-strasse 26, 85521 Otto-
brunn (DE). **VOLLATH, Ulrich** [DE/US]; 1144 E Akron
Pl, Superior, CO 80027 (US). **TALBOT, Nicholas,**
Charles [AU/AU]; 18 Amery Street, Ashburton, Victoria,
3147 (AU).(74) Agent: **RITER, Bruce, D.**; 101 First Street PMB 208, Los
Altos, CA 94022 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: GNSS SIGNAL PROCESSING WITH KNOWN POSITION FOR RECONVERGENCE

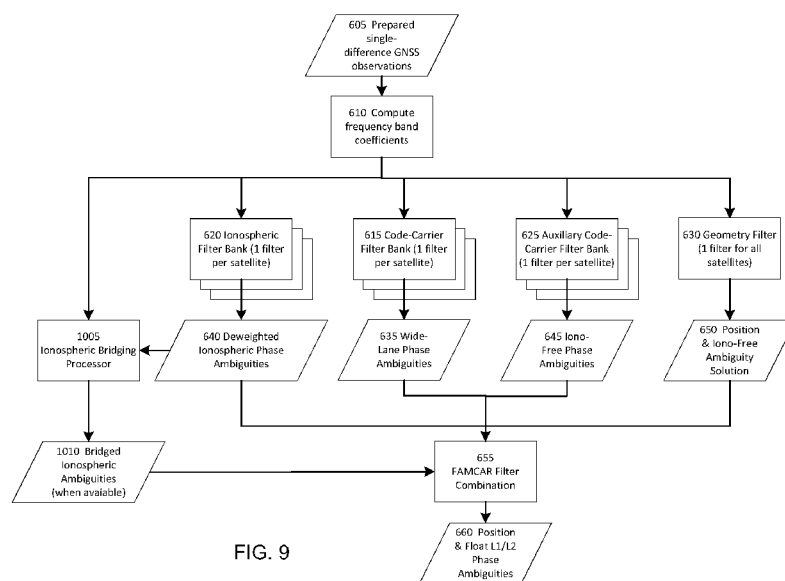


FIG. 9

(57) Abstract: Methods and apparatus provide for positioning of a rover antenna from GNSS data derived from multi-frequency signals and correction data derived from a network of reference stations. At each of a plurality of epochs, the GNSS data and correction data are used to estimate values defining a rover antenna position and a set of multi-frequency ambiguities. An ionospheric-free carrier-phase ambiguity per satellite is estimated based on a known rover antenna position. The estimated ionospheric-free carrier-phase ambiguity is combined with an estimated wide-lane ambiguity and with an estimated ionospheric-free ambiguity and with values defining the known rover antenna position to obtain values defining an aided rover antenna position and aided multi-frequency ambiguities.





-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

TITLE OF INVENTION

GNSS SIGNAL PROCESSING WITH KNOWN POSITION FOR RECONVERGENCE

5

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The following are related hereto and incorporated herein in their entirety by this reference: United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P); International Patent Application PCT/US2010/02565 filed 19 September 2010 (TNL A-2565PCT); International Patent Application PCT/US2010/02564 filed 19 September 2010 (TNL A-2585PCT); International Patent Application PCT/US2010/02563 filed 19 September 2010 (TNL A-2599PCT); International Patent Application PCT/US2010/02562 filed 19 September 2010 (TNL A-2617PCT); International Patent Application PCT/US2010/02581 filed 19 September 2010 (TNL A-2647PCT); United States Provisional Application for Patent No. 61/337,980 filed 14 February 2010 (TNL A-2633P); International Patent Application PCT/US2011/24733 filed 14 February 2011 (TNL A-2633PCT); International Patent Application PCT/US2011/24743 filed 14 February 2011 (TNL A-2939PCT); International Patent Application PCT/US2011/24763 filed 14 February 2011 (TNL A-2940PCT); United States Provisional Application for Patent No. 61/442,680 filed 14 February 2011 (TNL A-2801P); International Patent Application PCT/US2009/059552 filed 5 October 2009 (TNL A-2288PCT); United States Provisional Application for Patent No. 61/195,276 filed 6 October 2008 (TNL A-2288P); International Patent Application PCT/US/2009/004471 filed 5 August 2009 (TNL A-2526PCT); International Patent Application PCT/US/2009/004473 filed 5 August 2009 (TNL A-2525PCT); International Patent Application PCT/US/2009/004474 filed 5 August 2009 (TNL A-2524PCT); International Patent Application PCT/US/2009/004472 filed 5 August 2009 (TNL A-2523PCT); International Patent Application PCT/US/2009/004476 filed 5 August 2009 (TNL A-2339PCT); United States Provisional Application for Patent No. 61/189,382 filed 19 August 2008 (TNL A-2339P); United States Patent Application 12/224,451 filed 26 August 2008, United States Patent Application Publication US 2009/0027625 A1 (TNL A-1789US); International Patent Application PCT/US07/05874 filed 7 March 2007, International Publication No. WO 2008/008099 A2 (TNL A-1789PCT); United States Patent Application No. 11/988,763 filed 14 January 2008, United States Patent Application Publication US 2009/0224969 A1 (TNL A-1743US); International Patent Application No. PCT/US/2006/034433 filed 5 September 2006, International Publication No. WO 2007/032947 A1 (TNL A-1743PCT); United States Patent No. 7,432,853 granted 7 October 2008; (TNL A-1403US); (TNL A-1403PCT); International Patent Application No. PCT/US2004/035263 filed 22 October 2004 and International Publication Number WO 2005/045463 A1 (TNL A-1403PCT);

United States Patent No. 6,862,526 granted 1 March 2005 (TNL A-1006US); and United States Provisional Application for Patent No. 61/396,676, filed 30 May 2010 (TNL A-2751P).

[0002] A copy of International Patent Application PCT/US2011/24733 filed 14 February 2011 (TNL A-2633PCT) is attached to and forms a part of this application for patent, including Appendix A
5 thereof which is a copy of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

TECHNICAL FIELD

[0003] The present invention relates to the field of Global Navigation Satellite Systems (GNSS). More particularly, the present invention relates to methods and apparatus for processing of GNSS data to provide high precision positioning with rapid solution convergence.

BACKGROUND ART

[0004] Global Navigation Satellite Systems (GNSS) include the Global Positioning System (GPS), the Glonass system, the proposed Galileo system, the proposed Compass system, and others. Each GPS satellite transmits continuously using two radio frequencies in the L-band, referred to as L1 and L2, at respective frequencies of 1575.42MHz and 1227.60MHz. Two signals are transmitted on L1, one for civil users and the other for users authorized by the United States Department of Defense (DoD). One signal is transmitted on L2, intended only for DoD-authorized users. Each GPS signal has a carrier at the L1 and L2 frequency, a pseudo-random noise (PRN) code, and satellite navigation data. Two different PRN codes are transmitted by each satellite: a coarse acquisition code and a precision (P/Y) code which is encrypted for DoD-authorized users. Each C/A code is a unique sequence of 1023 bits, which is repeated each millisecond. New GPS satellites are able to broadcast on 3 frequencies. Other GNSS systems likewise have satellites which transmit multiple signals on multiple carrier frequencies.

[0005] FIG. 1 schematically illustrates a typical prior-art scenario to determine the position of a mobile receiver (rover). Rover 105 receives GNSS signals from one or more satellites in view, such as satellites 110, 115, 120, 125 and 130 shown. The signals pass through the earth's atmosphere 160, the upper portion is called the ionosphere, while the lower portion of the atmosphere is referred to as the troposphere. The multi-frequency GNSS PRN code and carrier phase signals are simultaneously tracked by the rover receiver and by one or more GNSS reference receivers 135 and 140. The ionosphere causes a dispersive effect whereby the code is delayed, while the carrier phase is advanced. The troposphere delays the signals with the magnitude of the effect dependent on the prevailing atmospheric temperature, pressure, relative humidity and precipitable water vapor content.

[0006] Each satellite broadcasts a prediction of its expected orbital trajectory in a navigation message. The navigation message also includes a prediction of the expected satellite clock behavior. The satellite clock, orbit and atmospheric errors can be considered as causing an apparent shift in the satellite locations 110 -> 170, 115->175, 120->180, 125-185, 130-190, as depicted in FIG. 1.

[0007] Prior-art network GNSS processing techniques such as described in United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P), enable satellite and atmospheric errors to be estimated by first tracking the satellite signals at a network of reference stations, spatially distributed globally and/or regionally. The satellite orbit / clock and atmospheric errors are estimated in a network processor such as 145, in FIG. 1. The satellite correction data is then encoded and transmitted via antenna 150, for later reception and use by one or more rovers 105

[0008] In prior-art rover processing techniques such as described in International Patent Application PCT/US2010/02562 filed 19 September 2010 (TNL A-2617PCT), the rover GNSS data is combined with the GNSS network correction data at a plurality of epochs in order to estimate the rover antenna position plus nuisance parameters such as a set of multi-frequency (carrier phase) ambiguities and tropospheric biases

[0009] FIG. 2 is a block diagram of a typical integrated receiver system 200 with GNSS rover 105 and communications antenna 202. Receiver system 200 can serve as rover 105 or as a reference station. Receiver system 200 includes a GNSS receiver 205, a computer system 210 and one or more communications links 215. Computer system 210 includes one or more processor(s) 220, one or more data storage elements 225, program code 230 for controlling the processor(s) 220, and user input/output devices 235 which may include one or more output devices 240 such as a display or speaker or printer and one or more devices 245 for receiving user input such as a keyboard or touch pad or mouse or microphone.

[0010] FIG. 3 illustrates the horizontal position accuracy convergence over time of a GNSS rover position solution based on global GNSS network correction data and precise satellite orbit and clock data. The x-axis represents time in minutes, while the y-axis represents the horizontal position accuracy in centimeters. The x-y axes are denoted 405. The trace of horizontal position accuracy is denoted 410. Many high precision applications require for example 2.5cm (1 inch) horizontal position accuracy; this threshold is indicated by the dashed horizontal line 415. The convergence time (420) needed to achieve the position threshold is around 18 minutes in this example. A tracking interruption at the rover receiver occurs around time 40minutes (denoted 425). The tracking interruption leads to a reconvergence period 430.

[0011] Based on GPS satellites alone, it is common to have convergence times of 10-30 minutes to achieve a horizontal position accuracy of 2.5cm. Many GNSS applications need cm-level accuracy and therefore the convergence time hinders the usefulness of the system. It is common for satellite tracking to be interrupted from time-to-time on one or more satellites at the rover, particularly when the rover is moving. If the number of tracked satellites drops below 4, the solution is converged again as shown in FIG. 3.

[0012] In prior-art processing techniques, Geng, J, et al, 2010, *Rapid re-convergences to ambiguity-fixed solutions in precise point positioning*, Journal of Geodesy, Vol 84, pp 705-714, a technique is described for improving the re-convergence of precise point positioning following tracking interruptions. Specifically, the wide-lane ambiguities are estimated first with the aid of ionospheric-free code measurements. Next a linear time-window-based prediction of the ionospheric bias on each cycle slipped satellite is made. The predicted ionospheric bias is used to limit the search space of narrow-lane phase ambiguities. The reported results from ibid, show re-convergence times of 5 seconds in most tests. Few details are provided on the filtering scheme used for the PPP solution.

[0013] In prior-art processing techniques, Banville, S, and Langley, R.B., 2010, *Instantaneous Cycle-Slip Correction for Real-Time PPP Applications*, NAVIGATION, Journal of the US Institute of Navigation, Vol 57 No 4, Winter, pp325-334, describe a way of repairing cycle slips in Precise Point Positioning (PPP) applications based on time-differenced phase measurements. First an attempt is made to fix the time-differenced wide-lane carrier phase ambiguities following an interruption to satellite tracking. Next the known wide-lane ambiguities are used in conjunction with the assumed time-wise change in ionospheric bias to fix the L1 and L2 on each satellite during the tracking interruption.

[0014] Precise Point Positioning (PPP) techniques involve careful modeling of various error sources affecting satellite measurements. Real-time rover processors are often limited in terms of size, weight and power and therefore careful consideration must be given to efficient data processing techniques that minimize compute power. The prior-art methods for cycle slip repair in PPP applications do not mention the use of distributed filtering for the underlying state parameter estimation.

[0015] Improved GNSS processing methods and apparatus are desired, especially to achieve faster and more efficient convergence to a solution, improved accuracy and/or greater availability.

SUMMARY

[0016] The following invention presents a way of reducing convergence / reconvergence times by taking advantage of:

- 5 - predictability of the tropospheric biases over short tracking outages (tropo-bridging);
- predictability of the satellite ionospheric biases over short tracking outages (iono-bridging);
- predetermined knowledge of the user location (known position input).

[0017] Methods and apparatus provide for positioning of a rover antenna from GNSS data derived
10 from multi-frequency signals and correction data derived from a network of reference stations. At
each of a plurality of epochs, the GNSS data and correction data are used to estimate values defining a
rover antenna position and a set of multi-frequency ambiguities. An ionospheric-free carrier-phase
ambiguity per satellite is estimated based on a known rover antenna position. The estimated
ionospheric-free carrier-phase ambiguity is combined with an estimated widelane ambiguity and with
15 an estimated ionospheric-free ambiguity and with values defining the known rover antenna position to
obtain values defining an aided rover antenna position and aided multi-frequency ambiguities.

BRIEF DESCRIPTION OF DRAWING FIGURES

[0018] Embodiments in accordance with the invention are described herein with reference to the drawing Figures, in which:

FIG. 1 schematically illustrates a GNSS rover operating with correction data in the presence of
5 satellite error sources;

FIG. 2 schematically illustrates a typical integrated GNSS receiver system;

FIG. 3 shows convergence and reconvergence of horizontal position accuracy over a tracking interruption;

FIG. 4 schematically illustrates the use of global corrections at a rover receiver

10 FIG. 5 is a schematic diagram of a factorized-array multi-carrier ambiguity resolution (FAMCAR) filtering scheme used for processing of GNSS signal data;

FIG. 6 is a flow chart of geometry filter processing;

FIG. 7 is a flow chart of epoch processing of GNSS data;

FIG. 8 illustrates observed versus filtered ionospheric phase over time with a tracking interruption;

15 FIG. 9 is a schematic diagram of a FAMCAR filtering scheme with ionospheric bridging in accordance with some embodiments of the invention;

FIG. 10 is a flow chart of ionospheric bridging processing in accordance with some embodiments of the invention;

FIG. 11 illustrates a caching process in accordance with some embodiments of the invention;

FIG. 12 schematically illustrates a surveying scenario using a GNSS rover with correction data;

FIG. 13 illustrates a known-position aiding process in accordance with some embodiments of the invention; and

FIG. 14 schematically illustrates the use of known-position aiding in the FAMCAR process in
5 accordance with some embodiments of the invention.

DETAILED DESCRIPTION

[0019] Global Virtual Reference Station (GVRS) Positioning Principles

[0020] Overview

[0021] FIG. 4 shows an embodiment of Global Virtual Reference Station (GVRS) rover processing with GNSS satellite corrections (taken from Fig 38 of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P)). Rover receiver 3805 receives GNSS signals from multiple GNSS satellites, of which three are shown at 3810, 3815, 3820. Receiver 3805 derives GNSS data 3825 from code observations and carrier-phase observations of the GNSS signals over multiple epochs.

[0022] Precise satellite data 3830 for the GNSS satellites are received, via a correction message broadcast by a communication satellite 3835 in this case, or by other means, such as wireless Internet. The correction messages are decoded by a message decoder 3832. A Synthesized Base Station (SBS) module 3835 receives the precise satellite data 3830 and also receives information which it can use as a virtual base location, such as an approximate rover position with time tag 3842 generated by an optional navigation engine 3845. The approximate rover position is optionally obtained from other sources as described below.

[0023] SBS module 3835 uses the precise satellite data 3830 and the approximate rover position with time tag 3842 to synthesize base station data 3850 for the virtual base location. The base station data 3850 comprises, for example, synthesized observations of L1 code, L2 code, L1 carrier-phase and L2 carrier-phase, and optionally includes information on L1 cycle slip, L2 cycle slip and the virtual base location.

[0024] The synthesized base station data 3850 is delivered to the RTK processing engine 3855, and combined with locally collected GNSS data 3825. The combined GNSS data can be processed in a manner similar to conventional single-base real-time kinematic data in order to produce an estimate of the rover position 3860.

[0025] FAMCAR

[0026] The Factorized Multi-Carrier Ambiguity (FAMCAR) algorithm uses a distributed filtering strategy for estimating the carrier phase ambiguities, position and other parameters needed in high-precision GNSS data processing. The FAMCAR approach was originally designed for efficient single-baseline RTK processing as described in U.S. Patent 7,432,853, Vollath, U., *Ambiguity Estimation of GNSS Signals for Three or more Carriers*. However the FAMCAR approach can readily

accommodate single-baseline, virtual base processing, and global virtual reference station (GVRs) processing as described below.

[0027] FIG. 5 schematically illustrates the distributed filtering scheme used for FAMCAR-based GVRs processing. Table 1 presents a summary of the observation types processed in each filter component.

Filter	GNSS observation type processed	GPS L1 Band Coefficient α	GPS L2 Band Coefficient β
Code-Carrier	Wide-lane phase combination	+1	-1
	Narrow-lane code combination	+1	+1
Ionospheric	Ionospheric phase combination	$+_{L1}\lambda$	$-_{L2}\lambda$
Auxiliary Code-Carrier	Ionospheric-free phase combination	$_{L2}\lambda^2 / (_{L2}\lambda^2 - _{L1}\lambda^2)$	$-_{L1}\lambda_{L2}\lambda / (_{L2}\lambda^2 - _{L1}\lambda^2)$
	Ionospheric-free code combination	$_{L2}\lambda^2 / (_{L2}\lambda^2 - _{L1}\lambda^2)$	$-_{L1}\lambda^2 / (_{L2}\lambda^2 - _{L1}\lambda^2)$
Geometry	Ionospheric-free phase combination	$_{L2}\lambda^2 / (_{L2}\lambda^2 - _{L1}\lambda^2)$	$-_{L1}\lambda_{L2}\lambda / (_{L2}\lambda^2 - _{L1}\lambda^2)$

Table 1 Summary of observation types applied to FAMCAR component filters for GVRs processing.

with multi-frequency phase combinations formed as follows:

$$_c\Phi = \alpha_{L1}\Phi + \beta_{L2}\Phi \quad (1)$$

10 and multi-frequency code combinations formed as follows:

$$_cR = \alpha_{L1}R + \beta_{L2}R \quad (2)$$

where:

α, β L1 and L2 measurement band coefficients respectively,

$_{L1}\Phi, _{L2}\Phi$ L1 and L2 carrier phase measurements respectively,

$_c\Phi$ Carrier phase combination,

$_{L1}\lambda, _{L2}\lambda$ L1 and L2 carrier wavelengths respectively,

$_{L1}R, _{L2}R$ L1 and L2 code measurements respectively,

5 $_cR$ Code combination.

[0028] In FIG. 5 single-differenced GNSS observations 605, formed from the combined Synthesized Base Station Data and locally collected rover GNSS data, are fed into the FAMCAR estimation process typically at regular (for example 1Hz) epochs. The frequency band coefficients for each of the multi-band measurement combinations needed are computed at 610. The multi-band measurement combinations are input to the Code-Carrier Filter bank 615, the Ionospheric Filter Bank 620, the Auxiliary Code-Carrier Filter Bank 625, and the Geometry Filter 630. The output of the Code-Carrier-, Ionospheric-, and Auxiliary Code-Carrier Filter banks is: Wide-Lane Phase Ambiguities 635, Ionospheric Phase Ambiguities 640, Iono-Free Phase ambiguities 645, respectively. The Geometry filter produces position and iono-free ambiguities which are contained in 650. All position and ambiguities are combined at 655 to produce the final Position & Float Ambiguity L1/L2 estimates 660.

[0029] Component Filters

[0030] *Code-Carrier and Auxiliary Code-Carrier Filters*

[0031] The Code-Carrier filters and Auxiliary Code-Carrier filters utilize code/carrier combinations that are matched in terms of ionospheric bias. This means that the combinations can be averaged indefinitely without ionospheric bias corrupting the estimated carrier phase ambiguity results. The precision of the carrier phase ambiguity estimates are driven largely by the precision of the underlying code measurements. In particular for the Auxiliary Code-Carrier filters, the uncertainties in the phase ambiguity estimates are typically several cycles even after convergence times of many minutes.

25 [0032] The output of the Code-Carrier- filter banks and the Auxiliary Code-Carrier filter banks includes:

- carrier phase ambiguity estimates;
- phase combination used;
- variance of the carrier phase ambiguity estimates;
- 30 - associated statistics.

[0033] *Ionospheric Filters*

[0034] For GVRS processing, the ionospheric filters are not able to readily estimate the difference in ionospheric bias between server and rover (essentially the absolute ionospheric bias at the rover).

Hence, the ionospheric filter results are normally disabled via deweighting (i.e. setting their variances large = 1e+4). Note that this contrasts with single-baseline RTK processing where the ionospheric biases can be tightly constrained and therefore accelerate the convergence of the final results.

[0035] The output of the Ionospheric filter banks include:

- carrier phase ambiguity estimates;
- phase combination used;
- variance of the carrier phase ambiguity estimates;
- associated statistics.

[0036] *Geometry Filter*

[0037] The Geometry filter state vector (x) typically includes the following parameters:

- rover position (X_A, Y_A, Z_A), given in terms of WGS84 Cartesian coordinates,
- receiver clock terms for each satellite system (i.e. T_G = GPS clock bias; T_R = GLONASS clock bias, etc),
- single-difference iono-free (if) carrier phase multipath biases for each satellite ($\Delta_{if} m^i, i = 1..s$),
- rover tropospheric scale (τ_s) and optionally east and north tropospheric gradient parameters (τ_e, τ_n),
- single-difference iono-free carrier phase ambiguities for each satellite ($\Delta_{if} N^i, i = 1..s$).

$$\mathbf{x} = [X_A \ Y_A \ Z_A \ T_G \ T_R \ \Delta_{if} m^1 \ \Delta_{if} m^2 \dots \Delta_{if} m^s \ \tau_s \ \tau_e \ \tau_n \ \Delta_{if} N^1 \ \Delta_{if} N^2 \dots \Delta_{if} N^s]^T \quad (3)$$

[0038] The Geometry filter output includes:

- position, carrier phase ambiguity estimates and tropospheric bias parameters;
- phase combination used;
- variance-covariance matrix for the estimated parameters;
- associated statistics.

[0039] *Geometry filter processing steps*

[0040] FIG. 6 illustrates the processing steps used in the Geometry filter which follow a general Kalman filtering approach. At each new time epoch 705, a time update of the filter occurs 735, involving:

- 5 - testing for the occurrence of cycle slips (tracking interruptions) on each satellite (710),
- initializing the ambiguity state value(s) for any cycle slipped satellite (715),
- adding process noise to the position and receiver clock states (720),
- adding process noise to the tropospheric bias parameter(s) (725),
- predicting the multipath bias state values for each satellite (730).

10 [0041] When GNSS code and phase measurements are available (test 740), they are used to update the filters at 745. The current filter results are made available at 750. Test 755 checks for more epochs to process. If more epochs are available, then the new epoch is handled at 705. Processing is terminated at 760 when no more data is available, i.e. when the rover receiver is turned off.

15 [0042] *Filter Combiner*

[0043] The Filter-Combiner accepts the output of component filters and forms a so-called *float solution*. That is, the single-difference L1 and L2 carrier phase ambiguities are estimated as *floating* point numbers. The position of the rover is also derived from the filter combination step. The results of the filter combination are intended to be equivalent to those that would be obtained with an analogous
20 *big-filter*. i.e. a filter which models state parameters for all unknowns, rather than a distributed filtering scheme.

[0044] The position and float (floating-point) carrier phase ambiguities are forwarded on to the iFlex ambiguity search/validation component of the system at each epoch.

[0045] iFlex

25 [0046] In traditional carrier phase data processing, the ambiguities are resolved and constrained to a single integer candidate – often called the *fixed-ambiguity* solution. With the carrier phase ambiguities resolved, the precision of the remaining position (and other) parameters is greatly improved. The iFlex scheme takes advantage of the integer-nature of the ambiguities without necessarily enforcing a single integer ambiguity outcome. The overall convergence of the GVRs processing is enhanced by iFlex
30 treatment of the carrier phase ambiguities (refer to International Patent Application PCT/US/2009/004476 filed 5 August 2009 (TNL A-2339PCT) for details of the iFlex technique).

[0047] FAMCAR Processing Summary

[0048] FIG. 7 illustrates the FAMCAR processing steps. At 805 a new epoch of single-difference GNSS data becomes available. The GNSS single-difference observations are used at step 810 to update the Code-Carrier-, Ionospheric-, Auxiliary Code-Carrier-, and Geometry filters. The results from each filter / filter-bank are assembled at 815, and combined at 820 in a least squares sense to form a position and float ambiguity solution. The position and float ambiguity solution is statistically tested at 825 to validate the solution quality. If the solution passes the statistical test(s), An iFlex position and ambiguity solution is generated at 830. If the float solution is deemed bad, then action is taken at 835 to isolate and reset the offending filter(s). The epoch processing loop continues if more data is available (840), otherwise processing is stopped (845).

[0049] The unknown parameters estimated in the FAMCAR combination state vector include the following:

$$\mathbf{x} = [X_A \ Y_A \ Z_A \ \Delta_{L1} N^1 \ \Delta_{L2} N^1 \ \Delta_{L1} N^2 \ \Delta_{L2} N^2 \dots \Delta_{L1} N^s \ \Delta_{L2} N^s]^T \quad (4)$$

where $\Delta_{L1} N^i \ \Delta_{L2} N^i$ are the single-difference L1 and L2 floating point carrier phase ambiguities, for satellites $i=1..s$.

[0050] The uncertainty of the FAMCAR state parameters are contained within the corresponding state covariance matrix.

[0051] Troposphere Bridging

[0052] Introduction

[0053] The troposphere is considered as the lower-part of the atmosphere up to an altitude of approximately 50km above the earth. The troposphere is composed of dry gasses and water vapour and causes a non-dispersive delay of GNSS radio waves.

[0054] Modelling the Tropospheric Bias

Although the dry component of the tropospheric delay can be well modeled via surface measurements of temperature, pressure and relative humidity; the effect of the wet component is more problematic. The wet component can be handled via the estimation of one or more tropospheric scale terms in the state vector of the Geometry filter.

[0055] The troposphere delay at any given point is often assumed as being isotropic, however experience has shown that weather fronts cause strong spatial biases. Additional east/north gradient components can be estimated in the geometry filter state vector to help address the eolotropic nature of

the tropospheric wet delay. Details of horizontal tropospheric gradient estimation using a single GPS receiver are given in Bar-Sever, Y.E, et. al., 1997, *Estimating Horizontal Gradients of Tropospheric Path Delay with a Single GPS Receiver*, submitted to the Journal of Geophysical Research, November 7.

- 5 [0056] The tropospheric bias is generally slowly changing. Even with the passage of strong weather fronts, the tropospheric bias normally only changes $< 10\text{mm} / \text{hour}^{1/2}$ [ibid]. The tropospheric bias is therefore well predicted over time once the tropospheric states have converged.

[0057] The measurement coefficients for the tropospheric parameters are given by:

$$\begin{aligned}
 & - \tau_s^i = \text{rover tropospheric model delay} && (\text{scale parameter for satellite } i), \\
 10 \quad & - \tau_e^i = \frac{\sin(\text{azim}^i) * \cos(\text{elev}^i)}{[\sin(\text{elev}^i)]^2} && (\text{east gradient parameter for satellite } i), \\
 & - \tau_n^i = \frac{\cos(\text{azim}^i) * \cos(\text{elev}^i)}{[\sin(\text{elev}^i)]^2} && (\text{north gradient parameter for satellite } i)
 \end{aligned}$$

where:

azim^i is the azimuth of satellite i with respect to (with respect to) true north at the rover location,

elev^i is the elevation of satellite i with respect to the local horizon plane of the rover.

- 15 [0058] The tropospheric bias states can be suitably modeled as random walk, autoregressive, or Gauss-Markov processes. Table 2 contains an acceptable model for the tropospheric bias parameters.

[0059] The tropospheric states are updated during the Geometry Filter time-update step, as shown by 725 in FIG. 6. When measurement updates are missed (see test 740 in FIG. 6), i.e. when there are data gaps, the uncertainty in the tropospheric parameters is increased by time-update of the Geometry Filter.

- 20 The tropospheric parameters re-converge with the application of measurement data. Given the appropriate measurement and system modeling of the tropospheric states, the Kalman filtering process automatically handles tropospheric bridging in the Geometry filter. That is, the change in the satellite tropospheric biases can be accurately predicted across tracking interruptions of several minutes.

Tropospheric State Parameter	System Model Type	Initial State Variance	System Model Parameters
Scale	Random Walk	ScaleFactor * 0.0019	DrivingNoiseVariance = DeltaTime ² * ScaleFactor * 1.0e-8
East Gradient	First-Order Gauss-Markov	ScaleFactor * 5.0e-6	CorrelationTime = 1800sec Correlated Variance = ScaleFactor * 5.0e-6
North Gradient	First-Order Gauss-Markov	ScaleFactor * 5.0e-6	CorrelationTime = 1800sec Correlated Variance = ScaleFactor * 5.0e-6

Table 2 Suitable tropospheric state definition. (ScaleFactor = 0.40)

[0060] Ionospheric Bridging

[0061] Introduction

- 5 [0062] On short-baseline RTK processing, the ionospheric bias is well known and therefore, the ionospheric filter ambiguity estimates are rapidly determined with high precision. The float-ambiguity solution is quickly determined as a result of the high precision ionospheric filter ambiguity estimates. For GVRs processing, the ionospheric filter results are heavily dewighted (essentially ignored) because of a lack of ionospheric bias information. However, once the float solution has converged the
- 10 ionospheric bias for each observed satellite can be determined as described below.

[0063] Once the satellite ionospheric biases have been determined, the ionospheric bridging approach relies on the predictability of the ionosphere to accelerate re-convergence of the float solution immediately following a tracking interruption.

[0064] Estimation of Ionospheric Phase Ambiguities

- 15 [0065] Recall from (4), that the FAMCAR estimation process yields L1 and L2 float(ing point) carrier phase ambiguities for each satellite observed:

$$\Delta_{L1}N^1 \Delta_{L2}N^1 \Delta_{L1}N^2 \Delta_{L2}N^2 \dots \Delta_{L1}N^s \Delta_{L2}N^s$$

[0066] The formal precision of the L1 and L2 ambiguities is available from the ambiguity partition (O_{amb}) of the state vector covariance matrix:

$$\mathbf{Q} = \begin{bmatrix} \mathbf{Q}_{xx} & \mathbf{Q}_{xn} \\ \mathbf{Q}_{nx} & \mathbf{Q}_{nn} \end{bmatrix} \quad (5)$$

where:

$\mathbf{Q}_{xx}$ Covariance partition for the position unknowns (3x3);

$\mathbf{Q}_{xn}$ Covariance partition for the position/ambiguity unknowns (3xa);

5 $\mathbf{Q}_{nx}$ Covariance partition for the ambiguity/position unknowns (ax3);

$\mathbf{Q}_{nn}$ Covariance partition for the ambiguity unknowns (axa);

a number of ambiguity states.

[0067] The iFlex processing scheme can be used to generate improved estimates of the state parameters which includes the carrier phase ambiguities. Let the iFlex L1 and L2 ambiguities be
10 denoted with a $\tilde{}$ as follows:

$$\Delta_{L1}\tilde{N}^1 \Delta_{L2}\tilde{N}^1 \Delta_{L1}\tilde{N}^2 \Delta_{L2}\tilde{N}^2 \dots \Delta_{L1}\tilde{N}^s \Delta_{L2}\tilde{N}^s \quad (6)$$

[0068] The iFlex scheme can also yield the covariance matrix of the unknown parameters, hence the formal precision of the iFlex ambiguities is known and this allows an assessment to be made as
15 whether or not the iFlex ambiguities are sufficiently close to their true integer values.

[0069] With the iFlex carrier phase ambiguities well known, the single-difference ambiguity term on satellite i, can be computed for the ionospheric phase combination as:

$$\Delta_{iono}N^i =_{L1}\lambda_{L1}\tilde{N}^i -_{L2}\lambda_{L2}\tilde{N}^i \quad (7)$$

[0070] The ionospheric biases can be estimated on each single-difference (server-rover) satellite
20 measurement according to:

$$\Delta_{iono}I^i(t) = \Delta_{iono}\Phi^i(t) - \Delta_{iono}N^i(t) - \Delta_{iono}b^i(t) \quad (8)$$

where:

$\Delta_{iono}I^i(t)$ - the single-difference ionospheric delay, at time t, for satellite i;

$\Delta_{iono}N^i(t)$ - the single-difference ionospheric ambiguity, for satellite i;

$\Delta_{iono} \Phi^i(t)$ - the single-difference ionospheric phase at time t, for satellite i;

$\Delta_{iono} b^i(t)$ - the single-difference ionospheric phase bias at time t, for satellite i.

[0071] The single-difference ionospheric phase bias term ($\Delta_{iono} b^i(t)$) in (8) includes non-integer biases of rover and server, and phase wind-up effects induced on the rover receiver antenna. Phase
 5 wind-up effects change with rotation of the rover antenna, however the effect is identical for all satellites observed at the rover and therefore cancel with double-differencing. Server biases are enforced to be constant, through the treatment of the satellite phase clock terms. The single-difference ionospheric ambiguity term ($\Delta_{iono} N^i(t)$) is constant so long as carrier phase tracking is maintained.

[0072] The single-difference ionospheric delay ($\Delta_{iono} I^i(t)$) changes with time as the ionospheric
 10 bias at the rover changes. Multipath bias is also included in the single-difference ionospheric delay, a component that typically has a magnitude of for example 1-5cm and a correlation time of 10-60s.

[0073] If tracking is interrupted at the rover, the single-difference ionospheric ambiguity term in (8) changes. The single-difference ionospheric ambiguity term can be re-established after a tracking interruption by using predicted ionospheric delay and observed ionospheric carrier phase:

$$15 \quad \Delta_{iono} N^i(t_1) = \Delta_{iono} N^i(t_0) + \Delta_{iono} \Phi^i(t_1) - \{ \Delta_{iono} \Phi^i(t_0) + \Delta_{iono} I^i(t_1) - \Delta_{iono} I^i(t_0) \} \quad (9)$$

where:

$\Delta_{iono} N^i(t_0)$ - single-difference ionospheric ambiguity, at time t0;

$\Delta_{iono} N^i(t_1)$ -single-difference ionospheric ambiguity, at time t1 (iono-bridged ambiguities);

20 $\Delta_{iono} \Phi^i(t_0)$ - single-difference ionospheric phase, observed at time t0;

$\Delta_{iono} \Phi^i(t_1)$ - single-difference ionospheric phase, observed at time t1;

$\Delta_{iono} I^i(t_1) - \Delta_{iono} I^i(t_0)$ - change in single-difference ionospheric delay between times 0 and 1.

[0074] The single-difference ionospheric ambiguity terms ($\Delta_{iono} N^i(t_1)$), for each satellite are used in place of the heavily deweighted ionospheric filter ambiguity estimates in the filter combination step
 25 (refer to 640 in FIG. 5). The precision of the resulting float solution is improved by the ionospheric ambiguity aiding.

[0075] Predicting the change in ionospheric delay

[0076] The variation in the single-difference ionospheric delay over time $[\Delta_{iono} I^i(t_1) - \Delta_{iono} I^i(t_0)]$ should be precisely modeled. The ionosphere is considered as that part of the atmospheric from around 50-1000km above the earth. Radiation from the sun causes ionization of particles which then result in a frequency-dependent bias on radio waves passing through the medium. The complex physical structure of the ionosphere and the influence of variable solar radiation levels make accurate ionospheric delay modeling difficult. Nevertheless, for the purposes of predicting the ionospheric bias it is possible to just model the variation of the single-difference ionospheric delay for each satellite, without considering the underlying physical causes of the variation.

10 [0077] A simple 2-state Kalman filter can be used to model single-difference ionospheric phase and ionospheric phase rate (these filters are designated as – iono predictor/filters), with a state vector:

$$\mathbf{x} = \begin{bmatrix} \Delta_{iono} \Phi^i(t) \\ \Delta_{iono} \dot{\Phi}^i(t) \end{bmatrix} \quad (10)$$

with the state transition matrix (M) defined as:

$$\mathbf{M} = \begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix} \quad (11)$$

15 the system driving noise covariance matrix given by:

$$\mathbf{Q}_w = \xi \begin{bmatrix} \Delta t^3/3 & \Delta t^2/2 \\ \Delta t^2/2 & \Delta t \end{bmatrix} \quad (12)$$

where the spectral density of the driving noise (ξ) defines the level of filtering applied. A suitable value for $\xi = 4.0e-5$.

[0078] The measurement model for the filter is defined as:

$$20 \quad \Delta_{iono} \Phi^i(t) = [1 \quad 0] \begin{bmatrix} \Delta_{iono} \Phi^i(t) \\ \Delta_{iono} \dot{\Phi}^i(t) \end{bmatrix} + \nu^i(t) \quad (13)$$

with

$\nu^i(t)$ measurement residual for satellite i, at time t.

[0079] The Kalman filter provides a way of reducing high-frequency noise on the measurements and enables the prediction of the change in ionospheric phase delay across tracking interruptions. FIG. 8 illustrates the observed ionospheric phase for a single satellite. The variation in the observations is due mainly to changes in the ionospheric delay as well as carrier phase multipath. The filtered estimates track the general trend of the ionospheric phase observations. Immediately following the tracking interruption, the difference between the predicted and actual ionospheric phase measurement provides an estimate of the approximate change in carrier phase ambiguity.

[0080] Using the Bridged Ionospheric Ambiguities

[0081] Once the rover FAMCAR solution has converged sufficiently and the ionospheric ambiguities are well known, each single-difference satellite ionospheric phase ambiguity is cached. If an outage occurs on tracked satellites, the ionospheric carrier phase ambiguity estimates generated after the tracking outage [$\Delta_{iono} N^i(t_1)$ from (9)] are used to replace the normally deweighted ionospheric filter information (see 640 in FIG. 5).

[0082] The precision of the position and ambiguity estimates obtained from the FAMCAR process with ionospheric bridging is far better than those that would derive without bridging.

[0083] FIG. 9 schematically illustrates the FAMCAR filtering process with iono bridging functionality added. FIG. 9 is an extension of the standard FAMCAR filtering schematic shown in FIG. 5. In FIG. 9, the Ionospheric bridging processor 1005, accepts prepared single-difference GNSS observations, plus the deweighted ionospheric phase ambiguities 640. When ionospheric bridging is needed and possible, the bridged ionospheric ambiguities 1010 are used to replace the deweighted ionospheric phase ambiguities from 640. The bridged ionospheric ambiguities help to improve the FAMCAR float solution produced by the filter combiner at 655.

[0084] Bridging Timeout

[0085] The bridged ambiguities are applied to the FAMCAR process every epoch immediately following the outage in order to gain rapid re-convergence of the position estimates. However, it is important to limit the amount of time that the bridged ambiguities are applied to the FAMCAR solution. If for example there is an error in one or more of the bridged ambiguities, this error will propagate indefinitely forward and result in position errors of a few centimeters up to several decimeters.

[0086] The ionospheric bridging can be stopped as soon as the geometry filter naturally re-converges to a level where the bridged ambiguities no longer provide an improvement to the results.

[0087] Detailed Flowchart for Ionospheric Bridging Process

[0088] FIG. 10 contains a detailed flowchart for the ionospheric bridging process. Note that the first step of the ionospheric bridging process (815); and the last step 820, relate to FIG. 8.

5 [0089] The test at 1105 is used to determine if the Geometry filter has converged, if so, then ionospheric bridging is no longer needed. A test is made at 1110 to see if iFlex ambiguities have already been cached. iFlex ambiguities are cached to be able to run the ionospheric bridging process. The ionospheric bias is predicted at 1115 for each cached satellite according to the approach defined by equations 9-13. If the cached ionospheric ambiguities are out of date (test 1120) then a further test
10 is made at 1125 to see if the predicted ionospheric ambiguities are sufficiently well known. If the ionospheric ambiguities are well known, then they are stored at 1130.

[0090] The deweighted ionospheric filter ambiguities are replaced by bridged ionospheric ambiguities at 1135, when possible. The ionospheric bias filters are updated for each tracked satellite at 1140. Finally, the FAMCAR filter results are combined at 820.

15 [0091] FIG. 11 presents a flowchart describing the iFlex ambiguity caching process. The flowchart is an expansion of steps 830 and 840 in FIG. 8.

[0092] A test is made at 1205 to see if the number of iFlex ambiguities has settled. If the number of satellites is changing, this generally indicates a poor tracking environment and compromised iFlex ambiguity estimates. If the iFlex ambiguities are well known, then they can be assumed to approach a
20 single integer candidate (test 1210) and therefore the iFlex ambiguities can be cached at 1215. The cycle slip counters are stored with the iFlex ambiguities for later use in the ionospheric bridging process.

[0093] If the number of satellites tracked is inconsistent, or the iFlex ambiguities are not well enough known, caching is skipped until another epoch of data is processed.

[0094] The ionospheric bridging process enables centimeter level horizontal positioning accuracy to
25 be reestablished within 5-30s after tracking interruptions. Tracking interruptions up to 2 minutes can be readily bridged as long as the ionospheric delays are smoothly changing.

[0095] Known Position Techniques

[0096] Background Art

[0097] Known position initialization techniques have been used since the first RTK products were
30 sold. In a prior-art method Allison, M. T. et al., 1994, Determination of phase ambiguities in satellite ranges, U.S. Patent 5,359,332, Issued Oct 25, the distance and orientation of a rover antenna relative to a reference antenna is used in the estimation of the carrier phase ambiguities on GNSS signals for the purposes of centimeter level positioning. An apparatus is also described in which an azimuth measuring device is coupled with a fixed distance rover antenna mount. The method and apparatus

described focuses on single reference (base) RTK positioning and does not address the estimation process needed for GVRs positioning.

[0098] Known Position Input

[0099] Introduction

5 [0100] FIG. 12 schematically illustrates a scenario using a GNSS rover with correction data for point surveying. A user 1100 has a rover receiver (rover) 1105 which is mounted on a range pole 1110 or in some cases is a hand-held, or machine-mounted unit without a range pole. Rover 1105 includes a GNSS antenna 1115 and a communications antenna 1120. Rover 1105 receives at its GNSS antenna 1115 the signals from GNSS satellites 1125, 1130, 1135, 1140, 1145, etc. Rover 1105 also receives at
10 its communications antenna 1120 correction data from a corrections source 1150 via a communications link 1155. The communications link is, for example, a radio link or mobile telephone link, or any other suitable means of conveying the correction data to the rover 1105. The correction data can be of any suitable type for improving the positioning accuracy of rover 1105, such as: differential base station data from a base station serving as corrections source 1150, or virtual
15 reference station data from a network of reference stations serving as corrections source 1150 (WAAS is one example), or precise orbits and clocks data from a GVRs service such as that described in United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P). In the example of FIG. 12, the phase center of GNSS antenna 1115 is determined and reduced for the height and orientation of the range pole 1110 to the survey point 1160. The position of the
20 rover can be determined at each measurement epoch while static or kinematic. In this example, the location of point 1160 is determined via static occupation, followed by a segment of kinematic positioning, then another static occupation of point 1170. The location of occupied points is often saved as part of a measurement process.

[0101] There are several applications that can take advantage of knowledge of the user location in
25 order to reduce solution convergence times. For example, machine control operators from time-to-time need to stop and shut down their machine during meal times or overnight. The position of the machine is therefore often accurately known prior to the tracking interruption. Similarly, a surveyor often measures the location of points of interest via static occupation, separated by periods of kinematic positioning. If tracking is interrupted while moving, the surveyor can return to a previously surveyed
30 mark (like point 1160 or point 1170 in FIG. 12) and restart operation. The use of known position information can accelerate re-convergence of the estimation process.

[0102] The Known Position Input scheme presented below is applicable to GVRs rover processing, but it can also be used for single-base, VRS, and all RTK techniques.

[0103] Geometry Filter Seeding

[0104] The known rover position information can be used to seed the (X,Y,Z) position states of the Geometry Filter via tightly constrained position covariance terms. The known position in this case would help to accelerate the convergence of all states in the Geometry Filter and therefore the overall Float filter and iFlex solution.

- 5 [0105] The disadvantage of position seeding is that if the input coordinates are incorrect, this will corrupt the Geometry filter into the future, unless the filter is reset.

[0106] Known Position Input via Auxiliary Code-Carrier Filter Aiding

- 10 [0107] The auxiliary code-carrier filter results can be used to provide a means of inputting position information to the FAMCAR process. An advantage of this approach is that the position aiding process does not alter the underlying filters, but rather is just applied to the output of the Auxiliary Code-Carrier Filters. The position aiding process is analogous to that used for iono-bridging. In the case of position aiding, the Auxiliary Code-Carrier filter results are modified, whereas for iono-bridging, the ionospheric filter results are modified.

- 15 [0108] The Auxiliary Code-Carrier filter bank normally produces iono-free ambiguity estimates for each tracked satellite based on iono-free code measurements. Iono-free code is inherently noisy and therefore the iono-free ambiguity estimates of the Auxiliary Code-Carrier filters are also noisy and only contribute a small amount of information to the float solution.

[0109] When the position of the rover (A) is known, the geometric range from rover to each satellite is given by:

$$20 \quad \rho_A^i = \sqrt{(x^i - X_A)^2 + (y^i - Y_A)^2 + (z^i - Z_A)^2} \quad (14)$$

where:

(x^i, y^i, z^i) Cartesian WGS84 coordinates of satellite i, given by the satellite ephemeris,

(X_A, Y_A, Z_A) Cartesian WGS84 coordinates of the rover (known position).

- 25 [0110] The reference receiver (R) location is also known and the geometric range from reference receiver to each satellite is given as:

$$\rho_R^i = \sqrt{(x^i - X_R)^2 + (y^i - Y_R)^2 + (z^i - Z_R)^2} \quad (15)$$

where:

(X_R, Y_R, Z_R) Cartesian WGS84 coordinates of the reference receiver. Note that in the case of GVRs processing, the reference receiver is synthetic, nevertheless the reference receiver coordinates are defined.

[0111] The single difference iono-free carrier phase ambiguities are estimated for each satellite via the following equation (with all quantities given in metres):

$$\Delta_{if} N_{RA}^i = \Delta_{if} \Phi_{RA}^i - [\Delta \rho_{RA}^i + \Delta \tau_{RA}^i + \Delta \kappa_{RA}^i] \quad (16)$$

where:

- $\Delta_{if} N_{RA}^i$ single-difference iono-free carrier phase ambiguity for satellite i,
- $\Delta_{if} \Phi_{RA}^i$ single-difference iono-free carrier phase observation for satellite i,
- 10 $\Delta \rho_{RA}^i$ single-difference geometric range for satellite i ($\Delta \rho_{RA}^i = \rho_A^i - \rho_R^i$),
- $\Delta \tau_{RA}^i$ single-difference tropospheric bias for satellite i, based on a tropospheric model (e.g. Hopfield, Goad-Goodman, etc), or based on the estimated tropospheric bias parameters from the Geometry Filter,
- 15 $\Delta \kappa_{RA}^i$ single-difference receiver clock bias (= reference receiver clock bias minus the rover receiver clock bias).

[0112] The uncertainty of the rover location is expressed in terms of the following position covariance matrix:

$$\mathbf{Q}_p = \begin{bmatrix} q_{xx} & q_{xy} & q_{xz} \\ q_{yx} & q_{yy} & q_{yz} \\ q_{zx} & q_{zy} & q_{zz} \end{bmatrix} \quad (17)$$

where q_{xx} refers to the variance of the x-coordinate, q_{xy} refers to the covariance of the x and y coordinates etc.

[0113] The variance of the rover-satellite geometric range is obtained by projecting the rover position covariance matrix into the direction of the satellite according to:

$$\sigma_{\rho_A^i}^2 = \begin{bmatrix} a_x^i & a_y^i & a_z^i \end{bmatrix} \begin{bmatrix} q_{xx} & q_{xy} & q_{xz} \\ q_{yx} & q_{yy} & q_{yz} \\ q_{zx} & q_{zy} & q_{zz} \end{bmatrix} \begin{bmatrix} a_x^i \\ a_y^i \\ a_z^i \end{bmatrix} \quad (18)$$

where:

$$a_x^i = \frac{-(x^i - X_A)}{\rho_A^i} \quad \text{Partial derivative of the rover-satellite geometric range with respect to the rover } X_A \text{ coordinate;}$$

$$5 \quad a_y^i = \frac{-(y^i - Y_A)}{\rho_A^i} \quad \text{Partial derivative of the rover-satellite geometric range with respect to the rover } Y_A \text{ coordinate;}$$

$$a_z^i = \frac{-(z^i - Z_A)}{\rho_A^i} \quad \text{Partial derivative of the rover-satellite geometric range with respect to the rover } Z_A \text{ coordinate.}$$

[0114] The variance of the computed single difference iono-free carrier phase ambiguity is computed
10 by applying the law of propagation of variances to (16):

$$\sigma_{\Delta_{if} N_{RA}^i}^2 = \sigma_{\Delta_{if} \Phi_{RA}^i}^2 + \sigma_{\Delta \rho_{RA}^i}^2 + \sigma_{\Delta \tau_{RA}^i}^2 + \sigma_{\Delta \kappa_{RA}^i}^2 \quad (19)$$

where:

$$\sigma_{\Delta_{if} N_{RA}^i}^2 \quad \text{variance of the single-difference iono-free carrier phase ambiguity for satellite } i;$$

$$\sigma_{\Delta_{if} \Phi_{RA}^i}^2 \quad \text{variance of the single-difference iono-free carrier phase measurement for satellite } i;$$

$$15 \quad \sigma_{\Delta \rho_{RA}^i}^2 \quad \text{variance of the single-difference geometric range term for satellite } i;$$

$$\sigma_{\Delta \tau_{RA}^i}^2 \quad \text{variance of the single-difference tropospheric model value for satellite } i;$$

$$\sigma_{\Delta \kappa_{RA}^i}^2 \quad \text{variance of the single-difference receiver clock bias term.}$$

[0115] Normally the dominant errors in (19) relate to the geometric-range term $\sigma_{\Delta\rho_{RA}^i}^2$, and the carrier phase measurement $\sigma_{\Delta\phi_{RA}^i}^2$; the other error sources are often ignored.

FIG. 13 illustrates the use of known position information in the updating of the auxiliary code-carrier filter results. This flowchart is an expansion of steps 815 and 820 in FIG. 7.

- 5 [0116] The position aiding process is terminated as soon as the geometry filter has sufficiently converged. The geometry filter convergence test is conducted at 1305. If known position is available (1310), then at 1320 ionospheric-free carrier phase ambiguities are computed based on the known position input. The ionospheric-free carrier phase ambiguities are stored to the Geometry Cache as part of step 1320.
- 10 [0117] It is important to monitor cycle slips in the multi-frequency bands to ensure that the ionospheric-free carrier phase ambiguities stored in the Geometry cache are consistent with the current phase (1325). The Auxiliary Code-Carrier Filter ambiguity results are updated with the Geometry Cached ambiguities in step 1330. The results of the Auxiliary Code-Carrier Filters are posted at 1335, and used in the FAMCAR combination step 820.
- 15 [0118] FIG. 14 schematically describes the FAMCAR filtering process with position aiding. FIG. 14 is derived from the standard FAMCAR filtering process shown in FIG. 5. The known position processor, 1405, accepts single-differenced ionospheric-free phase data from 605/610, plus the ionospheric-free phase ambiguities 645 produced by the Auxiliary Code-Carrier Filter bank 625. When known position information 1402 is provided to the known position processor, it produces
- 20 ionospheric-free phase ambiguities that replace those produced by the Auxiliary Code-Carrier Filter bank (1410). The known position aided ambiguities are used in the FAMCAR combination step 655. Finally, the position and float ambiguity estimates are reported at step 660.

[0119] Known Position Input via Code-Carrier Filters

- [0120] The low accuracy of the Auxiliary Code-Carrier Filter ambiguity results normally means that
- 25 they don't contribute significantly to the final FAMCAR combined float solution. This makes the Auxiliary Code-Carrier Filter results well suited to use for known position input. Furthermore, the iono-free carrier phase combination used in the Auxiliary Code-Carrier Filters, means that the known position range computations can be formed without being impacted by ionospheric bias. Ionospheric bias is a significant error source for GVRs processing.

- 30 [0121] The known position input could also be handled by modifying the Code-Carrier Filter results, in a manner which is analogous to that used in the Auxiliary Code-Carrier Filter results. The disadvantage of this approach is that the Code-Carrier Filters nominally use the wide-lane carrier

phase combination, which contains an ionospheric bias. Second, the code-carrier filter results contribute significantly to the FAMCAR combined float solution therefore this information would be compromised if replaced by the known position input.

[0122] Rather than replacing the Auxiliary Code-Carrier Filter results with known position information, an alternative is to generate a parallel bank of Auxiliary Code-Carrier Filter results devoted to known position information input.

[0123] Termination of the known position aiding process

[0124] The known position aiding process outlined does not corrupt any FAMCAR component filter, just the uncombined filter results (output) are modified prior to the FAMCAR filter combination step.

10 The known position aiding process is automatically terminated when:

- The known position is deemed to be incorrect;
- The Geometry filter has converged sufficiently that the known position aiding is no longer required.

[0125] The known position information is deemed suspect or incorrect if the float/iFlex solution fails
15 a statistical test of the mean and/or variance.

[0126] When the position states of the Geometry filter have converged, i.e. all variances < for example 0.002m^2 . In this case, the position aiding no longer adds significant information to the float solution.

[0127] Performance of Known Position Input processing

20 [0128] As illustrated in FIG. 3, convergence and re-convergence of the horizontal position accuracy can take 15-20 minutes to achieve centimeter-level. With known position input, the convergence time is normally reduced to a few seconds up to for example 1 minute.

[0129] Following is a summary of some of the inventive concepts described herein:

[0130] [Iono Bridging]

1. A positioning method, comprising
 - a. Obtaining GNSS data derived from multi-frequency signals received at a rover antenna,
 - b. Obtaining correction data derived from a network of reference stations,
 - c. At each of a plurality of epochs, using the GNSS data and the correction data to estimate values defining a rover antenna position and a set of multi-frequency ambiguities,
 - d. Using an ionospheric filter to model variation in ionospheric bias per satellite,
 - e. Estimating a set of ionospheric carrier-phase ambiguities at least when the multi-frequency ambiguities have attained a predetermined precision,
 - f. Caching the estimated ionospheric carrier-phase ambiguities,
 - g. Detecting an interruption of signal received at the rover antenna,
 - h. Determining reacquisition of signals received at the rover antenna,
 - i. Predicting an ionospheric bias per satellite over an interruption interval,
 - j. For each satellite, combining a cached ionospheric carrier-phase ambiguity with a predicted ionospheric bias to obtain a post-interruption ionospheric ambiguity estimate,
 - k. Using the post-interruption ionospheric ambiguity estimates to aid estimation of at least a rover antenna position subsequent to the reacquisition.
2. The method of 1, wherein aiding comprises, at each of a plurality of epochs after reacquisition of signals, using the GNSS data and the correction data and the post-interruption ionospheric ambiguity estimates to estimate values defining an aided rover antenna position and an aided set of multi-frequency ambiguities.
3. The method of 2, further comprising determining a precision of the post-interruption rover antenna position and of each of the multi-frequency ambiguities.
4. The method of 3, wherein when the precisions of the post-interruption rover antenna position and of each of the multi-frequency ambiguities has achieved a predetermined threshold, using the post-interruption ionospheric ambiguity estimates to aid estimation is terminated.
5. The method of one of 1-4, wherein rover-satellite ionospheric biases are substantially uncorrelated with reference station-satellite ionospheric biases.
6. The method of one of 1-5, wherein the ionospheric filter models an ionospheric bias per satellite which is single-differenced between rover data and correction data.
7. The method of one of 1-6, wherein the set of ionospheric carrier-phase ambiguities comprises a single-differenced ionospheric ambiguity per satellite.

8. The method of one of 1-7, wherein detecting an interruption comprises determining that fewer than four satellites are continuously observed over a predetermined interval.
9. The method of one of 1-8, wherein determining reacquisition comprises determining that at least four satellites are continuously observed over a predetermined interval.
- 5 10. The method of one of 1-9, wherein the estimated rover antenna position has a precision which is better than a precision that would be obtained without use of the generated set of ionospheric ambiguity estimates.
11. The method of one of 1-10, further comprising terminating using the post-interruption ionospheric ambiguity estimates to aid estimation when substantially no further benefit is
10 obtained therefrom.
12. The method of one of 1-11, wherein the values defining the rover antenna position are estimated in a filter, the method further comprising monitoring precisions of the values estimated and terminating using the post-interruption ionospheric ambiguity estimates to aid estimation of rover antenna position when a precision threshold is achieved for values
15 defining the rover position.
13. The method of one of 10-11 wherein terminating using the post-interruption ionospheric ambiguity estimates to aid estimation of rover antenna position comprises continuing to use the GNSS data and the correction data to estimate values defining a rover antenna position.
- 20 14. The method of one of 1-13, further comprising predicting tropospheric bias and using predicted tropospheric bias to aid the estimation of at least a rover antenna position subsequent to the reacquisition.
15. The method of one of 1-14, wherein the set of ionospheric carrier-phase ambiguities is determined as a weighted average of integer ambiguity candidate sets.
- 25 16. The method one of 1-15, wherein caching of the estimated ionospheric phase ambiguities is deferred until satellite tracking is determined to be stable and within predetermined parameters.
17. The method of one of 1-16, further comprising estimating time-wise variation of an ionospheric bias per satellite.
- 30 18. The method of one of 1-17, further comprising estimating a change in ionospheric carrier-phase ambiguities after detecting an interruption of signal received at the rover antenna.
19. The method of one of 1-18, wherein using the post-interruption ionospheric ambiguity estimates to aid estimation of at least a rover antenna position subsequent to the reacquisition comprises combining the post-interruption ionospheric ambiguity estimates
35 with estimates of other parameters from a set of factorized filters.
20. The method of 19, wherein the post-interruption ionospheric ambiguity estimates are substituted for estimates from a bank of ionospheric filters.

21. Apparatus for performing a method according to one of 1-20.
 22. A computer program comprising instructions for causing an apparatus to perform a method according to one of 1-20.
 23. A computer program product comprising a tangible computer-readable medium embodying instructions for causing an apparatus to perform a method according to one of 1-20.
- 5

[0131] [Known Position]

1. A positioning method, comprising
 - a. Obtaining GNSS data derived from multi-frequency signals received at a rover antenna,
 - 5 b. Obtaining correction data derived from a network of reference stations,
 - c. At each of a plurality of epochs, using the GNSS data and the correction data to estimate values defining a rover antenna position and a set of multi-frequency ambiguities,
 - d. Estimating an ionospheric-free carrier-phase ambiguity per satellite based on
10 a known rover antenna position, and
 - e. Using the estimated ionospheric-free carrier-phase ambiguities to assist in determining an aided rover antenna position.
2. The method of 1, wherein using the estimated ionospheric-free carrier-phase ambiguities to assist in determining an aided rover antenna position comprises
15 combining the estimated ionospheric-free carrier-phase ambiguity with an estimated widelane ambiguity and with an estimated ionospheric-free ambiguity and with values defining the known rover antenna position to obtain values defining an aided rover antenna position and aided multi-frequency ambiguities.
3. The method of one of 1-2, further comprising terminating using the estimated
20 ionospheric-free carrier-phase ambiguities to assist in determining an aided rover antenna position when substantially no further benefit is obtained therefrom.
4. The method of one of 1-3, further comprising monitoring precision of an unaided rover antenna position estimate to determine when substantially no further benefit is obtained from using the estimated ionospheric-free carrier-phase ambiguities to
25 assist in determining an aided rover antenna position.
5. The method of one of 2-4, wherein the widelane ambiguities are estimated in a set of code-carrier filters.
6. The method of one of 2-5, wherein the ionospheric-free ambiguities are estimated in a geometry filter.
- 30 7. The method of one of 1-6, wherein the ionospheric-free carrier-phase ambiguity per satellite based on a known rover antenna position is computed using the known rover antenna position and observed carrier-phase measurements.
8. The method of one of 1-7, wherein the ionospheric-free carrier-phase ambiguity for at least one satellite based on a known rover antenna position is improved using a
35 prevailing tropospheric bias on the respective satellite.

9. The method of one of 1-8, wherein using the estimated ionospheric-free carrier-phase ambiguities to assist in determining an aided rover antenna position estimated ionospheric-free carrier-phase ambiguity estimates with estimates of other parameters from a set of factorized filters.
- 5 10. The method of 9, wherein the estimated ionospheric-free carrier-phase ambiguity estimates are substituted for estimates from a bank of auxiliary code-carrier filters.
11. The method of 10, further comprising creating a separate bank of auxiliary code carrier filter results for the known position results so that normal auxiliary code carrier filter results remain unaffected.
- 10 12. Apparatus for performing a method according to one of 1-11.
13. A computer program comprising instructions for causing an apparatus to perform a method according to one of 1-11.
14. A computer program product comprising a tangible computer-readable medium embodying instructions for causing an apparatus to perform a method according
- 15 to one of 1-11.

[0132] The foregoing description of embodiments is not intended as limiting the scope of but rather to provide examples of the invention as defined by the claims.

SPECIFICATIONTITLE OF INVENTION5 **GNSS SIGNAL PROCESSING WITH REGIONAL AUGMENTATION NETWORK**CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The following are related hereto and incorporated herein in their entirety by this reference: United States Provisional Application for Patent No. 61/277,184 filed 19
10 September 2009 (TNL A-2585P); International Patent Application PCT/US2009/059552 filed 5 October 2009 (TNL A-2288PCT); United States Provisional Application for Patent No. 61/195,276 filed 6 October 2008 (TNL A-2288P); International Patent Application PCT/US/2009/004471 filed 5 August 2009 (TNL A-2526PCT); International Patent Application PCT/US/2009/004473 filed 5 August 2009 (TNL A-2525PCT); International
15 Patent Application PCT/US/2009/004474 filed 5 August 2009 (TNL A-2524PCT); International Patent Application PCT/US/2009/004472 filed 5 August 2009 (TNL A-2523PCT); International Patent Application PCT/US/2009/004476 filed 5 August 2009 (TNL A-2339PCT); United States Provisional Application for Patent No. 61/189,382 filed 19 August 2008 (TNL A-2339P); United States Patent Application 12/224,451 filed 26 August
20 2008, United States Patent Application Publication US 2009/0027625 A1 (TNL A-1789US); International Patent Application PCT/US07/05874 filed 7 March 2007, International Publication No. WO 2008/008099 A2 (TNL A-1789PCT); United States Patent Application No. 11/988,763 filed 14 January 2008, United States Patent Application Publication US 2009/0224969 A1 (TNL A-1743US); International Patent Application No. PCT/US/2006/034433 filed 5 September 2006, International Publication No. WO
25 2007/032947 A1 (TNL A-1743PCT); United States Patent No. 7,432,853 granted 7 October 2008; (TNL A-1403US); (TNL A-1403PCT); International Patent Application No. PCT/US2004/035263 filed 22 October 2004 and International Publication Number WO 2005/045463 A1 (TNL A-1403PCT); United States Patent No. 6,862,526 granted 1 March
30 2005 (TNL A-1006US); and United States Provisional Application for Patent No. 61/396,676, filed 30 May 2010 (TNL A-2751P).

TECHNICAL FIELD

5 **[0002]** The present invention relates to the field of Global Navigation Satellite Systems (GNSS). More particularly, the present invention relates to methods and apparatus for processing of GNSS data with regional augmentation for enhanced precise point positioning.

BACKGROUND ART

10 **[0003]** Global Navigation Satellite Systems (GNSS) include the Global Positioning System (GPS), the Glonass system, the proposed Galileo system, the proposed Compass system, and others. Each GPS satellite transmits continuously using two radio frequencies in the L-band, referred to as L1 and L2, at respective frequencies of 1575.41 MHz and 1227.60 MHz. Two signals are transmitted on L1, one for civil users and the other for users authorized by the United States Department of Defense (DoD). One signal is transmitted on L2, intended only for DoD-authorized users. Each GPS signal has a carrier at the L1 and L2 frequency, a
15 pseudo-random number (PRN) code, and satellite navigation data. Two different PRN codes are transmitted by each satellite: a coarse acquisition (C/A) code and a precision (P/Y) code which is encrypted for DoD-authorized users. Each C/A code is a unique sequence of 1023 bits, which is repeated each millisecond. Other GNSS systems likewise have satellites which transmit multiple signals on multiple carrier frequencies.

20 **[0004]** FIG. 1 schematically illustrates a typical prior-art scenario to determine the position of a mobile receiver (rover). Rover 100 receives GPS signals from any number of satellites in view, such as SV1, SV2, and SVM, shown respectively at 110, 120 and 130. The signals pass through the earth's ionosphere 140 and through the earth's troposphere 150. Each signal has two frequencies, L1 and L2. Receiver 100 determines from the signals respective pseudo-
25 ranges, PR1, PR2, ..., PRM, to each of the satellites. Pseudo-range determinations are distorted by variations in the signal paths which result from passage of the signals through the ionosphere 140 and the troposphere 150, and from multipath effects, as indicated schematically at 160.

30 **[0005]** Pseudo-range can be determined using the C/A code with an error of about one meter, a civil receiver not using the military-only P/Y code determines rover position with an error in the range of meters. However, the phases of the L1 and L2 carriers can be measured with an accuracy of 0.01 - 0.05 cycles (corresponding to pseudo-range errors of 2 mm to 1 cm), allowing relative position of the rover to be estimated with errors in the range of millimeters

to centimeters. Accurately measuring the phase of the L1 and L2 carriers requires a good knowledge of the effect of the ionosphere and the troposphere for all observation times.

[0006] Relative positioning allows common-mode errors to be mitigated by differencing the observations of the rover with observations of a reference station at a known location near the rover, e.g., within 50-100 km. The reference station observations can be collected at a physical base station or estimated from observations of a network of reference stations. See for example U.S. Pat. No. 5,477,458 "Network for Carrier Phase Differential GPS Corrections" and U.S. Pat. No. 5,899,957 "Carrier Phase Differential GPS Corrections Network."

[0007] Precise point positioning (PPP), also called absolute positioning, uses a single GNSS receiver together with precise satellite orbit and clock data to reduce satellite-related error sources. A dual-frequency receiver can remove the first-order effect of the ionosphere for position solutions of centimeters to decimeters. The utility of PPP is limited by the need to wait longer than desired for the float position solution to converge to centimeter accuracy.

And unlike relative positioning techniques in which common-mode errors are eliminated by differencing of observations, PPP processing uses undifferenced carrier-phase observations so that the ambiguity terms are corrupted by satellite and receiver phase biases. Methods have been proposed for integer ambiguity resolution in PPP processing. See, for example, Y. Gao et al., GNSS Solutions: Precise Point Positioning and Its Challenges, Inside GNSS, November/December 2006, pp. 16-18. See also United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

[0008] Improved GNSS processing methods and apparatus are desired, especially to achieve faster convergence to a solution, improved accuracy and/or greater availability.

SUMMARY

[0009] Improved methods and apparatus for processing of GNSS data with augmentation for enhanced precise positioning are presented.

5 [0010] Some embodiments of the invention provide methods and/or apparatus for processing of GNSS data derived from multi-frequency code and carrier observations are presented which make available correction data for use by a rover located within the region, the correction data comprising: the ionospheric delay over the region, the tropospheric delay over the region, the phase-leveled geometric correction per satellite, and the at least one code bias
10 per satellite.

[0011] Some embodiments provide methods and apparatus for determining a precise position of a rover located within a region in which a GNSS receiver is operated to obtain multi-frequency code and carrier observations and correction data, to create rover corrections from the correction data, and to determine a precise rover position using the rover observations and
15 the rover corrections.

[0012] In some embodiments the correction data comprises at least one code bias per satellite, a fixed-nature MW bias per satellite and/or values from which a fixed-nature MW bias per satellite is derivable, and an ionospheric delay per satellite for each of multiple regional network stations and/or non-ionospheric corrections.

20 [0013] In some embodiments the correction data comprises at least one code bias per satellite, a fixed-nature MW bias per satellite and/or values from which a fixed-nature MW bias per satellite is derivable, and an ionospheric delay per satellite for each of multiple regional network stations and an ionospheric phase bias per satellite, and/or non-ionospheric corrections.

25 [0014] Some embodiments provide methods and apparatus for encoding and decoding the correction messages containing correction data in which network messages include network elements related to substantially all stations of the network and cluster messages include cluster elements related to subsets of the network.

[0015] Some embodiments provide regional correction data streams prepared in accordance
30 with the methods and suitable for broadcast and use by mobile GNSS receivers within a network area.

[0016] Some embodiments provide computer program products embodying instructions for carrying out the methods.

BRIEF DESCRIPTION OF DRAWING FIGURES

[0017] These and other aspects and features of the present invention will be more readily understood from the embodiments described below with reference to the drawings, in which:

- 5 FIG. 1 schematically illustrates a typical prior-art scenario to determine a rover position;
- FIG. 2 schematically illustrates a system in accordance with some embodiments of the invention;
- FIG. 3 schematically illustrates a global network processor in accordance with some embodiments of the invention;
- 10 FIG. 4 schematically illustrates a regional network processor in accordance with some embodiments of the invention;
- FIG. 5 schematically illustrates a regional network process in accordance with some embodiments of the invention;
- FIG. 6 schematically illustrates augmented precise point positioning in accordance with some
- 15 embodiments of the invention;
- FIG. 7 schematically illustrates generating synthetic reference station data for augmented precise point positioning in accordance with some embodiments of the invention;
- FIG. 8 schematically illustrates augmented precise point positioning with differential processing in accordance with some embodiments of the invention;
- 20 FIG. 9 schematically illustrates augmented precise point positioning with differential processing in accordance with some embodiments of the invention;
- FIG. 10 schematically illustrates augmented precise point positioning with differential processing in accordance with some embodiments of the invention;
- FIG. 11 schematically illustrates construction of synthetic reference station observations in
- 25 accordance with some embodiments of the invention;
- FIG. 12 schematically illustrates an ionospheric shell and a portion of a tropospheric shell surrounding the Earth;
- FIG. 13 illustrates a slanted ray path from a satellite to a receiver passing through the troposphere;
- 30 FIG. 14 illustrate the relation between Total Electron Content along a slant path and Vertical Total Electron content;

FIG. 15 illustrates how ionosphere parameters describe the ionosphere at a piercepoint relative to a reference point;

FIG. 16 schematically illustrates troposcailing in accordance with some embodiments of the invention;

5 FIG. 17 schematically illustrates spacing of locations for geometric correction terms are determined in accordance with some embodiments of the invention;

FIG. 18 schematically illustrates a linear model for determining the geometric correction at a rover location from geometric corrections three arbitrary locations in accordance with some embodiments of the invention;

10 FIG. 19 schematically illustrates ionospheric delay IPBS at a physical base station location PBS and ionospheric delay ISRS at a synthetic reference station location SRS;

FIG. 20 schematically illustrates regional correction message encoding in accordance with some embodiments of the invention;

15 FIG. 21 schematically illustrates clusters of regional network stations in accordance with some embodiments of the invention;

FIG. 22 shows an example of a rover located within a regional network having clusters in accordance with some embodiments of the invention;

FIG. 23 is a schematic diagram of a computer system in accordance with some embodiments of the invention; and

20 FIG. 24 is a schematic diagram of a GNSS receiver system in accordance with some embodiments of the invention;

DETAILED DESCRIPTION**Part 1: Introduction**

5 **[0018]** Methods and apparatus in accordance with some embodiments involve making available and/or using correction data with rover observations of GNSS satellite signals for precise navigation or positioning of a rover located within a region. The correction data comprises (1) at least one code bias per satellite, i.e. a fixed-nature MW bias per satellite (or values from which a fixed-nature MW bias per satellite is derivable), (2) a phase-leveled geometric correction per satellite derived from the network fixed double difference
10 ambiguities, and (3) an ionospheric delay per satellite for each of multiple regional network stations, and optionally an ionospheric phase bias per satellite, and/or non-ionospheric corrections.

15 **[0019]** The corrections are determined at least in part from code and carrier phase observations of GNSS satellite signals by reference stations of a network distributed over the region. The code bias is derived from fixed ambiguities (e.g., double-differenced) of the regional reference station network.

20 **[0020]** The corrections enable reconstruction of code and phase observations of the reference stations. The ability to reconstruct the geometric part (ionospheric-free observation combinations) is based on the phase-leveled geometric correction term per satellite. This geometric correction term encapsulates the integer nature of the ambiguity and compensates the orbit error and satellite clock error seen in the regional reference station network.

25 **[0021]** If m stations of the regional network observe n satellites, the transmission bandwidth needed to transmit $m \times n$ observations and $m \times n$ carrier observations on each GNSS frequency would be impractical. Some embodiments of the invention substantially reduce this bandwidth requirement. Only one or three geometric corrections is/are transmitted for each of the n satellites in accordance with some embodiments. Only one code bias is transmitted for each of the n satellites in accordance with some embodiments. Only one tropospheric value is optionally transmitted for each of the m stations. The non-ionospheric part of the regional network correction comprises the code biases, phase-leveled geometric
30 correction and the optional tropospheric values.

[0022] In some embodiments, the ionospheric part of the regional reference station network correction is based on observation space. It is derived from the ionospheric carrier-phase dual-frequency combination minus the ambiguity determined from processing the regional

network observations. Thus $m \times n$ ionospheric corrections are optionally transmitted for processing of rover observations.

[0023] In some embodiments, an absolute ionosphere model estimated from the network, or a global/regional ionosphere model like WAAS, IONEX or GAIM is used; an ionospheric phase bias per satellite and per station is derived together with the ionospheric correction per satellite per station. Thus $m \times n$ ionospheric corrections plus n ionospheric phase biases are optionally transmitted for processing of rover observations. Carrier phase observations of the regional network's reference stations (e.g., on carriers L1 and L2) can be fully reconstructed using the geometric part (phase-leveled geometric correction and tropospheric corrections) together with the ionospheric part (ionospheric corrections and optional ionospheric phase biases). If the optional tropospheric corrections are not provided, the tropospheric delay at the rover can be estimated in rover processing, at the cost of slower convergence.

[0024] Double differencing of the reconstructed observations of the regional network stations with raw L1 and L2 carrier-phase observations of the rover receiver results in ambiguity values which are close to integer.

[0025] Some advantages of this approach are:

- No master station is required. This leads to a simpler algorithm for generating synthetic reference station data and reduced burden for encoding and decoding the correction messages when these are transmitted for processing of rover observations.
- Multipath mitigation and noise reduction. The phase-leveled geometric correction term per satellite is generated using all stations in the regional reference station network. Reconstructed observations thus mitigate the multipath of all stations, instead of the inherent mitigation of the full multipath and noise of a master station. In addition, the ionospheric part is in some embodiments smoothed over time by the regional network processor to reduce noise.
- Smooth transition from only global network corrections to global corrections augmented with regional corrections when the rover moves into a region covered by a regional network. The regional corrections add a geometric correction per satellite together with ionospheric and/or non-ionospheric corrections. When a rover moves into a region covered by a regional network, processing of the rover observations benefits immediately from the added regional corrections.
- Bandwidth reduction. With a regional network of, for example, 80 reference stations tracking 12 satellites, a transmission bandwidth of about 2200-2500 bits/second should provide an update rate of 10 seconds even without optimizations (described

below) that become possible because of the changed information content of the messages.

Part 2: Reconstructing Code and Carrier-Phase Observations

5 Part 2.1 Carrier-Phase Observation Data with Fixed Double-Difference Ambiguities

[0026] GPS L₁ and L₂ carrier phase observations can be expressed as:

$$L_1 = \lambda_1 \varphi_1 = \rho + T + I_1 + c \cdot (t_r - t^s) + b_1^r - b_1^s + \lambda_1 N_1 + v_1 \quad (1)$$

$$L_2 = \lambda_2 \varphi_2 = \rho + T + \frac{\lambda_2^2}{\lambda_1^2} I_1 + c \cdot (t_r - t^s) + b_2^r - b_2^s + \lambda_2 N_2 + v_2 \quad (2)$$

10 where

L_1 and L_2 are the L₁ and L₂ carrier phase observations in metric units,

φ_1 and φ_2 are the L₁ and L₂ carrier phase observations in cycles,

ρ is the geometric range between antenna phase centers of satellite and receiver,

15 T is the tropospheric delay,

I_1 is the L₁ ionospheric delay,

t^s and t_r are the satellite clock error and receiver clock error, respectively,

b_1^s and b_2^s are the satellite L₁ phase bias and satellite L₂ phase bias, respectively,

b_1^r and b_2^r are the receiver L₁ phase bias and satellite L₂ phase bias, respectively,

20 N_1 and N_2 are “true” L₁ and L₂ integer ambiguities, respectively, and

v_1 and v_2 are phase noise plus multipath of L₁ and L₂, respectively.

[0027] The ionospheric-free carrier-phase observation can be expressed as

$$L_{IF} = \rho + T + c \cdot (t_r - t^s) + b_c^r - b_c^s + N_c + v_c \quad (3)$$

where

$$25 \quad N_c = \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} N_1 + \frac{\lambda_1^2 \lambda_2}{\lambda_2^2 - \lambda_1^2} N_2 = \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} N_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} N_2 \quad (4)$$

is the ionospheric-free ambiguity,

$$b_c^r = \frac{\lambda_2^2}{\lambda_2^2 - \lambda_1^2} b_1^r - \frac{\lambda_1^2}{\lambda_2^2 - \lambda_1^2} b_2^r \text{ and } b_c^s = \frac{\lambda_2^2}{\lambda_2^2 - \lambda_1^2} b_1^s - \frac{\lambda_1^2}{\lambda_2^2 - \lambda_1^2} b_2^s \quad (5)$$

are respectively the receiver and satellite ionospheric-free satellite phase biases, and

$$N_w = N_1 - N_2 \quad (6)$$

is the widelane ambiguity .

5 **[0028]** The ionospheric phase observation L_{I1} mapped to frequency L1 can be written as

$$L_{I1} = \frac{\lambda_1^2}{\lambda_1^2 - \lambda_2^2} (L_1 - L_2) = I_1 + b_I^r - b_I^s + N_I + v_I \quad (7)$$

where

$$N_I = \frac{\lambda_1^3}{\lambda_1^2 - \lambda_2^2} N_1 - \frac{\lambda_1^2 \lambda_2}{\lambda_1^2 - \lambda_2^2} N_2 = -\frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} N_w + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} N_2 \quad (8)$$

is the ionospheric ambiguity, and

$$b_I^r = \frac{\lambda_1^2}{\lambda_2^2 - \lambda_1^2} (b_2^r - b_1^r) \text{ and } b_I^s = -\frac{\lambda_1^2}{\lambda_2^2 - \lambda_1^2} b_1^s + \frac{\lambda_1^2}{\lambda_1^2 - \lambda_2^2} b_2^s \quad (9)$$

are respectively the receiver and satellite ionospheric phase biases.

15

[0029] The formulas are simplified by forming the single difference of observations of two satellites at each reference station to cancel out receiver clock error and receiver phase bias. The single-difference L1 and L2 carrier-phase combinations are

$$\nabla L_1 = \lambda_1 \nabla \varphi_1 = \nabla \rho + \nabla T + \nabla I_1 - c \cdot \nabla t^s + \nabla b_1^s + \lambda_1 \nabla N_1 + \nabla v_1 \quad (10)$$

20

$$\nabla L_2 = \lambda_2 \nabla \varphi_2 = \nabla \rho + \nabla T + \frac{\lambda_2^2}{\lambda_1^2} \nabla I_1 - c \cdot \nabla t^s + \nabla b_2^s + \lambda_2 \nabla N_2 + \nabla v_2 \quad (11)$$

The single difference ionospheric-free phase is then expressed as

$$\nabla L_{IF} = \nabla \rho + \nabla T - c \nabla t^s + \nabla b_c^s + \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} \nabla N_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} \nabla N_2 + \nabla v_c \quad (12)$$

[0030] Assuming the single difference integer ambiguities estimated by the network processor are $\nabla \bar{N}_w, \nabla \bar{N}_2$, the estimated single-difference ionospheric-free satellite phase bias

25

$\nabla \bar{b}_c^s$ can be derived as

$$\nabla \bar{b}_c^s = \nabla L_c - \nabla \tilde{\rho} - \nabla \bar{T} + c \nabla \tilde{t}^s - \left(\frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} \nabla \bar{N}_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} \nabla \bar{N}_2 \right) \quad (13)$$

where

$\nabla \tilde{\rho}$ is the single difference geometric range computed from the ephemeris,
 $\nabla \tilde{t}^s$ is the single difference satellite clock error computed from the ephemeris, and
 $\nabla \bar{T}$ is the single difference tropospheric delay estimated in the network processor.

[0031] If the satellite orbits and clocks are perfect and the tropospheric delays estimated from the network are also perfect, and ignoring the phase noise, the relationship of the derived single-difference ionospheric-free satellite phase bias $\nabla \bar{b}_c^s$ to the “true” bias ∇b_c^s is

$$\begin{aligned} \nabla \bar{b}_c^s &= \nabla b_c^s + \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} (\nabla N_w - \nabla \bar{N}_w) + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} (\nabla N_2 - \nabla \bar{N}_2) \\ &= \nabla b_c^s + \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} \nabla dN_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} \nabla dN_2 \end{aligned} \quad (14)$$

[0032] The derived single-difference ionospheric-free satellite phase bias is offset by a linear combination of integer wideband and L2 cycles if the fixed ambiguities are not equal to the “true” ambiguities. If the double difference ambiguities between all the reference stations are fixed correctly, this equation is valid for all the stations

[0033] A network-derived ionospheric-free phase bias per satellite is generated by combining the ionospheric-free biases derived from all stations (for example, by averaging or least squares). In reality, the orbit, clock computed from ephemeris and estimated tropospheric delay are not perfect, all the common errors mapped to line of sight from receiver to satellite are absorbed by this satellite bias term. As this term preserves the integer nature of phase observations and purely geometric correction, this term is also called a phase-leveled geometric correction.

[0034] The single difference ionospheric phase observation can be expressed as

$$\nabla L_{I1} = \nabla I_1 + \nabla b_I^s - \frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} \nabla N_w + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla N_2 + \nabla v_I \quad (15)$$

[0035] Ignoring the phase noise and assuming the satellite bias cannot be separated from the ionospheric delay, with the network derived single difference ambiguities the derived L1 ionospheric delay is expressed as:

$$\begin{aligned}
\nabla \bar{I}_1 &= \nabla L_{I1} + \left(\frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} \nabla \bar{N}_w - \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla \bar{N}_2 \right) \\
&= \nabla I_1 + \nabla b_I^s - \frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} (\nabla N_w - \nabla \bar{N}_w) + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} (\nabla N_2 - \nabla \bar{N}_2) \quad (16) \\
&= \nabla I_1 + \nabla b_I^s - \frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} \nabla dN_w + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla dN_2
\end{aligned}$$

This is not the “true” ionospheric delay, but is biased by a combination of integer widelane , L2 cycles and an ionospheric phase bias.

5 **[0036]** Alternatively, if the absolute ionosphere model is estimated with the network data (for example as described in United States Provisional Application for Patent No. 61/396,676, filed 30 May 2010, Attorney Docket TNL A-2751P, the content of which is incorporated herein by this reference), or a global ionosphere model is available (for example WAAS, GAIM, or IONEX), by using Eq (15), the satellite ionosphere bias can be estimated with a
10 least squares filter or Kalman filter. To avoid rank deficiency, one satellite bias can be set to zero, or a zero mean constraint (the sum of all satellite biases equal to zero) can be used.

[0037] The L1 ionospheric delay can be expressed as:

$$\nabla \bar{I}_1 = \nabla L_{I1} - \nabla \bar{b}_I^s + \left(\frac{\lambda_1^3}{\lambda_2^2 - \lambda_1^2} \nabla \bar{N}_w - \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla \bar{N}_2 \right) \quad (16a)$$

15 Where $\nabla \bar{b}_I^s$ is the estimated single difference ionospheric phase bias.

[0038] The main difference between Eq (16) and Eq (16a) is that, in Eq (16a), the single-differenced ionospheric satellite phase bias $\nabla \bar{b}_I^s$ is estimated with an ionosphere model and excluded from single-differenced ionospheric correction, while in Eq (16) the single-differenced ionospheric satellite phase bias ∇b_I^s is inherently included in the
20 ionospheric delay.

[0039] In principle, with Eq (16), it is not necessary to estimate an ionosphere model over the network as far as the network ambiguities can be fixed, i.e., with the MW combination to fix widelane ambiguities and ionospheric-free phase combination to fix narrowlane ambiguities. An advantage of this approach is that the system is
25 insensitive to the activity of ionosphere. A disadvantage is that the derived ionospheric correction is not bias free. For satellite- to-satellite single-differenced ionospheric correction, it contains the single-differenced satellite ionospheric phase bias. For undifferenced ionospheric correction, it contains a satellite ionospheric

phase bias and a receiver ionospheric phase bias. So the ionospheric correction generated with Eq (16) is only consistent in double difference. This means the computation of the ionospheric correction at a Synthetic Reference Station (SRS) location has to be done in differential way -- difference between the SRS location and a nearby physical reference station (termed a Physical Base Station, or PBS) and then add to the ionospheric correction from one of the physical reference stations. This implies that the SRS data cannot be generated for a satellite for which ambiguities are not fixed at the PBS. If there are only a few satellites in view at the SRS location or the satellite geometry is bad, this could lead to large positioning error for the rover.

[0040] In contrast, the ionospheric correction generated with Eq (16a) is consistent with the used absolute ionosphere model. By estimating the satellite/receiver ionospheric phase bias, the derived ionospheric corrections are consistent in undifferenced mode, so the generation of ionospheric correction at the SRS location does not rely on any physical reference station. Insofar as ambiguities are fixed for a satellite at some reference stations, the ionospheric correction can be generated for the SRS location. When used with the ionospheric-free correction per satellite, the generated SRS data is fully synthetic.

[0041] With derived single difference ionospheric-free satellite phase bias and ionospheric delay/ionospheric satellite phase bias, L1 and L2 phase observations can be fully reconstructed. The reconstructed single difference L1 carrier phase is

$$\begin{aligned}
 \nabla \hat{L}_1 &= \lambda_1 \nabla \hat{\phi}_1 = \nabla \hat{L}_c + \nabla \hat{I}_1 \\
 &= \nabla \rho + \nabla T - c \nabla t^s + \nabla b_c^s + \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} \nabla dN_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} \nabla dN_2 \\
 &\quad + \nabla I_1 + \nabla b_I^s + \frac{\lambda_1^3}{\lambda_1^2 - \lambda_2^2} \nabla dN_w + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla dN_2 \\
 &= \nabla \rho + \nabla T - c \nabla t^s + \nabla I_1 + \nabla b_1^s + \lambda_1 (\nabla dN_w + \nabla dN_2) \\
 &= \nabla \rho + \nabla T - c \nabla t^s + \nabla I_1 + \nabla b_1^s + \lambda_1 \nabla dN_1
 \end{aligned} \tag{17}$$

and the reconstructed single difference L2 carrier phase is

$$\begin{aligned}
\nabla \hat{L}_2 &= \lambda_2 \nabla \hat{\phi}_2 = \nabla \hat{L}_c + \nabla \hat{I}_1 \frac{\lambda_2^2}{\lambda_1^2} \\
&= \nabla \rho + \nabla T - c \nabla t^s + \nabla b_c^s + \frac{\lambda_1 \lambda_2^2}{\lambda_2^2 - \lambda_1^2} \nabla dN_w + \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2} \nabla dN_2 \\
&\quad + (\nabla I_1 + \nabla b_I^s + \frac{\lambda_1^3}{\lambda_1^2 - \lambda_2^2} \nabla dN_w + \frac{\lambda_1^2}{\lambda_1 + \lambda_2} \nabla dN_2) \frac{\lambda_2^2}{\lambda_1^2} \\
&= \nabla \rho + \nabla T - c \nabla t^s + \frac{\lambda_2^2}{\lambda_1^2} \nabla I_1 + \nabla b_2^s + \lambda_2 \nabla dN_2
\end{aligned} \tag{18}$$

Comparing Eq. (17) and Eq. (18) with Eq. (10) and Eq. (11), it can be seen that the reconstructed single difference L1 and L2 phases are the original phases plus an offset of integer ambiguity.

5 **[0042]** The formulas above are derived in satellite-to-satellite single differences. These apply to non-differenced observations if a receiver-dependent bias is added to each satellite observed at the reference station. The receiver bias term is absorbed by the receiver clock term.

10 **[0043]** Tropospheric delay is estimated in the regional network using zenith total delay (ZTD) per station or a troposcoring factor per station and using a standard tropospheric model (e.g. Neill, Hopfield, etc.) and a mapping function to map a tropospheric delay for line of sight from each reference station to each satellite, in some embodiments. The *a priori* tropospheric model used at the regional network processor is the same as that used in processing of rover observations in some embodiments.

15 **[0044]** The relation between the estimated tropospheric delay to estimated zenith total delay and troposcoring can be written as:

$$T = ZTD \cdot MP = (1 + T_s) \cdot ZTD_{\text{model}} MP \tag{19}$$

where:

20 T is the tropospheric delay of a given satellite at a reference station,
 ZTD is the estimated tropospheric zenith total delay at the reference station,
 MP is the mapping function of the *a priori* troposphere model used in the network processor,
 T_s is the troposcoring factor, and
 ZTD_{model} is the zenith total delay computed from the *a priori* troposphere model.

25

Part 2.2 Reconstructing L1 and L2 Pseudorange Observations

[0045] For the narrow-lane pseudorange combination P_N , narrow-lane code biases (derived, for example, from a global network) are applied to obtain integer nature wide-lane carrier phase ambiguities using wide-lane carrier minus narrow-lane code filters; this is also known as the Melbourne-Wübbena (MW) widelaning technique.

[0046] The constructed narrow-lane code combinations are bias free in the sense of a geometric pseudorange measurement if the MW code bias is estimated in the regional network processor. If the MW code bias is derived from another source (e.g., a global network) and applied in the regional network processor to determine widelane ambiguities, the constructed narrow-lane codes are also bias free. While it is not required that the narrowlane code be bias free, in some embodiments it is bias free.

[0047] The single difference narrowlane code and widelane phase can be written, respectively, as

$$\nabla P_N = \nabla \rho + \nabla T - c \nabla t^s + \frac{\lambda_2^2}{(\lambda_2 - \lambda_1)^2} \nabla I_1 + \nabla B_N + \nabla \varepsilon_N, \quad (20)$$

$$\nabla L_W = \lambda_W \varphi_W = \nabla \rho + \nabla T - c \nabla t^s + \frac{\lambda_2^2}{(\lambda_2 - \lambda_1)^2} \nabla I_1 + \nabla b_W + \lambda_W \nabla N_W + \nabla v_W. \quad (21)$$

[0048] The Melbourne-Wübbena combination is given by

$$\lambda_W \nabla \bar{N}_W = \frac{\sum_{i=1}^n (\nabla L_W - \nabla P_N)}{n} + (\nabla b_W - \nabla B_N) = \frac{\sum_{i=1}^n (\nabla L_W - \nabla P_N)}{n} + \nabla B_{NW} \quad (22)$$

where ∇B_{NW} is the MW code bias derived, for example, by the global network processor.

This MW code bias term ∇B_{NW} is a combination of code bias and carrier-phase bias and is used when fixing the widelane ambiguity in the network processing.

[0049] Narrowlane code observations and ionospheric-free code observations can be reconstructed respectively as

$$\nabla \hat{P}_N = \nabla \hat{L}_c + \frac{\lambda_2^2}{(\lambda_2 - \lambda_1)^2} \nabla I_1 + \nabla B_{NW} \quad (23)$$

$$\nabla \hat{P}_{IF} = \nabla \hat{L}_{IF} \quad (24)$$

[0050] Finally, L1 code observations and L2 code observations can be reconstructed respectively as

$$\nabla \hat{P}_1 = \nabla \hat{L}_{IF} - \nabla I_1 + \alpha \nabla B_{NW} \quad (25)$$

$$\nabla \hat{P}_2 = \nabla \hat{L}_{IF} - \frac{\lambda_2^2}{\lambda_1^2} \nabla I_1 + \beta \nabla B_{NW} \quad (26)$$

where $\alpha = \frac{\lambda_1}{\lambda_2}$ and $\beta = \frac{\lambda_2}{\lambda_1}$.

By using these two factors, the MW code bias term is cancelled out in the ionospheric-free code combination and is only present in narrowlane code combination.

5 **[0051]** In summary, the regional network processor generates correction terms comprising a code bias per satellite and at least one of an ionospheric delay per satellite and a non-ionospheric correction. They may include:

- 10 ○ A satellite-dependent bias term per satellite derived from the network fixed double difference ambiguities. This bias term encapsulates the integer nature of the ambiguities and compensates the orbit error and satellite clock error seen in the regional reference station network (Eq. 13).
- A tropospheric zenith total delay per station or troposcoring per station (Eq.19).
- An ionospheric correction per station per satellite (Eq. 16) or, alternatively, an ionospheric correction per station per satellite plus an ionospheric phase bias per satellite
- 15 Eq.(16a).
- An MW code bias term. This term can be derived from a global network processor or regional network (Eq.22). For an explanation of the satellite dependent bias term, also called “uncalibrated phase delays” (“UPD”), see Ge et al., “Resolution of GPS carrier-phase ambiguities in Precise Point Positioning (PPP) with daily observations,” Journal of
- 20 Geodesy, Vol. 82, No. 7, July 2008, pages 401-412.

[0052] Code observations and carrier-phase observations of each reference station in the regional network can be reconstructed using these corrections.

25 **Part 2.3 Constructing Synthetic Reference Station Data for Processing of Rover Observations**

[0053] The construction of synthetic reference station (SRS) data is similar to the reconstruction of pseudorange and carrier phase data at a reference station described in Part 2.2 above, except that the tropospheric delays are derived (or interpolated) from the troposcoring (zenith total delay) corrections and the and the ionosphere delays are derived (or interpolated) from the ionospheric corrections supplied by the regional network.

30 **[0054]** For example, constructed observations for an SRS location within the region of the regional network are given by

$$\hat{L}_{1SRS} = \lambda_1 \hat{\phi}_{1SRS} = (\tilde{\rho}_{SRS} - c\tilde{t}^s + \bar{b}_c^s) + I_{1SRS} + T_{SRS} \quad , \quad (27)$$

$$\hat{L}_{2_{SRS}} = \lambda_2 \hat{\phi}_{2_{SRS}} = (\tilde{\rho}_{SRS} - c\tilde{t}^s + \bar{b}_c^s) + \frac{\lambda_2^2}{\lambda_1^2} I_{1_{SRS}} + T_{SRS} \quad , \quad (28)$$

$$T_{SRS} = (TS_{SRS} + 1) \cdot ZTD_{model_{SRS}} \cdot MP \quad , \quad (29)$$

where:

- 5 $\hat{L}_{1_{SRS}}$ is the constructed SRS L1 carrier-phase observation in metric units,
- $\hat{L}_{2_{SRS}}$ is the constructed SRS L2 carrier-phase observation in metric units,
- $\hat{\phi}_{1_{SRS}}$ is the constructed SRS L1 carrier-phase observation in cycles,
- $\hat{\phi}_{2_{SRS}}$ is the constructed SRS L2 carrier-phase observation in cycles,
- 10 $\tilde{\rho}_{SRS}$ is the geometric range from the selected (SRS) location to the satellite computed from ephemeris (precise orbits 350 and clocks 375 from global network processor, or IGU URO; or broadcast orbits and clocks from satellite navigation message or any other source of orbits and clock with enough accuracy to correctly fix ambiguities in the regional network processor; the required accuracy depends on the size of the regional network),
- $\tilde{t}^s$ is the satellite clock error computed from ephemeris,
- 15 $\bar{b}_c^s$ is the phase-leveled geometric correction derived from the network processing,
- $I_{1_{SRS}}$ is the ionospheric correction mapped to GPS L1 frequency for the selected (SRS) location,
- T_{SRS} is the tropospheric correction for the selected (SRS) location, and
- TS_{SRS} is the troposcaling for the selected (SRS) location from regional network troposcaling
- 20 estimation.

[0055] Synthetic reference station (SRS) observations are in some embodiments generated in an SRS module. The SRS module can be situated at the regional network processor (at the “server side,” e.g., in a server computer), at the rover (at the “rover side,” e.g., in the rover processor or in a client computer associated with the rover), or at any other suitable location.

25 **[0056]** If the SRS observations are generated at the regional network processor, the ephemeris used to generate SRS corrections can be exactly the same as the one used in the network processing, $\bar{b}_c^s$ can be used directly to generate SRS observations.

[0057] However, if the SRS observations are generated on the rover side, transmission latency and data corruption via the communication link from network processor to rover side processor may make it impractical or impossible to assure the same ephemeris is used unless

30 a complicated validation algorithm is implemented. Instead, in some embodiments a

geometric correction which contains geometric range for an arbitrary location combined with (minus) satellite clock error and (plus) satellite bias is transmitted. This geometric correction term carries over to the rover side the orbit and clock used on the server side, avoiding the need to maintain consistency of orbit and clock between server side and rover side.

5 **[0058]** In addition, if this geometric correction term is transmitted for three arbitrary locations (e.g., within the region of the regional network), a linear model can be used to compensate the satellite orbit error for other locations (e.g., the selected SRS location which may be a rover location known only with low accuracy). A linear model is suitable for this purpose because the orbit error mapped to line of sight is very linear over a local region.

10 **[0059]** The corrected geometric range computed for a given location i is written as:

$$G_i = \tilde{\rho}_i - c \tilde{t}^s + \bar{b}_c^s \quad (30)$$

where

$\tilde{\rho}_i$ is the geometric range computed from server ephemeris,

$\tilde{t}^s$ is the satellite clock error, and

15 $\bar{b}_c^s$ is ionospheric-free carrier phase satellite bias derived from the network processing.

[0060] Geometric range $\tilde{\rho}_i$ and satellite clock error $\tilde{t}^s$ can be computed (e.g., at the rover) for the same location using the satellite's broadcast navigation message (broadcast ephemeris). The geometric range difference $d\rho_i$ between the geometric range $\tilde{\rho}_i$ computed from broadcast ephemeris adjusted for broadcast satellite clock error $\tilde{t}^s$ and the geometric correction G_i from the regional network for the same location is

$$d\rho_i = (\tilde{\rho}_i - c \tilde{t}^s) - G_i \quad (31)$$

[0061] With geometric range correction values $d\rho_i$ for three locations in the network region, a linear model is used in some embodiments to calculate a geometric range correction $d\rho_{SRS}$ for a selected (SRS) location within the network region. The corrected geometric range for the selected (SRS) location is then

$$G_{SRS} = (\tilde{\rho}_{SRS} - c \tilde{t}^s) - d\rho_{SRS} \quad (32)$$

where

$\tilde{\rho}_{SRS}$ is the geometric range from satellite to the selected (SRS) location determined from the broadcast ephemeris,

30 $\tilde{t}^s$ is the satellite clock error determined from the broadcast ephemeris, and

$d\rho_{SRS}$ is the geometric range correction for the selected (SRS) location.

[0062] In this case, the rover does not require precise orbit and clock; broadcast orbit and clock information is sufficient. Spacing between the three arbitrary locations should be large enough and with good geometry to minimize the error of building the linear model.

[0063] In some embodiments the geometric bias per satellite is transmitted to the SRS module (e.g., at the rover) for each epoch of synthetic reference station data to be generated. Eq. (27) and Eq. (28) can be rewritten respectively for the SRS location as

$$\hat{L}_{1_{SRS}} = \lambda_1 \hat{\phi}_{1_{SRS}} = G_{SRS} + I_{1_{SRS}} + T_{SRS} \quad (33)$$

$$\hat{L}_{2_{SRS}} = \lambda_2 \hat{\phi}_{2_{SRS}} = G_{SRS} + \frac{\lambda_2^2}{\lambda_1^2} I_{1_{SRS}} + T_{SRS} \quad (34)$$

[0064] Troposcailing and ionospheric correction for the selected (SRS) location are computed for example using interpolation, least squares adjustment with the troposcailing, and ionospheric correction from the reference stations. While the coordinates of the reference stations are used in troposcailing and residual interpolation, a resolution of 10m to 100m is sufficient for this purpose.

[0065] A method used in some embodiments is the WLIM (Weighted Linear Interpolation Method), in which a linear model centered at SRS location is computed using least square adjustment with the corrections from at least three reference stations.

$$\begin{bmatrix} r_1 \\ r_2 \\ \vdots \\ r_n \end{bmatrix} = \begin{bmatrix} 1 & \Delta N_1 & \Delta E_1 \\ 1 & \Delta N_2 & \Delta E_2 \\ \vdots & \vdots & \vdots \\ 1 & \Delta N_n & \Delta E_n \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} \text{ or } R = AX \quad (35)$$

where

$r_i (i=1,2,...n)$ are troposcailing values at each of n reference stations, or ionospheric correction of a satellite (or satellite to satellite difference of observations at a reference station) for each of n reference stations,

$\Delta N_i, \Delta E_i$ are the north and east coordinate differences, respectively, from the selected (SRS) location to the reference stations, and

a, b, c are estimates for constant part, north and east gradient.

[0066] Using least squares adjustment gives an estimate X where

$$X = (A^T P A)^{-1} A^T P R, \quad (36)$$

where

P is a distance-dependent weighting matrix,

and a corresponding variance of unit weight: σ_0^2 where

$$\sigma_0^2 = \frac{V^T P V}{n - 3} \quad (37)$$

and a covariance matrix Q for X :

$$Q = \sigma_0^2 \cdot (A^T P A)^{-1} \quad (38)$$

[0067] In some embodiments, the troposcoring correction for a selected (SRS) location is obtained by taking the constant part from the model, because the model is centered at the SRS location. For ionospheric correction, this method is applicable only when the ionospheric delay per satellite / per station is computed with Eq(16a).

[0068] In some embodiments, the troposcoring correction and/or ionospheric correction for a selected (SRS) location is/are obtained by taking the difference between the SRS location and the nearest reference station to the SRS location, and adding the respective troposcoring/ionospheric correction of that reference station

$$r_{SRS} = BX + r_1 \quad \text{and} \quad \sigma_{SRS}^2 = BQB^T \quad (39)$$

where

$B = \begin{bmatrix} 0 & \Delta N & \Delta E \end{bmatrix}$ and $\Delta N, \Delta E$ are the respective north coordinate difference and east coordinate difference between the SRS and nearest reference station to SRS location, and

r_1 is the troposcoring/ionospheric correction respectively of the nearest reference station.

Part 3: System Overview

[0069] FIG. 2 schematically illustrates a system 200 in accordance with some embodiments of the invention. Reference stations of a global (worldwide) tracking network, such as reference stations 205, 210, ... 215, are distributed about the Earth with the aim of having substantially continuous observability of most or all GNSS satellites. The position of each reference station is known very precisely, e.g., within less than 2 cm. Each reference station is equipped with an antenna and tracks the GNSS signals transmitted by the satellites in view at that station, such as GNS satellites 220, 225, ... 230. The GNSS signals have codes modulated on each of two or more carrier frequencies. Each reference station of the global network acquires GNSS data 305 representing, for each satellite in view at each epoch, carrier-phase (carrier) observations of at least two carriers, and pseudorange (code) observations of the respective codes modulated on at least two carriers. The reference stations also obtain the broadcast navigation message with almanac and ephemerides of the satellites from the satellite signals. The almanac contains the rough position of all satellites of the GNSS, while the so-called broadcast ephemerides provide more precise predictions (ca. 1 m) of the satellites' positions and the satellites' clock error (ca. 1.5 m) over specific time intervals.

[0070] GNSS data collected at the reference stations of the global network are transmitted via communications channels 235 to a global network processor 240. Global network processor 240 uses the GNSS data from the reference stations of the global network with other information to generate a global correction message containing precise satellite position and clock data, as described for example in United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P). The global correction message is transmitted for use by any number of GNSS rover receivers. The global correction message is transmitted for example as shown in FIG. 2 via communications channel/s 245 and an uplink 250 and a communications satellite 255 for broadcast over a wide area; any other suitable transmission medium may be used including but not limited to radio broadcast or mobile telephone link. Rover 260 is an example of a GNSS rover receiver having a GNSS antenna 265 for receiving and tracking the signals of GNSS satellites in view at its location, and optionally having a communications antenna 270. Depending on the transmission band of the global correction message, it can be received by rover 260 via GNSS antenna 265 or communications antenna 270. The system of FIG. 1 as described thus far is as described in United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

[0071] FIG. 2 shows additional elements of a system in accordance with embodiments of the present invention. Reference stations of a regional (local) tracking network, such as reference stations 280, 282, ... 284, are distributed within a region of the Earth with the aim of observing GNSS satellites when they are visible over the region. The position of each reference station is known very precisely, e.g., within less than 2 cm. Each reference station is equipped with an antenna and tracks the GNSS signals transmitted by the satellites in view at that station, such as GNSS satellites 220, 225, ... 230. Each reference station of the regional network acquires GNSS data representing, for each satellite in view at each epoch, carrier-phase (carrier) observations of at least two carriers, and pseudorange (code) observations of the respective codes modulated on at least two carriers. The regional reference stations typically also obtain the broadcast navigation message with almanac and ephemerides of the satellites from the satellite signals.

[0072] GNSS data collected at the reference stations of the regional network are transmitted via communications channels 288 to a regional network processor 290. Regional network processor 290 uses the GNSS data from the reference stations of the regional network with other information to generate a regional correction message containing correction data as described below. The regional correction message is transmitted for use by any number of GNSS rover receivers within the region of the regional network. The regional correction message is transmitted for example as shown in FIG. 2 via communications channel/s 292 and

an uplink such as uplink 250 and a communications satellite 255; any other suitable transmission medium may be used including but not limited to radio broadcast or mobile telephone link. The regional correction message can also be transmitted using an uplink and/or communications satellite other than those used for the global network message.

5

Part 3: Global Network Corrections

[0073] FIG. 3 is a schematic diagram showing principal components of the process flow 300 of a global network processor 240. Detailed description is provided in United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).
10 Data from the global network of reference stations are supplied without corrections as GNSS data 305 or after correction by an optional data corrector 310 as corrected GNSS data 315, to four processors: a code clock processor 320, a Melbourne-Wübbena (MW) bias processor 325, an orbit processor 330, and a phase clock processor 335.

[0074] Data corrector 310 optionally analyzes the raw GNSS data 305 from each reference
15 station to check for quality of the received observations and, where possible, to correct the data for cycle slips, which are jumps in the carrier-phase observations occurring, e.g., each time the receiver has a loss of lock. Commercially-available reference stations typically detect cycle slips and flag the data accordingly. Cycle slip detection and correction techniques are summarized, for example, in *G. Seeber, SATELLITE GEODESY*, 2nd Ed. (2003)
20 at pages 277-281. Data corrector 310 optionally applies other corrections. Though not all corrections are needed for all the processors, they do no harm if applied to the data. For example as described below some processors use a linear combination of code and carrier observations in which some uncorrected errors are canceled in forming the combinations.

[0075] Observations are acquired epoch by epoch at each reference station and transmitted
25 with time tags to the global network processor 240. For some stations the observations arrive delayed. This delay can range between milliseconds and minutes. Therefore an optional synchronizer 318 collects the data of the corrected reference station data within a predefined time span and passes the observations for each epoch as a set to the processor. This allows data arriving with a reasonable delay to be included in an epoch of data.

[0076] The MW bias processor 325 takes either uncorrected GNSS data 305 or corrected
30 GNSS data 315 as input, since it uses the Melbourne-Wübbena linear combination which cancels out all but the ambiguities and the biases of the phase and code observations. Thus only receiver and satellite antenna corrections are important for the widelane processor 325. Based on this linear combination, one MW bias per satellite and one widelane ambiguity per
35 receiver-satellite pairing are computed. The biases are smooth (not noisy) and exhibit only some sub-daily low-rate variations. The widelane ambiguities are constant and can be used as

long as no cycle slip occurs in the observations on the respective satellite-receiver link. Thus the bias estimation is not very time critical and can be run, e.g., with a 15 minute update rate. This is advantageous because the computation time grows with the third power of the number of stations and satellites. As an example, the computation time for a global network with 80 stations can be about 15 seconds. The values of fixed widelane ambiguities 340 and/or widelane biases 345 are optionally used in the orbit processor 330 and/or the phase clock processor 335, and/or are supplied to a scheduler 355. MW bias processor 325 is described in detail in Part 7 of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P), attached as Appendix A.

[0077] Some embodiments of orbit processor 330 are based on a prediction-correction strategy. Using a precise force model and starting with an initial guess of the unknown values of the satellite's parameters (initial position, initial velocity and dynamic force model parameters), the orbit of each satellite is predicted by integration of the satellite's nonlinear dynamic system. The sensitivity matrix containing the partial derivatives of the current position to the unknown parameters is computed at the same time. Sensitivities of the initial satellite state are computed at the same time for the whole prediction. That is, starting with a prediction for the unknown parameters, the differential equation system is solved, integrating the orbit to the current time or into the future. This prediction can be linearized into the direction of the unknown parameters. Thus the partial derivatives (sensitivities) serve as a measure of the size of the change in the current satellite states if the unknown parameters are changed, or vice versa.

[0078] In some embodiments these partial derivatives are used in a Kalman filter to improve the initial guess by projecting the GNSS observations to the satellite's unknown parameters. This precise initial state estimate is used to again integrate the satellite's dynamic system and determine a precise orbit. A time update of the initial satellite state to the current epoch is performed from time to time. In some embodiments, ionospheric-free ambiguities are also states of the Kalman filter. The fixed widelane ambiguity values 340 are used to fix the ionospheric-free ambiguities of the orbit processor 330 to enhance the accuracy of the estimated orbits. A satellite orbit is very smooth and can be predicted for minutes and hours. The precise orbit predictions 350 are optionally forwarded to the standard clock processor 320 and to the phase clock processor 335 as well as to a scheduler 355.

[0079] Ultra-rapid orbits 360, such as IGU orbits provided by the International GNSS Service (IGS), can be used as an alternative to the precise orbit predictions 355. The IGU orbits are updated four times a day and are available with a three hour delay.

[0080] Standard clock processor 320 computes code-leveled satellite clocks 360 (also called standard satellite clocks), using GNSS data 305 or corrected GNSS data 315 and using precise

orbit predictions 355 or ultra-rapid orbits 365. Code-leveled means that the clocks are sufficient for use with ionospheric-free code observations, but not with carrier-phase observations, because the code-leveled clocks do not preserve the integer nature of the ambiguities. The code-leveled clocks 360 computed by standard clock processor 320 represent clock-error differences between satellites. The standard clock processor 320 uses the clock errors of the broadcast ephemerides as pseudo observations and steers the estimated clocks to GPS time so that they can be used to compute, e.g., the exact time of transmission of a satellite's signal. The clock errors change rapidly, but for the use with code measurements, which are quite noisy, an accuracy of some centimeter is enough. Thus a "low rate" update rate of 30 seconds to 60 seconds is adequate. This is advantageous because computation time grows with the third power of number of stations and satellites. The standard clock processor 325 also determines troposphere zenith delays 365 as a byproduct of the estimation process. The troposphere zenith delays and the code-leveled clocks are sent to the phase clock processor 335. Standard clock processor 320 is described in detail in Part 6 of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

[0081] The phase clock processor 335 optionally uses the fixed widelane ambiguities 340 and/or MW biases 345 from widelane processor 325 together with the troposphere zenith delays 365 and the precise orbits 350 or IGU orbits 360 to estimate single-differenced clock errors and narrowlane ambiguities for each pairing of satellites. The single-differenced clock errors and narrowlane ambiguities are combined to obtain single-differenced phase-leveled clock errors 370 for each satellite (except for a reference satellite) which are single-differenced relative to the reference satellite. The low-rate code leveled clocks 360, the troposphere zenith delays 365 and the precise orbits 350 or IGU orbits 360 are used to estimate high-rate code-leveled clocks 375. Here, the computational effort is linear with the number of stations and to the third power with the number of satellites. The rapidly-changing phase-leveled clocks 370 and code-leveled clocks 375 are available, for example, with a delay of 0.1 sec – 0.2 sec. The high-rate phase-leveled clocks 370 and the high-rate code-leveled clocks 375 are sent to the scheduler 355 together with the MW biases 340. Phase clock processor 340 is described in detail in Part 9 of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

[0082] Scheduler 355 receives the orbits (precise orbits 350 or IGU orbits 360), the MW biases 340, the high-rate phase-leveled clocks 370 and the high-rate code-leveled clock 375. Scheduler 355 packs these together and forwards the packed orbits and clocks and biases 380 to a message encoder 385 which prepares a correction message 390 in compressed format for transmission to the rover. Transmission to a rover takes for example about 10 sec – 20 sec over a satellite link, but can also be done using a mobile phone or a direct internet connection

or other suitable communication link. Transmission to regional network processor 290 is also via a suitable communication link. Scheduler 355 and message encoder are described in detail in Part 10 of United States Provisional Application for Patent No. 61/277,184 filed 19 September 2009 (TNL A-2585P).

5

Part 3: Regional Network Corrections

[0083] FIG. 4 schematically illustrates a regional network processor 400, such as regional network processor 290, in accordance with some embodiments of the invention. A data synchronizer 405 receives reference data from each reference station of the regional network, such as reference data 410, 415, ... 420 from respective reference stations 280, 284, ... 286. Synchronizer 405 also receives precise satellite orbits and clocks 425 from global network processor 300 or any other available source. Synchronizer 405 also optionally receives MW biases 430, such as MW biases 340 from global network processor 300; if MW biases are not supplied to regional network processor 400 from an external source, these are optionally estimated in regional network processor 400.

15

[0084] Observations are acquired epoch by epoch at each regional network reference station and transmitted with time tags to iterative filter(s) 440. For some stations the observations may arrive delayed. This delay can range between milliseconds and minutes. Therefore the optional synchronizer 435 collects the regional network reference station data within a predefined time span and passes the observations for each epoch as a set to iterative filter(s) 440. This allows data arriving with a reasonable delay to be included the processing of an epoch of data. Iterative filter(s) 440 can be implemented using least squares, using a single Kalman filter or, for better computing efficiency, as factorized filters using techniques described in United States Patent No. 7,432,853 (TNL A-1403), United States Patent Application Publication US 2009/0224969 A1 (TNL A-1743) and/or United States Patent Application Publication US 2009/0027264 A1 (TNL A-1789). If implemented as optional factorized filters, the synchronized data set 435 is supplied for example to one or more banks of code/carrier filters 442 which produce estimates for the code/carrier combinations and associated statistical information 444, to ionospheric filters 446 which produce estimates for the ionospheric combinations and associated statistical information 448, to a geometric filter 450 which produces an estimate for the geometric combination and associated statistical information 452, and the estimates are combined in a combiner 455. Quintessence filters (not shown) may optionally be used if the reference station data are obtained from GNSS signals having three or more carriers, as described in United States Patent No. 7,432,853 (TNL A-1403).

20

25

30

35

[0085] The array of estimates and associated statistical information 458 from iterative filter(s) 440, which includes float-solution ambiguity values, is supplied to a “fixing” element 460. Some embodiments of “fixing” element 460 employ any suitable techniques known in the art, such as simple rounding, bootstrapping, integer least squares based on the Lambda method, or Best Integer Equivariant. See for example P. Teunissen et al.; *GNSS Carrier Phase Ambiguity Resolution: Challenges and Open Problems*, In M.G. Sideris (ed.); Observing our Changing Earth, International Association of Geodesy Symposia 133, Springer Verlag Berlin-Heidelberg 2009 and Verhagen, Sandra, *The GNSS integer ambiguities: estimation and validation*, Publications on Geodesy 58, Delft, 2005. 194 pages, ISBN-13: 978 90 6132 290 0. ISBN-10: 90 6132 290 1. See also the discussion of ambiguity fixing in United States Patent No. 7,432,853. The term “fixing” as used here is intended to include not only fixing of ambiguities to integer values using techniques such as rounding, bootstrapping and Lambda search, but also to include forming a weighted average of integer candidates to preserve the integer nature of the ambiguities if not fixing them to integer values. The weighted average approach is described in detail in unpublished International Patent Applications PCT/US/2009/004471, PCT/US/2009/004472, PCT/US/2009/004473, PCT/US/2009/004474 and PCT/US/2009/004476 filed 5 August 2009 (TNL A-2339PCT) and United States Provisional Application for Patent No. 61/189,382 filed 19 August 2008 (TNL A-2339P).

[0086] A regional correction data generation element 465 prepares regional correction data 470 comprising, for example, at least one code bias per satellite, and at least one of an ionospheric delay per satellite at multiple regional network stations, an optional ionospheric phase bias per satellite, and non-ionospheric corrections. The non-ionospheric corrections comprise, for example, a tropospheric delay per regional network station and/or a geometric correction per satellite.

[0087] FIG. 5 schematically illustrates a regional network process 465 for generating the regional correction data 470 from correction data 500 in accordance with some embodiments of the invention. At least one code bias per satellite 505 is obtained at 510. The code bias per satellite can be determined in the global network processor, in the regional network processor, or in another processor. An ionospheric delay 515 over a region, which may be all or a part of the region of the regional network, is obtained at 520, and optionally an ionospheric phase bias per satellite. The ionospheric delay 515 may be determined from an ionospheric model or by estimating ionospheric delay per satellite per station. A tropospheric delay 525 over a region, which may be all or a part of the region of the regional network, is obtained at 530. The tropospheric delay 525 may be determined for example by estimating a zenith total delay (ZTD) per regional network station in the regional network processor. A phase-leveled

geometric correction per satellite 535 is obtained at 540. The phase-leveled geometric correction per satellite is estimated, after fixing ambiguities, in the global network processor or in the regional network processor. Further details of the regional correction 470 data are explained below.

5

Part 3: Precise Navigation/ Positioning With Regional Network Corrections

[0088] FIG. 6 schematically illustrates an augmented precise navigation/positioning scenario 600 in accordance with some embodiments of the invention. Global network processor 240 delivers global correction data 390 to regional network processor 290. Global correction data comprises, for example, phase-leveled clocks 370, code-leveled clocks 365, MW biases 345 and satellite orbit position and velocity information 350. Regional network processor 290 also receives data from regional network stations and generates regional correction data 470. Regional correction data comprises, for example, MW biases (MW biases 345 from global correction message 390 or MW biases estimated in regional network processor 290 or MW biases obtained from any other available source), a phase-leveled geometric correction per satellite 535 estimated in regional network processor 290, ionospheric delay per satellite per station, 515 and optionally an ionospheric phase bias per satellite, and tropospheric delay per station 525.

[0089] Regional correction data 470 from server side processing 605 is delivered, e.g., as encoded regional correction data 480, for use in rover side processing 610. GNSS signals from GNSS satellites 615, 620, 625 are observed by rover receiver 630 which provides GNSS observation data 635. An optional navigation engine 640 estimates a rough position of the antenna of rover receiver 630, typically without the use of corrections. This rough position, or an approximate position of rover receiver 630 known from another source, is used as an approximate rover position 645 in preparing regional corrections (e.g., 715), appropriate to the approximate position 645. A time tag 650 is associated with the approximate rover position 650. The GNSS observation data 635, approximate rover position 645 and time tag 650, and regional correction data 470 (with MW biases optionally coming directly from global correction data 390) are supplied to a rover data corrector 655. Rover data corrector 655 applies the regional correction data 470 with MW biases to the GNSS observation data 635 to obtain corrected rover data 660 for the approximate rover position 645 which corresponds in time with the GNSS data 635. A non-differential processor 665, such as a Precise Point Positioning (PPP) engine, estimates a precise rover position 670 from the corrected rover data 660.

[0090] While the rover data corrector 655 and non-differential processor 665 are shown in FIG. 6 as being located within the rover side processing 610, either or both of these may be

located elsewhere, such as at server side processing 605. Such a configuration may be advantageous in situations where the rover receiver has limited processing power and has two-way communication with a remotely-located computer having available processing capacity and/or in tracking applications (e.g., tracking location of mobile objects or persons carrying the rover receiver 630) where knowledge of the rover receiver's precise position is needed at a location remote from the rover receiver.

[0091] FIG. 7 schematically illustrates augmented precise navigation/ positioning in accordance with some embodiments of the invention. GNSS data 710 (e.g., GNSS data 635) comprising code and carrier observations are obtained from the rover receiver at 705.

Regional correction data 470 comprising one or more code biases per satellite, together with ionospheric corrections and/or non-ionospheric corrections and MW biases, are obtained at 710. Regional corrections 720 are prepared at 725. GNSS data 710 and regional corrections 720 are used at 730 to determine a precise rover location 735.

[0092] FIG. 8 schematically illustrates augmented precise navigation/ positioning with differential processing in accordance with some embodiments of the invention. Global network processor 240 delivers global correction data 390 to regional network processor 290. Global correction data comprises, for example, phase-leveled clocks 370, code-leveled clocks 365, MW biases 345 and satellite orbit position and velocity information 350. Regional network processor 290 also receives data from regional network stations and generates regional correction data 470. Regional correction data comprises, for example, MW biases (MW biases 345 from global correction message 390 or MW biases estimated in regional network processor 290 or MW biases obtained from any other available source), a phase-leveled geometric correction per satellite 535 estimated in regional network processor 290, ionospheric delay per satellite per station 515, and optionally an ionospheric phase bias per satellite, and tropospheric delay per station 525.

[0093] Regional correction data 470 from server side processing 805 is delivered, e.g., as encoded regional correction data 480, for use in rover side processing 810. GNSS signals from GNSS satellites 815, 820, 825 are observed by rover receiver 830 which provides GNSS observation data 835. An optional navigation engine 840 estimates a rough position of the antenna of rover receiver 830, typically without the use of corrections. This rough position, or an approximate position of rover receiver 830 known from another source, is taken as a synthetic reference station (SRS) location 845. A time tag 850 is associated with SRS location 845. A synthetic reference station module 855 uses the current SRS location 845 and current regional correction data 470 to construct a set of synthetic reference station observations 860 for processing of each epoch of GNSS data 835 in a differential processor 865. Differential processor 865 is, for example, a conventional real time kinematic (RTK)

positioning engine of a commercially available GNSS receiver. Differential processor uses the SRS observations 860 and the GNSS data 835 to determine a precise rover position 870, for example at each epoch of GNSS data 835.

[0094] In some embodiments the MW biases 345 from global network processor 240 are passed through the regional network processor 290 and provided to SRS module 855 as a part of regional correction data 470. In some embodiments the MW biases 345 from global network processor 240 are passed directly from global network processor 240 to SRS module 855 as a part of global correction data 390, e.g., if the rover has the capability to receive global correction data 390 in addition to regional correction data 480. In some embodiments the MW biases are estimated by the regional network processor 290 and provided to SRS module 855 as a part of regional correction data 470.

[0095] While the SRS module 855 and differential processor 865 are shown in FIG. 8 as being located within the rover side processing 810, either or both of these may be located elsewhere, such as at server side processing 805. Such a configuration may be advantageous in situations where the rover receiver has limited processing power and has two-way communication with a remotely-located computer having available processing capacity and/or as in tracking applications where knowledge of the rover receiver's position is needed at a location remote from the rover receiver.

[0096] FIG. 9 schematically illustrates augmented precise navigation/ positioning with differential processing in accordance with some embodiments of the invention. In this example the server side processing includes the SRS module. Global network processor 240 delivers global correction data 390 to regional network processor 290. Global correction data comprises, for example, phase-leveled clocks 370, code-leveled clocks 365, MW biases 345 and satellite orbit position and velocity information 350. Regional network processor 290 also receives data from regional network stations and generates regional correction data 470. Regional correction data comprises, for example, MW biases (MW biases 345 from global correction message 390 or MW biases estimated in regional network processor 290 or MW biases obtained from any other available source a phase-leveled geometric correction per satellite 535 estimated in regional network processor 290, ionospheric delay per satellite per station 515, and tropospheric delay per station 525.

[0097] GNSS signals from GNSS satellites 915, 920, 925 are observed by rover receiver 930 which provides GNSS observation data 935. An optional navigation engine 940 estimates a rough position of the antenna of rover receiver 930, typically without the use of corrections. This rough position, or an approximate position of rover receiver 930 known from another source, is taken as a synthetic reference station (SRS) location 945. A time tag 950 is associated with SRS location 945. Server side processing 905 includes an SRS module 955

which uses the current SRS location 945 and current regional correction data 470 to construct a set of synthetic reference station observations 960 for processing of each epoch of GNSS data 935 in a differential processor 965. Differential processor 865 is, for example, a conventional real time kinematic (RTK) positioning engine of a commercially available GNSS receiver. Differential processor uses the SRS observations 960 and the GNSS data 935 to determine a precise rover position 970, for example at each epoch of GNSS data 935.

[0098] Sources of an approximate position of rover receiver to use as SRS location 845 or 945 include, without limitation, (a) the autonomous position of the rover receiver as determined by navigation engine 840 or 940 using rover data 835, (b) a previous precise rover position such as a precise rover position determined for a prior epoch by differential processor 865 or 965, (c) a rover position determined by an inertial navigation system (INS) collocated with the rover, (d) the position of a mobile phone (cell) tower in proximity to a rover collocated with a mobile telephone communicating with the tower, (e) user input such as a location entered manually by a user for example with the aid of keyboard or other user input device, and (f) any other desired source.

[0099] Regardless of the source, some embodiments update the SRS location 845 or 945 from time to time. The SRS location 845 or 945 is updated, for example: (a) never, (b) for each epoch of rover data, (c) for each n^{th} epoch of rover data, (d) after a predetermined time interval, (e) when the distance between the SRS location 845 or 945 and the approximate rover antenna position from navigation engine 840 or 940 exceeds a predetermined threshold, (f) when the distance between the approximate rover antenna position and the precise rover position exceeds a predetermined threshold, (g) for each update of the approximate rover antenna position, or (h) for each update of the precise rover antenna position 870 or 970. In some embodiments the SRS location 945 is not the same as the autonomous as the autonomous position solution, but somewhere close to it.

[00100] FIG. 10 schematically illustrates augmented precise navigation/ positioning with differential processing accordance with some embodiments of the invention. At 1005 the SRS location and time tag information 1010 are obtained. At 1015 the SRS location is verified as current, for example by comparing its time tag with a time tag of the current epoch of rover observations to be processed. At 1025 the rover corrections 1030 for the current SRS location are determined from the current SRS location and the regional correction data 470. At 1035 the current SRS observations 1040 are constructed from the rover corrections 1030. At 1045 the precise rover location 730 is determined by differential processing of the current SRS observations 1040 and the GNSS data 635.

[00101] FIG. 11 schematically illustrates construction of synthetic reference station observations in accordance with some embodiments of the invention. At 1105 the regional

correction message 1110 received from a transmission channel such as communications satellite 255 is decoded. The decoding unpacks regional correction data elements comprising a geometric correction (code bias) per satellite 1115, a troposcoring value (Zenith Total Delay) per station 1120 and an ionospheric correction per satellite per station, and optionally ionospheric phase bias per satellite 1125. An SRS location 1130 is obtained as described above. Satellite orbits and clocks 1110 are obtained from the broadcast GNSS satellite navigation message or precise satellite orbit and clock information is optionally retrieved at 1140 by decoding global correction message 390. MW biases 1142 are obtained from regional correction message 1110 via regional correction message decoder 1105 or MW biases 1144 are obtained from global correction message 390 via global correction message decoder 1140.

[00102] A module 1145 constructs ionospheric-free phase observations 1150 for satellites in view at the SRS location using the SRS location information 1130 and the satellite orbits and clocks information 1135 to compute a range and the geometric correction per satellite 1115 to correct the computed range (Eq.32). A module 1155 determines a tropospheric delay 1160 for the SRS location from the troposcoring per station 1120 (Eq. 36,Eq. 39). A module 1165 determines an ionospheric delay 1170 for the SRS location from the ionospheric correction per satellite per station data optionally ionospheric phase bias per satellite 1125 (Eq.36,Eq.39). At 1175 the SRS carrier-phase observations 1180 are constructed for two (or more) carrier frequencies by combining the ionospheric free-phase observations 1150 with the tropospheric correction 1160 for the SRS location and the ionospheric correction for the SRS location 1175 (Eq. 33,Eq.34). At 1185 the SRS code observations 1190 are constructed by combining the SRS carrier-phase observations 1180 with MW biases 1142 or MW biases 1144 (Eq. 25,Eq.26). The SRS carrier observations 1180 and SRS code observations 1190 comprise the SRS observations 1095 at each epoch.

Part 4: Correction for Atmospheric Effects

[00103] FIG. 12 schematically illustrates an ionospheric shell 1200 and a portion 1205 of a tropospheric shell surrounding the Earth 1210, with ground-based reference stations 1220, 1225, 1230, ... 1235 of a network each receiving signals from GNSS satellites 1260, 1265, ... 1270. For convenience of illustration, only the portion 1205 of the tropospheric shell surrounding reference station 1220 is shown. The troposphere has a depth of, for example zero to about 11km. Tropospheric delay affects the signals received by each reference station in a manner depending on atmospheric temperature, pressure and humidity in the vicinity of the reference station, as well as the elevation of the satellite relative to the

reference station. The error is about 1mm per meter at ground level, such that the last meter of the signal path to the reference station gives about 1mm of error in the tropospheric model.

[00104] Various techniques are known for modeling tropospheric path delay on the signals. See, for example, B. HOFMANN-WELLENHOF *et al.*, GLOBAL POSITIONING SYSTEM: THEORY AND PRACTICE, 2d Ed., 1993, section 6.3.3, pp. 98-106. Tropospheric scaling (tropo-scaling) which lumps the atmospheric parameters into one tropo-scaling parameter can be implemented in at least three ways. A first approach is to model Zenith Total Delay (ZTD) representing tropospheric delay in a vertical direction relative to the reference station as a value representing range error δr , e.g., 2.58 meters. A second approach is to model the sum of one plus a scaling factor $(1 + S)$ such that tropospheric delay in the vertical direction $T' = (1 + S) T$, where T is a constant, e.g., $1 + S = 1.0238$. A more convenient approach is to model S directly, e.g., $S = 2.38\%$. For purposes of the present invention, it is sufficient to treat as “tropospheric effect” all that affects different signal frequencies in the same way (non-dispersive).

[00105] FIG. 13 illustrates a slanted ray path from a satellite to a receiver passing through the troposphere. Except when a satellite is directly over a reference station, signal rays penetrate the atmosphere in a slant path from satellite to receiver as shown in FIG. 13, such as a straight-line path 1310 from satellite 1260 to reference station 1220. The slant path of the signal ray from a given satellite to each reference station penetrates the troposphere at an angle α which is different for each satellite in view at the station. The tropospheric mapping function is thus different for each satellite-to-reference-station combination. The effect of the different slant angles can be compensated by relating the geometry-dependent zenith delay $T\alpha$ with a geometry-independent T_{90}° (Vertical T) by a mapping function $m(\alpha)$: $T\alpha = m(\alpha) T_{90}^\circ$.

[00106] Except when a satellite is directly over a reference station, signal rays penetrate the ionosphere in a slant path from satellite to receiver as shown in FIG. 14, such as straight-line path 1405 from satellite 1260 to reference station 1220. This slant path is explicitly accounted for by the so-called mapping function $f_{\text{mapping}}(\zeta) = 1/\cos(\zeta)$, where ζ is the angle of the signal ray with the line perpendicular to the ionospheric sphere through the piercepoint (e.g., line 1410). Since the slant path of the signal ray from a given satellite to each reference station penetrates the ionosphere at a different angle, the angle is different for each reference station. The mapping function is thus different for each satellite-to-reference-station combination. The effect of the different slant angles can be compensated by relating the geometry-dependent Total Electron Content (TEC) with a geometry-independent VTEC (Vertical TEC) by $TEC/f_{\text{mapping}}(\zeta) = TEC \cos(\zeta) = VTEC$. As shown for example in FIG. 14 with respect to reference station 1220 and satellite 1260, the TEC determined along

slant path 1405 corresponds to the VTEC along the line 1410 perpendicular to the ionospheric sphere 1415 at piercepoint 1420.

[00107] With the relative coordinates that were introduced above and the concept of the mapping function, the ionospheric advance across the network area can be written as (here the uppercase i and j are to be understood as exponents, not indices)

$$I(\Delta\lambda, \Delta\varphi) = m(\Delta\lambda, \Delta\varphi) \left(\sum_{i,j=0}^{\infty} \alpha_{i,j} \Delta\lambda^i \Delta\varphi^j \right). \quad (40)$$

That is, the ionospheric advance across the network area is expressed in terms of its Taylor series (or any other set of orthogonal functions, such as spherical Bessel functions). For most purposes, and as illustrated here, the expansion can be stopped at first order, and the terminology $a_{1,0} = a_\lambda$ and $a_{0,1} = a_\varphi$ can be introduced. The expression $a_{0,0} = I_0$ is the ionospheric advance at the reference point, while a_λ and a_φ are the gradients in the ionosphere in the relative coordinates. The ionosphere at the piercepoints is therefore expressed as

$$I_n^m = m_n^m \left(I_0^m + a_\lambda^m \Delta\lambda_n^m + a_\varphi^m \Delta\varphi_n^m \right). \quad (41)$$

Thus for each satellite m in view the parameters $(I_0^m, a_\lambda^m, a_\varphi^m)$ characterize the ionosphere across the network area. Those parameters are estimated, together with the carrier-phase integer ambiguity and multipath states. Generally, if the expansion Eq. (39) is carried to k -th order, the number of states introduced for the ionosphere is $(k+1)(k+2)/2$. The other terms of Eq.(39) $(m_n^m, \Delta\lambda_n^m, \Delta\varphi_n^m)$ are given by the geometry of the network and the position of satellite m .

[00108] FIG. 15 illustrates how the ionosphere parameters $(I_0^m, a_\lambda^m, a_\varphi^m)$ describe the ionosphere at a piercepoint relative to a reference point. The ionosphere has a TEC of I_0^m at the reference point, with a slope a_λ^m in angular direction λ and a slope a_φ^m in angular direction φ . In the example of FIG 15, the TEC 1500 at piercepoint 1505 is the sum of a contribution 1510 equal to I_0^m , a contribution 1520 based on slope a_λ^m and the angular distance of piercepoint 1505 from reference point 1525 in direction λ , and a contribution 1530 based on slope a_φ^m and the angular distance of piercepoint 1505 from reference point 1525 in direction φ .

[00109] While a linear treatment of the ionosphere delivers excellent availability, reliability is increased with an even more realistic model which takes into account the thickness of the ionosphere. As is known (for example from D. BILITZA, *International*

Reference Ionosphere 2000, RADIO SCIENCE 2 (36) 2001, 261), the electron density of the ionosphere has a certain profile $f(h)$ as a function of altitude h which peaks sharply at a height between 300-400 kilometers above ground. To calculate the electron content that a ray experiences from satellite m to station n one would calculate the integral

$$I_n^m \propto \int_{(x^m, y^m, z^m)}^{(x_n, y_n, z_n)} ds f(h), \quad (41)$$

where s is the measure along the direct line of sight between station and satellite. Notice how for the simple shell model already considered, $f(h) = \Delta(h - h_0)$ (Dirac Delta distribution),

this expression returns the previous mapping function as $\left. \frac{ds}{ds} \right|_{h_0} = \frac{1}{\cos \varphi}$.

[00110] Using suitable parameters for $f(h)$, the integral for all station-satellite pairs can be numerically computed at each epoch. For practical purposes an approximation in terms of a box profile is fully sufficient and delivers improvements over the shell model. It is further assumed that the gradients in the ionosphere do not depend on altitude. This assumption can easily be relaxed by adding further gradient states for different altitudes. That the finite thickness of the ionosphere is an important feature of the model can be understood by picturing the entry and exit point of the ray of a low elevation satellite, e.g., as shown in FIG. 8 of United States Patent Application Publication US 2009/0224969 A1. If the thickness of the ionospheric shell is 200 kilometers, the entry point and exit point might be separated by some 1000 kilometers. With typical gradients of $a_\lambda, a_\phi \sim 10^{-3}$ m/km, the contributions to the calculation of ionospheric advance differ greatly from entry point to exit point.

[00111] FIG. 16 schematically illustrates troposcalsing.

[00112] FIG. 19 schematically illustrates ionospheric delay IPBS at a physical base station location PBS and ionospheric delay ISRS at a synthetic reference station location SRS.

Part 5: Message Encoding & Decoding

[00113] It will be recalled that an objective of making regional correction data 470 available for processing of rover observations is to enable reconstruction of regional network observations and/or construction of synthetic reference station observations based on the regional network observations. Some embodiments mitigate the bandwidth required and/or speed the rover processing by encoding the regional correction data, e.g., as at 475 in FIG. 4.

[00114] FIG. 20 schematically illustrates a correction message encoding scheme in accordance with some embodiments. Regional correction data 470 is divided into network elements 2005 which apply to the entire regional network of, for example 80 reference stations, and cluster elements 2010 which apply to subsets ("clusters") of, for example, up to

16 reference stations of the regional network. The encoded regional correction data 480 is then segmented into a network message 2015 containing the network elements and a series of cluster messages 2020, 2025, 2030, ... 2035 containing cluster elements of respective station clusters 1, 2., 3, ... n .

5 **[00115]** The network elements 2005 include, for example, a time tag, a geometric correction per satellite, a location of an arbitrary point in the network to which corrections are referenced, MW biases, and the number of cluster messages to follow in the epoch, and optionally an ionospheric phase bias per satellite. The cluster elements 2010 include, for example, a tropo scaling value per station, an ionospheric correction per station per satellite, and the station locations. Station height is not needed if corrections are referenced to a standard elevation which is known to a rover receiving the correction data. The station locations need not be physical station locations, but may instead be virtual station locations for which the corrections are estimated from the observations at physical reference stations of the regional network.

15 **[00116]** FIG. 21 schematically illustrates clusters of regional network stations: cluster 1 at 2105, cluster 2 at 2110, cluster 3 at 2115, cluster 4 at 2120. Each cluster in this simplified example has four stations, though the number of stations is a matter of design choice. Cluster 1 has stations 1-1, 1-2, 1-3 and 1-4; cluster 2 has stations 12-1, 2-2, 2-3 and 2-4; cluster 3 has stations 3-1, 3-2, 3-3 and 3-4; and cluster 4 has stations 4-1, 4-2, 4-3 and 4-4. The cluster elements of clusters 1, 2, 3 and 4 are used respectively to construct cluster message 2125, 2130, 2135 and 2140.

25 **[00117]** In some embodiments, a regional correction message epoch has one network message 2105 followed by a series of cluster messages 2020-2035, the number and sequence of which may vary from epoch to epoch. In some embodiments, each correction message epoch has a network message and a subset of cluster messages, with the clusters in the subset rotating over a series of epochs. In some embodiments, the order of clusters in the correction message epoch is based on an expected or estimated or known number of rovers physically located in the cluster. For example:

Network Message	Cluster 1 Message	Cluster 2 Message	-- -- --	Cluster n Message

30 **[00118]** A rover does not need all the cluster messages to construct a synthetic reference station correction for its approximate location. FIG. 22 shows an example in which a rover 2205 is located within a regional network having clusters 2210, 2220, 2230 and 2240, each having a respective network station (or virtual network station) 2215, 2225, 2235, 2245. Rover 2205 is surrounded by network stations 2215, 2225 and 2235 which are well

distributed around it and within a suitable radius for preparing corrections for the rover's location from their observations (or virtual observations). The observations of network station 2245 are not needed by rover 2205 at its current location. If the rover moves for example well into cluster 2210 where it no longer needs cluster elements from clusters 2220 or 2230, the rover can use the cluster elements only from cluster 2210.

[00119] In some embodiments, rover 2205 uses the location information of the network message to construct a list of clusters, compares its approximate current location with the list to determine which cluster messages are needed to construct synthetic reference station corrections appropriate to its current location, and retrieves the cluster elements from the corresponding cluster messages. This approach can save memory, processor time, and other resources when processing rover observations to determine the precise rover location.

[00120] As discussed above with reference to Eq. (30), Eq. (31) and Eq. (32), the geometric correction term can be transmitted for three arbitrary locations in the network. Alternatively, the geometric correction term can be transmitted for a single arbitrary location in the network, along with the delta (difference from this term) for each of two other arbitrary locations in the network. From these geometric correction terms (or geometric correction term plus deltas), the rover constructs a linear model to estimate the geometric correction applicable to its approximate location.

[00121] FIG. 17 shows for example three arbitrary locations 1705, 1710, 1715 for which the geometric correction terms are determined in the network processor. Spacing between the three arbitrary locations should be large enough (e.g., 5 degrees of latitude and 5 degrees of longitude) and with good geometry to minimize error when building a linear model for a rover location 1720 within the network. FIG. 18 schematically illustrates a linear model for determining the geometric correction 1820 at rover location 1720 from the geometric corrections 1805, 1810, 1815 for a given satellite at respective arbitrary locations 1705, 1710, 1715. This approach helps to minimize bandwidth by reducing the number of geometric correction values needed to construct the corrections needed at the rover.

[00122] In some embodiments the regional network processing is carried out independently by multiple regional network processors to provide redundancy. Operating the regional network processors independently (and possibly with non-identical sets of network station observations) means that biases and scalings may differ from between regional network processors. In some embodiments a network message includes a processor identifier so that the rover will know to react appropriately if its source of network messages changes, e.g., by resetting its filters to avoid using incompatible biases and scalings. Some embodiments include a cycle slip indicator to signal the rover that a cycle slip has occurred on a satellite in the regional network processing, so that the rover can reset the ambiguity values

in its filters. To further save transmission bandwidth, some embodiments use an optional ionospheric correction general model from which the cluster message gives delta (difference) values; the rover uses the optional model from the network message with the difference values from the cluster message(s) to construct the ionospheric correction for the rover's approximate location, e.g., for the SRS location.

[00123] Some embodiments have a network correction message structured as follows:

# of items	description
1	processor id
3 (or 1+3)	3 arbitrary locations (lat, long), [or 1 arbitrary location plus delta to other two locations]
3	1 geometric correction per satellite for each of 3 arbitrary locations
3 (optional)	optional iono correction general model from which cluster message gives deltas
1	cycle slip indicator (CTC)

[00124] Some embodiments have cluster messages structured as follows (for n satellites and with m stations per cluster):

# of items	description
1	time tag
m	station position (B,L) (lat,lon)
m	tropo scaling
$m \times n$	iono correction
m	site iono bias

Part 6: Receiver and Processing Apparatus

[00125] FIG. 23 is a schematic diagram of a computer system in accordance with some embodiments of the invention. Computer system 2320 includes one or more processors 2330, one or more data storage elements 2335, program code 2340 with instructions for controlling the processor(s) 2330, and user input/output devices 2445 which may include one or more output devices 2350 such as a display or speaker or printer and one or more devices 2355 for receiving user input such as a keyboard or touch pad or mouse or microphone.

[00126] FIG. 24 is a block diagram of a typical integrated GNSS receiver system 2400 with GNSS antenna 2405 and communications antenna 2410. The Trimble R8 GNSS System is an example of such a system. Receiver system 2400 can serve as a rover or base station or reference station. Receiver system 2400 includes a GNSS receiver 2415, a computer system 2420 and one or more communications links 2425. Computer system 2420 includes one or more processors 2430, one or more data storage elements 2435, program code

2440 with instructions for controlling the processor(s) 2430, and user input/output devices
2445 which may include one or more output devices 2450 such as a display or speaker or
printer and one or more devices 2455 for receiving user input such as a keyboard or touch pad
or mouse or microphone.

5

Part 7: General Remarks

[00127] The inventive concepts can be employed in a wide variety of processes and
equipment. Some exemplary embodiments will now be described. It will be understood that
these are intended to illustrate rather than to limit the scope of the invention.

10

[00128] Those of ordinary skill in the art will realize that the detailed description of
embodiments of the present invention is illustrative only and is not intended to be in any way
limiting. Other embodiments of the present invention will readily suggest themselves to such
skilled persons having the benefit of this disclosure. For example, while a minimum-error
combination is employed in the examples, those of skill in the art will recognize that many
combinations are possible and that a combination other than a minimum-error combination
can produce acceptable if less than optimum results; thus the claims are not intended to be
limited to minimum-error combinations other than where expressly called for. Reference is
made in detail to implementations of the present invention as illustrated in the accompanying
drawings. The same reference indicators are used throughout the drawings and the following
detailed description to refer to the same or like parts.

15

20

[00129] In the interest of clarity, not all of the routine features of the implementations
described herein are shown and described. It will be appreciated that in the development of
any such actual implementation, numerous implementation-specific decisions must be made
to achieve the developer's specific goals, such as compliance with application- and business-
related constraints, and that these specific goals will vary from one implementation to another
and from one developer to another. Moreover, it will be appreciated that such a development
effort might be complex and time-consuming, but would nevertheless be a routine
undertaking of engineering for those of ordinary skill in the art having the benefit of this
disclosure.

25

30

[00130] In accordance with embodiments of the present invention, the components,
process steps and/or data structures may be implemented using various types of operating
systems (OS), computer platforms, firmware, computer programs, computer languages and/or
general-purpose machines. The methods can be run as a programmed process running on
processing circuitry. The processing circuitry can take the form of numerous combinations of
processors and operating systems, or a stand-alone device. The processes can be
implemented as instructions executed by such hardware, by hardware alone, or by any

35

combination thereof. The software may be stored on a program storage device readable by a machine. Computational elements, such as filters and banks of filters, can be readily implemented using an object-oriented programming language such that each required filter is instantiated as needed.

5 **[00131]** Those of skill in the art will recognize that devices of a less general-purpose nature, such as hardwired devices, field programmable logic devices (FPLDs), including field programmable gate arrays (FPGAs) and complex programmable logic devices (CPLDs), application specific integrated circuits (ASICs), or the like, may also be used without departing from the scope and spirit of the inventive concepts disclosed herein.

10 **[00132]** In accordance with an embodiment of the present invention, the methods may be implemented on a data processing computer such as a personal computer, workstation computer, mainframe computer, or high-performance server running an OS such as Microsoft® Windows® XP and Windows® 2000, available from Microsoft Corporation of Redmond, Washington, or Solaris® available from Sun Microsystems, Inc. of Santa Clara,
15 California, or various versions of the Unix operating system such as Linux available from a number of vendors. The methods may also be implemented on a multiple-processor system, or in a computing environment including various peripherals such as input devices, output devices, displays, pointing devices, memories, storage devices, media interfaces for transferring data to and from the processor(s), and the like. Such a computer system or
20 computing environment may be networked locally, or over the Internet.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

GNSS SIGNAL PROCESSING WITH PRECISE SATELLITE DATA

CROSS-REFERENCE TO RELATED APPLICATIONS

5

BACKGROUND

BRIEF SUMMARY

10

Section A: Melbourne-Wübbena Bias Processing

[(FIG. 11)]

15

Section B: Orbit Processing

[(FIG. 26B)]

Section C: Phase-Leveled Clock Processing

[(FIG. 29)]

20

Section D: Rover Processing with Synthesized Base Station Data

[(FIG. 38)]

Section E: Rover Processing with Ambiguity Fixing

[(FIG. 48)]

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 shows a high-level view of a system in accordance with some embodiments of the invention;

5 FIG. 2 shows a high-level view of a system and system data in accordance with some embodiments of the invention;

FIG. 3 is a schematic diagram of network processor architecture in accordance with some embodiments of the invention;

10 FIG. 4 is a schematic diagram of data correction in accordance with some embodiments of the invention;

FIG. 5 is a schematic view of linear combinations of observations in accordance with some embodiments of the invention;

FIG. 6 is a schematic view of a generic Kalman filter process;

15 FIG. 7 is a schematic diagram of a code-leveled clock processor in accordance with some embodiments of the invention;

FIG. 8, FIG. 9 and FIG. 10 are deleted;

FIG. 11 is a schematic diagram of a Melbourne-Wübbena bias process flow in accordance with some embodiments of the invention;

20 FIG. 12 is a schematic diagram of a Melbourne-Wübbena bias process flow in accordance with some embodiments of the invention;

FIG. 13A shows filter states of an undifferenced Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 13B shows filter states of a single-differenced Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

25 FIG. 14 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 15 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

30 FIG. 16 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 17 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 18 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 19A is an observation graph of GNSS stations and satellites;

FIG. 19B is an abstract graph showing stations and satellites as vertices and station-satellite

5 observations as edges;

FIG. 19C depicts a minimum spanning tree of the graph of FIG. 19B;

FIG. 19D depicts a minimum spanning tree with constrained edges;

FIG. 19E is an undifferenced observation graph of GNSS stations and satellites;

FIG. 19F is an filter graph corresponding to the observation graph of FIG. 19E;

10 FIG. 19G is a single-differenced observation graph of GNSS stations and satellites;

FIG. 19H is a filter graph corresponding to the observation graph of FIG. 19G;

FIG. 19I is a set of observations graphs comparing constraints in undifferenced and single-differenced processing;

15 FIG. 20 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 21A shows a spanning tree on an undifferenced observation graph;

FIG. 21B shows a minimum spanning tree on an undifferenced observation graph;

FIG. 21C shows a spanning tree on a single-differenced observation graph;

FIG. 21D shows a minimum spanning tree on a single-differenced observation graph;

20 FIG. 22 is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 23A is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

25 FIG. 23B is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 24A is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 24B is a schematic diagram of a Melbourne-Wübbena filtering process in accordance with some embodiments of the invention;

30 FIG. 24C is a schematic diagram of a Melbourne-Wübbena filtering process in accordance with some embodiments of the invention;

FIG. 24D is a schematic diagram of a Melbourne-Wübbena filtering process in accordance with some embodiments of the invention;

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 25A is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 25B illustrates the effect of shifting biases in accordance with some embodiments of the invention;

5 FIG. 25C is a schematic diagram of a Melbourne-Wübbena bias processor in accordance with some embodiments of the invention;

FIG. 26A is a schematic diagram of the startup of an orbit processor in accordance with some embodiments of the invention;

10 FIG. 26B is a schematic diagram of an orbit processor in accordance with some embodiments of the invention;

FIG. 26C is a schematic diagram of an orbit mapper of an orbit processor in accordance with some embodiments of the invention;

FIG. 26D is a schematic diagram of an orbit mapper of an orbit processor in accordance with some embodiments of the invention;

15 FIG. 27A is a timing diagram of code-leveled clock processing in accordance with some embodiments of the invention;

FIG. 27B is a timing diagram of code-leveled clock processing in accordance with some embodiments of the invention;

20 FIG. 28A is a schematic diagram of a high-rate code-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 28B is a schematic diagram of a high-rate code-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 28C is a schematic diagram of a high-rate code-leveled satellite clock processor in accordance with some embodiments of the invention;

25 FIG. 29 is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 30A is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

30 FIG. 30B is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 30C is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 31 is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 32 is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

5 FIG. 33 is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 34 is a schematic diagram of a high-rate phase-leveled satellite clock processor in accordance with some embodiments of the invention;

FIG. 35 is blank;

10 FIG. 36 is a schematic diagram of a network processor computer system in accordance with some embodiments of the invention;

FIG. 37 is a simplified schematic diagram of an integrated GNSS receiver system in accordance with some embodiments of the invention;

15 FIG. 38 is a schematic diagram of a GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

FIG. 39 depicts observation clock prediction in accordance with some embodiments of the invention;

FIG. 40 is a schematic diagram of a process for generating synthesized base station data in accordance with some embodiments of the invention;

20 FIG. 41 is blank;

FIG. 42 is a schematic diagram of an alternate GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

FIG. 43 is a simplified schematic diagram of a GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

25 FIG. 44 is a timing diagram of a low-latency GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

FIG. 45 is a timing diagram of a high-accuracy GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

30 FIG. 46 is a schematic diagram of an alternate GNSS rover process with synthesized base station data in accordance with some embodiments of the invention;

FIG. 47 depicts performance of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention in relation to a GNSS rover process without ambiguity fixing;

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 48 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 49 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

5 FIG. 50 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 51 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

10 FIG. 52 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 53 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 54 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

15 FIG. 55 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 56 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

20 FIG. 57 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 58 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 59 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

25 FIG. 60 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention;

FIG. 61 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention; and

30 FIG. 62 is a schematic diagram of a GNSS rover process with ambiguity fixing in accordance with some embodiments of the invention.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

DETAILED DESCRIPTION

Part 1: System Overview

5 GNSS include GPS, Galileo, Glonass, Compass and other similar positioning systems. While the examples given here are directed to GPS processing the principles are applicable to any such positioning system.

10 Definition of Real time: In this document the term “Real time” is mentioned several times. In the scope of the inventions covered by the following embodiments this term means that there is an action (e.g., data is processed, results are computed) as soon the required information for that action is available. Therefore, certain latency exists, and it depends on different aspects depending on the component of the system. The required information for the application covered in this document is usually GNSS data, and/or GNSS corrections, as described below.

15 The network processors running in real time are able to provide results for one epoch of data from a network of monitoring receivers after: (1a) The data is collected by each of the monitoring receivers (typically less than 1 msec); (1b) The data is transmitted from each receiver to the processing center (typically less than 2 sec); (1c) The data is processed by the processor. The
20 computation of the results by the network processors typically takes between 0.5 and 5 seconds depending on the processor type, and amount of data to be used.

It is usual that data that do not follow certain restrictions in transmission delay (e.g., 3 sec) are rejected or buffered and therefore not immediately used for the current epoch update. This avoids
25 the enlargement of the latency of the system in case one or more stations are transmitting data with an unacceptable amount of delay.

A rover receiver running in real time is able to provide results for one epoch of data after the data is collected by receiver (typically less than 1 msec) and: (2a) The correction data is generated by
30 the processing center (see 1a,1b,1c); (2b) The correction data (if required) is received from the processing center (typically less than 5 sec); (2c) The data is processed (typically less than 1 msec).

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

To avoid or minimize the effect of data latency caused by (2a) and (2b), a delta phase approach can be used so updated receiver positions can be computed (typically in less than 1 msec) immediately after the data is collected and with correction data streams. The delta phase approach is described for example in US Patent 7,576,690 granted August 18, 2009 to U. Vollath.

5

FIG. 1 and FIG. 2 show high level views of a system 100 in accordance with some embodiments of the invention. Reference stations of a worldwide tracking network, such as reference stations 105, 110, ... 115, are distributed about the Earth. The position of each reference station is known very precisely, e.g., within less than 2 cm. Each reference station is equipped with an antenna and tracks the GNSS signals transmitted by the satellites in view at that station, such as GNS
10 satellites 120, 125, ... 130. The GNSS signals have codes modulated on each of two or more carrier frequencies. Each reference station acquires GNSS data 205 representing, for each satellite in view at each epoch, carrier-phase (carrier) observations 210 of at least two carriers, and pseudorange (code) observations 215 of the respective codes modulated on at least two
15 carriers. The reference stations also obtain the almanac and ephemerides 220 of the satellites from the satellite signals. The almanac contains the rough position of all satellites of the GNSS, while the so-called broadcast ephemerides provide more precise predictions (ca. 1 m) of the satellites' positions and the satellites' clock error (ca. 1.5 m) over specific time intervals.

20 GNSS data collected at the reference stations is transmitted via communications channels 135 to a network processor 140. Network processor 140 uses the GNSS data from the reference stations with other information to generate a correction message containing precise satellite position and clock data, as detailed below. The correction message is transmitted for use by any number of GNSS rover receivers. The correction message is transmitted as shown in FIG. 1 via an uplink
25 150 and communications satellite 155 for broadcast over a wide area; any other suitable transmission medium may be used including but not limited to radio broadcast or mobile telephone link. Rover 160 is example of a GNSS rover receiver having a GNSS antenna 165 for receiving and tracking the signals of GNSS satellites in view at its location, and optionally having a communications antenna 170. Depending on the transmission band of the correction message,
30 it can be received by rover 160 via GNSS antenna 165 or communications antenna 170.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 2: Network Architecture

FIG. 3 is a schematic diagram showing principal components of the process flow 300 of a network processor 140 in accordance with some embodiments of the invention. GNSS data from the global network of reference stations 310 is supplied without corrections as GNSS data 305 or
5 after correction by an optional data corrector 310 as corrected GNSS data 315, to four processors: a standard clock processor 320, a Melbourne-Wübbena (MW) bias processor 325, an orbit processor 330, and a phase clock processor 335.

10 Data corrector 310 optionally analyzes the raw GNSS data 305 from each reference station to check for quality of the received observations and, where possible, to correct the data for cycle slips, which are jumps in the carrier-phase observations occurring, e.g., each time the receiver has a loss of lock. Commercially-available reference stations typically detect cycle slips and flag the data accordingly. Cycle slip detection and correction techniques are summarized, for example, in
15 *G. Seeber, SATELLITE GEODESY*, 2nd Ed. (2003) at pages 277-281. Data corrector 310 optionally applies other corrections. Though not all corrections are needed for all the processors, they do no harm if applied to the data. For example as described below some processors use a linear combination of code and carrier observations in which some uncorrected errors are canceled in forming the combinations.

20 Observations are acquired epoch by epoch at each reference station and transmitted with time tags to the network processor 140. For some stations the observations arrive delayed. This delay can range between milliseconds and minutes. Therefore an optional synchronizer 318 collects the data of the corrected reference station data within a predefined time span and passes the
25 observations for each epoch as a set to the processor. This allows data arriving with a reasonable delay to be included in an epoch of data.

The MW bias processor 325 takes either uncorrected GNSS data 305 or corrected GNSS data 315 as input, since it uses the Melbourne-Wübbena linear combination which cancels out all but the
30 ambiguities and the biases of the phase and code observations. Thus only receiver and satellite antenna corrections are important for the widelane processor 325. Based on this linear combination, one MW bias per satellite and one widelane ambiguity per receiver-satellite pairing are computed. The biases are smooth (not noisy) and exhibit only some sub-daily low-rate

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

variations. The widelane ambiguities are constant and can be used as long as no cycle slip occurs in the observations on the respective satellite-receiver link. Thus the bias estimation is not very time critical and can be run, e.g., with a 15 minute update rate. This is advantageous because the computation time grows with the third power of the number of stations and satellites. As an
5 example, the computation time for a reasonable network with 80 stations can be about 15 seconds. The values of fixed widelane ambiguities 340 and/or widelane biases 345 are optionally used in the orbit processor 330 and/or the phase clock processor 335, and/or are supplied to a scheduler 355. MW bias processor 325 is described in detail in Part 7 below.

10 Some embodiments of orbit processor 330 are based on a prediction-correction strategy. Using a precise force model and starting with an initial guess of the unknown values of the satellite's parameters (initial position, initial velocity and dynamic force model parameters), the orbit of each satellite is predicted by integration of the satellite's nonlinear dynamic system. The sensitivity matrix containing the partial derivatives of the current position to the unknown
15 parameters is computed at the same time. Sensitivities of the initial satellite state are computed at the same time for the whole prediction. That is, starting with a prediction for the unknown parameters, the differential equation system is solved, integrating the orbit to the current time or into the future. This prediction can be linearized into the direction of the unknown parameters. Thus the partial derivatives (sensitivities) serve as a measure of the size of the change in the
20 current satellite states if the unknown parameters are changed, or vice versa.

In some embodiments these partial derivatives are used in a Kalman filter to improve the initial guess by projecting the GNSS observations to the satellite's unknown parameters. This precise initial state estimate is used to again integrate the satellite's dynamic system and determine a
25 precise orbit. A time update of the initial satellite state to the current epoch is performed from time to time. In some embodiments, ionospheric-free ambiguities are also states of the Kalman filter. The fixed widelane ambiguity values 340 are used to fix the ionospheric-free ambiguities of the orbit processor 330 to enhance the accuracy of the estimated orbits. A satellite orbit is very smooth and can be predicted for minutes and hours. The precise orbit predictions 350 are
30 optionally forwarded to the standard clock processor 320 and to the phase clock processor 335 as well as to a scheduler 355.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Ultra-rapid orbits 360, such as IGU orbits provided by the International GNSS Service (IGS), can be used as an alternative to the precise orbit predictions 355. The IGU orbits are updated four times a day and are available with a three hour delay.

5 Standard clock processor 320 computes code-leveled satellite clocks 360 (also called standard satellite clocks), using GNSS data 305 or corrected GNSS data 315 and using precise orbit predictions 355 or ultra-rapid orbits 365. Code-leveled means that the clocks are sufficient for use with ionospheric-free code observations, but not with carrier-phase observations, because the code-leveled clocks do not preserve the integer nature of the ambiguities. The code-leveled
10 clocks 360 computed by standard clock processor 320 represent clock-error differences between satellites. The standard clock processor 320 uses the clock errors of the broadcast ephemerides as pseudo observations and steers the estimated clocks to GPS time so that they can be used to compute, e.g., the exact time of transmission of a satellite's signal. The clock errors change rapidly, but for the use with code measurements, which are quite noisy, an accuracy of some
15 centimeter is enough. Thus a "low rate" update rate of 30 seconds to 60 seconds is adequate. This is advantageous because computation time grows with the third power of number of stations and satellites. The standard clock processor 325 also determines troposphere zenith delays 365 as a byproduct of the estimation process. The troposphere zenith delays and the code-leveled clocks are sent to the phase clock processor 335. Standard clock processor 320 is described in detail in
20 Part 6 below.

The phase clock processor 335 optionally uses the fixed widelane ambiguities 340 and/or MW biases 345 from widelane processor 325 together with the troposphere zenith delays 365 and the precise orbits 350 or IGU orbits 360 to estimate single-differenced clock errors and narrowlane
25 ambiguities for each pairing of satellites. The single-differenced clock errors and narrowlane ambiguities are combined to obtain single-differenced phase-leveled clock errors 370 for each satellite (except for a reference satellite) which are single-differenced relative to the reference satellite. The low-rate code leveled clocks 360, the troposphere zenith delays 365 and the precise orbits 350 or IGU orbits 360 are used to estimate high-rate code-leveled clocks 375. Here, the
30 computational effort is linear with the number of stations and to the third power with the number of satellites. The rapidly-changing phase-leveled clocks 370 and code-leveled clocks 375 are available, for example, with a delay of 0.1 sec – 0.2 sec. The high-rate phase-leveled clocks 370

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

and the high-rate code-leveled clocks 375 are sent to the scheduler 355 together with the MW biases 340. Phase clock processor 340 is described in detail in Part 9 below.

Scheduler 355 receives the orbits (precise orbits 350 or IGU orbits 360), the MW biases 340, the
5 high-rate phase-leveled clocks 370 and the high-rate code-leveled clock 375. Scheduler 355
packs these together and forwards the packed orbits and clocks and biases 380 to a message
encoder 385 which prepares a correction message 390 in compressed format for transmission to
the rover. Transmission to a rover takes for example about 10 sec – 20 sec over a satellite link,
but can also be done using a mobile phone or a direct internet connection or other suitable
10 communication link. Scheduler 355 and message encoder are described in detail in Part 10
below.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 3: Observation Data Corrector

FIG. 4 is a schematic diagram of data correction in accordance with some embodiments of the invention. Optional observation corrector 310 corrects the GNSS signals collected at a reference station for displacements of the station due to centrifugal, gyroscopic and gravitational forces acting on the Earth, the location of the station's antenna phase center relative to the station's antenna mounting point, the location of the satellite's antenna phase center relative to the satellite's center of mass given by the satellite's orbit, and variations of those phase centers depending on the alignment of the station's antenna and the satellite's antenna.

The main contributors to station displacements are solid Earth tides up to 500 mm, ocean tidal loadings up to 100 mm, and pole tides up to 10 mm. All of these depend on where the station is located. More description is found in McCarthy, D.D., Petit, G. (eds.), *IERS Conventions (2003)*, IERS Technical Note No. 32, and references cited therein.

Ocean tides caused by the forces of astronomical bodies – mainly the moon – acting on the Earth's loose masses, also cause the Earth's tectonic plates to be lifted and lowered. This well-known effect shows up as recurring variations of the reference stations' locations. The solid Earth tides are optionally computed for network processing as well as for rover processing, as the effect should not be neglected and the computational effort is minor.

The second largest effect is the deformation of the Earth's tectonic plates due to the load of the oceans varying over time with the tides. Ocean tide loading parameters used to quickly compute the displacement of a station over time depend on the location of the station. The computational effort to derive these parameters is quite high. They can be computed for a given location, using any of the well-known models available at the online ocean-tide-loading service provided by the Onsala Space Observatory Ocean, <http://www.oso.chalmers.se/~loading/>, Chalmers: Onsala Space Observatory, 2009. The lower accuracy parameters, e.g., from interpolation of a precomputed grid, are sufficient for the applications discussed here.

The smallest effect mentioned here is that due to pole tides. This displacement is due to the lift of a tectonic plate caused by the centrifugal and gyroscopic effects generated by the polar motion of the Earth. Earth orientation parameters are used for this computation. These are updated

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

regularly at the International Earth Rotation & Reference System Service, International Earth Rotation & Reference System Service, <http://hpiers.obspm.fr/>, L'Observatoire de Paris, 2009, and are not easily computed. This minor effect is therefore optionally neglected in the rover processing.

5

Absolute calibrated antenna models are used to compute the offsets and variations of receiver and satellite antenna phase centers. A description is found at J. Kouba, *A Guide to Using International GPS Service (IGS) Products*, Geodetic Survey Division Natural Resources Canada, February 2003. Calibration data collected by the IGS is made available in antex files at <http://igscb.jpl.nasa.gov/>, 2009; satellite antenna offset information is found for example in the IGS absolute antenna file [igs05.atx](#).

10

Another effect is the antenna phase wind-up. If a receiver antenna is moving relative to the sender antenna the recorded data shows a phase shift. If this effect is neglected, a full turn of the satellite around the sending axis will cause an error of one cycle in the carrier-phase detected at the receiver. Since the satellite's orientation relative to the receiver is well known most of the time, this effect can be modeled as described in Wu J.T., Hajj G.A., Bertiger W.I., & Lichten S.M., *Effects of antenna orientation on GPS carrier phase*, MANUSCRIPTA GEODAETICA, Vol. 18, pp. 91 – 98 (1993).

15

20

The relative movement of the station and the satellite is mainly due to the orbiting satellite. If a satellite is eclipsing - this means the satellite's orbit crosses the Earth's shadow - additional turns of the satellite around its sending axis are possible. For example, GPS Block IIA satellites have a noon turn and a shadow crossing maneuver, while GPS Block IIR satellites have a noon turn and a midnight turn. If the sun, the Earth and the satellite are nearly collinear it is hard to compute the direction of the turn maneuvers, and an incorrect direction will cause an error in the carrier-phase of one cycle. The satellite's yaw attitude influences the phase wind-up and the satellite antenna corrections. More detailed descriptions are found in Kouba, J., *A simplified yaw-attitude model for eclipsing GPS satellites*, GPS SOLUTIONS (2008) and Bar-Sever, Y.E., *A new model for GPS yaw attitude*, JOURNAL OF GEODESY, Vol. 70, pp. 714-723 (1996).

25

30

The sun position is needed to compute the satellite's body-fixed coordinate frame, since the x axis is defined by the cross product of the satellite's position and the sun's position. This

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

coordinate system is used to compute the yaw attitude, the satellite's antenna correction (offset and variations, mapped into line of sight) and the phase wind-up correction. The moon's position is also needed for the solid Earth tides. How to compute the position of the sun and the moon is found, for example, in Seidelmann, P.K. (ed.), *Explanatory Supplement to the Astronomical*

5 *Almanac*, University Science Books, U.S. (1992).

Further corrections can also be applied, though these are of only minor interest for the positioning accuracy level demanded by the marketplace.

10 Additional effects as corrections for relativistic effects, ionospheric and troposphere delays do not need to be considered in the optional data corrector 310. Relativistic corrections are usually applied to the satellite clocks. The major first order effect due to the ionosphere is eliminated using an ionospheric free combination of the GNSS observations, and the effect due to the troposphere is in some embodiments partly modeled and partly estimated.

15

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 4: Forming Linear Combinations

4.1 Basic Modeling Equations

- 5 For code P_{ikm}^j and carrier phase Φ_{ik}^j observations¹ between receiver i and satellite j on frequency band k and modulation type m the following observation model is assumed that relates the observations to certain physical quantities,

$$P_{ikm}^j = \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + I_{P,ik}^j + b_{P,ikm} - b_{P,km}^j + m_{P,ik}^j + \varepsilon_{P,ik}^j. \quad (1)$$

$$\Phi_{ik}^j = \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + I_{\Phi,ik}^j + b_{\Phi,ik} - b_{\Phi,k}^j + \lambda_k N_{ik}^j + m_{\Phi,ik}^j + \varepsilon_{\Phi,ik}^j. \quad (2)$$

with

10

ρ_i^j	geometrical range from satellite j to receiver i
c	speed of light
Δt_i	receiver i clock error
Δt^j	satellite j clock error
T_i^j	tropospheric delay from satellite j to receiver i
$I_{P,ik}^j = \frac{I_{1i}^j}{f_k^2} + \frac{2I_{2i}^j}{f_k^3} + \frac{3I_{3i}^j}{f_k^4}$	code ionospheric delay on frequency f_k
$I_{\Phi,ik}^j = -\frac{I_{1i}^j}{f_k^2} - \frac{I_{2i}^j}{f_k^3} - \frac{I_{3i}^j}{f_k^4}$	carrier phase ionospheric delay on frequency f_k
$b_{P,ikm}$	code receiver bias
$b_{P,km}^j$	code satellite bias
$b_{\Phi,ik}$	phase receiver bias
$b_{\Phi,k}^j$	phase satellite bias
N_{ik}^j	integer ambiguity term from satellite j to receiver i on

¹ The modulation type dependency in the phase observation is suppressed by assuming that the different phase signals on a frequency band are already shifted to a common base inside the receiver, e.g. L2C is assumed to be shifted by -0.25 cycles to compensate the 90 degrees rotation of the quadrature phase on which it is modulated.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

	wavelength λ_k
$m_{P,ik}^j$	code multipath from satellite j to receiver i
$m_{\Phi,ik}^j$	phase multipath from satellite j to receiver i
$\mathcal{E}_{P,ik}^j$	code random noise term
$\mathcal{E}_{\Phi,ik}^j$	phase random noise term

Examples of different modulation types (also called code types) are in case of GPS L1C/A, L1P, L1C on L1-frequency band and L2C, L2P on L2-frequency band and in case of Glonass L1C/A, L1P and L2C/A, L2P.

5

Notice that the symbol Φ that is used here for carrier phase observations, is also used for the time transition matrix in the Kalman filter context. For both cases, Φ is the standard symbol used in the scientific literature and we adopted this notation. The meaning of Φ will be always clear from the context.

10

In the following we neglect the second order $\frac{I_{2i}^j}{f_k^3}$ and third order $\frac{I_{3i}^j}{f_k^4}$ ionospheric terms that are typically in the range of less than 2 cm (Morton, van Graas, Zhou, & Herdtner, 2008), (Datta-

Barua, Walter, Blanch, & Enge, 2007). In this way, $I_{P,ik}^j = \frac{I_i^j}{f_k^2} = -I_{\Phi,ik}^j$ with $I_i^j := I_{1i}^j$. Only

under very severe geomagnetic active conditions the second and third order terms can reach tens of centimeters. However, these conditions occur only for a few days in many years. The higher order ionospheric terms can be taken into account by ionospheric models based on the Appleton-Hartree equation that relates the phase index of refraction of a right hand circularly polarized wave propagating through the ionosphere to the wave frequency f_k , the electron density and the earth magnetic field. Approximations to the Appleton-Hartree equation allow to relate the

15

20

parameters I_{2i}^j, I_{3i}^j of the second and third order ionospheric terms to the first order ionospheric estimation parameter $I_i^j := I_{1i}^j$ that is a measure of the total electron content along the signal propagation path. Thus higher order ionospheric terms can be corrected on base of observation data on at least two frequencies.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In the following we will often talk about ionospheric-free (IF) linear combinations. However, notice that these linear combinations only cancel the first order ionospheric term and are thus not completely ionospheric-free.

5 **1. Linear Combinations of Observations**

By combining several code P_{ikm}^j and carrier phase Φ_{ik}^j observations in a linear way

$$LC = \sum_{i,j,k,m} a_{P,ikm}^j P_{ikm}^j + a_{\Phi,ik}^j \Phi_{ik}^j \quad \text{with } a_{P,ikm}^j, a_{\Phi,ik}^j \in R \text{ for all } i, j, k, m \quad (3)$$

some of the physical quantities can be eliminated from the linear combination LC so that these quantities do not have to be estimated if the linear combination is used as the observation input for an estimator. In this way some linear combinations are of special importance.

Single difference (SD) observations between two satellites j_1 and j_2 eliminate all quantities that are not satellite dependent, i.e. that do not have a satellite index j .

15 Defining $X^{j_1 j_2} := X^{j_2} - X^{j_1}$, the between satellite SD observations are formally obtained by substituting each index j by $j_1 j_2$ and ignoring all terms without a satellite index j

$$P_{ikm}^{j_1 j_2} = \rho_i^{j_1 j_2} - c\Delta t^{j_1 j_2} + T_i^{j_1 j_2} + I_{P,ik}^{j_1 j_2} - b_{P,km}^{j_1 j_2} + m_{P,ik}^{j_1 j_2} + \varepsilon_{P,ik}^{j_1 j_2} \quad (4)$$

$$\Phi_{ik}^{j_1 j_2} = \rho_i^{j_1 j_2} - c\Delta t^{j_1 j_2} + T_i^{j_1 j_2} + I_{\Phi,ik}^{j_1 j_2} - b_{\Phi,k}^{j_1 j_2} + \lambda_k N_{ik}^{j_1 j_2} + m_{\Phi,ik}^{j_1 j_2} + \varepsilon_{\Phi,ik}^{j_1 j_2} \quad (5)$$

In this way the receiver clock and receiver bias terms have been eliminated in the linear combination.

20

In the same way single difference observations between two receivers i_1 and i_2 eliminate all quantities that are not receiver dependent, i.e. that have no receiver index i .

By generating the difference between two receivers i_1 and i_2 on the between satellite single difference observations (4) and (5), double difference (DD) observations are obtained that also eliminate all receiver dependent terms from (4) and (5).

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Defining $X_{i_1 i_2}^{j_1 j_2} := X_{i_2}^{j_1 j_2} - X_{i_1}^{j_1 j_2} = (X_{i_2}^{j_2} - X_{i_2}^{j_1}) - (X_{i_1}^{j_2} - X_{i_1}^{j_1})$, the DD observations are formally obtained from (4) and (5) by substituting each index i by $i_1 i_2$ and ignoring all terms without a receiver index i

$$P_{i_1 i_2, km}^{j_1 j_2} = \rho_{i_1 i_2}^{j_1 j_2} + T_{i_1 i_2}^{j_1 j_2} + I_{P, i_1 i_2, k}^{j_1 j_2} + m_{P, i_1 i_2, k}^{j_1 j_2} + \varepsilon_{P, i_1 i_2, k}^{j_1 j_2} . \quad (6)$$

$$\Phi_{i_1 i_2, k}^{j_1 j_2} = \rho_{i_1 i_2}^{j_1 j_2} + T_{i_1 i_2}^{j_1 j_2} + I_{\Phi, i_1 i_2, k}^{j_1 j_2} + \lambda_k N_{i_1 i_2, k}^{j_1 j_2} + m_{\Phi, i_1 i_2, k}^{j_1 j_2} + \varepsilon_{\Phi, i_1 i_2, k}^{j_1 j_2} . \quad (7)$$

- 5 In this way also the satellite clock and the satellite biases have been eliminated in the linear combination.

In the following we assume that all code observations P_{ikm}^j correspond to the same modulation type so that the modulation type index m can be suppressed.

10

For our purposes two linear combinations that cancel the first order ionospheric delay $\frac{I_i^j}{f_k^2}$ in different ways are of special importance, the iono-free linear combination for code and carrier phase and the Melbourne-Wuebbena (MW) linear combination $\Phi_{i, WL}^j - P_{i, NL}^j$ consisting of the

widelane (WL) carrier phase $\frac{\Phi_{i, WL}^j}{\lambda_{WL}} := \frac{\Phi_{i1}^j}{\lambda_1} - \frac{\Phi_{i2}^j}{\lambda_2}$ and narrowlane (NL) code $\frac{P_{i, NL}^j}{\lambda_{NL}} := \frac{P_{i1}^j}{\lambda_1} + \frac{P_{i2}^j}{\lambda_2}$

- 15 observations with wavelengths $\lambda_{WL} = \frac{c}{f_{WL}} := \frac{c}{f_1 - f_2}$ and $\lambda_{NL} = \frac{c}{f_{NL}} := \frac{c}{f_1 + f_2}$, (Melbourne, 1985), (Wübbena, 1985),

$$\begin{aligned} P_{i, NL}^j &= \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + \lambda_{NL} \left(\frac{b_{P, i1}}{\lambda_1} + \frac{b_{P, i2}}{\lambda_2} \right) - \lambda_{NL} \left(\frac{b_{P, 1}^j}{\lambda_1} + \frac{b_{P, 2}^j}{\lambda_2} \right) \\ &\quad + \lambda_{NL} \left(\frac{I_i^j}{\lambda_1 f_1^2} + \frac{I_i^j}{\lambda_2 f_2^2} \right) + \lambda_{NL} \left(\frac{m_{P, i1}^j + \varepsilon_{P, i1}^j}{\lambda_1} + \frac{m_{P, i2}^j + \varepsilon_{P, i2}^j}{\lambda_2} \right) \end{aligned} \quad (8)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\begin{aligned} \Phi_{i,WL}^j = & \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + \lambda_{WL} \left(\frac{b_{\Phi,i1}}{\lambda_1} - \frac{b_{\Phi,i2}}{\lambda_2} \right) - \lambda_{WL} \left(\frac{b_{\Phi,1}^j}{\lambda_1} - \frac{b_{\Phi,2}^j}{\lambda_2} \right) \\ & - \lambda_{WL} \left(\frac{I_i^j}{\lambda_1 f_1^2} - \frac{I_i^j}{\lambda_2 f_2^2} \right) + \lambda_{WL} \underbrace{\left(N_{i1}^j - N_{i2}^j \right)}_{=:\tilde{N}_{i,WL}^j} + \lambda_{WL} \left(\frac{m_{\Phi,i1}^j + \varepsilon_{\Phi,i1}^j}{\lambda_1} - \frac{m_{\Phi,i2}^j + \varepsilon_{\Phi,i2}^j}{\lambda_2} \right) \end{aligned} \quad (9)$$

so that

$$\begin{aligned} \Phi_{i,WL}^j - P_{i,NL}^j = & \underbrace{\lambda_{WL} \left(\frac{b_{\Phi,i1}}{\lambda_1} - \frac{b_{\Phi,i2}}{\lambda_2} \right) - \lambda_{NL} \left(\frac{b_{P,i1}}{\lambda_1} + \frac{b_{P,i2}}{\lambda_2} \right)}_{=:b_{i,MW}^j} + \\ & - \underbrace{\left[\lambda_{WL} \left(\frac{b_{\Phi,1}^j}{\lambda_1} - \frac{b_{\Phi,2}^j}{\lambda_2} \right) - \lambda_{NL} \left(\frac{b_{P,1}^j}{\lambda_1} + \frac{b_{P,2}^j}{\lambda_2} \right) \right]}_{=:b_{MW}^j} + \lambda_{WL} N_{i,WL}^j + \\ & + \underbrace{\lambda_{WL} \left(\frac{m_{\Phi,i1}^j}{\lambda_1} - \frac{m_{\Phi,i2}^j}{\lambda_2} \right) - \lambda_{NL} \left(\frac{m_{P,i1}^j}{\lambda_1} + \frac{m_{P,i2}^j}{\lambda_2} \right)}_{=:m_{i,MW}^j} + \\ & + \underbrace{\lambda_{WL} \left(\frac{\varepsilon_{\Phi,i1}^j}{\lambda_1} - \frac{\varepsilon_{\Phi,i2}^j}{\lambda_2} \right) - \lambda_{NL} \left(\frac{\varepsilon_{P,i1}^j}{\lambda_1} + \frac{\varepsilon_{P,i2}^j}{\lambda_2} \right)}_{=: \varepsilon_{i,MW}^j} + \\ = & b_{i,MW}^j - b_{MW}^j + \lambda_{WL} N_{i,WL}^j + m_{i,MW}^j + \varepsilon_{i,MW}^j \end{aligned} \quad (10)$$

where the ionospheric term in the WL-phase cancels with the ionospheric term in the NL-code due to

$$\begin{aligned} -\lambda_{WL} \left(\frac{1}{\lambda_1 f_1^2} - \frac{1}{\lambda_2 f_2^2} \right) - \lambda_{NL} \left(\frac{1}{\lambda_1 f_1^2} + \frac{1}{\lambda_2 f_2^2} \right) &= -\frac{c}{f_1 - f_2} \left(\frac{c}{f_1} - \frac{c}{f_2} \right) - \frac{c}{f_1 + f_2} \left(\frac{c}{f_1} + \right. \\ &= -\frac{c^2}{f_1 - f_2} \frac{f_2 - f_1}{f_1 f_2} - \frac{c^2}{f_1 + f_2} \frac{f_2 + f_1}{f_1 f_2} \\ &= +\frac{c^2}{f_1 f_2} - \frac{c^2}{f_1 f_2} \\ &= 0 \end{aligned}$$

Neglecting the usually unmodeled multipath $m_{i,MW}^j$ and random noise terms $\varepsilon_{i,MW}^j$, equation (10)

5 simplifies to

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\Phi_{i,WL}^j - P_{i,NL}^j = b_{i,MW} - b_{MW}^j + \lambda_{WL} N_{i,WL}^j \quad (11)$$

or in a between satellite single difference (SD) version to

$$\Phi_{i,WL}^{j_1 j_2} - P_{i,NL}^{j_1 j_2} = -b_{MW}^{j_1 j_2} + \lambda_{WL} N_{i,WL}^{j_1 j_2} \quad (12)$$

Note that the satellite bias cancels in the double difference (DD) (between receivers and between satellites) Melbourne-Wuebbena (MW) observation,

5

$$\Phi_{i_1 i_2, WL}^{j_1 j_2} - P_{i_1 i_2, NL}^{j_1 j_2} = \lambda_{WL} N_{i_1 i_2, WL}^{j_1 j_2} \quad (13)$$

Thus the DD-WL ambiguities $N_{i_1 i_2, WL}^{j_1 j_2}$ are directly observed by the DD-MW observations.

The iono-free linear combination on code $P_{i,IF}^j := \frac{f_1^2 P_{i1}^j - f_2^2 P_{i2}^j}{f_1^2 - f_2^2}$ and carrier phase

$$10 \quad \Phi_{i,IF}^j := \frac{f_1^2 \Phi_{i1}^j - f_2^2 \Phi_{i2}^j}{f_1^2 - f_2^2} \text{ results in}$$

$$\begin{aligned} P_{i,IF}^j &= \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + \underbrace{\frac{f_1^2 b_{P,i1} - f_2^2 b_{P,i2}}{f_1^2 - f_2^2}}_{=: b_{P,i,IF}} - \underbrace{\frac{f_1^2 b_{P,1}^j - f_2^2 b_{P,2}^j}{f_1^2 - f_2^2}}_{=: b_{P,IF}^j} \\ &\quad + \underbrace{\frac{f_1^2 m_{P,i1}^j - f_2^2 m_{P,i2}^j}{f_1^2 - f_2^2}}_{=: m_{P,i,IF}^j} + \underbrace{\frac{f_1^2 \varepsilon_{P,i1}^j - f_2^2 \varepsilon_{P,i2}^j}{f_1^2 - f_2^2}}_{=: \varepsilon_{P,i,IF}^j} \\ &= \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + b_{P,i,IF} - b_{P,IF}^j + m_{P,i,IF}^j + \varepsilon_{P,i,IF}^j \end{aligned} \quad (14)$$

and

$$\begin{aligned} \Phi_{i,IF}^j &= \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + \underbrace{\frac{f_1^2 b_{\Phi,i1} - f_2^2 b_{\Phi,i2}}{f_1^2 - f_2^2}}_{=: b_{\Phi,i,IF}} - \underbrace{\frac{f_1^2 b_{\Phi,1}^j - f_2^2 b_{\Phi,2}^j}{f_1^2 - f_2^2}}_{=: b_{\Phi,IF}^j} \\ &\quad + \underbrace{\frac{f_1^2 \lambda_{i1} N_{i1}^j - f_2^2 \lambda_{i2} N_{i2}^j}{f_1^2 - f_2^2}}_{=: \lambda_{i,IF} N_{i,IF}^j} + \underbrace{\frac{f_1^2 m_{\Phi,i1}^j - f_2^2 m_{\Phi,i2}^j}{f_1^2 - f_2^2}}_{=: m_{\Phi,i,IF}^j} + \underbrace{\frac{f_1^2 \varepsilon_{\Phi,i1}^j - f_2^2 \varepsilon_{\Phi,i2}^j}{f_1^2 - f_2^2}}_{=: \varepsilon_{\Phi,i,IF}^j} \\ &= \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + b_{\Phi,i,IF} - b_{\Phi,IF}^j + \lambda_{i,IF} N_{i,IF}^j + m_{\Phi,i,IF}^j + \varepsilon_{\Phi,i,IF}^j \end{aligned} \quad (15)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Neglecting the usually unmodeled multipath $m_{P,i,IF}^j$, $m_{\Phi,i,IF}^j$ and random noise terms $\varepsilon_{P,i,IF}^j$,

$\varepsilon_{\Phi,i,IF}^j$, (14) and (15) simplify to

$$P_{i,IF}^j = \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + b_{P,i,IF} - b_{P,IF}^j. \quad (16)$$

$$\Phi_{i,IF}^j = \rho_i^j + c\Delta t_i - c\Delta t^j + T_i^j + b_{\Phi,i,IF} - b_{\Phi,IF}^j + \lambda_{IF} N_{i,IF}^j. \quad (17)$$

or in a between satellite single difference (SD) version to

$$P_{i,IF}^{j_1 j_2} = \rho_i^{j_1 j_2} - c\Delta t^{j_1 j_2} + T_i^{j_1 j_2} - b_{P,IF}^{j_1 j_2}. \quad (18)$$

$$\Phi_{i,IF}^{j_1 j_2} = \rho_i^{j_1 j_2} - c\Delta t^{j_1 j_2} + T_i^{j_1 j_2} - b_{\Phi,IF}^{j_1 j_2} + \lambda_{IF} N_{i,IF}^{j_1 j_2}. \quad (19)$$

- 5 The iono-free wavelength λ_{IF} just depends on the ratio of the involved frequencies that are listed for different GNSS in Table 1 and Table 2.

Table 1

	GPS			Galileo				
	L1	L2	L5	E2L1E1	E5a	E5b	E5a/b	E6
10.23 MHz ·	154	120	115	154	115	118	116.5	125

10 **Table 2**

Glonass		$(k = -7, \dots, +6)$	$\frac{L1}{L2} = \frac{9}{7}$
L1	L2		
$(1602 + k \cdot 9 / 16) \text{ MHz}$		$(1246 + k \cdot 7 / 16) \text{ MHz}$	

Defining $F_1, F_2 \in N$ by

$$\begin{aligned} f_1 &=: F_1 \text{ gcd}(f_1, f_2) \\ f_2 &=: F_2 \text{ gcd}(f_1, f_2) \end{aligned} \Rightarrow \frac{f_1}{f_2} = \frac{F_1}{F_2} \quad (20)$$

where gcd is an abbreviation for the greatest common divisor, it follows for the iono-free

- 15 wavelength

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\begin{aligned}
 \lambda_{IF} N_{i,IF}^j &:= \frac{f_1^2 \lambda_1 N_{i1}^j - f_2^2 \lambda_2 N_{i2}^j}{f_1^2 - f_2^2} = \lambda_1 \frac{f_1^2 N_{i1}^j - f_2^2 \frac{\lambda_2}{\lambda_1} N_{i2}^j}{f_1^2 - f_2^2} = \lambda_1 \frac{f_1^2 N_{i1}^j - f_2^2 \frac{f_1}{f_2} N_{i2}^j}{f_1^2 - f_2^2} \\
 &= \lambda_1 \frac{\frac{f_1^2}{f_2^2} N_{i1}^j - \frac{f_1}{f_2} N_{i2}^j}{\frac{f_1^2}{f_2^2} - 1} = \lambda_1 \frac{\frac{F_1^2}{F_2^2} N_{i1}^j - \frac{F_1}{F_2} N_{i2}^j}{\frac{F_1^2}{F_2^2} - 1} = \lambda_1 \frac{F_1}{F_2^2} \frac{F_1 N_{i1}^j - F_2 N_{i2}^j}{\frac{F_1^2}{F_2^2} - 1} \\
 &= \underbrace{\lambda_1 \frac{F_1}{F_1^2 - F_2^2}}_{=:\lambda_{IF}} \underbrace{(F_1 N_{i1}^j - F_2 N_{i2}^j)}_{:=N_{i,IF}^j} \quad (21)
 \end{aligned}$$

The factors F_1, F_2 are listed for different GNSS frequency combinations together with the resulting iono-free wavelengths in Table 3.

Table 3

GNSS	Freq. bands	F_1 / F_2	λ_1 / m	λ_{NL} / m	$\frac{\lambda_{IF}}{\lambda_1} = \frac{F_1}{F_1^2 - F_2^2}$
GPS	L1-L2	77/60	0.1903	0.1070	0.0331
	L1-L5	154/115	0.1903	0.1089	0.0147
	L2-L5	24/23	0.2442	0.1247	0.5106
Galileo	L1-E5a	154/115	0.1903	0.1089	0.0147
	L1-E5b	77/59	0.1903	0.1077	0.0315
	L1-E6	154/125	0.1903	0.1050	0.019
	E5b-E5a	118/115	0.2483	0.1258	0.1688
	E6-E5a	25/23	0.2344	0.1221	0.2604
	E6-E5b	125/118	0.2344	0.1206	0.0735
Glomass	L1-L2	9/7	$\frac{c}{(1602 + k \cdot 9/16) \cdot 10^6}$	$\frac{c}{(2848 + k) \cdot 10^6}$	0.2813

5

(22)

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Since for most frequency combinations the iono-free wavelength λ_{IF} is too small for reliable ambiguity resolution (the frequency combination L2-L5 is a mentionable exception), the following relation between the iono-free ambiguity $N_{i,IF}^j$ and the widelane ambiguity $N_{i,WL}^j$ is of special importance. By using the definitions

$$\left. \begin{aligned} N_{i,WL}^j &:= N_{i1}^j - N_{i2}^j \\ N_{i,NL}^j &:= N_{i1}^j + N_{i2}^j \end{aligned} \right\} \Leftrightarrow \begin{aligned} N_{i1}^j &= \frac{1}{2}(N_{i,NL}^j + N_{i,WL}^j) \\ N_{i2}^j &= \frac{1}{2}(N_{i,NL}^j - N_{i,WL}^j) \end{aligned} \quad (23)$$

5 the iono-free ambiguity term can be rewritten as

$$\begin{aligned} \lambda_{IF} N_{i,IF}^j &:= \frac{f_1^2}{f_1^2 - f_2^2} \lambda_1 N_{i1}^j - \frac{f_2^2}{f_1^2 - f_2^2} \lambda_2 N_{i2}^j \\ &= \underbrace{\left(\frac{f_1^2}{f_1^2 - f_2^2} \frac{c}{f_1} + \frac{f_2^2}{f_1^2 - f_2^2} \frac{c}{f_2} \right)}_{\frac{cf_1}{(f_1-f_2)(f_1+f_2)} + \frac{cf_2}{(f_1-f_2)(f_1+f_2)} = \frac{c}{f_1-f_2} =: \lambda_{WL}} \frac{1}{2} N_{i,WL}^j + \underbrace{\left(\frac{f_1^2}{f_1^2 - f_2^2} \frac{c}{f_1} - \frac{f_2^2}{f_1^2 - f_2^2} \frac{c}{f_2} \right)}_{\frac{cf_1}{(f_1-f_2)(f_1+f_2)} - \frac{cf_2}{(f_1-f_2)(f_1+f_2)} = \frac{c}{f_1+f_2} =: \lambda_{NL}} \frac{1}{2} N_{i,NL}^j \\ &= \frac{1}{2} \lambda_{NL} N_{i,NL}^j + \frac{1}{2} \lambda_{WL} N_{i,WL}^j \quad ; \quad N_{i,NL}^j = N_{i1}^j + N_{i2}^j = N_{i1}^j + \frac{1}{2}(N_{i,NL}^j - N_{i,WL}^j) \\ &= \lambda_{NL} N_{i1}^j + \frac{1}{2}(\lambda_{WL} - \lambda_{NL}) N_{i,WL}^j \end{aligned} \quad (24)$$

Thus, once the widelane ambiguity $N_{i,WL}^j$ has been fixed to integer on base of the Melbourne-Wübbena linear combination (11), the relation (24) can be used for integer resolution of the unconstrained narrowlane ambiguity N_{i1}^j (especially when $\lambda_{NL} \gg \lambda_{IF}$, see Table 3),

$$N_{i1}^j = \frac{1}{\lambda_{NL}} \left(\lambda_{IF} N_{i,IF}^j - \frac{1}{2}(\lambda_{WL} - \lambda_{NL}) N_{i,WL}^j \right) \quad (25)$$

10 We call N_{i1}^j the unconstrained or free narrowlane ambiguity since it occurs in (24) in combination with the narrowlane wavelength λ_{NL} and does not depend on whether the fixed widelane is even or odd. Since $N_{NL} = N_{WL} + 2N_2$ (see (23)), N_{NL} always has to have for consistency reasons the same even/odd status as N_{WL} and is therefore already constrained to some extent.

15

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 5: Kalman Filter Overview

Some embodiments of the standard clock processor 320, the MW bias processor 325, the orbit processor 330 and the phase clock processor 335 use a Kalman filter approach.

5

FIG. 6 shows a diagram of the Kalman filter algorithm 600. The modeling underlying the Kalman filter equations relate the state vector x_k at time step k (containing the unknown parameters) to the observations (measurements) z_k via the design matrix H_k and to the state vector at time step $k-1$ via the state transition matrix Φ_{k-1} , together with process noise w_{k-1} and

10

observation noise v_k whose covariance matrices are assumed to be known as Q_k, R_k , respectively. Then the Kalman filter equations predict the estimated state $\hat{x}_{k-1}$ together with its covariance matrix P_{k-1} via the state transition matrix Φ_{k-1} and process noise input described by covariance matrix Q_{k-1} to time step k resulting in predicted state $\hat{x}_k^-$ and predicted covariance matrix P_k^- . Predicted state matrix and state covariance matrix are then corrected by the

15

observation z_k in the Kalman filter measurement update where the gain matrix K_k plays a central role in the state update as well as in the state covariance update.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 6: Code-Leveled Clock Processor

The estimated absolute code-leveled low-rate satellite clocks 365 are used in positioning solutions, for example to compute the precise send time of the GNSS signal and also to obtain a quick convergence of float position solutions, e.g., in precise point positioning. For send time computation a rough, but absolute, satellite clock error estimate can be used. Even the satellite clocks from the broadcast message are good enough for this purpose. However, the quality of single-differenced pairs of satellite clock errors is important to achieve rapid convergence in positioning applications. For this purpose a clock accuracy level of ca. 10 cm is desired.

Some embodiments use quality-controlled ionospheric-free combinations of GNSS observations from a global tracking network, optionally corrected for known effects, to estimate (mostly) uninterrupted absolute code-leveled satellite clock errors.

The raw GNSS reference station data 305 are optionally corrected by data corrector 310 to obtain corrected network data 315 as described in Part 3 above.

For each station, ionospheric-free combinations derived from observation of signals with different wavelengths (e.g. L1 and L2) and the broadcasted clock error predictions are used as an input for the filter:

(26)

$$P_{r,IF}^s - c\Delta t_{rel}^s = \rho_r^s + c\Delta t_{P,r} - c\Delta t_P^s + T_r + \varepsilon_{P,r,IF}^s$$

(27)

$$\Phi_{r,IF}^s - c\Delta t_{rel}^s = \rho_r^s + c\Delta t_{P,r} - c\Delta t_P^s + T_r + \lambda N_r^s + \varepsilon_{\Phi,r,IF}^s$$

$$\Delta t_{brc}^s = \Delta t^s + \delta^s \quad (28)$$

where

$P_{r,IF}^s$ is the ionospheric-free code combination for each receiver-satellite pair r,s

$\Phi_{r,IF}^s$ is the ionospheric-free phase observation for each receiver-satellite pair r,s

Δt_{brc}^s is the broadcast satellite clock error prediction

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

ρ_r^s is the geometric range from satellite s to receiver r

Δt_{rel}^s represents the relativistic effects for satellite s

$c\Delta t_{P,r} := c\Delta t_r + b_{P,r,IF}$ is the clock error for receiver r

$c\Delta t_P^s := c\Delta t^s + b_{P,IF}^s$ is the clock error for satellite s

5 T_r is the troposphere delay observed at receiver r

$\mathcal{E}_{P,r,IF}^s$ represents noise in the code measurement

$\mathcal{E}_{\Phi,r,IF}^s$ represents noise in the carrier measurement

$\lambda N_r^s := \lambda_{IF} N_{r,IF}^s + b_{\Phi,r,IF} - b_{P,r,IF} - (b_{\Phi,IF}^s - b_{P,IF}^s)$ is the float carrier ambiguity

from satellite s to receiver r

10

The geometric range ρ_r^s at each epoch can be computed from a precise satellite orbit and a precise reference station location. The relativistic effects Δt_{rel}^s can be computed using the satellite orbits. The respective noise terms $\mathcal{E}_{P,r,IF}^s$ and $\mathcal{E}_{\Phi,r,IF}^s$ are not the same for code and carrier observations. Differencing the phase observation and code observation directly leads to a rough estimate of the carrier ambiguity N_r^s though influenced by measurement noise $\mathcal{E}_{P,r,IF}^s$ and $\mathcal{E}_{\Phi,r,IF}^s$:

15

$$\Phi_{r,IF}^s - P_{r,IF}^s = \lambda N_r^s + \mathcal{E}_{\Phi,r,IF}^s + \mathcal{E}_{P,r,IF}^s \quad (29)$$

20

Thus as an input for the filter this difference $\Phi_{r,IF}^s - P_{r,IF}^s$, the phase measurement $\Phi_{r,IF}^s$ and the broadcasted satellite clock error prediction Δt_{brc}^s is used. The difference $\Phi_{r,IF}^s - P_{r,IF}^s$ is a pseudo measurement for the ambiguities, which are modeled as constants. The converged ambiguities are used to define the level of the clock errors.

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Once the ambiguities are converged, the phase measurement $\Phi_{r,IF}^s$ provides a measurement for the clock errors and the troposphere. For the troposphere $T_r = (1 + c_{T,r})\hat{T}_r$ it is sufficient to estimate only one scaling factor per receiver $c_{T,r}$. A mapping to different elevations is computed using a troposphere model $\hat{T}_r$. The scaling factor can be assumed to vary over time like a random walk process.

For the satellite clocks a linear time discrete process is assumed

$$\Delta t^s(t_{i+1}) = \Delta t^s(t_i) + w_1^s(t_i) + (\Delta \dot{t}^s(t_i) + w_2^s(t_i))(t_{i+1} - t_i) \quad (30)$$

with random walks w_1^s and w_2^s overlaid on the clock error Δt^s and on the clock error rate $\Delta \dot{t}^s$. The receiver clocks are usually not as precise as the satellite clocks and are often unpredictable. Thus the receiver clocks are modeled as white noise to account for any behavior they might exhibit.

The system of receiver and satellite clocks is underdetermined if only code and phase observations are used. Thus all clock estimates can have a common trend (any arbitrary function added to each of the clocks). In a single difference this trend cancels out and each single difference clock is correct. To overcome this lack of information the broadcast clock error predictions can be used as pseudo observations for the satellite clock errors to keep the system close to GPS time.

The assumption of a random walk on the clock rate is equal to the assumption of a random run on the clock error itself. Optionally a quadratic clock error model is used to model changes in the clock rate. This additional parameter for clock rate changes can also be modeled as a random walk. The noise input used for the filter can be derived by an analysis of the clock errors using for example the (modified) Allan deviation or the Hadamard variance. The Allan deviation is described in *A. van Dierendonck, Relationship between Allan Variances and Kalman Filter Parameters*, PROCEEDINGS OF THE 16TH ANNUAL PRECISE TIME AND TIME INTERVAL (PTTI) SYSTEMS AND APPLICATION MEETING 1984, pp. 273-292. The Hadamard variance is described in *S. Hutsell, Relating the Hadamard variance to MCS Kalman filter clock estimation*, 27TH

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

ANNUAL PRECISE TIME AND TIME INTERVAL (PTTI) APPLICATIONS AND PLANNING MEETING
1996, pp. 291-301.

There are many different approaches to overcome the underdetermined clock system besides
5 adding the broadcasted satellite clock errors as pseudo-observations. One is to fix one of the
satellite or receiver clock errors to the values of an arbitrarily chosen function (e.g. 0 or additional
measurements of a good receiver clock). Another is to fix the mean of all clocks to some value,
for example to the mean of broadcasted or ultra-rapid clock errors as done in *A. Hausschild, Real-
time Clock Estimation for Precise Orbit Determination of LEO-Satellites*, ION GNSS 2008, Sept.
10 16–19, 2008, Savannah, Georgia, 9 pp. This is taken into account in deriving the clock models;
the system model and the noise model fits the clock error difference to the fixed clock error and
no longer to the original clock error.

FIG. 7A is a schematic diagram of a “standard” code-leveled clock processor 320 in accordance
15 with some embodiments of the invention. An iterative filter such as a Kalman filter 705 uses for
example ionospheric-free linear combinations 710 of the reference station observations and clock
error models 715 with broadcast satellite clocks 720 as pseudo-observations to estimate low-rate
code-leveled (standard) satellite clocks 365, tropospheric delays 370, receiver clocks 725, satellite
clock rates 730, (optionally) ionospheric-free float ambiguities 374, and (optionally) ionospheric-
20 free code-carrier biases 372.

Further improvements can be made to quality of the clocks. Single differences of the estimated
clock errors can exhibit a slow drift due to remaining errors in the corrected observations, errors
in the orbits, and unmodeled biases between phase and code measurements. After some time the
25 single differences of the estimated clock errors no longer match a code-leveled clock. To account
for such a drift, the mismatch between code and phase measurements is optionally estimated and
applied to the estimated clock errors. In some embodiments this is done by setting up an
additional filter such as filter 735 of FIG. 7A with only one bias per satellite and one per receiver,
to estimate the ionospheric-free code-carrier biases 372 as indicated by “option 1.” The receiver
30 biases are modeled for example as white noise processes. The satellite biases are modeled for
example as random walk with an appropriate small input noise, because only low rate variations
of the satellite biases are expected. Observations used for this filter are, for example, an
ionospheric-free code combination 740, reduced by the tropospheric delay 370, the satellite clock

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

errors 365 and the receiver clock errors 725 estimated in the above standard code-leveled clock filter 705. Rather than setting up the additional filter such as filter 730, the iono-free code-carrier biases are in some embodiments modeled as additional states in the code-leveled clock estimation filter 705, as indicated by “option 2.”

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 7: MW (Melbourne-Wübbena) Bias Processor**Part 7.1 MW Bias: Motivation**

The range signals emitted by navigation satellites and received by GNSS receivers contain a part
5 for which delays in the satellite hardware are responsible. These hardware delays are usually just
called satellite biases or uncalibrated delays. In differential GNSS processing the satellite biases
do not play any role when both receivers receive the same code signals (e.g. in case of GPS both
L1C/A or both L1P). However, the biases are always important for Precise Point Positioning
(PPP) applications where the precise positioning of a single rover receiver is achieved with the
10 help of precise satellite clocks and precise orbits determined on base of a global network of
reference stations (as e.g. by the International GNSS service (IGS)) (Zumberge, Heflin, Jefferson,
Watkins, & Webb, 1997), (Héroux & Kouba, 2001). Here the knowledge of satellite biases can
allow to resolve undifferenced (or between satellite single differenced) integer ambiguities on the
rover which is the key to fast high precision positioning without a reference station (Mervart,
15 Lukes, Rocken, & Iwabuchi, 2008), (Collins, Lahaye, Héroux, & Bisnath, 2008).

Usually the satellite biases are assumed to be almost constant over time periods of weeks (Ge,
Gendt, Rothacher, Shi, & Liu, 2008), and their variations can be neglected
(Laurichesse & Mercier, 2007), (Laurichesse, Mercier, Berthias, & Bijac, 2008). Our own
20 intensive studies revealed by processing in the here proposed way GPS data of a global network
of reference stations over several months that there are daily repeating patterns in the Melbourne-
Wuebbena (MW) linear combination of satellite biases of size up to about 14 cm over 6 hours², as
well as drifts over a month of up to about 17 cm and sometimes sudden bias level changes (of
arbitrary size) of individual satellites within seconds (e.g. GPS PRN 24 on 2008.06.26). Therefore
25 the real-time estimation of satellite biases as a dynamical system in a sequential least squares
filter (like e.g. a Kalman filter ((Grewal & Andrews, 2001), (Bierman, 1977)) and the
transmission of these biases to PPP based rover receivers (in addition to precise satellite clocks
and orbits) becomes important for integer ambiguity resolution on the rover.

² Nevertheless, the daily repeatability of the MW satellite biases is usually in the range of 2 to 3 cm which is consistent with the literature.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 7.2 MW Bias: Process Flow

FIG. 11 is a schematic diagram of a process flow 1100 for MW satellite bias and WL ambiguity determination in accordance with some embodiments. GNSS observation data 305 on code and carrier phase on at least two frequencies from a number of reference station receivers is used as the main input into the process. These observations are optionally corrected at 310 for effects that do not require estimation of any model parameters. Among the corrections typically used in PPP applications for the MW linear combination are especially the receiver and satellite antenna offsets and variations; higher order ionospheric terms are of importance since these corrections do not cancel in this linear combination. The optionally corrected GNSS observation data 315 is then forwarded to a module 1105 that generates linear combinations 1110 of the code and phase observations on two frequencies. The determined MW observation combinations 1110 are then input into a sequential filter 1115 (such as a Kalman filter) that relates MW observations $\Phi_{i,WL}^j - P_{i,NL}^j$ to the estimation parameters, i.e., the MW satellite biases b_{MW}^j 1120, WL ambiguities $N_{i,WL}^j$ 1125 and optionally MW receiver biases $b_{i,MW}$ 1130 via Equation (11) in the undifferenced case or via Equation (12) in the between satellite single difference case.

Importantly, process noise input on the MW satellite biases b_{MW}^j ensures that the biases can vary over time. Due to the periodic behavior of satellite biases, optionally the biases may also be modeled by harmonic functions, e.g. as

$$b_{MW}^j = b_0^j + b_1^j \sin(\alpha^j) + b_2^j \cos(\alpha^j) \quad (31)$$

where α^j defines the position of satellite j in the orbit (e.g. α^j could be the argument of latitude or the true anomaly) and b_0^j, b_1^j, b_2^j are the estimated parameters that need much less process noise than a single parameter b_{MW}^j and can therefore further stabilize the estimation process.

In addition to the observation data, a single MW bias constraint 1140 and several ambiguity constraints 1145 are input to the filter [935]. These constraints are additional arbitrary equations that are e.g. of the form

$$b_{WL}^{j_0} = 0 \quad (32)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$N_{i,WL}^j = \text{round}(N_{i,WL}^j) \quad (33)$$

and that are added to the filter with a very low observation variance of e.g. $10^{-30} m^2$. The constraints ensure that the system of linear equations in the filter 1115 is not underdetermined so that the variances of the model parameters immediately become of the same order as the observation variance. They have to be chosen in a careful way so that the system of linear

5 equations is not over-constrained by constraining a double-difference WL ambiguity which is directly given by the MW observations (see equation (13)). By constraining the ambiguities to an arbitrary integer, information about the integer nature of the ambiguities comes into the system. In a Kalman filter approach where the system of equations in (11) or (12) (optionally together with (31)) is extended by arbitrary equations for the initial values of all parameters so that always

10 a well defined float solution (with variances of the size of the initial variances) exists, it is preferable to constrain the ambiguities to the closest integer of the Kalman filter float solution.

The estimated MW satellite biases 1120 are either directly used as the process output or after an optional additional WL ambiguity fixing step. Therefore the estimated WL ambiguities 1125 are

15 optionally put into an ambiguity fixer module 1135. The resulting fixed WL ambiguities 340 (that are either fixed to integer or float values) are used as the second process output. Optionally the fixed WL ambiguities 340 are fed back into the filter 1115 (or into a filter copy or a secondary filter without ambiguity states (compare FIG. 24A – FIG. 25D) to get satellite MW bias output 1120 which is consistent with integer WL ambiguities.

20 The MW satellite biases 1120 are transferred for example via the scheduler 355 to rover receivers where they help in fixing WL ambiguities at the rover. Network WL ambiguities 1125 or 340 can be forwarded to the phase clock processor 335 and orbit processor 330 where they help in fixing iono-free (IF) ambiguities when the reference station data 305 from the same receiver

25 network is used in these processors. Alternatively, instead of the network WL ambiguities 1125 or 340], MW satellite biases 1120 are transferred to orbit processor 330 and phase clock processor 335 to derive WL ambiguities in a station-wise process for the network receivers in the same way as it is done on the rover. Then the derived WL ambiguities help in fixing IF ambiguities. With such an approach, GNSS data from different reference station networks can be

30 used in the different processors.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 12 shows a schematic diagram of a processing architecture 1200 in accordance with some embodiments. Code and carrier phase observations 1205 (e.g., from reference station data 305) on at least two frequencies from a number of reference station receivers are put into a linear combiner 1210 that generates a set of Melbourne-Wuebbena (MW) linear combinations 1220, one such MW combination for each station-satellite pairing from code and carrier phase observations on two frequencies. If more than two frequencies are available several MW combinations can be generated for a single station-satellite pairing. These MW observations are then put into a processor 1225 that estimates at least MW biases per satellite 1230 and WL ambiguities per station-satellite pairing 1235 based on modeling equations (11) in the undifferenced case or (12) in the between satellite single difference case (both optionally together with (31)). The processor is usually one or more sequential filters such as one or more Kalman filters. Since it can also consist of several filters, here the more general term processor is used. Process noise 1240 input on the MW satellite biases in the processor allows them to vary from epoch to epoch even after the convergence phase of filtering. The outputs of the process are the estimated satellite MW biases 1230 and network WL ambiguities 1235.

Thus, some embodiments provide a method of processing a set of GNSS signal data derived from code observations and carrier-phase observations at multiple receivers of GNSS signals of multiple satellites over multiple epochs, the GNSS signals having at least two carrier frequencies, comprising: forming an MW (Melbourne-Wübbena) combination per receiver-satellite pairing at each epoch to obtain a MW data set per epoch; and estimating from the MW data set per epoch an MW bias per satellite which may vary from epoch to epoch, and a set of WL (widelane) ambiguities, each WL ambiguity corresponding to one of a receiver-satellite link and a satellite-receiver-satellite link, wherein the MW bias per satellite is modeled as one of (i) a single estimation parameter and (ii) an estimated offset plus harmonic variations with estimated amplitudes.

Broadcast satellite orbits 1245 contained in the navigation message are optionally used, for example with coarse receiver positions 1250, to reduce the incoming observations to a minimal elevation angle under which a satellite is seen at a station. The receiver positions 1250 are optionally given as an additional input, or alternatively can be derived as known in the art from the code observations and the broadcast satellite orbit. The restriction to observations of a minimal elevation can be done at any place before putting the observations into the processor.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

However, performing the restriction directly after pushing the code and carrier phase observations into the process avoids unnecessary computations.

FIG. 13A and FIG. 13B show respectively the state vectors for the undifferenced (= zero-differenced (ZD)) and single differenced embodiments, listing parameters to be estimated.

The ZD state vector 1310 comprises n satellite bias states b_{MW}^j , a number of ambiguity states $N_{i,WL}^j$ that changes over time with the number of satellites visible at the stations, and m receiver bias states $b_{i,MW}$. The SD state vector 1320 comprises n satellite bias states $b_{MW}^{jj_0}$ to a fixed reference satellite j_0 that can be either a physical or an artificial satellite. In addition, the SD state vector comprises the same number of ambiguity states as in the ZD case. However, here each ambiguity represents a SD ambiguity to a physical or artificial satellite. Each station can have its own choice of reference satellite. In the SD case no receiver bias states are necessary, so that there are always m less states in the SD state vector 1320 than in the comparable ZD state vector 1310. More details about artificial reference satellites follow in Part 7.4.

Part 7.3 MW Process: Correcting and Smoothing

FIG. 14 shows a process 1400 with the addition of observation correction to the MW process of FIG. 12. Some embodiments add the observation data corrector module 310 of FIG. 3. Code and carrier phase observations 1205 on at least two frequencies from a number of reference stations (e.g., from reference station data 305) are corrected in the optional observation data corrector 310 for effects that do not require estimation of any model parameters (especially receiver and satellite antenna offsets and variations, and higher order ionospheric effects). Knowledge of the broadcast satellite orbits 1245 and the coarse receiver positions 1250 is used for this. The corrected observation data 1310 are then optionally fed into the process of FIG. 12 to produce MW satellite biases 1330 and widelane ambiguities 1335.

In FIG. 15, code and carrier phase observations 1205 on at least two frequencies from a number of reference stations (e.g., from reference station data 305) are optionally corrected in the observation data corrector 310, then combined in a linear combiner 1210 to form Melbourne-Wuebbena linear combinations 1220 and finally smoothed over several epochs in a smoother 1410 to form smoothed Melbourne-Wuebbena combinations 1420. Alternatively, smoothing can

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

be done on the original observations or on any other linear combination of the original observations before generating the MW linear combination. In any case, the resulting smoothed MW observations are put into the processor 1225 for estimating MW satellite biases 1430 and WL ambiguities 1435 as in the embodiments of FIG. 12 and FIG. 14.

5

Smoothing means to combine multiple observations over time, e.g. by a simple averaging operation, to obtain a reduced-noise observation. MW smoothing is done to reduce the multipath error present in (10) that is not explicitly modeled in the processor 1225, e.g., as in modeling equations (11) and (12). Smoothing is motivated by the expectation that the MW observation is almost constant over short time periods since the MW observation only consists of hardware biases and a (constant) ambiguity term. A reasonable smoothing interval is, for example, 900 seconds. An additional advantage of smoothing the MW observations is that an observation variance can be derived for the smoothed observation from the input data by the variance of the mean value,

10

$$\sigma_{\text{obs,MW}}^2 = \frac{\sum_{t=1}^n (x_t - \bar{x})^2}{(n-1)n} \quad \text{with} \quad \bar{x} = \frac{1}{n} \sum_{t=1}^n x_t \quad (34)$$

15

where x_t is the MW observation at smoothing epoch t and n is the number of observations used in the smoothing interval. To ensure that this variance really reflects multipath and not just a too-small number of possibly unreliable observations in the smoothing interval, it is advantageous to accept a smoothed observation as filter input only when a minimal number of observations is available, e.g. 80% of the theoretical maximum. Note that the statistical data that holds mean value and variance of the Melbourne-Wuebbena observation has to be reset in case of an unrepaid cycle slip since this observation contains an ambiguity term. Of course, a cycle slip also requires a reset of the corresponding ambiguity in the filter.

20

If smoothing is done by a simple averaging operation over a fixed time interval, smoothing implies different data rates in the process. Observations 1205 are coming in with a high data rate, while smoothed MW observations 1420 are forwarded to the processor with a lower data rate. This kind of smoothing has the advantage that observations put into the processor are not correlated and can therefore be handled in a mathematically correct way. The alternative of using some kind of a (weighted) moving average allows to stay with a single (high) data rate, but has the disadvantage that the resulting smoothed observations become mathematically correlated.

30

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 7.4 MW Process: MW Bias Constraint

FIG. 16 shows a process 1600 with the addition of one or more MW bias constraints to the
 5 process of FIG. 15, which can similarly be added to the embodiments shown in FIG. 12, FIG. 14.
 At least one MW bias constraint 1605 like (32) is put into the processor to reduce the rank defect
 in modeling equations (11) or (12).

The rank defect in (11) or (12) becomes apparent by counting the number of observations and the
 10 number of unknowns in these equations. For example in (11), if there are $i = 1, \dots, m$ stations and
 $j = 1, \dots, n$ satellites and it is assumed that all satellites are seen at all stations, there will be
 $m \cdot n$ Melbourne-Wuebbena observations. However, at the same time there are also $m \cdot n$
 unknown ambiguities $N_{i,WL}^j$ in addition to m receiver biases $b_{i,MW}$ and n satellite biases b_{MW}^j ,
 resulting in $m \cdot n + m + n$ unknowns. Thus the system of equations defined by (11) can only be
 15 solved if the number of arbitrary constraints introduced into the system is the number of
 unknowns minus the number of observations, i.e. $(m \cdot n + m + n) - (m \cdot n) = m + n$.

Most of these constraints should be ambiguity constraints as the following consideration
 demonstrates. For n satellites $n - 1$ independent between-satellite single differences can be
 20 generated. In the same way, from m stations $m - 1$ between station single differences can be
 derived. In a double difference (DD) between stations and satellites these independent single
 differences are combined, resulting in $(m - 1) \cdot (n - 1) = m \cdot n - (m + n - 1)$ double difference
 observations. Since as in (13) the DD ambiguities are uniquely determined by the DD-MW
 observations, the difference between the $m \cdot n$ ambiguities in (11) and the $m \cdot n - (m + n - 1)$
 25 unique DD ambiguities should be constrained, resulting in $m + n - 1$ ambiguity constraints. Thus
 from the $m + n$ required constraints all but one should be ambiguity constraints. The remaining
 arbitrary constraint should be a constraint on the biases. This statement remains true in the more
 general case when not all satellites are seen at all stations and thus the number of required
 constraints can no longer be counted in the demonstrated simple way. The constraint on the
 30 biases itself is an arbitrary equation like (32) or more generally of the form

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\sum_i a_i b_{i,MW} + \sum_j a^j b_{MW}^j = b \quad \text{with} \quad a_i, a^j, b \in R \quad (35)$$

In the single difference case (12) the constraint on the biases is more straightforward. The state vector of the satellite biases does not contain all possible SD biases but only the independent ones. This is achieved by taking an arbitrary reference satellite and choosing as states only the SD biases to the reference. To be prepared for a changing reference satellite in case the old reference satellite is not observed anymore, it is preferable to also have a state for the reference satellite. However, the SD bias of the reference to itself has to be zero.

$$b_{MW}^{j_{ref} j_{ref}} = b_{MW}^{j_{ref}} - b_{MW}^{j_{ref}} \equiv 0 \quad (36)$$

This equation is added as a constraint. Note, however, that the SD bias states are not necessarily interpreted as SDs to a physical reference satellite. It is also possible to have an artificial reference satellite with a bias that is related to the biases of the physical satellites (this ensures that the artificial satellite is connected to the physical satellites)

$$\sum_j a^j b_{MW}^j = b \quad \text{with} \quad a^j, b \in R \quad (37)$$

By specifying arbitrary values for a^j, b (with at least one $a^j \neq 0$) and introducing (37) as a constraint into (12), the information about the bias of the reference satellite comes into the system.

With knowledge of MW satellite biases (as they are derived from the system proposed here) from a different source, it is also reasonable to introduce more than one bias constraint into the system. For example, if all MW satellite biases are constrained, it is in a single-difference approach not necessary to introduce any ambiguity constraints into the system, since (12) can be rewritten as

$$\Phi_{i,WL}^{j_1 j_2} - P_{i,NL}^{j_1 j_2} + b_{MW}^{j_1 j_2} = \lambda_{WL} N_{i,WL}^{j_1 j_2} \quad (38)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Thus all SD ambiguities $N_{i,WL}^{j_1j_2}$ are uniquely determined with knowledge of the SD-MW satellite biases. It is exactly this relation that helps a rover receiver to solve for its WL ambiguities with the help of the here derived MW satellite biases.

- 5 In the undifferenced approach, one ambiguity constraint per station is introduced when the MW satellite biases for all satellites are introduced as constraints into the system.

All bias constraints to handle the rank defect in modeling equations (11) or (12) are avoided if one additional ambiguity constraint is introduced instead. However, this additional ambiguity
10 constraint is not arbitrary. It is chosen such that the double difference relation (13) is fulfilled. However, (13) does not contain the unmodeled multipath and just determines a float value for the DD ambiguity. Thus, deriving an integer DD ambiguity value from (13) is prone to error.

To better distinguish between arbitrary ambiguity constraints and ambiguity constraints that have
15 to fulfill the DD ambiguity relation (13), we usually call the second kind of constraints ambiguity fixes. While constraints are arbitrary and do not depend on the actual observations, fixes do. Constraints cannot be made to a wrong value, fixes can. Which of the ambiguities can be constrained to an arbitrary value is described in Part 7.6.

20 **Part 7.5 MW Bias Process: WL Ambiguity Constraints**

FIG. 17 shows a process 1700 with the addition of one or more WL ambiguity constraints to the process of FIG. 16, which can similarly be added to the embodiments shown in FIG. 12, FIG. 14 and FIG. 15. At least one WL ambiguity integer constraint 1705 as in Equation (33) is put into
25 the processor 1225 to further reduce the rank defect in modeling equations (11) or (12). As for FIG. 16, the correct number of arbitrary ambiguity constraints in a network with $i = 1, \dots, m$ stations and $j = 1, \dots, n$ satellites, where all satellites are seen at all stations, is $m + n - 1$. However, in a global network with reference stations distributed over the whole Earth not all satellites are seen at all stations. For this case, choosing the correct number of arbitrary
30 ambiguity constraints and determining the exact combinations that are not restricted by the DD ambiguity relation (13) is described in Part ____.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Although the constrained ambiguities that are not restricted by the DD ambiguity relation (13) could be constrained to any value in order to reduce the rank effect in the modeling equations (11) or (12), it is desirable to constrain these ambiguities to an integer value so that the integer nature of the ambiguities comes into the system. This helps later on when for the remaining
5 unconstrained float ambiguities, integer values are searched that are consistent with (13) and to which these ambiguities can be fixed.

In a Kalman filter approach where equations (11) or (12) are extended by equations for the initial values of the parameters, there is always a well defined float solution for all parameters (that has,
10 however, a large variance if the initial variances of the parameters have also been chosen with large values). In this case it is reasonable to constrain the ambiguities to the closest integer of their Kalman filter float solution since this disturbs the filter in the least way and gives the solution that is closest to the initial values of the parameters. It is also advantageous to constrain the ambiguities one after the other, looking up after each constraint the updated float ambiguity of
15 the next ambiguity to be constrained. Such a procedure helps to stabilize the filter in cases of network outages where many ambiguities are lost, receiver biases are modeled as white noise parameters and just already converged satellite biases have a defined value.

Part 7.6 MW Bias Process: Determining WL Ambiguity Constraints

20

FIG. 18 shows a process 1800 with the addition of determining one or more WL ambiguity constraints for the process of FIG. 17 so as to avoid under- and over-constraining of the modeling equations (11) or (12).

25 Under-constraining means that too few constraints have been introduced to overcome the rank defect in (11) or (12). Over-constraining means that arbitrary constraints have been introduced that are inconsistent with the DD ambiguity relation (13). Thus, a system can be at the same time over- and under-constrained.

30 The MW observation input 1420 defines an observation graph, 1805, i.e. a number of edges given by observed station-satellite links. Based on this graph a spanning tree (ST) 1815 is generated by an ST generator 1810 that connects all stations and satellites (in the undifferenced case (11)) or just all satellites (in the between satellite single differenced case (12)) without introducing loops.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The resulting ST 1815 defines the WL ambiguity constraints 1705, i.e., which WL ambiguities are constrained.

FIG. 19A shows at 1900 how observed station-satellite links can be interpreted as an abstract graph, i.e. a number of vertices connected by edges. The stations at the bottom of FIG. 19A and the satellites at the top of FIG. 19A are identified as vertices and the station-satellite pairs (each pair corresponding to observations at a station of a satellite's signals) as edges. The abstract graph 1910 of FIG. 19B does not distinguish any more between stations and satellites and instead shows the edges as links between vertices.

In graph theory a tree is a graph without closed loops. An example is shown at 1920 in FIG. 19C, where the tree is marked with bold lines. A spanning tree on a graph is a tree that connects (or spans) all vertices, as in FIG. 19C.

Instead of building the spanning tree based on the current observation graph, it can alternatively be based on all station-satellite ambiguities that are currently in the filter. These ambiguities correspond to station-satellite links that were observed in the past but that are not necessarily observed anymore in the current epoch. We call the station-satellite links defined by the filter ambiguities the filter graph. Notice that it is a bit arbitrary for how long ambiguities are kept in the filter when they are no longer observed. If a fixed slot management for the ambiguities in the filter is used that holds a maximal number of ambiguities for each station so that a newly observed ambiguity on a rising satellite will throw out the oldest ambiguity if all slots are already used, this time of keeping a certain ambiguity does not have to be specified. It will be different for each satellite on each station. However, such a slot management guarantees that after some time each station holds the same number of ambiguities.

In general the filter graph contains more station-satellite links than the observation graph. It contains in addition stations that are not observed anymore (which often occurs for short time periods in a global network), satellites no longer observed at any station (e.g. since a satellite became unhealthy for a short time period), or just station-satellite links that fall below the elevation cutoff. Working on the filter graph is of special importance when the later described ambiguity fixing is also done on the filter graph and ambiguity constraints and fixes are introduced on the original filter and not on a filter copy.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In the single-differenced observation graph 1960 of FIG. 19G two satellites are usually connected by several edges since the two satellites are usually observed at several stations. Each edge connecting two satellites corresponds to an (at least in the past) observed satellite-station-satellite link, i.e., a single-difference observation. Of course, also the SD filter graph 1970 of FIG. 19H contains more edges than the SD observation graph 1960.

Constraining the ambiguities determined by a spanning tree over the observation or the filter graph can avoid under- and over-constraining of modeling equations (11) or (12). This is illustrated for the undifferenced case in FIG. 19D. A spanning tree (ST) on the observation graph or filter graph connects all vertices without introducing loops (see emphasized edges in FIG. 19C). FIG. 19D shows at 1930 in addition to the spanning tree edges (in dark grey) that are constrained to an arbitrary integer value, also a single satellite bias constraint S1 depicted in dark grey. The satellite bias is visualized as a circle since its contribution to the observation is the same for all receiver observations of this satellite.

Constraining the ST edges together with one additional satellite bias S1 allows to resolve the underdetermined linear system of equations (11): The observation R1-S1 together with the satellite bias constraint S1 and the ambiguity constraint R1-S1 allows to uniquely solve for receiver bias R1 (compare equation (11)). Once receiver bias R1 is known, the observation R1-S2 together with the ambiguity constraint R1-S2 allows to solve for satellite bias S2. In the same way all other receiver and satellite biases can be computed with the help of the ST constrained ambiguities. The spanning property of the ST ensures that all satellite and receiver biases are reached while the tree property ensures that there are no loops that would constrain a double difference observation (13). Once all satellite and receiver biases are known, the remaining ambiguities (e.g. R2-S1, R2-S4 and R2-S5 in FIG. 19D) can be directly computed from the remaining observations one after the other.

In the SD case shown in FIG. 19G and 19H the argumentation is quite similar. Constraining one SD satellite bias to an arbitrary value (e.g., constraining the bias of a physical reference satellite to 0), the SD satellite bias of the next satellite can be determined with the help of an SD observation between the first and second satellite and the ambiguity constraint from the SD spanning tree between the two satellites (compare equation (12)). Once the second satellite bias

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

is known the third bias can be calculated. In the same way all other satellite biases are determined with the help of the SD spanning tree constraints. By adding one ambiguity constraint per station to an arbitrary satellite, all remaining SD ambiguities (single-differenced against a station-specific reference satellite) in the filter can be resolved one after the other.

5

The relation underlying this description between an undifferenced (= zero-differenced (ZD)) spanning tree 1975 and a SD spanning tree 1980 is depicted in FIG. 19I. Connecting each station with a single satellite by introducing one ambiguity constraint per station and adding to these constraints the ones given by an ST on the SD observation graph (or filter graph), defines the same constraints that are given by an ST on a ZD observation graph (or filter graph) 1985. Building up a spanning tree on a graph is not a unique process. For a given graph there exist many trees that span the graph. To make the generation of a spanning tree more unique the use of a minimum spanning tree (with respect to some criterion) is proposed in Part 7.7.

10

15

Part 7.7 MW Bias Process: Minimum Spanning Tree

Fig. 21A shows at 2110 a spanning tree (ST) on an undifferenced observation graph. FIG. 21B shows at 2120 a minimum spanning tree (MST) (Cormen, Leiserson, Rivest, & Stein, 2001) on the undifferenced observation graph of FIG. 21A. FIG. 20 shows the ST generator 1810 of FIG. 18 replaced with an MST generator 2010. For building up an MST on a graph, each edge has an edge weight resulting in a so-called weighted graph. The MST is defined as the spanning tree with the overall minimal edge weight. The edge weight can be assigned in any of a variety of ways. One possible way is based on the current receiver-satellite geometry and therefore use the station positions 1250 and the satellite positions 1245 as inputs. The connections between the coarse receiver positions 1250, the broadcast satellite orbits 1245 and the MST generator 2010 are depicted in FIG. 20.

20

25

The edges in the undifferenced observation graph or filter graph are given by station-satellite links. In some embodiments the edge weight is the geometric distance from receiver to satellite or a satellite-elevation-angle-related quantity (like the inverse elevation angle or the zenith distance (=90°-elevation)).

30

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The edges in the single-differenced observation graph or filter graph are given by satellite-receiver-satellite links connecting two different satellites over a station. In some embodiments the edge weight is the geometric distance from satellite to receiver to satellite, or a combination of the elevations under which the two satellites are seen at the receiver. In some embodiments the combination of the two elevations is the sum of the inverse elevations, the sum of the zenith distances, the minimal inverse elevation, or the minimal zenith distance.

In FIG. 21 A and FIG. 21B the ST and MST edges are marked with an "X." The ST 2110 in FIG. 21A and the MST 2120 in FIG. 21B are identical, and the ST 2130 in FIG. 21C and the MST 2140 in FIG. 21D are identical, reflecting the fact that each ST can be obtained as an MST by definition of suitable edge weights.

An MST is well defined (i.e. it is unique) if all edge weights are different. Assigning the weights to the edges allows control on how the spanning tree is generated. In embodiments using geometrical based weights the MST is generated in a way that highest satellites (having smallest geometrical distance and smallest zenith distance, or smallest value of $1/\text{elevation}$) are preferred. These are also the station-satellite links that are least influenced by the unmodeled multipath. In these embodiments the weights prefer those edges for constraining which should shift the least multipath into other links when constraining the ambiguities to an integer value. In embodiments using low elevation station-satellite links with high multipath for constraining, the multipath is shifted to links with higher elevation satellites. This can result in the counter-intuitive effect that ambiguities on high elevation satellites become more difficult to fix to an integer value.

Generating an MST on a given weighted graph is a standard task in computer science for which very efficient algorithms exist. Examples are Kruskal's, Prim's, and Boruvka's algorithms.

FIG. 22 shows an alternative way of choosing the edge weights of the observation graph or filter graph on which the MST (defining the constrained ambiguities) is generated. In some embodiments, the edge weights are derived from the ambiguity information in the filter, i.e. from the values of the WL ambiguities 1435, or from the variances 2210 of the WL ambiguities, or from both.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

A particular interesting edge weight used in some embodiments is the distance of the corresponding ambiguity to its closest integer value. In this way the MST chooses the ambiguities for constraining that span the observation/filter graph and that are as close as possible to integer. Thus the states in the processor are influenced in a minimal way by the constraints to integer. An additional advantage is that the constraints of the last epoch will also be favored in the new epoch since their distance to integer is zero which prevents from over-constraining the filter when the constraints are directly applied to the filter and no filter copy is used. The same goal is reached by using the variance of the ambiguity as an edge weight. Constrained ambiguities have a variance of the size of the constraining variance, e.g., $10^{-30} m^2$, and are thus favored in the MST generation in some embodiments. In some embodiments each combination of ambiguity distance to integer and ambiguity variance is used as an edge weight. In some embodiments the combination of an edge weight derived from the station-satellite geometry and from ambiguity information is used. In some embodiments for example, in the first epoch a geometrically motivated weight is chosen (to minimize effects from unmodeled multipath and to ensure that constraints stay in the system for a long time) and in later epochs an ambiguity-derived weight (to avoid over-constraining) is chosen.

Part 7.8 MW Bias Process: WL Ambiguity Fixing

FIG. 23 shows fixing of the WL ambiguities before they are sent out (e.g. for use in the phase clock processor 335 or orbit processor 300). In some embodiments the WL ambiguity state values 1435 are forwarded together with at least the WL ambiguity variances 2210 from the filter to an ambiguity fixer 2305 module. The ambiguity fixer module 2305 outputs the fixed WL ambiguities 2310.

The ambiguity fixer module 2305 can be implemented in a variety of ways.

Threshold based integer rounding: In some embodiments a simple fixer module checks each individual ambiguity to determine whether it is closer to integer than a given threshold (e.g., closer than $a = 0.12$ WL cycles). If also the standard deviation of the ambiguity is below a second given threshold (e.g., $\sigma = 0.04$ so that $a = 3\sigma$) the ambiguity is rounded to the next integer for fixing. Ambiguities that do not fulfill these fixing criteria remain unfixed. In some

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

embodiments the satellite elevation angle corresponding to the ambiguity is taken into account as an additional fixing criterion so that e.g. only ambiguities above 15° are fixed.

Optimized sequence, threshold based integer bootstrapping: A slightly advanced approach

5 used in some embodiments fixes ambiguities in a sequential way. After the fix of one component of the ambiguity vector, the fix is reintroduced into the filter so that all other not yet fixed ambiguity components are influenced over their correlations to the fixed ambiguity. Then the next ambiguity is checked for fulfilling the fixing criteria of distance to integer and standard deviation. In some embodiments the sequence for checking ambiguity components is chosen in
10 an optimal way by ordering the ambiguities with respect to a cost function, e.g. distance to integer plus three times standard deviation. In this way the most reliable ambiguities are fixed first. After each fix the cost function for all ambiguities is reevaluated. After that, again the ambiguity with the smallest costs is checked for fulfilling the fixing criteria. The fixing process stops when the best ambiguity fixing candidate does not fulfill the fixing criteria. All remaining ambiguities
15 remain unfixed.

Integer least squares, (generalized) partial fixing: A more sophisticated approach used in some embodiments takes the covariance information of the ambiguities from the filter into account. The best integer candidate N_1 is the closest integer vector to the least squares float

20 ambiguity vector $\hat{N} \in R^v$ in the metric defined by the ambiguity part of the (unconstrained) state covariance matrix $P_{\hat{N}} \in R^v \times R^v$, both obtained from the filter, i.e.

$$N_1 = \arg \min_{N \in Z^v} (N - \hat{N})^T P_{\hat{N}}^{-1} (N - \hat{N}) \quad (39)$$

25 However, since the observation input to the filter is, due to measurement noise, only precise to a certain level also the resulting estimated float ambiguity vector $\hat{N}$ is only reliable to a certain level. Then a slightly different $\hat{N}$ may lead to a different $N \in Z^v$ that minimizes (39).

Therefore in some embodiments the best integer candidate is exchanged with e.g. the second best integer candidate by putting other noisy measurements (e.g. from other receivers) into the filter. To identify the reliable components in the ambiguity vector that can be fixed to a unique integer

30 with a high probability, the minimized quantity $(N - \hat{N})^T P_{\hat{N}}^{-1} (N - \hat{N})$ is compared in some

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

embodiments under the best integer candidates in a statistical test like the ratio test. If N_i is the i 'th best ($i > 1$) integer candidate this implies that

$$(N_i - \hat{N}) P_{\hat{N}}^{-1}(N_i - \hat{N}) > (N_1 - \hat{N}) P_{\hat{N}}^{-1}(N_1 - \hat{N}), \text{ or}$$

$$F_i := \frac{(N_i - \hat{N}) P_{\hat{N}}^{-1}(N_i - \hat{N})}{(N_1 - \hat{N}) P_{\hat{N}}^{-1}(N_1 - \hat{N})} > 1 \quad (40)$$

- 5 The quotient in (40) is a random variable that follows an F-distribution. Some embodiments basically follow the description in (Press, Teukolsky, Vetterling, & Flannery, 1996). The probability that F_i would be as large as it is if $(N_i - \hat{N}) P_{\hat{N}}^{-1}(N_i - \hat{N})$ is smaller than

$(N_1 - \hat{N}) P_{\hat{N}}^{-1}(N_1 - \hat{N})$ is denoted as $Q(F_i | \nu, \nu)$ whose relation to the beta function and precise algorithmic determination is given in (Press, Teukolsky, Vetterling, & Flannery, 1996). In other words, $Q(F_i | \nu, \nu)$ is the significance level at which the hypothesis

$(N_i - \hat{N}) P_{\hat{N}}^{-1}(N_i - \hat{N}) < (N_1 - \hat{N}) P_{\hat{N}}^{-1}(N_1 - \hat{N})$ can be rejected. Thus each candidate for which e.g. $Q(F_i | \nu, \nu) \geq 0.05$ can be declared as comparable good as N_1 . The first candidate $i_0 + 1$ for which $Q(F_{i_0+1} | \nu, \nu) < 0.05$ is accepted as significantly worse than N_1 .

- 15 Then all the components in the vectors $N_1, N_2, \dots, N_{i_0}$ that have the same value can be taken as reliable integer fixes. The components in which these ambiguity vectors differ should not be fixed to an integer. However, among these components there can exist certain linear combinations that are the same for all vectors $N_1, N_2, \dots, N_{i_0}$. These linear combinations can also be reliably fixed to an integer.

20

In some embodiments determination of the best integer candidate vectors is performed via the efficient LAMBDA method (Teunissen, 1995).

- 25 FIG. 23B shows the WL ambiguities are sent out (e.g. for use in the phase clock processor 335 or orbit processor 300). In some embodiments the components of the high-dimensional ambiguity vector are fixed to float values that are given by a linear combination of the best integer candidates.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In these embodiments the WL ambiguity state values 1435 are forwarded together with the ambiguity variance-covariance matrix 2210 from the filter to an integer ambiguity searcher module 2320. Integer ambiguity searcher module 2320 outputs a number of integer ambiguity candidate sets 2323 that are then forwarded to an ambiguity combiner module 2325 that also gets the least squares ambiguity float solution 1435 and the ambiguity variance-covariance matrix 2210 from the filter as an input. The least squares ambiguity float solution 1435 is used together with the ambiguity variance-covariance matrix 2210 for forming a weight for each integer ambiguity candidate. In the ambiguity combiner module 2325 the weighted integer ambiguity candidates are summed up. The output is a fixed WL ambiguity vector 2330 that can then be forwarded to the phase clock processor 335 and orbit processor 330.

To derive the weights for the integer ambiguity vectors, note that the least squares ambiguity float vector $\hat{N}$ is the expectation value of a multidimensional Gaussian probability function $p(N)$, i.e.

$$\hat{N} = \int_{N \in R^v} N p(N) dN \quad \text{with} \quad p(N) = \frac{e^{-\frac{1}{2}(N-\hat{N})^T P_N^{-1} (N-\hat{N})}}{\int_{N \in R^v} e^{-\frac{1}{2}(N-\hat{N})^T P_N^{-1} (N-\hat{N})} dN} \quad (41)$$

Thus an ambiguity expectation value that recognizes the integer nature of the ambiguities is given by

$$\check{N} := \sum_{N \in Z^v} N \check{p}(N) \quad \text{with} \quad \check{p}(N) = \frac{e^{-\frac{1}{2}(N-\hat{N})^T P_N^{-1} (N-\hat{N})}}{\sum_{N \in Z^v} e^{-\frac{1}{2}(N-\hat{N})^T P_N^{-1} (N-\hat{N})}} \quad (42)$$

Since the summation over the whole integer grid $N \in Z^v$ cannot be computed in practice, the sum is in some embodiments restricted to the best integer ambiguity candidates

$$\check{N} \approx \sum_{i \text{ with } \check{p}(N_i) < \varepsilon} N_i \check{p}(N_i) \quad \text{with} \quad \check{p}(N_i) \approx \frac{e^{-\frac{1}{2}(N_i-\hat{N})^T P_N^{-1} (N_i-\hat{N})}}{\sum_{i \text{ with } \check{p}(N_i) < \varepsilon} e^{-\frac{1}{2}(N_i-\hat{N})^T P_N^{-1} (N_i-\hat{N})}} \quad (43)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The $\tilde{p}(N_i)$ are the desired weights for the best integer ambiguity candidates. The ambiguity candidates themselves can be determined in an efficient way with the LAMBDA method (Teunissen, 1995).

5 **Part 7.9 MW Bias Process: Using Fixed WL Ambiguities**

FIG. 24A shows an embodiment 2400. In this way the estimated MW biases 1430 are made consistent with the fixed WL ambiguities 2330. These fixed-nature MW satellite biases from the network are transferred to the rover receiver where they help in fixing WL ambiguities.

10

The fixed WL ambiguities 2330 can be introduced into the processor 1225 in several different ways. FIG. 24B, FIG. 24C and FIG. 24D show details of three possible realizations of the processor 1225 that differ in the manner of feeding back the fixed WL ambiguities into the MW bias estimation process.

15

In the embodiment 2400 the processor 1225 comprises a single sequential filter 2410 (such as a Kalman filter) that holds states 2415 for satellite MW biases, states 2420 for WL ambiguities and - in case of the undifferenced observation model (11) - also states 2425 for receiver MW biases. In the single differenced (SD) observation model (12) no receiver bias states occur. In addition to these states, which contain the values of the least-squares best solution of the model parameters for the given observations, the filter also contains variance-covariance (vc) information 2430 of the states. The vc-information is usually given as a symmetric matrix and shows the uncertainty in the states and their correlations. It does not directly depend on the observations but only on the observation variance, process noise, observation model and initial variances. However, since the observation variance is derived from the observations when smoothing is enabled (see Part 7.3), there can also be an indirect dependence of the vc-matrix 2430 on the observations.

20

25

30

The filter input comprises MW observations (e.g., smoothed MW observations 1420) and satellite MW-bias process noise 1240 (see Part 7.2), a MW bias constraint 1605 (see Part 7.4), integer WL ambiguity constraints 1705 (see Part 7.5) and, optionally, shifts from a bias and ambiguity shifter 24 (discussed in Part 7.10).

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The filter output of primary importance comprises the satellite MW biases 1430, the (float) WL ambiguities 1430 and the (unconstrained) WL ambiguity part 2210 of the vc-matrix 2430. The ambiguity information is forwarded to an ambiguity fixer module (see Part 7.8) that outputs (float or integer) fixed WL ambiguities 2310. These fixed WL ambiguities 2310 are output for use in the orbit processor 330 and the phase clock processor 335. In addition, the fixed WL ambiguities 2310 are reintroduced into the filter by adding them as pseudo observations with a very small observation variance (of e.g. $10^{-30} m^2$). The resulting satellite MW biases 1430 are output to the rover and, optionally, to the orbit processor 330 and the phase clock processor 335. Since they are consistent with the fixed WL ambiguities, we call them fixed MW biases.

Note that, if an ambiguity were fixed to a wrong integer, the wrong ambiguity would remain in the filter 2410 until a cycle slip on that ambiguity occurs or it is thrown out of the filter (such as when it has not been observed anymore for a certain time period or another ambiguity has taken over its ambiguity slot in the filter 2410). If this were to occur the MW biases would be disturbed for a long time. However, an advantage of this approach is that also ambiguity fixes remain in the filter that have been fixed to integer when the satellites were observed at high elevations but having meanwhile moved to low elevations and could not be fixed anymore or that are even no longer observed. These ambiguity fixes on setting satellites can stabilize the solution of MW biases a lot.

Note also that a float ambiguity should not be fixed with a very small variance (of e.g. $10^{-30} m^2$) in the single filter 2410 since in this way new observations cannot improve anymore the ambiguity states by bringing them closer to an integer. In some embodiments the float ambiguity is fixed with a variance that depends on its distance to integer so that the observation variance tends to zero when the distance to the closest integer tends to zero and tends to infinity when the distance to the closest integer tends to 0.5. However, for fixing float ambiguities the approaches used in the embodiments of FIG. 24C and FIG. 24D are more suitable.

In the embodiment 2440 of FIG 24C the processor 1225 comprises two sequential filters 2445 and 2450 where the process flow for the first filter 2445 is almost identical with the filter 2410 of FIG. 24B. The difference is that no fixed WL ambiguities 1430 are fed back into filter 2445. Instead, each time new fixed WL ambiguities 2310 are available (e.g. after each observation update), a filter copy 2450 of the first filter 2445 is made and then the fixed WL ambiguities 2310

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

are introduced as pseudo-observations into the filter copy 2450. The original filter 2445 thus remains untouched so that no wrong fixes can be introduced into it. The filter copy 2450 outputs fixed satellite MW biases 2455 (e.g., as MW biases 345).

5 A disadvantage of this approach is that only currently observed ambiguities can be fixed and introduced into the filter copy 2550. All prior ambiguity fixes are lost. However, this is a preferred way of processing when the whole ambiguity space is analyzed at once as it is done in the integer least squares partial fixing and integer candidate combination approaches (see Part 7.8).

10

Embodiment 2460 of FIG. 24D shows an alternative approach to feed the fixed WL ambiguities into the estimation process. Here the fixed WL ambiguities 2310 are forwarded to an ambiguity subtractor module 2665 that reduces the MW observations 1420 by the ambiguities. The resulting ambiguity-reduced MW observations 2670 are put into a second filter 2475 that does not
15 have any ambiguity states but only satellite MW bias states 2480 and - in the undifferenced approach (11) - also receiver MW bias states 2485. This second filter 2475 just needs a single MW bias constraint 2490 and process noise on satellite MW biases 2480 as additional inputs. In case biases are shifted in the first filter 2440 they also have to be shifted in the second filter 2475.

20 The second filter 2475 outputs fixed satellite MW biases 2450.

Note that in this approach the ambiguities are not fixed with a very small observation variance (of e.g. $10^{-30} m^2$) but only with the usual observation variance of the MW observations. By inserting observations over time with the same fixed ambiguity, the weak ambiguity constraint is
25 more and more tightened. All prior ambiguity fixes remain in the filter to some extent. A wrong fix that is detected after some time will be smoothed out. Thus it is also quite reasonable to put float-ambiguity-reduced MW observations into the filter.

Since the second filter 2475 does not have ambiguity states that build the majority of states in the
30 first filter, the second filter 2475 is very small and can be updated at a very high rate of, e.g. every second, without running into performance problems. Thus in some embodiments the original MW observations without any prior smoothing are input into this filter.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 7.10 MW Bias Process: Shifting MW Biases

FIG. 25A shows an embodiment 2500 in which the process described in Part 7.8 is augmented with an external satellite MW bias shifter module 2505. The term *external* means, in contrast to the shifting module shown in FIG. 25C where the shifting is applied on the filter. Note that all the ambiguity constraining and fixing related steps as well as the correction and smoothing steps are optional.

The bias shifter module 2505 shifts the satellite MW biases 1430 to produce satellite MW biases 2510 in a desired range of at least one WL cycle. This is possible since as seen from Equation (11) a shift in a satellite bias by n WL cycles are absorbed by the WL ambiguities corresponding to this satellite, e.g.

$$\begin{aligned}\Phi_{i,WL}^j - P_{i,NL}^j &= b_{i,MW} - b_{MW}^j + \lambda_{WL} N_{i,WL}^j \\ &= b_{i,MW} - \underbrace{(b_{MW}^j + n\lambda_{WL})}_{\equiv: \tilde{b}_{MW}^j} + \lambda_{WL} \underbrace{(N_{i,WL}^j - n)}_{\equiv: \tilde{N}_{i,WL}^j}\end{aligned}\quad (44)$$

Similar shifts are possible for receiver biases.

FIG. 25B shows the impact of shifting MW biases as in equation (44). Each MW combination is depicted in FIG. 25B as the distance between a receiver (e.g., one of receivers 2525, 2530, 2535, 2540) and a satellite 2545. This distance is represented by the sum of a receiver bias (which is the same for all satellites and therefore visualized as a circle around the receiver such as 2550), a satellite bias (that is the same for all receivers and therefore visualized as a circle 2555 around the satellite) and an ambiguity (that depends on the receiver-satellite pair and is therefore visualized as a bar such as bar 2560 for the pairing of receiver 2525 and satellite 2545). Reducing the satellite bias by the wavelength of one WL cycle (as depicted by smaller circle 2565) increases all related ambiguities by the wavelength of one WL cycle. The receiver biases are untouched by this operation.

An advantage of shifting satellite MW biases into a defined range is that in this way the biases can be encoded with a fixed number of bits for a given resolution. This allows to reduce the

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

necessary bandwidth for transferring satellite MW biases to the rover which is in some embodiments done over expensive satellite links.

Although all satellite biases b_{MW}^j / λ_{WL} can be mapped for a certain fixed time e.g. into the range

5 $[-0.5, +0.5[$ it is preferable to extend this range e.g. to $[-1, +1[$ in order to avoid frequent jumps in the MW satellite biases when they leave the defined range. Due to the oscillating behavior of MW satellite biases, the satellite biases at the border of the defined range close to -0.5 or $+0.5$ might often leave this range. For example, a bias moving to $-0.5 - \varepsilon$ is then mapped to $+0.5 - \varepsilon$. Then the bias oscillates back to $+0.5 + \varepsilon$ and is then mapped back to $-0.5 + \varepsilon$. In
10 practice, it has been found that with a range of $[-1, +1[$ bias jumps can be avoided for several months.

Note that MW bias jumps can also be handled at the rover by comparing the latest received MW bias value with the previous one. If the values differ by approximately one cycle a bias jump is
15 detected and the correct bias reconstructed. The situation is complicated by the fact that WL ambiguities consistent with shifted satellite MW biases are used in the phase clock processor to determine iono-free (IF) biases that are also sent to the rover. Reconstructing the MW bias at the rover after a jump requires also an adaptation of the IF bias by $\frac{1}{2}(\lambda_{WL} - \lambda_{NL})$.

20 FIG. 25C shows an alternative to the external satellite MW bias shifter module 2505 of FIG. 25A. Satellite MW biases 1430 and WL-ambiguities 1435 are sent to an internal shifter module 2580 that determines on the basis of equation (44) shifts for MW biases and WL ambiguities such that the biases are mapped to the desired range. Then all these shifts are applied to the bias and ambiguity states in the filter. In this way biases have to be shifted only once while in the approach
25 of FIG. 25A the shifts are repeated each time satellite MW biases are output.

However, note that unshifted and shifted WL ambiguities are not allowed to be used at the same time in a single filter. This is e.g. important when WL ambiguities are forwarded to the orbit processor 330 for fixing IF ambiguities. If fixed IF ambiguities are reintroduced into a single
30 original filter (and no filter copy as in FIG. 24C is used), WL ambiguities of different epochs

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

come together in the filter. It has to be ensured that the WL ambiguities of different epochs are the same. If this is not the case the corresponding IF ambiguity is reset.

Part 7.11 MW Bias Process: Numerical Examples

5

The behavior of daily solutions for MW satellite biases was monitored over a time period of 61 days in June and July 2008 and the difference of each daily solution to the first day of this period (June 1). PRN 16 was chosen as the reference satellite with bias value 0. All biases were mapped into the interval $[0,1[$. Drifts of different sizes in the satellite biases are clearly detectable. All the larger drifts occur for block IIA satellites. Individual satellites show drifts of about 0.2 WL cycles within a month. These values would motivate a satellite bias update of perhaps once per day. However, for PRN 24 there is a sudden bias jump on June 26 of almost 0.2 WL cycles. The occurrence of such events demonstrates the importance of real-time estimation and transmission of MW satellite biases.

15

In another example the MW satellite biases for the time period from Oct. 02 to 14, 2008 were continuously processed in a Kalman filter. Again PRN 16 was chosen as the reference. The result shows that each satellite has its own daily pattern with some kind of repetition already after 12 hours (the time a GPS satellite needs for one revolution). The variations of the satellite biases are up to about 0.16 WL cycles within 6 hours. The difference of the MW satellite biases to the values they had 24 hours before demonstrates that the day to day repeatability is usually below 0.03 WL cycles. However, this day to day repeatability does not well reflect the large inner day variations of the MW satellite biases.

20

25

The filtered satellite WL biases are dependent on their process noise input. With a noise input variance between 10^{-6} and 10^{-7} squared WL cycles per hour the periodical behavior and the sudden bias level change on June 26 is well reflected. With less noise input these patterns are not detected. Due to this analysis a process noise input variance of $5 \cdot 10^{-7}$ squared WL cycles per hour on satellite WL biases is recommended.

30

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 7.12 MW Bias Process: References

- Bierman, G. J. (1977). *Factorization Methods for Discrete Sequential Estimation*. New York: Academic Press, Inc.
- 5 Collins, P. (2008). Isolating and Estimating Undifferenced GPS Integer Ambiguities. *Proceedings of ION-NTM-2008*, (pp. 720-732). San Diego, Calif.
- Collins, P., Gao, Y., Lahaye, F., Héroux, P., MacLeod, K., & Chen, K. (2005). Accessing and Processing Real-Time GPS Corrections for Precise Point Positioning - Some User Considerations. *Proceedings of ION-GNSS-2005*, (pp. 1483-1491). Long Beach, Calif.
- 10 Collins, P., Lahaye, F., Héroux, P., & Bisnath, S. (2008). Precise Point Positioning with Ambiguity Resolution using the Decoupled Clock Model. *Proceedings of ION-GNSS-2008*. Savannah, Georgia.
- Cormen, T. H., Leiserson, C. E., Rivest, R. L., & Stein, C. (2001). Chapter 23: Minimum Spanning Trees. In *Introduction to Algorithms* (Second Edition ed., pp. 561-579). MIT Press and
- 15 McGraw-Hill.
- Datta-Barua, S., Walter, T., Blanch, J., & Enge, P. (2007). Bounding Higher Order Ionosphere Errors for the Dual Frequency GPS User. *Radio Sci.*, 43, RS5010, doi:10.1029/2007RS003772 .
- Ge, M., Gendt, G., Rothacher, M., Shi, C., & Liu, J. (2008). Resolution of GPS carrier-phase ambiguities in Precise Point Positioning (PPP) with daily observations. *Journal of Geodesy* , Vol.
- 20 82, pp. 389-399.
- Grewal, M. S., & Andrews, A. P. (2001). *Kalman Filtering: Theory and Practice Using MATLAB*. New York: Wiley-Interscience.
- Héroux, P., & Kouba, J. (2001). GPS Precise Point Positioning Using IGS Orbit Products. *Phys. Chem. Earth (A)* , Vol. 26 (No. 6-8), pp. 572-578.
- 25 Laurichesse, D., & Mercier, F. (2007). Integer ambiguity resolution on undifferenced GPS phase measurements and its application to PPP. *Proceedings of ION-GNSS-2007*, (pp. 839-448). Fort Worth, Texas.
- Laurichesse, D., Mercier, F., Berthias, J., & Bijac, J. (2008). Real Time Zero-difference Ambiguities Fixing and Absolute RTK. *Proceedings of ION-NTM-2008*, (pp. 747-755). San
- 30 Diego, Calif.
- Melbourne, W. (1985). The case for ranging in GPS-based geodetic systems. *Proceedings of the First International Symposium on Precise Positioning with the Global Positioning System. Vol. 1*, pp. 373-386. Rockville, Maryland: US Dept. of Commerce.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Mervart, L., Lukes, Z., Rocken, C., & Iwabuchi, T. (2008). Precise Point Positioning With Ambiguity Resolution In Real-Time. *Proceedings of ION-GNSS-2008*. Savannah, Georgia.

Morton, Y., van Graas, F., Zhou, Q., & Herdtner, J. (2008). Assessment of the Higher Order Ionosphere Error on Position Solutions. *ION GNSS 21st International Meeting of the Satellite Division*. Savannah, GA, USA.

Press, W. H., Teukolsky, S. A., Vetterling, W. T., & Flannery, B. P. (1996). F-Distribution Probability Function. In *Numerical Recipes in C* (p. 229). Cambridge University Press.

Schaer, S. (2000, May 09). *IGSMail-2827: Monitoring (P1-C1) code biases*. Retrieved from <http://igscb.jpl.nasa.gov/mail/igsmail/2000/msg00166.html>.

Teunissen, P. (1995). The least-squares ambiguity decorrelation adjustment: a method for fast GPS integer ambiguity estimation. *Journal of Geodesy*, Vol. 70, No. 1-2, pp. 65-82.

Wübbena, G. (1985). Software Developments for Geodetic Positioning with GPS using TI 4100 code and carrier measurements. *Proceedings of the First International Symposium on Precise Positioning with the Global Positioning System*. Vol. 1, pp. 403-412. Rockville, Maryland: US

Dept. of Commerce.

Zumberge, J., Heflin, M., Jefferson, D., Watkins, M., & Webb, F. (1997). Precise point positioning for the efficient and robust analysis of GPS data from large networks. *Journal of Geophysical Research*, Vol. 102 (No. B3), pp. 5005-5018.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 8: Orbit Processor

Precise (cm-accurate) orbits allow precise satellite clock estimation and precise positioning. Orbit accuracy has a direct influence on the final position accuracy of the rover using precise
5 satellite orbits and clocks data as described herein.

Part 8.1 Option 1: Use IGS-published ultra-rapid orbits

The International GNSS Service (IGS) provides predicted satellite orbits which can be
10 downloaded via the Internet. A description of these orbits can be found in J. KOUBA, A GUIDE TO
USING INTERNATIONAL GPS SERVICE (IGS) PRODUCTS, Geodetic Survey Division, Natural
Resources Canada, February 2003, 31 pages and at
<http://igsceb.jpl.nasa.gov/components/prods.html>.

15 The IGS Ultra-rapid (predicted) orbits, also called IGU orbits, are generated and published four
times a day at 3, 9, 15, 21 hours of the UTC day. IGS claims a 5 cm orbit standard deviation,
though our analyses have shown that individual satellite orbit errors can go up to 60 cm. In one
case we have seen a 2 meter error.

20 Market requirements for commercial positioning service demand precise orbits with errors less
than 3 cm and with high reliability and availability. The currently available IGU orbits do not
meet these requirements. Nevertheless, they are useful either for positioning applications where
the requirements are less demanding, or as a countercheck to detect gross errors in orbits
estimated as described below.

25

Part 8.2 Option 2: Determine Satellite Orbits in Real Time

Referring to FIG. 1, observation data is streamed in real time from globally distributed GNSS
reference stations, such as reference stations 105, 110, 115, to network processor 140. In some
30 embodiments, the network processor estimates the satellite orbits in real time using a Kalman-
filter approach in a numerically stable UD-Filter implementation as described in G. Bierman,
Factorization Methods for Discrete Sequential Estimation, Academic Press, Inc., New York,
1977. Hereafter the term real time refers to processing immediately after observation data is

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

available, typically in less than one second. The time-dependent filter state $x(t)$ is set up in the following way

	$x_{cr}(t)$	receiver clock errors
5	$x_{cs}(t)$	satellite clock errors
	$x_{qs}(t)$	satellite dependent orbit parameters
	$x(t) = x_r(t)$	receiver positions
	$x_{ZDT}(t)$	zenith tropospheric delays for each station
	$x_{EOP}(t)$	earth orientation parameters
10		(EOP: $x_p, y_p, UT1-UTC$ or length of day)
	x_{AMB}	carrier-phase ambiguities
	$x_{if-bias}$	iono-free biases

15 $x_{cr}(t)$ is the vector with all receiver clock errors in the network. Each station has at least one clock offset but may have also drift and drift rates, depending on the type and stability of the station clock. The receiver clocks are modeled, for example, as white noise processes or as stochastic processes (e.g., random walk, Gauss Markov) depending on the type and stability of the station clock.

20

$x_{cs}(t)$ is the vector with the satellite clocks. The vector contains a clock offset and a drift but may have drift and drift rates depending on the type and stability of the satellite clock (Rubidium, Cesium or Hydrogen maser). The satellite clocks are modeled, for example, as white noise processes or as stochastic processes depending on the type and stability of the satellite clock.

25

$x_{qs}(t)$ is the vector with the satellite dependent dynamic orbit parameters. This includes the satellite positions and velocities and additional force model parameters, which are

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$x_{qs}(t) = \begin{bmatrix} x_s(t) \\ \dot{x}_s(t) \\ x_{slr}(t) \\ x_{harm}(t) \end{bmatrix} \quad (45)$$

where

5 $x_s(t)$ is the satellite position vector (one per satellite) in the inertial reference frame (X,Y,Z).

$\dot{x}_s(t)$ is the satellite velocity vector (one per satellite) in the inertial reference frame (X,Y,Z).

10 $x_{slr}(t)$ is the vector with the solar radiation pressure parameters. It consists of a component in the sun-satellite direction, a second component in the direction of the solar radiation panel axis and a third component perpendicular on the first 2 axes. All three components are modeled for example as stochastic processes.

15 $x_{harm}(t)$ is the vector with harmonic coefficients for the orbit components along-track, radial and cross-track or in a satellite body fixed coordinate system. They are modeled for example as stochastic processes.

$x_r(t)$ is the station position vector in the Earth centered / Earth fixed reference frame. Stations can be either fixed or unknown in the estimation process.

20 $x_{ZTD}(t)$ is the vector with the tropospheric zenith delays estimated for each station. Tropospheric gradients are optionally also estimated. These parameters are modeled for example as stochastic processes.

25 $x_{EOP}(t)$ are earth orientation parameters (EOPs) estimated routinely in real time. The vector consists of the offsets to the conventional pole (x_p, y_p) and the difference between UT1 and UTC time scales ($UT1 - UTC$ or length of day). The precisely-known EOP parameters are used to transition between the inertial and the earth-fixed reference frames. All three parameters are estimated for example as stochastic processes.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

x_{AMB} each satellite-station link has an individual carrier phase ambiguity in the filter state.
These parameters are modeled for example as constants.

5 $x_{if-bias}$ ionospheric-free code-carrier biases, one bias per receiver-satellite pair. Code and carrier have biases, which are different from receiver to receiver and satellite to satellite and might vary with time. These parameters are modeled for example via stochastic processes.

10 The ionospheric-free dual-frequency combinations of code and carrier observations have different biases, which vary with time. While these parameters can be estimated as additional unknowns in the orbit processor Kalman filter, they are optionally estimated in a separate processor (e.g. in standard clock processor 320 as ionospheric-free code-carrier biases 372, shown in FIG. 3) and applied to the pseudorange observations used in the orbit processor.

15

For linearization purposes, some embodiments have the filter set up to estimate differences to a reference trajectory and to initial force model parameters. In these embodiments the state vector for each satellite is

20
$$x_{qs}(t_k) = \begin{bmatrix} r(t_k) - r_0(t_k) \\ p(t_k) - p_0(t_k) \\ y - y_0 \end{bmatrix} = \begin{bmatrix} \Delta r(t_k) \\ \Delta p(t_k) \\ \Delta y \end{bmatrix} \quad (46)$$

where

$x_{qs}(t_k)$ is the satellite state vector at time t_k

$r(t_k)$ is the satellite position and velocity in the inertial reference frame

$r_0(t_k)$ represents the reference trajectory created by a numerical orbit integrator

25 $p(t_k)$ is the vector with stochastic force model parameters

$p_0(t_k)$ is the vector with approximate initial stochastic force model parameters

y is the vector with constant force model parameters

y_0 is the vector with approximate constant force model parameters

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

and where

$$r(t_k) = \begin{bmatrix} x_x(t_k) \\ \dot{x}_x(t_k) \end{bmatrix} \quad (47)$$

5 The prediction in the filter model for the satellite dependent part is done via the following relation

$$\begin{bmatrix} \Delta r(t_{k+1}) \\ \Delta p(t_{k+1}) \\ \Delta y \end{bmatrix} = \begin{bmatrix} \Phi_{rr}(t_{k+1}, t_k) & \Phi_{rp}(t_{k+1}, t_k) & \Phi_{ry}(t_{k+1}, t_k) \\ 0 & M_k & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \Delta r(t_k) \\ \Delta p(t_k) \\ \Delta y \end{bmatrix} + \begin{bmatrix} 0 \\ w_k \\ 0 \end{bmatrix} \quad (48)$$

with

$$\Phi_{rr}(t_{k+1}, t_k) = \left[\frac{\partial r(t_{k+1})}{\partial r(t_k)} \right], r(t) = r_0(t) \quad (49)$$

$$10 \quad \Phi_{rp}(t_{k+1}, t_k) = \left[\frac{\partial r(t_{k+1})}{\partial p(t_k)} \right], r(t) = r_0(t), p(t) = p_0(t) \quad (50)$$

$$\Phi_{ry}(t_{k+1}, t_k) = \left[\frac{\partial r(t_{k+1})}{\partial y} \right], r(t) = r_0(t), y = y_0 \quad (51)$$

These matrices are computed for example by integration of the variational equations as described in the section below on numerical orbit integration.

15

M_k is the matrix describing the stochastic noise modeling

w_k is the noise input

Part 8.3 Numerical orbit integration

20

The satellite motion in orbit can be described by a second order differential equation system

$$\ddot{x} = \ddot{x}(x, \dot{x}, q) \quad (52)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

with

- $\ddot{x}$ acceleration in the inertial reference frame
- x position in the inertial reference frame
- $\dot{x}$ velocity in the inertial reference frame
- 5 q vector of satellite dependent force model unknowns and initial position/velocity

The vector q is defined as

$$q = \begin{bmatrix} r(t_0) \\ a \end{bmatrix} \quad (53)$$

10

where

- $r(t_0)$ are the initial position and velocity in inertial reference frame
- a is the vector with dynamic force model parameters

- 15 Satellite position $x(t)$ and velocity $\dot{x}(t)$ at time t are derived from satellite position $x(t_0)$ and velocity $\dot{x}(t_0)$ at time t_0 using, for example, a numerical integration (a predictor-corrector method of higher order).

$$\dot{x}(t) = \dot{x}(t_0) + \int \ddot{x}(t) dt \quad (54)$$

$$x(t) = x(t_0) + \int \dot{x}(t) dt \quad (55)$$

20

The real-time filter uses the partial derivatives of the accelerations $\ddot{x}(t)$ with respect to the unknown parameters q

$$\begin{bmatrix} \frac{\partial \ddot{x}}{\partial q} \end{bmatrix} = \begin{bmatrix} \frac{\partial \ddot{x}}{\partial x} \end{bmatrix} \begin{bmatrix} \frac{\partial x}{\partial q} \end{bmatrix} \quad (56)$$

25

The equation of this example ignores derivatives with respect to satellite velocity since there are no relevant velocity-dependent forces acting on GNSS satellites in medium earth orbit.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The following matrix is computed for epoch t_i :

$$\Phi_{rq}(t_i, t_0) = \begin{bmatrix} \frac{\partial x}{\partial q(t_i, t_0)} \\ \frac{\partial \dot{x}}{\partial q(t_i, t_0)} \end{bmatrix} \quad (57)$$

- 5 The matrix for the next epoch t_{i+1} can then be computed via the chain rule

$$\Phi_{rq}(t_{i+1}, t_0) = \Phi_{rq}(t_{i+1}, t_i) \Phi_{rq}(t_i, t_0) \quad (58)$$

The partial derivatives of the observations with respect to the unknowns q can again be derived via chain rule

10

$$\frac{\partial l}{\partial q} = \frac{\partial l}{\partial r} \Phi_{rq} \quad (59)$$

These partials are used in the observation update of the filter.

- 15 The following models are used to compute the accelerations $\ddot{x}$ acting on the satellite; some embodiments use these for the integration process:

1. The Earth's gravity field is modeled by available models such as the EIGEN-CG01C or the EGM96 model. These are spherical harmonic expansions with very high resolution.
20 Some embodiments use up to degree and order 12 for orbit integration.
2. Gravitational forces due to the attraction by sun, moon and planets.
3. The gravitational forces of sun and moon acting on the Earth's figure will deform the Earth. This effect also changes the gravity field; it is called "Solid Earth Tide" effect. Some embodiments follow the recommendations of the IERS Conventions 2003.
- 25 4. Some embodiments account for the Solid Earth Pole Tide, caused by the centrifugal effect of polar motion. This tide must not be confused with Solid Earth Tides. Some embodiments follow the recommendations of the IERS Conventions 2003.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

5. The gravitational forces of sun and moon acting on the oceans will change the gravity field; this is called the “Ocean Tide” effect. Some embodiments use the CSR3.0 model recommended by the IERS Conventions 2003.

6. Some embodiments also consider the relativistic acceleration, which depends upon position and velocity of the satellite.

7. The solar radiation pressure, the acceleration acting on GNSS satellites, is most difficult to model. Some embodiments consider three components: a first component in the sun-satellite direction, a second component in the direction of the solar radiation panel axis (y-bias) and a third component perpendicular to the first two axes.

8. Some embodiments also model residual errors mainly induced by the insufficient knowledge of the force models via harmonic functions as described in the following.

GNSS satellites like GPS, GLONASS, GALILEO and COMPASS satellites are in mid earth orbits (MEO) of approximately 26000 km. The following table shows the accelerations acting on GNSS satellites and their effects after a one-day orbit integration.

Perturbation	Acceleration [m/s ²]	Orbit prediction error after one day [m]
Earth's gravitation	0.59	330000000
Earth's oblateness	$5 \cdot 10^{-5}$	24000
Lunar direct tides	$5 \cdot 10^{-6}$	2000
Solar direct tides	$2 \cdot 10^{-6}$	900
Higher degree terms in geopotential	$3 \cdot 10^{-7}$	300
Direct solar radiation pressure	$9 \cdot 10^{-8}$	100
Radiation pressure along solar panel axis	$5 \cdot 10^{-10}$	6
Earth albedo (solar radiation due to reflection by earth)	$3 \cdot 10^{-9}$	2
Solid Earth tides	$1 \cdot 10^{-9}$	0.3
Ocean tides	$1 \cdot 10^{-10}$	0.06
General relativity	$3 \cdot 10^{-10}$	0.3
Venus in lower conjunction	$2 \cdot 10^{-10}$	0.08

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 8.4 Harmonic Force Modeling

Some embodiments handle residual errors by introducing a harmonic model having a cosine term and a sine term in each of the along-track, radial and cross-track directions. As the residuals have
 5 a period of about one revolution of the satellite about the Earth, the harmonics depend on the argument of latitude of the satellite:

$$\ddot{\vec{x}}_{residual} = \begin{pmatrix} A_1 \cos u + A_2 \sin u \\ A_3 \cos u + A_4 \sin u \\ A_5 \cos u + A_6 \sin u \end{pmatrix} = \begin{pmatrix} A_1 & A_2 \\ A_3 & A_4 \\ A_5 & A_6 \end{pmatrix} \begin{pmatrix} \cos u \\ \sin u \end{pmatrix} \quad (60)$$

10 with

A_1, A_2 ... amplitudes to be estimated for along-track

A_3, A_4 ... amplitudes to be estimated for cross-track

A_5, A_6 ... amplitudes to be estimated for radial component

u ... argument of latitude of the satellite

15

Alternatively to the use of along track, cross track and radial components, the satellite related system (sun-satellite direction, solar panel direction and the normal to both) can be used, to model solar radiation pressure.

20

Part 8.5 Transformation from Inertial to Earth-Fixed Reference Frame

Some embodiments transform from Inertial to the Earth-fixed reference frame using the IAU 2000A precession/nutation formulas, which follow the IERS Conventions 2003.

25

Part 8.6 Earth orientation parameters

Some embodiments take Earth orientation parameters (EOPs) from the IERS rapid files GPSRAPID.DAILY. These files are provided by IERS on a daily basis and are based on the combination of the most recently available observed and modeled data (including VLBI 24-hour
 30 and intensive, GPS, and AAM (Atmospheric Angular Momentum)). The combination process

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

involves applying systematic corrections and slightly smoothing to remove the high frequency noise. GPSRAPID.DAILY contains the values for the last 90 days from Bulletin A for x/y pole, UT1-UTC, dPsi, dEps, and their errors and predictions for next 15 days at daily intervals.

- 5 After the interpolation, UT1 is corrected for diurnal and/or semidiurnal variations due to Ocean Tides. The polar motion angles are corrected for diurnal variations due to tidal gravitation for a non-rigid Earth, as well as for diurnal and/or semidiurnal variations due to Ocean Tides. Corrections are computed according to:

$$10 \quad \Delta A = \sum_f B_{Af} \sin \theta_f + C_{Af} \cos \theta_f, \quad A \in \{UT1, x_P, y_P\} \quad (61)$$

- Amplitudes B_{Af} , C_{Af} for 41 diurnal and 30 semi-diurnal Ocean Tidal constituents are listed in tables 8.2 and 8.3 in the IERS Conventions (2003). The EOPs from the GPSRAPID.DAILY are introduced as approximate values for the real-time estimation process, keeping linearization
15 errors at a minimum.

Part 8.7 Startup of the Real-Time System

- When starting the system for the first time or after interruptions of more than a day, some
20 embodiments derive initial values for satellite position velocity and force model parameters using satellite broadcast ephemerides or IGU orbits. Some embodiments use a least-squares fit to adapt a numerically integrated orbit to the broadcast elements from the satellite navigation message or to the IGU orbit for the satellite. The adapted orbit initial state is then integrated for a time period of up to two days into the future. The satellite positions, velocities and partials are stored in a
25 “partials” file for use by the real-time system.

- FIG. 26A shows an embodiment of the startup process 2600 for the real-time orbit processor. An orbit integrator 2605 predicts the orbital states (position and velocity) of each satellite into the future starting from an approximate orbit vector 2615, an initial state taken for example from the
30 broadcast satellite ephemeris or the IGS ultra-rapid orbit IGU by using numerical integration and modeling all relevant forces acting on the satellites, e.g., predicted Earth orientation parameters from IERS. During this process an orbit prediction 2620 is generated, which holds all predicted

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

orbital states and the partial derivatives. In a next step an adaptation process fits the predicted orbit to the broadcast orbit or IGU orbit via a least squares batch process. This process is iterated until the initial orbital states for the satellites are no longer changing. Then the partials file 2620 is forwarded to the real-time real-time orbit process 2630 of FIG. 26B.

5

FIG. 26B shows an embodiment of a real-time orbit process 2630. Process 2630 obtains values for an initial start vector 2635 from partials file 2635; these values are used to construct predicted observations for an iterative filter 2640 on a regular basis, e.g., every 150 seconds. Iterative filter 2640 is, for example, a classical Kalman filter or a UD factorized filter or a Square Root

10

Information Filter (SRIF). The orbit start vector 2635 contains the partial derivatives of the current orbit state and force model parameters with respect to the start vector and EOPs and are used to map the partials of the observations to the start vector and force model unknowns.

Kalman filter 2640 receives iono-free linear combinations 2645 of observation data from the reference stations in real time, e.g., each epoch, such as once per second, and predicted Earth

15

orientation parameters (EOP) 2610. With each observation update, Kalman filter 2640 provides improved values for the state vector parameters: receiver clocks 2655 (one per station), zenith tropospheric delays 2660 (one per station), satellite clocks 2665 (one per satellite), optional satellite clock rates 2670 (one per satellite), and orbit start vectors 2680 (one orbit start vector per satellite). In the embodiment of FIG. 26B, orbit state vector 2680 is supplied from time to time (e.g., each epoch, such as once per second) and mapped via the orbit mapper 2682 to the current-epoch orbit position/velocity vector 350.

20

Orbit mapper 2682 uses the partial derivatives from the partials file and the following relationship to derive satellite position and velocity at the current epoch t_i from the state vector at epoch t_0

25

(Fig 26C).

$$r(t_i) = r_0(t_i) + \Phi_{rq}(t_i, t_0) x_{qs}(t_0) = r_0(t_i) + \begin{bmatrix} \frac{\partial r(t_i)}{\partial r(t_0)} & \frac{\partial r(t_i)}{\partial p(t_0)} & \frac{\partial r(t_i)}{\partial y} \end{bmatrix} \begin{bmatrix} \Delta r(t_0) \\ \Delta p(t_0) \\ \Delta y \end{bmatrix} \quad (62)$$

with

$r_0(t_i)$... reference trajectory (position and velocity) created by a numerical orbit integrator

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$\Phi_{rq}(t_i, t_0)$... partials of the position and velocity at t_i with respect to the start
vector
 $x_{qs}(t_0)$... at t_i estimated difference of the start vector (state vector) at t_0

- 5 Next $r(t_i)$ which is given in the inertial reference frame is transformed into the Earth centered /
Earth fixed reference frame.

The current-epoch orbit position/velocity vector 350 in the Earth centered / Earth fixed reference
frame is forwarded to the standard clock processor 320, to the phase clock processor 335 and to
10 the scheduler 355 of FIG. 3.

Some embodiments of process 2630 avoid linearization errors by restarting the numerical
integration in an orbit integrator 2685 from time to time, such as every 6 or 12 or 24 hours. Orbit
mapper 2684 uses the partial derivatives from the partials file and the following relationship to
15 derive a new orbit state vector 2690 in the inertial reference frame at time $t_0 + x$ hours from the
start vector at epoch t_0 (Fig 26D).

$$r(t_i) = r_0(t_i) + \Phi_{rq}(t_i, t_0)x_{qs}(t_0) = r_0(t_i) + \begin{bmatrix} \frac{\partial r(t_i)}{\partial r(t_0)} & \frac{\partial r(t_i)}{\partial p(t_0)} & \frac{\partial r(t_i)}{\partial y} \end{bmatrix} \begin{bmatrix} \Delta r(t_0) \\ \Delta p(t_0) \\ \Delta y \end{bmatrix} \quad (63)$$

with

$r_0(t_i)$... reference trajectory (position and velocity) created by a numerical
20 orbit integrator
 $\Phi_{rq}(t_i, t_0)$... partials of the position and velocity at t_i with respect to the start
vector
 $x_{qs}(t_0)$... at t_i estimated difference of the start vector (state vector) at t_0

- 25 Predicted EOPs 2610 (e.g., from IERS) and estimated EOPs together with updated new orbit start
vector 2690 are used as inputs to orbit integrator 2685 to transform coordinates between the
inertial frame and the earth-fixed frame, e.g., following the IERS Conventions.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

This numerical integration runs in the background and generates a new partials file 2635 which is used to update the predicted observations of Kalman filter 2640. The start vector for the numerical integration of orbit integrator 2675 is for example the latest best estimate of the real-time system, orbit start vector 2690.

5

Part 8.8 Fixing ambiguities in Real-Time Orbit Determination

Kalman filter 2640 uses the ionospheric-free dual-frequency combinations 2645 of the L1 and the L2 GNSS observations. The ionospheric-free combination usually leads to a very small wavelength

10

$$\begin{aligned}
 \lambda_{IF} N_{IF} &:= \frac{f_1^2 \lambda_1 N_1 - f_2^2 \lambda_2 N_2}{f_1^2 - f_2^2} \\
 &= \underbrace{\lambda_1 \frac{F_1}{F_1^2 - F_2^2}}_{=: \lambda_{IF}} \underbrace{(F_1 N_1 - F_2 N_2)}_{=: N_{IF}} \quad \text{with} \quad \begin{aligned} f_1 &=: F_1 \operatorname{gcd}(f_1, f_2) \\ f_2 &=: F_2 \operatorname{gcd}(f_1, f_2) \end{aligned}
 \end{aligned}
 \tag{64}$$

15 The factors F_1 and F_2 are given in Table 3. For example, for GPS L1 and L2 frequencies with $F_1 = 77, F_2 = 60$ and $\lambda_1 = 0.1903m$ the resulting iono-free wavelength is $\lambda_{IF} = \lambda_1 \frac{F_1}{F_1^2 - F_2^2} \approx 6mm$. This is below the noise level of the phase observations so that there is no possibility to directly fix the iono-free ambiguity to the correct integer value. Notice that for the iono-free combination between L2 and L5 the iono-free wavelength is with $\lambda_{IF} \approx 12.47cm$

20 large enough for reliable ambiguity resolution.

To make use of the integer nature of the L1 and L2 ambiguities one could try to solve for the L1 and L2 ambiguities, which is difficult due to the unknown ionospheric contribution to the L1 and L2 carrier phase observations at the stations. A preferred approach is to solve for carrier-phase

25 ambiguities by fixing the widelane ambiguities $N_{WL} := N_1 - N_2$ in a first step. Substituting N_2 in (64) by $N_2 = N_1 - N_{WL}$ results in

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\lambda_{IF} N_{IF} = \lambda_{NL} N_1 + \frac{1}{2} (\lambda_{WL} - \lambda_{NL}) N_{WL} \quad (65)$$

with $\lambda_{WL} := \frac{c}{f_1 - f_2}$ and $\lambda_{NL} := \frac{c}{f_1 + f_2}$. Thus, once N_{WL} is known, (65) can be solved for N_1 by

using the float value from the filter for $\lambda_{IF} N_{IF}$. After fixing the N_1 ambiguity vector to integer or to a weighted average of integer values it can be reinserted into (65) to get a fixed value for

$$\lambda_{IF} N_{IF}.$$

In some embodiments the widelane ambiguities N_{WL} are computed in the widelane bias processor 325 and are transferred to the orbit processor 2630 for example every epoch. For embodiments in which the orbit processor 2630 processes ionospheric-free observations, the ambiguities estimated are ionospheric-free ambiguities $\lambda_{IF} N_{IF}$.

For embodiments in which the widelane ambiguities N_{WL} are provided by the MW bias processor 325, equation (65) can also be used to reformulate the Kalman filter equations (by subtracting $\frac{1}{2} (\lambda_{WL} - \lambda_{NL}) N_{WL}$ from the observations) and estimate the N_1 ambiguities directly.

As an alternative to resolving the N_1 ambiguity with a given integer widelane ambiguity, the equations above can be formulated such that N_2 or narrowlane ambiguities are estimated instead; the approaches are equivalent because all these ambiguities are linearly related.

Some embodiments of ambiguity “fixing” mechanism 2695 employ any suitable techniques known in the art, such as Simple rounding, , Bootstrapping , Integer Least Squares based on the Lambda Method, or Best Integer Equivariant (Verhagen, 2005, Teunissen and Verhagen, 2007) The term “fixing” as used here is intended to include not only fixing of ambiguities to integer values using techniques such as rounding, bootstrapping and Lambda search, but also to include forming a weighted average of integer candidates to preserve the integer nature of the ambiguities if not fixing them to integer values. The weighted average approach is described in detail in unpublished patent applications PCT/US2009/004476, PCT/US2009/004472,

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

PCT/US2009/004474, PCT/US2009/004473, and PCT/US2009/004471 which are incorporated herein by this reference.

Analyses have shown that the orbit quality is significantly improved by “fixing” the ambiguities,
5 either as integer values or as weighted averages of integer candidates.

Part 8.9 Orbit Processing at IGS Analysis Centers

GNSS orbit determination is done by a variety of IGS Analysis Centers. To our knowledge none
10 of these Centers provides real-time orbit estimation as proposed here.

The CODE Analysis Center (AC) uses a batch least squares approach as described in Dach et al. (2007) and not a sequential filter implementation as described here. Details on the modeling are also described in Beutler et al. (1994). The CODE AC participates in the generation of the IGS
15 Ultra-rapid orbits (IGU). Orbit positions correspond to the estimates for the last 24 hours of a 3-day long-arc analysis plus predictions for the following 24 hours. This is done every 6 hours while the processing and prediction time span is shifted by 6 hours in each step.

The Geoforschungszentrum GFZ estimates orbits and computes a contribution to the IGS Ultra-rapid orbits. The approach is documented by Ge et al. (2005, 2006). Their processing and that of
20 the CODE process is based on a batch least squares approach. GFZ does ambiguity resolution, but only in post-processing mode. No attempt is documented on real-time efforts involving a sequential filter.

25 The European Space Operation Centre ESOC of ESA also contributes to the IGS Ultra-rapid orbit computation. The approach is documented by Romero et al. (2001) and Dow et al. (1999). The approach is also based only on a prediction of satellite orbits. No true real-time processing is done.

30 The Jet Propulsion Laboratory JPL, USA, determines GPS satellite orbits with their system based on the GIPSY-OASIS II software package developed for the US Global Positioning System, general satellite tracking, orbit determination and trajectory studies. Details are published in US Patent 5,963,167 of Lichten et al. The JPL system allows a fully automatic operation and

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

delivery of validated daily solutions for orbits, clocks, station locations and other information with no human intervention. This data contributes to the orbits published by the IGS including the Ultra-rapid orbit service providing IGU orbits. US Patent 5,828,336 of Yunck et al. describes the implementation of a real-time sequential filter.

5

The approach of embodiments of the present invention differs from that of US Patent 5,828,336 in at least these ways:

- the approach described in US Patent 5,828,336 appears to use smoothed pseudo-ranges only; an example observation update rate given is 5 minutes
- 10 - the JPL system described in US Patent 5,828,336 does not appear to fix carrier-phase ambiguities
- the approach of US Patent 5,828,336 uses an ionospheric model

Part 8.10 References

15

Beutler, G., E. Brockmann, W. Gurtner, U. Hugentobler, L. Mervart, and M. Rothacher (1994), *Extended Orbit Modeling Techniques at the CODE Processing Center of the International GPS Service for Geodynamics (IGS): Theory and Initial Results*, Manuscripta Geodaetica, 19, 367-386, April 1994.

20

Bierman, Gerald J. (1977): *Factorization Methods for Discrete Sequential Estimation*, Academic Press, Inc., New York

Dach, R., U. Hugentobler, P. Fridez, M. Meindl (eds.) (2007), *Documentation of the Bernese GPS Software Version 5.0*, January 2007

25

Dow, J., Martin-Mur, T.J., *ESA/ESOC Processing Strategy Summary*, IGS Central Bureau web site, igsjb.jpl.nasa.gov/igsjb/center/analysis/esa.acn, 1999

30 Ge, M., G. Gendt, G. Dick and F.P. Zhang (2005), *Improving carrier-phase ambiguity resolution in global GPS*, Journal of Geodesy, Volume 80, Number 4, July 2006, DOI: 10.1007/s00190-005-0447-0

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Ge, M., G. Gendt, G. Dick, F.P. Zhang and M. Rothacher (2006), *A new data processing strategy for huge GNSS global networks*, Journal of Geodesy, Volume 79, number 1-3, June 2005, DOI: 10.1007/s00190-006-0044-x

- 5 Landau, Herbert (1988): *Zur Nutzung des Global Positioning Systems in Geodäsie und Geodynamik: Modellbildung, Software-Entwicklung und Analyse*, Heft 36 der Schriftenreihe des Studiengangs Vermessungswesen der Universität der Bundeswehr München, Dezember 1988

Lichten, S., Yoaz Bar-Sever, Winy Bertiger, Michael Heflin, Kenneth Hurst, Ronald J.

- 10 Muellerschoen, Sien-Chong Wu, Thomas Yunck, James Zumberge (1995) *GIPSY-OASIS II: A HIGH PRECISION GPS DATA PROCESSING SYSTEM AND GENERAL SATELLITE ORBIT ANALYSIS TOOL*, Proceedings of NASA Technology Transfer Conference, Oct 24-26, 1995, Chicago, Ill.

- 15 Lichten, Stephen M., Wu Sien-Chong, Hurst Kenneth, Blewitt Geoff, Yunck Thomas, Bar-Sever Yoaz, Zumberge James, Bertiger William I., Muellerschoen Ronald J., Thornton Catherine, Heflin Michael (1999), *Analyzing system for global positioning system and general satellite tracking*, United States Patent 5963167, October 5, 1999.

- 20 McCarthy, Dennis D. and Gérard Petit (2003), *IERS CONVENTIONS, IERS (International Earth Rotation Service) Technical Note 32*, October 2003

Romero, I., C. García Martínez, J.M. Dow, R. Zandbergen (2001), *Moving GPS Precise Orbit Determination Towards Real-Time*, Proceedings GNSS 2001, Seville, Spain, May 2001.

- 25 Yunck, Thomas P., William I. Bertiger, Stephen M. Lichten, Anthony J. Mannucci, Ronald J. Muellerschoen, Sien-Chong Wu, (1998), *Robust real-time wide-area differential GPS navigation*, US Patent 5828336, October 27, 1998.

Teunissen, P.J.G, S. Verhagen (2009); *GNSS Carrier Phase Ambiguity Resolution: Challenges and Open Problems*, In M.G. Sideris (ed.); Observing our Changing Earth, International Association of Geodesy Symposia 133, Springer Verlag Berlin-Heidelberg 2009.

- 30

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Verhagen, Sandra (2995): *The GNSS integer ambiguities: estimation and validation*, Publications on Geodesy 58, Delft, 2005. 194 pages., ISBN-13: 978 90 6132 290 0. ISBN-10: 90 6132 290 1.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 9: Phase Clock Processor

Referring to FIG. 3, the phase clock processor 335 receives as input MW biases b_{MW}^j 345 (one per satellite) and/or widelane ambiguities $N_{i,WL}^j$ 340 (one per satellite-receiver pair), precise orbit information 350 (one current orbit position/velocity per satellite), troposphere information 370 (one troposphere zenith delay per station), low-rate code leveled clocks 365 (one low-rate code-leveled clock error per satellite) and the reference-station GNSS observation data 305 or 315. The phase clock processor 335 generates from these inputs the computed high-rate code-leveled clocks 375 (one high-rate code-leveled clock error per satellite) and the high-rate phase-leveled clocks 370 (one high-rate phase-leveled clock error per satellite), and forwards the MW biases 345 (one per satellite).

Part 9.1 Determining WL Ambiguities from MW Biases

Neglecting multipath, a useful characteristic of the Melbourne-Wübbena (MW) linear combination $\Phi_{i,WL}^j - P_{i,NL}^j$ is that, aside from some remaining noise $\varepsilon_{i,MW}^j$, only the satellite MW biases b_{MW}^j and the receiver MW biases $b_{i,MW}$ and the widelane ambiguity term $\lambda_{WL} N_{i,WL}^j$ remain:

$$\Phi_{i,WL}^j - P_{i,NL}^j = b_{i,MW} - b_{MW}^j + \lambda_{WL} N_{i,WL}^j + \varepsilon_{i,MW}^j \quad (66)$$

To get rid of the noise $\varepsilon_{i,MW}^j$, the Melbourne-Wübbena linear combination for each satellite is in some embodiments reduced by the satellite MW bias b_{MW}^j for that satellite and smoothed (e.g., averaged) over time. Single-differencing between satellites then cancels out the receiver MW bias $b_{i,MW}$, leaving only a single-differenced widelane ambiguity term per satellite-receiver-satellite connection. The single-differenced widelane ambiguities are computed using the (constant) widelane wavelength λ_{WL} . Since only single-differenced widelane ambiguities are used in the phase clock processor, this method is in some embodiments used as a substitute for using the widelane ambiguities 340 from the MW bias processor 325 and/or for a quality check on the widelane ambiguities 340 received from the MW bias processor 325.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 9.2 Single-Differenced Phase-Leveled Clocks

The location of each reference station is precisely known. The precise location of each satellite at
5 each epoch is given by the current orbit position/velocity data 350 from orbit processor 330. The
geometric range ρ_i^j between a satellite j and a reference station i at each epoch is calculated
from their known locations. The tropospheric delay T_i^j for each reference station is received
from the code clock processor 320.

10 The ionospheric-free linear combination

$$\Phi_{i,IF}^j = \rho_i^j + c\Delta t_{\Phi,i} - c\Delta t_{\Phi}^j + T_i^j + \lambda_{IF} N_{i,IF}^j + \varepsilon_{\Phi,i,IF}^j \quad (67)$$

is reduced by the (known) geometric range ρ_i^j and the (known) troposphere delay T_i^j , leaving as
unknowns only the ionospheric-free ambiguity term $\lambda_{IF} N_{i,IF}^j = \lambda_{NL} N_{i1}^j + \frac{1}{2}(\lambda_{WL} - \lambda_{NL})$, the
satellite phase clock error term $c\Delta t_{\Phi}^j := c\Delta t + b_{\Phi,IF}^j$ and the receiver phase clock error term

15 $c\Delta t_{\Phi,i} := c\Delta t + b_{\Phi,i,IF}.$

Single-differencing the observations of two satellites at the same receiver cancels out the receiver
clock error.

20 Reducing this single difference by the according single difference widelane ambiguity leads to
the single difference phase clock together with a single difference N_1 ambiguity (often also
called narrowlane ambiguity in this context since its corresponding wavelength here is λ_{NL}).

(68)

$$\Phi_{i,IF}^{j_1 j_2} - \rho_i^{j_1 j_2} - T_i^{j_1 j_2} - \frac{1}{2}(\lambda_{WL} - \lambda_{NL}) N_{i,WL}^{j_1 j_2} = -c\Delta t_{\Phi}^{j_1 j_2} + \lambda_{NL} N_{i1}^{j_1 j_2} + \varepsilon_{\Phi,i,IF}^{j_1 j_2}$$

25 This is computed for each station observing the same pair of satellites. At this point it is
impossible to distinguish between the single difference satellite clock error and the single

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

difference narrowlane ambiguity term, which is an integer multiple of the narrowlane wavelength.
If the single difference ambiguity is set to zero a single difference phase clock

$$c\Delta\tilde{t}_{\Phi,i}^{j_1j_2} := -\left(\Phi_{i,IF}^{j_1j_2} - \rho_i^{j_1j_2} - T_i^{j_1j_2} - \frac{1}{2}(\lambda_{WL} - \lambda_{NL})N_{i,WL}^{j_1j_2}\right) \quad (69)$$

shifted by an integer number of narrowlane cycles is achieved. This phase clock has a non fixed
5 narrowlane status. The difference of two of those single difference clocks is an integer number of narrowlane cycles.

Part 9.3 Smoothed Single-Differenced Phase Clocks

10 For each pair of satellites, the single-differenced phase clock errors observed from different stations shifted to a common level using fixed narrowlane ambiguities is averaged to get a more precise clock error:

$$c\Delta\bar{t}_{\Phi}^{j_1j_2} = \frac{1}{n} \sum_{i=1}^n (c\Delta\tilde{t}_{\Phi,i}^{j_1j_2} + \lambda_{NL} N_{iL}^{j_1j_2}) \quad (70)$$

15 Part 9.4 Phase Clock Estimation

Part 9.4.1 Spanning-Tree-Based Phase Clocks

Some embodiments use a spanning-tree approach to estimate phase-leveled clocks. To compute a
20 single-differenced clock error between any arbitrary pair of satellites, a set of single difference-phase clocks is needed for the satellite-to-satellite links such that there is a unique path to reach each satellite via satellite-to-satellite links starting from a dedicated reference satellite. If all satellites are nodes of a graph, such a path is called spanning tree. If each edge of the graph is equipped with a weight, a minimum spanning tree is a spanning tree with a minimal sum of edge
25 weights. Some embodiments use a discrete category based weighting scheme for an edge between two satellites and assign the following phase clock values to the edge:

i Several edges connecting satellites j_1 and j_2 have a fixed N_1 ambiguity:

(Weighted) averaged single-differenced clock $c\Delta\bar{t}_{\Phi}^{j_1j_2}$,

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

ii Only a single edge connecting satellites j_1 and j_2 has a fixed N_1 ambiguity:

$$c\Delta\tilde{t}_{\Phi,i}^{j_1j_2} + \lambda_{NL} N_{i1}^{j_1j_2},$$

iii No edge connecting satellites j_1 and j_2 has a fixed N_1 ambiguity : $c\Delta\tilde{t}_{\Phi,i}^{j_1j_2}$ for receiver i with $\min(\text{elevation}(j_1, j_2))$ is maximal.,

5 iv No WL ambiguity available for edge connecting satellites j_1 and j_2 : Don't use such an edge; thus no phase clock has to be defined;

Each edge of category (i) has a lower weight than an edge of category (ii), each edge of category (ii) has a lower weight than an edge of category (iii) etc. Edges within each category have a continuous weight that is in some embodiments derived in category (i) from the variance of the average and in category (ii) and (iii) from the elevations under which the satellites in the single difference are seen at the corresponding station.

15 If the minimum spanning tree uses an edge without a fixed narrowlane status, the narrowlane ambiguity $N_{i1}^{j_1j_2}$ is set to zero and achieves fixed status. Choosing a reference satellite with phase clock error $c\Delta t_{\Phi}^{j_{ref}}$ set to zero, single-differenced phase clock errors $c\Delta t^{j_{ref}j_2}$ to all other satellites are computed solving a linear system. The satellite's phase clock error is then defined as

$$c\Delta t_{\Phi}^{j_2} := c\Delta t_{\Phi}^{j_{ref}j_2}$$

20 **Part 9.4.2 Filter Estimation of Phase Clocks**

Some embodiments use a filter approach to estimate phase-leveled clocks. A filter is set up with all satellite phase clock errors as states. The state of the reference satellite's clock error $c\Delta t_{\Phi}^{j_{ref}}$ is set to zero. In some embodiments all links from the spanning tree and in addition all links with fixed narrowlanes are added to the filter to estimate more precise single-differenced phase clock errors.

Part 9.5 Narrowlane Filter Bank

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Once a set of single-differenced phase clock errors is estimated, e.g., as in Part 9.4, all observations for shifted single-differenced phase clocks in Part 9.2 are reduced by the clock errors estimated in Part 9.4:

$$N_{il}^{j_1 j_2} \approx \frac{1}{\lambda_{NL}} \left(c \Delta \bar{t}_{\Phi}^{j_1 j_2} - c \Delta \tilde{t}_{\Phi, i}^{j_1 j_2} \right). \quad (71)$$

5

What remains is an observable for the integer narrowlane offset. For each station a narrowlane filter with a narrowlane ambiguity state per satellite is updated with those observations.

Part 9.6 High-Rate Single-Differenced Code-Leveled Clocks

10

The phase clock processor 335 also computes high-rate code-leveled clocks.

Part 9.6.1 Buffering Low-Rate Code-Leveled Clocks

15 GNSS observations (reference station data 305 or 315) for a time (e.g., an epoch) t_1 are buffered for use when the low-rate information with the same time tag (t_1) arrives from the code-leveled clock processor 360; this information comprises two of: clock errors 365, tropospheric delays 370, and ionospheric-free float ambiguities 374. Thus, GNSS observations matched in time with the low-rate clock processor information are always available from an observation buffer. When
20 a set of low-rate code leveled clocks 365 arrive they are combined with the GNSS observations and with the tropospheric delays 370 and with time-matched satellite position/velocity information 350 to compute the carrier ambiguities.

FIG. 27A shows at 2700 the flow of data for the case where the satellite clocks (clock errors) 365
25 and the tropospheric delays 370 are used. GNSS observations arrive over time at the phase clock processor 335 with (e.g. epoch) time tags t_0, t_1, t_2, t_3 , etc. Low-rate code leveled clocks $c \Delta t_p^j$ and tropospheric delays T arrive asynchronously over time with time tags t_0, t_1, t_2, t_3 , etc. An observation buffer 2705 holds the observations. These are combined for each time t_i in a combiner 2710 with satellite position/velocity data, with the low-rate code-leveled clocks $c \Delta t_p^j$
30 and with the tropospheric delays T to produce the ionospheric-free float ambiguity terms

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$\lambda N_i^j := \lambda_{i,IF} N_{i,IF}^j + b_{\Phi,i,IF} - b_{P,i,IF} - (b_{\Phi,IF}^j - b_{P,IF}^j)$. A process 2715 computes the single-differenced code-leveled clocks 2720.

FIG. 27B shows at 2715 the flow of data for the case where the ionospheric-free float ambiguities 374 and the tropospheric delays 370 are used. GNSS observations arrive over time at the phase clock processor 335 with (e.g. epoch) time tags t_0, t_1, t_2, t_3 , etc. Ionospheric-free float ambiguity terms λN_i^j and tropospheric delays T arrive asynchronously over time with time tags t_0, t_1, t_2, t_3 , etc. An observation buffer 2720 holds the observations. These are combined for each time t_i in a combiner 2710 with the ionospheric-free ambiguity terms λN_i^j , with the low-rate code-leveled clocks $c\Delta t_p^j$ and with the tropospheric delays T to produce the ionospheric-free ambiguity terms λN_i^j . A process 2740 computes the single-differenced code-leveled clocks 2720.

Part 9.6.2 Computing Ambiguities in the Phase Clock Processor

The data combiner (2710 or 2735) forms an ionospheric-free linear combination of the carrier-phase observation, and reduces this by the geometric range ρ_i^j (computed using the receiver and satellite positions), the tropospheric delay T_i^j and the low-rate code-leveled satellite clock error $c\Delta t_p^j$ (e.g., clocks 365). After this reduction the receiver clock error and a float ambiguity remains. If this is done using between-satellite single-differenced observations, the receiver clock is eliminated and thus only the single-differenced ionospheric-free ambiguity term remains:

$$\Phi_{i,IF}^{j_1 j_2}(t_1) - \rho_i^{j_1 j_2}(t_1) - T_i^{j_1 j_2}(t_1) + c\Delta t_p^{j_1 j_2}(t_1) = \lambda N_i^{j_1 j_2}(t_1) + \varepsilon_{\Phi,i,IF}^{j_1 j_2}(t_1) \quad (72)$$

with $c\Delta t_p^{j_1 j_2} := c\Delta t^{j_1 j_2} + b_{P,IF}^{j_1 j_2}$ and float ambiguity $\lambda N_i^{j_1 j_2} := \lambda_{i,IF} N_{i,IF}^{j_1 j_2} - (b_{\Phi,IF}^{j_1 j_2} - b_{P,IF}^{j_1 j_2})$ which is a constant value and is kept to be used until the next update of low rate clocks.

As an alternative to computing the ionospheric-free ambiguities in the phase clock processor 335, the ionospheric-free float ambiguities are obtained from a previous processor, such as ionospheric-free float ambiguities 374 from the low-rate code clock processor 320.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 9.6.3 Using Iono-Free Ambiguities to Compute High Rate Code Clocks

Once iono-free ambiguities are known for time t_1 , single-differenced ionospheric-free linear
5 combinations at any time in the future (e.g. t_2) can be used for each pair of satellites along with tropospheric delay and current geometric range:

(73)

$$\Phi_{i,j_2}^{j_1,j_2}(t_2) - \rho_i^{j_1,j_2}(t_2) - T_i^{j_1,j_2}(t_2) - \lambda N_i^{j_1,j_2}(t_1) = -c\Delta t_P^{j_1,j_2}(t_2) + \varepsilon_{\Phi,i,j_2}^{j_1,j_2}(t_2) + \varepsilon_{\Phi,i,j_2}^{j_1,j_2}(t_1)$$

The result of this computation is the single-differenced phase-leveled satellite clock error $c\Delta t_P^{j_1,j_2}$.

With this it is possible to estimate high-rate single-differenced code-leveled clock errors $c\Delta t_P^{j_{ref},j_2}$

10 between a given satellite j_2 and a chosen reference satellite j_{ref} . If only the between-satellite single-differenced clock errors are of interest, the reference satellite clock error $c\Delta t_P^{j_{ref}}$ is set to zero.

FIG. 28A shows a first embodiment 2800 for preparing the undifferenced (also called ZD or
15 Zero-Differenced) high-rate code-leveled satellite clocks 375. Precise satellite orbit information, e.g., satellite position/velocity data 350 or 360, and GNSS observations, e.g., reference station data 305 or 315, are supplied as inputs to a first process 2805 and as inputs to a second process 2810. The first process 2805 estimates a set of ionospheric-free float ambiguities 2815. These are supplied to the second process 2810 which estimates the undifferenced high-rate code-leveled
20 satellite clocks (clock errors) 375.

FIG. 28B shows a second embodiment 2820 for preparing the undifferenced (also called ZD or
Zero-Differenced) high-rate code-leveled satellite clocks 375. Precise satellite orbit information, e.g., satellite position/velocity data 350 or 360, and GNSS observations, e.g., reference station
25 data 305 or 315, are supplied as inputs to a low-rate code-leveled clock processor 2825, e.g., code clock processor 320, and as inputs to a high-rate code-leveled clock processor 2830. The low-rate code-leveled clock processor 2825 prepares ionospheric-free float ambiguities 2835, e.g., ionospheric-free float ambiguities 374, and tropospheric delays 2840, e.g., tropospheric delays 370. The ionospheric-free float ambiguities 2835 and the tropospheric delays 2840 are supplied

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

to the high-rate code-leveled clock processor 2830, e.g., forming a part of phase clock processor 335. The high-rate code-leveled clock processor 2830 uses the inputs at 2845 to compute single-differenced high-rate code-leveled satellite clocks 2850. A filter 2855 uses these to estimate undifferenced high-rate code-leveled satellite clocks (clock errors) 2860, e.g., high-rate code-leveled satellite clocks 375.

FIG. 28C shows a third embodiment 2865 for preparing the undifferenced high-rate code-leveled satellite clocks 375. Precise satellite orbit information, e.g., satellite position/velocity data 350 or 360, and GNSS observations, e.g., reference station data 305 or 315, are supplied as inputs to a low-rate code-leveled clock processor 2870, e.g., code clock processor 320, and as inputs to a high-rate code-leveled clock processor 2875. The low-rate code-leveled clock processor 2870 prepares low-rate code-leveled clocks 2880, e.g., low-rate code-leveled satellite clocks 365, and tropospheric delays 2882, e.g., tropospheric delays 370. The low-rate code-leveled satellite clocks 2880 and the tropospheric delays 2882 are supplied to the high-rate code-leveled clock processor 2875, e.g., forming a part of phase clock processor 335. The high-rate code-leveled clock processor 2884 uses the inputs at 2884 to compute ionospheric-free float ambiguities 2886 which are used at 2888 to compute single-differenced high-rate code-leveled satellite clocks 2890. A filter 2892 uses these to estimate undifferenced high-rate code-leveled satellite clocks (clock errors) 2894, e.g., high-rate code-leveled satellite clocks 375.

Part 9.6.4 Clock Shifter

Single-differenced phase-leveled clock errors $c\Delta t_{\Phi}^{j_{ref}j_2}$ and single-differenced code-leveled clock errors $c\Delta t_P^{j_{ref}j_2}$ are estimated as in the course of estimating phase-leveled satellite clocks and high-rate single-differenced code-leveled satellite clocks. The single-differenced high-rate code-leveled satellite clocks have the same accuracy as single differences of the low-rate code-leveled satellite clocks. The phase-leveled satellite clocks are constructed to preserve the integer nature of the narrowlane ambiguity if used for single-differenced ionospheric-free carrier-phase observations together with the precise satellite orbits and the widelane ambiguities, derived from the MW biases, used in the clock estimation. Thus the quality of a single-differenced phase-leveled clock error is not changed if this clock error is shifted by an integer number of narrowlane cycles. Since the phase-leveled satellite clock errors will always be used in a single difference, such a shift which is applied all satellite clock errors will cancel out again in the single-

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

differencing operation. In accordance with some embodiments the following shift is applied to the phase-leveled satellite clock errors to keep their values close to the low-rate code-leveled satellite clock errors and reduce their noise.

5 Thus in some embodiments an integer number of narrowlane cycles

$$s_{NL}^{j_{ref} j_2} = \text{Round}(c\Delta t_P^{j_{ref} j_2} - c\Delta t_{\Phi}^{j_{ref} j_2}) \quad (74)$$

is added to each of the phase-leveled satellite clock errors to minimize the distance to the high-rate code-leveled satellite clocks.

10 In some embodiments the low-rate code-leveled clock errors are approximated with a continuous steered clock $c\Delta t_{P,steered}^j$. The value of the steered clock of the reference satellite

$$s_{ref} = c \Delta t_{P,steered}^{j_{ref}} \quad (75)$$

is then added to all high-rate clocks. Doing so, all clocks are close to the code-leveled low-rate clocks, but the reference clock is smooth.

15 In some embodiments the mean of the difference between the high-rate phase-leveled satellite clocks and their corresponding steered low-rate clock is computed and added to all shifted phase-leveled satellite clock errors. The same is done for the high-rate code-leveled satellite clocks. This procedure pushes some noise into the reference clock.

$$\begin{aligned} s_{P,noise} &= \frac{1}{n} \sum_{j=1}^n \left(c\Delta t_P^{j_{ref} j_2} - c\Delta t_{P,steered}^{j_{ref} j_2} \right) \\ s_{\Phi,noise} &= \frac{1}{n} \sum_{j=1}^n \left(c\Delta t_{\Phi}^{j_{ref} j_2} - c\Delta t_{P,steered}^{j_{ref} j_2} + s_{NL}^{j_{ref} j_2} \right) \end{aligned} \quad (76)$$

20 The shifted clock errors read as

$$\begin{aligned} c\Delta t_P^{j_2} &= c\Delta t_P^{j_{ref} j_2} + s_{P,noise} + s_{ref} \\ c\Delta t_{\Phi}^{j_2} &= c\Delta t_{\Phi}^{j_{ref} j_2} + s_{\Phi,noise} + s_{ref} + s_{NL}^{j_{ref} j_2} \end{aligned} \quad (77)$$

The shifting is mainly done to keep the phase-leveled satellite clock errors near GPS time and therefore make certain transmission methods applicable. In addition the clock bias

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$b_{\Delta t}^j = c\Delta t_p^j - c\Delta t_{\Phi}^j, \quad (78)$$

which is the difference between the phase-leveled satellite clocks and code-leveled satellite clocks, can be kept within a certain range.

Part 9.6.5 Jump messages

5

If the clock bias leaves its range or if the phase-leveled clocks' satellite-to-satellite links have been estimated without using fixed narrowlane ambiguities, the shift will change and a jump message is sent. This also means that the phase-leveled satellite clock error changes its level.

10

Part 9.7 Phase Clock Processor Embodiments

FIG. 29 shows an architecture 2900 of a phase clock processor 335 in accordance with some embodiments of the invention. The inputs to the phase clock processor are: MW biases and/or fixed WL ambiguities 2095 (e.g., MW biases 345 and/or fixed WL ambiguities 340), low-rate (LR) code-leveled clocks 2910 (one per satellite, e.g., low-rate code-leveled satellite clocks 365), satellite orbit information (e.g., precise satellite orbit position/velocities 350 and/or IGU orbit data 360), tropospheric delays 2920 (one per reference station, e.g., tropospheric delays 370), and GNSS observations 2925 (of multiple satellites at multiple reference stations, e.g., reference station data 305). The choice of MW biases or fixed WL ambiguities gives two options. A first option is to use the low-rate MW biases together with the low-rate orbit information 2915 and the GNSS observations 2925 in an optional fixer bank 2930 to fix the WL ambiguities. These are then provided at a high rate (HR) as single-differenced fixed WL ambiguities 2935 to a computation process 2940. A second option is use the low-rate fixed WL ambiguities directly to supply single-differenced (SD) fixed WL ambiguities to the process 2940. By high-rate is meant that the single-differenced fixed WL ambiguities used in the high-rate process 2940 remain the same from epoch to epoch in process 2940 between low-rate updates.

The low-rate code-leveled clocks 2910 are used in process 2945 to compute low-rate single-differenced ionospheric-free float ambiguities 2950. These are used with the low-rate orbit data 2915 and the low-rate tropospheric delays 2920 and the high-rate GNSS observations 2925 in a process 2955 to compute single-differenced high-rate code-leveled clocks 2960 (one per satellite, such as high-rate code-leveled satellite clocks 375).

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The high-rate single-differenced fixed WL ambiguities 2935 are used with the low-rate orbit data 2915 and the low-rate tropospheric delays 2920 and the GNSS observations 2925 in a process 2940 which computes high-rate phase-leveled clocks 2945 (one per satellite, such as high-rate phase-leveled satellite clocks 375). The high-rate phase-leveled clocks 2945 are used together with the orbit data 2915 and the tropospheric delays 2920 and the GNSS observations 2925 in an ambiguity fixer bank 2975 which attempts to fix single-differenced ambiguities, e.g., L1 ambiguities. The single-differenced fixed ambiguities 2980 are pushed into the process 2965 to aid the computation of high-rate phase-leveled clocks 2970.

The MW biases and/or fixed WL ambiguities 2905 and the low-rate code-leveled clocks 2910 and the single-differenced high-rate code-leveled clocks 2960 and high-rate phase-leveled clocks 2970 are fed into a process 2985 which shifts and combines these to deliver a high rate data flow 2990 containing (at least) high-rate phase-leveled satellite clocks, high-rate code-leveled clocks and high-rate MW biases. Data 2990 is supplied to scheduler 355 as described in FIG. 3.

FIG. 30A shows an embodiment 3000 of a process for estimating high-rate phase-leveled satellite clocks. Precise satellite orbit information, e.g., satellite position/velocity data 350 or 360, and GNSS observations, e.g., reference station data 305 or 315, are supplied at low rate as inputs to a first process 3015 and at high rate as inputs to a second process 3020. The first process 3015 estimates ambiguities 3025, one set of ambiguities per receiver. Each ambiguity corresponds to one of a receiver-satellite link and a satellite-receiver-satellite link. These ambiguities are supplied at low rate to the second process 3020 which estimates the high-rate phase-leveled clocks 3030.

In general a linear combination of carrier phase observations has receiver-dependent parameters p_r like receiver position, receiver clock error or receiver biases, satellite-dependent parameters p^s like the satellite position, and receiver-satellite-link dependent parameters p_r^s like the tropospheric or the ionospheric delay. Let $\Omega_{rk}^s, k \in L$ be linear combinations of code and carrier phase observations with wavelength λ_k and ambiguity N_{rk}^s . A code and carrier phase combination as assumed here can be written as

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\hat{\Omega}_r^s := \sum_{k \in \hat{L}} a_k \Omega_{rk}^s = f(p_r, p^s, p_r^s) + c\Delta t^s + \sum_{k \in \hat{L}} a_k (b_k^s + \lambda_k N_{rk}^s) + \varepsilon_r^s, \quad (79)$$

with $\hat{L} \subseteq L, \hat{L}$ not empty and real factors $a_k \in \mathfrak{R}$.

Note that $f: \mathfrak{R}^{n_p} \rightarrow \mathfrak{R}$ is linear in most of the parameters. If a mapping exists to convert between a receiver-satellite link dependent parameter and a receiver dependent parameter, it can be used to reduce the number of unknowns. As an example the troposphere delay can be modeled as a delay at zenith, which is mapped to line of sight. Thus instead of having one parameter per receiver-satellite link, only one parameter per receiver is needed.

Using special linear combinations such as an ionospheric-free combination, parameters can be canceled out. Each additional input of at least one of the parameters contained in p_r, p^s and p_r^s simplifies and accelerates the estimation process. In satellite-receiver-satellite single differences the parameters p_r cancel out. In the following all can be done in single or zero difference, but this will not be mentioned explicitly in each step.

If all parameters p_r, p^s, p_r^s and $c\Delta t^s$ are known and the noise is neglected, the remaining part $\sum_{k \in \hat{L}} a_k (b_k^s + \lambda_k N_{rk}^s)$ is not unique without additional information. Setting the ambiguities for a specific satellite-receiver combination to zero will shift the biases accordingly. If the ambiguities are known, the level of the bias is defined; if the bias is known, the level of ambiguities is defined.

In some linear combinations Ω_{rk}^s of code and carrier-phase observations the parameter p_r, p^s, p_r^s and $c\Delta t^s$ cancel out, as do the receiver biases b_{rk} . This allows estimating the biases b_k^s, b_{rk} and the ambiguities N_{rk}^s separated from the other parameter.

Not all satellite biases can be estimated separately from the satellite clock error $c\Delta t^s$. In this case the sum of the real satellite clock and the biases are estimated together and the result is just referred as the satellite clock error. In this case shifting a bias is equivalent with shifting a clock.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In the following a distinction is made between ambiguities belonging to biases and ambiguities belonging to clock errors. The clock ensemble and also the biases ensemble estimated from GNSS observations are underdetermined. Thus one of the satellite or receiver clock errors or any combination of them can be set to any arbitrary value or function to make the system solvable. In some embodiments one of the clocks is set to zero, or additional measurements or constraints for one of the clock errors or a linear combination of clock errors are added. The examples given here always have a reference clock or bias set to zero, for purposes of illustration, but this is not a requirement and another approach can be used.

Process I (3015): In a first step all other input parameters are used to reduce the linear combination of carrier phase observations. Depending on the linear combination used, there are small differences in how to estimate phase-leveled satellite clock errors. One option is to use a single, big filter: In this case, all remaining unknown parameters of p_r, p^s and p_r^s , the satellite clock errors, including biases, and all ambiguities of $\hat{\Omega}_r^s$ are modeled as states in one filter, e.g. a Kalman filter. As an example the filter used for orbit determination in Part 8. [ORBIT_PROCESSOR], the one used for code-leveled clocks in Part 6. [CLOCK_PROCESSOR] (except the integer nature of ambiguities) or the Melbourne-Wübbena bias processor in Part 8. [WL_PROCESSOR] can be used. Another option is to perform a hierarchical estimation.

In some embodiments using linear combinations Ω_{rk}^s of code and carrier-phase observations in which the parameters p_r, p^s, p_r^s and $c\Delta t^s$ cancel out, the biases and ambiguities of Ω_{rk}^s estimated in an auxiliary filter and can be used to simplify the main filter.

Another option is to use a bank of filters rather than a single filter or rather than a main filter with auxiliary filter. If all parameter beside the ambiguities are known, in at least one of the code and carrier-phase combinations $\hat{\Omega}_r^s$ or $\Omega_{rk}^s, k \in \hat{L}$ the ambiguities can be estimated in a filter bank with one filter for each ambiguity or one filter for each receiver. This is done for single-differenced observations in the phase clock processor to estimate the widelane ambiguities using the Melbourne-Wübbena linear combination and Melbourne-Wübbena biases as input.

A further option is to use a combination of a main filter with a bank of filters. In some

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

embodiments the results of the filter banks are used to reduce the carrier-phase combinations $\hat{\Phi}_r^s$ in the main filter used to estimate the remaining unknowns.

At least one set of fixed ambiguities is sent from process I (3015) to process II (3020), but all the
5 estimated parameters could be sent in addition.

Process II (3025): In process II the linear combination $\hat{\Omega}_r^s$ is reduced by all input parameters from process I or additional sources. If no fixed ambiguities are available for the ambiguities from process I that belong to the clock error, a subset of those ambiguities defined e.g. by a
10 spanning tree is in some embodiments set to any arbitrary integer number and used like fixed ambiguities as discussed above. If this subset changes or is replaced by fixed ambiguities of process I, the resulting satellite phase clock errors may change their level. All remaining unknowns are modeled as states in a filter, e.g. a Kalman filter.

15 As in FIG. 30A, some embodiments estimate the ambiguities at a first rate and estimate a phase-leveled clock per satellite at a second rate higher than the first rate. The ambiguities estimated in process I (3005) are constant as long the receiver has no cycle slip. Thus an estimated ambiguity can be used for a long time. Also some of the other states like the troposphere estimated in
20 process I (3005) vary slowly and can be assumed to be constant for a while. If the observations of process II (3020) are reduced by those constant and slowly varying parameters, the filter used to estimate clock errors has only a few unknowns left and is therefore quite fast. In general, processor II can work at a higher update rate than process I.

FIG. 30B is a simplified schematic diagram of an alternate phase clock processor embodiment
25 3035 with WL ambiguities input as in option 2 of FIG. 29 (compare with process 2965). Satellite orbit data 3005 (e.g., 350 or 360), GNSS observations 3010 (e.g., 305 or 315), tropospheric delays 3040 (e.g., 370) and fixed WL ambiguities 3045 (e.g., 340) are supplied to a filter bank 3050 of process I (3015). Filter bank 3050 estimates single-differenced free narrowlane ambiguities 3055. The SD free NL ambiguities 3055 and the fixed WL ambiguities 3045 are
30 combined in a process 3060 with the satellite orbit data 3005, the GNSS observations 3010, and the tropospheric delays 3040 to compute single-differenced satellite clocks 3062. These are applied to a narrowlane filter bank 3064 to estimate single-differenced- satellite clocks 3066. A spanning tree process 3068 (e.g. MST) is applied to these to produce a set of single-differenced

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

satellite clocks 3070. These are fed back to the filter bank 3050 of process I (3015) to improve the estimation of the single-differenced free narrowlane ambiguities 3055.

FIG. 30C is a simplified schematic diagram of an alternate phase clock processor embodiment 5 3075 with MW biases input as in option 1 of FIG. 29 (compare with process 2965). Satellite orbit data 3005 (e.g., 350 or 360), GNSS observations 3010 (e.g., 305 or 315), tropospheric delays 3040 (e.g., 370) and fixed WL ambiguities 3045 (e.g., 340) are supplied to a filter bank 3078 of process I (3015). Filter bank 3078 estimates single-differenced free narrowlane ambiguities 3088. A filter bank 3082 uses the MW satellite biases 3045 to estimate WL ambiguities 3084. 10 As in FIG. 30B, the SD free NL ambiguities 3055 and the fixed WL ambiguities 3084 are combined in a process 3060 with the satellite orbit data 3005, the GNSS observations 3010, and the tropospheric delays 3040 to compute single-differenced satellite clocks 3062. These are applied to a narrowlane filter bank 3064 to estimate single-differenced- satellite clocks 3066. A spanning tree process 3068 (e.g. MST) is applied to these to produce a set of single-differenced 15 satellite clocks 3070. These are fed back to the filter bank 3078 of process I (3015) to improve the estimation of the single-differenced free narrowlane ambiguities 3080.

FIG. 31 shows an embodiment 3100 in which estimating a phase-leveled clocks per satellite comprises using at least the satellite orbit information, the ambiguities and the GNSS signal data 20 to estimate a set of phase-leveled clocks per receiver, each phase-leveled clock corresponding to one of a receiver-satellite link and a satellite-receiver-satellite link; and using a plurality of the phase-leveled clocks to estimate one phase-leveled clock per satellite. The satellite orbit information 3105 (e.g, 350 or 360) and the GNSS observations 3110 (e.g., 305 or 315) are used in a first process 3115 to determine the ambiguities 3120. The ambiguities 3120 are used with the 25 satellite orbit information 3105 and the GNSS observations 3110 in a second process 3125 to estimate the set of phase leveled clocks 3130, each phase-leveled clock corresponding to one of a receiver-satellite link and a satellite-receiver-satellite link. These are used in a third process 3135 to estimate satellite clocks 3140, one per satellite.

30 Instead of having a big filter, the problem can be decoupled using a small filter for each satellite-to-satellite link to estimate clock errors per receiver-satellite link or in single difference case per satellite-receiver-satellite link. Afterwards those clock errors per link can be combined either

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

using only links defined by a spanning tree (e.g., as at 3058) or using a filter with one clock error state per satellite.

In some embodiments, the ambiguities are estimated using at least one previously-estimated
5 phase-leveled clock per satellite. As mentioned above, the known fixed ambiguities define the clock error level, and (vice versa) a known clock error leads to ambiguities fitting this clock error. Thus the feedback of clock error estimates to process I allows to estimate ambiguities without having a dedicated clock error state. Since process II can already produce clock error estimates before having all ambiguities fixed, this feedback is advantageous in such a scenario to fix
10 ambiguities belonging to clock errors. Using clock error estimates from a second phase clock processor as input to process I allows to estimate ambiguities fitting those clocks and finally to estimate satellite clock errors at the same level as the other processor's clock errors.

FIG. 32 shows one such embodiment 3200. The satellite orbit information 3205 (e.g, 350 or 360) and the GNSS observations 3210 (e.g., 305 or 315) are used in a first process 3215 to determine
15 the ambiguities 3220. The ambiguities 3220 are used with the satellite orbit information 3205 and the GNSS observations 3210 in a second process 3225 to estimate the set of phase leveled clocks 3230. These are fed back to the first process 3215 where they are used in estimating the ambiguities 3220. For this embodiment it is advantageous to have a secondary clock processor as a back up which is available to immediately provide clock error estimates without level change in
20 case of a failure of the primary clock processor.

In some embodiments at least one additional phase-leveled clock per satellite estimated from an external source is obtained and used to estimate the ambiguities. FIG. 33 shows one such
embodiment 3300. In part 3355, the satellite orbit information 3305 (e.g, 350 or 360) and the
25 GNSS observations 3310 (e.g., 305 or 315) are used in a first process 3315 to determine the ambiguities 3320. The ambiguities 3320 are used with the satellite orbit information 3305 and the GNSS observations 3310 in a second process 3325 to estimate the set of phase leveled clocks 3330. In part 3385, the satellite orbit information 3355 (e.g, 350 or 360) and the GNSS
observations 3310 (e.g., 305 or 315) are used with one or more of satellite clocks 3330 in a first
30 process 3365 to estimate the ambiguities 3370. In this embodiment part 3335 is an external source of the satellite clocks 3330 with respect to part 3385. The ambiguities 3370 are used with the satellite orbit information 3355 and the GNSS observations 3360 in a second process 3375 to estimate the set of phase leveled clocks 3380.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In some embodiments, at least one set of ambiguities per receiver is determined for additional receivers, each ambiguity corresponding to one of a receiver-satellite link and a satellite-receiver-satellite link. After determining the ambiguities for the additional receivers, at least the precise
5 orbit information, the ambiguities for the additional receivers and the GNSS signal data are used to estimate the at least one additional phase-leveled clock per satellite.

FIG. 34 shows one such embodiment 3400. In part 3455, the satellite orbit information 3405 (e.g., 350 or 360) and the GNSS observations 3310 (e.g., 305 or 315) are used in a first process 3415 to
10 determine the ambiguities 3420. The ambiguities 3420 are used with the satellite orbit information 3405 and the GNSS observations 3410 in a second process 3425 to estimate the set of phase leveled clocks 3430. In part 3485, the satellite orbit information 3455 (e.g., 350 or 360, but optionally from a different orbit processor associated with a different network of reference stations) and the GNSS observations 3410 (e.g., 305 or 315, but optionally from a different
15 network of reference stations) are used with one or more of satellite clocks 3430 in a first process 3465 to estimate the ambiguities 3470. The ambiguities 3470 are used with the satellite orbit information 3455 and the GNSS observations 3460 in a second process 3475 to estimate the set of phase leveled clocks 3480.

20 The primary and secondary clock processors can also be of different kind. This option can be used to estimate the ambiguities close to the level of clock errors based on a different linear combination (e.g. code clock error or different phase combination). Using those ambiguities in process II will lead to clock errors close to clock errors input in process I.

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 10: Scheduler & Message Encoder

FIG. 35 is a schematic diagram showing a scheduler 355 and a message encoder 385 in accordance with some embodiments of the invention.

5

Methods and apparatus for encoding and transmitting satellite information are described in US Patent Application Publication 2009/0179792 A1 and 2009/0179793 A1.

10

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 11: Rover Processing with Synthesized Reference Station Data

Rodrigo Leandro

Ulrich Vollath

5 Xiaoming Chen

Part 11.1 Introduction

Existing RTK rover positioning engines are typically designed to process differenced data; the
10 rover data is differenced with base station data and the filters operate on the differenced data.
The GNSS observations are contaminated with a number of errors such as satellite clock error,
receiver clock error, troposphere delay error, and ionospheric delay error. The satellite-dependent
errors (e.g. satellite clock error) can be eliminated if the difference between the observations of
two receivers observing the same satellite is used. If those receivers are located close enough to
15 each other (e.g. a few kilometers under normal conditions) then the atmosphere-related errors can
also be eliminated. In case of VRS (Virtual Reference Station) the difference is done not between
two stations, but between the rover station and a virtual station, whose data is generated using
observations from a network of receivers. From this network it is possible to create knowledge of
how errors behave over the region of the network, allowing differential positioning over longer
20 distances.

Prior approaches for Precise Point Positioning (PPP) and PPP with ambiguity resolution
(PPP/RTK) remove modeled errors by applying them as corrections (subtracting the errors) to the
rover data. Though this works, using a rover receiver configured to process differenced data
25 requires a change in data preparation in that single-differencing has to be replaced by rover-data-
only error correction before the data can be processed.

This implies two different modes of operation inside the rover's positioning engine. In practice
this results in separate processors for PPP and RTK. This consumes a lot of software
30 development resource, and occupies more of the rover's CPU memory for the additional modules
and data.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 11.2 Global Virtual Reference Station Positioning

Some embodiments of the invention are based on a substantially different approach, in which a Synthesized Base Station (SBS) data stream is generated for any position on or near the Earth's surface using precise satellite information (e.g., precise orbits and clocks). This data stream is equivalent to having a real reference station near the rover.

For processing at the rover, a Real-Time Kinematic (RTK) positioning engine is used that is adapted to the different error characteristics of PPP as compared to traditional Virtual Reference Station (VRS) processing. Unlike traditional VRS processing, some embodiments of the invention use a processing approach which does not rely on small ionospheric residuals. And in contrast with traditional VRS processing, some embodiments of the invention optionally process different pseudorange observables.

PPP and PPP/RTK functionality are retained, with comparatively low software development and few changes in the rover positioning engine, while retaining the advantage of well-proven RTK engines that had been developed and perfected with many man-years of development time. Examples of such functionality include processing of data collected under canopy and dealing with delays in the reference data/corrections (low-latency positioning).

PPP-RTK studies using the SBS technique have proven the high performance of such a system. A positioning accuracy of 10 cm horizontal (95%) was achieved after about 600 seconds (mean) when processing a test data set. Convergence to the typical long baseline and VRS survey accuracy of 2.54 cm horizontal (95%) was achieved after 900 seconds (mean). This suggests that SBS techniques described here can provide sub-inch horizontal-positioning performance.

Part 11.2 Generating SBS Data

The SBS technique enables the generation of virtual GNSS data (data from a virtual GNSS reference/base station) for any position on or near the Earth's surface using precise satellite information (e.g., orbits, clocks). The core of the processing is done inside a module which responsible for the generation of the virtual data. The aim of such data generation is to make it possible to use GNSS satellite precise information in a GNSS receiver running an RTK Engine

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

(RTK Engine is described in Part __ [RTK DESCRIPTION]). Therefore the receiver's antenna position is computed by the RTK engine with differential GNSS data processing (i.e. difference between observations of a reference receiver and a rover receiver) using the SBS data as coming from the (virtual) reference receiver, and the rover receiver. The technique therefore allows that a differential GNSS processor is used to compute positions anywhere without the explicit need of a nearby reference station.

The SBS module uses at least one of the following:

- Phase-leveled clocks: These are the satellite clock offsets computed as described in Part 9.__ [PHASE CLOCK DESCRIPTION].
- Code-leveled clocks): These are the satellites clock offsets computed as described in Part 6.__ [STANDARD CLOCK DESCRIPTION].
- Melbourne-Wuebenna bias: These are the satellite biases for the Melbourne-Wuebenna phase and code combination computed as described in Part 8.__ [WL BIAS DESCRIPTION].
- Jump messages: These messages can indicate whether or not the satellite phase clock had a change of level in the recent past (e.g. 10 minutes). The reasons for a level change are pointed out in Part 9.__ [PHASE CLOCK DESCRIPTION]. Whenever a jump (level change) occurs in the satellite phase clock offset, some action has to be taken on the rover. This action might be the reset of the satellite's ambiguity(ies) in the RTK engine;
- Approximate rover position: This is the position for which the virtual base data will be generated. The approximate position of the rover can be used for example so that geometric-dependent components (e.g. satellite position) are the same as for the rover data.
- Time tag: This is the time (epoch) for which the virtual data has to be generated. The virtual data has to be created for certain instants of time (epochs) that depend on the rover observation time tags, so that it can be used in the differential data processing together with the rover data.

Given one or more items of the list above as input the SBS module generates as output a set of GNSS virtual observations. These observations comprise and are not restricted to: L1 code, L2 code, L1 phase, L2 phase, L1 cycle slip information, L2 cycle slip information, exact virtual base position. Once the virtual reference station dataset is available it can be

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

delivered to the RTK engine for differential processing with the rover's own GNSS observation data and optionally using the precise satellite data. The RTK engine can then apply conventional RTK processing to compute the rover coordinates (see Part __ [RTK DESCRIPTION]).

5

Part 11.3 Moving Base

The best corrections for kinematic rovers are obtained when the SBS position and the synthesized reference station data for the SBS position are updated frequently, e.g., for every epoch of rover observations a new set of SBS data is generated. Some embodiments use as the SBS position a first estimate of the rover position, derived for example from a simple navigation solution using the rover observations.

In the case of prior-art Virtual Reference Station (VRS) processing, a moving rover can result in a significant separation between the rover position and the VRS location for which the VRS data is synthesized. Some implementations mitigate this by changing the VRS position when this distance exceeds a certain threshold. This can lead to resets of the RTK engine in most implementations.

For attitude determination (heading, blade control etc.), typical RTK processing engines are usually capable of processing data from a moving base station; frequent updating of the SBS position and the synthesized reference station data for the SBS position do not require modification of these rover processing engines.

25 **Part 11.4 SBS Embodiments**

FIG. 38 shows an embodiment 3800 of SBS processing in accordance with the invention. Rover receiver 3805 receives GNSS signals from multiple GNSS satellites, of which three are shown at 3810, 3815 and 3820. Receiver 3805 derives GNSS data 3825 from code observations and carrier-phase observations of the GNSS signal over multiple epochs.

Precise satellite data 3830 for the GNSS satellites are received, such as via a correction message 390 broadcast by a communications satellite 3835 or by other means, and decoded by a message

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

decoder 3832. A SBS module 3835 receives the precise satellite data 3830 and also receives information which it can use as a virtual base location, such as an approximate rover position with time tag 3842 generated by an optional navigation processor 3845. The approximate rover position is optionally obtained from other sources as described below.

5

SBS module 3835 uses the precise satellite data 3830 and the approximate rover position with time tag 3842 to synthesize base station data 3850 for the virtual base location. The base station data 3850 comprises, for example, synthesized observations of L1 code, L2 code, L1 carrier-phase and L2 carrier-phase, and optionally includes information on L1 cycle slip, L2 cycle slip, and the virtual base location. The SBS module 3835 is triggered by an event or arrival of information which indicates that a new epoch of synthesized base station data is to be generated. In some embodiments the trigger is the availability of a rover observation epoch data set. In some embodiments the trigger is the current rover time tag. In some embodiments one epoch of synthesized base station data 3850 is generated for each epoch of GNSS data observations 3825. In some embodiments the trigger is the availability of an updated set of precise satellite data 3830.

10

15

20

In some embodiments a differential processor 3855, such as a typical RTK positioning engine of an integrated GNSS receiver system 3700, receives the precise satellite data 3830, the synthesized base station data 3850, and the GNSS data 3825 of rover receiver 3805, and uses these to determine a precise rover position 3860. Synthesized base station data 3850 is substituted for base station data in such processing.

25

FIG. 39 shows clock prediction between an observation time Obs 0 and a subsequent observation time Obs 1.

FIG. 40 is a schematic block diagram of the SBS module 3835.

The SBS module 3835 uses at least one of the following:

30

- Phase-leveled clocks 370: These are the satellite clock offsets computed as described in Part 9: Phase Clock Processor;
- Code-leveled clocks 365: These are the satellite clock offsets computed as described in Part 6: Standard Clock Processor;

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

- Melbourne-Wübbena biases 345: These are the satellite biases for the Melbourne-Wübbena phase and code combination computed as described in Part 8: Widelane Bias Processor;
- Jump messages (e.g., from correction message 390): Jump messages indicate when the satellite phase clock has had a change of level in the recent past (e.g. 10 minutes). The reasons for a level change are pointed out in Part 9. **[PHASE CLOCK DESCRIPTION]**. When a jump (level change) in the satellite phase clock offset is indicated, action is taken at the rover such as reset of the satellite's ambiguity(ies) in the RTK engine.
- Approximate rover position 3840: This is the position for which the virtual base data will be generated. The approximate position of the rover can be used so geometric-dependent components (e.g. satellite position) are the same as for the rover data.
- Time tag 3842: This is the time for which the virtual data is to be generated. The synthesized base station data 3850 is created for certain instants of time that depend on the rover observation time tags, so that it can be used in the differential data processing together with the rover data.

Given one or more of these items as input the SBS module 3850 generates as output 3850 a set of GNSS virtual observations. These observations comprise and are not restricted to: L1 code, L2 code, L1 phase, L2 phase, L1 cycle slip information, L2 cycle slip information, and exact virtual base position. The virtual base station is delivered to the differential processor 3855 as is the rover's GNSS data 3825 and, optionally, the precise satellite data 3830. The differential processor 3855 computes the coordinates of the precise rover position 3860, as described in Part **[RTK DESCRIPTION]**.

At any instant the SBS module 3835 may receive one or more of the following: approximate rover position 3840, precise satellite data 3830, and/or a time tag 3842. The approximate rover position 3840 is stored at 4005 as an updated current virtual base position. The precise satellite data 3840 is saved at 4010. The time tag 3842 is saved at 4015. Any of these items, or an optional external trigger 4020, can be used as a trigger event at decision point 4025 begin the generation of a new set of synthesized base station data 3850.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The satellite data for the current time tag is evaluated at 4030. This means that the satellite position and clock error that are stored are converted to the correct transmission time of the signal, so they can be consistently used with the rover observations. This is done because the stored satellite position and clock errors do not necessarily match the time tag of each requested epoch of the SBS module. The precise satellite data set for the current time tag 4035 is used at 4040 to synthesize a base station data set for the current time tag. At 4040, the satellite position and satellite velocity are computed for the current time tag. The geometric range between the virtual base station i and the satellite j is computed for example as:

$$\rho_i^j = \sqrt{\left((X^j - X_i)^2 + (Y^j - Y_i)^2 + (Z^j - Z_i)^2\right)} \quad (40.1)$$

where X^j, Y^j, Z^j is the satellite position at the time of the current time tag, and

X_i, Y_i, Z_i is the virtual base station location at the time of the current time tag.

The neutral atmosphere (or, troposphere) delay T_i^j is computed for example using a prediction model. For examples of prediction models see [Leandro 2009], [Leandro et al. 2006a], or [Leandro et al. 2006b].

The ionospheric delay I_i^j for L1 frequency is computed for example using an ionosphere model.

This can be a prediction model, such as the GPS broadcast ionosphere model [ICD-GPS], or something more sophisticated. Optionally the ionospheric delay can be set to zero.

The uncorrected synthesized base station data set for the time of the time tag is then computed for example as:

$$\Phi_{i,1}^j = \rho_i^j - c\Delta t_\Phi^j + T_i^j - I_i^j \quad (40.2)$$

$$\Phi_{i,2}^j = \rho_i^j - c\Delta t_\Phi^j + T_i^j - \frac{f_1^2}{f_2^2} I_i^j \quad (40.3)$$

$$P_{i,1}^j = \rho_i^j - c\Delta t_P^j + T_i^j + I_i^j + \frac{f_2}{f_1} \left(\lambda_{WL} \cdot b_{MW}^j - c\Delta t_\Phi^j + c\Delta t_P^j \right) \quad (40.4)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$P_{i,2}^j = \rho_i^j - c\Delta t_P^j + T_i^j + \frac{f_1^2}{f_2^2} I_i^j + \frac{f_1}{f_2} (\lambda_{WL} \cdot b_{MW}^j - c\Delta t_\Phi^j + c\Delta t_P^j) \quad (40.5)$$

where $\Phi_{i,1}^j$ is the synthesized L1 carrier observation for the virtual base location,

$\Phi_{i,2}^j$ is the synthesized L2 carrier observation for the virtual base location,

$P_{i,1}^j$ is the synthesized L1 code observation for the virtual base location, and

5 $P_{i,2}^j$ is the synthesized L2 code observation for the virtual base location.

The uncorrected synthesized base station data set 4045 is corrected at 4050 to create a synthesized base station data set 3850 for the current time tag. The corrections includes one or more of the effects described in Part __[CORRECTION MANAGER DESCRIPTION], such as
10 solid earth tides, phase wind-up, and antenna phase center variation. The corrected synthesized base station data set is:

$$\Phi_{i,1}^j = \Phi_{i,1}^{j'} - C_{i,1}^j \quad (40.6)$$

$$15 \quad \Phi_{i,2}^j = \Phi_{i,2}^{j'} - C_{i,2}^j \quad (40.7)$$

$$P_{i,1}^j = P_{i,1}^{j'} - C_{i,1}^j \quad (40.8)$$

$$P_{i,2}^j = P_{i,2}^{j'} - C_{i,2}^j \quad (40.9)$$

The synthesized base station data set generation is then complete for the current time tag and is
20 delivered to the differential processor 3855.

In some embodiments the differential processor 3855 uses the broadcast ephemeris to determine the satellite position and clock error, as in this mode of positioning only approximate quantities are needed for the satellite. This is also true when the differential processor is using SBS data,
25 however in some embodiments the processor optionally uses the available precise satellite data.

FIG. 41 is a schematic block diagram of a typical RTK positioning engine ...

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

FIG. 42 shows an alternate embodiment 4200 which is a variant of the processing 3800 of FIG. 38. In this embodiment the precise satellite data 3830 and rover observation data 3825 are sent to a PPP (Precise Point Positioning) engine 4210 rather or in addition to the differential processor 3855. The PPP engine 4210 delivers the rover coordinates in place of or in addition to those from the differential processor 3855.

FIG. 43 is a simplified view of the embodiment of FIG. 38. The synthesized GNSS data 3850 is created for a given location using precise satellite data 3830. The synthesized data 3850 is forwarded to the differential processor 3855 which, also using the rover GNSS data 3825, computes the rover position 3860.

FIG. 44 is a timing diagram of a low-latency version of the processing of FIG. 38, FIG. 42 or FIG. 44. In this variant, the arrival an epoch of rover observation data (e.g., 3825) or an epoch time tag (e.g., 3842) is used as a trigger for the generation of synthesized base station data (e.g., 3850). For example, a set of synthesized base station data (e.g., 3850) is generated for each epoch of rover observation data (e.g., 3825). The virtual base location (e.g., approximate rover position 3840) is updated from time to time as indicated by timing marks 4402 - 4408. Precise satellite data (e.g., precise satellite data 3830) is received from time to time as indicated by timing marks 4410 - 4424. Rover data (e.g., rover observations 3825) are received from time to time as indicated by timing marks 4426 - 4454. The arrivals of virtual base locations, the precise satellite data and the rover data are asynchronous. Each arrival of an epoch of rover data (indicated by a respective one of timing marks 4426 - 4454) results in the generation of a corresponding set of virtual base station data (indicated by a respective one of timing marks 4456 - 4484). In each case it is preferred to use the latest virtual base station location and the latest precise satellite data when processing an epoch of rover observation data with the corresponding virtual base station data. Each pairing of rover data and virtual base station data, e.g., of timing mark pair 4424 and 4456, results in the generation of a corresponding rover position, e.g., of timing mark 4485. Generated rover positions are indicated by timing marks 4485 - 4499.

In some embodiments a new SBS data epoch is created at each time a new rover data epoch is observed. FIG. 45 is a timing diagram of a high-accuracy version of the processing of FIG. 38, FIG. 42 or FIG. 43. In this variant, the arrival of a set of precise satellite data (e.g., 3830) is used as a trigger for the generation of synthesized base station data (e.g., 3850). For example, a set of

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

synthesized base station data (e.g., 3850) is generated for each set of precise satellite data (e.g., 3850). The virtual base location 3840 (e.g., approximate rover position) is updated from time to time as indicated by timing marks 4502 - 4508. Precise satellite data (e.g., precise satellite data 3830) are received from time to time as indicated by timing marks 4510 - 4524. Synthesized
5 base station data (e.g., 3850) are generated for example from each new set of precise satellite data, as indicated by timing marks 4526 - 4540. Rover data (e.g., rover observations 3825) are received from time to time as indicated by timing marks 4542 - 4570. The arrivals of virtual base locations, the precise satellite data and the rover data are asynchronous, but in this variant the synthesized base station data sets are synchronized (have the same time tags) as with precise
10 satellite data sets, e.g., indicated by timing marks 4510 and 4526, 4512 and 4528, etc. Each new epoch of rover data is processed using the most recent synthesized base station data set. For example the rover data epochs arriving at timing marks 4544 and 4536 are processed using synthesized base station data prepared at timing mark 4526, etc.

15 In some embodiments a new SBS data epoch is created each time a new precise satellite data set is obtained. FIG. 46 shows a variant 4600 of the process of FIG. 38, FIG. 42 or FIG. 43 in which the virtual base location 4605 is taken from any of a variety of sources. Some embodiments take as the virtual base location 4605 (a) the autonomous position 4610 of the rover as determined for example by the rover's navigation engine 3845 using rover data 3825. Some embodiments take
20 as the virtual base station location 4605 (b) a previous precise rover position 4615 for example a precise rover position 4220 determined for a prior epoch by differential processor 3855 or by PPP engine 4210. Some embodiments take as the virtual base location 4605 (c) the autonomous position 4610 of the rover as determined for example by the SBS module 3835 using rover data 3825. Some embodiments take as the virtual base location 4605 (d) the autonomous position
25 4610 of the rover as determined for example by the SBS module 3835 using rover data 3825 and precise satellite data 3830. Some embodiments take as the virtual base station location 4605 an approximate rover location obtained from one or more alternate position sources 4620, such as a rover position determined by an inertial navigation system (INS) 4625 collocated with the rover, the position of a mobile phone (cell) tower 4630 in proximity to a rover collocated with a mobile
30 telephone communicating with the tower, user input 4635 such as a location entered manually by a user for example with the aid of keyboard 3755 or other user input device, or any other desired source 4640 of a virtual base station location.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Regardless of the source, some embodiments update the virtual base station location 4605 or 3840 from time to time for use by SBS module 3835 as indicated by arrow 4645. The virtual base station location 4605 can be updated for example:

- (a) never,
- 5 • (b) for each epoch of rover data,
- (c) for each n^{th} epoch of rover data,
- (d) after a predetermined time interval,
- (e) when the distance between the approximate rover antenna position (e.g., 3840) or autonomous rover antenna position (e.g., 4610) and the virtual base station location (e.g.,
- 10 4605) exceeds a predetermined threshold,
- (f) when the distance between the approximate rover antenna position (e.g., 3840) or autonomous rover antenna position (e.g., 4610) and the precise rover antenna position (e.g., 4220) exceeds a predetermined threshold,
- (g) for each update of the approximate rover antenna position (e.g., 3840),
- 15 • (h) for each update of the precise rover antenna position (e.g., 4220).

For case (a), the first virtual base station location (e.g., 4605) that is provided to SBS module 3835 is used for the whole period during which the data processing is done. For case (b), the virtual base station location (e.g., 4605) is updated every time a new epoch of the rover data 3825

20 is collected, as this new epoch can be used to update the rover approximate position 3840 which can be used as the virtual base station location 4805. For cases (b) and (c) the virtual base station location 4605 is updated every time a certain number (e.g., 1 to 10) of epochs of rover data 3825 is collected. In case (d) the virtual base station location 4605 is updated at a certain time interval (e.g., every 10 seconds). Case (e) can be viewed as a mixture of cases (a) and (b), where the

25 current virtual base station location 4605 is kept as long as the distance between the current virtual base station location and the approximate rover antenna position is less than a limiting distance (e.g., 100 m). Case (f) is similar to case (e), except that the distance between the virtual base station location and a recent precise rover position is used. For case (g) the virtual base station location is updated each time the approximate rover antenna position changes. For case

30 (h) the virtual base station location is updated each time the precise rover antenna position changes.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

In some embodiments the virtual base station location 3840 used for the generation of the SBS data comes from the autonomous position solution of the rover receiver, e.g., approximate rover position 3840. In some embodiments the virtual base station location 3840 is not the same position as the autonomous position solution, but somewhere close to it.

- 5 Some embodiments use as the virtual base station location 3840 a source such as: an autonomously determined position of the rover antenna, a previously determined one of said rover antenna positions, a synthesized base station data generating module (e.g., 3835), a precise rover position (e.g., 4220), a position determined by a PPP engine (e.g., 4210), a position determined by an inertial navigation system (e.g., 4625), a mobile telephone tower location (e.g., 10 4630), information provided by a user (e.g., 4635), or any other selected source (e.g., 4540).

- In some embodiments the virtual base station location 3840 is not kept constant throughout the rover observation period but is updated if certain conditions are met such as: never, for each epoch of rover data, when the distance between an approximate rover antenna position and the 15 virtual base station location exceeds a predetermined threshold, for each update of the rover antenna positions, and for a specific GNSS time interval. In some embodiments a change of the virtual base station location 3840 location is used to trigger the generation of a new SBS epoch of data.

- 20 In some embodiments the SBS data is used for any kind of between-station differential GNSS processor, no matter what type data modeling is involved, such as processors using: aided inertial navigation (INS), integrated INS and GNSS processing, normal real-time kinematic (RTK), Instant RTK (IRTK, e.g., using L1/L2 for fast on-the-fly ambiguity resolution), Differential GPS (DGPS) float-solution processing, and/or triple-differenced processing. In some embodiments the 25 SBS data is used in post-processing of rover data. In some embodiments the SBS data is used in real time (i.e., as soon as the rover observation is available and a SBS record can be generated for it). In some embodiments the time tag of the rover matches the time tag of the SBS data within a few milliseconds.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 11. 5 SBS References

5 Leandro R.F., Santos, M.C. and Langley R.B., (2006a). "UNB Neutral Atmosphere Models: Development and Performance". Proceedings of ION NTM 2006, Monterey, California, January, 2006.

Leandro R.F., Santos, M.C. and Langley R.B., (2006b). "Wide Area Neutral Atmosphere Models for GNSS Applications". Proceedings of ION GNSS 2006, Fort Worth, Texas, September, 2006.

10 Leandro, R. F. (2009). Precise Point Positioning with GPS: A New Approach for Positioning, Atmospheric Studies, and Signal Analysis. Ph.D. dissertation, Department of Geodesy and Geomatics Engineering, Technical Report No. 267, University of New Brunswick, Fredericton, New Brunswick, Canada, 232 pp.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 12: Rover Processing with Ambiguity Fixing

Part 12.1 Ambiguity Fixing Introduction

The common high accuracy absolute positioning solution (also called Precise Point Positioning, or PPP) makes use of precise satellite orbit and clock error information. This solution also uses iono-free observations because there is no information available about the behavior of the ionosphere for the location of the rover receiver (few cm). High accuracy absolute positioning solutions in this scenario have always been based on float estimates of carrier-phase ambiguities, as it was not possible to maintain the integer nature of those parameters using un-differenced iono-free observations. Another issue concerning the integer nature of un-differenced ambiguities is the presence of non-integer phase biases in the measurements. These biases have to be also present in the correction data (e.g. clocks), otherwise the obtained ambiguities from the positioning filter will not be of integer nature.

Typical observation models used in prior-art processing are:

$$\phi = R + dT - dt + T + N_{if} \quad (1)$$

$$P = R + dT - dt + T \quad (2)$$

where

ϕ is the phase observation at the rover of a satellite signal (measured data)

P is the code observation at the rover of a satellite signal (measured data)

R is the range from satellite to rover at the transmission time of the observed signals

dT is the receiver clock (also called herein a code-leveled receiver clock or receiver code clock or standard receiver clock)

dt is the satellite clock (also called herein a code-leveled satellite clock or satellite code clock or standard satellite clock)

T is the tropospheric delay of the satellite to rover signal path

N_{if} is the iono-free ambiguity

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Typical prior-art PPP processing uses the ionospheric-free phase ϕ and code P observations (measurements) of the signals of multiple satellites along with externally-provided satellite clock information dt in an attempt to estimate values for the receiver position (X^r , Y^r , and Z^r), receiver clock dT , tropospheric delay T and the iono-free float ambiguities N_{if}^{Float} . The state
5 vector of parameters to be estimated in a Kalman-filter implementation, for each satellite j observed at the rover is thus:

$$\begin{Bmatrix} X^r \\ Y^r \\ Z^r \\ dT \\ T \\ N_{if}^{j, Float} \end{Bmatrix} \quad (3)$$

10 Embodiments of the invention provide for absolute positioning which takes into account the integer nature of the carrier-frequency ambiguities in real time processing at the rover. By real time processing is meant that the observation data is processed as soon as: (a) the data is collected; and (b) the necessary information (e.g. satellite corrections) are available for doing so. Novel procedures use special satellite clock information so that carrier-phase (also called phase)
15 ambiguity integrity is maintained in the ambiguity state values computed at the rover. The rover's processing engine handles the satellite clock error and a combination of satellite biases that are applied to the receiver observations.

Prior-art PPP engines are not able to use phase-leveled clocks, or at least are not able to take
20 advantage of the integer nature of these clocks. Some embodiments of the invention make use of this new information, e.g., in a modified position engine at the rover.

One goal of using phase-leveled satellite clocks and bias information is to obtain supposed integer ambiguities, which are used to obtain an enhanced position solution which takes advantage of the
25 integer nature of the ambiguities. This improves the position solution (4710) as compared with a position solution (4705) in which the ambiguities are considered to be float numbers, as shown in Figure 47.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The result of such prior-art PPP processing does not allow the integer nature iono-free ambiguities N_{if} to be reliably determined, but instead only enables estimation of iono-free float ambiguities N_{if}^{Float} . The iono-free float ambiguities N_{if}^{Float} can be viewed as including additional effects that can be interpreted as an error e such that:

$$N_{if}^{Float} = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] + e \quad (4)$$

$$N_{if}^{Float} = N_{if}^{PL} + e \quad (5)$$

10 where

N_{if}^{Float} is an iono-free float ambiguity representing a combination of an iono-free integer ambiguity $N_{if}^{Integer}$ and an error e

$N_{WL}^{Integer}$ is a Widelane integer ambiguity

α is an Widelane ambiguity coefficient

15 $N_1^{Integer}$ is an L1 integer ambiguity

β is an L1 ambiguity coefficient

N_{if}^{PL} is a phase-leveled iono-free ambiguity

In some particular cases it is possible to consider $N_{if}^{Float} \cong N_{if}^{integer}$ in a practical way.

20 Therefore there are cases where the formulation of the float ambiguity N_{if}^{Float} as a composition of other two integer-nature ambiguity (as in $N_{if}^{Float} = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] + e$) is not necessary.

Part 12.2 Determining iono-free phase-leveled ambiguities N_{if}^{PL} : Option 1

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Some embodiments of the invention are based on eliminating the un-wanted effects, or in other words the iono-free float ambiguity error e to allow determination of iono-free phase-leveled ambiguities N_{if}^{PL} . To eliminate the error e , the phase observation model is redefined:

$$\phi = R + \boxed{dT_p} - dt_p + T + N_{if}^{PL} \quad (6)$$

where

dT_p is a phase-leveled receiver clock (also called a receiver phase clock)

dt_p is a phase-leveled satellite clock (also called a satellite phase clock)

10 N_{if}^{PL} is a phase-leveled iono-free ambiguity

Satellite phase clock dt_p in (6) is phase-based and has integer nature and, in contrast to Eq. (4), it can provide phase-leveled ambiguities free of error e , so that:

$$15 \quad N_{if}^{PL} = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] \quad (7)$$

The phase-leveled iono-free ambiguity N_{if}^{PL} is not an integer but yet has an integer nature; the phase-leveled iono-free ambiguity N_{if}^{PL} can be interpreted as a combination of two integer ambiguities. One way of doing so is assuming that it is a combination of a widelane integer ambiguity $N_{WL}^{Integer}$ and an L1 integer ambiguity $N_1^{Integer}$ in which the widelane ambiguity coefficient α and the L1 ambiguity coefficient are not necessarily integers.

The phase-leveled clock dt_p can be quite different from a standard (code-leveled) satellite clock dt . To avoid confusion, the term dt_p is used to denote the phase-leveled satellite clock and the term dt_c is used herein to denote the standard (code-leveled) satellite clock, i.e., $dt_c = dt$.

The introduction of the phase-leveled satellite clock term dt_p in (6) means that the corresponding receiver clock term dT_p is also phase leveled. The term dT_p is used herein to denote the phase-

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

leveled receiver clock and the term dT_c is used to denote the standard (code-leveled) receiver clock, i.e., $dT_c = dT$. In a positioning engine where phase and code measurements are used simultaneously two clock states are therefore modelled for the receiver; in this formulation these are the phase-leveled receiver clock dT_p and the standard (code-leveled) receiver clock dT_c .

5

As mentioned above, typical prior-art PPP processing attempts to estimate values for four parameters for each observed satellite: receiver coordinates X^r, Y^r , and Z^r , receiver clock dT , tropospheric delay T and the iono-free float ambiguities N_{if}^{Float} . The introduction of phase-leveled clock terms adds one further parameter to be estimated in the rover engine: phase-leveled receiver clock dT_p . The restated observation models are therefore as shown in equations (6) and (2), respectively and reproduced here:

10

$$\phi = R + \boxed{dT_p} - dt_p + T + N_{if}^{PL} \quad (8)$$

$$P = R + \boxed{dT_c} - dt_c + T \quad (9)$$

15

In this formulation each observation type (phase ϕ or code P) is corrected with its own clock type (phase-leveled satellite clock dt_p or code-leveled satellite clock dt_c). Some embodiments of the invention therefore use the phase ϕ and code P observations (measurements) of the signals of multiple satellites observed at a rover along with externally-provided code-leveled (standard) satellite clock information dt_c and phase-leveled satellite clock information dt_p to estimate values for range R , code-leveled receiver clock dT_c , phase-leveled receiver clock dT_p , tropospheric delay T and the iono-free phase-leveled ambiguities N_{if}^{PL} . The state vector of parameters to be estimated in a Kalman-filter implementation, for each satellite j observed at the rover is thus:

25

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\begin{Bmatrix} X^r \\ Y^r \\ Z^r \\ dT_c \\ dT_p \\ T \\ N_{if}^{j, PL} \end{Bmatrix} \quad (10)$$

Part 12.3 Determining iono-free phase-leveled ambiguities N_{if}^{PL} : Option 2

- 5 A second formulation for handling the phase-leveled information is to substitute for the code-leveled receiver clock dT_c an offset δdT_p representing the difference between the code-leveled receiver clock dT_c and the phase-leveled receiver clock dT_p :

$$\delta dT_p = dT_c - dT_p \quad (11)$$

10

so that equations (6) and (2) become, respectively:

$$\phi = R + \boxed{dT_c} - dt_p + T + N_{if}^{PL} \quad (12)$$

$$P = R + \cancel{dT_c} + \delta dT_p - dt_c + T \quad (13)$$

15

Accordingly, some embodiments of the invention use the phase ϕ and code P observations (measurements) of the signals of multiple satellites observed at a rover along with externally-provided code-leveled (standard) satellite clock information dt_c and phase-leveled satellite clock information dt_p to estimate values for range R , phase-leveled receiver clock dT_p , receiver-

- 20 clock offset δdT_p , tropospheric delay T and the iono-free phase-leveled ambiguities N_{if}^{PL} .

The state vector of parameters to be estimated in a Kalman-filter implementation, for each satellite j observed at the rover is thus:

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\begin{Bmatrix} X^r \\ Y^r \\ Z^r \\ dT_p \\ \delta dT_p \\ T \\ N_{if}^{j, PL} \end{Bmatrix} \quad (14)$$

This second formulation still has five types of parameters to be estimated, but because δdT_p is an offset there is less process noise in the Kalman filter than for state vector (10). The advantage of such model as compared to option 1 is that the stochastic model can be setup differently, meaning that the noise level assigned to a clock bias state (e.g. δdT_p) can be different from a clock state (e.g. dT_c). Assuming that phase- and code-leveled clocks behave in a similar way, the noise level needed for modelling a bias state should be less than for modelling a clock state.

10 **Part 12.4 Determining iono-free phase-leveled ambiguities N_{if}^{PL} : Option 3**

A third formulation for handling the phase-leveled information is to substitute for the phase-leveled receiver clock dT_p an offset $-\delta dT_p$ representing the difference between the phase-leveled receiver clock dT_p and the code-leveled receiver clock dT_c :

$$15 \quad -\delta dT_p = dT_p - dT_c \quad (15)$$

so that equations (6) and (2) become, respectively:

$$20 \quad \phi = R \left[-dT_p \right] + dT_c - dt_p + T + N_{if}^{PL} \quad (16)$$

$$P = R \left[-dT_c \right] + \delta dT_c - dt_c + T \quad (17)$$

Accordingly, some embodiments of the invention use the phase ϕ and code P observations (measurements) of the signals of multiple satellites observed at a rover along with externally-provided code-leveled (standard) satellite clock information dt_c and phase-leveled satellite clock

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

information dt_p to estimate values for range R , code-leveled receiver clock dT_c , receiver-clock offset $-\delta dT_p$, tropospheric delay T and the iono-free phase-leveled ambiguities N_{if}^{PL} . The state vector of parameters to be estimated in a Kalman-filter implementation, for each satellite j observed at the rover is thus:

5

$$\left\{ \begin{array}{c} X^r \\ Y^r \\ Z^r \\ dT_c \\ -\delta dT_p \\ T \\ N_{if}^{j, PL} \end{array} \right\} \quad (18)$$

This third formulation still has five types of parameters to be estimated, but because $-\delta dT_p$ is an offset there is less process noise in the Kalman filter than for state vector (10).

10

Part 12.5 Determining iono-free phase-leveled ambiguities N_{if}^{PL} : Option 4

A fourth formulation for handling the phase-leveled information first estimates the iono-free float ambiguities $N_{if}^{j, Float}$ using code-leveled (standard) satellite clocks dt_c for phase observations ϕ and for code observations P as in (3), and shifts the iono-free float ambiguities $N_{if}^{j, Float}$ afterward using the phase-leveled clock information to obtain the iono-free phase-leveled ambiguities N_{if}^{PL} .

15

The starting point for this formulation is:

20

$$\phi = R + dT_c - dt_c + T + N_{if}^{j, Float} \quad (19)$$

$$P = R + dT_c - dt_c + T \quad (20)$$

Note that (19) and (20) are identical to (1 **Error! Reference source not found.**) and (2), since $dT_c = dT$ and $dt_c = dt$.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

This fourth formulation, as in the typical prior-art PPP processing discussed above, uses the phase ϕ and code P observations (measurements) of the signals of multiple satellites observed at a rover along with externally-provided code-leveled (standard) satellite clock information dt_c to
 5 estimate values for range R , code-leveled receiver clock dT_c , tropospheric delay T and the iono-free float ambiguities N_{if}^{Float} . The state vector of parameters to be estimated in a Kalman-filter implementation, for each satellite j observed at the rover is thus:

$$\begin{Bmatrix} X^r \\ Y^r \\ Z^r \\ dT_c \\ T \\ N_{if}^{j, Float} \end{Bmatrix} \quad (21)$$

10

As with the prior-art PPP processing, the estimation of parameter values of state vector (21) does not allow the iono-free float ambiguities $N_{if}^{j, Float}$ to be reliably determined as iono-free phase-leveled ambiguities N_{if}^{PL} :

$$N_{if}^{Float} = N_{if}^{PL} + e = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] + e \quad (22)$$

15

where

N_{if}^{Float} is an iono-free float ambiguity representing a combination of a iono-free phase-leveled ambiguity N_{if}^{PL} and an error e

20

$N_{WL}^{Integer}$ is a Widelane integer ambiguity

α is an Widelane ambiguity coefficient

$N_1^{Integer}$ is an L1 integer ambiguity

β is an L1 ambiguity coefficient

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

This fourth formulation assumes that error e represents the difference between the code-leveled (standard) satellite clock dt_c and the phase-leveled satellite clock dt_p :

$$e = dt_c - dt_p \quad (23)$$

so that

$$5 \quad N_{if}^{PL} = N_{if}^{Float} - (dt_c - dt_p) \quad (24)$$

$$N_{if}^{PL} = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] + e - e \quad (25)$$

$$N_{if}^{PL} = [\alpha N_{WL}^{Integer} + \beta N_1^{Integer}] \quad (26)$$

To summarize, this fourth formulation obtains iono-free float ambiguities N_{if}^{Float} from (19) and
 10 then shifts each of these by the difference between the standard (code-leveled) satellite clock dt_c^j and the phase-leveled clock dt_p^j for the respective satellite j to obtain the iono-free phase-leveled ambiguities N_{if}^{PL} as shown in (24).

For this purpose, the rover can be provided with (1) the standard (code-leveled) satellite clock
 15 dt_c^j and the phase-leveled clock dt_p^j for each satellite j observed at the rover, or (2) the standard (code-leveled) satellite clock dt_c^j and a clock bias δt_c representing the difference between the standard (code-leveled) satellite clock dt_c^j and the phase-leveled clock dt_p^j , or (3) the phase-leveled clock dt_p^j and a clock bias δt_p representing the difference between the phase-leveled clock dt_p^j and the standard (code-leveled) satellite clock dt_c^j . These are equivalent for
 20 processing purposes as can be seen from (24).

This fourth formulation has advantages and disadvantages. A disadvantage is that it assumes the behavior of the standard (code-leveled) satellite clock dt_c^j and the phase-leveled clock dt_p^j for
 each satellite j observed at the rover is substantially the same over the period of time for the
 25 ambiguity was computed. An advantage is that jumps (integer cycle slips) which might occur in the phase clock estimations can be more easily handled in processing at the rover.

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

Part 12.6 Determining position using Melbourne-Wuebenna biases b_{WL}^j :

After the iono-free phase-leveled ambiguities $N_{if}^{j, PL}$ are determined for a given epoch, they can be single-differenced as $\nabla^{ab} N_{if}^{j, PL}$, single-differenced integer (fixed) widelane

- 5 ambiguities $\nabla^{ab} N_{WL}^{j, Integer}$ can be removed from them to obtain single-differenced L1 float ambiguities $\nabla^{ab} N_1^{j, Float}$, and the single-differenced L1 float ambiguities $\nabla^{ab} N_1^{j, Float}$ can be fixed as single-differenced L1 integer ambiguities $\nabla^{ab} N_1^{j, Integer}$.

- Single-differenced widelane integer ambiguities $\nabla^{ab} N_{WL}^{j, Integer}$ are estimated in a widelane-
10 ambiguity filter which runs in parallel with the geometry filter of the rover's processing engine. The rover receiver is provided with a Melbourne-Wuebenna bias b_{MW}^j for each of the j satellites in view, e.g., from an external source of data corrections - see Part 7. [WL BIAS PROCESSOR DESCRIPTION]. Melbourne-Wuebenna bias b_{MW}^j can be computed as:

$$15 \quad \frac{\phi_{WL}^j - P_{NL}^j}{\lambda_{WL}} = N_{WL}^{j, Integer} + b_{MW}^j - b_{MW}^R \quad (27)$$

where

- ϕ_{WL}^j is the widelane carrier-phase combination of rover observations of satellite j
 P_{NL}^j is the narrowlane code combination of rover observations of satellite j
 λ_{WL} is the widelane wavelength
 20 $N_{WL}^{j, Integer}$ is the widelane integer ambiguity for satellite j
 b_{MW}^R is the Melbourne-Wuebenna bias for the rover R .

- The widelane ambiguity filter eliminates the rover's Melbourne-Wuebenna bias b_{WL}^R by differencing (27) for each pairing of satellites "a" and "b" to obtain the single-differenced
 25 widelane integer ambiguities $\nabla^{ab} N_{WL}^{j, Integer}$:

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\nabla^{ab} N_{WL}^{Integer} = \nabla^{ab} \left(\frac{\phi_{WL} - P_{NL}}{\lambda_{WL}} \right) - \nabla^{ab} b_{MW} \quad (28)$$

where

$$\nabla^{ab} b_{MW} = b_{MW}^a - b_{MW}^b \quad (29)$$

- 5 Once the single-differenced widelane integer ambiguities $\nabla^{ab} N_{WL}^{Integer}$ are known, they are removed from the single-differenced iono-free phase-leveled ambiguities $\nabla^{ab} N_{if}^{PL}$ to obtain the single-differenced L1 float ambiguities $\nabla^{ab} N_1^{Float}$.

- The float Kalman filter used to estimate the iono-free phase-leveled ambiguities N_{if}^{PL} (or the
10 iono-free float ambiguities $N_{if}^{j Float}$ in the third alternate formulation discussed above) also gives $C_{N_{if}}$, the covariance matrix of the iono-free phase-leveled ambiguities N_{if}^{PL} . Because the widelane ambiguities are integer (fixed) values after their values are found, $C_{N_{if}}$ is the same for N_{if}^{PL} as for $N_{if}^{j Float}$.

- 15 From (7) it is known that:

$$\nabla N_{if}^{ab PL} = \alpha \nabla N_{WL}^{ab Integer} + \beta \nabla N_1^{ab Float} \quad (30)$$

where

- $\nabla N_{if}^{ab PL}$ is the single-difference phase-leveled iono-free ambiguity (differenced between
20 satellites “a” and “b”)
 $\nabla N_{WL}^{ab Integer}$ is the single-difference widelane integer ambiguity (differenced between satellites “a” and “b”)
 $\nabla N_1^{ab Float}$ is the single-difference L1 float ambiguity (differenced between satellites “a” and “b”)

25

Therefore

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

$$\nabla N_1^{ab\,Float} = \frac{\nabla N_{if}^{ab\,PL} - \alpha \nabla N_{WL}^{ab\,Integer}}{\beta} \quad (31)$$

Because $\nabla N_{WL}^{ab\,Integer}$ are fixed (integer) values, it is assumed that the respective covariance matrices of the L1 float ambiguities $N_1^{ab\,Float}$ and the iono-free phase-leveled ambiguities $N_{if}^{j\,PL}$ are related by:

$$C_{N_1^{Float}} = C_{N_{if}^{PL}} \cdot F^2 \quad (32)$$

where

$C_{N_1^{Float}}$ is the covariance matrix of the L1 float ambiguities $N_1^{j\,Float}$
 $C_{N_{if}^{PL}}$ is the covariance matrix of the iono-free phase-leveled ambiguities $N_{if}^{j\,PL}$
 F is a factor to convert the units of the variances from iono-free cycles to L1 cycles.

The desired “fixed” (integer-nature) single-differenced L1 float ambiguities $\nabla N_1^{ab\,Integer}$ can be determined from the single-differenced L1 float ambiguities $\nabla N_1^{ab\,Float}$ and the covariance matrix $C_{N_1^{Float}}$ of the L1 float ambiguities $N_1^{ab\,Float}$ using well-known techniques, such as Lambda (Jonge et al. 1994), modified Lambda (Chan et al. 2005), weighted averaging of candidate sets, or others.

Having determined the single-differenced integer widelane ambiguities $\nabla N_{WL}^{ab\,Integer}$ and the single-differenced integer L1 ambiguities, integer-nature iono-free ambiguities $\nabla N_{if}^{ab\,Integer}$ are determined from:

$$\nabla N_{if}^{ab\,Integer} = \alpha \nabla N_{WL}^{ab\,Integer} + \beta \nabla N_1^{ab\,Integer} \quad (33)$$

Appendix A
PROVISIONAL APPLICATION FOR UNITED STATES PATENT

The integer-nature iono-free ambiguities $\nabla N_{if}^{ab Integer}$ are introduced (“pushed”) as a pseudo-observation into the Kalman float filter (or optionally a copy of it) to determine a rover position based on integer-nature ambiguities. The state vector of the float filter copy is thus:

$$\begin{Bmatrix} X^r \\ Y^r \\ Z^r \\ dT_c \\ T \end{Bmatrix} \quad (34)$$

The rover position can then be determined with an accuracy (and precision) substantially better than for the typical prior-art PPP processing in which the ambiguities are considered to be float numbers, as shown in FIG. [47]

Part 12.7 Ambiguity Fixing References

Jonge de, P.J., and C.C.J.M. Tiberius (1994). A new GPS ambiguity estimation method based on integer least squares. *Proceedings of the 3rd International Symposium on Differential Satellite Navigation Systems DSNS'94*, London, UK, April 18-22, Paper No. 73, 9 pp.


X. -W. Chang, X. Yang and T. Zhou (2005). MLAMBDA: a modified LAMBDA method for integer least-squares estimation. *Journal of Geodesy*, Springer Berlin / Heidelberg. Volume 79, Number 9 / December, 2005, pp.552-565.

CLAIMS

1. A positioning method, comprising
obtaining GNSS data derived from multi-frequency signals received at a rover
5 antenna,
obtaining correction data derived from a network of reference stations,
at each of a plurality of epochs, using the GNSS data and the correction data to
estimate values defining a rover antenna position and a set of multi-frequency
ambiguities,
10 estimating an ionospheric-free carrier-phase ambiguity per satellite based on a known
rover antenna position, and
assisting determination of an aided rover antenna position using the estimated
ionospheric-free carrier-phase ambiguities.
2. The method of claim 1, wherein assisting determination comprises combining the
15 estimated ionospheric-free carrier-phase ambiguity with an estimated widelane
ambiguity and with an estimated ionospheric-free ambiguity and with values defining
the known rover antenna position to obtain values defining an aided rover antenna
position and aided multi-frequency ambiguities.
3. The method of claim 1, further comprising terminating assisting determination when
20 substantially no further benefit is obtained therefrom.
4. The method of claim 1, further comprising monitoring precision of an unaided rover
antenna position estimate to determine when substantially no further benefit is
obtained from using the estimated ionospheric-free carrier-phase ambiguities in
assisting determination of an aided rover antenna position.
- 25 5. The method of claim 2, wherein the widelane ambiguities are estimated in a set of
code-carrier filters.
6. The method of claim 2, wherein the ionospheric-free ambiguities are estimated in a
geometry filter.
7. The method of claim 1, wherein the ionospheric-free carrier-phase ambiguity per
30 satellite based on a known rover antenna position is computed using the known rover
antenna position and observed carrier-phase measurements.
8. The method of claim 1, wherein the ionospheric-free carrier-phase ambiguity for at
least one satellite based on a known rover antenna position is improved using a
prevailing tropospheric bias on the respective satellite.

9. The method of claim 1, wherein assisting determination comprises using the estimated ionospheric-free carrier-phase ambiguity estimates with estimates of other parameters from a set of factorized filters.
10. The method of claim 9, wherein the estimated ionospheric-free carrier-phase ambiguity estimates are substituted for estimates from a bank of auxiliary code-carrier filters.
11. The method of claim 10, further comprising creating a separate bank of auxiliary code carrier filter results for the known position results so that normal auxiliary code carrier filter results remain unaffected.
12. Positioning apparatus, comprising a processor and a set of instructions enabling the processor to perform the steps of:
obtaining GNSS data derived from multi-frequency signals received at a rover antenna,
obtaining correction data derived from a network of reference stations,
at each of a plurality of epochs, using the GNSS data and the correction data to estimate values defining a rover antenna position and a set of multi-frequency ambiguities,
estimating an ionospheric-free carrier-phase ambiguity per satellite based on a known rover antenna position, and
assisting determination of an aided rover antenna position using the estimated ionospheric-free carrier-phase ambiguities.
13. The apparatus of claim 12, wherein assisting determination comprises combining the estimated ionospheric-free carrier-phase ambiguity with an estimated widelane ambiguity and with an estimated ionospheric-free ambiguity and with values defining the known rover antenna position to obtain values defining an aided rover antenna position and aided multi-frequency ambiguities.
14. The apparatus of claim 12, wherein the steps further comprise terminating assisting determination when substantially no further benefit is obtained therefrom.
15. The apparatus of claim 12, wherein the steps further comprise monitoring precision of an unaided rover antenna position estimate to determine when substantially no further benefit is obtained from using the estimated ionospheric-free carrier-phase ambiguities in assisting determination of an aided rover antenna position.
16. The apparatus of claim 13, wherein the widelane ambiguities are estimated in a set of code-carrier filters.
17. The apparatus of claim 13, wherein the ionospheric-free ambiguities are estimated in a geometry filter.

18. The apparatus of claim 13, wherein the ionospheric-free carrier-phase ambiguity per satellite based on a known rover antenna position is computed using the known rover antenna position and observed carrier-phase measurements.
19. The apparatus of claim 12, wherein the ionospheric-free carrier-phase ambiguity for at least one satellite based on a known rover antenna position is improved using a prevailing tropospheric bias on the respective satellite.
20. The apparatus of claim 12, wherein assisting determination comprises using the estimated ionospheric-free carrier-phase ambiguity estimates with estimates of other parameters from a set of factorized filters.
21. The apparatus of claim 12, wherein the estimated ionospheric-free carrier-phase ambiguity estimates are substituted for estimates from a bank of auxiliary code-carrier filters.
22. The apparatus of claim 21, further comprising creating a separate bank of auxiliary code carrier filter results for the known position results so that normal auxiliary code carrier filter results remain unaffected.
23. A computer program product comprising a tangible computer-readable medium embodying instructions for causing an apparatus to perform the method of claim 1.
24. A computer program comprising instructions for causing an apparatus to perform the method of claim 1.

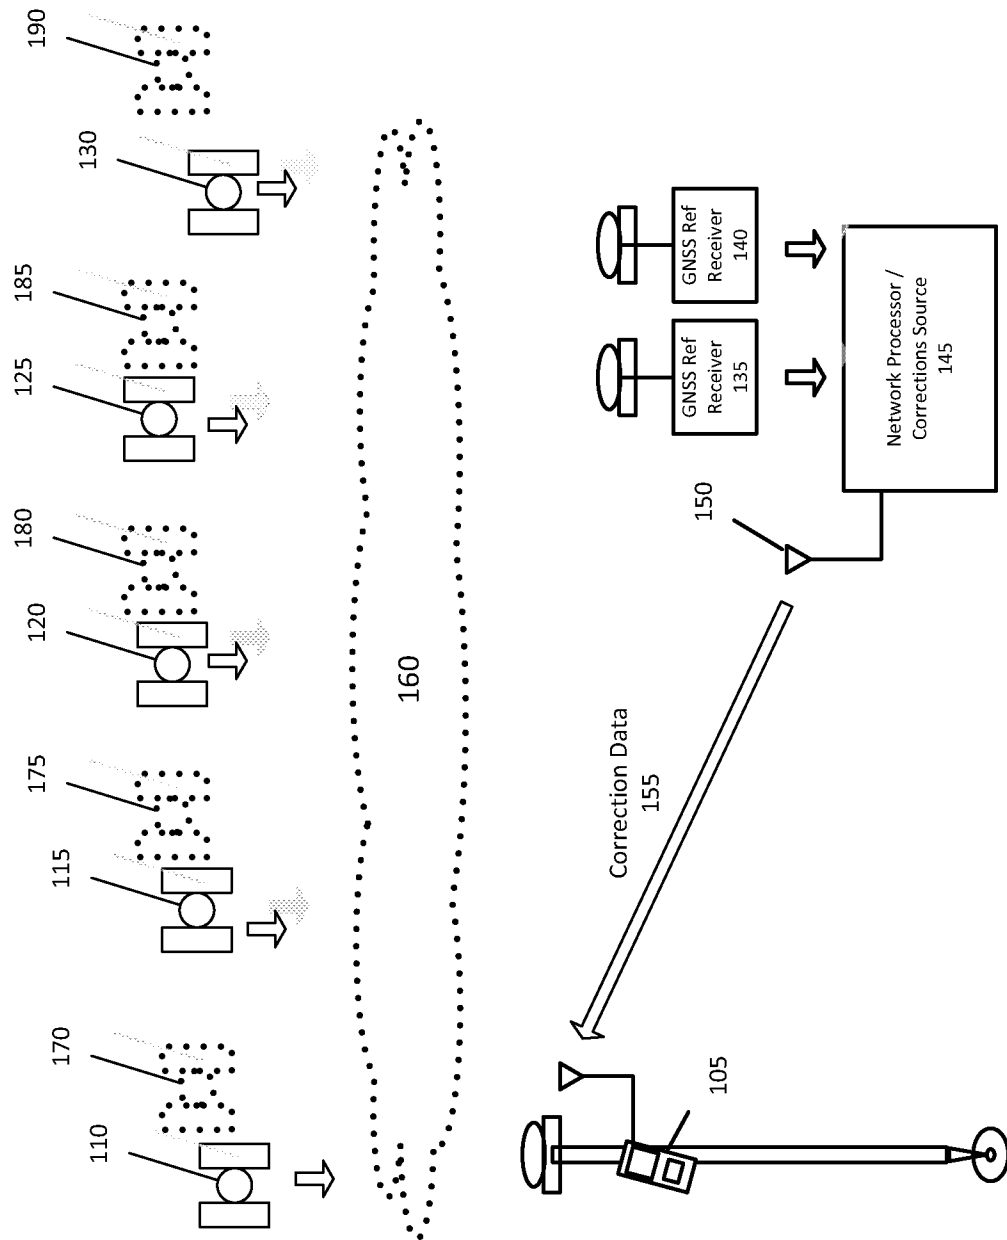

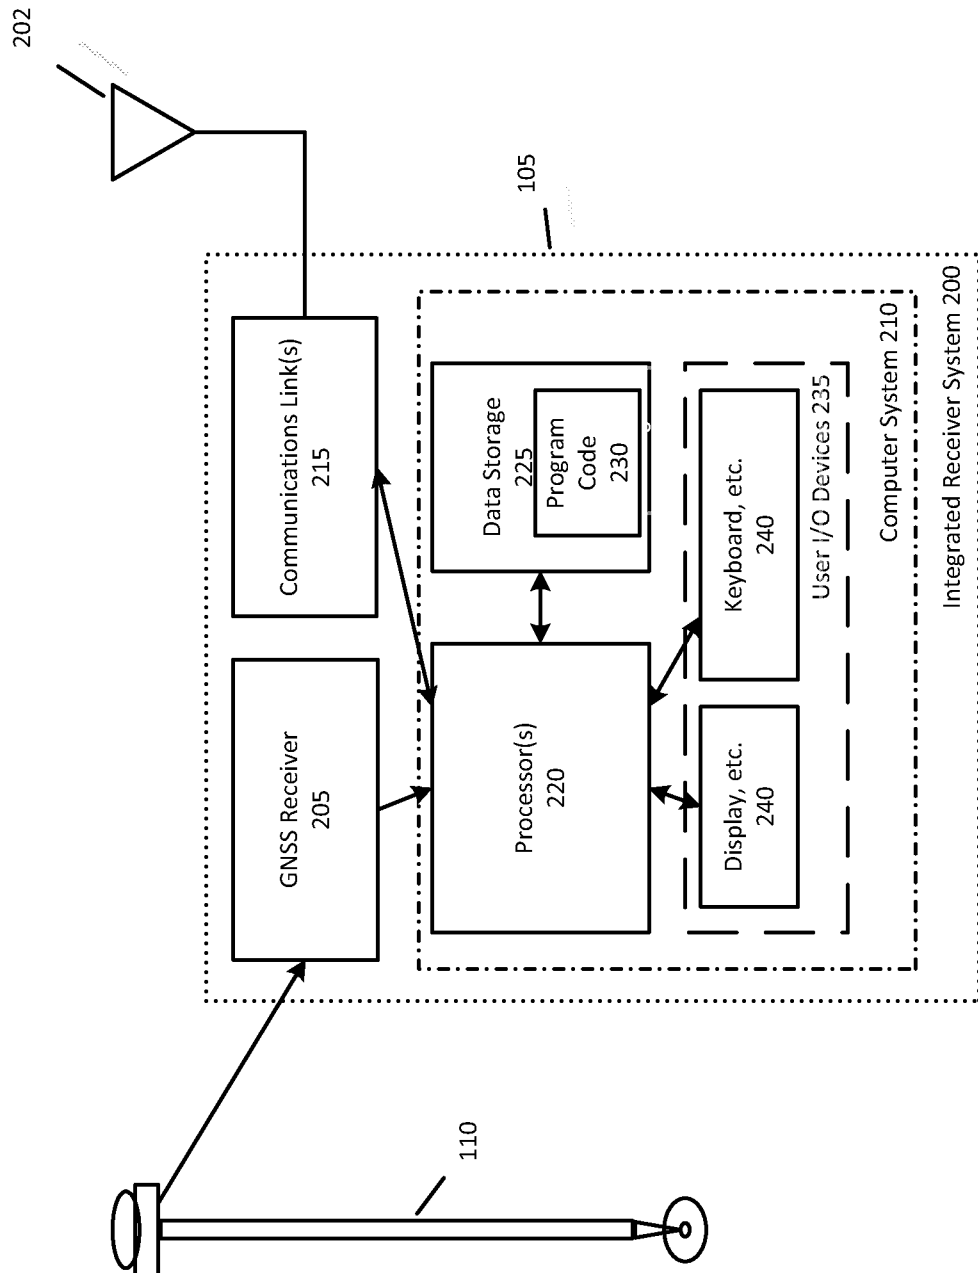


FIG. 2

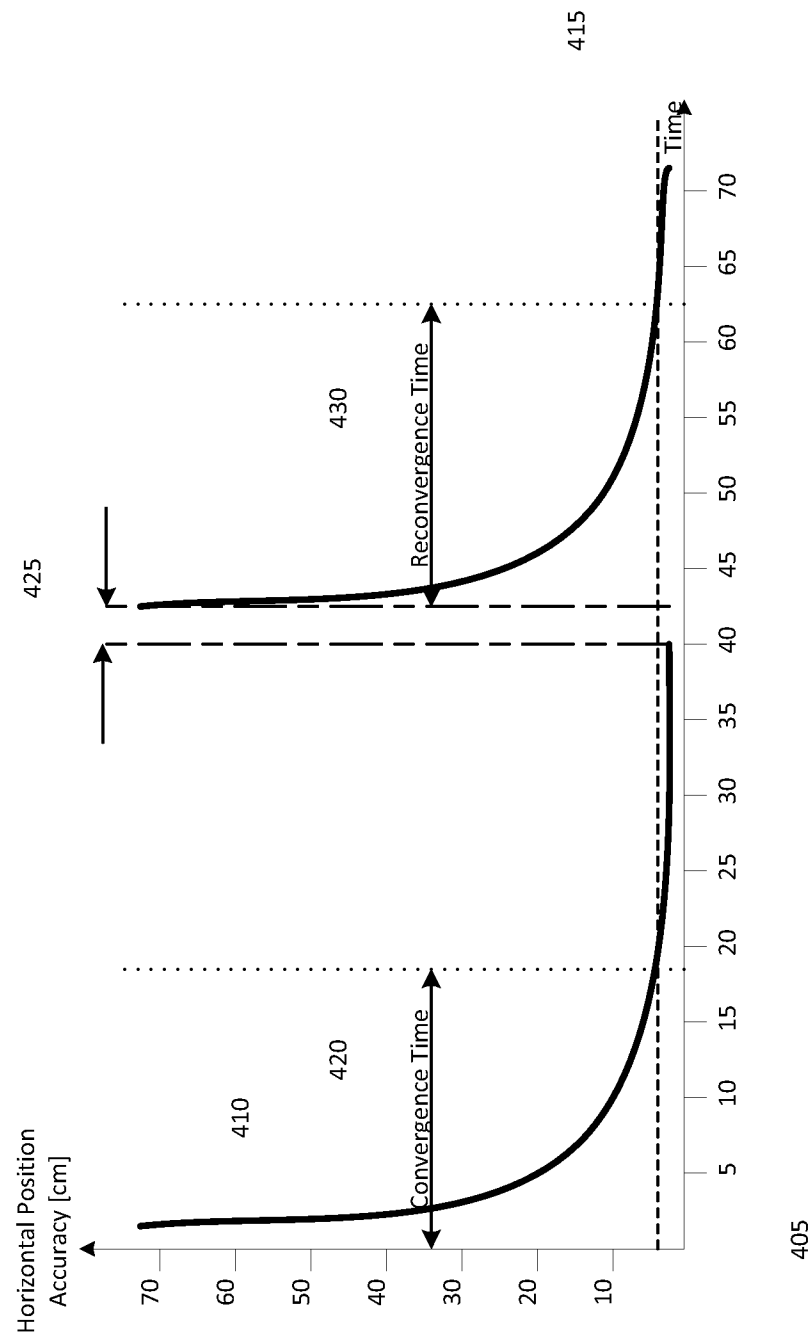


FIG. 3

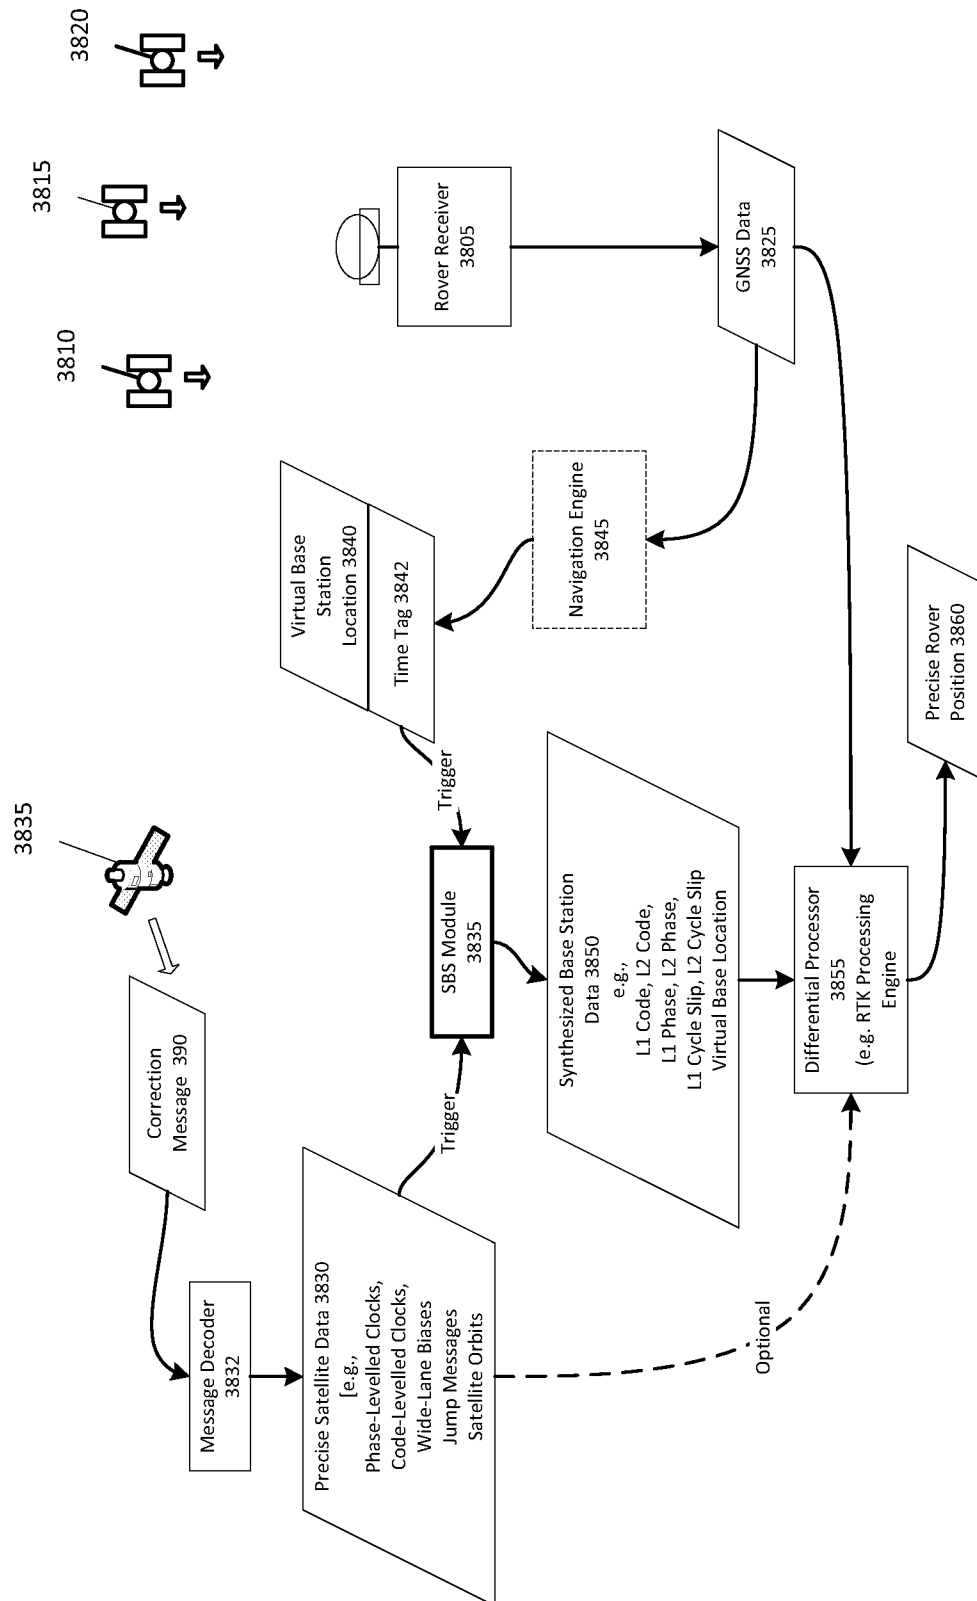


FIG. 4

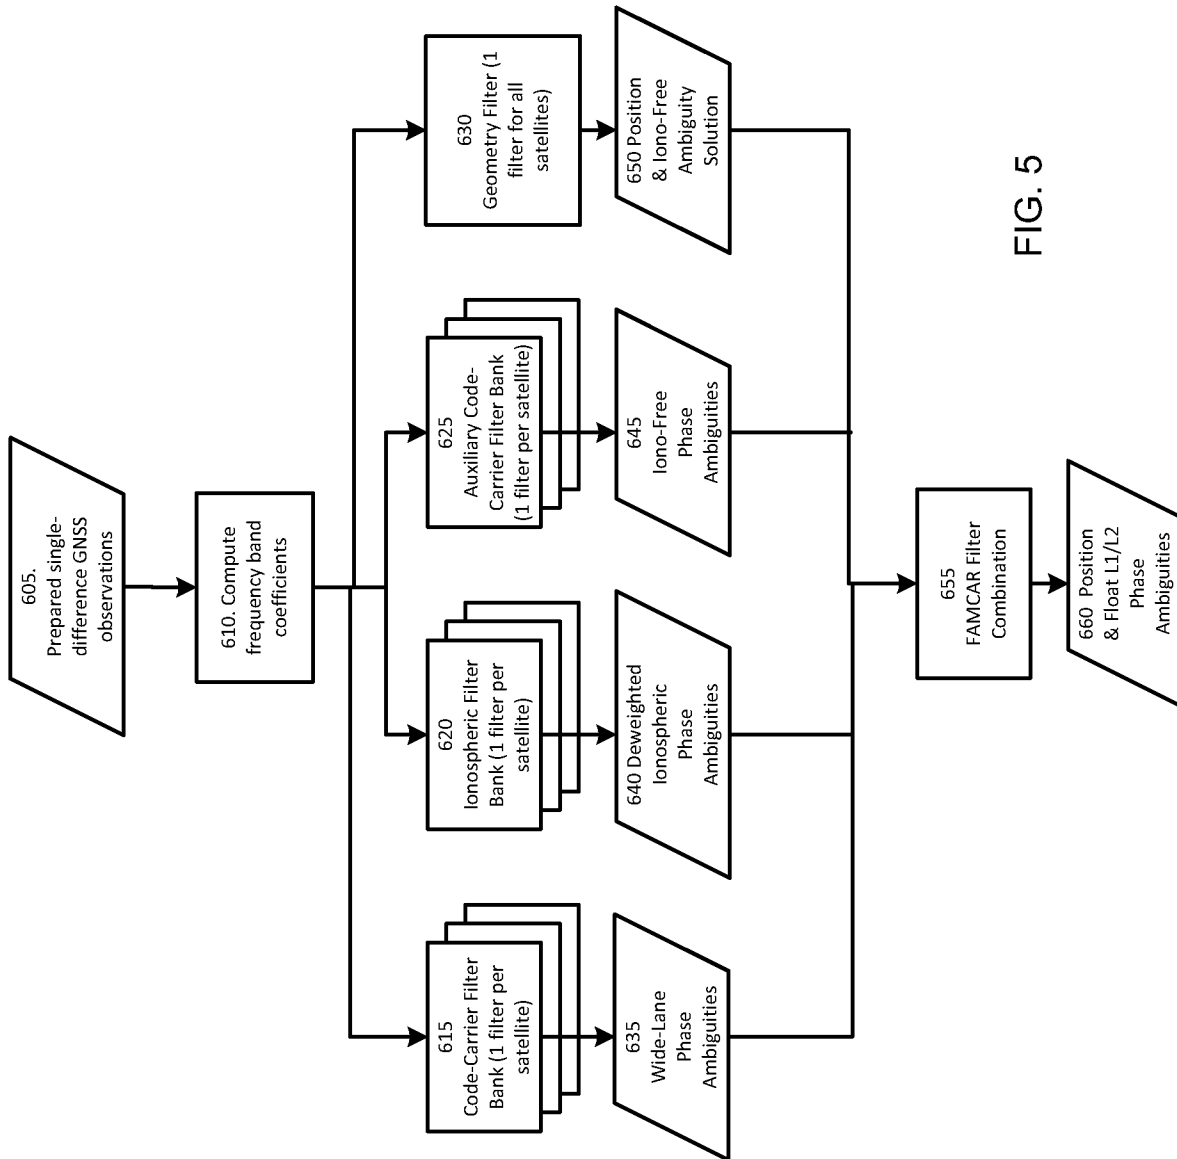


FIG. 5

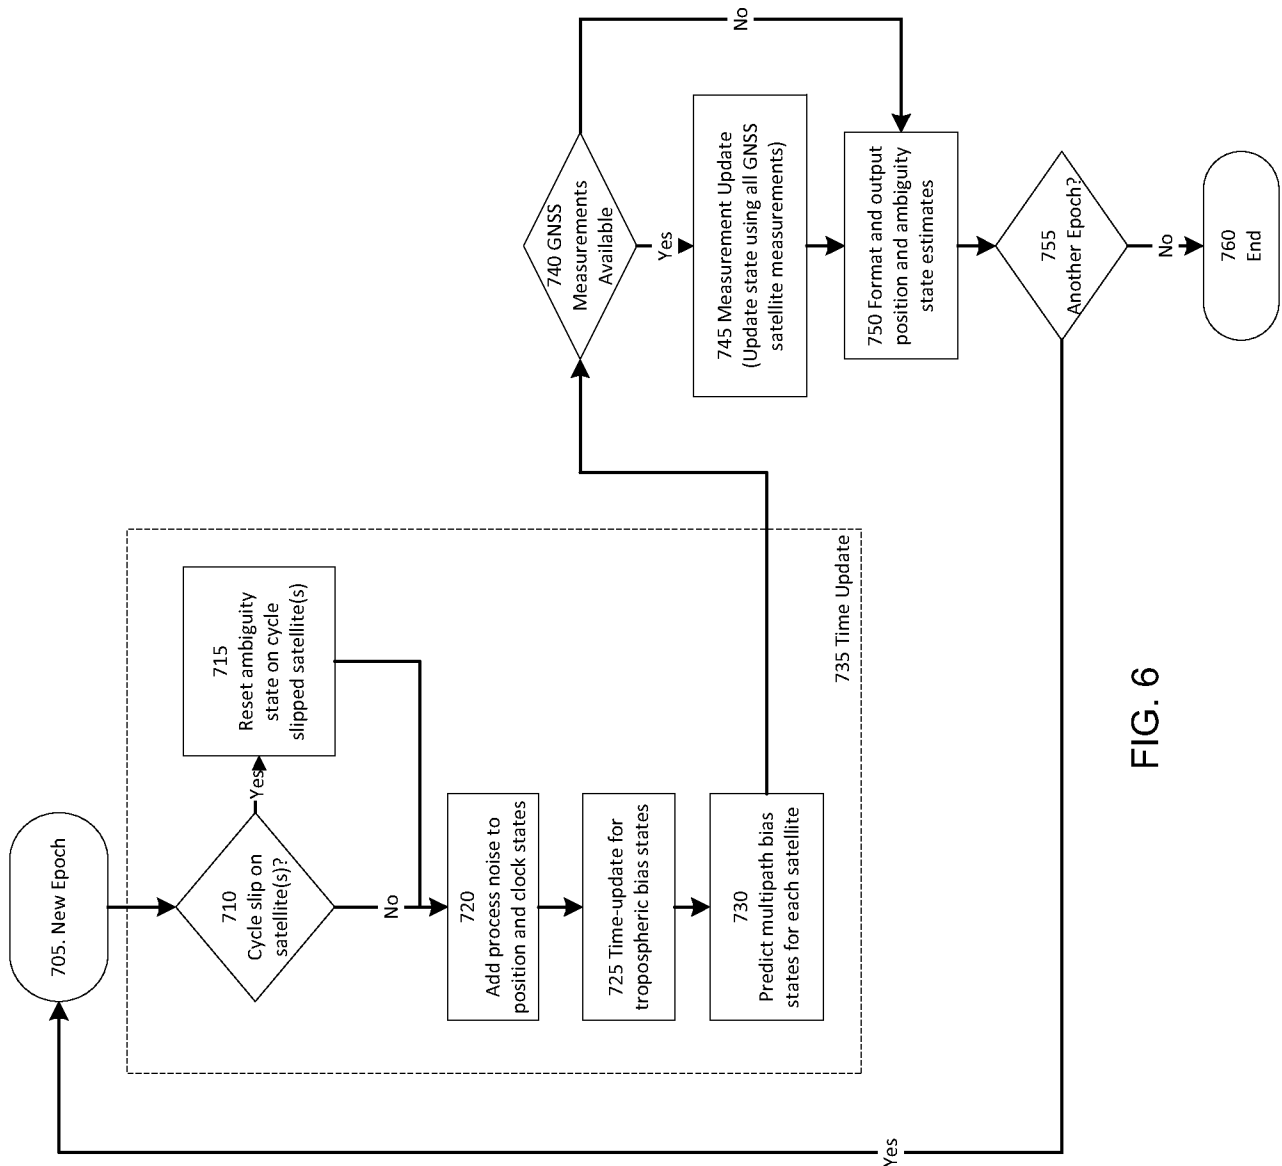
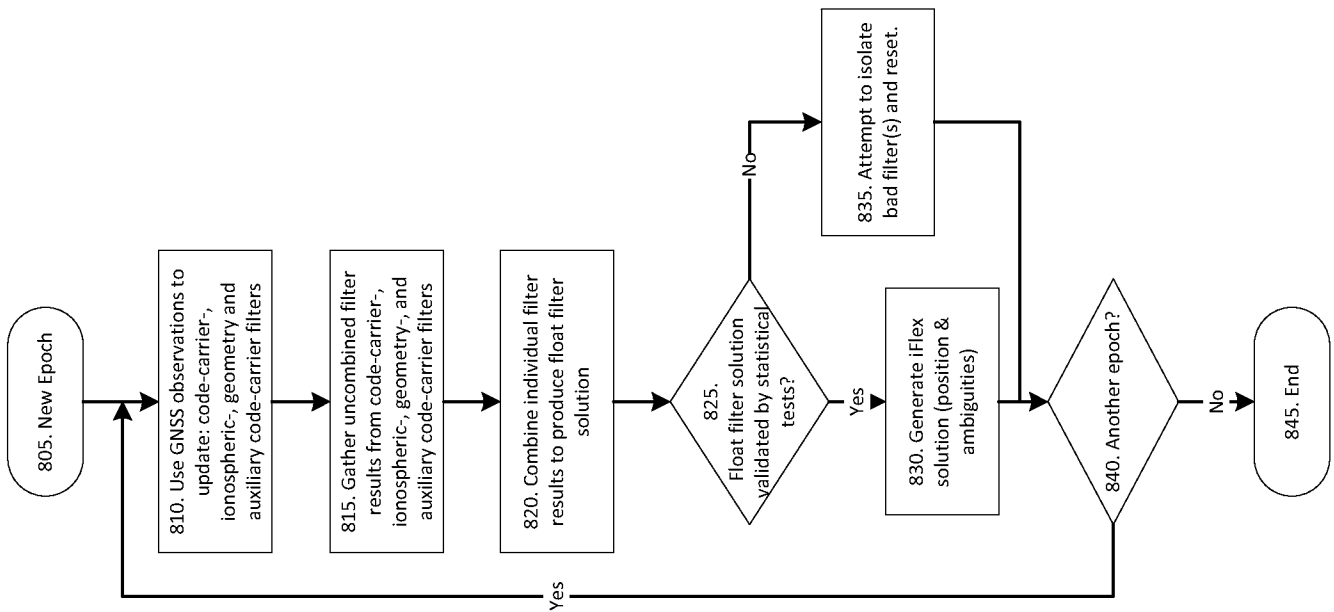


FIG. 6

FIG. 7



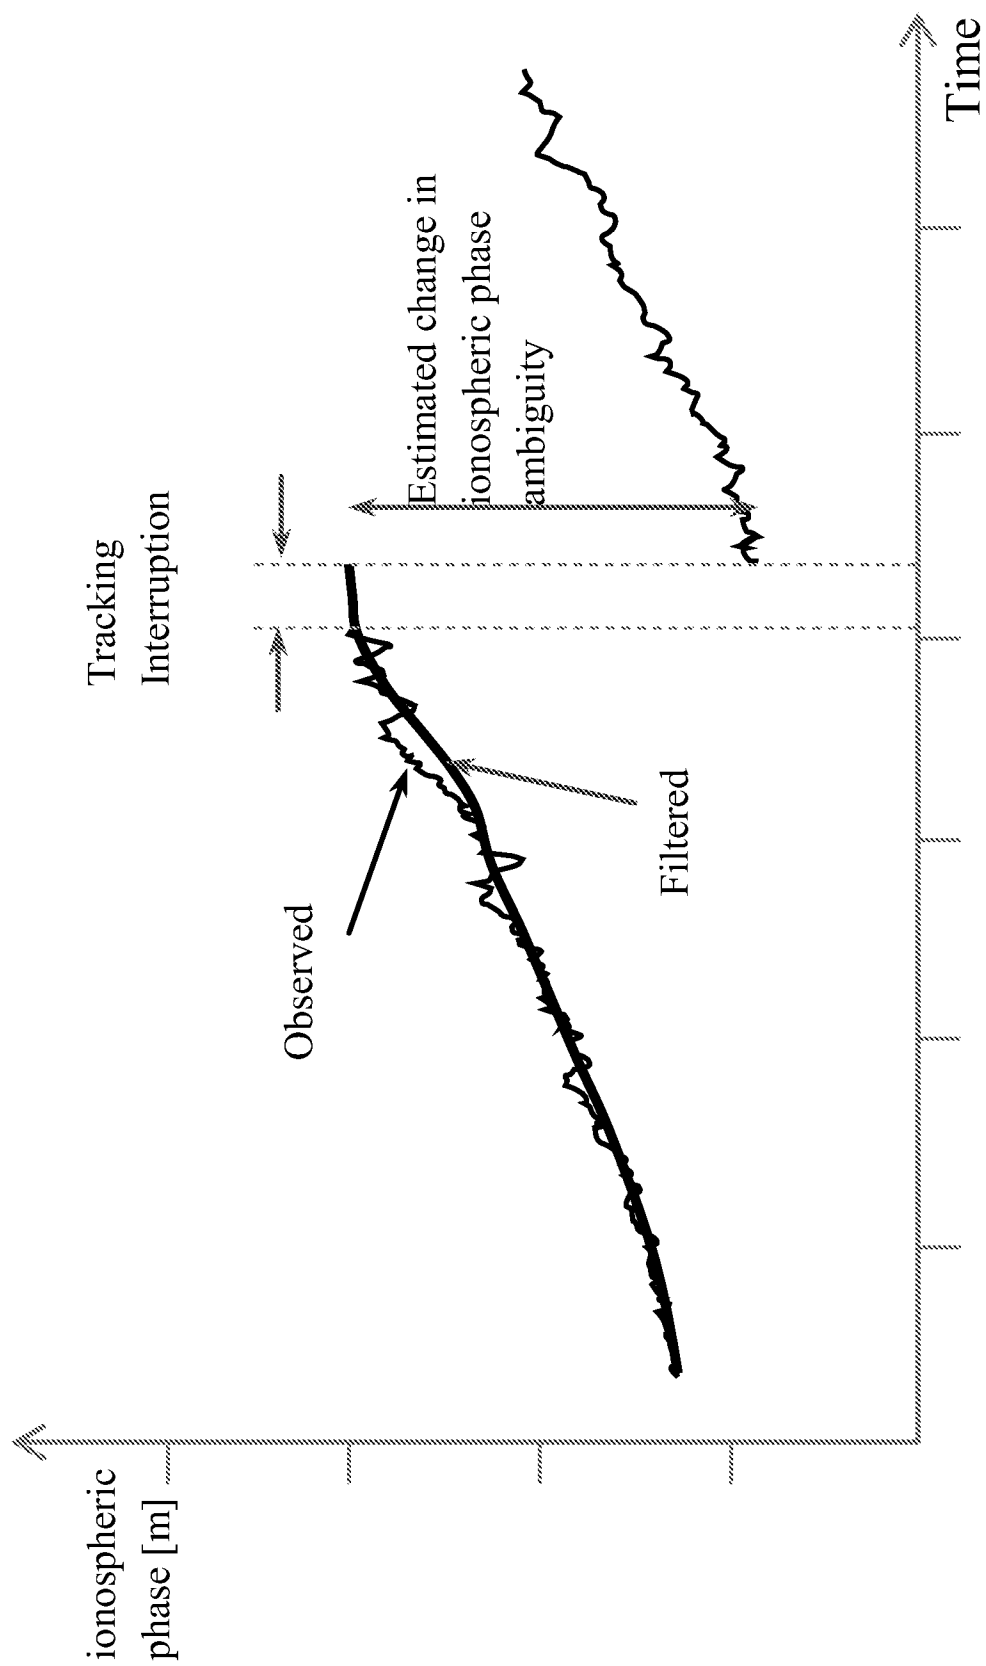


FIG. 8

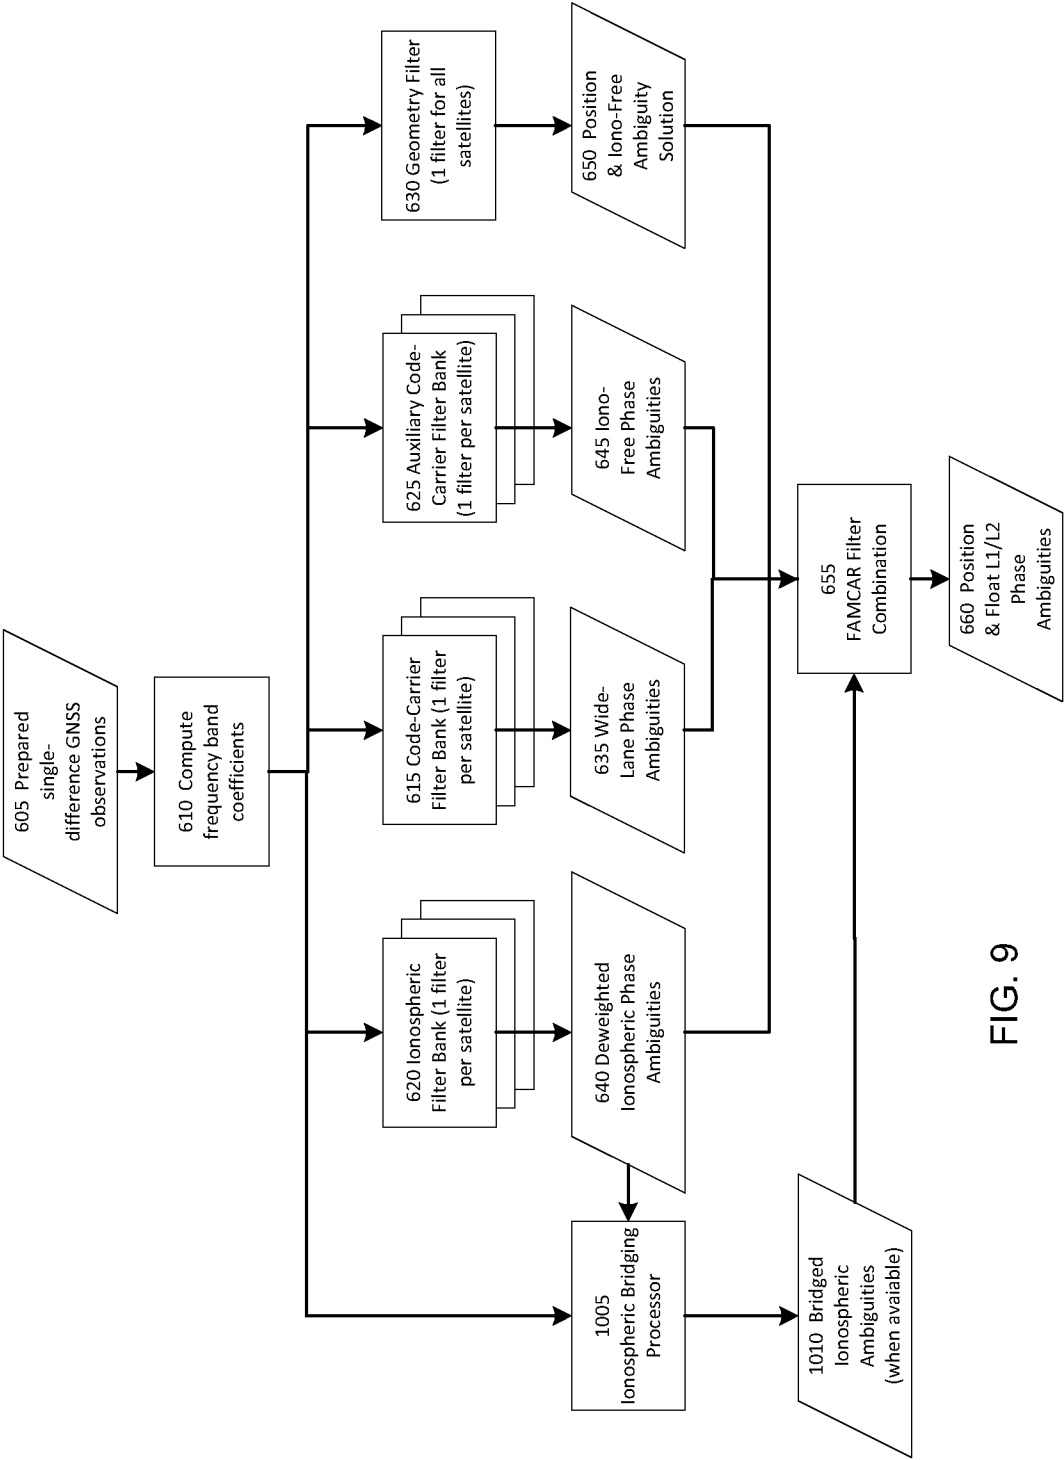


FIG. 9

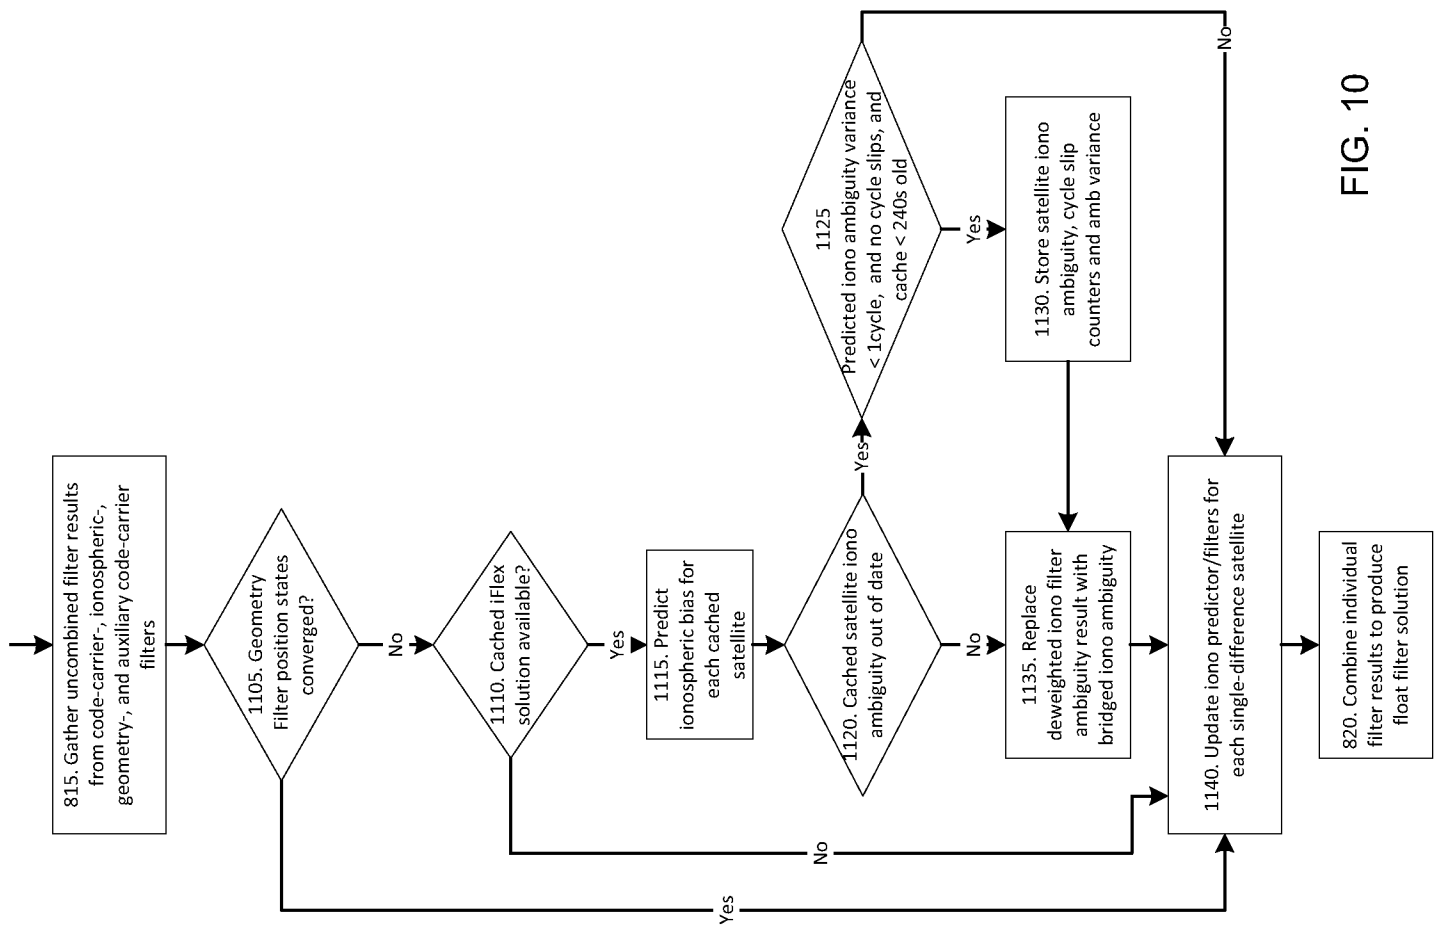


FIG. 10

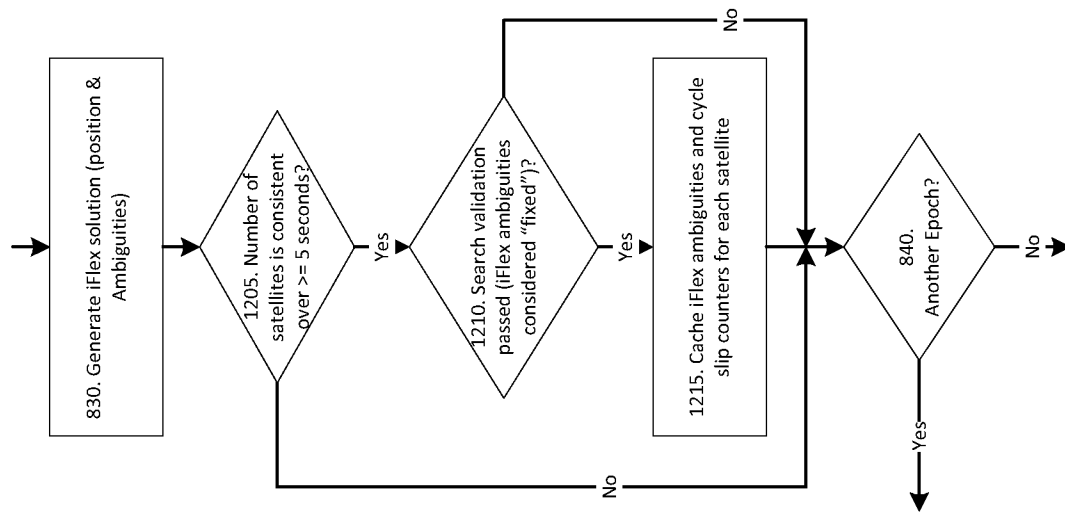
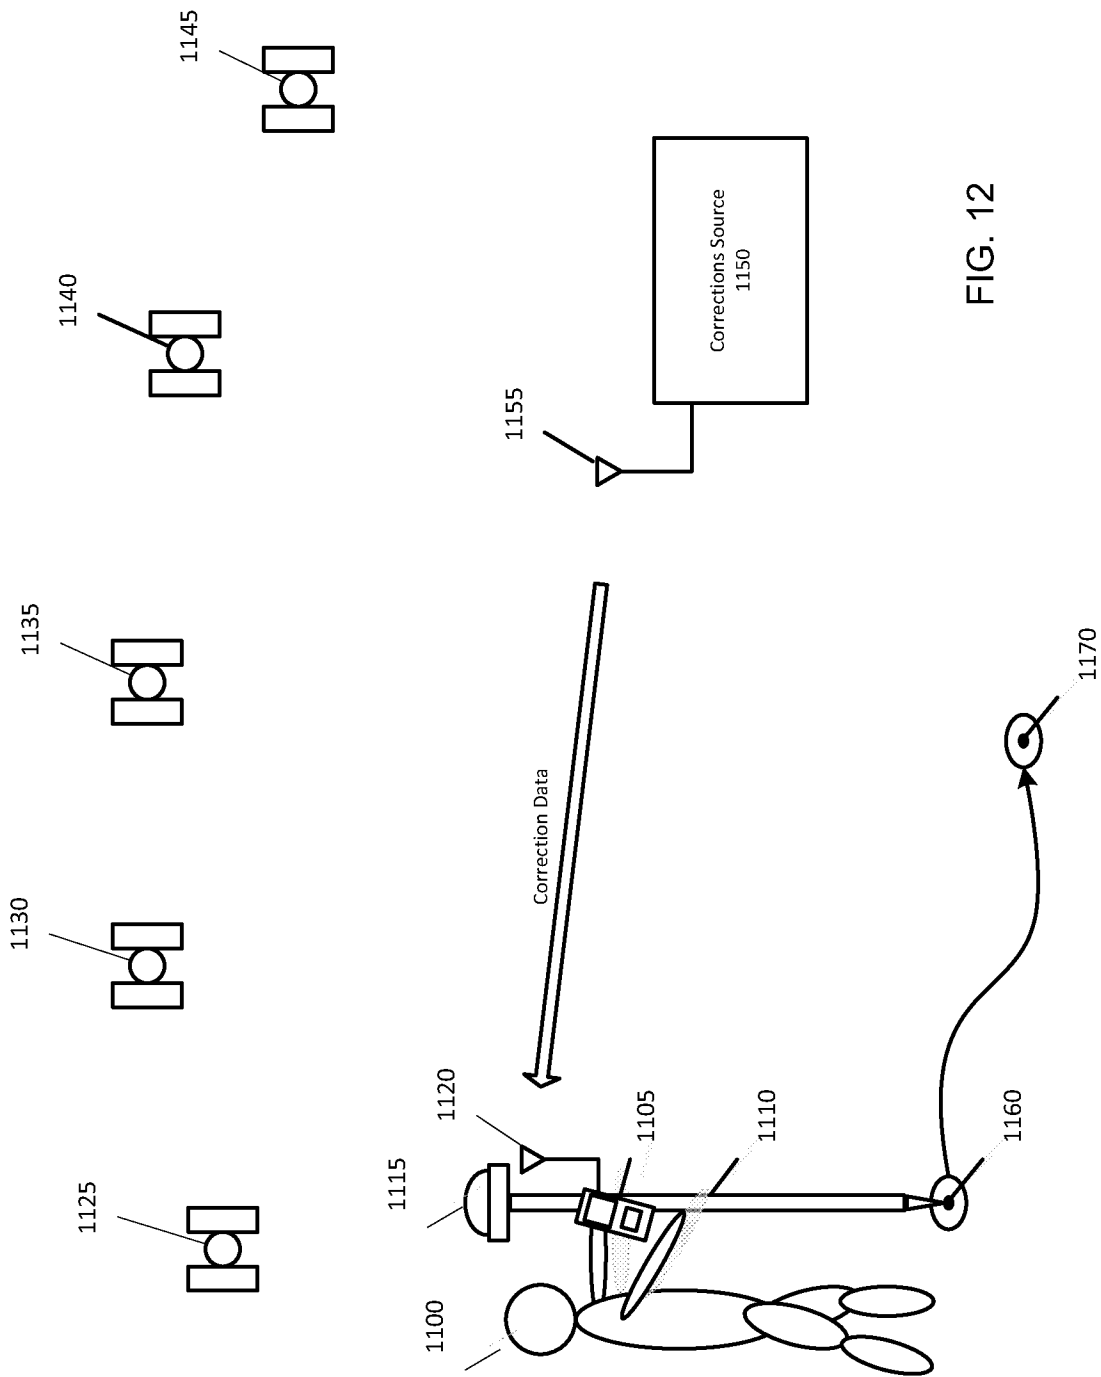
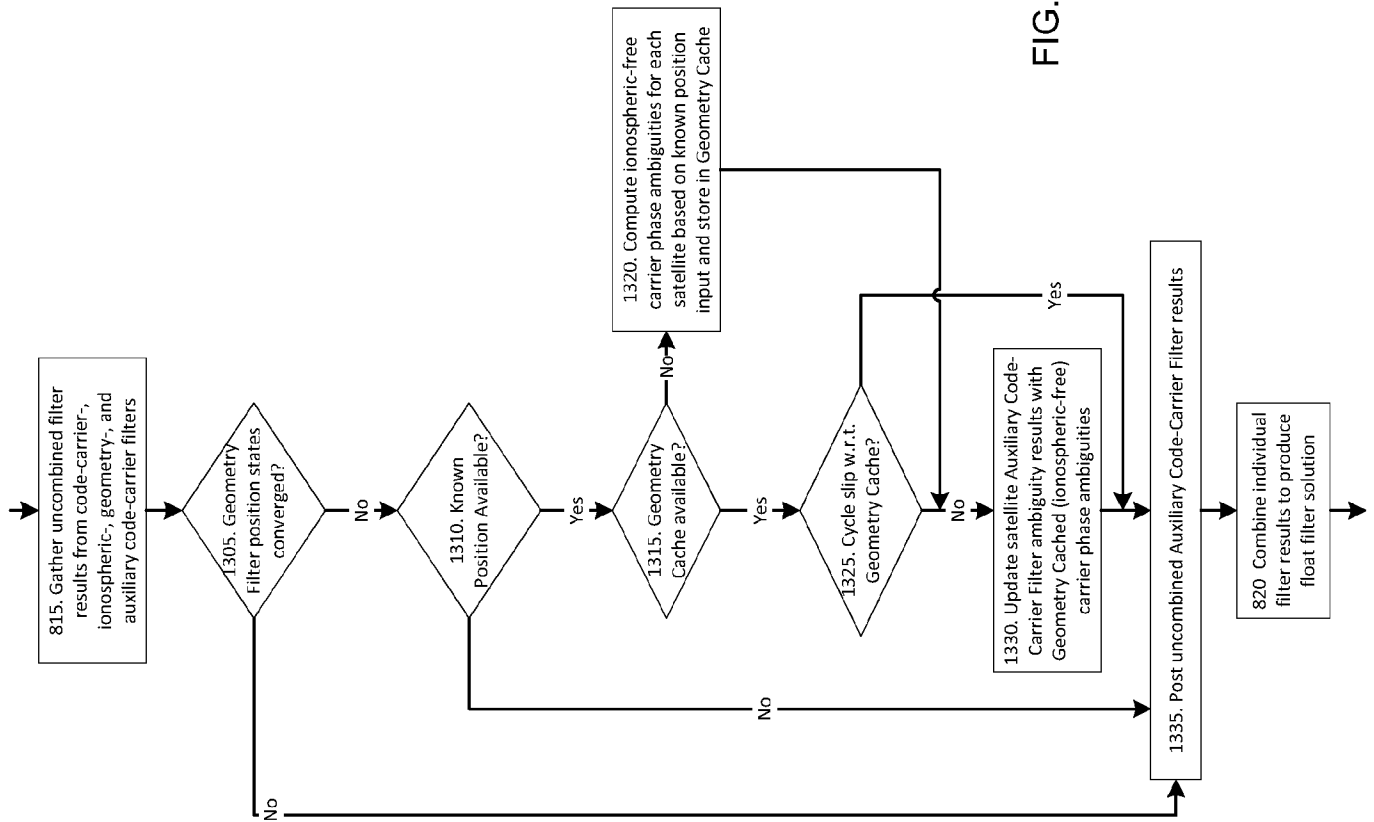


FIG. 11





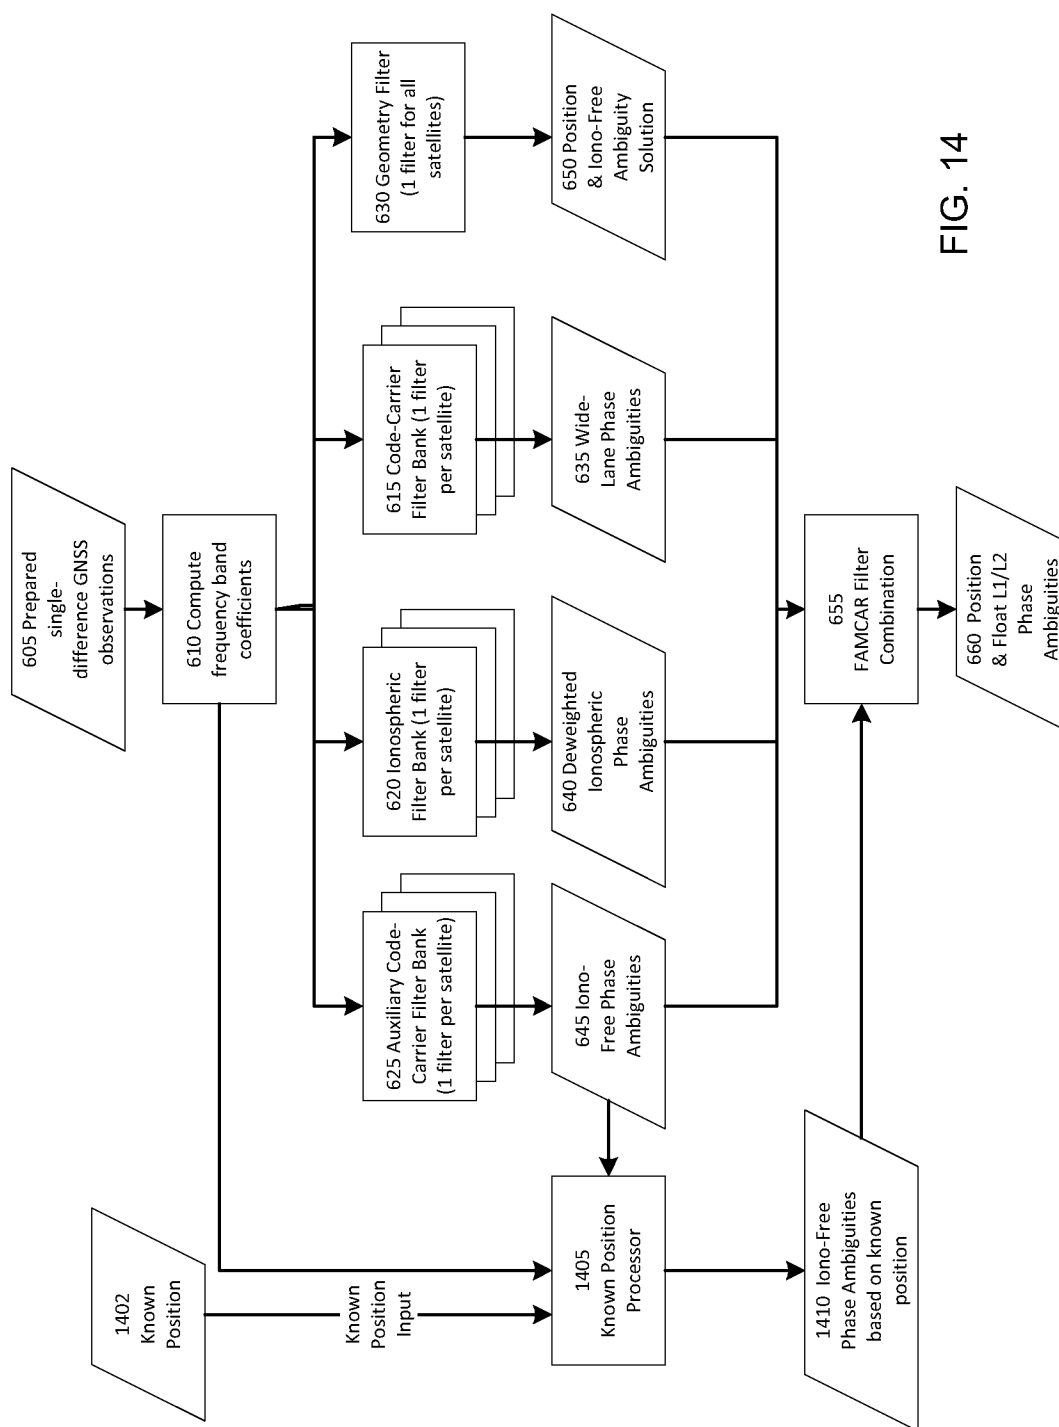


FIG. 14

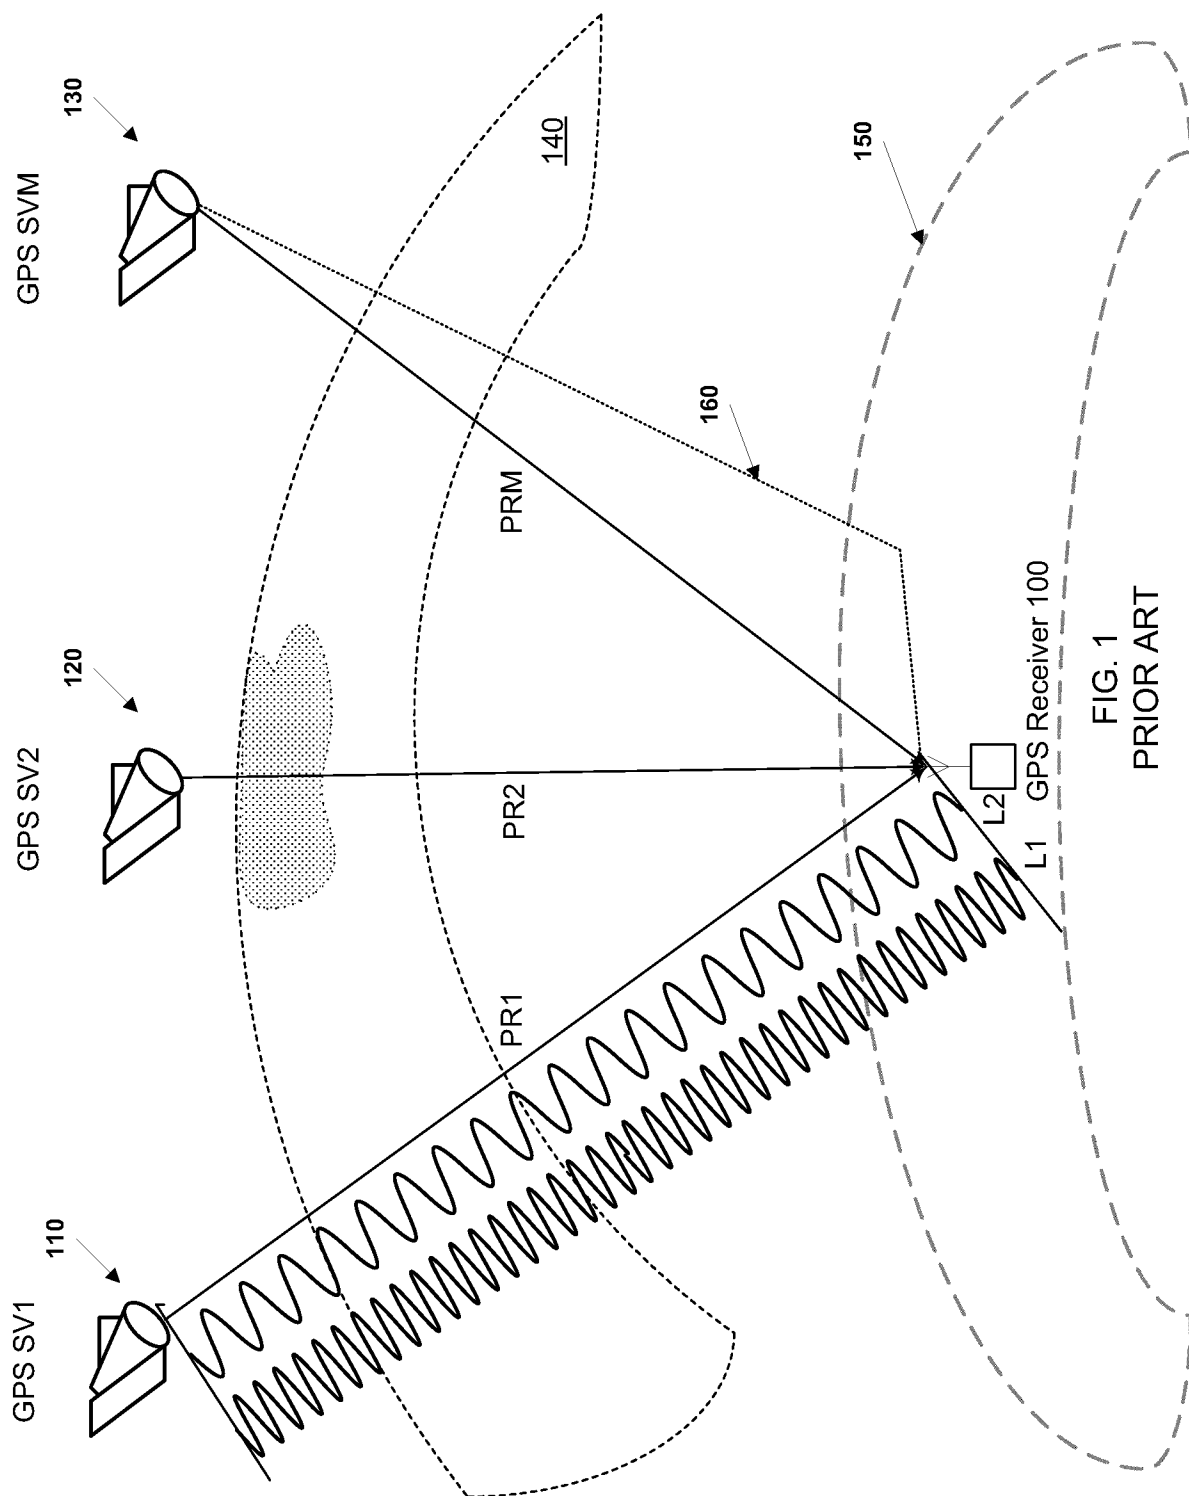
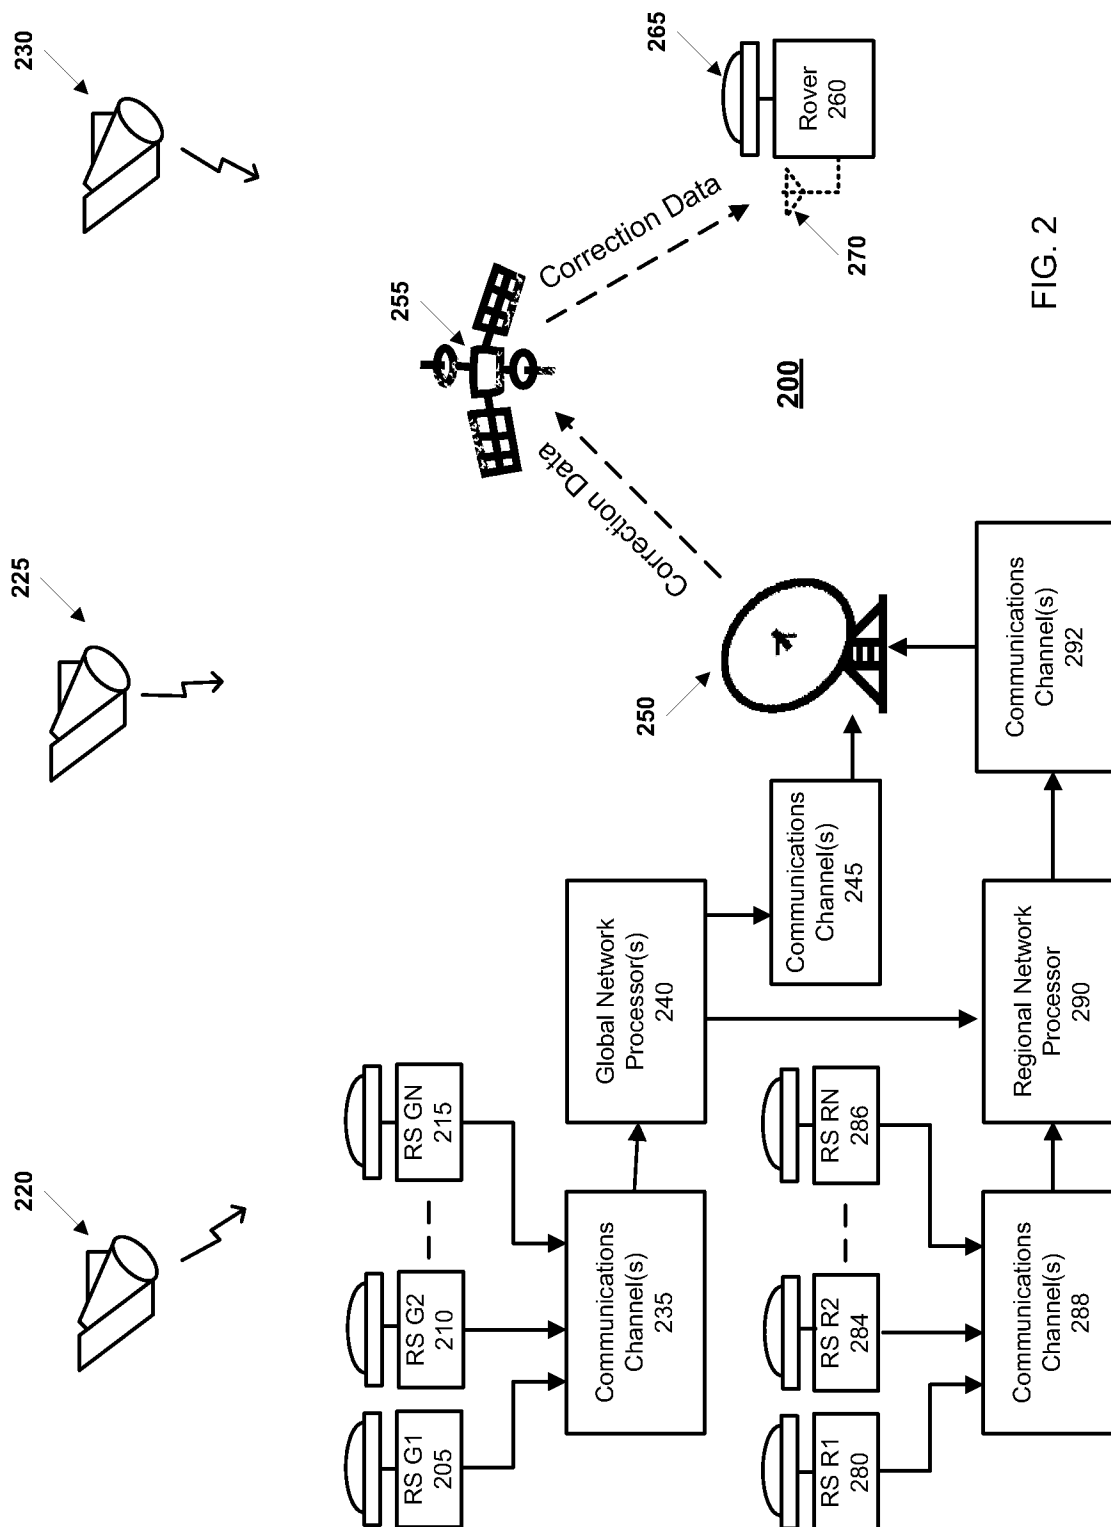


FIG. 1
PRIOR ART



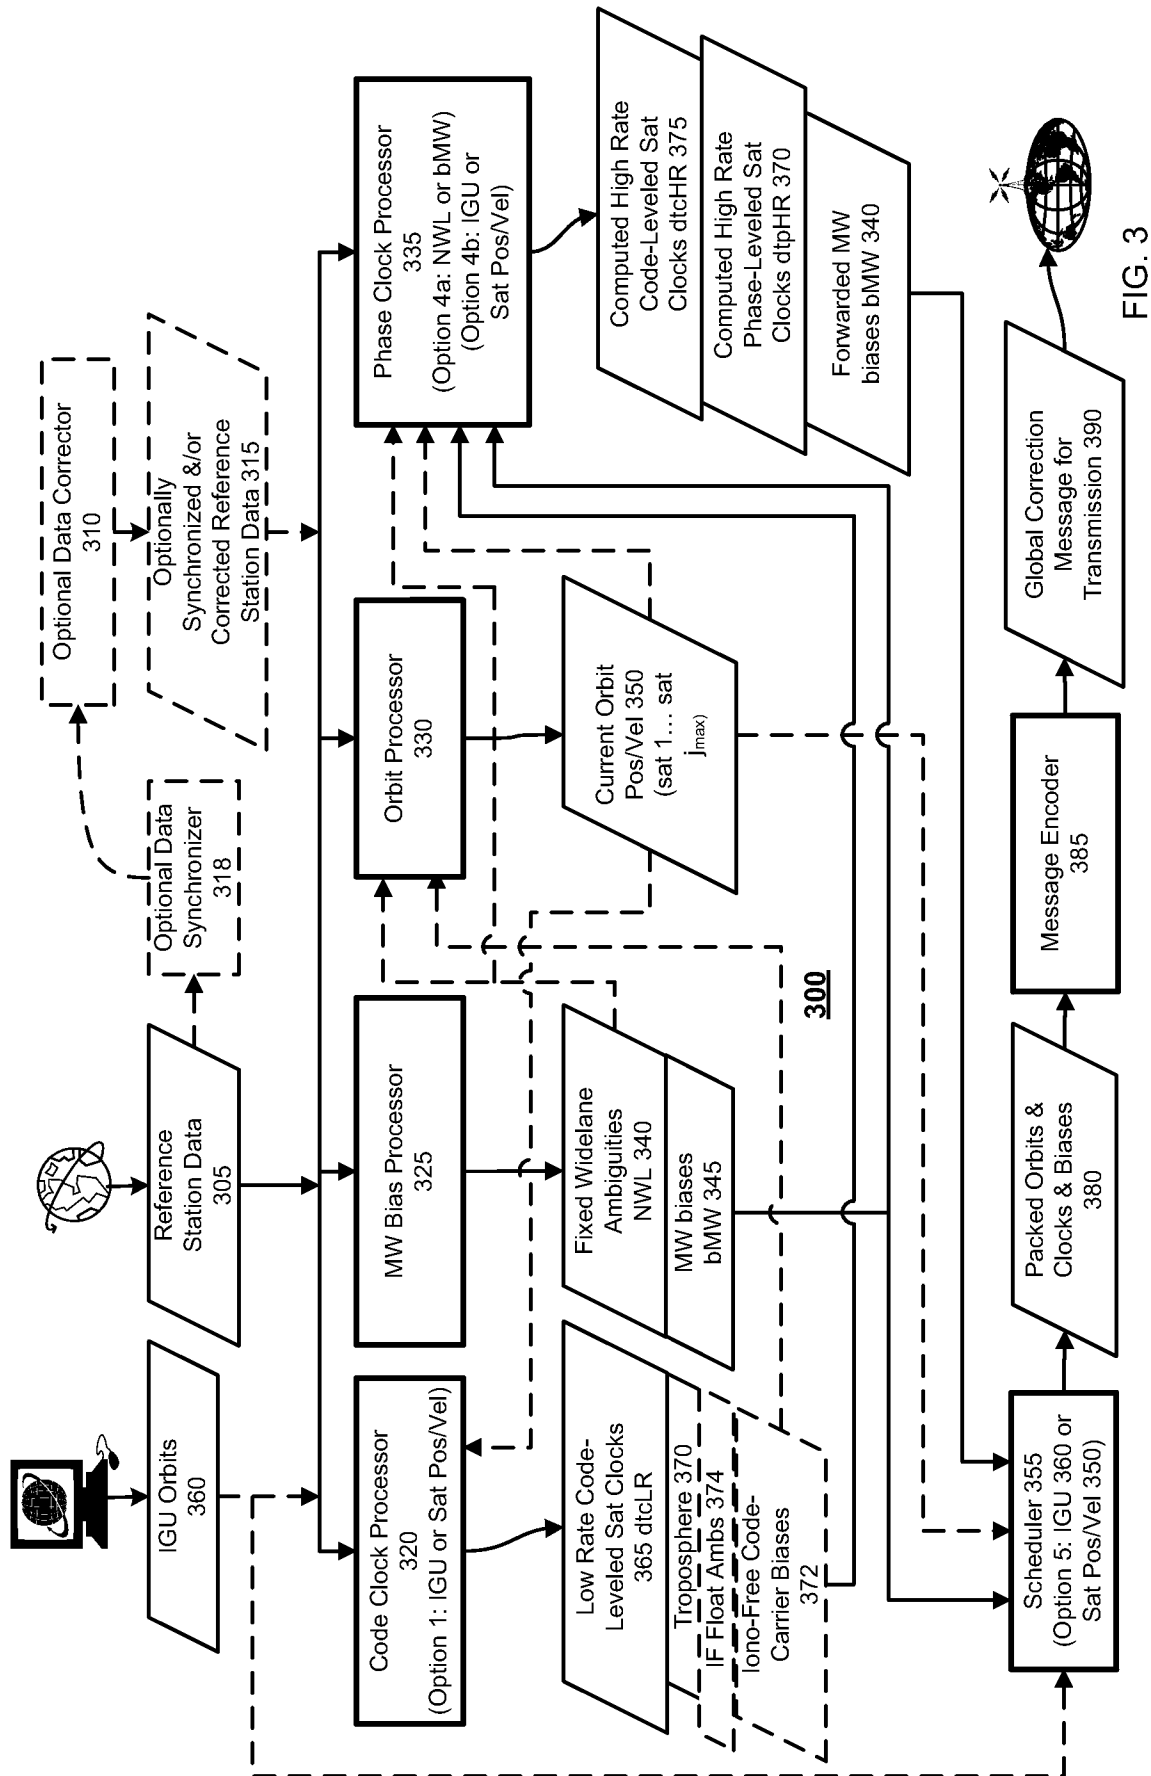


FIG. 3

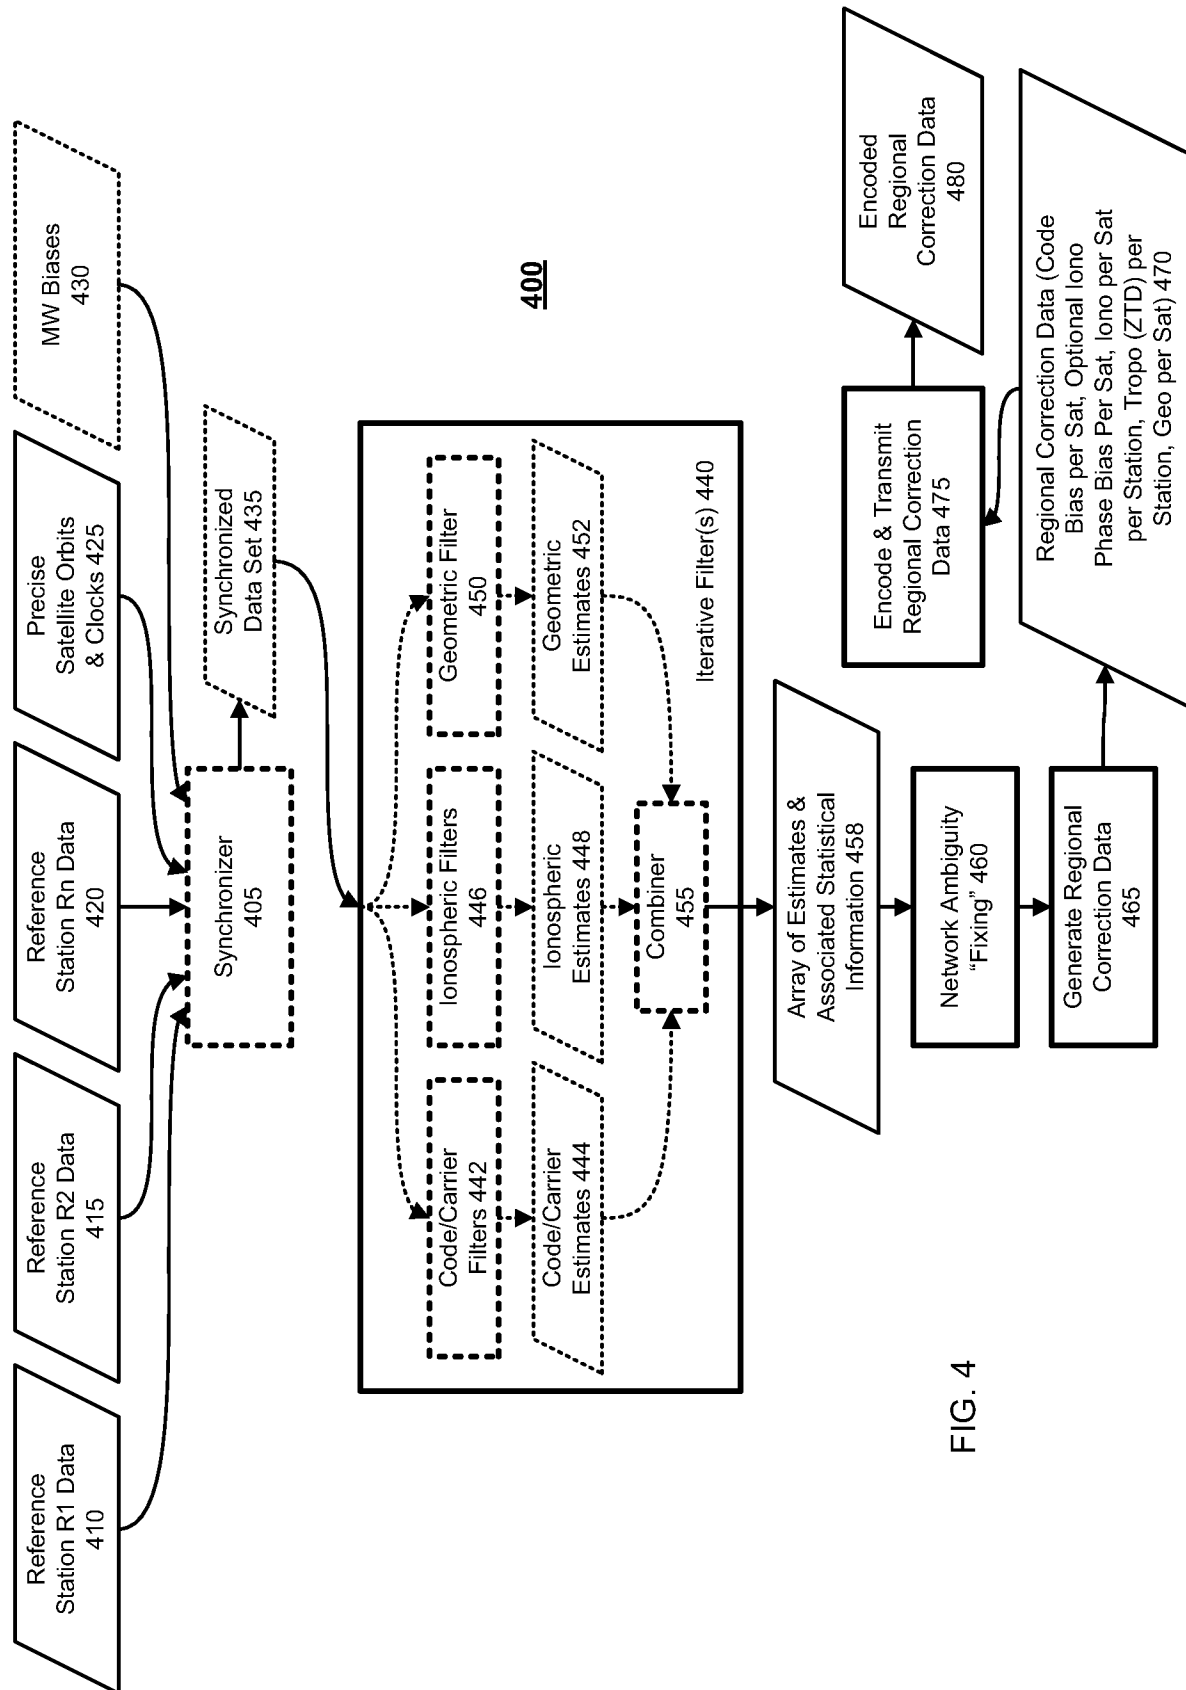


FIG. 4

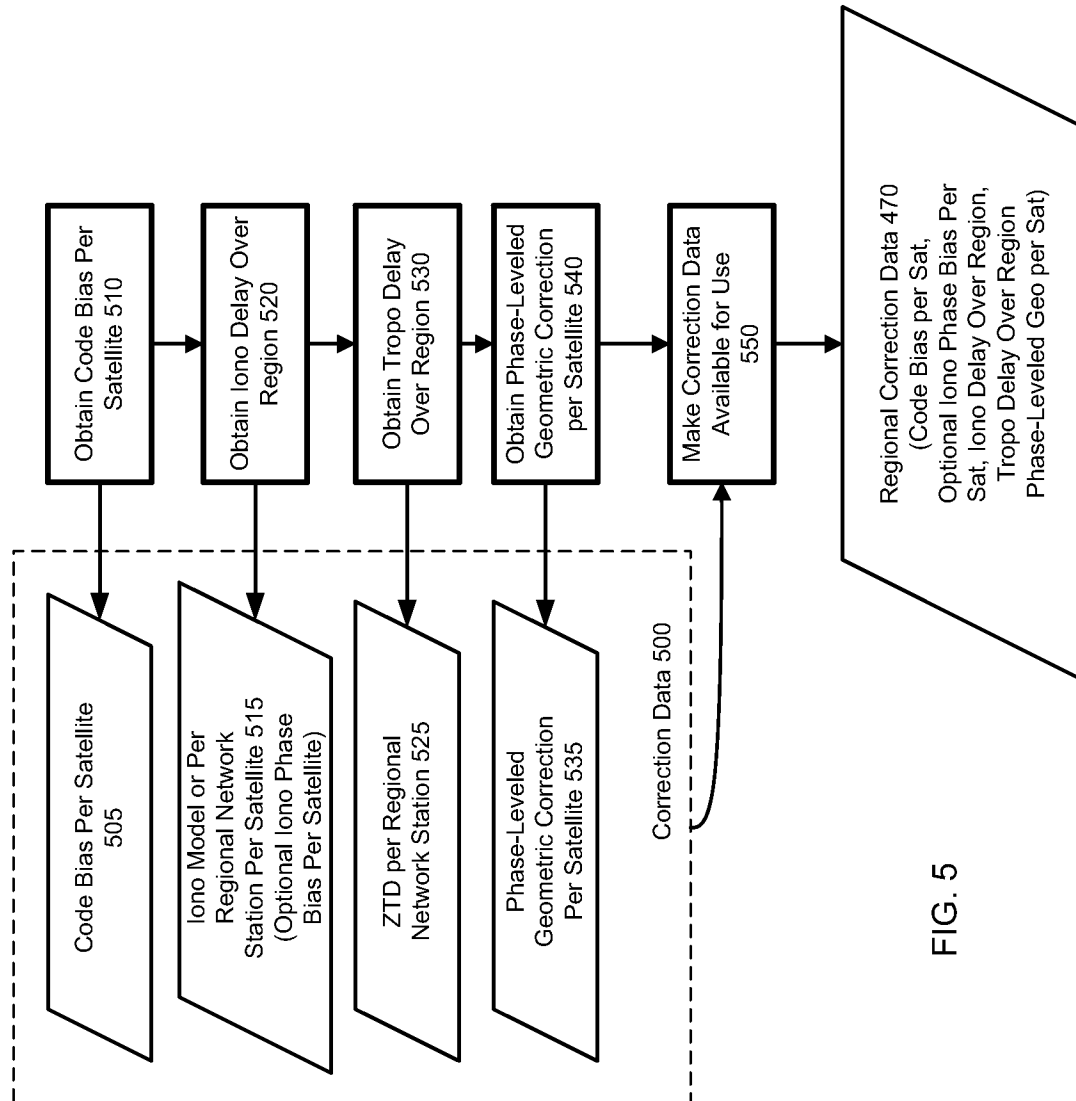


FIG. 5

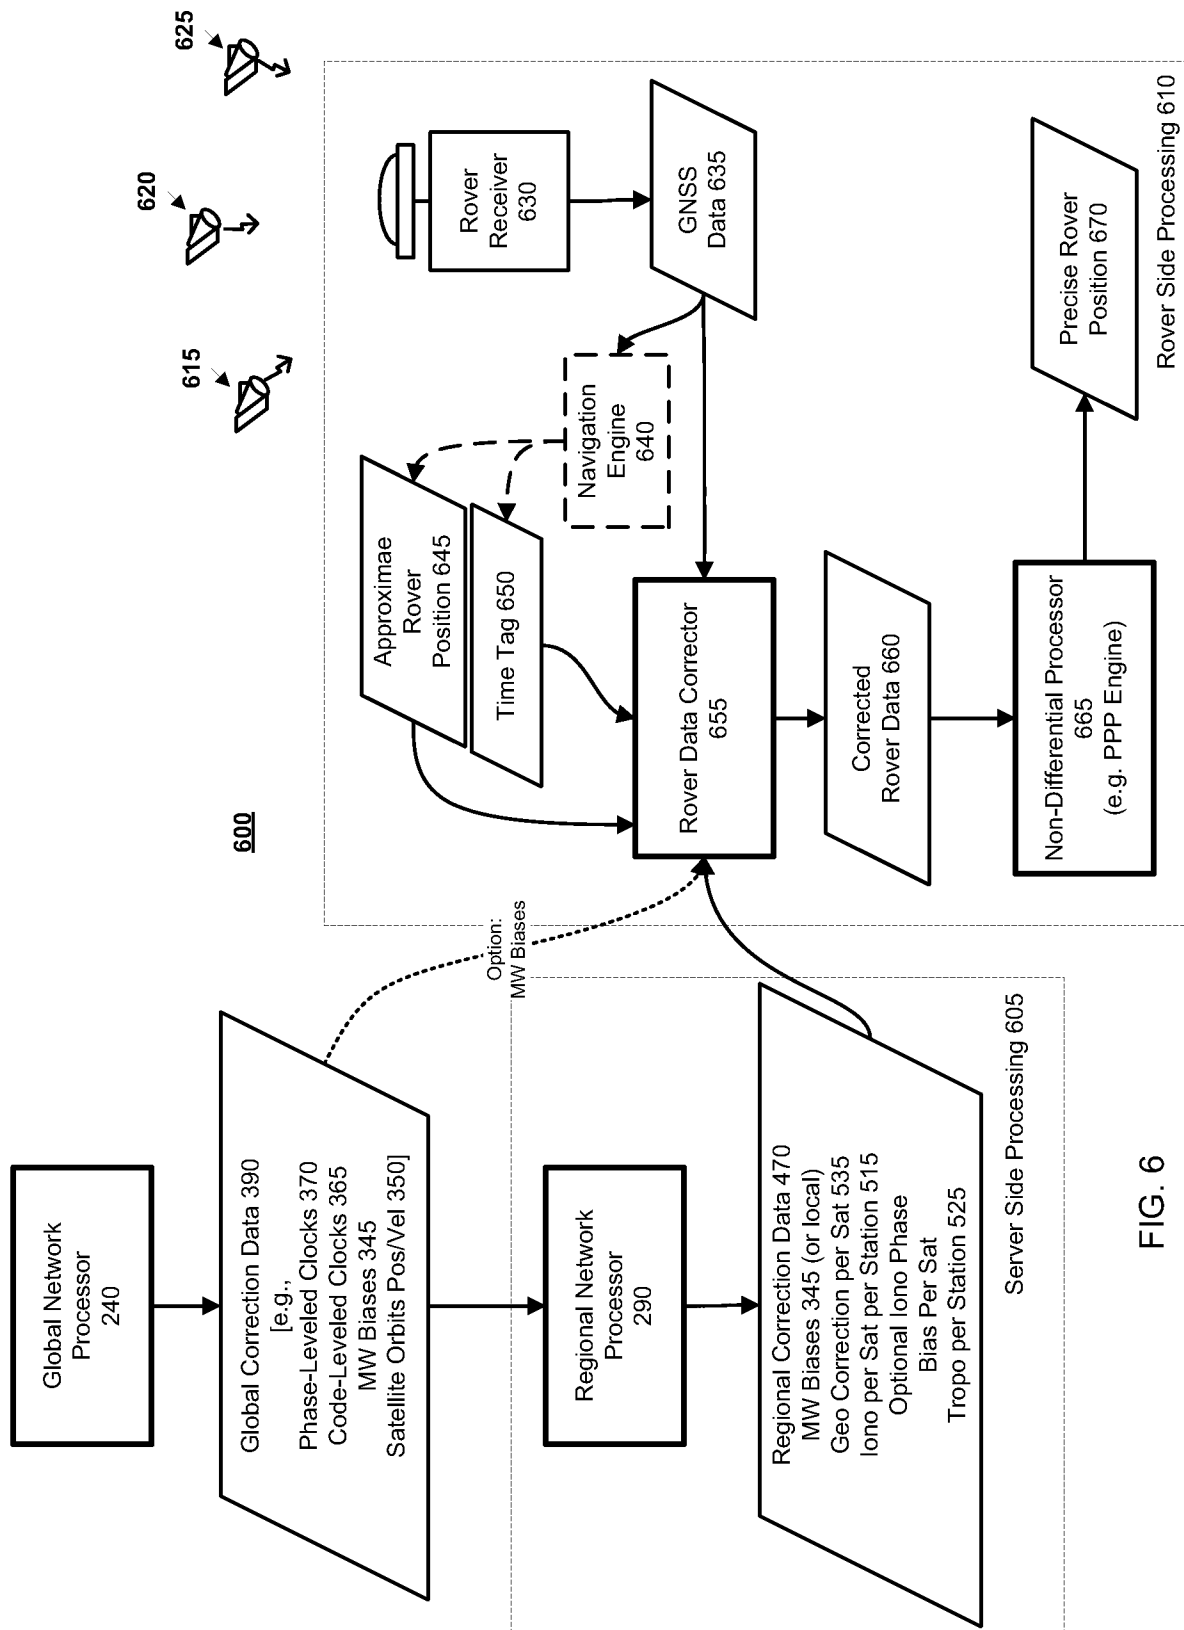


FIG. 6

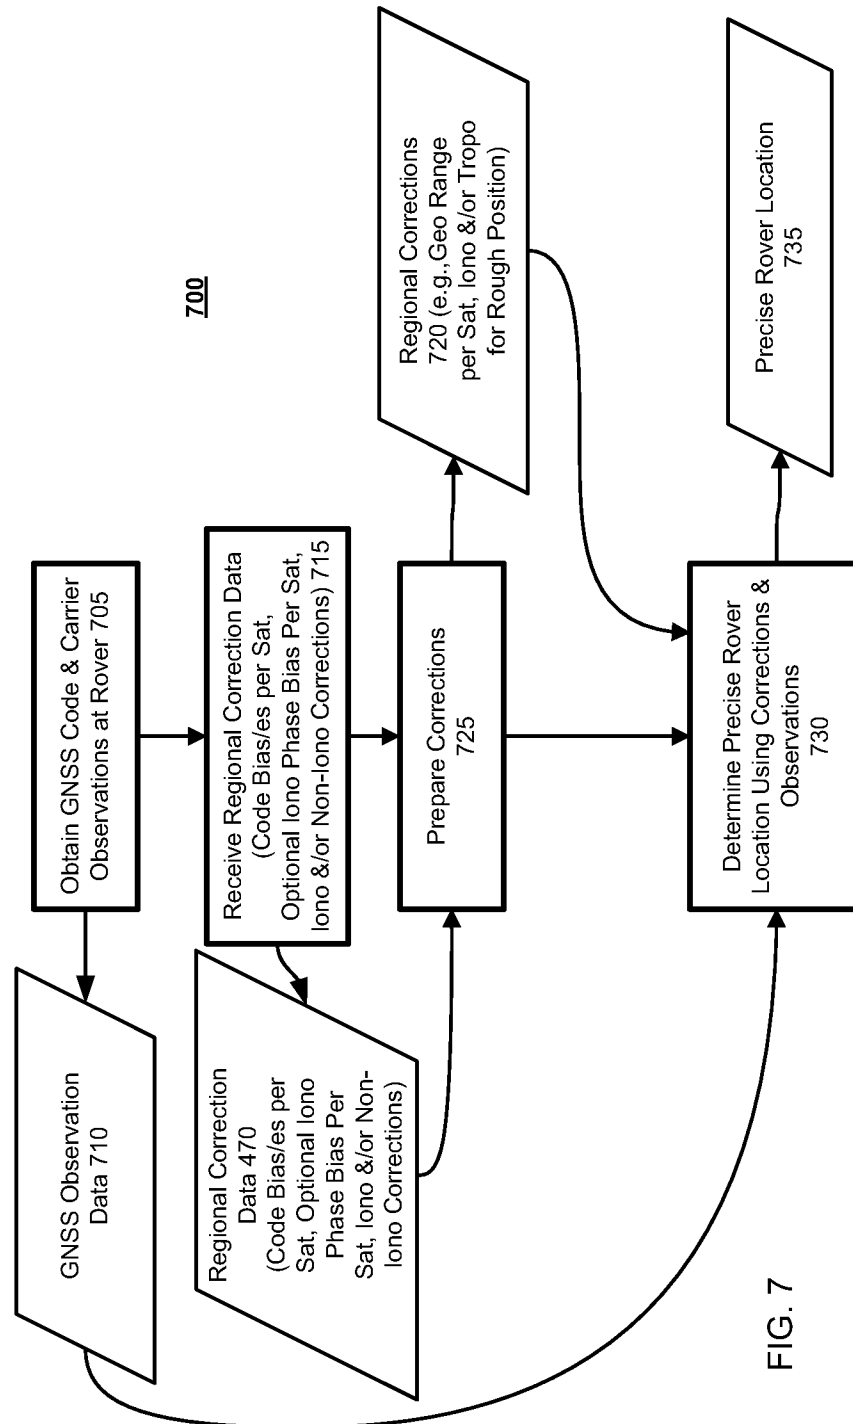


FIG. 7

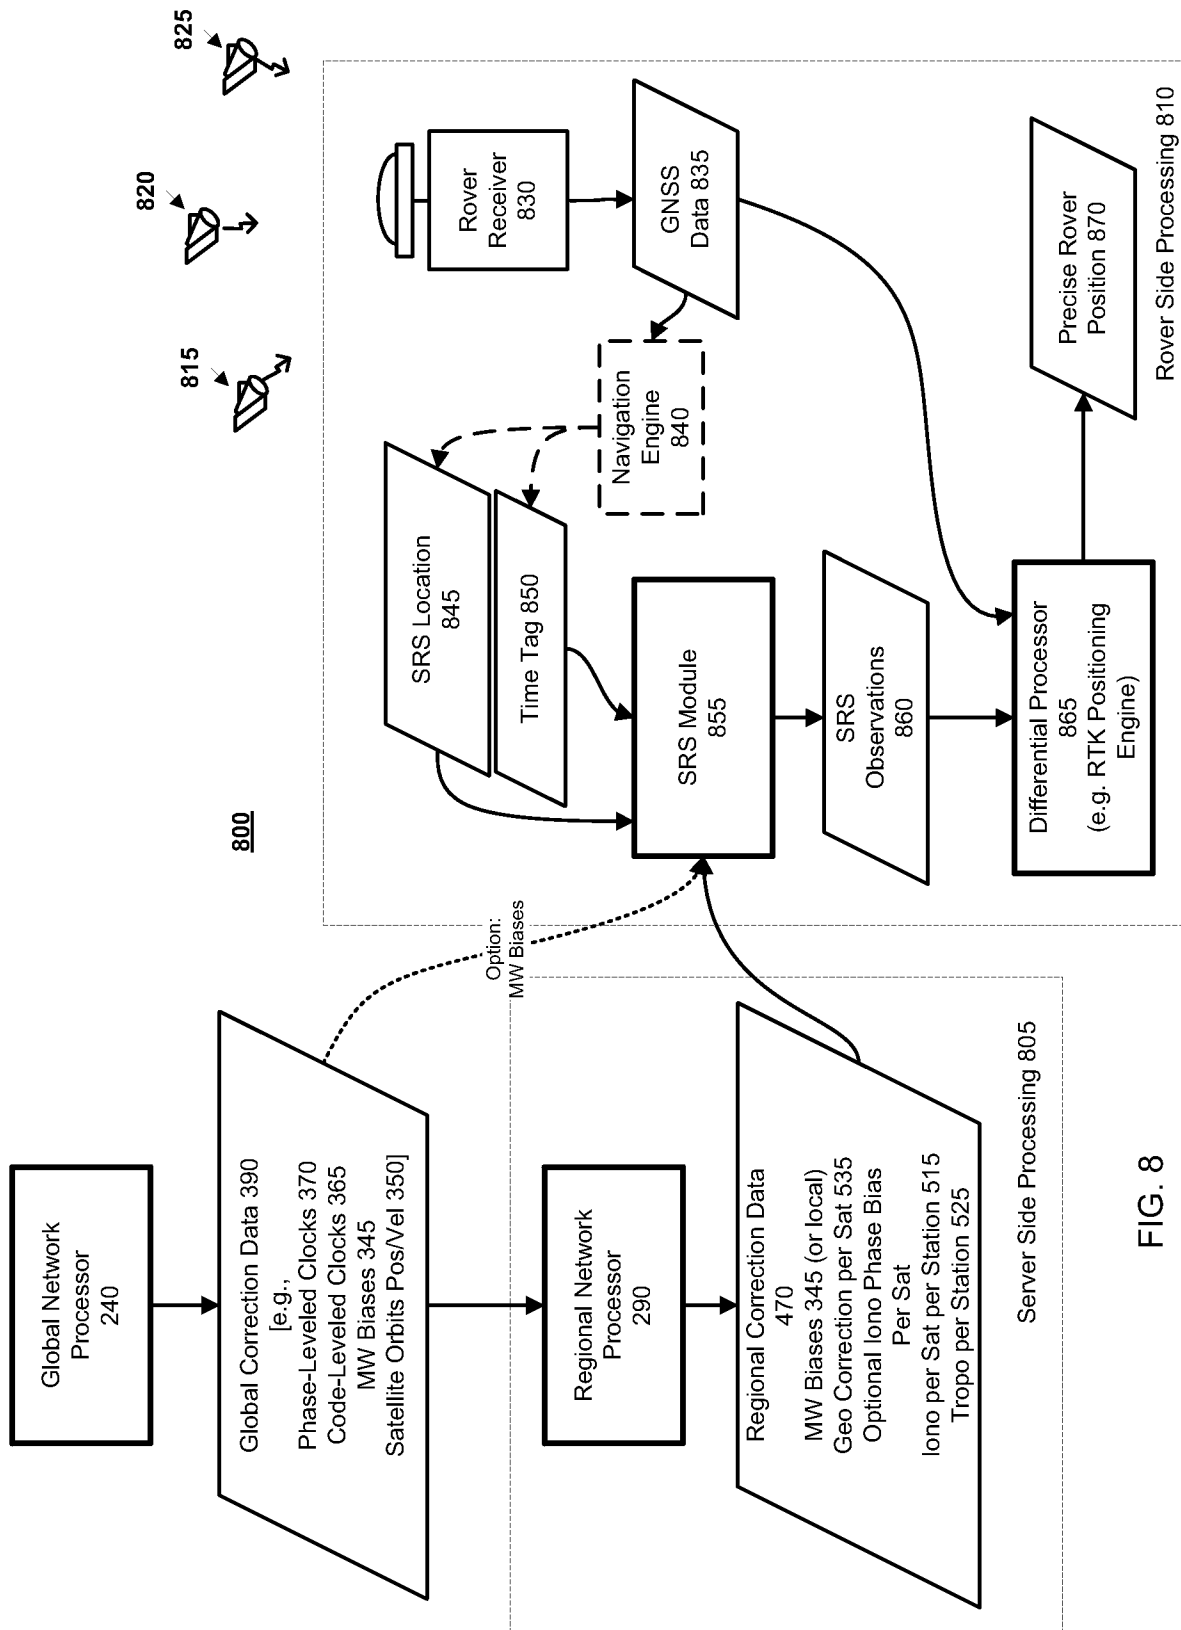


FIG. 8

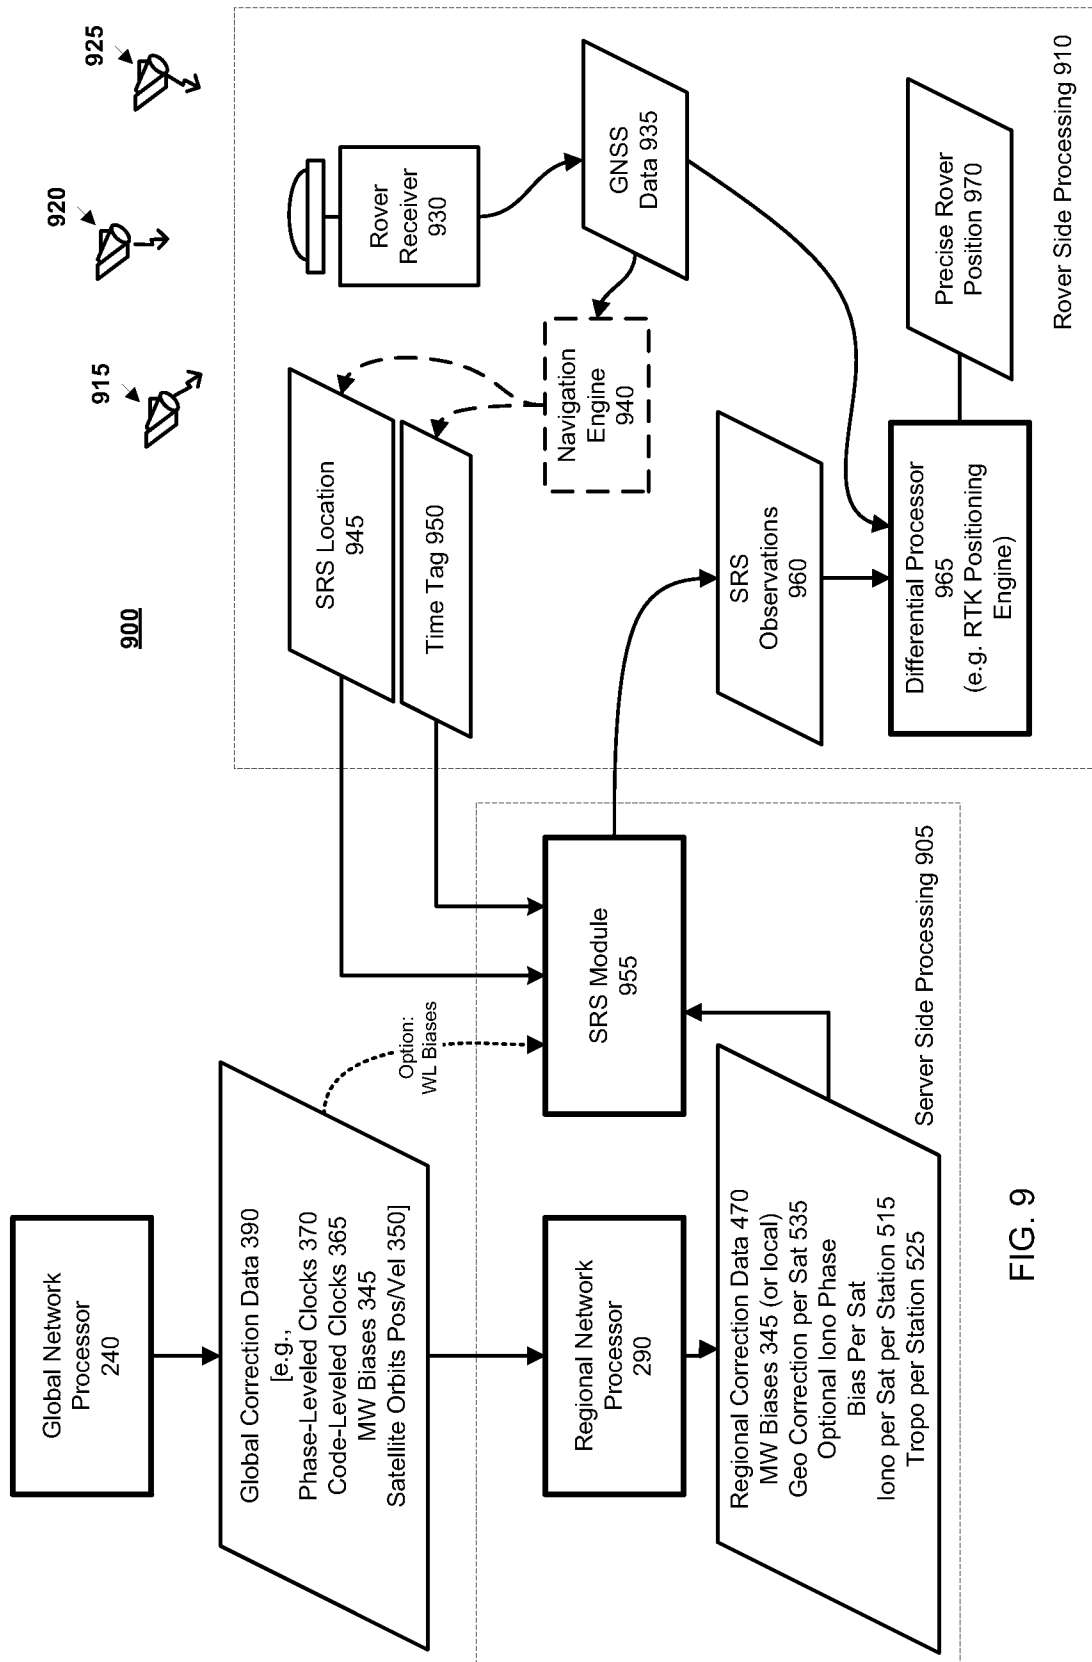


FIG. 9

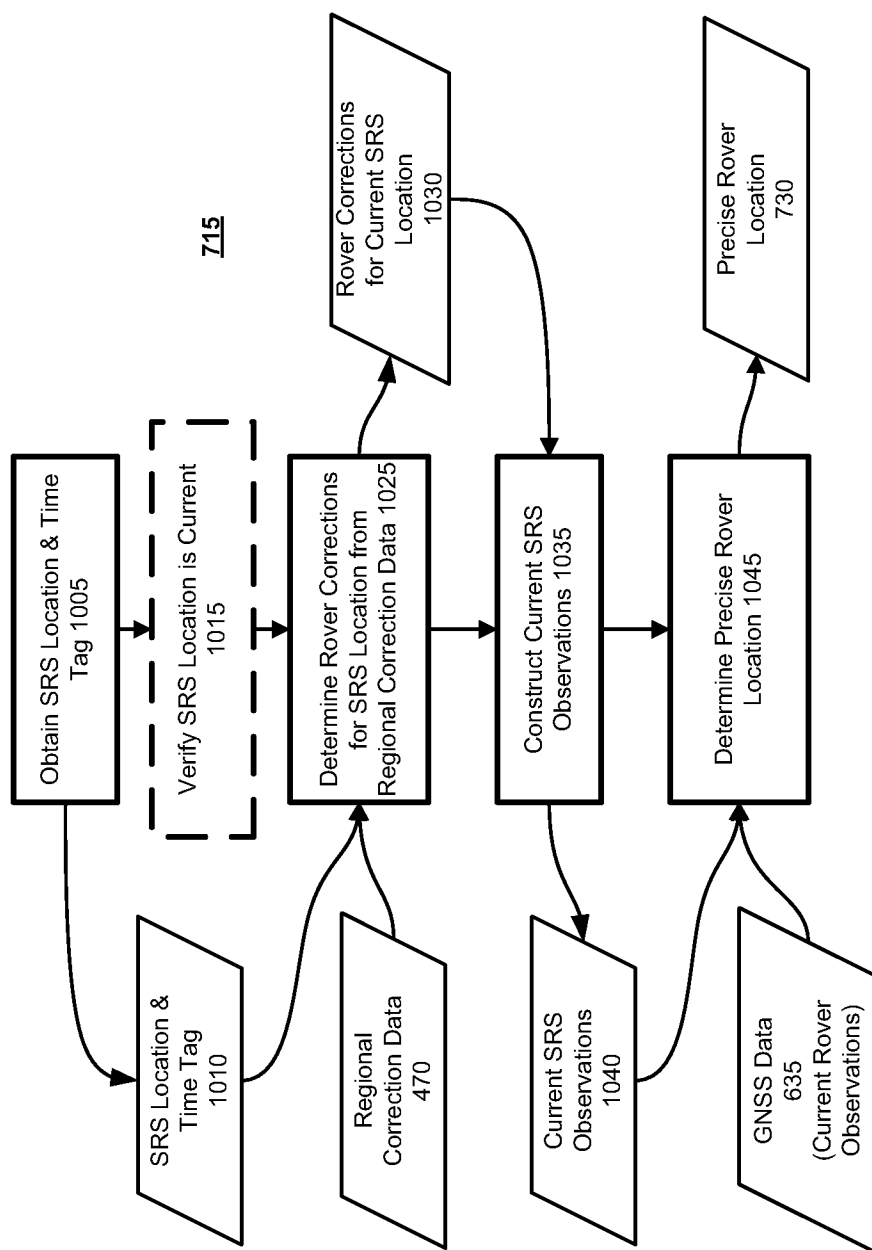
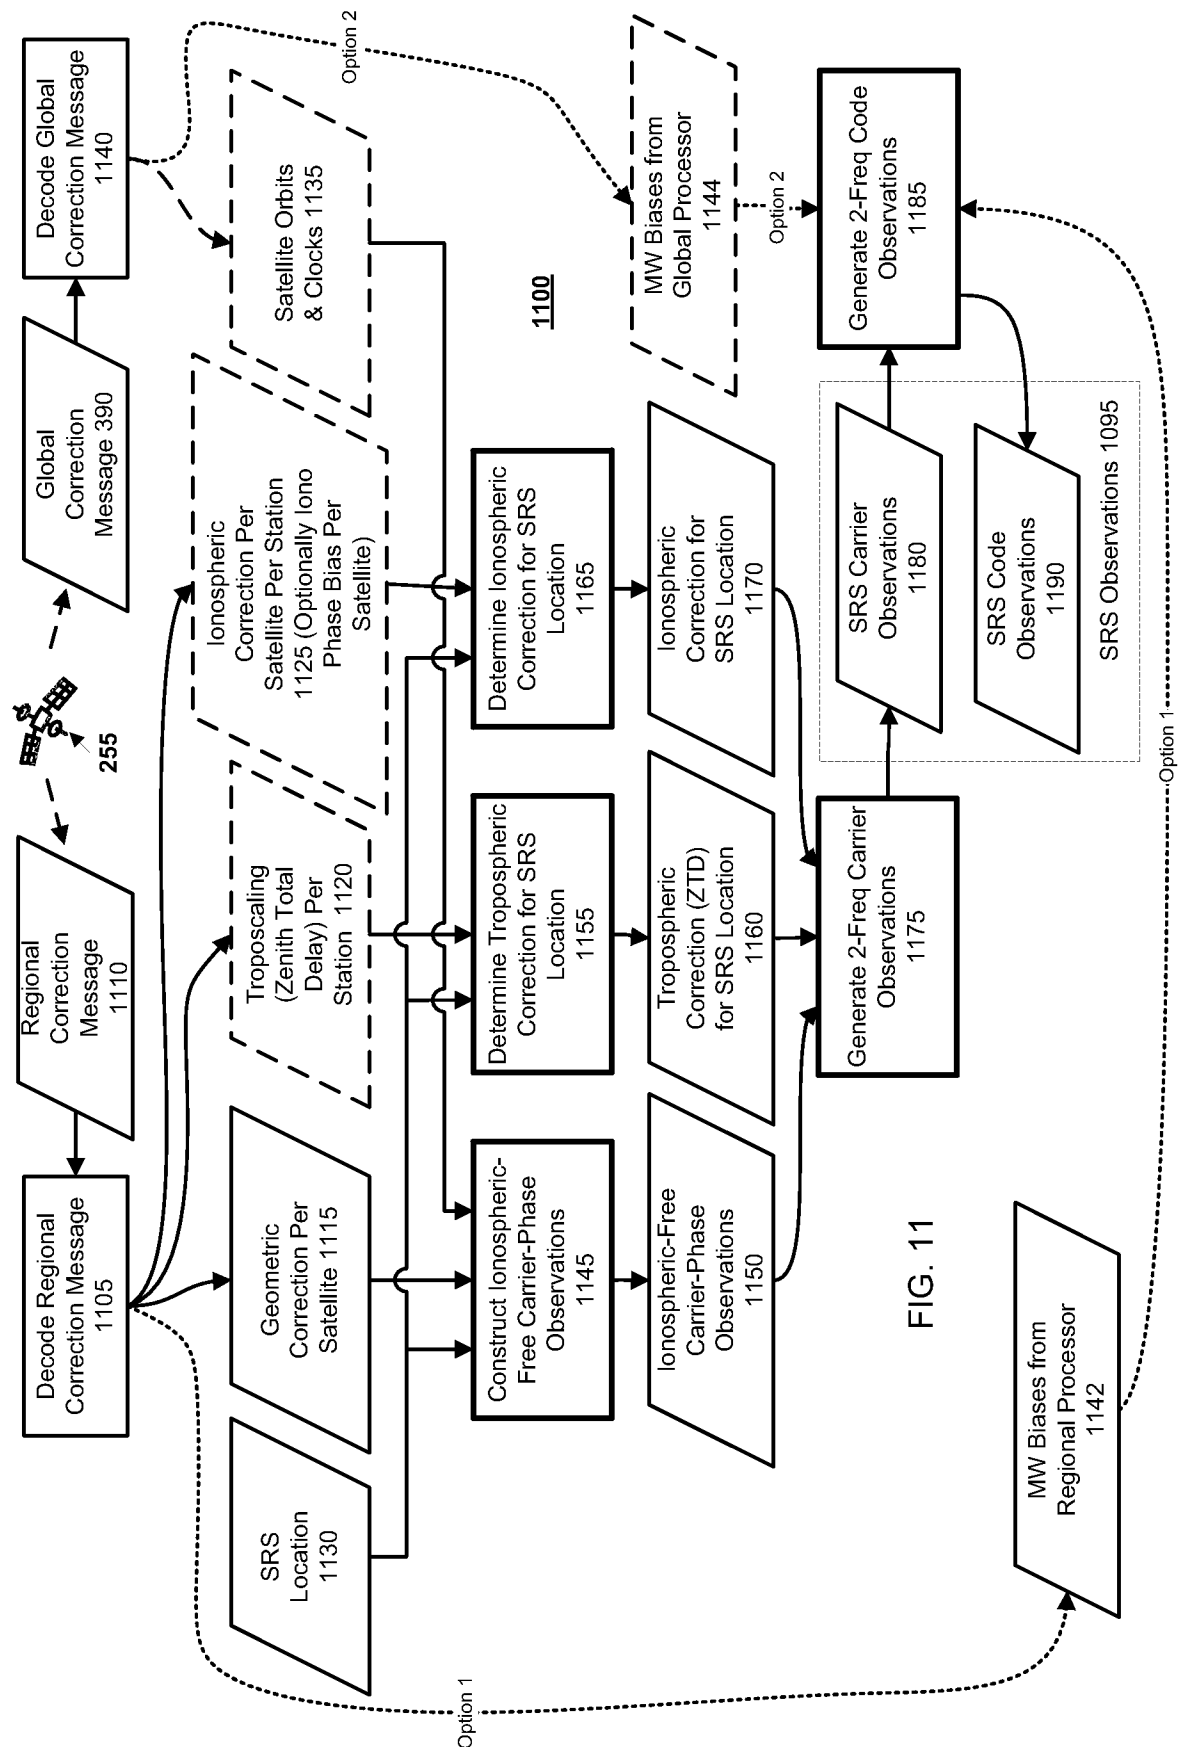


FIG. 10



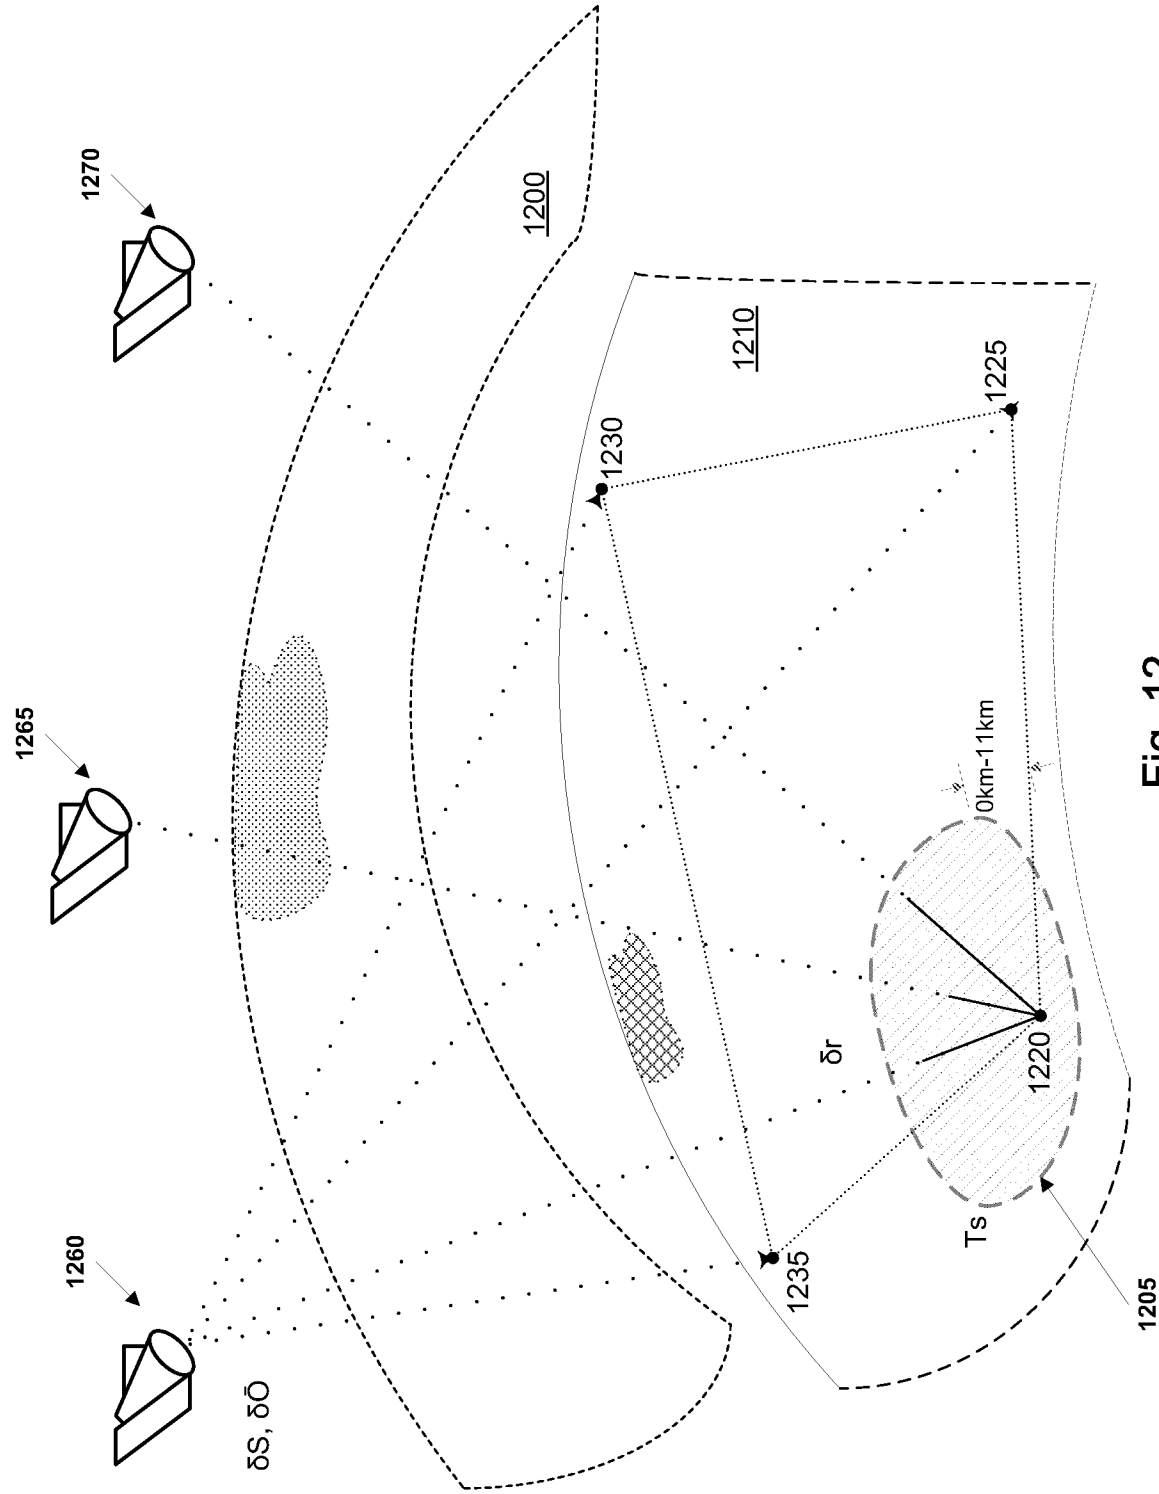


Fig. 12

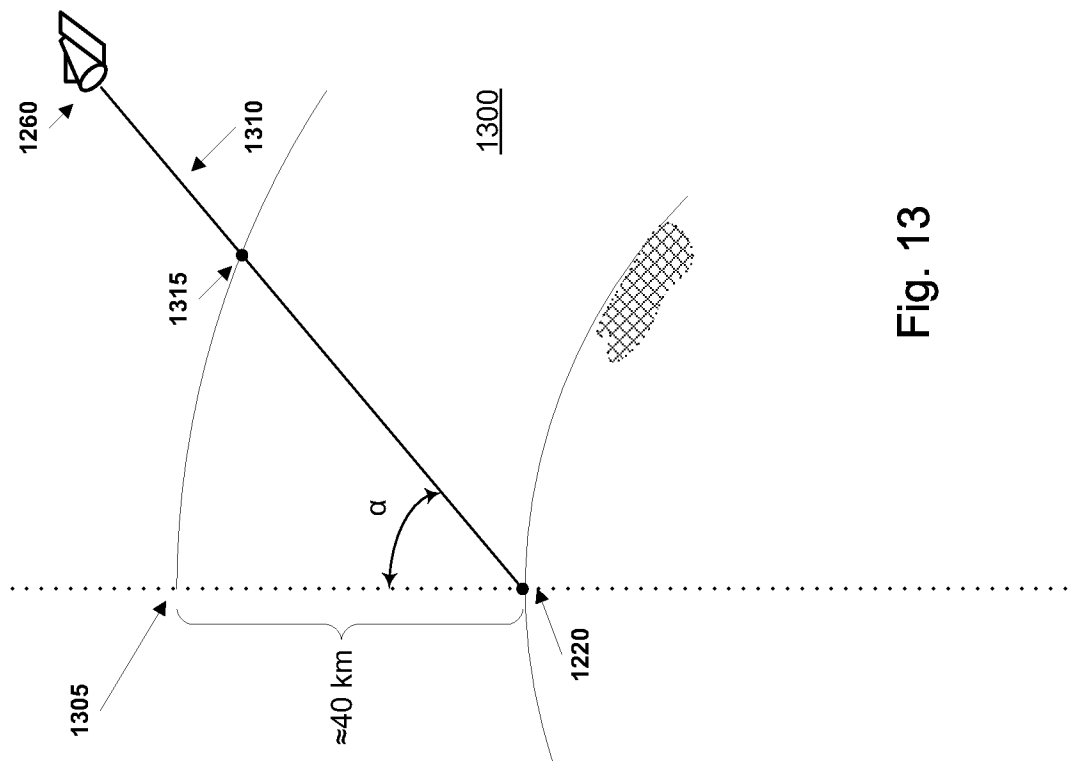


Fig. 13

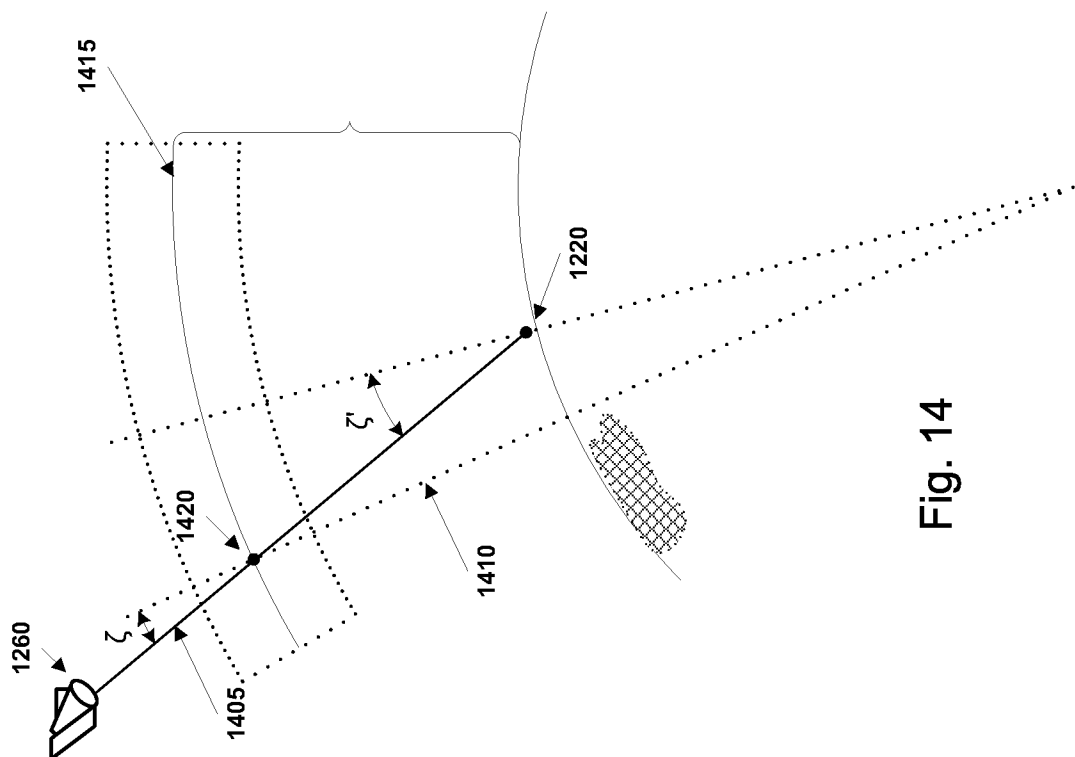


Fig. 14

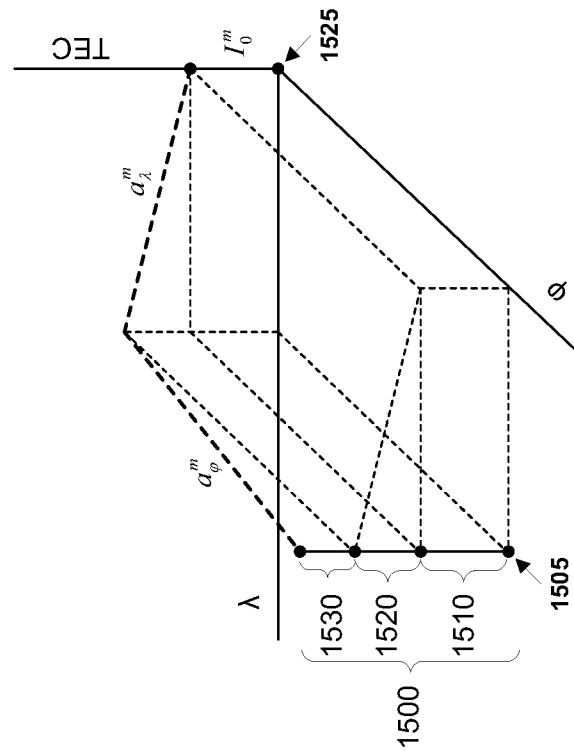


Fig. 15

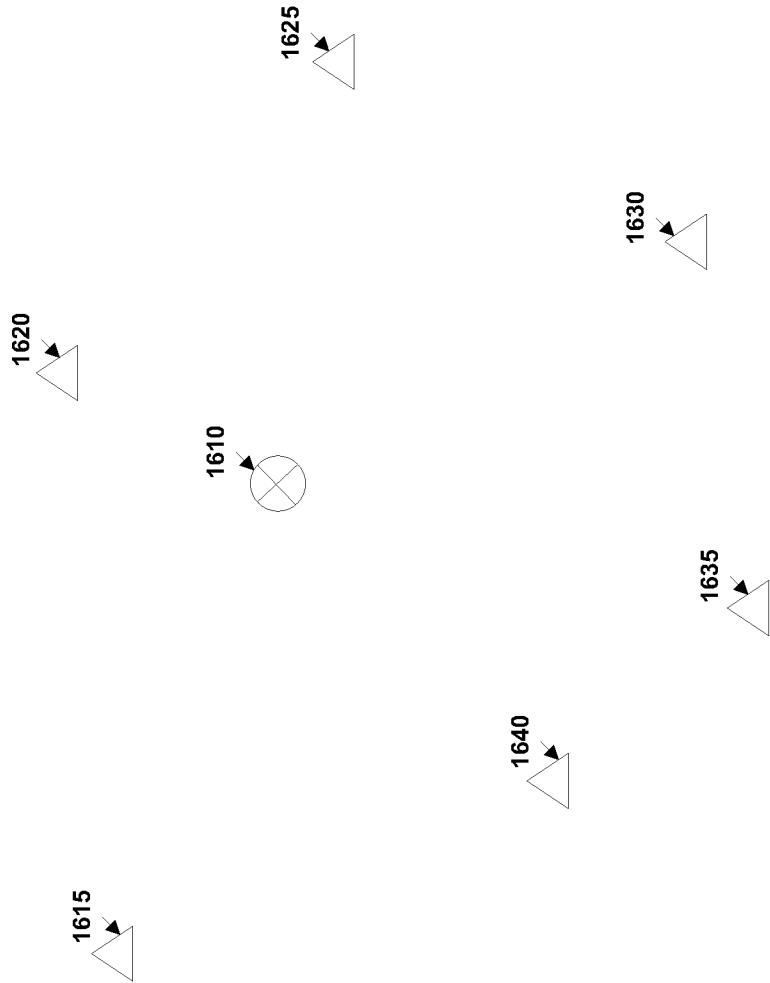


FIG. 16
Troposcaling Example

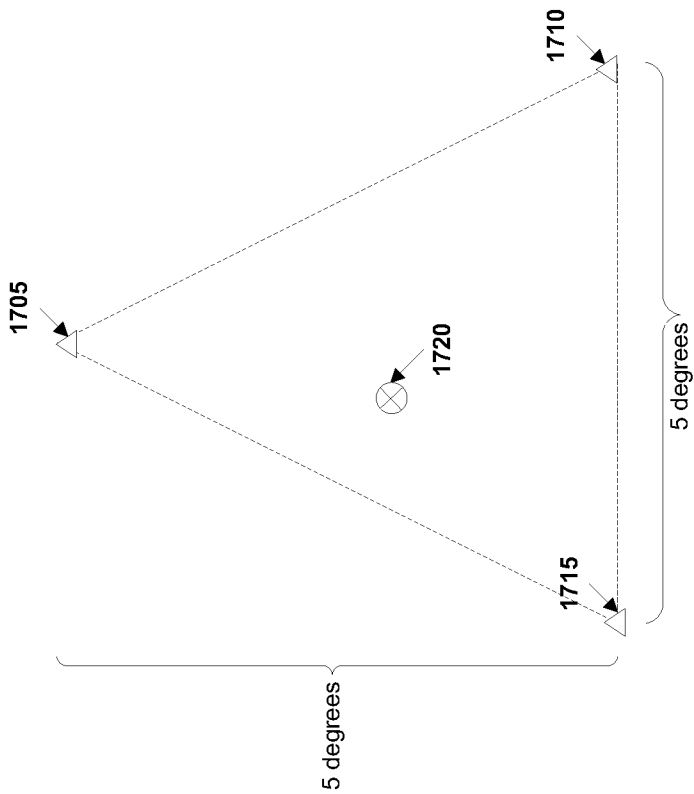


FIG. 17

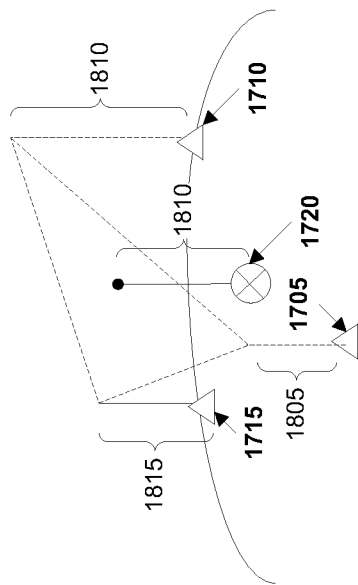


FIG. 18

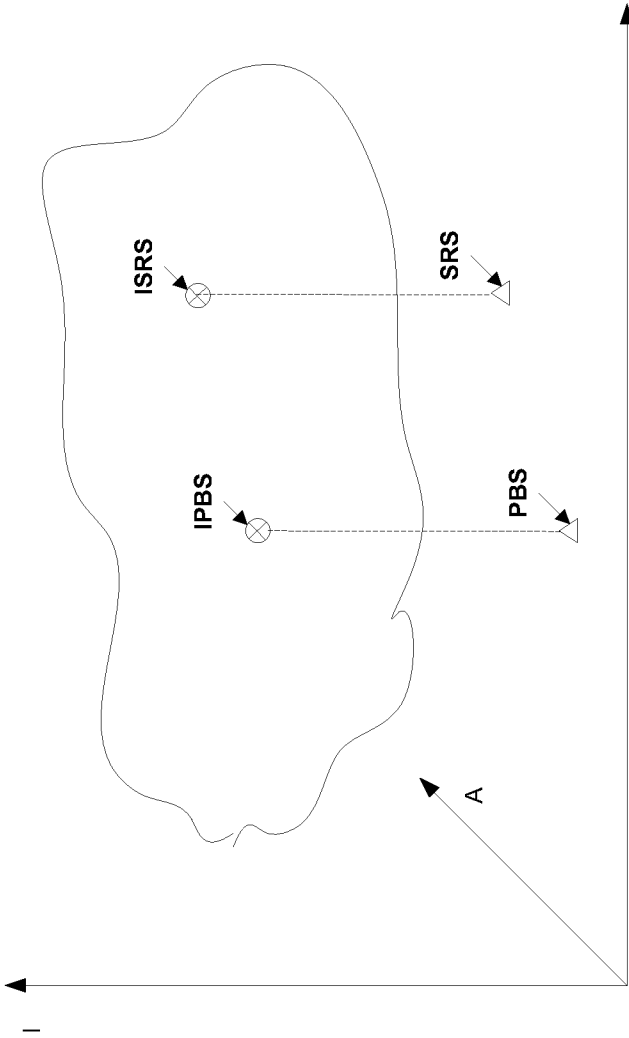


FIG. 19

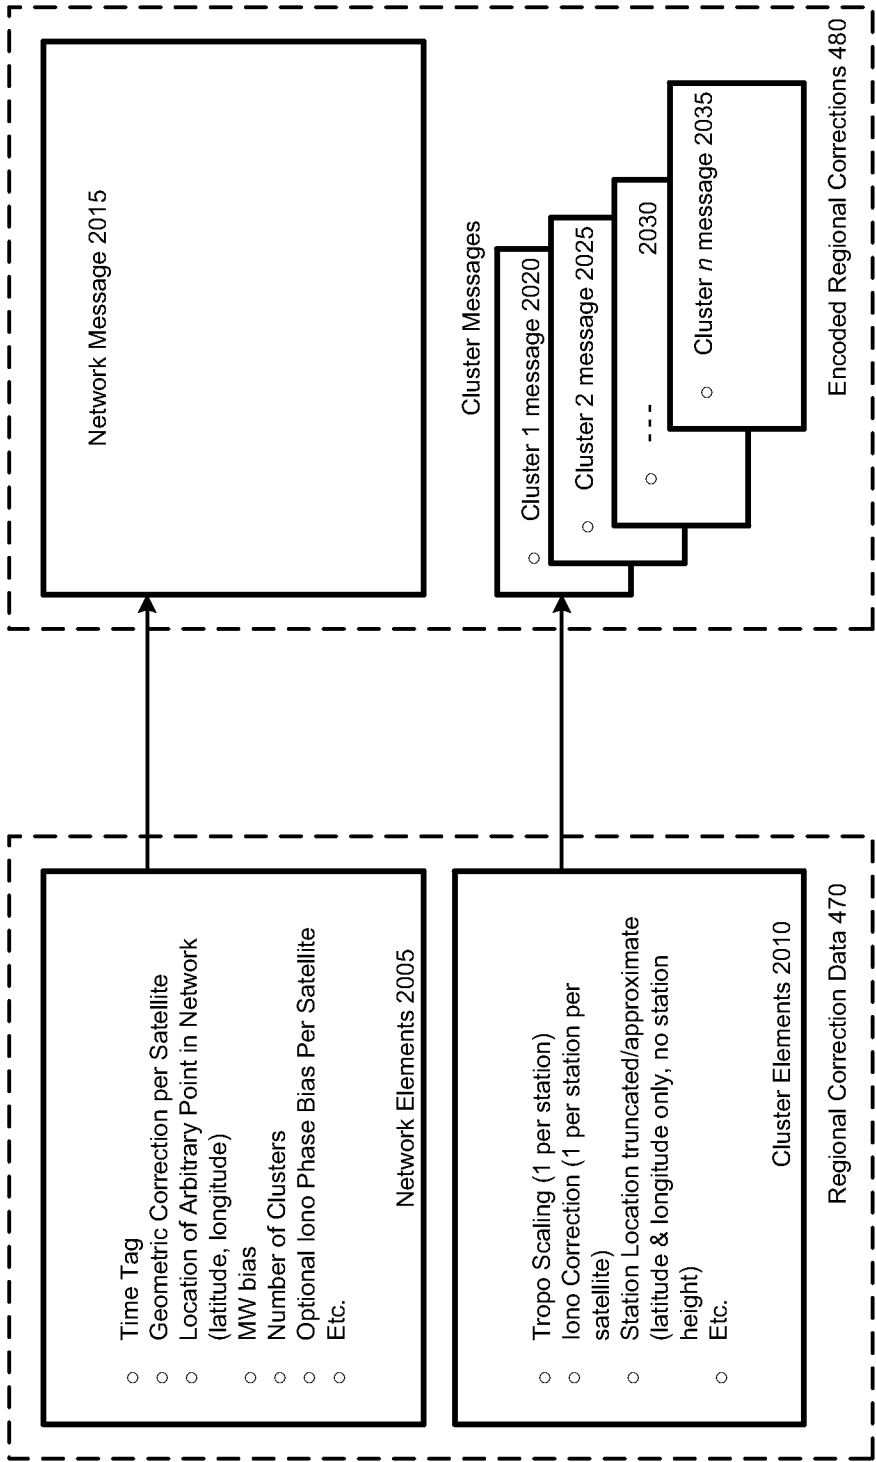


FIG. 20

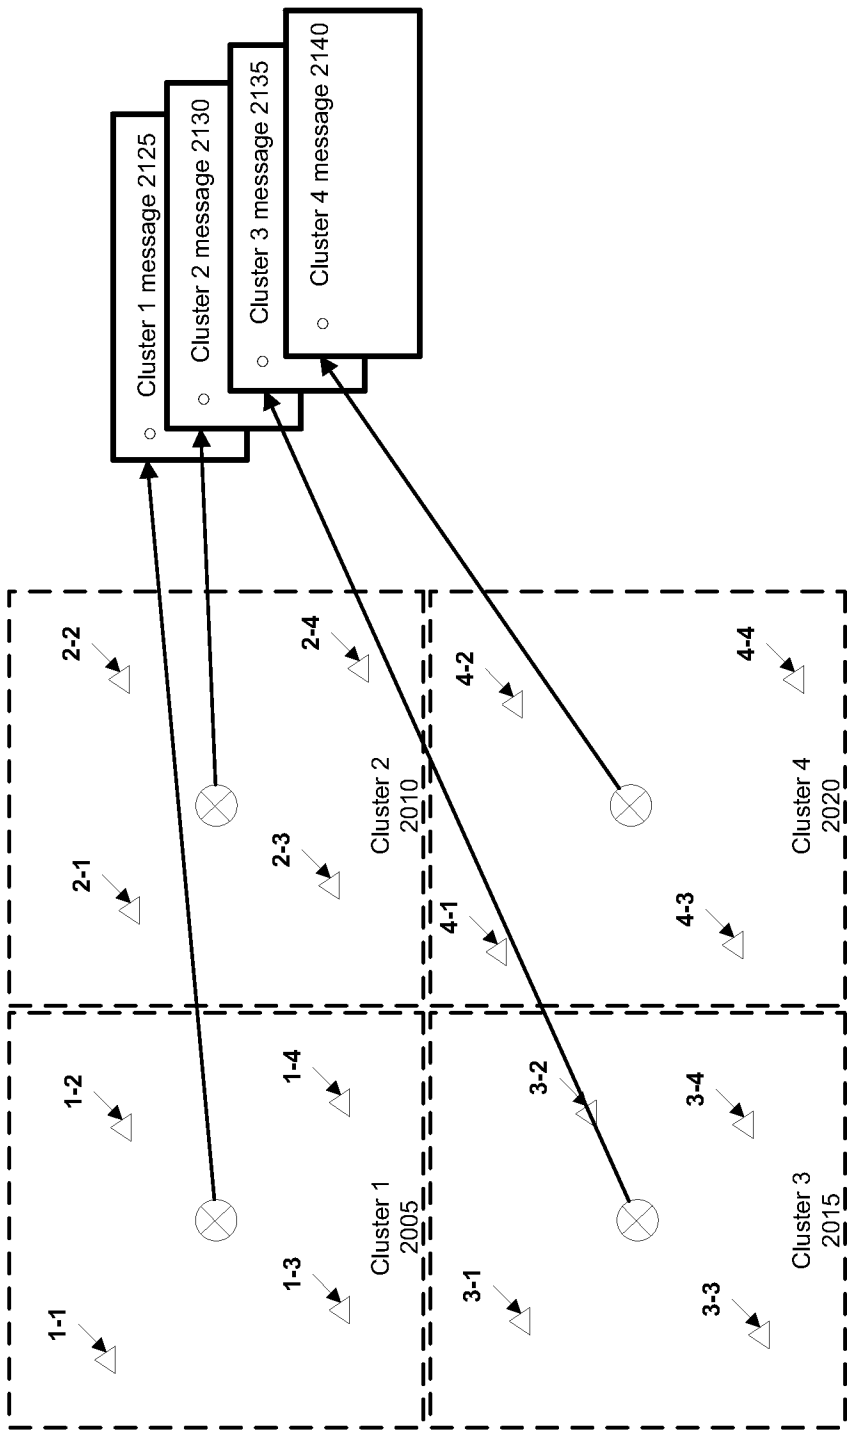


FIG. 21

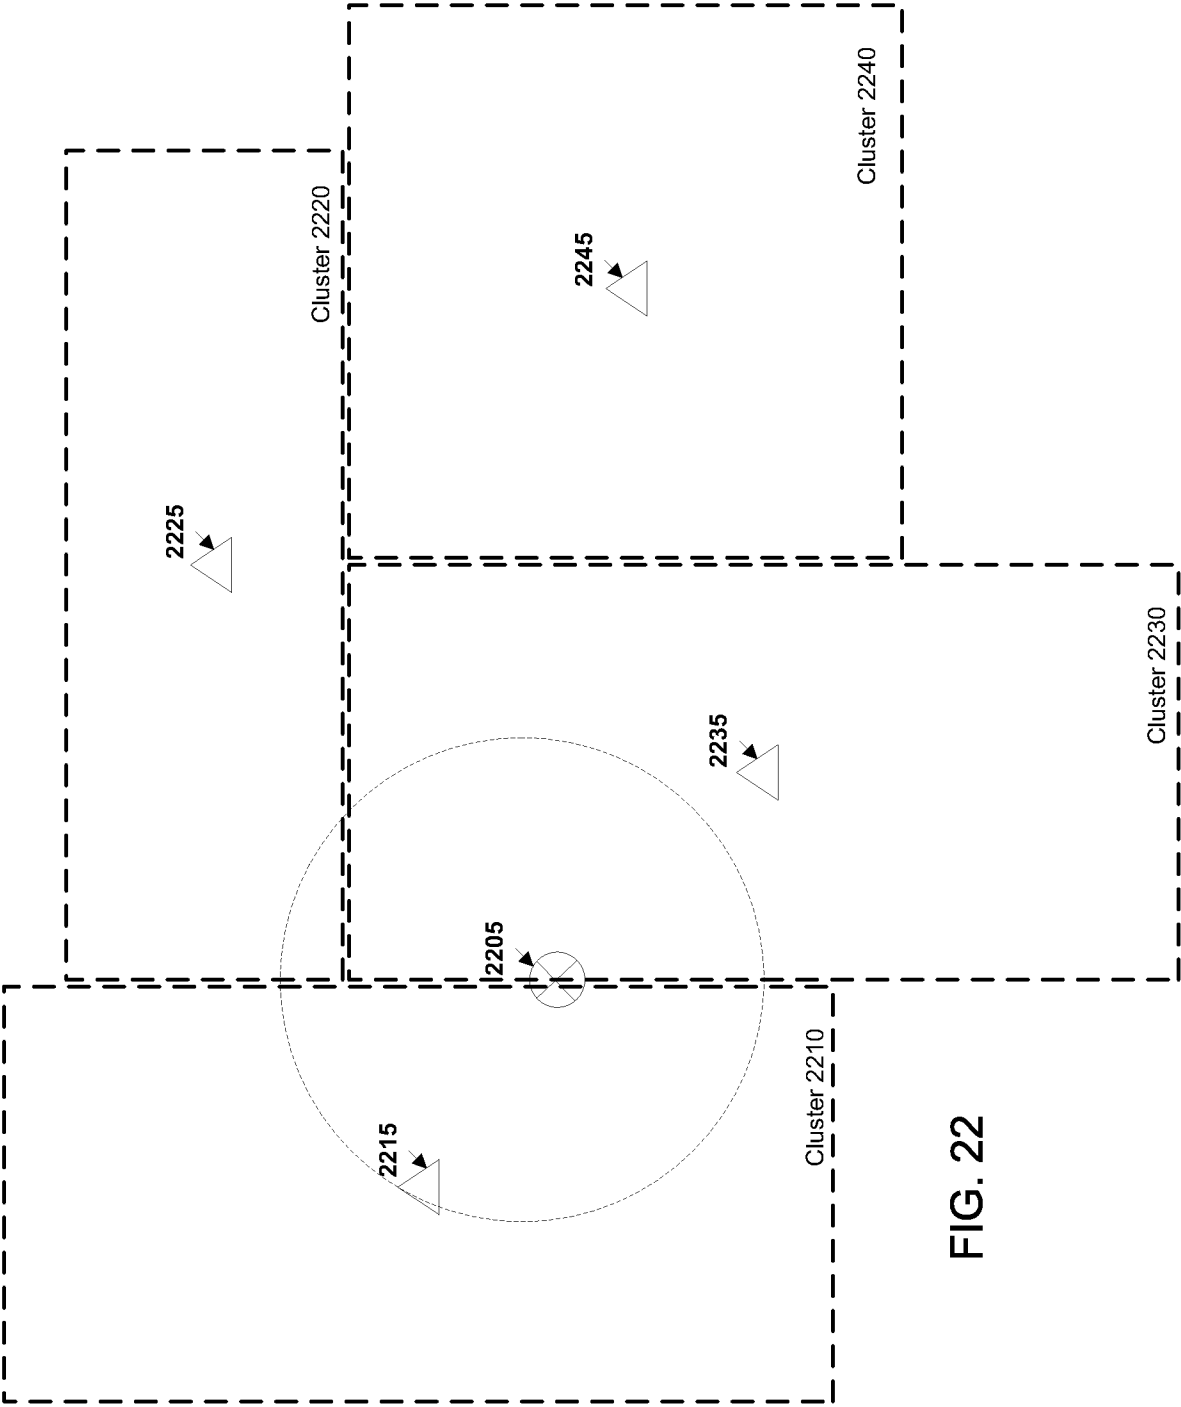


FIG. 22

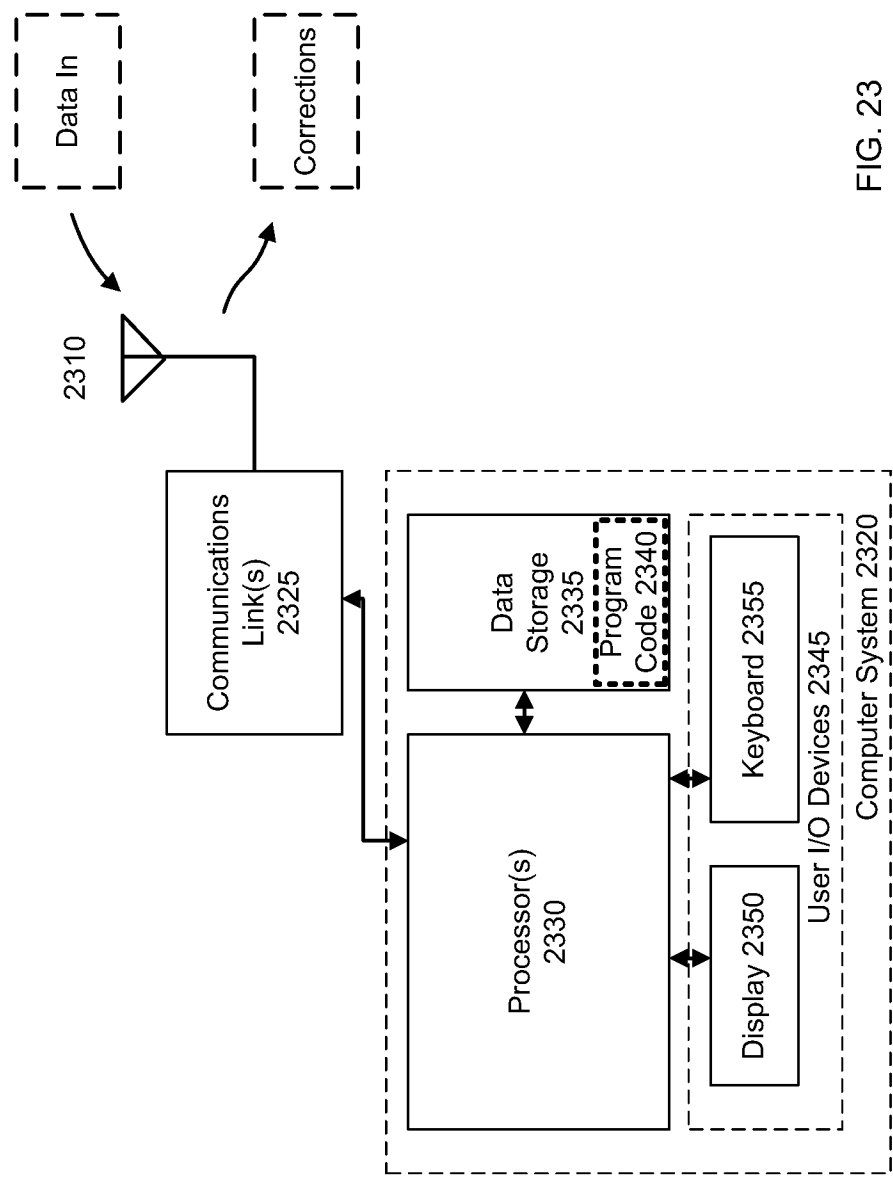


FIG. 23

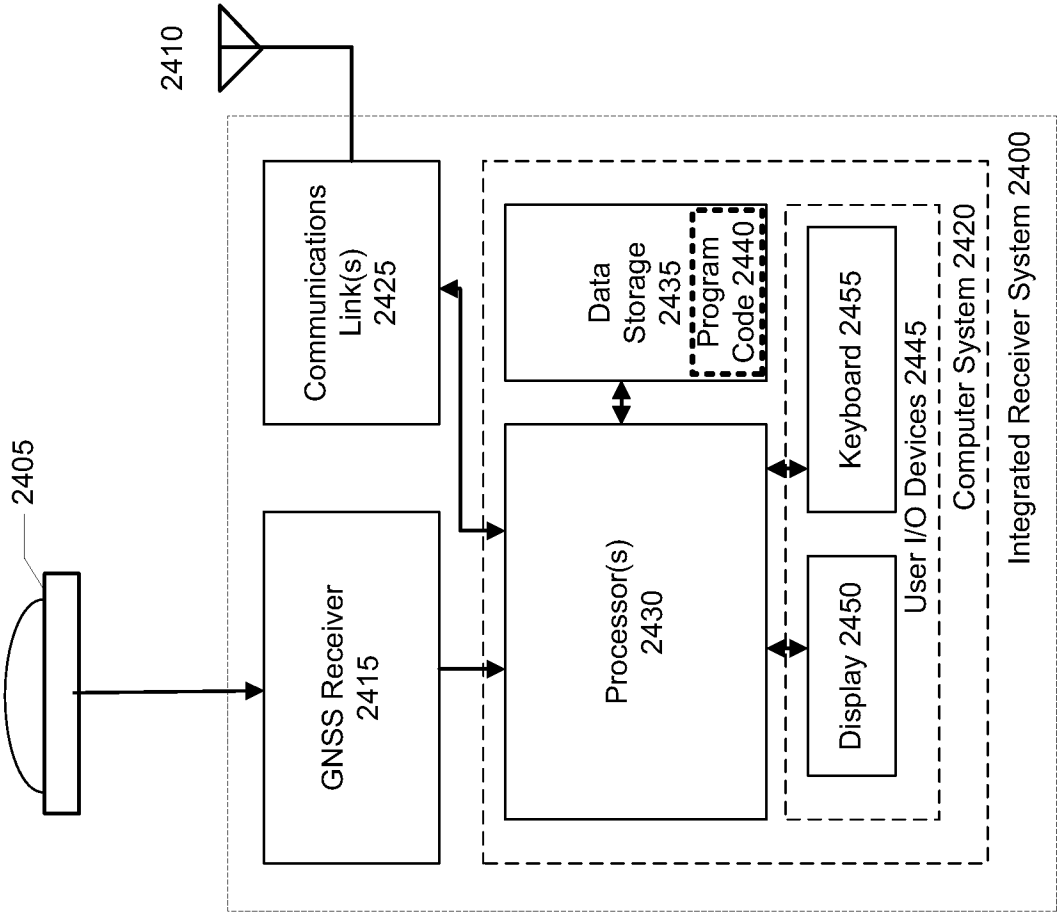


FIG. 24

Appendix A

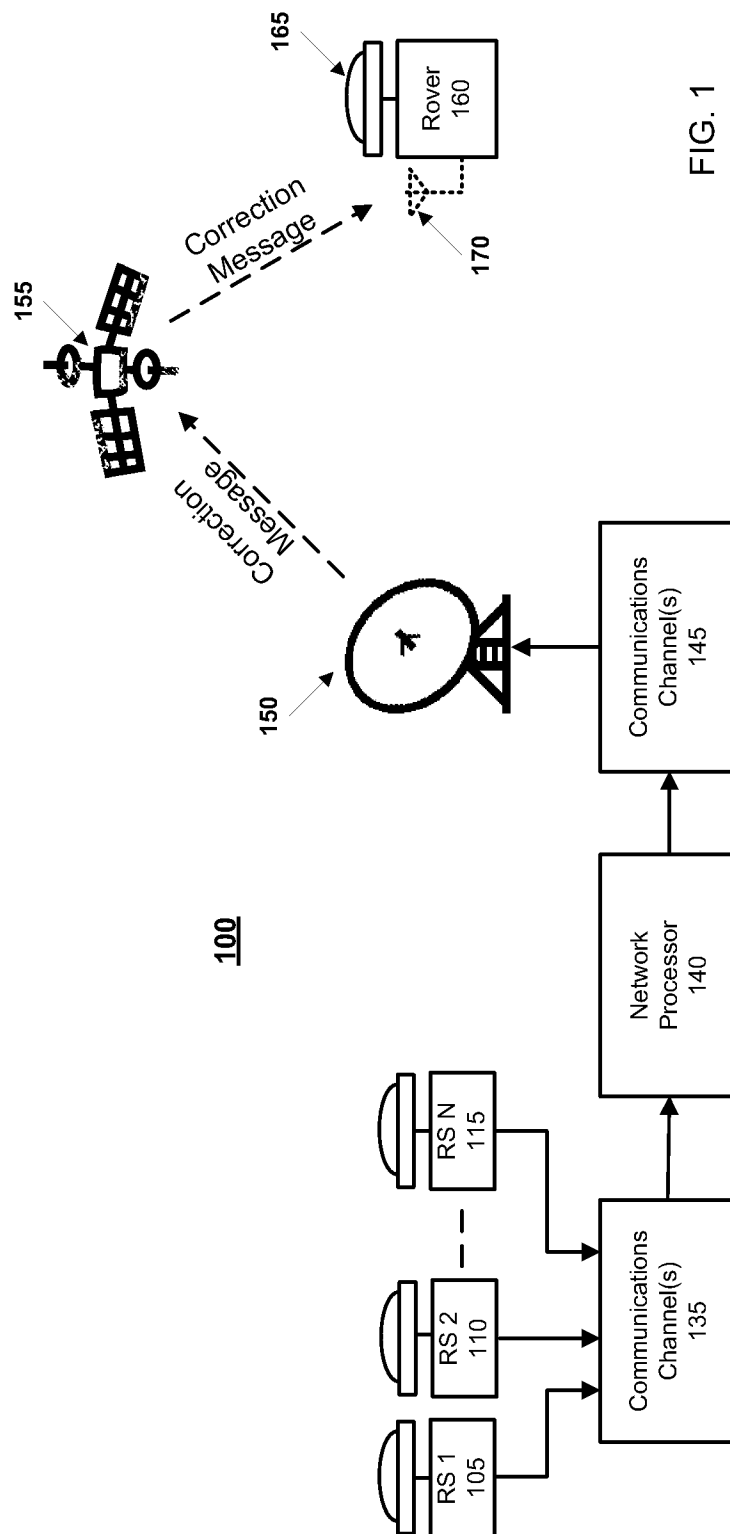
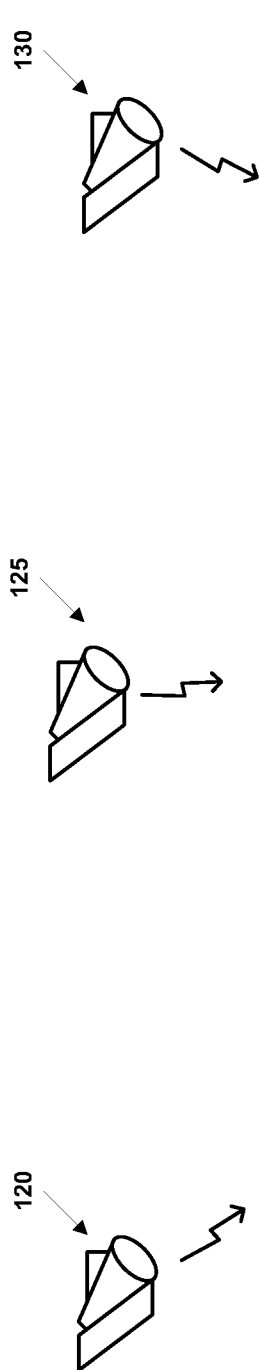


FIG. 1

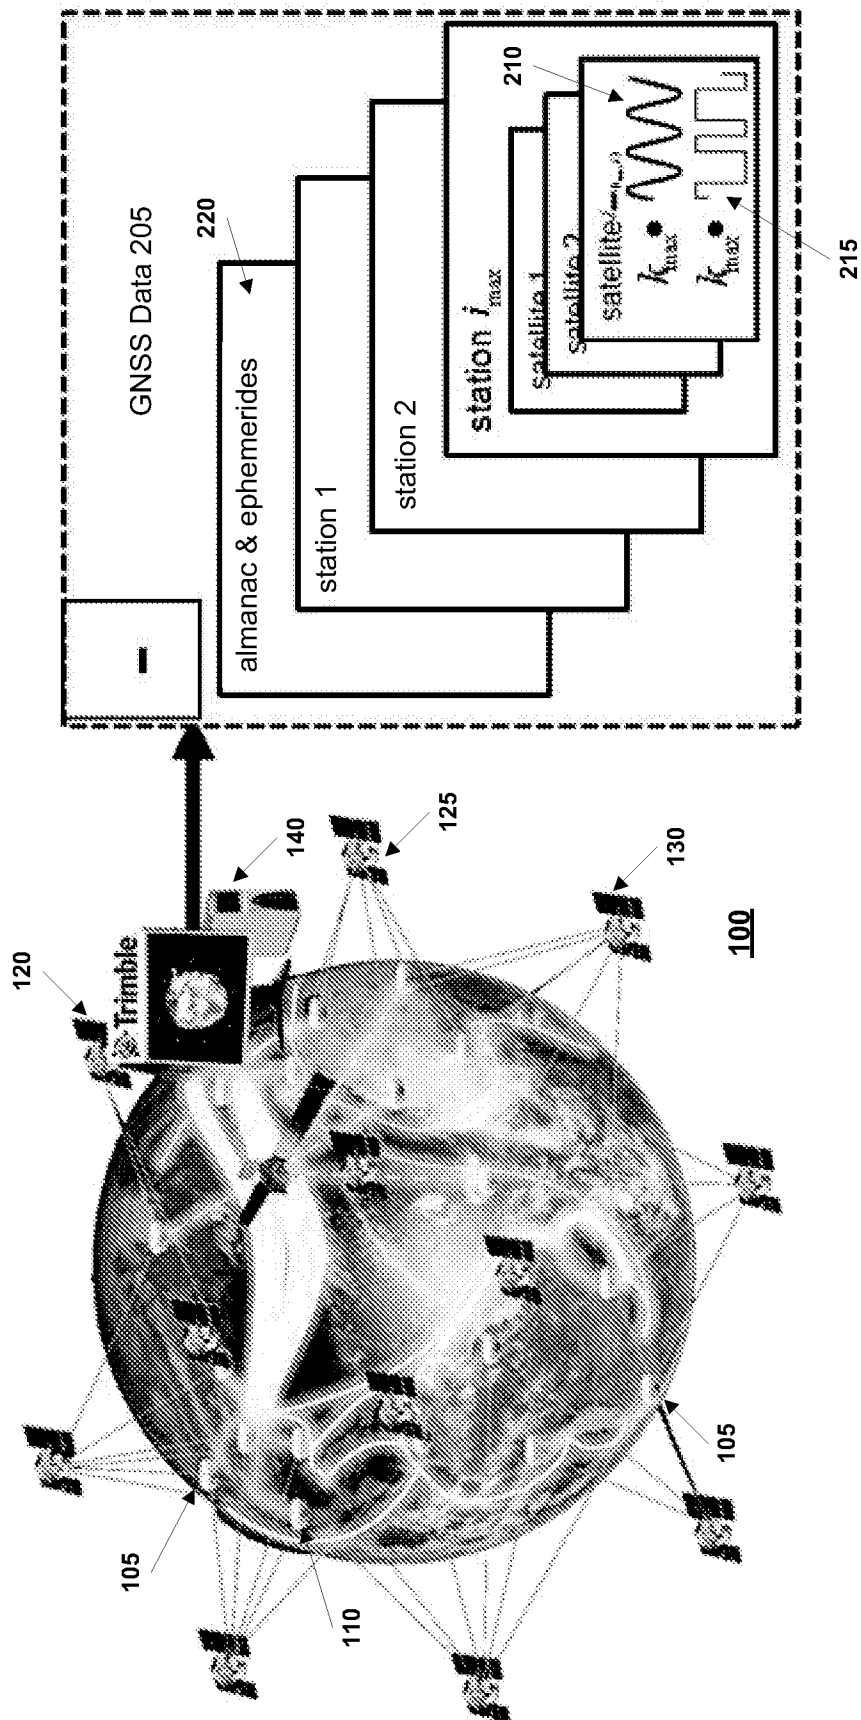


FIG. 2

Appendix A

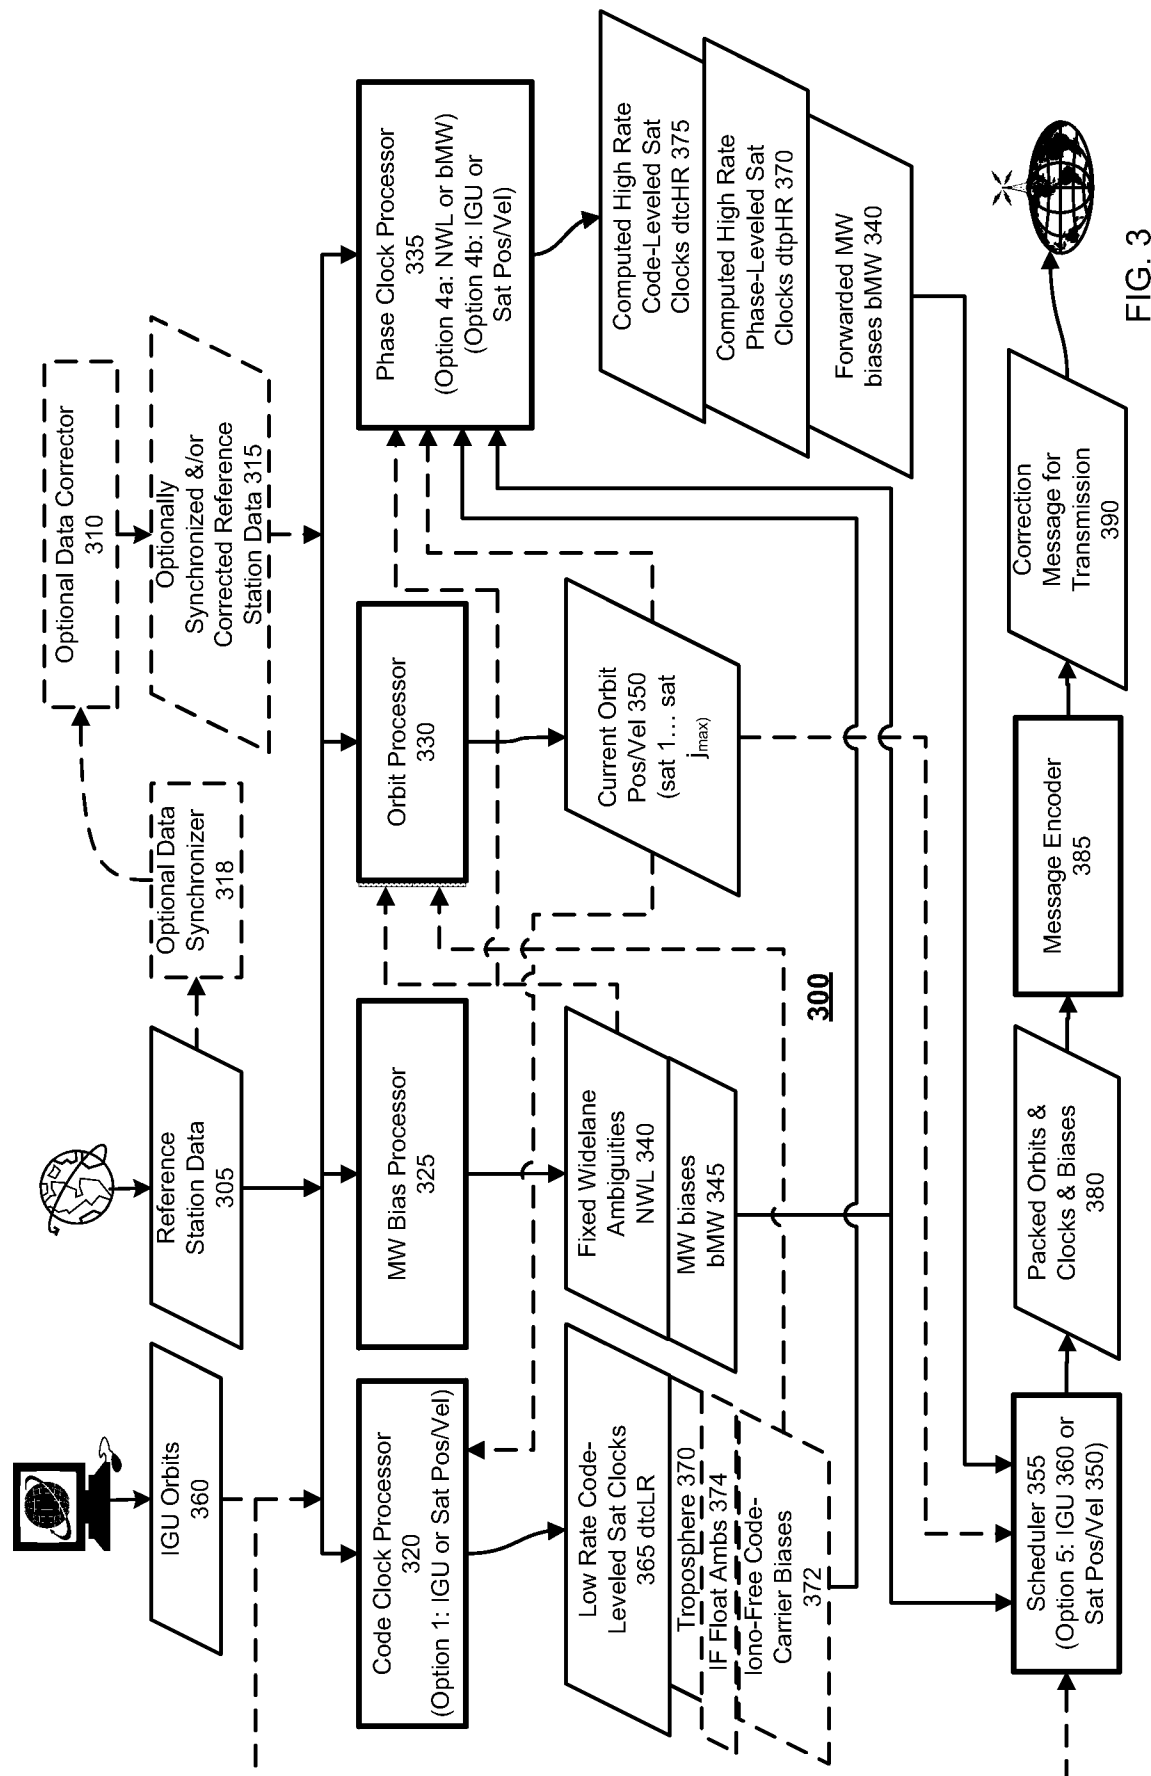


FIG. 3

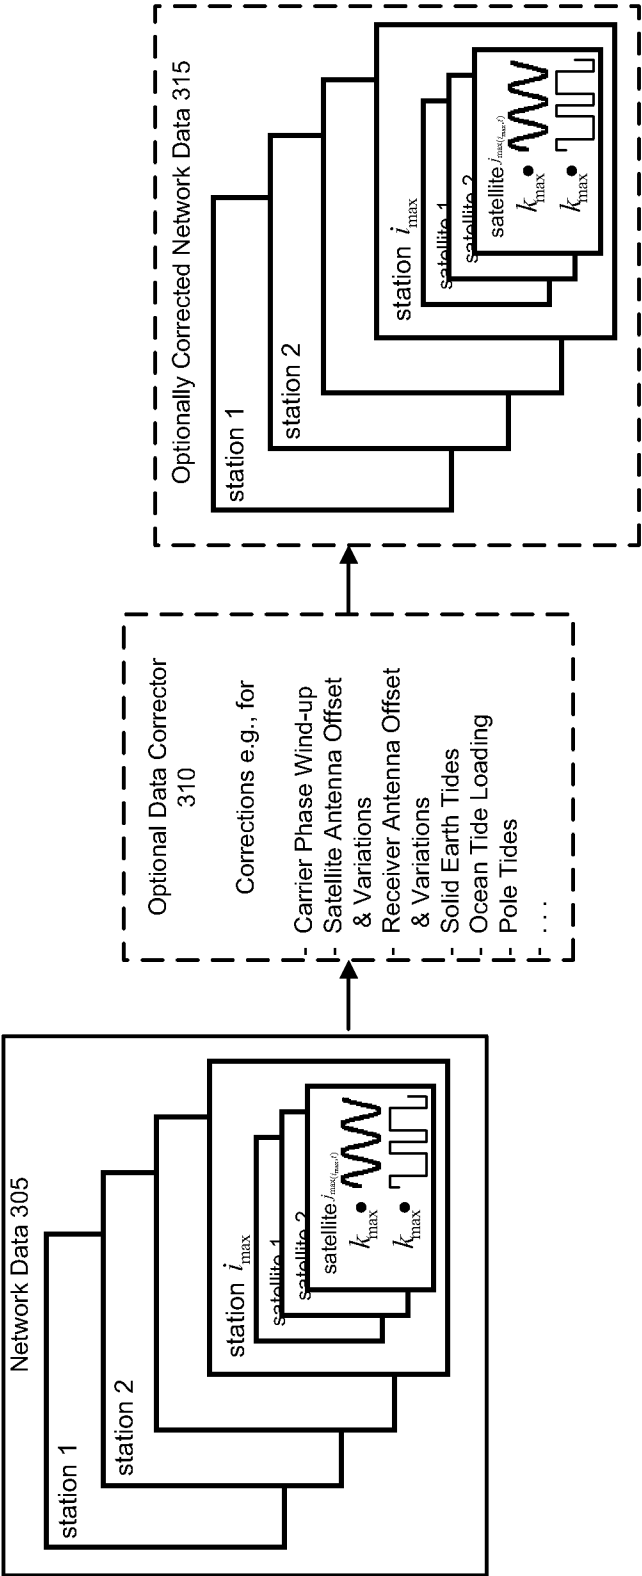


FIG. 4

Appendix A

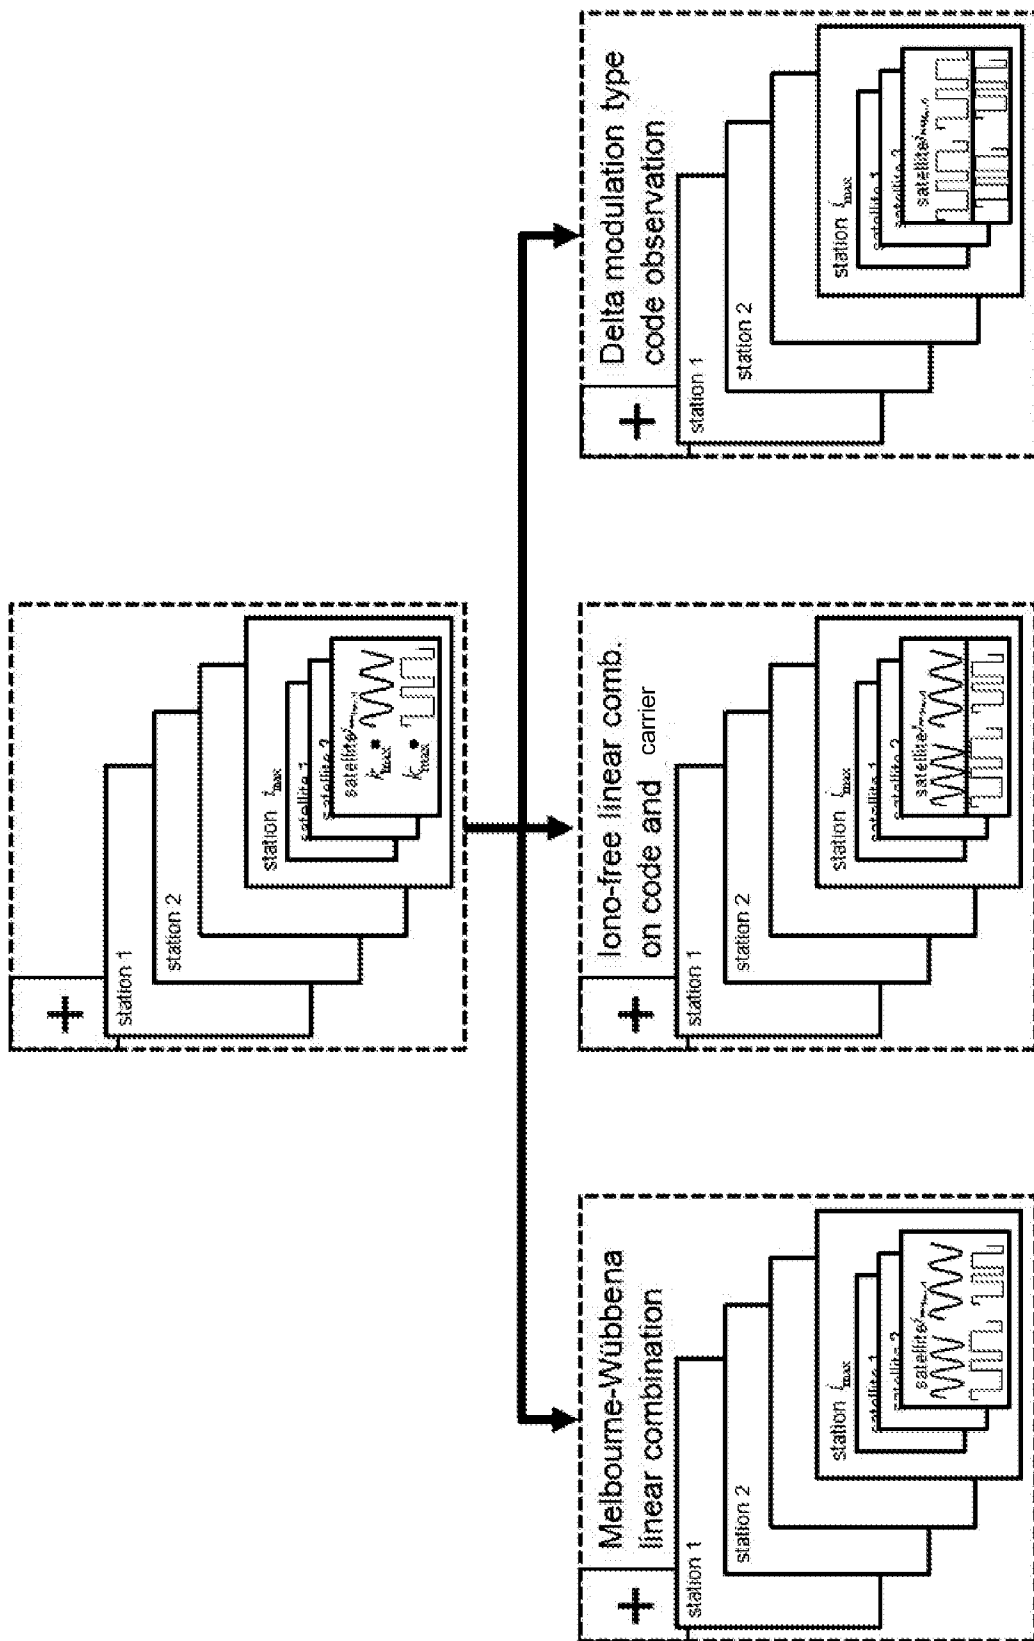


FIG. 5
Forming Linear
Combinations

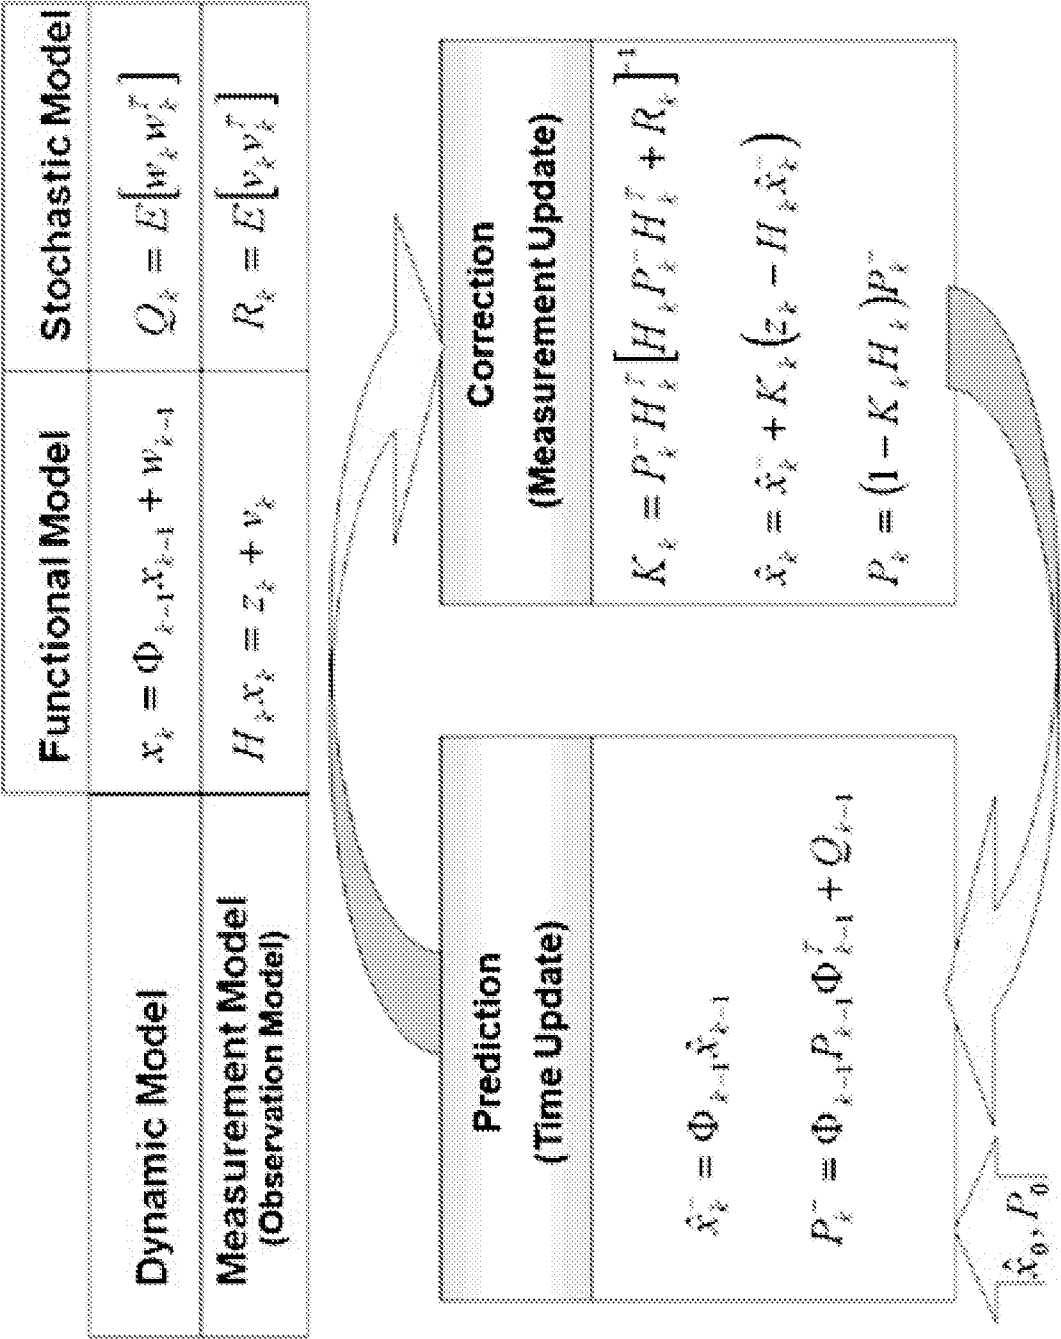


FIG. 6

Appendix A

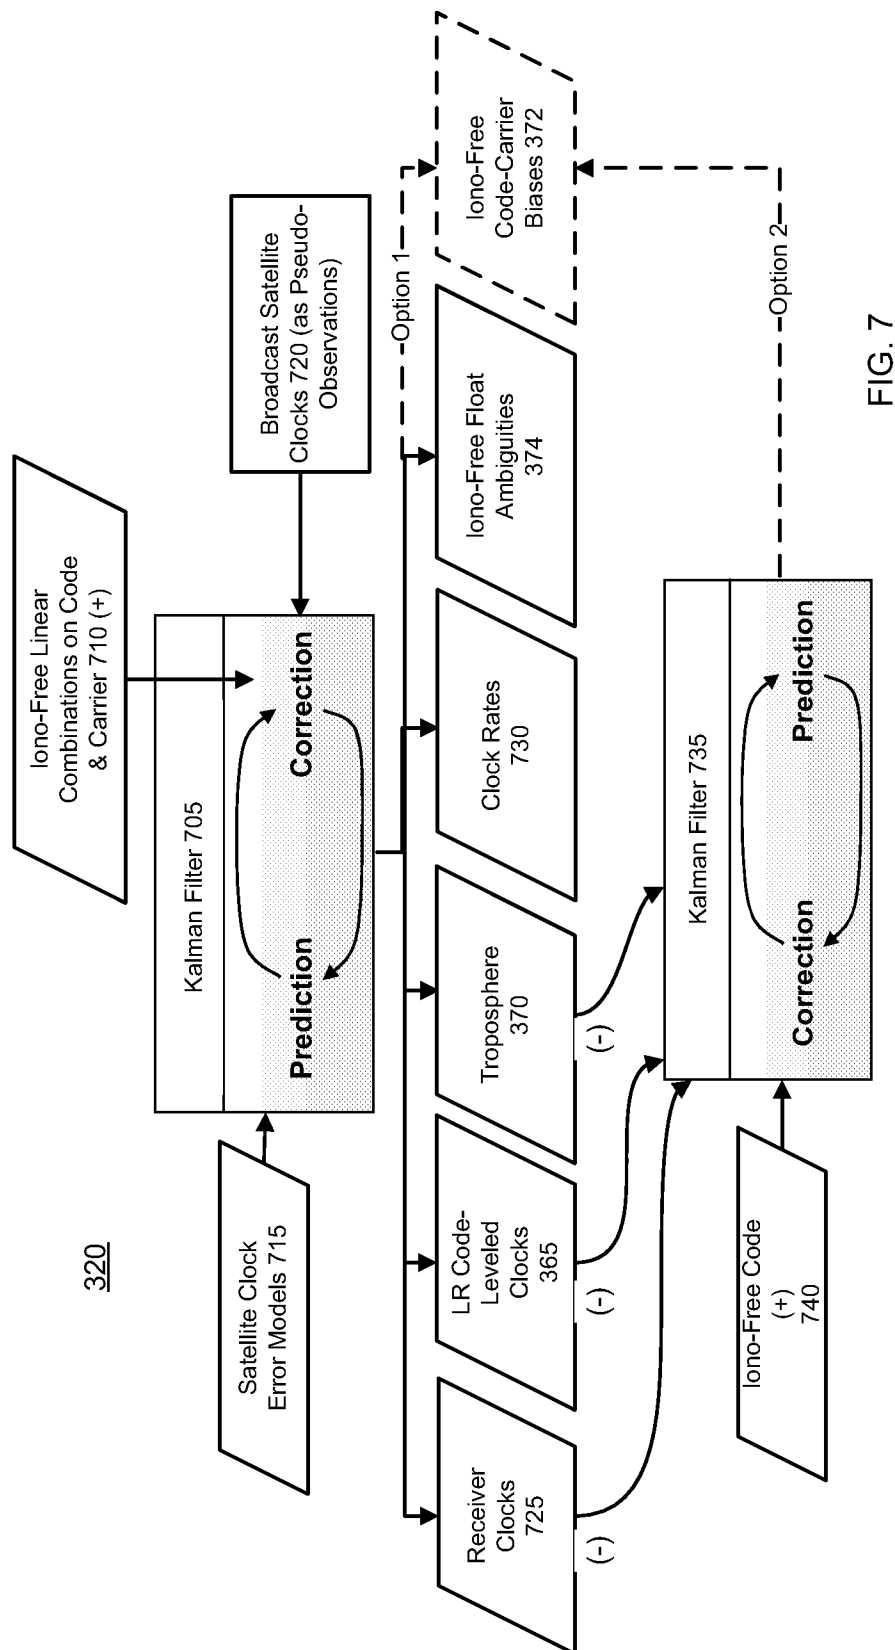


FIG. 7

Appendix A

FIG. 8 Deleted
FIG. 9 Deleted
FIG. 10 Deleted

Appendix A

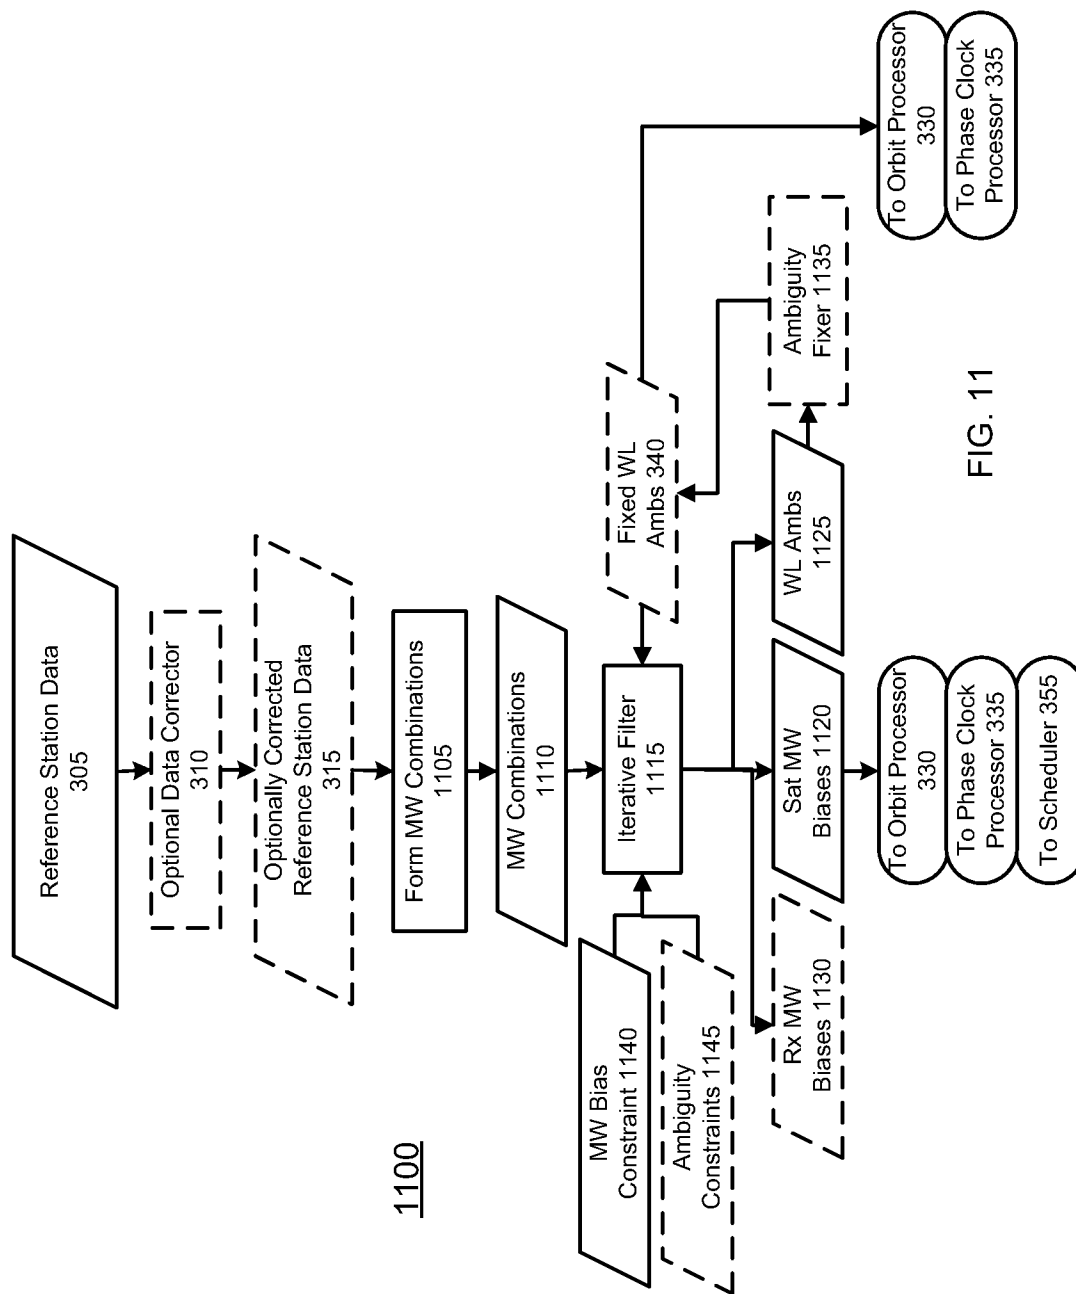


FIG. 11

Appendix A


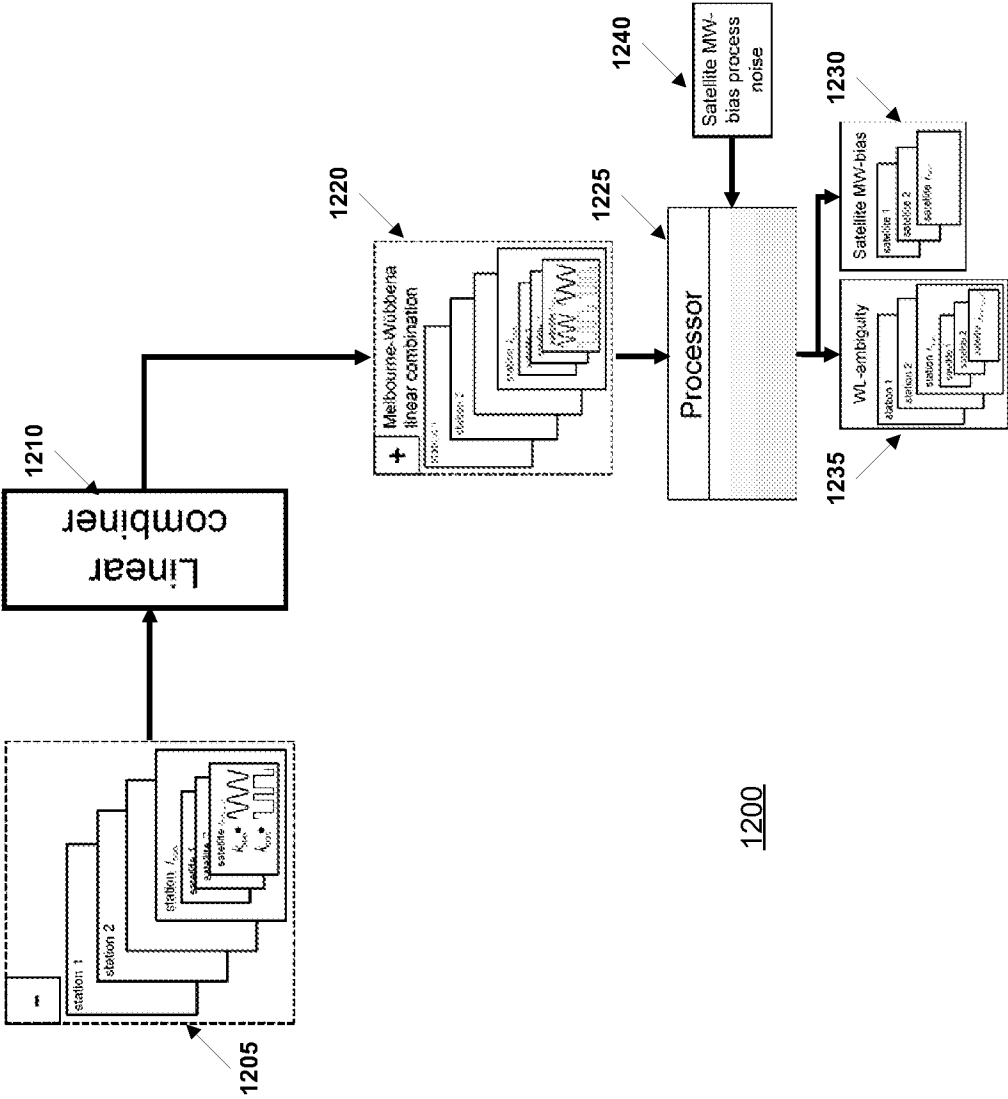


FIG. 12

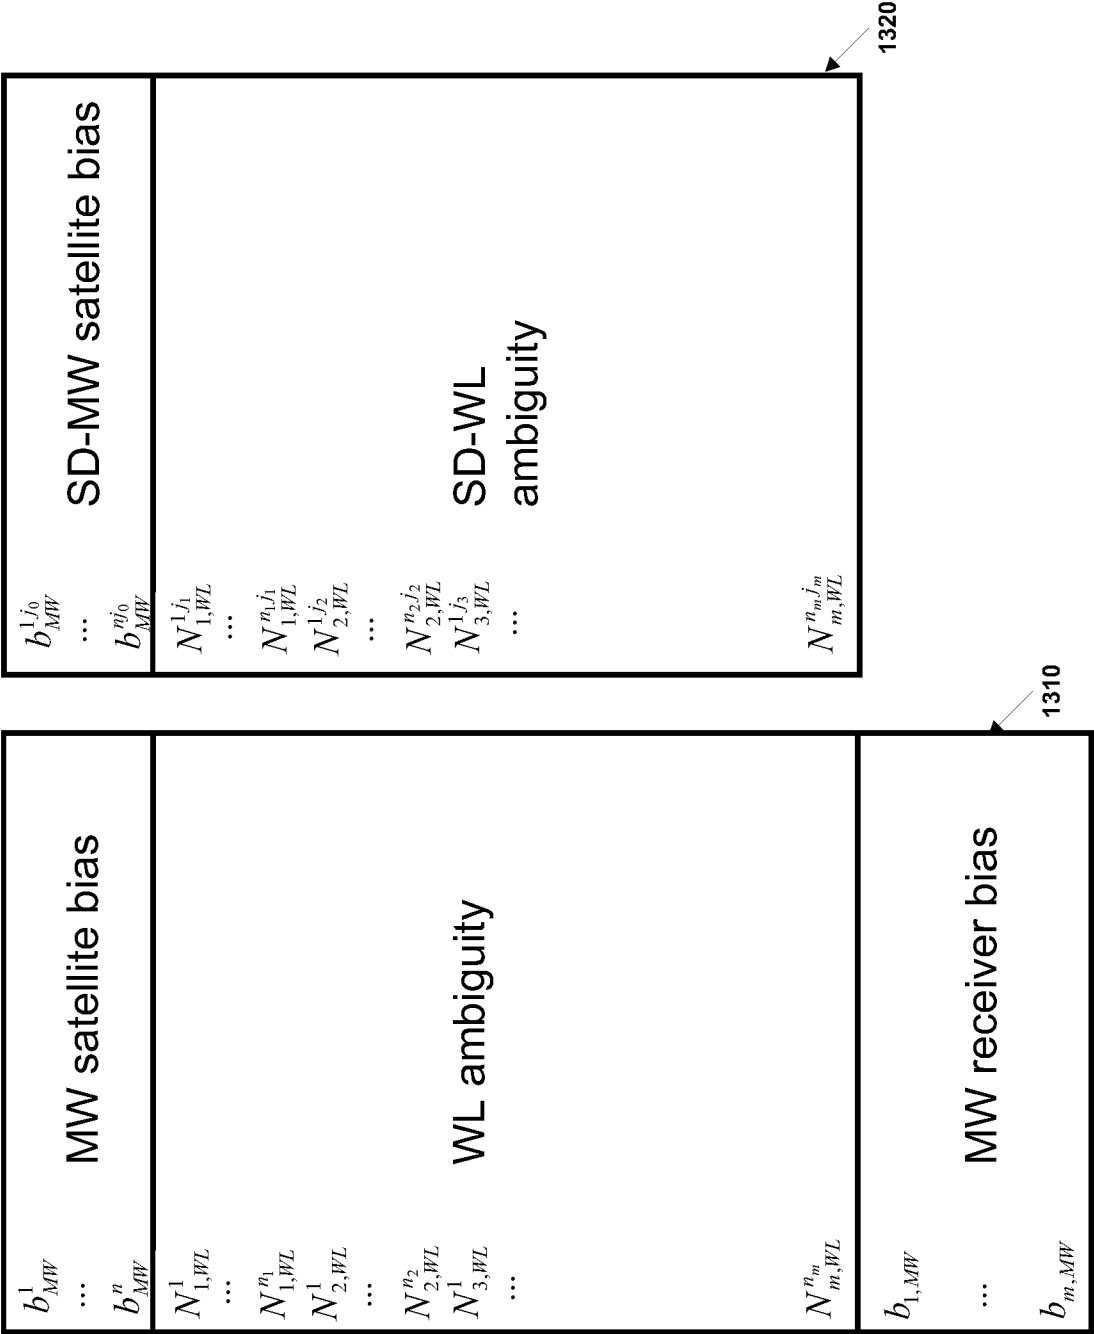

Appendix A

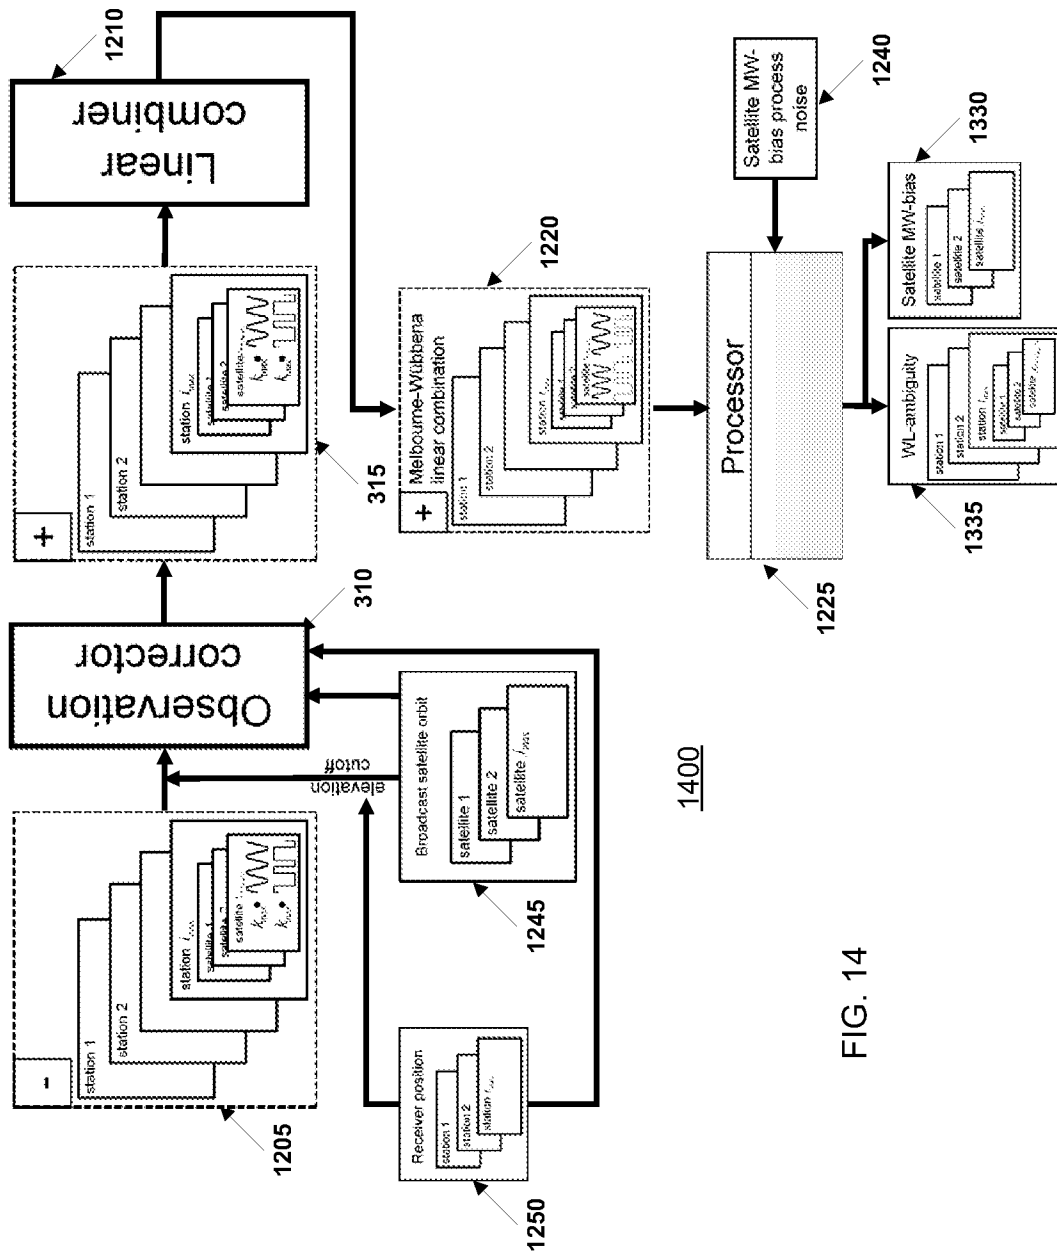


FIG. 14

Appendix A

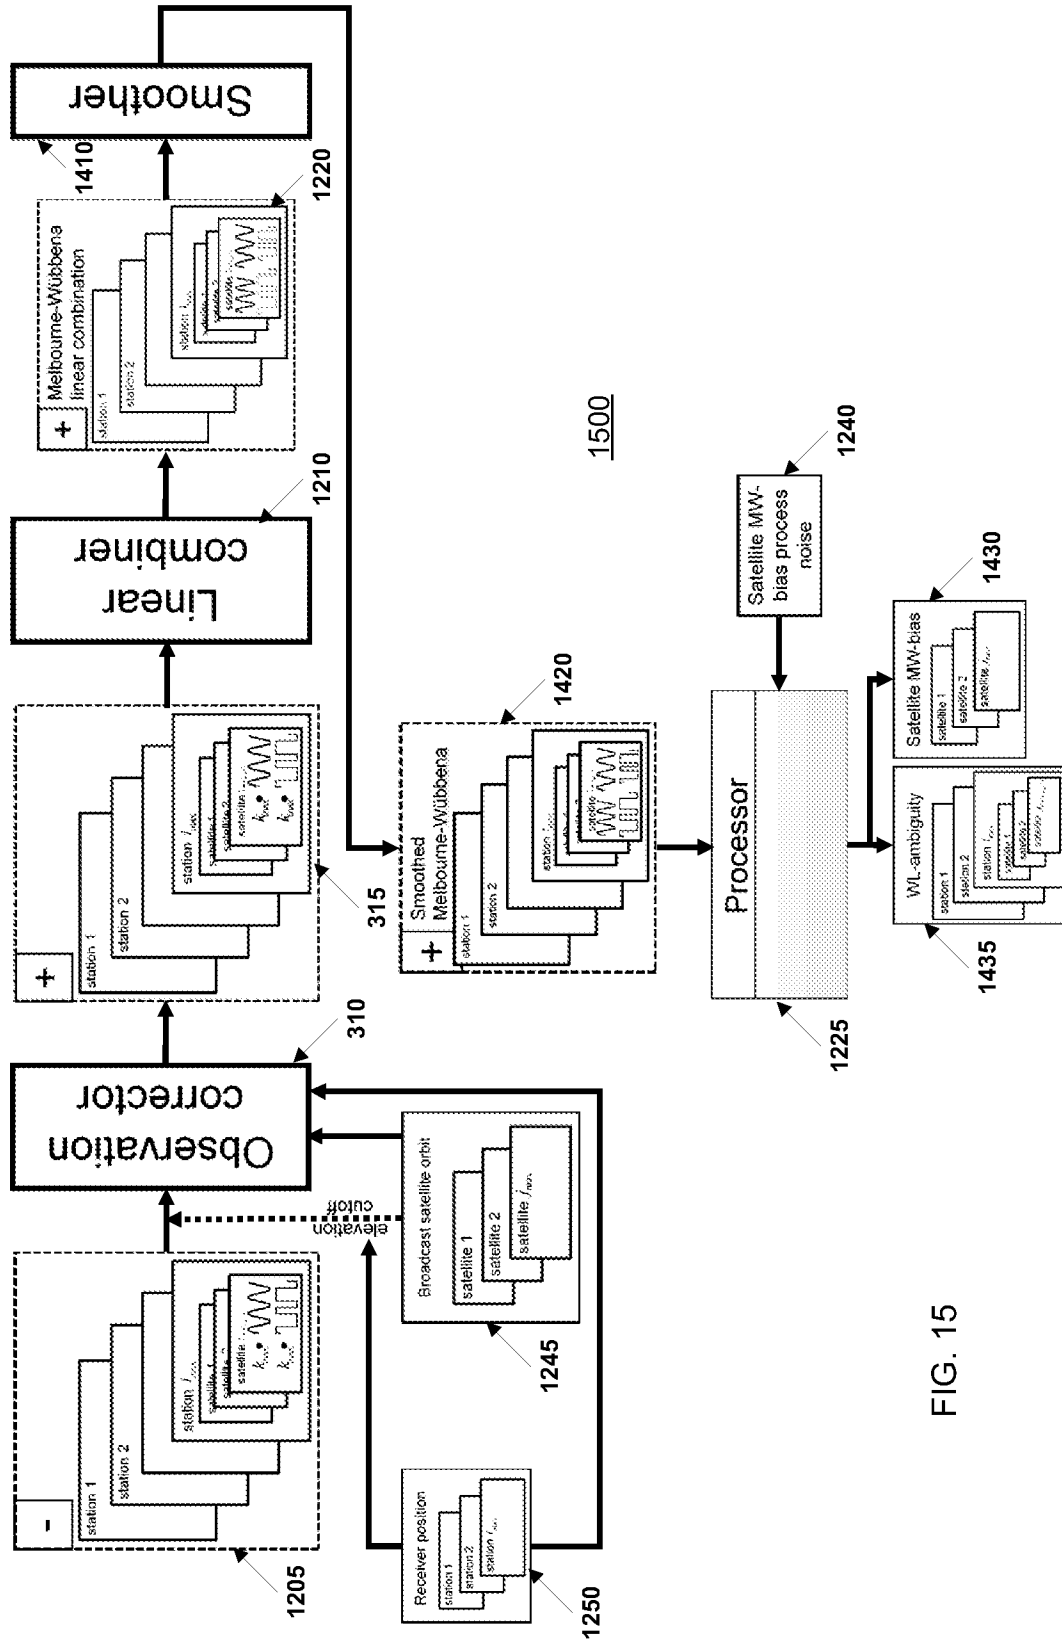


FIG. 15

Appendix A

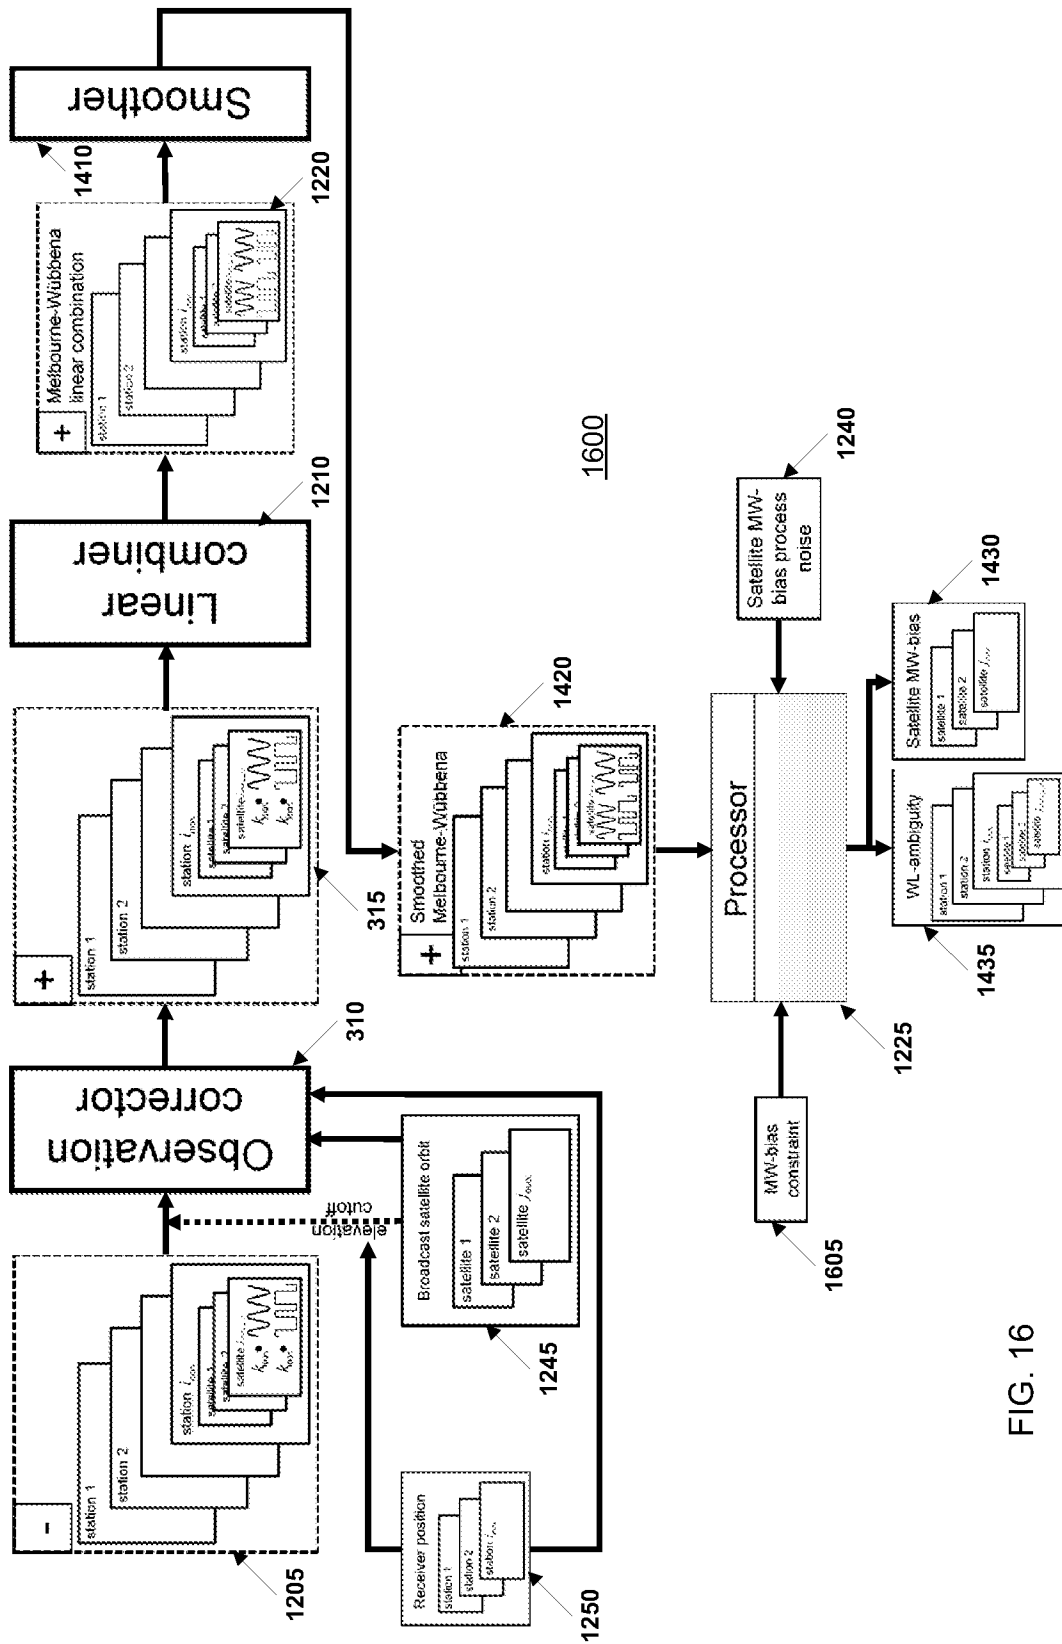


FIG. 16

Appendix A

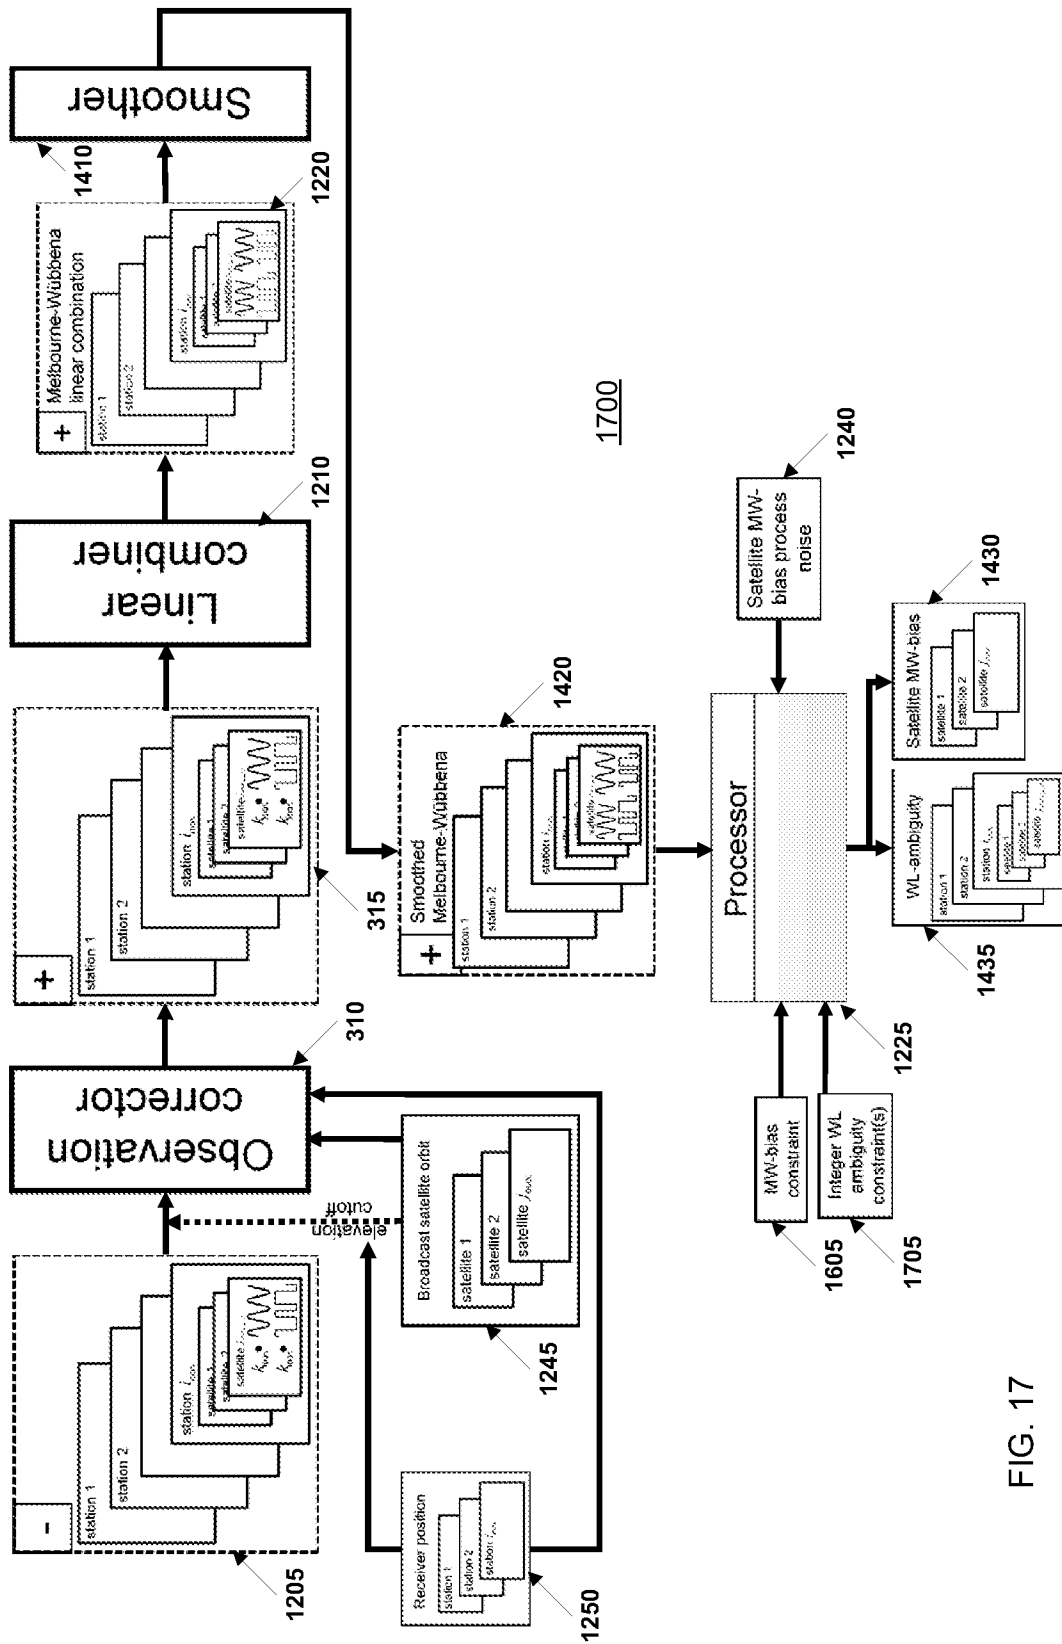


FIG. 17

Appendix A

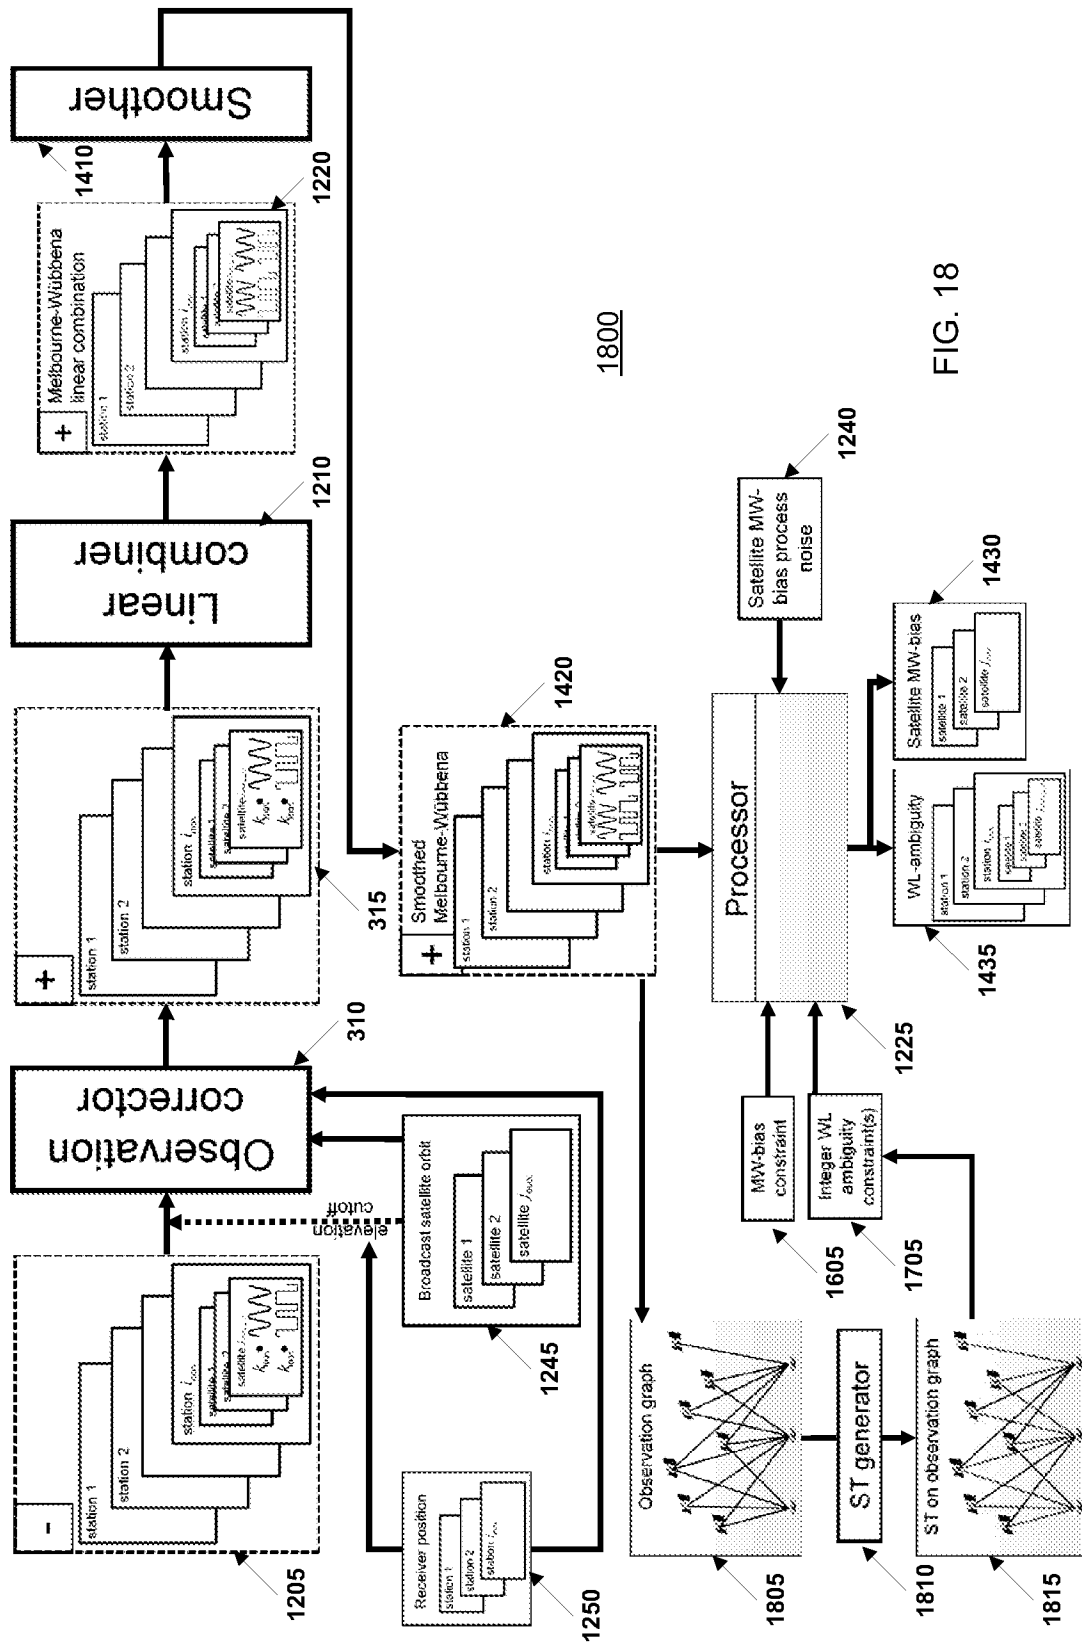
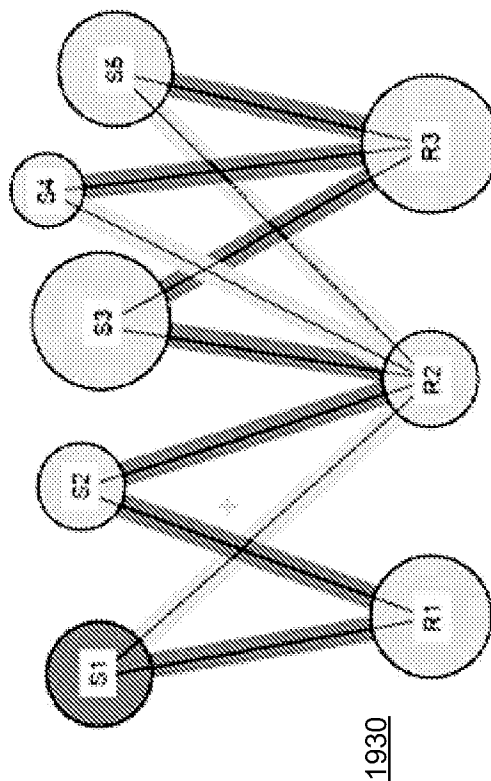
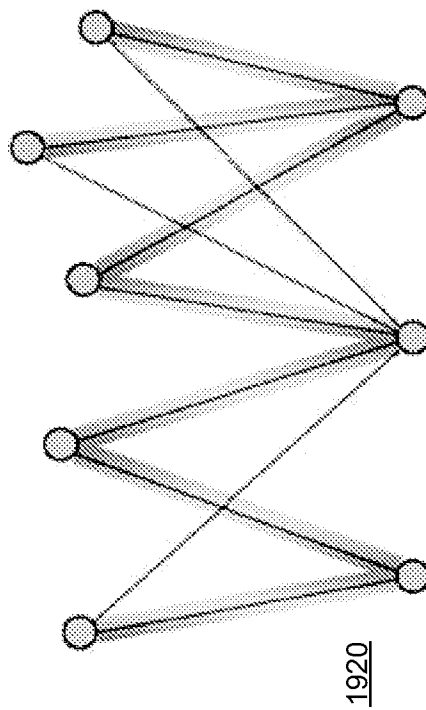
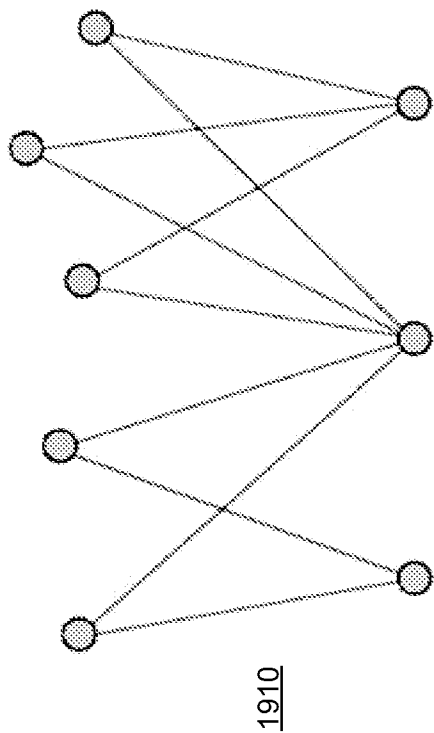
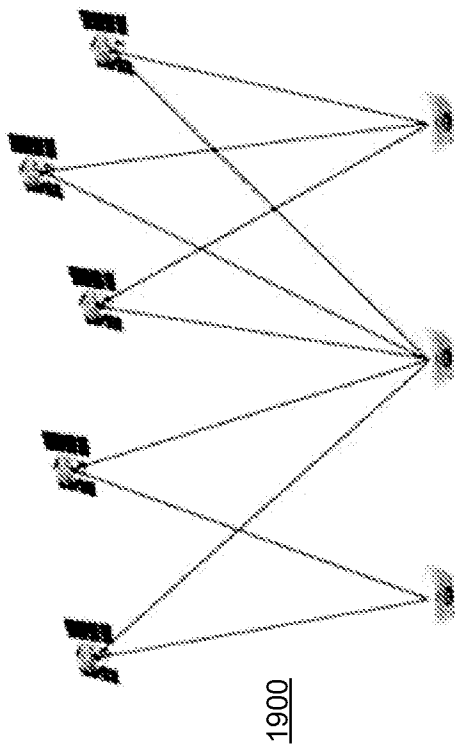


FIG. 18

Appendix A



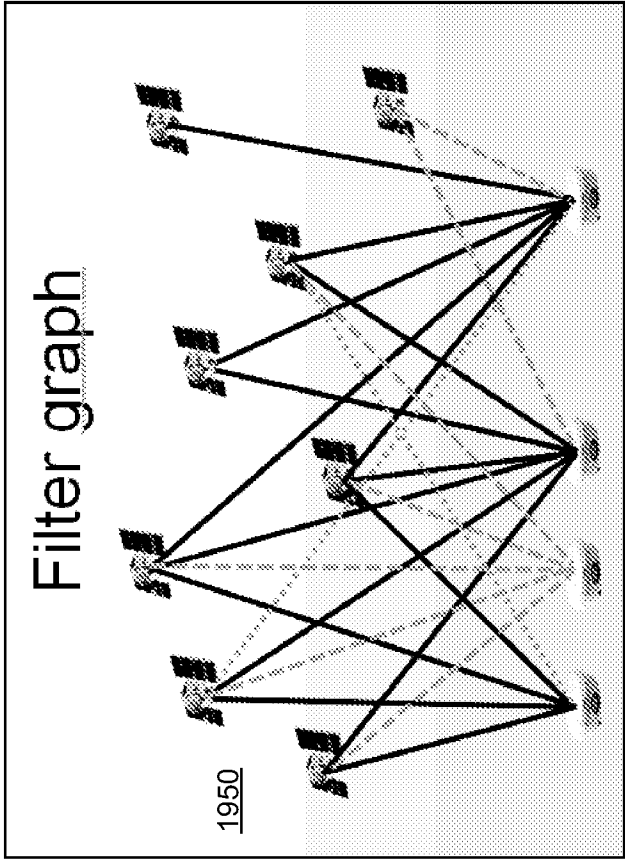


FIG. 19F

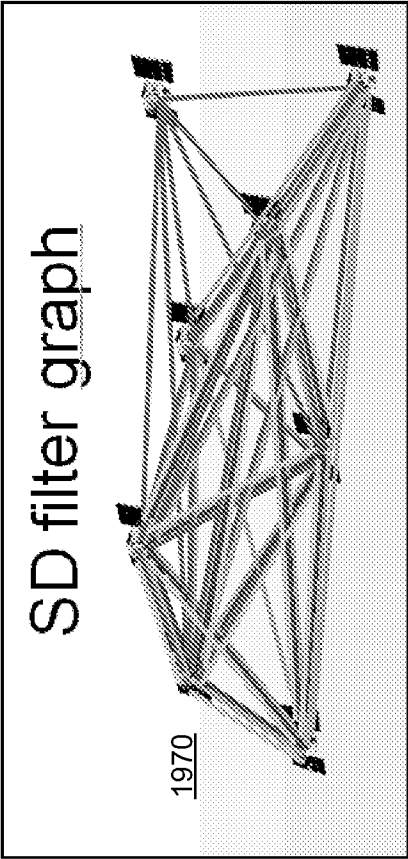


FIG. 19H

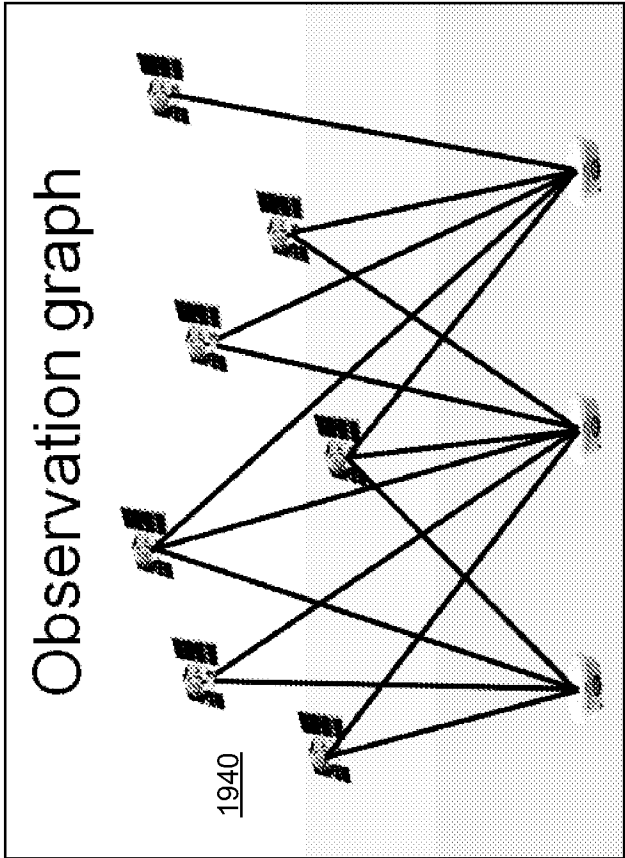


FIG. 19E

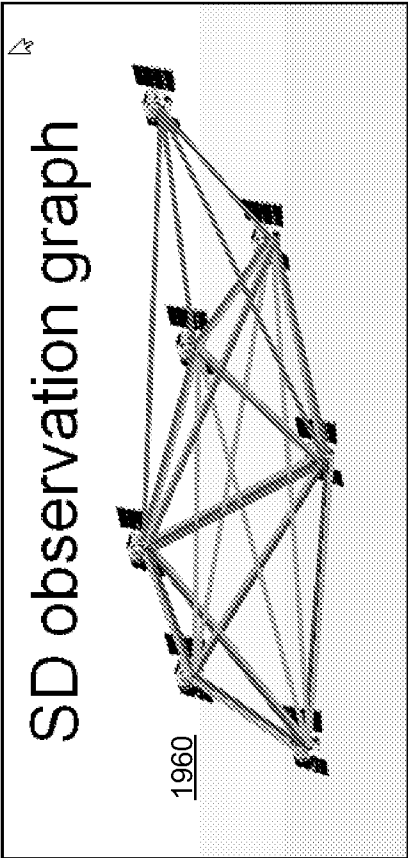


FIG. 19G

Appendix A

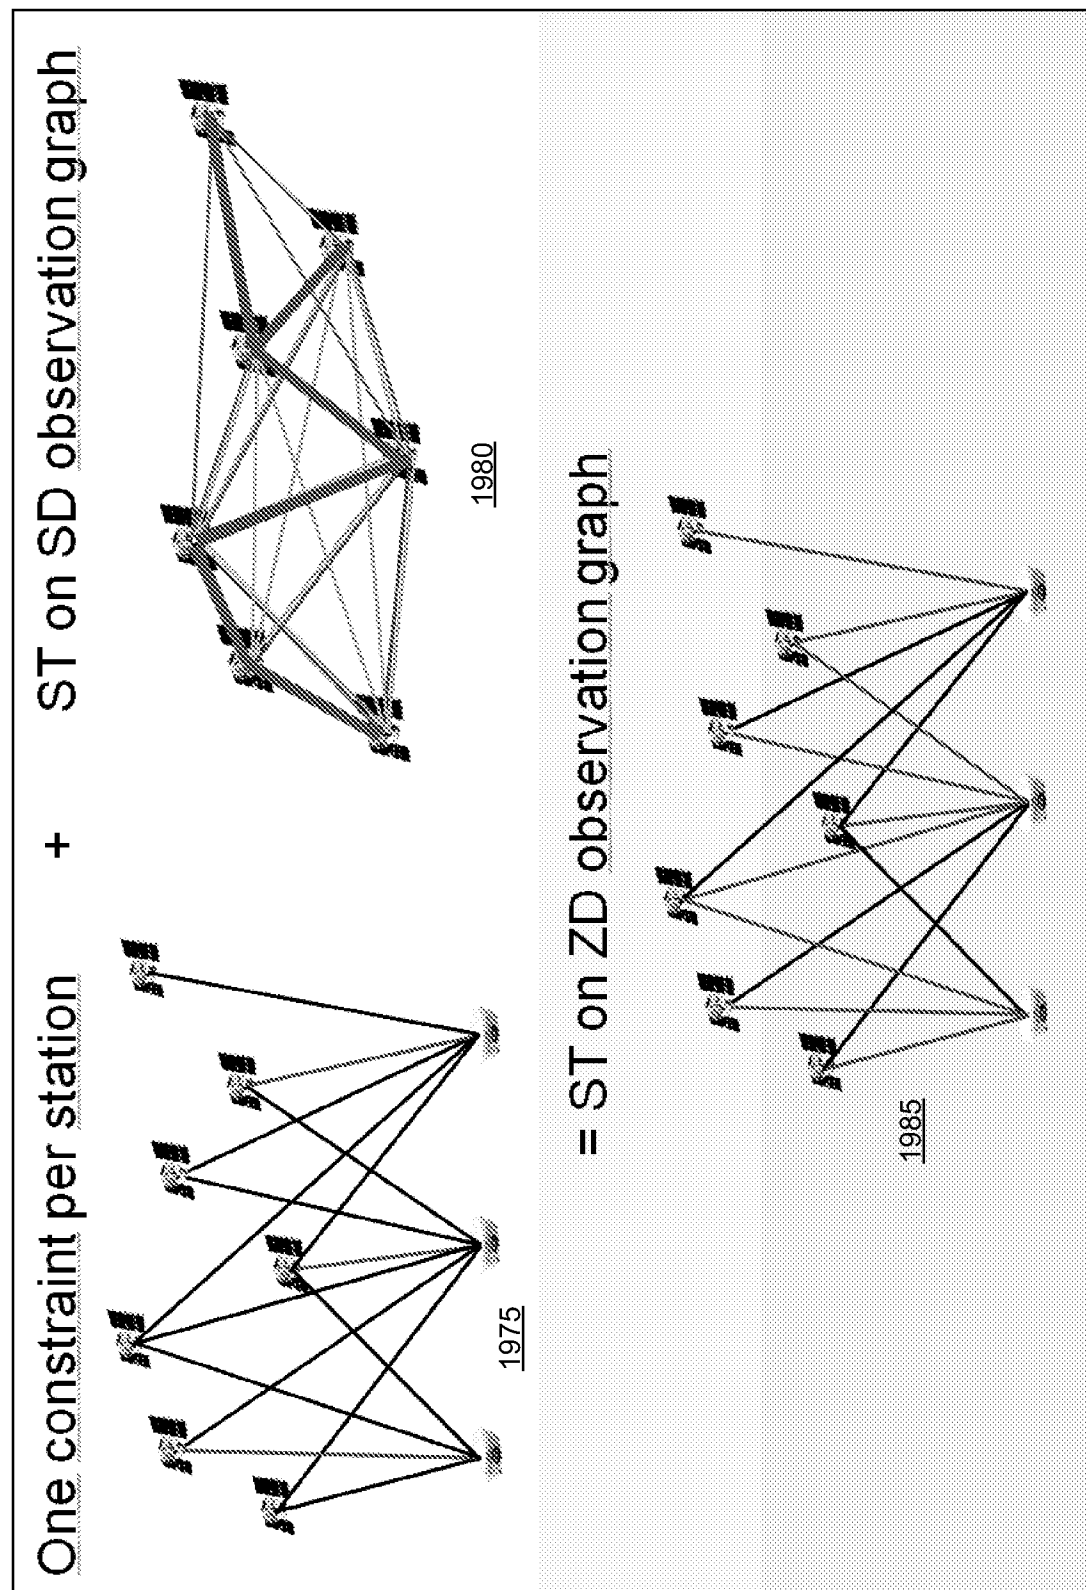


FIG. 19I






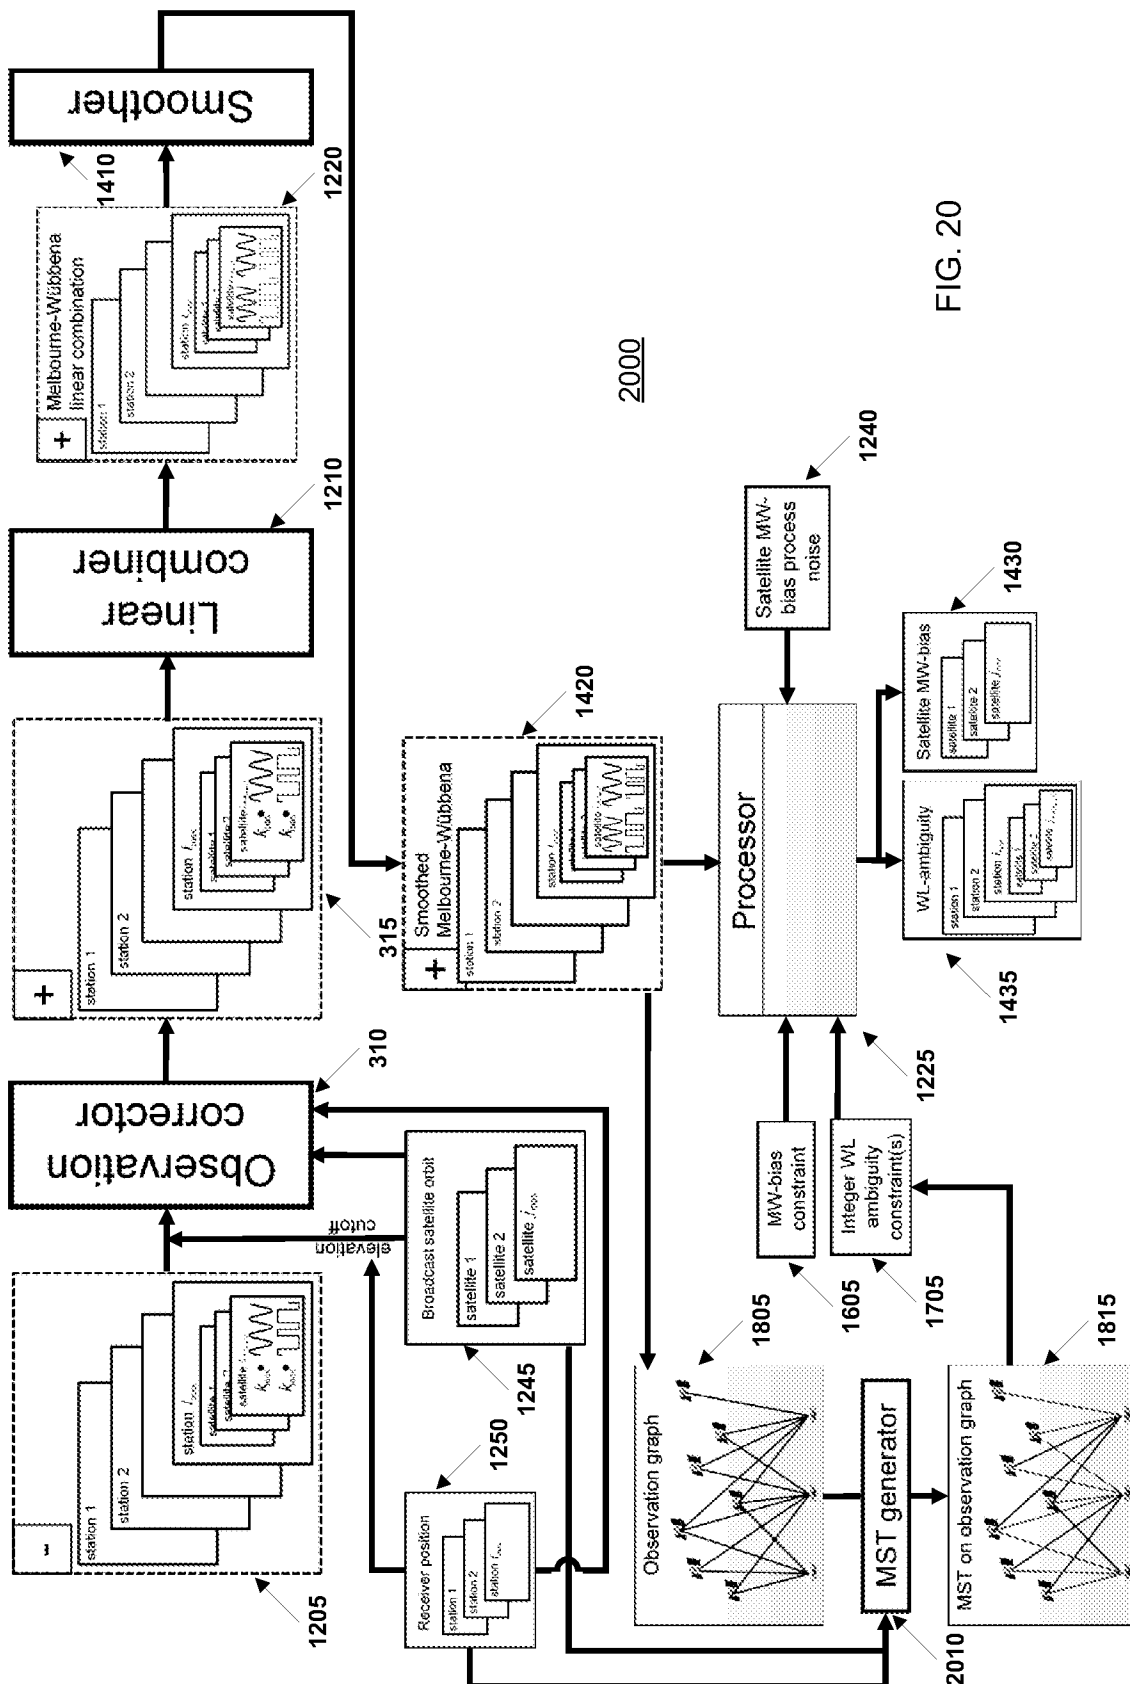



FIG. 20

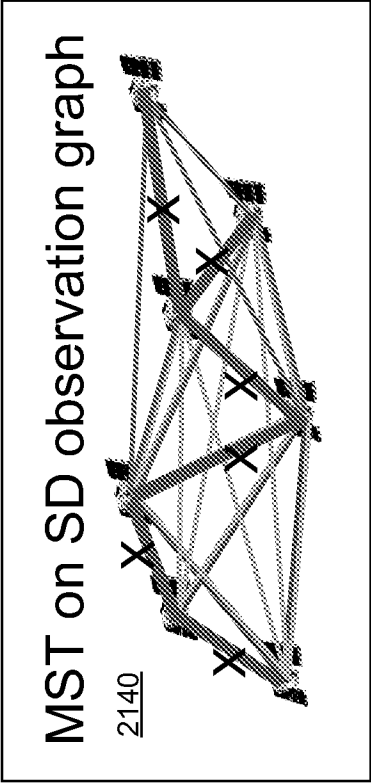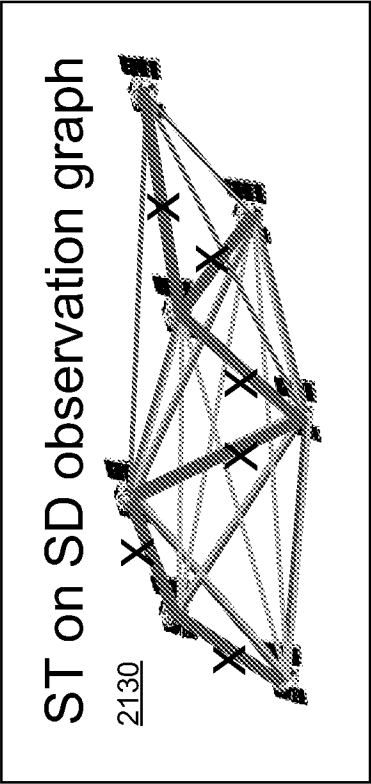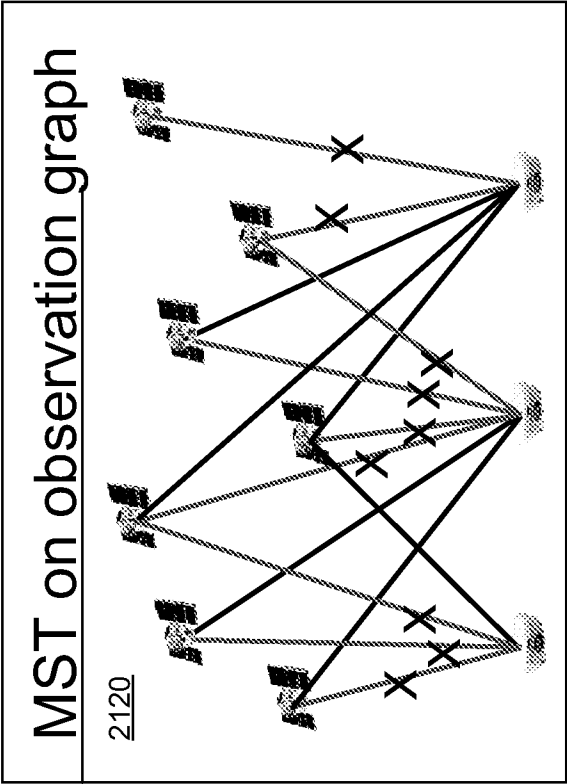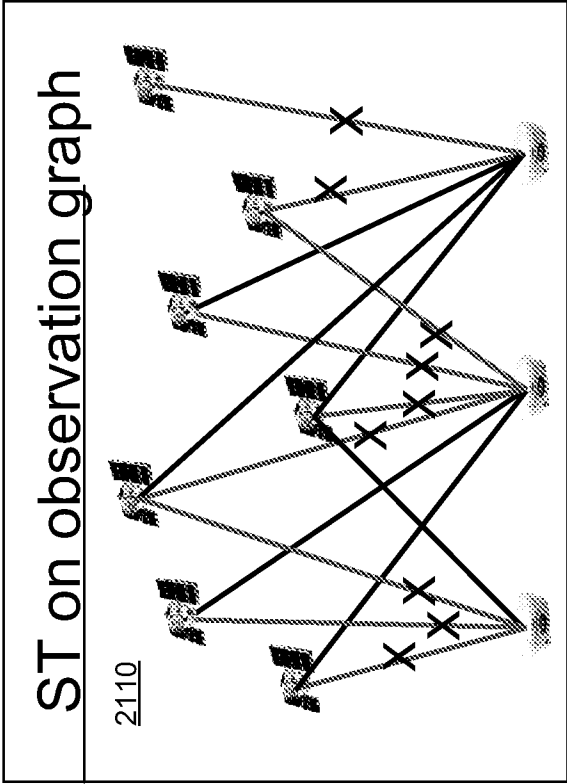


Appendix A

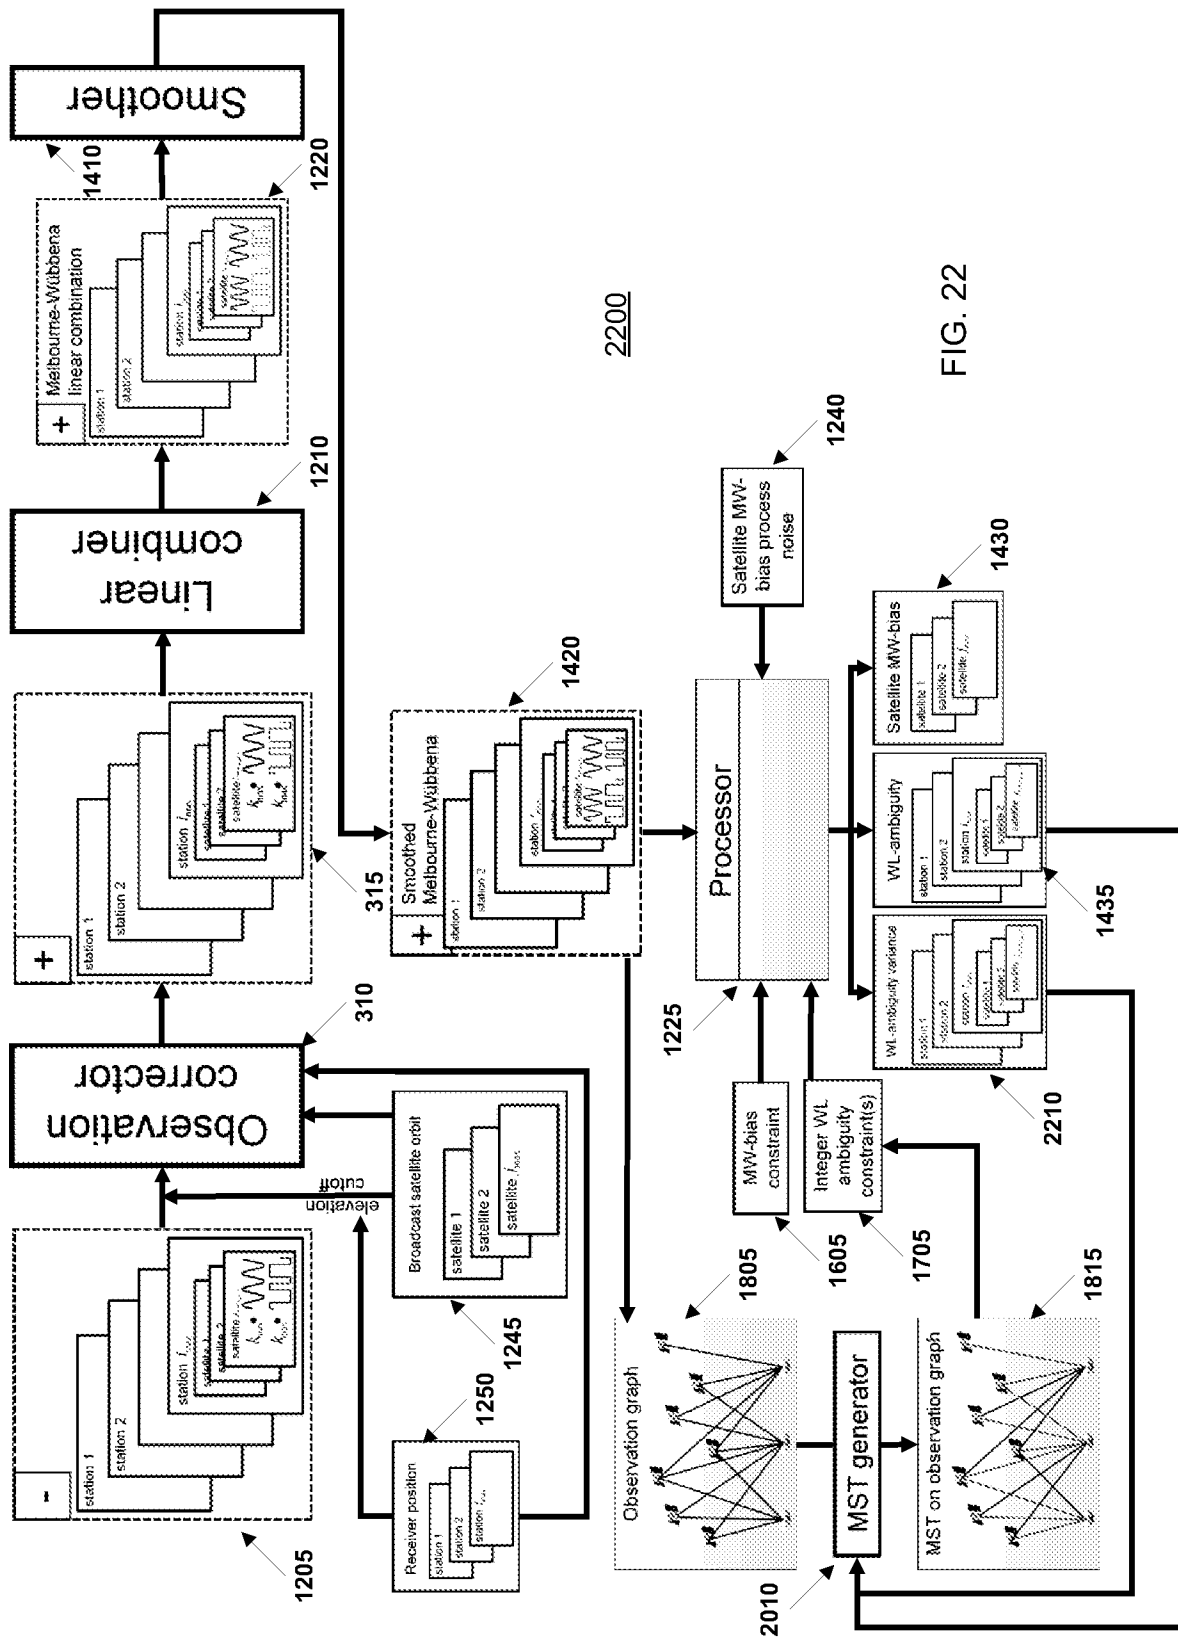


Appendix A

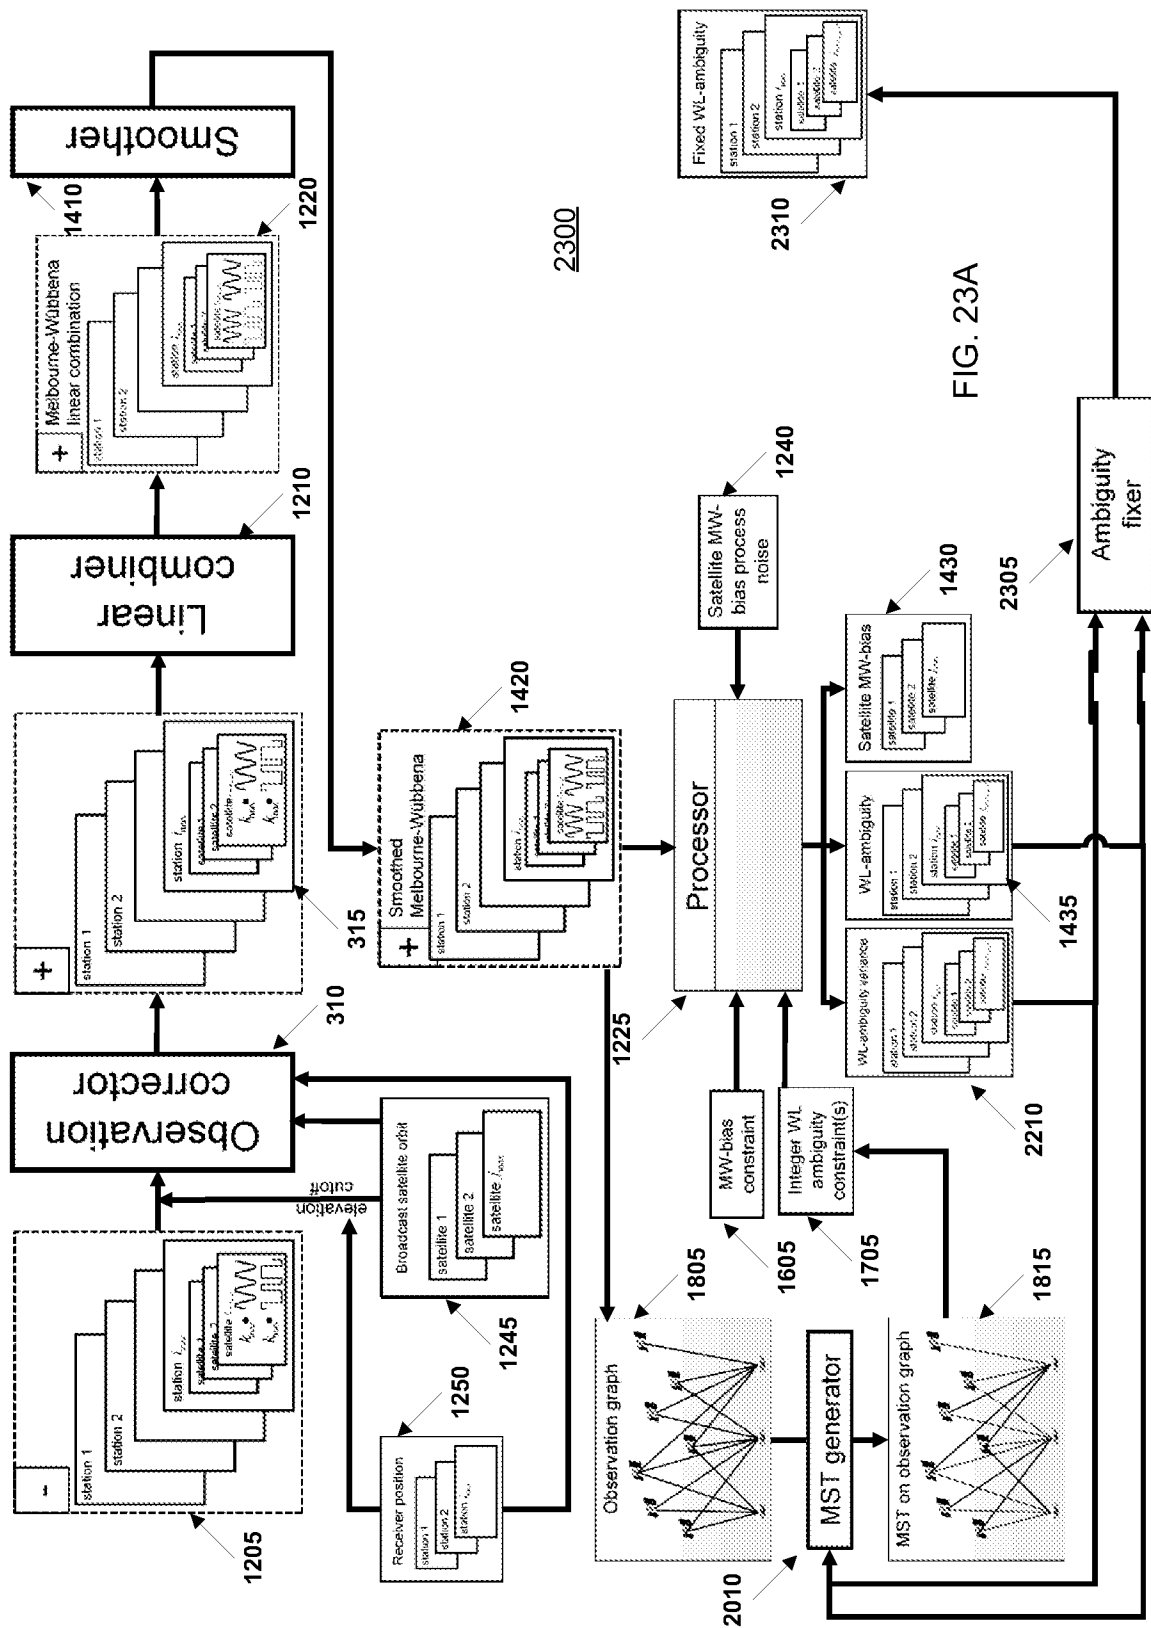

Appendix A

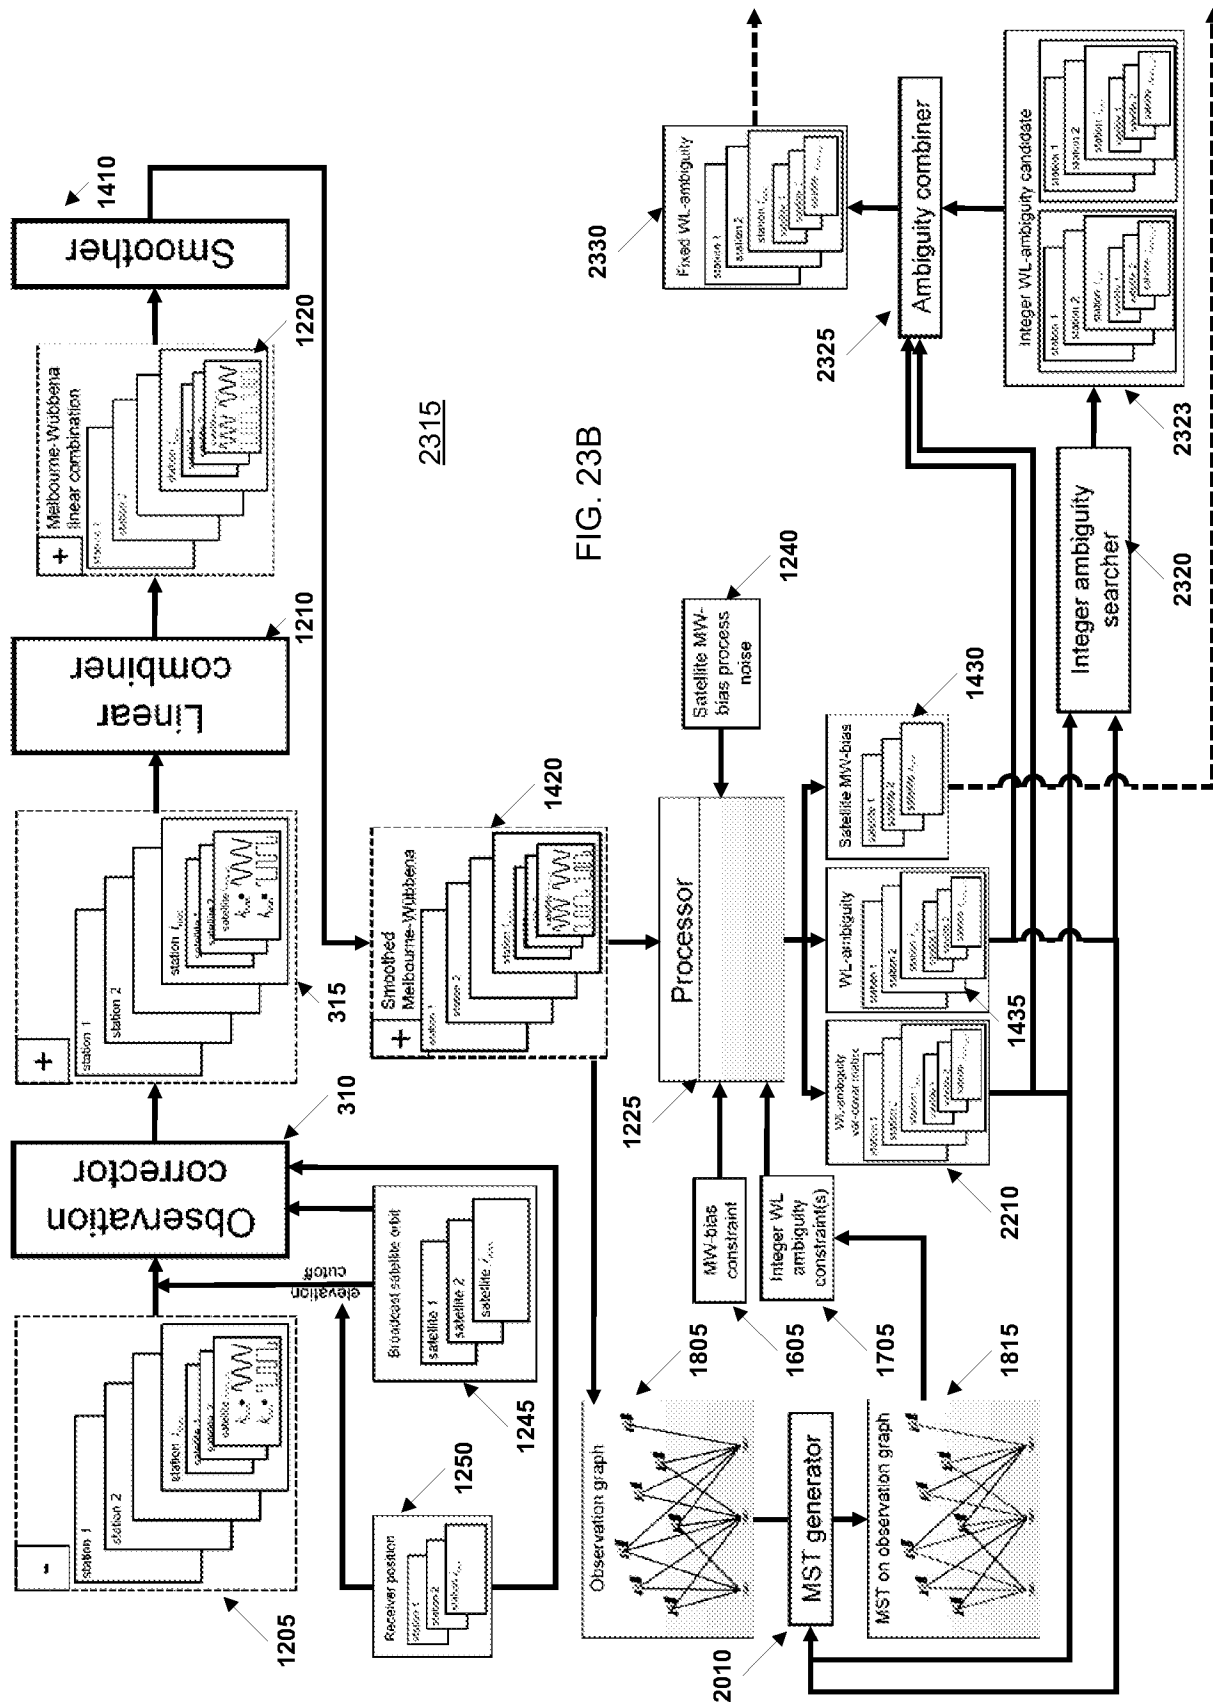

Appendix A

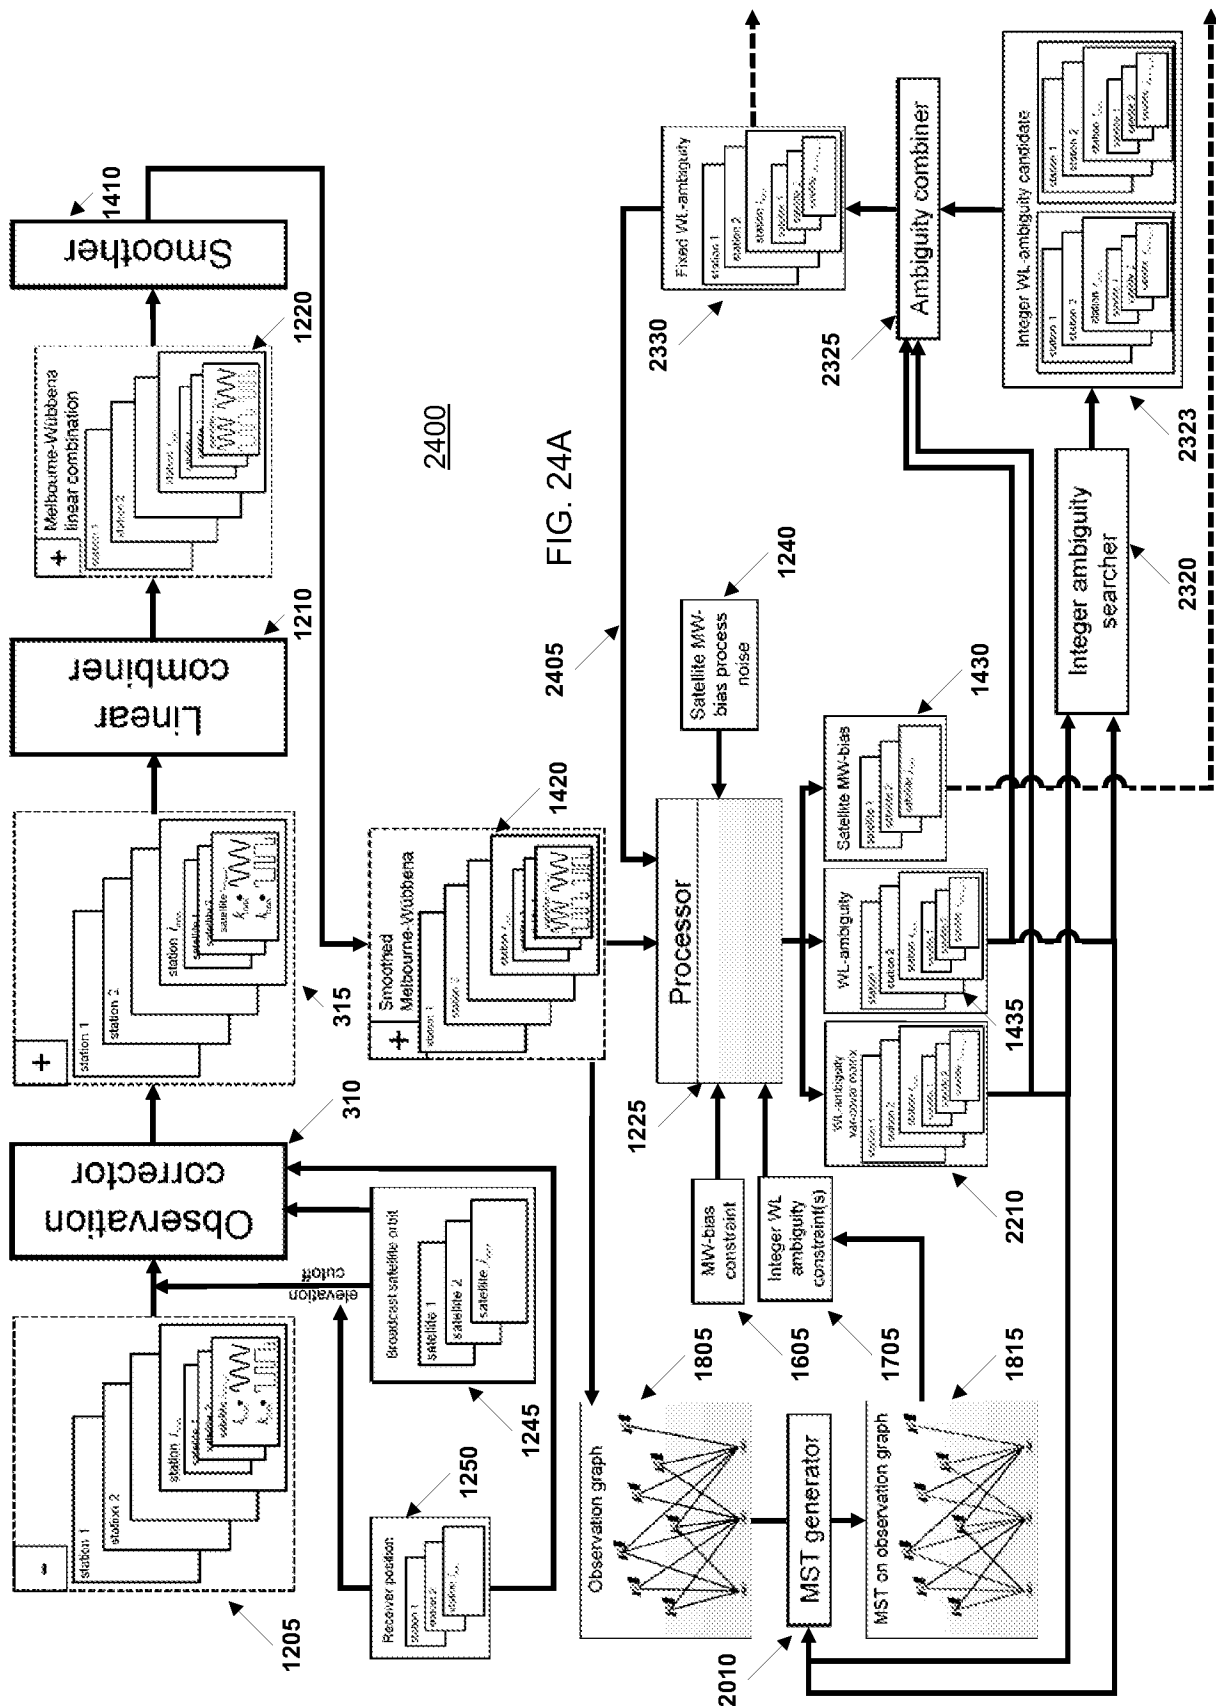

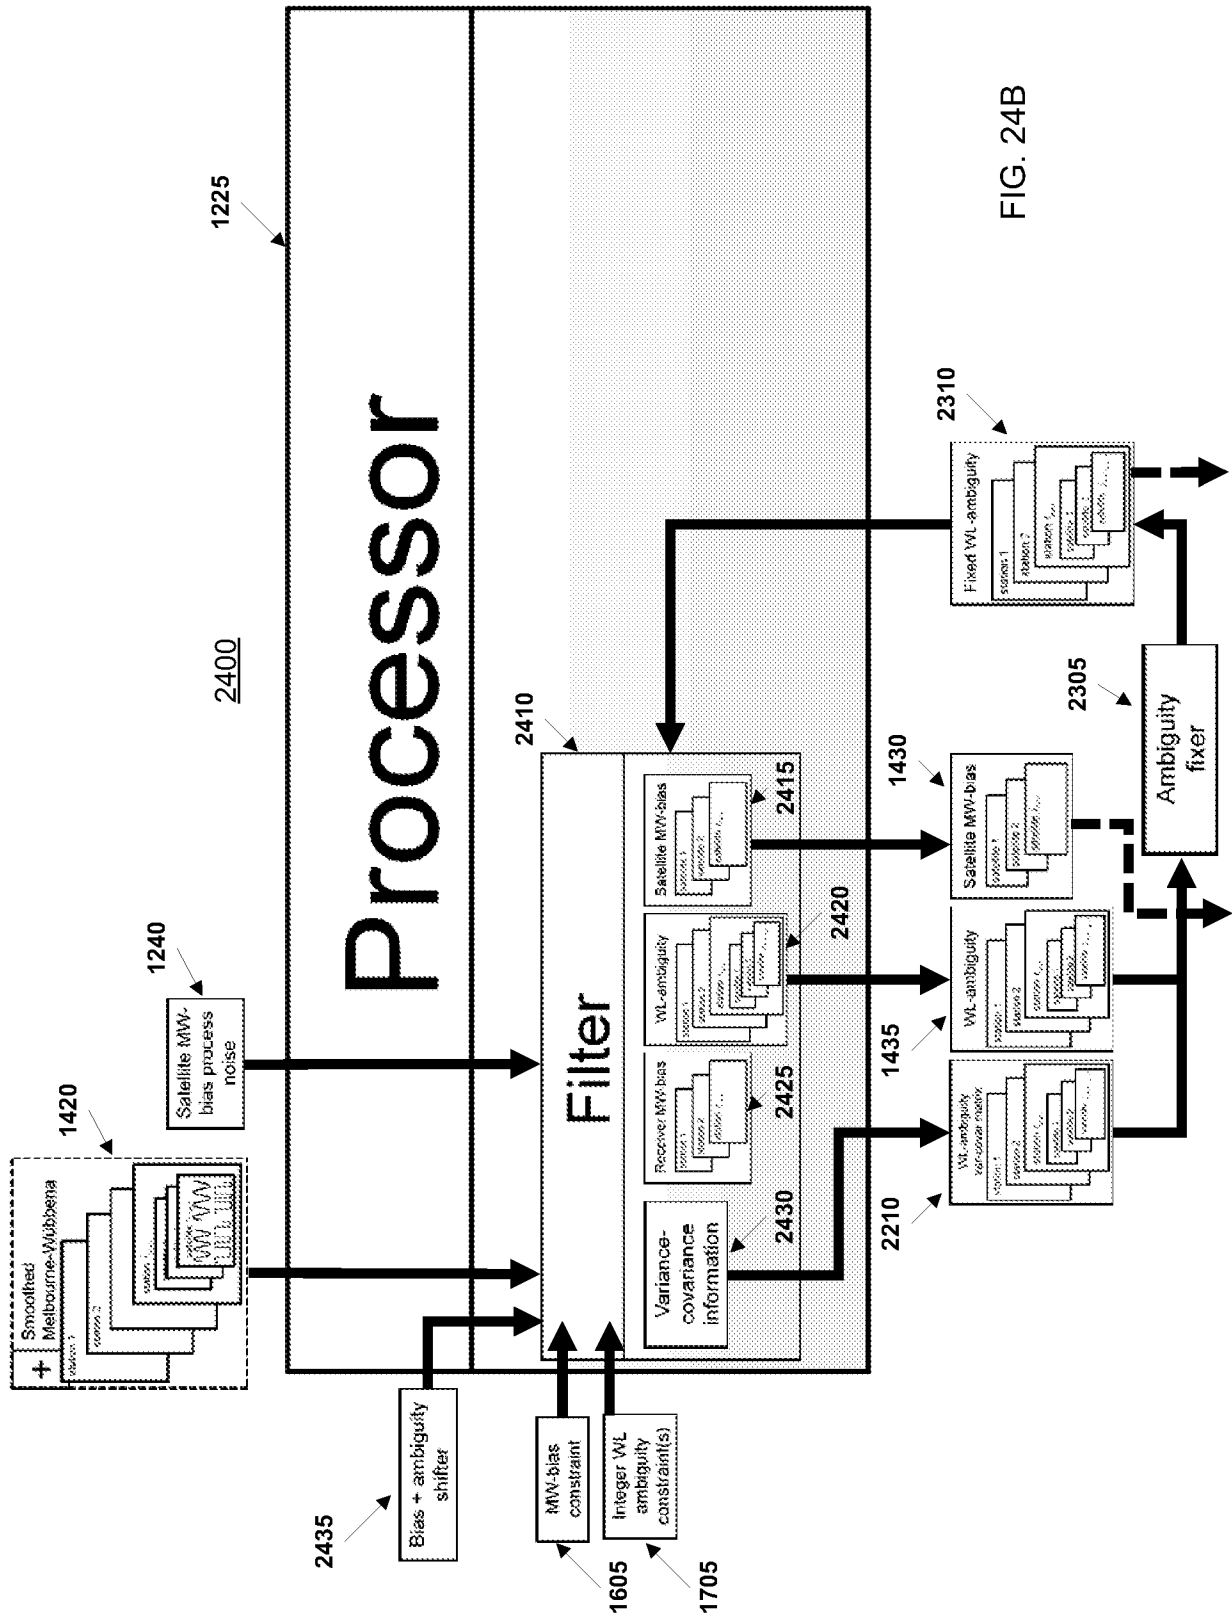


FIG. 24B

Appendix A

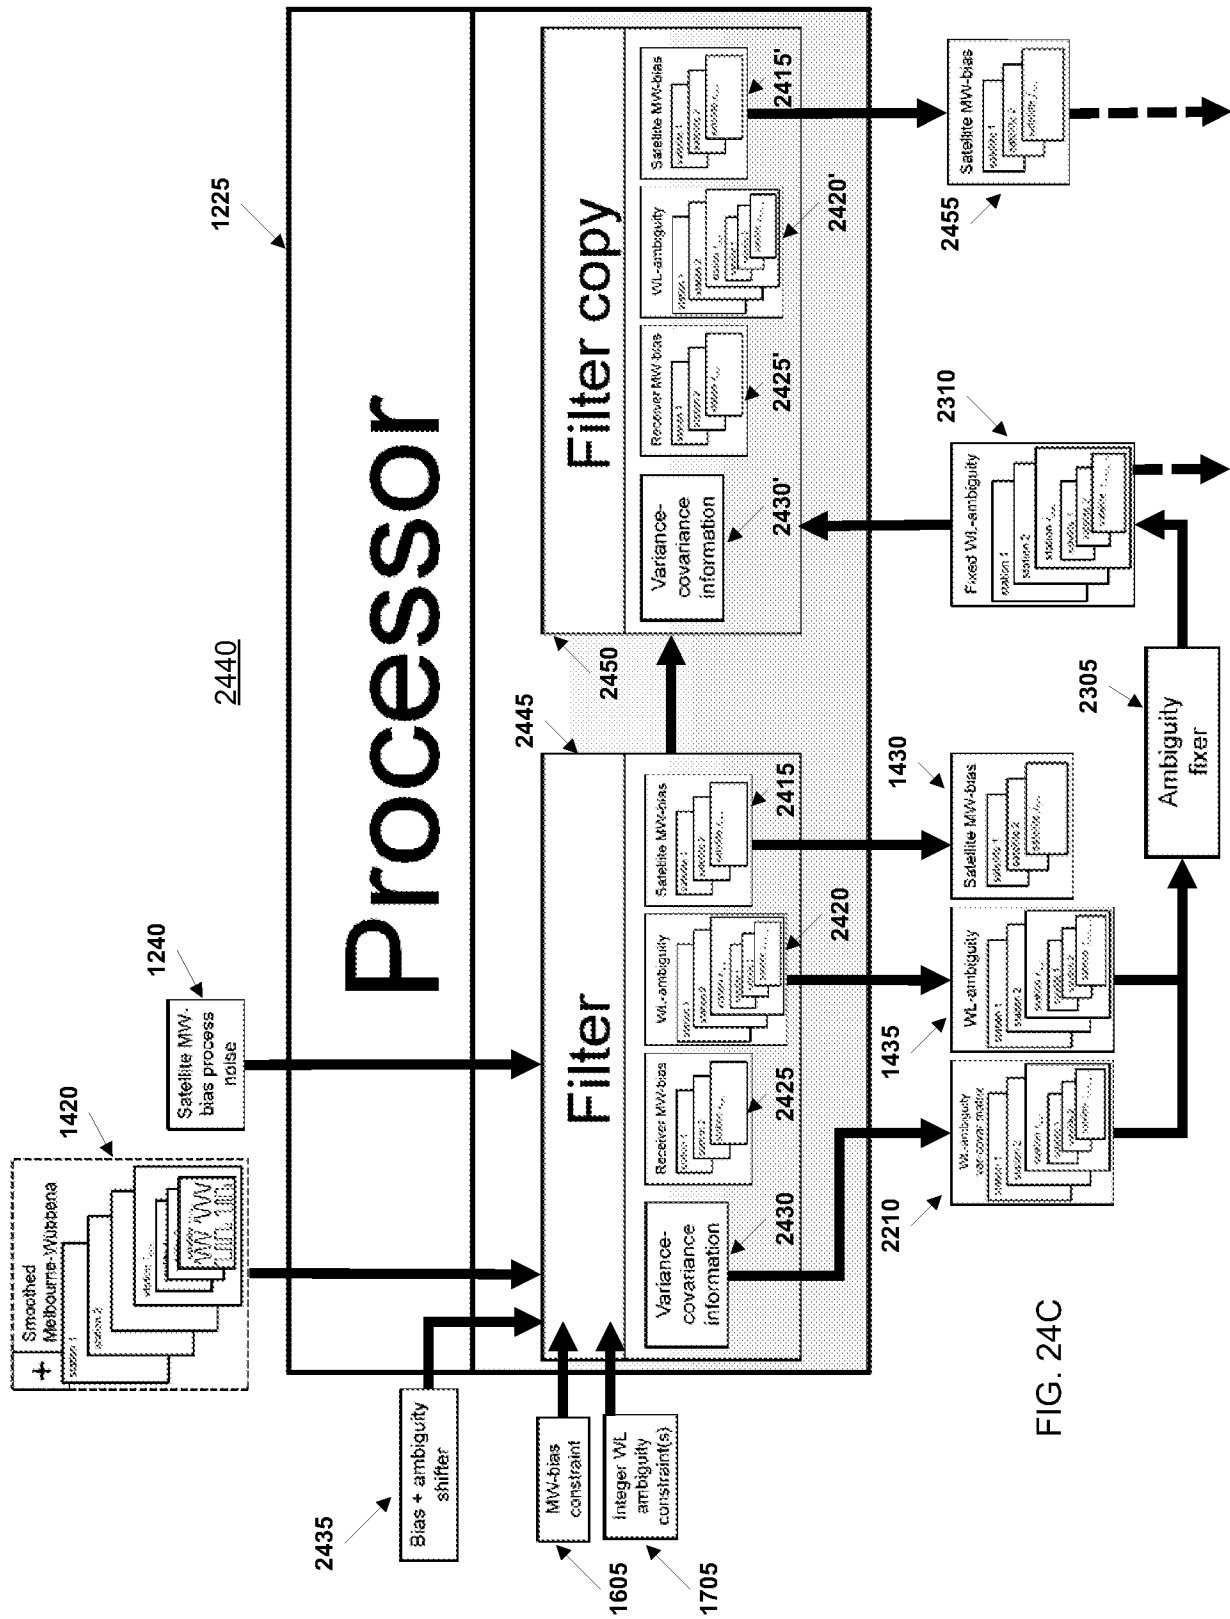


FIG. 24C

Appendix A

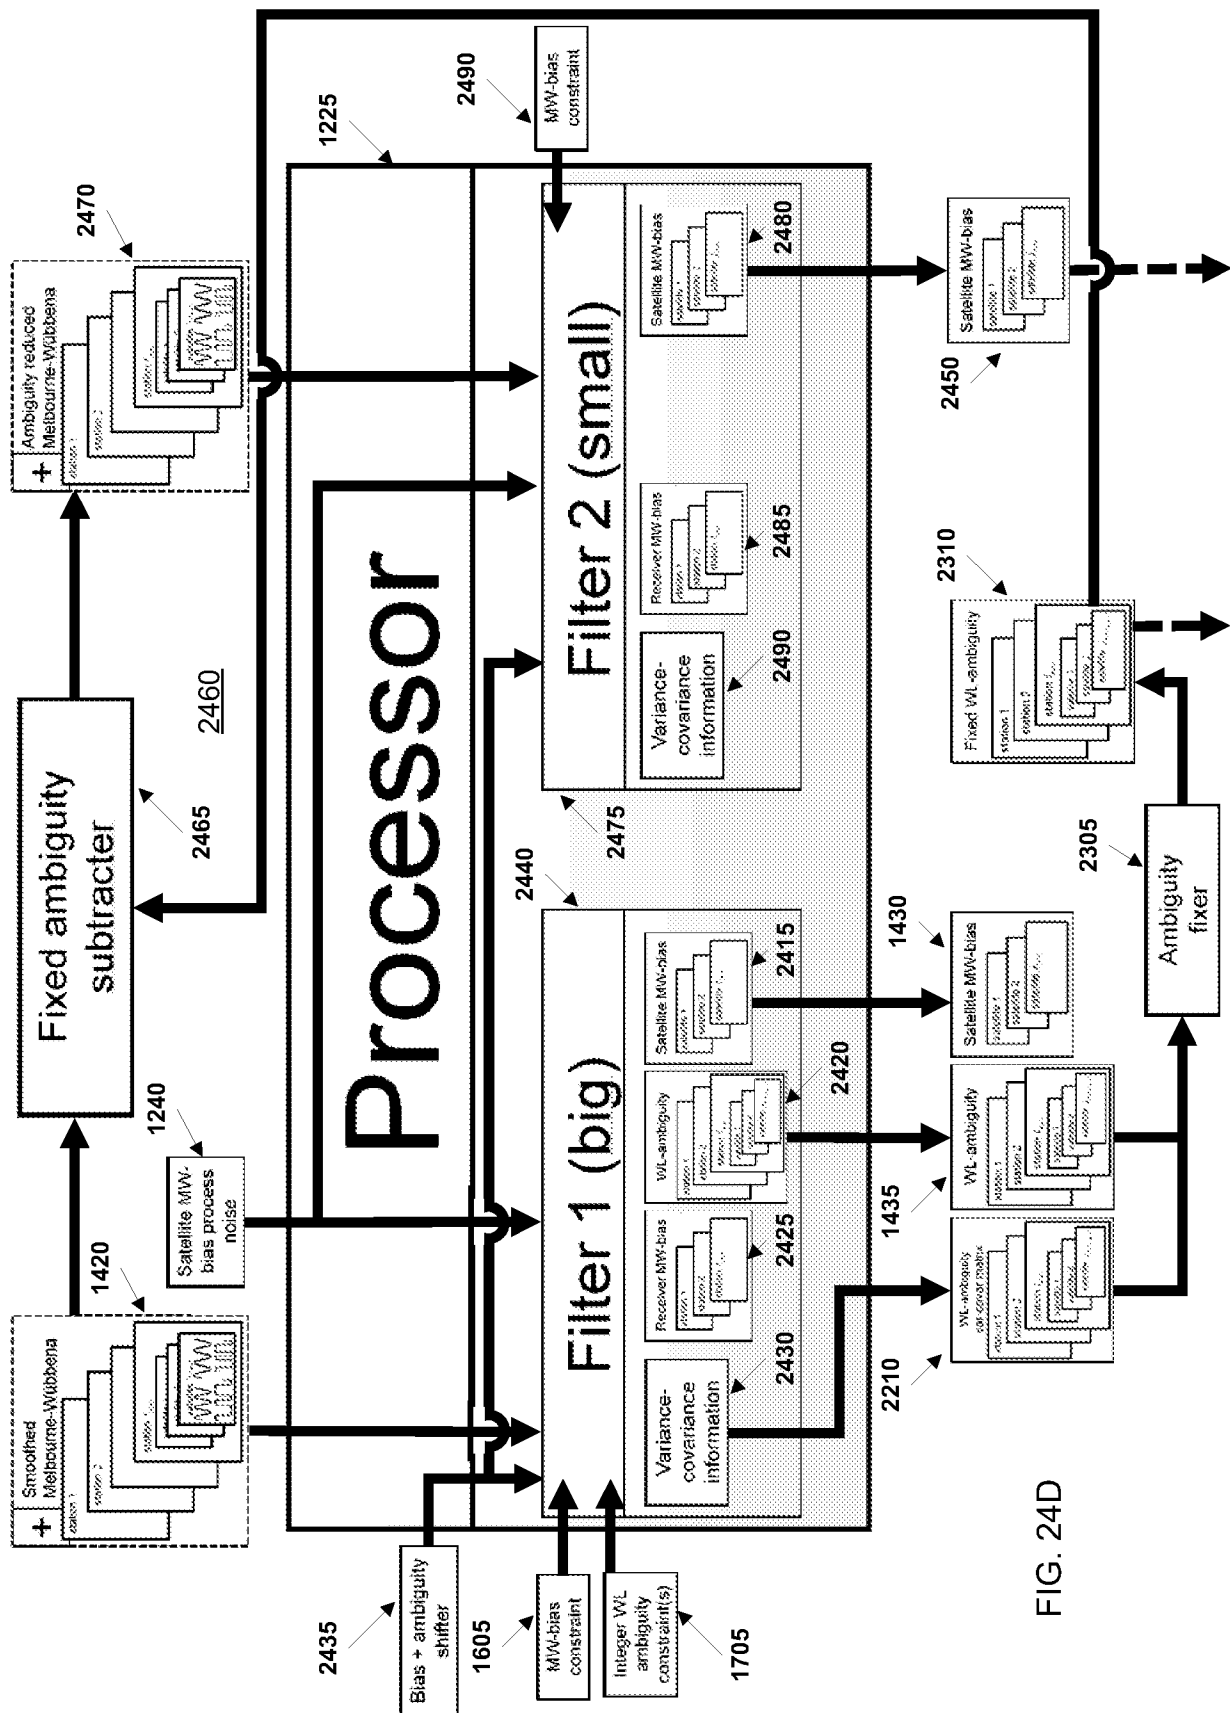


FIG. 24D

Appendix A

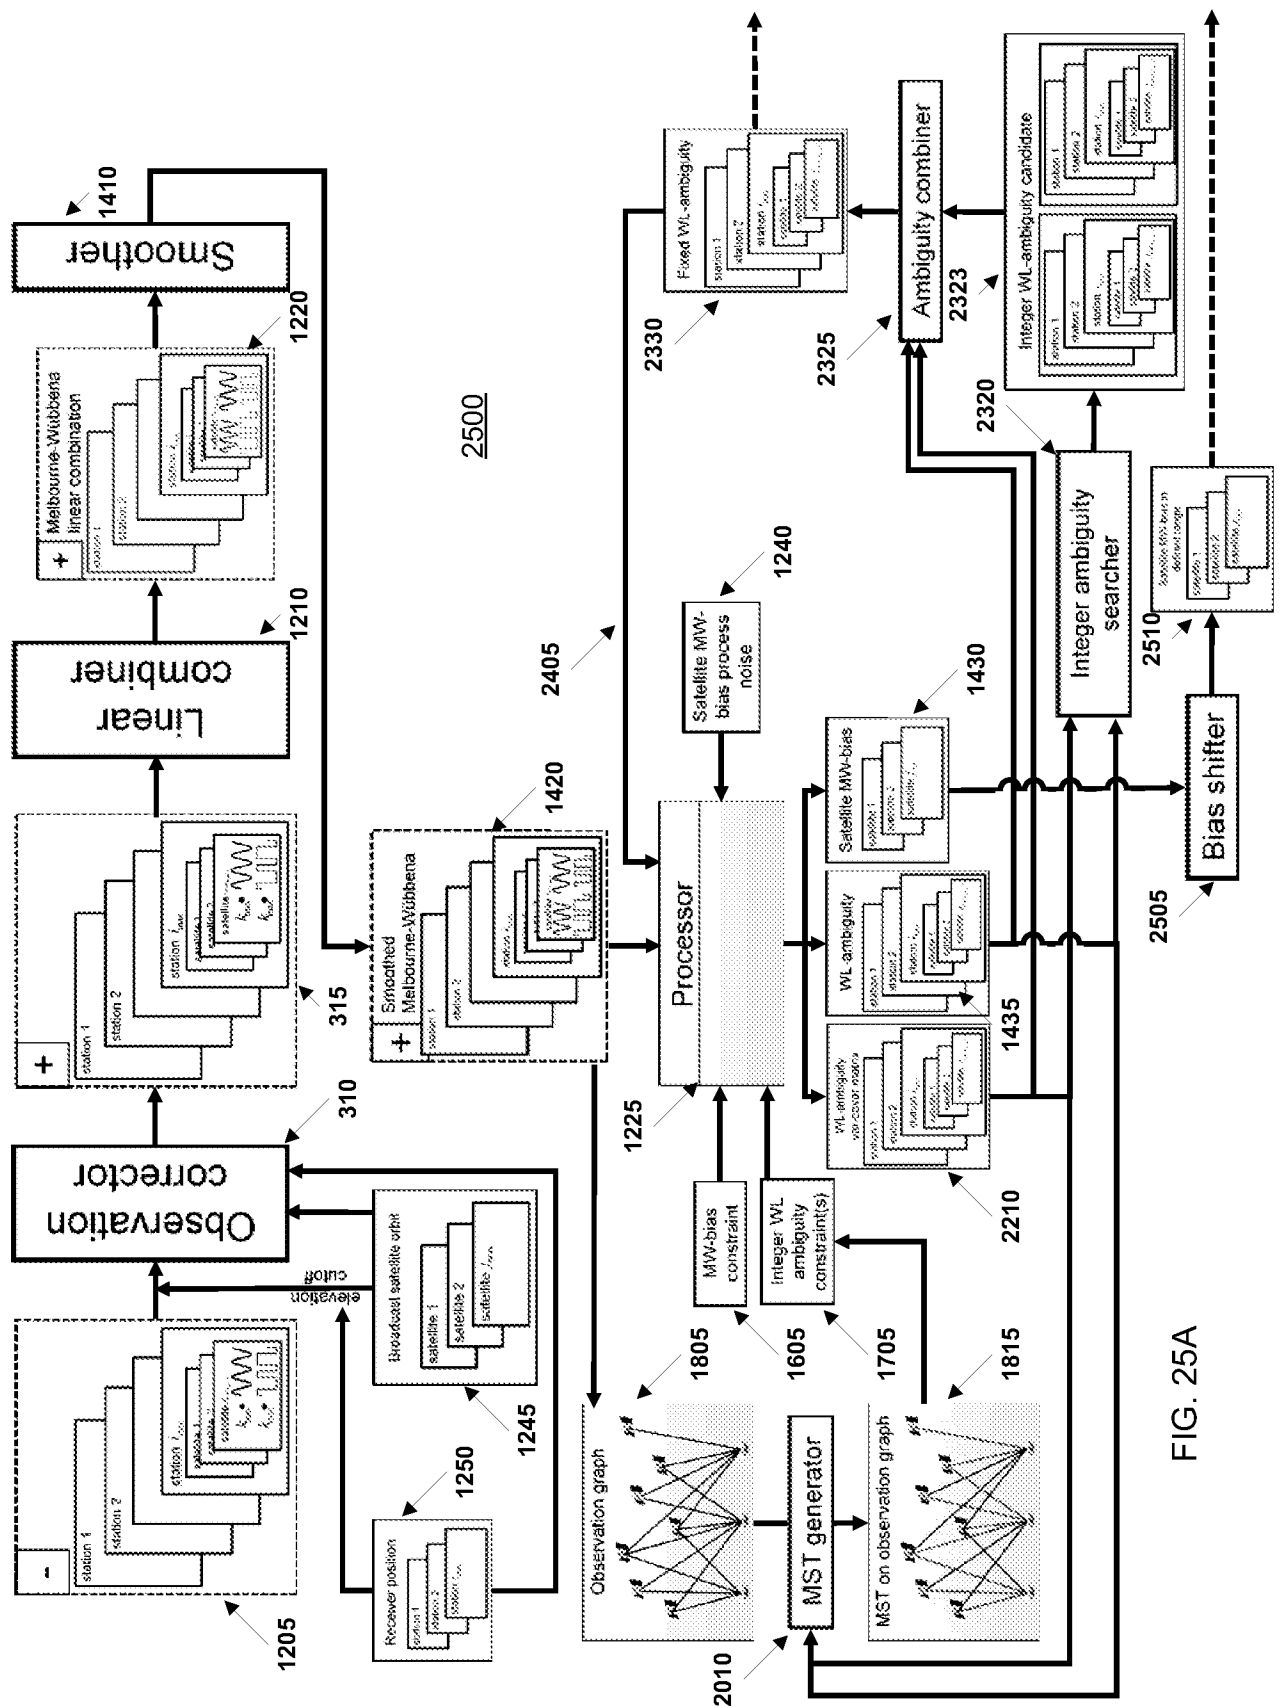


FIG. 25A

Appendix A



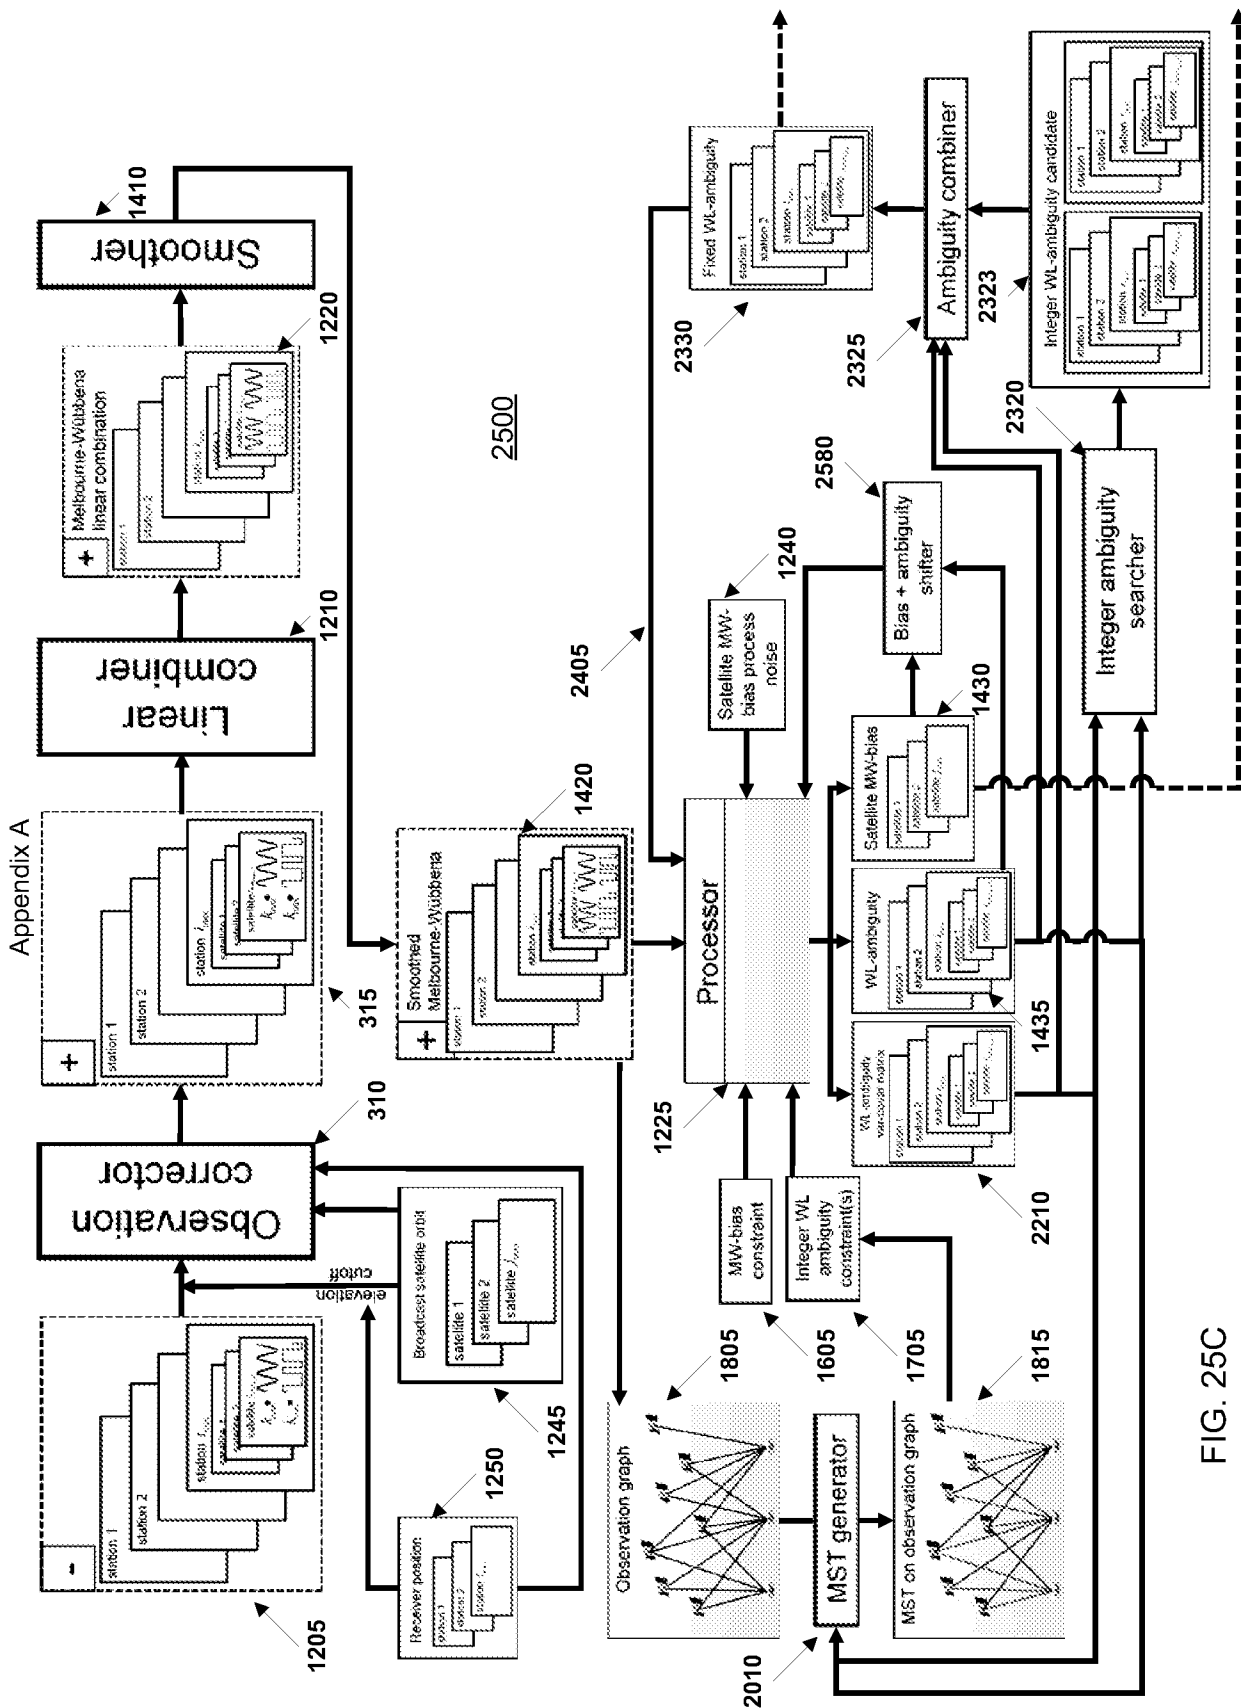


FIG. 25C


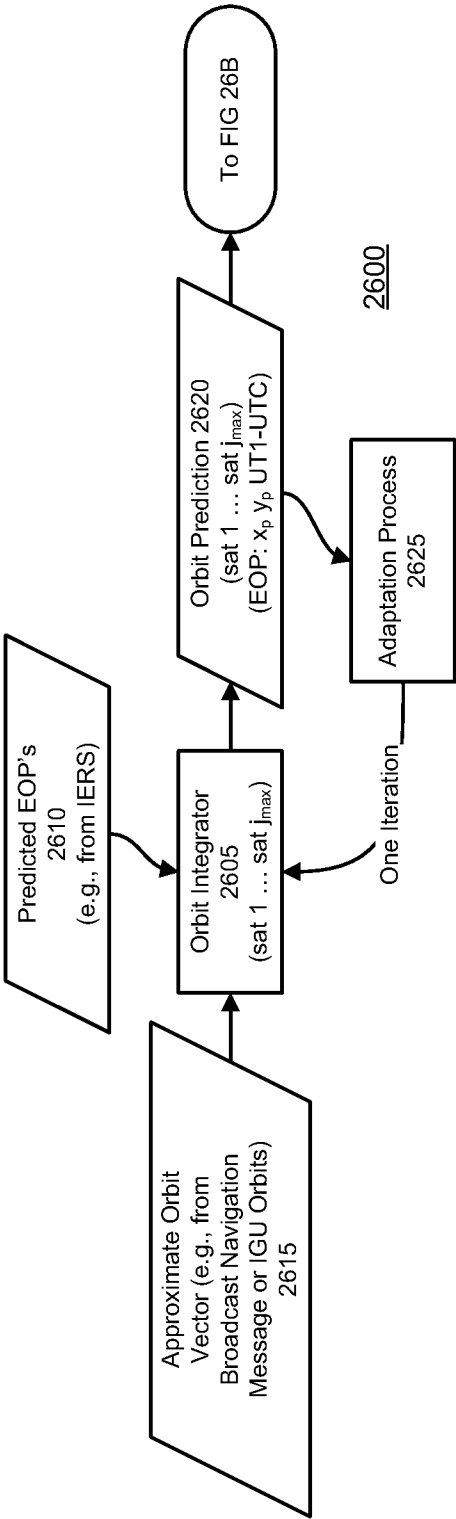


FIG. 26A

Appendix A

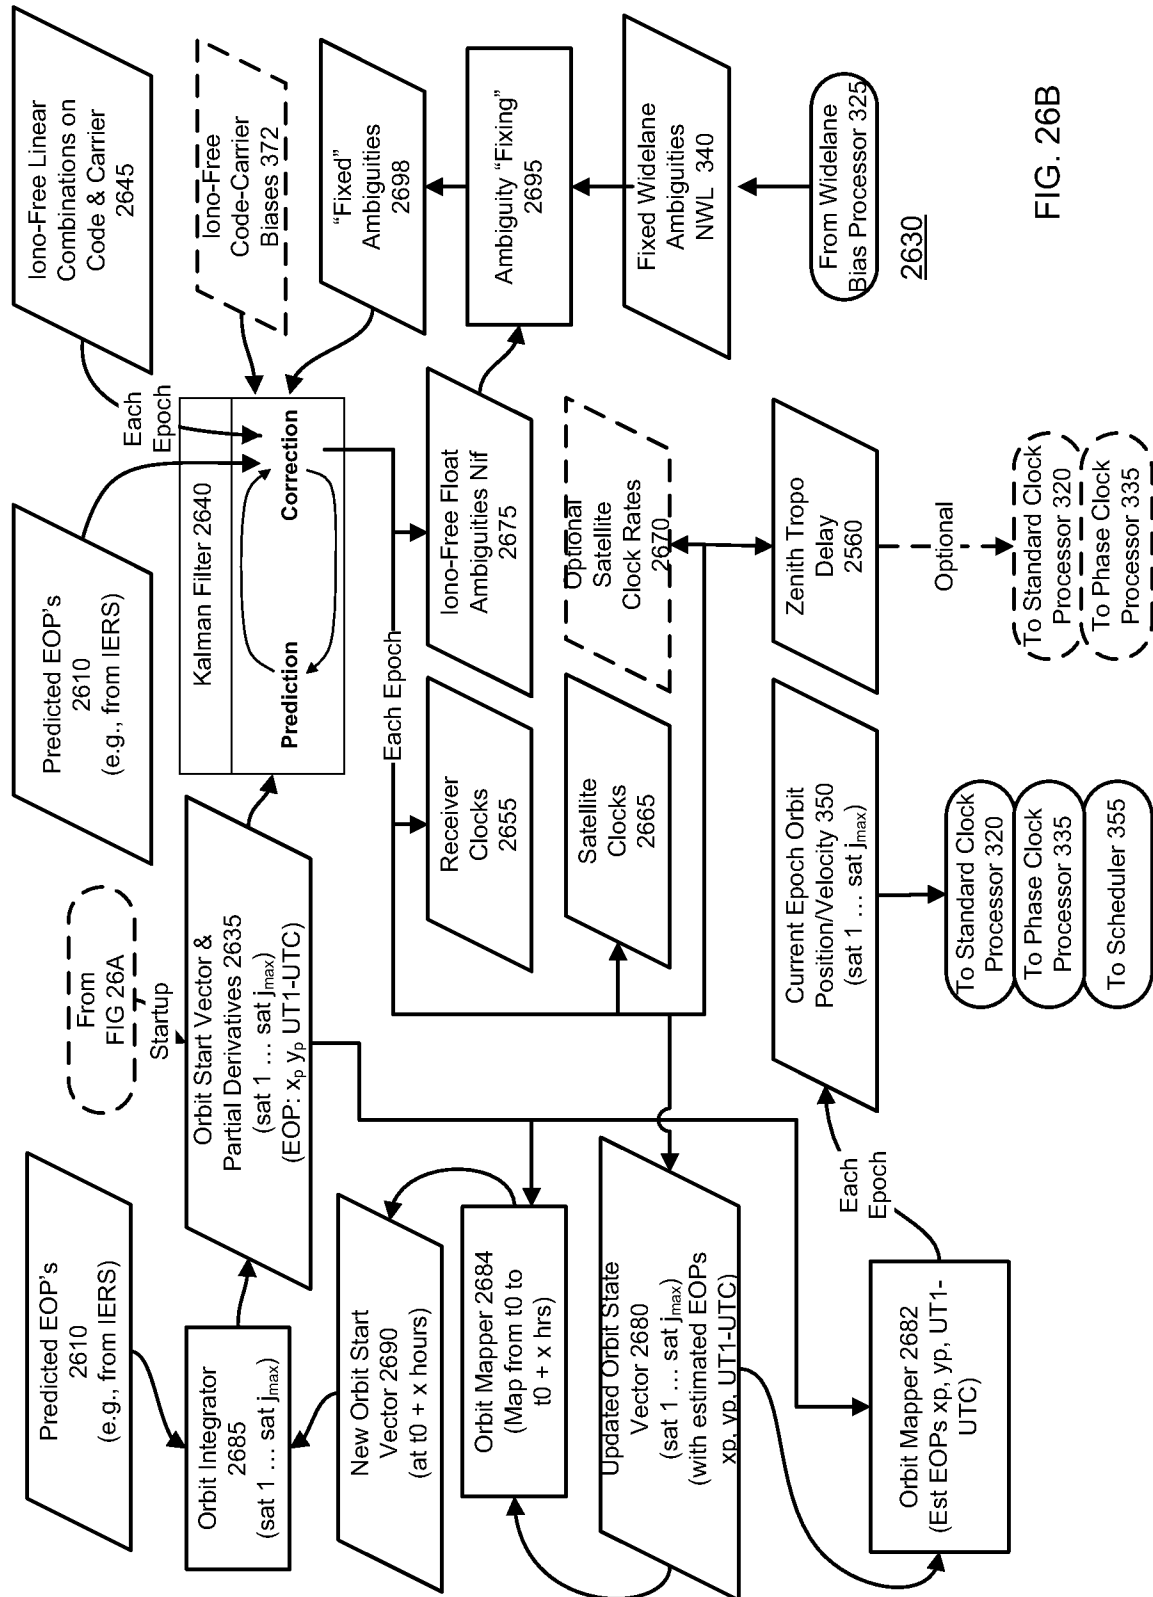

Appendix A

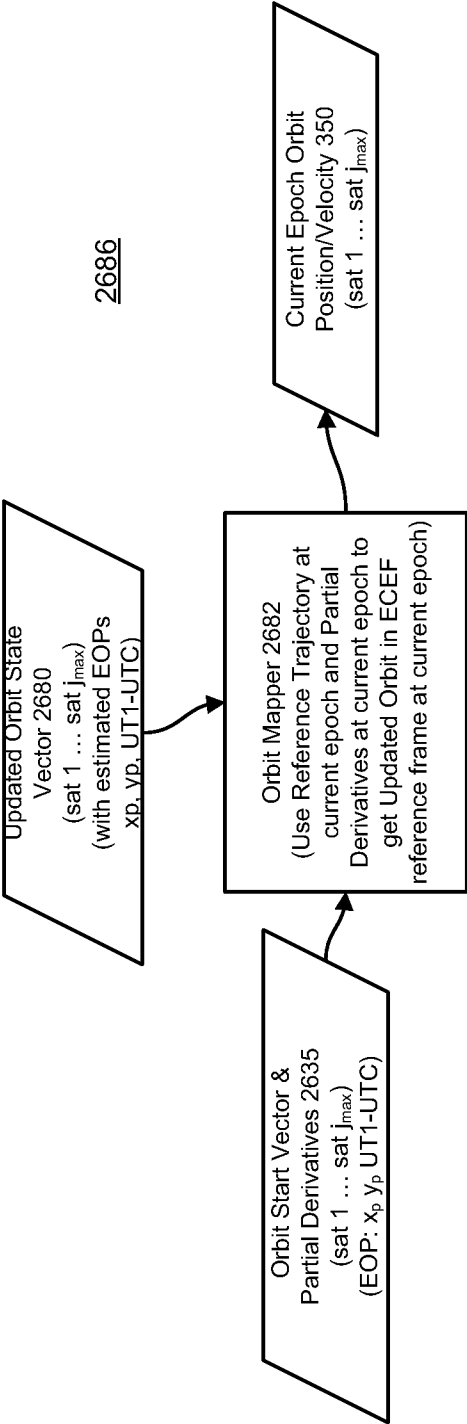


FIG. 26C

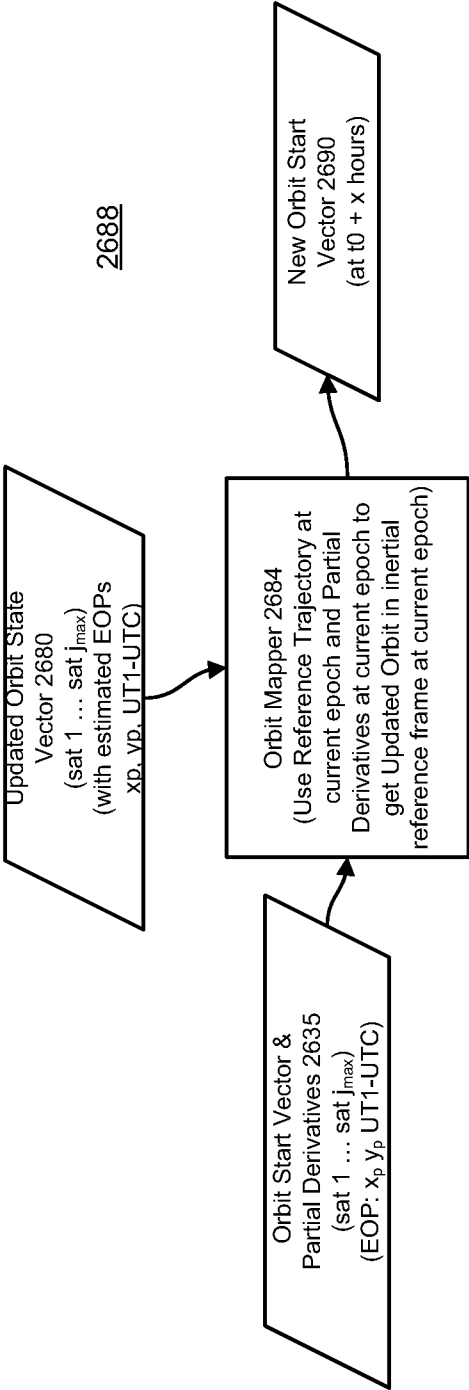


FIG. 26D

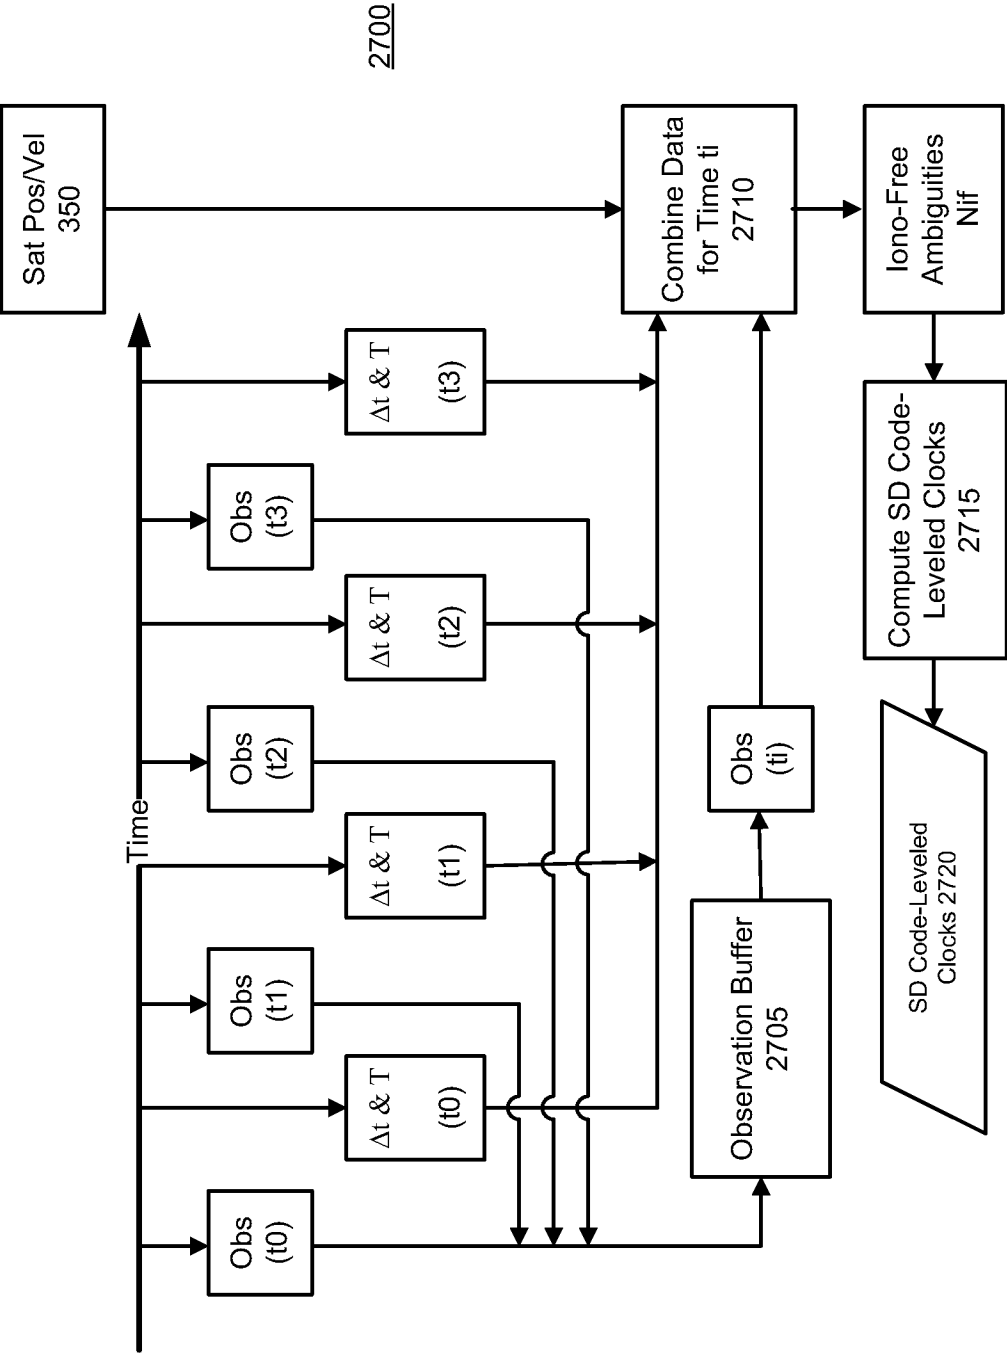


FIG. 27A

Appendix A

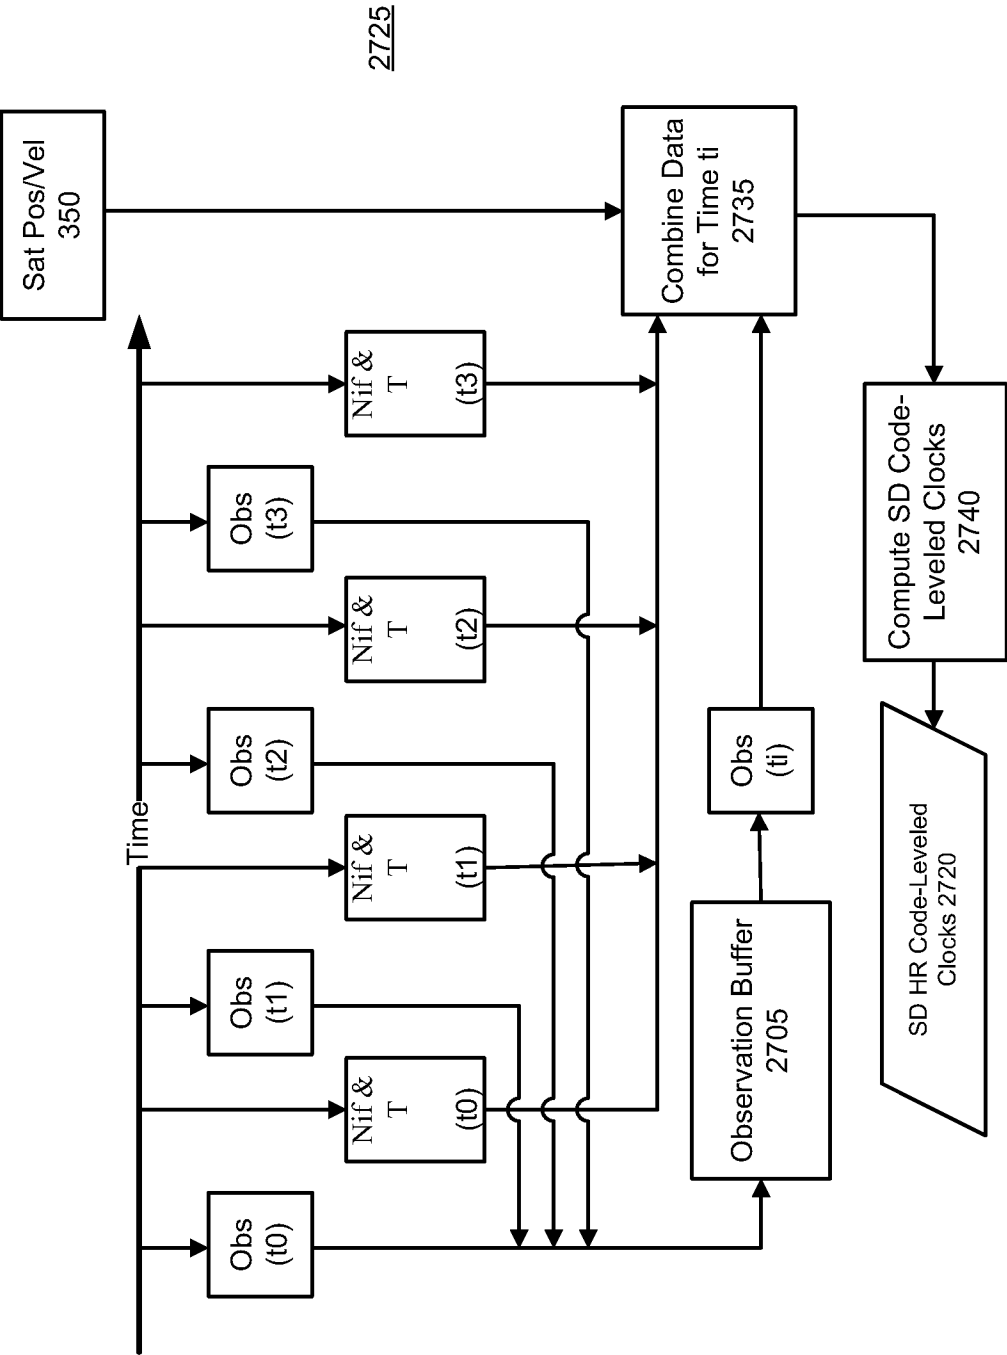


FIG. 27B

Appendix A

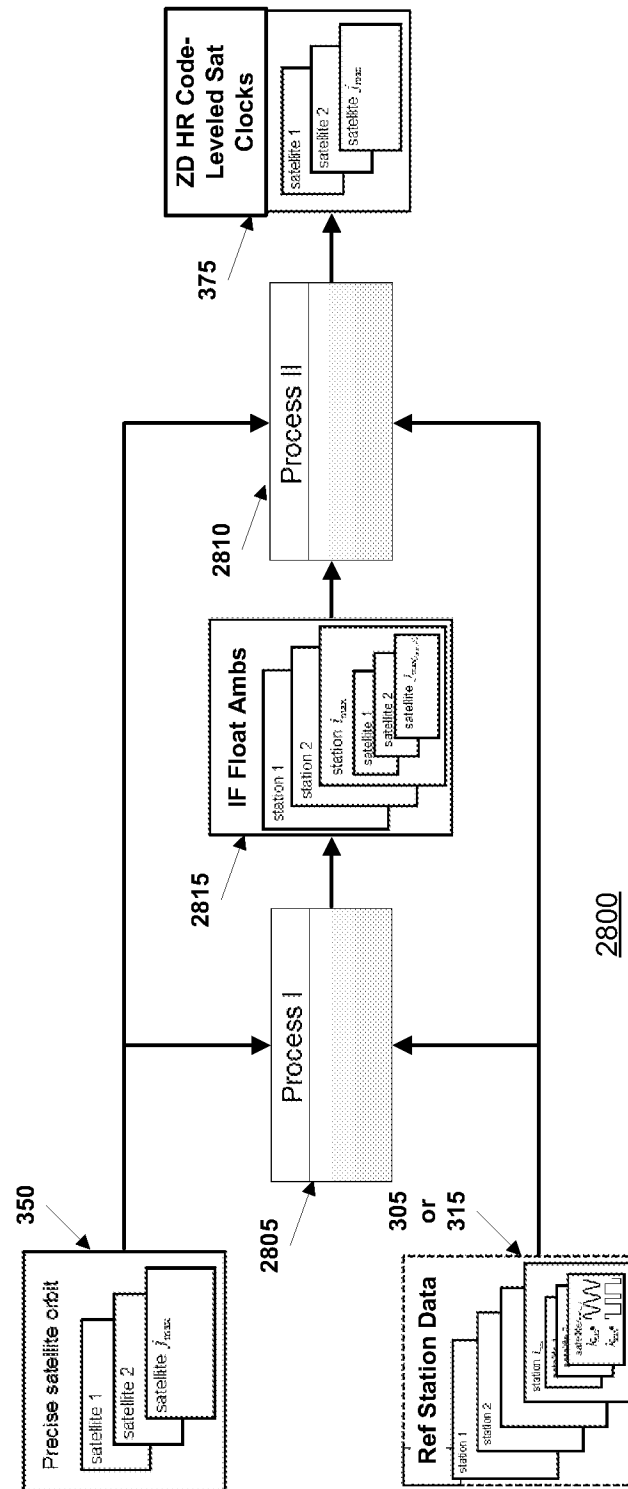


FIG. 28A

Appendix A

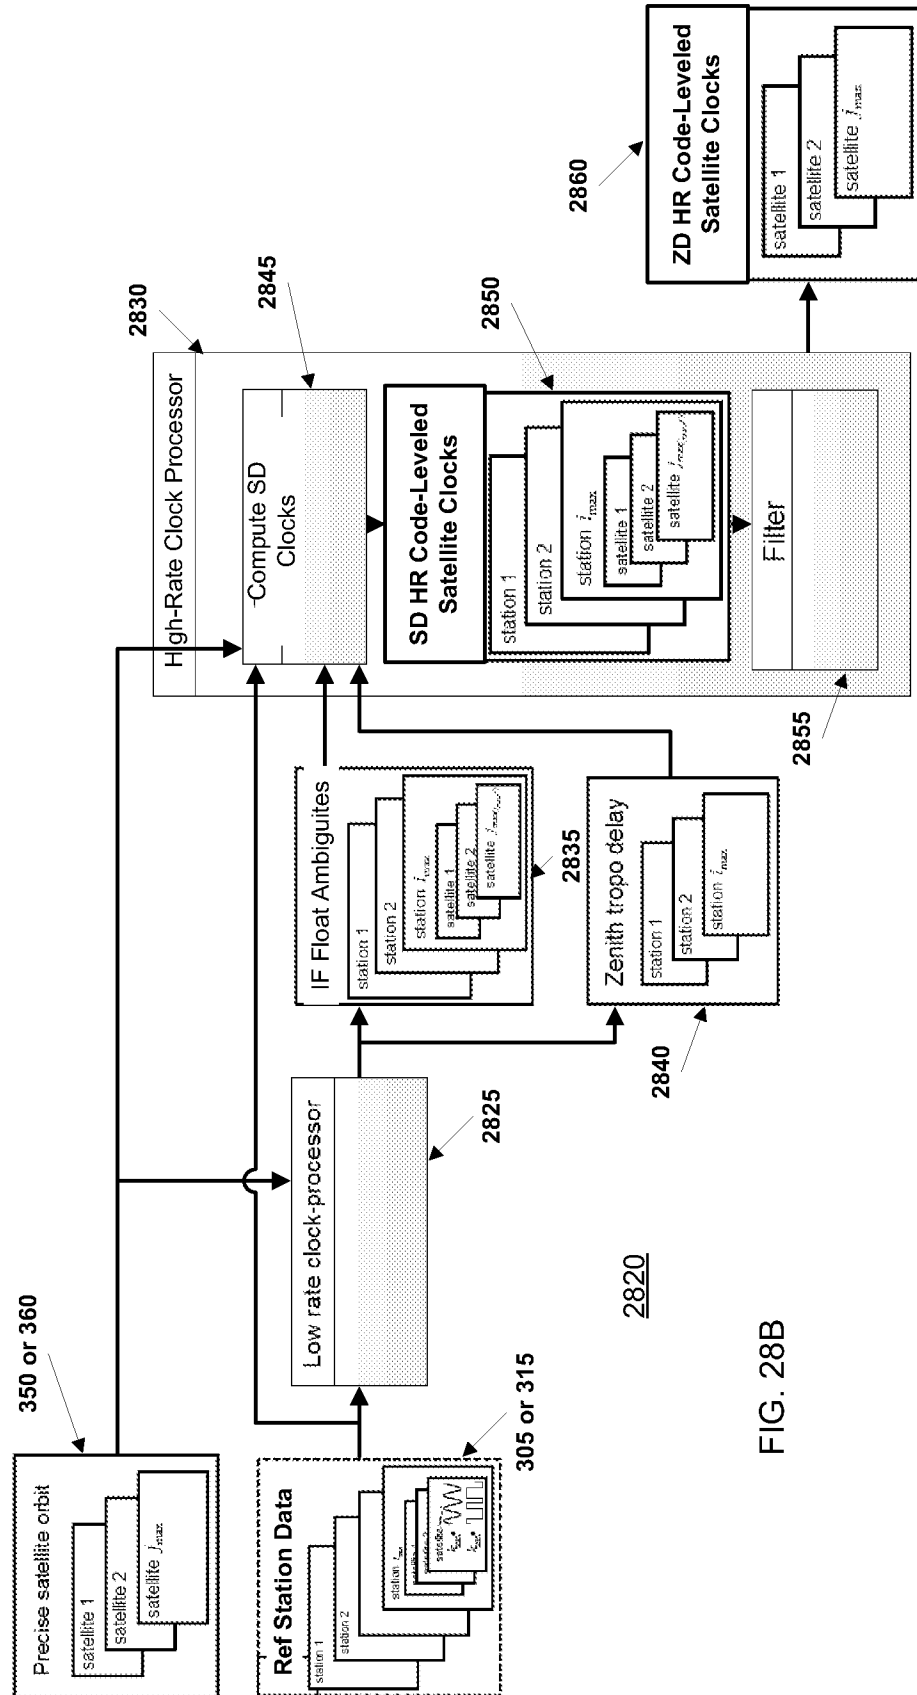


FIG. 28B

Appendix A

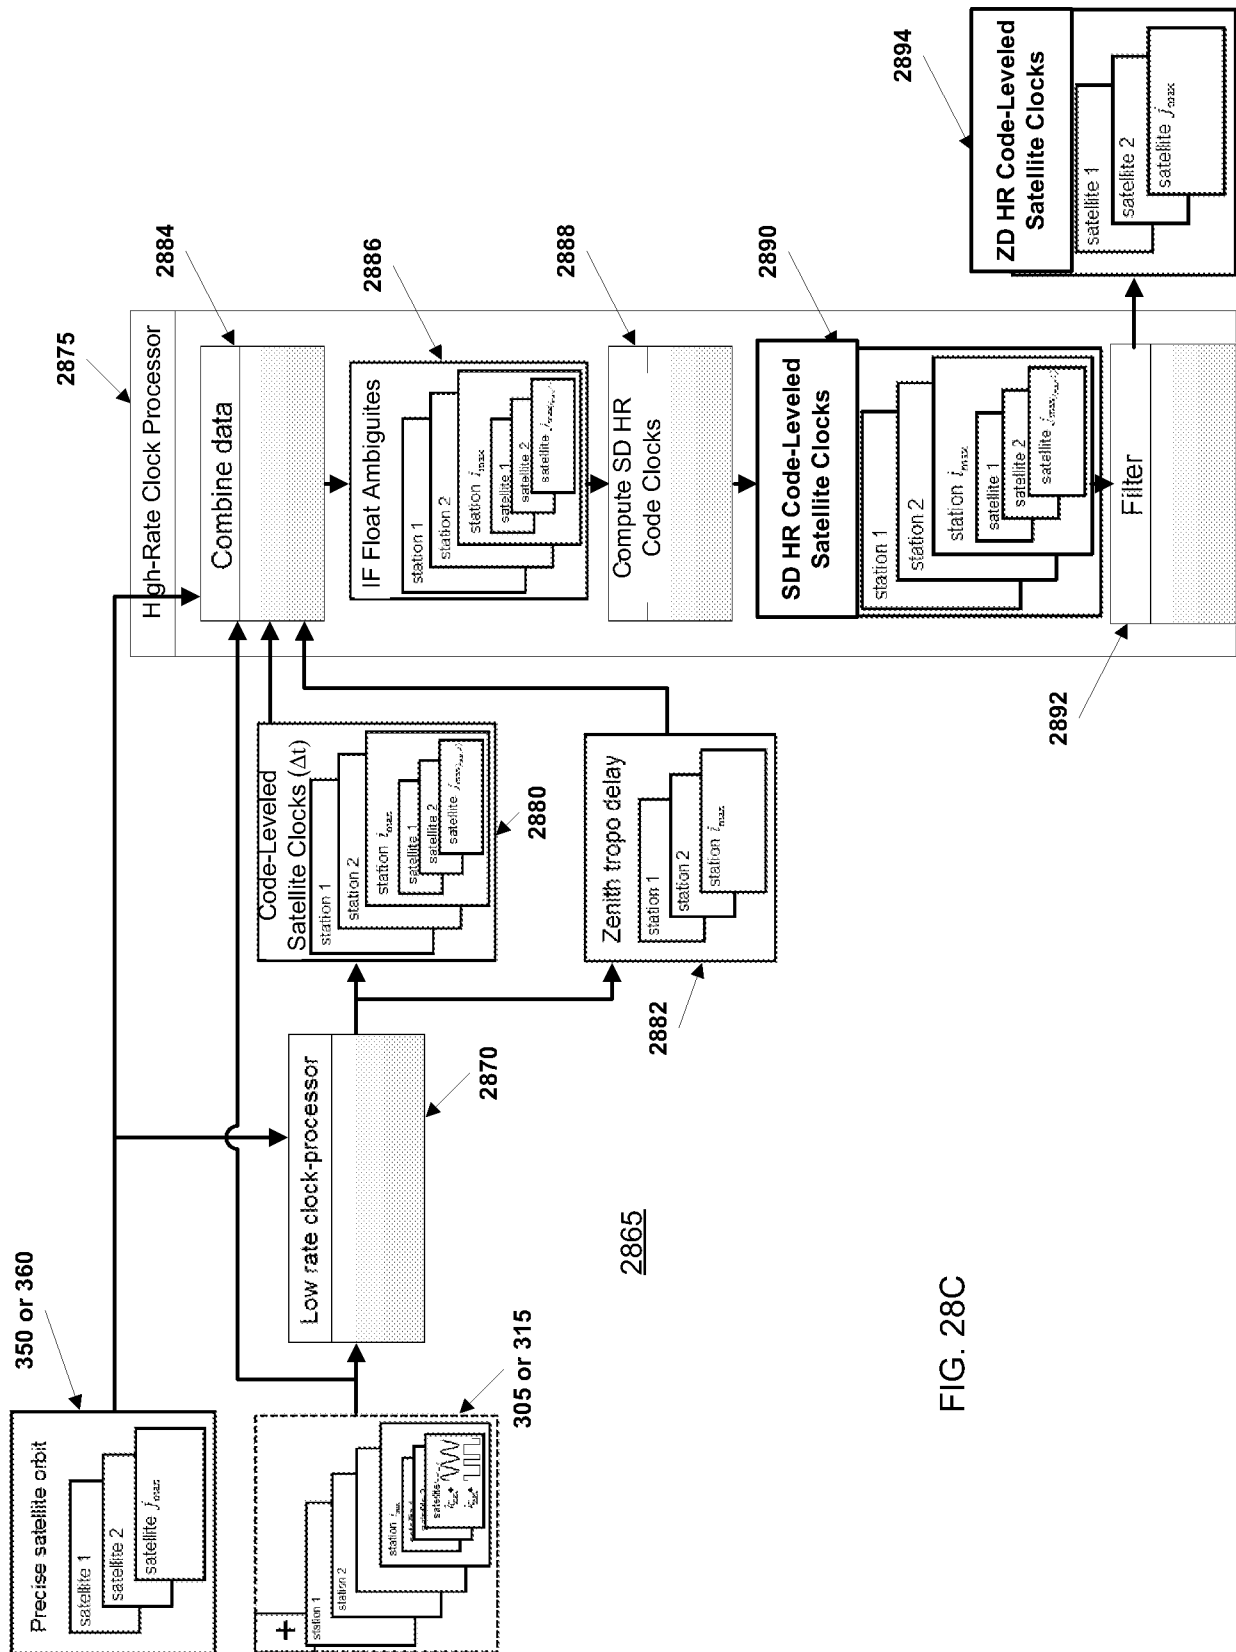


FIG. 28C

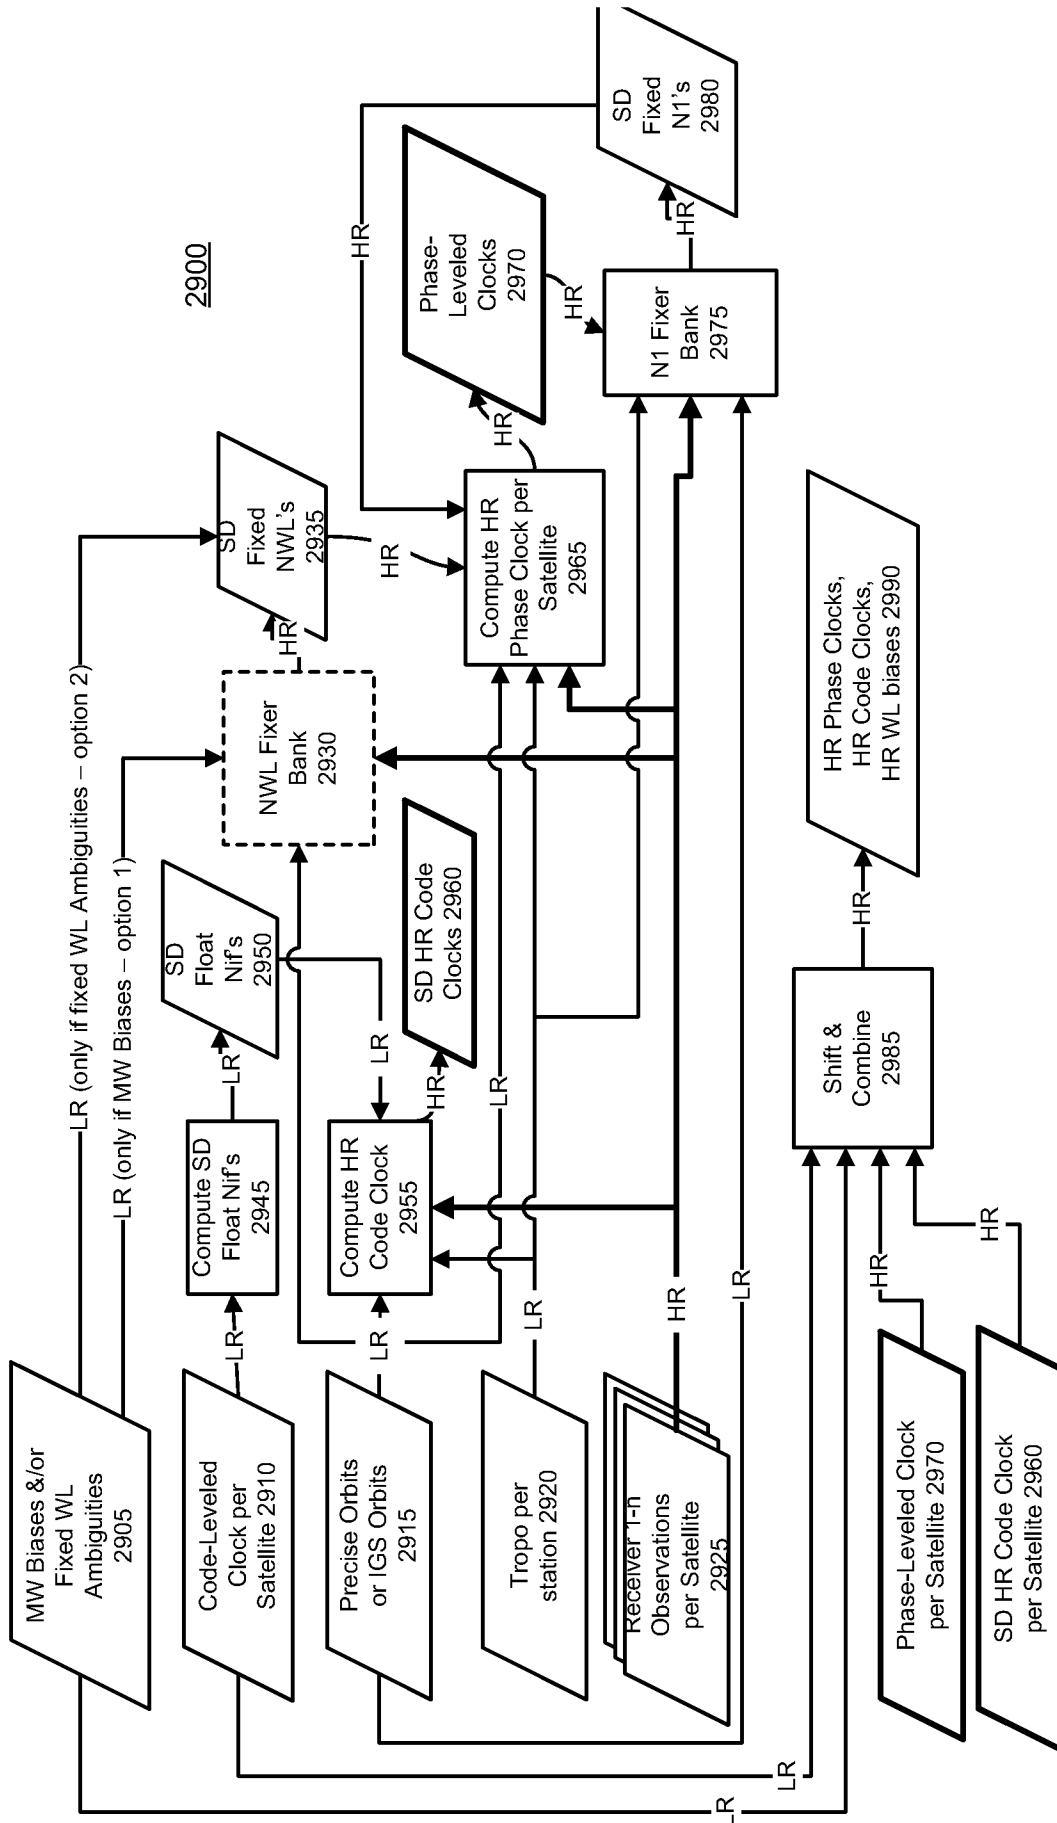


FIG. 29

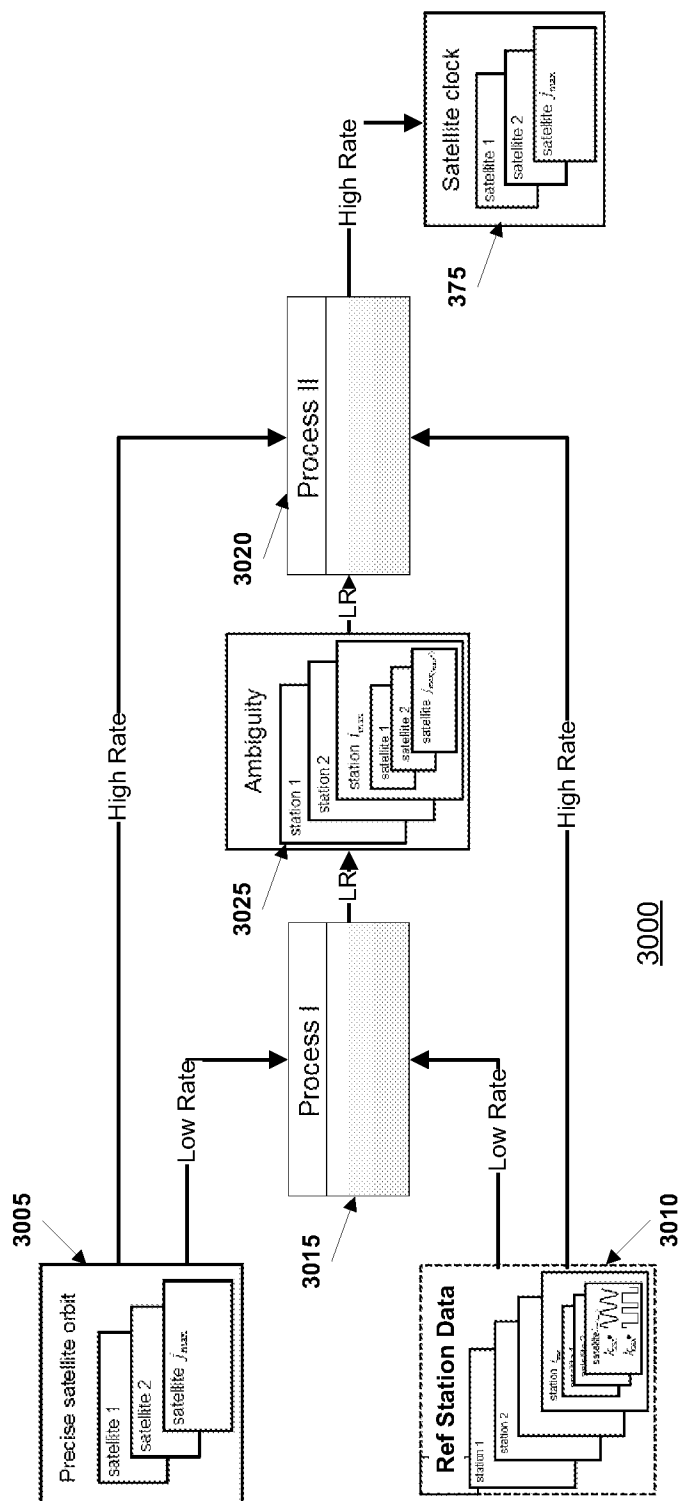


FIG. 30A

Appendix A

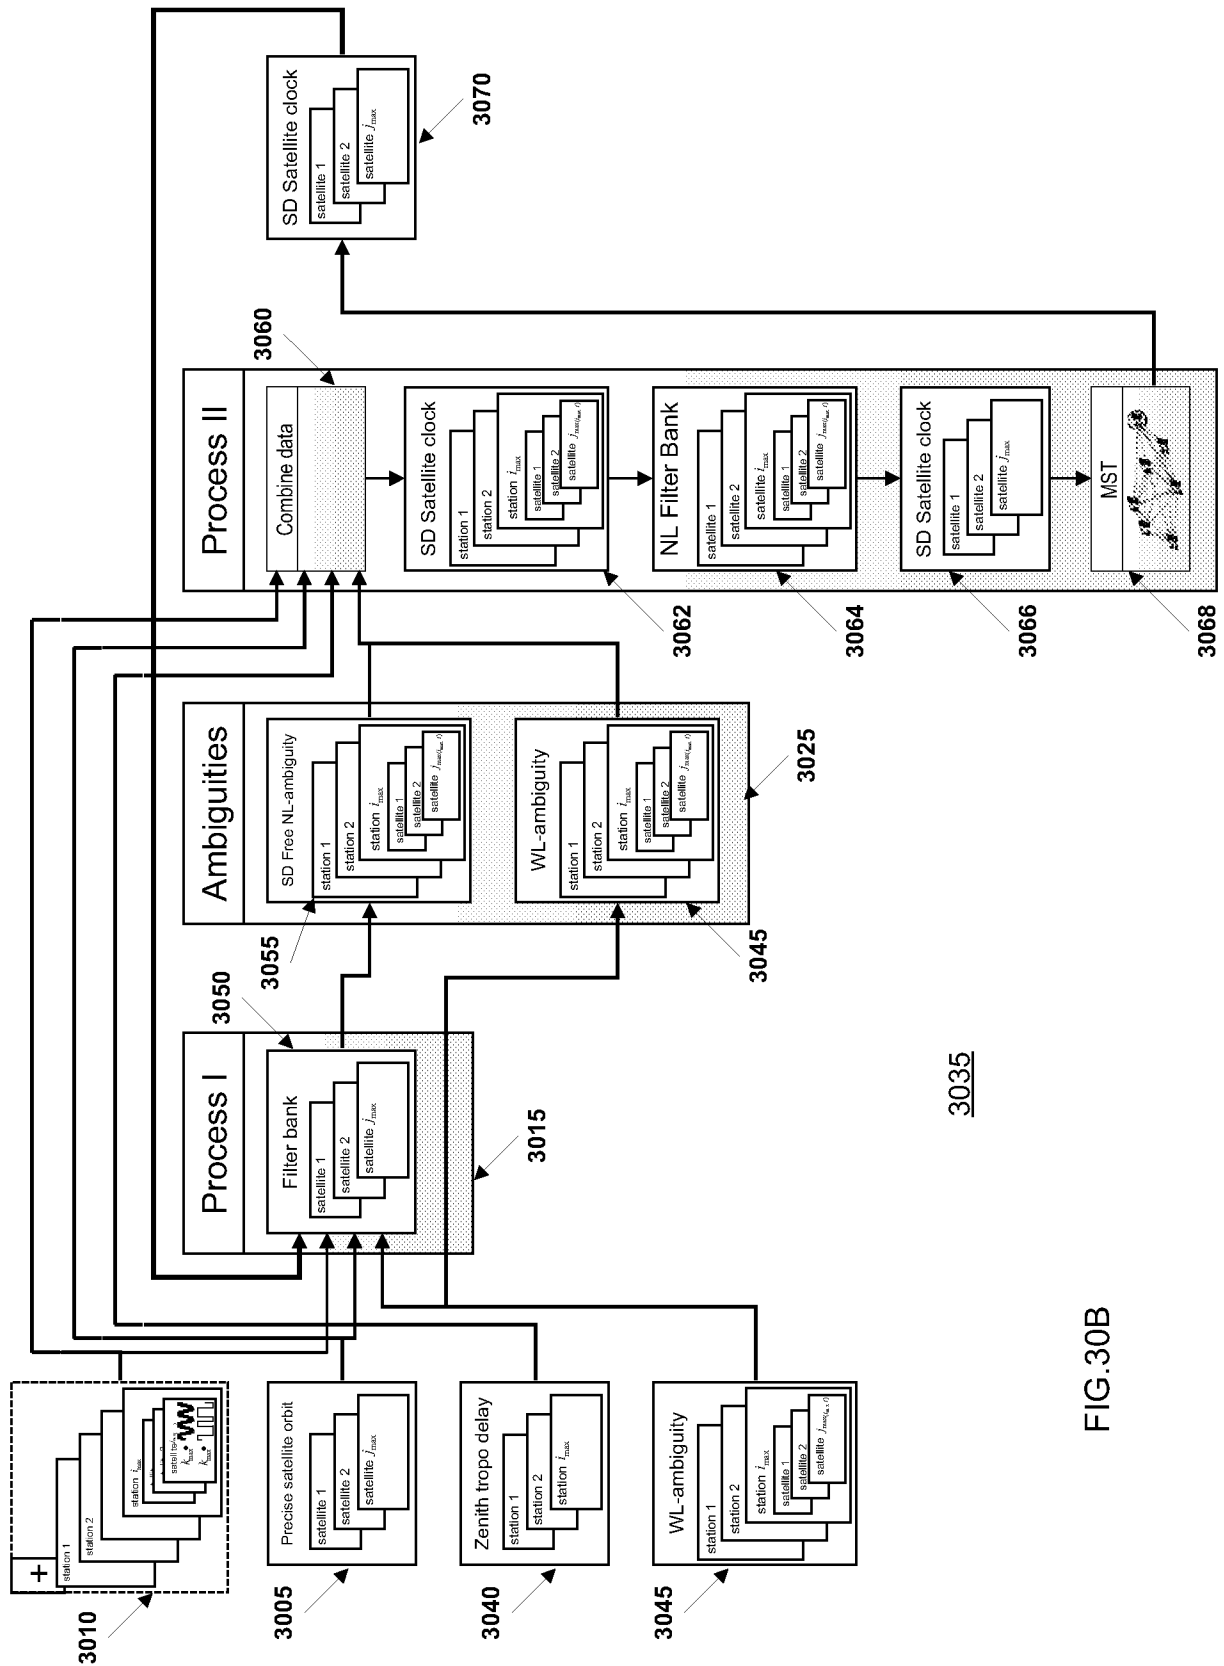


FIG.30B

Appendix A

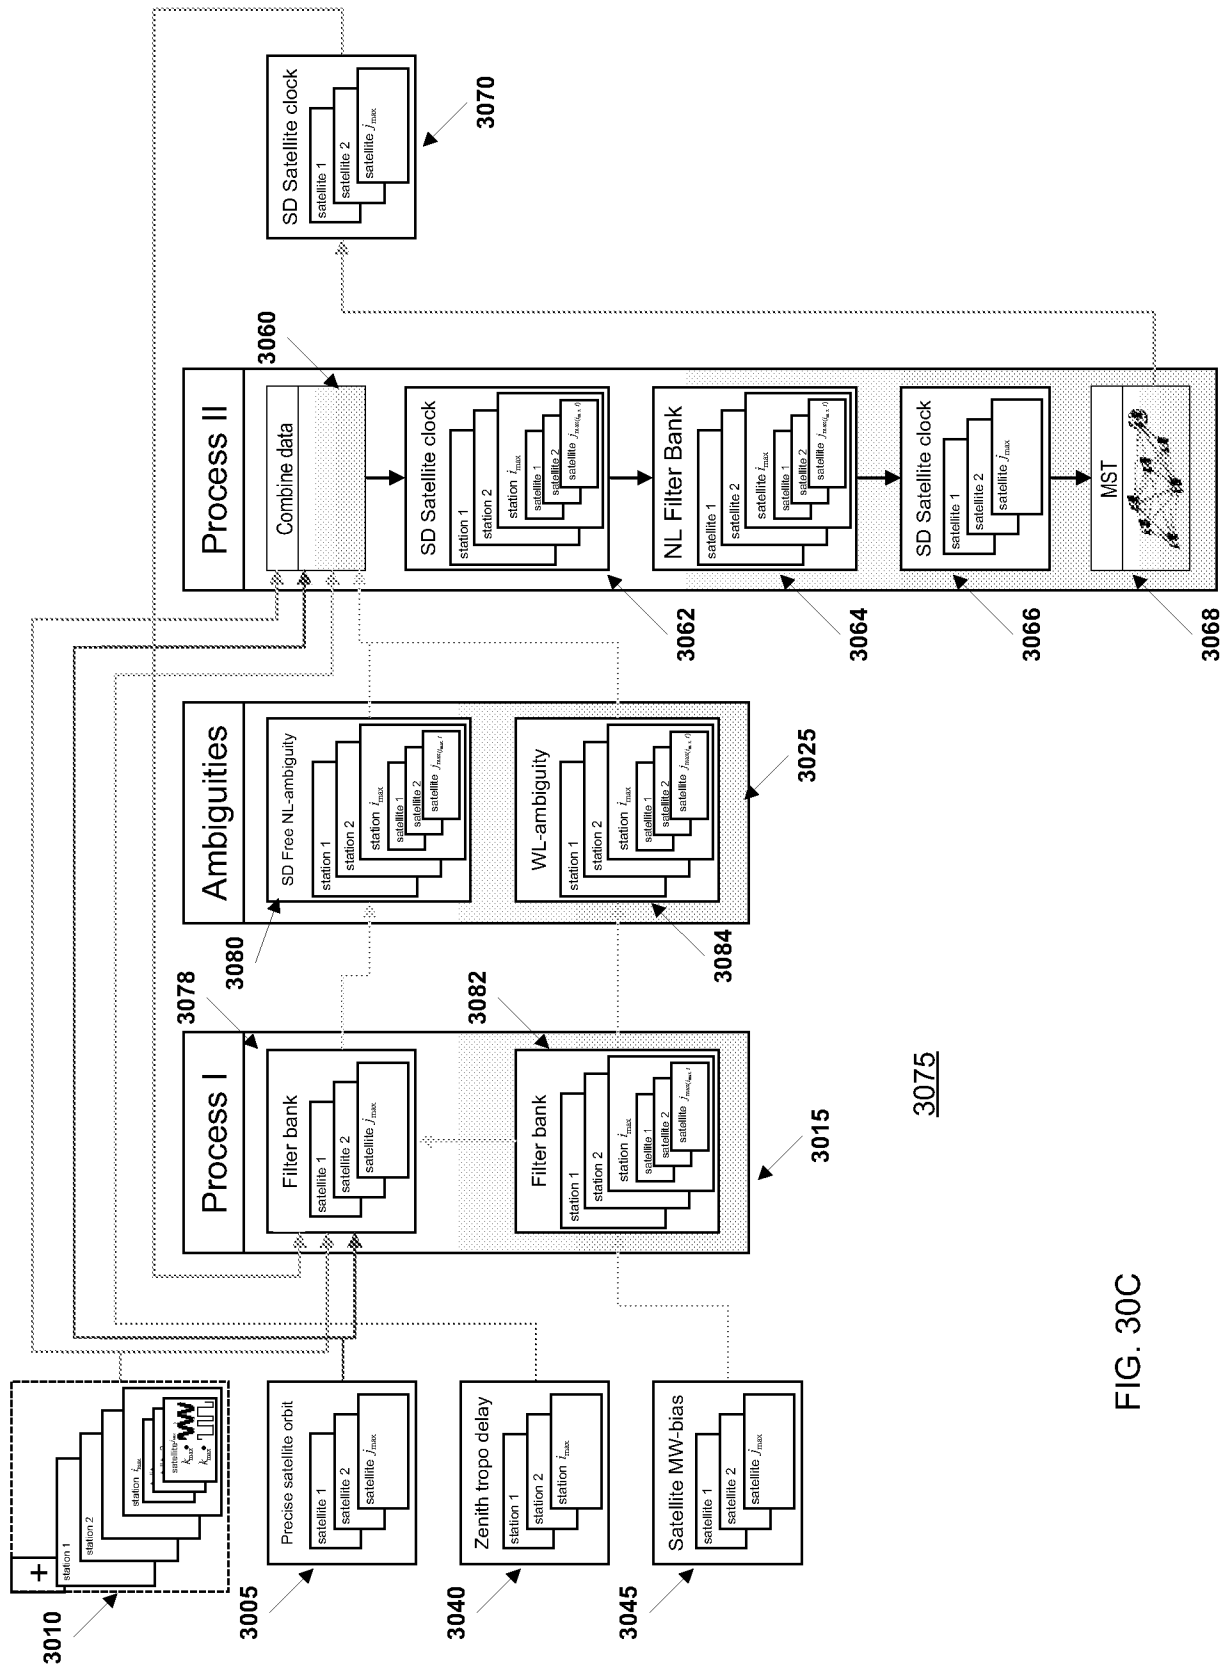


FIG. 30C

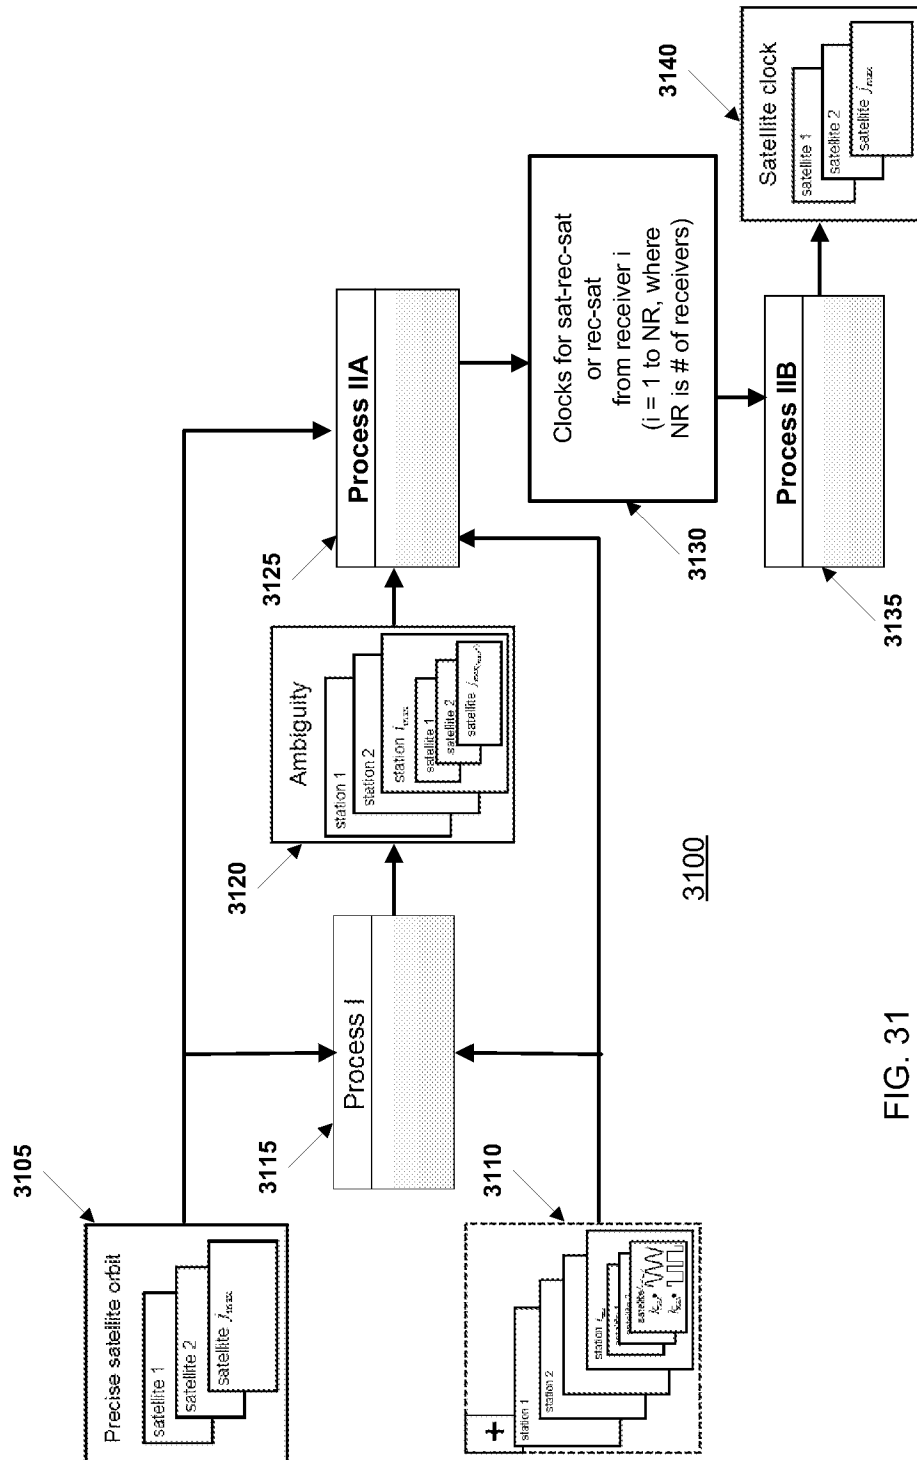


FIG. 31


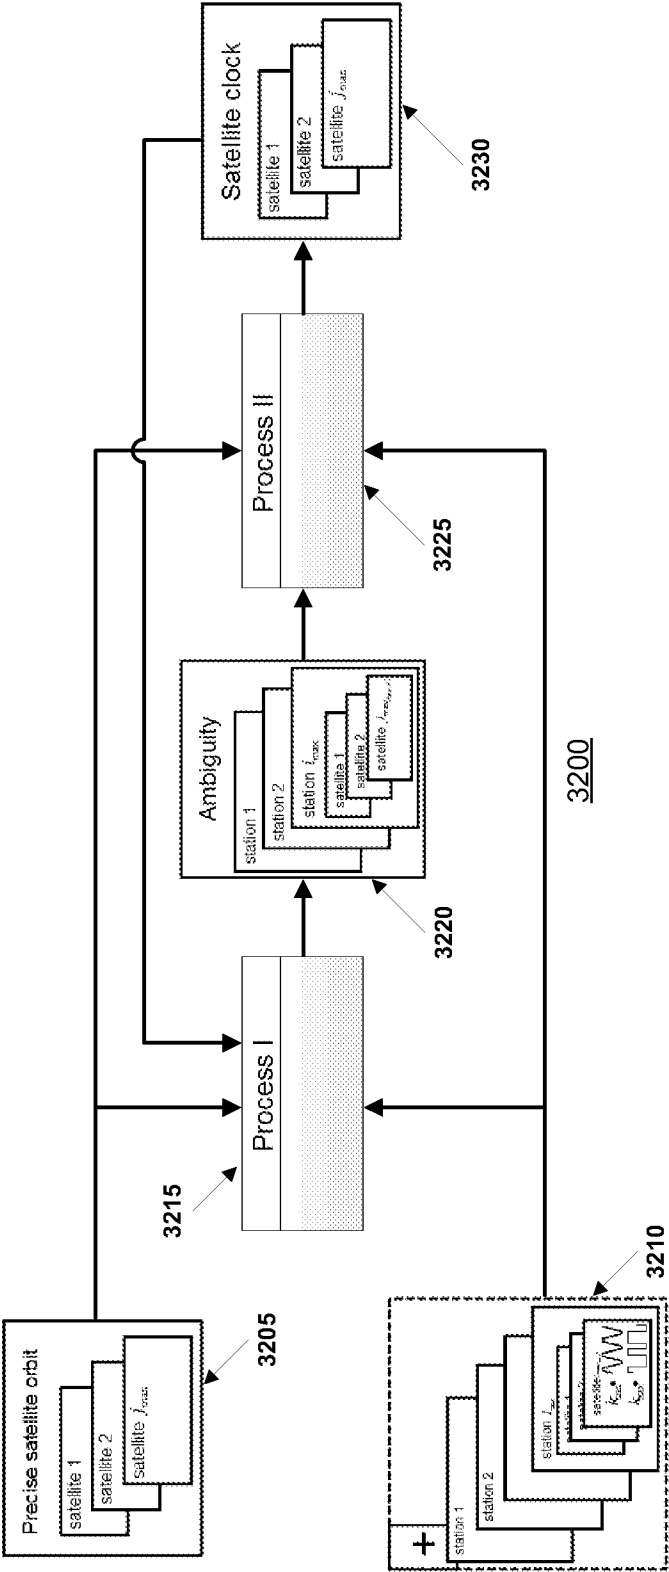


FIG. 32

Appendix A

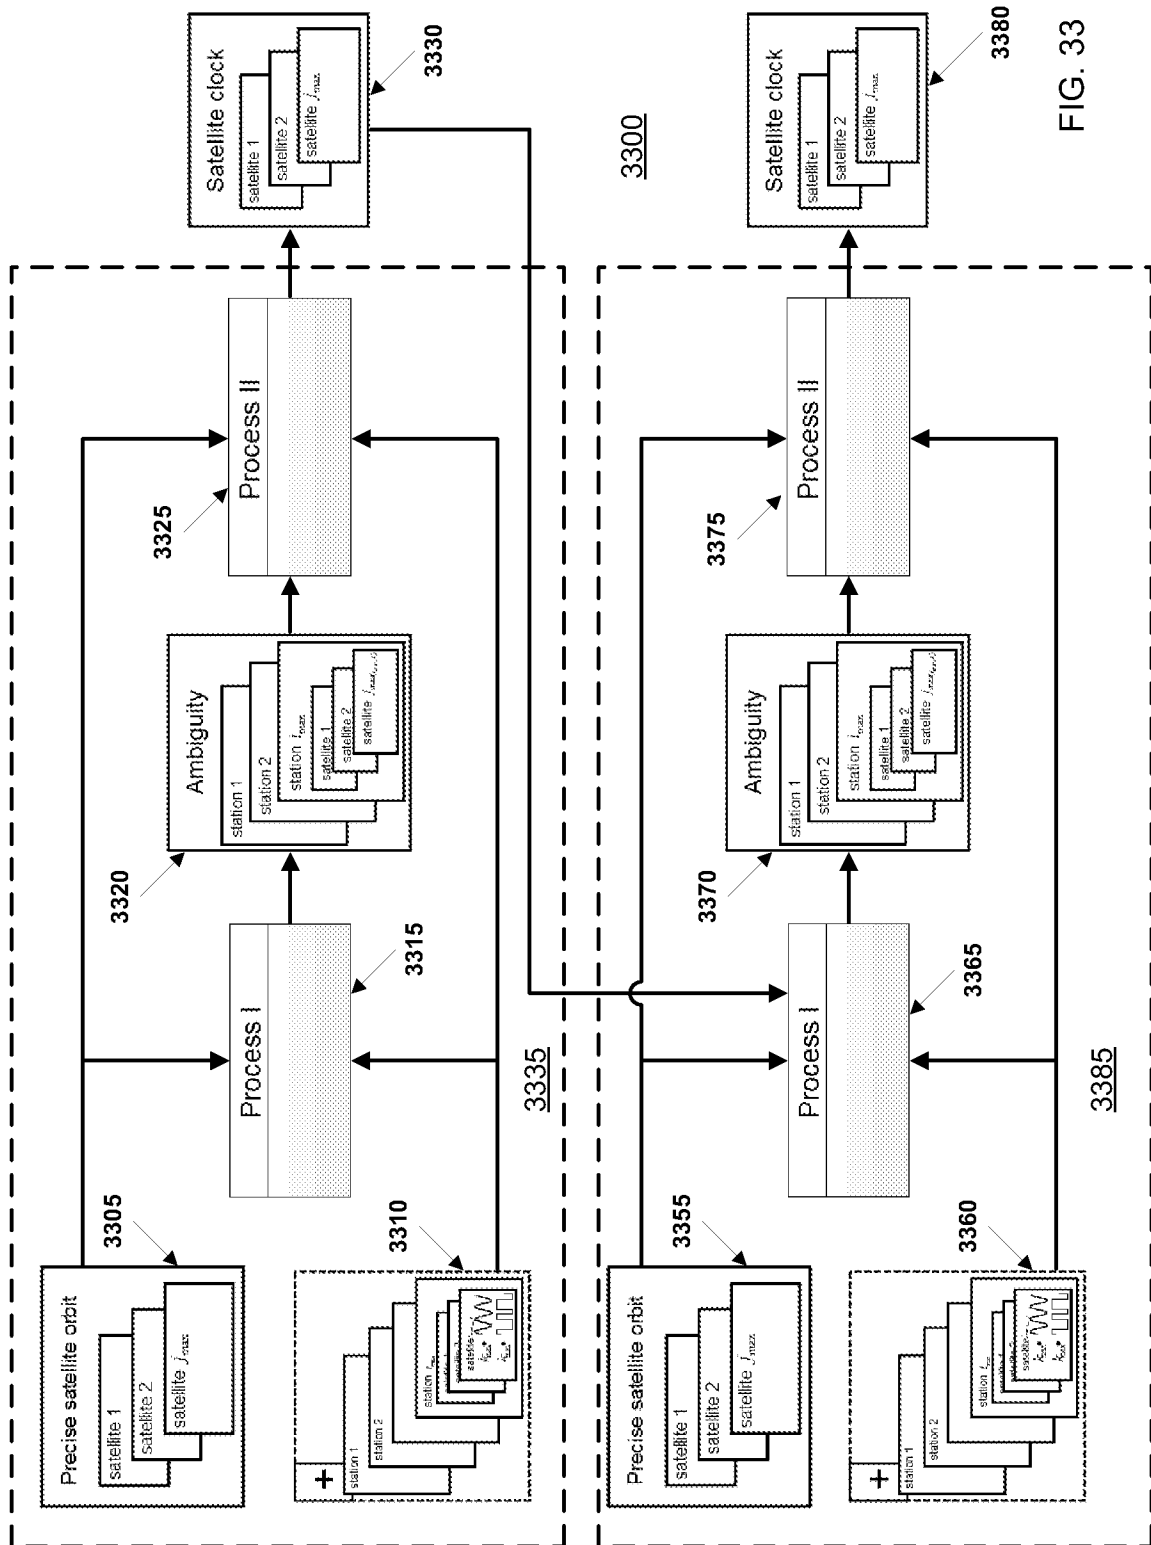

Appendix A

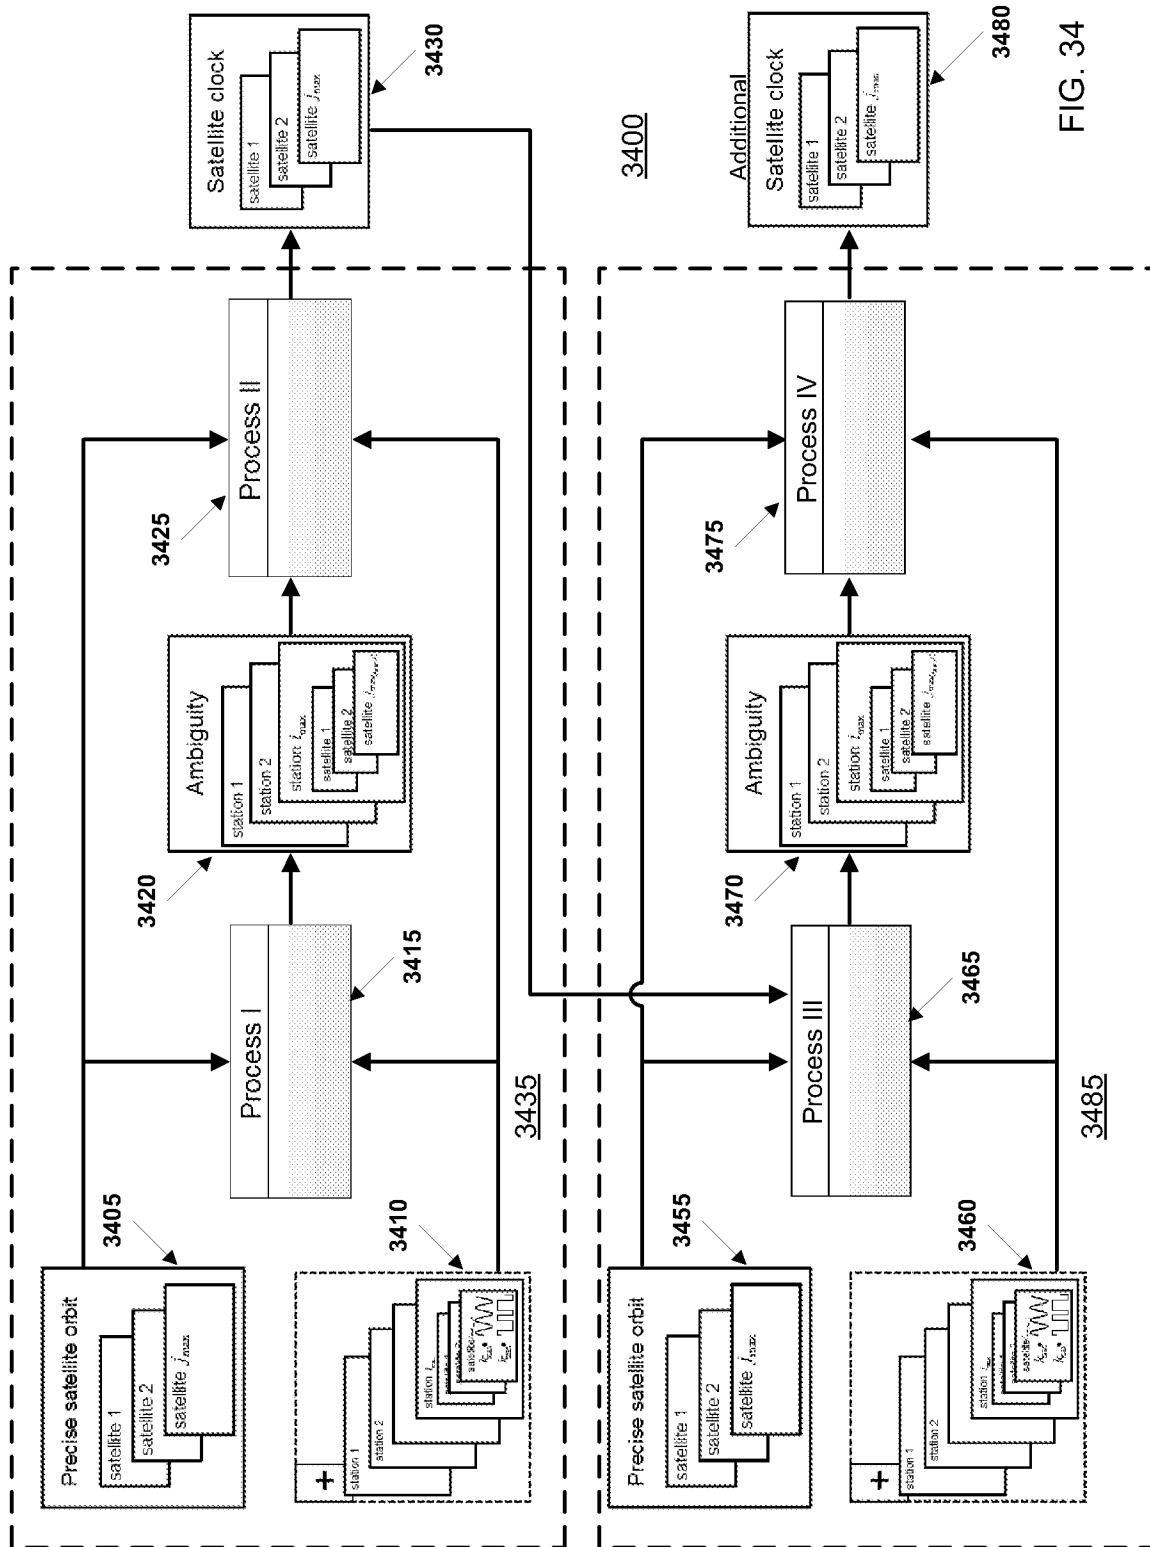


FIG. 34

FIG. 35

Appendix A

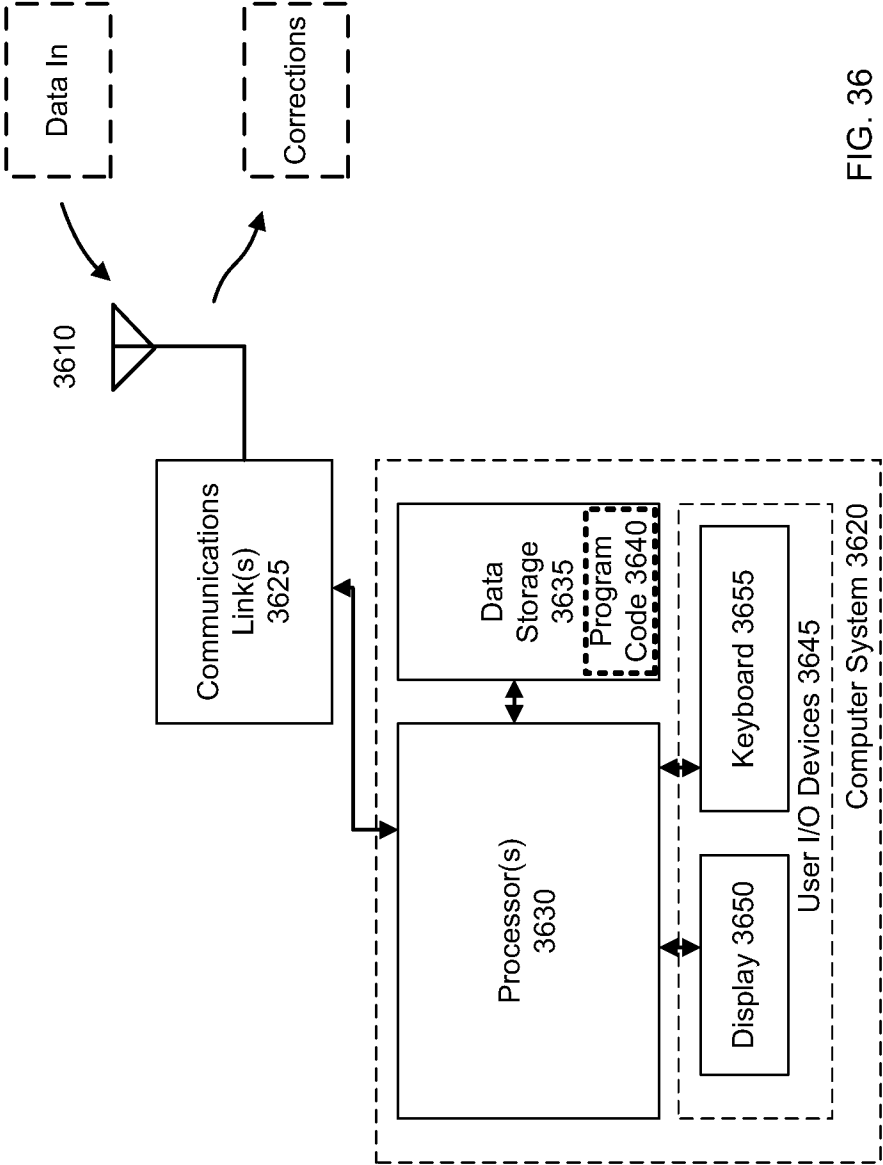


FIG. 36

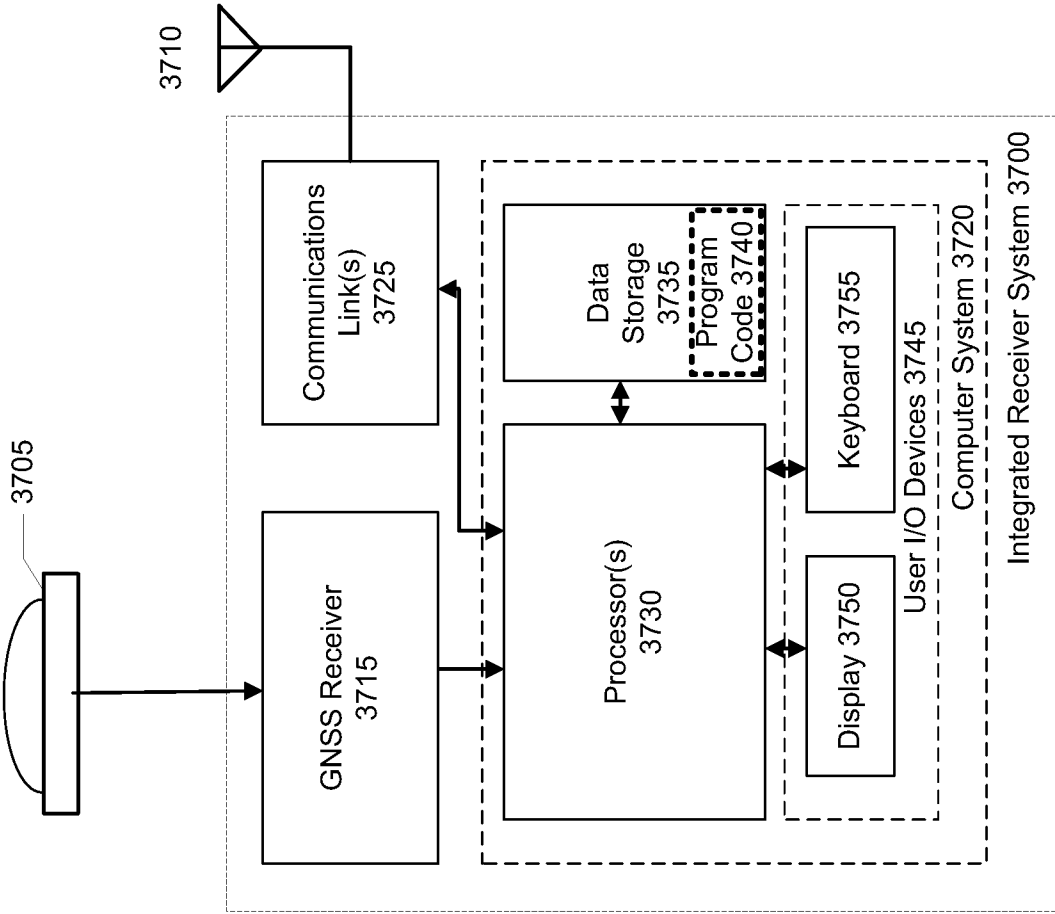


FIG. 37

Appendix A

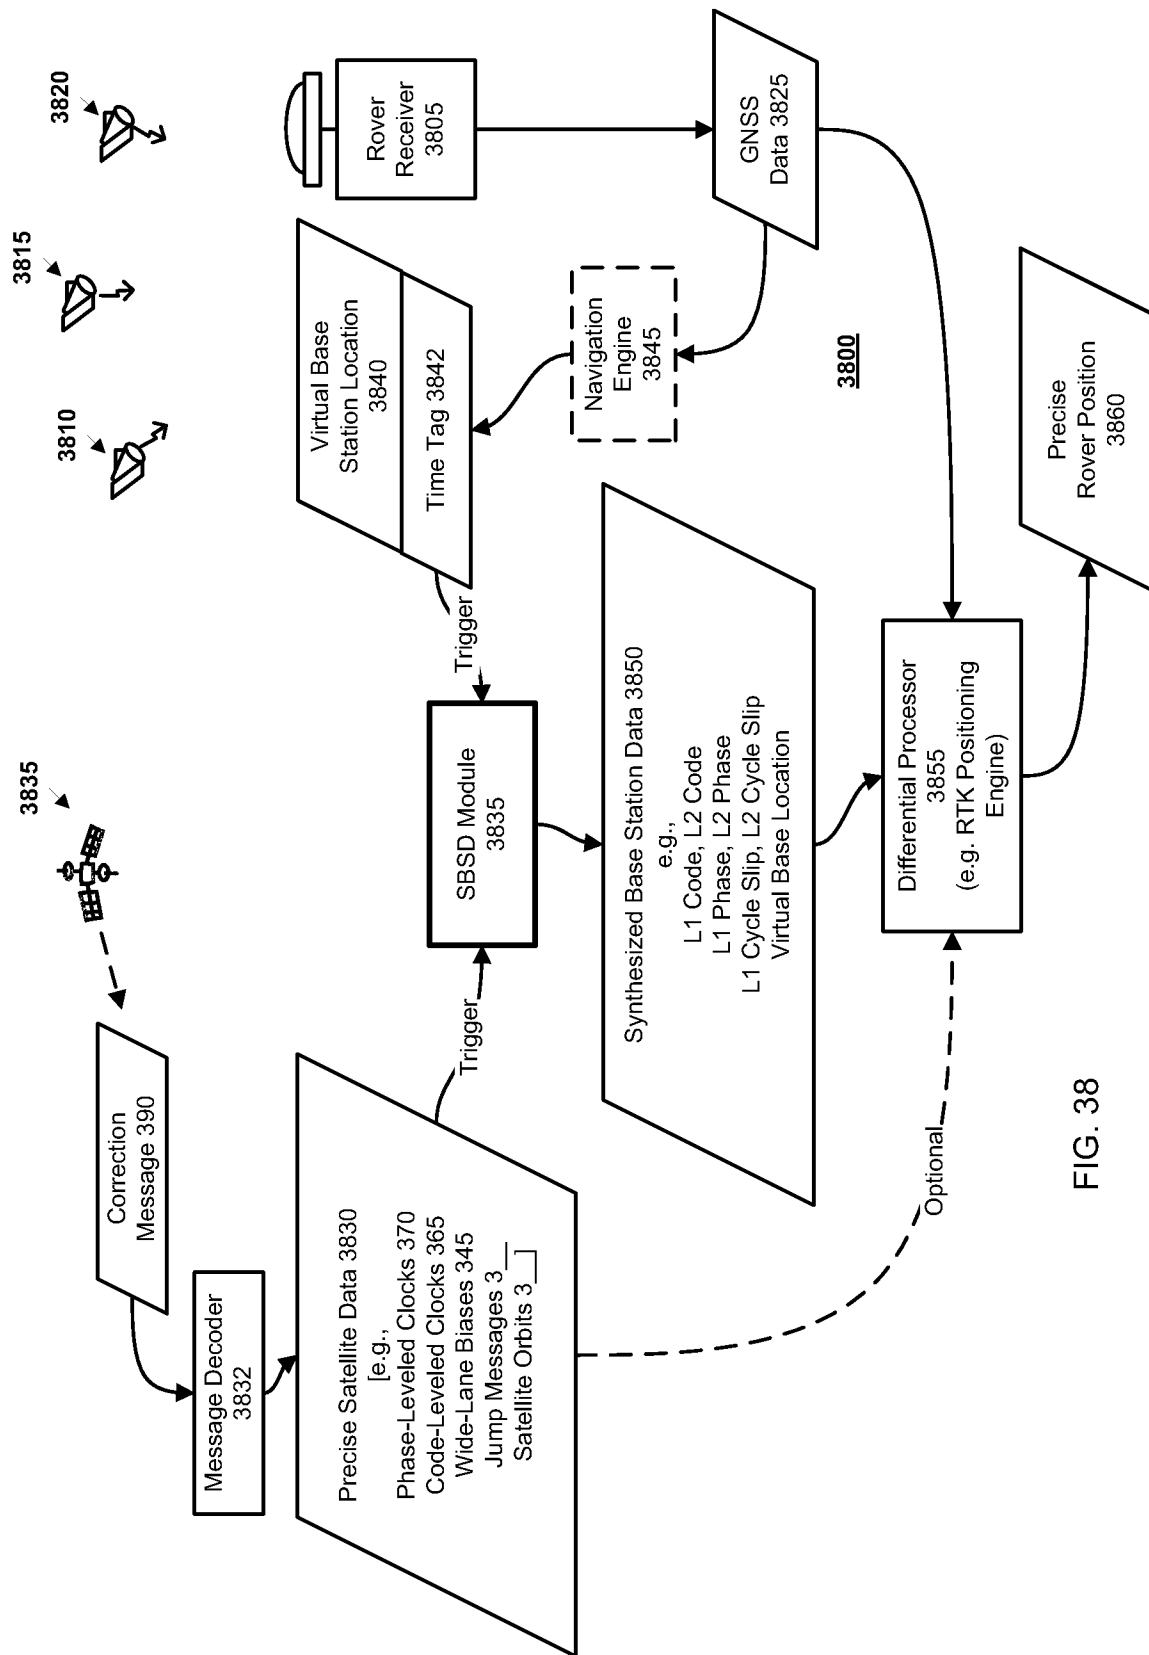


FIG. 38

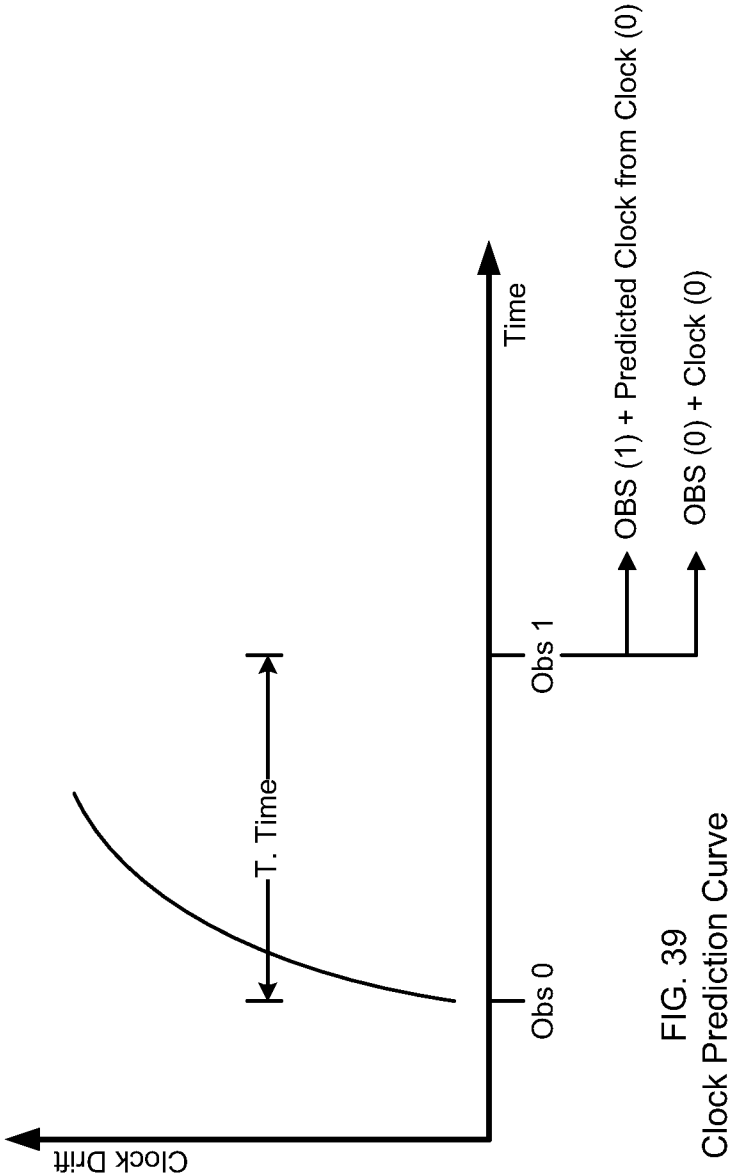


FIG. 39
Clock Prediction Curve

Appendix A

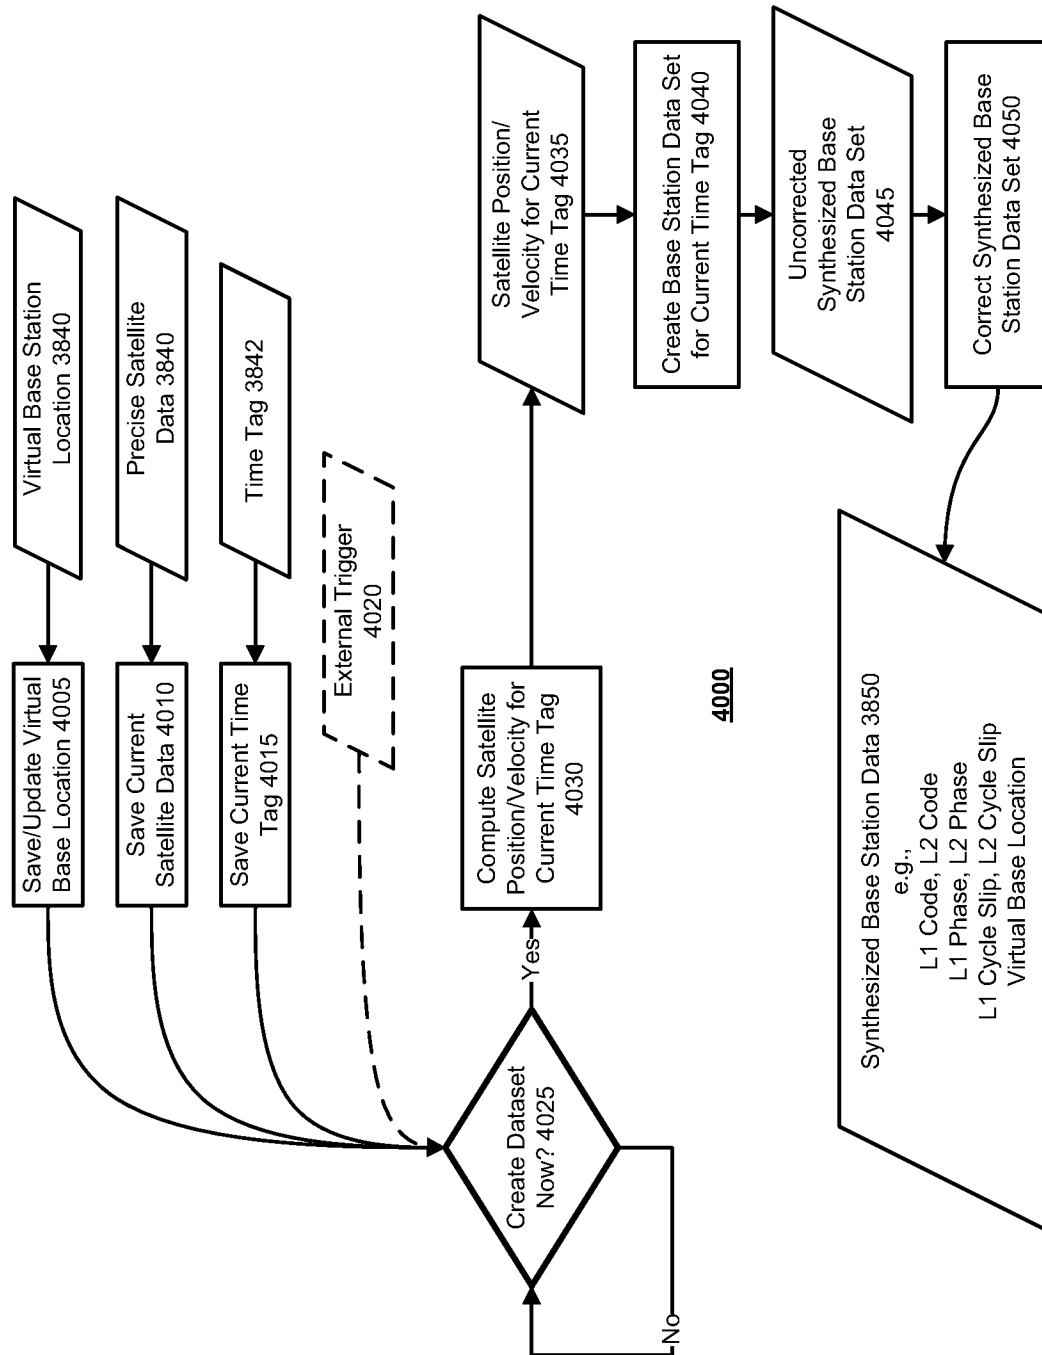


FIG. 40

Appendix A

FIG. 41
RTK Engine

Appendix A

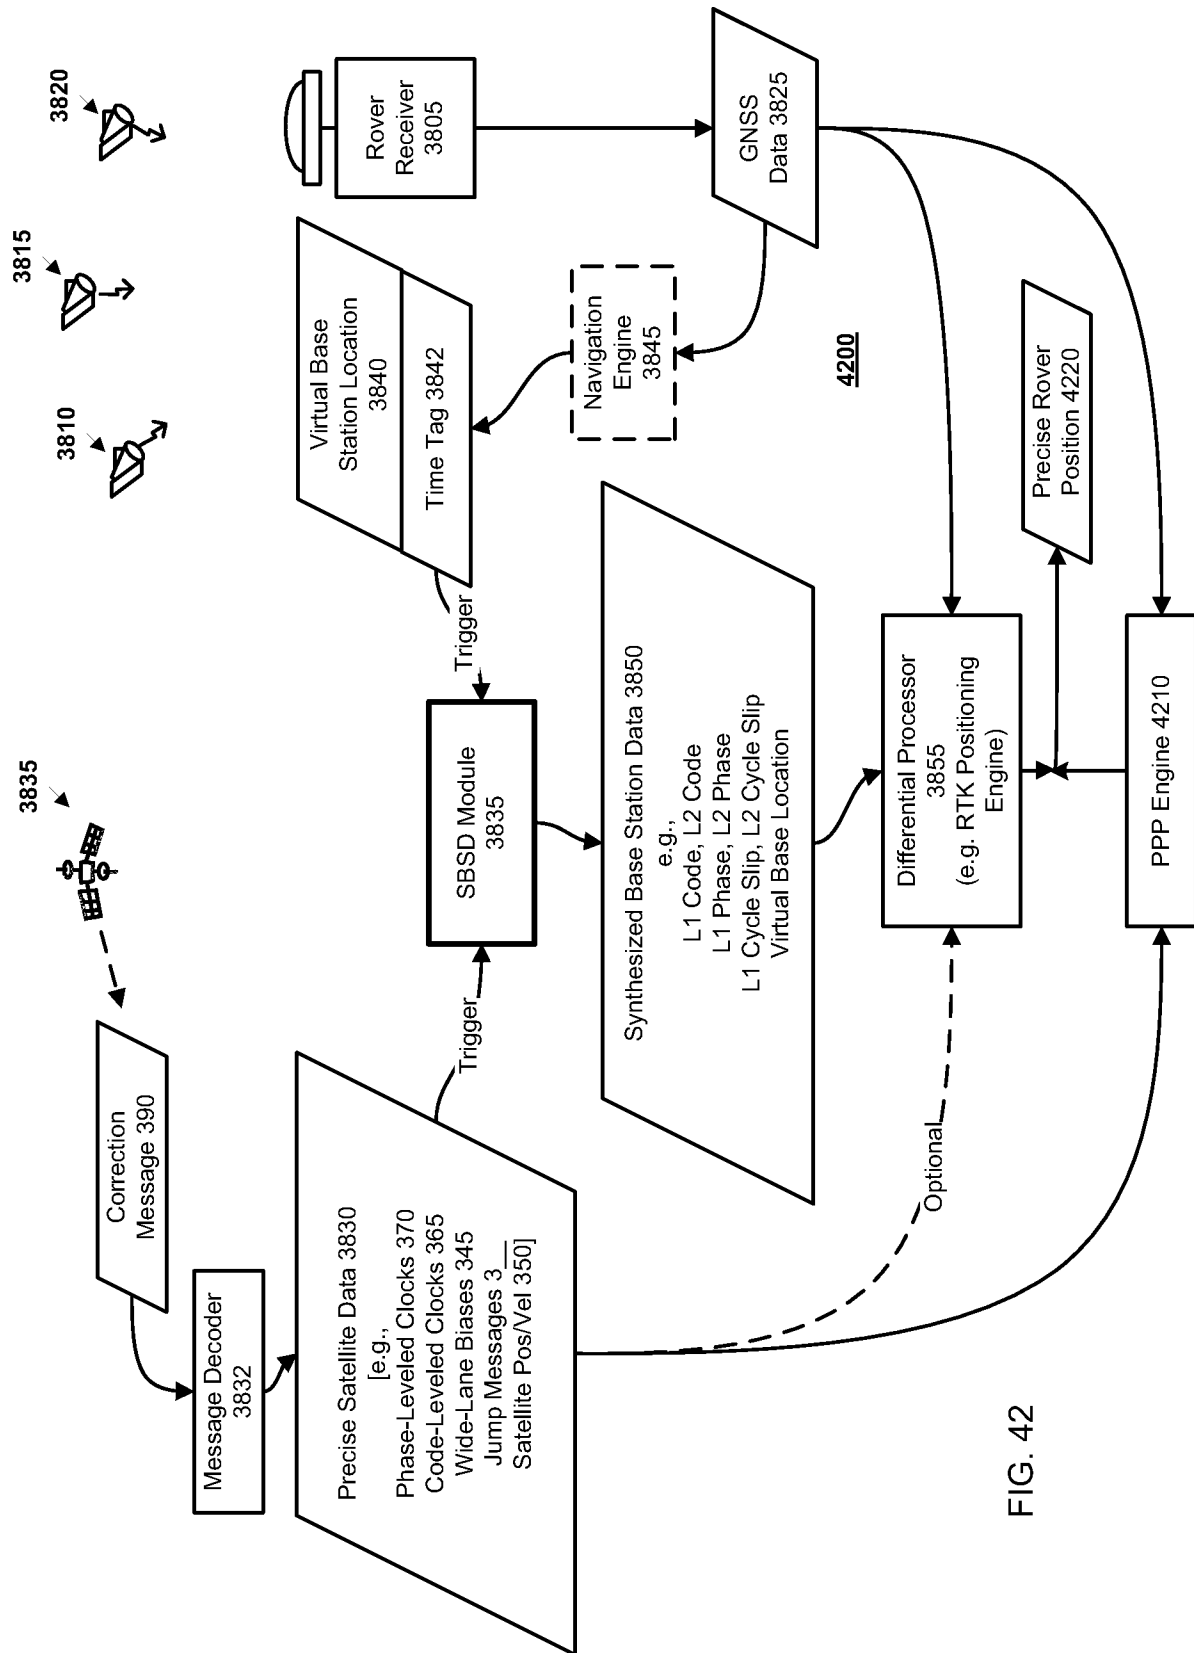


FIG. 42

Appendix A

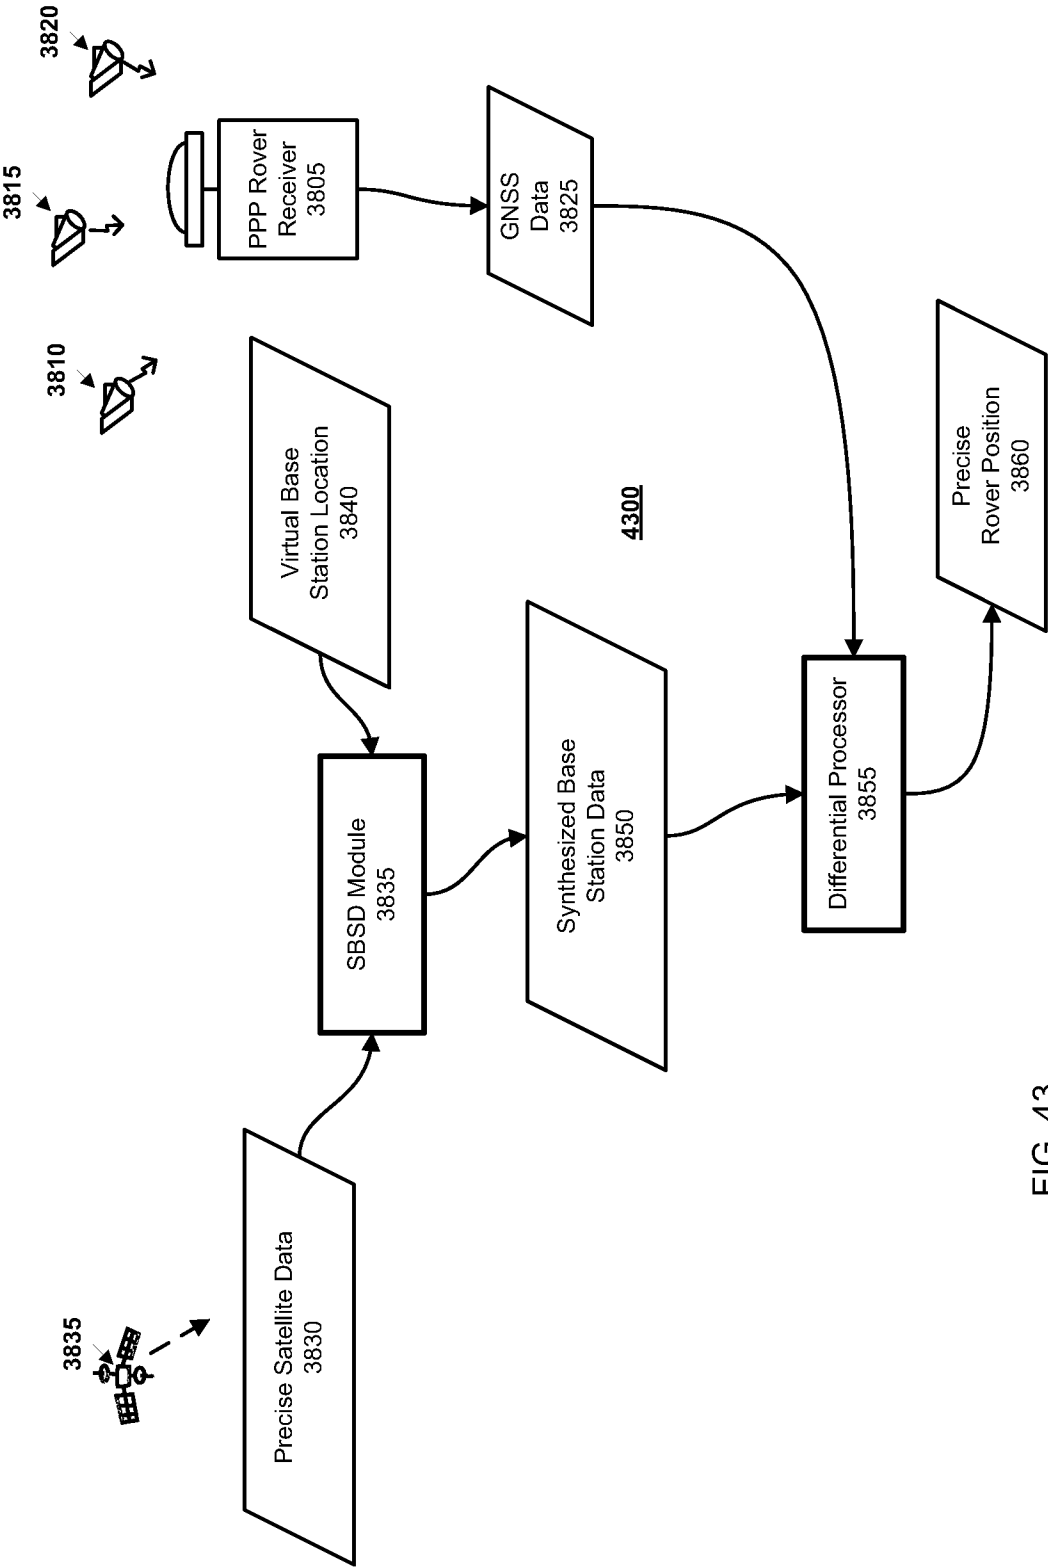


FIG. 43

Appendix A

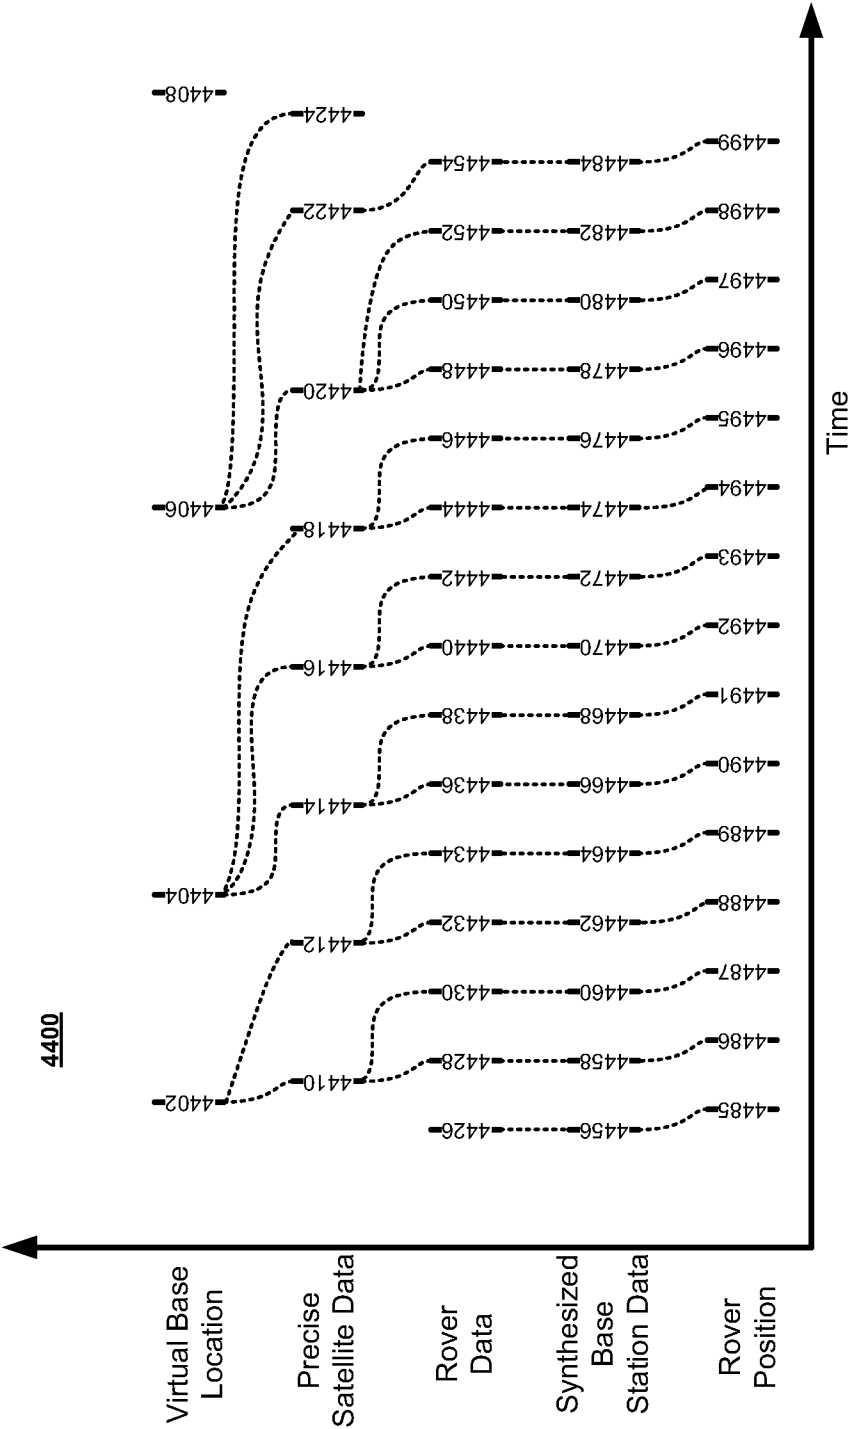


FIG. 44

Appendix A

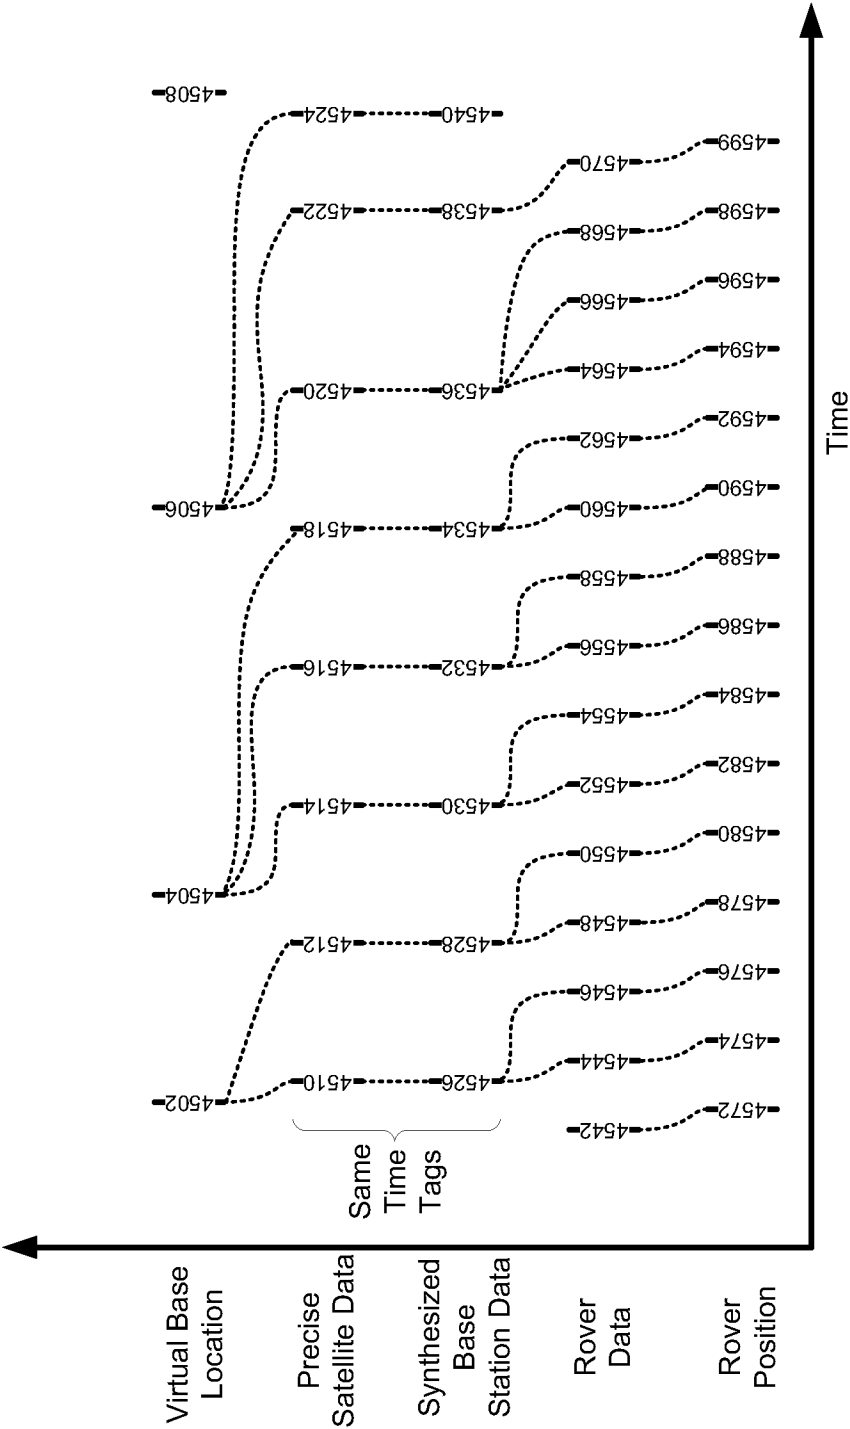


FIG. 45

Appendix A

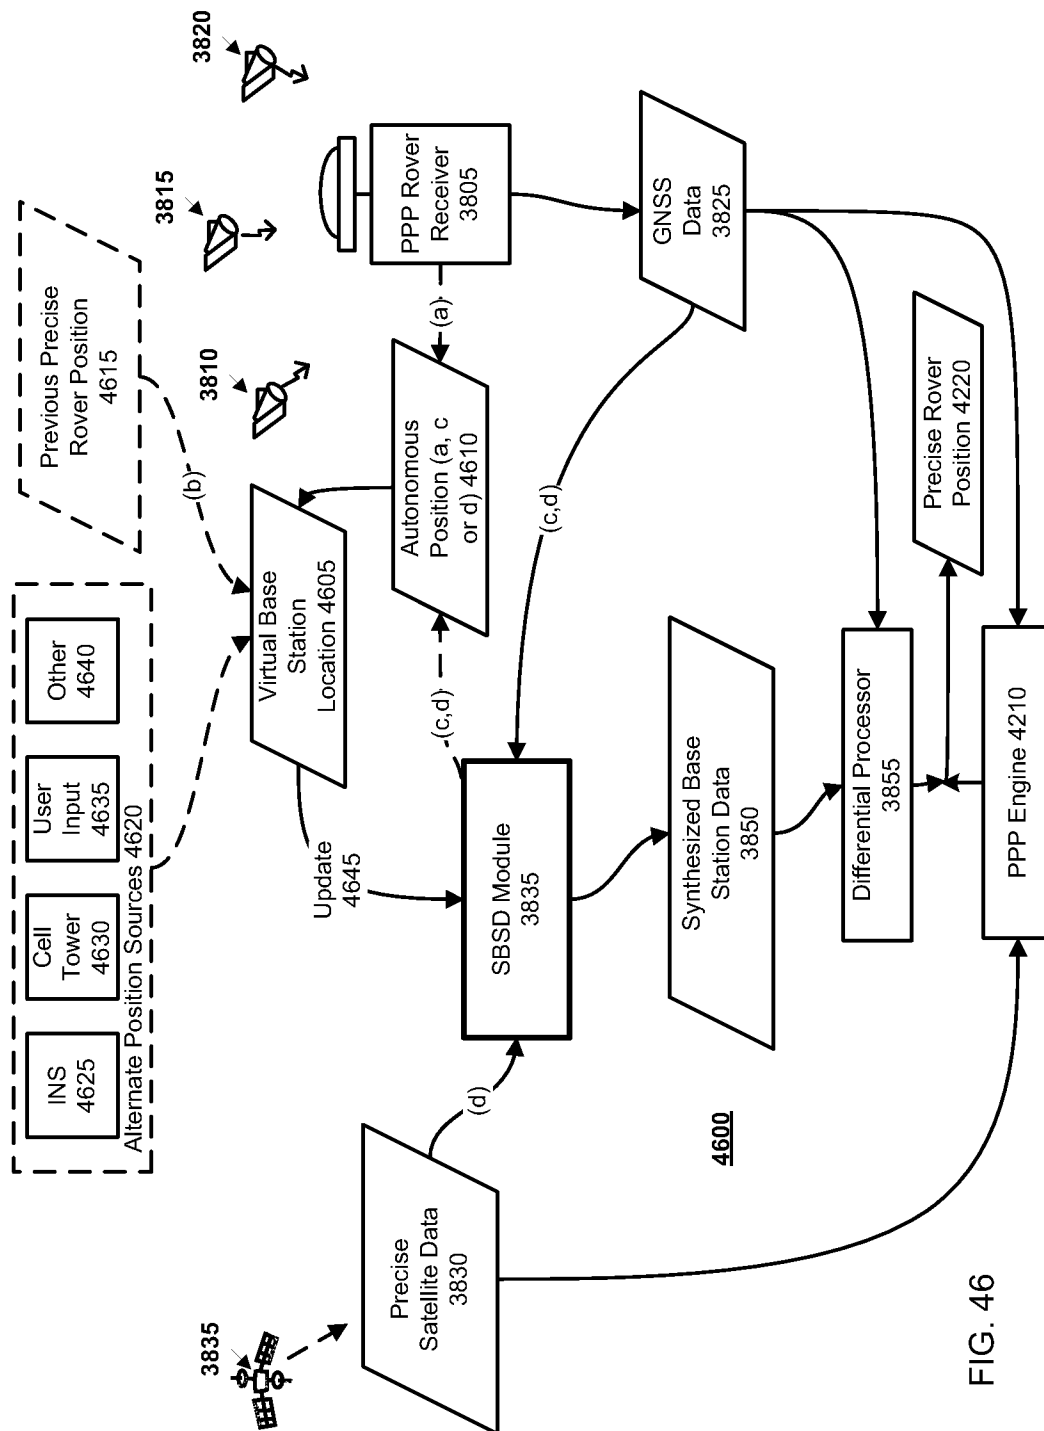


FIG. 46

Appendix A

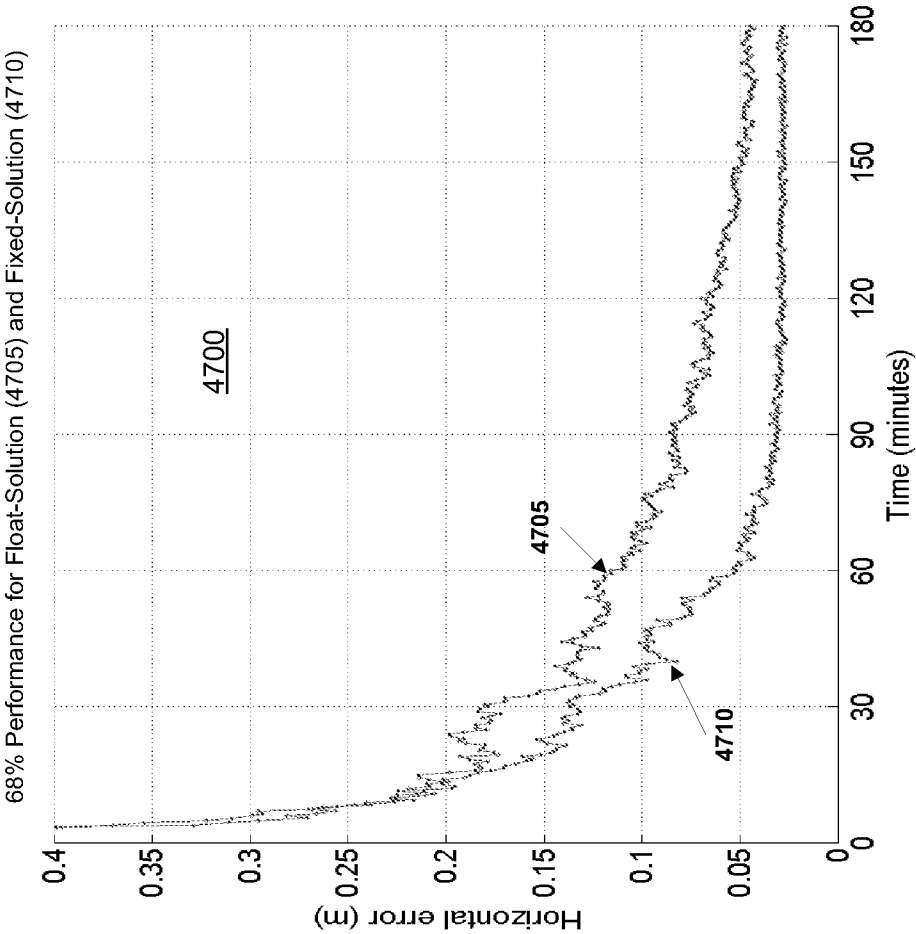


FIG. 47
PPP Ambiguity Fixing

Appendix A

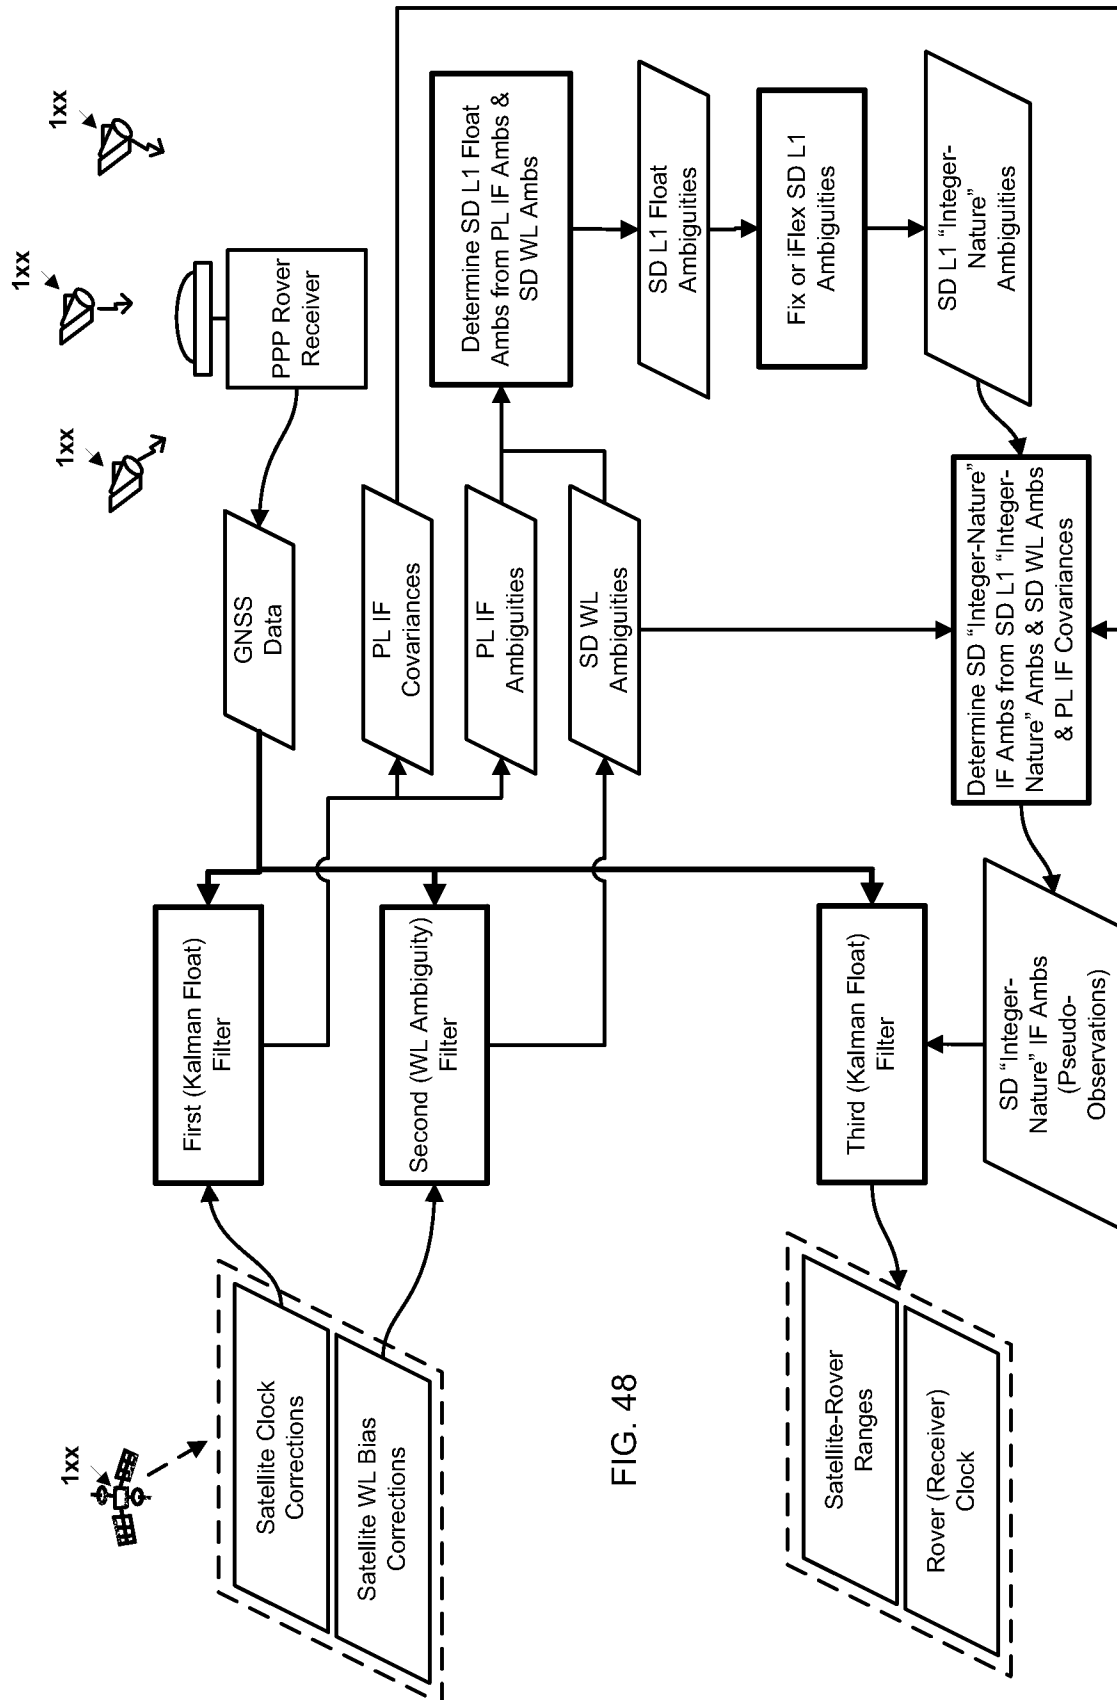


FIG. 48

Appendix A

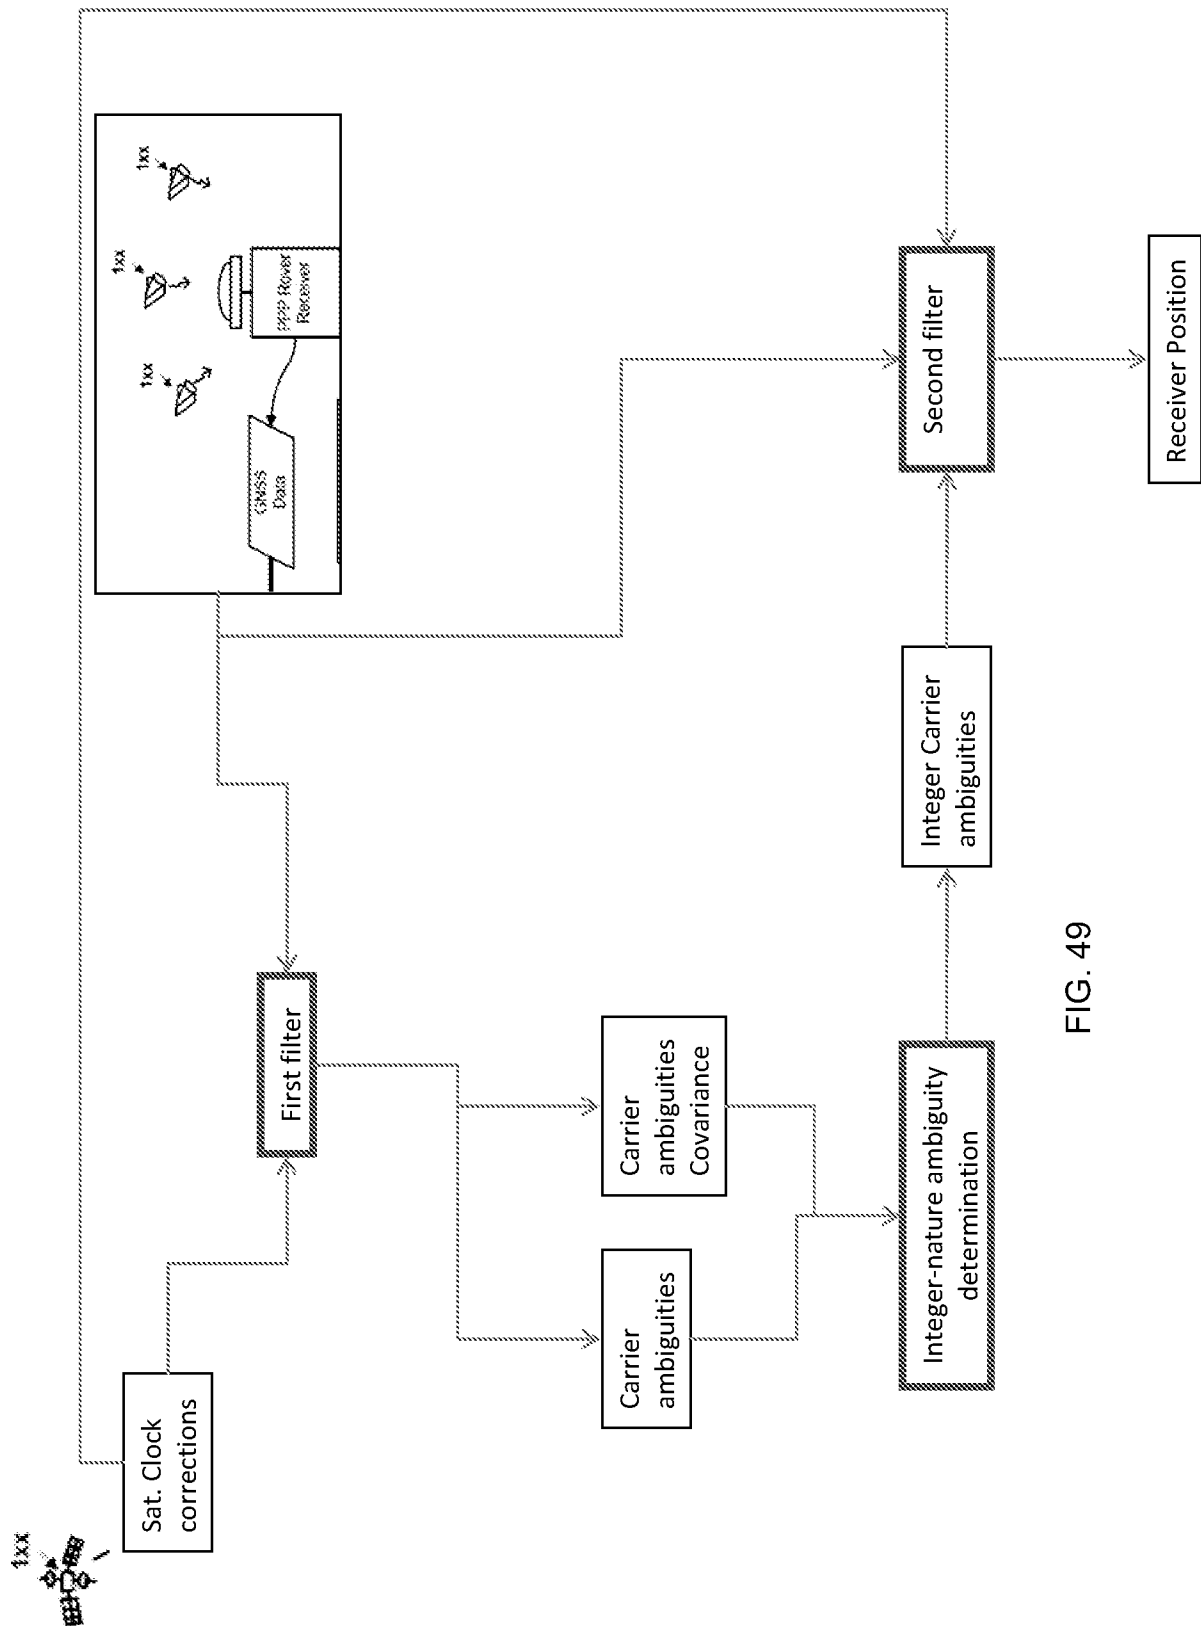


FIG. 49

Appendix A

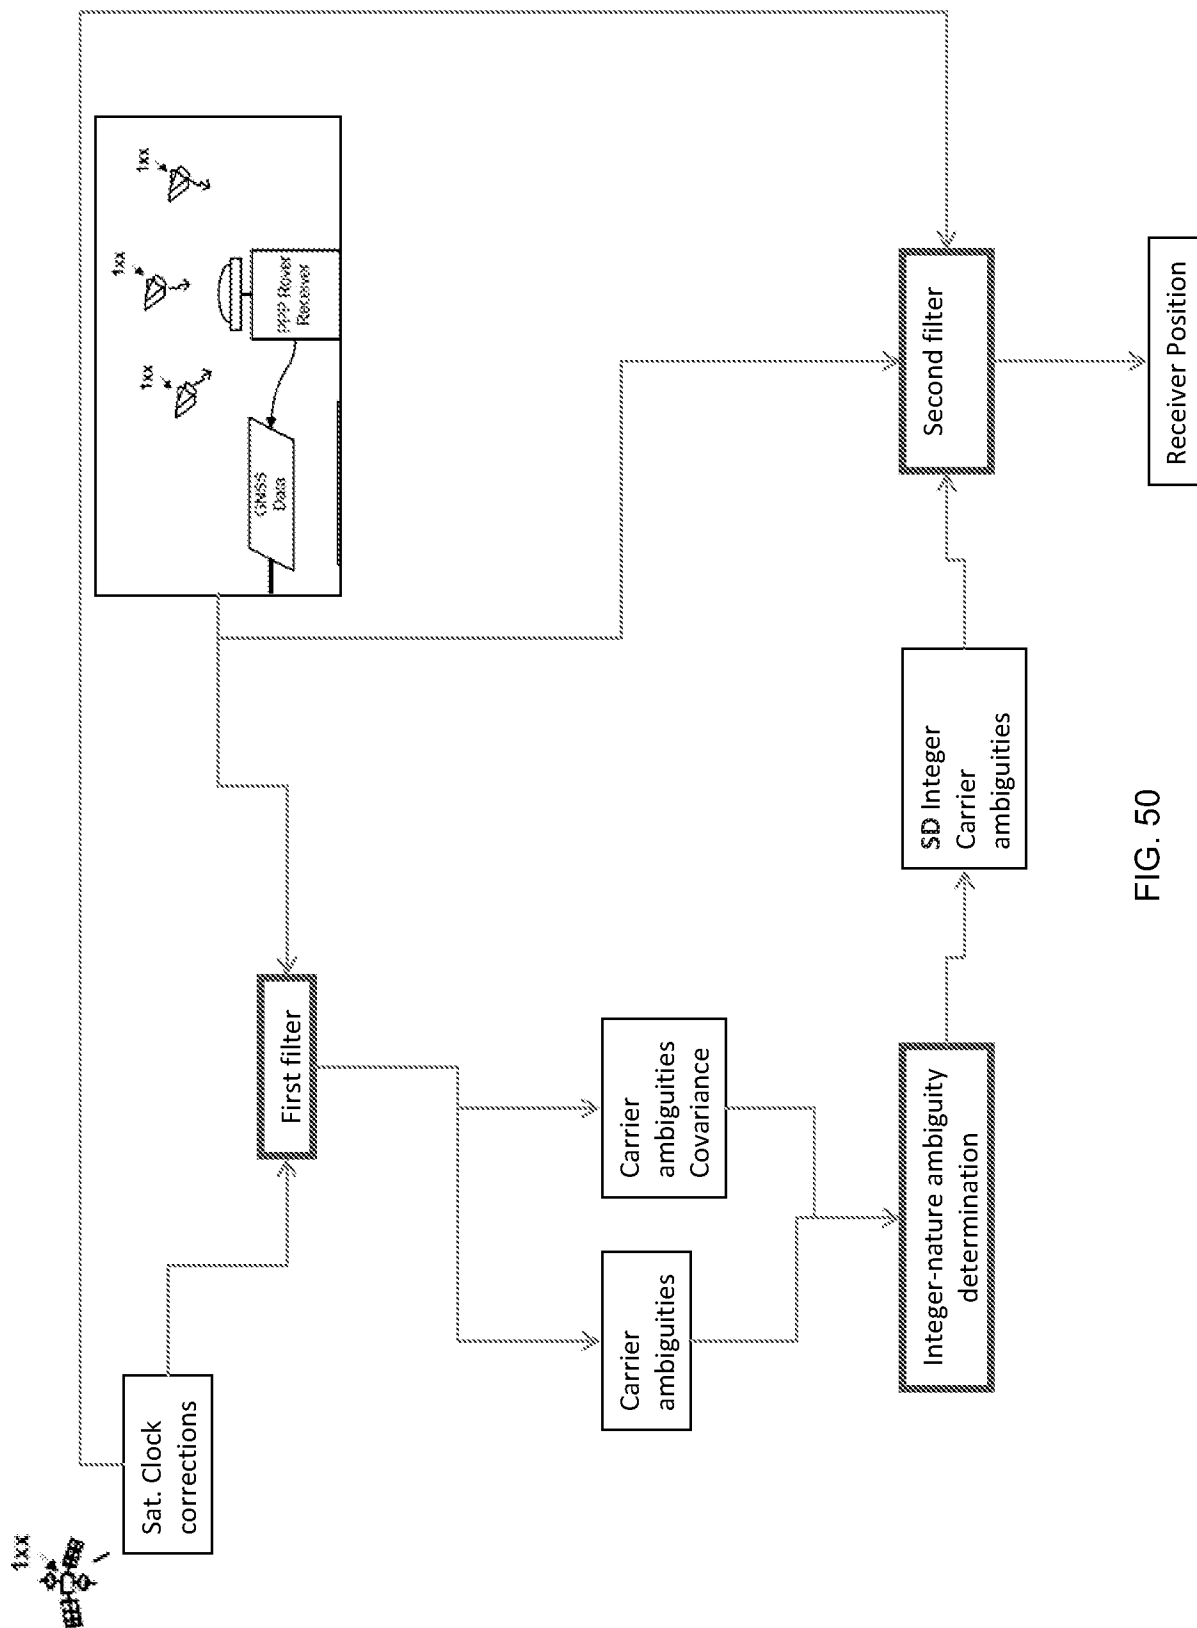


FIG. 50

Appendix A

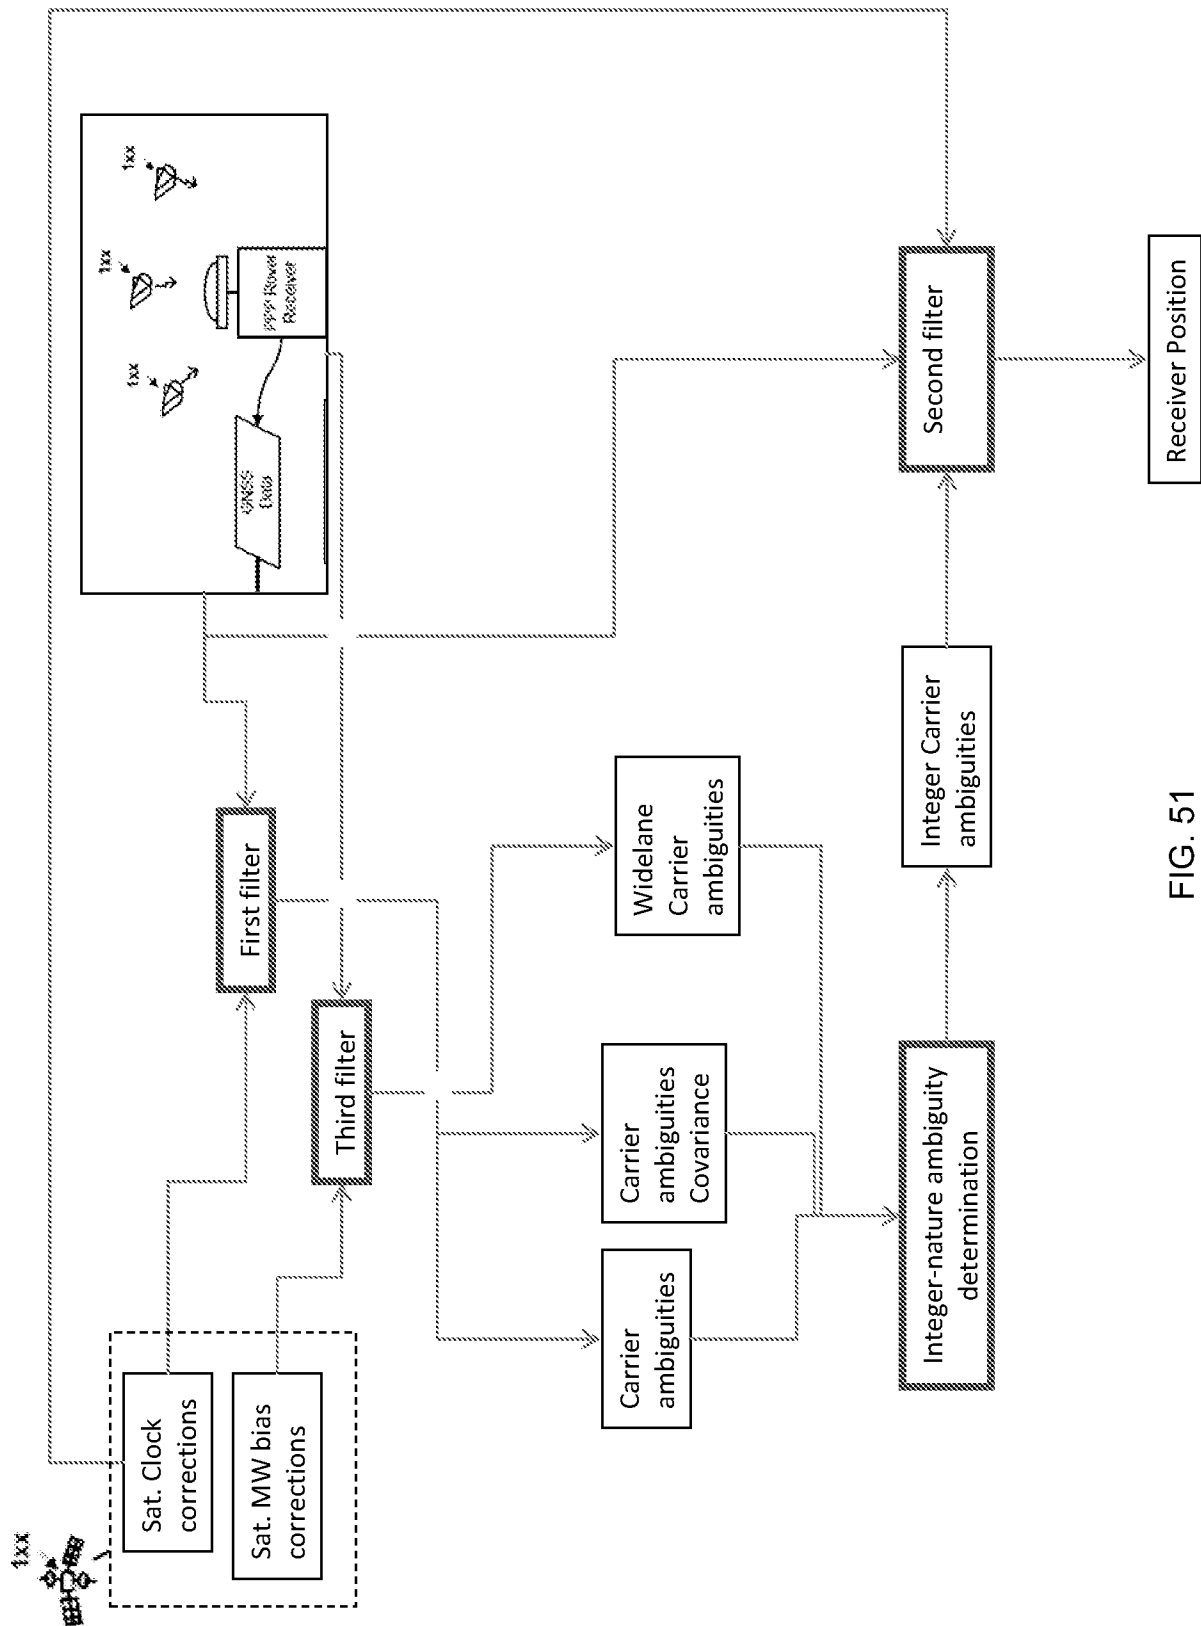


FIG. 51

Appendix A


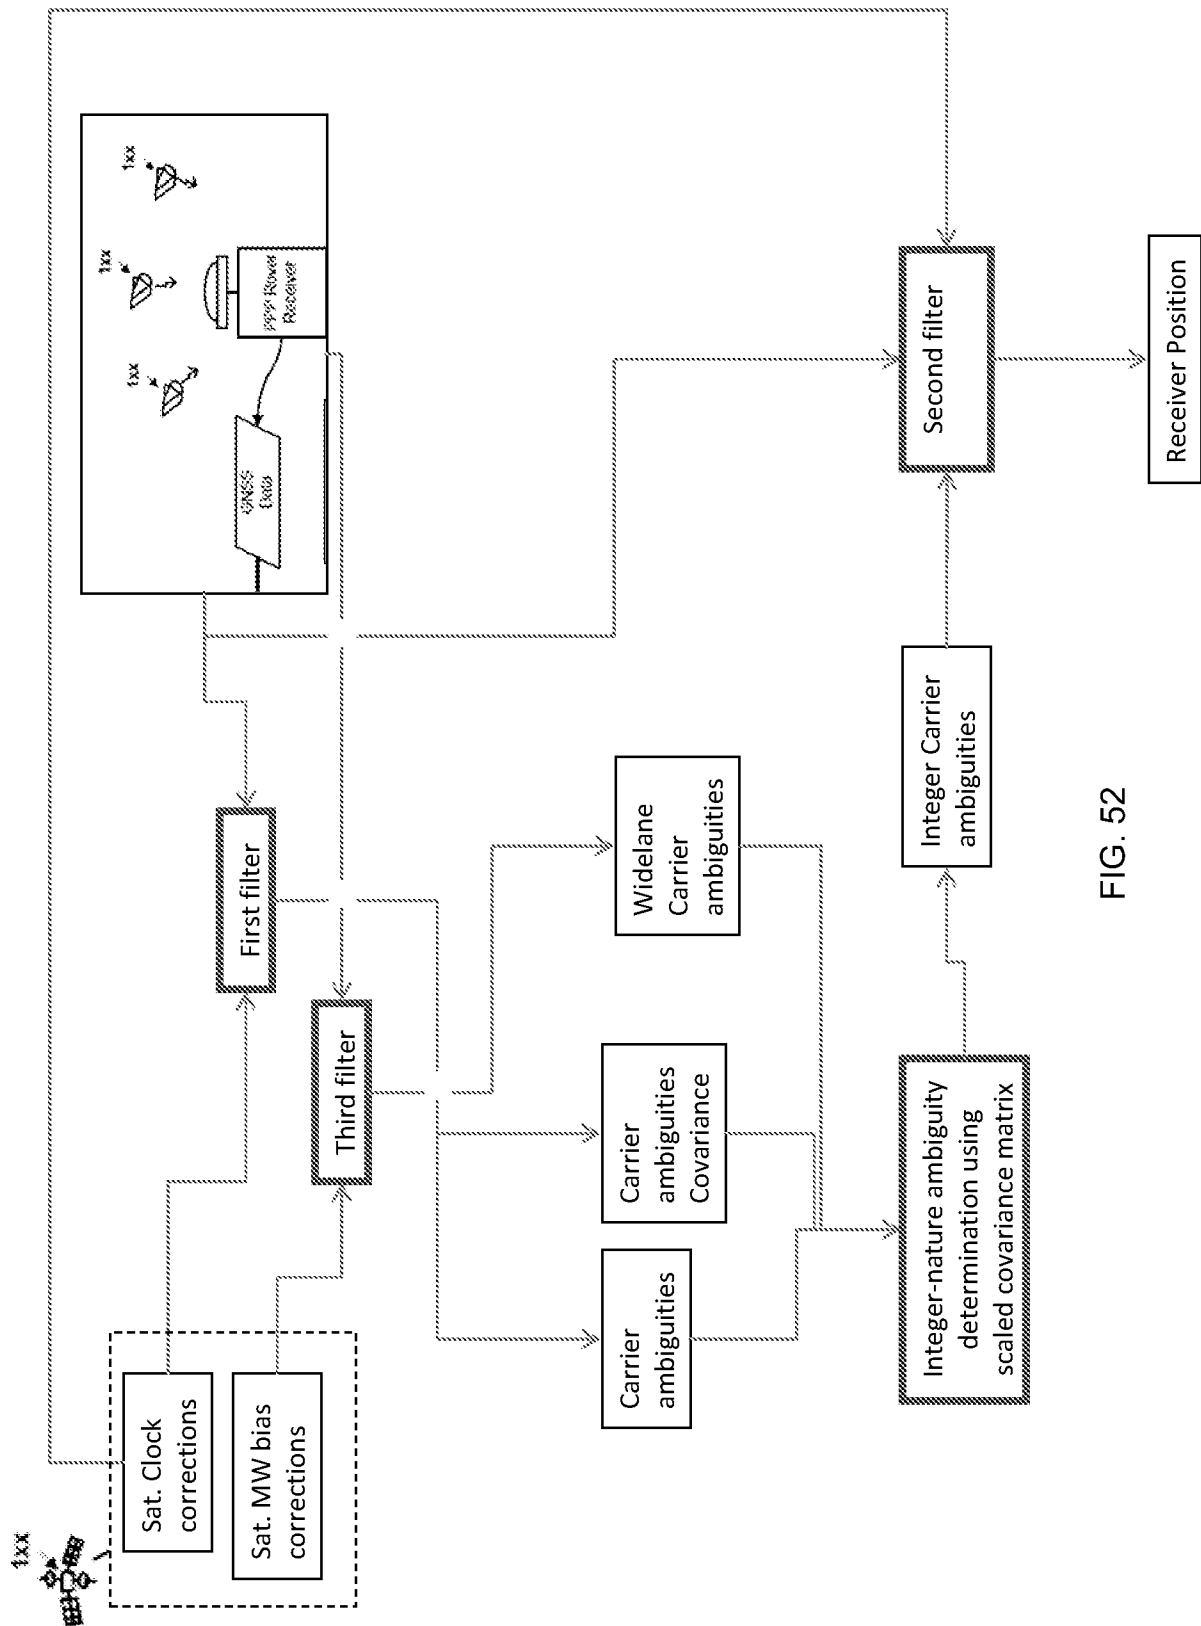


FIG. 52

Appendix A

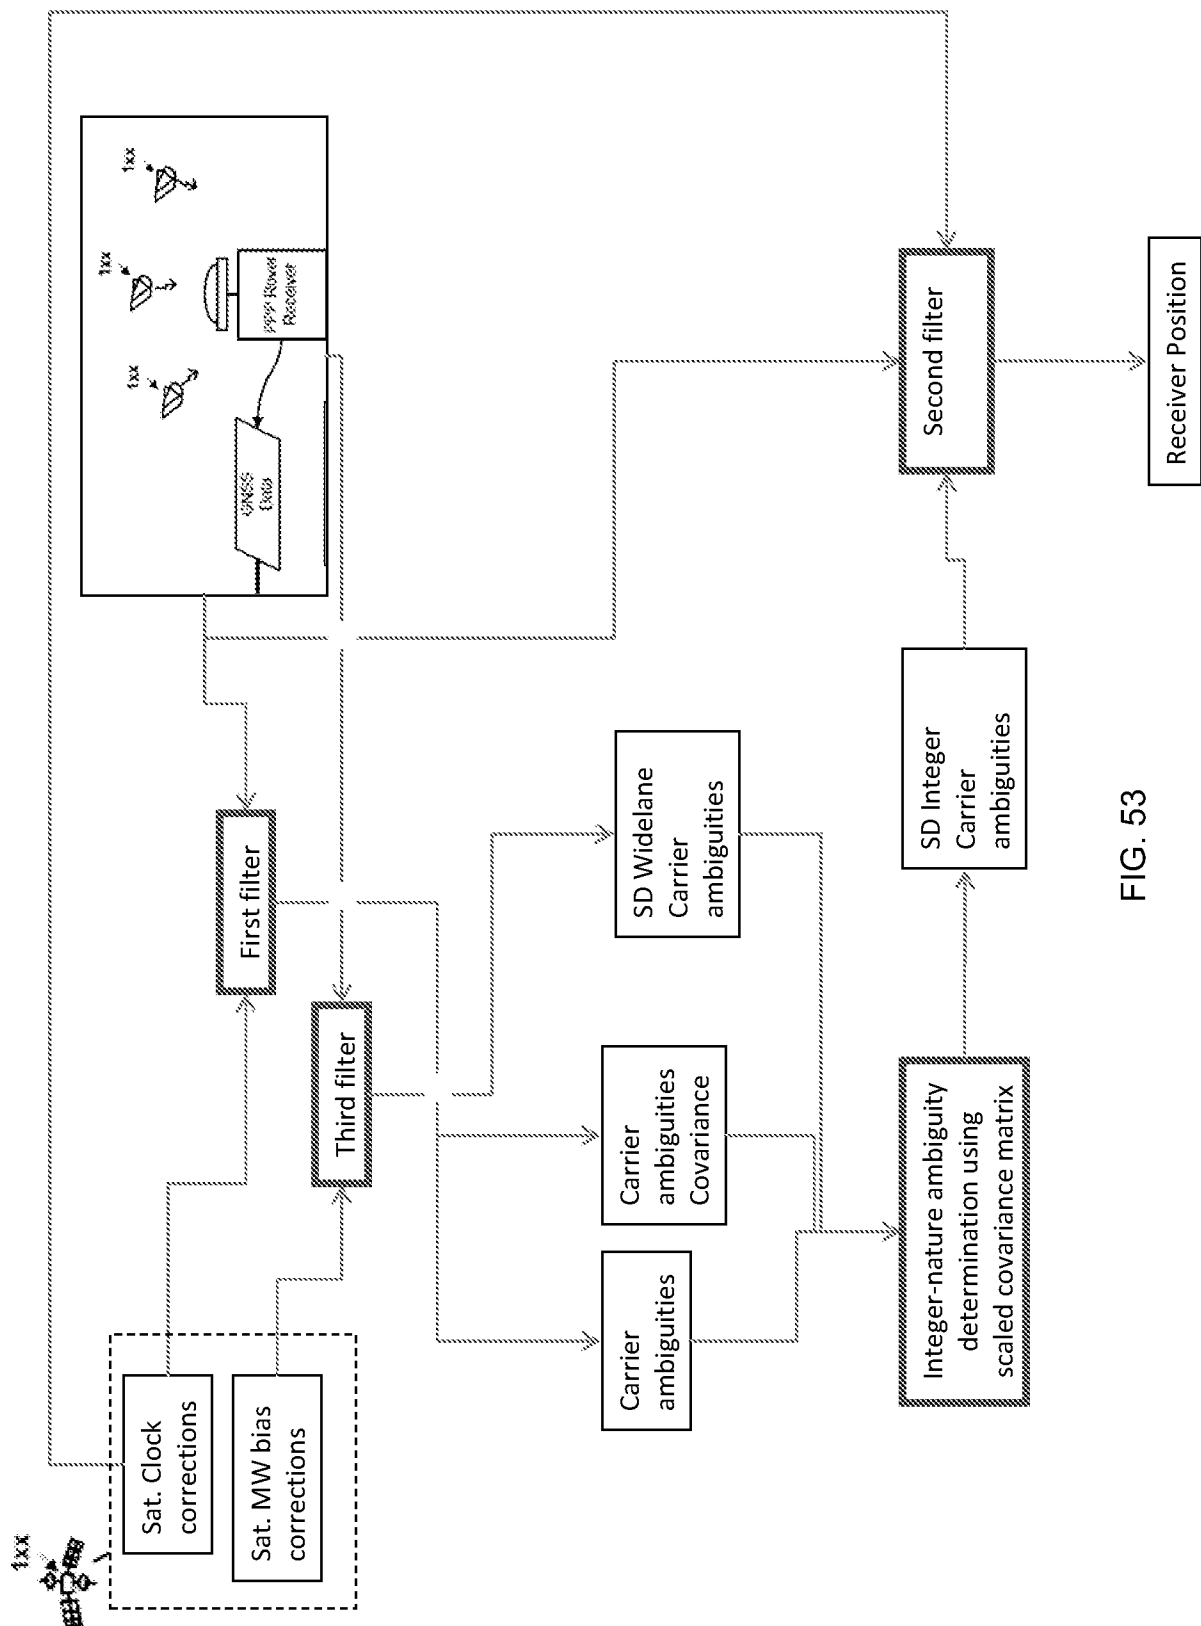

Appendix A

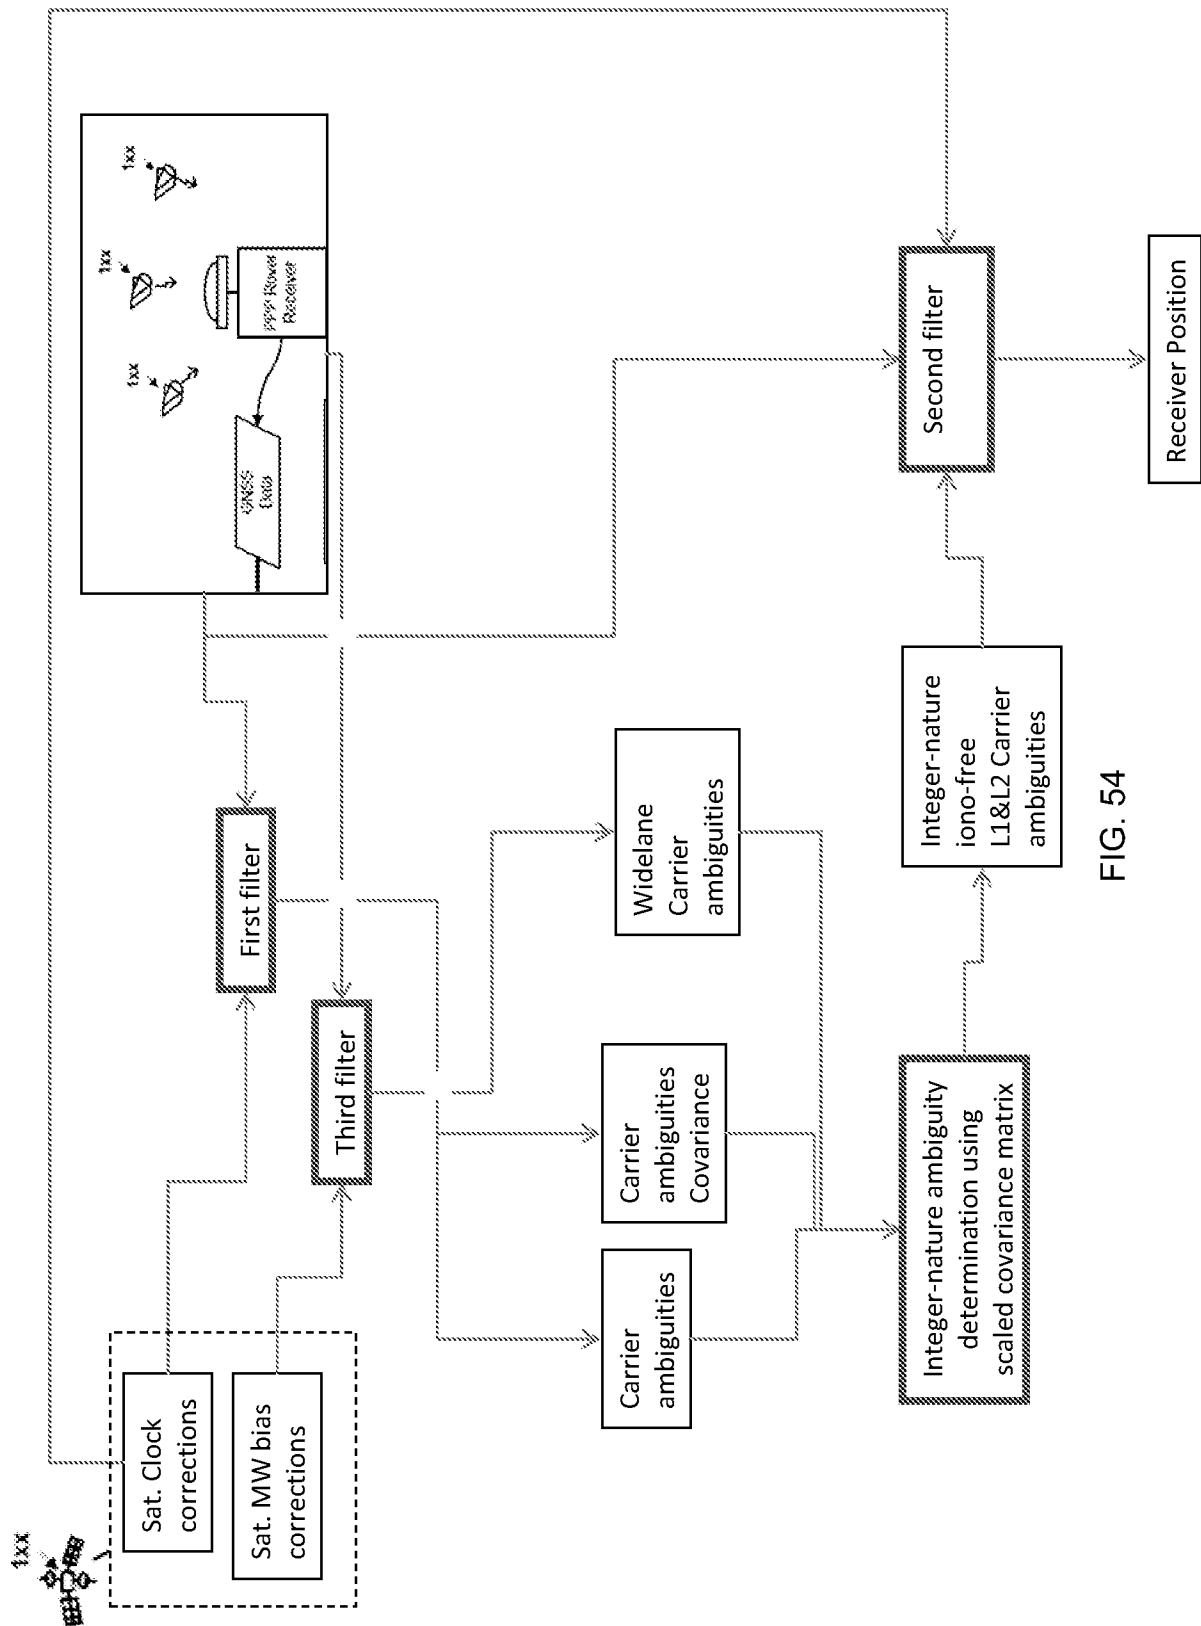


FIG. 54

Appendix A

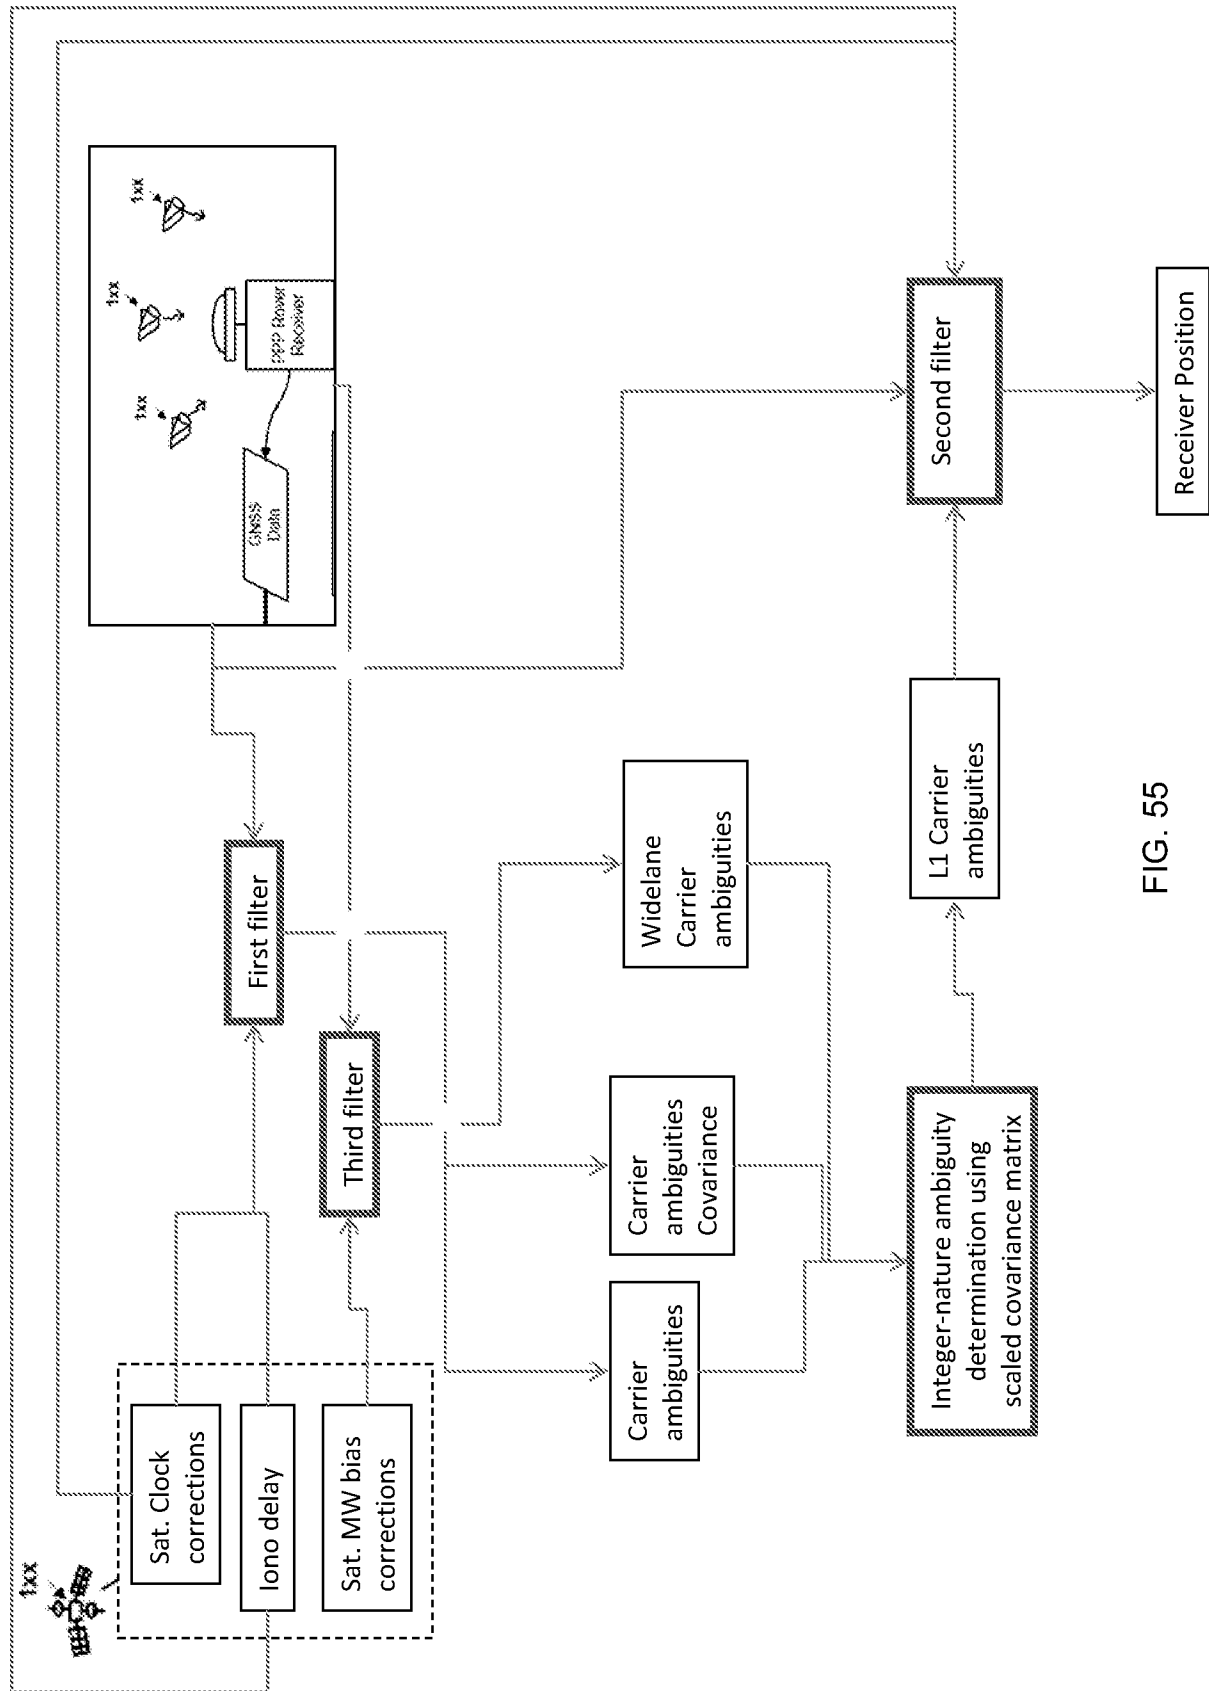


FIG. 55

Appendix A

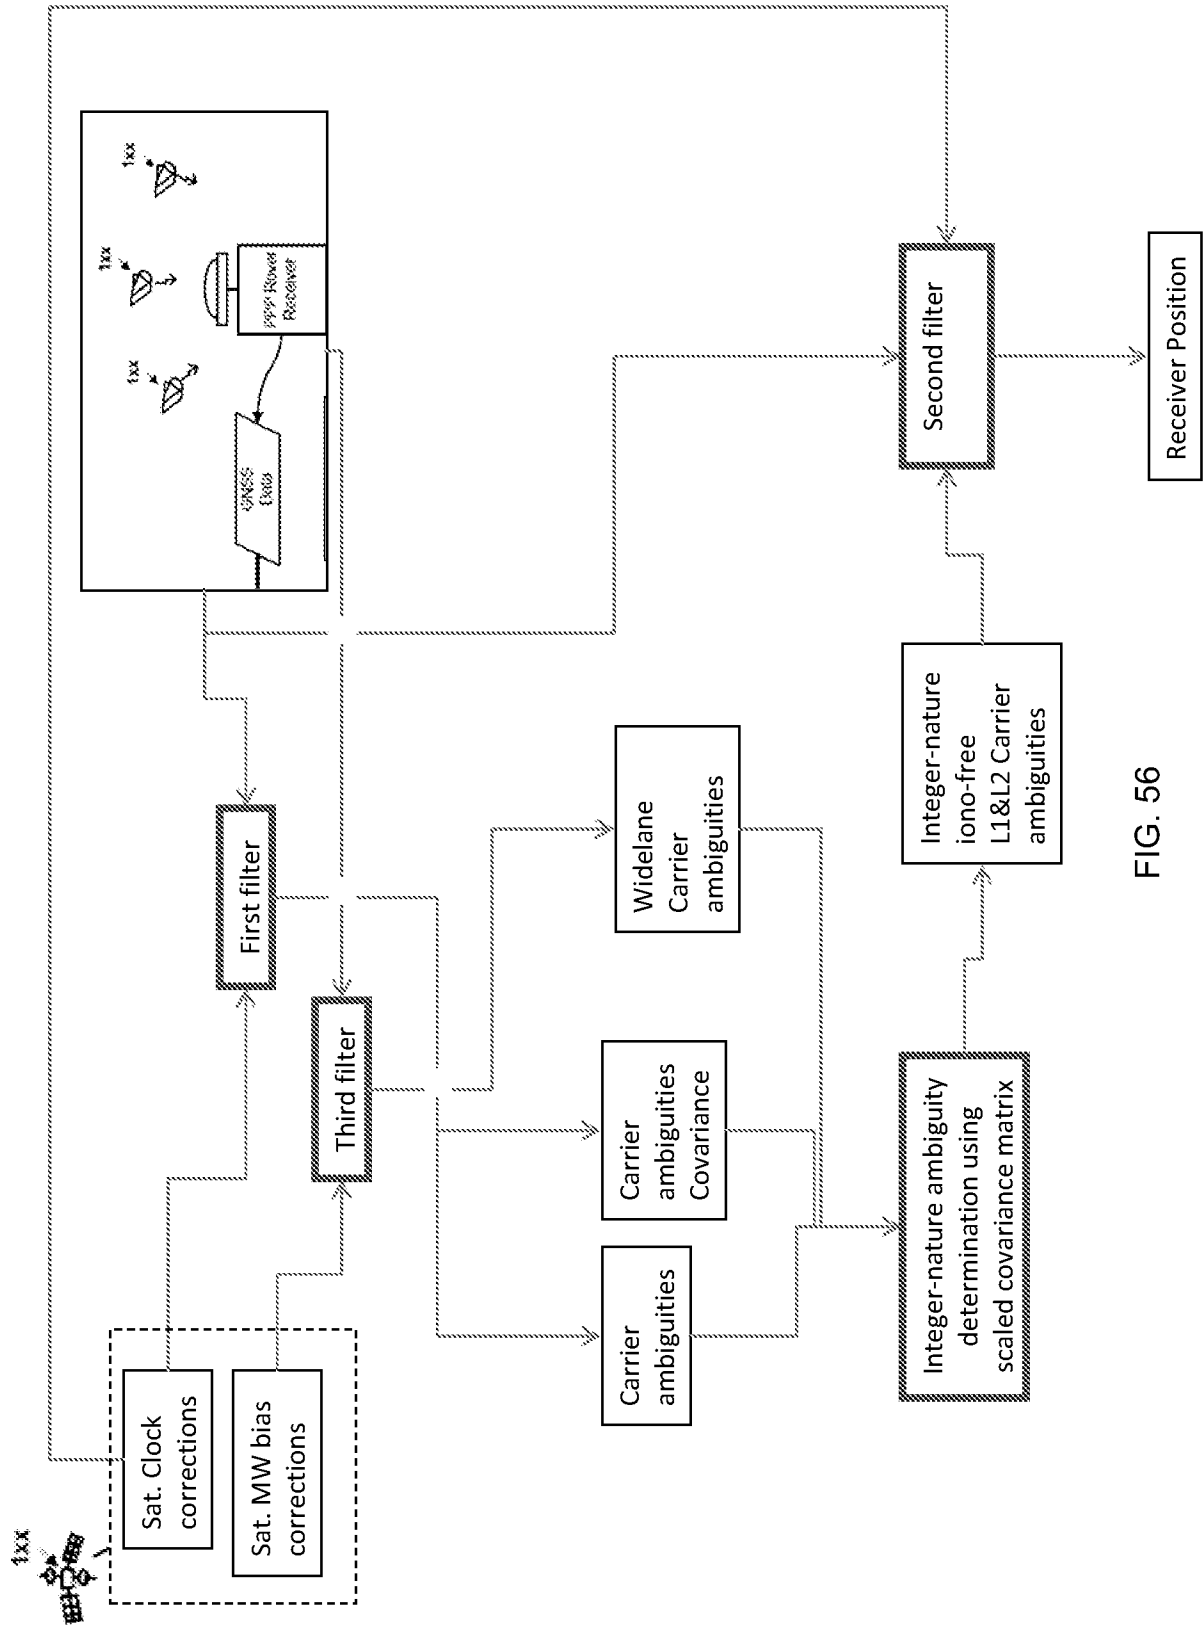


FIG. 56

Appendix A

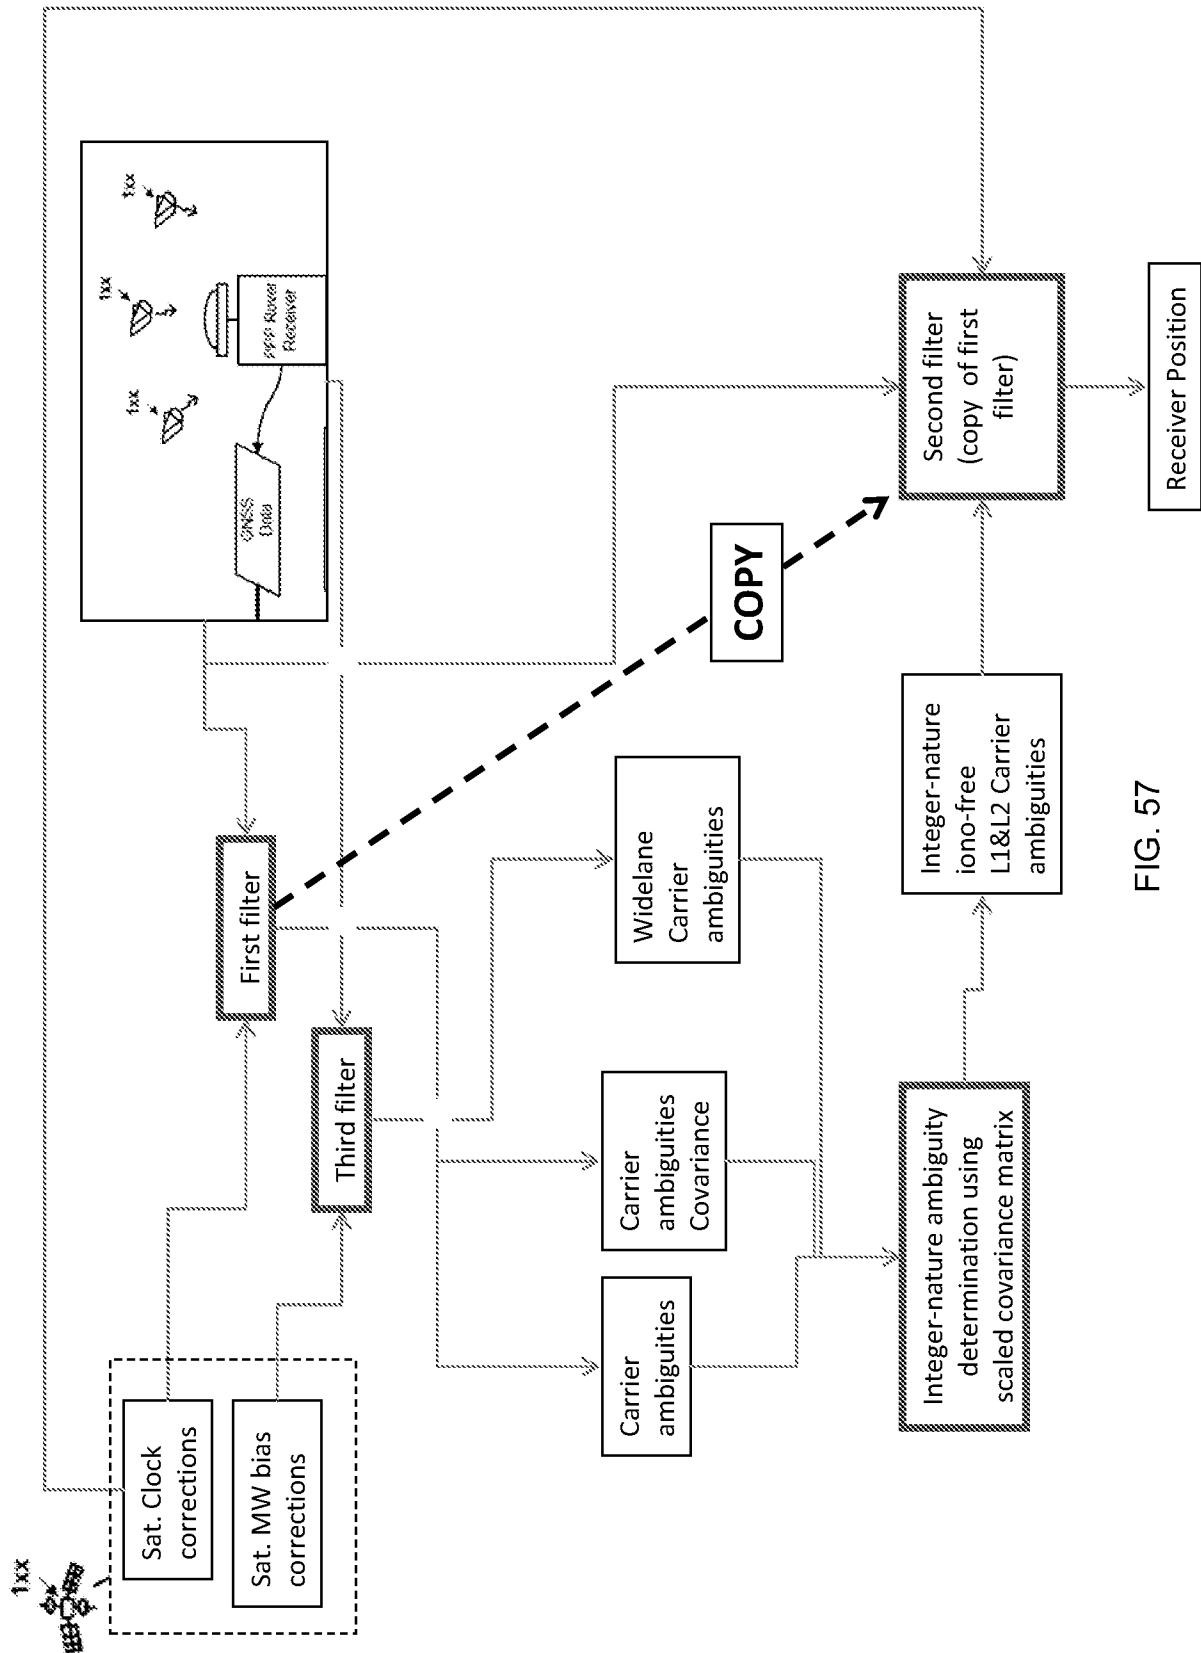


FIG. 57

Appendix A

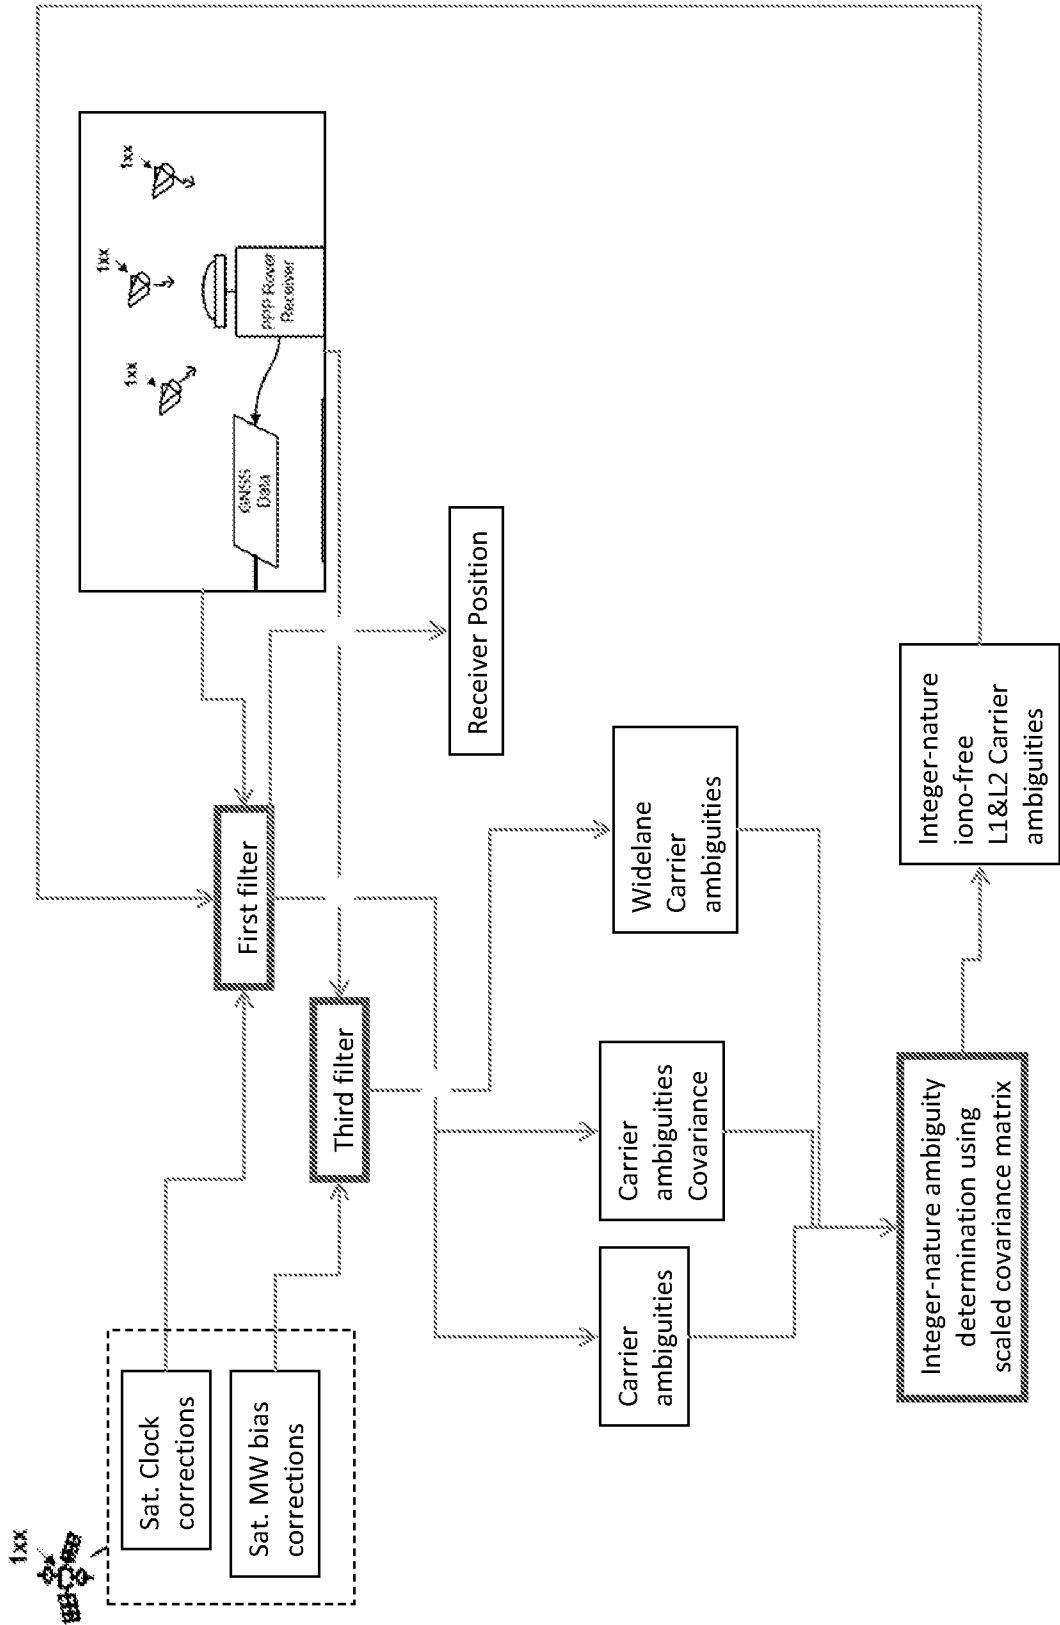


FIG. 58

Appendix A


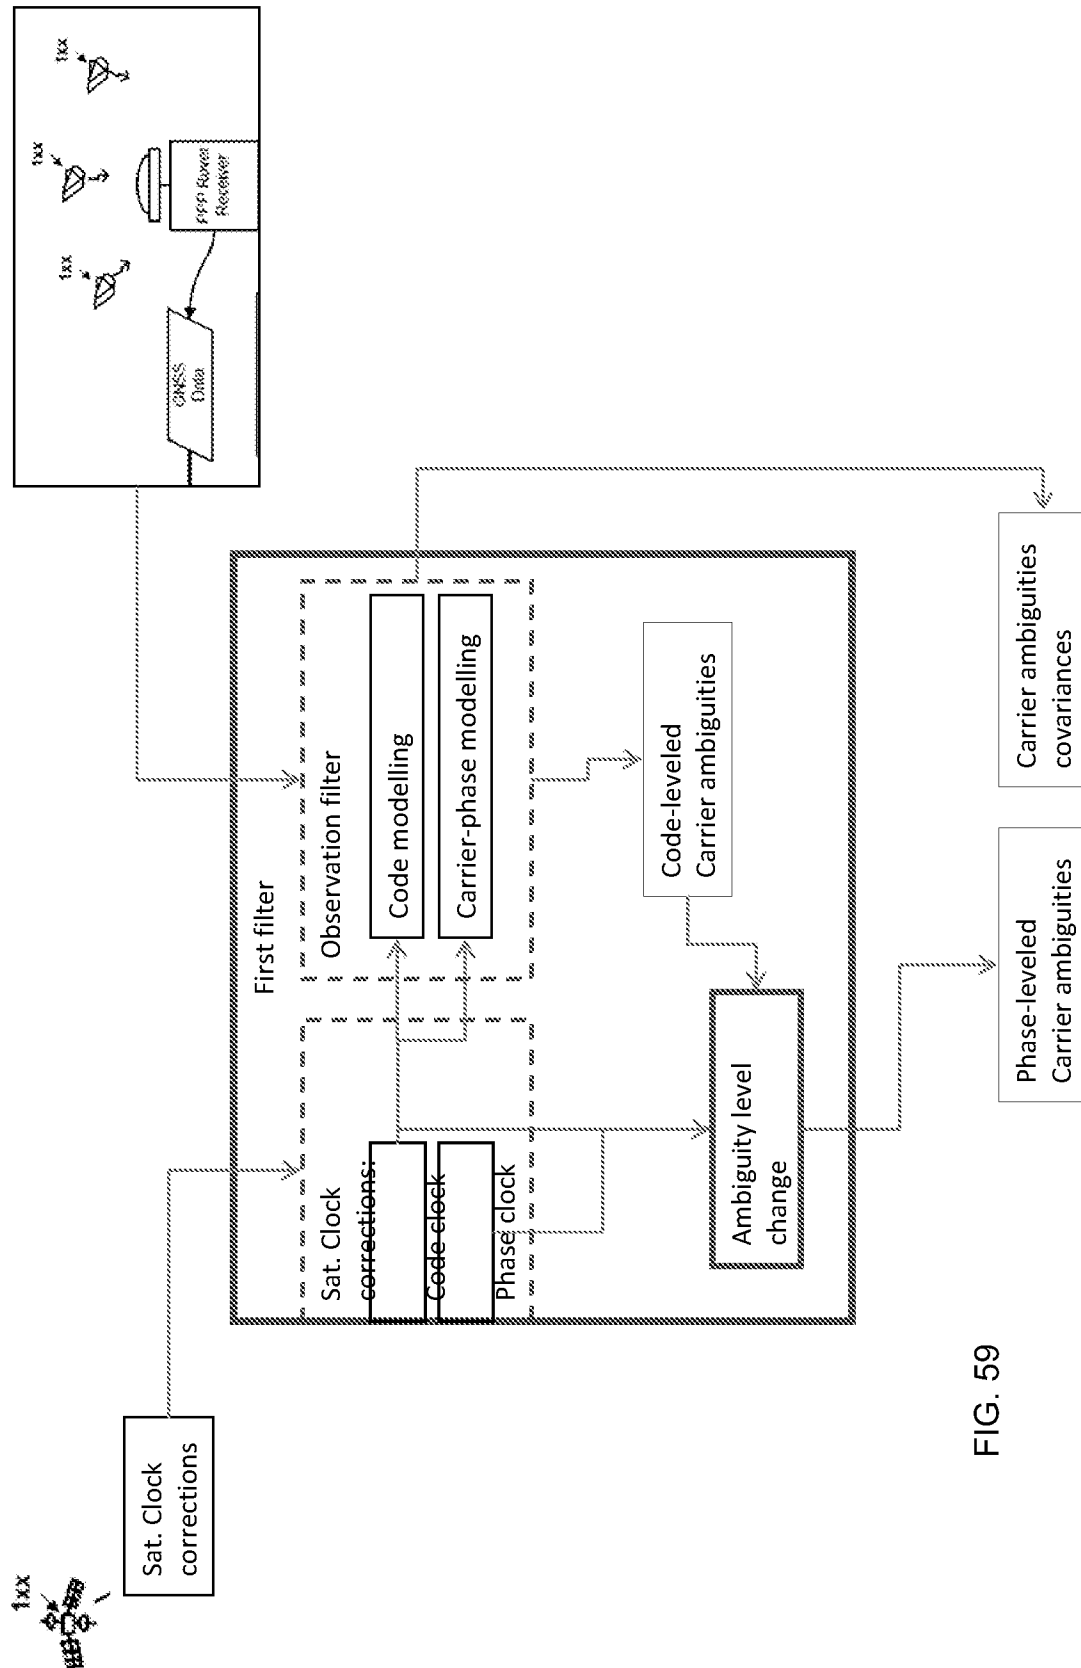


FIG. 59

Appendix A

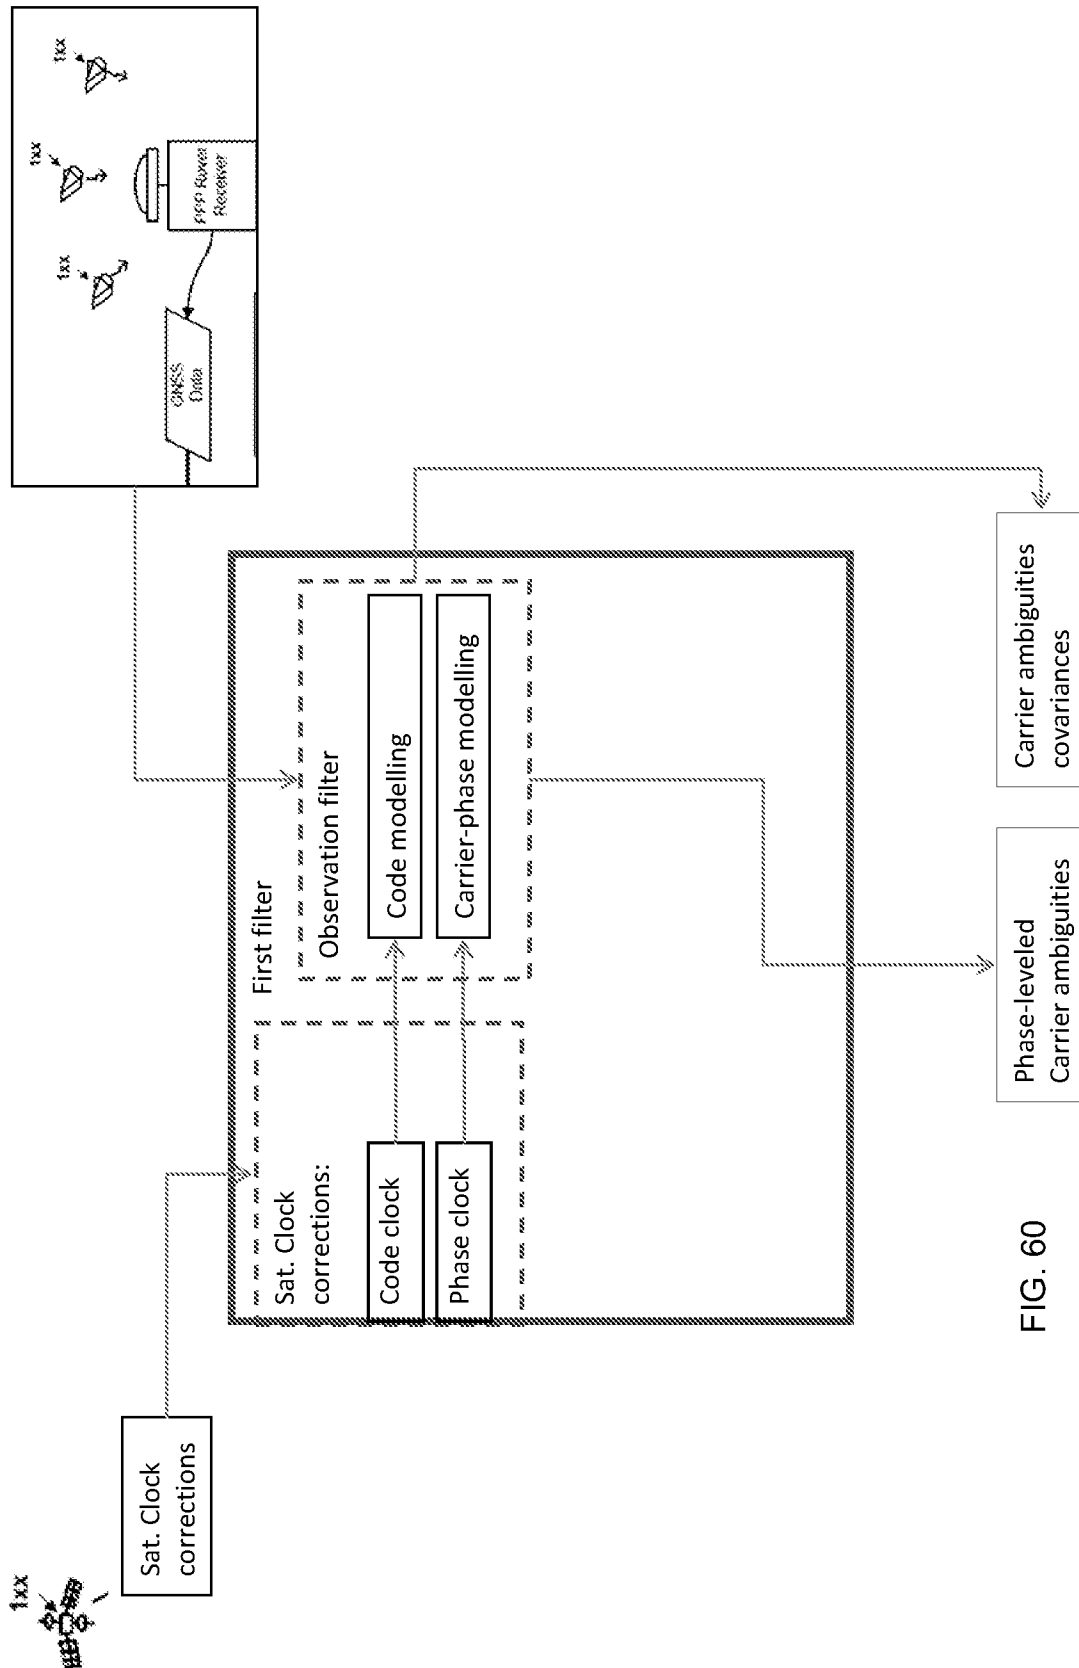

Appendix A

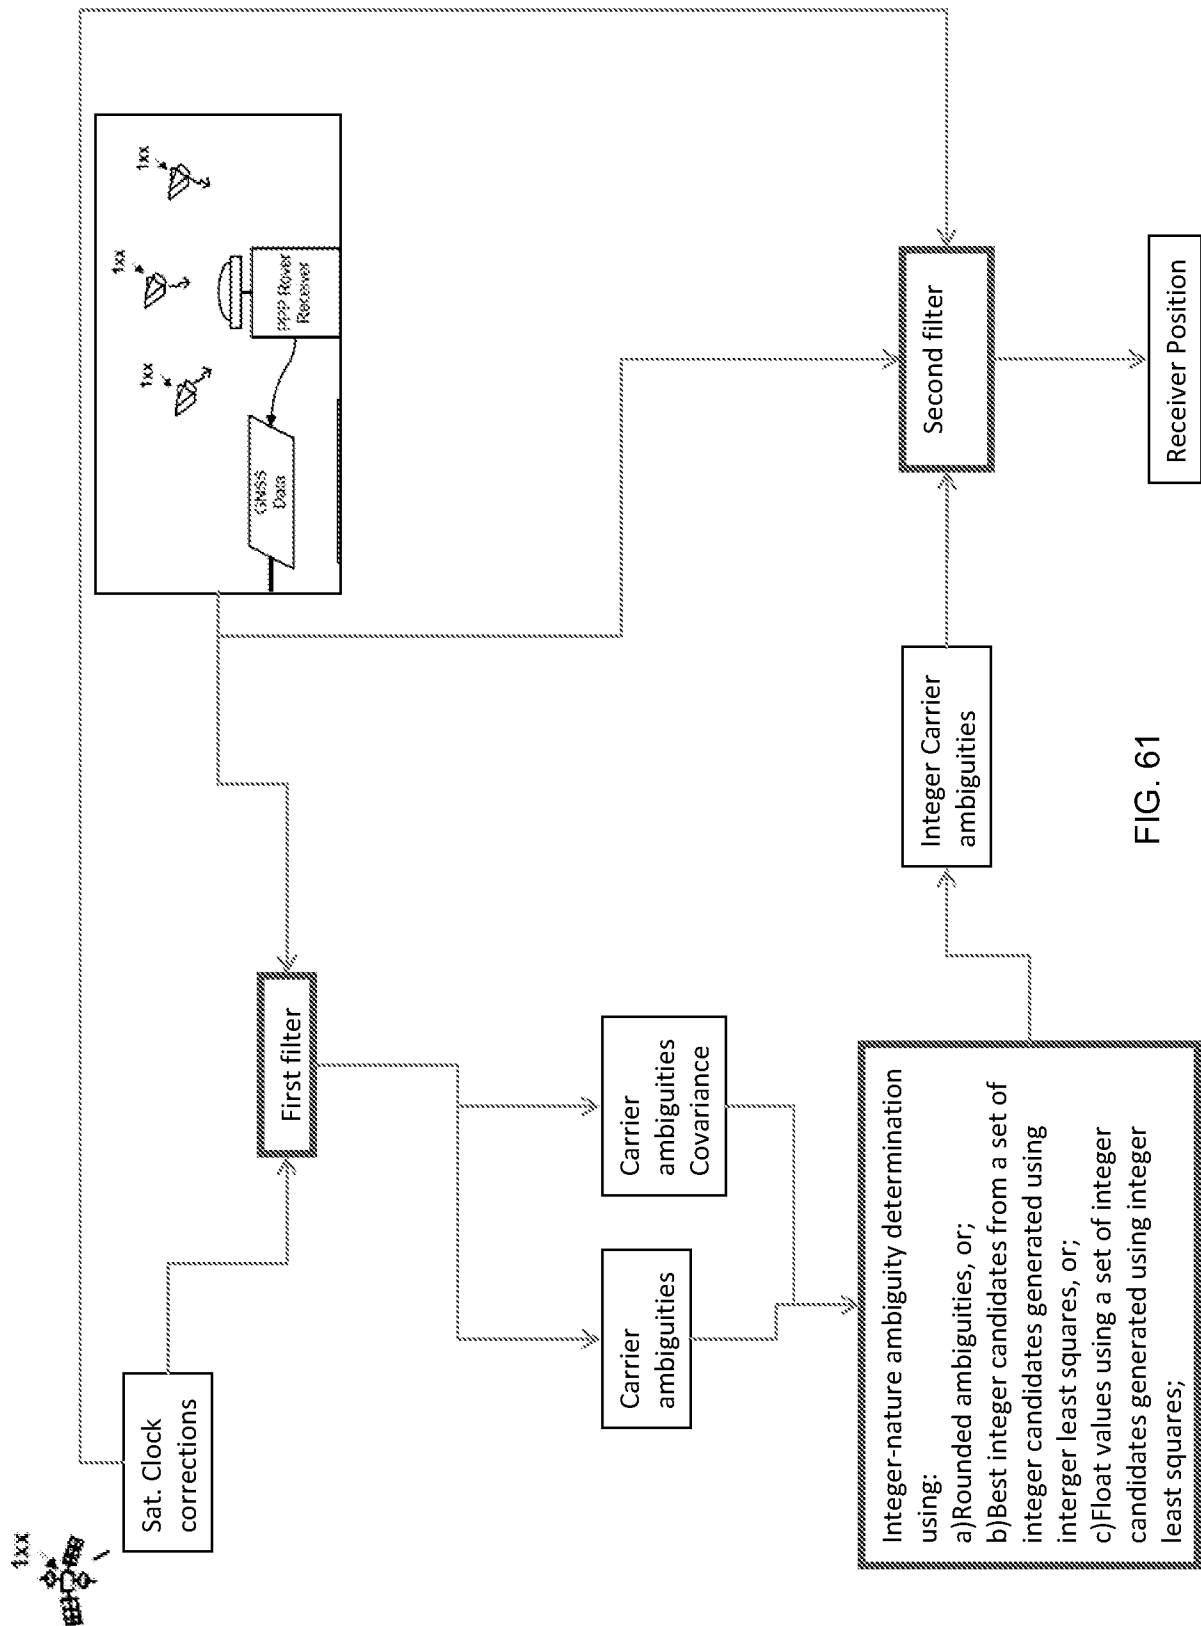


FIG. 61

Appendix A

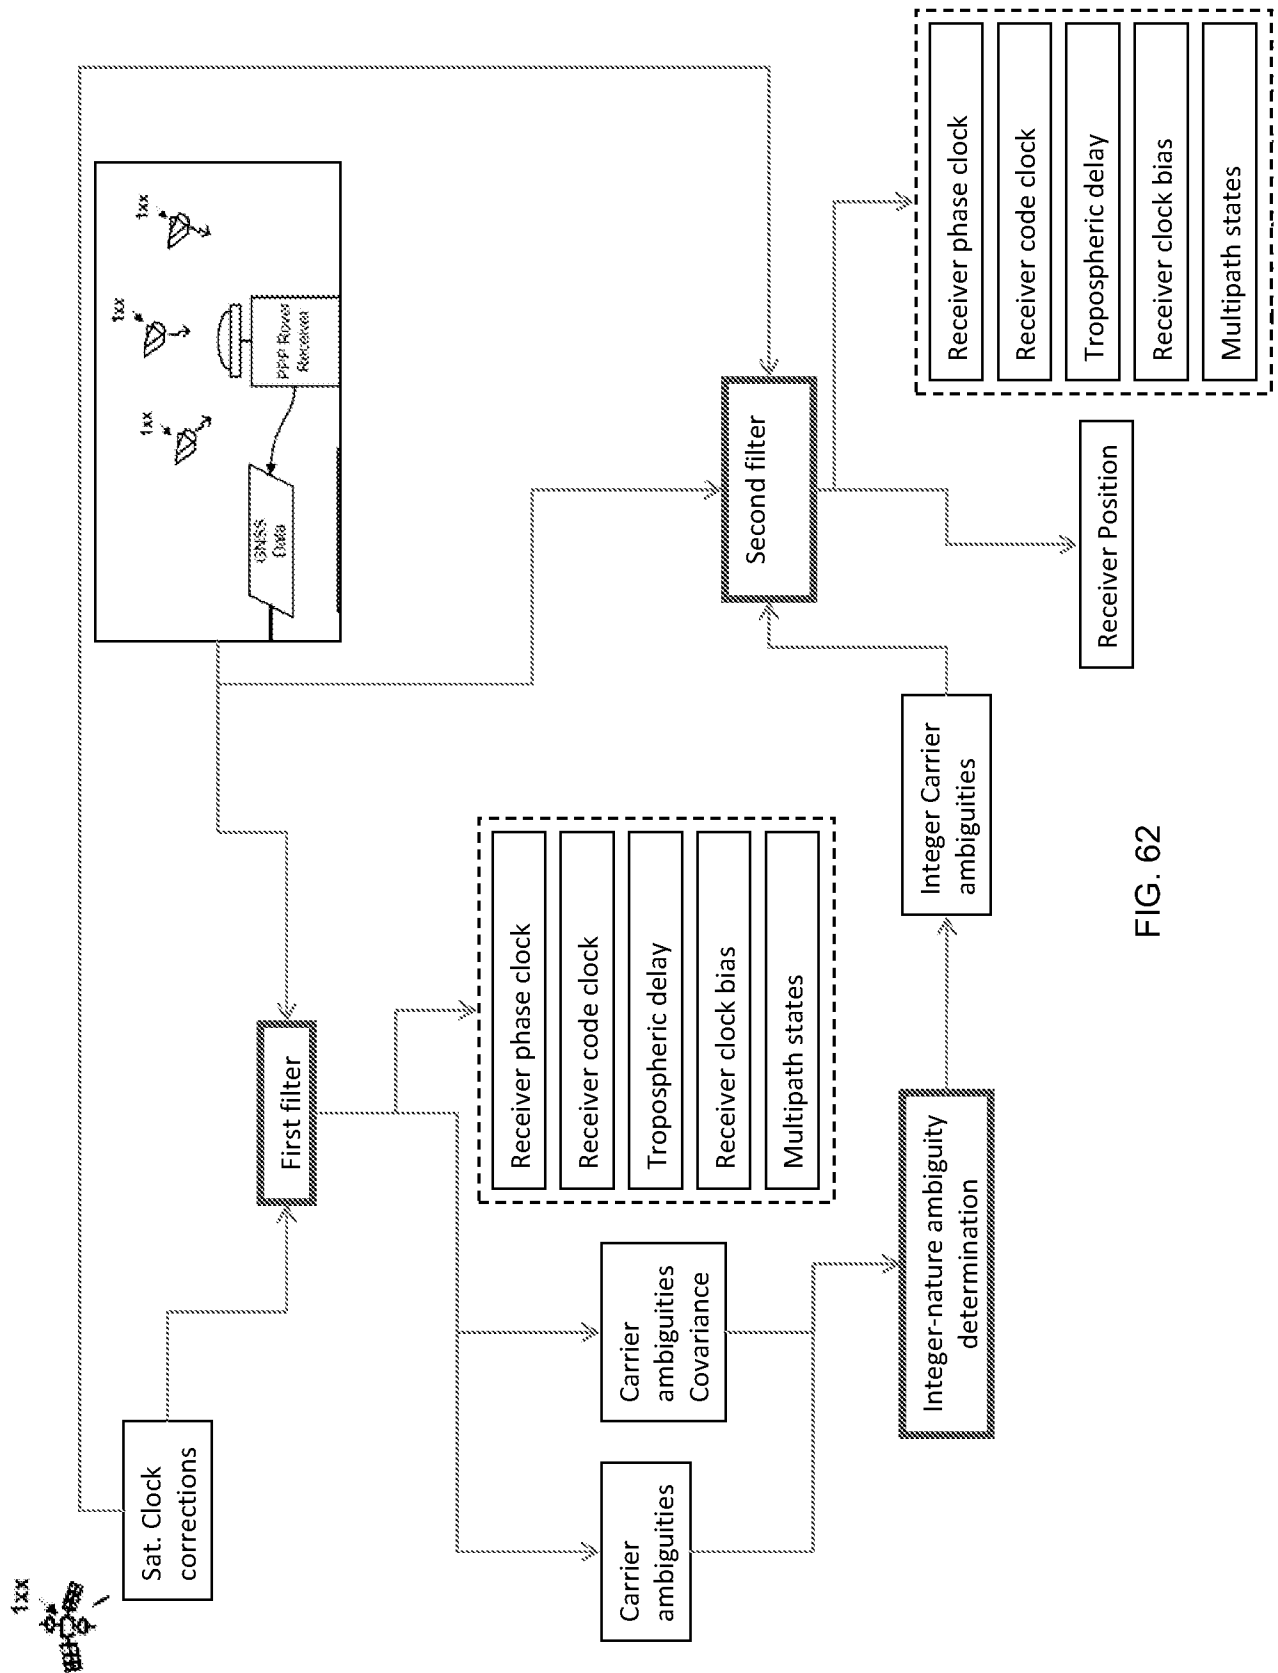


FIG. 62

A. CLASSIFICATION OF SUBJECT MATTER**G01S 19/39(2010.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01S 19/39; G01S 5/14; H04B 7/185; G01S 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: GNSS, rover, ionospheric, ambiguity

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005-0101248 A1 (VOLLATH, U.) 12 May 2005 See abstract, paragraphs [0085]-[0090], and fig. 8.	1-24
A	US 2009-0224969 A1 (KOLB, P. E.) 10 September 2009 See abstract, paragraphs [0043]-[0048], and fig. 3.	1-24
A	US 2010-0156709 A1 (ZHANG, Y. et al.) 24 June 2010 See abstract, claims 1-19, and fig. 4.	1-24
A	US 2008-0204312 A1 (EULER, H.) 28 August 2008 See abstract, claims 12-25, and fig. 2.	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 AUGUST 2012 (28.08.2012)

Date of mailing of the international search report

05 SEPTEMBER 2012 (05.09.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

YU, Jin Tae

Telephone No. 82-42-481-8542



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/028671

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005-0101248 A1	12.05.2005	AT 537463 T	15.12.2011
		CN 101770035 A	07.07.2010
		CN 1875291 A	06.12.2006
		CN 1875291 B	28.04.2010
		CN 1875291 C	28.04.2010
		CN 1875291 C0	06.12.2006
		EP 1678517 A1	12.07.2006
		EP 1678517 B1	14.12.2011
		EP 2322946 A2	18.05.2011
		EP 2322946 A3	22.06.2011
		JP 2007-510158 A	19.04.2007
		JP 2007-510158 T	19.04.2007
		JP 4787762 B2	05.10.2011
		RU 2006118311 A	10.12.2007
		RU 2374660 C2	27.11.2009
		US 2008-0165053 A1	10.07.2008
		US 2009-0135057 A1	28.05.2009
		US 2009-0184868 A1	23.07.2009
		US 2009-0262013 A1	22.10.2009
		US 7432853 B2	07.10.2008
		US 7498979 B2	03.03.2009
		US 7746272 B2	29.06.2010
		US 7982667 B2	19.07.2011
		US 8130143 B2	06.03.2012
		WO 2005-045463 A1	19.05.2005
US 2009-0224969 A1	10.09.2009	CN 101258418 A0	03.09.2008
		CN 101258418 B	21.09.2011
		DE 112006002381 T5	10.07.2008
		US 7868820 B2	11.01.2011
		WO 2007-032947 A1	22.03.2007
		WO 2007-032947 A8	26.06.2008
		WO 2007-032947 A9	21.02.2008
US 2010-0156709 A1	24.06.2010	US 7911378 B2	22.03.2011
US 2008-0204312 A1	28.08.2008	AU 2006-246664 A1	23.11.2006
		AU 2006-246664 B2	08.10.2009
		CA 2608558 A1	23.11.2006
		CN 101176014 A0	07.05.2008
		CN 101176014 B	14.09.2011
		EP 1724605 A1	22.11.2006
		EP 1883836 A1	06.02.2008
		JP 2008-541109 A	20.11.2008
		JP 2008-541109 T	20.11.2008
		US 7728767 B2	01.06.2010
		WO 2006-122748 A1	23.11.2006