




(22) Date de dépôt/Filing Date: 1996/10/28
 (41) Mise à la disp. pub./Open to Public Insp.: 1998/04/28
 (45) Date de délivrance/Issue Date: 2004/08/31

(51) Cl.Int.⁶/Int.Cl.⁶ H05B 37/02
 (72) Inventeur/Inventor:
 BIRRELL, PETER, AU
 (73) Propriétaire/Owner:
 H.P.M. INDUSTRIES PTY LIMITED, AU
 (74) Agent: MARKS & CLERK

(54) Titre : MINUTERIE SYNCHRONISEE
 (54) Title: SYNCHRONISED TIMING DEVICE

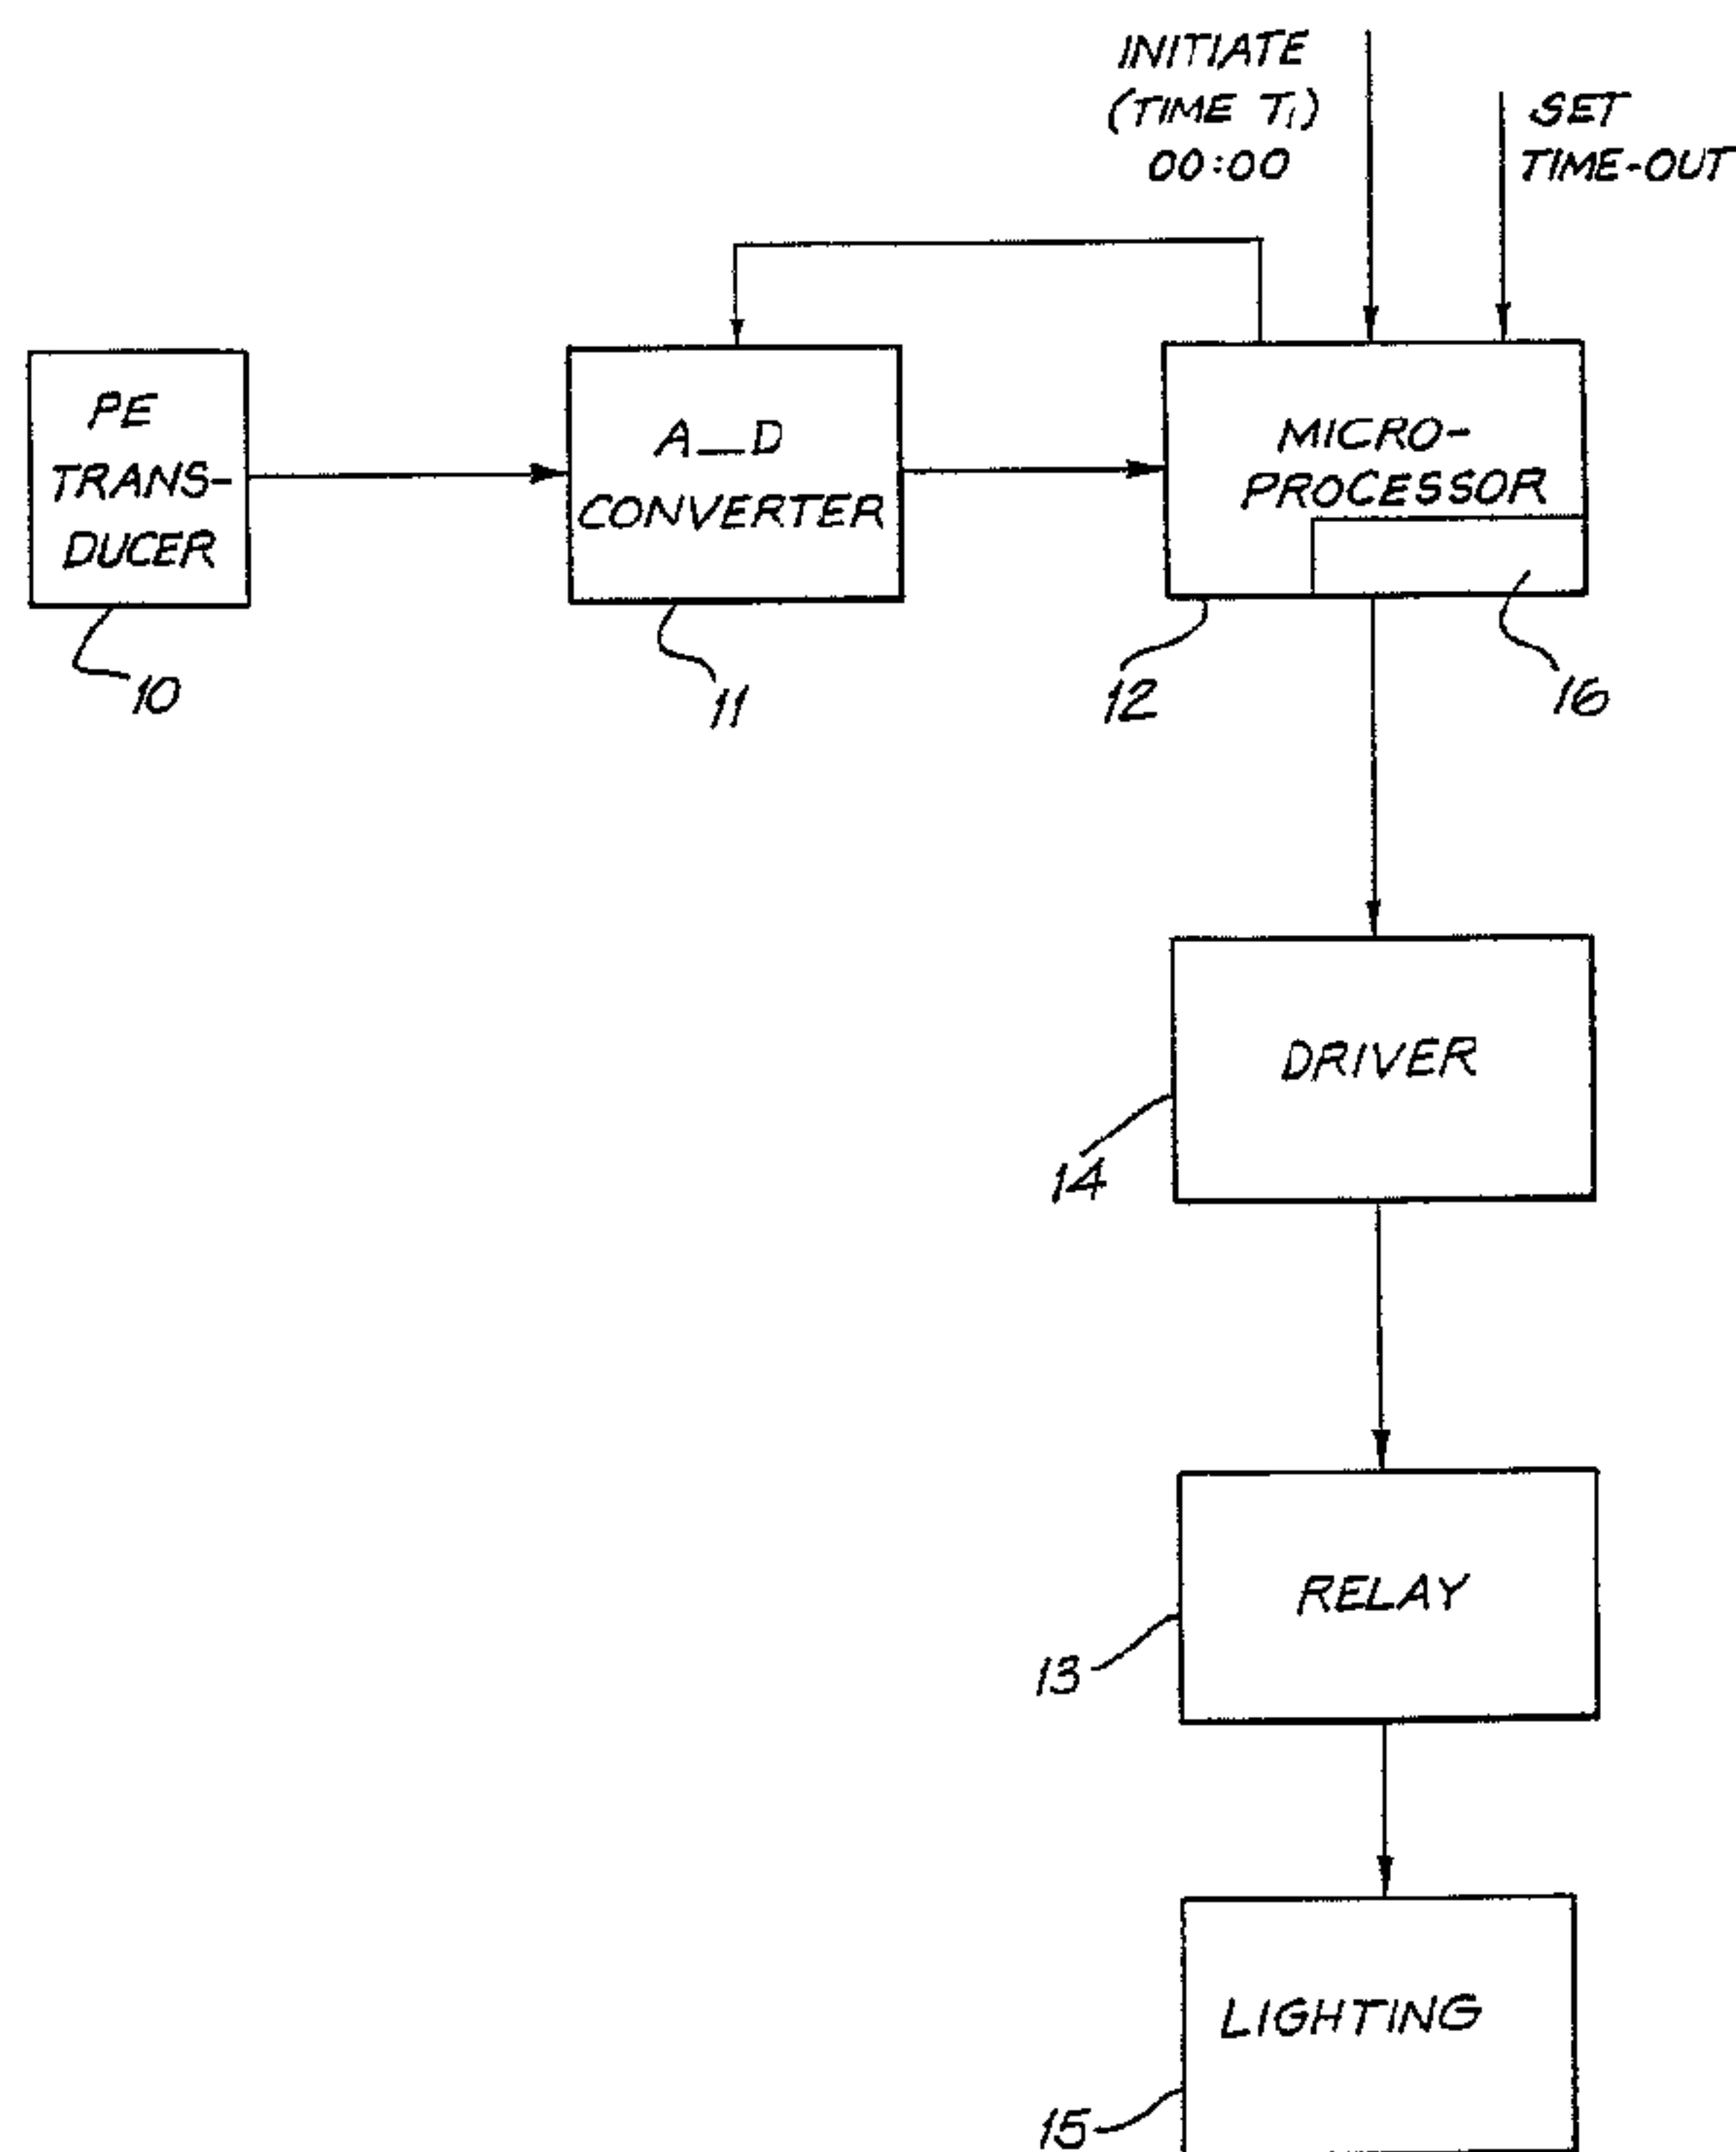

(57) Abrégé/Abstract:

A timing device which is associated with a light level sensor and which is arranged to provide a time-out signal to a relay after a predetermined time has elapsed following detection of a low light condition and initial energisation of the relay. The device provides for synchronisation of an initiation time T_1 and, hence, a time-out signal generating time T_2 with respect to a periodically occurring event time T_3 (for example, sunset time) in order that the desired time of generating the time-out signal might be re-established following interruption of power to the device. Should loss of power occur, the last entered event time T_3 is employed to synchronise the initiation time T_1 and, hence, the signal generating time T_2 , when detection of a predetermined light level next occurs following re-establishment of power to the device.

2188977

ABSTRACT OF THE DISCLOSURE

A timing device which is associated with a light level sensor and which is arranged to provide a time-out signal to a relay after a predetermined time has elapsed following detection of a low light condition and initial energisation of the relay. The device provides for synchronisation of an initiation time T_1 and, hence, a time-out signal generating time T_2 with respect to a periodically occurring event time T_3 (for example, sunset time) in order that the desired time of generating the time-out signal might be re-established following interruption of power to the device. Should loss of power occur, the last entered event time T_3 is employed to synchronise the initiation time T_1 and, hence, the signal generating time T_2 , when detection of a predetermined light level next occurs following re-establishment of power to the device.

- 2 -

SYNCHRONISED TIMING DEVICEFIELD OF THE INVENTION

This invention relates to a timing device which is associated with a photoelectric transducer and which is arranged to be synchronised with reference to a predetermined lighting condition that is sensed by the transducer.

BACKGROUND OF THE INVENTION

Photoelectric transducers are conventionally employed in light level sensors which are used for detecting the level of ambient light and for controlling the switching of electrical circuits with changes in ambient light levels. In some applications it is required that switch-on should occur when the ambient light falls below a predetermined level (for example at sunset) and that switch-off should occur at a time which precedes the following sunrise. This requirement is conventionally met by locating a timer in circuit with the light level sensor and by setting the timer to effect switch-off at a particular local time. However, a timer requires sustained power or battery back-up in order that it might function in a predictable manner and, thus, provide for consistent switch-off operations. Alternatively, vigilance must be maintained and the timer must promptly be reset following power failures, again in the interest of avoiding erratic switch-off timing.

The present invention is directed to a timing device which is synchronised by reference to a predetermined lighting condition and which avoids at least some of the problems associated with conventional light level sensor-timer devices.

SUMMARY OF THE INVENTION

The present invention provides an electronic timing device for use in conjunction with a light level sensor and which comprises:

means for providing a clock function and for setting an initiation time T_1 upon initial implementation of the device, means for entering and storing a signal time T_2 for generating a time-out signal, where $T_2 = T_1 + t_1$ and t_1 is a predetermined time interval, means for generating the time-out signal at the signal time T_2 on expiration of the
5 predetermined time interval t_1 following the initiation time T_1 in successive 24-hour periods of time, means for entering and storing an event time T_3 for a periodically occurring event responsive to a predetermined light level being detected by the light level sensor, and means for synchronising the initiation time T_1 with respect to the entered event time T_3 upon detection of the predetermined light level.

10 In operation of the device, should loss of power occur, the last entered time T_3 is employed to synchronise the initiation time T_1 when detection of the predetermined light level next occurs following re-establishment of power to the device.

The invention may alternatively be defined in terms of a method of generating a time-out signal in an electronic timing device which is used in conjunction with a light
15 level sensor, wherein the time-out signal is generated at a selected signal time T_2 and wherein the method comprises the step of implementing a clock function and setting an initiation time T_1 upon the implementation of the timing device, entering and storing the selected signal time T_2 , where $T_2 = T_1 + t_1$ and t_1 is a predetermined time interval, generating the time-out signal at the signal time T_2 on expiration of the predetermined time interval t_1
20 following the initiation time T_1 in successive 24-hour periods of time, entering and storing an event time T_3 for a periodically occurring event at which a predetermined light level is detected by the light level sensor, and employing the entered event time T_3 to synchronize the initiation time T_1 with respect to the event time T_3 upon detection of the predetermined light level.

25

As will be apparent from the above definitions of the invention, the timing device is arranged to be "self-adjusting". Thus, in the event of loss and subsequent re-
5 establishment of power, the device will continue to

provide a time-out signal at the originally selected time T_2 , provided only that the predetermined light level is detected at event time T_3 to act as the trigger for synchronisation of the device after power is restored.

5 The predetermined light level might be detected as the result of sunrise or sunset or from a remote artificially created light condition. That is, the event time $T_3=T_1+t_2$ may be selected such that the time interval t_2 is less than or greater than the predetermined time interval t_1 . However, the time interval t_2 preferably is
10 selected to be shorter than the interval t_1 .

Appropriate controls such as operating condition checks and response delays may be incorporated in the device in order that discrimination might be provided
15 against transient false indications of the predetermined light condition.

The invention will be more fully understood from the following description of a preferred embodiment of a light level sensor for use in controlled switching of
20 artificial lighting under low light conditions and for use in limiting the period of time during which the lighting is sustained under the low light conditions. The description is provided with reference to the accompanying drawings.

25 BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Figure 1 is a block diagrammatic representation of the sensor and a relay which is controlled (i.e., energised or de-energised) by the sensor, and

30 Figure 2 shows a flow diagram of process control functions performed in the sensor.

DETAILED DESCRIPTION OF THE INVENTION

As illustrated in Figure 1, the light sensor comprises a photoelectric transducer 10, typically in the
35 form of a phototransistor. The level (or average level) of the output signal from the transducer 10 will be significant of the level of incident light, whatever may be the source of the light, and the output signal is

applied to an analogue-to-digital converter 11 which functions to sample and digitise the transducer output signal under the control of a following microprocessor 12. The output from the analogue-to-digital converter 11 is fed to the microprocessor 12 and a determination is made as to the average value of the difference between quantised high and low levels of the transducer output signal. This provides a periodic measure of the level of light falling incident on the transducer 10 and is compared with a reference value for the purpose of producing a HIGH light indication or a LOW light indication. A LOW light indication is used to generate a signal which is applied to a relay 13, by way of a driver stage 14, to effect energising of the relay and consequential switching of artificial lighting 15.

Having energised the lighting 15 as a consequence of the detection of a LOW light condition, the microprocessor 12 provides a time-out function for the purpose of de-energising the relay 13 and switching-off the lighting during the period of the LOW light condition and prior to an event that establishes a HIGH light condition. To this end the microprocessor incorporates an integral timing device or network which is indicated diagrammatically as being contained within block 16 in the microprocessor. The timing device 16 includes a 24-hour clock counter which normally would be initiated during installation of the complete system and into which a time-out code might be inserted at the same time. Thus, the clock counter might be initiated to time T_1 of 00:00 corresponding to local installation time of 16:00 hours and the time-out code might be entered and stored as $t_1=08:00$ to effect time-out at local time $(16:00+08:00=)$ 24:00 hours, corresponding to time $T_2=00:00+08:00$.

In the absence of the features of the present invention, if power to the system was to fail for a period of, say, two hours, future time-out signals might be generated at local time 02:00 hours (or at a time that

varies with the time of sunset, depending upon the functional characteristics of the device) rather than at the required local time of 24:00 hours. However, the present invention provides effectively for re-establishment of the original condition by synchronising the initiation time T_1 with an event time T_3 , when detecting a LOW light (e.g., sunset) condition, and resetting the T_1 -to- T_3 relationship when the LOW light condition occurs next following loss and re-establishment of power. The re-establishment of this relationship will involve a slight time shift, due to the daily difference in sunset time, but it is thought that the shift will be accommodated by users of the system. Alternatively, the device may be programmed to compensate for sunset time shifts during successive 24-hour periods.

The above described operations are program controlled in the microprocessor/timing device 12/16 and the various process control functions, plus supplementary functions, are indicated diagrammatically in the flow diagram shown in Figure 2.

As indicated in Figure 2 an input (which comprises a processed form of the output from the analogue-to-digital converter 11) is applied to the processing/timing stage in the microprocessor 12 at periodic intervals, typically once per minute but in any case at intervals which are short relative to the time interval t_1 . If the input tests HIGH a ONCE THROUGH function is reset and a relay-off signal is applied to the driver stage 14 for the purpose of de-energising the relay. If the input tests not-HIGH an enquiry is executed to determine if the time-out time T_2 has expired and if it has not a relay-on signal is applied to the driver 14 so that the relay 13 is maintained in an energised state and lighting is maintained. If on making the enquiry it is determined that the time-out time T_2 has expired a relay-off signal is applied to the driver stage 14.

As a parallel program function, if the ambient light tests LOW a test is made to determine whether the ONCE

THROUGH program function is set. If this enquiry is determined in the affirmative, an enquiry is again made as to whether the time-out time T_2 has expired. If it has, a relay-off signal is applied to the driver stage 14, and if it has not a relay-on signal is applied to the driver stage 14.

If the ONCE THROUGH enquiry is answered in the negative, the ONCE THROUGH program control is set and an enquiry is made as to whether a power failure to the complete system has been recorded. If this enquiry is answered in the negative, the stored sunset time T_3 is updated as the current sunset time, and the further program functions as above described proceed toward applying commands to the relay driver 14,

In the event that the power failure recordal enquiry is answered in the affirmative, a further enquiry is made as to whether a sunset time T_3 is stored. If it is not, program-controlled storage of the currently occurring sunset time T_3 is stored.

If the enquiry as to whether a sunset time T_3 is stored is answered in the affirmative, the last stored sunset time T_3 is recalled to establish synchronisation between the time T_3 and the initiation time T_1 . Thus, if T_1 is initiated as 00:00 hours (corresponding to 16:00 hours local time) and T_3 is recalled as 02:00 hours (being the last stored sunset time, corresponding to 18:00 hours local time), synchronisation is established such that T_1 occurs two hours prior to T_3 (at 16:00 hours local time) and T_2 is then established arithmetically as being 08:00 hours, corresponding to 24:00 hours local time.

From the above description it will be seen that, by establishing an initiation time T_1 of 00:00 hours (whatever the local time may be) and by storing time-out and sunset times T_2 ($=T_1+t_1$) and T_3 ($=T_1+t_2$) with reference to the initiation time T_1 , synchronisation may be effected at any time by preserving the daily-modified

relationship between T_1 and T_3 , so that the time-out T_2 will be preserved with reference to the original initiation time T_1 .

5 The system in accordance with the present invention accommodates seasonal changes and provides for re-establishment of initial conditions without there being a need for a local time clock. As T_3 shifts between summer and winter (i.e., as the time interval t_2 varies), daily updating of the sunset time (i.e. the LOW
10 light condition) T_3 will enable T_1 to be recalled with reasonable accuracy, (following re-establishment of power) with reference to the next occurring low light input signal to the timing device at any time during the course of a year.

15 Variations and modifications may be made in the process steps (and the underlying algorithm) represented in the flow diagram of Figure 2. The essence of the invention resides in the synchronisation of the initiation time T_1 (and, as a consequence,
20 synchronisation of the time-out signal generating time T_2) with reference to periodically occurring event time T_3 (typically the time of sunset) as detected by the device itself.

The various process steps shown in the flow diagram
25 of Figure 2 may be implemented in any microprocessor having elements that are arranged to perform the process steps under program control. Such a microprocessor is well known in the art and program control may be implemented using techniques that are well understood in
30 the art.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An electronic timing device for use in connection with a light level sensor and
5 which comprises means for providing a clock function and for setting an initiation time T_1 upon initial implementation of the device, means for entering and storing a signal time T_2 for generating a time-out signal, where $T_2 = T_1 + t_1$ and t_1 is a predetermined time interval, means for generating the time-out signal at the signal time T_2 on expiration of the predetermined time interval t_1 following the initiation time T_1 in successive 24-hour
10 periods of time, means for entering and storing an event time T_3 for a periodically occurring event responsive to a predetermined light level being detected by the light level sensor, and means for synchronising the initiation time T_1 with respect to the entered event time T_3 upon detection of the predetermined light level.
- 15 2. The timing device as claimed in claim 1, wherein the means for providing a clock function and setting an initiation time, the means for entering and storing a signal time T_2 , the means for generating a time-out signal, the means for entering and storing an event time T_3 and the means for synchronizing the initiation time T_1 and the event T_3 are embodied, respectively, within a microprocessor.
- 20 3. The timing device as claimed in claim 2, wherein the device is integrated with the light level sensor and the light level sensor incorporates a photoelectric transducer.
4. The timing device as claimed in claim 2 or 3, wherein an output from the light
25 level sensor is digitized and processed by the microprocessor at periodic intervals which are short relative to the predetermined time interval t_1 .
5. The timing device as claimed in claim 2, 3 or 4, wherein an output from the
30 microprocessor is applied by way of a driver circuit to a relay which is arranged to switch power to a lighting circuit.

6. A method for generating a time-out signal in an electronic timing device which is used in conjunction with a light level sensor, wherein the time-out signal is generated at a selected signal time T_2 and wherein the method comprises the step of:

implementing a clock function and setting an initiation time T_1 upon the implementation
5 of the timing device, entering and storing the selected signal time T_2 , where $T_2 = T_1 + t_1$
and t_1 is a predetermined time interval, generating the time-out signal at the signal time
 T_2 on expiration of the predetermined time interval t_1 following the initiation time T_1 in
successive 24-hour periods of time, entering and storing an event time T_3 for a
periodically occurring event at which a predetermined light level is detected by the light
10 level sensor, and employing the entered event time T_3 to synchronize the initiation time
 T_1 with respect to the event time T_3 upon detection of the predetermined light level.

7. The method as claimed in claim 6, wherein synchronization of the initiation time
 T_1 with respect to the event time T_3 is effected upon detection of the predetermined light
15 level following loss of and subsequent re-establishment of power to the timing device
incorporating the light level sensor.

8. The method as claimed in claim 6 or 7, wherein the periodically occurring event
time T_3 is entered and stored upon detection of a LOW light condition.

20

9. The method as claimed in claim 8, wherein the LOW light condition is
established as a consequence of sunset.

10. The method as claimed in any one of claims 6 to 9, wherein the event time T_3 is
25 established as $T_3 = T_1 + t_2$, where t_2 is a time interval shorter than the predetermined time
interval t_1 .

11. The method as claimed in any one of claims 6 to 9, wherein a test is made at
periodic testing intervals for the existence of the predetermined light level and wherein
30 each testing interval period is short relative to the predetermined time interval t_1 .

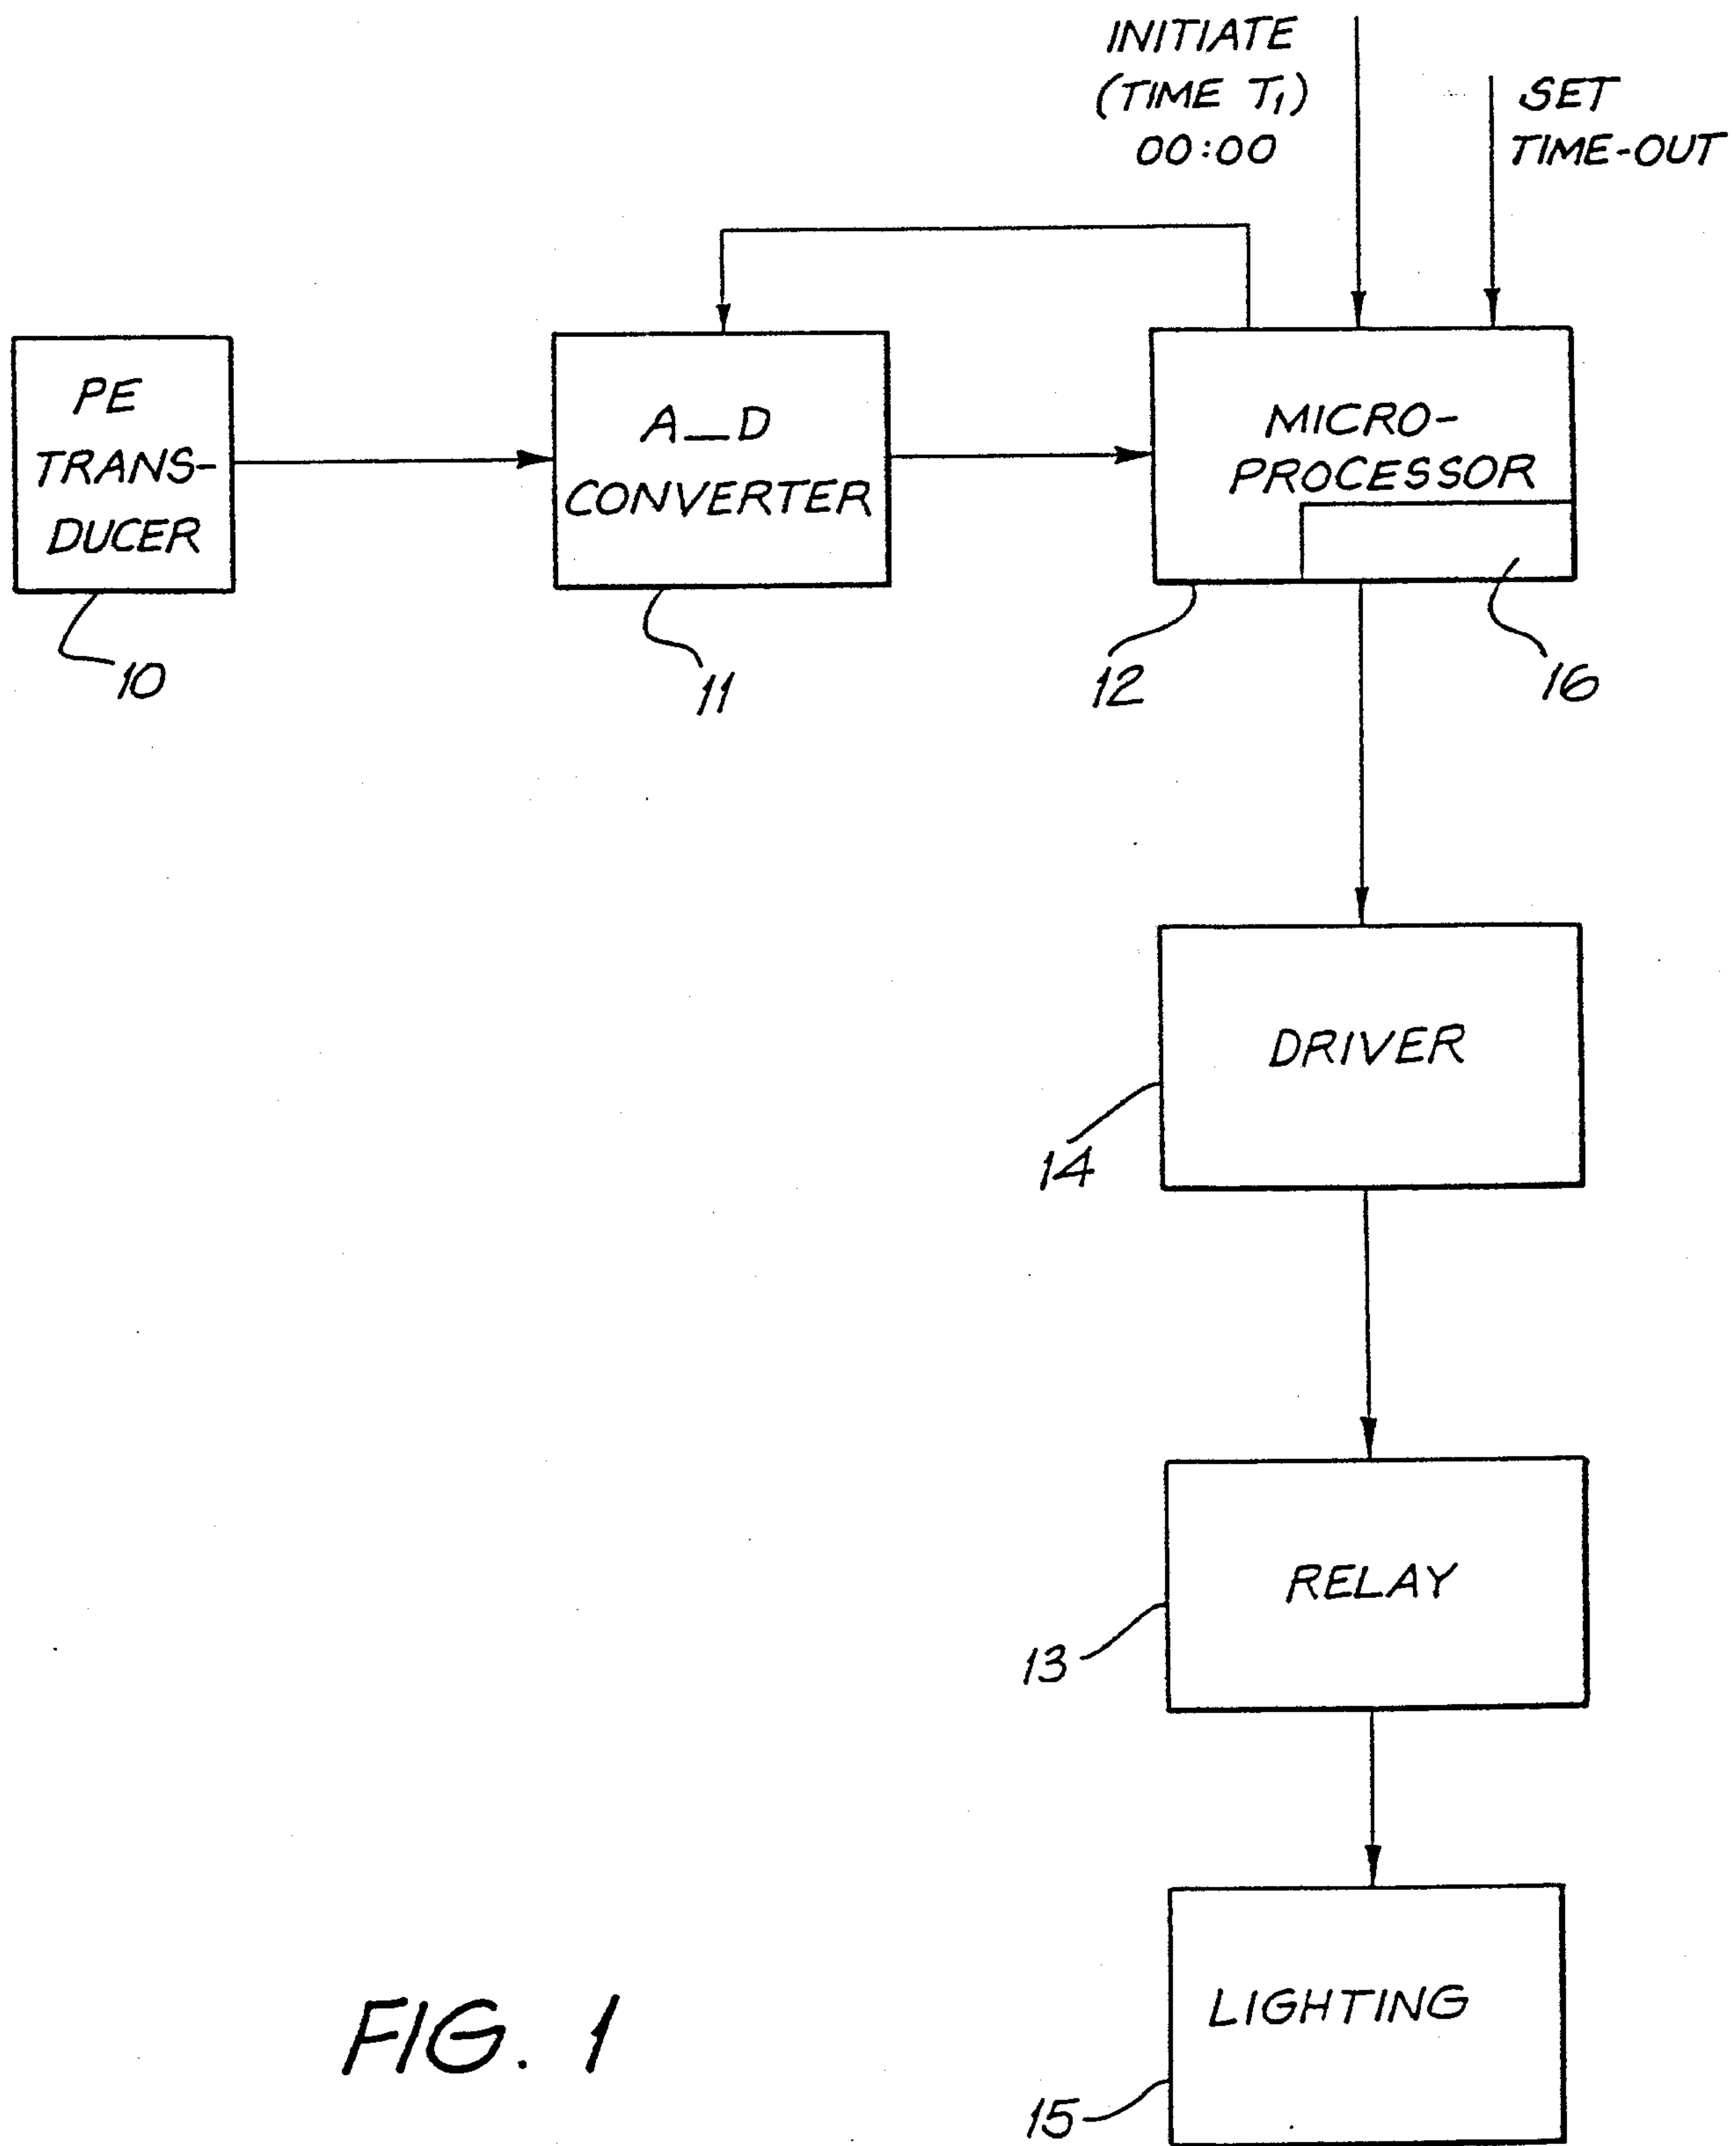


FIG. 1

Marks & Clerk

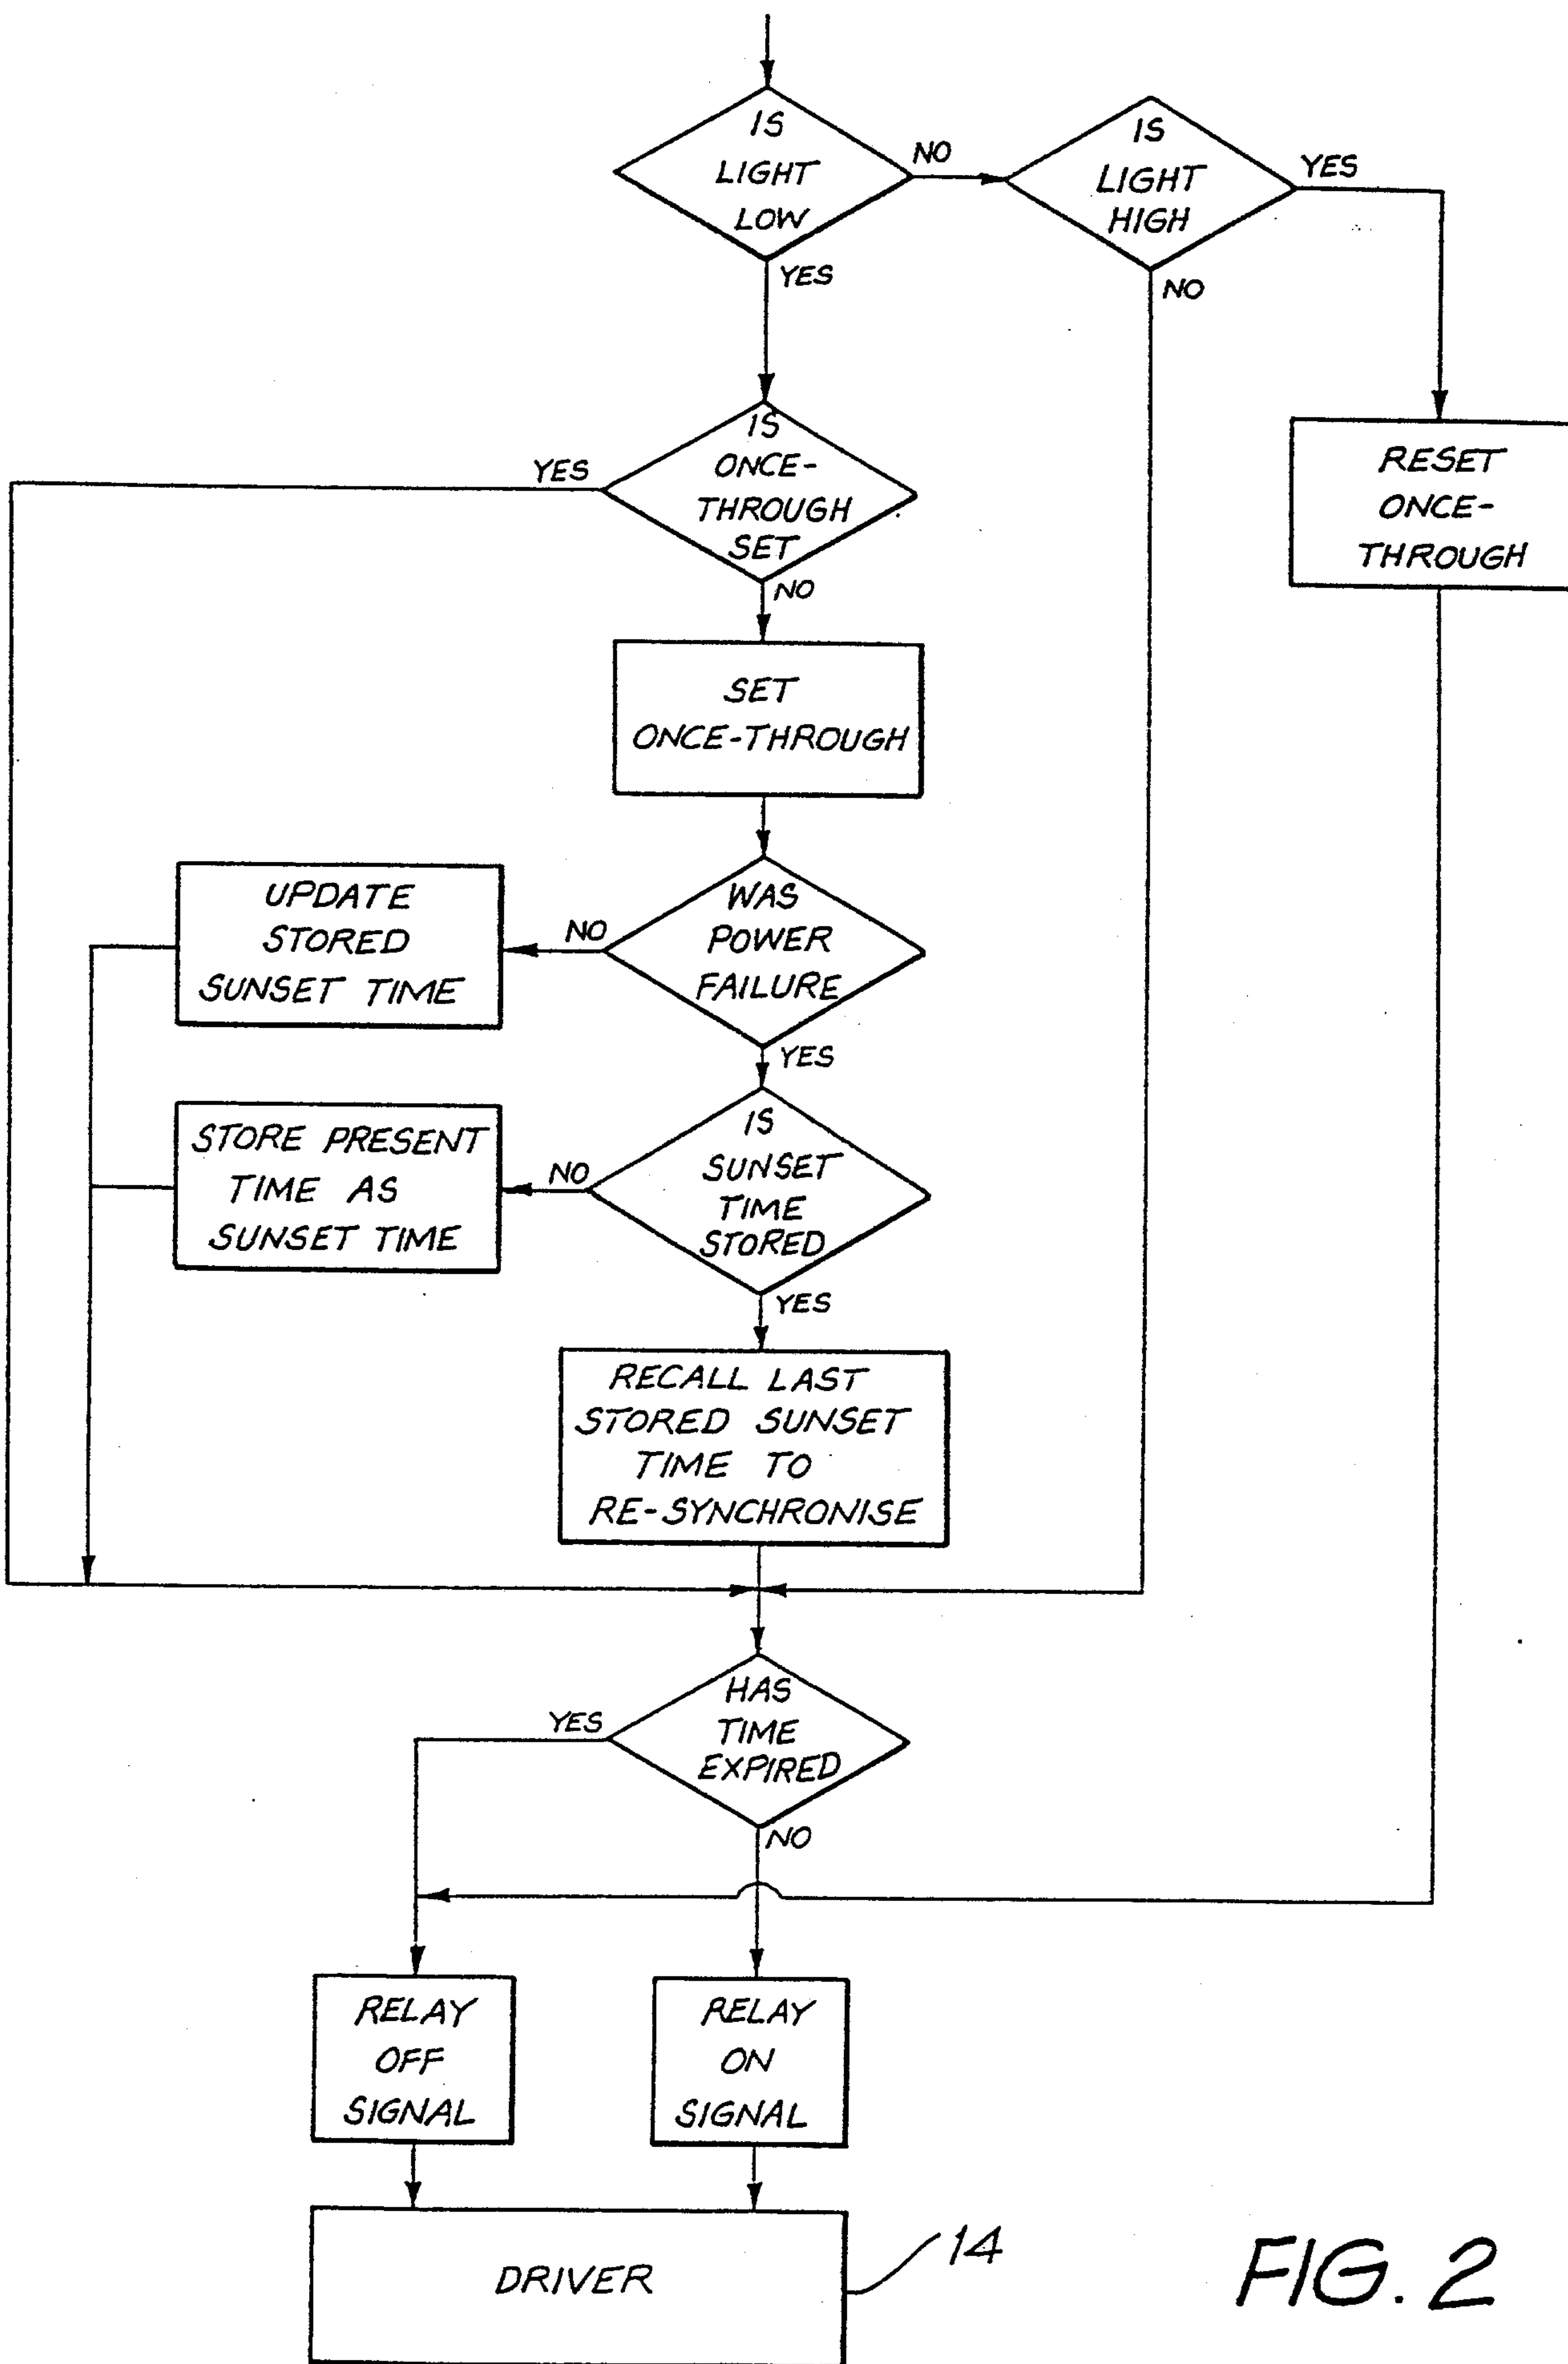


FIG. 2

Marks & Clerk

