



- (51) **International Patent Classification:**
H02J 3/38 (2006.01)
- (21) **International Application Number:**
PCT/UA2014/000135
- (22) **International Filing Date:**
23 December 2014 (23.12.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
a201400687 24 January 2014 (24.01.2014) UA
- (71) **Applicant:** TECHINVEST-ECO, LIMITED LIABILITY COMPANY [UA/UA]; vul. Okruzhna, 11, Vorzel, Kyiv region, 08296 (UA).
- (72) **Inventors:** CHERNILEVSKYY, Ihor Kostiantynovych; vul. Zustrichna, 8-7, Lviv, 79024 (UA). TOKAREV, Viktor Serhiyovych; vul. Vernandskogo, 34-44, Lviv, 79049 (UA). TOKAREV, Stanislav Viktorovych; vul. Vernandskogo, 34-44, Lviv, 79049 (UA). SELEZNIOV, Oleksandr Mikhailovich; vul. Dragana, 16-16, Lviv, 79049 (UA). MENSHENIN, Pavlo Germanovich; vul. Lisenka, 36-1, Lviv, 79008 (UA). ILCHUK, Hryhorii Arhypovych; vul. Lazarenka, 36, Lviv, 79026 (UA). PETRUS, Roman Yuriyovych; vul. Timoshenka, 38, Lviv region, s. Veliki Glibovichi, 81228 (UA). RUDAK, Viktor Oleksandrovich; vul. Molodizhna, 4, s. Zaruddia, Sumy

region, Romensky district, 42072 (UA). LOBOYKO, Serhiy Vasyliovych; vul. Zolota, 23-68, Lviv, 79039 (UA). IANUSHEVSKYI, Dmytro Mykolayovych; vul. Vil'iamsa, 13/2-8, Kyiv, 03191 (UA).

(74) **Agent:** BOROVIK, Petro; P/B 32, Kyiv, 01042 (UA).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** METHOD AND APPARATUS FOR EXTRACTING ELECTRICAL ENERGY FROM PHOTOVOLTAIC MODULE

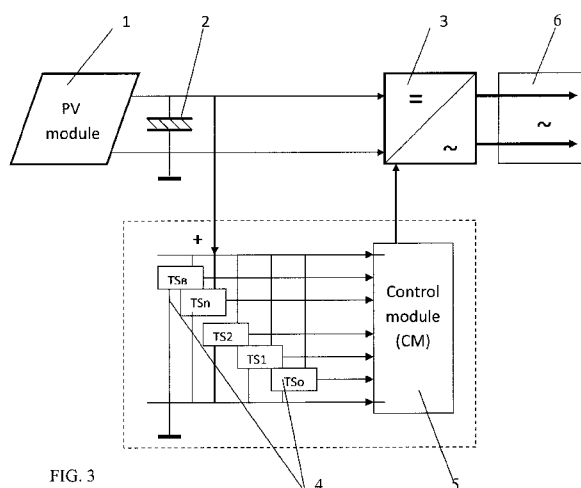


FIG. 3

(57) **Abstract:** The present invention relates to the field of energetic, more particularly to generation of photovoltaic direct current followed by its transformation into alternating -AC- or direct -DC- currents. The invention is applicable to photovoltaic power plants and setups connected either to local AC electrical power distribution systems or to energy storage systems, which apply the known from the prior art devices. According to the claimed method selection electricity from photovoltaic module (1) by which the energy of solar radiation is converted to an electrical signal, pre-store energy electrical signal by using capacitor (2) not less than 0.15 Farad, charged to the maximum power voltage photovoltaic module that determined from the current- voltage characteristics, normalized voltage electrical signal using a DC/DC converter and accumulate. At the same time selected energy is converted to alternating current through DC / AC inverter (3) and continuously is served into a AC local grid (6) while power DC / DC converters and (or) DC / AC inverter installed on for at least one of three levels that is not less than the power of photovoltaic module with a minimum insolation, the maximum insolation and for at least one intermediate insolation.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

METHOD AND APPARATUS FOR EXTRACTING ELECTRICAL ENERGY FROM PHOTOVOLTAIC MODULE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the priority of Ukraine Patent Application No. a2014
5 00678 filed on Jan. 24, 2014, in the Ukrainian Institute of Industrial Property, the
disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to the field of energetic, more particularly to
10 generation of photovoltaic direct current followed by its transformation into
alternating (AC) or direct (DC) currents. The invention is applicable to
photovoltaic power plants and setups connected either to local AC electrical power
distribution systems or to energy storage systems, which apply the known from the
prior art devices.

15 2. Description of the Related Art

The drawbacks, attributed to the nature of any photovoltaic cells, are the
limiting factors for wide development of plants converting solar radiation directly
into electrical energy. These drawbacks arise because photovoltaic cells exist only
together with directly connected p-n or hetero-junctions, consequently:

- 20 - photovoltaic cell generates only DC;
- a power generated is directly proportional to the illumination level of the
photovoltaic cells surface (insolation).

Because photoelectric convertors (and photoelectric modules) can generate
only direct current (DC), while local industrial electrical power distribution
25 systems (LIEDS) are predominantly AC, a large number of techniques to invert
DC into AC have been developed and are known from prior art to date.
Nevertheless, all of them are based on the principle of switching the direct current,
flowing through the load, ON-and-OFF repeatedly at a fast rate. Devices designed
for DC to AC inversion known as DC/ AC inverters. In case of photoelectric

convertors, the external load is connected in parallel with p-n junction (in the direct direction). This p-n junction absorbs energy of photoelectric convertors when external load is switched OFF, that is one of the most important reasons for losses in the DC/AC inversion.

5 The directly proportional dependence of current generated upon insolation of the land-based photoelectric convertors is the reason for continuous changes in the initial power of PV modules. This is due to both declining an incidence angle of solar radiation at the surface of solar cells during a day (predictable changes) and changes in the atmosphere transparency (cloudiness - weakly predictable changes).

10 Any deviations of the supplying power from the load power in case of solar cells leads to instantaneous and irrevocable losses of energy.

 In order to prevent these losses, more than 25 different methods for tracking the maximum power point of photovoltaic panels (Maximum Power Point Tracking - MPPT) used in the DC/AC inverters have been developed and
15 described to date. Common for these MPPT methods are:

- measurement of the actual parameters of the PV module at the exact time;
- systematic execution of calculation cycle of PV module power;
- systematic adjustments of DC / AC inverter power.

 The main losses of energy generated by PV module are:

- 20 - losses during the load disconnection required for the systematic measurements of the real parameters of PV module;
- losses due to imbalance between the PV module power and the DC/AC inverter power that appears during time between two successive corrections;
 - switching losses in DC/AC inverter in the short part of each cycle when the
25 device is partially OFF.

 There are several technical solutions to overcome these losses. The examples are:

A circuit arrangement for controlling/regulating photovoltaic systems comprising a plurality of solar generators connected in series and/or in parallel is described in the US Patent 7709727 [1], in which each solar generator of the photovoltaic systems is connected with a variable energy bypass that is controlled/regulated in such a manner, that each solar generator is operated continuously in its respective current specific MPP to overcome the losses associated with fluctuation of parameters of the individual PV modules and the difference in insolation conditions at large area.

US Patent 7456523 [2] describes a power generation system which comprises a plurality of the connected in parallel sets of PV module and power converters connected to the inverters to supply the alternating current power to a commercial power grid. The system allows to overcome the losses associated with fluctuation of parameters of the individual PV module because each power converter controls the output current and voltage of PV module (maximum power point tracking, MPPT), performs DC/DC conversion to even PV module voltage with voltage of the local industrial grid and DC/AC inversion, synchronization of each power converter with the grid. The described solution provides energy gain by 5-15% and the power generation system continuing function in case of failure or power loss by any of the PV module. The weaknesses of the described administration system are associated to the lack of a compensation of the energy lost due to MPPT control, a high complicity of a system because of necessity to synchronize a plurality of the independent power sources, the use of DC/DC convertor working in the mode ON-OFF.

The US Patent 8400134 [3] describes the apparatus and method for tracking the maximum power point (MPPT) of a solar panel, in accordance with which the voltage and current, generated by the solar panel, are monitored and used to generate a pulse signal for charging a capacitor, that decreases the losses associated with ON-OFF mode operation, being typical for both DC/DC and DC/AC

converters. When the capacitor voltage exceeds the predetermined level, a part of energy is skipped through the switch causing a short circuit between the current source and the ground. The evident shortcomings and restrictions of this solution are: i) take-off electrical energy from photovoltaic module is realized in impulse mode, similarly as in case of direct connection PV module to DC/DC and DC/AC converters; ii) a part of energy is skipped through a short circuit between the current source and the ground, that is an additional source of energy loss; iii) the apparatus is operating at current of 800 mA, which is a usual limit for electrolytic capacitors.

The apparatus and method, described in the US Patent 7808213 and EP Patent 2075895 [4, 5], use a flexible textile capacitor with a total energy from 35 to 112 J. The capacitor is connected to PV module output in parallel; and when the said capacitor is charged to a predetermined charging level, it discharges a current to the charging part of the power supplier of mobile electronic device, e.g. cell phone. Thus the power supplier described operates in a mode like DC/DC converter. At a low insolation level ($\leq 25\%$) this systems allows to enhance efficiency of 3-7 times as compared with the direct connection of the PV module to the charging part of the power supplier. At an insolation level of about 80%, the gain in energy obtained is 3-6%. The described solution has a quite narrow application, limited by low-power electronic devices and is not provided for exploitation for energy transformation to commercial power grids.

The closest solutions, to what is claimed by this invention, are described in the Ukrainian Patent UA 51651 and Russian Patent RU 2195754 [6,7], which suggest for take-off energy to apply a capacitor charged to the level equal to the MPP voltage of PV module. The apparatus includes a PV module, a capacitor, two threshold voltage controllers adjusted on the upper and lower thresholds, DC/DC converter with pulse-width modulation (PWM), and the feedback means for voltage. Whereas, the upper threshold voltage for triggering off the sensor is set

equal to the MPP voltage of PV module at the maximum level (100%) of insolation; and the lower threshold voltage is set to be by 3-5 % smaller than the upper threshold voltage. The capacitance has been chosen in the range of 0.02 - 100 F. The internal resistance of capacitor is chosen to be an order lower than the internal resistance of the PV module under maximum insolation conditions. Power of DC / DC converter is unchangeable in spite of changes in power of the PV module at any certain time. A method of electric energy take-off using the apparatus described provides for the charging of the capacitor to the voltage U_B , forming an energy pulse with the power and voltage normalized by the DC/DC converter using energy previously accumulated in the capacitor and energy continually supplied from the PV module. The energy pulses received are used to charge the rechargeable battery (RB).

In accordance to that invention, the method and apparatus provides, due to electric capacity and low internal resistance of the capacitor used, a continuous energy take-off from the PV module at its maximum power point under any operating modes of DC/DC converter, extraction of electrical energy flow in a wide range of PV module power, normalization of the energy impulse over the power and voltage regardless of the instantaneous power of the PV module, more efficient use of energy of PV module – capacitor, reducing energy loss by 25-52% for long-term (daily) exposure of the PV module, simplicity of performance and operation.

3. Summary of the invention

The main objective of the present invention is minimization of the electrical energy losses during take-off of electrical energy from PV module and its transformation via improving the efficiency of the system PV module – device in a wide range of insolation, followed by transformation of the energy received into energy that either can be transferred to the AC electrical power distribution

systems (local grid) or that can be used for supplying the energy storage systems, which apply one of the many known methods for energy storage.

This task is solved in such a way, that in the method for take-off of electrical energy from the photovoltaic module connected in parallel to the input of DC/DC converter or to the input of DC/AC inverter with connected to them in parallel a capacitor and a means for voltage measurement, and the latter being connected to the module controlling the inverter, the following parameters are measured: i) voltage U_B at the maximum power point of PV module under maximal level of insolation, ii) the minimal voltage U_0 which is not less as 5% of the open circuit voltage of PV module in the case of DC/DC converter or not less as 25% in the case of DC/AC inverter, iii) voltage U_1 at the maximum power point of PV module under at least one intermediate level of insolation between its maximal and minimal values.

Then the DC/DC converter or the DC/AC inverter is adjusted to one of the power levels (P_x), which is not less as the maximal power of PV module under either minimal insolation (P_0), either maximal insolation (P_B), or at least one intermediate insolation (P_1) between minimal and maximal insolation in accordance with the following rules.

At arising and increasing insolation, energy from PV module is transferred to capacitor and collected there continuously; according to the invention, voltage on the capacitor (U_C) is measured simultaneously, and when U_C achieves the value U_0 , the means for voltage measurement (MVM) sends a signal to switch the control module on; when U_C achieves the value U_1 the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_1 ; when U_C achieves the value U_B the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_B .

At decreasing insolation, the DC/DC converter or the DC/AC inverter consumes energy collected by the capacitor. When U_C drops down to the value U_1

the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_1 ; when U_C drops down to the value U_0 , the means for voltage measurement (MVM) sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_0 ; when U_C drops down to the value lower than U_0 , the means for voltage measurement (MVM) sends a signal to switch the DC/DC converter or the DC/AC off.

The extracted energy can be transformed into alternating current by means of the DC/AC inverter and continuously transferred to a local AC electrical power distribution system (local grid), otherwise, the extracted energy can be transformed by means of the DC/DC converter and supplied to the energy storage system. In both cases power of DC/AC inverter or the DC/DC converter is adjusted to at least one of three levels which are not less as power of PV module under either minimal insolation, either maximal insolation, or at least one intermediate insolation between minimal and maximal insolations.

Other tasks of the invention were: 1) to design an apparatus for take-off the electric energy from PV module, which provides minimization of the electrical energy losses at its extraction from PV module via improving the efficiency of the device in a wide range of insolation levels, and 2) transformation of electric energy generated by PV module into energy suitable either for transferring to a local AC electrical power distribution system (local grid) or for supplying the energy storage system.

These tasks are solved in such a way, that in the apparatus for extraction of electrical energy from PV module, which includes:

1) the DC/AC inverter with a power, being not less than the PV module nominal power, and with the possibility of its connection to a local AC electrical power distribution system (local grid); or the DC/DC converter with a power, being not less than the PV module nominal power, and with the possibility of its connection to input of the energy storage system;

2) the capacitor connected in parallel to the input of inverter or converter;
 3) the means for voltage measurement (MVM) on the capacitor;
 4) the control module connected to DC/AC inverter or DC/DC converter and connected to the means for voltage measurement on the capacitor, -

5 in accordance with the invention:

1) DC/AC inverter or DC/DC converter are designed to be capable of changing their power at least at three levels;

2) the means for voltage measurement is designed to be capable of supplying the information regarding at least three predetermined fixed values of the capacitor
 10 voltage to the control module;

4) the control module (CM) is designed to be capable of switching the power levels of the DC/AC inverter or the DC/DC converter depending on the capacitor voltage;

5) the internal resistance of the capacitor is at least twice lower than the
 15 internal resistance of the PV module at its MPP, while capacity of the capacitor is defined as follows:

$$C \geq (k \cdot P_B) / (U_B^2 - U_1^2), \quad (1)$$

where C is capacitance of the capacitor in Farads (F); P_B is maximal power of PV module under its maximal insolation in Watts (W); U_B is voltage of PV module at
 20 the maximum power point (MPP) under maximal insolation in Volts (V); U_1 is an intermediate fixed voltage at the MPP under insolation that is less than maximal insolation closest to the U_B in Volts (V); k is the factor with an absolute value of 0.3 - 0.5 second (sec).

In this embodiment, a combined unit consisting at input of one or more
 25 DC/DC converters and DC/AC inverter at output can be used as the DC/AC inverter.

In this embodiment, as the means for voltage measurements can be used at least three means for voltage measurement (MVM), each of which generates a signal indicating on certain value of voltage on the capacitor.

In this advantageous embodiment, the control module is a microprocessor;
5 otherwise the control module can be made mainly of basic hard-wired logic elements.

For identification of the apparatus according to the invention, it is proposed to use the acronym of the first letters in its name in English: Electrical Energy Take-Off System - EETOS.

10 BRIEF DESCRIPTION OF THE DRAWINGS

The claimed invention is illustrated by the following example for realization of the method for electrical energy take-off from PV module and apparatus for its implementation as well as the relevant drawings, which represent the following:

- Fig. 1. Current-voltage characteristics of PV module under different insolation
15 levels;
- Fig. 2. Block-scheme of the apparatus for 3-level the electrical energy take-off from PV module according to the invention;
- Fig. 3. Block-scheme of the apparatus for n-level electrical energy take-off from PV module if using MVM according to the invention;
- 20 Fig. 4. Block-scheme of the apparatus for electrical energy take-off from PV module for an energy storage system according to the invention;
- Fig. 5. Choice of different voltage to determine inverter power (1st type of PV module - polycrystalline silicon);
- Fig. 6. Choice of different voltage to determine inverter power (2nd type of PV
25 module - monocrystalline silicon);
- Fig. 7. Block-scheme of the algorithm for the apparatus functioning at n control points ($n = 4$);

FIG. 8. Block-scheme of the algorithm for the apparatus functioning at the three-point control.

The drawings, illustrating the claimed invention, as well as the shown example of embodiment of the method and apparatus for its realization do not restrict or limit in any way the scope of invention in according to the claims, but only explain the core of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Simulations and experimental tests were performed to check the possibility of achieving the technical result, which allowed to define the optimum parameters of the capacitor, particularly its internal resistance and capacitance value. The simulation results are presented in Tables 1-4. As tables 1-4 show, the technical results derived manifest a substantial increase in the efficiency of the system, when using the claimed method and apparatus; and this requires the capacitor internal resistance to be at least twice lower than the internal resistance of the PV module.

Table 1

The dependence of the efficiency on the capacitor internal resistance R_{sc} for the system of PV module - device under condition of equal both the internal resistance of energy sources R_s and the load R_L

Efficiency	R_s	R_{sc}	Integrated mark of system functioning
0,500	1	Without capacitor	
0,500	0,9990	1000	unsatisfactorily
0,502	0,9901	100	unsatisfactorily
0,524	0,9091	10	unsatisfactorily
0,545	0,8333	5	unsatisfactorily
0,600	0,6667	2	unsatisfactorily
0,667	0,5000	1	unsatisfactorily

Table 1. continuation			
Efficiency	R_s	R_{sc}	Integrated mark of system functioning
0,750	0,3333	0,5	satisfactorily
0,857	0,1667	0,2	OK
0,917	0,0909	0,1	OK
0,955	0,0476	0,05	OK
0,981	0,0196	0,02	OK
0,990	0,0099	0,01	OK

Table 2

The dependence of the efficiency on insolation level for the system of PV module - device under following conditions: sources internal resistance $R_s = R_L$,

$$R_{sc} = 1 \text{ Ohm}$$

Efficiency	R_{pv}	Insolation level	Integrated mark of system functioning
0,667	1	100,0%	unsatisfactorily
0,655	1,11	90,0%	unsatisfactorily
0,643	1,25	80,0%	unsatisfactorily
0,630	1,43	70,0%	unsatisfactorily
0,615	1,67	60,0%	unsatisfactorily
0,600	2,00	50,0%	unsatisfactorily
0,583	2,50	40,0%	unsatisfactorily
0,565	3,33	30,0%	unsatisfactorily
0,545	5,00	20,0%	unsatisfactorily
0,524	10,00	10,0%	unsatisfactorily
0,512	20,00	5,0%	unsatisfactorily
0,505	50,00	2,0%	unsatisfactorily

Table 3

The dependence of the efficiency on insolation level for the system of PV module - device under following conditions: sources internal resistance $R_s = R_L$,

$$R_{sc} = 0,5 \text{ Ohm}$$

Efficiency	R_{pv}	Insolation level	Integrated mark of system functioning
0,750	1	100,0%	satisfactorily
0,744	1,11	90,0%	satisfactorily
0,737	1,25	80,0%	satisfactorily
0,730	1,43	70,0%	satisfactorily
0,722	1,67	60,0%	satisfactorily
0,714	2,00	50,0%	satisfactorily
0,706	2,50	40,0%	satisfactorily
0,697	3,33	30,0%	satisfactorily
0,688	5,00	20,0%	satisfactorily
0,677	10,00	10,0%	unsatisfactorily
0,672	20,00	5,0%	unsatisfactorily
0,669	50,00	2,0%	unsatisfactorily

5

Table 4

The dependence of the efficiency on insolation level for the system of PV module - device under following conditions: sources internal resistance $R_s = R_L$,

$$R_{sc} = 0,33 \text{ Ohm}$$

Efficiency	R_{pv}	Insolation level	Integrated mark of system functioning
0,801	1	100,0%	OK
0,797	1,11	90,0%	OK

Table 4. continuation			
Efficiency	Rpv	Insolation level	Integrated mark of system functioning
0,793	1,25	80,0%	OK
0,789	1,43	70,0%	OK
0,784	1,67	60,0%	OK
0,779	2,00	50,0%	OK
0,774	2,50	40,0%	OK
0,769	3,33	30,0%	OK
0,764	5,00	20,0%	OK
0,758	10,00	10,0%	satisfactorily
0,755	20,00	5,0%	satisfactorily
0,753	50,00	2,0%	satisfactorily

To determine the optimum capacitances of the capacitor, the critical modes for the apparatus operation have been simulated, namely the operations at the maximum power of inverter ($P_{\max}$) and minimum power of PV module (P_{low}).

5 The maximal power of inverter ($P_{\max}$) is characteristic for function of the apparatus under high insolation of PV module. Power switch-over on the inverter input should, however, provide a satisfactory Power Quality (PQ) at the inverter output. As it follows from the practice, time for disturbed operation of the inverter at a certain power level should be of several tenths of second till several seconds
 10 depending on the type and functioning conditions of the power grid. To provide this, the capacitor should be able to accumulate the appropriate energy reserve necessary for power changing, which can be estimated using the formula:

$$E = P_{\max} \cdot t \quad (2)$$

where t is time of transitional process at changing the power.

At operation of the apparatus under conditions of minimal power (insolation), interruption in transferring energy from PV module to inverter is possible. In this case, the energy accumulated in the capacitor has to provide conditions of Bridging Power (BP) on the inverter input. The required energy can be estimated by formula:

$$E = P_{\text{low}} \cdot t \quad (3)$$

where t is the interruption time in gaining energy from PV module.

The estimation of energy required was performed for standard PV modules: PVM-1 with rated power of 280 W, PVM-2 with rated power of 180 W, and PVM-3 with rated power of 20 W (the prototype [3]). These estimation results are gathered in Table 5.

Table 5

The value of electrical energy that reserved by capacitor for PV modules with different rated power and for different requirements

PV module	Mode	Power (P), W	Requirements	P·t, J
PVM 1	Pmax	280	PQ	140
PVM 1	Pmid	140	PQ	70
PVM 1	Plow	56	BP	112
PVM 2	Pmax	180	PQ	90
PVM 2	Pmid	90	PQ	45
PVM 2	Plow	36	BP	72
PVM 3	Pmax	22	PQ	11
PVM 3	Pmid	11	PQ	6
PVM 3	Plow	4	BP	8

When certain amount of energy is taken off from capacitor, its voltage shouldn't decline from MPP of PV module above a certain value. In accordance

with the investigations performed, the optimum for such decline is in the range of $\Delta = 3-5 \%$. In this case, energy of the capacitor is changed by the value:

$$E_{sc} = ((U_B^2 - U_1^2) \cdot C) / 2 \quad (4)$$

where C is capacitance of the capacitor, U_B is voltage of PV module at PMM under maximal insolation, U_1 is an intermediate fixed voltage, which is close to voltage U_B .

Thus, capacitance of the capacitor can be determined by the formula:

$$C \geq (k \cdot P_B) / (U_B^2 - U_1^2) \quad (5)$$

where P_B is the inverter power that corresponds to PV module voltage at its MPP under maximal insolation; k is an empirical coefficient, which has the dimensions of a unit of time.

The value of k can be estimated depending on the capacitor parameters:

$$k = 2 \cdot \tau \cdot (1 - U_1^2 / U_B^2) \quad (6)$$

where τ is the time constant, which depends on the manufacturing technology of the certain type of capacitor and on internal resistance of the capacitor R_{SC} , the algorithm for determining the value of which is shown above.

To determine the optimal values of the coefficient k authors performed a large number of calculations with further modeling and experimental assessment of the apparatus for $1.45 \text{ sec} \leq \tau \leq 4.5 \text{ sec}$. Evaluation of k values has been performed for the 280 W PV module (PVM-1), 180 W PV module (PVM-2), and 20 W PV module (PVM-3[3]). The results of these simulations and experiments are shown in Table 6. It was found that the k value, which provides the stable technical effect and determines capacitance of the capacitor, is lying in the range of 0.26 - 0.53.

Device for electrical energy take-off from the photovoltaic module (Fig. 2, 3) comprises PV module (1), capacitor (2), DC/AC inverter (3), a means for voltage measurement on the capacitor (4), and the control module (5).

Table 6

The value of coefficient k for PV modules with different U_{oc} and for different capacitors

k	R_{pv}	R_{sc}	τ	U_B	ΔU	Δ	Integrated mark of system functioning
0,141	1	1	1,45	22	1,1	5,0%	unsatisfactorily
0,283	1	0,5	1,45	22	1,1	5,0%	satisfactorily
0,428	1	0,33	1,45	22	1,1	5,0%	OK
0,707	1	0,2	1,45	22	1,1	5,0%	OK
0,114	1	1	1,45	33	1,32	4,0%	unsatisfactorily
0,227	1	0,5	1,45	33	1,32	4,0%	satisfactorily
0,344	1	0,33	1,45	33	1,32	4,0%	OK
0,568	1	0,2	1,45	33	1,32	4,0%	OK
0,086	1	1	1,45	53	1,59	3,0%	unsatisfactorily
0,171	1	0,5	1,45	53	1,59	3,0%	satisfactorily
0,260	1	0,33	1,45	53	1,59	3,0%	OK
0,428	1	0,2	1,45	53	1,59	3,0%	OK
0,266	1	1	4,5	53	1,59	3,0%	unsatisfactorily
0,532	1	0,5	4,5	53	1,59	3,0%	satisfactorily
0,806	1	0,33	4,5	53	1,59	3,0%	OK
1,330	1	0,2	4,5	53	1,59	3,0%	OK

5 As the DC/AC inverter (3) can be used a combined unit consisting of one or more DC/DC converters at input and DC/AC inverter at output.

As the means for voltage measurements (4) can be used at least three voltage threshold sensors (TS), each of which generates a signal indicating on a certain value of voltage on the capacitor (n voltage threshold sensors (TSn) are shown in

Figure 3). The control module (5) can be implemented as a microprocessor or can be made of basic (standard) logic elements.

Maximum power of the DC/AC inverter (3) should be not less than the nominal power of the PV module (1). The DC / AC inverter (3) is configured to change the power of the maximum towards reduction at least at three levels. Output DC/AC inverter (3) is connected to the AC local grid (6) (Fig. 2, 3). The capacitor (2) is connected parallel to the input of the DC/AC inverter (3). The control module (5) is connected to the DC/AC inverter (3) and the means to measure the voltage of the capacitor (4). Means for measuring the voltage (4) is arranged to supply to the control module (5) an information regarding the at least three fixed pre-set values of voltage on the capacitor (2). Control module (5) is arranged to switch power levels of DC / AC inverter (3) depending on the voltage level on the capacitor (2). The internal resistance of the capacitor (2) is at least twice lower than the internal resistance of the PV module (1) at its MPP under maximum insolation. The capacitance of capacitor (2) is defined as:

$$C \geq (k \cdot P_B) / (U_B^2 - U_1^2) \quad (7)$$

where C - capacitance in Farads, P_B - the maximum power PV module (1) at maximum insolation, W; U_B - PV module (1) voltage at the MPP at maximum insolation, V; U_1 - intermediate fixed voltage at the MPP at less than the maximum insolation, the closest to the voltage U_B , V, k - coefficient of absolute value of 0.3 ... 0.5 sec.

The method for take-off electrical energy from PV module using the device described above as follows.

Initially, on the basis of current-voltage characteristics of PV module (1) the following parameters are measured: i) voltage U_B at the MPP of PV module under maximal level of insolation, ii) voltage U_0 which is not less as 25% of the open circuit voltage of PV module (1) in the case of DC/AC inverter (3) and not less as 15% of the open circuit voltage of PV module in the case of DC/DC converter,

iii) voltage U_1 at the MPP of PV module (1) under at least one intermediate level of insolation between its maximal and minimal values. Then the DC/AC inverter (3) is adjusted to one of the power levels (P_x), which is not less as the maximal power of PV module (1) under either minimal insolation (P_0), either maximal insolation (P_B), or at least one intermediate insolation (P_1) between minimal and maximal insolation. The apparatus operates in accordance with the following scenario. At arising and increasing insolation, energy from PV module (1) is transferred to the capacitor (2) and collected there continuously; and voltage (U_C) on the capacitor (2) is measured simultaneously. When U_C achieves the value U_0 , the means for voltage measurement (4) sends a signal to switch the control module (5) on; when U_C achieves the value U_1 the control module (5) sends a signal to the DC/AC inverter (3) to operate at the power level P_1 ; when U_C achieves the value U_B the control module (5) sends a signal to the DC/AC inverter (3) to operate at the power level P_B . The signal lines that correspond to voltages U_0 , U_1 ..., U_B are shown in Fig. 2, pos. 7. Vice versa, at decreasing insolation, the DC/AC inverter (3) consumes energy collected by the capacitor (2) and when U_C drops down to the value U_1 the control module (5) sends a signal to the DC/AC inverter (3) to operate at the power level P_1 ; when U_C drops down to the value U_0 , the means for voltage measurement (4) sends a signal to the DC/AC inverter (3) to operate at the power level P_0 ; when U_C drops down to the value lower than U_0 , the means for voltage measurement (4) sends a signal to switch the DC/AC inverter (3) off.

For realizing the method as a means for voltage measurement can be used at least three voltage threshold sensors (TS) (4), each of which forms and sends signal to the control module (5) about the presence of certain voltage at capacitor (2). An example of specific device and realization of the method using such devices with DC / AC inverter (3) is illustrated (FIG. 3). Another example illustrates realization of the method and specific device, which provides for the use

of DC / DC converter (3) (FIG. 4) to supply pulsed-power load (6) or energy storage (8).

INFORMATION VERIFYING THE POSSIBILITY OF THE INVENTION

To verify the possibility of the method for take-off of electric energy were

5 used the followings:

- a dual stand, which allows to register amount of the received energy by two independent channels;
- 2 standard PV modules SPV-190M-24 (Sinski PV Co., Ltd) with rated power of 190 W and open circuit voltage $U_{oc} = 43.4$ V were
10 stationary installed alongside and in the same plane;
- supercapacitor (hereinafter - SC) with electrical capacity of 5.2 F and operating voltage of 42 V;
- electronic circuit that commits the energy extraction in a constant load mode.

15 Example 1. Experimental verification of the identity of both channels on the registration of energy amount was carried out at different levels of insolation. Level of average insolation was assessed by normalizing the average power obtained through channel 1 for a specified exposition to rated power of PV module. Exposures time was chosen arbitrarily, but not less than 60 seconds. Test
20 results are given in Table 7 of this description. To check the proposed method for take-off electrical energy, the EETOS apparatus was included in channel 2 and tested similarly to channel 1. The results of this testing are given in Table 7. Channel 2 with the included EETOS apparatus, that is the subject of the invention, showed better performance at all levels of insolation. The effectiveness of the
25 EETOS apparatus increases with decreasing insolation level from 103.2% if the insolation level is 91.2% to 3309% if the insolation level is 0.1% of the rated power of PV module.

Table 7

The average power received from the PV modules with rated power of 190 W
under condition of EETOS system application (Comparative Table)

Insolation level	Channel 1 and Channel 2 are equally loaded under the same insolation level (both channels without EETOS application)			Channel 1 and Channel 2 are equally loaded under the same insolation level (Channel 2 with EETOS application)		
	Channel 1	Channel 2	Ratio P_2/P_1 , %	Channel 1	Channel 2	Ratio P_2/P_1 , %
	The average power P_1 , W	The average power P_2 , W		The average power P_1 , W	The average power P_2 , W	
1	2	3	4	5	6	7
0,0%	*	*	*	0,02	2,49	12450,0%
0,1%	0,16	0,23	143,8%	*	*	*
0,1%	*	*	*	0,21	6,95	3309,5%
0,4%	0,8	1,13	141,3%	*	*	*
0,7%	1,33	1,76	132,3%	*	*	*
1,0%	1,83	2,22	121,3%	*	*	*
0,9%	1,65	2,16	130,9%	*	*	*
1,4%	2,72	3,14	115,4%	*	*	*
2,2%	*	*	*	4,23	21,19	500,9%
2,8%	5,23	6,2	118,5%	*	*	*
2,8%	5,41	6,49	120,0%	*	*	*
3,8%	*	*	*	7,13	26,68	374,2%
5,1%	9,77	11,38	116,5%	*	*	*
5,3%	*	*	*	10,11	35,30	349,2%
7,8%	*	*	*	14,86	40,91	275,3%
8,3%	*	*	*	15,69	44,11	281,1%
8,9%	16,87	18,71	110,9%	*	*	*
11,7%	*	*	*	22,38	48,84	218,2%
12,1%	22,91	25,11	109,6%	*	*	*

Table 7. continuation						
1	2	3	4	5	6	7
17,3%	32,96	35,07	106,4%	*	*	*
19,2%	*	*	*	36,50	63,57	174,2%
23,0%	43,61	45,34	104,0%	*	*	*
23,0%	43,62	44,45	101,9%	*	*	*
25,1%	*	*	*	47,71	71,14	149,1%
29,7%	56,40	57,37	101,7%	*	*	*
30,9%	58,70	59,63	101,6%	*	*	*
32,8%	62,27	63,20	101,5%	*	*	*
33,6%	*	*	*	63,88	83,75	131,1%
37,2%	70,75	71,44	101,0%	*	*	*
37,4%	71,09	71,98	101,3%	*	*	*
39,2%	74,50	75,43	101,2%	*	*	*
45,7%	86,74	87,42	100,8%	*	*	*
46,7%	88,80	90,13	101,5%	*	*	*
50,0%	*	*	*	95,04	104,28	109,7%
55,8%	106,01	106,98	100,9%	*	*	*
59,9%	113,79	116,53	102,4%	*	*	*
91,2%	*	*	*	173,31	178,93	103,2%
100,0 %	190,00 Nominal power		-	-	-	-

* - measurement wasn't carried out

Example 2. Experimental verification of the effectiveness of the proposed method for take-off electrical energy was performed by monitoring the work of both channels around the daylight hours. Evaluation of the average insolation throughout the daylight hours was performed by normalizing the amount of energy from channel 1 to the maximum amount of energy received per daylight hours in channel 1 during the entire period of observation. Channel 2 operated either with included EETOS apparatus (09/24 and 09/25) or without it. The test results are given in Table 8. The proposed method has allowed to increase the amount of

energy received per daylight hours by 27.8% and 22.9% at an average insolation of 80.1% and 88.5% respectively.

Table 8

The Total Energy received from the PV modules with nominal power of 190 W at condition of EETOS system application (Comparative Table)

Date (day and month)	Insolation level, %	Channel 1 and Channel 2 are equally loaded under the same insolation			Comments
		Channel 1	Channel 2	Ratio	
		Energy, E_1 , J	Energy, E_2 , J	E_2/E_1 , %	
14.09	52,8%	1299161	1326644	102,1%	without EETOS
16.09	24,0%	591958	614582	103,8%	without EETOS
19.09	73,7%	1815613	1861046	102,5%	without EETOS
20.09	73,7%	1815601	1859295	102,4%	without EETOS
21.09	79,8%	1965744	2074504	105,5%	without EETOS
24.09	80,1%	1973170	2521434	127,8%	Channel 2 with EETOS application
25.09	88,5%	2180443	2679508	122,9%	Channel 2 with EETOS application
Nominal power	100,0%	2462440	-	-	-

Example 3. PV module made on the base of monocrystalline silicon cells was used for experimental verification of feasibility of the proposed apparatus. In accordance with the specification PV module has the following parameters: rated power - 190 W, open circuit voltage $U_{oc} = 43.4$ V, short-circuit current - 6.5 A, internal resistance – 6.3 Ohm, the calculated MPP voltage $U_{mpp} = 0.8 \cdot U_{oc} = 34.7$ V. For PV module based on monocrystalline silicon cells a dependence of MPP on

the insolation level is typical and close to the type 2 (FIG. 6). In this case, the method for take-off electrical energy was realized by adjusting system to three voltage levels using three voltage threshold sensors (4) and inverter with three power levels (3). Capacitor (2) consists of 7 modules BSC 6-30 based on structurally perfect carbon forms and aqueous electrolyte. In accordance with the BSC 6-30 specification it has: electrical capacity - 30 F, internal resistance - less as 0.15 Ohm, and the optimal current - 10 A. In this case, electrical capacity of Capacitor (2) is 4.5 F at operating voltage of 42 V. The internal resistance of Capacitor (2) is 1.05 Ohms, that is 6 times lower than internal resistance of PV module (1) at MPP.

As a DC / AC inverter (3) was used microinverter MICRO-0.25-I-OUTD-208/240 manufacture of Power-One Inc. (Aurora Micro), designed to operate with individual PV module. In accordance with the Aurora Micro specification it has: rated power at the input – up to 265 W, operating voltage – from 12 to 60 V, maximum current – 12.5 A. Aurora Micro has a MPPT function for the input voltage in the range from 25 to 50 V, that allows smoothly change its power from 0.2 to 250 W. The minimum operating voltage, allowing DC / AC conversion, is 12 V, that is 27.6% of the PV module open circuit voltage $U_{oc} = 43.4$ V or 20% of the maximum open circuit voltage permitted by its specification. At the output Aurora Micro provides AC with rated power of 250 W at 230 V and 50 Hz. Measurement of input and output voltage, frequency, current, power and energy output were carried out by regular means Aurora Micro and visualized via unit for data collection (Aurora CDD).

AC line with voltage 220 V and 50 Hz was used as local grid (6).

To implement the control module, three voltage TS (4) were manufactured on the base of low-power bipolar transistors KT 315 and logic microcircuits K364 series, produced by MOS technology. Accordingly to the operating algorithm with three management levels, the TS_B , TS_1 , and TS_0 were configured on the next

voltages: $U_B = 34.7$ V, $U_1 = 32.0$ V $U_o = 29.5$ V. When the threshold voltage is achieved, the corresponding TS_n changes the output signal, e.g. from '1' to '0' or vice versa from '0' to '1'.

When the threshold voltage is achieved, the corresponding TS_n changes the output signal, e.g. from '1' to '0' or vice versa from '0' to '1'.

The control module (5) has been manufactured on the base of field-effect transistors MOSFET (IRF3710PBF, STW12NK80Z), which are characterized by a low voltage drop at open mode. The control module (5) receives signals from the TS_n in a standard digital form and generates corresponding control signals for MOSFET managing also in the form of a digital signal (5V). In accordance with commands of control module (5), DC / AC inverter (3) is switched to the appropriate power level, namely $P_o = 50$ W, $P_B = 200$ W, $P_1 = 100$ W.

During these experiments it was found, that if open circuit voltage of PV module decreases below 25% of its rated value, the work of DC / AC inverter becomes unstable, therefore, the reliable technical result can not be established. Accordingly, the implementation method and apparatus with the use of DC / DC converter when open circuit voltage of PV module decreases below 15% of its rated value, the reliable technical result can not be established.

Example 4. describes the results of experimental verification of higher efficiency of the systems with EETOS apparatus in take-off energy from the PV module in a wide range of insolation levels as compared to efficiency of the systems with MRRT function.

For this experiment PV panel with rated power of 190 W and microinverter MICRO-0.30-I-OUTD-208/240 production of Power-One Inc. (Aurora Micro) described in previous examples 1-3 were used. To test the efficiency of the proposed method, the EETOS apparatus was included in Channel 1 and Aurora Micro with MRRT function was included in Channel 2. For both channels 1 and 2 the identical insolation and the similar testing procedures have been applied. Test

results are shown in Table 9. These results indicate that for all insolation levels a higher efficiency was observed for Channel 1 with the EETOS apparatus, which is the subject of the present invention. In this case the gain in energy received from PV module is of 21.1 %, indicating reduction of the energy losses during electric power take-off from PV module, i.e. achieving the technical results due to exploiting the method and the apparatus in accordance with the present invention.

Table 9

The Total Energy received from the PV modules with rated power of 190 W under condition of EETOS system (Channel 1) and MPPT (Channel 2) application

(Comparative Table)

Exposition time		Channel 1 with EETOS system application		Channel 2 with microinverter Aurora30 (MPPT) application		Ratio E1/E2, %
Start	Time, sec	The average power P_1 , W	Energy E1, J	The average power P_2 , W	Energy E2, J	
1	2	3	4	5	6	7
9_32	-	-	-	-	-	-
9_41	540	39,92	21557	0,13	70	30707,7%
10_00	1140	73,23	83482	63,60	72504	115,1%
10_20	1200	37,89	45468	2,91	3492	1302,1%
10_40	1200	88,16	105792	83,01	99612	106,2%
11_00	1200	86,94	104328	76,86	92232	113,1%
11_20	1200	95,00	114000	94,56	113472	100,5%
11_40	1200	87,45	104940	71,40	85680	122,5%
12_00	1200	65,88	79056	63,09	75708	104,4%
12_21	1260	100,61	126769	83,20	104832	120,9%
12_40	1140	139,36	158870	134,97	153866	103,3%
13_00	1200	130,88	157056	128,52	154224	101,8%
13_20	1200	84,60	101520	75,15	90180	112,6%

Table 9. continuation						
1	2	3	4	5	6	7
13_40	1200	114,73	137676	102,27	122724	112,2%
14_00	1200	94,82	113784	83,22	99864	113,9%
14_20	1200	51,55	61860	10,53	12636	489,6%
14_40	1200	114,54	137448	94,23	113076	121,6%
15_00	1200	43,94	52728	33,51	40212	131,1%
15_20	1200	12,24	14688	7,59	9108	161,3%
15_40	1200	14,68	17616	9,90	11880	148,3%
16_00	1200	21,83	26196	16,62	19944	131,3%
16_20	1200	11,91	14292	7,74	9288	153,9%
16_40	1200	14,12	16944	9,57	11484	147,5%
17_00	1200	10,29	12348	0,24	288	4287,5%
17_20	1200	5,52	6624	3,15	3780	175,2%
17_40	1200	1,19	1428	0,27	324	440,7%
Total	29280	-	1816470	-	1500480	121,1%

Simulations and investigations have also shown that the effectiveness of the EETOS apparatus depends on the number of levels of inverter power and appropriately defined for measuring PV module voltage at intermediate insolation levels. Increasing the number of points of regulation causes to a decrease in the difference between the power levels set in the inverter or converter; and accordingly it has a positive effect on improving the efficiency of the whole system, but negatively affects its cost.

Experiments with PV modules up to 190 watts and open circuit voltage of 40 volts showed that technical result already manifested at presence for at least three power levels with the voltage difference between neighboring points of regulation from 1 volt to 2.5 volt. Reducing differences the voltage to a value less than 1 volt leads to increase capacity of capacitor and complicates the device as a whole and, therefore, becomes uneconomical. The optimal value of voltage difference between

the voltages neighboring points of regulation should be set in the range of 3% to 5% of the PV module open circuit voltage.

5

10

15

-
1. US Patent 7709727. Circuit arrangement for a photovoltaic system.- issued 04.05.2010.
 2. US Patent 7456523. Power generation system, and administration apparatus and administration method of power generation system. - issued 25.11.2008.
 3. The US Patent 8400134. Apparatus and methodology for maximum power point tracking for a solar panel. - issued 19.03.2013.
 4. US Patent 7808213. Flexible power apparatus. - issued 05.10.2010.
 5. EP Patent 2075895. Flexible power supply apparatus. - issued 05.01.2011.
 6. UA Patent 51651. Device and method for energy extraction from the photoelectric converter. - issued 16.12.2002.
 - 7 . RU Patent 2195754. Device and method for energy extraction from the solar battery. - issued 27.12.2002.

CLAIMS

1. The method for electrical energy take-off from a photovoltaic module in which on the basis of current-voltage characteristics of photovoltaic module (PVM) connected in parallel to the input of either DC/DC converter or DC/AC inverter, with a capacitor connected to them in parallel and a means for voltage measurement, connected with the control module of DC/DC converter or DC/AC inverter, the following parameters are measured: i) voltage U_B at the maximum power point (MPP) of PVM under maximal level of insolation, ii) the minimum voltage U_0 which is not less as 5% of the open circuit voltage of PVM in the case of DC/DC converter or not less as 25% in the case of DC/AC inverter, iii) voltage U_1 at the MPP of PVM under at least one intermediate level of insolation between its maximal and minimal values; then the DC/DC converter or the DC/AC inverter is adjusted to one of the power levels (P_x), which is not less as the maximal power of PVM under either minimal insolation (P_0), either maximal insolation (P_B), or at least one intermediate insolation (P_1) between minimal and maximal insolation accordingly; at arising and increasing insolation, energy from PVM is transferred to capacitor and collected there continuously; *characterized in that*, voltage on the capacitor (U_C) is measured simultaneously, and when U_C achieves the value U_0 , the means for voltage measurement sends a signal to switch the control module on; when U_C achieves the value U_1 the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_1 ; when U_C achieves the value U_B the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_B ; and vice versa, at decreasing insolation, the DC/DC converter or the

DC/AC inverter consumes energy collected by the capacitor; when U_C drops down to the value U_1 the control module sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_1 ; when U_C drops down to the value U_0 , the means for voltage measurement sends a signal to the DC/DC converter or the DC/AC inverter to operate at the power level P_0 ; when U_C drops down to the lower value than U_0 , the means for voltage measurement sends a signal to switch the DC/DC converter or the DC/AC off.

2. The method of claim 1, wherein extracted energy is transformed into alternating current by means of the DC/AC inverter and continuously transferred into a local AC electrical power distribution system, whereas power of DC/AC inverter is adjusted to at least one of three levels, which are not less as power of PVM under either minimal insolation, either maximal insolation, or at least one intermediate insolation.

3. The method of claim 1, wherein extracted energy is transformed by means of the DC/DC converter and supplied to the energy storage system, whereas power of DC/DC converter is adjusted to at least one of three levels, which are not less as power of PVM under either minimal insolation, either maximal insolation, or at least one intermediate insolation.

4. The apparatus for electrical energy take-off from a photovoltaic PV module (PVM) comprising either DC/AC inverter with a power, being not less than the PVM nominal power, and with the possibility of connecting its output to a local AC electrical power distribution system or the DC/DC converter with a power, being not less than the PVM nominal power, and with the possibility of its connection to input of the energy storage system; the capacitor connected in parallel to the input of DC/AC inverter or DC/DC converter; the means for voltage measurement

on the capacitor; the control module connected to DC/AC inverter or DC/DC converter and connected to the means for voltage measurement on the capacitor; *characterized in that* DC/AC inverter or DC/DC converter are designed to be capable of switch their power between at least three levels; the means for voltage measurement is designed to be capable of supplying the data regarding at least three predetermined fixed values of the capacitor voltage to the control module, the control module is designed to be capable of switching the power levels of the DC/AC inverter or the DC/DC converter depending on the capacitor voltage, wherein the internal resistance of the capacitor is at least twice lower than the internal resistance of the PVM at its maximum power point (MPP), while capacity of the capacitor is defined as follows:

$$C \geq (k * P_B) / (U_B^2 - U_1^2),$$

where C is capacitance of the capacitor in Farad (F); P_B is maximal power of PVM under its maximal insolation in Watt (W); U_B is voltage of PVM at the maximum power point under maximal insolation in Volt (V); U_1 is an intermediate fixed voltage at the maximum power point under insolation that is less than maximal insolation closest to the U_B in Volt (V); k is the factor with an absolute value of 0.3 - 0.5 second (sec).

5. The apparatus of claim 4, wherein as the DC/AC inverter is used a combined unit comprising one or more DC/DC converters at its input and DC/AC inverter at its output.
6. The apparatus of claim 4, wherein as the means for voltage measurements are used at least three threshold devices, each of which generates a signal indicating on certain value of voltage on the capacitor.
7. The apparatus of claim 4, wherein the control module is a microprocessor.

8. The apparatus of claim 4, wherein the control module is made of hard-wired logic elements.

5

10

15

20

25

1/9

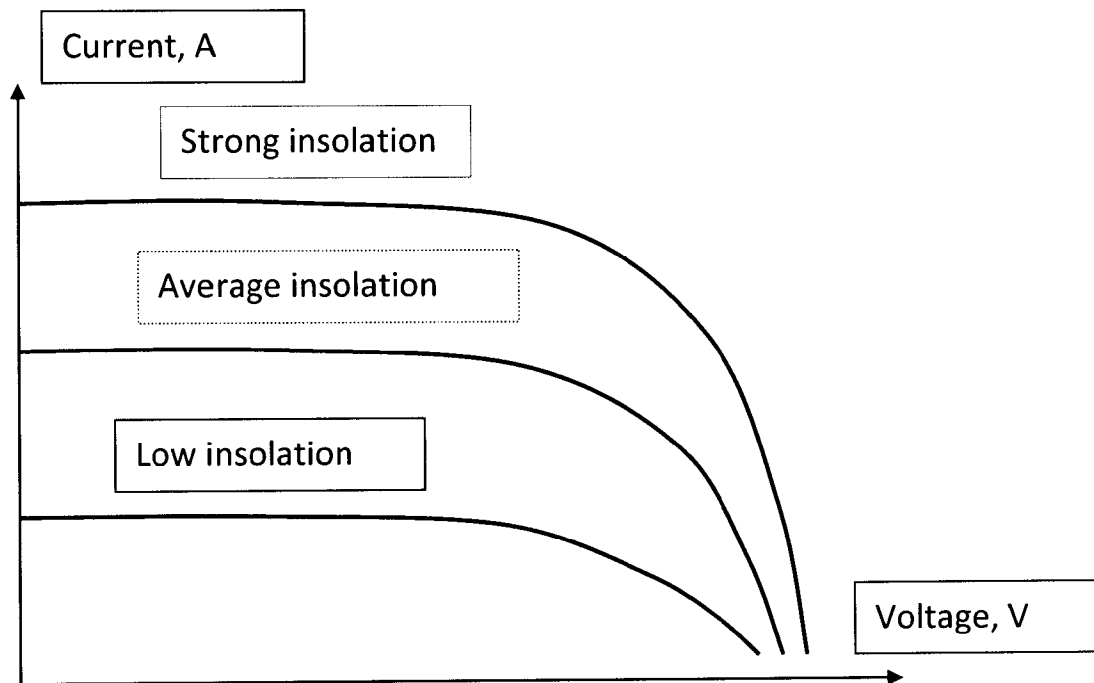


FIG. 1

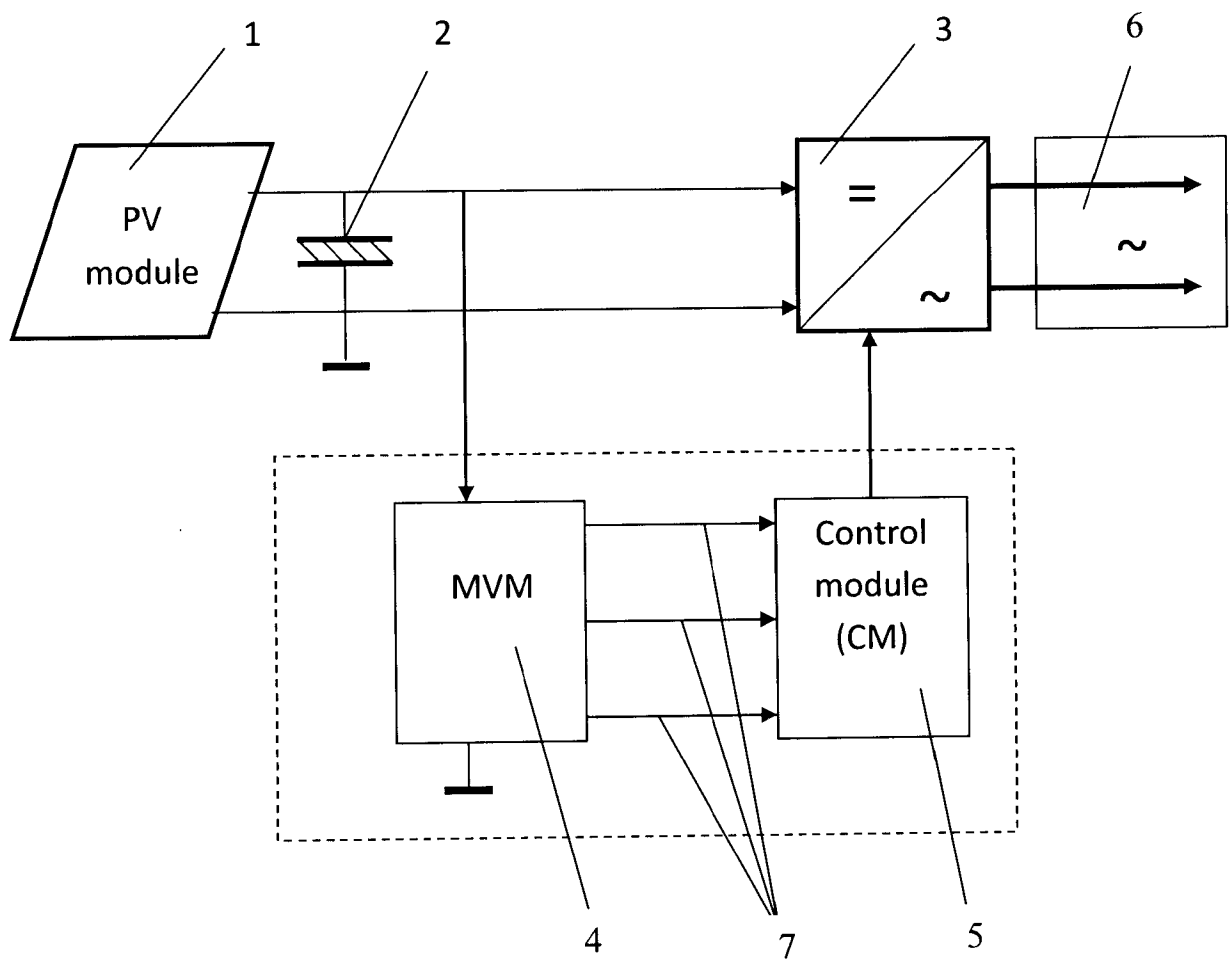


FIG. 2

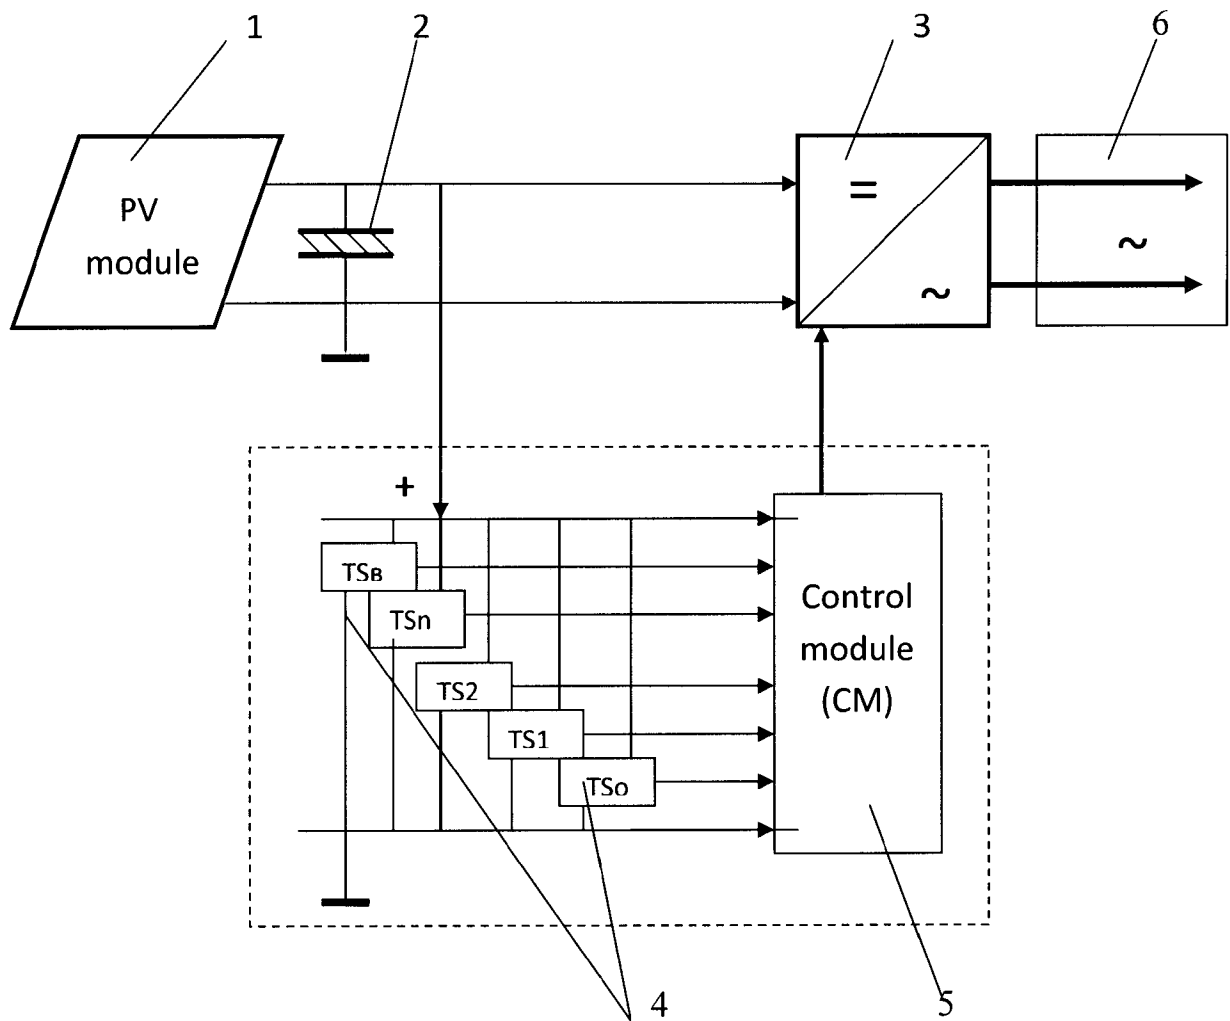


FIG. 3

4/9

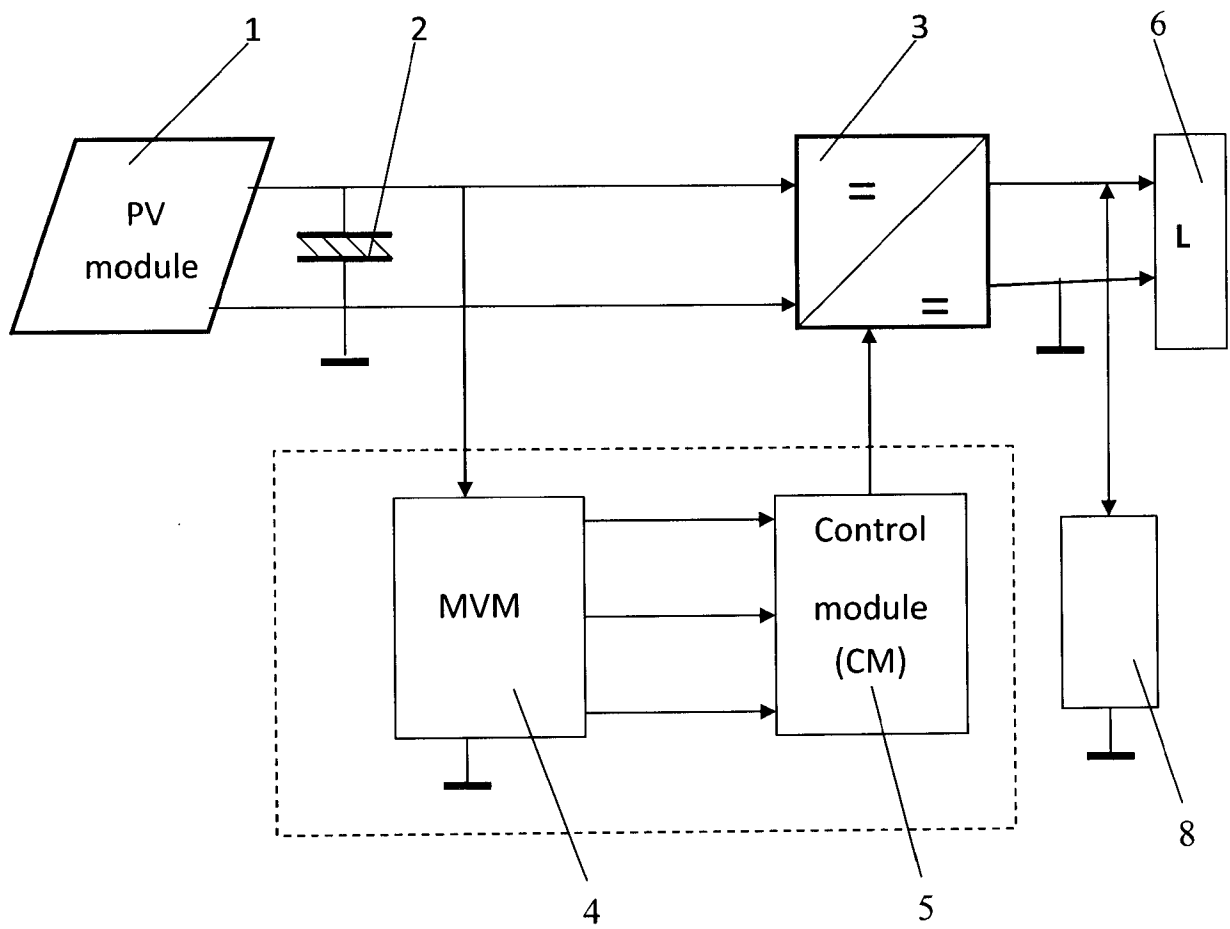


FIG. 4

5/9

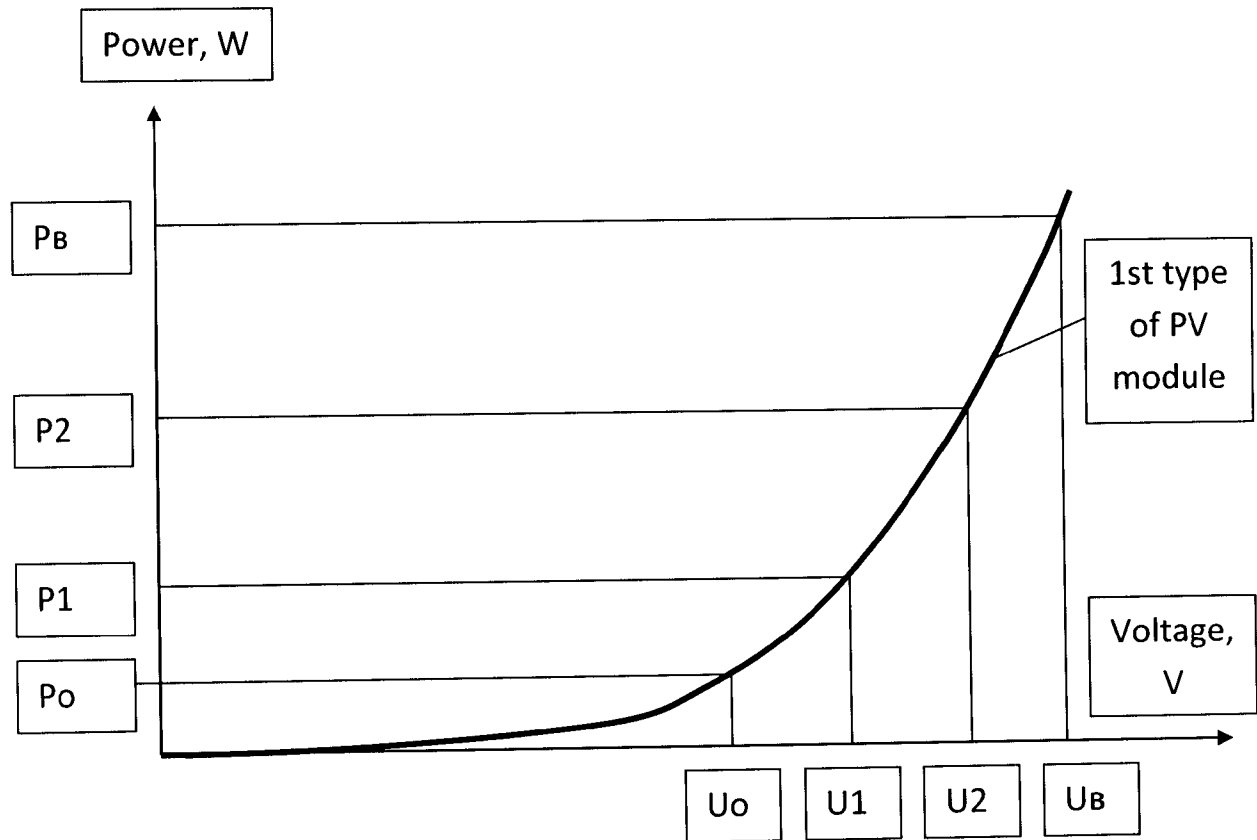


FIG. 5

6/9

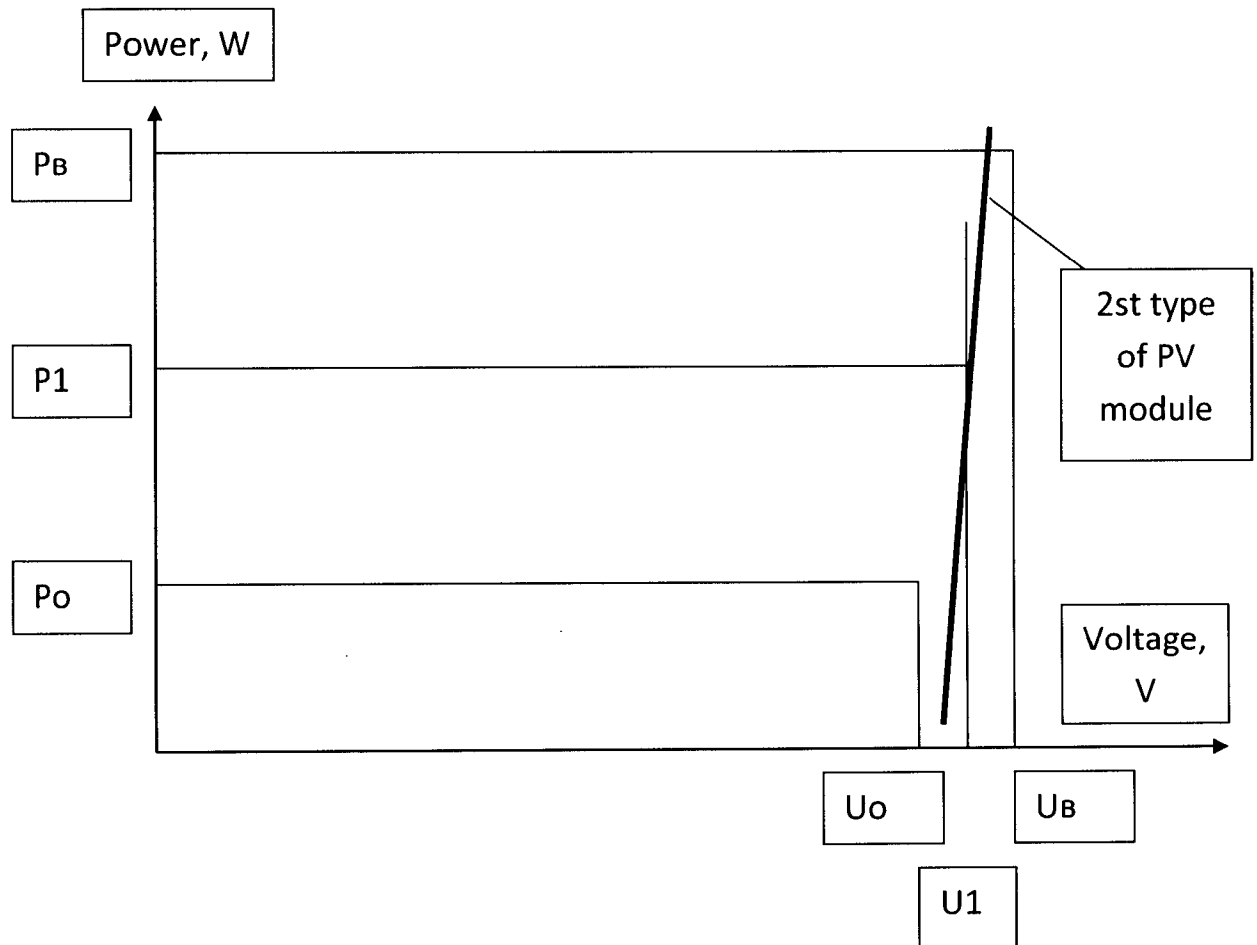


FIG. 6

7/9

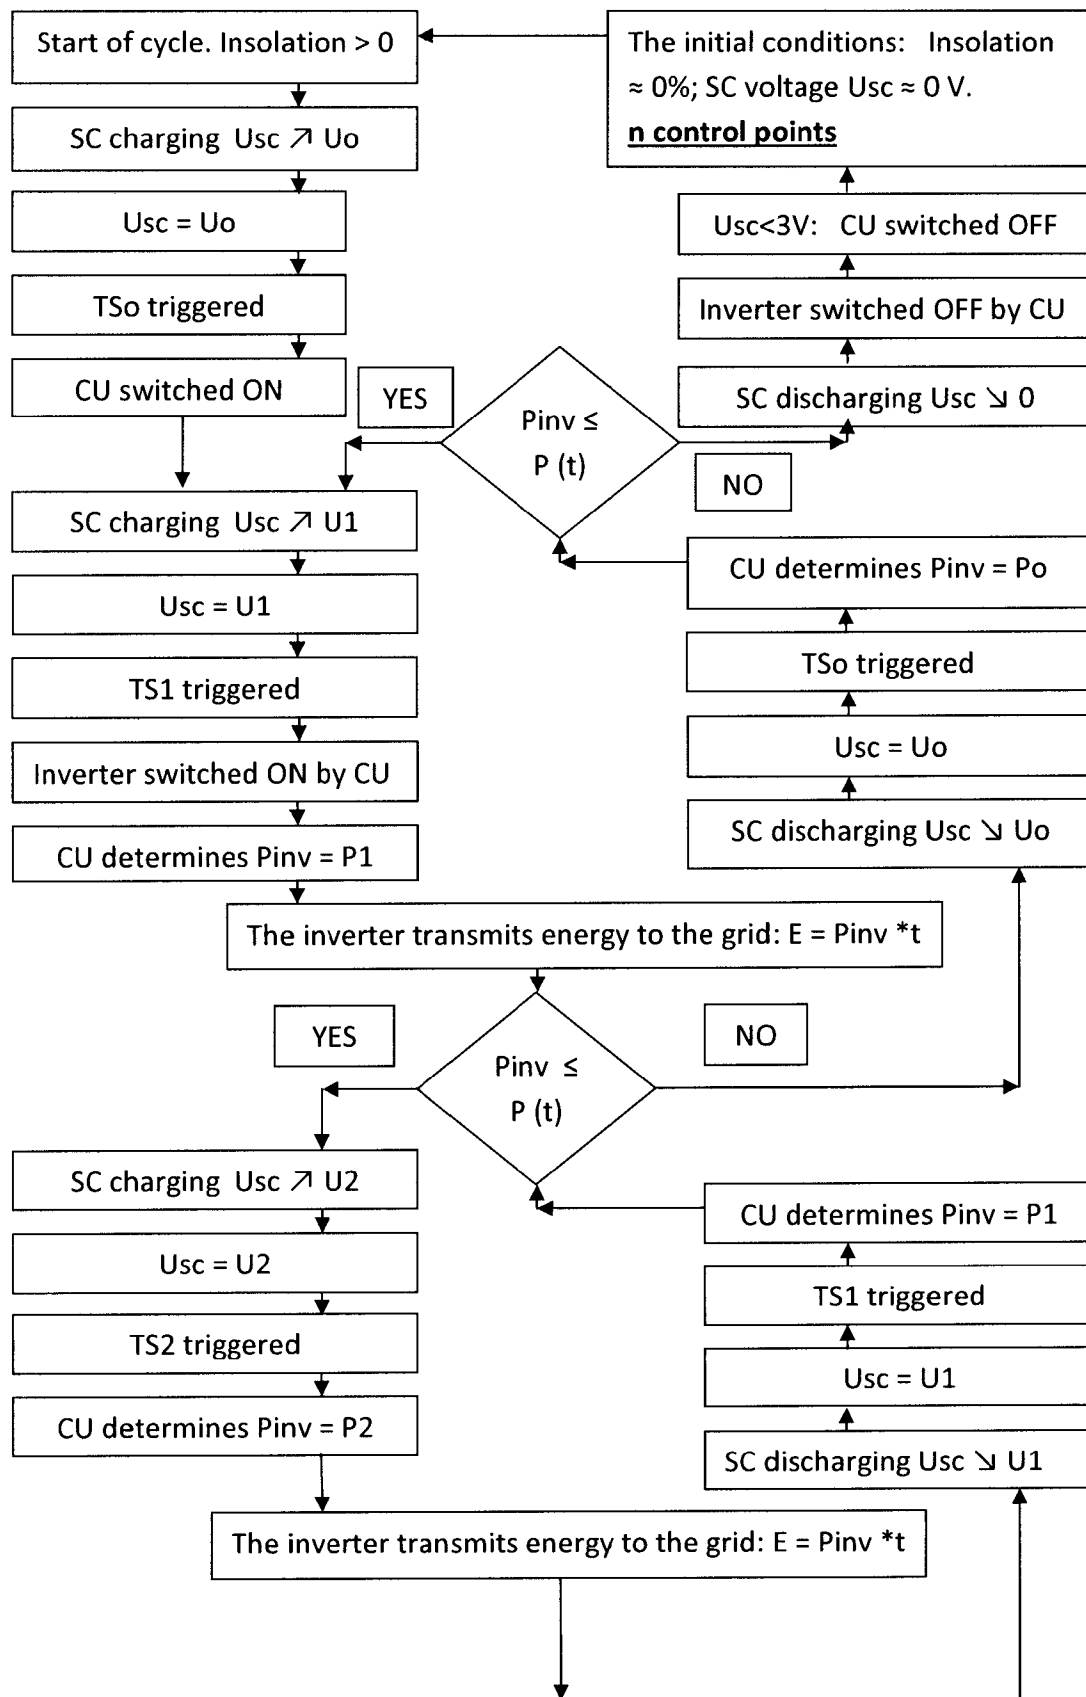


FIG. 7

8/9

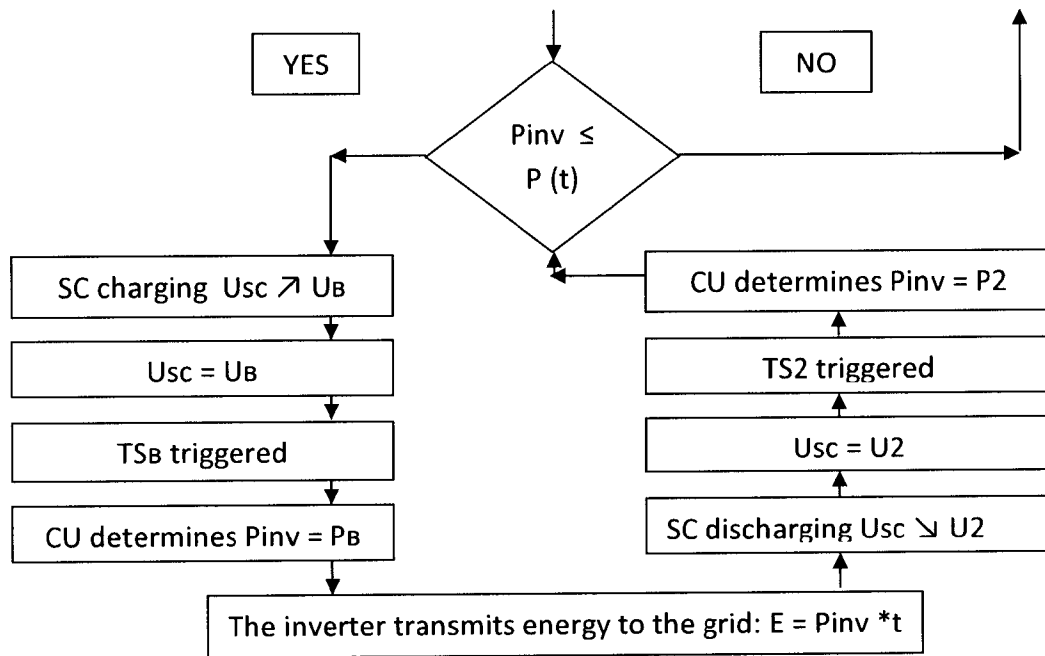


FIG. 7 (continuation)

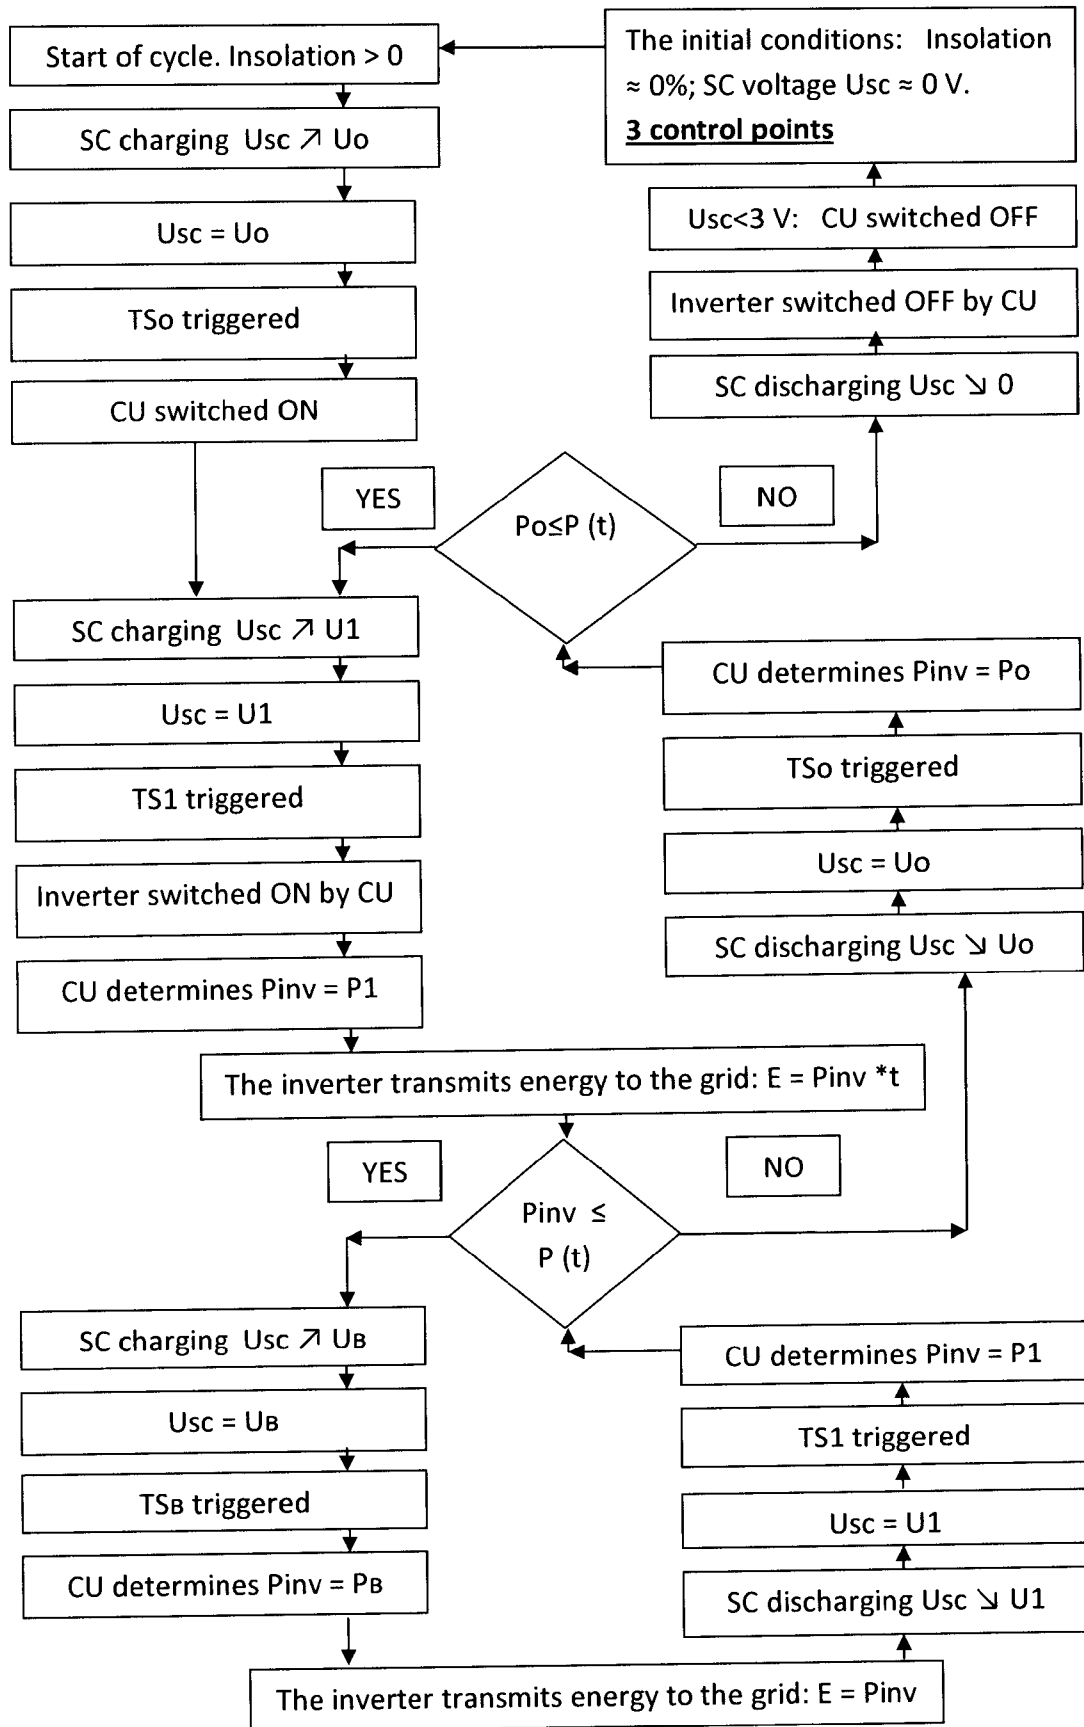


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/UA2014/000135

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02J3/38
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	CN 203 193 364 U (CHANGZHOU ANT TAG ELECTRONIC SCIENCE & TECHNOLOGY CO LTD) 11 September 2013 (2013-09-11) paragraphs [0021], [0022], [0026]; figures 1,2	1-8
Y	US 2010/156185 A1 (KIM JIN WOOK [KR] ET AL) 24 June 2010 (2010-06-24) figures 2,5	1-8
Y	US 2011/298305 A1 (CHISENGA LESLEY [GB] ET AL) 8 December 2011 (2011-12-08) figures 1,7	2,3,5,7
Y	CN 101 431 246 B (BEIJING INST TECHNOLOGY [CN] BEIJING INST TECHNOLOGY) 21 July 2010 (2010-07-21) abstract; figure 3	4-8
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 May 2015

Date of mailing of the international search report

21/05/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Varela Fraile, Pablo

INTERNATIONAL SEARCH REPORT

International application No

PCT/UA2014/000135

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	RUPESH G WANDHARE ET AL: "Novel control scheme to reduce the effect of intermittent solar radiation on the grid connected PV system power output without losing MPPT", APPLIED POWER ELECTRONICS CONFERENCE AND EXPOSITION (APEC), 2012 TWENTY-SEVENTH ANNUAL IEEE, IEEE, 5 February 2012 (2012-02-05), pages 79-85, XP032127652, DOI: 10.1109/APEC.2012.6165801 ISBN: 978-1-4577-1215-9 Section IV. Proposed control strategy; Section V. Simulation results -----	4-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/UA2014/000135

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
CN 203193364	U	11-09-2013	NONE	
US 2010156185	A1	24-06-2010	DE 102009055287 A1 US 2010156185 A1	29-07-2010 24-06-2010
US 2011298305	A1	08-12-2011	CN 102270850 A CN 202218176 U EP 2577828 A2 GB 2482653 A US 2011298305 A1 US 2014252859 A1 WO 2011154720 A2	07-12-2011 09-05-2012 10-04-2013 15-02-2012 08-12-2011 11-09-2014 15-12-2011
CN 101431246	B	21-07-2010	NONE	