US 20180073749A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2018/0073749 A1

Gagne (43) Pub. Date: Mar. 15, 2018

(54) METHODS AND SYSTEM FOR CONTROLLING A COMBINATION BOILER

(71) Applicant: **Lochinvar, LLC**, Lebanon, TN (US)

(72) Inventor: **Curtis George Gagne**, Smyrna, TN (US)

(21) Appl. No.: **15/265,055**

(22) Filed: **Sep. 14, 2016**

Publication Classification

(51) **Int. Cl.**

F24D 19/10 (2006.01)

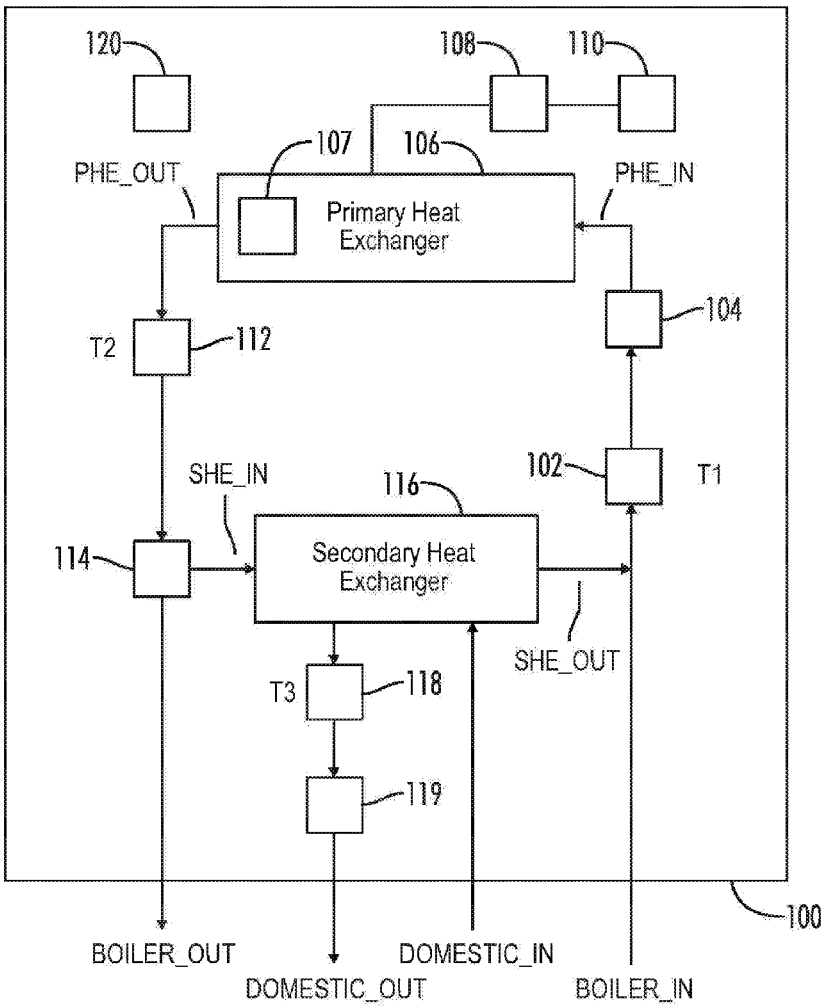
F24D 3/08 (2006.01)

(52) **U.S. Cl.**

CPC ***F24D 19/1069*** (2013.01); ***F24D 3/08*** (2013.01); *F24D 2240/10* (2013.01); *F24D 2220/06* (2013.01); *F24D 2220/042* (2013.01)

(57) **ABSTRACT**

A combination boiler provides heated water to a boiler loop and domestic hot water (DHW) to a domestic water loop. The combination boiler includes a primary heat exchanger (PHE) connected to the boiler loop and a burner to provide heat to the primary heat exchanger. A secondary heat exchanger (SHE) transfers heat energy from the boiler loop to the domestic water loop. A controller monitors a PHE inlet temperature and a DHW output temperature, obtains a pre-heat initialization temperature threshold and a pre-heat cancellation temperature threshold, and detects a low temperature condition. A pre-heat operation is initiated responsive to the low temperature condition by circulating heated water from the PHE to the SHE. The burner is selectively fired at least in part according to an outlet temperature of the PHE.



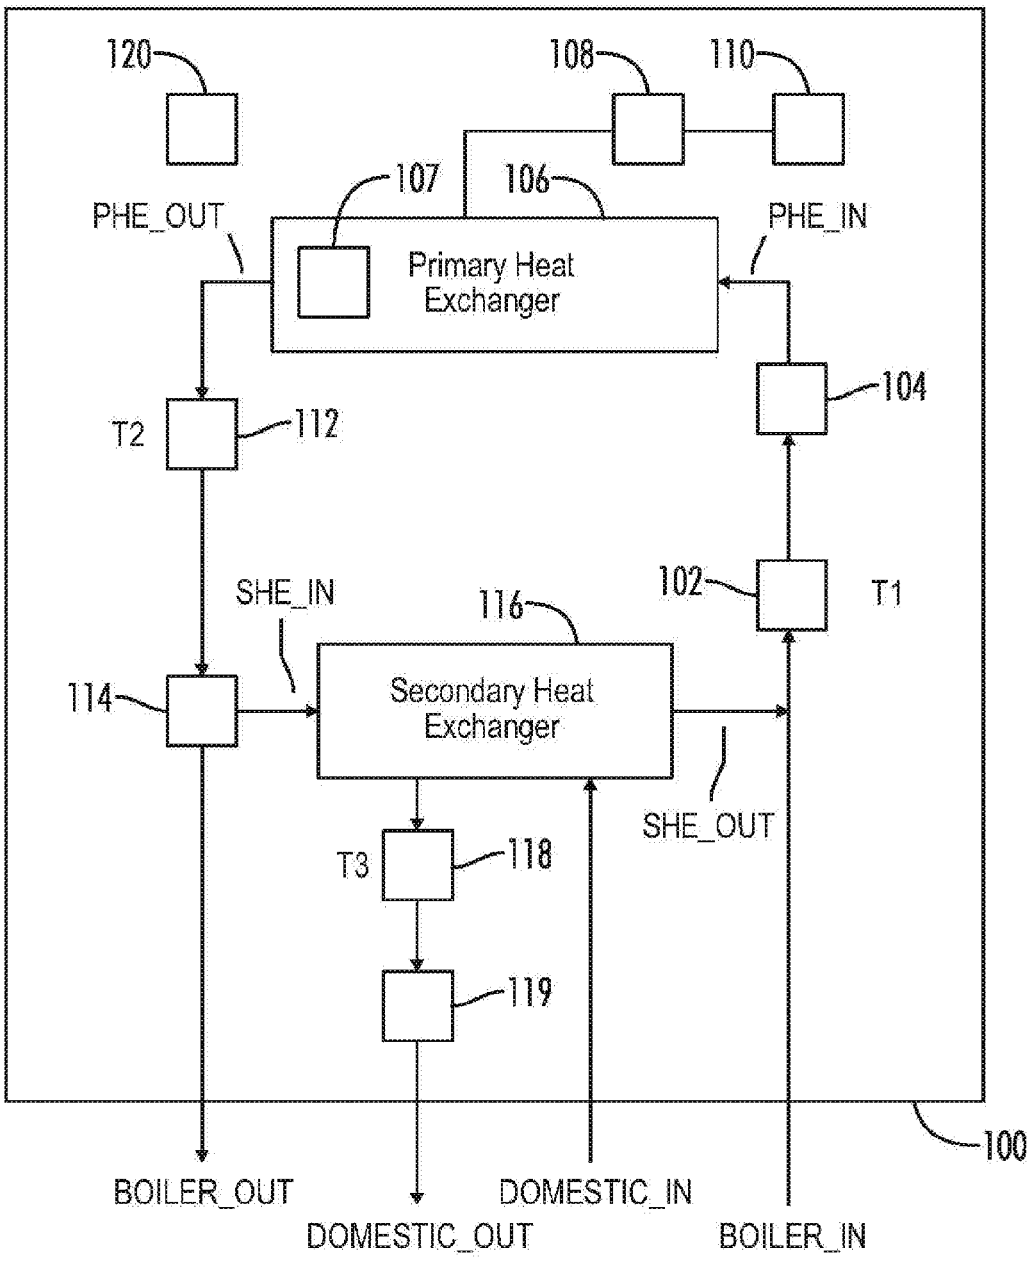

120
108
110
107
106
PHE_OUT
PHE_IN
Primary Heat Exchanger
104
T2
112
102
T1
SHE_IN
116
114
Secondary Heat Exchanger
SHE_OUT
T3
118
119
100
BOILER_OUT
DOMESTIC_OUT
DOMESTIC_IN
BOILER_IN

FIG. 1

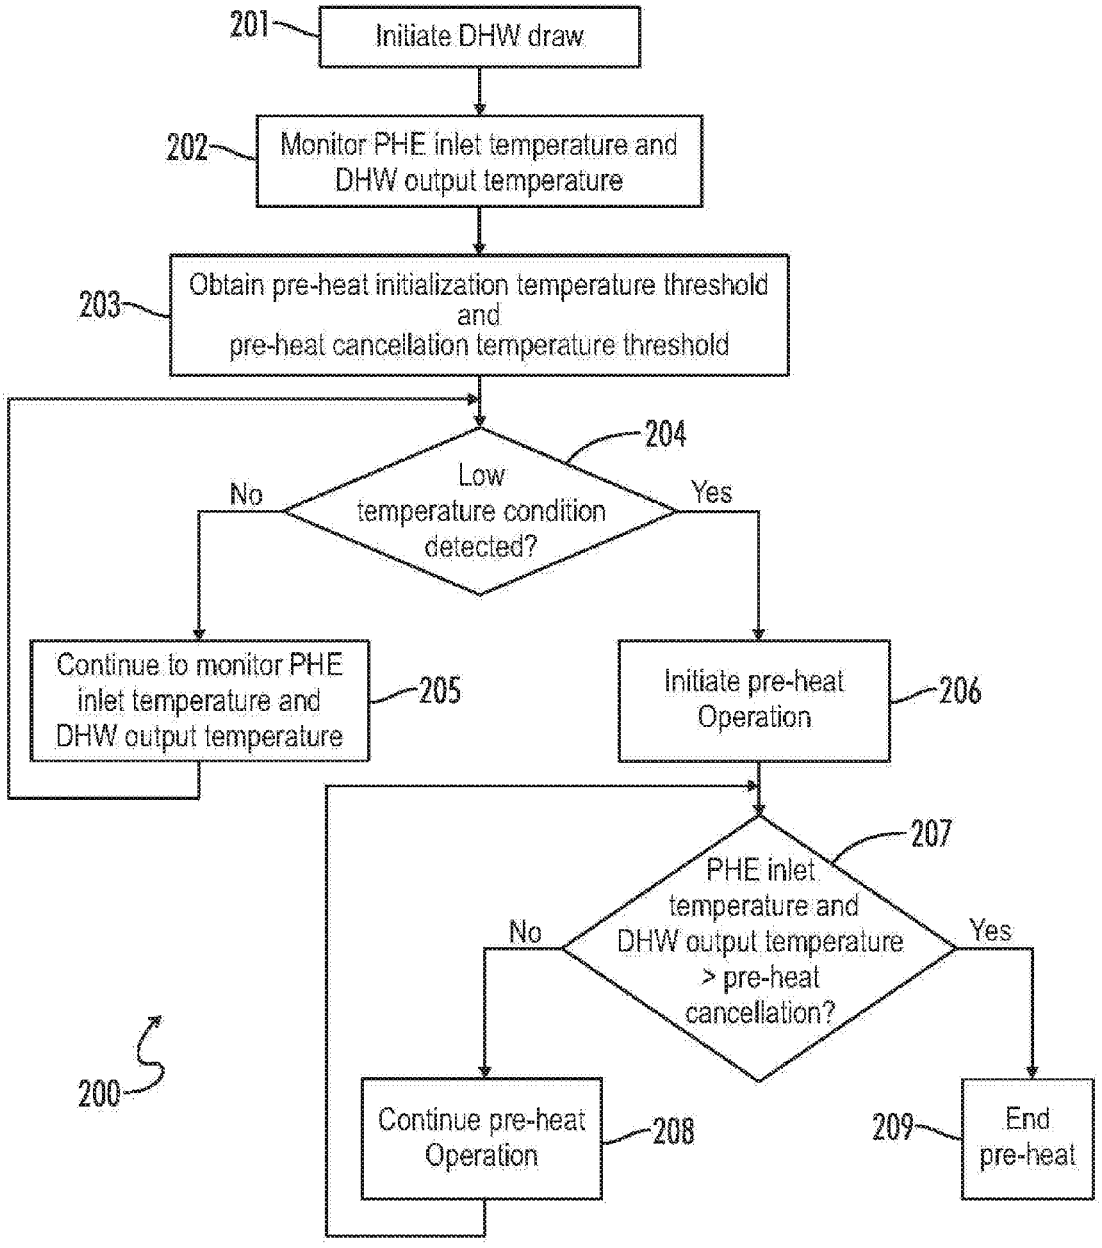

201
Initiate DHW draw
202
Monitor PHE inlet temperature and DHW output temperature
203
Obtain pre-heat initialization temperature threshold and pre-heat cancellation temperature threshold
204
Low temperature condition detected?
No
Yes
Continue to monitor PHE inlet temperature and DHW output temperature
205
Initiate pre-heat Operation
206
207
PHE inlet temperature and DHW output temperature > pre-heat cancellation?
No
Yes
200
Continue pre-heat Operation
208
209
End pre-heat

FIG. 2

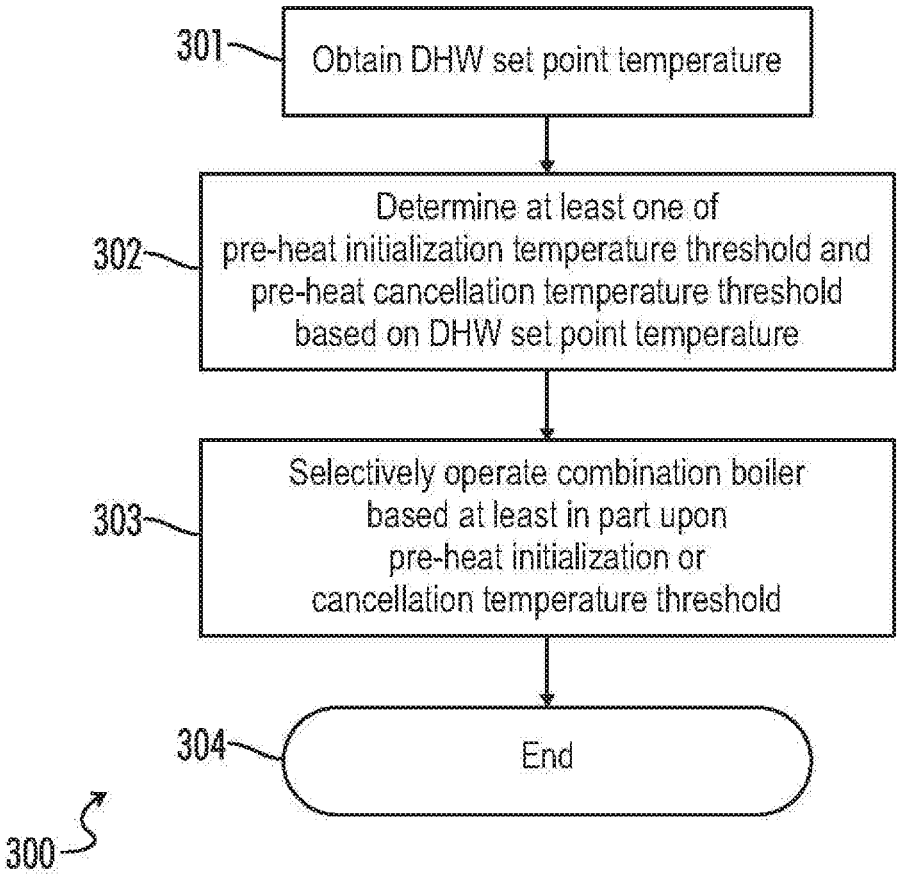

301
Obtain DHW set point temperature
302
Determine at least one of pre-heat initialization temperature threshold and pre-heat cancellation temperature threshold based on DHW set point temperature
303
Selectively operate combination boiler based at least in part upon pre-heat initialization or cancellation temperature threshold
304
End
300

FIG. 3

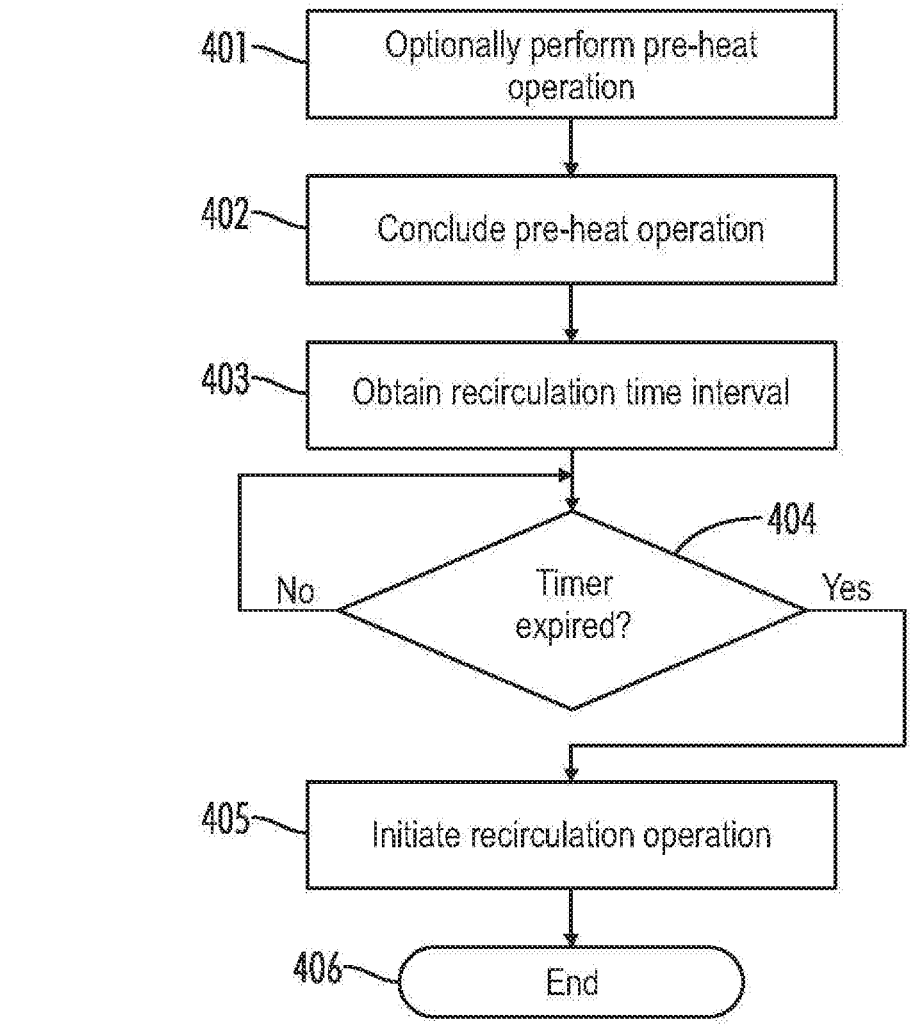

401
Optionally perform pre-heat operation
402
Conclude pre-heat operation
403
Obtain recirculation time interval
404
Timer expired?
No
Yes
405
Initiate recirculation operation
406
End
400

FIG. 4

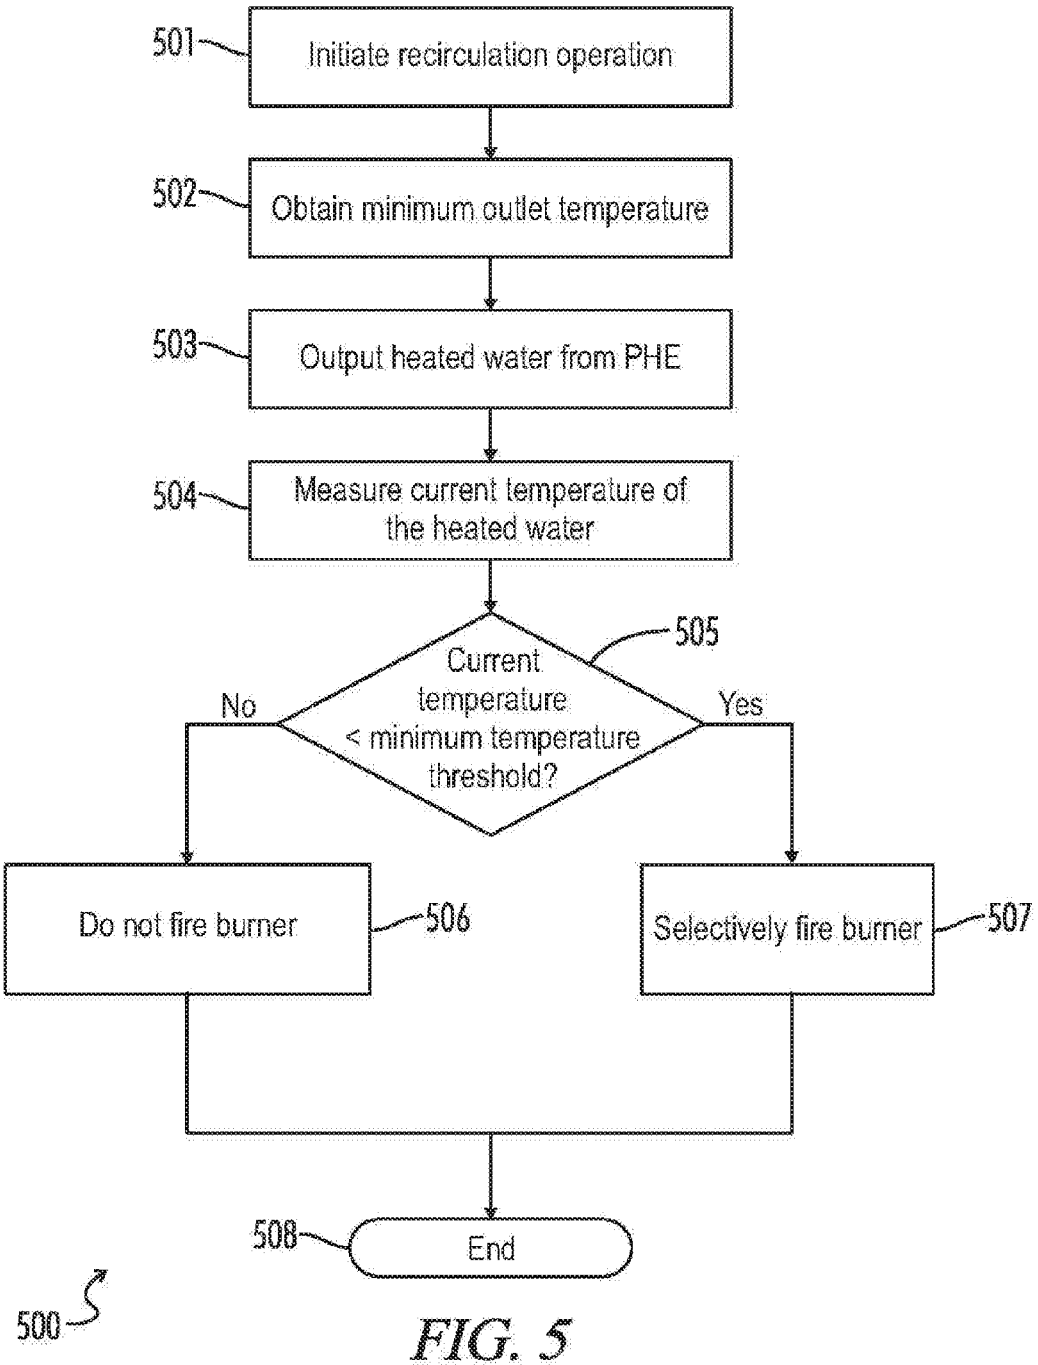

501
Initiate recirculation operation
502
Obtain minimum outlet temperature
503
Output heated water from PHE
504
Measure current temperature of the heated water
505
Current temperature < minimum temperature threshold?
No
Yes
Do not fire burner
506
Selectively fire burner
507
508
End
500

FIG. 5

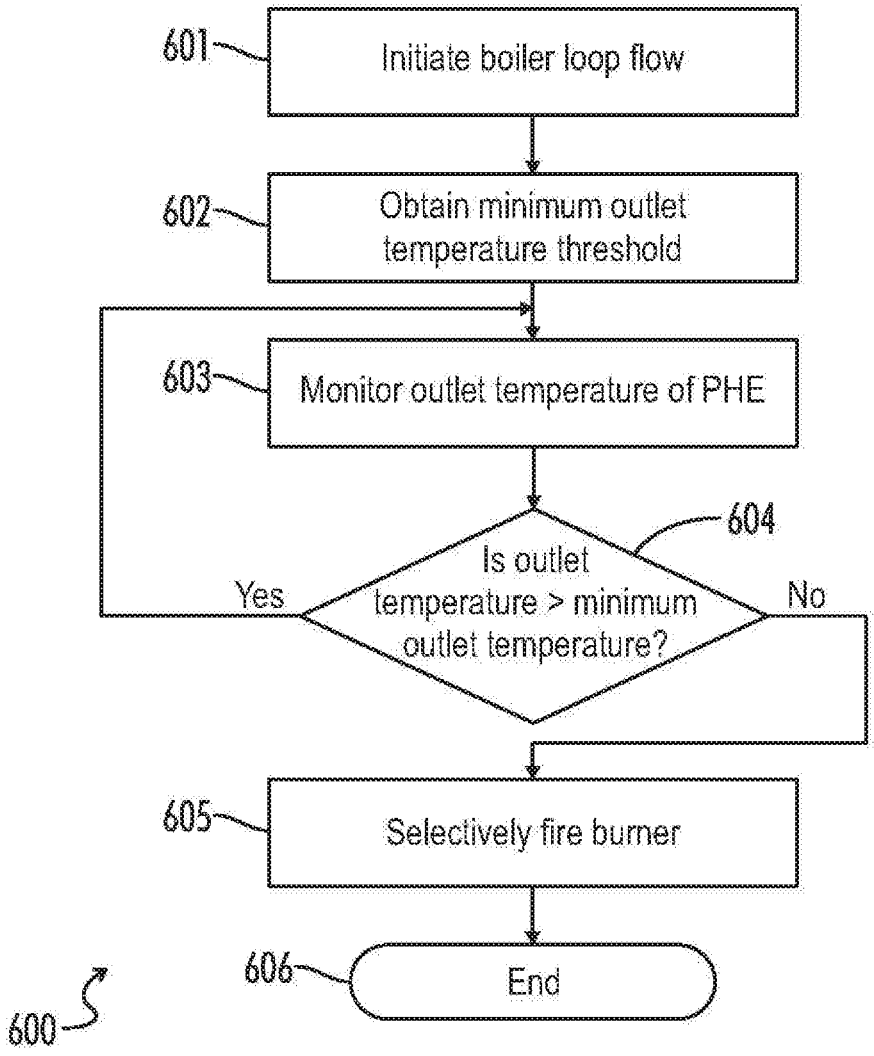

601
Initiate boiler loop flow
602
Obtain minimum outlet temperature threshold
603
Monitor outlet temperature of PHE
604
Is outlet temperature > minimum outlet temperature?
Yes
No
605
Selectively fire burner
606
End
600

FIG. 6

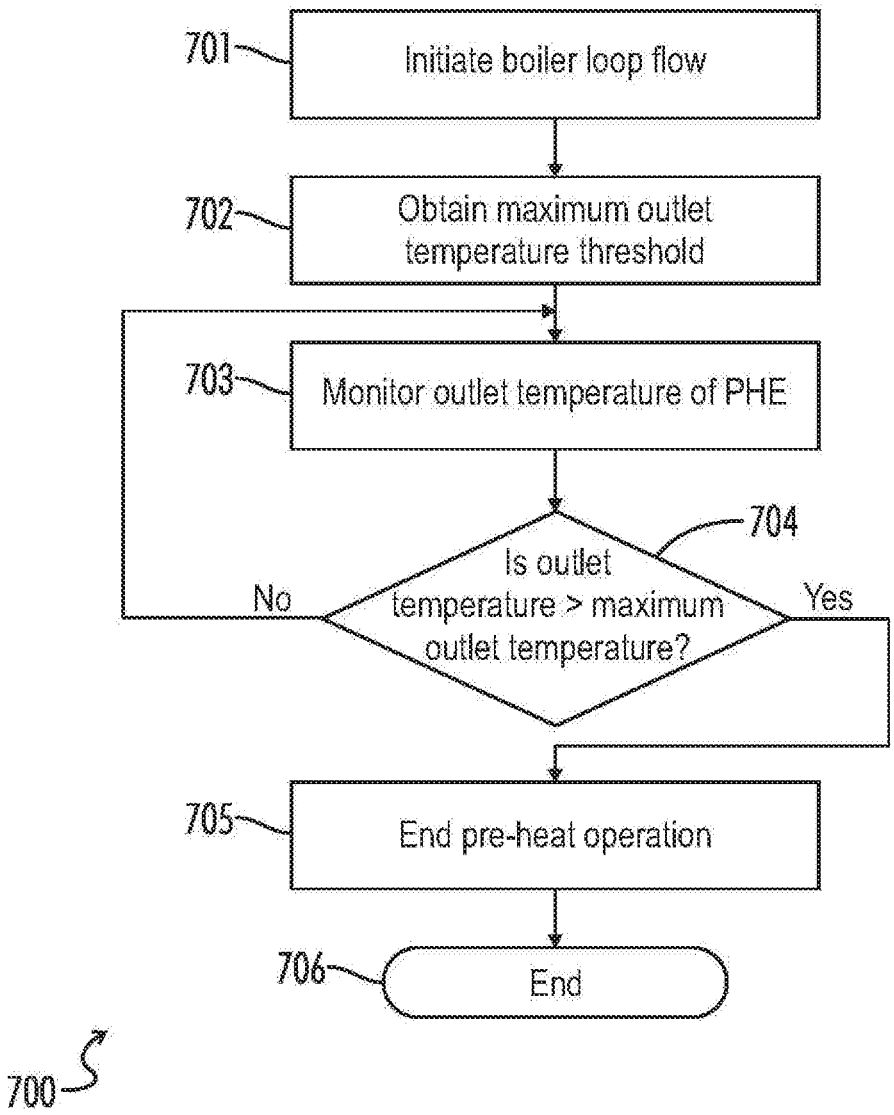

701
Initiate boiler loop flow
702
Obtain maximum outlet temperature threshold
703
Monitor outlet temperature of PHE
704
Is outlet temperature > maximum outlet temperature?
No
Yes
705
End pre-heat operation
706
End
700

FIG. 7

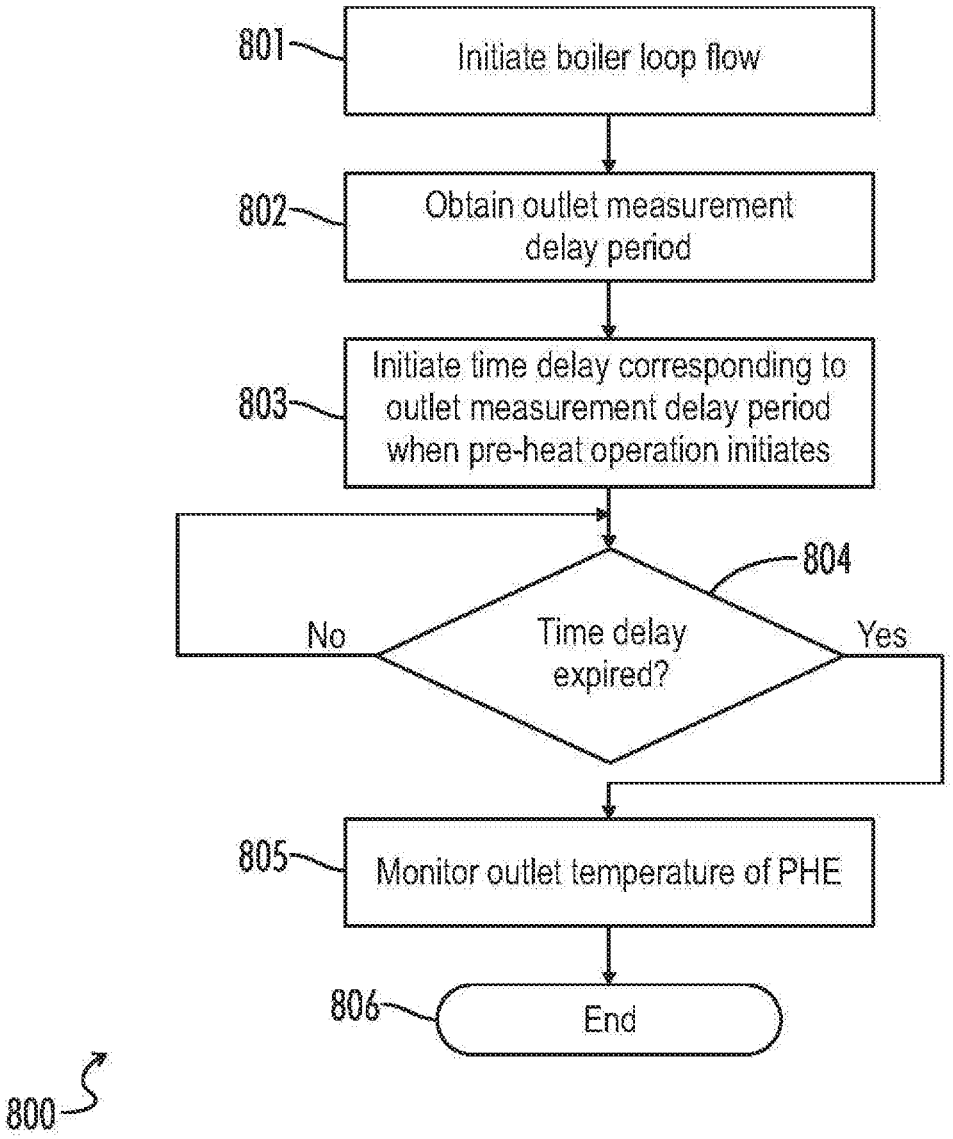

801
Initiate boiler loop flow
802
Obtain outlet measurement delay period
803
Initiate time delay corresponding to outlet measurement delay period when pre-heat operation initiates
804
Time delay expired?
No
Yes
805
Monitor outlet temperature of PHE
806
End
800

FIG. 8

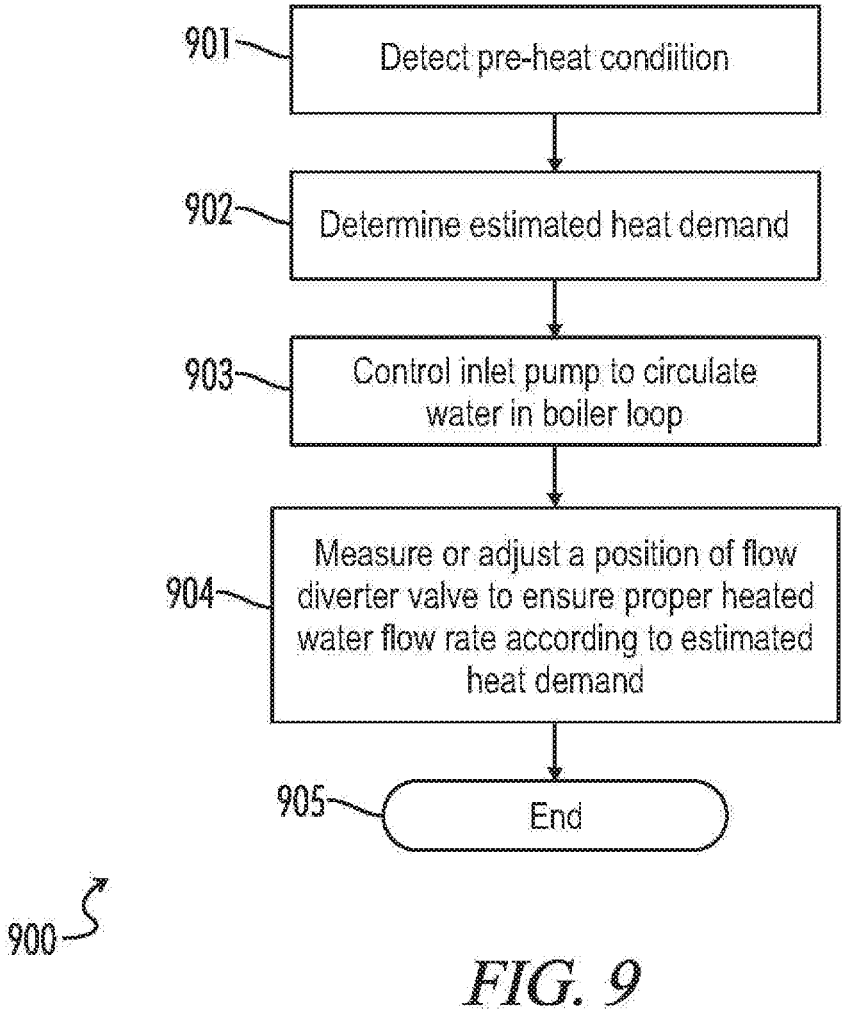

901
Detect pre-heat condiition
902
Determine estimated heat demand
903
Control inlet pump to circulate water in boiler loop
904
Measure or adjust a position of flow diverter valve to ensure proper heated water flow rate according to estimated heat demand
905
End
900

FIG. 9

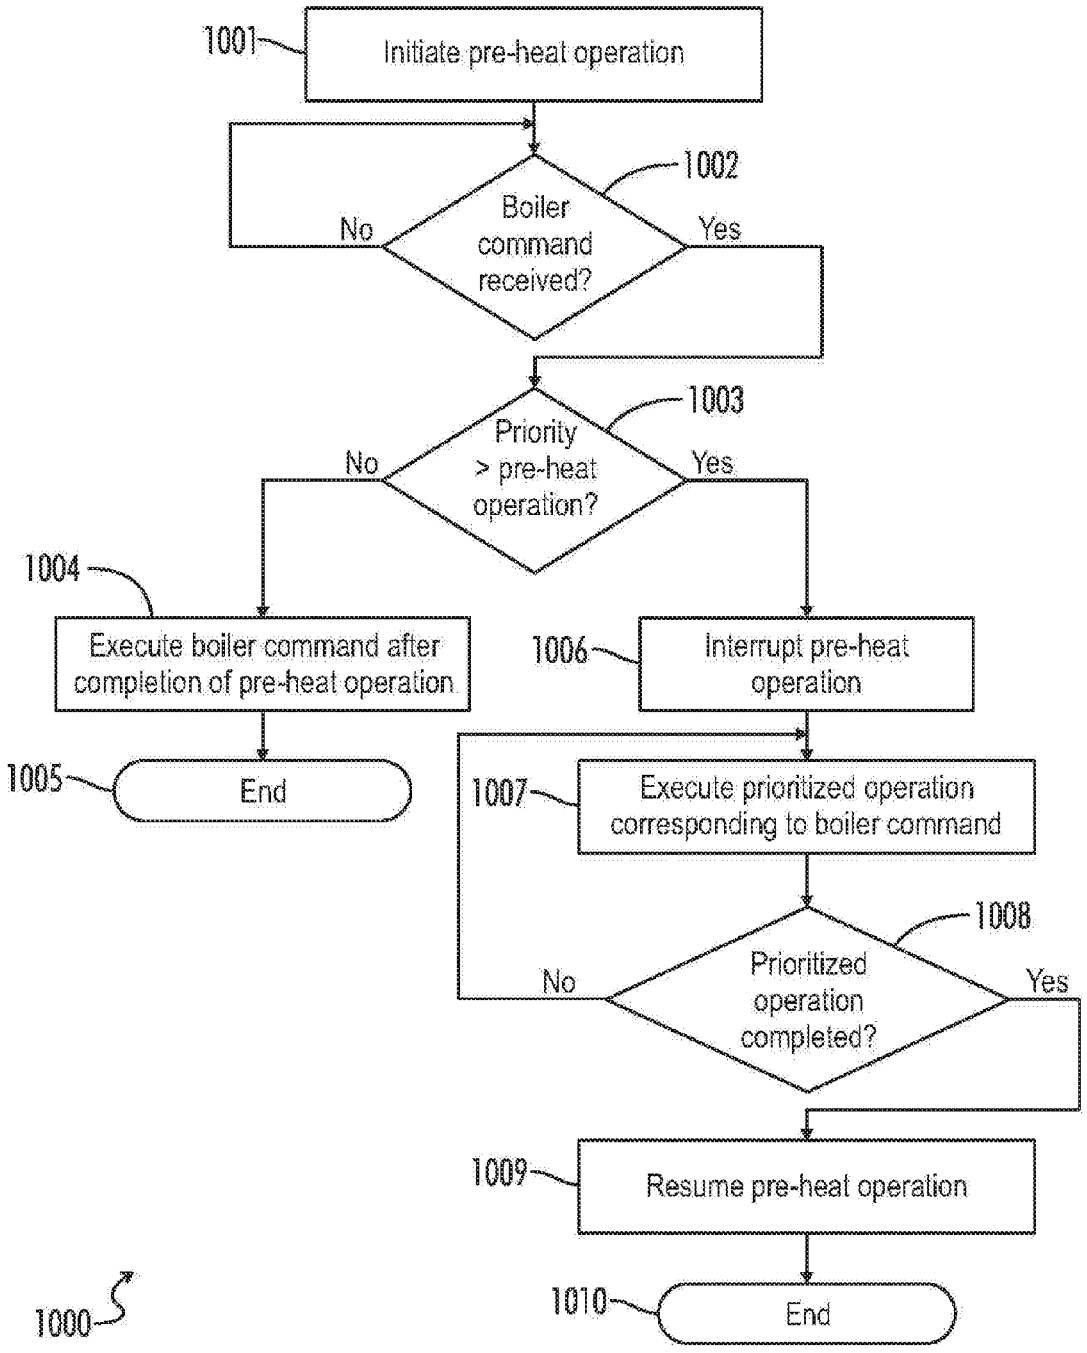

1001
Initiate pre-heat operation
1002
Boiler command received?
No
Yes
1003
Priority > pre-heat operation?
No
Yes
1004
Execute boiler command after completion of pre-heat operation
1005
End
1006
Interrupt pre-heat operation
1007
Execute prioritized operation corresponding to boiler command
1008
Prioritized operation completed?
No
Yes
1009
Resume pre-heat operation
1010
End
1000

FIG. 10

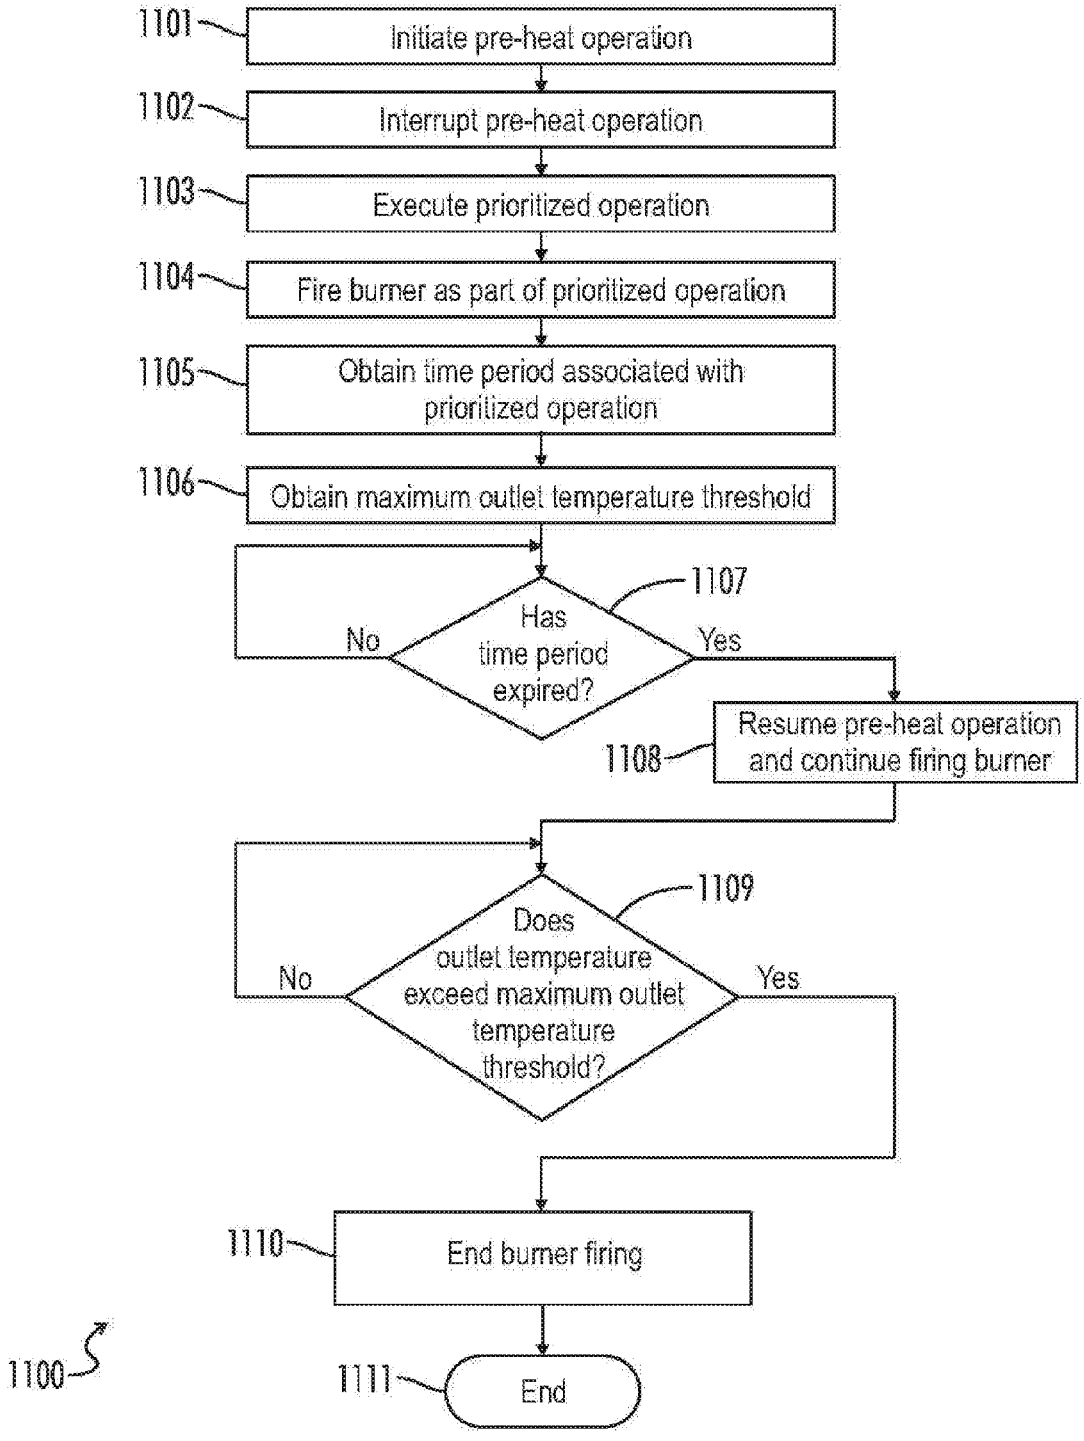

1101
Initiate pre-heat operation
1102
Interrupt pre-heat operation
1103
Execute prioritized operation
1104
Fire burner as part of prioritized operation
1105
Obtain time period associated with prioritized operation
1106
Obtain maximum outlet temperature threshold
1107
Has time period expired?
No
Yes
1108
Resume pre-heat operation and continue firing burner
1109
Does outlet temperature exceed maximum outlet temperature threshold?
No
Yes
1110
End burner firing
1111
End
1100

FIG. 11

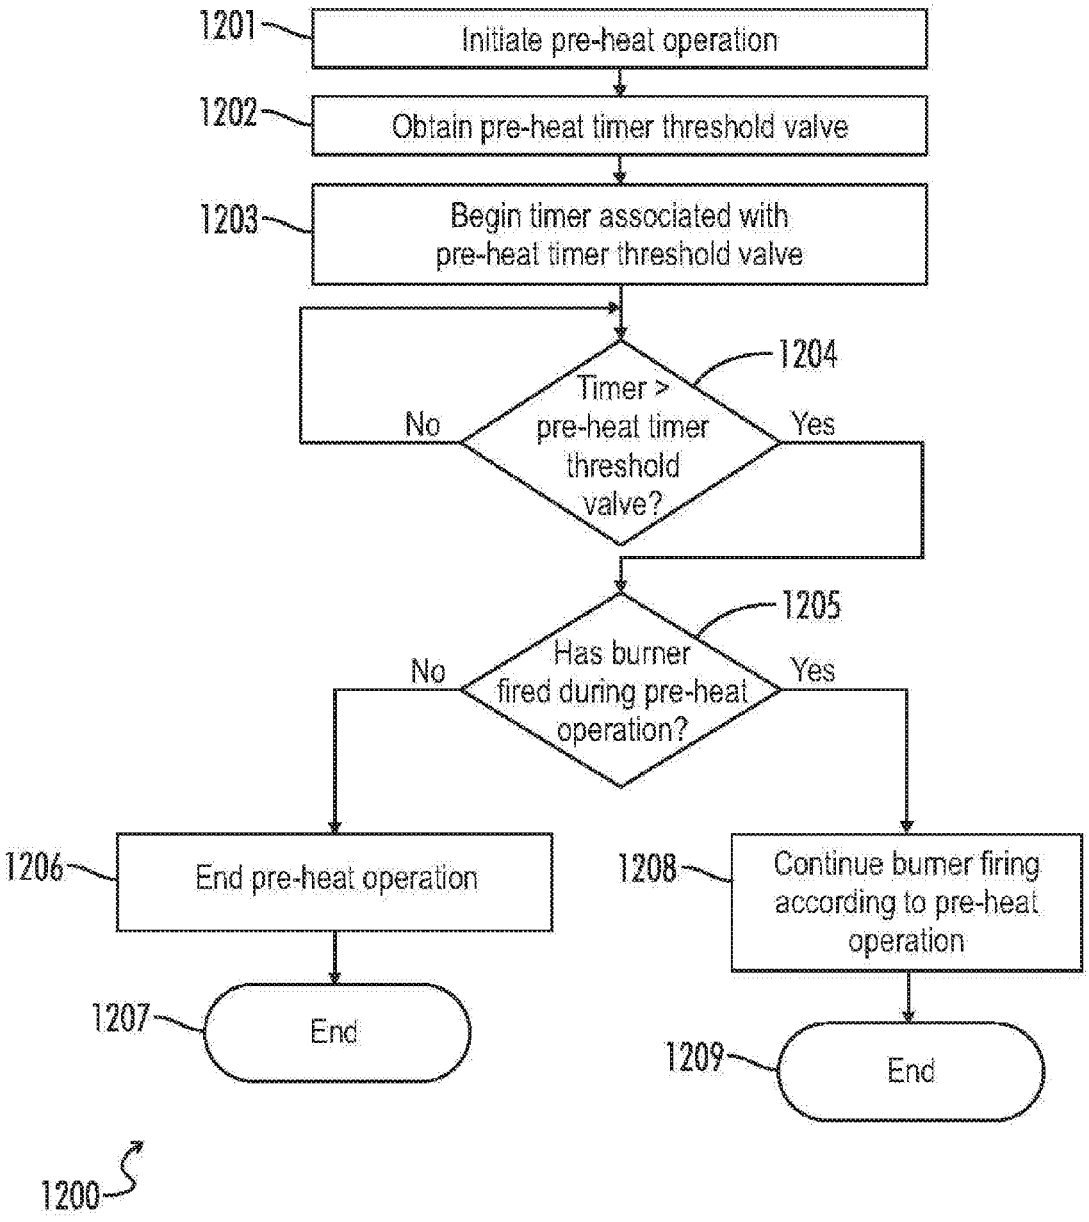

1201
Initiate pre-heat operation
1202
Obtain pre-heat timer threshold valve
1203
Begin timer associated with pre-heat timer threshold valve
1204
Timer > pre-heat timer threshold valve?
No
Yes
1205
Has burner fired during pre-heat operation?
No
Yes
1206
End pre-heat operation
1207
End
1208
Continue burner firing according to pre-heat operation
1209
End
1200

FIG. 12

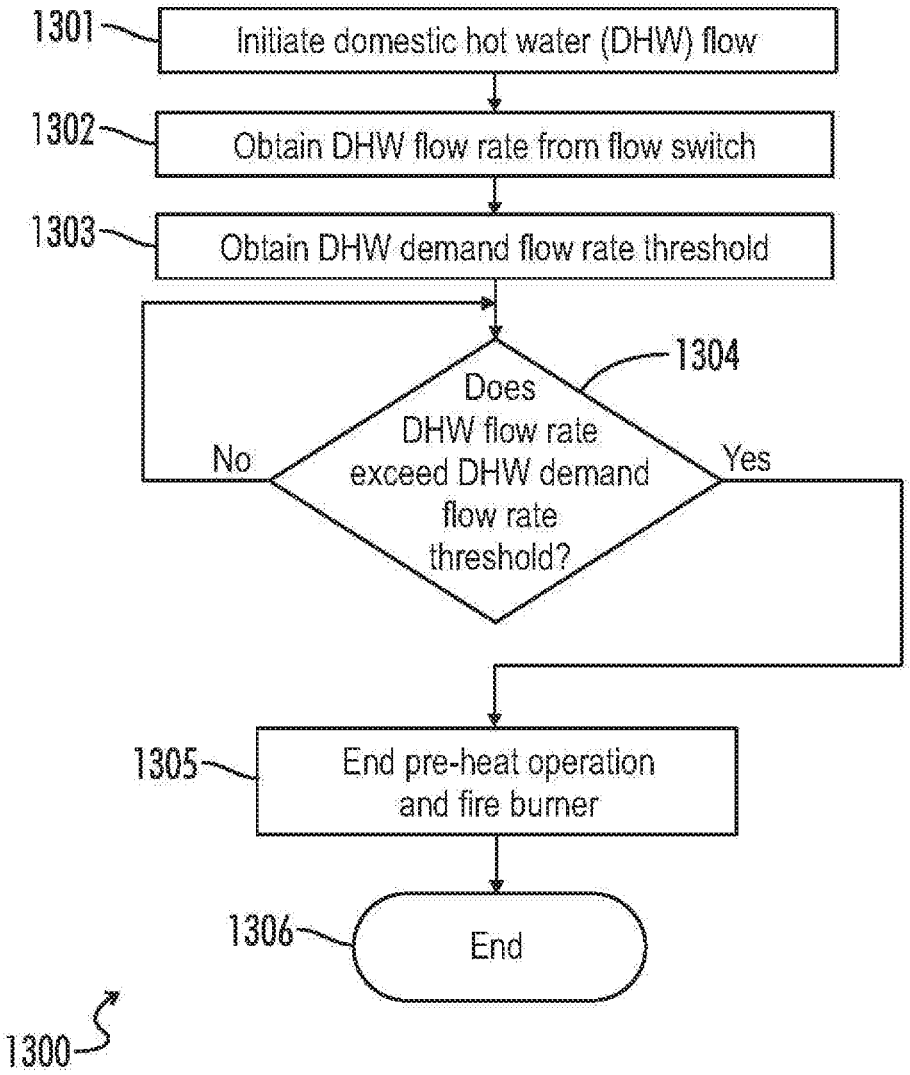

1301
Initiate domestic hot water (DHW) flow
1302
Obtain DHW flow rate from flow switch
1303
Obtain DHW demand flow rate threshold
1304
Does DHW flow rate exceed DHW demand flow rate threshold?
No
Yes
1305
End pre-heat operation and fire burner
1306
End
1300

FIG. 13

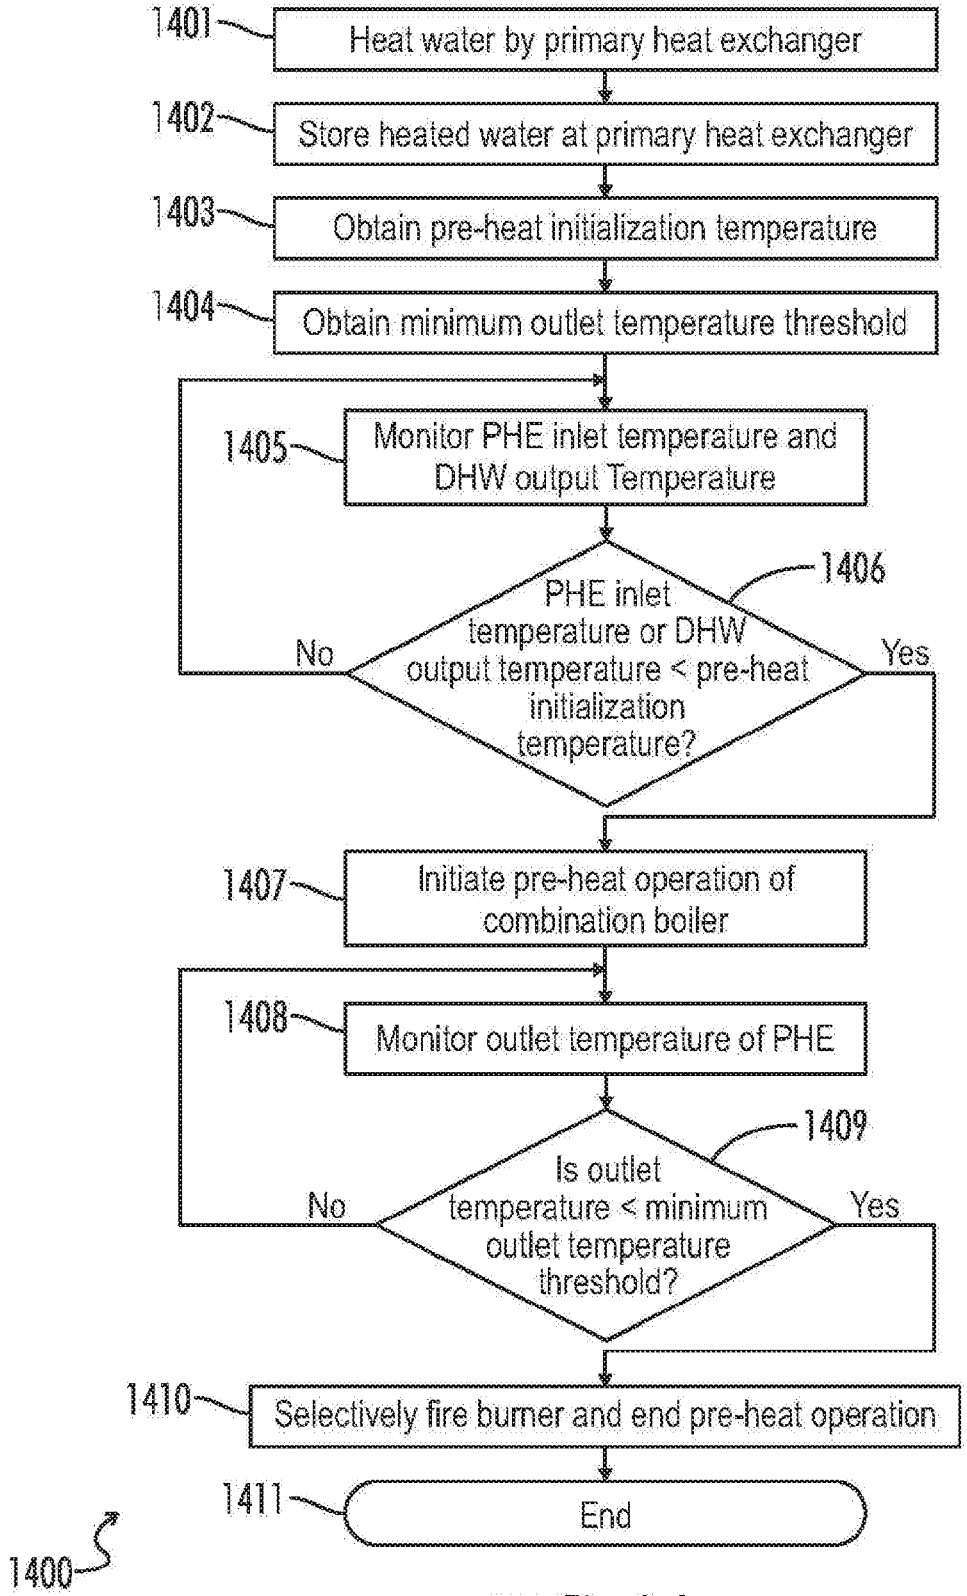

1401
Heat water by primary heat exchanger
1402
Store heated water at primary heat exchanger
1403
Obtain pre-heat initialization temperature
1404
Obtain minimum outlet temperature threshold
1405
Monitor PHE inlet temperature and DHW output Temperature
1406
PHE inlet temperature or DHW output temperature < pre-heat initialization temperature?
No
Yes
1407
Initiate pre-heat operation of combination boiler
1408
Monitor outlet temperature of PHE
1409
Is outlet temperature < minimum outlet temperature threshold?
No
Yes
1410
Selectively fire burner and end pre-heat operation
1411
End
1400

FIG. 14

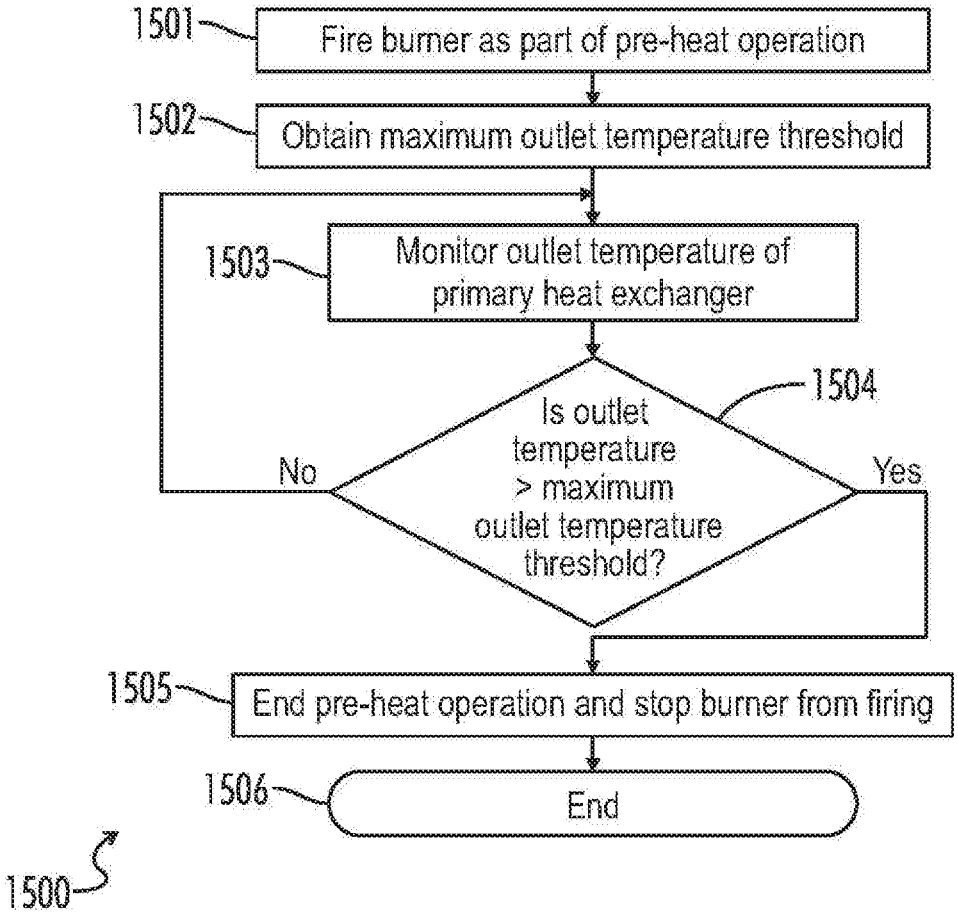

1501
Fire burner as part of pre-heat operation
1502
Obtain maximum outlet temperature threshold
1503
Monitor outlet temperature of primary heat exchanger
1504
Is outlet temperature > maximum outlet temperature threshold?
No
Yes
1505
End pre-heat operation and stop burner from firing
1506
End
1500

FIG. 15

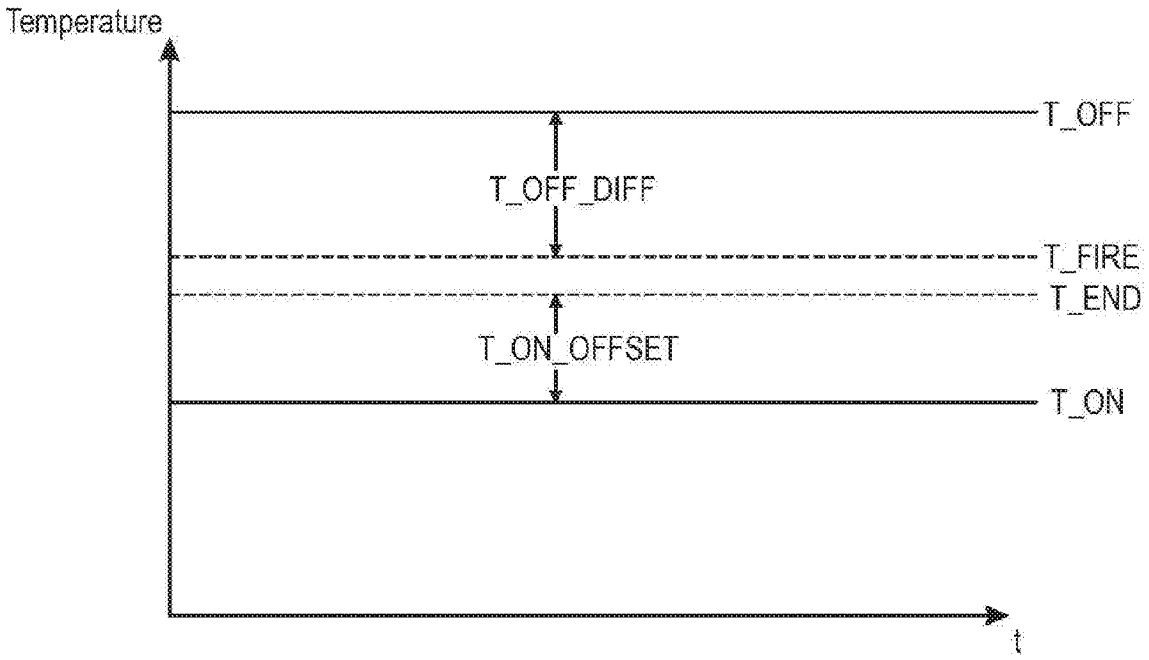


FIG. 16

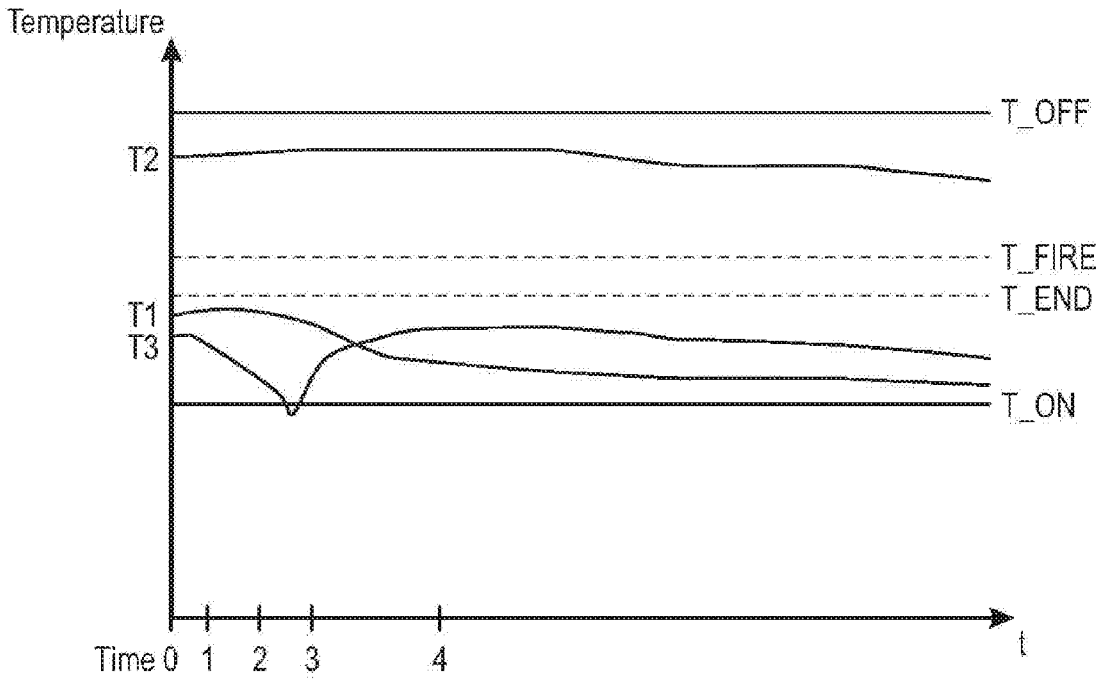


FIG. 17

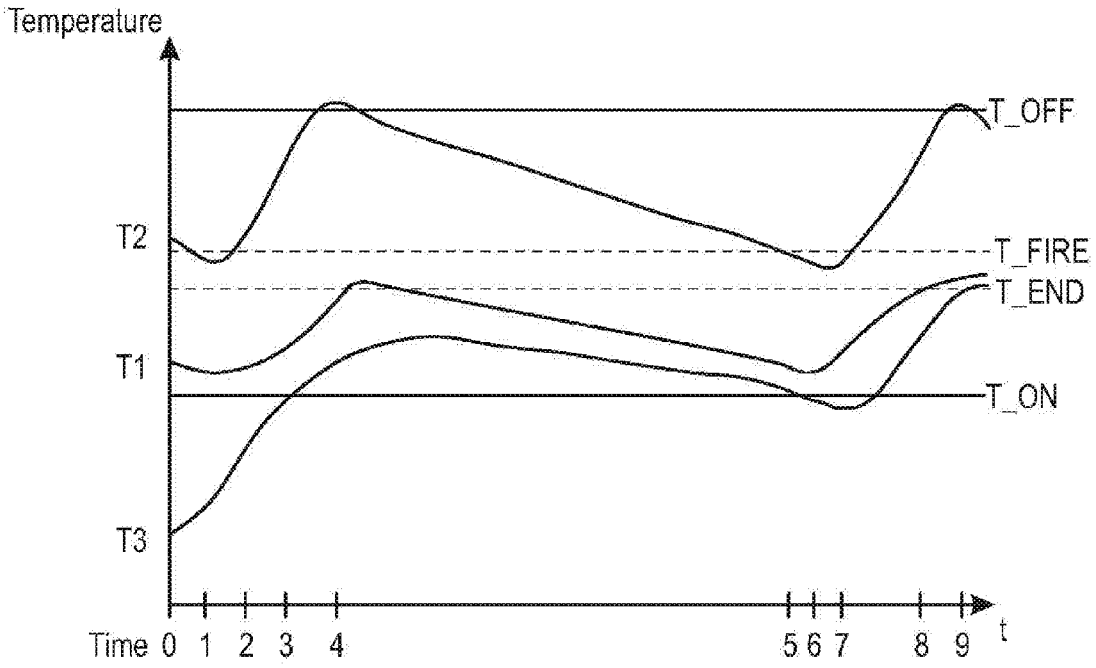


FIG. 18

METHODS AND SYSTEM FOR CONTROLLING A COMBINATION BOILER

[0001] A portion of the disclosure of this patent document contains material that is subject to copyright protection. The copyright owner has no objection to the reproduction of the patent document or the patent disclosure, as it appears in the U.S. Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

CROSS-REFERENCES TO RELATED APPLICATIONS

[0002] This application claims benefit of the following patent application(s) which is/are hereby incorporated by reference: None

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0003] Not Applicable

REFERENCE TO SEQUENCE LISTING OR COMPUTER PROGRAM LISTING APPENDIX

[0004] Not Applicable

BACKGROUND OF THE INVENTION

[0005] The present invention relates generally to controlling operations of a combination boiler. More particularly, the present invention relates to providing a combination boiler control to reduce an amount of time it takes to reach a desired temperature for a domestic hot water (DHW) demand, to manage low DHW flow draws, and to allow hot water circulation (e.g., recirculation) in a combination boiler system.

[0006] Current combination boiler implementations experience difficulty managing the time it takes after a hot water draw is started to supply water at a desired temperature. Combination boilers might rely on a flow switch or a flow sensor to identify when a DHW draw has started and cause the boiler to fire. However, combination boiler flow switches typically have a minimum flow rate that can be detected. In cases where the required DHW flow is less than the minimum setting of the flow switch, the boiler will not fire and there the unit will not provide heated water. Furthermore, when a DHW flow is less than the minimum flow switch setting, typically less heat output is required than the minimum firing rate of the combination boiler burner. Because of the use of thermostatic mixing valves with combination boilers, it is not advisable to implement a hot water circulation system where the full circulation (and/or recirculation) flow passes through a combination boiler. This makes it impractical to achieve flows high enough to trigger a flow switch of the combination boiler.

[0007] Providing pre-heat functionality in a combination boiler presents numerous challenges. One such challenge relates to avoiding frequent firing cycles and short run times for a combination boiler, which would otherwise cause problematic thermal cycling of the primary combustion heat exchanger and potentially reduce the lifecycle of the boiler.

[0008] Current pre-heat methods used in some combination boilers and on-demand water heaters require either manual or dynamic scheduling. This scheduling, however, is only beneficial if a DHW demand occurs according to the schedule. For example, if a pre-heat method is scheduled at 5:00 A.M., the pre-heat method does not help if a DHW demand occurs at 4:30 A.M. Other pre-heat methodologies rely on firing the boiler at specific time intervals. However, periodic firing does not allow for hot water circulation (and/or recirculation) or low flow DHW draws.

[0009] It would therefore be desirable for a combination boiler to provide pre-heat operations to reduce a time to reach a desired set point temperature for a DHW demand, to manage low flow DHW draws, and to allow hot water circulation/recirculation.

BRIEF SUMMARY OF THE INVENTION

[0010] An invention as disclosed herein may solve the above described problems by:

[0011] In one exemplary embodiment, provided is a combination boiler for providing heated water to a boiler loop and domestic hot water (DHW) to a domestic water loop. The combination boiler includes a primary heat exchanger configured to be connected to the boiler loop and a burner configured to provide heat to the primary heat exchanger. The combination boiler further includes a secondary heat exchanger configured to transfer heat energy from the boiler loop to the domestic water loop. A controller is included as part of the combination boiler. The controller is configured to monitor a primary heat exchanger inlet temperature and a DHW output temperature, to obtain a pre-heat initialization temperature threshold and a pre-heat cancellation temperature threshold, and to detect a low temperature condition when at least one of the primary heat exchanger inlet temperature and the DHW output temperature falls below the pre-heat initialization temperature threshold. The controller is further configured to initiate a pre-heat operation of the combination boiler responsive to a low temperature condition by circulating heated water from the primary heat exchanger to the secondary heat exchanger, and to end the pre-heat operation without firing the burner when both of the primary heat exchanger inlet temperature and the DHW output temperature exceed the pre-heat cancellation temperature threshold.

[0012] In another exemplary embodiment, a method is provided for controlling a combination boiler having a primary heat exchanger connected to a boiler loop, a burner configured to provide heat to the primary heat exchanger, and a secondary heat exchanger configured to transfer heat energy from the boiler loop to a domestic water loop. The method begins by storing heated water at the primary heat exchanger, obtaining a pre-heat initialization temperature threshold and a pre-heat cancellation temperature threshold, and monitoring a primary heat exchanger inlet temperature and a domestic hot water (DHW) output temperature. The method includes detecting at least one of the primary heat exchanger inlet temperature and the DHW output temperature falling below the pre-heat initialization temperature threshold, and initiating a pre-heat operation of the combination boiler by circulating the heated water from the primary heat exchanger to the secondary heat exchanger. The method further includes ending the pre-heat operation without firing the burner when both of the primary heat exchanger inlet temperature and the DHW output temperature exceed the pre-heat cancellation temperature threshold.

[0013] In a further exemplary embodiment, a method is provided for controlling a combination boiler having a primary heat exchanger connected to a boiler loop, a burner configured to provide heat to the primary heat exchanger,

and a secondary heat exchanger configured to transfer heat energy from the boiler loop to a domestic water loop. The method includes storing heated water at the primary heat exchanger, obtaining a pre-heat initialization temperature and a minimum outlet temperature threshold, and monitoring a primary heat exchanger inlet temperature and a domestic hot water (DHW) output temperature. The method continues by detecting at least one of the primary heat exchanger inlet temperature and the DHW output temperature falling below the pre-heat initialization temperature threshold. A pre-heat operation of the combination is initiated by circulating the heated water from the primary heat exchanger to the secondary heat exchanger. An outlet temperature of the primary heat exchanger is monitored, and the burner is fired when the outlet temperature falls below the minimum outlet temperature threshold.

[0014] Numerous other objects, features, and advantages of the present invention will be readily apparent to those skilled in the art upon a reading of the following disclosure when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0015] FIG. **1** is a graphical block diagram illustrating a combination boiler consistent with an exemplary embodiment.

[0016] FIG. **2** illustrates an exemplary method for controlling pre-heat operation of a combination boiler.

[0017] FIG. **3** illustrates an exemplary process for operating a combination boiler according to a DHW set point temperature.

[0018] FIG. **4** illustrates an exemplary process for implementing a circulation time interval for a combination boiler.

[0019] FIG. **5** illustrates a circulation process in accordance with an exemplary embodiment.

[0020] FIG. **6** illustrates an exemplary process for controlling burner firing for a combination boiler.

[0021] FIG. **7** illustrates an exemplary process for selectively ending pre-heat operations of a combination boiler.

[0022] FIG. **8** illustrates an exemplary process for providing delayed measurement corresponding to a pre-heat operation of a combination boiler.

[0023] FIG. **9** illustrates an exemplary control process for diverting at least a portion of boiler loop water by the combination boiler.

[0024] FIG. **10** illustrates an exemplary process for executing a prioritized operation during execution of a pre-heat operation.

[0025] FIG. **11** illustrates an exemplary process for controlling burner firing when a prioritized operation is received.

[0026] FIG. **12** illustrates an exemplary control method for providing a pre-heat timer threshold value corresponding to a pre-heat operation.

[0027] FIG. **13** illustrates an exemplary process for providing flow-based control for a combination boiler.

[0028] FIG. **14** illustrates an exemplary process for providing combination boiler control and burner firing.

[0029] FIG. **15** illustrates an exemplary burner firing control process for a combination boiler.

[0030] FIG. **16** illustrates a chart reflecting relationships between temperature thresholds used in providing combination boiler control.

[0031] FIG. **17** illustrates an exemplary timing diagram for an implementation where a burner of a combination boiler does not fire during a pre-heat operation.

[0032] FIG. **18** illustrates an exemplary timing diagram for an implementation where a burner of a combination boiler is fired.

DETAILED DESCRIPTION OF THE INVENTION

[0033] Referring generally to FIGS. **1-18**, various exemplary embodiments of an invention may now be described in detail. Where the various figures may describe embodiments sharing various common elements and features with other embodiments, similar elements and features are given the same reference numerals and redundant description thereof may be omitted below.

[0034] Various embodiments disclosed herein are directed to methods and systems for controlling a combination boiler. Exemplary implementations consistent with the present disclosure may reduce the time required to provide hot water at a desired water temperature by, for example, maintaining boiler loop water stored in a primary heat exchanger of a combination boiler at an elevated temperature in order to be able to start transferring heat immediately when a hot water demand is started but before the boiler can be fired. Implementations consistent with the present disclosure may also identify when a low flow condition associated with a DHW output occurs and operate an inlet pump of the combination boiler to initially satisfy the DHW demand using heat energy stored in boiler loop water at the primary heat exchanger, and then fire the combination boiler burner as needed to replenish stored heat energy. The present disclosure further provides advantages associated with providing hot water circulation/recirculation and providing thermal storage which may maximize cycle times and run times while still providing satisfactory operation. According to one aspect of the present disclosure, a DHW draw may be detected and one or more operations may be performed without the requirement of a DHW flow switch, and thus may resolve issues related to low flow DHW draws.

[0035] FIG. **1** illustrates a graphical block diagram illustrating a combination boiler consistent with an exemplary embodiment. The combination boiler **100** is configured to control operations associated with two water loops. The first loop is a boiler loop connected to the combination boiler **100** at an input BOILER_IN of the combination boiler **100** and an output BOILER_OUT of the combination boiler **100**. In various embodiments the boiler loop may be configured to provide space heating or hydronic heating. The combination boiler **100** also includes a domestic water loop for providing potable water. The domestic loop connects to the combination boiler **100** at an input DOMESTIC_IN of the combination boiler **100** and is output from the combination boiler **100** at an output DOMESTIC_OUT. Although described as a loop, it should be appreciated that the domestic loop may take the form of either a closed or open flow loop. For example, the domestic loop may include one or more domestic water input sections configured to input domestic water into the domestic water loop.

[0036] In operation, the combination boiler **100** is configured to provide heat energy from the boiler loop to the domestic loop in order to provide heated domestic hot water (DHW) output. Boiler loop water is input to the combination boiler **100** at BOILER_IN and flows toward the primary heat

exchanger (PHE) inlet temperature sensor **102**. Although illustrated in FIG. **1** as being located within the combination boiler **100**, it should be appreciated that the PHE inlet temperature sensor **102** may be physically located either internally or externally to the combination boiler **100**, without departing from the spirit and scope of the present disclosure. A detected PHE inlet temperature T**1** is measured by the PHE inlet temperature sensor **102**. After passing the primary heat exchanger inlet temperature sensor **102**, boiler loop water flows toward an inlet pump **104**. In various embodiments, inlet pump **104** is configured to regulate a flow rate of boiler water in the boiler loop. The output of the inlet pump **104** (also illustrated with reference to PHE_IN in FIG. **1**) continues to a primary heat exchanger **106**.

[0037] Primary heat exchanger **106** may take the form of a shell and tube heat exchanger, a plate heat exchanger, a plate and shell heat exchanger, a fire-tube combustion heat exchanger, a water-tube combustion heat exchanger, an adiabatic wheel heat exchanger, a plate fin heat exchanger, a pillow plate heat exchanger, a fluid heat exchanger, a waste heat recovery heat exchanger, a dynamic scraped surface heat exchanger, a phase-change heat exchanger, a direct contact heat exchanger, a microchannel heat exchanger, or any other physical device capable of transferring heat energy to boiler loop water. Primary heat exchanger **106** may include a storage **107**. The storage **107** is configured in one exemplary embodiment to store heated boiler loop water, the heated water having been heated by the burner **108**. Although described and illustrated as a part of the primary heat exchanger **106**, it should be appreciated that the storage **107** may be separate from the primary heat exchanger **106** and may be physically located either internally or externally to the combination boiler **100**, without departing from the spirit and the scope of the present disclosure.

[0038] The primary heat exchanger **106** includes or is otherwise connected to a burner **108** or other heat source configured to provide heat. The burner **108** is configured to heat water contained within the boiler loop. The burner **108** may be configured to include an input fan **110**. Although described with reference to a fan, it should be appreciated that the input fan **110** may be replaced by a water bypass configured to vary an amount of heat used to vary an amount of heated water passed through the secondary heat exchanger **116**. In this exemplary embodiment, the bypass may be configured to be controlled (e.g., by the controller **120** rather than explicitly by the input fan **110**). The input fan **110** is configured to supply a fuel and air mixture to the burner **108**. Although the input fan **110** is described as part of the burner **108** in various embodiments, the input fan **110** may optionally be physically separate from the burner **108**. Furthermore, at least one of the burner **108** and the input fan **110** may be physically located internally or externally (or a combination thereof) to the combination boiler **100**. Although not illustrated in FIG. **1**, the combination boiler **100** may include an energy input module configured to receive one or more sources of energy for use by the burner **108**. For example, the combination boiler **100** may include a heating oil or natural gas input, where the heating oil or natural gas input is used by the burner **108** to provide heat energy to boiler loop water via the primary heat exchanger **106**. Although described with reference to a burner, it should be appreciated that the burner **108** may take the form of one or more elements configured to provide heat energy to boiler loop water at the primary heat exchanger **106**, and may or may not require the use of the input fan **110** during operation depending upon a particular implementation. In one or more exemplary embodiments, a burner **108** may take the form of one or more heating elements configured to regulate an amount of heat supplied to boiler loop water or domestic loop water.

[0039] Although described with respect to an input fan **110**, it should be appreciated that one or more heat sources may be used to provide a heat input rate corresponding to the primary heat exchanger **106**. In one exemplary embodiment, an input fan **100** may be configured to supply a volume of fuel and/or air, or a mixture thereof, to the burner **108** proportional to a given heat demand or input. In one or more exemplary embodiments, a fan speed as described herein may relate to a heat input associated with the primary heat exchanger **106**. Alternatively or additionally, heat input corresponding to the burner **108** may be provided by one or more heating elements (e.g., an electric heating element) configured to be controlled by the controller **120**. In one exemplary embodiment, the controller **120** may be configured to control one or more electric heating elements to provide a heat output characteristic to the one or more heating elements corresponding to a heating demand. Even further additionally or alternatively, the one or more heating elements are configured in one exemplary embodiment to supply an appropriate amount of fuel, air, heat, or other operational setting to the one or more heating elements (e.g., via one or more settings or pulses corresponding to an on/off heat source). An operational setting of the input fan **110** or one or more heating elements may be configured to correspond to an input heating demand and/or input. Optionally, a fan speed of the input fan **110** may be configured to correspond to a specific heat input.

[0040] Heated water is output from the primary heat exchanger **106** along output PHE_OUT. Heated water output from the primary exchanger **106** is received at PHE outlet temperature sensor **112**. The PHE outlet temperature sensor **112** is configured in one embodiment to measure a PHE outlet temperature T**2**. Heated boiler loop water is received at the flow diverting valve **114** after passing the PHE temperature sensor **112**. The flow diverting valve **114** is configured to provide a selected amount of heated water from the boiler loop to at least one of the boiler output BOILER_OUT and the secondary heat exchanger **116** (via input SHE_IN). In operation, the flow diverting valve **114** may be configured to direct all or a portion of heated boiler loop water from the primary heat exchanger **106** to the secondary heat exchanger **116**. In various embodiments the flow diverting valve **114** may be configured to output all heated boiler loop water from the primary heat exchanger **106** via the BOILER_OUT output of combination boiler **100**. In one exemplary embodiment, a flow path corresponding to the combination boiler **100** may be configured to bypass the BOILER_OUT and BOILER_IN of the combination boiler **100**. In this exemplary embodiment, one or more additional temperature and/or flow sensors may be implemented in the combination boiler **100** (for example, one or more sensors may be provided corresponding to the SHE_OUT path). The additional one or more sensors may be implemented, for example, because a temperature at PHE inlet temperature sensor **102** might not match the SHE_OUT temperature (e.g., because of a potential status as a mixture of water, potentially at a different temperature measured relative to at least one of an inlet and an outlet of the

secondary heat exchanger **116** rather than an inlet or an outlet of the primary heat exchanger **106**).

[0041] Secondary heat exchanger **116** is configured to receive domestic input water (e.g., potable water) via input DOMESTIC_IN. The secondary heat exchanger **116** is configured to heat input domestic water by transferring heat energy received from the boiler loop to the domestic loop. Heated water output from the primary heat exchanger **106** is directed by the flow diverting valve **114** and through the secondary heat exchanger **116**. In one exemplary embodiment, heated domestic hot water is output from the secondary heat exchanger **116**. Although described with reference to a PHE outlet temperature, it should be appreciated that the PHE outlet temperature sensor **112** may be located at an input section of the secondary heat exchanger **116** and may, in one or more embodiments, correspond to an input temperature of the secondary heat exchanger **116** (for example, the PHE outlet temperature sensor **112** may be located at least one of before or after the flow diverting valve **114**. A temperature of the domestic hot water output measured by a DHW output temperature sensor **118** in one exemplary embodiment. The DHW output temperature sensor **118** is configured to measure a domestic hot water temperature T**3**. After passing the DHW output temperature sensor **118**, domestic loop heated water is output from the combination boiler **100** via the output DOMESTIC_OUT.

[0042] A controller **120** is configured to control operations of at least one component of the combination boiler **100**. The controller **120** may be configured to include or otherwise access one or more memory storage elements to store or obtain at least one parameter used by the controller **120** to control at least a portion of operations performed by or corresponding to the combination boiler **100**.

[0043] In one exemplary embodiment the controller **120** is configured to control operations of at least one of the flow diverting valve **114** and the inlet pump **104** to cause a predetermined amount of heated boiler loop water to be diverted from the boiler loop into the secondary heat exchanger **116** in order to transfer heat energy to domestic loop water. The controller **120** may be configured to provide domestic hot water output at a predetermined temperature (e.g., at a predetermined or user-specified set point temperature). Boiler loop water is output from the secondary heat exchanger **116** via the output SHE_OUT after transferring at least a portion of its heat energy to the domestic loop water. In one exemplary embodiment, boiler loop water output from the secondary heat exchanger **116** is received at the boiler loop at a position before the PHE inlet temperature sensor **102**. Additionally or alternatively, at least a portion of the output boiler loop water from the secondary heat exchanger **116** may be received at any point of the boiler loop without departing from the spirit and the scope of the present disclosure.

[0044] The combination boiler **100** may include a flow switch **119** located at an output of the secondary heat exchanger **116**. In one exemplary embodiment the flow switch **119** is located between the domestic hot water output temperature sensor **118** and the combination boiler DOMESTIC_OUT output of the combination boiler **100**. The flow switch **119** may be configured to measure a DHW flow rate. In operation, the controller **120** may be configured to compare the DHW flow rate to a DHW demand flow rate threshold and control operations of the combination boiler **100** to (i) end a pre-heat operation, and (ii) fire the burner **108** when the DHW flow rate exceeds the DHW demand flow rate threshold.

[0045] The terms "controller," "control circuit" and "control circuitry" as used herein may refer to, be embodied by or otherwise included within a machine, such as a general purpose processor, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof designed and programmed to perform or cause the performance of the functions described herein. A general purpose processor can be a microprocessor, but in the alternative, the processor can be a microcontroller, or state machine, combinations of the same, or the like. A processor can also be implemented as a combination of computing devices, e.g., a combination of a DSP and a microprocessor, a plurality of microprocessors, one or more microprocessors in conjunction with a DSP core, or any other such configuration.

[0046] The steps of a method, process, or algorithm described in connection with the embodiments disclosed herein can be embodied directly in hardware, in a software module executed by a processor, or in a combination of the two. A software module can reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of computer-readable medium known in the art. An exemplary computer-readable medium can be coupled to the processor such that the processor can read information from, and write information to, the memory/storage medium. In the alternative, the medium can be integral to the processor.

[0047] Although described with reference to water loops, it should be appreciated that a combination boiler **100** in accordance with the present disclosure may be configured to heat one or more liquids via a primary fluid that may be directly or indirectly heated in a manner as described herein. For example, a combination boiler **100** may include a water heater providing a secondary space heating function using a secondary space heating function and a water heating element implementing two or more liquid sources for functionality. Alternatively or additionally, one or more exemplary embodiments may include a water heater without a space heating capability (e.g., as a system similar to that illustrated by FIG. **1**, without requiring a BOILER_OUT and/or BOILER_IN connection, which may or may not include a different liquid to heat a loop liquid (e.g., as a heat pump water heater).

[0048] FIG. **2** illustrates an exemplary method for controlling pre-heat operation of the combination boiler **100**. The process **200** begins at a step **201** where a domestic hot water draw is initiated. In one exemplary embodiment, the domestic hot water draw corresponds to an output domestic hot water demand associated with the secondary heat exchanger **116**. At a step **202** the PHE inlet temperature T**1** and a DHW output temperature T**3** are monitored. The pre-heat initialization temperature threshold (T_ON) and pre-heat cancellation temperature threshold (T_OFF) are obtained at a step **203**. It is determined at a step **204** whether a low temperature condition is detected. In one exemplary embodiment, a low temperature condition corresponds to at

least one of the PHE inlet temperature T1 or DHW output temperature T3 falling below the pre-heat initialization temperature threshold.

[0049] If a low temperature condition is not detected at the step **204** the process continues to a step **205** where the PHE inlet temperature T1 and DHW output temperature T3 are monitored, and the process returns to the step **204**. If a low temperature condition is detected at the step **204** process continues to a step **206**, where a pre-heat operation is initiated. It is determined at a step **207** whether both of the PHE inlet temperature T1 and the DHW output temperature T3 are greater than the pre-heat cancellation temperature threshold. If it is determined that both of the PHE inlet temperature T1 and the DHW output temperature T3 are not greater than the pre-heat cancellation temperature threshold, the process continues to a step **208**, where a pre-heat operation is continued and the process returns to the step **207**. If it is determined at the step **207** that both of the PHE inlet temperature T1 and the DHW output temperature T3 are greater than the pre-heat cancellation temperature threshold, the process continues to a step **209** where the pre-heat operation is ended.

[0050] FIG. **3** illustrates an exemplary process for operating a combination boiler according to a DHW set point temperature. The process **300** begins at a step **301**, where a DHW set point temperature is obtained. The process continues to a step **302**, where at least one of a pre-heat initialization temperature threshold (T_ON) and the pre-heat cancellation temperature threshold (T_OFF) are determined, based at least in part upon the DHW set point temperature. For example, at least one of the pre-heat initialization temperature and the pre-heat cancellation temperature threshold may increase or decrease with a respective increase or decrease in the DHW set point temperature (e.g., for a higher DHW set point temperature, the pre-heat initialization temperature threshold may be higher than that of a cooler DHW set point temperature in order for the combination boiler **100** to more quickly enter a pre-heat operation). At a step **303**, the combination boiler **100** is selectively operated based at least in part upon at least one of pre-heat initialization and cancellation temperature thresholds in the manner described herein. The process ends at a step **304**.

[0051] FIG. **4** illustrates an exemplary process for implementing a circulation and/or recirculation time interval for a combination boiler. The process **400** begins at a step **401**, where the combination boiler **100** initiates a pre-heat operation. The pre-heat operation concludes at step **402**. After the pre-heat operation has concluded, the process continues to a step **403**, where a circulation and/or recirculation (herein referred to as circulation) time interval is obtained. In one exemplary embodiment, the controller **120** is configured to monitor a period of time corresponding to the circulation time interval. The circulation time interval may include a periodic time period such as 30, 45, 60, or 90 minutes, or may be a non-periodic and/or demand-driven amount of time. After obtaining the circulation time interval, the process continues to a step **404**, where it is determined whether a timer corresponding to the circulation time interval has expired. If the timer has not expired, the process returns to the step **404** until the timer has expired. If it is determined at the step **404** that the timer has expired, the process continues to a step **405**, where a circulation operation is initiated.

[0052] In accordance with one exemplary embodiment of the present disclosure, a circulation operation may comprise periodically circulating water through at least the boiler loop of the combination boiler **100**. Alternatively or additionally, a circulation operation may include circulating at least a portion of heated boiler loop water through the secondary heat exchanger **116** to transfer heat energy from the heated boiler loop water to domestic loop water via the secondary heat exchanger **116**. The controller **120** may be configured to adjust or manipulate an operational setting of at least one of the inlet pump **104** and/or the flow diverting valve **114** to cause at least a portion of boiler loop water to pass through the secondary heat exchanger **116**. After initiating the circulation operation at the step **405**, the process concludes at a step **406**. In one exemplary embodiment, the circulation operation described with reference to FIG. **4** may be used to monitor a stored water temperature of boiler loop water, for example stored by storage **107**. The circulation operation may be performed either with or without concurrent water flow in the domestic water loop in various embodiments.

[0053] FIG. **5** illustrates an exemplary circulation operation in accordance with aspects of the present disclosure. The process **500** begins at a step **501**, where a circulation operation is initiated. Either before or after initiating the circulation operation at the step **501**, a minimum outlet temperature threshold (also described herein with reference to T_FIRE) is obtained at a step **502**. The process continues to a step **503**, where heated boiler loop water is output from the primary heat exchanger **106**. The heated boiler loop water output by the primary heat exchanger **106** may, in one exemplary embodiment, take the form of water stored at the storage **107**. At a step **504**, a current temperature of the heated boiler loop water output from the primary heat exchanger **106** is measured. The current temperature of the heated boiler loop water may be measured by the PHE outlet temperature sensor **112** in one embodiment. It is determined at a step **505** whether the current temperature of the heated water is less than the minimum outlet temperature threshold. If the current temperature is not less than the minimum outlet temperature threshold, the process continues to a step **506**, where the burner **108** is not fired and the process ends at a step **508**. If it is determined at the step **505** that the current temperature is less than the minimum outlet temperature threshold, the process continues to a step **507** where the burner **108** is selectively fired and the process then concludes at the step **508**.

[0054] FIG. **6** illustrates an exemplary process for controlling burner firing for a combination boiler. The process **600** begins at step **601**, where a boiler loop flow is initiated. A minimum outlet temperature threshold (T_FIRE) is obtained at a step **602**. At a step **603**, an outlet temperature (T2) of the primary heat exchanger **106** is monitored (for example, by the PHE outlet temperature sensor **112**). It is determined a step **604** whether the PHE outlet temperature T2 is greater than the minimum outlet temperature threshold. If it is determined at the step **604** that the PHE outlet temperature T2 is greater than the minimum outlet temperature threshold, the process returns to step **603**, where the PHE outlet temperature T2 is monitored. If it is determined at the step **604** that the outlet PHE temperature T2 is not greater the minimum outlet temperature threshold, the process continues to a step **605**, where the burner **108** is selectively fired. The process then concludes at the step **606**.

[0055] FIG. **7** illustrates an exemplary process for selectively ending a pre-heat operation of a combination boiler. The process **700** begins at a step **701**, where a boiler loop flow is initiated. Either before or after initiating the boiler loop flow at the step **701**, a maximum outlet temperature threshold (also described herein with reference to T_END) is obtained at step **702**. At a step **703**, an outlet temperature (T**2**) of the primary heat exchanger **106** is monitored (for example, by the PHE outlet temperature sensor **112**). It is determined at a step **704** whether the PHE outlet temperature T**2** is greater than the maximum outlet temperature threshold. If it is determined that the PHE outlet temperature T**2** is not greater than the maximum outlet temperature threshold, the process returns to the step **703**, where the PHE outlet temperature T**2** continues to be monitored. If it is determined at the step **704** that the PHE outlet temperature T**2** is greater than the maximum outlet temperature threshold, the process continues at a step **705**, where a pre-heat operation is ended and the controller **120** causes the burner **108** to stop firing. The process then concludes at the step **706**.

[0056] FIG. **8** illustrates an exemplary process for providing delayed measurement corresponding to a pre-heat operation of a combination boiler. The process **800** begins at a step **801**, where a boiler loop flow is initiated. Either before or after initiating the boiler loop flow at the step **801**, an outlet measurement delay period is obtained at a step **802**. At a step **803**, a time delay corresponding to the outlet measurement delay period is initiated when a pre-heat operation begins. The controller **120** may execute a delay time period corresponding to the outlet measurement delay period. It is determined at a step **804** whether the time delay has expired. If it is determined at the step **804** that the time delay has not expired, the process returns to the step **804** until the time delay has expired. If it is determined at a step **804** that the time delay has expired, the process continues to a step **805**, where an outlet temperature (T**2**) of the primary heat exchanger **106** is monitored. The process then concludes at a step **806**. In one exemplary embodiment, the time delay corresponding to the outlet measurement delay period is implemented to allow sufficient flow through the boiler loop of the combination boiler **100** to permit an accurate temperature reading of boiler loop water. In various embodiments, a temperature of heated boiler loop water stored at the storage **107** may be measured by the PHE outlet temperature sensor **112**.

[0057] FIG. **9** illustrates an exemplary control process for diverting at least a portion of boiler loop water by the combination boiler. The process **900** begins at a step **901**, where a pre-heat condition is detected. As previously described, a pre-heat condition may include a low temperature condition associated with at least one of the PHE inlet temperature T**1** or DHW output temperature T**3**, relative to the pre-heat initialization temperature threshold T_ON. After the pre-heat condition is detected at the step **901**, the process continues to a step **902**, where an estimated heat demand is determined. After determining an estimated heat demand, the controller **120** is configured, in one exemplary embodiment, to cause the inlet pump **104** to circulate water in the boiler loop at a step **903**. The process continues to a step **904**, where a position of the flow diverter valve **114** is either measured or adjusted to ensure a proper heated water flow rate according to the estimated heat demand. The process then concludes at a step **905**.

[0058] FIG. **10** illustrates an exemplary process for providing a prioritized operation during execution of a pre-heat operation. The process **1000** begins at a step **1001**, where a pre-heat operation is initiated. After initiating the pre-heat operation, the process continues to a step **1002**, where it is determined whether a boiler command has been received. If it is determined at the step **1002** that a boiler command has not been received, the process returns to the step **1002** until a boiler command is received. If it is determined that the step **1002** that a boiler command has been received, the process continues to a step **1003**, where it is determined whether a priority associated with the received boiler command is greater than that of the current pre-heat operation. If the priority of the received boiler command is less than the current pre-heat operation, the process continues to a step **1004**, where at least one operation corresponding to the received boiler command is executed after completion of the pre-heat operation. The process then ends at step **1005**.

[0059] If it is determined at the step **1003** that the priority of the received boiler command is greater than the current pre-heat operation, the process continues to a step **1006**, where the current pre-heat operation is interrupted. After the current pre-heat operation is interrupted at the step **1006**, the process continues to a step **1007**, where at least one prioritized operation corresponding to the received boiler command is executed. It is determined at a step **1008** whether the prioritized operation has completed. If it is determined at the step **1008** that the prioritized operation is not completed, the process returns to the step **1007**, where at least one operation corresponding to the boiler command is executed. If it is determined at the step **1008** that the prioritized operation has completed, the process continues to a step **1009**, where the interrupted pre-heat operation is resumed. The process then concludes at a step **1010**.

[0060] FIG. **11** illustrates an exemplary process for controlling burner firing when a prioritized operation is received. The process **1100** begins at a step **1101**, where a pre-heat operation is initiated. At a step **1102**, the pre-heat operation is interrupted. At least one prioritized operation corresponding to the received interrupt is executed at a step **1103**. At a step **1104**, the burner **108** is fired as part of a prioritized operation. A time period associated with the prioritized operation is obtained at a step **1105**. A maximum outlet temperature threshold (e.g., maximum outlet temperature threshold T_END) is obtained at a step **1106**. It is determined at a step **1107** whether the time period associated with the prioritized operation has expired. If it is determined at the step **1107** that the time period has not expired, the process continues to wait until the time period has expired. If it is determined at the step **1107** that the time period has expired, the process continues to a step **1108**, where the interrupted pre-heat operation is resumed and the burner **108** continues to fire. The process then continues to step **1109**, where it is determined whether the outlet temperature (T**2**) of the primary heat exchanger **106** exceeds the maximum outlet temperature threshold. In one exemplary embodiment, the PHE outlet temperature T**2** is measured by the PHE outlet temperature sensor **112**. If it is determined that the PHE outlet temperature T**2** does not exceed the maximum outlet temperature threshold, the process returns to the step **1109** until the PHE outlet temperature T**2** exceeds the maximum outlet temperature threshold. If it is determined at the step **1109** that the PHE outlet temperature T**2** exceeds the maximum outlet temperature threshold, the process contin-

ues to a step **1110**, where firing the burner **108** is ended and the process concludes at a step **1111**.

[0061] Although illustrated in FIG. **11** as being performed sequentially, the determinations made at the steps **1107** and **1109** may be determined concurrently or in a non-cascaded fashion. For example, in one exemplary embodiment, the burner **108** may continue to fire after resuming the pre-heat operation until at least one of (i) the time period expires or (ii) the outlet temperature exceeds the maximum outlet temperature threshold.

[0062] FIG. **12** illustrates an exemplary control method for providing a pre-heat timer threshold value corresponding to a pre-heat operation. The process **1200** begins at a step **1201**, where a pre-heat operation is initiated. A pre-heat timer threshold value is obtained at a step **1202**. After the pre-heat timer threshold value is obtained, a timer associated with the pre-heat timer threshold value is initiated at a step **1203**. The timer may be configured to increase in value over time, and a current timer value may be compared to the pre-heat timer threshold value. It is determined at a step **1204** whether the current timer value is greater than the pre-heat timer threshold value. If it is determined that the step **1204** that the timer value is not greater than the pre-heat timer threshold value, the process returns to the step **1204** until the timer value is greater than the pre-heat timer threshold value. If it is determined at the step **1204** that the timer value is greater than the pre-heat timer threshold value, the process continues to a step **1205**, where it is determined whether the burner has fired during a current pre-heat operation. If it is determined at the step **1205** that the burner has not fired during the current pre-heat operation, the process continues to a step **1206**, where the pre-heat operation is ended and the process concludes at a step **1207**. If it is determined at a step **1205** that the burner has fired during a current pre-heat operation, the process continues to a step **1208**, where burner **108** continues to fire according to the current pre-heat operation. The process then concludes at a step **1209**.

[0063] FIG. **13** illustrates an exemplary process for providing flow-based control for a combination boiler. The process **1300** begins at a step **1301**, where a DHW flow is initiated. The DHW flow rate is obtained from a flow switch (e.g., flow switch **119**) at a step **1302**. Additionally or alternatively, the DHW flow rate may be estimated based, at least in part, upon at least one of a DHW output temperature, a DHW input temperature, and an inlet temperature of the primary heat exchanger **106**. A DHW demand flow rate threshold is obtained at a step **1303**. It is determined at a step **1304** whether the DHW flow rate exceeds the DHW demand flow rate threshold. If it is determined at the step **1304** that the DHW flow rate does not exceed the DHW demand flow rate threshold, the process waits until the DHW flow rate exceeds the DHW demand flow rate threshold. If it is determined at step **1304** that the DHW flow rate exceeds the DHW demand flow rate threshold, the process continues to at step **1305**, where the pre-heat operation is ended and the burner **108** is fired. The process then concludes at a step **1306**.

[0064] FIG. **14** illustrates an exemplary process for providing combination boiler control and burner firing. The process **1400** begins at a step **1401**, where boiler loop water is heated by the primary heat exchanger **106**. The process continues to a step **1402**, where heated water heated by the primary heat exchanger **106** is stored at the primary heat exchanger **106**. In one exemplary embodiment, at least a portion of the heated boiler loop water is stored at the storage **107**. The process continues to a step **1403** where a pre-heat initialization temperature threshold (also described herein with reference to T_ON) is obtained. At a step **1404**, a minimum outlet temperature threshold (also described herein with reference T_FIRE) is obtained.

[0065] The PHE inlet temperature T**1** and a DHW output temperature T**3** are monitored at a step **1405**. It is determined at a step **1406** whether the PHE inlet temperature T**1** or the DHW output temperature T**3** is less than the pre-heat initialization temperature threshold. If it is determined at the step **1406** that at least one of the PHE inlet temperature T**1** or the DHW output temperature T**3** is greater than the pre-heat initialization temperature threshold, the process returns to the step **1405**, where the PHE inlet temperature T**1** and the DHW output temperature T**3** continue to be monitored. If it is determined at the step **1406** that at least one of the PHE inlet temperature T**1** or the DHW output temperature T**3** is less than the pre-heat initialization temperature threshold, the process continues to a step **1407**, where a pre-heat operation of the combination boiler **100** is initiated. The process then continues to a step **1408**, where an outlet temperature of the primary heat exchanger **106** is monitored (i.e., PHE outlet temperature T**2**). It is determined at a step **1409** whether the PHE outlet temperature T**2** is less than the minimum outlet temperature threshold at a step **1409**. If it is determined at the step **1409** that the PHE outlet temperature T**2** is not less than the minimum outlet temperature threshold, the process returns to the step **1408** where the outlet temperature of the primary heat exchanger is monitored. If it is determined at the step **1409** that the PHE outlet temperature T**2** is less than the minimum outlet temperature threshold, the process continues to a step **1410**, where the burner **108** is selectively fired and the pre-heat operation is ended. The process concludes at a step **1411**.

[0066] FIG. **15** illustrates an exemplary burner firing control process for a combination boiler. The process **1500** begins at a step **1501**, where the burner **108** of the combination boiler **100** is fired as part of a pre-heat operation. A maximum outlet temperature threshold (also described herein with reference to T_END) is obtained at a step **1502**. An outlet temperature (T**2**) of the primary heat exchanger **106** is monitored at a step **1503**. In one exemplary embodiment, the PHE outlet temperature T**2** may be measured by the PHE outlet temperature sensor **112**. It is determined at a step **1504** whether the PHE outlet temperature T**2** is greater than the maximum outlet temperature threshold. If it is determined at a step **1504** that the PHE outlet temperature T**2** is not greater than the maximum outlet temperature threshold, the process returns to the step **1503**, where the PHE outlet temperature T**2** continues to be monitored. If it is determined at the step **1504** that is PHE outlet temperature T**2** is greater than the maximum outlet temperature threshold, the process continues to a step **1505**, where the pre-heat operation is ended and the burner is stopped from firing. The process then concludes at a step **1506**.

[0067] FIG. **16** illustrates an a chart reflecting the relationship between temperature thresholds used in providing combination boiler control. The X-axis of chart **1600** represents a time value and the Y-axis of the chart represents a temperature value. T_OFF represents the pre-heat cancellation temperature threshold corresponding to an outlet temperature of the primary heat exchanger **106** (e.g., PHE outlet temperature T**2**). T_FIRE represents a minimum outlet tem-

perature threshold related to an outlet temperature of the primary heat exchanger **106** (e.g., PHE outlet temperature T**2**). T_OFF_DIFF represents an offset between the values of T_OFF and T_FIRE, and further represents an operational temperature range with respect to an output of the primary heat exchanger **106** to allow operations of the combination boiler **100** without firing the burner **108** of the combination boiler **100**. T_END represents a maximum outlet temperature threshold of DHW output (e.g., DHW output temperature T**3**) and an inlet temperature of the primary heat exchanger **106** (e.g., PHE inlet temperature T**1**). T_ON represents a pre-heat initialization temperature threshold corresponding to DHW output (e.g., DHW output temperature T**3**) from the secondary heat exchanger **116** and the inlet temperature of the primary heat exchanger **106** (e.g., PHE inlet temperature T**1**). T_ON_OFFSET represents an offset between the values of T_END and T_ON corresponding to an operational temperature range of values of both the DHW output temperature T**3** and the PHE inlet temperature T**3**, within which a pre-heat operation of the combination boiler **100** is not specifically initiated or ended.

[0068] Although illustrated in a linear and constant manner, it should be appreciated by one having ordinary skill in the art that each of the values corresponding to T_OFF, T_OFF_DIFF, T_FIRE, T_END, T_ON_OFFSET and T_ON, may take the form of non-constant values and may fluctuate during operation.

[0069] FIG. **17** illustrates an exemplary timing diagram in accordance with aspects of the present disclosure. Specifically, FIG. **17** illustrates a timing diagram for an implementation where a DHW output temperature drops below the pre-heat initialization temperature threshold, causing a pre-heat operation of the combination boiler **100** to be performed. In the implementation of FIG. **17**, heated water stored at the primary heat exchanger **106** is sufficient, when circulated through the secondary heat exchanger **116**, to cause the DHW output temperature demand to be satisfied without causing the burner **108** of the combination boiler **100** to fire.

[0070] As illustrated in FIG. **17**, both of the PHE inlet temperature T**1** and the DHW output temperature T**3** of the combination boiler **100** are within the range of the pre-heat initialization temperature threshold T_ON and the maximum outlet temperature threshold T_END at time**0**. At time**1** of FIG. **17**, a DHW draw begins and the DHW output temperature T**3** begins to decrease based, at least in part, upon a DHW input water temperature of the domestic loop. At time**2** of FIG. **17**, the DHW output temperature T**3** drops below the pre-heat initialization temperature threshold T_ON and causes a pre-heat operation to be initiated at the combination boiler **100**. Because the PHE outlet temperature T**2** is greater than the minimum outlet temperature threshold T_FIRE at time**2**, the controller **120** causes boiler loop water to be flowed from the primary heat exchanger **106** through the secondary heat exchanger **116** via at least one of the inlet pump **104** and flow diverting valve **114**. Heat energy transferred from the heated boiler loop water to water in the domestic loop at the secondary heat exchanger **116** causes the DHW output temperature T**3** to increase and become greater than the pre-heat initialization temperature threshold T_ON.

[0071] In one exemplary embodiment, the DHW output temperature T**3** may correspond to a predetermined or user specified set point temperature. In the embodiment illustrated by FIG. **17**, at time**3**, the DHW output temperature T**3** corresponds to the set point temperature. When the DHW output temperature T**3** reaches the set point temperature, the controller **120** of the combination boiler **100** may be configured to modify a rate of boiler loop water flow from the boiler loop through the secondary heat exchanger **116**. For example, an amount of boiler loop water diverted from the boiler loop through the secondary heat exchanger **116** by the flow diverting valve **114** and/or inlet pump **104** may be slowed or stopped when the DHW output temperature T**3** reaches or approaches the set point temperature.

[0072] In the embodiment illustrated by FIG. **17**, sufficient water is stored at the storage **107** of the primary heat exchanger **106**, such that when a pre-heat operation begins and heated boiler loop water is circulated from the boiler loop through the secondary heat exchanger **116**, the heat demand associated with a DHW draw is satisfied by the energy transfer from the circulated heated water from the storage **107**. At time**4** of FIG. **17**, the DHW draw is ended and each of the PHE inlet temperature T**1**, the PHE outlet temperature T**2**, and the DHW output temperature T**3** slowly decrease over time, for example towards an ambient temperature. In this example, the pre-heat operation may end, for example, by the expiration of a pre-heat operation timer.

[0073] FIG. **18** illustrates a timing diagram for an implementation where a burner **108** of the combination boiler **100** is fired during operation. As illustrated in FIG. **18**, at time**0** the DHW output temperature T**3** is below the pre-heat initialization temperature threshold T_ON. As such, a pre-heat operation of the combination boiler **100** is initiated. Because the PHE outlet temperature T**2** is greater than the minimum outlet temperature threshold T_FIRE at time**0**, the burner **108** of the combination boiler **100** does not fire. The controller **120** of the combination boiler **100** is configured to circulate heated boiler loop water from the boiler loop through the secondary heat exchanger **116** at initiation of the pre-heat operation period. At time**1** of FIG. **18**, the PHE outlet temperature T**2** drops below the minimum outlet temperature threshold T_FIRE. Because the PHE outlet temperature T**2** falls below the minimum outlet temperature threshold T_FIRE during a pre-heat operation, the controller **120** causes the burner **108** to fire. After the burner **108** fires, at time**2** illustrated by FIG. **18**, the PHE outlet temperature T**2** of the combination boiler **100** increases above the minimum outlet threshold T_FIRE.

[0074] After the burner **108** fires, and because water is circulating from the boiler loop through the secondary heat exchanger **116** during the pre-heat operation, each of the PHE inlet temperature T**1**, the PHE outlet temperature T**2**, and the DHW output temperature T**3** increase after the pre-heat operation begins. At time**3** of FIG. **18**, the DHW output temperature T**3** increases above the pre-heat initialization temperature threshold T_ON. The PHE outlet temperature T**2** rises above the pre-heat cancellation temperature threshold T_OFF at time**4** of FIG. **18**. As such, the controller **120** causes the burner **108** to stop firing, and the PHE outlet temperature T**2** decreases over time. At time**5** of FIG. **18**, the DHW draw is stopped, and each of the PHE inlet temperature T**1**, the PHE outlet temperature T**2**, and the DHW output temperature T**3** slowly decrease over time, for example towards an ambient temperature. At time**5** of FIG. **18**, the PHE outlet temperature T**2** falls below the minimum outlet temperature threshold T_FIRE. However, because a pre-heat operation has not initiated, the burner **108** is not

caused to fire at the time that the PHE outlet temperature T2 falls below the minimum outlet temperature threshold T_FIRE.

[0075] At time6 of FIG. **18**, the DHW output temperature T3 falls below the pre-heat initialization temperature threshold T_ON. Because at least one of the PHE inlet temperature T1 and the DHW output temperature T3 have fallen below the pre-heat initialization temperature threshold T_ON, the controller **120** begins a pre-heat operation of the combination boiler **100**. At initiation of the pre-heat operation, heated boiler loop water is diverted and circulated through the secondary heat exchanger **106** via at least one of the flow diverted valve **114** and the inlet pump **104**. The controller **120** is configured to control operations of at least one of the flow diverting valve **114** and the inlet pump **104** to cause the circulation of boiler loop water through the secondary heat exchanger **116**. After a delay period associated with the pre-heat operation, at time7 of FIG. **18**, the controller **120** causes circulation of the heated boiler loop water through the secondary heat exchanger **116** to begin. Each of the PHE inlet temperature T1, the PHE outlet temperature T2, and the DHW output temperature T3 increase as the water is recirculated, and because the PHE outlet temperature T2 is less than the minimum outlet temperature threshold T_FIRE, the controller **120** causes the burner **108** of the combination boiler **100** to fire.

[0076] At time8 of FIG. **18**, the PHE inlet temperature T1 rises above the maximum outlet temperature threshold T_END. However, the pre-heat operation is not ended because both of the PHE inlet temperature T1 and the DHW output temperature T3 are required to exceed the maximum outlet temperature threshold T_END for the controller **120** to end a current pre-heat operation. Shortly after time8 of FIG. **18**, the PHE outlet temperature T2 exceeds the pre-heat cancellation temperature threshold T_OFF, causing the controller **120** to end the current pre-heat operation and stop firing the burner **108**. At time9 of FIG. **18**, both of the PHE inlet temperature T1 and the DHW output temperature T3 are greater than the maximum outlet temperature threshold T_END, however, the pre-heat operation has previously ended based on the PHE outlet temperature exceeding the pre-heat cancellation temperature threshold T_OFF.

[0077] As described herein, a combination boiler **100** may monitor both a PHE inlet temperature T1 and a DHW output temperature T3 to determine when a pre-heat call is needed. When a pre-heat call is active, the inlet pump **104** of the boiler loop may run with the flow diverting valve **114** in a position to cause boiler loop water to flow between the primary heat exchanger **106** and the secondary heat exchanger **116**. This enables heat energy to be transferred from the boiler loop to the domestic water loop as well as to be able to read the temperature of the water stored in the primary heat exchanger **106**. Once a pre-heat operation has started, and after a short delay (e.g., to ensure the temperature of the water stored in the primary heat exchanger **106** can be read, the PHE outlet temperature sensor **112** is monitored to determine when the burner **108** needs to be fired in order to replenish the heat in the primary heat exchanger **106**. During a pre-heat operation, but before the boiler has fired, the controller **120** of the combination boiler **100** also monitors both the DHW output temperature T3 and the PHE inlet temperature T1 to determine if the pre-heat operation can be ended before the boiler has had to fire. If the controller **120** determines that the burner **108** needs to fire for the pre-heat call, it will cause the burner **108** to ignite and be forced to low fire. The burner **108** may then run at low fire until the PHE outlet temperature T2 reaches a desired temperature. The PHE outlet temperature T2 may be monitored, for example, because this temperature represents a maximum possible temperature for the domestic water loop (e.g., because of heat transfer between the boiler loop and domestic loop), and has the least delay in measurement.

[0078] A combination boiler **100** may optionally be equipped with a space heating temperature sensor and can also compare that temperature to the desired storage temperature of the primary heat exchanger **106** (e.g., at the storage **107**) and the controller **120** may change a position of the flow diverting valve **114** to a space heating position to take heat from the heating system, rather than causing the burner **108** to fire.

[0079] By monitoring both the PHE inlet temperature T1 and the DHW output temperature T3 to determine when to start a pre-heat call, the controller **120** is able to either periodically or non-periodically circulate water between the primary heat exchanger **106** and the secondary heat exchanger **116**, as needed, in order to monitor the temperature of water stored at the primary heat exchanger **106**. This can occur when the water at the location of the sensors has cooled to a certain point indicating the need to run the inlet pump **104**, or if some other condition has caused one or more of the temperatures to drop below a particular value (e.g., T_ON).

[0080] By monitoring the DHW output temperature T3 specifically, the controller **120** is able to determine if a low DHW flow or circulation is present, as either would cause the DHW output temperature T3 to drop. In his case, the controller **120** may operate the inlet pump **104** and circulate water between the primary heat exchanger **106** and the secondary heat exchanger **116**, thereby starting the transfer of heat energy to the domestic water loop. By handling these calls differently from a typical DHW draw, the controller **120** can use much less aggressive control methods to mitigate the risk of overshooting the desired temperature or short cycling the burner **108** in the event that it must fire.

[0081] By incorporating an outlet temperature differential to determine when to fire the burner **108**, the run time of the burner **108** can be maximized thereby preventing rapid thermal cycling of the primary heat exchanger **106**. This ensures that the burner **108** will only fire when it will be able to gain enough heat to run for an acceptable duration.

[0082] As described herein, systems and methods are provided for controlling a combination boiler. Various advantages are provided by implementing systems consistent with the present disclosure, including increased longevity of mechanical operation, decreased fuel expense, and decreased energy usage.

[0083] Throughout the specification and claims, the following terms take at least the meanings explicitly associated herein, unless the context dictates otherwise. The meanings identified below do not necessarily limit the terms, but merely provide illustrative examples for the terms. The meaning of "a," "an," and "the" may include plural references, and the meaning of "in" may include "in" and "on." The phrase "in one embodiment," as used herein does not necessarily refer to the same embodiment, although it may.

[0084] The term "coupled" means at least either a direct connection between the connected items or an indirect connection through one or more passive or active intermediary devices.

[0085] Conditional language used herein, such as, among others, "can," "might," "may," "e.g.," and the like, unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements and/or states. Thus, such conditional language is not generally intended to imply that features, elements and/or states are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without author input or prompting, whether these features, elements and/or states are included or are to be performed in any particular embodiment.

[0086] The previous detailed description has been provided for the purposes of illustration and description. Thus, although there have been described particular embodiments of a new and useful invention, it is not intended that such references be construed as limitations upon the scope of this invention except as set forth in the following claims.

What is claimed is:

1. A combination boiler for providing heated water to a boiler loop and domestic hot water (DHW) to a domestic water loop, the combination boiler comprising:
- a primary heat exchanger configured to be connected to the boiler loop;
- a burner configured to provide heat to the primary heat exchanger;
- a secondary heat exchanger configured to transfer heat energy from the boiler loop to the domestic water loop; and
- a controller configured to:
  - monitor a primary heat exchanger inlet temperature and a DHW output temperature;
  - obtain a pre-heat initialization temperature threshold and a pre-heat cancellation temperature threshold;
  - detect a low temperature condition when at least one of the primary heat exchanger inlet temperature and the DHW output temperature falls below the pre-heat initialization temperature threshold;
  - initiate a pre-heat operation of the combination boiler responsive to the low temperature condition by circulating heated water from the primary heat exchanger to the secondary heat exchanger; and
  - end the pre-heat operation without firing the burner when both of the primary heat exchanger inlet temperature and the DHW output temperature exceed the pre-heat cancellation temperature threshold.

2. The combination boiler of claim **1**, wherein the controller is further configured to:
- obtain a DHW set point temperature; and
- determine at least one of the pre-heat initialization temperature threshold and the pre-heat cancellation temperature threshold based at least in part upon the DHW set point temperature.

3. The combination boiler of claim **1**, wherein the controller is further configured to:
- obtain a circulation time interval; and
- start a circulation operation after the pre-heat operation has ended and a time period corresponding to the circulation time interval has expired.

4. The combination boiler of claim **3**, wherein:
- the primary heat exchanger includes a storage capacity configured to store the heated water; and
- wherein during the circulation operation, the controller is configured to:
  - obtain a minimum outlet temperature threshold associated with the primary heat exchanger;
  - cause the heated water to be output from the primary heat exchanger;
  - measure a current temperature of the heated water; and
  - selectively fire the burner when the current temperature falls below the minimum outlet temperature threshold.

5. The combination boiler of claim **1**, wherein the controller is further configured to:
- obtain a minimum outlet temperature threshold;
- monitor an outlet temperature of the primary heat exchanger; and
- fire the burner prior to ending the pre-heat operation when the outlet temperature falls below the minimum outlet temperature threshold.

6. The combination boiler of claim **1**, wherein the controller is further configured to:
- obtain a maximum outlet temperature threshold;
- monitor an outlet temperature of the primary heat exchanger; and
- end the pre-heat operation when the outlet temperature exceeds the maximum outlet temperature threshold.

7. The combination boiler of claim **1**, wherein the controller is further configured to:
- obtain an outlet measurement delay period;
- initiate a time delay in accordance with the outlet measurement delay period when the pre-heat operation initiates; and
- monitor an outlet temperature of the primary heat exchanger after expiration of the delay period.

8. The combination boiler of claim **1**, wherein the combination boiler includes a pump and a flow diverter valve, and wherein the controller is configured such that the pre-heat operation is initiated by:
- determining an estimated heat demand;
- operating the pump to circulate water in the boiler loop; and
- at least one of measuring or adjusting a position of the flow diverter valve to ensure heated water flows from the primary heat exchanger to the secondary heat exchanger at a rate corresponding to the estimated heat demand.

9. The combination boiler of claim **1**, wherein the controller is further configured to:
- receive a boiler command having a higher priority than the pre-heat operation while the pre-heat operation is being performed;
- interrupt the pre-heat operation and perform a prioritized operation corresponding to the boiler command; and
- resume the pre-heat operation after the prioritized operation has completed.

10. The combination boiler of claim **9**, wherein the controller is configured to:
- fire the burner as part of the prioritized operation;
- obtain a time period associated with the prioritized operation;
- obtain a maximum outlet temperature threshold; and

continue to fire the burner after resuming the pre-heat operation until at least one of:

(i) the time period expires; and

(ii) the outlet temperature exceeds the maximum outlet temperature threshold.

11. The combination boiler of claim **1**, wherein the controller is configured to obtain a pre-heat timer threshold value and to end the pre-heat operation after a time period corresponding to the pre-heat timer threshold value when the burner has not fired during the time period.

12. The combination boiler of claim **1**, further comprising:

a flow switch associated with the domestic water loop; and

wherein the controller is configured to:

(i) obtain a DHW flow rate from the flow switch;

(ii) obtain a DHW demand flow rate threshold; and

(iii) end the pre-heat operation and fire the burner when the DHW flow rate exceeds the DHW demand flow rate threshold.

13. The combination boiler of claim **1**, wherein the primary heat exchanger includes a storage capacity configured to store the heated water.

14. A method of controlling a combination boiler, the combination boiler having a primary heat exchanger connected to a boiler loop, a burner configured to provide heat to the primary heat exchanger, and a secondary heat exchanger configured to transfer heat energy from the boiler loop to a domestic water loop, the method comprising:

(a) storing heated water at the primary heat exchanger;

(b) obtaining a pre-heat initialization temperature threshold and a pre-heat cancellation temperature threshold;

(c) monitoring a primary heat exchanger inlet temperature and a domestic hot water (DHW) output temperature;

(d) detecting a low temperature condition when at least one of the primary heat exchanger inlet temperature and the DHW output temperature falls below the pre-heat initialization temperature threshold;

(e) initiating a pre-heat operation of the combination boiler responsive to the low temperature condition by circulating the heated water from the primary heat exchanger to the secondary heat exchanger; and

(f) ending the pre-heat operation without firing the burner when both of the primary heat exchanger inlet temperature and the DHW output temperature exceed the pre-heat cancellation temperature threshold.

15. The method of claim **14**, further comprising:

obtaining a DHW set point temperature; and

determining at least one of the pre-heat initialization temperature threshold and the pre-heat cancellation temperature threshold based at least in part upon the DHW set point temperature.

16. The method of claim **14**, further comprising:

obtaining a circulation time interval; and

starting a circulation operation after the pre-heat operation has ended and a time period corresponding to the circulation time interval has expired.

17. The method of claim **16**, wherein the circulation operation comprises:

obtaining a minimum outlet temperature threshold associated with the primary heat exchanger;

outputting the heated water from the primary heat exchanger;

measuring a current temperature of the heated water; and

determining a burner fire status based by comparing the current temperature to the minimum outlet temperature threshold.

18. The method of claim **17**, wherein the burner fire status corresponds to a condition not to fire the burner when the current temperature is greater than the minimum outlet temperature.

19. The method of claim **14**, further comprising:

obtaining an outlet measurement delay period;

initiating a delay period in accordance with the outlet measurement delay period when the pre-heat operation initiates; and

monitoring an outlet temperature of the primary heat exchanger after expiration of the delay period.

20. The method of claim **14**, wherein the combination boiler includes a pump and a flow diverter valve, and wherein step (e) comprises:

determining an estimated heat demand;

operating the pump to circulate water in the boiler loop; and

at least one of measuring or adjusting a position of the flow diverter valve to ensure heated water flows from the primary heat exchanger to the secondary heat exchanger at a rate corresponding to the estimated heat demand.

21. The method of claim **14**, further comprising:

receiving a boiler command having a higher priority than the pre-heat operation while the pre-heat operation is performed;

interrupting the pre-heat operation and performing a prioritized operation corresponding to the boiler command; and

resuming the pre-heat operation after the prioritized operation has completed.

22. A method of controlling a combination boiler, the combination boiler having a primary heat exchanger connected to a boiler loop, a burner configured to provide heat to the primary heat exchanger, and a secondary heat exchanger configured to transfer heat energy from the boiler loop to a domestic water loop, the method having steps comprising:

(a) storing heated water at the primary heat exchanger;

(b) obtaining a pre-heat initialization temperature threshold and a minimum outlet temperature threshold;

(c) monitoring a primary heat exchanger inlet temperature and a domestic hot water (DHW) output temperature;

(d) detecting at least one of the primary heat exchanger inlet temperature and the DHW output temperature falling below the pre-heat initialization temperature threshold;

(e) initiating a pre-heat operation of the combination boiler by circulating the heated water from the primary heat exchanger to the secondary heat exchanger;

(f) monitoring an outlet temperature of the primary heat exchanger; and

(g) firing the burner when the outlet temperature falls below the minimum outlet temperature threshold.

23. The method of claim **22**, further comprising:

obtaining a maximum outlet temperature threshold; and

ending the pre-heat operation by stopping the burner from firing and stopping circulation of the heated water when the outlet temperature exceeds the maximum outlet temperature threshold.

24. The method of claim **23**, further comprising:

obtaining a circulation time interval; and

starting a circulation operation after the pre-heat operation has ended and a time period corresponding to the circulation time interval has expired.

25. The method of claim **24**, wherein the circulation operation comprises:

outputting the heated water from the primary heat exchanger;

measuring a current temperature of the heated water; and

determining a burner fire status based by comparing the current temperature to the minimum outlet temperature threshold.

26. The method of claim **22**, wherein step (f) comprises:

obtaining an outlet measurement delay period;

initiating a time delay in accordance with the outlet measurement delay period when the pre-heat operation is initiated; and

monitoring the outlet temperature after expiration of the delay period.

27. The method of claim **22**, wherein the combination boiler includes a pump and a flow diverter valve, and wherein step (e) further comprises:

determining an estimated heat demand;

operating the pump to circulate water in the boiler loop; and

at least one of measuring or adjusting a position of the flow diverter valve to ensure heated water flows from the primary heat exchanger to the secondary heat exchanger at a rate corresponding to the estimated heat demand.

28. The method of claim **22**, further comprising:

receiving a boiler command having a higher priority than the pre-heat operation while the pre-heat operation is being performed;

interrupting the pre-heat operation and performing a prioritized operation corresponding to the boiler command; and

resuming the pre-heat operation after the prioritized operation is completed.

29. The method of claim **28**, further comprising:

obtaining a time period associated with the prioritized operation;

obtaining a maximum outlet temperature threshold; and

continuing to fire the burner after resuming the pre-heat operation until at least one of:

(i) the time period expires; and

(ii) the outlet temperature exceeds the maximum outlet temperature threshold.

* * * * *