




<p>(51) International Patent Classification ⁶ : H04N 7/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/06503 (43) International Publication Date: 29 February 1996 (29.02.96)</p>
<p>(21) International Application Number: PCT/US95/10665 (22) International Filing Date: 22 August 1995 (22.08.95) (30) Priority Data: 08/294,983 24 August 1994 (24.08.94) US (71) Applicant: MACROVISION CORPORATION [US/US]; 1341 Orleans Drive, Sunnyvale, CA 94089 (US). (72) Inventor: COPELAND, Gregory, C.; 1479 Lapaz Court, San Jose, CA 94089 (US). (74) Agent: BRILL, Gerow, D.; Macrovision Corporation, 1341 Orleans Drive, Sunnyvale, CA 94089 (US).</p>		<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METHOD AND APPARATUS FOR INSERTING SOURCE IDENTIFICATION DATA INTO A VIDEO SIGNAL

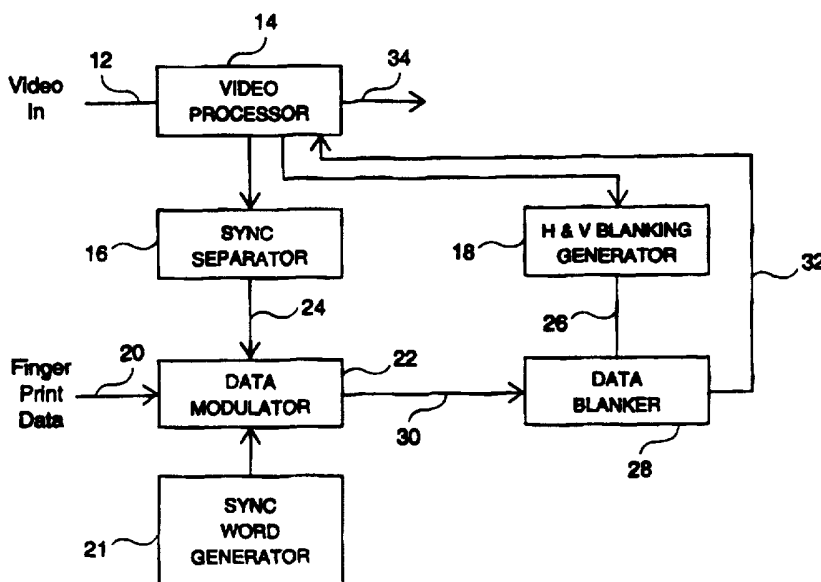

(57) Abstract

The source identification data (Finger Print) is injected into the active picture area of a video signal without disturbing the viewing of the video signal and the data is retrieved by a data reader, called a Fingerprint Reader. The data injection or "fingerprinting" process consists of dynamically offsetting the video pedestal to carry information which can then be read back from any videotape made from the output of the data-injecting unit. In particular, the fingerprint carries the ID number of the unit used and the current date. The offset lasts for one entire field and has an amplitude of approximately 0.5 IRE that is, a given field either has the nominal setup or a setup value differing from nominal by 0.5 IRE. The data is repeated every 128 fields in order to provide ample samples for the reader to detect and display the source identification data.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD AND APPARATUS FOR INSERTING SOURCE IDENTIFICATION DATA INTO A VIDEO SIGNAL

A portion of the disclosure of this patent document
5 contains material that is subject to copyright protection. The
copyright owner has no objection to the facsimile production
by any one of the patent disclosure, as it appears in the
Patent and Trademark Office files or records, but otherwise
reserves all copyright rights whatsoever.

10 BACKGROUND

With video piracy becoming more rampant by the day, it is
becoming more desirable to have a method for identifying
whether a video recording or video transmission is originating
from an authorized source. Source or tape identification
15 processes using the data transmission capability of the
vertical interval have been known to those skilled in the art.
However such system suffer from the ease of eliminating the
source identification data by blanking and reinsertion
techniques. The source identification or "fingerprint" systems
20 known do not transmit the data during the active time of the
video signal.

One form of video piracy has been to use a video camera to
record the picture and sound off the screen and speakers in a
theater displaying a movie. Admittedly this method produces a
25 very inferior copy. However, in certain parts of the world,
generally outside of the United States, such a copy is
acceptable. The use of video movie projection systems in
theaters is becoming more popular. Generally, these systems

incorporate a form of video scrambling to protect the electronic video signals prior to projection. However, vertical interval source identification and video scrambling do not protect the projected image once the signal has been
5 descrambled.

A method of source identification of movie and other material is needed to provide a source code to reduce the likelihood of illegal copying and if such copying is done, identify the theater or source of the duplication.

10

SUMMARY

A method and apparatus injection of data (Finger Print) into the active picture area of a video signal without disturbing the viewing of the video signal and the retrieval of the data by a data reader, a Fingerprint Reader. The data
15 injection or "fingerprinting" process consists of dynamically offsetting the video pedestal to carry information which can then be read back from any videotape made from the output of the data-injecting unit. In particular, the fingerprint carries the ID number of the unit used and the current date.
20 The offset lasts for one entire field and has an amplitude of approximately 0.5 IRE units. A given field either has the nominal setup or a setup value differing from nominal by 0.5 IRE unit.

The reader detects the finger print data from the video
25 signal and process the data for display. From this data a data can determine the source of the video information such as a specific theater and date the video material was played.

Another application may be to include such source data at the video is recorded.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of the data insertion apparatus; and

Fig. 2a - 2e is a series of wave forms representing sync word;

Fig. 3 is a block diagram of the Fingerprint Reader.

DETAILED DESCRIPTION OF THE INVENTION

The data injection or "fingerprinting" process consists of dynamically offsetting the video pedestal to carry information which can then be read back from any videotape made from the output of the data-injecting unit or from a video tape of a screen display of a signal containing the data. In particular, the fingerprint carries the ID number of the unit used and the current date. The offset lasts for at least one entire field and has an amplitude of approximately 0.5 IRE unit. A given field either has the nominal setup or a setup value differing from nominal by 0.5 IRE.

Video Signal 12 to be fingerprinted is inputted to Video Processor 14. Video Processor 14 provides Video Signal 12 to Sync Separator 16 and H & V Blanker 18. Finger Print Data 20 is inputted to Data Modulator 22. Finger Print Data 20 may be in serial or parallel form.

The fingerprint data format is a 64-bit block. The first 16 bits are a (data) frame synchronization word generated by Sync Word Generator 21; the next 16 bits are the source ID number; and the final 32 bits are the date code. A typical

sync word is shown in Fig. 2a. The block is repeated indefinitely. The signal format is binary Manchester: a "0" is represented by a 0-1 transition, a "1" by a 1-0 transition, with the phase reference supplied by the sync word as shown in
5 Fig. 2b. Each data bit therefore occupies two fields. It will be apparent to one skilled in the art that other data formats can be used, with the recovery process adjusted accordingly.

Data Modulator 22 receives the Finger Print Data 20 in
10 either serial or parallel form and Sync Word Data 22 and generates Formatted Finger Print Data as described above consisting of 16 bits as synchronization word followed by 16 for a source ID and 32 for a date code. Since the data is to be inputted to a video signal, it is necessary to synchronize
15 the data to the video signal. An output of Sync Separator 16 consists of Vertical (field) Synchronizing Pulse 24. Sync Separator 16 uses techniques known to one skilled in the art of television engineering to separate Vertical Synchronizing Pulse 24 from the video signal. In addition to putting the
20 data in a format usable by the system, Data Modulator 22 synchronizes the beginning of any Formatted Finger Print Data to the field rate using Vertical Synchronizing Pulse 24.

Since the individual bits of this data covers one or more field, it is necessary to blank out the data during the
25 horizontal and vertical blanking periods of the inputted video signal. H & V Blanking Generator 18 receives the video signal from Video Processor 14 and generates a combined H & V Blanking Signal 26 that is coupled to Data Blanker 28.

Formatted Finger Print Data 30 is coupled to a data input of Data Blanker 28. Data Blanker 28 uses H & V Blanking Signal 26 to blank out the data during the horizontal and vertical blanking intervals of the input video signal. The output of
5 Data Blanker 28 is Blanked Formatted Finger Print Data 32 which is coupled back into Video Processor for adding to the video signal thus producing Fingerprinted Video Signal 34.

When Fingerprinted Video Signal 34 is projected on a screen or displayed on a video monitor, the variation in video
10 level due to the insertion is imperceptible to a viewer, but is detected by any video recorder recording the signal directly or via a television camera doing an off-screen recording of the projected image.

The recovery or "reading" process operates is shown in Fig.
15 3. A Finger Print Reader 40 is used to detect and analyze any Formatted Finger Print Data 30 present in a Fingerprinted Video Signal 42 is coupled to Low Pass Filter 44 with a cut-off frequency of about 1 Khz. The output of Low Pass Filter 44 is coupled to 30 Hz Notch Filter 82. 30 Hz Notch Filter 82 is
20 used to remove a 30 Hz component that can be observed in the data as a frame to frame variation in tape output level due to differences in playback video heads. The 30 Hz Notch Filter can be places either before or after Matched Filter 52.

The output of 30 HZ Notch Filter 82 is coupled to Analog to
25 Digital Converter 46. Analog to Digital Converter 46 also receives Clock Signal 48 from Clock Generator 50. The clock frequency is approximately 4 Khz. However clock frequencies from 1 Khz. to 15 Khz. are equally usable. The clock frequency

also may be locked to the incoming video. The output of Analog to Digital Converter 46 that is shown in Fig. 2b is coupled to Matched Filter 52. Matched Filter 52, to a first approximation, doubles the data amplitude and largely cancels the video content. The output of Matched 52 is represented by Fig. 2c.

The output of Matched Filter 52 may not always provide a sufficiently clean signal for further processing due to time base errors in the playback signal. To improve the usability of the output signal of Matched Filter 52 is coupled to Squarer 53 to Phase Lock Loop 55 to generate a clock signal at the bit of the data. This clock signal is coupled to Storage Register 56 to eliminate variations in the data due to time base errors.

The output of Matched Filter 52 that contains data with canceled video is then correlated to the sync word to establish the data framing. Once the data is properly framed, it is digitally integrated to further improve the Signal to Noise Ratio (SNR). This process consists of writing the digitized values of 128 consecutive fields into Storage Register 56 that contains 128 individual registers that have been clocked by Clock Signal 57. Shift Register 56, Correlator 58, Sync Word Generator 60, Peak Detector 62 and Address Control 64 are in a loop that is used to synchronize the data to make it readable by the user. The output of Storage Register 56 is coupled to Correlator 58. In addition a preprogrammed Sync Word Generator 60 couples a unique Sync Word 66, as shown in Fig. 2d, to Correlator 58 to correlate

the sync word information in the Fingerprint Data 32 with Sync Word 66. Correlation Data 68, as shown in Fig. 2e is coupled to Peak Detector 62. If there is a match, adding the digitized values of the next 128 fields to those of the first, and
5 continuing the process as required. As the accumulation proceeds, the data value in each register will be directly multiplied by the number of passes while the video and noise will tend to average out. After a suitable number of passes, generally in excess of twenty, the recovered sequence of 128
10 high or low offset fields is coupled to Adder 72 and 64 Word register 76 where the data is decoded to the original 64 bits, and the pertinent data is read out to output terminal 80.

The apparatus described above may use a hardware implementation or a combination of hardware and software.
15 Attached is the source code information using the Matlab language for a software implementation of part of the fingerprint reader.

The data that is read out can be connected to any display device capable of reading a 64 bit data stream. Such a device
20 could be an alphanumeric display, a computer screen or incorporated back into the video signal for an on screen display. The display device displays the ID number and date code.

During an experiment using the elements described above,
25 data has been found to be recoverable down to the vicinity of 1/2 millivolt on a 1 volt video signal, less than 0.1 IRE.

It is important to note, that unless the sync word in the insertion device and the reader are identical, no output will

result or misleading results will be obtained. In order to make the reading device have a more universal use, the sync word generator in the reader has an ability to be preprogrammed either by the manufacturer for the user or by
5 the user.

In principle, while using the system described above, a person attempting to defeat the system could simply blank or otherwise distort one or two fields out of every 128 fields, a distortion which might be brief enough not to significantly
10 affect the utility of the pirated signal. Since the data is periodic, this would distort one of the characters. Which character in particular would not be known, but with the present data format, there is be a 25% probability of hitting one of the ID number characters, thereby disguising the
15 identity of the pirated unit. Alternatively a pirate may add a signal that will swamp or override the original fingerprint so that the fingerprint reader produces inconsistent or incorrect results.

An alternative implementation has some advantages. In a
20 technique similar to that used for spread-spectrum transmission, the basic data rate may be slowed, and Exclusive-Ors with a known pseudo-random sequence at the original frame rate. Normally the pseudo random sequence will be much longer than the data sequence. This has the advantage
25 of keeping the setup variation rate high, to minimize visibility of the data, while insuring that any attempt to mask a data character would blank an unacceptably long portion of the signal. A second alternative would simply randomly

interchange the position of data bits within the block in a time-variant manner, such that no periodic distortion would suffice to distort any particular data character. Data recovery for this second method is clearly more complex, but
5 well within the state of the art.

A third alternative may be to encrypt the data prior to it being added to the signal and using complementary decryption techniques for detection.

The apparatus and method described above describes a
10 system and method of adding a finger print signal to a video signal. One of the principle uses of this method and apparatus is to prevent piracy or identify the source of the pirated video material. Another embodiment of the concept is to fingerprint an original film that is ultimately recorded into
15 a video format. This can be accomplished by one of two methods. The film as it is being duplicated in film has a bias light source with a short turn on/off time to provide a small increase of illumination in the film printer. This bias would sufficiently low to create a very small shift in the
20 brightness, but not be visible to a viewer of the film. A second method is to provide such a bias during the projection of the film. The rate of the bias light takes into account the various projection media, direct film projection at 24 frames per second, 25 frames per second when used in a 50 Hz
25 television system or the 3/2 mechanism when used in a 60 Hz television system.

The above description is illustrative and not limiting. Further modifications will be apparent to one of ordinary skill in the art in light of this disclosure.

```

function [zc,y,loc] = finger2(file_name,sim)
% This function computes the fingerprint values given the input
% filename. It also plots intermediate results for debugging and
% visualation. This function assumes that the input is in voc
% type 1 format digitized at 4 KHz. The data is assumed to be
% frame of 64 bits manchester encoded with a sync word of 16 bits
% followed by 16 bits of decoder id, 3 bytes of date data (in bcd)
% and finally 1 byte of spare presently set to 0's. Data is
% assumed to non-inverted, although it is believed that the decoder
% now ouputs inverted fingerprint. The sound blaster used did not
% invert the data on input, but the sound blaster inverted the data
% on output. The data was collected using the program named
% fingrprt.exe and executed from the DOS prompt.
% Greg Copeland 8/16/94

%
% Get the data and decimate by 8 using a 256 tap
% low pass filter. Each bit before decimation is approximately
% 133 samples long (4000 Hz sample rate / 30 Hz bit rate). After
% decimation each symbol period then becomes
% approximately 16.7 (4000Hz/30Hz/8) samples long.
%

if sim==1 % 1 for data, 0 simulation
    fid = fopen(file_name);% open the input file
    x = fread(fid,100,'uint8'); % eliminate the header info
    i=0; x0 = zeros(8,1); % clear filter state
    x1 = x0; x2 = x0; x3 = x0; % create lpf for decimation
    lpf = firls(123,[0 .08 .125 1],[1.0 1.0 0.0 0.0]);
    m = [-ones(1,66) 0 ones(1,66)];% and conv with matched filt
    lpf = conv(lpf,m); % for combined filtering
    plot(20*log10(abs(fft([lpf zeros(1,8*size(lpf))]+.00001))));
    pause(1);
    dec = 8;
    flag = 1;
    x0 = zeros(256,1);
    x = zeros(dec,1);
    while flag % loop for each 8 sample blk
        x0(1:256-dec)=x0(dec+1:256);% until no more data avail
        [x,count] = fread(fid,dec,'uint8'); % read input file
        flag = count == dec; % full block to use ?
        if(flag)
            x0(256-dec+1:256)=x(1:dec);% shift state info
            i = i+1;
            z(i) = x0' * lpf'; % find decimation sample
        end
    end
    end
    y = z;

    clear lpf % free memory for later use
    clear x0 % these vars are no longer
    clear x % needed
    clear z

else % if here generate test data
    pad = rand(1,48) > .5; % generate some random data

```

```

datain = [1 0 1 0 1 1 0 0 1 0 0 0 1 1 1 0 pad]; % with sync
y = 2*datain - ones(1,64);
y = kron(y,[ones(1,8) 0 -ones(1,8)]); % symbol waveform
y = kron(ones(1,3),y); % gen 3 frames
y = 0.0625*conv(y,[-ones(1,8) ones(1,8)]); % matched filtering
y = y + 0.25*randn(y); % additive noise
end

z = y; % this is a simple agc
[m,n]=size(z);
y(1:16) = y(1:16)/std(z(1:31)); % normalize data by the
for i=17:16:n-32 % max in the block and
    s = 1.0/std(z(i-16:i+31)); % adjacent blocks
    y(i:i+15) = s*z(i:i+15);
end
i=i+15;
y(i:n)=zeros(1,n-i+1); % clear tail
clear z; % free some more memory

plot(y); % plot agc'ed data
pause(1);

%
% next we acquire symbol clock and decimate again by this clock
% This phase consists of taking the matched filter output,
% differentiating, multiplying by the matched filter output and
% filtering around twice the symbol clock frequency. The filter
% is complex, so that the phase of the filtered data may be found
% for later use in the Kalman filter symbol synchronizer
%

dif=0.5*conv([1 0 -1],y); % differentiate data
y = [0 y 0]; % pad input to same length
err = dif .* y; % product of each
[a,b]=size(err); % build bpf around clock
bitfilt = [sin((-63:63)*(pi/4.15))-j*cos((-63:63)*(pi/4.15))];
bitfilt = bitfilt .* hanning(127); % frequency
err = conv(err,bitfilt); % band pass the data
[c,d]=size(err);
err(1:63)=[]; err(b+1:d)= [];
phase = -atan2(imag(err),real(err))/pi; % find the phase of bpf out
err = real(err)/max(real(err));
m= 400; n=450; t=m:n; % plot some debug stuff
plot(t,y(m:n),'w',t,err(m:n),'b',t,dif(m:n),'r',t,phase(m:n),'g');
pause(1);
clear dif % free memory

%
% This is the Kalman filter for tracking the symbol clock
%
% Kalman filter parameters
%
%  $X(k+1) = A * X(k) + U(k)$  model
%  $Z(k) = C * X(k) + W(k)$  observation
%
x=[10 8.35 0]'; % initial state var (phase,period,aux1,aux2)

```

```

A = [1 1 0           % state transition matrix
     0 1 0           % phase,period,aux1,aux2
     0 0 .8];        % aux to decorrelate err measurements
C = [1 0 1];         % observation matrix
Rw = 1;              % observation noise covariance
Rx = 20*eye(3);     % initial state covariance
Ru = [0 0 0         % model driving covariance
      0 .00001 0
      0 0 .00001];
%
%   This is an interpolation filter for finding the
%   interpolated matched filter output. This is required
%   because the symbol clock may not land exactly on a
%   sample.
%

interp = firls(64,[0 .12 .13 1],[1 1 0 0]); % simple ls fir
interp(65) = 0;
interp = interp/sum(interp(33));% normalize interp filter

j=1; k = 1;          % init some loop vars
z = zeros(1,128);
[n,m] = size(y);
pass = 1;

while x(1) < m-10    % x(1) is the sample #
    i = floor(x(1)); frac = x(1) - i; % i is the integer sample #
    e = -(phase(i) + 0.255*frac);% find the phase err

    Rv = C*Rx*C' + Rw; % update the error variance
    Rvi = inv(Rv); % and its inverse
    G = A*Rx*C'*Rvi; % calculate Kalman gain
    x = A*x + 2*G*e; % compute prediction state
    Rx = Rx - Rx*C'*Rvi*C*Rx; % find prediction covariance
    Rx = A*Rx*A' + Ru; % find state est covariance

    iindex = 9-floor(8*frac); % interpolate sample
    yt = y(i-3:1:i+4); it = interp(iindex:8:56+iindex);
    yi = yt * it'; % this is the interp result
    if(pass > 1) % allow 1 frame pass to
        ze = yi - z(j); % establish good clock
        if(ze > 1) ze = .5; end% hard limit for noise
        if(ze < -1) ze = -.5; end % spikes
        z(j) = z(j) + ze/(pass-1); % accumulate data each pass
    end
    loc(k,:) = [ x(2)-8 x(3) e yi];% diagnostic vector
    k=k+1; j=j+1; % update loop counters
    if(j > 128) % mod 128 for accumulation
        j = 1; pass = pass+1;% (128 1/2 symbols/frame)
    end
end

plot(z); % data accumulated at symbol
pause(1); % intervals
plot(loc); % plot vco freq, aux var,
pause(1); % phase error, and sample value

```

```

%
% find the sync word, using correlation and display results
%
m=[1 0];% A      C      8      E
sync= [m -m m -m m m -m -m m -m -m -m m m m -m zeros(1,96)];
zc = real(ifft(fft(z).*conj(fft(sync))));
zc = zc/max(abs(zc)); % normalize cross correlation data
plot(zc); % plot corr for debug
pause(1); % Oh, you want to see the results?
index = find(zc==max(zc)) % find the location of the corr peak
zs = zeros(1,128); % and rotate the data to the normal
zs(index) = 1; % orientation
zc = real(ifft(fft(z).*conj(fft(zs))));
zc = zc/std(abs(zc));
zc = zc-mean(zc(1:2:32)); % offset compensation
plot(zc(1:2:128)) % due to flutter @ 30Hz
dataout = zc(1:2:128)>0; % decode bits
if sim == 0 % test for errors
    'bit errors = ',sum(xor(datain,dataout))
else
    'bit errors = ',sum(xor([1 0 1 0 1 1 0 0 1 0 0 0 1 1 1 0],dataout(1:16)))
end
byte_w = [ 8 4 2 1]; % convert bits to hex out
bytes = zeros(1,16);
hexstr=['0' '1' '2' '3' '4' '5' '6' '7' '8' '9' 'A' 'B' 'C' 'D' 'E' 'F'];
for i=0:15 % loop for each hex digit
    t = byte_w*dataout(1+4*i:4+4*i) + 1;
    bytes(i+1) = hexstr(t);
end
'sync dec id date spare' % display decoded data
bytes % here

```


CLAIMS

I Claim:

1. A method for incorporating source identification
5 data to the active picture of a video signal and detecting
same comprising the steps of:
generating source identification data;
generating a synchronizing word;
adding said source identification data and said
10 synchronizing word to a video signal;
detecting said identification data and said synchronizing
word from said video signal;
synchronizing said data using said synchronizing word;
and
15 displaying said identification data.
2. An apparatus to incorporate source identification
data into a video signal comprising:
a video processor having a video input signal, wherein
said video input signal is coupled to a sync separator;
20 said sync separator generates a vertical triggering
pulse, wherein said vertical triggering pulse is coupled to a
data modulator;
source identification data is inputted to said data
modulator;
25 said data modulator generates a serial data stream
comprising a sync word and said source identification; and
said data stream is coupled to said video processor
wherein said data stream is blanked during horizontal and

vertical blanking intervals of said video input signal and said blanked data is combined with said video input signal.

3. An apparatus as in Claim 2, wherein said source identification data comprises data identifying a source of
5 said video material and a date and time stamp.

4. An apparatus as in Claim 3, wherein said source comprises a specific theater displaying said video signal.

5. An apparatus as in Claim 3, wherein said source is a specific video cassette duplicator or recorder that originally
10 recorded said video signal.

6. An apparatus as in Claim 2, wherein said synchronizing word is preprogrammed into a read only memory.

7. An apparatus as in Claim 2, wherein said synchronizing word is generated by a user controlled keyboard
15 or keypad.

8. An apparatus as in Claim 2, wherein said video processor is part of a video projection system.

9. An apparatus as in Claim 2, wherein said video processor is part of a video recording system.

20 10. An apparatus for detecting a source identification signal from a video signal comprising:

a low pass filter that receives a video input signal containing a source identification data signal;

a clock signal generator;

25 an analog to digital converter wherein said analog to digital converter receives said low passed video signal and said clock signal;

a matched filter wherein said matched filter detects said source identification data signal;

a sync word generator to generate a first sync word;

a storage and synchronization system to store said data
5 and synchronize a second sync word contained within said source identification signal so as to produce a readable source identification signal;

a register to store said readable source identification signal; and

10 a display device to display said source identification device.

11. An apparatus as in Claim 10, wherein said low pass filter has a cutoff frequency between 200 Hz and 1 Khz.

12. An apparatus as in claim 10, wherein said clock
15 signal has a clock frequency about four time a low pass cutoff frequency of said low pass filter.

13. An apparatus as in claim 10, wherein said sync word generator comprises a preprogrammed read only memory.

14. An apparatus as in Claim 10, wherein said sync word
20 generator comprises a user controlled keyboard or key pad.

15. An apparatus as in Claim 10, wherein said display is selected from the group consisting of an LED, LCD, a cathode ray display and an on screen insert to a video display device displaying said video signal.

25 16. An apparatus to incorporate source identification data into a video signal comprising:

means for processing a video signal;

means for generating a vertical triggering pulse;

means for providing source identification data;
means for providing a sync word;
means for blanking said sync word and source
identification data during video blanking intervals;
5 means for coupling said sync word and source
identification data to said video signal.

17. An apparatus for detecting a source identification
signal containing source identification data from a video
signal comprising:

10 means for low pass filtering said video signal;
means for converting said low passed video signal to a
digital signal;
means for generating a first sync word;
means for synchronizing said source identification signal
15 containing a second sync so as to provide source
identification data;
means for displaying said source identification data..

18. A method for incorporating source identification
information into motion picture film comprising the steps of:
20 generating source identification data;
generating a synchronizing word;
turning a bias light on and off that add increased
illumination to motion picture film using said source
identification data and synchronizing word.

25 19. An apparatus using the method as recited in Claim 18
wherein said apparatus is a film printer.

20. An apparatus using the method as recited in Claim 18 wherein said apparatus is a film projector.






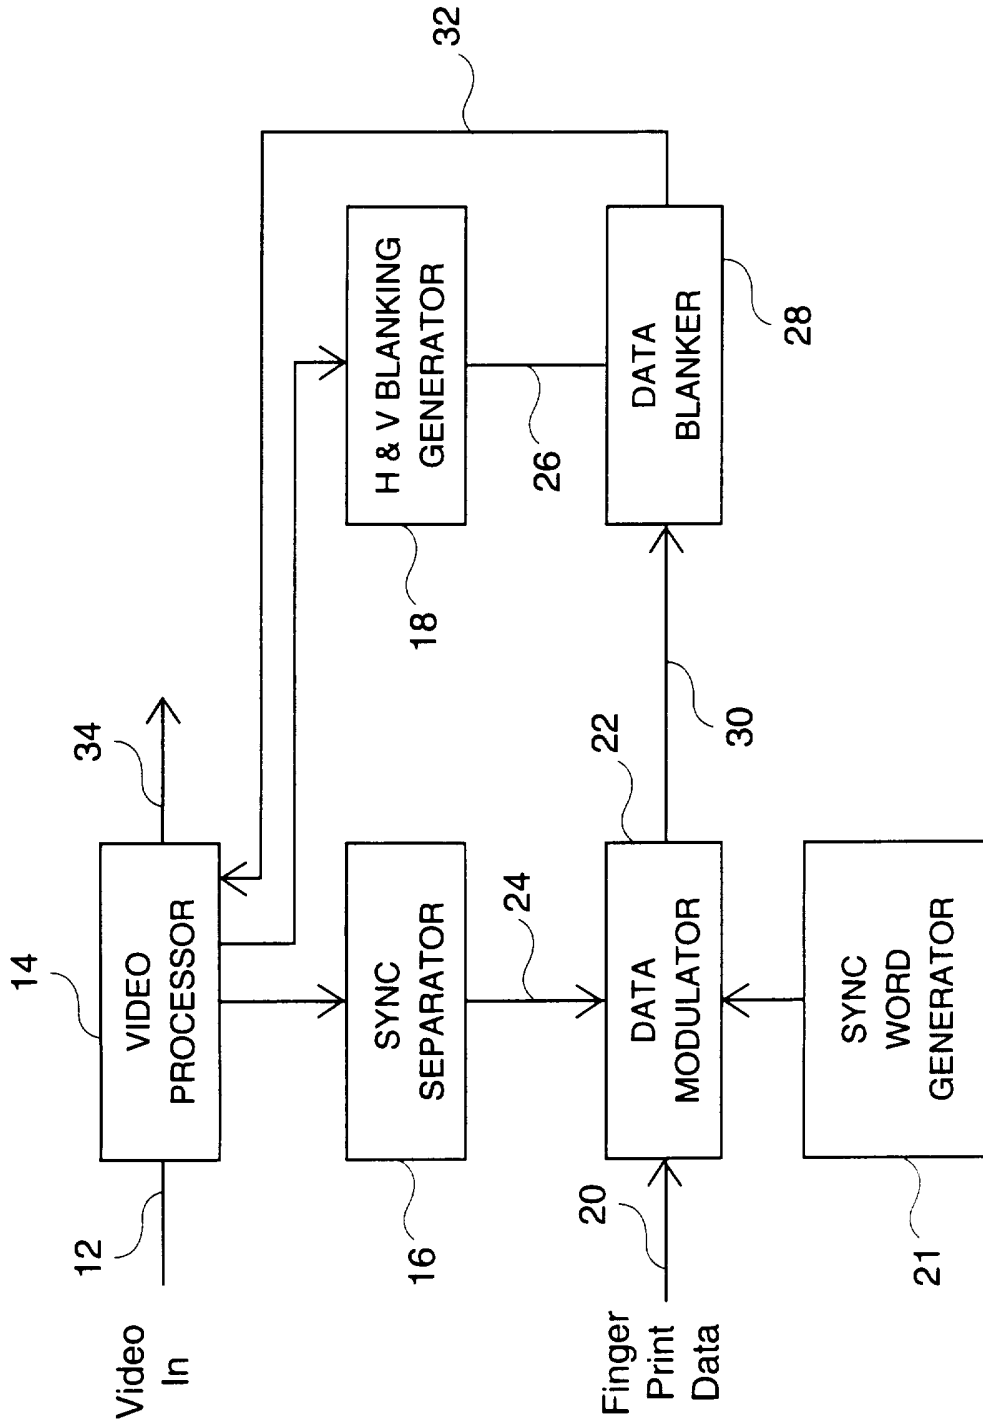


Fig 1

SYNC WORD = AC8Eh = 1010110010001110

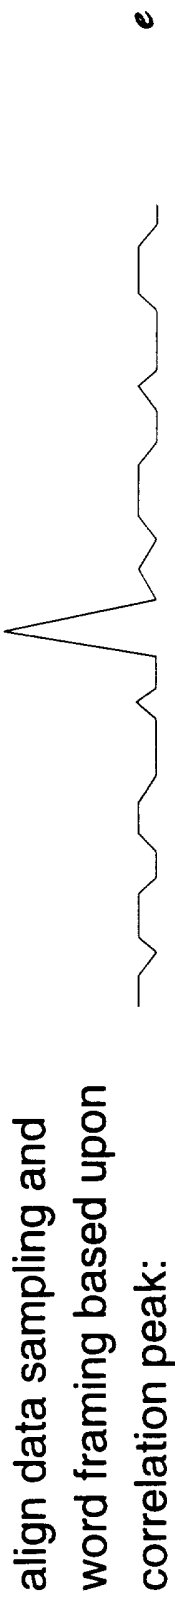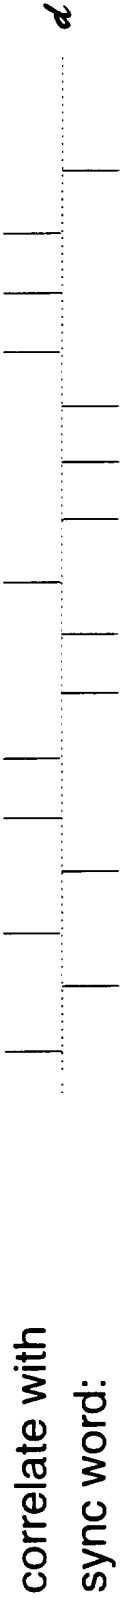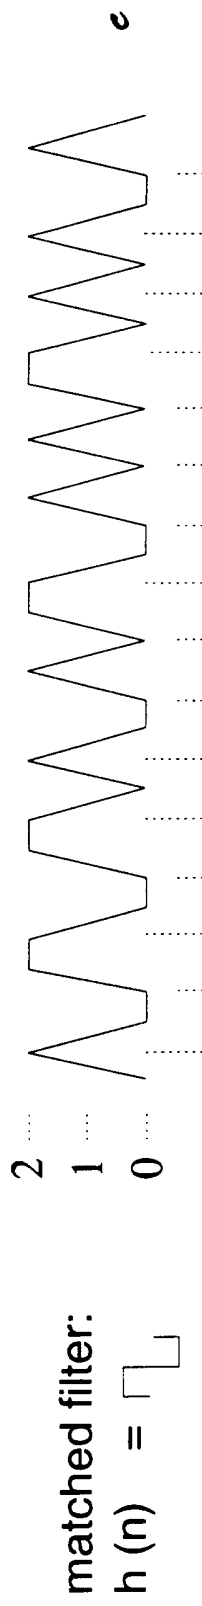

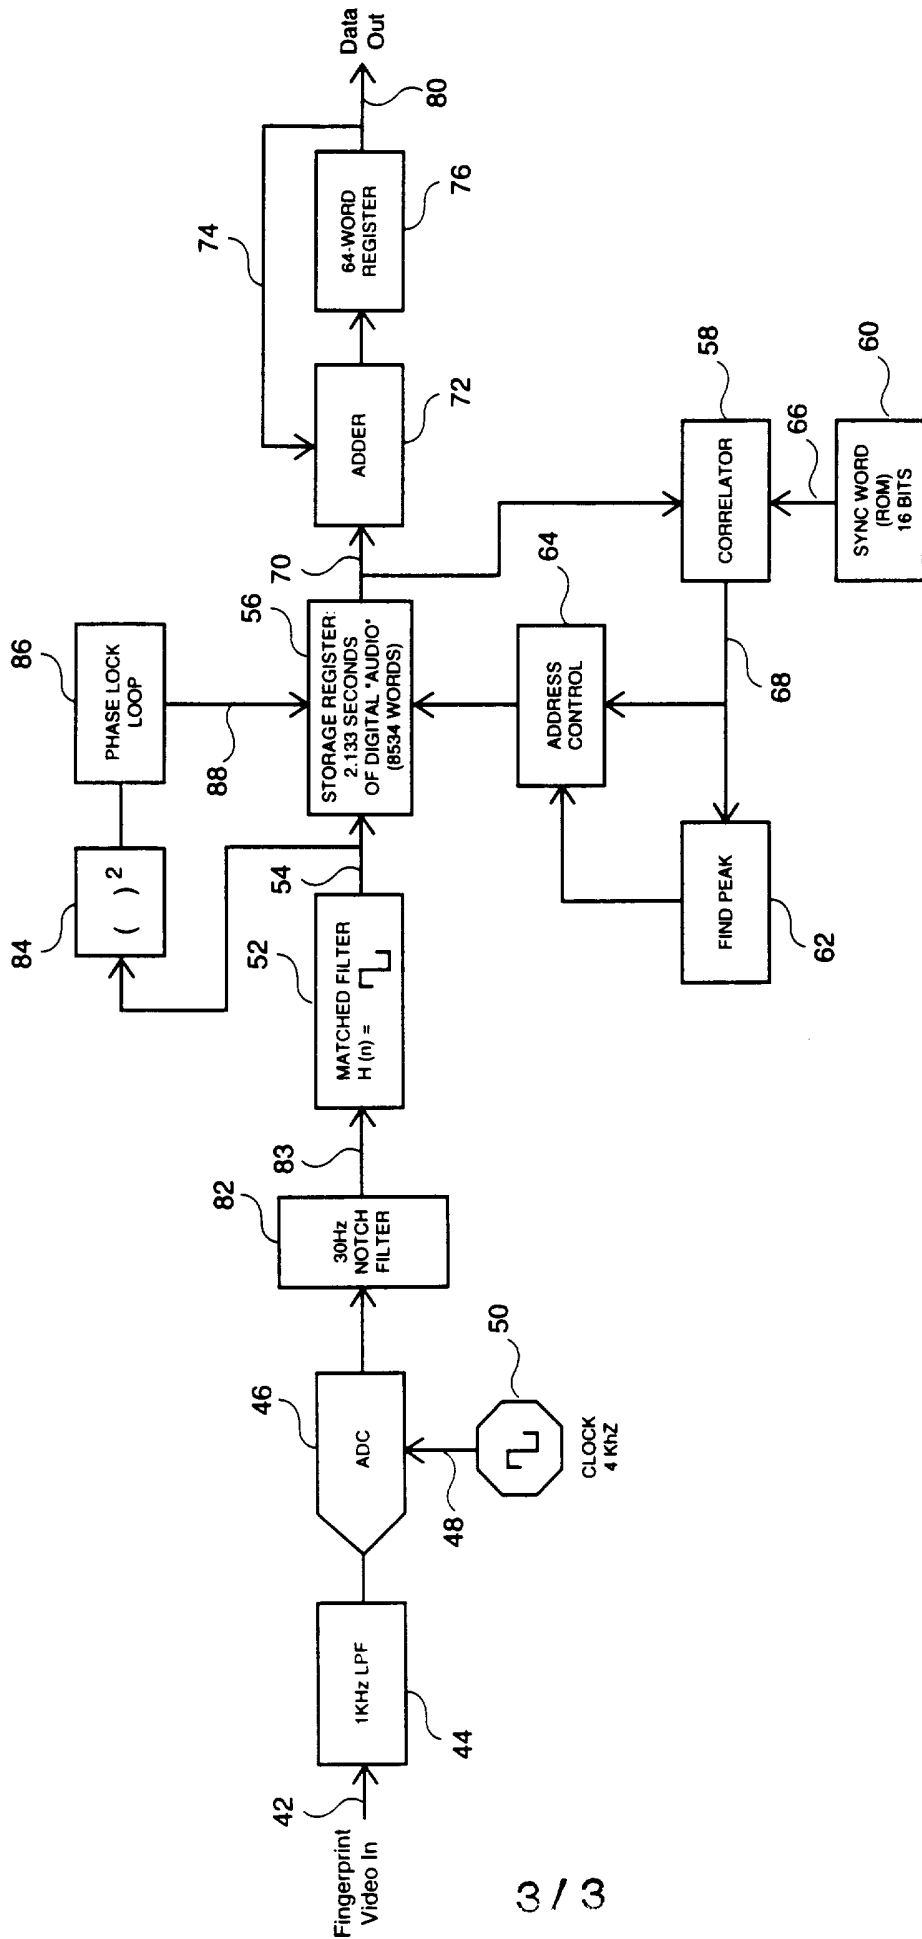

INTERNATIONAL SEARCH REPORT

Int. Application No.
PCT/US 95/10665

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04N7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	EP,A,0 107 567 (THOMSON CSF) 2 May 1984 see page 3, line 16 - page 7, line 31; figures see abstract ---	1-5, 16, 18 9, 10, 17
Y A	EP,A,0 041 121 (BLAUPUNKT WERKE GMBH) 9 December 1981 see abstract see page 5, line 1 - page 9, last paragraph ---	1-5, 16, 18
Y A	CH,A,627 034 (BARBEY PIERRE) 15 December 1981 see the whole document ---	18 1
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents:

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- '&' document member of the same patent family

Date of the actual completion of the international search

18 December 1995

Date of mailing of the international search report

- 4. 01. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Bosch, F

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 95/10665

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,2 165 129 (BRITISH BROADCASTING CORP) 3 April 1986 see abstract; figure 3 ---	1, 16, 18
A	US,A,3 848 082 (SUMMERS G) 12 November 1974 see abstract; figure 1 see column 2, line 38 - column 4, line 1 ---	1
A	US,A,4 807 031 (BROUGHTON ROBERT S ET AL) 21 February 1989 see abstract; figures -----	18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/US 95/10665
--

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0107567	02-05-84	FR-A- 2534433	13-04-84
EP-A-0041121	09-12-81	DE-A- 3020787 JP-A- 57024179	17-12-81 08-02-82
CH-A-627034	15-12-81	NONE	
GB-A-2165129	03-04-86	NONE	
US-A-3848082	12-11-74	DE-A- 2400889 JP-A- 49106220	18-07-74 08-10-74
US-A-4807031	21-02-89	AU-B- 615465 AU-B- 2084288 CA-A- 1323688 DE-D- 3886929 DE-T- 3886929 EP-A- 0346402 FI-B- 93916 GR-B- 1000173 GR-B- 1000595 HU-B- 209795 IE-B- 61641 IL-A- 88089 IL-A- 107233 IL-A- 107234 JP-T- 2501881 NO-B- 176230 OA-A- 9050 PT-B- 88800 PT-A- 100213 WO-A- 8904100	03-10-91 23-05-89 26-10-93 17-02-94 04-08-94 20-12-89 28-02-95 15-11-91 26-08-92 28-11-94 16-11-94 27-02-94 24-06-94 31-07-94 21-06-90 14-11-94 31-03-91 29-07-94 29-04-94 05-05-89