

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/072250 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2005/000192

(22) International Filing Date: 6 January 2005 (06.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/766,049 28 January 2004 (28.01.2004) US
10/789,756 27 February 2004 (27.02.2004) US

(71) Applicant (for all designated States except US):
WORCESTER POLYTECHNIC INSTITUTE
[US/US]; 100 Institute Road, Worcester, Massachusetts 01609 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LUDWIG, Reinhold**
[US/US]; c/o Worcester Polytechnic Institute, 100 Institute Road, Worcester, Massachusetts 01609 (US). **BOGDANOV, Gene** [US/US]; c/o Worcester Polytechnic Institute, 100 Institute Road, Worcester, Massachusetts 01609

(US). **OBI, Aghogho** [NG/US]; c/o Worcester Polytechnic Institute, 100 Institute Road, Worcester, Massachusetts 01609 (US).


(74) Agents: **COHEN, Jerry** et al.; Perkins, Smith & Cohen, LLP, One Beacon Street, Boston, MA 02108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: MULTI-MODAL RF COIL FOR MAGNETIC RESONANCE IMAGING

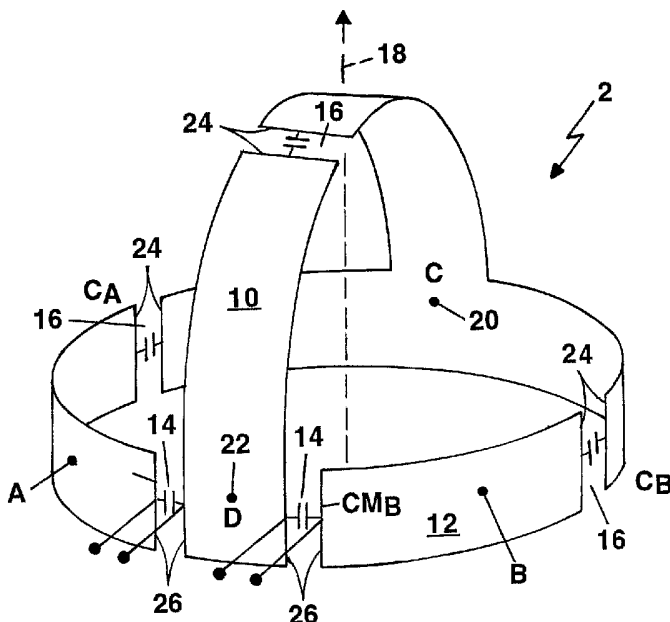

(57) Abstract: Multi-modal coils for coupling MRI RF signals from an anatomical region(s) to be imaged. The coil includes a segmented annular base ring conductor including a plurality of capacitances disposed between the segments, and at least one arcuate conductor symmetrically connected at each end to the base ring, one end terminating in direct contact with the base ring, the other end electrically connected to the base ring via two of the capacitive electrical connections. The RF coil is operable in multiple receiving modes in phase quadrature to establish a rotating magnetic field phasor orthogonal to the temporally constant uniform magnetic field of the magnetic resonance instrument. The RF coil can be combined with a second RF coil to simultaneously image two anatomical regions.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

Multi-Modal RF Coil For Magnetic Resonance Imaging

Field of the Invention

This invention relates generally to magnetic resonance imaging RF coils, and, more particularly, to the imaging of an anatomical region of interest, such as the human female breast, for the purpose of early detection of cancerous growths and lesions.

Background of the Invention

In the U.S. alone, breast cancer is the second leading cause of female cancer mortality. Each year breast cancer strikes more than 200,000 U.S. women and results in the deaths of approximately 40,000. Early detection is the key to saving lives and reducing the cost of treating breast cancer. The American Cancer Society reports that 96% of all women survive breast cancer when it is detected in its early stages; however, one in four is unlikely to survive with late detection (1). The average cost of treating early breast cancer today is estimated to be between \$10,000 and \$15,000, while late stage treatments average more than \$100,000. Magnetic resonance imaging (MRI) is a widely used clinical soft-tissue diagnosis tool that has enjoyed significant success. However, commercially available whole-body imaging systems with large encircling coils are less efficient when the goal is to obtain detailed, high-resolution images from a localized area such as the female breast. Researchers have recognized these limitations and have developed a number of specialized designs, mostly related to breast-encircling coils, such as illustrated generically in Figure 1. A good example of the present state-of-the-art in RF coil development is encapsulated in the patent US 6,023,166 (Feb. 8, 2000) issued to Greg Eydelman of Fonar Corporation. Eydelman built a system consisting of a primary RF coil encircling the entire human chest and two secondary (two winding) RF coils fitted over each breast.

Additional single loop (US 5,646,530, Diagnostic Instruments, July 8, 1997) or array coil (US 6,493,572, Toshiba, Dec. 10, 2002) configurations have been proposed. Particularly the array coil concept attempts to capitalize on the use of multiple receiver channels to improve signal-to-noise ratio. Unfortunately, these multi-loop coil configurations are less efficient due to their fixed wire arrangement; they typically cover

only a small region of interest (ROI) in the center of the breast and leave critical areas near the breast bone insufficiently covered.

There exists, therefore, a need to provide an anatomically shaped coil that covers the entire extent of a ROI, such as a breast volume, which is better suited to detect the early onset of cancer, for instance by being more sensitive to the increased water content associated with malignancy. A high signal-to-noise ratio (SNR) RF coil may provide sufficient sensitivity to yield a detectable response in localized increases in blood volume present during angiogenic activity observed in early tumor growth.

Summary Of The Invention

The needs for the invention set forth above as well as further and other needs and advantages of the present invention are achieved by the embodiments of the invention described hereinbelow.

The present invention is directed to a single or dual set of multi-modal radio frequency (RF) coils for use in a magnetic resonance (MR) imaging system. Each RF coil is dimensioned so as to receive an anatomical region of interest to be imaged, such as a human breast. Each RF coil functions in at least two modes operated in phase quadrature. In a RF quadrature detection configuration, pairs of MR signals are processed and combined to obtain one combined MR signal having a better signal-to-noise ratio than either of the single signals from the individual RF coil channels of the configuration.

In one embodiment, the RF coil is comprised of a segmented annular base ring conductor, a plurality of capacitive electrical connections (e.g., fixed and/or tunable capacitors) disposed between the segments of the base ring, and at least one arcuate conducting strap having one end in direct electrical contact with the base ring and another end electrically connected to the base ring through two of the capacitive electrical connections (e.g., one or more fixed and/or tunable capacitors.) The ends of each strap terminate at spatially distinct positions along the base ring, symmetrically disposed with respect to an imaginary central axis of the base ring. Some of the capacitances employed may serve to tune the RF coil to a desired resonance frequency and/or match the coil's

impedance to one or more transmission lines for interfacing the coil with the single- or multi-channel receiver electronics of the MR instrument with which the RF coil is utilized.

The term "arcuate" as used herein, encompasses a variety of geometrical shapes having appropriate dimensions to receive the anatomical region of interest. Any suitable
5 conductor may be used in forming segments of the base ring and strap, but preferably microstrip lines are employed.

In alternative embodiments described below, a single strap or multiple straps are operated in multiple receiving (or transmitting) modes in order to establish a rotating magnetic field phasor orthogonal to the main magnetic field created by the MR instrument
10 in which the RF coil is utilized.

In a single-strap embodiment of the RF coil, a first of two modes is established by current flowing circularly through the annular base ring, and a second mode is established by a 90° phase shifted current flowing through the strap and evenly branching between two halves of the annular base ring. Each strap is preferably composed of multiple
15 conductor segments electrically connected to one another by capacitive electrical connections (e.g., one or more fixed and/or tunable capacitors) whose reactances compensate the coil's inherent inductive reactance at a resonant frequency. These capacitances also serve to reduce eddy currents induced in the conductors by the switching gradient field.

20 As described below, electrical ports of the RF coil may be configured to interface with a plurality of standard transmission lines (i.e., coaxial cables) for conveying signals to a single or multi-channel receiver amplifier of the MR instrument, or may be adapted with hybridizing components to reduce the number of transmission lines required to achieve the interface.

25 In another embodiment of the present invention, two multi-modal RF coils are disposed with their respective segmented annular base rings so as to enable simultaneous imaging of two anatomical regions, such as two breasts of a patient.

Brief Description of the Figures of the Drawing

For a better understanding of the present invention, together with other and further objects thereof, reference is made to the accompanying drawing and detailed description, wherein:

5 **Figure 1** is an illustration of a prior art RF coil configured for pendant use in magnetic resonance imaging of a human breast;

Figure 2 is a side view illustration of a generic cup-shaped RF coil positioned proximate a female breast;

Figure 3 is an illustration of a single-strap RF cup-coil showing the approximate,
10 relative positioning of electrical components thereof;

Figures 4A, 4B are illustrations of single-strap embodiments of the RF cup-coil indicating two modes (Mode_0 , Mode_1) of operation possible for magnetic resonance imaging;

Figure 4C is an illustration of the combined magnetic field vector B_{RF} produced
15 by the individual magnetic fields associated with Mode_0 and Mode_1 ;

Figure 5 is an illustration of a three-strap embodiment of the RF cup-coil of the present invention;

Figure 6A is a schematic of the equivalent electronic circuit of the single-strap RF cup-coil;

20 **Figure 6B** is a schematic of the equivalent electronic circuit of the single-strap RF cup-coil populated with standard capacitors;

Figure 7A is a graphical plot of the magnitude of the reflection coefficient versus frequency showing the resonances associated with Mode_0 and Mode_1 in an untuned state;

Figure 7B is a graphical plot of the magnitude of the reflection coefficient versus
25 frequency showing Mode_0 and Mode_1 combined and tuned to 63.87 MHz, ;

Figure 8 is a schematic circuit diagram illustrating electrical components utilized in an optional RF coil interface circuit for dual-mode coils; and

Figure 9 is an illustration of a dual coil, single-strap RF coil configuration equipped with shielding disposed between the coils.

Detailed Description of Preferred Embodiments of The Invention

With reference to **Figure 2**, the present invention is directed to a single or dual set of radio frequency (RF) cup-coils **2** configured to receive an anatomical region of interest, such as human breast(s) **4**, and to function in at least two receiving modes operated in quadrature configurations. The cup-coil **2** is illustrated in an pendant configuration within the bore **9** of a conventional MRI scanner, but the cup-coil can also be operated in a vertical position. The principles of operation of conventional MRI systems are well understood. (see, for example, U.S. Patent No. 5,363,845 incorporated herein by reference) Generally speaking, a static uniform magnetic field B_0 **8** is applied to an object to be imaged to align the object's nuclear spins along the direction of the magnetic field B_0 . Then so-called gradient coils **7** arranged cylindrically with respect to the static uniform field generate a magnetic field gradient that allows spatial slice selection. An RF coil tuned to the resonance frequency of the nuclei in the slice, upon being driven by a transmit signal, allows for reorientation of the nuclei. The same RF coil, or a special receive coil, subsequently records the relaxation process of the nuclei. The processing of multiple receive signals results in the formation of an image of the particular slice of the anatomical region.

Figure 3 schematically illustrates a single-strap embodiment of a RF cup-coil **2**, wherein an arcuate strap **10** is connected to a base ring **12** and passes through an imaginary central axis **18** of the base ring **12**. As noted above, the term "arcuate" is meant to encompass non-hemispherical shapes such as, for example, rectangles, ellipses, parabolas, or other shapes. Strap **10** is directly connected to base ring **12** at one end at point C **20**, and electrically connected to base ring **12** through tuning capacitors C_{MA} , C_{MB} **14** bridging the gaps **26** between its other end (point D **22**) and two segments of base ring **12**. The strap **10** and base ring **12** can be implemented with microstrip conductor lines (e.g., copper) or any other conducting material, and are dimensioned so as to receive the anatomical region of interest (e.g., a human breast.) The capacitors C_A , C_B , C_C **16** and the inherent inductances L_1 , L_2 , L_3 of the segments of microstrip lines form a resonance system that can be tuned to a particular resonance frequency based on the requirement of

the main magnet system of the magnetic resonance (MR) instrument. In order to tune the cup-coil 2 efficiently, fixed and tunable capacitors C_A , C_B , C_C 16 are deployed at strategically selected cuts 24 in the microstrip segments comprising strap 10 and base ring 12. The selection and adjustment of tuning capacitors C_{MA} , C_{MB} 14 is based upon the resonance requirement of the cup-coil at a desired frequency. For instance, the capacitors C_{MA} , C_{MB} 14 can be adjusted such that a resonance frequency of 63.87MHz is achieved, consistent with a 1.5T main magnetic field of a MR system for proton imaging. Other magnetic field strengths can be implemented, such as 3T and higher. Capacitors C_A , C_B , C_C 16 can be selected and/or adjusted such that their reactances compensate the inherent inductive reactances of the cup coil the cup-coil 2, and such that together with the microstrip inductances L_1 , L_2 , and L_3 , the desired resonance frequency is obtained. They also reduce eddy currents that would result as a consequence of the switching gradients of the MR system. The reactance associated with capacitor C_3 should be chosen such that it compensates for the inductance associated the inductance L_3 of the upper strap.

Figures 4A and 4B illustrate, respectively, the two modes (Mode₀, Mode₁) of operation available in the single-strap RF cup-coil 2 and the magnetic fields associated therewith. In Mode₀, no current flows through strap 10 while a current I 26 induced in the base ring 12 by the magnetic flux density travels around the annular base ring 12 along current path A-C-B-D. In Mode₁, a 90° phase shifted current $2I$ 30 is induced in the strap 10 and is divided symmetrically into two currents I 32 between two halves of the base ring 12 (or vice versa) along current paths D-A-C and D-B-C respectively. The superposition of the modes establishes a rotating magnetic field phasor B_{RF} 6 (shown in **Figure 4C**) orthogonal to the uniform static uniform field B_0 8 (shown in **Figure 2**) of the MR instrument.

In alternative embodiments, multiple straps may be employed for a greater number of operating modes. For example, **Figure 5** illustrates a three-strap, six-port, embodiment 34 of the RF cup-coil that encompasses a higher number than two operating modes, and enables thus more controlled coverage in comparison to the single-strap embodiment. In multi-strap embodiments, each strap 36 is substantially parallel to and spaced-apart from each other's strap by a fixed distance 38, symmetrically disposed with respect to the

central axis **18** of the base ring **12**. Although not depicted for simplicity, each strap **36** is connected to the base ring conductor **12** as is the strap in the single-strap embodiment, *i.e.*, directly on one end and electrically through a bridging capacitor on the other. Additionally, each strap **36** is comprised of multiple, electrically connected segments of conductors, preferably microstrip lines. The capacitors disposed in the gaps between the conductor segments comprising each strap **36** must similarly be selected to create resonance conditions with the inductance of that strap.

Figure 6A presents an electronic equivalent circuit **40** of the single-strap RF cup coil **2** depicted in **Figure 3**. Nodes A-D in circuit **40** correspond to the identically labeled points in the schematic model of the cup-coil **2** shown in **Figure 3**. Electrical losses in the cup-coil **2** are represented in the model circuit by resistors R_1 through R_3 . The operational and dimensional specifications of a single-strap RF cup-coil implemented using standard fixed and variable capacitors on a dielectric "former" are reflected in **Figure 6B** and in **Table One** and **Table Two**. Specifically, the resonance of 63.87MHz was selected to be compatible with the static field strength of a 1.5T magnetic resonance system for proton imaging. However, by changing the coil geometry and the lumped element capacitor values, other frequencies corresponding to higher field strengths, such as 3 and 4T, can readily be realized. The quality factor, as a division of the magnetic resonance frequency over the 3 dB bandwidth, is recorded for an empty or unloaded coil and can deviate from the listed number by a wide margin depending on losses associated with the deployed capacitors and former materials among other factors. Those skilled in the art will readily appreciate that the details provided are in no sense limiting, as the operational characteristics are easily changed to accommodate the anatomical region of interest to be imaged and/or the resonance frequency desired. For example, the coil diameter has been increased to 250mm in other implementations of the cup-coil.

<u>Capacitor Value</u>	<u>Manufacturer</u>	<u>Part No.</u>
1-40 pF trimmer	Voltronics	NMP40M
10 pF ($\pm$ 5%)	Voltronics	V205 100J
47 pF ($\pm$ 5%)	Voltronics	V205 470J
100 pF ($\pm$ 5%)	Voltronics	V205 200

Table One

	<u>Parameter</u>	<u>Values</u>
	Coil diameter	200.0 mm
	Coil Width (strip width)	40.0 mm
5	Former outer diameter	200.0 mm
	Former inner diameter	187.3 mm
	Former material	cast acrylic
	Former height	40.0 mm
	Thickness copper strips	38 μ m
10	Operating frequency	63.87 Mhz
	Quality Factor (unloaded Q)	158.35
	3 dB bandwidth	0.40 MHz

Table Two

Additional cup-coil design choices that may optimize the signal-to-noise ratio and homogeneity include the number of straps employed, the length and shape of the strap(s) (alternate shapes, such as, for example more rectangular geometries, are deemed to fall within the definition of the term "arcuate" as used herein), and the dimensions of the base ring. The values of the capacitors in the example were selected based upon the values of the calculated inductances L_1 , L_2 , L_3 and the desired operating frequency of 63.87 Mhz.

The magnitude of the reflection coefficient S11 versus frequency shown in **Figure 7A** (recorded with a HP 8345 network analyzer) demonstrates that an untuned single-strap RF coil **2** includes two modes **42**, **44**. **Figure 7B** demonstrates that the cup coil **2** can be tuned and matched to a selected resonance frequency **46**. Through appropriate selection of capacitor values C_A , C_B , C_C **16**, different resonance frequencies can be achieved.

With reference to **Figure 8**, the cup-coil **2** may be interfaced through standard cabling and a single or multi-channel receiver amplifier to existing clinical MR instruments, such as manufactured by GE, SIEMENS, TOSHIBA, and others. The induced receiver current may be picked up by two standard coaxial cables (not shown) at ports **48** and **50** formed at the gaps **26** between strap **10** and base ring **12**. Tuning capacitors C_{MA} , C_{MB} **14** and one or more matching capacitors match the cup-coil impedance to the desired transmission cable impedance(s) (e.g., 50 Ω .) Alternatively, the induced currents picked up at ports **48**, **50** can be adapted for a single transmission line interface by combination with a 180° quadrature hybrid **52**, two optional pre-amplifiers **52**, and a 90° quadrature hybrid **56**.

With reference to **Figure 9**, two RF cup-coils **2** may be used and arranged with their respective base rings **12** in order to simultaneously image both breasts of a patient. Mutual electromagnetic interference between the coils **2** may be minimized by positioning segmented conductive foil as shielding **54** between them, or by carefully controlling the operational timing of the coils. Furthermore, interference between conventional RF transmitter coils and the single or dual RF cup-coil **2** can be minimized by employing an active tune, de-tune circuit (not shown.) Specifically, so-called PIN diodes can be connected in shunt with one or multiple capacitors of the cup-shaped coil. These PIN diodes receive a static bias voltage signal such that when biased in reverse direction, a high ohmic state exists at resonance, *i.e.*, the PIN diodes do not affect the operation of the RF cup-coil(s). However, if the static bias voltage signal is applied in forward direction, a low ohmic state exists at resonance, *i.e.*, the PIN diodes provide a low impedance bypass of the associated capacitors, thereby shifting the RF coil's frequency away from the original resonance frequency. As a result, during transmission of RF energy into the biological load, the RF coil will not cause undesired interference. Additional quadrature hybrid combiners are optionally employed to interface both RF coils to a single-channel receiver amplifier.

Although the invention has been described with respect to various embodiments, it should be realized that this invention is also capable of a wide variety of further and other embodiments within the spirit and scope of the appended claims.

We claim:

1. A multi-modal RF coil capable of being used within an MRI system, comprising:

a segmented annular base ring conductor having a central axis;

- 5 a plurality of capacitive electrical connections disposed between segments of the segmented annular base ring conductor;

at least one arcuate conductor symmetrically disposed with respect to the central axis of the base ring conductor and having two ends, one end
10 terminating in direct contact with the base ring conductor, the other end electrically connected to the base ring conductor via at least two of the plurality of capacitive electrical connections at a spatially distinct position along the base ring conductor.

- 15 2. The multi-modal RF coil of claim 1, wherein:

the at least one arcuate conductor comprises a single arcuate conductor; and
the RF coil being operable in two modes in phase quadrature to establish a rotating magnetic field phasor orthogonal to a temporally constant uniform
20 magnetic field generated by the MRI system.

3. The multi-modal RF coil of claim 2, wherein:

the base ring conductor is capable of establishing a first of the two modes as
25 a result of current flowing circularly through the annular base ring conductor; and

a second of the two modes is established by 90° phase shifted current flowing through the arcuate conductor and split between two halves of the
30 annular base ring conductor.

4. The multi-modal RF coil of claim 1, wherein:

the at least one arcuate conductor comprises a plurality of arcuate
conductors symmetrically disposed with respect to the central axis of the
base ring conductor; and

the RF coil is operable in a plurality of modes in phase quadrature to
establish a rotating magnetic field phasor orthogonal to a temporally
constant uniform magnetic field generated by the MRI system.

5. The multi-modal RF coil of claim 1, wherein the at least one arcuate conductor
defines a selected cut in an anatomical region to be imaged by the MRI system.

6. The multi-modal RF coil of claim 1, wherein the base ring conductor is comprised
of a plurality of microstrip line segments.

7. The multi-modal RF coil of claim 1, wherein the at least one arcuate conductor is
comprised of a plurality of microstrip line segments.

8. The multi-modal RF coil of claim 1, wherein the at least one arcuate conductor
further comprises conducting segments and at least one tunable capacitive electrical
connection disposed in a gap between the conducting segments for establishing resonance
with the inherent coil inductance at the target frequency.

9. The multi-modal RF coil of claim 1, wherein one or more of the plurality of
capacitive electrical connections operate so as to tune the RF coil.

10. The multi-modal RF coil of claim 1, wherein at least one of the reactances
associated with the plurality of capacitive electrical connections compensates some or all
of the inherent coil inductive reactance at the resonant frequency.

11. The multi-modal RF coil of claim 1, wherein at least one of the plurality of capacitive electrical connections match the impedance of transmission lines for connecting the RF coil to receiving electronics.
- 5 12. The multi-modal RF coil of claim 1, wherein the RF coil is dimensioned so as to receive a human breast.
13. The multi-modal RF coil of claim 1, further comprising:
two electrical ports for accessing electrical signals induced in the RF coil;
10 and
means for modifying the accessed electrical signals to interface with a single or multi-channel receiver amplifier.
14. A pair of multi-modal RF coils of the type set forth in claim 1, and wherein the
15 pair of RF coils are disposed in a manner so as to enable imaging of two anatomical regions by the MRI system.
15. The pair of multi-modal RF coils of claim 14, wherein the two anatomical regions comprise a pair of human breasts.
- 20 16. The pair of multi-modal RF coils of claim 14, further comprising:
two pairs of electrical ports, each pair of electrical ports capable of
accessing electrical signals induced in one of the multi-modal RF coils.
- 25 17. The pair of multi-modal RF coils of claim 16, further comprising means for modifying the accessed electrical signals to interface with a single-channel receiver amplifier.
18. The pair of multi-modal RF coils of claim 14, further comprising shielding disposed
30 between the pair of multi-modal RF coils.

19. The multi-modal RF coil of claim 1, further comprising one or more PIN diodes arranged in shunt with the plurality of capacitive electrical connections, the diodes being switchable between high and low impedance states that are capable of operating at a resonant frequency so as to actively tune or de-tune the RF coil.

5

20. An MRI system, including:

a main magnet component providing a temporally constant and uniform magnetic field;

at least one gradient coil producing a pulsed, linear field gradient;

10

at least one RF coil acting as a transmitter;

at least one multi-modal RF coil comprising


a segmented annular base ring conductor having a central axis,

a plurality of capacitive electrical connections disposed between segments of the segmented annular base ring conductor, and

15

at least one arcuate conductor symmetrically disposed with respect to the central axis of the base ring conductor and having two ends, one end terminating in direct contact with the base ring conductor, the other end electrically connected to the base ring conductor via at least two of the plurality of capacitive electrical connections at a spatially distinct position along the base ring conductor; and electronics for transmitting and receiving electrical signals from the at least one multi-modal RF coil.

20

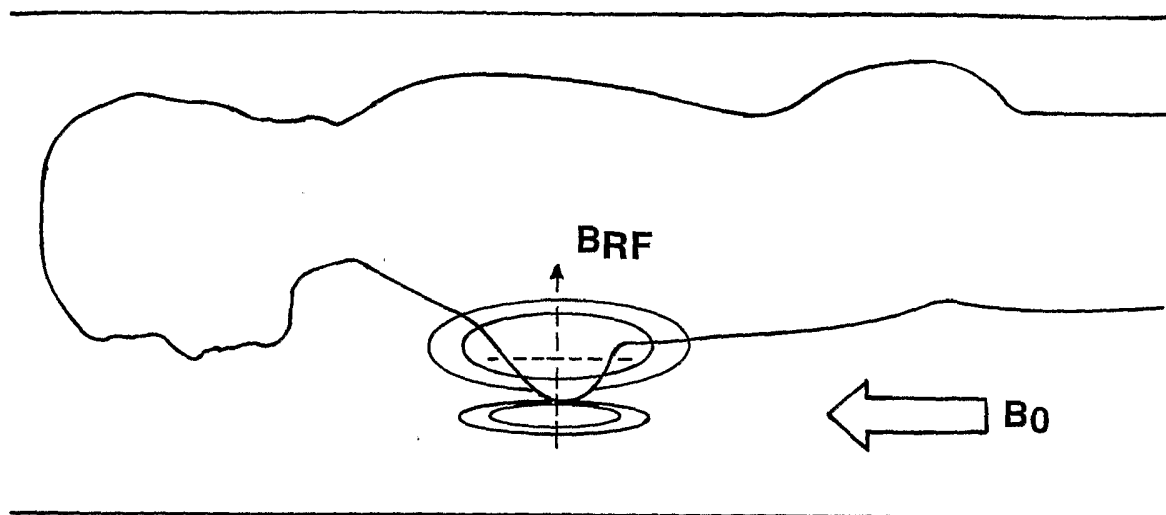

LOCALIZED DUAL-LOOP RF COIL FOR BREAST CANCER IMAGING

Figure 1 PRIOR ART

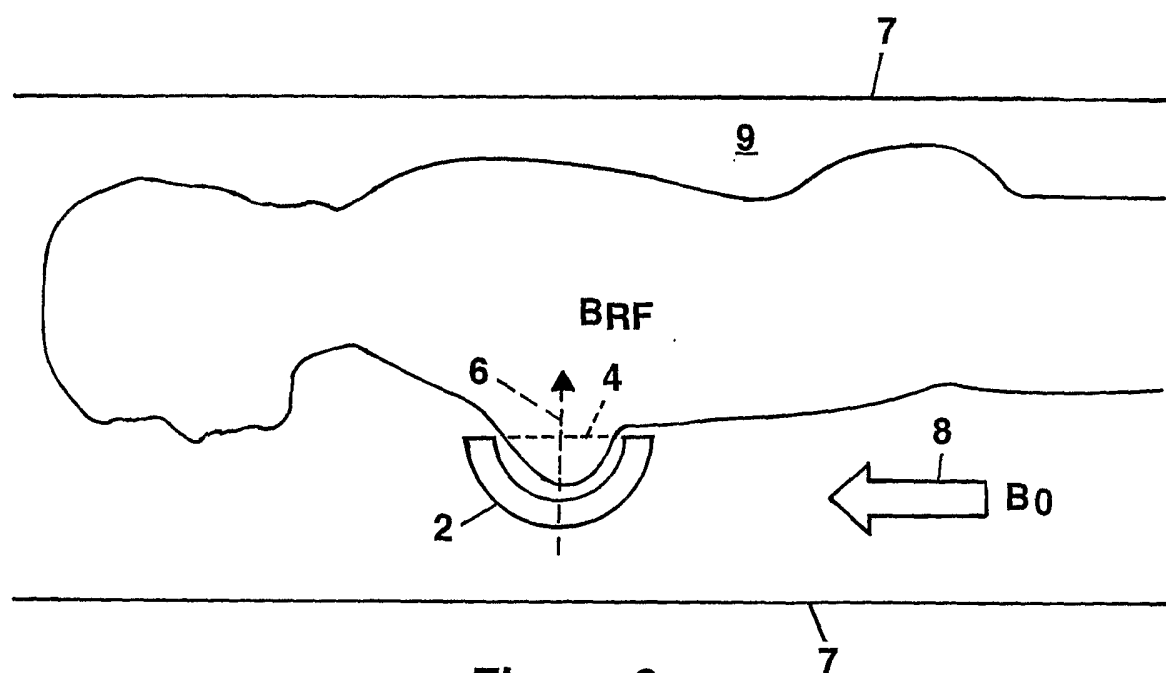


Figure 2

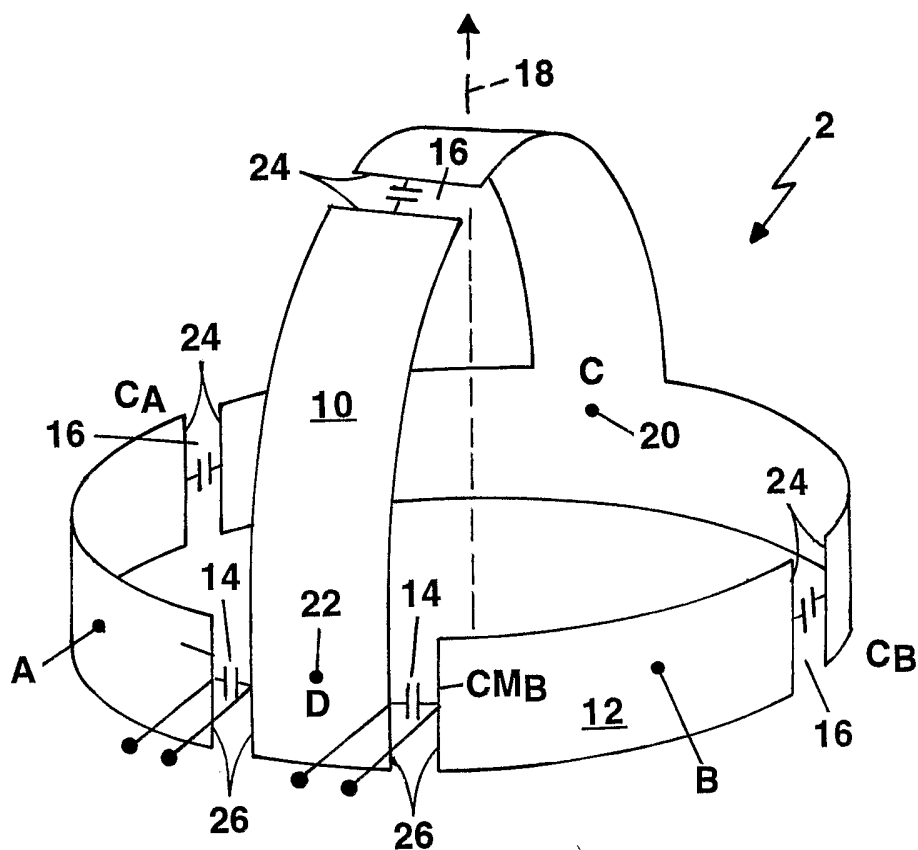


Figure 3

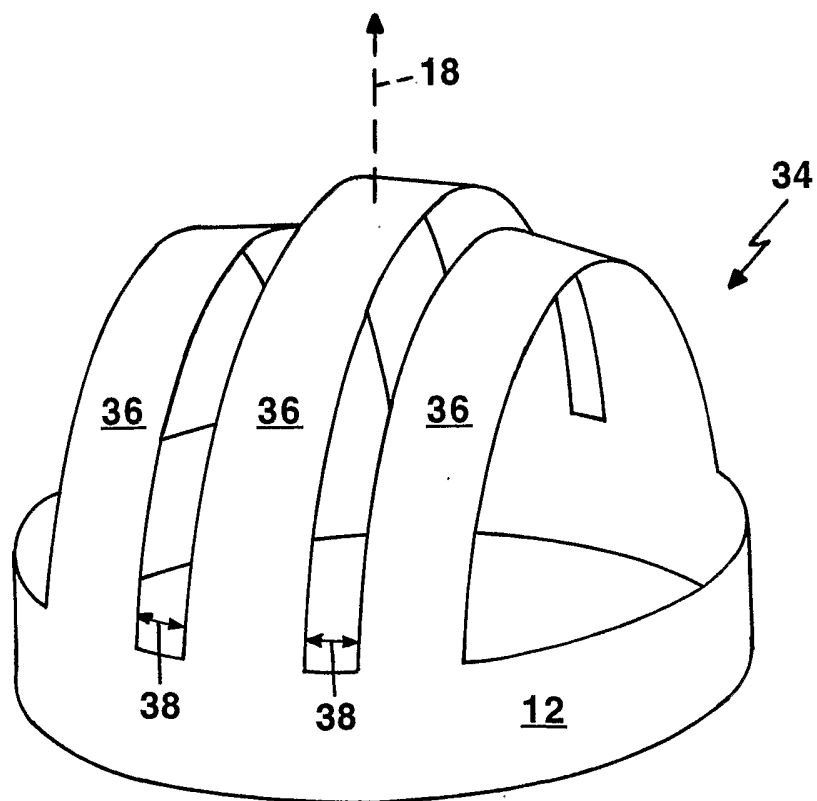


Figure 5

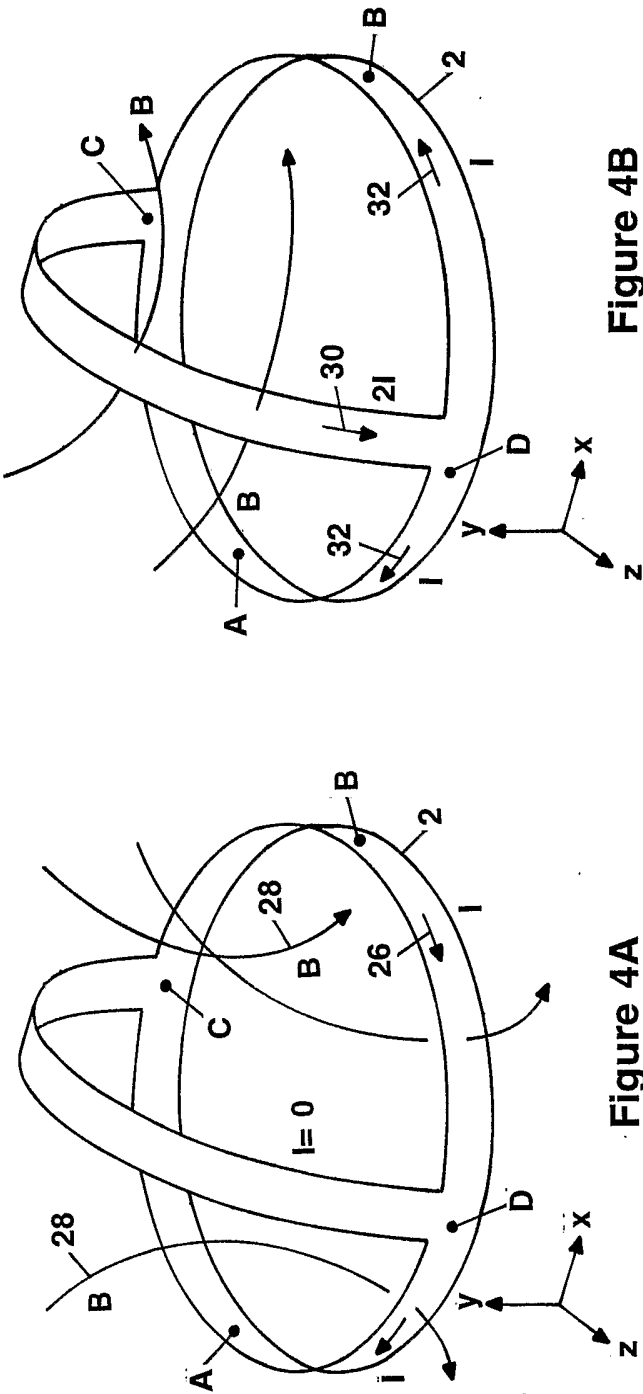


Figure 4B
MODE 1

Figure 4A
MODE 0

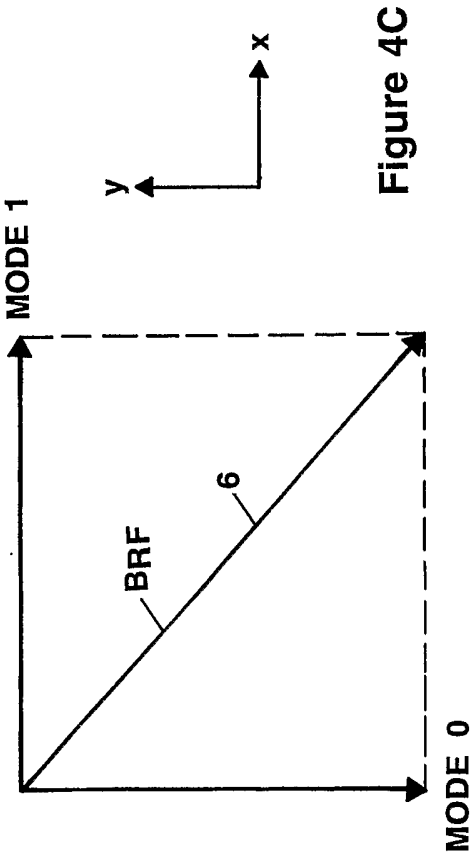


Figure 4C

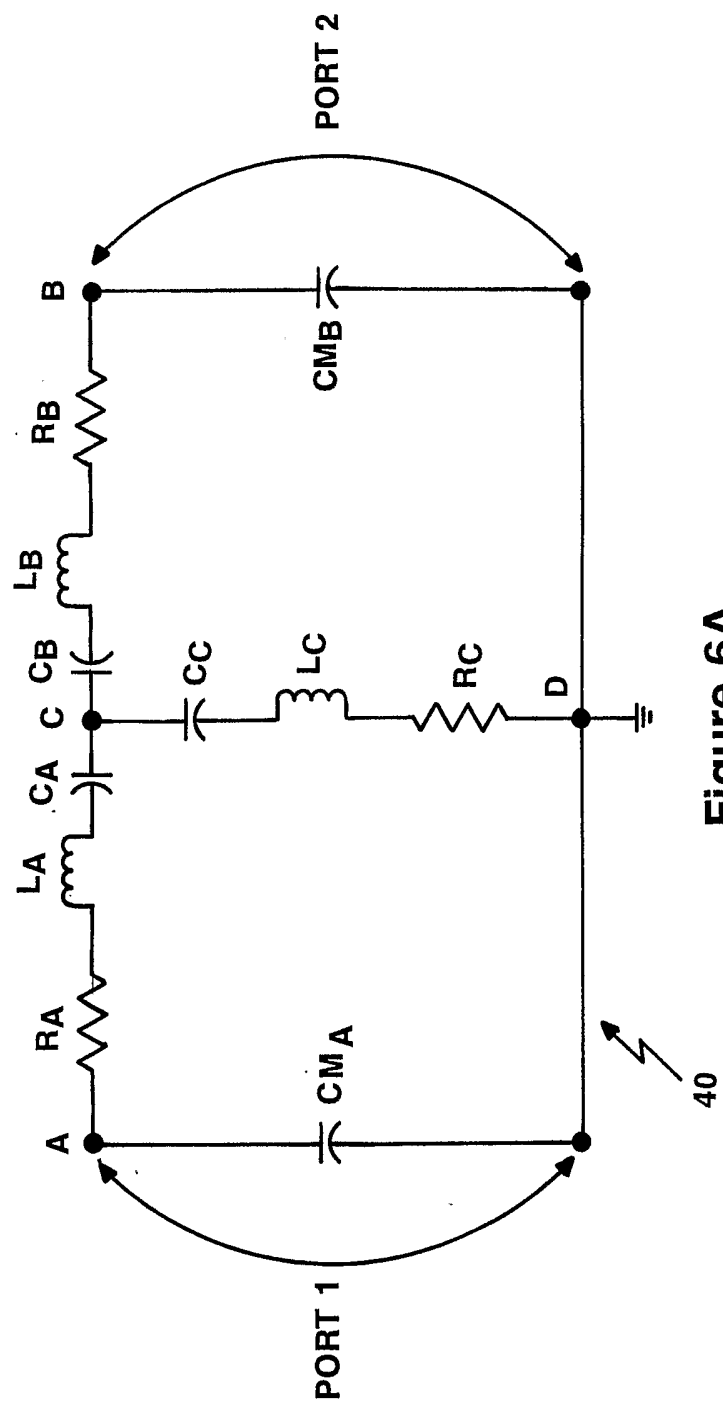


Figure 6A

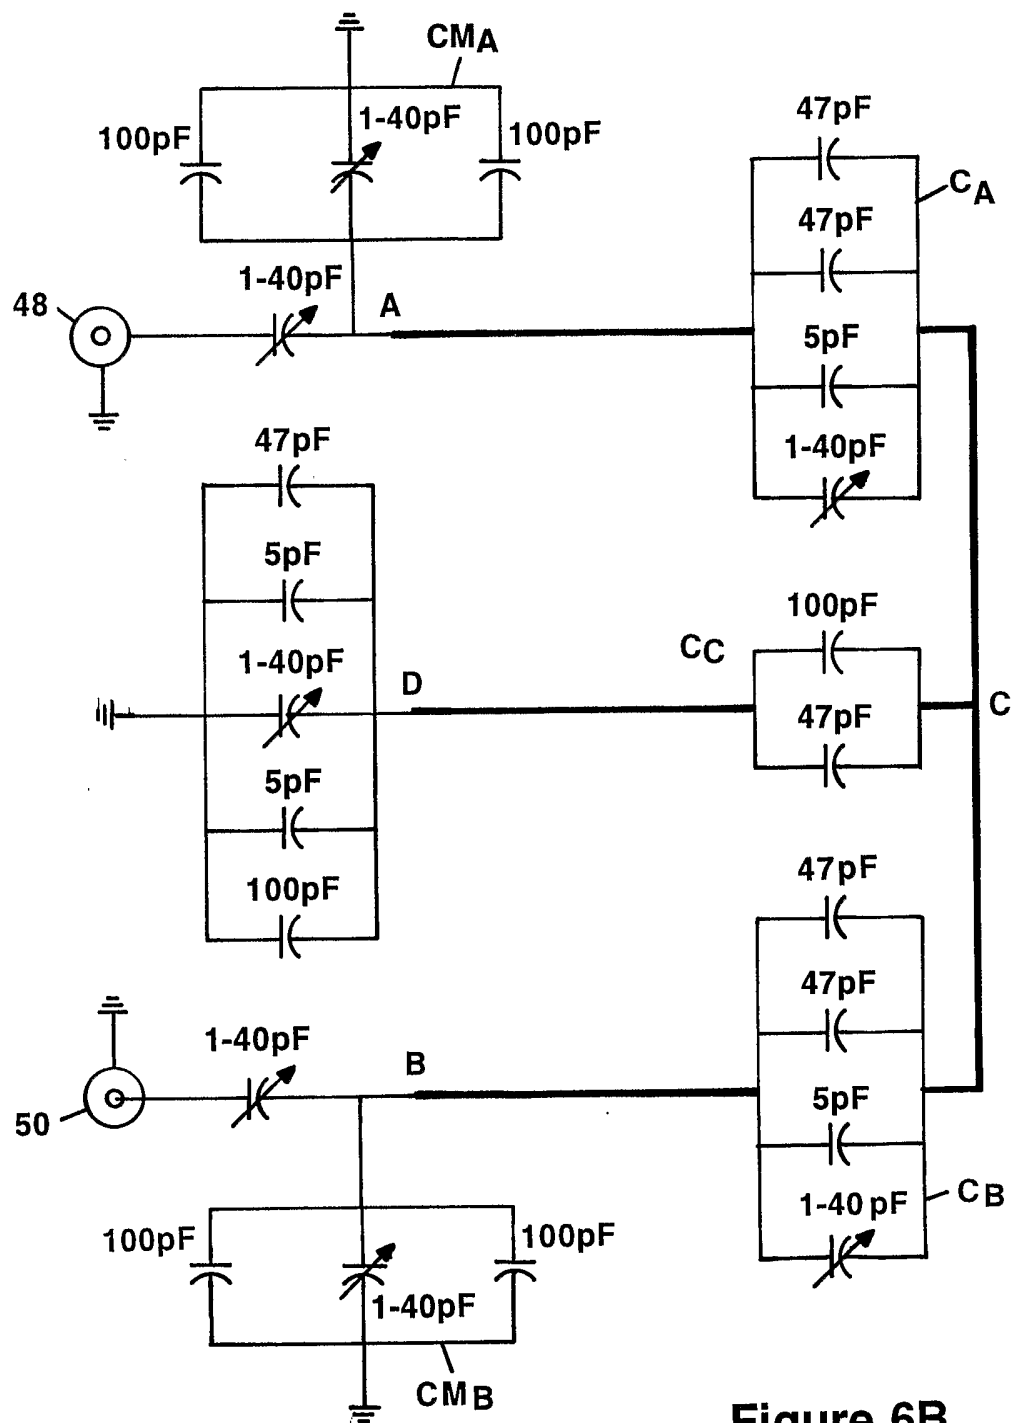


Figure 6B

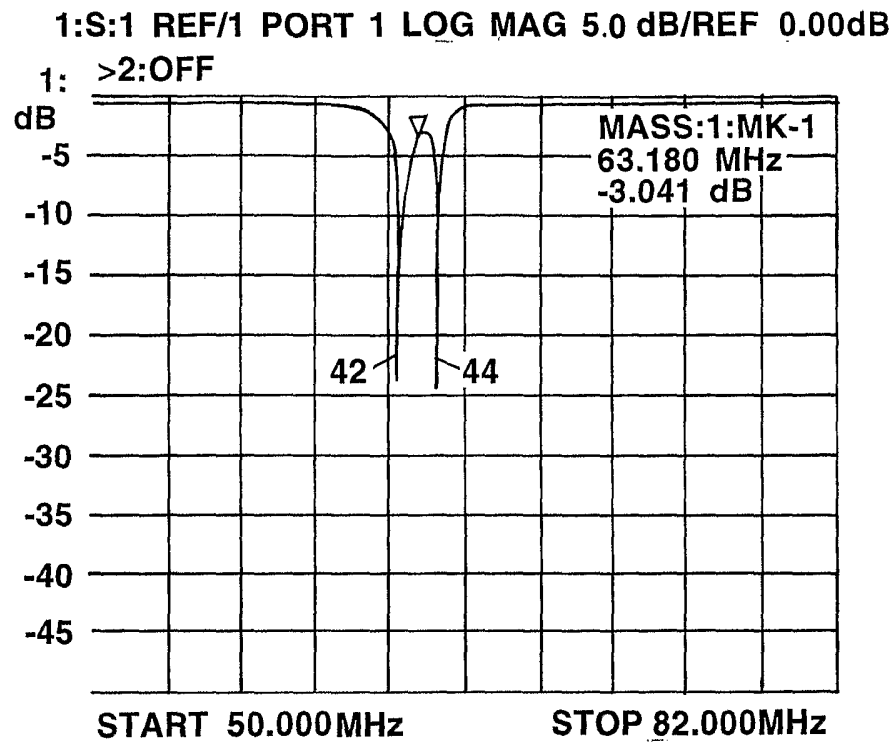


Figure 7A

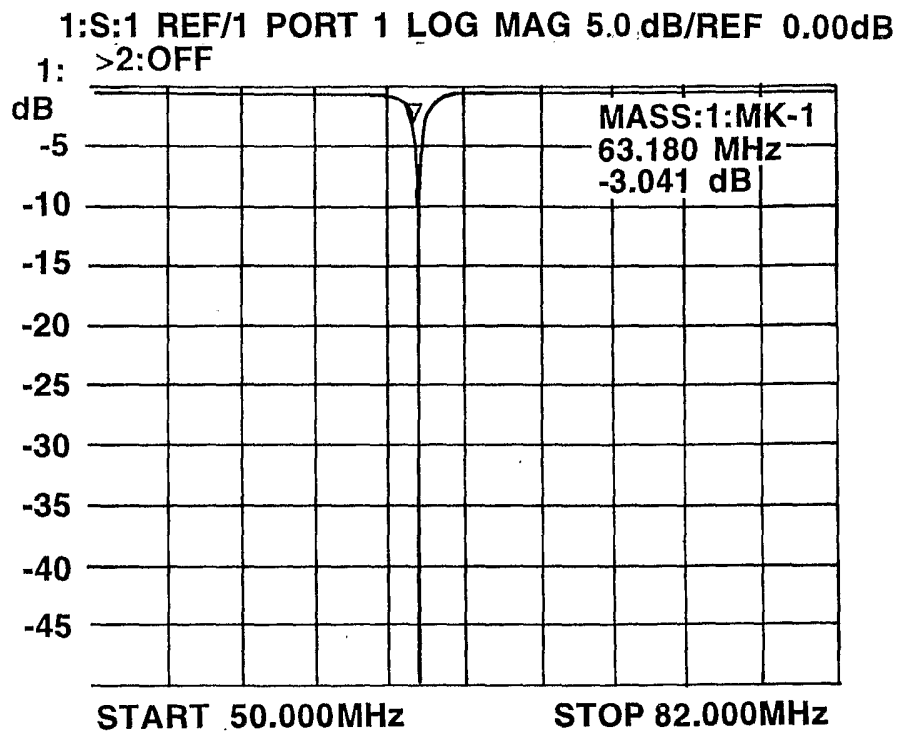


Figure 7B

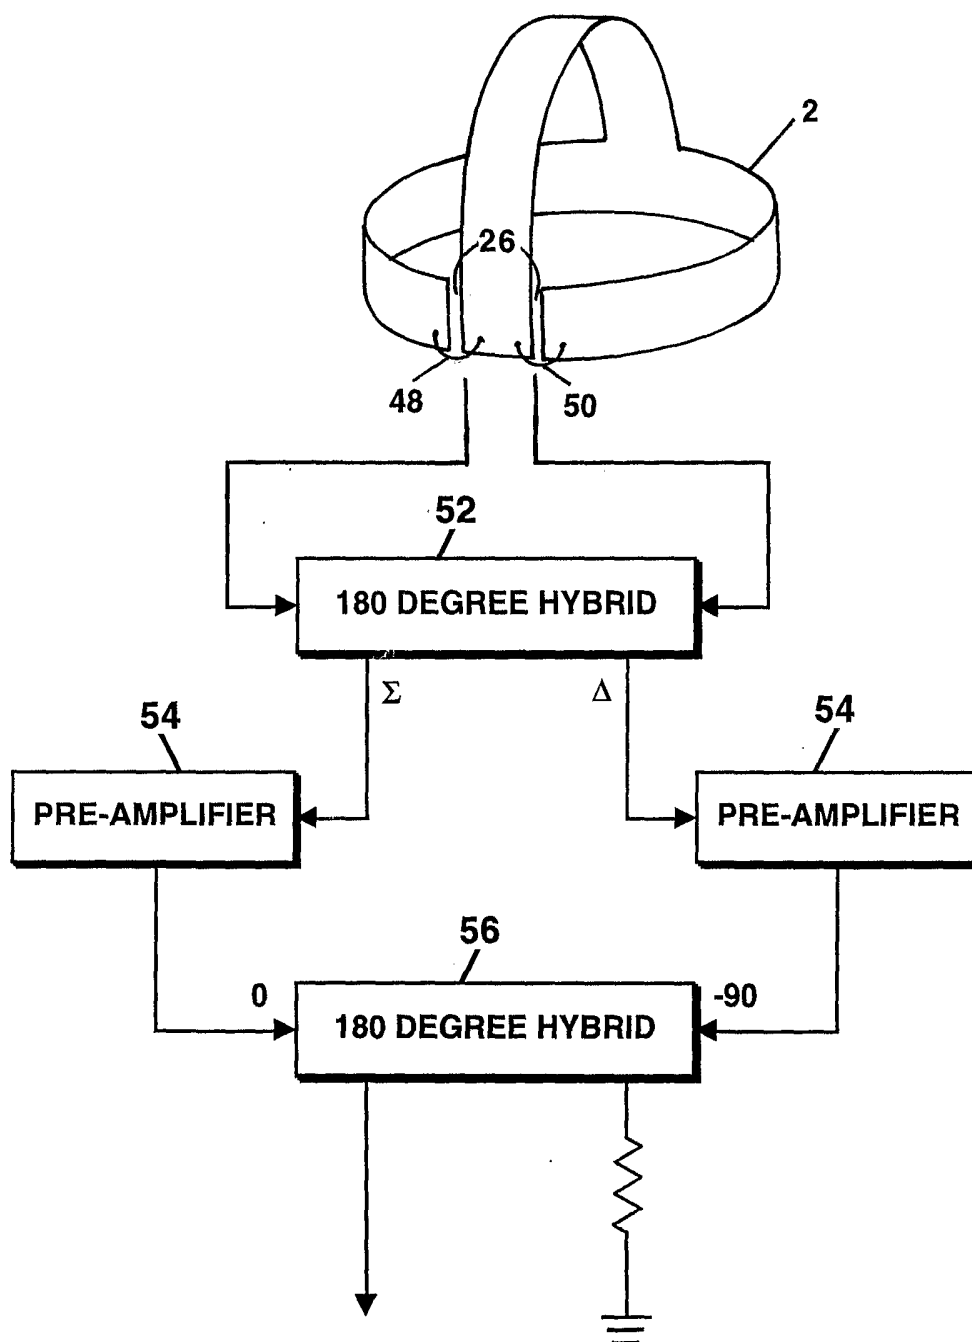


Figure 8

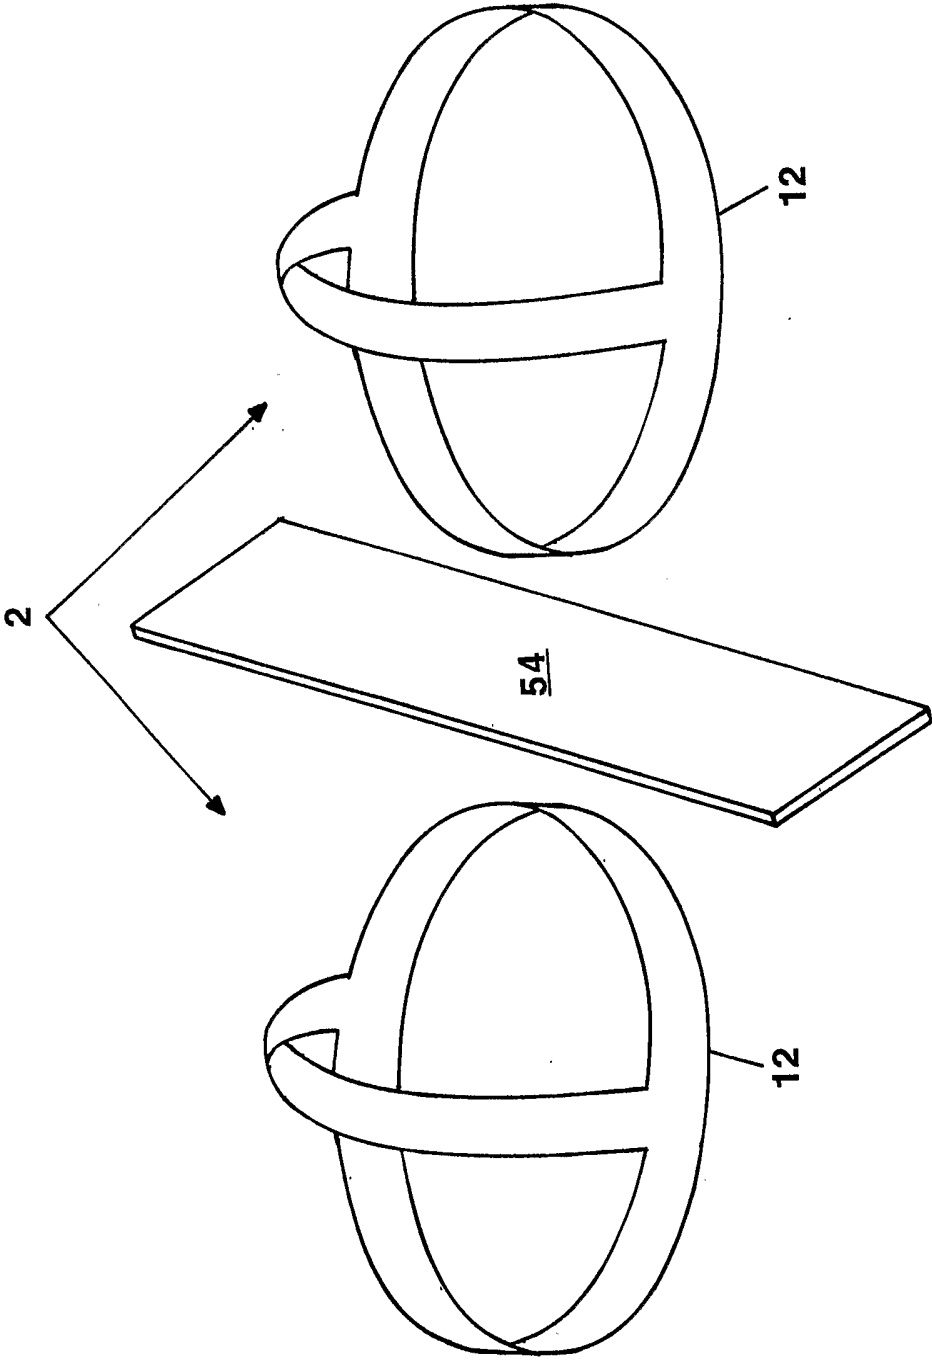


Figure 9