

(19)



(11)

EP 2 933 907 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.10.2015 Bulletin 2015/43

(51) Int Cl.:
H02M 1/14 (2006.01) H02M 3/158 (2006.01)

(21) Application number: **14392006.4**

(22) Date of filing: **16.04.2014**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
 Designated Extension States:
BA ME

(72) Inventor: **Childs, Mark**
Lydiard Millicent, Wilts SNE 3L2 (GB)


(74) Representative: **Schuffenecker, Thierry**
120 Chemin de la Maure
06800 Cagnes sur Mer (FR)

(71) Applicant: **Dialog Semiconductor GmbH**
73230 Kirchheim/Teck-Nabern (DE)

(54) Drive scheme for weakly coupled coils

(57) A variable efficiency and response buck converter is achieved. The device includes a multi-phase switch, the coupled coils, the filter capacitor, and the load. The multi-phase switch includes the phase control inputs, the circuit common reference, at least two pairs of complementary switches with each switch containing one upper switch and one lower switch, at least two phase control outputs from the complementary switches. The coupled inductive coils are coupled to the phase control outputs to enable weak couplings and strong couplings. Based on the working mode, equivalently the coupled coils can provide strong mutual inductances and weak mutual inductances. The filter capacitors connected to the output of the coupled coils provide high efficiency output to the load.

ple inductive coils are coupled to the phase control outputs to enable weak couplings and strong couplings. Based on the working mode, equivalently the coupled coils can provide strong mutual inductances and weak mutual inductances. The filter capacitors connected to the output of the coupled coils provide high efficiency output to the load.

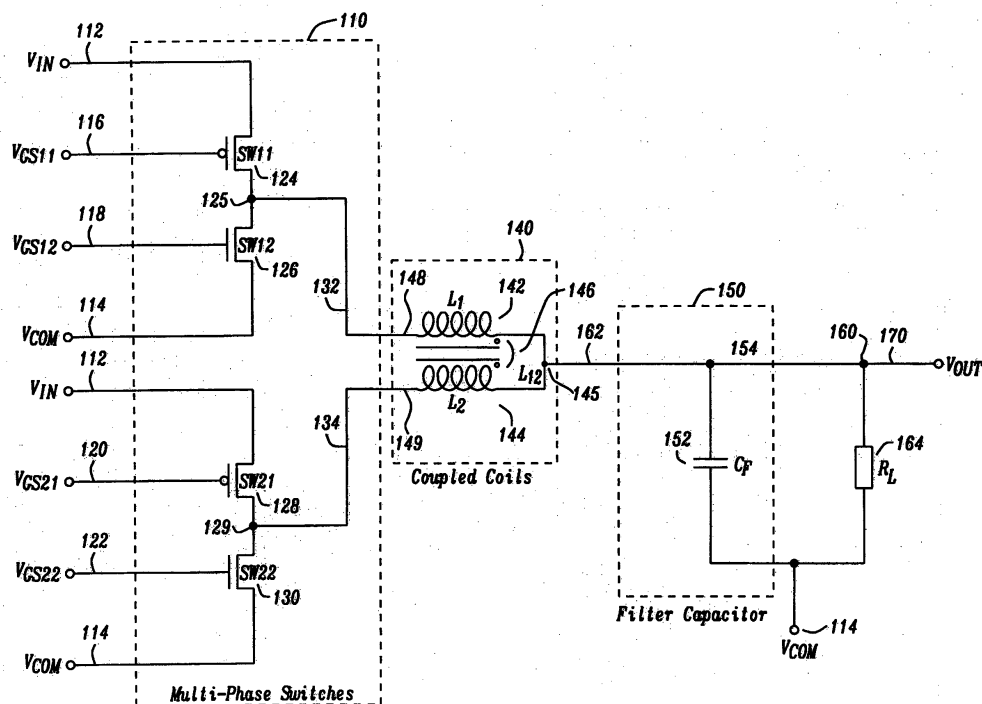**FIG. 1****EP 2 933 907 A1**

Description

Technical Field

[0001] The disclosure relates generally to variable buck converters, voltage regulators, and methods and, more particularly, to how to control the efficiency and the response of the buck converter and voltage regulators and a method thereof.

Background Art

[0002] Buck converters are switching voltage regulators that operate in a step down method to provide a voltage output that is smaller than the input voltage. It accomplishes this by causing the circuit topology to change by virtue of turning on and off semiconductor devices. It uses signal switching to transfer energies into inductors. It uses a low pass filter scheme to eliminate high frequency harmonics to maintain a relatively constant output voltage and reduce the ripple of the output.

[0003] Typically buck converters use a feedback circuit to regulate the output voltage in the presence of load changes. They are more efficient at the cost of additional components and complexity.

[0004] Buck converters can be made very compact. Therefore they are popularly used for mobile devices, printed circuit boards, even in integrated circuit packages.

[0005] An example of a prior art buck converter circuit 600 is illustrated in a circuit schematic block diagram in FIG. 6a. The circuit 600 includes the a P type switch SW1 612, an N type switch SW2 614, an energy storage inductor L 630, the low pass filter capacitor C_F 632, and the output load R_L 634. The input voltage V_{in} 610 is the given high voltage. The output voltage V_{out} 636 is the converted voltage that is usually lower than V_{in} 610. The V_{com} 640 is the common reference ground of the buck converter circuit 600. The control voltage V_{GS1} 616 is coupled to the gate of the switch SW1 612 to control its on and off status. The control voltage V_{GS2} 618 is coupled to the gate of the switch SW2 614 to control its on and off status.

[0006] The control voltage V_{GS1} 616 and V_{GS2} 618 are complementary to each other. It means that when V_{GS1} 616 turns on the switch SW1 612, the V_{GS2} 618 turns off the switch SW2 614. When V_{GS1} 616 turns off the switch SW1 612, the V_{GS2} 618 turns on the switch SW2 614. Hence, there are two working states for the buck converter in one working cycle.

[0007] One example of the working cycle is illustrated in FIG. 6b. During the time period T_{s1} 662, the switch SW1 612 is turned on. Then the switch SW2 614 is turned off. The node voltage V_s 620 is equal to the input voltage V_{in} 610 since the SW1 612 is on with almost zero voltage drop. Then the buck converter storing the magnetic energy into the inductive coil charges inductor L 630. Then during the time period T_{s2} 663, the switch SW1 612 is

turned off. Based on the Lenz's law, the inductor L 630 will instantaneously maintain the current flowing through it. Therefore the loop current will go through the switch SW2 614 and turn it on. The node voltage V_s 620 is shorted to the common reference V_{com} 640. The total working cycle is T_{sw} 666. It is obvious that $T_{sw} = T_{s1} + T_{s2}$. The inductor and the capacitor form the low pass filter that filters out the high frequency harmonics reaches the output V_{out} 636. As a result, the output voltage V_{out} 636 is relatively constant with very small ripples.

[0008] If the ratio of T_{s1} over T_{sw} is defined as the duty cycle D , $D = T_{s1}/T_{sw}$. During the period T_{s1} 662, the current through the inductor 630 L ramps up linearly. During the period T_{s2} 664, the current through the inductor 630 L ramps down linearly. To make sure the ending current of the ramping down is equal to the starting current of the ramping up so that the buck converter 600 can maintain balance, the ratio of the output V_{out} 636 to the input voltage V_{in} 610 must be equal to the duty cycle:

$$V_{out} / V_{in} = D$$

[0009] The output voltage V_{out} 636 can be further controlled through feedback schemes. One popular method is the pulse width modulation (PWM) method. The PWM mode operates switches in synchronization with a clock that has a predetermined cycle. The magnetic energy stored in the inductor is repeatedly increased and decreased periodically. Hence, the power is transferred from the input V_{in} 610 to the output V_{out} 636. The output can be stabilized to a desired level by turning on and off the switch during synchronization with the clock. This mode is optimal for mid and high load current. However, it is not very efficient at lower load currents. Then if a buck converter 600 is to operate efficiently over a relatively wide range of load currents, including low load currents, the pulse frequency modulation (PFM) will be used.

[0010] The PFM is similar to PWM in the sense that the switch SW1 612 can be used to produce a series of inductor current pulses that are applied to the filter capacitor C_F 632. However, the frequency of the pulses is not fixed. It varies in order to maintain a regulated output voltage between the upper regulated output voltage level and the lower regulated voltage level. At low load currents, PFM can provide increased efficiency as compared to PWM for the same current output. This is particularly true since the PWM operation has been optimized for efficient mid and high load current operation.

[0011] In view of the foregoing, buck converters have been designed to operate in a PWM mode for mid and high load currents and PFM for low load currents.

[0012] It is commonly known that a smaller inductor L 630 in the buck converter 600 give faster transient response, and the larger inductors give higher efficiency. High efficiency is important in all modes. But the link between the inductance of the inductor L 630 and the effi-

ciency is particularly critical in the pulsed frequency modulation (PFM) mode. Fast load transient response on the other hand is most important in modes optimized for high load currents that can be handled by the pulse width modulation modes (PWM).

[0013] Inductors are just becoming available where several coils are embedded in the same package. These differ from those previously available in that their coupling ratio is much lower. Traditional multi-inductor packages were designed for use as transformers. Therefore they have a coupling ratio approaching 100%. However, with the new manufacturing techniques, multi-inductor packages are available where the coupling ratio is around 10%.

Summary of the invention

[0014] If the buck converter is designed to make use of multi-inductor packages, driving the inductors with the correct architecture can bring benefits to both efficiency and load transient response.

[0015] It is known that small value inductors allow faster responses to the load current changes because the current variation rate di/dt is proportional to L . Large value inductors are more efficient for a number of reasons. In PFM mode, the charge delivered to the output is fixed per cycle (for discontinuous mode). The energy wasted can also be assumed to be fixed per cycle. Anything that increases the charge delivered (without increasing the energy wasted) will increase the efficiency. A higher value inductor increases the charge delivered as it slows down the current ramp and increases the area under the current ramp curve.

[0016] It has been found that traditionally the load transient response (speed) and efficiency were mutually exclusive. The fast load transient response is achieved by the required small inductors. The higher efficiency is achieved by the large value inductors. The buck converter must compromise on one of the requirements. As will become clear in the following Description of the disclosure, using weakly coupled inductors, where they are in a single package, or simply deliberately coupled by their layout, the buck converter can make the most of both speed and efficiency simultaneously.

[0017] A principal object of the present disclosure is to provide a switch converter.

[0018] A further object of the present disclosure is to provide a variable efficiency and transient response voltage conversion circuit device

[0019] Another further object of the present disclosure is to provide a method a method to tune the inductance of the mutually coupled inductor coils to provide a lower inductance for fast converter response or a higher inductance for suppression of current ripples.

[0020] In accordance with the objects of this disclosure, a switch converter is achieved. The device comprises a multi-phase switch having an input voltage, mutually coupled inductive coils connected to the multi-

phase switch, wherein the switching converter is capable of tuning the inductance of the mutually coupled inductor coils to provide a lower inductance for fast converter response or a higher inductance for suppression of current ripple. The multi-phase switch is capable of receiving phase control signals and transferring them into phases needed for sync modes and sleep modes. It comprises at least two pairs of complementary signals as the input to multi-phase switches, at least two pairs of complementary switches receiving complementary signals as inputs to generate sync mode or sleep mode complementary phases, and at least one pair of phase signals generated as the output from complementary switches. The two pairs of complementary signals are capable of generating the sleep mode phase when they are in phases (0°) and the sync mode phase when they are out-of-phase (180°). The pair of output phase signals are instigated in pairs, such as 0° , 90° , 180° , 270° for 4 pairs of complementary input signals. The mutually coupled inductive coil connected to output phase signals of multi-phase switches is capable of enabling both strong and weak couplings to optimize efficiencies and speed requirements of switches, the mutually coupled inductive coil further comprises 2 inductors with mutual couplings for 0° and 180° phases, or 4 inductors with mutual couplings for 0° , 90° , 180° , 270° , or multi-inductors with more phases. The mutually coupled inductive coil connected to output phase signals of multi-phase switches has the coupling ratio less than 100%. The mutually coupled inductive coil connected to output phase signals of multi-phase switches has the coupling ratio in between 5% and 30%. The mutually coupled inductive coil connected to output phase signals of multi-phase switches has a bigger inductance when the phase signal is in the sleep mode and a smaller inductance when the phase signal is in the sync mode. The coupled inductive coil connected to output phase signals of multi-phase switches in the sleep mode has 1% higher efficiency for low output currents. The coupled inductive coil connected to output phase signals of multi-phase switches in the sync mode has faster response for high output currents.

[0021] Also In accordance with the objects of this disclosure, a variable efficiency and transient response voltage conversion circuit device is achieved. The device comprises a converter control unit, an array of phase control circuit units controlled by the converter control unit, a multi-phase switch controlled by the array of phase control circuit units, a mutually coupled inductive coil at the output of the multi-phase switch, a plurality of capacitors and resistors circuits at the output of the coupled inductive coil; and an output monitor circuit connected to the output of the plurality of capacitors and resistors circuits and the input of the converter control unit. The converter control unit is capable of receiving control commands and transferring them into phase control signals needed for phase control circuits. The converter control unit further comprises circuit accepting control signals for efficiency and response specifications, and a regula-

tion circuit accepting signals from the output monitor circuit. The array of phase control units connected to the control unit is capable of converting signals from outputs of the control unit to analog complementary control signals. Each phase control circuit unit further comprises a circuit accepting control signals from the converter control unit, and a conversion circuit with certain embedded algorithms to implement complementary phase control signals. The multi-phase switch controlled by the array of phase control circuit units is capable of creating an array of complementary phase signals that enables sleep modes, sync modes, or other multi-phase modes according to the number of input complementary phase control signals. A multi-phase switch further comprises at least two pairs of complementary signals as the input to multi-phase switches, at least two pairs of complementary switches receiving complementary signals as inputs to generate sync mode or sleep mode complementary phases, and at least one pair of phase signals generated as the output from complementary switches. The mutually coupled inductive coil connected to output phase signals of multi-phase switches is capable of enabling both strong and weak couplings to optimize efficiencies and speed requirements of switches. The mutually coupled inductive coil further comprises 2 inductors with mutual couplings for 0° and 180° phases, or 4 inductors with mutual couplings for 0° , 90° , 180° , 270° , or multi-inductors with more phases. The plurality of capacitors and resistors circuits at an output of the coupled inductive coil is capable of filtering out high frequency harmonics to deliver relatively constant voltages. A plurality of capacitors and resistors circuits further comprises a plurality of capacitors shunt in between the output and the common reference, a plurality of resistors shunt in between the output and the common reference, or a plurality of capacitors and resistors shunt in between the output and the common reference. The output monitor circuit connected to the output of the plurality of capacitors and resistors circuits and the input of the converter control unit is capable of detecting the load voltage or current and feed back the control signal into the control unit for the pulse frequency modulation (PFM) or the pulse width modulation (PWM). The output monitor circuit further comprises a high impedance receiving circuit to sample the load current or voltage, a signal conversion circuit with embedded algorithms to transfer the sampled load current or voltage into control signals, and an output driving circuit to port the generated port signal into the converter control unit to facilitate the pulse frequency modulation (PFM) or the pulse width modulation (PWM).

[0022] Also in accordance with the objects of this disclosure, a method for controlling inductance of a switch converter is achieved. The method comprises a multi-phase switch having an input voltage, mutually coupled inductive coils connected to the multi-phase switch; and tunes the inductance of the mutually coupled inductor coils to the provide a lower inductance for fast converter response or a higher inductance for suppression of cur-

rent ripple. The multi-phase switch comprises complementary switches with complementary input voltages to generated output signals with various controlled phases. The mutually coupled inductive coils comprise weakly two or more coupled coils connected to the output of the multi-phase switches. The bigger effective inductances are obtained by controlling input phases of the coupled inductance coils to be in phase and bigger effective inductances are obtained by controlling input phases of the coupled inductance coils to be out-of-phase. The buck works in the "sleep mode" when the input phases of the coupled inductive coils are in phase and in the "sync mode" when the input phases of the coupled inductive coils are out of phase. The efficiency under the "sleep mode" is highest while the load response under the "sync mode" is the fastest. The efficiency under the "sync mode" does not matter much at large load current due to the weak coupling of the inductive coils. The method can be extended to other type of bucks such as boosts and buck-boosts.

[0023] As such, a novel variable efficiency and response buck converter with the controlled effective inductance from the coupled coils and a method to vary the efficiency and the response needed for the voltage conversion circuit through the weakly coupled coils are herein described. The circuit provides various efficiencies and response speed to the load. The efficiency is achieved with the larger effective inductance from the weakly coupled inductive coils. The faster response is achieved with the smaller effective inductance from the weakly coupled inductive coils. The device and method are applicable to a variety of switching converters, including buck converters, boost converters and buck-boost converters. The device and method are applicable to a variety of phase control schemes, the pulse frequency modulation (PFM), and the pulse width modulation (PWM) methods. The device and method are extensible to add more pairs of weakly coupled coils. The device and method are extensible to use strongly coupled coils. Other advantages will be recognized by those of ordinary skills in the art.

Description of the drawings

[0024] The present disclosure and the corresponding advantages and features provided thereby will be best understood and appreciated upon review of the following detailed description of the disclosure, taken in conjunction with the following drawings, where like numerals represent like elements, in which:

FIG. 1 is a circuit schematic diagram illustrating one example of a variable efficiency and transient response buck converter in accordance with one embodiment of the disclosure;

FIG. 2 is a circuit schematic diagram illustrating one example of a variable efficiency and transient response buck converter with the feedback circuit and

the phase control system in accordance with one embodiment of the disclosure;

FIG. 3 is the signal diagram illustrating one example of the inductor coil currents in a variable efficiency and transient response buck converter using the in-phase "sleep mode" in accordance with one embodiment of the disclosure;

FIG. 4 is the signal diagram illustrating one example of the inductor coil currents in a variable efficiency and transient response buck converter using the out-of-phase "sync mode" in accordance with one embodiment of the disclosure;;

FIG. 5 is the efficiency diagram illustrating one example of a variable efficiency and transient response buck converter using the in-phase "sleep mode" and the out-of-phase "sync mode" in accordance with one embodiment of the disclosure;;

FIG. 6 is a circuit schematic block diagram illustrating a prior art, buck converter circuit.

Fig. 7 is the flow chart illustrating the methodology of using weakly coupled inductive coils to tune both speed and efficiency simultaneously.

Description of the preferred embodiments

[0025] FIG. 1 is a circuit schematic diagram illustrating one example of a variable efficiency and response buck converter 100 in accordance with one embodiment of the disclosure. The device 100 includes a multi-phase switch 110, the coupled coils 140, the filter capacitor 150, and the load 164. The multi-phase switch 110 includes input V_{in} 112, the circuit common reference V_{com} 114, the upper switch SW11 124, the low switch SW12 126, the upper switch SW21 128, the low switch SW22 130, the input V_{GS11} 116, the input V_{GS12} 118, the input V_{GS21} 120, the input V_{GS22} 122, the output 132 from the upper switch SW11 124 and the low switch SW12 126, and the output 134 from the upper switch SW21 128 and the low switch SW22 130. The coupled coils 140 includes inductor L1 142, the inductor L2 144, the mutual inductance L12 146, the input 148 to the inductor L1 142, the input 149 to the inductance L2 149, the output 162. The filter capacitor 150 includes the filter capacitor C_F 152. The load is simply represented by the load resistor R_L 164. The output of the buck converter is V_{out} 170.

[0026] In the multi-phase switches 110, the switch SW11 124 and SW12 126 form a pair and are preferably coupled at the node 125. The switches may be implemented in any available technology, such as MOS or bipolar or mixed technology. The input V_{GS11} 116 is preferably coupled to the switch SW11 124. The input V_{GS12} 118 is preferably coupled to the switch SW12 126. The output 132 is preferably coupled at the node 125 to both the upper switch SW11 124 and the low switch SW12 126. The switch SW21 128 and SW22 130 form a pair and are preferably coupled at the node 129. The switches may be implemented in any available technology, such as MOS or bipolar or mixed technology. The input V_{GS21}

120 is preferably coupled to the switch SW21 128. The input V_{GS22} 122 is preferably coupled to the switch SW22 130. The output 134 is preferably coupled at the node 129 to both the upper switch SW21 128 and the low switch SW22 130.

[0027] In the coupled coils 140, the input 148 is preferably coupled to the output 132 from the multi-phase switches 110, and the input 149 is preferably coupled to the output 134 from the multi-phase switches 110. The inductor L1 142 is preferably coupled to the inductor L2 144 at the node 145. The other end of inductor L1 142 is preferably coupled to the input 148. The other end of inductor L2 144 is preferably coupled to the input 149. The output 162 is preferably coupled to the coupled coils 140 at the node 145.

[0028] In the filter capacitor 150, one side of the filter capacitor C_F 152 is coupled to the input 162. The other side of the filter capacitor C_F 152 is coupled to the common reference ground V_{com} 114. The output 154 of the filter capacitor 150 is coupled to one side of the load resistor R_L 164 at the node 160. The output V_{out} 170 is preferably coupled to the load resistor R_L 164 at the node 160.

[0029] While the embodiment illustrates one coupled coils with only two pairs of switches, it should be understood that multiple coupled coils with multiple pair of switches may be used in the present disclosure.

[0030] In the preferred embodiment, the input V_{GS11} 116 and the input V_{GS12} 118 are controlled by complementary pulsed signals. Thereby the switch SW11 124 has opposite on/off status relative to the SW12 126. The input V_{GS21} 120 and the input V_{GS22} 122 are controlled by complementary pulsed signals. Thereby the switch SW21 128 has opposite on/off status relative to the SW22 130. Because the symmetry of the circuit configuration in the multi-phase switches 110, the output 132 and 134 from the multi-phase switches 110 will have identical waveforms except the phase. The output 132 and 134 could be in-phase or out-of-phase. When the output 132 and 134 are in-phase, the buck converter 100 is working under the "sleep mode". When the output 132 and 134 are out-of-phase, the buck converter 100 is working under the "sync mode". The sleep mode is a mode for the low output currents and high efficiency. It is preferably for the pulse frequency modulation (PFM). The sync mode is a mode for the larger load transients. It is preferably for the pulse width modulation (PWM).

[0031] The inductor L1 142 and L2 144 form a pair of inductors. They have the mutual inductance L12 146. If the inductor L1 142 and L2 144 are weakly coupled, the mutual inductance L12 146 is small. The current in the inductor L1 142 will affect the value of the current in the inductor L2 144 if the mutual inductance L12 is not equal to zero. If the input 148 of the inductor L1 142 and the input 149 of the inductor L2 144 are in-phase, both inductors are operated in the same polarity. Hence, the current in the inductor L1 142 and the current in the inductor L2 144 will both ramp with the same polarity. The

coils will interfere constructively. The current in the inductor L1 142 will act together with the current in the inductor L2 144, and vice versa. This constructive interference increases the effective inductance to the buck converter 100. As one example, if the two inductors are matched and coupled with 10% coupling ratio, the increase in the effective inductance is also 10%. If the input 148 of the inductor L1 142 and the input 149 of the inductor L2 144 are out-of-phase, both inductors are operated in the opposite polarity. Hence, the current in the inductor L1 142 and the current in the inductor L2 144 will ramp with the opposite polarity. The coils will interfere destructively. The current in the inductor L1 142 will act inversely with the current in the inductor L2 144, and vice versa. This destructive interference decreases the effective inductance to the buck converter 100.

[0032] In the proposed embodiment, the coupled coils can be implemented in the same IC package. With the new manufacturing techniques, the weakly coupled coils are available in package where the coupling ratio is around 5% to 30%. It is also understandable that the proposed embodiment does not have a limit to the coupling ratio. Hence, coupled coils made by other manufacturing techniques with strong inductive coupling are also included in the proposed embodiment.

[0033] In the proposed embodiment, the buck converter 100 has at least two pairs of switches in the multi-phase switches 110. The switches SW11 124 and the SW12 126 are one pair with the output 132. The switches SW21 128 and the SW22 130 are another pair with the output 134. The inductor L1 142 is controlled by the output 132. The inductor L2 144 is controlled by the output 134.

[0034] The buck converter 100 works in the "sleep mode" when the output 132 and 134 are in-phase. In this case, if the current in the inductor L1 142 ramps up, the current in the inductor L2 144 also ramps up. Hence, the coupled coils 140 appear to have larger effective buck converter inductance than the nominal inductance value of each individual inductor L1 142 and L2 144. Because the larger buck inductance results in higher efficiency, the "sleep mode" will show higher efficiency, especially for the low output currents in the PFM mode.

[0035] The buck converter 100 works in the "sync mode" when the output 132 and 134 are out-of-phase. In this case, if the current in the inductor L1 142 ramps up, the current in the inductor L2 144 ramps down. Hence, the coupled coils 140 appear to have a smaller effective buck converter inductance than the nominal inductance value of each individual inductor L1 142 and L2 144. Because a smaller buck inductance allows the output current to change more rapidly in the response to a load step, the buck converter 100 will have better load transient response, especially for the larger load transient in the PWM mode. The efficiency in this mode is not typically limited by the coil value. Hence, the decrease in the efficiency caused by the smaller inductance value is negligible.

[0036] Referring now to Fig. 3, it is one example diagram of the currents in the inductor L1 142 and inductor L2 144 in the "sleep mode" where high efficiency is needed. In this mode, the current Icoil (L1) 312 in the inductor L1 142 is in-phase with the current Icoil (L2) 322 in the inductor L2 144. They ramp in phase. This increases the effective buck converter inductance. Hence, the current Icoil (L1) 312 under the in-phase coupling ramps slower than the current Icoil (L1) 314 that has no coupling. It is noted that the current Icoil (L1) 312 has greater area underneath it than the current Icoil (L1) 314. It implies that the energy delivered under the coupling case is higher than the energy delivered without the coupling. This justifies why the efficiency is higher in the "sleep mode".

[0037] Referring now to Fig. 4, it is one example diagram of the currents in the inductor L1 142 and inductor L2 144 in the "sync mode" where the larger transient response is needed. In this mode, the current Icoil (L1) 412 in the inductor L1 142 is out-of-phase with the current Icoil (L2) 422 in the inductor L2 144. Hence, they ramp out of phase. This decreases the effective buck converter inductance. Hence, the current Icoil (L1) 412 under the out-of-phase coupling ramps faster than the current Icoil (L1) 414 that has no coupling. It implies that the buck converter 100 under the coupling case responds faster to the load step than the case without the coupling. This justifies why better load transient response can be achieved in the "sync mode".

[0038] The proposed embodiment can be implemented in exactly the opposite way. The polarity of the coupled coils 140 can be reversed. As a result, the "sleep mode" will be invoked when the output 132 and 134 are out of phase while the "sync mode" will be invoked when the output 132 and 134 are in phase.

[0039] Referring now to Fig. 5, it shows one example of the calculated efficiency of the buck converter 100 from the proposed embodiment. The efficiency 512 vs. the load current shows the efficiency of the buck converter 100 when it is working in the "sleep mode" with the mutual inductance L12 146 equal to 1.2 uH. The efficiency 514 vs. the load current shows the efficiency of the buck converter 100 when it is working in the "sleep mode" with the mutual inductance L12 146 equal to 0.8 uH. The efficiency 522 vs. the load current shows the efficiency of the buck converter 100 when it is working in the "sync mode" with the mutual inductance L12 146 equal to 1.2 uH. The efficiency 524 vs. the load current shows the efficiency of the buck converter 100 when it is working in the "sync mode" with the mutual inductance L12 146 equal to 0.8 uH. The improvement of the efficiency in the "sleep mode" has 1% for the same load transient response. The decrease in "sync mode" efficiency is negligible for significant load currents. Fig. 5 has been verified both experimentally and in simulation. Hence, the proposed embodiment is confirmed to be effective.

[0040] Referring now to Fig. 7, it shows the flowchart of the methodology of using the weakly coupled inductive coils to achieve both speed and efficiency from the pro-

posed embodiment. It begins with the load level judgment 702. If the load is low, the sleep mode will be invoked through 710. Then the weakly coupled inductive coils 140 will be fed by the in-phase control signals. Large equivalent inductance will be achieved. Then the generate bulk output at 730 will have very good efficiency. If the load is high, the sync mode will be invoked through 720. Then the weakly coupled inductive coils 140 will be fed by the out-of-phase control signals. Less equivalent inductance will be achieved. Then the generate bulk output at 730 will have better response speed. At the output of the bulk 730, a sample of the output will be taken through 740. The sampled load information will be fed to the input of 702.

[0041] Referring now to Fig. 1, it shows one example when the multi-phase switches 110 contains only two pairs of complementary switches. One pair includes the switches SW11 124 and SW12 126. Another pair includes SW21 128 and SW22 130. However, the proposed embodiment can be extended to more pairs in the multi-phase switches 110. For example, there can be four pairs of complementary switches in the multi-phase switches 110. As a result, the buck converter 100 becomes a four-phase converter. In the PFM mode, the four phases are typically in phase (in the "sleep mode") to achieve the maximum efficiency. But in the "sync mode", the phases would typically be equally spaced with 0, 90, 180, and 270 degree delays. The phases would therefore be paired as 0, 90, 180, and 270 degree.

[0042] In the proposed embodiment, the coupled coils 140 can be extended to include more than one pair of coupled inductances L1 142 and L2 144. The drive scheme with different phases can be applied together with the combination of many pairs of coupled coils to adjustable efficiency and load transient response. It shall be able switch to achieve the maximum effective inductance for a high efficiency mode and or the fast response for the low output mode.

[0043] An alternative embodiment is to disable one phase. If a phase is disabled, then the output of the disabled phase may be set to go high-impedance. In this case the voltage on the secondary coil - the one on the disabled phase - may vary with the voltage on the primary coil. Thus the primary coil will act like a simple uncoupled inductor. For this embodiment, preferably, both phases through the one pair of coupled inductances L1 142 and L2 144 can be driven out-of-phase in the "sync mode" to minimize the effective capacitance. Then in the "sleep mode" the secondary phase can be disabled. Consequently the effective inductance will rise back to the nominal (uncoupled) value. This will increase the efficiency.

[0044] Referring now to Fig. 2, a circuit schematic diagram illustrate one example of the variable efficiency and response buck converter 200 using the control unit 210, the phase control units 212 and 214, and the output monitor 230 with one embodiment of the disclosure. The circuit 200 could be on a mobile device, such as a cellular phone, or on an integrated circuit chip, such as CPU. The

system 200 includes a control unit 210, the phase control units 212 and 214, the output monitor 230, the multi-phase switches 216, the coupled coils 222, the filter cap 224, and the load resistor R_L 226. The control unit 210 generates phase control signals 252 and 254 based on the pulse frequency modulation (PFM) or the pulse width modulation (PWM) need. The control unit 210 is also preferably coupled to the input V_{MNT} 234 from the output monitor circuit 230. The output 252 and 254 from the control unit 210 are coupled to the two phase control units 212 and 214 respectively. The phase control unit I 212 generates complementary analog signals 262 and 264 coupled to the multi-phase switches 216. The phase control unit II 214 generates complementary analog signals 266 and 268 coupled to the multi-phase switches 216. The multi-phase switches 216 includes at least 2 pairs of complementary switches (the upper switch and the low switch). If there are only 2 pairs of complementary switches in the multi-phase switches 216, the phase output 272 and 274 are coupled to the input of the coupled coils 222. The coupled coils 222 includes at least a pair of weakly coupled inductive coils. The output 240 of the coupled coils 222 is preferably coupled to the filter capacitor 224. The filter capacitor 224 and the load resistor R_L 226 are in parallel. The output voltage V_{out} 228 is coupled to the load resistor R_L 226. The output voltage V_{out} 228 is preferably coupled to the input V_{FB} 232 of the output monitor 230. The output monitor 230 monitors the output voltage V_{out} 228 or the load current I_{out} 242 and generates the control signal V_{MNT} 234 coupled to the control unit 210.

[0045] In the embodiment, the control unit 210 contains the circuit for automatically switching between PWM and PFM modes based on the input V_{MNT} 234 coupled from the output monitor 230. The output monitor 230 includes a reference generator to generate the reference signal for the error amplifier. The error amplifier generates the error signal between the feedback signal V_{FB} 232 from the circuit output and the reference signal. The error signal is coupled to the control unit 210 to decide which of the PWM and PFM modes will be used.

[0046] The number of the coupled coils 222 can be more than one. Correspondingly the multi-phase switch 216 coupled to the inputs of the coupled coils can be more than one. The number of the multi-phase switch 216 will be equal to the number of the coupled coils 222. Consequently there will be more the phase control units 212 and 214. The number of the phase control unit is equal to the 2 times of the multi-phase switch 216.

[0047] As such, a novel variable efficiency and response buck converter with weakly coupled coils are herein described. The circuit uses the mutually coupled coils in a multi-phase switching converter to effectively achieve an electrically tunable inductance for energy storage, and to tune the inductance according to whether a low inductance is desired for the fast converter response, or a large inductance to suppress the current ripple.

[0048] The device and method are applicable to a variety of programmable buck converters and buck schemes. The device and method are extensible to add more pairs of coupled coils and more multi-phase switches. Other advantages will be recognized by those of ordinary skill in the art.

[0049] The above detailed description of the disclosure, and the examples described therein, has been presented for the purposes of illustration and description. While the principles of the disclosure have been described above in connection with a specific device, it is to be clearly understood that this description is made only by way of example and not as a limitation on the scope of the disclosure.

Claims

1. A switch converter, the device comprising:

- a multi-phase switch having an input voltage;
- mutually coupled inductive coils connected to the multi-phase switch;

wherein the switching converter is capable of tuning the inductance of the mutually coupled inductor coils to provide a lower inductance for fast converter response or a higher inductance for suppression of current ripple.

2. The device of claim 1 wherein the multi-phase switch is capable of receiving phase control signals and transferring them into phases needed for sync modes and sleep modes, the multi-phase switch further comprising:

- at least two pairs of complementary signals as the input to multi-phase switches;
- at least two pairs of complementary switches receiving complementary signals as inputs to generate sync mode or sleep mode complementary phases;
- and at least one pair of phase signals generated as the output from complementary switches.

3. The device of claim 2 wherein the pair of complementary signals are capable of generating the sleep mode phase when they are in phases (0°) and the sync mode phase when they are out-of-phase (180°).

4. The device of claim 2 wherein the pair of output phase signals are instatiated in pairs, such as 0° , 90° , 180° , 270° for 4 pairs of complementary input signals.

5. The device of claim 2 where the pair of complemen-

tary signals are capable of providing the regular effective inductance and its corresponding efficiency by disabling the secondary phase in the sleep mode.

6. The device of claim 1 wherein a mutually coupled inductive coil connected to output phase signals of multi-phase switches has the coupling ratio less than 100%, and preferably in between 5% and 30%.

7. The device of claim 1 wherein a mutually coupled inductive coil connected to output phase signals of multi-phase switches has a bigger inductance when the phase signal is in the sleep mode and a smaller inductance when the phase signal is in the sync mode.

8. The device of claim 1 wherein a coupled inductive coil connected to output phase signals of multi-phase switches in the sleep mode has 1% higher efficiency for low output currents, and wherein a coupled inductive coil connected to output phase signals of multi-phase switches in the sync mode has faster response for high output currents.

9. A variable efficiency and transient response voltage conversion circuit device, the device comprising:

- a converter control unit;
- an array of phase control circuit units controlled by the converter control unit;
- a multi-phase switch controlled by the array of phase control circuit units;
- a mutually coupled inductive coil at the output of the multi-phase switch;
- a plurality of capacitors and resistors circuits at the output of the coupled inductive coil; and
- an output monitor circuit connected to the output of the plurality of capacitors and resistors circuits and the input of the converter control unit.

10. The device of claim 9 wherein the converter control unit is capable of receiving control commands and transferring them into phase control signals needed for phase control circuits, the converter control unit further comprising:

- a circuit accepting control signals for efficiency and response specifications;
- and a regulation circuit accepting signals from the output monitor circuit.

11. The device of claim 9 wherein the array of phase control units connected to the control unit is capable of converting signals from outputs of the control unit to analog complementary control signals, each phase control circuit unit further comprising:

- a circuit accepting control signals from the converter control unit;
 - and a conversion circuit with certain embedded algorithms to implement complementary phase control signals.
12. The device of claim 9 wherein the multi-phase switch controlled by the array of phase control circuit units is capable of creating an array of complementary phase signals that enables sleep modes, sync modes, or other multi-phase modes according to the number of input complementary phase control signals, a multi-phase switch further comprising:
- at least two pairs of complementary signals as the input to multi-phase switches;
 - at least two pairs of complementary switches receiving complementary signals as inputs to generate sync mode or sleep mode complementary phases;
 - and at least one pair of phase signals generated as the output from complementary switches.
13. The device of claim 1 or 9 wherein the mutually coupled inductive coil connected to output phase signals of multi-phase switches is capable of enabling both strong and weak couplings to optimize efficiencies and speed requirements of switches, the mutually coupled inductive coil further comprising:
- 2 inductors with mutual couplings for 0° and 180° phases; or
 - 4 inductors with mutual couplings for 0°, 90°, 180°, 270°; or
 - multi-inductors with more phases.
14. The device of claim 9 wherein the plurality of capacitors and resistors circuits at an output of the coupled inductive coil are capable of filtering out high frequency harmonics to deliver relatively constant voltages, a plurality of capacitors and resistors circuits further comprising:
- a plurality of capacitors shunt in between the output and the common reference;
 - a plurality of resistors shunt in between the output and the common reference;
 - or a plurality of capacitors and resistors shunt in between the output and the common reference.
15. The device of claim 9 wherein the output monitor circuit connected to the output of the plurality of capacitors and resistors circuits and the input of the converter control unit is capable of detecting the load voltage or current and feed back the control signal into the control unit for the pulse frequency modulation (PFM) or the pulse width modulation (PWM), the output monitor circuit further comprising:
- a high impedance receiving circuit to sample the load current or voltage;
 - a signal conversion circuit with embedded algorithms to transfer the sampled load current or voltage into control signals;
 - and an output driving circuit to port the generated port signal into the converter control unit to facilitate the pulse frequency modulation (PFM) or the pulse width modulation (PWM).
16. A method for controlling inductance of a switch converter, comprising the steps of:
- providing a multi-phase switch having an input voltage;
 - providing mutually coupled inductive coils connected to the multi-phase switch; and
 - tuning the inductance of the mutually coupled inductor coils to provide a lower inductance for fast converter response or a higher inductance for suppression of current ripple.
17. The method of claim 16 wherein the multi-phase switch comprises complementary switches with complementary input voltages to generated output signals with various controlled phases.
18. The method of claim 16 wherein the mutually coupled inductive coils comprises weakly two or more coupled coils connected to the output of the multi-phase switches.
19. The method of claim 16 wherein bigger effective inductances are obtained by controlling input phases of the mutually coupled inductive coils to be in phase and bigger effective inductances are obtained by controlling input phases of the coupled inductive coils to be out-of-phase.
20. The method of claim 16 wherein the switch converter works in the "sleep mode" when the input phases of the coupled inductive coils are in phase and in the "sync mode" when the input phases of the coupled inductive coils are out of phase.
21. The method of claim 20 wherein efficiency under the "sleep mode" is highest while the load response under the "sync mode" is the fastest and/or wherein efficiency under the "sync mode" does not matter much at large load current due to the weak coupling of the inductive coils.
22. The method of claim 16 can be extended to other type of bucks such as boosts and buck-boosts.

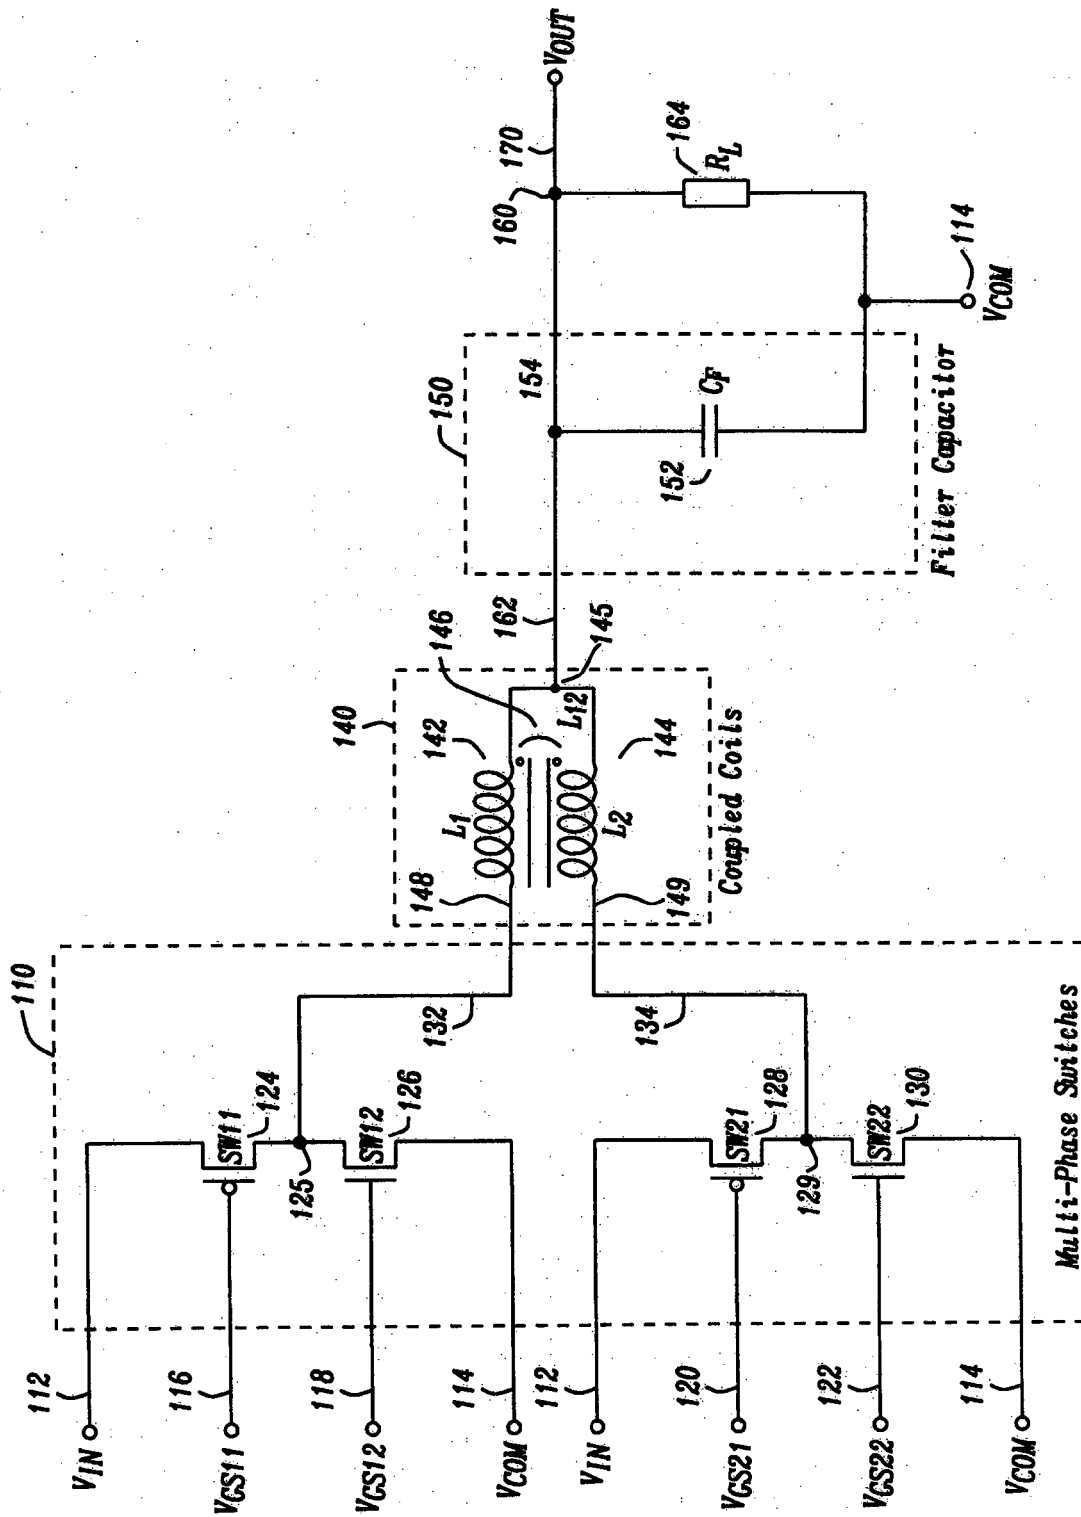


FIG. 1

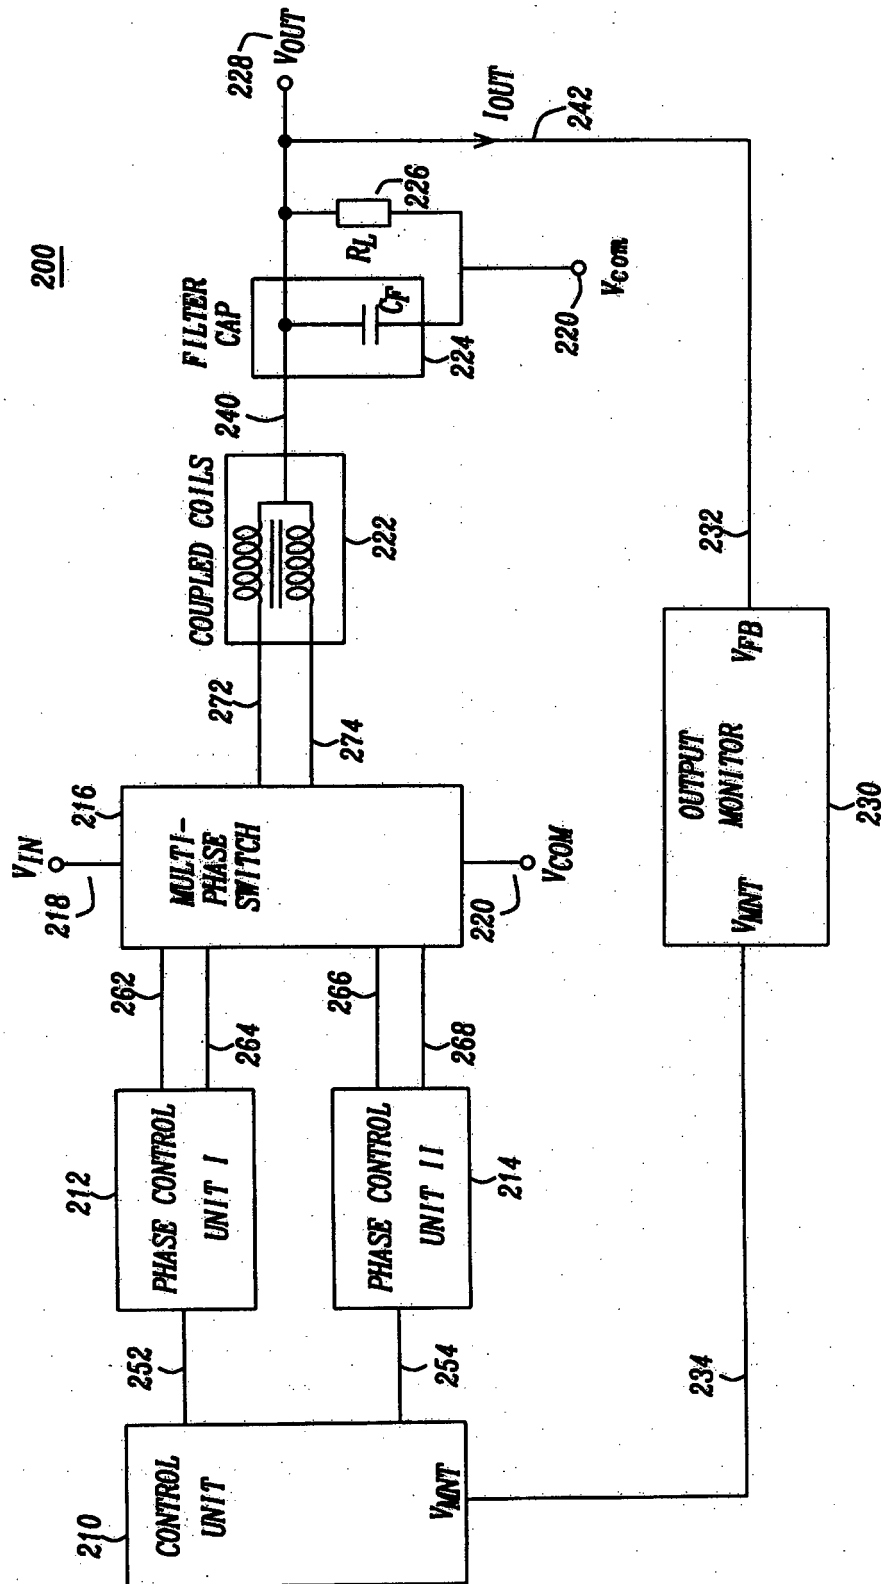


FIG. 2

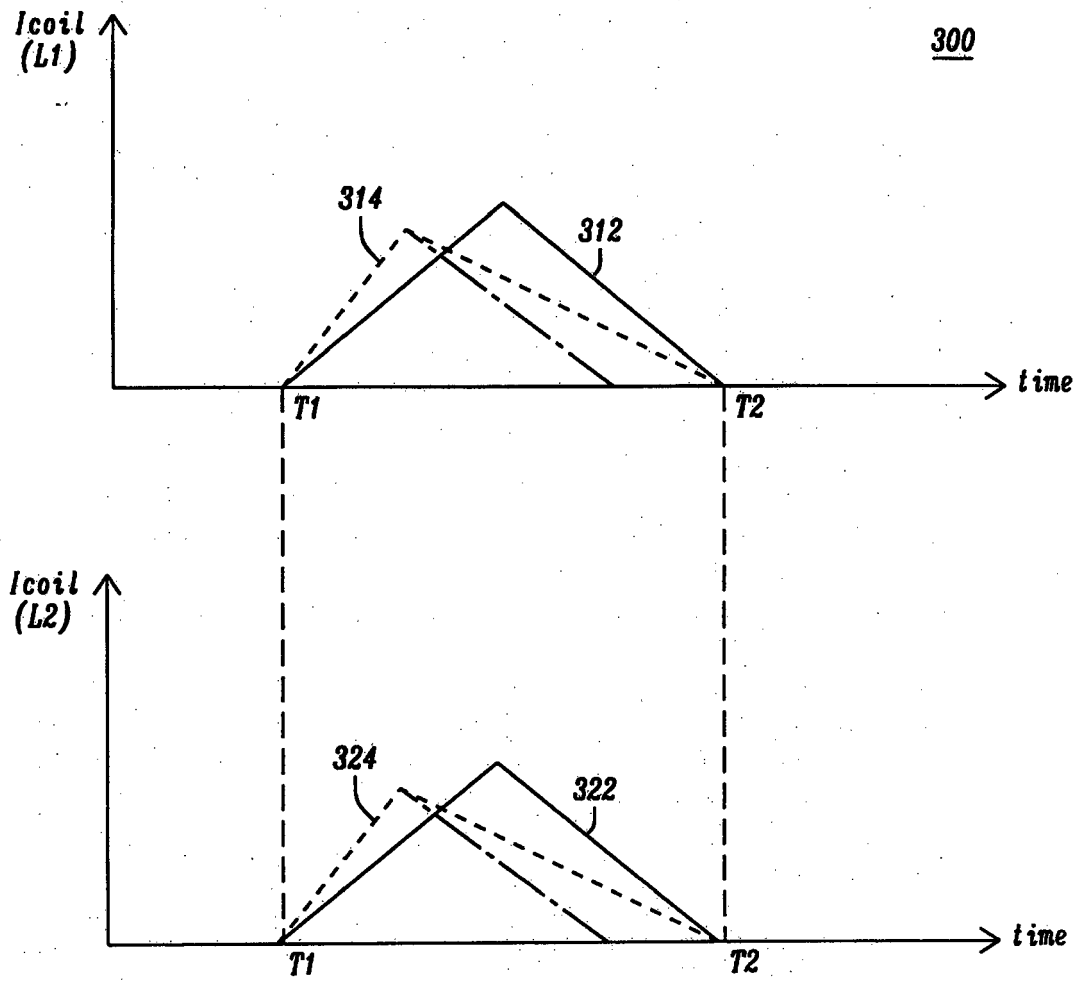


FIG. 3

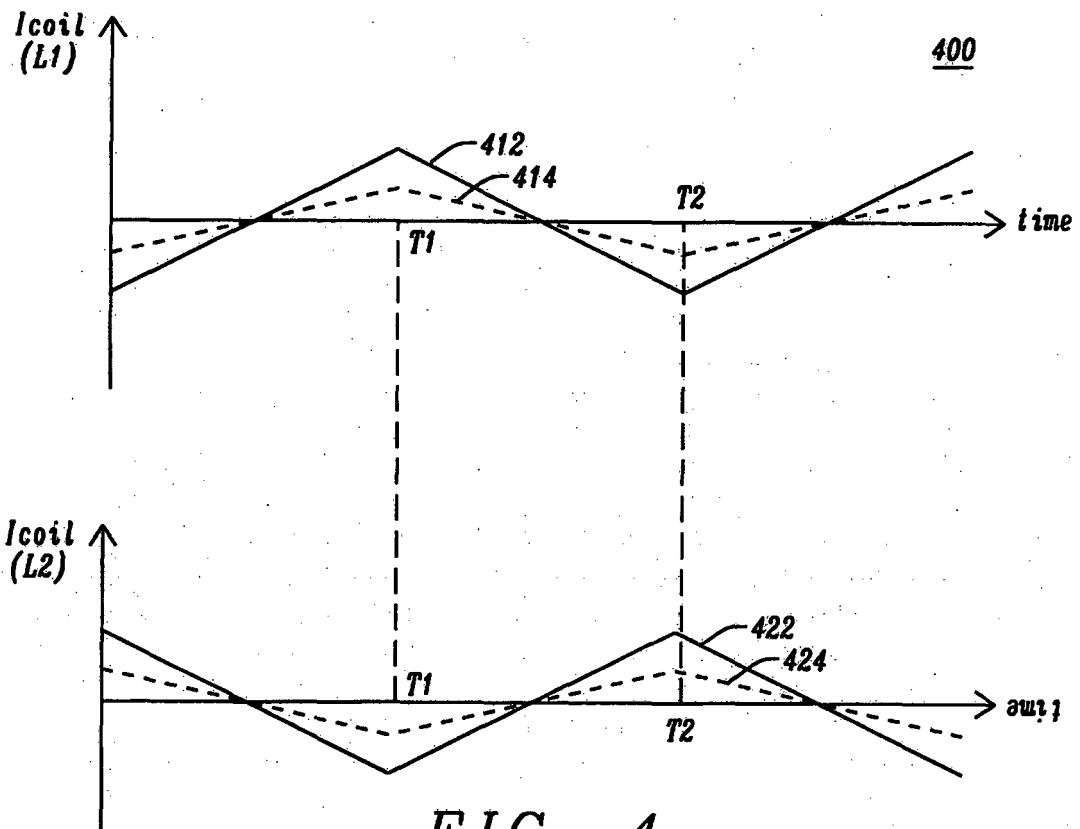


FIG. 4

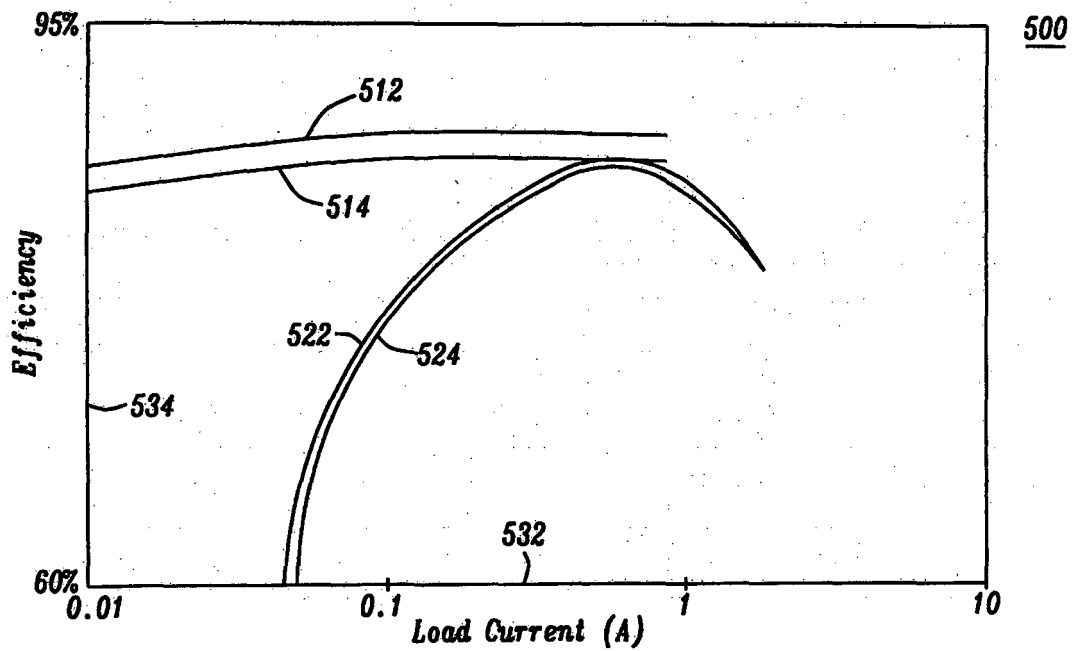


FIG. 5

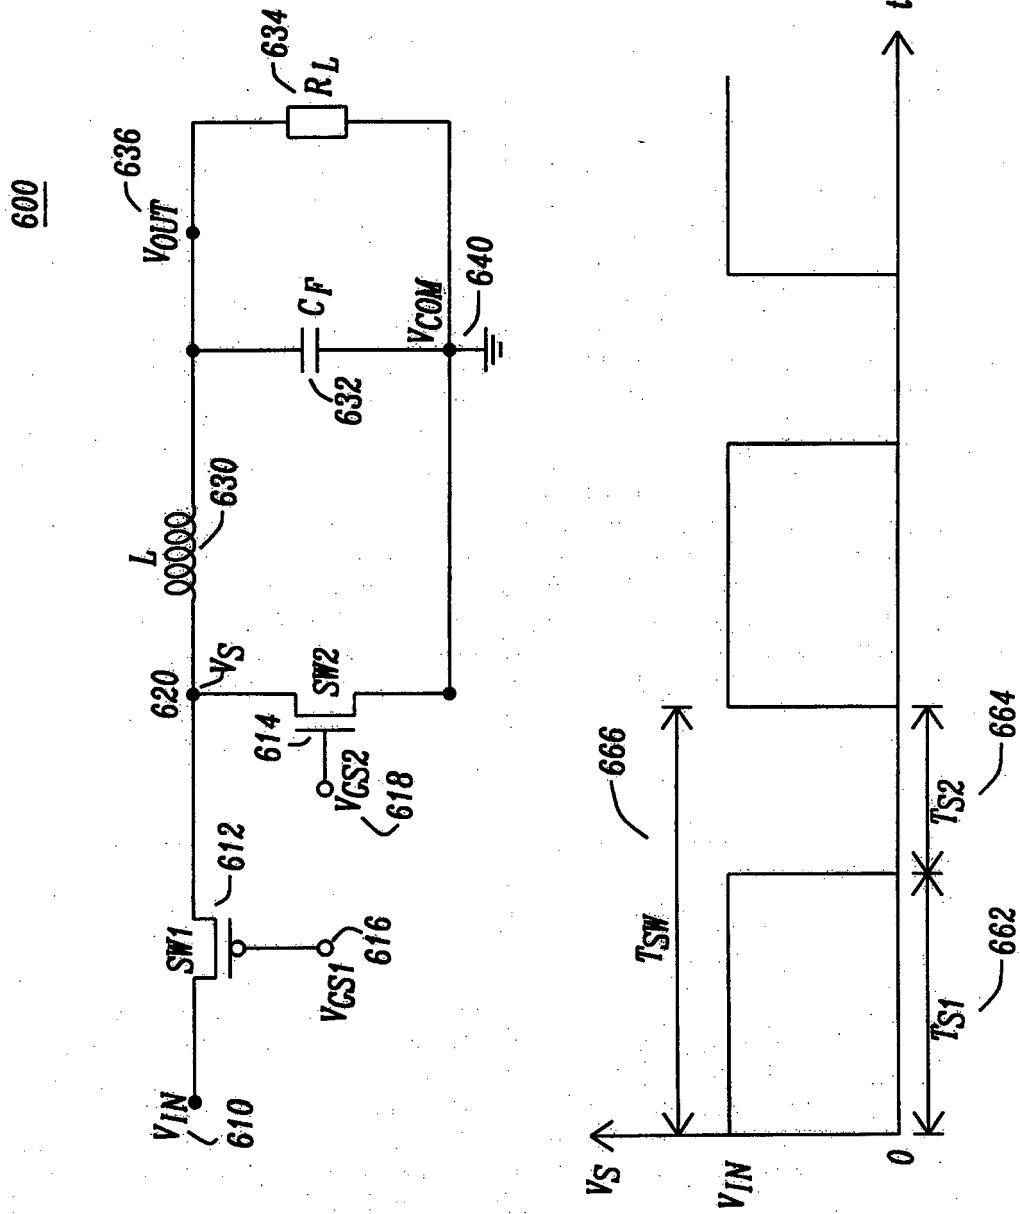


FIG. 6

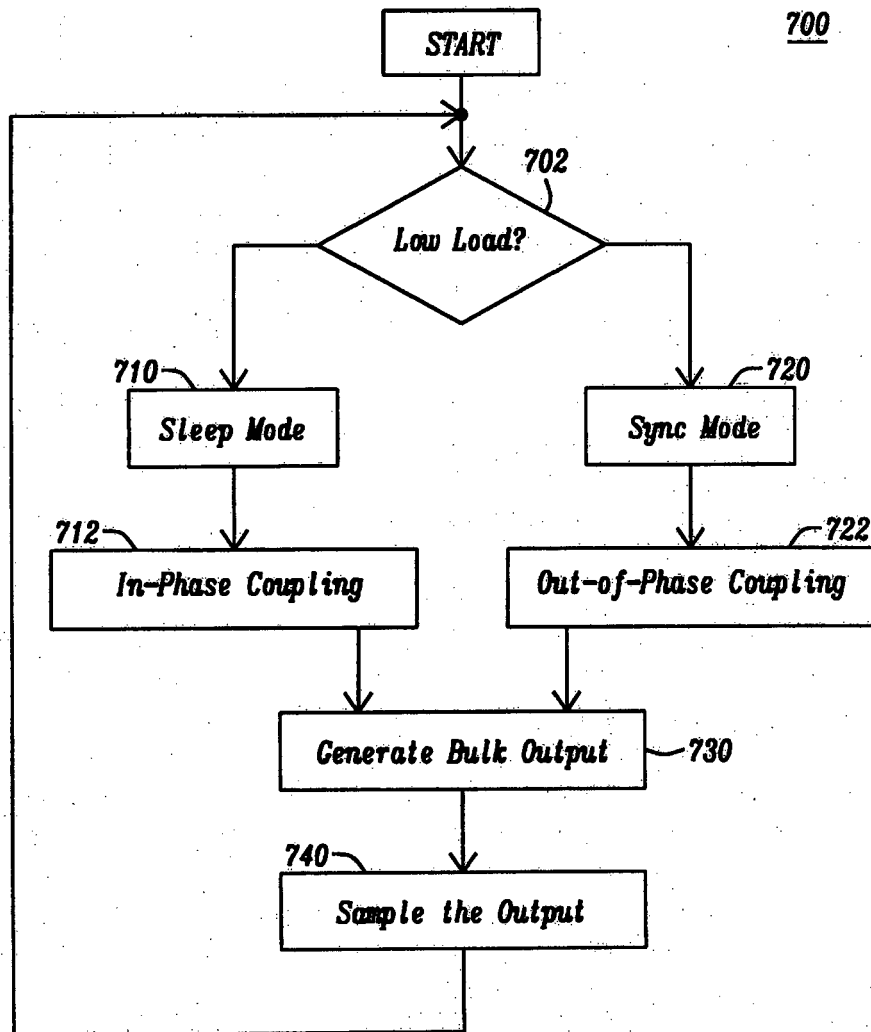


FIG. 7



EUROPEAN SEARCH REPORT

Application Number
EP 14 39 2006

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2007/176585 A1 (HE RUNSHENG [US] ET AL) 2 August 2007 (2007-08-02) * paragraphs [0007], [0031] - [0034], [0036] - [0038]; figure 2 *	1-22	INV. H02M1/14 H02M3/158
X	US 6 362 608 B1 (ASHBURN MICHAEL ANTHONY [US] ET AL) 26 March 2002 (2002-03-26) * columns 1-4 *	1-22	
X	US 2009/001945 A1 (WICKERSHAM ROBERT D [US] ET AL) 1 January 2009 (2009-01-01) * paragraphs [0011] - [0014]; figures 2,4 *	1-22	
X	US 2013/307503 A1 (OUYANG QIAN [CN] ET AL) 21 November 2013 (2013-11-21) * paragraphs [0007], [0021] - [0023]; figure 4 *	1-22	
X	US 2008/019158 A1 (WU WENKAI [US] ET AL) 24 January 2008 (2008-01-24) * paragraphs [0024] - [0039] *	1,9,16	TECHNICAL FIELDS SEARCHED (IPC)
A	FEI YANG ET AL: "Interleaved Critical Current Mode Boost PFC Converter With Coupled Inductor", IEEE TRANSACTIONS ON POWER ELECTRONICS, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, USA, vol. 26, no. 9, 9 September 2011 (2011-09-09), pages 2404-2413, XP011383348, ISSN: 0885-8993, DOI: 10.1109/TPEL.2011.2106165 * paragraph [SectionIII]; figures 2,3 *	1-22	H02M
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 12 November 2014	Examiner Grosse, Philippe
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 39 2006

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-11-2014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007176585 A1	02-08-2007	CN 1722592 A	18-01-2006
		EP 1617548 A2	18-01-2006
		JP 4652901 B2	16-03-2011
		JP 2006034091 A	02-02-2006
		TW I381606 B	01-01-2013
		US 2006013023 A1	19-01-2006
		US 2007176585 A1	02-08-2007
		US 2010171478 A1	08-07-2010

US 6362608 B1	26-03-2002	NONE	

US 2009001945 A1	01-01-2009	TW 200913443 A	16-03-2009
		US 2009001945 A1	01-01-2009

US 2013307503 A1	21-11-2013	CN 103427602 A	04-12-2013
		US 2013307503 A1	21-11-2013

US 2008019158 A1	24-01-2008	DE 102006034553 A1	06-06-2007
		US 2008019158 A1	24-01-2008

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82