Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2371367 A1 2000/11/30

(21) 2 371 367

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(86) Date de dépôt PCT/PCT Filing Date: 2000/05/18
(87) Date publication PCT/PCT Publication Date: 2000/11/30
(85) Entrée phase nationale/National Entry: 2001/11/08
(86) N° demande PCT/PCT Application No.: JP 2000/003178
(87) N° publication PCT/PCT Publication No.: 2000/072270
(30) Priorité/Priority: 1999/05/25 (11/145686) JP


(51) Cl.Int.^{7}/Int.Cl.^{7} G06T 15/00

(71) Demandeur/Applicant:
SONY COMPUTER ENTERTAINMENT INC., JP

(72) Inventeur/Inventor:
OKA, MASAAKI, JP

(74) Agent: MBM & CO.

(54) Titre : PROCEDE ET APPAREIL DE GENERATION D'IMAGES
(54) Title: METHOD AND APPARATUS FOR GENERATING IMAGES

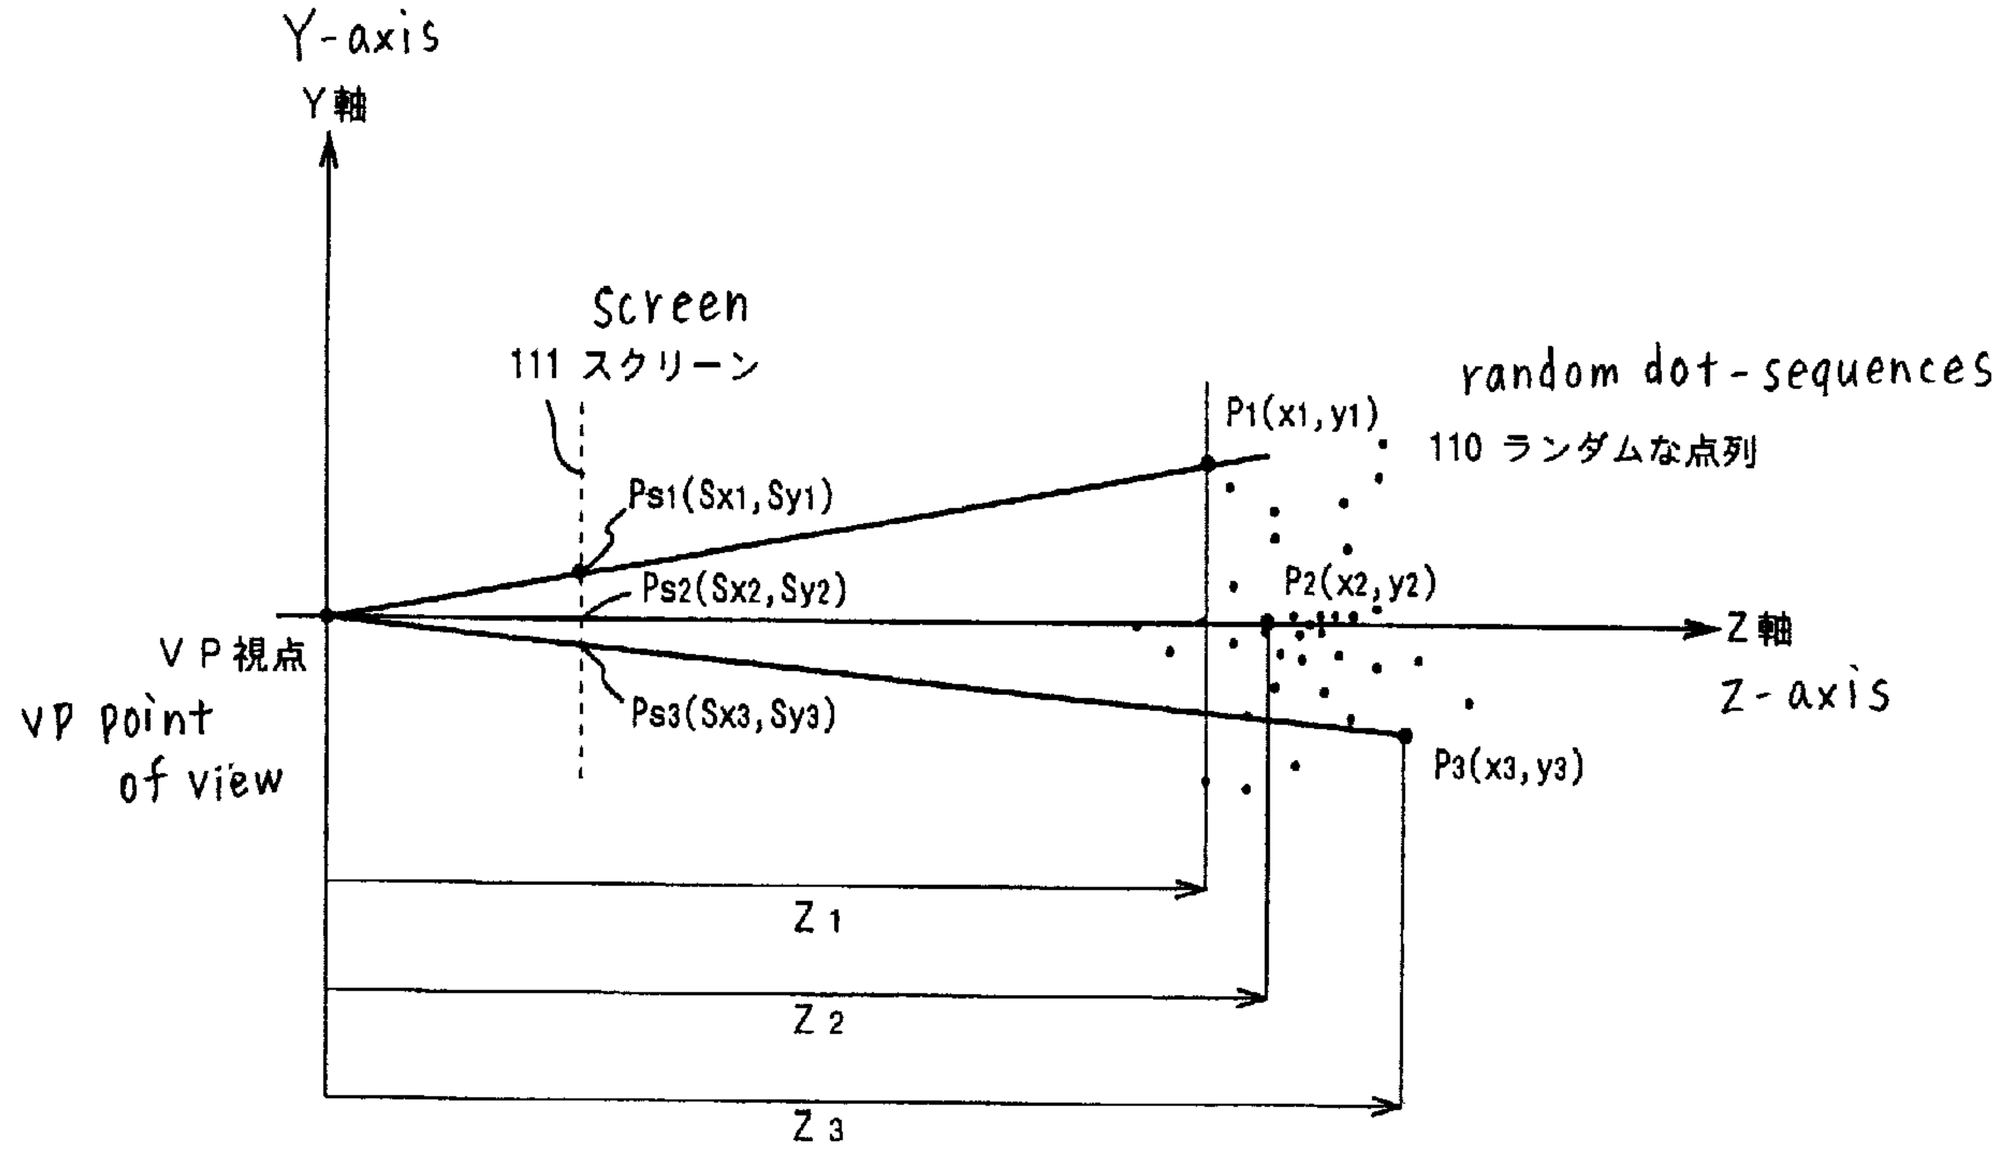

(57) Abrégé/Abstract:
An image generating apparatus and image generating method determine the distributions state of dot-sequences on a two-dimensional screen using two-dimensional Gaussian distribution in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space, and generate an image of dot-sequences on the two-dimensional screen based on the distribution state on the two-dimensional screen. The two-dimensional Gaussian distribution can be factored to the product of one-dimensional Gaussian distributions, and the one-dimensional Gaussian distributions can be generated by uniform random numbers. Thus, it is easy to create an image by projecting a plurality of dot-sequences randomly existing in a three-dimensional space onto a two-dimensional screen.

[Name of the Document] ABSTRACT

[Summary]

[Problem] It is an object of the invention to easily generate an image by projecting a plurality of dot-sequences randomly existing in a three-dimensional space onto a two-dimensional screen.

[Solving Means] A distribution state of dot-sequences on a two-dimensional screen cam be determined by using two-dimensional Gaussian distribution in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space, an generate an image of dot-sequences on the two-dimensional screen based on the distribution state on the two-dimensional screen. The two-dimensional Gaussian distribution can be factored to the product of one-dimensional Gaussian distributions, and the one-dimensional Gaussian distributions can be generated by uniform random numbers.

[Selected Diagram] FIG. 8

[Name of Document] SPECIFICATION

[Title of the Invention] IMAGE GENERATING APPARATUS, IMAGE GENERATING METHOD, ENTERTAINMENT SYSTEM, AND RECORDING MEDIUM

[Scope of Claims for a Patent]

[Claim 1] In an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating apparatus being characterized by comprising means for determining the distribution state on said two-dimensional screen based on the distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, wherein an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

[Claim 2] In an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating apparatus being characterized by comprising means for determining the distribution state on said two-dimensional screen based on the distribution state of dot-sequences, point of view, and direction of view, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

[Claim 3] In an image generating apparatus as claimed in Claim 2,

said image generating apparatus, wherein when the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis, said two-dimensional screen is placed on the X-Y plane, the probability density function for said

plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z), the distance from said point of view to said screen is represented by h, and the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z, the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

[Equation 1]

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

[Claim 4] In an image generating apparatus as claimed in Claim 2,

said image generating apparatus, wherein when the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis, said screen is placed on the X-Y plane, the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z), the distance from said point of view to said screen is represented by h, and the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z, the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

[Equation 2]

$$g(x,y)=\int_0^{\infty} f(x\cdot Z/h, y\cdot Z/h, Z)\cdot(Z/h)^2\, dZ$$

[Claim 5] In an image generating apparatus as claimed in Claim 2,

said image generating apparatus, wherein the plurality of dot-sequences existing within said three-dimensional space are apex coordinates for drawing objects with polygons.

[Claim 6] In an image generating apparatus as claimed in Claim 2,

said image generating apparatus, wherein the plurality of dot-sequences existing within said three-dimensional space are coordinates for drawing one of clouds, water surface, and tree leaves.

[Claim 7] In an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating apparatus being characterized by comprising means for determining the distribution state on said two-dimensional screen using uniform random numbers, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, wherein an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

[Claim 8] In an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating apparatus being characterized by comprising means for determining the distribution state on said two-dimensional screen using random numbers following a one-dimensional Gaussian distribution generated from uniform random numbers using the Box-Muller method, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, wherein an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

[Claim 9] In an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating apparatus being characterized by comprising means for determining the distribution state on said two-dimensional screen using two-

dimensional Gaussian distribution, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, wherein an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

[Claim 10] In an image generating apparatus as claimed in Claim 9,

said image generating apparatus, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x, y) = (1/2\pi)\exp\{-(x^2 + y^2)/2\}$$

using said two-dimensional Gaussian distribution.

[Claim 11] In an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating method, comprising the following steps:

determining distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

determining the distribution state on said two-dimensional screen, based on the distribution state of said plurality of dot-sequences in said three-dimensional space; and

generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

[Claim 12] In an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating method being characterized by comprising the following steps:

determining distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

determining the distribution state on said two-dimensional screen, based on the distribution state of said plurality of dot-sequences in said three-dimensional space; and

generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

[Claim 13] In an image generating method according to Claim 12,

said image generating method, wherein when the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis, said two-dimensional screen is placed on the X-Y plane, the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z), the distance from said point of view to said screen is represented by h, and the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z. the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

[Equation 4]

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

[Claim 14] In an image generating method according to Claim 12,

said image generating method, wherein when the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis, said screen is placed on the X-Y plane, the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z), the distance from said point of view to said screen is represented by h, and the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z. the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

[Equation 5]

$$g(x,y)=\int_0^{\infty} f(x\cdot Z/h, y\cdot Z/h, Z)\cdot(Z/h)^2\,dZ$$

[Claim 15] In an image generating method according to Claim 12,

said image generating method, wherein the plurality of dot-sequences existing within said three-dimensional space are apex coordinates for drawing objects with polygons.

[Claim 16] In an image generating method according to Claim 12,

said image generating method, wherein the plurality of dot-sequences existing within said three-dimensional space are coordinates for drawing one of clouds, water surface and tree leaves.

[Claim 17] In an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using uniform random numbers; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

[Claim 18] In an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using random numbers following a one-dimensional Gaussian distribution generated from uniform random numbers using the Box-Muller method; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

[Claim 19] In an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using two-dimensional Gaussian distribution ; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

[Claim 20] An image generating method according to Claim 19, wherein the probability density function g(x, y) which is the state of dot-sequences on a two-dimensional screen is determined by using said two-dimensional Gaussian distribution as

[Equation 6]

$$g(x,y) = (1/2\pi)\exp\{-(x^2+y^2)/2\}$$

[Claim 21] In an entertainment system having at least a control system, a graphics system, a sound system, and an optical disk control unit,

said entertainment system, characterized in that said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and that, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen based on the distribution state of the dot-sequences, and generates an image of dot-sequences on said two-dimensional screen according to the distribution state on said two-dimensional screen.

[Claim 22] In an entertainment system having at least a control system, a graphics system, a sound system, and an optical disk control unit,

said entertainment system, characterized in that said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and that, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen based on the distribution state of dot-sequences, point of view, and direction of view, and generates an image of dot-sequences on said two-dimensional screen according to the distribution state on said two-dimensional screen.

[Claim 23] In an entertainment system having at least a control system, a graphics system, a sound system, and an optical disk control unit,

said entertainment system, characterized in that said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and that, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen using two-dimensional Gaussian distribution, and generates an image of dot-sequences on said

two-dimensional screen according to the distribution state on said two-dimensional screen.

[Claim 24] A recording medium upon which has been recorded an image generating step for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

wherein there are recorded a step for determining distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

a step for determining the distribution state on said two-dimensional screen, based on the distribution state of said plurality of dot-sequences in said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

[Claim 25] A recording medium upon which has been recorded an image generating step for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

wherein there are recorded a step for determining distribution state of dot-sequences, point of view, and direction of view, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

a step for determining the distribution state on said two-dimensional screen, based on said determined distribution state of said plurality of dot-sequences, point of view, and direction of view, in said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

[Claim 26] A recording medium upon which has been recorded an image generating step for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen,

wherein there are recorded a step for determining the distribution state on said two-dimensional screen using two-dimensional Gaussian distribution, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

[Detailed Description of the Invention]

[0001]

[Technical Field Pertinent to the Invention]

The present invention relates to an image generating method, image generating apparatus, entertainment system, and recording medium, applicable to generating and displaying three-dimensional object images in real-time, with limited hardware resources such as an entertainment system such as a video game apparatus or a personal computer.

[0002]

More specifically, the present invention relates to three-dimensional computer graphics processing, and relates to an image generating apparatus, image generating method, entertainment system, and recording medium, for displaying dot-sequences (groups of dots) on a two-dimensional screen, following probability distribution in a three-dimensional space.

[Prior Art]

[0003]

In computer graphics processing, there are cases wherein a plurality of randomly-existing dots in three-dimensional space must be displayed on a two-dimensional hypothetical screen. Such multiple randomly-existing dots in three-dimensional space are used for example in cases of representing screen background clouds, waves on water, trees luxuriant with leaves, and so forth, with groups of

extremely small dot groups. That is, such objects to be drawn are represented by groups of extremely small polygons, so the apex coordinates of the polygon, the center point thereof, etc., can be understood as groups of dots (dot-sequences).

[0004]

Conventionally, with computer graphics, there has been the need to calculate the coordinates values for each dot of dot-sequences existing in a three-dimensional space making up such clouds, waves, leaves, etc., and then display on a two-dimensional hypothetical screen.

[0005]

[Problem that this invention is to solve]

However, since the distance from the point of view to each of the extremely great number of points making up the object being drawn differs for each point, so the number of calculations for coordinates conversion, perspective conversion, etc., is extremely great, and this has been a load on the CPU (Central Processing Unit) of the computer and other peripheral devices.

[0006]

In other words, the number of calculations for such coordinates conversion, perspective conversion, etc., is extremely great when performing real-time high-speed drawing computation of object images which sequentially change on an entertainment system such as a video game apparatus, and this has been a problem.

[0007]

Accordingly, the present invention has been made in light of the above problem, and it is an object thereof to provide a new image generating apparatus, image generating method, entertainment system, and recording medium, relating to computer graphics processing, for projecting dot-sequences randomly existing in three-dimensional space on a hypothetical two-dimensional screen.

[0008]

[Means for Solving the Problems]

According to a first aspect of the present invention, an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen includes means for determining the distribution state on the two-dimensional screen based on the distribution state of dot-sequences in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space, so that an image of dot-sequences is generated on the two-dimensional screen based on the distribution state on the two-dimensional screen.

[0009]

According to a second aspect of the present invention, an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises means for determining the distribution state on the two-dimensional screen based on the distribution state of dot-sequences, point of view, and direction of view, in the event that the plurality of dot-sequences randomly exist in a domain (for example, sphere) within the three-dimensional space, so that an image of dot-sequences is generated on the two-dimensional screen based on the distribution state on the two-dimensional screen.

[0010]

With the above image generating apparatus, when the direction from the point of view toward the plurality of dot-sequences is stipulated as the Z-axis, the two-dimensional screen is placed on the X-Y plane, the probability density function for the plurality of dot-sequences existing within the three-dimensional space is f(X, Y, Z), the distance from the point of view to the screen is represented by h, and the distance from the point of view to the dot-sequences existing within the three-dimensional space is represented by Z, the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen may be determined by

[Equation 7]

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

[0011]

Also, when the direction from the point of view toward the plurality of dot-sequences is stipulated as the Z-axis, the screen is placed on the X-Y plane, the probability density function for the plurality of dot-sequences existing within the three-dimensional space is f(X, Y, Z), the distance from the point of view to the screen is represented by h, and the distance from the point of view to the dot-sequences existing within the three-dimensional space is represented by Z, the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen may be determined by

[Equation 8]

$$g(x,y)=\int_0^{\infty} f(x\cdot Z/h, y\cdot Z/h, Z)\cdot(Z/h)^2\, dZ$$

[0012]

Such multiple dot-sequences existing within the three-dimensional space may be apex coordinates for drawing objects with polygons. The objects may be clouds, water surface, or tree leaves, for example, existing within the three-dimensional space.

[0013]

According to a third aspect of the present invention, an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises means for determining the distribution state on the two-dimensional screen using uniform random numbers, in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space, so that an image of dot-sequences is generated on the two-dimensional screen based on the distribution state on the two-dimensional screen.

[0014]

According to a fourth aspect of the present invention, an image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises means for determining the distribution state on the two-dimensional screen using two-dimensional Gaussian distribution, in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space, so that an image of dot-sequences is generated on the two-dimensional screen based on the distribution state on the two-dimensional screen.

[0015]

According to a fifth aspect of the present invention, an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises the following steps:

determining distribution state of dot-sequences in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space;

determining the distribution state on the two-dimensional screen, based on the distribution state of the plurality of dot-sequences in the three-dimensional space; and

generating an image of dot-sequences on the two-dimensional screen, based on the distribution state on the two-dimensional screen thus determined.

[0016]

According to a sixth aspect of the present invention, an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises the following steps:

determining the distribution state of dot-sequences, point of view, and direction of view, in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space;

determining the distribution state on the two-dimensional screen, based the determined distribution state, point of view, and direction of view; and

generating an image of dot-sequences on the two-dimensional screen, based on the distribution state on the two-dimensional screen thus determined.

[0017]

According to a seventh aspect of the present invention, an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises the following steps in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space:

determining the distribution state on the two-dimensional screen, using uniform random numbers; and

generating an image of dot-sequences on the two-dimensional screen, based on the determined distribution state on the two-dimensional screen.

[0018]

According to an eighth aspect of the present invention, an image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen comprises the following steps in the event that the plurality of dot-sequences randomly exist in a sphere within the three-dimensional space:

determining the distribution state on the two-dimensional screen, using two-dimensional Gaussian distribution ; and

generating an image of dot-sequences on the two-dimensional screen, based on the determined distribution state on the two-dimensional screen.

[0019]

Such an image generating apparatus or image generating method may be employed in an entertainment system comprising at least a control system, a graphics system, a sound system, and an optical disk control unit.

[0020]

Also, such a image generating method may be employed as a recording medium upon which has been recorded these steps.

[0021]

With the present invention, the distribution density (probability density function) of dot-sequences on a two-dimensional screen regarding dot-sequences randomly existing in a three-dimensional space can be obtained based on the distribution density (probability density function), point of view, and direction of view of the dot-sequences in the three-dimensional space, without performing coordinates conversion, perspective conversion, etc., for each individual point.

[0022]

Further, with the present invention, the distribution of dot-sequences on a two-dimensional screen regarding dot-sequences randomly existing in a three-dimensional space can be obtained by using two-dimensional Gaussian distribution without performing coordinates conversion, perspective conversion, etc., for each individual point, by means of employing an appropriate rule of approximation. This two-dimensional Gaussian distribution can be represented as the product of one-dimensional Gaussian distributions. Further, one-dimensional Gaussian distributions can be easily generated using uniform random numbers.

[0023]

Accordingly, the load on the CPU, GTE, and other computing means is lightened, and high-speed graphic processing can be realized.

[0024]

[Mode for carrying out the Invention]

The following is a detailed description of the embodiments according to the present invention, with reference to the attached drawings.

(Entertainment System)

[0025]

First, an example of an entertainment system capable of carrying out the three-dimensional graphics according to the present invention will be briefly described with reference to the drawings.

[0026]

Fig. 1 is a diagram illustrating the exterior view of a video game apparatus as an example of an entertainment system. This video game apparatus 1 is for reading out a game program recorded in an optical disk for example, and executing the game based on instructions from a user (game player). Incidentally, the term "executing the game" primarily refers to controlling progression, display, and audio of the game.

[0027]

The main unit 2 of the video game apparatus 1 is configured having at the center thereof a disk mounting unit 3 where an optical disk such as a CD-ROM which is the recording medium for supplying application programs such as video games and the like is mounted, a reset switch 4 for arbitrarily resetting the game, an electric power source switch 5, a disk operating switch 6 for operating the mounting of the optical disk, and two slots portions 7A and 7B, for example.

[0028]

Two operating devices 20 can be connected to the slot portions 7A and 7B, so that two users can compete. Also, memory card devices which can be used to save (store) and read out game data, and portable electronic devices which can be detached from the main unit and execute the game, can be inserted into these slot portions 7A and 7B.

[0029]

The operating device 20 has first and second operating units 21 and 22, a left button 23L, a right button 23R, a start button 24, and a selecting button 25, and further has operating units 31 and 32 which are capable of analog operation, a mode selection

switch 33 for selecting the operating mode for these operating units 31 and 32, and a display unit 34 for displaying the selected operating mode.

[0030]

Fig. 2 illustrates the slot portions 7A and 7B provided to the front of the main unit 2 of the video game apparatus 1. The slot portions 7A and 7B are each formed in two tiers, with memory card insertion portions 8A and 8B to which memory cards 10 or portable electronic devices 100 are mounted formed to the upper tier thereof, and controller connection portions (jacks) 9A and 9B to which the connecting terminal portion (connector) 26 of the connector 20 is connected formed to the lower tier thereof.

[0031]

The insertion holes (slots) of the memory card insertion portions 8A and 8B are formed somewhat asymmetrically, so there is no erroneous insertion of memory cards. On the other hand, the controller connection portions 9A and 9B are also formed somewhat asymmetrically, so there is no erroneous insertion of connecting terminal portions 26 of the controllers 20, and also formed so as to have a insertion hole shape differing from that of the memory card insertion portions 8A and 8B, so there is no erroneous insertion of memory cards.

[0032]

Fig. 3 illustrates a state wherein a portable electronic device 100 has been inserted into the memory card insertion portion 8A of the slot portion 7A at the front of the video game apparatus 1.

[0033]

Next, Fig. 4 is a block diagram illustrating an example of a schematic circuit configuration of the principal portions of the video game apparatus 1.

[0034]

This video game apparatus 1 is made up of a control system 50 comprising a CPU (Central Processing Unit) 51 and devices peripheral thereto and the like; a graphic system 60 comprising a GPU (Graphic Processing Unit) 62 for performing drawing to a frame buffer 63 and so forth; a sound system 70 comprising an SPU (Sound Processing Unit) and the like for generating music, sound effects, etc.; an optical disk control unit 80 for performing control of optical disks upon which are recorded application programs; a communication control unit 90 for controlling signals from the controllers 20 whereby instructions are input from the users, and input and output of data from and to memory cards 10 for storing game settings and the like and later-described portable electronic devices 100; a bus BUS to which the above components are connected; and so forth.

[0035]

The control system 50 is provided with a CPU 51, a peripheral device control unit 52 for performing interruption control, control of DMA (Dynamic Memory Access), etc., main memory (main storage device) 53 made up of RAM (Random Access Memory), and ROM (Read-Only Memory) 54 storing programs such as the so-called operating system which manages the main memory 53, graphic system 60, sound system 70, and so forth. Now, the term main memory 53 here refers to such whereby programs can be executed thereupon.

[0036]

The CPU 51 is for controlling the entire video game apparatus 1 by executing the operating system stored in the ROM 54, and is made up of a 32-bit RISC (Reduced-Instruction Set Computer) CPU, for example.

[0037]

Once the power is turned on to this video game apparatus 1, the CPU 51 of the control system 50 controls the graphic system 60, sound system 70, etc., by executing the operating system stored in the ROM 54.

[0038]

Also, once the operating system is executed, the CPU 51 performs initialization of the entire video game apparatus 1 such as checking operation and so forth, following which the CPU 51 controls the optical disc control unit 80 to execute application programs such as a game stored in the optical disk. By means of executing the programs such as games, the CPU 51 controls the graphic system 60, sound system 70, etc., according to input from the user, to control image display, and generation of sound effects and music.

[0039]

Also, the graphics system 60 is provided with a graphics data generating processor or a GTE (Geometry Transfer Engine) 61 for performing processing such as coordinates conversion and the like, a GPU (Graphic Processing Unit) 62 for performing drawing by following the drawing instructions from the CPU 51, a frame buffer 63 for storing image drawn by this GPU 62, and an image decoder 64 for decoding image data compressed and encoded by orthogonal transformation such as discrete cosine transformation and the like.

[0040]

The GTE 61 functions as a co-processor of the CPU 51. The GTE 61 has a parallel computer mechanism for executing multiple computations in parallel for example, so as to be able to perform high-speed computation such as coordinates conversion, light source calculation, matrix or vector computation, etc., according to computation requests from the CPU 51. That is, calculation of the apex coordinates of polygons relating to the present invention are carried out in the GTE 61. This GTE 61 is designed such that in the case of performing computation for flat shading wherein a single triangular polygon is drawn in a single color, the GTE 61 is capable of performing coordinates computation for up to around 1,500,000 polygons per second,

and accordingly, this video game apparatus reduces the load on the CPU 51, and realizes high-speed coordinates computation.

[0041]

Also, the GPU 62 operates following polygon drawing commands from the CPU 51. The GPU 62 has a two-dimensional address space independent from the CPU 51, and performs drawing of polygons and the like to the frame buffer 63 which is this address space. This GPU 62 is designed to be able to draw up to around 630,000 polygons per second.

[0042]

Further, the frame buffer 63 is made up of a so-called dual port RAM, and is capable of simultaneously performing drawing from the GPU 62 or transfer from the main memory 53, and reading for display. This frame buffer 63 has capacity of 1 megabyte for example, which is handled as a matrix of 1024 horizontal pixels by 512 vertical pixels, each pixel being 16 bits.

[0043]

Also provided to this frame buffer 63, besides the display area output as video output, is a CLUT (Color Look-Up Table) area storing a CLUT to which the GPU 62 makes reference at the time of drawing polygons and the like, and a texture area for storing textures which are inserted into the polygons and the like, subjected to coordinates conversion at the time of drawing, and drawn by the GPU 62 (i.e., mapped). The CLUT area and texture area are dynamically updated according to change in the display area and so forth.

[0044]

Also, the GPU 62 is designed so as to be able to perform, in addition to flat shading, Gouraud shading wherein the color within a polygon is determined by interpolating from the color of the apexes of the polygon, and texture mapping wherein textures stored in the texture area are pasted onto the polygon. In the event of

performing such Gouraud shading or texture mapping, the GTE 16 is capable of performing coordinates calculations for up to around 500,000 polygons per second.

[0045]

Further, the image decoder 64 decodes still or motion image data stored in the main memory 53 based on control from the CPU 51 and stores this in the main memory 53.

[0046]

Also, this regenerated image data is stored in the frame buffer 63 via the GPU 62, thus enabling it to be used for image backgrounds drawn by the above GPU 62.

[0047]

The sound system 70 is provided with an SPU 71 which generates music, sound effects, etc., based on instructions from the CPU 51, a sound buffer 72 wherein waveform data and the like is stored by this SPU 71, and a speaker 73 for outputting the music, sound effects, etc., generated by the SPU 71.

[0048]

The SPU 71 is provided with ADPCM decoding functions for playing sound data subjected to ADPCM (Adaptive Differential PCM encoding by taking 16-bit audio data as 4-bit differential signals for example, playing functions for generating sound effects and the like by playing the waveform data stored in the sound buffer 72, modulating functions for modulating and playing the waveform data stored in the sound buffer 72, and so forth.

[0049]

Having such functions allows the sound system 70 to be used as a so-called sampling sound source wherein music, sound effects, etc., are generated based on the waveform data recorded in the sound buffer 72, based on instructions from the CPU 51.

[0050]

The optical disk control unit 80 is provided with an optical disk device 81 for playing recorded programs and data and the like stored in the optical disk, a decoder 82 for decoding programs and data and the like to which are added ECC (Error Correction Code) for example, and a buffer 83 for realizing high-speed data reading from the optical disk by means of temporarily storing the data from the optical disk device 81. A sub-CPU 84 is connected to the decoder 82.

[0051]

Also, in addition to the above ADPCM data for the audio data recorded in the optical disk to be read out with the optical disk device 81, there is so-called PCM data, which is audio signals subjected to analog/digital conversion.

[0052]

The audio data recorded by representing 16-bit digital data as 4-bit differential signals for example for ADPCM data is decoded by the decoder 82, supplied to the above SPU 71, subjected to digital/analog conversion and the like by the SPU 71, and then used for driving the speaker 73.

[0053]

Also, audio data recorded as 16-bit digital data for example for PCM data is decoded by the decoder 82, then used for driving the speaker 73.

[0054]

Further, the communication control unit 90 has a communication control device 91 for performing control of communication with the CPU 51 via the bus BUS, with the controller connecting portion 12 to which controllers 20 for inputting instructions from the user are connected, and memory card insertion portions 8A and 8B to which memory cards 10 serving as auxiliary storing devices for storing game setting data and the like and the later-described portable electronic devices 100 are connected, being provided to this communication control device 91.

[0055]

The controller 20 connected to the controller connecting portion 9 has 16 instructing keys for example for inputting instructions from the user, and makes transmission by synchronous communication to the communication control device 91 around 60 times per second regarding the state of the instruction keys according to instructions from the communication control device 91. The communication control device 91 then sends the instruction key state of the controller 20 to the CPU 51.

[0056]

Thus, the instructions from the user are input to the CPU 51, and the CPU 51 performs processing according to the instructions from the user, based on the game program or the like which is being executed.

[0057]

Now, regarding the main memory 53, GPU 62, image decoder 64, decoder 82, and so forth, there is the need to transfer large amounts of image data a high speeds at the time of reading the program, displaying images, drawing images, etc. Accordingly, this video game apparatus is designed so as to perform so-called DMA transfer wherein data transfer is performed directly between the main memory 53, GPU 62, image decoder 64, decoder 82, and so forth, under control of the peripheral device control unit 52, without going through the CPU 51. Thus, the load on the CPU 51 due to data transfer can be reduced, and high-speed data transfer can be performed.

[0058]

Also, in the event that the CPU 51 needs to store game settings data and the like for the game being executed, the data to be stored is transferred to the communication control device 91, and the communication control device 91 writes the data from the CPU 51 to a memory card 10 or portable electronic device 100 inserted in the slot of a memory card insertion portion 8A or 8B.

[0059]

Now, the communication control device 91 has built in a protective circuit for preventing electrical destruction. The memory card 10 and portable electronic device 100 are separated from the bus BUS, and can be mounted or detached with the electric power turned on to the main unit. Accordingly, a new memory card can be inserted without turning off electric power to the main unit, in the event that the storage capacity of the memory card 10 or portable electronic device 100 is found to be insufficient, or in other like cases. Consequently, a new memory card can be inserted and the necessary data can be written to the new memory card, without losing any of the game data which needs to be backed up.

[0060]

Also, the parallel I/O interface (PIO) 96 and serial I/O interface (SIO) 97 are interfaces for connecting the memory card 10 or portable electronic device 100 to the video game apparatus 1.

[0061]

With the above-described entertainment system, high-speed computation using approximation calculations at the time of performing the perception conversion according to the present embodiment.

(Three-dimensional graphics)

[0062]

Three-dimensional graphics is an art relating to calculating how an object placed in three-dimensional space on a screen assumed at a certain position is perceived when viewing the object from a certain point of view.

[0063]

The GTE 61 functions as a co-processor for performing high-speed geometry computation. Of such high-speed computations, a typical geometry computation is provided to the game programmer in the format of a library, for example. In the following description, the approximation calculation for perception conversion capable

of obtaining the same results with a simple method at the time of conducting perception of dot-sequences randomly distributed in a three-dimensional space onto a two-dimensional screen can be prepared as a basic geometry library for example, and provided to game software programmers.

[0064]

Fig. 5 is a diagram for describing the projection of the multiple dot-sequences 110 randomly existing in a three-dimensional space onto a two-dimensional screen 111. Here, the multiple dot-sequences 110 randomly distributed in three-dimensional space exist as the object of drawing. In order to display the object of three-dimensional drawing on a two-dimensional display device (television set, monitor, etc.), there is the need to make a three-dimensional representation on a hypothetical two-dimensional screen 111 beforehand. Accordingly, there is the need to project the three-dimensional dot-sequences 110 onto the hypothetical two-dimensional screen 111.

[0065]

The point-of-view coordinates axes in the three-dimensional space surrounding the point of view VP are thus: the direction from the point of view VP toward the random dot-sequences 110 is the Z-axis, the horizontal direction of the screen 111 is the X-axis, and the vertical direction of the screen 111 is the Y-axis.

[0066]

(The current state of graphics)

[0067]

Fig. 6 is a diagram illustrating an example of perspective conversion for projecting dot-sequences randomly existing in a three-dimensional space onto a hypothetical two-dimensional screen. Of the random dot-sequences 110, representative points P1, P2, and P3 will be described. The coordinates of the points P1, P2, and P3 are P1 (X1, Y1), P2 (X2, Y2), and P3 (X3, Y3), respectively. With the distance from the point of view VP to the points P1, P2, and P3 as Z1, Z2, and Z3, and

the distance from the point of view VP to the screen as h, the coordinates values Ps1 (Sx1, Sy1), Ps2 (Sx2, Sy2), and Ps3 (Sx3, Sy3) of the points P1, P2, and P3 making up the random dot-sequence 110 on the screen 111 can be calculated using the following calculations, using triangles in a homothetic relation.

[Equation 9]

$$Sx1 = X1 \times (h/Z1), \quad Sy1 = Y1 \times (h/Z1) \Lambda \text{ (1)}$$
$$Sx2 = X2 \times (h/Z2), \quad Sy2 = Y2 \times (h/Z2) \Lambda \text{ (2)}$$
$$Sx3 = X3 \times (h/Z3), \quad Sy3 = Y3 \times (h/Z3) \Lambda \text{ (3)}$$

The reason for performing this calculation is as follows. The distance from the point of view VP to the screen is a constant h, but the distance from the point of view VP to the three points P1, P2, and P3 are each different, i.e., Z1, Z2, and Z3, so the homothetic ratios also differ, i.e., (h/Z1), (h/Z2), and (h/Z3).

[0068]

In the event that the dot-sequence randomly existing in the three-dimensional space is configured of an N number of dots, the calculations of the expressions (1) through (3) must be repeated for the number of points, i.e., N times, in order to calculate the coordinates on the screen.

[0069]

(First Embodiment)

[0070]

Now, let us assume that the randomly distributed dot-sequences existing in the three-dimensional space are dot-sequences uniformly distributed within a sphere.

[0071]

Fig. 7 is a diagram illustrating the results of randomly-existing dot-sequences in such a three-dimensional space having been projected on a two-dimensional screen in the direction of view (i.e., in the Z-axial direction).

[0072]

In the event of projecting such dot-sequences on a two-dimensional screen, the overall distribution of the projected dot-sequences exists within a circle, with the distribution being denser (darker) at the center position, growing gradually sparser in the radial direction, and becoming the sparsest (lightest) around the perimeter.

[0073]

Now, with the probability density function for the dot-sequences uniformly existing within the spherical three-dimensional space as f(X, Y, Z), the probability of emergence of dot-sequences can be represented with the following expression:

[Equation 10]

$$0 \le f(X,Y,Z) \le 1\Lambda \quad (4)$$

Performing volume integration of this probability density function f(X, Y, Z) over the entire three-dimensional space yields the total probability of emergence of dot-sequences as 1, giving the following expression:

[Equation 11]

$$\int f(X,Y,Z)\,dv = 1\Lambda \quad (5)$$

Next, the distribution probability of dots in the event of projecting a dot-sequence having the probability density function f(X, Y, Z) and existing in three-dimensional space onto a two dimensional screen will be studied. The probability density function of this dot-sequence on the two dimensional screen 111 is represented by g(X, Y).

[0074]

First, the relation between the three-dimensional space and the two dimensional screen 111 is obtained. As shown in Fig. 8, the area of a square S existing in three-dimensional space projected onto the screen is a minute area dS on the screen. With the distance from the point of view VP to the minute area dS on the screen 111 as h, and the distance from the point of view VP to the square S in three-dimensional space

as Z, the square S and the minute area dS are in the relation of the segment ratio (h/Z) squared, thus yielding the following relation.

[Equation 12]

$$S = dS \cdot (Z/h)^2 \Lambda \quad (6)$$

The probability of a dot-sequence on the minute area dS on the screen is obtained by integrating the probability of the dot-sequence in the three-dimensional space from the point of view to infinity (0 to ∞) in the form of a pyramid with the base thereof being the square S, and thus can be represented as the following expression:

[Equation 13]

$$g(x,y)\,dS = \int_0^\infty f(X,Y,Z) \cdot SdZ$$
$$= \int_0^\infty f(X,Y,Z) \cdot (Z/h)^2 dSdZ \Lambda \quad (7)$$

Expression (7) yields Expression (8):

[Equation 14]

$$g(x,y) = \int_0^\infty f(X,Y,Z) \cdot (Z/h)^2 dZ \Lambda \quad (8)$$

Now, the following equation for perspective conversion holds between the coordinates (x, y) on the screen and the coordinates (X, Y) in the three-dimensional space:

[Equation 15]

$$x = X \cdot (h/Z) \Lambda \quad (9)$$
$$y = Y \cdot (h/Z) \Lambda \quad (10)$$

Substituting Expressions (9) and (10) into Expression (8) yields the following expression:

[Equation 15]

$$g(x,y) = \int_0^\infty f(x \cdot Z/h, y \cdot Z/h, Z) \cdot (Z/h)^2 \, dZ \Lambda \quad (11)$$

Expression (11) can represent the dot-sequence distribution on the two-dimensional screen with the three-dimensional space coordinates values alone, and on the other hand, Expression (11) can represent this with the two-dimensional screen coordinates values alone.

[0075]

Thus, according to Expression (11), once the probability density function f(X, Y, Z) in three-dimensional space, point of view VP, and direction of view (the Z-axial direction in this case) are determined, the probability density function g(x, y) on the two-dimensional screen can be determined.

[0076]

Under the conditions that there is no need to display the front and back relationship between dots (i.e., the distance thereof in the Z direction) of the dot-sequence randomly existing in the three-dimensional space, the following can be said. That is, the conventional method of generating random dot-sequences within a three-dimensional space, and performing coordinates conversion and perspective conversion for each point, requires an extremely great number of calculations, which is a massive load on the CPU and GTE which are the computing means.

[0077]

Instead of performing such calculations, generating dot-sequences having a probability density g(x, y) on the two-dimensional screen as described above yields the same results for the obtained dot-sequence distribution on the screen.

[0078]

This is advantageous in that generating dot-sequences having a probability density g(x, y) on the two-dimensional screen does away with the necessity for the coordinates conversion and perspective conversion calculations for each point, and once the probability density function f(X, Y, Z), point of view VP, and direction of view are determined, dot-sequences can be generated beforehand. Accordingly, there

is the advantage that the load on the processing devices for graphics in an entertainment system, such as the CPU and GTE, can be lightened.

[0079]

(Second Embodiment)

[0080]

The integration expression in Expression (11) can be numerically solved if f(X, Y, Z) is provided. However, under constant conditions, this can be solved in an even simpler manner, using a approximation expression.

[0081]

Let us say that dot-sequences are uniformly distributed within a sphere in three-dimensional space. Under such conditions, the probability density f(X, Y, Z) of the dot-sequence in the three-dimensional space can be represented with a constant A.

[Equation 17]

$$f(X,Y,Z) = f(x \cdot Z/h, y \cdot Z/h, Z) = A\Lambda \quad (12)$$

Substituting Expression (12) into Expression (11) yields the following expression:

[Equation 18]

$$g(x,y) = \int_0^\infty A \cdot (Z/h)^2 \, dZ\Lambda \quad (13)$$

Now, Zin and Zout are the point of entry and point of exit of the integration path passing through the surface of the sphere. In the event that the integration path does not pass through the surface of the sphere, Zin = Zout = 0 holds.

[0082]

Further, in the event that the surface of the sphere is sufficiently distant from the point of view (in the event that Z is great), the difference from the point of view to each point making up the dot-sequence (i.e., the amount of change of Z of the dot-sequence within the surface of the sphere) is extremely small in relative considerations, and thus can be viewed as a constant. On the other hand, the distance h from the point

of view VP to the screen 111 is a constant. The homothetic ratio (Z/h) hardly changes, so (Z/h) can be viewed as a constant. Accordingly, with $(Z/h)^2 = B$, the following expression can be obtained:

[Equation 19]

$$g(x,y) = \int_0^\infty A \cdot B\, dZ\Lambda \quad (14)$$

Solving Expression (14) yields the following expression:

[Equation 20]

$$g(x,y) = A \cdot B(Zout - Zin)\Lambda \quad (15)$$

According to Expression (15), the dot-sequence distribution on the two-dimensional screen is proportional to (Zout - Zin). This (Zout - Zin) represents to what degree the line of view has passed through the sphere. That is to say, in the event that the line of view has passed through the center portion of the sphere, (Zout - Zin) is a relatively large value, but conversely, in the event that the line of view has near the surface of the sphere, (Zout - Zin) is a relatively small value.

[0083]

As a result, the probability density function g(x, y) on the two-dimensional screen has a distribution of a great value at the center of a circle corresponding to the center of the sphere, and has a small value at the perimeter (outer side) of the circle corresponding to the perimeter of the sphere.

[0084]

It can be understood that a distribution having such properties can be representatively approximated by two-dimensional Gaussian distribution. In this case, in order to simplify the expression, the variance of the two-dimensional Gaussian distribution to be approximated is made to be 1 (i.e., $\sigma^2 = 1$), and the average zero (i.e., ave. x = 0).

[0085]

Accordingly, Expression (11) can be represented as in the following expression:

[Equation 21]

$$g(x,y) = (1/2\pi)\exp\{-(x^2+y^2)/2\}\Lambda \quad (16)$$

Factoring the two-dimensional Gaussian distribution expression of Expression (16) allows representation to be made in a form of multiplied one-dimensional Gaussian distributions.

[Equation 22]

$$g(x,y) = (1/\sqrt{2\pi})\exp(-x^2/2)\cdot(1/\sqrt{2\pi})\exp(-y^2/2)\Lambda \quad (17)$$

The random numbers following the one-dimensional Gaussian distribution can be generated from uniform random numbers using the Box-Muller method.

[Equation 23]

$$GR = \sqrt{-2\log(R1)}\cdot\cos(2\pi R2)\Lambda \quad (18)$$

Here, R1 and R2 represent uniform random numbers, and GR represents Gaussian distribution random numbers.

[0086]

As a result, it can be understood that the distribution g(x, y) on the two-dimensional screen can be created using uniform random numbers.

[0087]

Incidentally, in order to simplify the Gaussian distribution expression, the variance of the Gaussian distribution is made to be 1, and the average zero. This is under the assumption that the dot-sequences to be drawn exist in three-dimensional space within a constant sphere, and a great number of points are distributed uniformly. In the event that the dot-sequences to be drawn existing in three-dimensional space expand beyond the sphere, the distribution g(x, y) on the two-dimensional screen

obtained under the assumption of the sphere containing most of the dot-sequences can be enlarged by an appropriate ratio in the x direction and y direction, according tot the state of the three-dimensional space expanding beyond the sphere.

[0088]

Thus, in the event of projecting dot-sequences uniformly distributed within a spherical surface onto a two-dimensional screen, the distribution of the dot-sequences on the two-dimensional screen can be obtained simply by using one-dimensional Gaussian distribution random numbers, without coordinates conversion and perspective conversion calculations for each point.

[0089]

In computer graphics, dot-sequences distributed in three-dimensional space can be simply projected on a two-dimensional screen, without placing a load on the CPU, GTE, and other coordinates computing means. Objects of drawing which randomly exist in three-dimensional space, such as clouds, water surface, and tree leaves, can thus be calculated using one-dimensional Gaussian distribution random numbers.

[0090]

[Effect of the Invention]

According to the present invention, a new image generating apparatus, image generating method, entertainment system, and recording medium, relating to computer graphics processing, can be provided, for projecting dot-sequences randomly existing in three-dimensional space onto a hypothetical two-dimensional screen.

[Brief Description of the Drawings]

[Fig. 1]

A diagram illustrating the exterior view of a video game apparatus as an example of an entertainment system for carrying out the present invention.

[Fig. 2]

A diagram illustrating the front of the video game apparatus shown in Fig. 1.

[Fig. 3]

A diagram illustrating the video game apparatus shown in Fig. 1 with a portable electronic device inserted.

[Fig. 4]

A diagram illustrating an example of a schematic circuit configuration of the principal portions of the video game apparatus shown in Fig. 1.

[Fig. 5]

A diagram describing the manner in which multiple randomly-existing dots (dot-sequence) in three-dimensional space are projected on a two-dimensional screen.

[Fig. 6]

A diagram describing an example of perspective conversion wherein randomly-existing dot-sequences in three-dimensional space in the current state are projected on a two-dimensional screen.

[Fig. 7]

A diagram illustrating the state of dot-sequence distribution of randomly-existing dot-sequences in three-dimensional space having been projected on a two-dimensional screen.

[Fig. 8]

A diagram describing the relation between the distribution of dot-sequences in three-dimensional space and the distribution of dot-sequences on the two-dimensional screen.

[Description of Reference Numerals]

1: video game device, 2: video game main body, 100: portable electronic device, 110: random sequence, 111: screen

CLAIMS

1. An image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating apparatus comprising:

means for determining the distribution state on said two-dimensional screen based on the distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

2. An image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating apparatus comprising:

means for determining the distribution state on said two-dimensional screen based on the distribution state of dot-sequences, point of view, and direction of view, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

3. An image generating apparatus according to Claim 2, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said two-dimensional screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

4. An image generating apparatus according to Claim 2, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f\left(x\cdot Z/h, y\cdot Z/h, Z\right)\cdot(Z/h)^2\,dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

5. An image generating apparatus according to Claim 2, wherein the plurality of dot-sequences existing within said three-dimensional space are apex coordinates for drawing objects with polygons.

6. An image generating apparatus according to Claim 2, wherein the plurality of dot-sequences existing within said three-dimensional space are coordinates for drawing

one of the following:

clouds;

water surface; or

tree leaves.

7. An image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating apparatus comprising:

means for determining the distribution state on said two-dimensional screen using uniform random numbers, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

8. An image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating apparatus comprising:

means for determining the distribution state on said two-dimensional screen using random numbers following a one-dimensional Gaussian distribution generated from uniform random numbers using the Box-Muller method, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

9. An image generating apparatus for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating apparatus comprising:

means for determining the distribution state on said two-dimensional screen using two-dimensional Gaussian distribution, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, so that an image of dot-sequences is generated on said two-dimensional screen based on the distribution state on said two-dimensional screen.

10. An image generating apparatus according to Claim 9, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y) = (1/2\pi)\exp\{-(x^2 + y^2)/2\}$$

using said two-dimensional Gaussian distribution.

11. An image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating method comprising the following steps:

determining distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

determining the distribution state on said two-dimensional screen, based on the distribution state of said plurality of dot-sequences in said three-dimensional space; and

generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

12. An image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating method comprising the following steps:

determining the distribution state of dot-sequences, point of view, and direction of view, in the event that said plurality of dot-sequences randomly exist in a domain

within said three-dimensional space;

determining the distribution state on said two-dimensional screen, based said determined distribution state of dot-sequences, point of view, and direction of view; and

generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

13. An image generating method according to Claim 12, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said two-dimensional screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

14. An image generating method according to Claim 12, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f(x\cdot Z/h, y\cdot Z/h, Z)\cdot(Z/h)^2\, dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

15. An image generating method according to Claim 12, wherein the plurality of dot-sequences existing within said three-dimensional space are apex coordinates for drawing objects with polygons.

16. An image generating method according to Claim 12, wherein the plurality of dot-sequences existing within said three-dimensional space are coordinates for drawing one of the following:

clouds;

water surface; or

tree leaves.

17. An image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using uniform random numbers; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

18. An image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using random numbers following a one-dimensional Gaussian distribution generated from uniform random numbers using the Box-Muller method; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

19. An image generating method for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, said image generating method comprising the following steps in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space:

determining the distribution state on said two-dimensional screen, using two-dimensional Gaussian distribution ; and

generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

20. An image generating method according to Claim 19, wherein the probability density function g(x, y) which is the state of dot-sequences on a two-dimensional screen is determined by

$$g(x, y) = (1/2\pi)\exp\{-(x^2 + y^2)/2\}$$

using said two-dimensional Gaussian distribution.

21. An entertainment system comprising at least:

a control system;

a graphics system;

a sound system; and

an optical disk control unit;

wherein said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and wherein, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen based on the distribution state of the dot-sequences, and generates an image of dot-sequences on said two-dimensional screen according to the distribution state on said two-dimensional screen.

22. An entertainment system comprising at least:

a control system;

a graphics system;

a sound system; and

an optical disk control unit;

wherein said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and wherein, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen based on the distribution state of dot-sequences, point of view, and direction of view, and generates an image of dot-sequences on said two-dimensional screen according to the distribution state on said two-dimensional screen.

23. An entertainment system comprising at least:

a control system;

a graphics system;

a sound system; and

an optical disk control unit;

wherein said graphic system has a graphics data generating processor for performing coordinates computation following drawing instructions from said control system;

and wherein, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space, said graphics data generating processor determines the distribution state on said two-dimensional screen using two-dimensional Gaussian distribution, and generates an image of dot-sequences on said two-dimensional screen according to the distribution state on said two-dimensional screen.

24. A recording medium upon which has been recorded software programs including an image generating method program for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, such that said program is computer-readable and executable, said program comprising:

a step for determining distribution state of dot-sequences in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

a step for determining the distribution state on said two-dimensional screen, based on the distribution state of said plurality of dot-sequences in said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen,

based on the distribution state on said two-dimensional screen thus determined.

25. A recording medium upon which has been recorded software programs including an image generating method program for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, such that said program is computer-readable and executable, said program comprising:

a step for determining distribution state of dot-sequences, point of view, and direction of view, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space;

a step for determining the distribution state on said two-dimensional screen, based on said determined distribution state of said plurality of dot-sequences, point of view, and direction of view, in said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on the distribution state on said two-dimensional screen thus determined.

26. A recording medium according to Claim 25, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f(X,Y,Z)\cdot(Z/h)^2 dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

27. A recording medium according to Claim 25, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x,y)=\int_0^{\infty} f\left(x\cdot Z/h, y\cdot Z/h, Z\right)\cdot(Z/h)^2\,dZ$$

wherein the direction from the point of view toward said plurality of dot-sequences is stipulated as the Z-axis;

said screen is placed on the X-Y plane;

the probability density function for said plurality of dot-sequences existing within said three-dimensional space is f(X, Y, Z);

the distance from said point of view to said screen is represented by h; and

the distance from said point of view to said dot-sequences existing within said three-dimensional space is represented by Z.

28. A recording medium according to Claim 25, wherein the plurality of dot-sequences existing within said three-dimensional space are apex coordinates for drawing objects with polygons.

29. A recording medium according to Claim 25, wherein the plurality of dot-sequences existing within said three-dimensional space are coordinates for drawing one of the following:

clouds;

water surface; or

tree leaves.

30. A recording medium upon which has been recorded software programs including an image generating method program for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, such that said program is computer-readable and executable, said program comprising:

a step for determining the distribution state on said two-dimensional screen using uniform random numbers, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

31. A recording medium upon which has been recorded software programs including an image generating method program for projecting a plurality of dot-sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, such that said program is computer-readable and executable, said program comprising:

a step for determining the distribution state on said two-dimensional screen using random numbers following a one-dimensional Gaussian distribution generated from uniform random numbers using the Box-Muller method, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.

32. A recording medium upon which has been recorded software programs including an image generating method program for projecting a plurality of dot-

sequences existing in a three-dimensional space upon a hypothetical two-dimensional screen, such that said program is computer-readable and executable, said program comprising:

a step for determining the distribution state on said two-dimensional screen using two-dimensional Gaussian distribution, in the event that said plurality of dot-sequences randomly exist in a domain within said three-dimensional space; and

a step for generating an image of dot-sequences on said two-dimensional screen, based on said determined distribution state on said two-dimensional screen.


33. A recording medium according to Claim 32, wherein the probability density function g(x, y) which is the distribution state of dot-sequences on a two-dimensional screen is determined by

$$g(x, y) = (1/2\pi)\exp\{-(x^2 + y^2)/2\}$$


using said two-dimensional Gaussian distribution.

【書類名】　図面　[Name of Document] Drawings


【図１】　[Fig. 1]

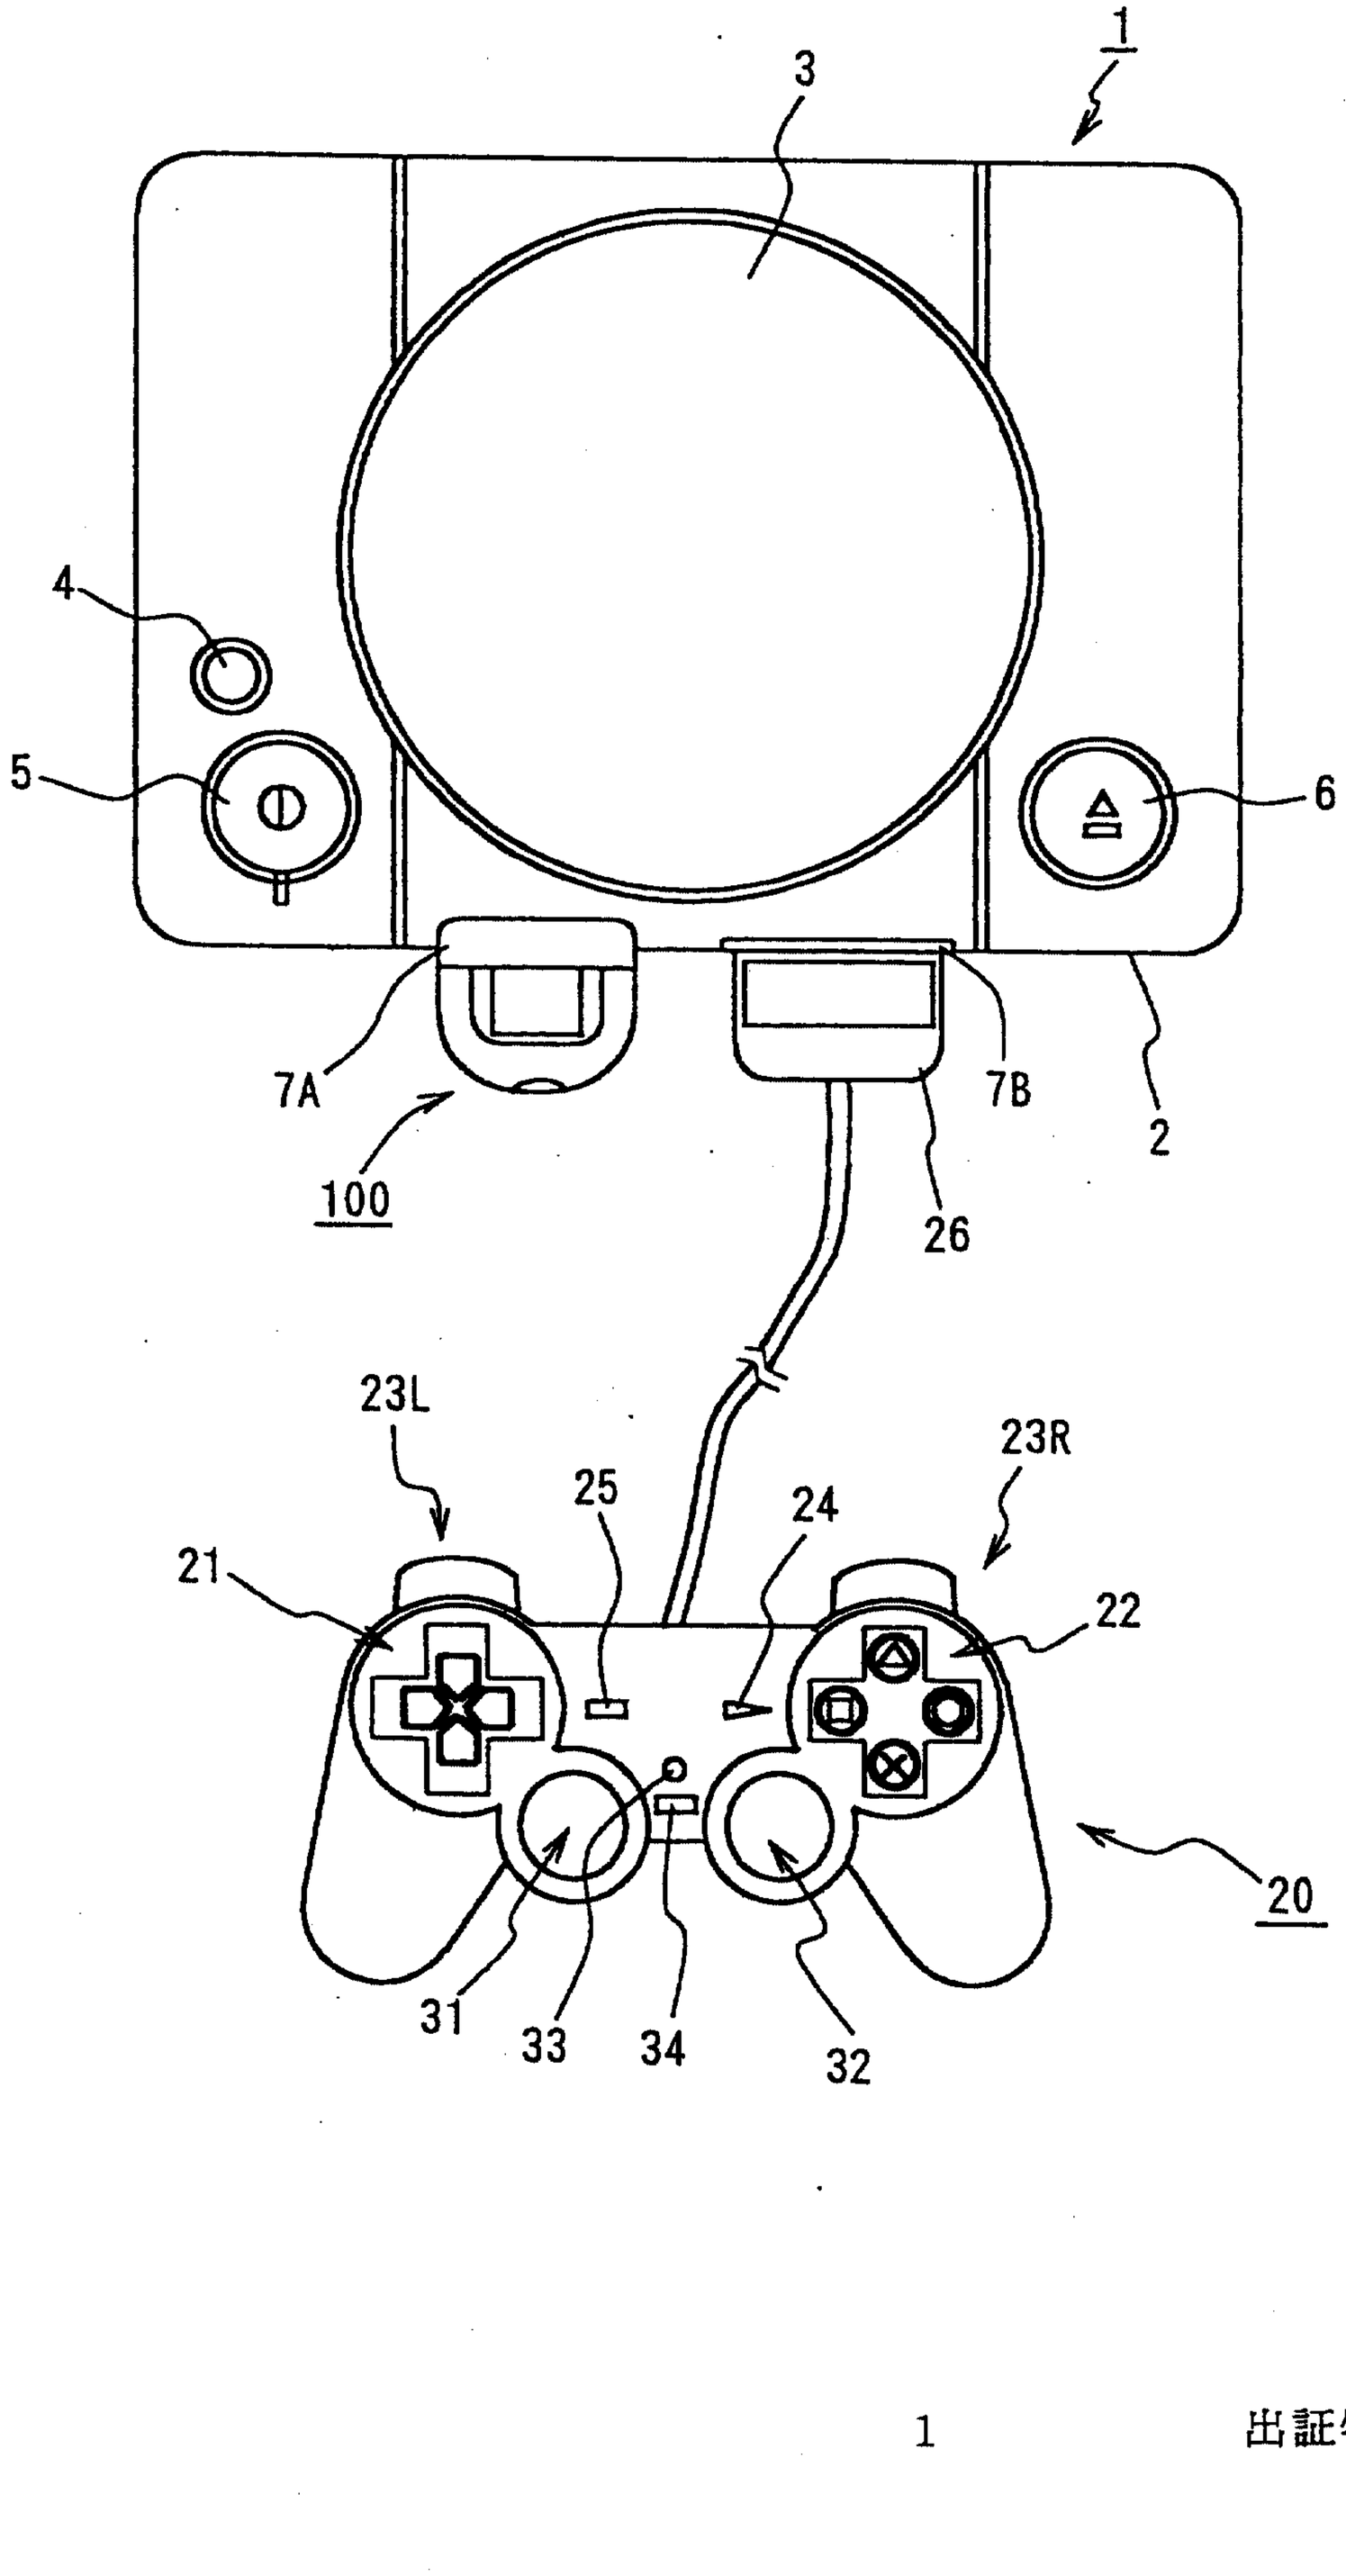


【図２】 (Fig. 2)

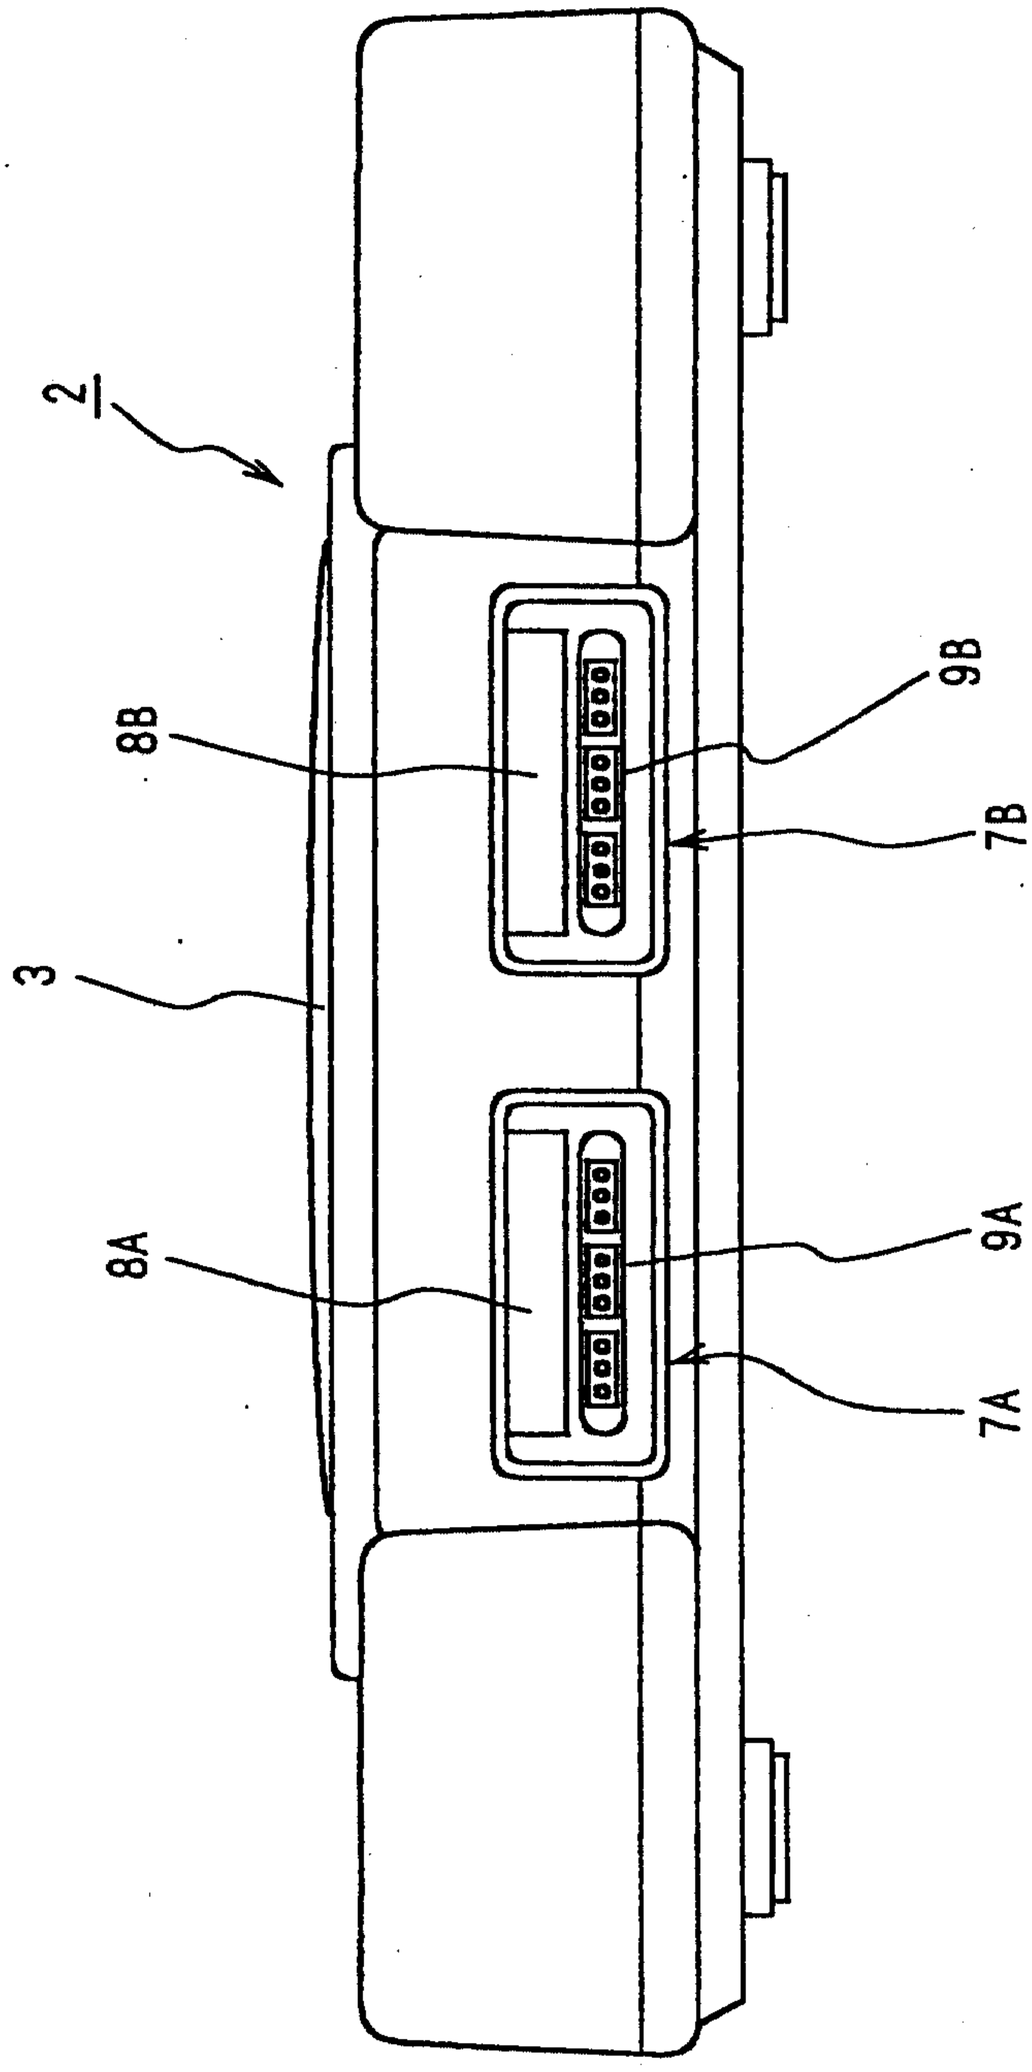


【図３】 〔Fig. 3〕

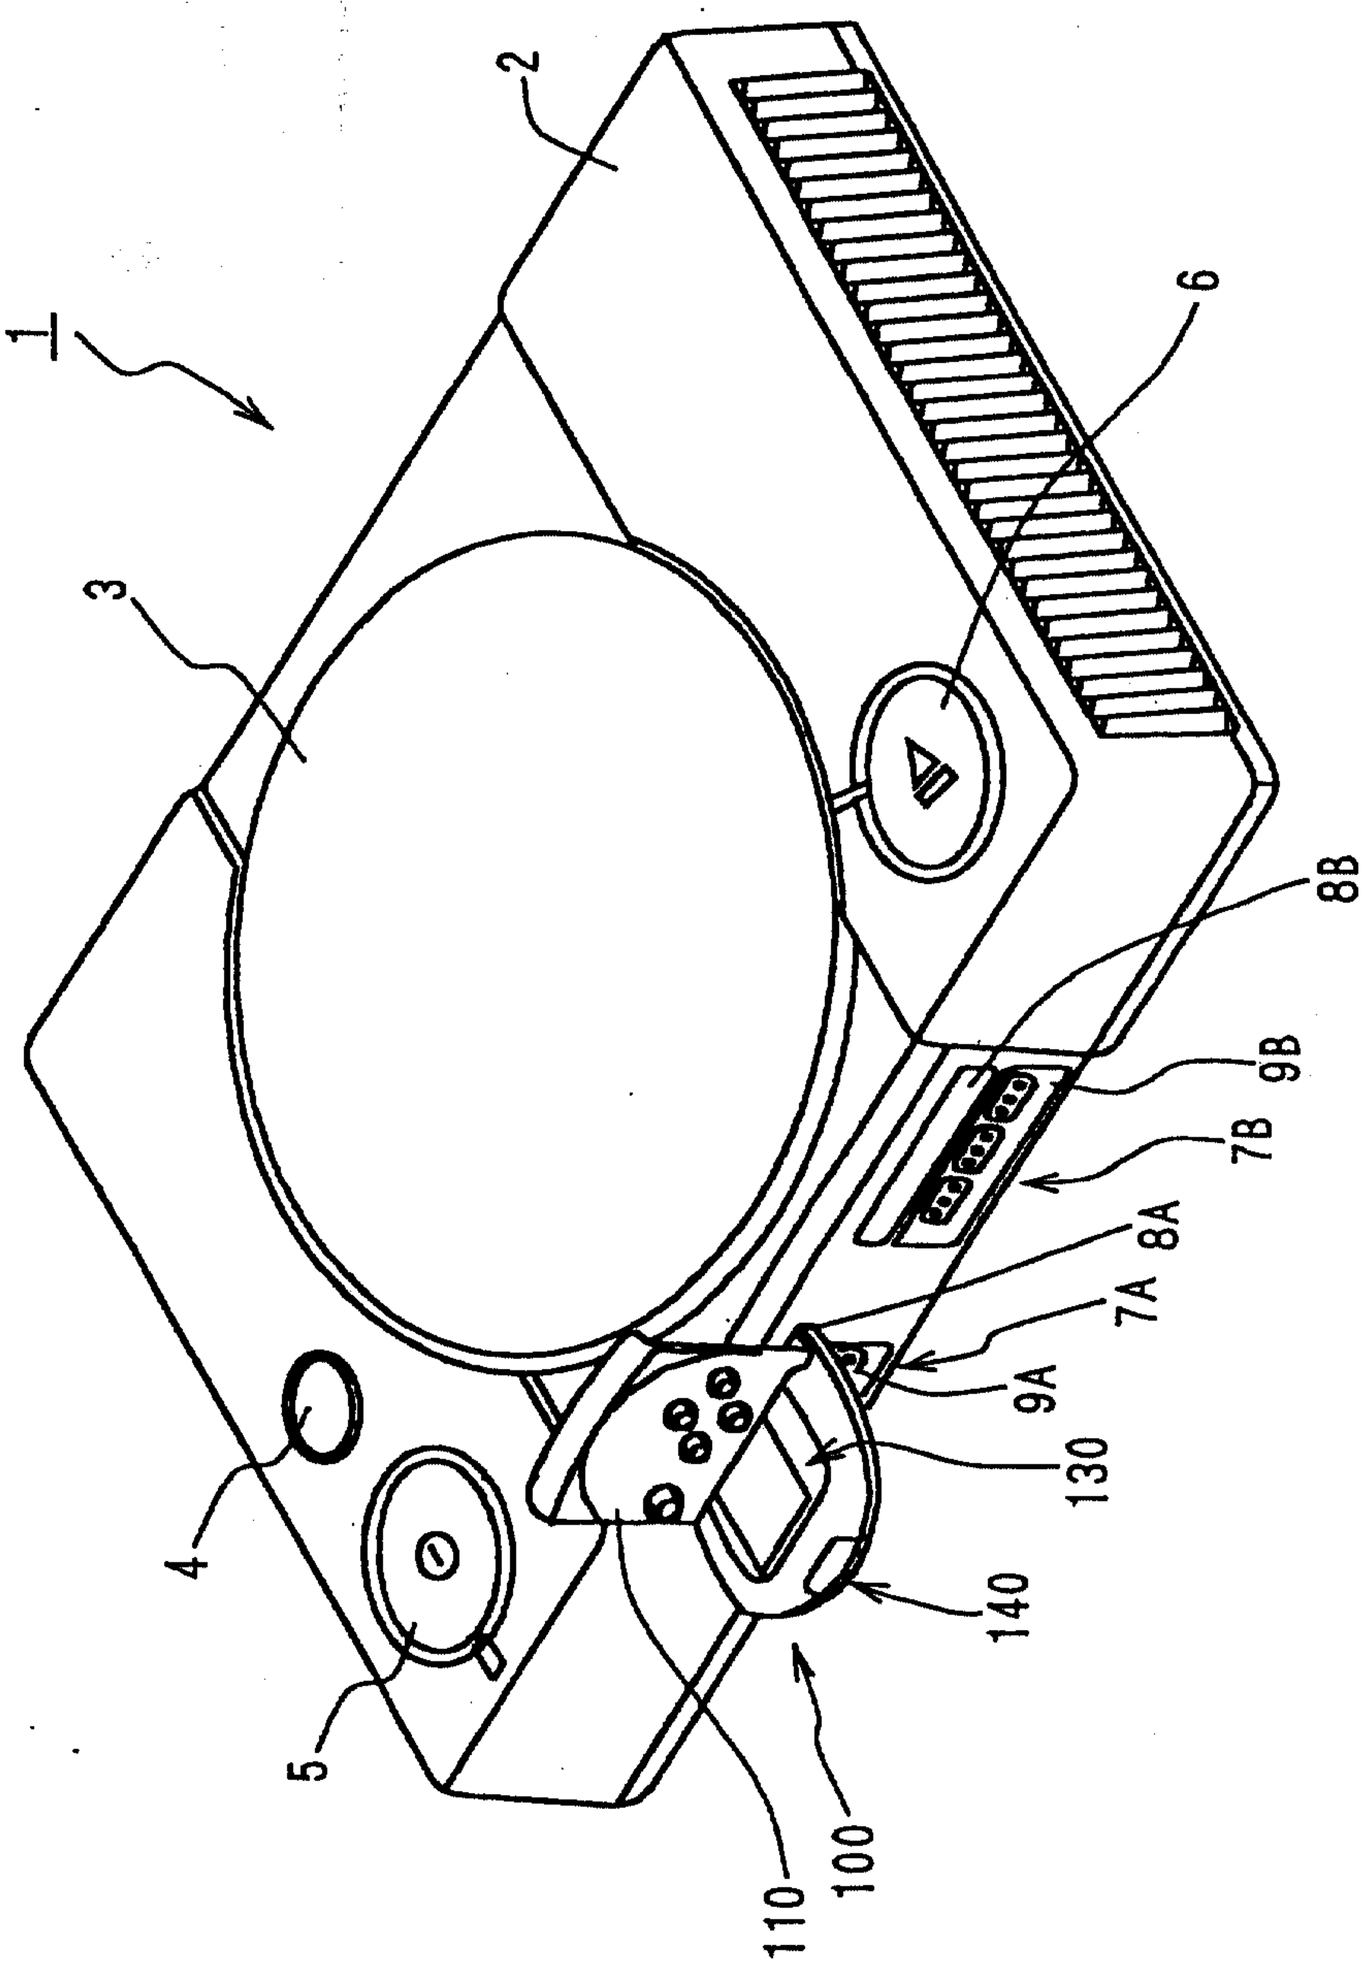


【図４】 { Fig. 4 }

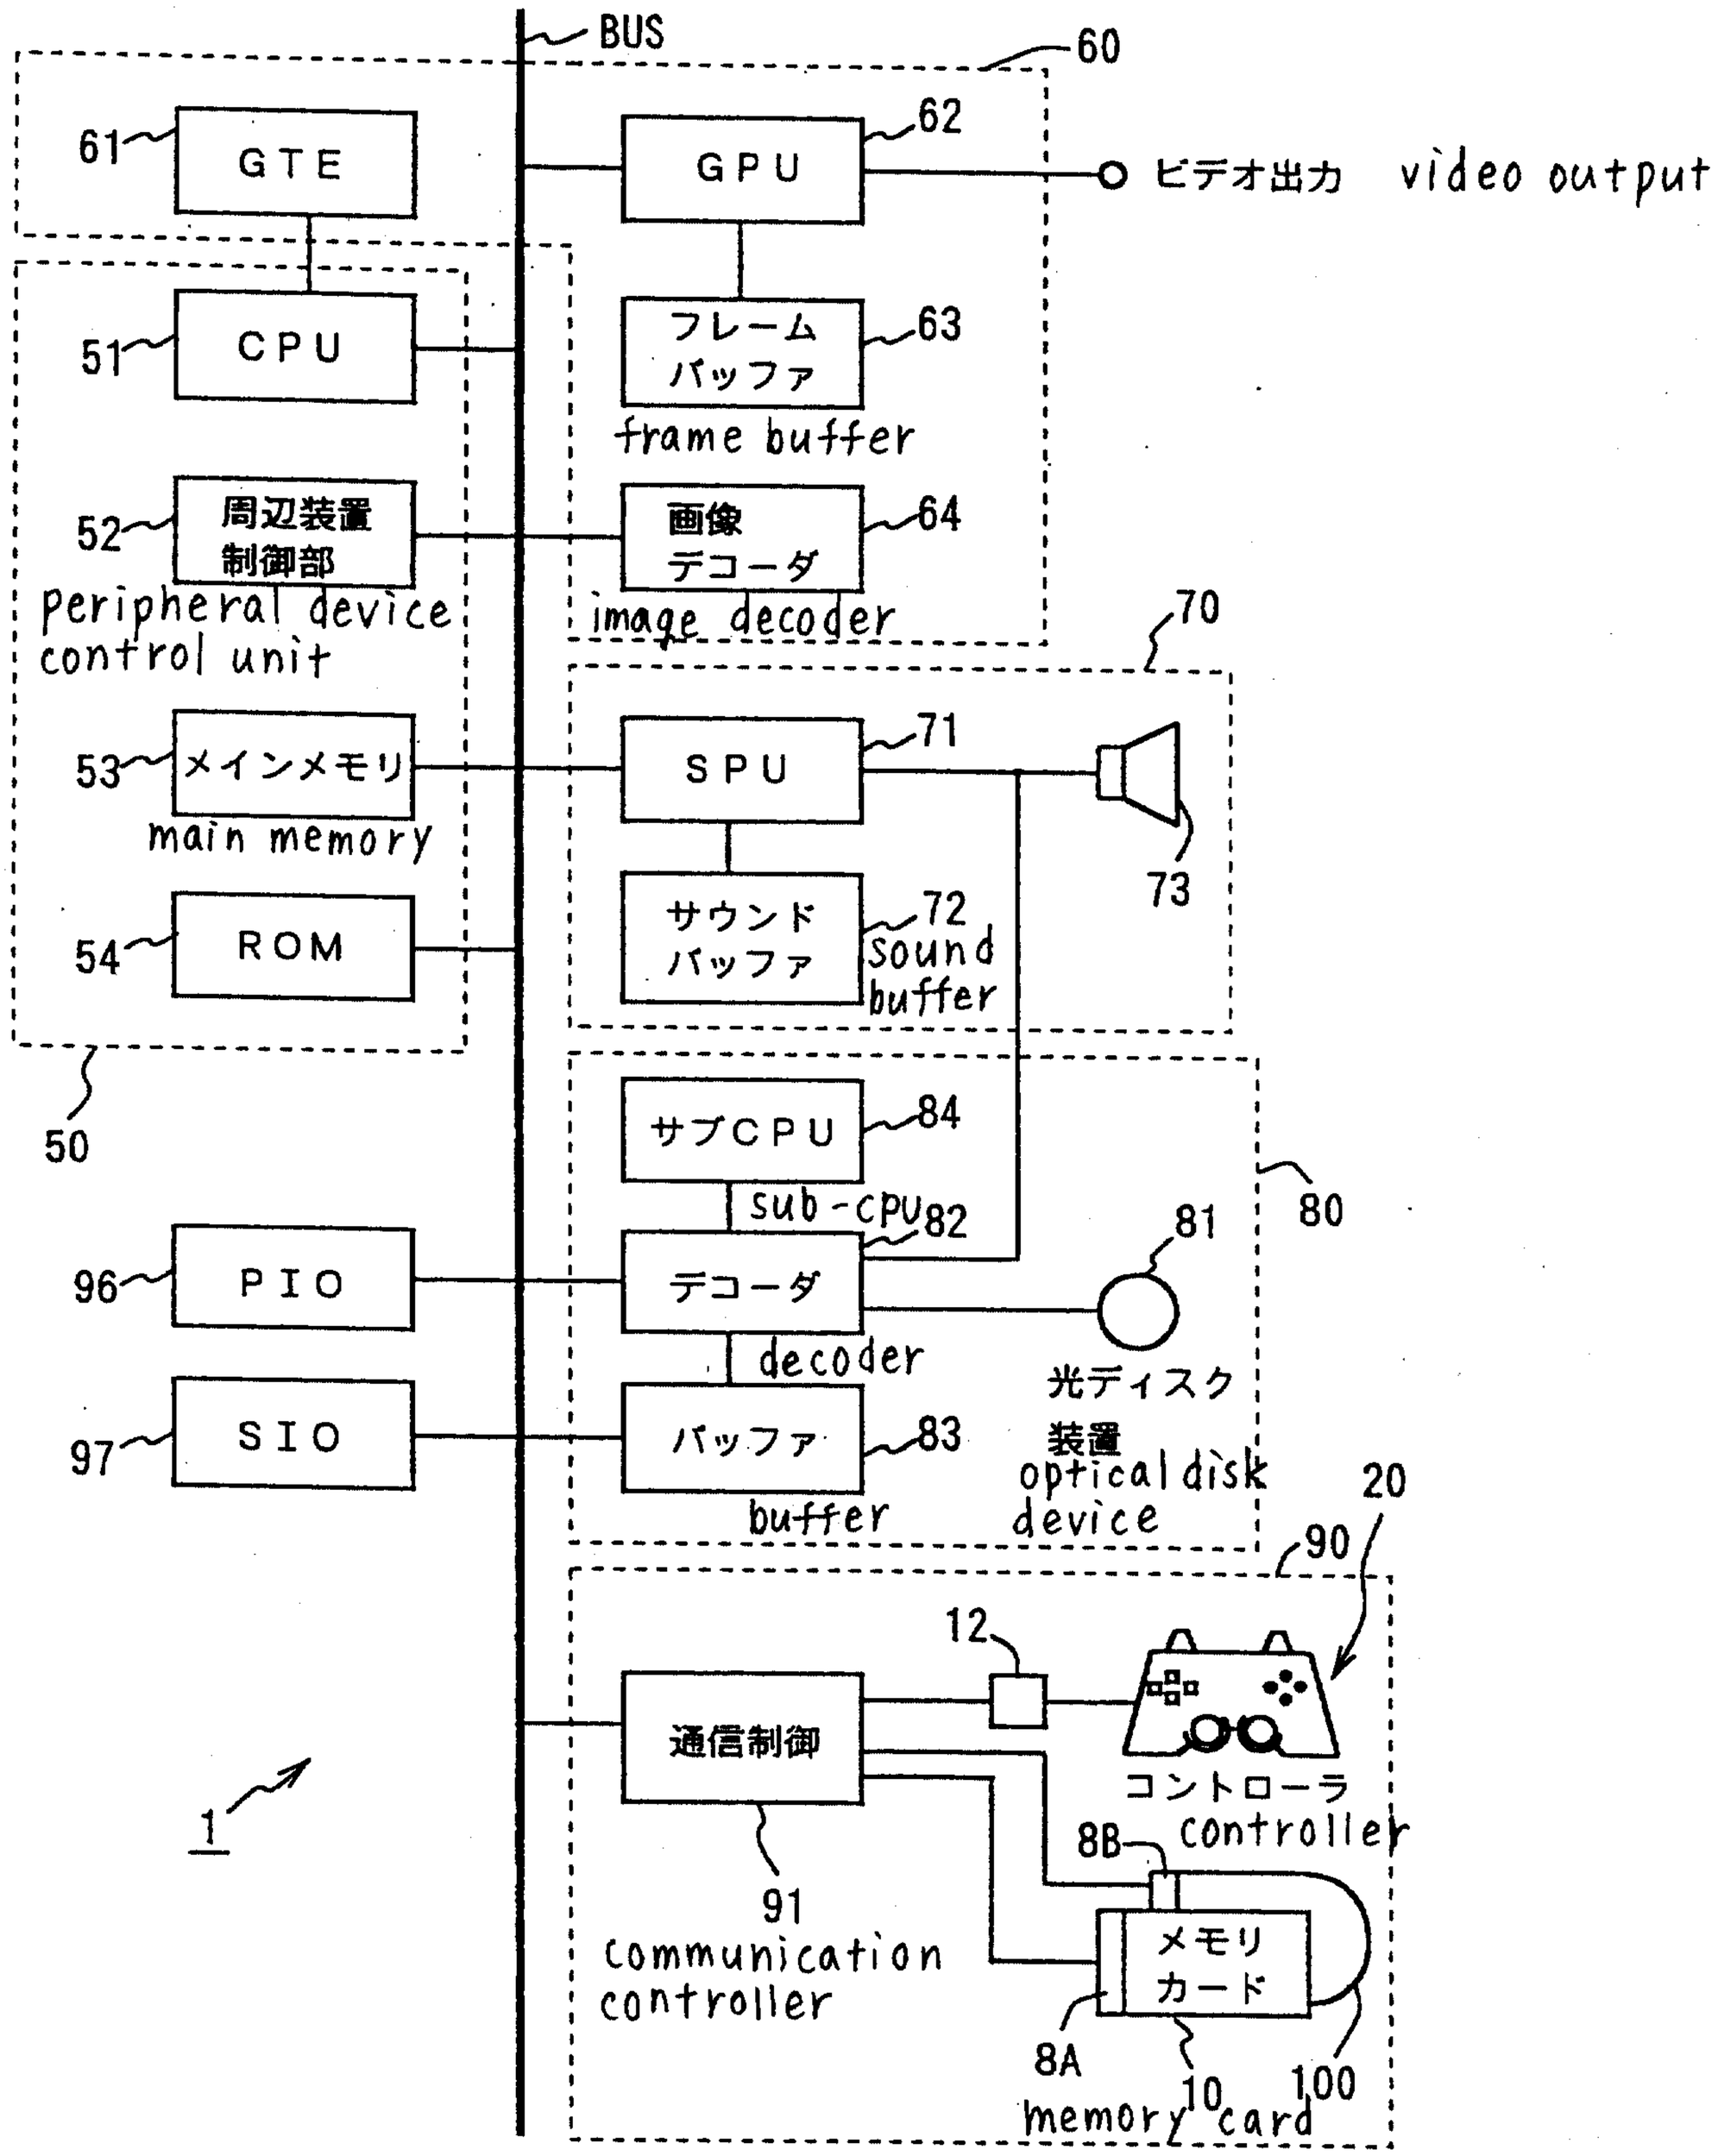
BUS
60
61
GTE
62
GPU
ビデオ出力 video output
51
CPU
フレーム
バッファ
63
frame buffer
52
周辺装置
制御部
peripheral device
control unit
画像
デコーダ
64
image decoder
70
53
メインメモリ
main memory
SPU
71
54
ROM
サウンド
バッファ
72
sound
buffer
73
50
サブCPU
84
sub-CPU
82
81
80
96
PIO
デコーダ
decoder
光ディスク
装置
optical disk
device
97
SIO
バッファ
83
buffer
20
90
12
通信制御
コントローラ
controller
8B
1
91
communication
controller
メモリ
カード
8A
memory card
10
100


【図５】 〔Fig.5〕

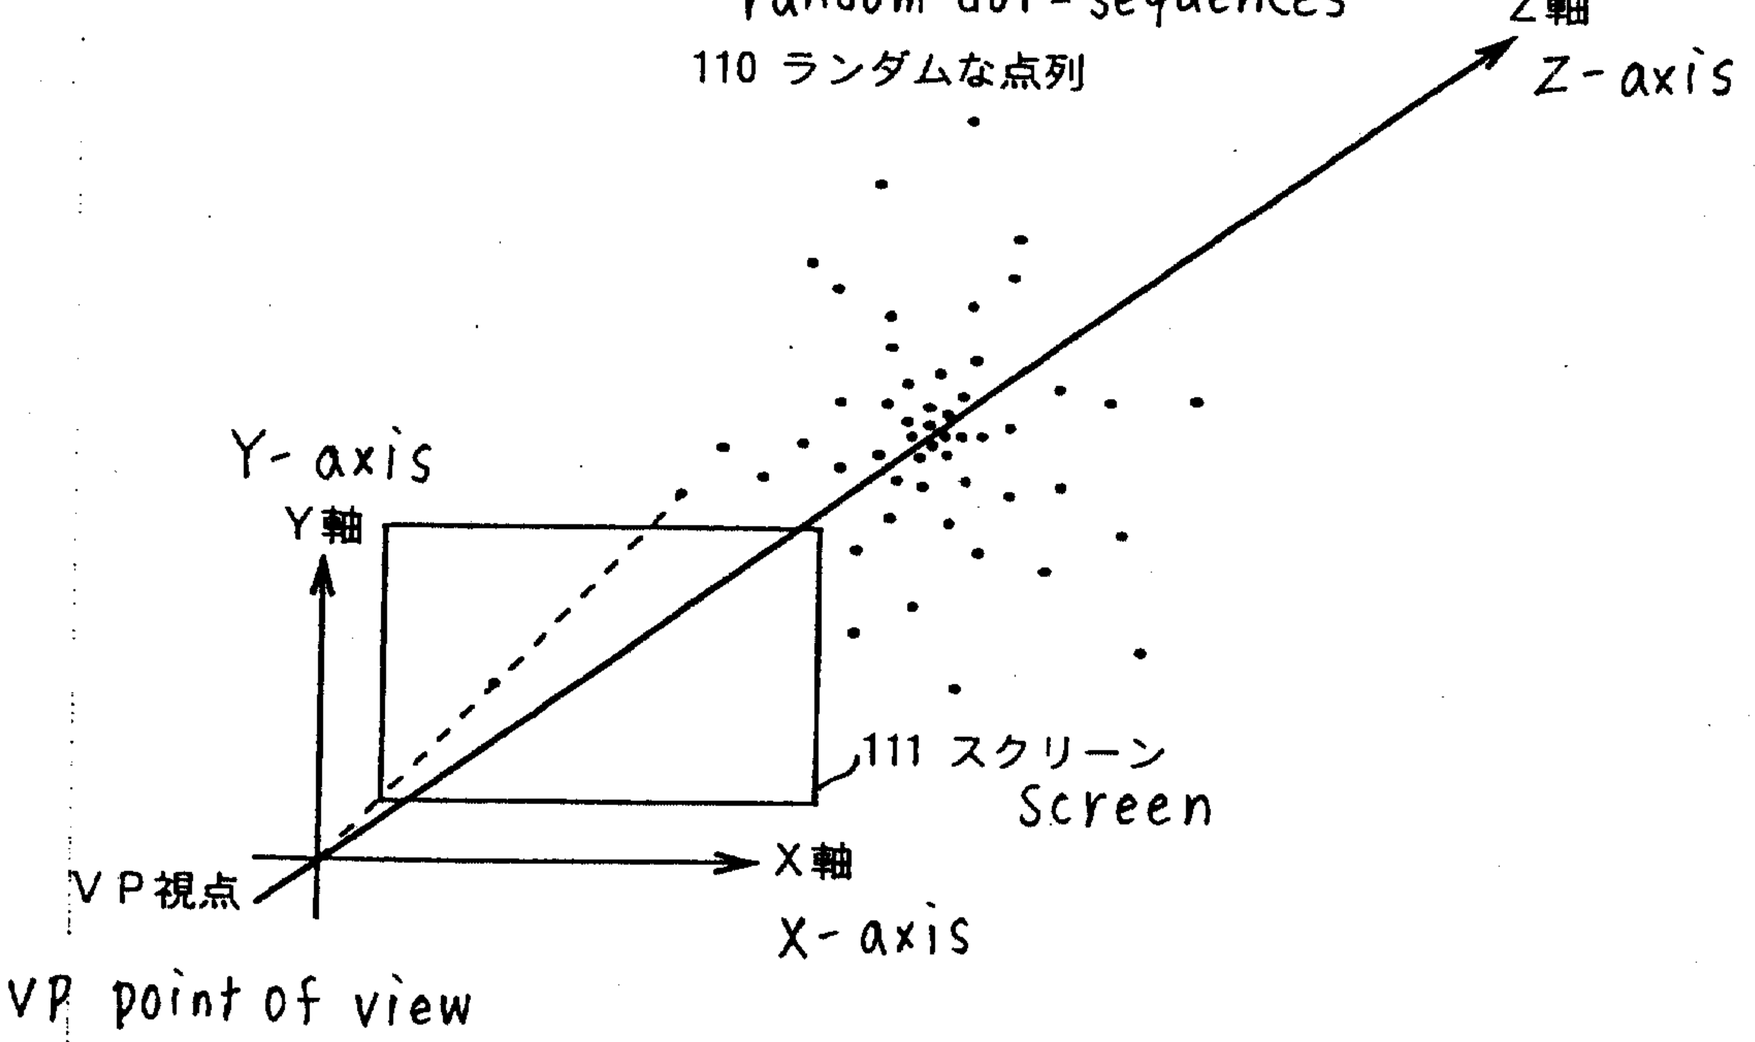
random dot-sequences
110 ランダムな点列
Z軸
Z-axis
Y-axis
Y軸
111 スクリーン
Screen
X軸
X-axis
VP視点
VP point of view


【図６】 (Fig.6)

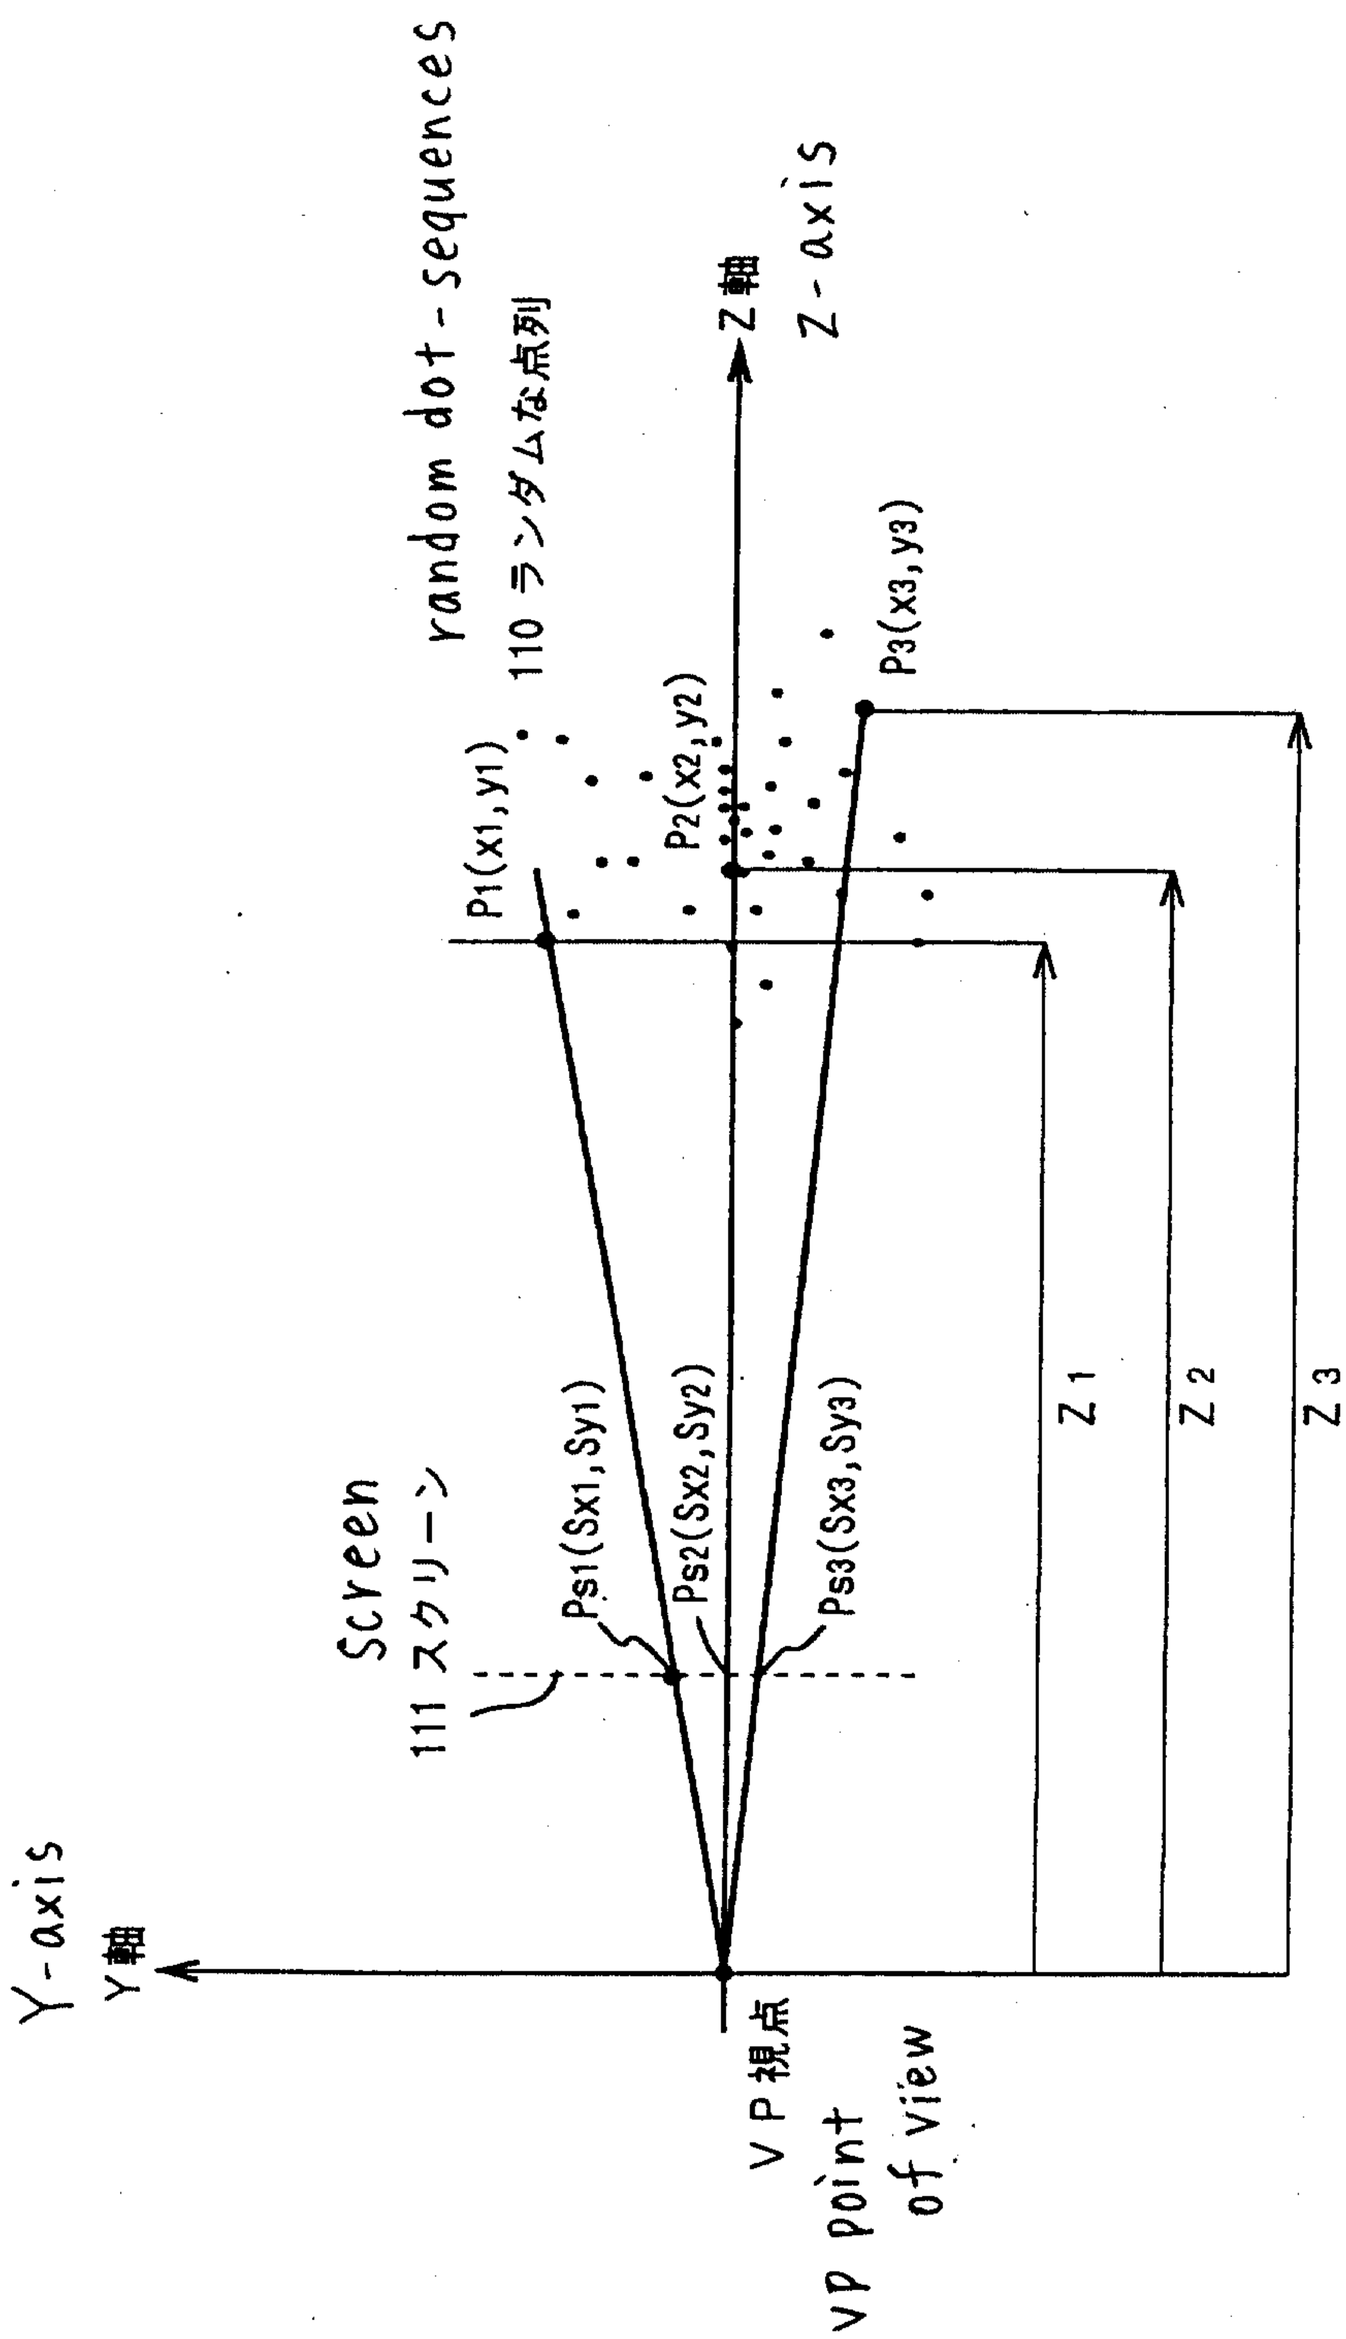

random dot-sequences
110 ランダムな点列
Z軸
Z-axis
P1(x1,y1)
P2(x2,y2)
P3(x3,y3)
Screen
111 スクリーン
Ps1(Sx1,Sy1)
Ps2(Sx2,Sy2)
Ps3(Sx3,Sy3)
Z1
Z2
Z3
Y-axis
Y軸
VP
vp point
of view
視点

【図７】 〔Fig. 7〕

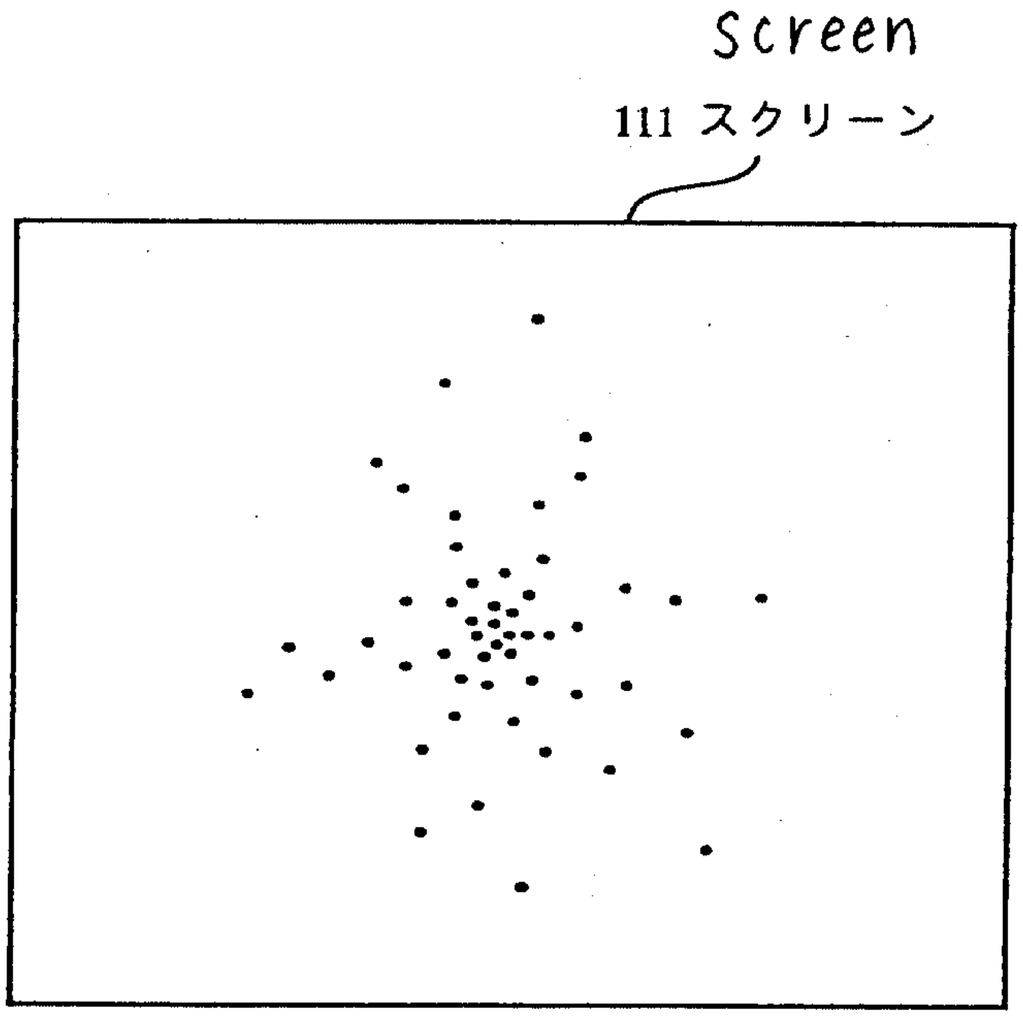

【図８】 〔Fig. 8〕

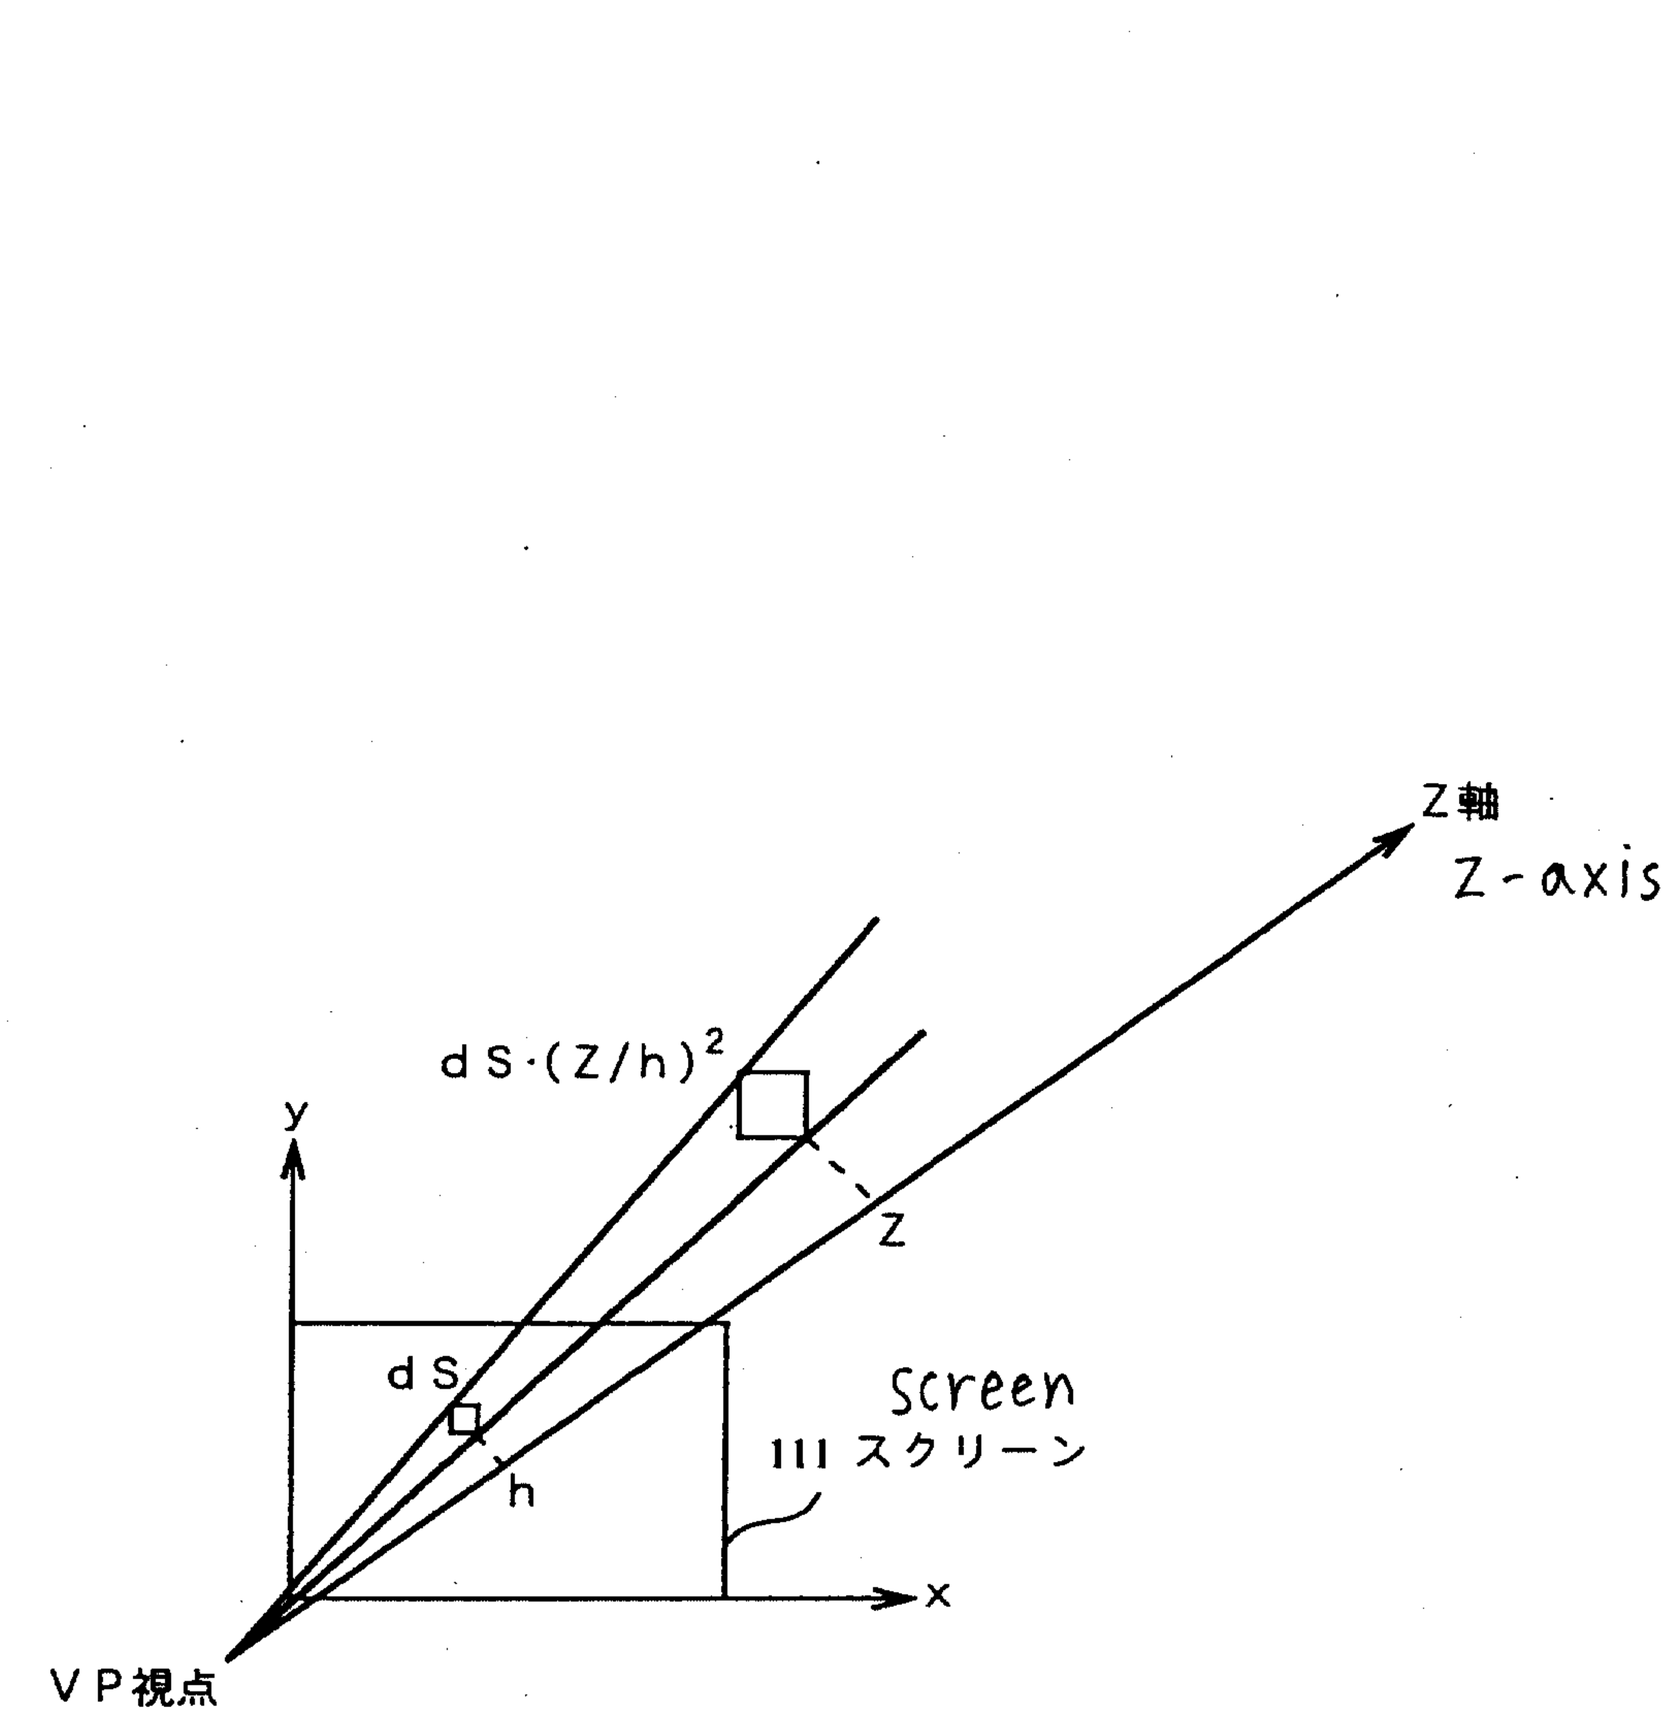

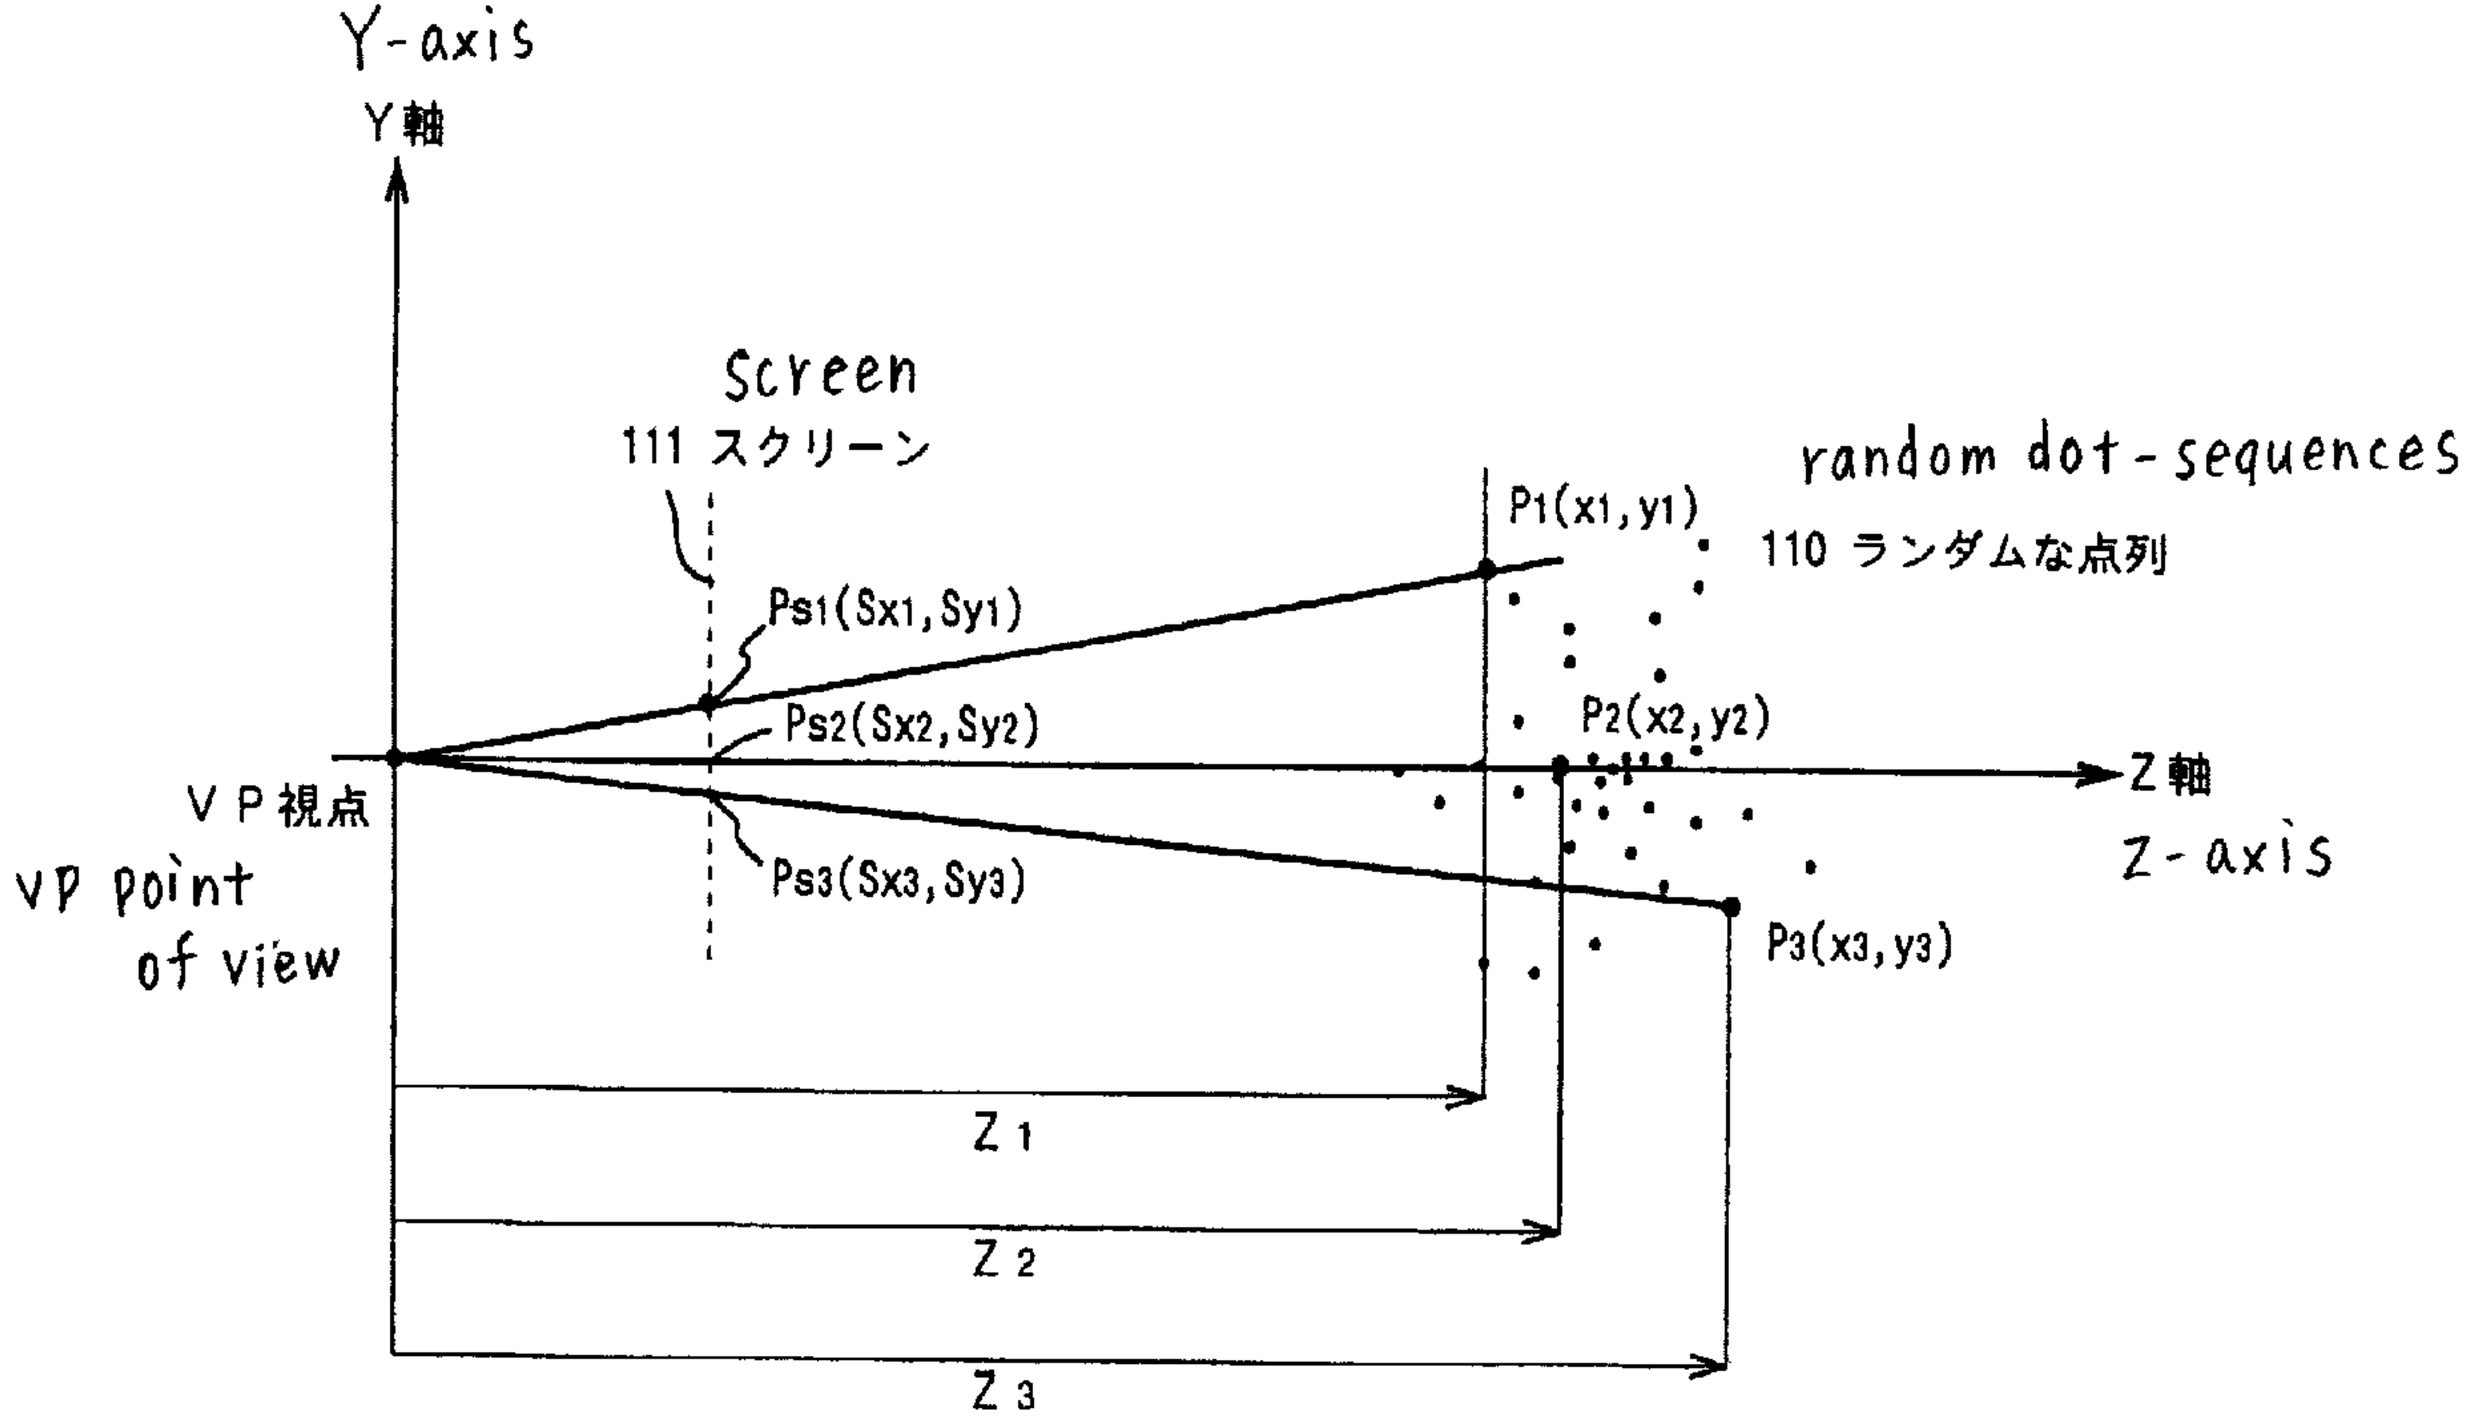
Y-axis
Y軸
Screen
111 スクリーン
random dot-sequences
110 ランダムな点列
P1(x1,y1)
Ps1(Sx1,Sy1)
Ps2(Sx2,Sy2)
P2(x2,y2)
VP視点
VP point
of view
Z軸
Z-axis
Ps3(Sx3,Sy3)
P3(x3,y3)
Z1
Z2
Z3