



(51) International Patent Classification:

G06F 1/12 (2006.01) G06F 1/324 (2019.01)
H04W 52/02 (2009.01)

(21) International Application Number:

PCT/EP2019/050778

(22) International Filing Date:

14 January 2019 (14.01.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1800552.0 12 January 2018 (12.01.2018) GB

(71) Applicant: **NORDIC SEMICONDUCTOR ASA**
[NO/NO]; Otto Nielsens veg 12, 7052 Trondheim (NO).

(72) Inventor: **MERIÖ, Ville**; c/o Nordic Semiconductor ASA,
Otto Nielsens veg 12, 7052 Trondheim (NO).

(74) Agent: **DEHNS**; St Bride's House, 10 Salisbury Square,
London Greater London EC4Y 8JD (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CLOCK CALIBRATION

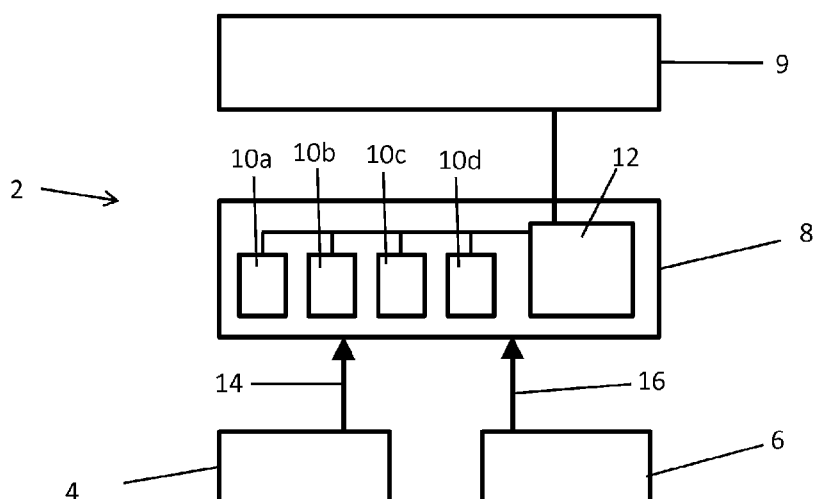


Figure 1

(57) Abstract: A circuit system comprises a processor (9), a first clock (4) with a first frequency, a second clock (6) with a second frequency, such second frequency being higher than said first frequency and a clock calibration module (8). The clock calibration module (8) comprises a plurality of counters (10a-d) configured to count cycles of the second clock (6) when triggered. Each of the plurality of counters (10a-d) is configured to be triggered at successive cycles of the first clock (4). Each of the plurality of counters (10a-d) is configured, after a predetermined number of cycles of the first clock (4), to output a count of elapsed second clock cycles and the processor (9) is configured to determine, using the counts outputted by the plurality of counters (10a-d), a ratio between the first frequency and the second frequency.



Clock Calibration

Technical Field

- 5 This invention relates to integrated circuit systems. It relates particularly, although not exclusively, to clocks within integrated circuit systems.

Background

- 10 Integrated circuit systems, e.g. System on Chips (SoCs), often comprise precise timing components in order to ensure accurate synchronisation both internally and with external devices, e.g. a modem communicating with a network. In order to ensure correct synchronisation, a high precision clock is typically provided as part of the SoC, e.g. a crystal oscillator or a high frequency RC oscillator.

15

While such high precision clocks provide a reliable means for keeping relatively accurate time, they typically have large power demands, and in applications where energy efficiency is of high importance, such as in battery powered devices where long battery life is important, it is undesirable to have to operate such high precision clocks all the time.

20

To reduce power consumption therefore, a SoC may utilise a lower frequency clock with correspondingly lower power demand. However, these can be more susceptible to timing errors such as random jitter (where the rising edges of the clock do not fall precisely regularly) and/or drift (where the frequency of the clock differs from its nominal value, e.g. due to temperature changes), and cannot therefore be relied upon for applications requiring highly precise timing, e.g. the synchronisation of discontinuous reception periods.

25

- 30 The present invention seeks to address the issue outlined above.

Summary

From a first aspect the invention provides a circuit system comprising:

- 2 -

- a processor;
a first clock with a first frequency;
a second clock with a second frequency, such second frequency being higher than said first frequency; and
- 5 a clock calibration module comprising a plurality of counters configured to count cycles of the second clock when triggered; wherein
each of the plurality of counters is configured to be triggered at successive cycles of the first clock;
each of the plurality of counters is configured, after a predetermined number of
10 cycles of the first clock, to output a count of elapsed second clock cycles; and
the processor is configured to determine, using the counts outputted by the plurality of counters, a ratio between the first frequency and the second frequency.
- Thus it will be seen by those skilled in the art that, in accordance with the invention,
15 the frequencies of two clocks may be compared quickly and accurately. The Applicant has appreciated that staggering the triggering of multiple counters to count in parallel reduces the effect of jitter present in the first frequency on any one measurement while not significantly increasing the time required to determine a ratio.
- 20 The counters may be configured to count the number of cycles of the second clock taken for just one cycle of the first clock to elapse – i.e. the predetermined number of cycles of the first clock may be one. While this is the fastest option for calculating the ratio between the two frequencies it may be too susceptible to a phase difference between the first and second clocks along with other sources of error, especially when
25 only a few counters are used. More preferably therefore the counters are configured to count the number of cycles of the second clock taken for M cycles of the first clock to elapse, where M is greater than one. Whilst this approach takes longer to produce a result than the single cycle approach previously described, measuring multiple cycles decreases the impact of a phase difference between the first and second clocks on the
30 measurement as one phase-offset rising edge does not corrupt the entire measurement. Depending on a nominal ratio between the first and second frequencies and the accuracy required, M is typically chosen to be more than 50, and preferably more than 100, e.g. more than 150 or more than 200.

- 3 -

In a set of embodiments, the counters are hardware counters. Using hardware counters (rather than software based counters) frees the processor up to perform other operations whilst counting is performed, which can be for a significant duration. Hardware counters may also be able to provide a more accurate count.

5

The processor may be configured to determine an initial value for the ratio using the count outputted by a first counter of the plurality of counters. In some embodiments this initial value may be refined using counts from subsequent counters, e.g. by averaging. Averaging counts from multiple counters may further mitigate the effects of random jitter in the frequency of the first clock, as jitter on any one measurement has a reduced impact on the final determined ratio. Performing measurements in parallel using multiple counters may decrease the time taken to accurately determine the ratio between the first and second frequencies. The number of counters used depends upon the amount of jitter expected and the nominal ratio between the first and second frequencies. In some embodiments only two counters may be used to take measurements, although in a set of embodiments at least five counters are used, and in some embodiments up to 10 counters are used. With particularly poor quality clock signals an even higher number of counters may be required, e.g. 12, 15 or up to 20.

20 While there are many possible applications of the present invention, the Applicant has appreciated that the present invention is particularly suited to facilitating accurate timing within a circuit system using low frequency clock components, as will be explained below. As mentioned above, low frequency clocks may have reduced power requirements and they are often also less expensive to implement than high frequency components.

25 In some embodiments the processor is operable in a lower power state and a higher power state. The processor may be configured to execute tasks periodically, for which it must be in the higher power state, and to enter into the lower power state between task executions to save power. The second clock is preferably not powered when the processor is in the low power state.

30 Some tasks within circuit systems require execution at very precise times. For example discontinuous reception (DRX) operation can significantly reduce the power demands of a radio communications device by utilising periodic DRX cycles, wherein the device

- 4 -

receives data only in a short burst at the start of each DRX cycle, such that the device is only active (and using power) for a fraction of each DRX cycle. However, to achieve correct operation, these cycles must be highly synchronised with other network elements and so precise timing is critical. In some embodiments this timing is achieved
5 by the first clock being configured to issue a signal to the processor once a pre-set number of cycles have elapsed, which causes the processor to execute a task, such as starting a receiver to receive data.

As highlighted above however, lower frequency clocks are more susceptible to
10 frequency drift than higher frequency clocks and therefore time measurements made using the first clock may not be entirely reliable. For instance, if the actual frequency of the first clock in use is lower than its nominal value (due to, for example, a change in ambient temperature), time measurements made using the first clock will be underestimations, leading to, in the embodiments described above, the possibility that
15 a task is executed too late. If the first clock runs fast, the opposite is true, and the task would be executed too early. A timing error in either direction may be detrimental to the operation of the system, for example in the case of data reception, if the timing of the cycle is incorrect (i.e. too late or too early), the radio communications device may be unable to perform any decoding and may lose network synchronisation.

20 The Applicant has realised however that by accurately determining the ratio between the frequencies of the first and second clocks, drift in the frequency of the first clock can be measured and compensated for when making time measurements. In some embodiments therefore the processor is configured to use the determined ratio
25 between the first frequency and the second frequency to calibrate the pre-set number of cycles used by the first clock. For example if the determined ratio indicates that the frequency of the first clock has drifted such that the first clock runs slow, the number of cycles may be reduced such that the next signal is issued at the correct time.

30 By doing so, the processor may accurately maintain timing using the first clock, with the (higher power, but more accurate) second clock only being used to calibrate periodically the first clock. The second clock may be powered off at times other than during calibrations to save power. In some embodiments, the processor is configured to perform a calibration of the first clock every time it enters the higher power state,
35 although the processor may instead decide dynamically whether or not to perform a

calibration based upon a previously determined ratio. For example, if it is determined at a calibration that negligible frequency drift had occurred, the processor may decide not to perform a calibration next time it enters into the higher power state. Dynamic calibration in this way can reduce power use by reducing the number of calibrations required and thus the length of time for which the second clock must be powered.

The clock calibration module may further comprise a ring buffer, to which the counts outputted by the plurality of counters are saved, e.g. as soon as they are outputted. Preferably, the processor is configured such that it may read the contents of the ring buffer at any point, for example when only one of the counters has outputted a count.

In some embodiments, the processor is configured to provide one or more measurement parameters to the clock calibration module. Measurement parameters may include the predetermined number of cycles of the first clock measured by each counter, the interval at which counters are triggered or the number of counters used for a particular calibration. The processor may be configured to vary dynamically the measurement parameters provided to the clock calibration module dependent upon a previously determined ratio (i.e. if the ratio indicates that negligible drift is present, the measurement parameters may be adjusted to shorten the duration of a calibration, e.g. by reducing the number of cycles of the first clock measured by each counter). Efficient control of the measurement parameters and/or calibration length in this way may reduce the power consumption of the circuit portion.

In addition, the processor may be configured to cut short a calibration if a value of the ratio calculated using measurements from only a sub-set of the plurality of counters definitively indicates that no or little drift has occurred since the last calibration. Additionally or alternatively, the processor may be configured to cut short a calibration if a value of the ratio calculated using measurements from only a sub-set of the plurality of counters is definitive, i.e. if an uncertainty parameter in the calculated value is below a threshold. The uncertainty parameter may comprise a measure of statistical dispersion (e.g. standard deviation, variance or spread) of the measurements from only a sub-set of the plurality of counters when deciding if the determined ratio is definitive. For example if measurements from only a sub-set of the plurality of counters have a standard deviation below a threshold value, the processor may cut the

calibration short and use the average value of these measurements to calculate a ratio.

5 Reducing the time taken to calibrate the first clock may reduce power consumption, as in some circumstances the second clock may be powered down as soon as the calibration is complete. Conversely, the circuit system may be configured to extend a calibration, for example if a definitive value of the ratio cannot be established.

10 In addition to using a determined ratio to calibrate the first clock, the processor may also use the determined ratio to refine retroactively processor timing, such that it can determine a more accurate time e.g. relative to an external time such as a network time. The more accurate time may then be used to execute a task at precisely the right time.

15 As explained above, the processor may be configured to enter into the higher power state to execute a time-critical task at a predefined time. In order to ensure that the task is executed at the correct time e.g. relative to an external time such as a network time, the processor may be woken early enough to carry out a calibration of the first clock before the task falls due, so that the amount of drift in the first clock may be
20 quantified, and the correct time to execute the task may be identified. The processor may therefore predict a maximum level of drift expected during a period of low power operation, so that it is woken early enough to have time to calibrate the first clock before the task falls due.

25 The maximum level of expected drift may be adjusted dynamically based upon a previously measured ratio, for example if the processor determines a ratio which indicates that the first frequency has drifted very little, the maximum level of expected drift may be reduced, and the pre-set number of cycles adjusted correspondingly. This ensures that the processor enters into the higher power state for only the minimum
30 required length of time, avoiding unnecessary power use.

The first and second clocks may be any type of clock known in the art per se, although preferably the first clock comprises an RC oscillator. The second clock preferably comprises a crystal oscillator. The first frequency is preferably less than 100 kHz, e.g.

- 7 -

32.768 kHz. The second frequency is preferably greater than 1 MHz and may be several hundred MHz, for example 76.8 MHz or 160 MHz.

The circuit portion may be implemented in an integrated circuit system, for example a
5 System on a Chip (SoC). Preferably the circuit portion is battery powered.

The Applicant considers the clock calibration module to be independently inventive and as such when viewed from a further aspect, the invention provides a circuit portion comprising:

- 10 a first clock with a first frequency;
- a second clock with a second frequency, wherein the first frequency is lower than the second frequency; and
- a plurality of counters configured when triggered to count cycles of the second clock; wherein
- 15 each of the plurality of counters is configured to be triggered at successive cycles of the first clock; and
- each of the plurality of counters is configured to output a count of elapsed second clock cycles after a predetermined number of cycles of the first clock.

20 Features of any aspect or embodiment described herein may, wherever appropriate, be applied to any other aspect or embodiment described herein. Where reference is made to different embodiments or sets of embodiments, it should be understood that these are not necessarily distinct but may overlap.

25 Detailed Description

Certain preferred embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a clock module according to an embodiment of the present
30 invention;

Figure 2 is a timing diagram illustrating operation of the clock module in Figure 1;

Figure 3 is a flow diagram illustrating the operation of the clock module in Figure 1;

- 8 -

Figure 4 shows a modem SoC according to another embodiment of the present invention; and

Figure 5 is a timing diagram illustrating an example of operation of the modem SoC shown in Figure 4.

5

Figure 1 shows a clock module 2 according to an embodiment of the present invention which comprises a low frequency clock 4 (e.g. comprising an RC oscillator) which outputs a LF clock signal 14, a high frequency clock 6 (e.g. comprising an crystal oscillator) which outputs a HF clock signal 16, a clock calibration module 8 and a
10 processor 9. The clock calibration module 8 comprises a plurality of counters 10a-d and a ring buffer 12. Whilst there are four counters 10a-d shown in Figure 1, any number of counters may be provided.

The low frequency clock 4 nominally operates at a lower frequency f_1 , and the high
15 frequency clock 6 operates at a higher frequency f_2 . The counters 10 are configured to, when triggered, count cycles of the high frequency clock 4. The clock calibration module 8 is configured to trigger successive counters 10 at successive cycles of the low frequency clock 4. The clock calibration module 8 is further configured to stop
20 each of the counters 10 after each one has measured a predetermined number M of cycles of the low frequency clock 4, set by the processor 9. The processor 9 is configured to read the contents of the ring buffer 12 and calculate a ratio between the lower frequency f_1 and the higher frequency f_2 .

The operation of the clock module 2 will be described with reference to the timing
25 diagram shown in Figure 2. The low frequency clock 4 outputs a LF clock signal 14, and the high frequency clock 6 outputs a HF clock signal 16. The HF clock signal 16 and the LF clock signal 14 are shown in Figure 2 as square wave signals, and the LF clock signal 14, due to limitations of the low frequency clock 4, demonstrates a significant amount of uncertainty in the timing of each rising and falling edge,
30 illustrated here with the use of dashed lines. This uncertainty is referred to as jitter. Contrastingly, the HF clock signal 16 exhibits negligible jitter.

In general the LF clock signal 14 will be phase offset from the HF clock signal 16, whereby rising edges of each signal do not coincide. This phase offset can be a
35 source of error when calculating the ratio between the lower frequency f_1 and the

- 9 -

higher frequency f_2 , especially when measurements are short (e.g. if their length is only a few cycles of the low frequency clock 4).

At a first time 18, a first rising edge of the LF clock signal 14 occurs and the clock calibration module 8 triggers the first counter 10a to begin counting cycles of the HF clock signal 16. At a second time 20, a second rising edge of the low frequency clock occurs. The clock calibration module 8 triggers the second counter 10b to begin counting cycles of the HF clock signal 16. At this point the first counter 10a has counted 18 HF cycles.

10

At a third time 22, a third rising edge of the LF clock signal 14 occurs. At this point the first counter 10a has counted 35 cycles and the second counter has counted 17 cycles. The clock calibration module 8 stops the first counter 10a and triggers the third counter 10c. The count from the first counter 10a is stored in the ring buffer 12.

15

Although not shown in Figure 2, the clock calibration module 8 continues to trigger and stop counters until all four counters 10a-d have recorded the number of HF clock cycles taken for two LF clock cycles to elapse. At this point the buffer 12 contains four measurements of the number of HF clock cycles taken for two LF clock cycles to

20

elapse.

This measurement process is shown in Figure 3, whereby in step 204 a different one of the counters 10a-d is started on each rising edge of the LF clock signal 14 until all counters 10a-d are started. At step 206, the clock module 2 checks if the predetermined number of LF cycles has been reached for any of the counters 10a-d. If it has, the counter is stopped and its count is outputted to the ring buffer 12. The process then repeats steps 204 and 206 until all four counters 10a-d have been started and subsequently stopped at step 208. At step 210, the processor 9 then reads the four measurements stored in the ring buffer 12, and uses them to calculate a ratio between the lower frequency f_1 and the higher frequency f_2 by dividing the average value of the measurements in the ring buffer by the predetermined number of cycles M.

25

30

As shown by the dotted line 212, the measurement process optionally comprises steps 214 and 216. The processor 9 is able to read the contents of the ring buffer 12 at any

35

- 10 -

time and as such, in addition to reading the contents of the ring buffer 12 once all four counters 10a-d have provided a measurement, the processor 9 is also able to read the ring buffer 12 when only N counters have provided a measurement, where N is less than four.

5

At step 214, the processor 9 calculates an intermediate value of the ratio between the lower frequency f1 and the higher frequency f2, using the average of the N measurements that are available. While this intermediate value is likely to be less accurate than one determined using measurements from all of the counters 10a-d, it may still indicate a definitive ratio. In order to establish whether the intermediate value is definitive, the processor 9 may calculate a measure of statistical dispersion (e.g. a variance) of the measurements in the ring buffer 12, and compare this to a threshold value of statistical dispersion when deciding if a determined value of the ratio is definitive.

15

If the intermediate value for the ratio is definitive, the processor 9 may cut short any further measurements by stopping any counters 10a-d that have not yet been stopped to prevent unnecessary further power use. If the intermediate value for the ratio is not definitive, the process returns to step 204. An intermediate value for the ratio may not be calculated on every rising edge of the LF clock signal 14.

20

While in this case the counters 10a-d count the number of cycles of the high frequency clock 6 taken for two low frequency clock cycles to elapse, this may be set by the processor to any number of low frequency clock cycles. Counting a greater number of low frequency cycles reduces the effects of any phase difference between the LF clock signal 14 and the HF clock signal 16 on the measured ratio, as the error caused by the initial rising edge offset is averaged across many cycles.

25

Figure 4 shows a modem SoC 102 that comprises a processor 104, a memory 106, an input/output module 108, a transceiver module 110, a SIM 112, and the clock module 2 described above.

30

The modem 102 may be provided as part of a battery powered mobile communication device (not shown), for example a smartphone or an 'Internet of Things' connected smart device. In such cases the input/output module 8 provides means for

35

- 11 -

communication with other elements of the device, for example a display or a sensor (not shown). It is desirable, particularly when provided as part of a battery powered device, to decrease the power demands of the modem 102 so as to increase battery life.

5

The modem 102 is operable to send and receive data from a network (not shown) via an antenna 116 and the transceiver module 110. Data received by the modem 102 is decoded by the processor 104 and may be sent onto other components of the device in an understandable format via the input/output module 108.

10

In use, the processor 104 executes various tasks, for example controlling discontinuous reception (DRX) operation of the transceiver module 110. In such operation the processor 104 controls the transceiver module 110 to periodically receive data from the network, in short prearranged time slots, and to power down in between. DRX operation can reduce the power demands of the modem 102 significantly compared to continuous reception operation (where the transceiver module 110 is continually powered), however to achieve reliable and effective operation the processor 104 must issue control commands at precise times to synchronise the reception periods properly with the network.

20

As described above, the clock module 2 comprises a low frequency clock 4 (such as an RC oscillator), a high frequency clock 6 (such as a crystal oscillator) and a clock calibration module 8.

25

During ordinary operation, the processor 104 is fully powered and uses the high frequency clock 6 for timing. However in order to reduce the power used by the modem 102, when the processor 104 is not in use (i.e. when it is not executing a task), the processor 104 enters into a lower power sleep state where one or more modules or circuits are switched off. There can often be long periods of time between tasks being executed, and so this measure can decrease power use significantly.

30

The high frequency clock 6 is switched off in the lower power sleep state, and instead the low frequency clock 4 is used to keep time.

- 12 -

The low frequency clock 4, however, is not entirely reliable. Between and during periods of sleep, the frequency of the low frequency clock 4 may drift from its nominal value, such that times measured by the low frequency clock 4 vary. To be confident of executing a task (e.g. starting a receiver for a DRX reception time slot) at precisely the correct time, the processor 104 may, on entry to the higher power state, measure the frequency of the low power clock 4, and use this measurement to determine and compensate for any drift that has occurred during the preceding period of low power operation. This allows the processor 104 to execute the task at precisely the right time. This frequency measurement is achieved by comparing the frequency of the low frequency clock 4 to that of the high frequency clock 6. Higher frequency clocks are generally less susceptible to drift and so are suitable to use as reference clocks.

The ratio of the frequencies is determined by the processor 104 during a period of high power operation. The clock module 2 is operated as described above, such that the ring buffer 12 contains measurements of the number of the high frequency clock cycles taken for a number, predetermined by the processor 104, of low frequency clock cycles to elapse. The processor 104 reads the contents of the ring buffer 12 and uses it to determine a ratio between the frequency of the low frequency clock 4 and that of the high frequency clock 6. This ratio can be compared to a previously measured (or provided) value to identify the amount of drift that has occurred.

In order to reduce the effects of jitter and other factors (e.g. phase offset from the HF clock signal 16) impacting the LF clock signal 14 and therefore the ratio determined by the processor 104, the processor 104 may calculate an average of the entries in the ring buffer 12, and use this average to determine the ratio.

The processor 104 can in fact read the contents of the ring buffer 12 at any time, including during a calibration. The processor 104 can therefore quickly produce a first estimate of the ratio using only a count from the first counter 10a or the first few counters (e.g. using counts from the first and second counters 10a, 10b). If the first estimate of the ratio definitively shows no drift has occurred since the previous calibration, the processor 104 may cut the calibration short, instructing the clock calibration module 8 to stop all the counters 10a-d. By reducing the length of time taken for a calibration, the total amount of time the processor 104 must spend in the higher power state may be reduced.

Once the processor 104 has determined the current ratio between the frequencies of the low and high frequency clocks 4, 6, it can adjust timings made by the low frequency clock 4 to ensure that the task is executed at the correct time.

5

This process of calibrating the low frequency clock 4 may be carried out during every period of high power operation. However if the processor 104 determines from a calibration that no or negligible drift has occurred since a previous calibration, it may not perform a calibration following the subsequent period of low power operation, saving power by reducing the amount of time the processor 104 is in the higher power state.

10

Figure 5 is a timing diagram illustrating operation of the modem SoC described above. At a first time 402 the modem 102 is in a high power state 404 and initiates a DRX reception period 406 which lasts until a second time 408. The modem 102 then enters a low power state 410 during which the processor 104 enters sleep, the high frequency clock 6 is not powered and the low frequency clock 4 is used to keep time. At a later time 412, the modem 102 re-enters the high power state 404. The processor then carries out a calibration 414 of the low frequency clock 4 as described above, determining a ratio between the frequencies of the low frequency clock 4 and the high frequency clock 6 and using this ratio to calculate a true time elapsed since the modem 102 entered the lower power state 410. The modem 102 is then able to execute a second DRX reception period 416 at precisely the right time 418.

15

20

At a subsequent time 420, after the DRX reception period 416 has ended, the modem enters the low power state 410. This process is repeated as operation of the modem 102 continues.

25

It will be appreciated by those skilled in the art that the invention has been illustrated by describing one or more specific embodiments thereof, but is not limited to these embodiments; many variations and modifications are possible, within the scope of the accompanying claims.

30

- 14 -

Claims

1. A circuit system comprising:
a processor;
5 a first clock with a first frequency;
a second clock with a second frequency, such second frequency being higher than said first frequency; and
a clock calibration module comprising a plurality of counters configured to count cycles of the second clock when triggered; wherein
10 each of the plurality of counters is configured to be triggered at successive cycles of the first clock;
each of the plurality of counters is configured, after a predetermined number of cycles of the first clock, to output a count of elapsed second clock cycles; and
the processor is configured to determine, using the counts outputted by the
15 plurality of counters, a ratio between the first frequency and the second frequency.
2. The circuit system as claimed in claim 1, wherein at least some counters of the plurality of counters are arranged to count in parallel.
- 20 3. The circuit system as claimed in claim 1 or 2, wherein the first clock is configured to issue a signal to the processor once a pre-set number of cycles have elapsed.
4. The circuit system as claimed in claim 3, wherein the signal causes the
25 processor to execute a task.
5. The circuit system as claimed in claim 3 or 4, wherein the processor is configured to use the determined ratio between the first frequency and the second frequency to calibrate the pre-set number of cycles used by the first clock.
30
6. The circuit system as claimed in claim 5, wherein the second clock is powered off at times other than during calibrations.
7. The circuit system as claimed in claim 5 or 6, wherein the processor is
35 operable in a lower power state and a higher power state and the processor is

- 15 -

configured to perform a calibration of the first clock every time it enters the higher power state.

8. The circuit system as claimed in claim 5 or 6, wherein the processor is
5 configured to decide dynamically whether or not to perform a calibration based upon a previously determined ratio.

9. The circuit system as claimed in any of claims 5-8, wherein the processor is
10 configured to cut short a calibration if a value of the ratio calculated using measurements from only a sub-set of the plurality of counters is definitive.

10. The circuit system as claimed in any of claims 5-9, wherein the second clock is powered down when the calibration is complete.

15 11. The circuit system as claimed in any of claims 5-10, wherein the circuit system is configured to extend a calibration if required.

12. The circuit system as claimed in any preceding claim, wherein each of the
20 plurality of counters is configured to count a number of cycles of the second clock taken for M cycles of the first clock to elapse, where M is greater than one.

13. The circuit system as claimed in any preceding claim, wherein the counters are hardware counters.

25 14. The circuit system as claimed in any preceding claim, wherein the processor is configured to determine an initial value for the ratio using the count outputted by a first counter of the plurality of counters.

15. The circuit system as claimed in any preceding claim, wherein the plurality of
30 counters comprises at least five counters.

16. The circuit system as claimed in any preceding claim, wherein the processor is operable in a lower power state and a higher power state.

- 16 -

17. The circuit system as claimed in claim 16, wherein the processor is configured to execute tasks in the higher power state, and to enter into the lower power state between task executions.
- 5 18. The circuit system as claimed in claim 16 or 17, wherein the second clock is not powered when the processor is in the low power state.
19. The circuit system as claimed in any preceding claim, wherein the clock calibration module further comprises a ring buffer, to which the counts outputted by the
10 plurality of counters are saved.
20. The circuit system as claimed in claim 19, wherein the processor is configured such that it may read the contents of the ring buffer at any point.
- 15 21. The circuit system as claimed in any preceding claim, wherein the processor is configured to provide one or more measurement parameters to the clock calibration module.
22. The circuit system as claimed in claim 21, wherein the processor is configured
20 to vary dynamically the measurement parameters provided to the clock calibration module dependent upon a previously determined ratio.
23. The circuit system as claimed in any preceding claim, wherein the processor is configured to use the determined ratio to refine processor timing retroactively.
25
24. The circuit system as claimed in any preceding claim, wherein the processor is configured to predict a maximum level of drift expected during a period of low power operation.
- 30 25. The circuit system as claimed in claim 24, wherein the maximum level of expected drift is adjusted dynamically based upon a previously measured ratio
26. The circuit system as claimed in any preceding claim, wherein the first clock comprises an RC oscillator.
35

- 17 -

27. The circuit system as claimed in any preceding claim, wherein the first frequency is less than 100 kHz.
28. The circuit system as claimed in any preceding claim, wherein the second clock
5 comprises a crystal oscillator.
29. The circuit system as claimed in any preceding claim, wherein the second frequency is greater than 1 MHz.
- 10 30. A circuit portion comprising:
a first clock with a first frequency;
a second clock with a second frequency, wherein the first frequency is lower
than the second frequency; and
a plurality of counters configured when triggered to count cycles of the second
15 clock; wherein
each of the plurality of counters is configured to be triggered at successive
cycles of the first clock; and
each of the plurality of counters is configured to output a count of elapsed
second clock cycles after a predetermined number of cycles of the first clock.
20
31. The circuit portion as claimed in claim 30, wherein at least some counters of the plurality of counters are arranged to count in parallel.

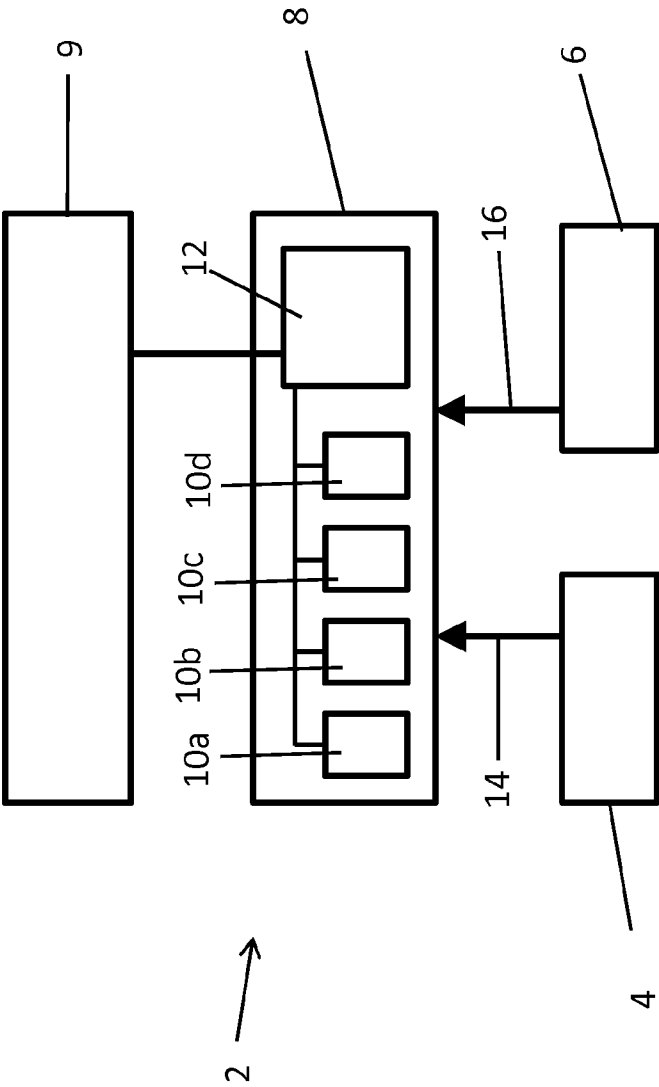


Figure 1

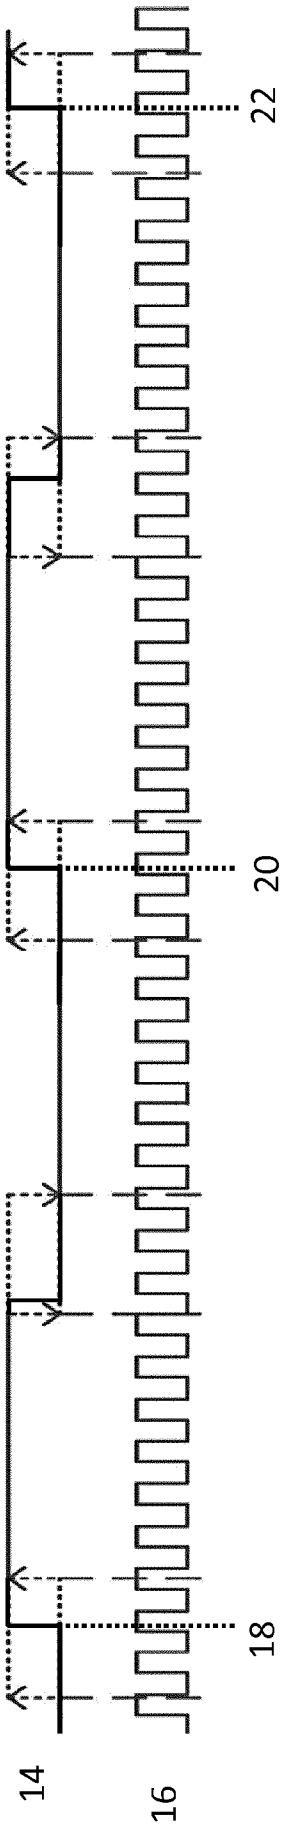


Figure 2

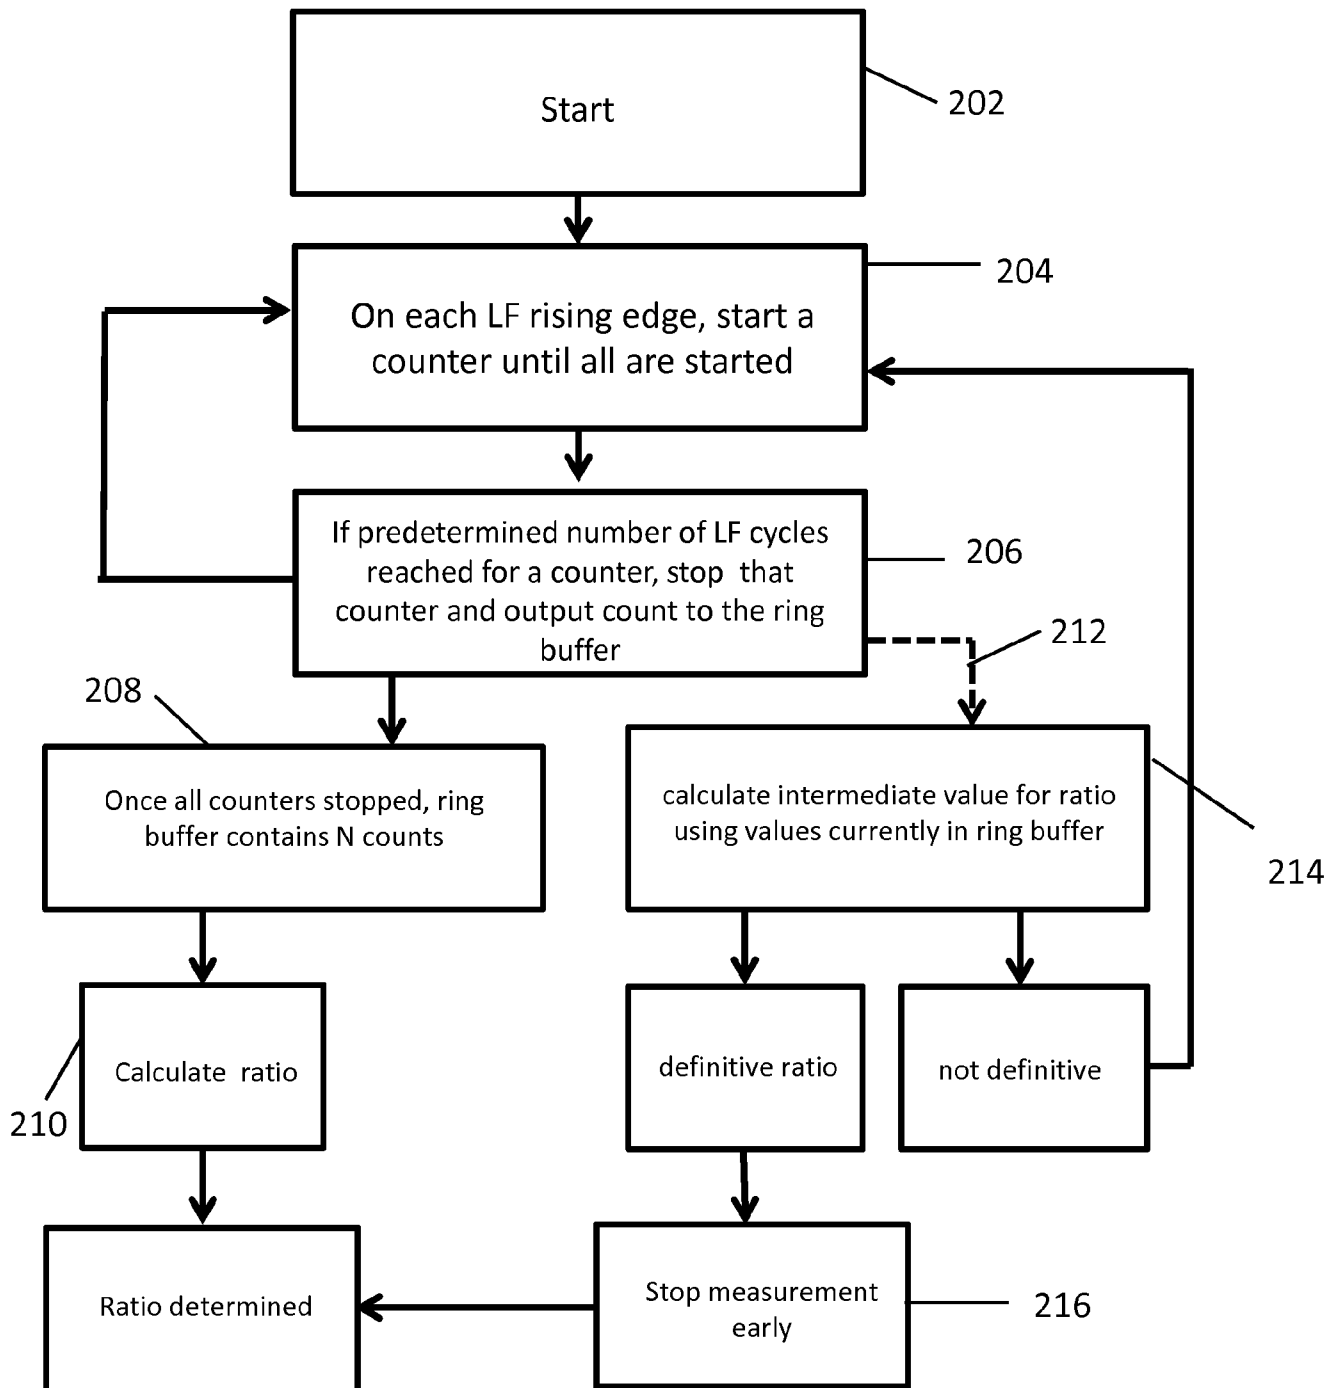
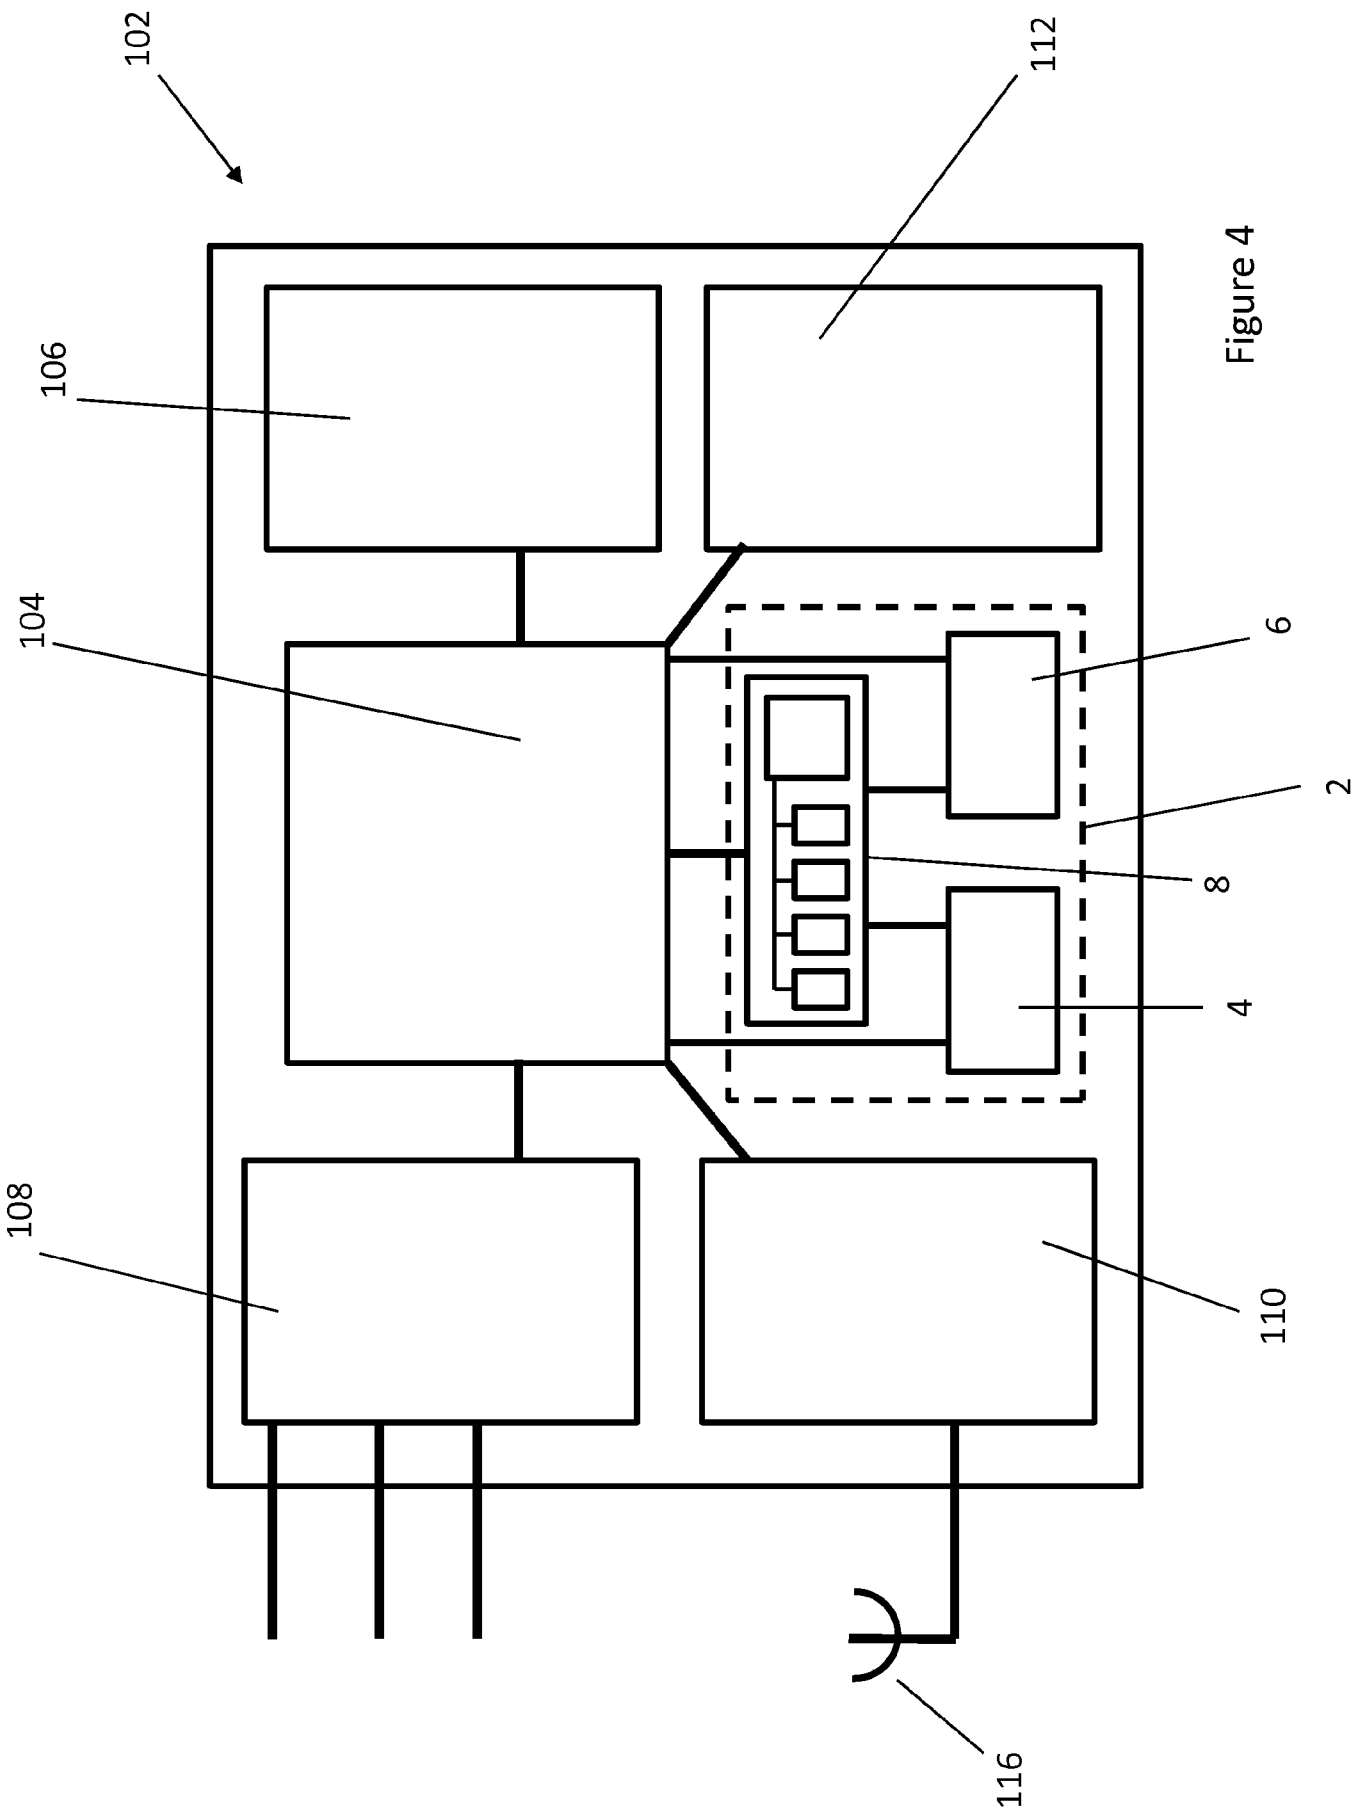


Figure 3

Figure 4



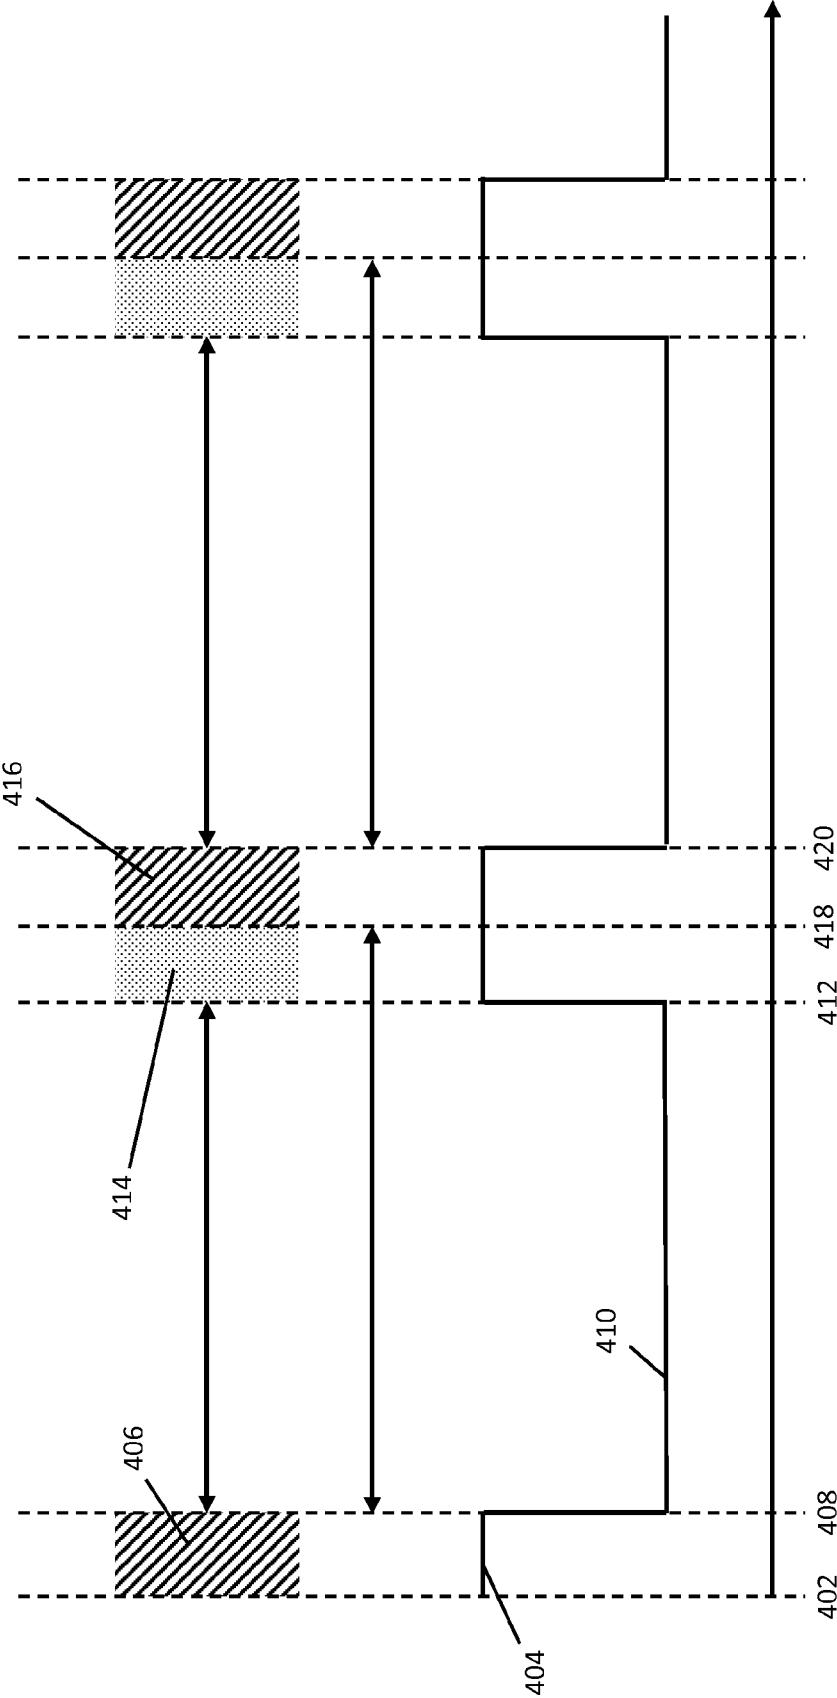


Figure 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/050778

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F1/12 H04W52/02 G06F1/324
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 089 970 A1 (ERICSSON TELEFON AB L M [SE]) 19 August 2009 (2009-08-19) paragraph [0004] - paragraph [0009] paragraph [0020] - paragraph [0039] paragraph [0041] figures 1, 8, 9, 11-13	1-31
X	US 2003/043766 A1 (MCDONOUGH JOHN G [US] ET AL) 6 March 2003 (2003-03-06) paragraph [0006] - paragraph [0007] paragraph [0030] - paragraph [0057] figures 1, 2	1-31



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 March 2019

Date of mailing of the international search report

28/03/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Schmidt, Daniel

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/050778

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015/074444 A1 (MEYER STEFAN [DE] ET AL) 12 March 2015 (2015-03-12) paragraph [0003] paragraph [0012] - paragraph [0027] paragraph [0079] paragraph [0094] figures 1-3 -----	1-31
A	US 2012/294212 A1 (MERIOE TOMI VILLE [FI] ET AL) 22 November 2012 (2012-11-22) paragraph [0045] - paragraph [0047] paragraph [0053] - paragraph [0061] paragraph [0068] - paragraph [0072] figures 1a, 2, 3a -----	1-31
A	US 6 725 067 B1 (MARX GERALD [US] ET AL) 20 April 2004 (2004-04-20) column 1, line 15 - line 35 column 5, line 14 - line 65 column 8, line 61 - column 9, line 28 figure 1 -----	1-31

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/050778

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2089970	A1	19-08-2009	AT 467272 T 15-05-2010
		BR PI0717795 A2 15-04-2014	
		CN 101523726 A 02-09-2009	
		DK 2089970 T3 16-08-2010	
		EP 2089970 A1 19-08-2009	
		ES 2345294 T3 20-09-2010	
		HK 1133334 A1 02-11-2012	
		JP 4994456 B2 08-08-2012	
		JP 2010506523 A 25-02-2010	
		TW 200821588 A 16-05-2008	
		US 7272078 B1 18-09-2007	
		WO 2008043629 A1 17-04-2008	

US 2003043766	A1	06-03-2003	NONE

US 2015074444	A1	12-03-2015	DE 102013109818 A1 12-03-2015
		US 2015074444 A1 12-03-2015	

US 2012294212	A1	22-11-2012	GB 2490980 A 21-11-2012
		US 2012294212 A1 22-11-2012	

US 6725067	B1	20-04-2004	NONE
