

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 May 2010 (20.05.2010)

(10) International Publication Number
WO 2010/057115 A2

(51) International Patent Classification:

H05B 37/02 (2006.01)

(74) Agents: ABRAMONTE, Frank et al.; Seed Intellectual Property Law Group PLLC, Suite 5400, 701 Fifth Avenue, Seattle, WA 98104-7064 (US).

(21) International Application Number:

PCT/US2009/064625

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

16 November 2009 (16.11.2009)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/115,438 17 November 2008 (17.11.2008) US
61/154,619 23 February 2009 (23.02.2009) US


(71) Applicant (for all designated States except US): EXPRESS IMAGING SYSTEMS, LLC [US/US]; 624 Rainier Avenue South, Seattle, WA 98144 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): REED, William, G. [US/US]; 9804 62nd Avenue South, Seattle, WA 98118 (US).

[Continued on next page]

(54) Title: ELECTRONIC CONTROL TO REGULATE POWER FOR SOLID-STATE LIGHTING AND METHODS THEREOF

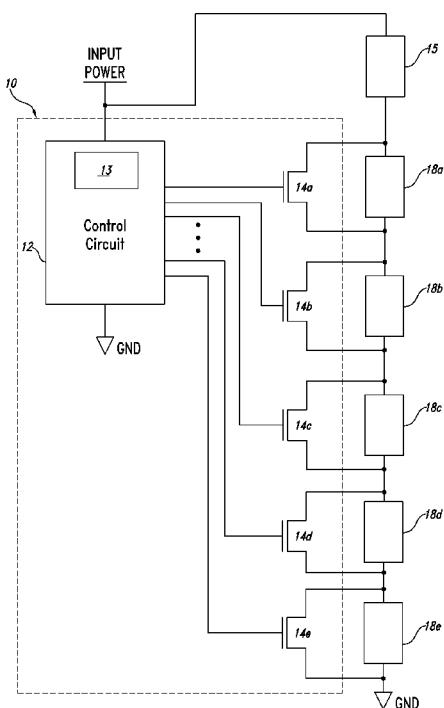

(57) Abstract: Apparatus and methods to regulate an input power applied to a plurality of light emitters are provided. A regulator device includes a plurality of switches and a control circuit that controls the plurality of switches. The plurality of switches selectively couple respective strings of the light emitters in series to the input power to emit light when deactivated. The control circuit may deactivate a number of the switches to couple the respective light emitters to the input power in response to a sensed operational parameter of the input power. The control circuit may adjust the number of the switches deactivated in response to a change in the sensed operational parameter of the input power. A number of the light emitters may be coupled to the input power regardless of the sensed operational parameter of the input power.

FIG. 1A



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

ELECTRONIC CONTROL TO REGULATE POWER FOR SOLID-STATE
LIGHTING AND METHODS THEREOF

5 Background

This application claims benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application No. 61/115,438, filed November 17, 2008, and U.S. Provisional Patent Application No. 61/154,619, filed February 23, 2009, where these two provisional applications are incorporated herein by reference
10 in their entireties.

Technical Field

This disclosure generally relates to the field of illumination devices and, more particularly, to regulation of electrical power applied to solid-state lighting in an illumination device.

15 Description of the Related Art

With increasing trend of energy conservation and for various other reasons, including replacement of gas-vapor lamps, solid-state lighting has become more and more popular as the source of illumination in a wide range of applications. As generally known, solid-state lighting refers to a type of lighting
20 that emits light from a solid object, such as a block of semiconductor, rather than from a vacuum or gas tube as is the case in traditional lighting. Examples of solid-state lighting include light-emitting diodes (LEDs), organic light-emitting diodes (OLEDs), and polymer light-emitting diodes (PLEDs). Solid-state lighting as compared to traditional lighting generates visible light with reduced
25 parasitic energy dissipation in the form of reduced heat generation. Further, solid-state lighting tends to have increased lifespan compared to traditional lighting. This is because, due to its solid-state nature, solid-state lighting provides for greater resistance to shock, vibration, and wear.

An LED illumination device is a type of solid-state lighting that
30 utilizes LEDs as a source of illumination, and typically has clusters of LEDs in a

suitable housing. The LEDs in an LED illumination device typically have very low dynamic resistance, with the same voltage drop for widely-varying currents. Thus, the LEDs cannot be connected directly to most power sources, such as the 120-volt alternating current (AC) mains commonly available in the U.S.,

5 without causing damages to the LEDs. LEDs typically conduct current in one direction, and require a current that does not exceed the maximum current rating of the LED.

Two methods have been typically used to limit the current that is applied to LEDs in an illumination device to a safe level. The first method uses
10 an electronic switching ballast that converts the AC input voltage from the power mains into a direct current (DC) regulated current of an acceptable value. The second method uses a string of LEDs coupled in series where a voltage drop of the string equal to the input voltage at the current limit.

An electronic switching ballast that regulates current typically
15 employs a switching current and a magnetic energy storage device such as a series inductor (e.g., in a buck regulator) or transformer (e.g., in a flyback regulator). Various different topologies have been developed in the attempt to obtain high conversion efficiencies. Still, a typical flyback or buck type regulator will have a conversion efficiency of only 60% to 90%, wasting 10% to 40% of
20 the input power in the form of heat.

Electronic switching ballasts tend to be expensive to manufacture because they require high frequency switching components, custom-wound magnetic components, and electrical noise suppression circuitry. Moreover, because of the high frequency required to utilize reasonably sized magnetic
25 components, electronic switching ballasts typically require electro-magnetic interference (EMI) filtering. This unavoidably adds cost and space requirements. Furthermore, robust and relatively expensive components are needed to ensure long life and efficient operation of electronic switching ballasts. In addition, a power factor correction (PFC) circuit is required to meet
30 power factor regulations. If external light dimmers will be used, the electronic switching ballast accordingly will need extra circuitry.

Series-string current control can have very high conversion efficiency, but only for one applied voltage level. If the voltage level of the input power falls below the LED string voltage, the LEDs do not produce the required light emission. If, however, the voltage level of the input power rises above the

5 LED string voltage, excess current flows through the LEDs and may result in damage to the LEDs. Series-string type of solid-state lighting thus requires a "ballast" resistor or active current-limiting circuitry to limit the current in the case of high input voltage. This current-limiting circuitry, nevertheless, eliminates any conversion efficiency advantage that the series-string type of solid-state

10 lighting may have by dissipating the excess power as heat. An additional disadvantage to the series-string type of solid-state lighting used in an AC application is that the LEDs do not begin to emit light until the applied voltage approaches the string voltage. This causes a loss of cost efficiency because the LEDs are not on (i.e., emitting light) throughout the entire AC line cycle.

15 Another disadvantage to the series-string type of solid-state lighting used in an AC application is that the string of LEDs only emits light during one half of the AC cycle, thus requiring the use of two strings of LEDs to produce light over the entire AC cycle. If light is only produced in one half of the cycle, using only one string of LEDs, the light undesirably appears to the eye to flicker at the 30Hz

20 half cycle frequency.

BRIEF SUMMARY

A regulator device to regulate an input power applied to a plurality of light emitters may be summarized as including a plurality of switches each of which selectively electrically couples a respective number of the light emitters to

25 receive the input power when the switch is deactivated; and a control circuit coupled to receive the input power and controllingly coupled to the plurality of switches, the control circuit configured to sense an operational parameter of the input power, the control circuit to deactivate a number of the switches to electrically couple the respective light emitters to the input power and a first

30 number of the light emitters responsive to the sensed operational parameter of

the input power, and to adjust the number of the switches deactivated responsive to a change in the sensed operational parameter of the input power, where the first number of the light emitters are coupled to the input power regardless of the sensed operational parameter of the input power.

- 5 The control circuit may deactivate a number of the switches to electrically couple the respective light emitters in series to the input power to emit light responsive to the sensed operational parameter of the input power, and wherein the control circuit may adjust the number of the switches deactivated to adjust the number of light emitters electrically coupled in series
- 10 to the input power responsive to a change in the sensed operational parameter of the input power. The control circuit may sense at least one of a current value and a voltage value of the input power applied to the number of light emitters electrically coupled in series to the input power. Each of the plurality of switches may be electrically coupled to a respective one of the light emitters. A
- 15 first switch of the plurality of switches may be selectively operable to electrically short a first number of the light emitters, wherein a second switch of the plurality of switches may be selectively operable to electrically short a second number of the light emitters, the second number being twice the first number. The control circuit may adjust the number of switches deactivated to adjust the number of
- 20 the respective light emitters electrically coupled in series to the input power to achieve a target voltage drop across the total number of light emitters electrically coupled in series to the input power responsive to a change in the sensed operational parameter of the input power. The control circuit may adjust the number of switches deactivated to adjust the number of the
- 25 respective light emitters electrically coupled in series to the input power to achieve a target current value of a current flowing through the total number of light emitters electrically coupled in series to the input power responsive to a change in the sensed operational parameter of the input power. The control circuit may include a microcontroller, the microcontroller activates and
- 30 deactivates a number of the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the

sensed operational parameter of the input power. The control circuit may include an analog-to-digital converter (ADC) to activate and deactivate a number of the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the sensed

5 operational parameter of the input power. The control circuit may include a plurality of comparators each of which is electrically coupled to a respective number of the switches to activate and deactivate the respective number of the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the sensed operational

10 parameter of the input power. The control circuit may include a current sensor to sense a current value of the input power, and wherein the current sensor may include one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor. The control circuit may include a plurality of pulse width modulation (PWM) modules each of which electrically coupled to drive a

15 respective one of the plurality of switches. At least one of the PWM modules may drive the respective switch with a pulse stream of increasing duty cycle to activate the respective switch. At least one of the PWM modules may drive the respective switch with a pulse stream of decreasing duty cycle to deactivate the respective switch.

20 The control circuit may further include a triangle wave generator to provide a triangular-wave signal to the PWM modules.

The regulator device may further include a voltage regulator to provide a regulated input power to power the control circuit, the voltage regulator electrically coupled to receive power from a base string of light

25 emitters of the plurality of light emitters that is coupled to receive the input power. The control circuit and the switches may be parts of a processor.

An illumination device may be summarized as including a first plurality of light emitters coupled to an input power; a second plurality of light emitters; and a control system electrically coupled to the second plurality of light

30 emitters and the input power, the control system to sense an operational parameter of the input power, the control system configured to electrically

couple a number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power exceeding a first threshold value.

The illumination device may further include a rectifier circuit

- 5 coupled to receive an alternating current (AC) power and the control system to rectify the AC power to provide the input power in direct current (DC) form to the control system, wherein the control system is configured to measure a waveform of the AC power.

The illumination device may further include a rectifier circuit

- 10 coupled to receive an alternating current (AC) power and the control system to rectify the AC power to provide the input power in direct current (DC) form to the control system, the rectifier circuit including a bridge rectifier having at least one light-emitting diode (LED). The control system may sense at least one of a current value and a voltage value of the input power and electrically couples a
- 15 number of the second plurality of light emitters in series to the input power and with the first plurality of the light emitters responsive to the sensed at least one of the current value and the voltage value of the input power exceeding the respective threshold current value or threshold voltage value. The control system may electrically couple all of the second plurality of light emitters in
- 20 series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power exceeding a second threshold value that is greater than the first threshold value. The control system may include a microcontroller and a plurality of transistors each of which is electrically coupled to the microcontroller to be controlled thereby, wherein the
- 25 microcontroller may deactivate at least one of the transistors to electrically couple a number of the second plurality of light emitters in series to the input power and with the first number of the light emitters responsive to the sensed operational parameter of the input power being between the first threshold value and a second threshold value. The control system may include an
- 30 analog-to-digital converter (ADC) and a plurality of transistors each of which is electrically coupled to the ADC to be controlled thereby, wherein the ADC may

deactivate at least one of the transistors to electrically couple the a number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power being between the first threshold value and a second threshold value. The control system may include a plurality of comparators and a plurality of transistors, each of the comparators controllingly coupled to a respective number of the transistors, each of the transistors electrically coupled to a respective number of the second plurality of light emitters, wherein each of the comparators compares the sensed operational parameter of the input power to a respective threshold value and deactivates the respective transistors to electrically couple the respective number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power being between the respective threshold value and a second threshold value. The control system may include a current sensor to sense a current value of the input power, and wherein the current sensor may include one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor. The light emitters may include solid-state light emitters. The light emitters may include LEDs.

The illumination device may further include an energy storage element coupled to an output of the rectifier circuit to provide a substantially constant DC voltage for the light emitters.

The illumination device may further include a voltage regulator to provide a regulated input power to power the control system, the voltage regulator electrically coupled to receive power from the first plurality of light emitters. The voltage regulator may be coupled to a first node in a base string of light emitters formed by the first plurality of light emitters, at least one of the light emitters in the base string being between the first node and an electrical ground to provide a DC voltage to the voltage regulator.

The illumination device may further include a rectifier electrically coupled between the voltage regulator and the first plurality of light emitters to rectify the power received by the voltage regulator from the first plurality of light

emitters; and an energy storage element electrically coupled between the rectifier and the voltage regulator. The control system and at least one of the light emitters may be parts of an LED-array light source. The control system and at least one of the light emitters may be parts of a monolithic LED light

5 source.

An illumination device may be summarized as including a plurality of light emitters, a first number of light emitters of the plurality of light emitters being electrically coupled in series to an input power; a plurality of switches which when deactivated electrically couple a respective number of the light

10 emitters to the input power in addition to the first number of the light emitters; and a control circuit controllingly coupled to the plurality of switches to activate and deactivate the switches in response to a sensed operational parameter of the input power being greater than a first threshold value.

The illumination device may further include a rectifier circuit

15 coupled to an alternating current (AC) power to rectify the AC power and coupled to provide the input power in direct current (DC) form to the control circuit and the first number of the light emitters, wherein the control circuit is configured to measure a waveform of the AC power.

The illumination device may further include a rectifier circuit

20 coupled to an alternating current (AC) power to rectify the AC power and coupled to provide the input power in direct current (DC) form to the control circuit and the first number of the light emitters, the rectifier circuit including a bridge rectifier having at least one light-emitting diode (LED). A first switch of the plurality of switches may be electrically coupled to short a second number

25 of the light emitters, wherein a second switch of the plurality of switches may be electrically coupled to short a third number of the light emitters, the third number being twice the second number. Each of the plurality of switches may be electrically coupled to short a respective one of the light emitters when activated. The control circuit may activate all of the switches responsive to the

30 sensed operational parameter of the input power being below the first threshold value. The control circuit may deactivate a first number of the switches

responsive to the sensed operational parameter of the input power being at a first value above the first threshold value. The control circuit may deactivate a first number plus a second number of the switches responsive to the sensed operational parameter of the input power being at a second value above the

5 first threshold value, the second value being greater than the first value. The control circuit may deactivate all of the switches responsive to the sensed operational parameter of the input power being above a second threshold value, the second threshold value being greater than the first threshold value. The plurality of light emitters may include a plurality of solid-state light emitters.

10 The plurality of light emitters may include a plurality of LEDs.

The illumination device may further include an energy storage element coupled to an output of the rectifier circuit to provide a substantially constant DC voltage for the light emitters. The control circuit may include a current sensor to sense a current value of the input power, and wherein the

15 current sensor may include one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor. The control circuit may include a plurality of pulse width modulation (PWM) modules each of which electrically coupled to drive a respective one of the plurality of switches. At least one of the PWM modules may drive the respective switch with a pulse stream of increasing duty cycle to

20 activate the respective switch. At least one of the PWM modules may drive the respective switch with a pulse stream of decreasing duty cycle to deactivate the respective switch.

The control circuit may further include a triangle wave generator to provide a triangular-wave signal to the PWM modules.

25 The illumination device may further include a voltage regulator to provide a regulated input power to power the control circuit, the voltage regulator electrically coupled to receive power from the first number of light emitters. The voltage regulator may be coupled to a first node in a base string of light emitters formed by the first number of light emitters, at least one of the

30 light emitters in the base string being between the first node and an electrical ground to provide a DC voltage to the voltage regulator.

The illumination device may further include a rectifier electrically coupled between the voltage regulator and the first number of light emitters to rectify the power received by the voltage regulator from the first number of light emitters; and an energy storage element electrically coupled between the

5 rectifier and the voltage regulator. The control circuit and the switches may be parts of a processor. The control circuit and at least one of the light emitters may be parts of an LED-array light source. The control circuit and at least one of the light emitters may be parts of a monolithic LED light source.

A method to regulate an input power may be summarized as

10 including determining a number of light emitters of a plurality of light emitters to be electrically coupled the input power based on an operational parameter of the input power; and electrically coupling the number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power, the number of the light emitters coupled to the input power

15 being between a value M and a value N where the value N is equal to a total quantity of light emitters in the plurality of light emitters, the value M being a positive number greater than zero but less than the value N.

The method may further include sensing the operational parameter of the input power. Electrically coupling a number of light emitters of

20 the plurality of light emitters to the input power based on the operational parameter of the input power may include electrically coupling a number M of the light emitters in series to the input power in response to the operational parameter of the input power being equal to or less than a threshold value.

Electrically coupling a number of light emitters of the plurality of light emitters to

25 the input power based on the operational parameter of the input power may include electrically coupling a number R of the light emitters in series to the input power responsive to the sensed operational parameter of the input power being equal to or greater than a threshold value, where the number R is a positive number between M and N. Electrically coupling a number of light

30 emitters of the plurality of light emitters to the input power based on the operational parameter of the input power may include varying the number of the

light emitters electrically coupled in series to the input power to be between the value M and the value N by a variable increment responsive to the sensed operational parameter of the input power, the variable increment ranging between 1 and a value equal to $N-M$. Varying the number of the light emitters

5 electrically coupled in series to the input power to be between the value M and the value N by a variable increment may include varying the number of the light emitters electrically coupled in series to the input power to be between the value M and the value N by a number of 2 to the P^{th} power, where P is a positive integer greater than or equal to zero. Electrically coupling a number of

10 light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power may include varying the number of the light emitters electrically coupled in series to the input power to be between the value M and the value N by an increment or decrement equal to 1 responsive to the sensed operational parameter of the input power being greater than a

15 threshold value. Electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power may include deactivating a number of a plurality of switches to electrically couple a respective number of the light emitters to the input power in response to the operational parameter of the input power being greater than a

20 threshold value, the respective number of the emitters coupled to the input power being between the value M and the value N. Sensing the operational parameter of an input power may include sensing at least one of a current value and a voltage value of the input power. Electrically coupling a number of light emitters of a plurality of light emitters to the input power may include electrically

25 coupling a number of solid-state light emitters of a plurality of solid-state light emitters to the input power. Electrically coupling a number of light emitters of a plurality light emitters to the input power may include electrically coupling a number of light-emitting diodes (LEDs) of a plurality of LEDs to the input power.

A method to regulate an input power may be summarized as

30 including electrically coupling a number of light emitters of a plurality of light emitters to the input power; and maintaining a first operational parameter of the

input power proximate to a target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power. Electrically coupling a number of light emitters of a plurality of light emitters to

5 an input power may include electrically coupling a number of solid-state light emitters of a plurality of solid-state light emitters to the input power. Electrically coupling a number of light emitters of a plurality of light emitters to the input power may include electrically coupling a number of light-emitting diodes (LEDs) of a plurality of LEDs to the input power. Maintaining a first operational

10 parameter of the input power proximate to a target value may include maintaining a current value of the input power proximate to a target current value. Adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power may include electrically coupling a first

15 number of light emitters of the plurality of light emitters in series to the input power responsive to the second operational parameter of the input power being equal to or less than a first threshold value.

The method may further include electrically coupling a variable number of light emitters of the plurality of light emitters in series to the input

20 power responsive to the second operational parameter of the input power being between the first threshold value and a second threshold value that is greater than the first threshold value, where the variable number is greater than the first number.

The method may further include electrically coupling all of the light

25 emitters of the plurality of light emitters in series to the input power responsive to the second operational parameter of the input power exceeding the second threshold value. Adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power may include adjusting the

30 number of light emitters of the plurality of light emitters electrically coupled in series to the input power proportionally to the variation in the second

operational parameter of the input power. Adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power may include electrically coupling substrings of light emitters of the plurality of

5 light emitters in series to the input power responsive to a variation in the second operational parameter of the input power. Maintaining a first operational parameter of the input power proximate to a target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of

10 the input power may include maintaining the first operational parameter of the input power proximate to the target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled in series to the input power to achieve a voltage drop across the number of light emitters electrically coupled in series to the input power responsive to a variation in the second

15 operational parameter of the input power. The first and the second operational parameters of the input power may be the same as one another. The first and the second operational parameters of the input power may be different from one another.

An illumination device may be summarized as including a light emitting diode-based rectifier that includes a plurality of diodes arranged as a bridge circuit, at least one of the plurality of diodes being a light emitting diode, the bridge circuit coupleable to an alternating current (AC) power and operable to rectify the AC power and provide a direct current (DC) power output. The bridge circuit may include four legs, each of the legs including at least one light emitting diode.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Figure 1A is a diagram showing a regulator device that regulates an input power applied to a plurality of light emitters according to one non-limiting illustrated embodiment.

Figure 1B is a diagram showing a portion of a control circuit of the regulator device of Figure 1A according to one non-limiting illustrated embodiment.

Figure 1C is a diagram showing a portion of a control circuit of the 5 regulator device of Figure 1A according to another non-limiting illustrated embodiment.

Figure 1D is a diagram showing the regulator device of Figure 1A according to another non-limiting illustrated embodiment.

Figure 1E is a diagram showing a portion of a control circuit of the 10 regulator device of Figure 1D according to one non-limiting illustrated embodiment.

Figure 1F is a diagram showing an arrangement to provide power to a control circuit of the regulator device of Figures 1A and 1D according to one non-limiting illustrated embodiment.

15 Figure 2 is a diagram showing an illumination device according to one non-limiting illustrated embodiment.

Figure 3 is a diagram showing an illumination device according to another non-limiting illustrated embodiment.

Figure 4 is a flow diagram showing a method to regulate an input 20 power according to one non-limiting illustrated embodiment.

Figure 5 is a flow diagram showing a method to regulate an input power according to another non-limiting illustrated embodiment.

Figure 6 is a diagram showing a rectifier circuit according to one non-limiting illustrated embodiment.

25 In the drawings, identical reference numbers identify similar elements or acts. The sizes and relative positions of elements in the drawings are not necessarily drawn to scale. For example, the shapes of various elements and angles are not drawn to scale, and some of these elements are arbitrarily enlarged and positioned to improve drawing legibility. Further, the 30 particular shapes of the elements as drawn, are not intended to convey any

information regarding the actual shape of the particular elements, and have been solely selected for ease of recognition in the drawings.

DETAILED DESCRIPTION

In the following description, certain specific details are set forth in order to provide a thorough understanding of various disclosed embodiments. However, one skilled in the relevant art will recognize that embodiments may be practiced without one or more of these specific details, or with other methods, components, materials, etc. In other instances, well-known structures associated with lighting fixtures, power generation and/or power system for lighting have not been shown or described in detail to avoid unnecessarily obscuring descriptions of the embodiments.

Unless the context requires otherwise, throughout the specification and claims which follow, the word "comprise" and variations thereof, such as, "comprises" and "comprising" are to be construed in an open, inclusive sense that is as "including, but not limited to."

Reference throughout this specification to "one embodiment" or "an embodiment" means that a particular feature, structure or characteristic described in connection with the embodiment is included in at least one embodiment. Thus, the appearances of the phrases "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily all referring to the same embodiment. Further more, the particular features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

The headings and Abstract of the Disclosure provided herein are for convenience only and do not interpret the scope or meaning of the embodiments.

As illustrated in Figure 1A, a regulator device 10 that regulates an input power applied to a finite number of light emitters, grouped into a base string 15 and substrings 18a-18e, may include a control circuit 12 and a plurality of switches 14a-14e coupled to the control circuit 12. In one

embodiment, the control circuit may comprise a semiconductor integrated circuit (e.g., a processor). In another embodiment, the control circuit 12 and the switches 14a-14e may be integral parts of a processor. In yet another embodiment, the control circuit 12, the switches 14a-14e, and the light emitters 5 (including the base string 15 and the substrings 18a-18e) may be integral parts of a processor.

Each of the base string 15 and substrings 18a-18e may include one or more light emitters coupled in series. The input power may be a DC input power. The control circuit 12 may be coupled to the input power, the 10 plurality of switches 14a-14e, and the base string 15. When coupled to the DC input power, the light emitters in the base string 15 and substrings 18a-18e will emit light provided that voltage drop across the string is at least the string forward voltage, or the sum of the minimum voltage required for each light emitter to emit light for the string.

15 Each of the plurality of switches 14a-14e may be electrically coupled across a respective string 18a-18e. For example, switch 14a may be electrically coupled across the substring 18a, switch 14b may be electrically coupled across the substring 18b, switch 14c may be electrically coupled across the substring 18c, switch 14d may be electrically coupled across the substring 18d, and switch 14e may be electrically coupled across the substring 18e. In various embodiments, there may be tens or dozens of substrings of 20 light emitters and correspondingly tens or dozens of switches, but only six strings (i.e., the base string 15 and substrings 18a-18e) and five switches (i.e., the switches 14a-14e) are shown in Figure 1A for simplicity and to avoid 25 unnecessarily obscuring the figure. The same principle also applies to Figures 2-5.

In one embodiment, each of the switches 14a-14e may be a solid-state switch. In one embodiment, each of the switches 14a-14e may be a transistor, such as, for example, an insulated-gate bipolar transistor (IGBT), a 30 metal-oxide-semiconductor field-effect transistor (MOSFET) or a bipolar junction transistor (BJT). Typically, when a transistor is activated, it conducts

current; when the transistor is deactivated, no current flows through it. Thus, when a switch 14a-14e is activated, it conducts current by creating a path of relatively minimal resistance and thereby electrically shoring the respective substring 18a-18e out of the resultant string of light emitters that is coupled in 5 series to the input power. Likewise, when a switch 14a-14e is deactivated, current will flow through the respective substring 18a-18e and thereby electrically coupling the respective substring 18a-18e into the resultant string of light emitters that is coupled in series to the input power.

10 The control circuit 12 is capable of sensing an operational parameter of the input power. The operational parameter sensed by the control circuit 12 may be the current value of the input power in one embodiment or the voltage value of the input power in another embodiment. Alternatively, the control circuit 12 may sense both the current value and voltage value of the input power.

15 In one embodiment, a current sensor 13 is used in the control circuit 12 and is electrically coupled in series with the resultant string of light emitters. This current sensor 13 may be a resistive sensor, a Hall-effect sensor, or a sense-coil type sensor, for example. In an embodiment, this current sensor 13 is a “high side” current sensor that enables the most negative 20 end of the resultant string to be connected to ground. Alternatively, the current sensor 13 may be placed anywhere in the resultant string, and may be a “low side” (or grounded) current sensor or sense resistor.

Alternatively, the voltage of the input power may be sensed. Accordingly, in one embodiment, the number of light emitters in the resultant 25 string is adjusted to match the input voltage based on known characteristics of the particular light emitters (e.g., LEDs) used. Modern high-flux LEDs have good matching of LED forward voltage (V_f) at a given current, and knowledge of the V_f may be utilized to calculate the number of LEDs required in the resultant string. However, this approach of voltage sensing may be less ideal due to the 30 variation in LED V_f over temperature and may result in somewhat less accuracy of current control than the approach with current sensing.

In one embodiment, the control circuit 12 electrically couples at least the base string 15 to the input power, regardless of the value of the sensed operational parameter of the input power, and activates all of the switches 14a-14e. This way, there will always be at least the base string 15 of

5 light emitters electrically coupled to the input power to emit light. As the operational parameter of the input power varies, the control circuit 12 may dynamically deactivate one or more of the switches 14a-14e to increase the number of light emitters in the resultant string of light emitters electrically coupled in series to the input power.

10 For example, in one embodiment, when the operational parameter of the input power exceeds a first threshold value by within a first amount, the control circuit 12 may deactivate the switch 14a while keeping the switches 14b-14e activated to additionally electrically couple the substring 18a in series with the base string 15 to the input power. When the operational parameter of

15 the input power exceeds the first threshold value by more than the first amount but within a second amount, the control circuit 12 may deactivate the switches 14a-14b while keeping the switches 14c-14e activated to additionally electrically couple the substrings 18a-18b in series with the base string 15 to the input power. When the operational parameter of the input power exceeds the first

20 threshold value by more than the second amount but within a third amount, the control circuit 12 may deactivate the switches 14a-14c while keeping the switches 14d-14e activated to additionally electrically couple the substrings 18a-18c in series with the base string 15 to the input power. When the operational parameter of the input power exceeds the first threshold value but

25 within a second threshold value that is greater than the first threshold value, the control circuit 12 may deactivate the switches 14a-14d while keeping the switch 14e activated to additionally electrically couple the substrings 18a-18e in series with the base string 15 to the input power. When the operational parameter of the input power exceeds the second threshold value, the control circuit 12 may

30 deactivate the switches 14a-14e to additionally electrically couple the substrings 18a-18e in series with the base string 15 to the input power.

In an alternative embodiment, the control circuit 12 may deactivate a different one or combination of the switches 14a-14e to electrically couple an appropriate number of the light emitters in series to the input power corresponding to the value of the operational parameter of the input power in 5 relation to the first and second threshold values. This approach can be especially helpful when each of the substrings 18a-18e includes a different number of light emitters, as will be explained in more detail below.

In one embodiment, the control circuit 12 may include a microcontroller that is electrically coupled to the switches 14a-14e to activate 10 and deactivate the switches 14a-14e, thereby controlling which one or ones of the substrings 18a-18e to be electrically coupled in series with the base string 15 to receive the input power to emit light. In an embodiment, the firmware operation for the microcontroller may be as follows:

Interrupt at zero crossing of AC line
15 Activate all switches to set light emitter string to a minimum length (control byte = xxx11111)
Begin
Measure light emitter string current
20 If current > LightEmitterCurrentNormal - 6%
 then decrement control byte
 If current < LightEmitterCurrentNormal + 6%
 then increment control byte
 Output control byte to switches
 Delay to allow switches to settle before
25 next current measurement
Repeat

In this embodiment, a five-bit section of the control byte is used to control the five switches. When a bit is set to 1, the switch is deactivated (turned off) and the respective light emitter substring electrically coupled to that 30 switch is added to the base string 15. In contrast, then a bit is set to 0, the

switch is activated (turned on) and the respective light emitter string electrically coupled to that switch is shorted or bypassed from the full string. Therefore, by setting the appropriate bit or bits in the control byte, one or more of the substrings 14a-14e may be added to or removed from the resultant string of

5 light emitters that receives the input power to emit light.

The control circuit 12 may use more complex firmware that includes current hysteresis to be used such that noise, switching transients, switching time of the solid-state switches or other disturbances will not result in false switching based on instantaneous current sensor readings.

10 In another embodiment, the control circuit 12 may include an analog-to-digital converter (ADC) 62, as illustrated in Figure 1B. The ADC 62 is electrically coupled to the switches 14a-14e to activate and deactivate the switches 14a-14e, thereby controlling which one or ones of the substrings 18a-18e to be electrically coupled in series with the base string 15 to receive the

15 input power to emit light. The ADC 62 receives an analog signal, such as a current derived from the input power, as input. The ADC 62 converts the analog signal into a digital signal as output to activate one or more of the switches 14a-14e and deactivate the remainder of the switches 14a-14e. For instance, if the input current results in the ADC 62 outputting a digital signal that

20 activates the switches 14a and 14d and deactivates the switches 14b, 14c, and 14e, then substrings 18a and 18d will be bypassed while substrings 18b, 18c, and 18e will be electrically coupled in series with the base string 15 to receive the input power to emit light.

In yet another embodiment, the control circuit 12 may include one

25 or more analog controllers, such as a plurality of comparator circuits 72a-72e, as illustrated in Figure 1C. Each of the comparator circuits 72a-72e is electrically coupled to a respective one of the switches 14a-14e to activate and deactivate the switches 14a-14e, thereby controlling which one or ones of the substrings 18a-18e to be electrically coupled in series with the base string 15 to

30 receive the input power to emit light. Each of the comparator circuits 72a-72e receives an input power signal, such as a voltage related to the input power, as

one input and receives a respective reference signal, such as a respective reference voltage derived from a voltage reference $V_{Reference}$, as the other input. Each of the comparator circuits 72a-72e compares the two input signals and either activates or deactivates the corresponding switch 14a-14e. This, in turn,

5 electrically couples zero or more of the substrings 18a-18e in series with the base string 15 to receive the input power to emit light.

When the substrings 18a-18e are switched in and out by the control circuit 12, the switching action may result in noticeable flicker of the light output of an illumination system in which the regulator device 10 is used. In 10 one embodiment, the switching is done by increasing a pulse width modulation (PWM) of the drive to the controlling switches 14a-14e such that those switches 14a-14e to be activated receive a pulse stream of increasing duty cycle while those switches 14a-14e to be deactivated receive a pulse stream of decreasing duty cycle. This causes the light emitted from the substring being switched out 15 to gradually decrease while the light emitted from the substring being switched in to gradually increase. Besides, by using PWM technique to drive the switches 14a-14e with a pulse stream of increasing or decreasing duty cycle, not only the flicker is removed but the average power to the substrings 18a-18e is also limited to less than the maximum limit.

20 As illustrated in Figure 1D, in one embodiment, the regulator device 10 of Figure 1A may include a plurality of PWM modules 16a-16e, each of which driving a respective one of the plurality of switches 14a-14e in the manner described above. In another embodiment, the PMW modules 16a-16e may be separate from the control circuit 12 but electrically coupled to the 25 control circuit 12.

As illustrated in Figure 1E, each of the PMW modules 16a-16e (shown as the PWM module 16) may receive a control signal from the control circuit 12 at a first input and a triangular-wave signal from a triangle wave generator 82 at a second input to drive its respective switch 14a-14e. The 30 triangle wave generator 82 may be an integral part of the control circuit 12 in one embodiment, or separate from the control circuit 12 in another

embodiment. In one embodiment, some or all of the control circuit 12, the switches 14a-14e, the PWM modules 16a-16e, and the triangle wave generator 82 may be integral parts of a processor. In the interest of brevity, the detailed structure and operation of the PWM modules 16a-16e and the triangle wave 5 generator 82 will neither be described nor illustrated since pulse width modulators and triangle wave generators are well known in the art.

In one embodiment, the voltage required to power the control circuit 12 is derived from a substring of light emitters that is part of the base string 15. Given that the base string 15 is coupled to receive the input power 10 regardless of the current value or voltage value of the input power, the base string 15 is always powered. Accordingly, the substring of the base string 15 powering the control circuit 12 is always on (i.e., receiving power).

As illustrated in Figure 1F, a rectifier 92 and an energy storage element 94, such as a storage capacitor, may be used to produce a DC voltage 15 that is loosely regulated by the forward drop of the substring of light emitters. The light emitters may be LEDs, as shown in Figure 1F, or solid state light emitters in another embodiment. In one embodiment, a substring of three LEDs is used to produce a DC voltage of approximately 9.6V. This DC voltage may then be more accurately regulated by a conventional voltage regulator 96 to the 20 required supply voltage, for example, 5.0V. The advantage of this arrangement is that the raw DC voltage is close to the final regulated voltage, resulting in low energy loss in the voltage regulator 96. In one embodiment, some or all of the control circuit 12, the voltage regulator 96, the rectifier 92, and the energy storage element 94 may be integral parts of a processor.

25 By varying the number of light emitters electrically coupled to the input power in series corresponding to the sensed current and/or voltage of the input power, the regulator device 10 regulates the current flowing through the resultant string of light emitters that is electrically coupled to the input power. In other words, the regulator device 10 does so by selectively deactivating and 30 activating one or more of the switches 14a-14e based on the sensed current and/or voltage to electrically couple the appropriate strings 18a-18e, in series

with the base string 15, to the input power. For example, if each light emitter has a forward voltage drop of 3.2 volts and the DC input power has a line voltage of 120 volts, then at least 38 light emitters will need to be electrically coupled to the input power in series to result in a current of less than 1 amp

5 flowing through the resultant string of light emitters.

Unlike an incandescent lamp, an LED lamp will not respond to the lower average power produced on the AC line by a standard light dimmer (not shown). The distorted waveform resulting from a dimmer setting less than 100% will not accurately reflect the dimming level the user desires because of

10 the photo-retentive effect of the human retina. To compensate for this phenomenon, a second analog input (not shown) to the control circuit 12 may be used to measure the waveform of the applied AC power. In the case of an external light dimmer circuit the waveform is highly distorted from the normal sinusoid. This distortion from sinusoid is measured and the percent of dimming

15 desired is thus accurately determined. In this case, the current flowing through the LEDs can be set lower than the nominal, resulting in a dimming function that correctly corresponds to the position setting of the dimmer.

As illustrated in Figure 2, an illumination device 20 may include a finite number of light emitters, grouped into a base string 25 and substrings

20 28a-28e, and a control system 22 electrically coupled to the light emitters. Each of the base string 25 and substrings 28a-28e may include one or more light emitters electrically coupled in series. In one embodiment, the light emitters in the base string 25 and the substrings 28a-28e may be solid-state light emitters. In another embodiment, the light emitters in the base string 25

25 and the substrings 28a-28e may be LEDs. In one embodiment, the control system 22 may comprise a processor. In one embodiment, the control system 22 and at least one of the light emitters (including the base string 25 and the substrings 28a-28e) may be integral parts of an LED-array light source. In another embodiment, the control system 22 and at least one of the light

30 emitters may be integral parts of a monolithic LED light source.

In one embodiment, the control system 22 may include a regulator such as the regulator device 10 shown in Figure 1A. The control system 22 may include a microcontroller, an ADC, or a plurality of comparator circuits as described above in reference to Figures 1A-1C. The control system 22 may

5 also include the PWM modules 16a-16e, the triangle wave generator 82, the voltage regulator 96 and other components as described above in reference to Figures 1D-1F. The control system 22 is coupled to receive a DC input power and sense at least one operational parameter of the input power, which may be the current value or the voltage value, or both, of the input power.

10 In one embodiment, the base string 25 is electrically coupled to receive the input power regardless what value the sensed operational parameter of the input power may be at. This way, there will be at least those light emitters in the base string 25 electrically coupled to the input power to emit light, provided that the voltage value of the input power is no less than the

15 forward voltage drop value of the string 25.

Based on the sensed operational parameter of the input power, the control system 22 electrically couples none or more of the substrings 28a-28e in series with the base string 25 to receive the input power to emit light. When the sensed operational parameter is below a first threshold value, only

20 the base string 25 is electrically coupled to receive the input power to emit light. When the sensed operational parameter exceeds the first threshold value by less than a first amount, the control system 22 electrically couples one of the substrings 28a-28e in series with the string 25 to increase the number of light emitters in the resultant string. When the sensed operational parameter

25 exceeds the first threshold value by more than the first amount but less than a second amount, the control system 22 electrically couples an additional one of the substrings 28a-28e in series with the resultant string. The process continues until the sensed operational parameter is above a second threshold value that is greater than the first threshold value with all the substrings 28a-

30 28e electrically coupled in series with the base string 25 to have a maximum number of light emitters in the resultant string. When the sensed operational

parameter decreases in value, the control system 22 decouples one or more of the substrings 28a-28e from the resultant string accordingly.

The objective of the aforementioned operation is to electrically couple a number of light emitters (hence a corresponding mixture of the substrings 28a-28e with the base string 25) to provide a resultant string of light emitters electrically coupled in series that has a forward voltage drop value at approximately a desired level to regulate the current flowing through the light emitters. The operation of electrically coupling/decoupling the substrings 28a-28e to be in series with the base string 25 may be similar to the operation of the regulator device 10 of Figures 1A-1C as described above and, in the interest of brevity, will not be described again.

In one embodiment, the illumination device 20 may include a rectifier circuit 26, such as a bridge rectifier. The rectifier circuit 26 is used to convert AC power mains current into 120Hz DC pulses to drive the resultant string of light emitters. This allows the light emitters to emit light at a high enough frequency that avoids visible flickering of the light. The rectifier circuit 26 may be coupled to receive electrical power from an AC power source and provide the input power in DC form to the control system 22 and the base string 25.

Figure 6 shows an LED-based bridge rectifier 27, according to one illustrated embodiment. The LED-based bridge rectifier 27 may be used as the rectifier circuit 26 in place of a standard bridge rectifier. The LED-based bridge rectifier 27 has LEDs D1, D2, D3, and D4 arranged to form a rectifier bridge as shown in Figure 6. Depending on the polarity of the AC input power, either the LEDs D1 and D4 are forward biased or the LEDs D2 and D3 are forward biased to provide the rectified DC output. The LEDs D1, D2, D3, and D4 provide the rectification as well as improve the efficiency of the final LED lamp by emitting light. This dual function replaces the standard bridge rectifier, which consumes power but does not emit light as the does LED-based bridge rectifier 27. The power consumed by a standard bridge rectifier is approximately 2V (i.e., the forward drop across diodes) times the lamp current

caused by the two diodes in the standard bridge rectifier that conduct during rectification. In alternative embodiments, one or more but not all of the diodes in the LED-based bridge rectifier 27 may be LEDs.

The nominal line voltage of 120VRMS becomes a pulse DC

5 voltage of approximately 170V peak-to-peak, which requires a resultant string of approximately 53 LEDs at rated current, with each LED having a typical forward voltage drop of 3.2 volts. A low line voltage of 90VRMS will result in approximately 127V peak-to-peak, which requires a resultant string of approximately 40 LEDs at rated current. A high line voltage of 130VRMS

10 results in a pulsed DC voltage of 184V peak-to-peak and a resultant string of approximately 58 LEDs.

In one embodiment, the illumination device 20 may include an energy storage element 29, such as a capacitor, coupled to the output of the rectifier circuit 26 (or the input of the control system 22 and the base string 25).

15 The energy storage element 29 provides a substantially constant DC voltage for the light emitters in the base string 25 as well as the substrings 28a-28e when they are electrically coupled in series to receive the input power. The control system 22 will operate in the same manner as with a pulsing DC voltage, but does not switch as many light emitters. This is because the current flowing

20 through the light emitters will be substantially constant when the string length (i.e., the number of light emitters electrically coupled in series) is set appropriately and as long as the average value of the input voltage remains relatively constant. The energy storage element 29 also helps to result in better utilization of the light emitters because of the continuous time of light emission

25 by the resultant string of light emitters coupled to the input power.

As illustrated in Figure 3, an illumination device 30 may include a finite number of light emitters, grouped into a base string 35 and substrings 38a-38e, a plurality of switches 34a-34e, and a control circuit 32 electrically coupled to the switches 34a-34e. Each of the base string 35 and substrings 30 38a-38e may include one or more light emitters electrically coupled in series. In one embodiment, the light emitters in the base string 35 and the substrings

38a-38e may be solid-state light emitters. In another embodiment, the light emitters in the base string 35 and the substrings 38a-38e may be LEDs. In one embodiment, the control circuit 32 may comprise a processor. In one embodiment, the control circuit 32 and at least one of the switches 34a-34e and 5 the light emitters (including the base string 35 and the substrings 38a-38e) may be integral parts of an LED-array light source. In another embodiment, the control circuit 32 and at least one of the switches 34a-34e and the light emitters may be integral parts of a monolithic LED light source.

In one embodiment, the control circuit 32 may be similar to the 10 control circuit 12 of Figure 1A. The control circuit 32 may include a microcontroller, an ADC, or a plurality of comparator circuits as described above in reference to Figures 1A-1C. The control circuit 32 may also include the PWM modules 16a-16e, the triangle wave generator 82, the voltage regulator 96 and other components as described above in reference to Figures 15 1D-1F. The control circuit 32 is coupled to receive a DC input power and sense at least one operational parameter of the input power, which may be the current value or the voltage value, or both, of the input power.

Each of the plurality of switches 34a-34e may be electrically coupled across a respective string 38a-38e. For example, switch 34a may be 20 electrically coupled across the substring 38a, switch 34b may be electrically coupled across the substring 38b, switch 34c may be electrically coupled across the substring 38c, switch 34d may be electrically coupled across the substring 38d, and switch 34e may be electrically coupled across the substring 38e. In one embodiment, each of the switches 34a-34e may be a solid-state 25 switch. In one embodiment, each of the switches 34a-34e may be a transistor, such as, for example, an IGBT, a MOSFET or a BJT.

In one embodiment, the number of light emitters in the resultant string of light emitters that is electrically coupled in series to the input power may be varied in a sequential fashion. More specifically, by selectively 30 electrically coupling one or more of the substrings 38a-38e in series with the base string 35, where each of the substrings 38a-38e includes one light emitter.

For example, the control circuit 32 may electrically couple, one at a time, the substrings 38a-38e in series with the base string 35 to form a resultant string or decouple, one at a time, the substrings 38a-38e from the resultant string to sequentially increment or decrement the number of light emitters in the

5 resultant string of light emitters.

Alternatively, a binary control method may be used where fewer switches are needed to switch in or out substrings of light emitters to adjust the number of light emitters in the resultant string in a more economical way. In one embodiment, the substrings 38a-38e may include one, two, four, eight, and 10 sixteen light emitters, respectively. Accordingly, light emitters may be added to or removed from the resultant string in a quantity that is binary-based number. In other words, the number of light emitters in the resultant string may be increased or decreased by a quantity of one, two, four, eight, sixteen, or any combination thereof.

15 In an embodiment, the base string 35 has twenty-two LEDs with the substrings 38a-38e having one, two, four, eight, and sixteen LEDs, respectively. This will result in a maximum number of LEDs in the resultant string to be fifty-three. The substrings 38a-38e may be switched in (i.e., electrically coupled in series) to form a resultant string having a number of light 20 emitters the quantity of which can vary from twenty-two LEDs to fifty-three LEDs with a resolution of one LED forward voltage V_f . A resolution finer than one LED V_f is not required to achieve high performance because the LED forward voltage V_f is typically somewhat compliant and changes with the current flowing through the LED. In this embodiment, one V_f represents a resolution of 25 approximately 4.5% of the shortest resultant string.

In one embodiment, the illumination device 30 may include a rectifier circuit 36, such as a bridge rectifier. The rectifier circuit 36 may be coupled to receive electrical power from an AC power source and provide the input power in DC form to the control circuit 32 and the base string 35. The 30 rectifier circuit 36 may be similar to the rectifier circuit 26.

In one embodiment, the rectifier circuit 36 may include an LED-based bridge rectifier 27 of Figure 6 in place of a standard bridge rectifier. The LED-based bridge rectifier 27 has LEDs D1, D2, D3, and D4 arranged as shown in Figure 6. Depending on the polarity of the AC input power, either the

5 LEDs D1 and D4 are forward biased or the LEDs D2 and D3 are forward biased to provide the rectified DC output. The LEDs D1, D2, D3, and D4 provide the rectification as well as improve the efficiency of the final LED lamp by emitting light. This dual function replaces the standard bridge rectifier, which consumes power but does not emit light as does the LED-based bridge rectifier 27. The

10 power consumed by a standard bridge rectifier is approximately 2V (*i.e.*, forward drop across diodes) times the lamp current caused by the two diodes in the standard bridge rectifier that conduct during rectification. In alternative embodiments, one or more but not all of the diodes in the LED-based bridge rectifier 27 may be LEDs.

15 In one embodiment, the illumination device 30 may include an energy storage element 39, such as a capacitor, coupled to the output of the rectifier circuit 36 (or the input of the control circuit 32 and the base string 35). The energy storage element 39 may be similar to the energy storage element 29. In the interest of brevity, the detailed structure and operation of the energy

20 storage element 39 will neither be described nor illustrated since energy storage elements are well known in the art.

Figure 4 illustrates a process 40 to regulate an input power according to one non-limiting illustrated embodiment. At 42, an operational parameter of an input power is sensed. Next, at 44, a number of light emitters

25 of a plurality of light emitters are electrically coupled to the input power corresponding to the sensed operational parameter of the input power. The number of the light emitters electrically coupled to the input power is between M and N where the plurality of light emitters has a total quantity of N light emitters. M is a positive number greater than zero but less than N.

30 In one embodiment, M light emitters are electrically coupled in series with the input power when the sensed operational parameter of the input

power is equal to or less than a threshold value. When the sensed operational parameter of the input power is equal to or greater than a threshold value, R light emitters are electrically coupled in series with the input power, where R is a positive number between M and N. The number of light emitters electrically coupled in series with the input power may be varied between M and N by a variable increment depending on the sensed operational parameter of the input power, and the variation may range between 1 and N-M. In one embodiment, the variation may be between M and N by a number of 2 to the Pth power, where P is a positive integer greater than or equal to zero. In another embodiment, the variation may be between M and N by an increment or decrement of 1 when the sensed operational parameter of the input power is greater than a threshold value.

In one embodiment, a number of switches electrically coupled between the light emitters and the input power are deactivated to electrically couple a respective number of the light emitters to the input power when the sensed operational parameter of the input power exceeds a second threshold value that is greater than the first threshold value.

The light emitters may be solid-state light emitters or, more specifically, LEDs.

Figure 5 illustrates a process 50 to regulate an input power according to another non-limiting illustrated embodiment. At 52, a number of light emitters of a plurality of light emitters are electrically coupled to an input power. At 54, a first operational parameter of the input power is maintained proximate to a target value by adjusting the number of light emitters of the plurality of light emitters electrically coupled to the input power corresponding to a variation in a second operational parameter of the input power.

In one embodiment, the first and second operational parameters of the input power may be different, such as one being the current value and the other being the voltage value of the input power. Alternatively, the first and second operational parameters of the input power may be the same, whether the current value or the voltage value of the input power. In one embodiment,

the current value of the input power is maintained proximate to a target current value.

As with the light emitters of the process 40, the light emitters in process 50 may be solid-state light emitters or, more specifically, LEDs.

5 The first operational parameter of the input power may be maintained by a variety of ways. In one embodiment, a first number of light emitters of the plurality of light emitters are electrically coupled in series to the input power when the second operational parameter of the input power is equal to or less than a first threshold value. When the second operational parameter
10 is between the first threshold value and a second threshold value that is greater than the first threshold value, a variable number of light emitters of the plurality of light emitters may be electrically coupled in series to the input power where the variable number is greater than the first number. Further, when the second operational parameter exceeds the second threshold value, all of the light
15 emitters of the plurality of light emitters are electrically coupled in series to the input power. The number of light emitters electrically coupled to the input power may be adjusted proportionally to the variation in the second operational parameter. In one embodiment, this may be achieved by electrically coupling substrings of light emitters of the plurality of light emitters in series to the input
20 power according to a variation in the second operational parameter. In one embodiment, a voltage drop across the number of light emitters electrically coupled in series to the input power is maintained according to a variation in the second operational parameter.

Thus, a regulator device, such as the regulator device 10, an
25 illumination device, such as the illumination device 20 and 30, and methods, such as the processes 40 and 50, are disclosed herein and should provide a simple and cost-efficient electronic ballast to dynamically regulate the current flowing through the string of LEDs emitting light. For instance, at least some embodiments allow the input power current to flow through some of the LEDs
30 but electrically short or bypass the other LEDs to vary the number of LEDs in the string of LEDs electrically coupled in series to the input power to vary the

string forward voltage in relation to the applied voltage. The current flowing through the string of LEDs or the voltage applied to the string, or both, is sensed and LEDs are switched in or out to adjust the number of LEDs in the string to provide the proper current at the applied voltage. This has the

5 advantage that the LED light may be used over the standard AC voltage range of 90VRMS to 130VRMS with no loss of efficiency and no danger of excessive current being applied to the string. In addition, the regulator device as well as the illumination device begins and ends the cycle with a short string of LEDs so that light begins to be emitted at a much lower voltage, thereby using the LEDs

10 over a much larger phase angel of the AC cycle.

The above description of illustrated embodiments, including what is described in the Abstract, is not intended to be exhaustive or to limit the embodiments to the precise forms disclosed. Although specific embodiments of and examples are described herein for illustrative purposes, various equivalent

15 modifications can be made without departing from the spirit and scope of the disclosure, as will be recognized by those skilled in the relevant art. The teachings provided herein of the various embodiments can be applied to other context, not necessarily the exemplary context of solid-state luminaire generally described above.

20 It will be understood by those skilled in the art that, although the embodiments described above and shown in the figures are generally directed to the context of solid-state lighting, luminaire utilizing traditional or other non-solid state lighting source may also benefit from the concepts described herein. For example, although the embodiments described above and shown in the

25 figures are directed to luminaires using solid-state lighting source, the concepts and the embodiments described herein are equally applicable to luminaires other than those using solid-state lighting source. Further, although strings of light emitters are shown in the figures, the various embodiments may be utilized with other types of loads, whether light-emitting or not.

30 These and other changes can be made to the embodiments in light of the above-detailed description. In general, in the following claims, the

terms used should not be construed to limit the claims to the specific embodiments disclosed in the specification and the claims, but should be construed to include all possible embodiments along with the full scope of equivalents to which such claims are entitled. Accordingly, the claims are not

5 limited by the disclosure.

CLAIMS

We claim:

1. A regulator device to regulate an input power applied to a plurality of light emitters, comprising:
 - a plurality of switches each of which selectively electrically couples a respective number of the light emitters to receive the input power when the switch is deactivated; and
 - a control circuit coupled to receive the input power and controllingly coupled to the plurality of switches, the control circuit configured to sense an operational parameter of the input power, the control circuit to deactivate a number of the switches to electrically couple the respective light emitters to the input power and a first number of the light emitters responsive to the sensed operational parameter of the input power, and to adjust the number of the switches deactivated responsive to a change in the sensed operational parameter of the input power, where the first number of the light emitters are coupled to the input power regardless of the sensed operational parameter of the input power.
2. The regulator device of claim 1 wherein the control circuit deactivates a number of the switches to electrically couple the respective light emitters in series to the input power to emit light responsive to the sensed operational parameter of the input power, and wherein the control circuit adjusts the number of the switches deactivated to adjust the number of light emitters electrically coupled in series to the input power responsive to a change in the sensed operational parameter of the input power.
3. The regulator device of claim 2 wherein the control circuit senses at least one of a current value and a voltage value of the input power applied to the number of light emitters electrically coupled in series to the input power.

4. The regulator device of claim 1 wherein each of the plurality of switches is electrically coupled to a respective one of the light emitters.

5. The regulator device of claim 1 wherein a first switch of the plurality of switches is selectively operable to electrically short a first number of the light emitters, wherein a second switch of the plurality of switches is selectively operable to electrically short a second number of the light emitters, the second number being twice the first number.

6. The regulator device of claim 1 wherein the control circuit adjusts the number of switches deactivated to adjust the number of the respective light emitters electrically coupled in series to the input power to achieve a target voltage drop across the total number of light emitters electrically coupled in series to the input power responsive to a change in the sensed operational parameter of the input power.

7. The regulator device of claim 1 wherein the control circuit adjusts the number of switches deactivated to adjust the number of the respective light emitters electrically coupled in series to the input power to achieve a target current value of a current flowing through the total number of light emitters electrically coupled in series to the input power responsive to a change in the sensed operational parameter of the input power.

8. The regulator device of claim 1 wherein the control circuit includes a microcontroller, the microcontroller activates and deactivates a number of the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the sensed operational parameter of the input power.

9. The regulator device of claim 1 wherein the control circuit includes an analog-to-digital converter (ADC) to activate and deactivate a number of

the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the sensed operational parameter of the input power.

10. The regulator device of claim 1 wherein the control circuit includes a plurality of comparators each of which is electrically coupled to a respective number of the switches to activate and deactivate the respective number of the switches to adjust a total number of the plurality of light emitters electrically coupled in series to the input power responsive to the sensed operational parameter of the input power.

11. The regulator device of claim 1 wherein the control circuit includes a current sensor to sense a current value of the input power, and wherein the current sensor comprises one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor.

12. The regulator device of claim 1 wherein the control circuit includes a plurality of pulse width modulation (PWM) modules each of which is electrically coupled to drive a respective one of the plurality of switches.

13. The regulator device of claim 12 wherein at least one of the PWM modules drives the respective switch with a pulse stream of increasing duty cycle to activate the respective switch.

14. The regulator device of claim 12 wherein at least one of the PWM modules drives the respective switch with a pulse stream of decreasing duty cycle to deactivate the respective switch.

15. The regulator device of claim 12 wherein the control circuit further includes a triangle wave generator to provide a triangular-wave signal to the PWM modules.

16. The regulator device of claim 1, further comprising:
a voltage regulator to provide a regulated input power to power the control circuit, the voltage regulator electrically coupled to receive power from a base string of light emitters of the plurality of light emitters that is coupled to receive the input power.

17. The regulator device of claim 1 wherein the control circuit and the switches are parts of a processor.

18. An illumination device, comprising:
a first plurality of light emitters coupled to an input power;
a second plurality of light emitters; and
a control system electrically coupled to the second plurality of light emitters and the input power, the control system to sense an operational parameter of the input power, the control system configured to electrically couple a number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power exceeding a first threshold value.

19. The illumination device of claim 18, further comprising:
a rectifier circuit coupled to receive an alternating current (AC) power and the control system to rectify the AC power to provide the input power in direct current (DC) form to the control system, wherein the control system is configured to measure a waveform of the AC power.

20. The illumination device of claim 18, further comprising:
a rectifier circuit coupled to receive an alternating current (AC) power and the control system to rectify the AC power to provide the input power in direct current (DC) form to the control system, the rectifier circuit including a bridge rectifier having at least one light-emitting diode (LED).

21. The illumination device of claim 18 wherein the control system senses at least one of a current value and a voltage value of the input power and electrically couples a number of the second plurality of light emitters in series to the input power and with the first plurality of the light emitters responsive to the sensed at least one of the current value and the voltage value of the input power exceeding the respective threshold current value or threshold voltage value.

22. The illumination device of claim 18 wherein the control system electrically couples all of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power exceeding a second threshold value that is greater than the first threshold value.

23. The illumination device of claim 18 wherein the control system includes a microcontroller and a plurality of transistors each of which is electrically coupled to the microcontroller to be controlled thereby, wherein the microcontroller deactivates at least one of the transistors to electrically couple a number of the second plurality of light emitters in series to the input power and with the first number of the light emitters responsive to the sensed operational parameter of the input power being between the first threshold value and a second threshold value.

24. The illumination device of claim 18 wherein the control system includes an analog-to-digital converter (ADC) and a plurality of transistors each of which is electrically coupled to the ADC to be controlled thereby, wherein the ADC deactivates at least one of the transistors to electrically couple the a number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power being between the first threshold value and a second threshold value.

25. The illumination device of claim 18 wherein the control system includes a plurality of comparators and a plurality of transistors, each of the

comparators controllingly coupled to a respective number of the transistors, each of the transistors electrically coupled to a respective number of the second plurality of light emitters, wherein each of the comparators compares the sensed operational parameter of the input power to a respective threshold value and deactivates the respective transistors to electrically couple the respective number of the second plurality of light emitters in series to the input power and with the first plurality of light emitters responsive to the sensed operational parameter of the input power being between the respective threshold value and a second threshold value.

26. The illumination device of claim 19 wherein the control system includes a current sensor to sense a current value of the input power, and wherein the current sensor comprises one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor.

27. The illumination device of claim 18 wherein the light emitters comprise solid-state light emitters.

28. The illumination device of claim 18 wherein the light emitters comprise LEDs.

29. The illumination device of claim 19, further comprising:
an energy storage element coupled to an output of the rectifier circuit to provide a substantially constant DC voltage for the light emitters.

30. The illumination device of claim 18, further comprising:
a voltage regulator to provide a regulated input power to power the control system, the voltage regulator electrically coupled to receive power from the first plurality of light emitters.

31. The illumination device of claim 30 wherein the voltage regulator is coupled to a first node in a base string of light emitters formed by the first plurality

of light emitters, at least one of the light emitters in the base string being between the first node and an electrical ground to provide a DC voltage to the voltage regulator.

32. The illumination device of claim 30, further comprising:
a rectifier electrically coupled between the voltage regulator and the first plurality of light emitters to rectify the power received by the voltage regulator from the first plurality of light emitters; and
an energy storage element electrically coupled between the rectifier and the voltage regulator.

33. The illumination device of claim 18 wherein the control system and at least one of the light emitters are parts of an LED-array light source.

34. The illumination device of claim 18 wherein the control system and at least one of the light emitters are parts of a monolithic LED light source.

35. An illumination device, comprising:
a plurality of light emitters, a first number of light emitters of the plurality of light emitters being electrically coupled in series to an input power;
a plurality of switches which when deactivated electrically couple a respective number of the light emitters to the input power in addition to the first number of the light emitters; and
a control circuit controllingly coupled to the plurality of switches to activate and deactivate the switches in response to a sensed operational parameter of the input power being greater than a first threshold value.

36. The illumination device of claim 35, further comprising:
a rectifier circuit coupled to an alternating current (AC) power to rectify the AC power and coupled to provide the input power in direct current (DC) form to the control circuit and the first number of the light emitters, wherein the control circuit is configured to measure a waveform of the AC power.

37. The illumination device of claim 35, further comprising:
a rectifier circuit coupled to an alternating current (AC) power to rectify
the AC power and coupled to provide the input power in direct current (DC) form to
the control circuit and the first number of the light emitters, the rectifier circuit
including a bridge rectifier having at least one light-emitting diode (LED).

38. The illumination device of claim 35 wherein a first switch of the
plurality of switches is electrically coupled to short a second number of the light
emitters, wherein a second switch of the plurality of switches is electrically coupled to
short a third number of the light emitters, the third number being twice the second
number.

39. The illumination device of claim 35 wherein each of the plurality
of switches is electrically coupled to short a respective one of the light emitters when
activated.

40. The illumination device of claim 35 wherein the control circuit
activates all of the switches responsive to the sensed operational parameter of the
input power being below the first threshold value.

41. The illumination device of claim 35 wherein the control circuit
deactivates a first number of the switches responsive to the sensed operational
parameter of the input power being at a first value above the first threshold value.

42. The illumination device of claim 41 wherein the control circuit
deactivates a first number plus a second number of the switches responsive to the
sensed operational parameter of the input power being at a second value above the
first threshold value, the second value being greater than the first value.

43. The illumination device of claim 41 wherein the control circuit
deactivates all of the switches responsive to the sensed operational parameter of the

input power being above a second threshold value, the second threshold value being greater than the first threshold value.

44. The illumination device of claim 35 wherein the plurality of light emitters comprises a plurality of solid-state light emitters.

45. The illumination device of claim 35 wherein the plurality of light emitters comprises a plurality of LEDs.

46. The illumination device of claim 36, further comprising:
an energy storage element coupled to an output of the rectifier circuit to provide a substantially constant DC voltage for the light emitters.

47. The illumination device of claim 35 wherein the control circuit includes a current sensor to sense a current value of the input power, and wherein the current sensor comprises one of a resistive sensor, a Hall-effect sensor, and a sense-coil type sensor.

48. The illumination device of claim 35 wherein the control circuit includes a plurality of pulse width modulation (PWM) modules each of which is electrically coupled to drive a respective one of the plurality of switches.

49. The illumination device of claim 48 wherein at least one of the PWM modules drives the respective switch with a pulse stream of increasing duty cycle to activate the respective switch.

50. The illumination device of claim 48 wherein at least one of the PWM modules drives the respective switch with a pulse stream of decreasing duty cycle to deactivate the respective switch.

51. The illumination device of claim 48 wherein the control circuit further includes a triangle wave generator to provide a triangular-wave signal to the PWM modules.

52. The illumination device of claim 35, further comprising:
a voltage regulator to provide a regulated input power to power the control circuit, the voltage regulator electrically coupled to receive power from the first number of light emitters.

53. The illumination device of claim 52 wherein the voltage regulator is coupled to a first node in a base string of light emitters formed by the first number of light emitters, at least one of the light emitters in the base string being between the first node and an electrical ground to provide a DC voltage to the voltage regulator.

54. The illumination device of claim 52, further comprising:
a rectifier electrically coupled between the voltage regulator and the first number of light emitters to rectify the power received by the voltage regulator from the first number of light emitters; and
an energy storage element electrically coupled between the rectifier and the voltage regulator.

55. The regulator device of claim 35 wherein the control circuit and the switches are parts of a processor.

56. The regulator device of claim 35 wherein the control circuit and at least one of the light emitters are parts of an LED-array light source.

57. The regulator device of claim 35 wherein the control circuit and at least one of the light emitters are parts of a monolithic LED light source.

58. A method to regulate an input power, comprising:
determining a number of light emitters of a plurality of light emitters to be electrically coupled the input power based on an operational parameter of the input power; and
electrically coupling the number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power, the number of the light emitters coupled to the input power being between a value M and a value N where the value N is equal to a total quantity of light emitters in the plurality of light emitters, the value M being a positive number greater than zero but less than the value N.

59. The method of claim 58, further comprising:
sensing the operational parameter of the input power.

60. The method of claim 58 wherein electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power comprises electrically coupling a number M of the light emitters in series to the input power in response to the operational parameter of the input power being equal to or less than a threshold value.

61. The method of claim 58 wherein electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power comprises electrically coupling a number R of the light emitters in series to the input power responsive to the sensed operational parameter of the input power being equal to or greater than a threshold value, where the number R is a positive number between M and N.

62. The method of claim 58 wherein electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power comprises varying the number of the light emitters electrically coupled in series to the input power to be between the value M

and the value N by a variable increment responsive to the sensed operational parameter of the input power, the variable increment ranging between 1 and a value equal to N-M.

63. The method of claim 62 wherein varying the number of the light emitters electrically coupled in series to the input power to be between the value M and the value N by a variable increment comprises varying the number of the light emitters electrically coupled in series to the input power to be between the value M and the value N by a number of 2 to the P^{th} power, where P is a positive integer greater than or equal to zero.

64. The method of claim 58 wherein electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power comprises varying the number of the light emitters electrically coupled in series to the input power to be between the value M and the value N by an increment or decrement equal to 1 responsive to the sensed operational parameter of the input power being greater than a threshold value.

65. The method of claim 58 wherein electrically coupling a number of light emitters of the plurality of light emitters to the input power based on the operational parameter of the input power comprises deactivating a number of a plurality of switches to electrically couple a respective number of the light emitters to the input power in response to the operational parameter of the input power being greater than a threshold value, the respective number of the emitters coupled to the input power being between the value M and the value N.

66. The method of claim 59 wherein sensing the operational parameter of an input power comprises sensing at least one of a current value and a voltage value of the input power.

67. The method of claim 58 wherein electrically coupling a number of light emitters of a plurality of light emitters to the input power comprises electrically coupling a number of solid-state light emitters of a plurality of solid-state light emitters to the input power.

68. The method of claim 58 wherein electrically coupling a number of light emitters of a plurality light emitters to the input power comprises electrically coupling a number of light-emitting diodes (LEDs) of a plurality of LEDs to the input power.

69. A method to regulate an input power, comprising:
electrically coupling a number of light emitters of a plurality of light

emitters to the input power; and

maintaining a first operational parameter of the input power proximate to a target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power.

70. The method of claim 69 wherein electrically coupling a number of light emitters of a plurality of light emitters to an input power comprises electrically coupling a number of solid-state light emitters of a plurality of solid-state light emitters to the input power.

71. The method of claim 69 wherein electrically coupling a number of light emitters of a plurality of light emitters to the input power comprises electrically coupling a number of light-emitting diodes (LEDs) of a plurality of LEDs to the input power.

72. The method of claim 69 wherein maintaining a first operational parameter of the input power proximate to a target value comprises maintaining a current value of the input power proximate to a target current value.

73. The method of claim 69 wherein adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power comprises electrically coupling a first number of light emitters of the plurality of light emitters in series to the input power responsive to the second operational parameter of the input power being equal to or less than a first threshold value.

74. The method of claim 73, further comprising:
electrically coupling a variable number of light emitters of the plurality of light emitters in series to the input power responsive to the second operational parameter of the input power being between the first threshold value and a second threshold value that is greater than the first threshold value, where the variable number is greater than the first number.

75. The method of claim 74, further comprising:
electrically coupling all of the light emitters of the plurality of light emitters in series to the input power responsive to the second operational parameter of the input power exceeding the second threshold value.

76. The method of claim 69 wherein adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power comprises adjusting the number of light emitters of the plurality of light emitters electrically coupled in series to the input power proportionally to the variation in the second operational parameter of the input power.

77. The method of claim 69 wherein adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power comprises electrically coupling substrings of light emitters of the plurality of light

emitters in series to the input power responsive to a variation in the second operational parameter of the input power.


78. The method of claim 69 wherein maintaining a first operational parameter of the input power proximate to a target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled to the input power responsive to a variation in a second operational parameter of the input power comprises maintaining the first operational parameter of the input power proximate to the target value by adjusting a total number of light emitters of the plurality of light emitters electrically coupled in series to the input power to achieve a voltage drop across the number of light emitters electrically coupled in series to the input power responsive to a variation in the second operational parameter of the input power.

79. The method of claim 69 wherein the first and the second operational parameters of the input power are the same as one another.

80. The method of claim 69 wherein the first and the second operational parameters of the input power are different from one another.

81. An illumination device, comprising:
a light emitting diode-based rectifier that includes a plurality of diodes arranged as a bridge circuit, at least one of the plurality of diodes being a light emitting diode, the bridge circuit coupleable to an alternating current (AC) power and operable to rectify the AC power and provide a direct current (DC) power output.

82. The illumination device of claim 81 wherein the bridge circuit includes four legs, each of the legs including at least one light emitting diode.

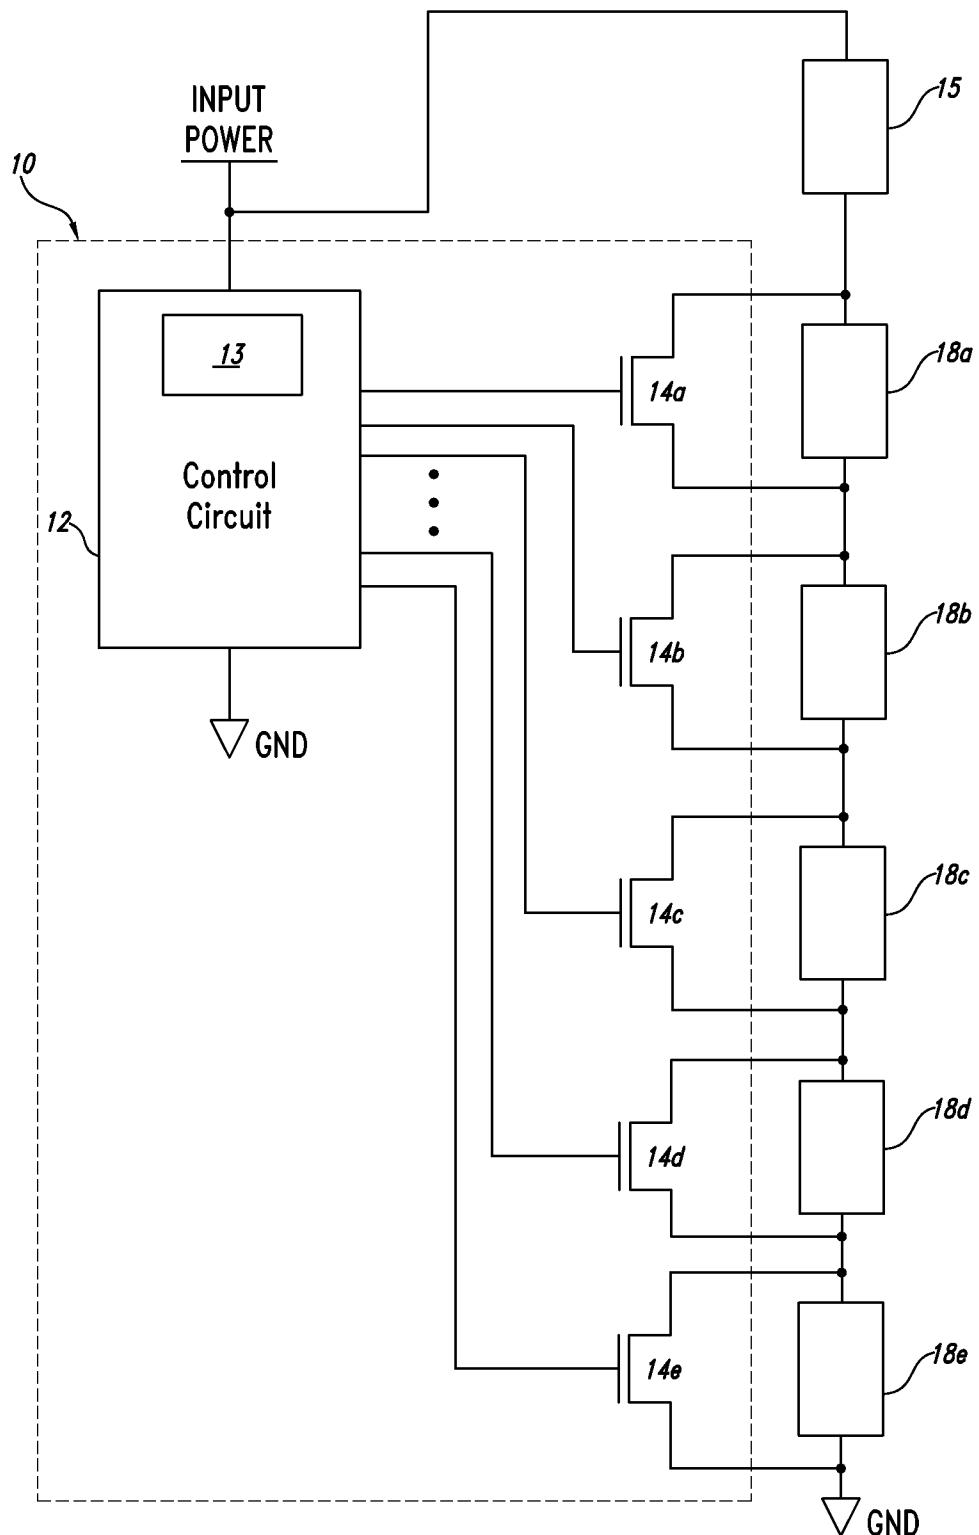*FIG. 1A*

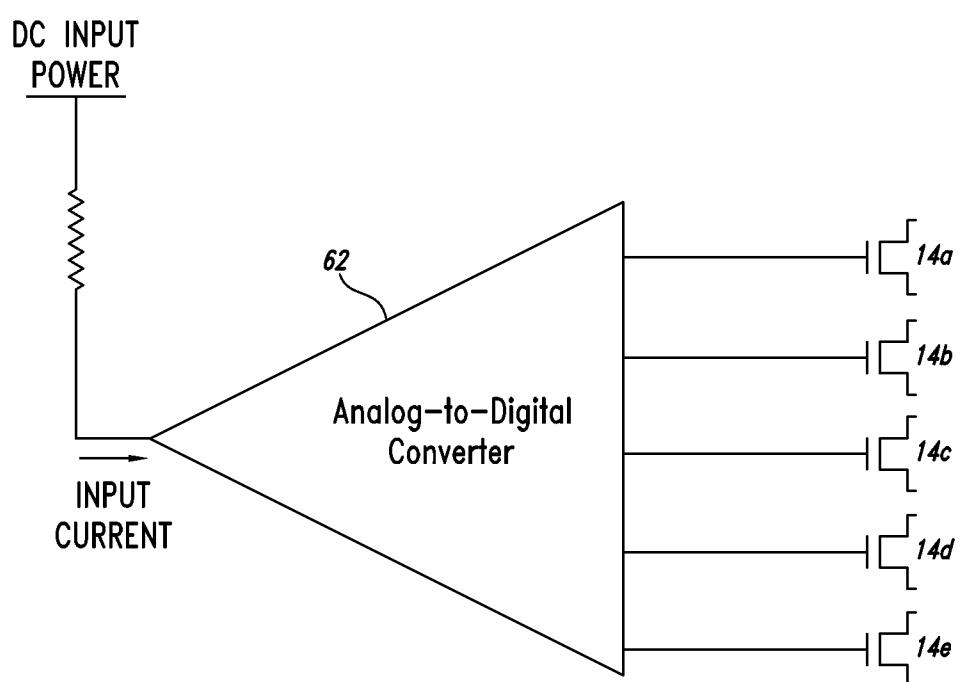


FIG. 1B

3/11

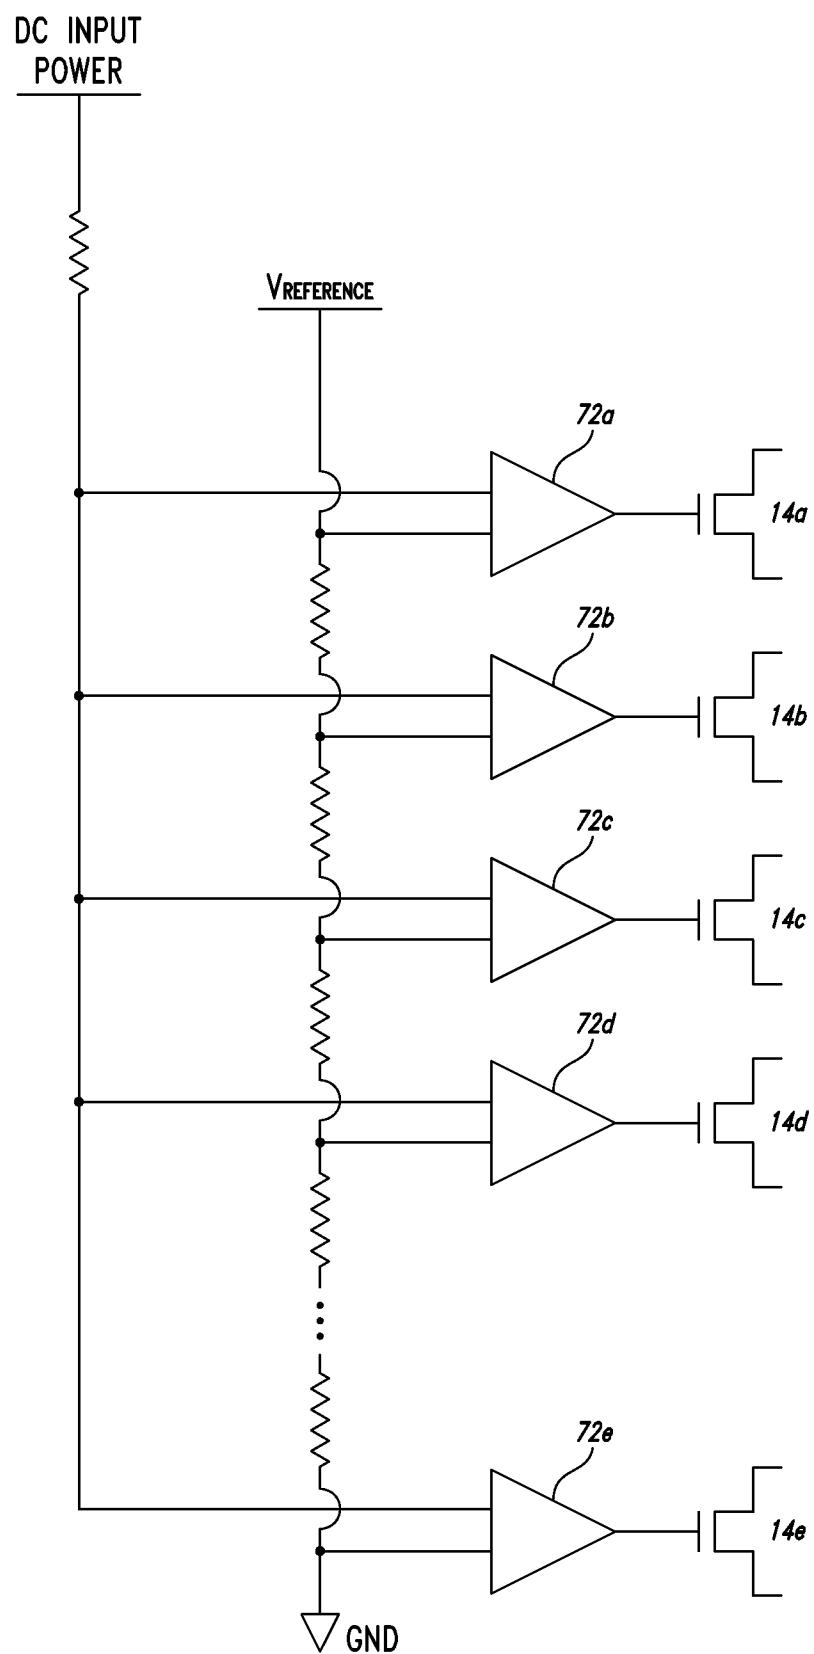


FIG. 1C

4/11

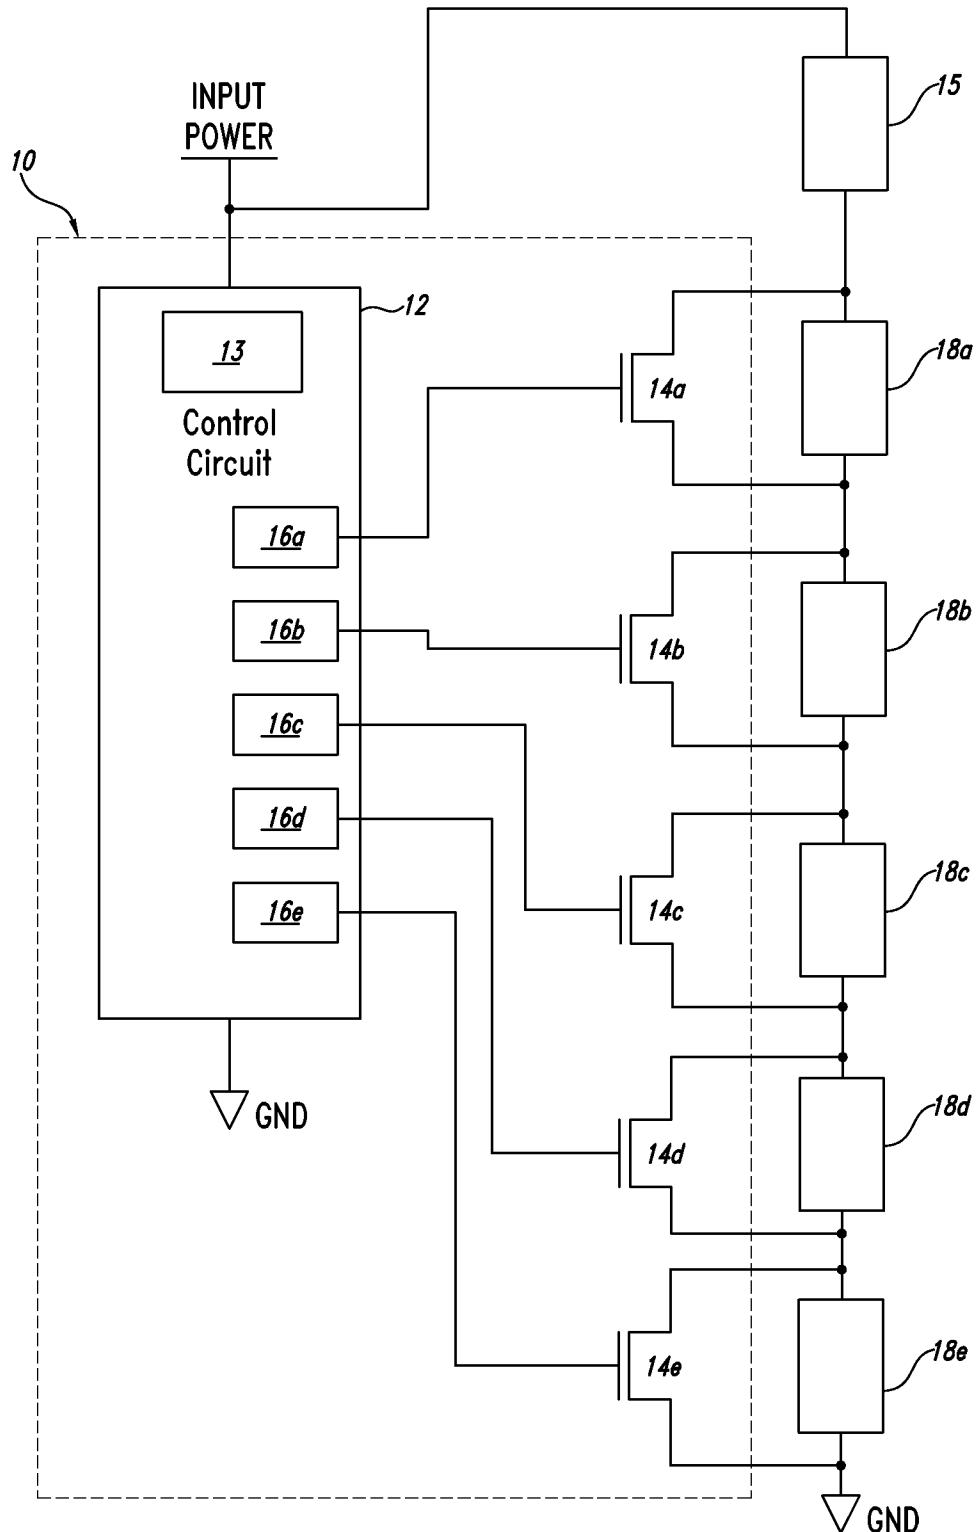


FIG. 1D

5/11

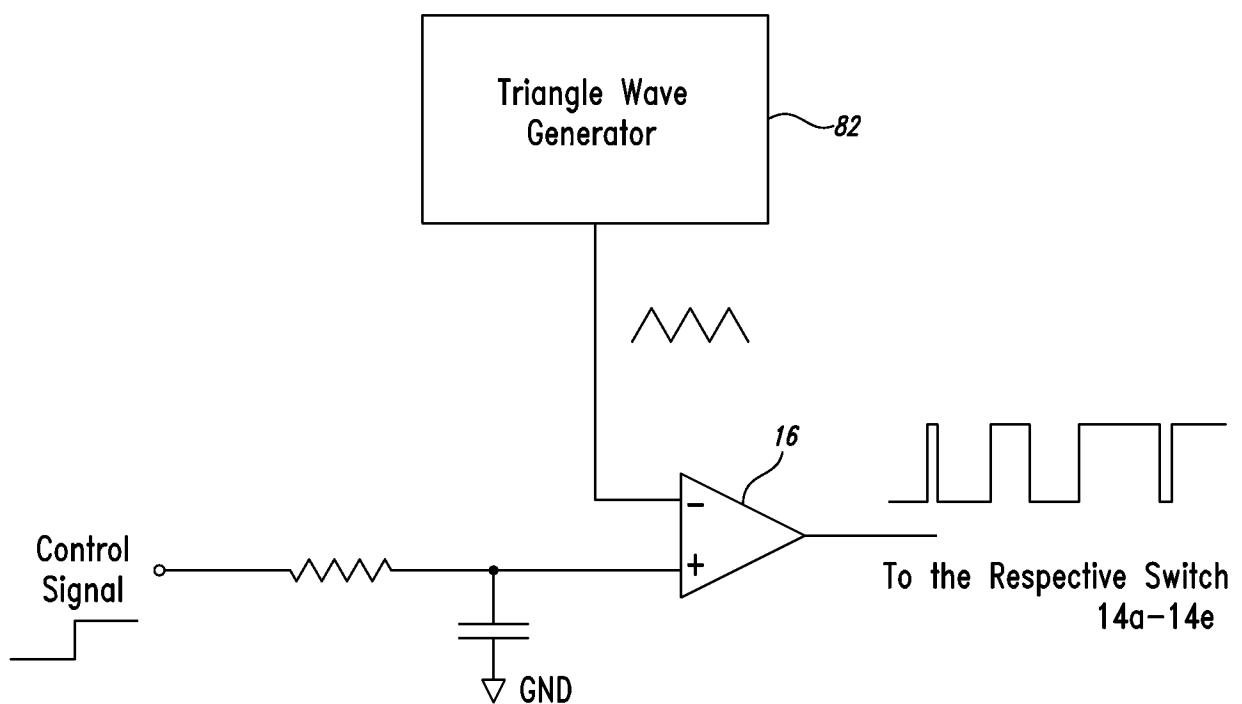


FIG. 1E

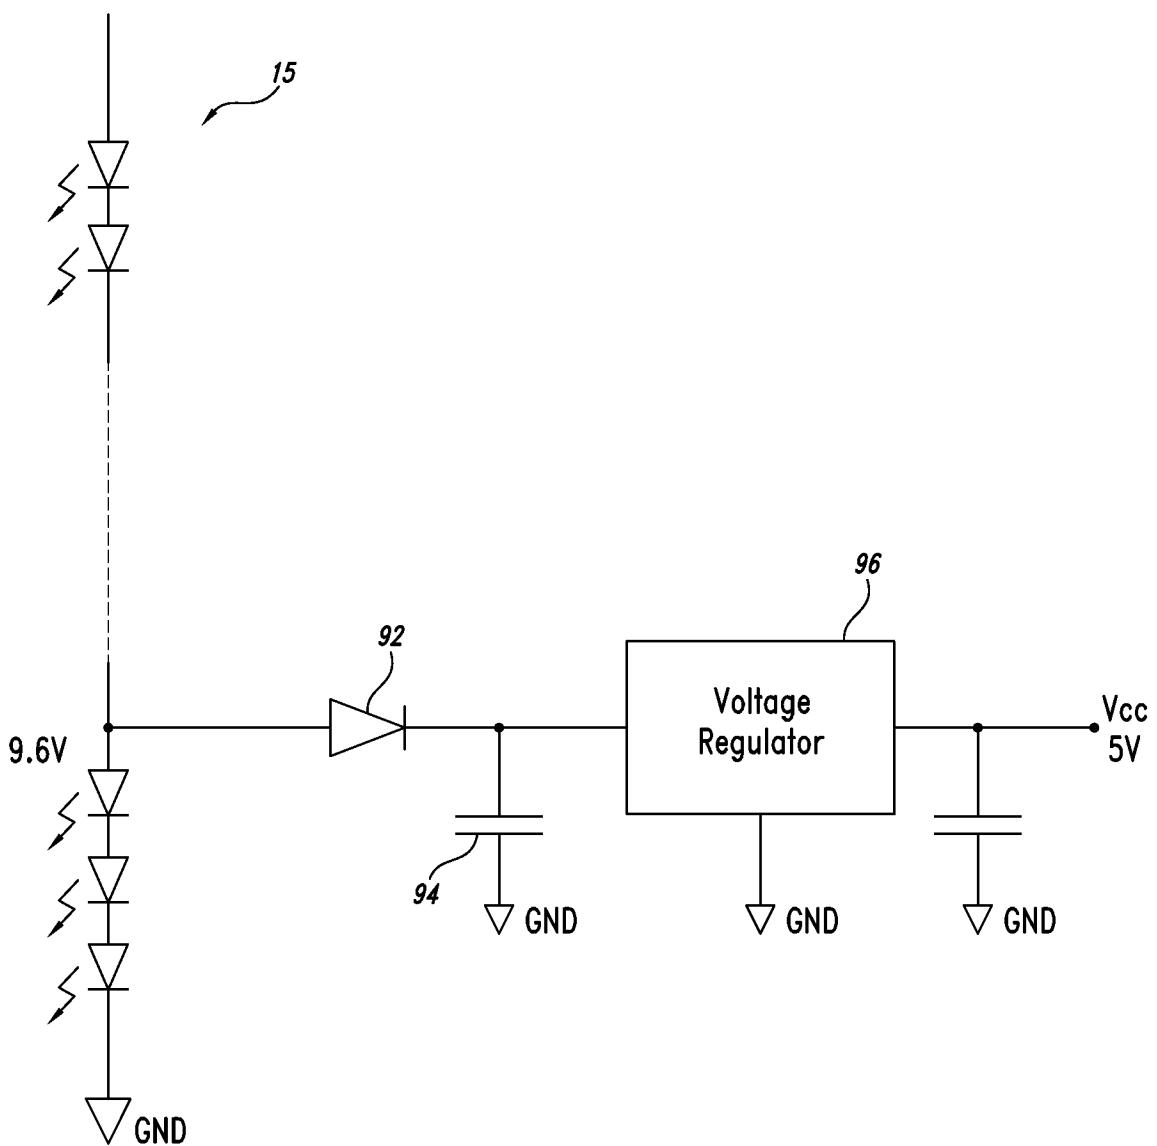


FIG. 1F

7/11

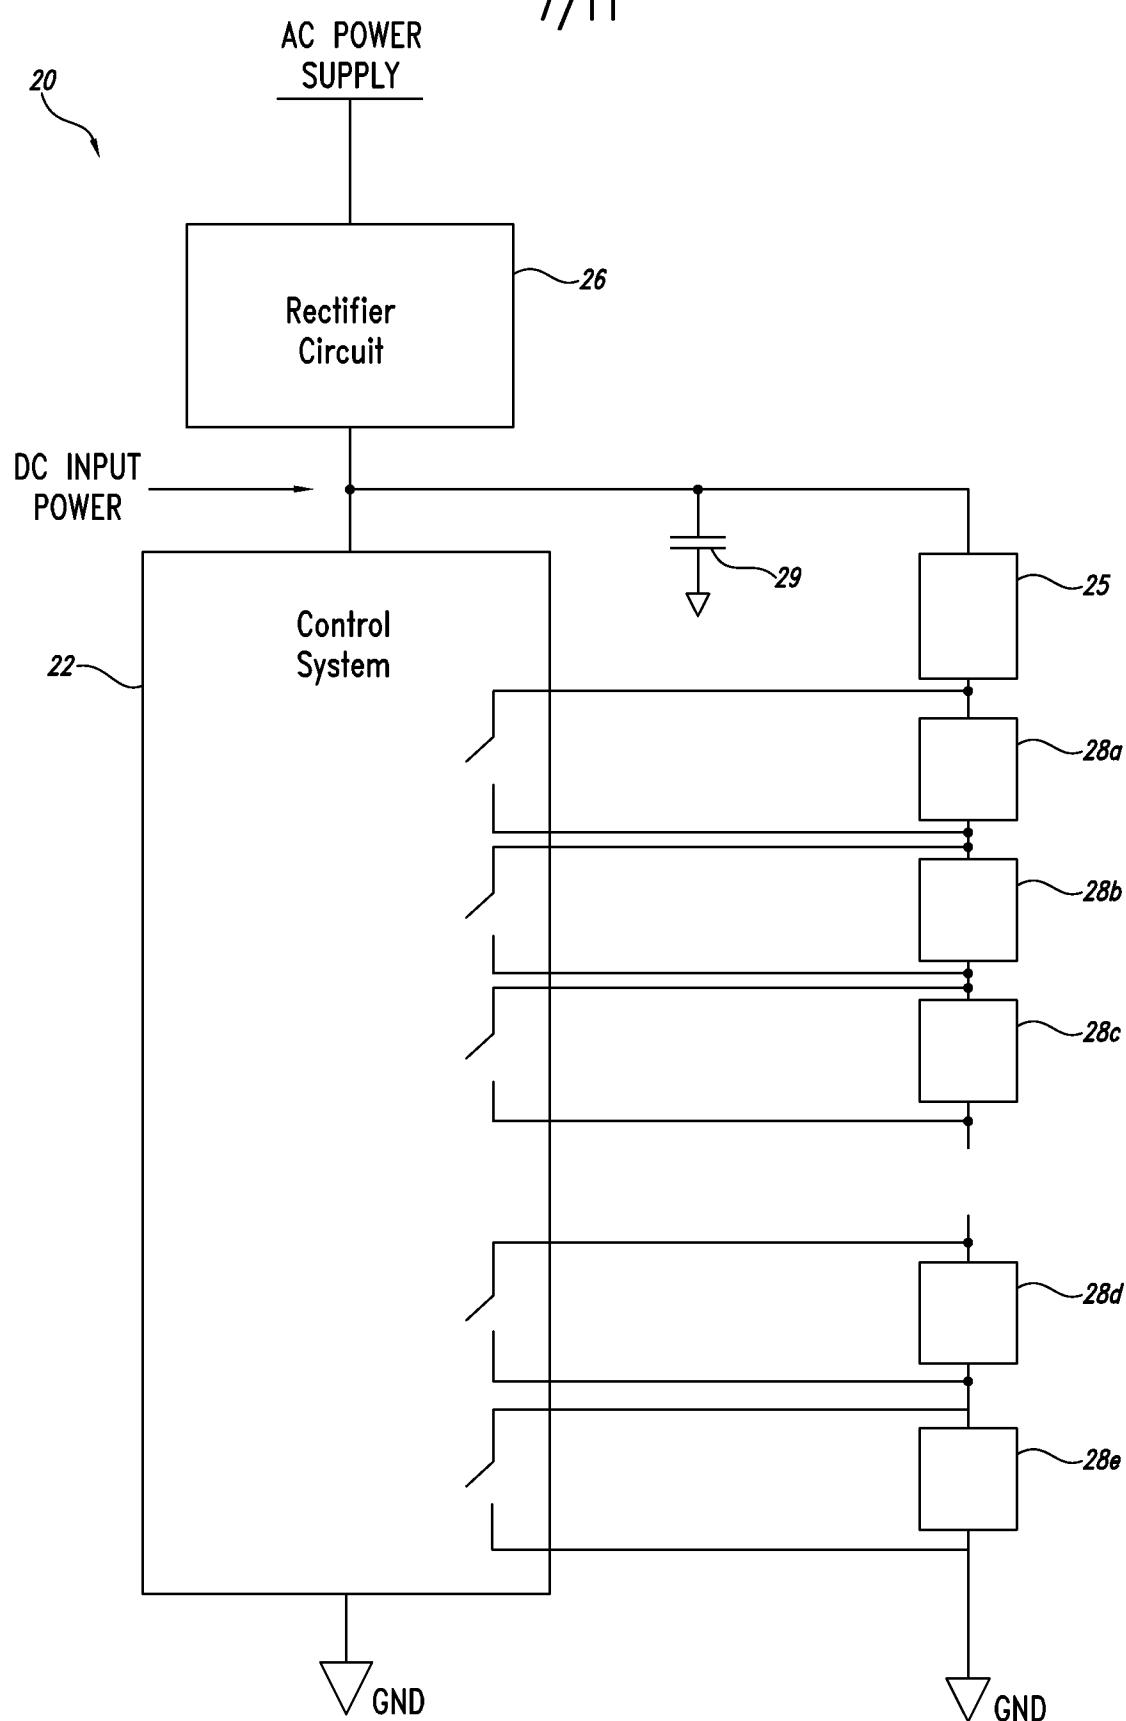


FIG. 2

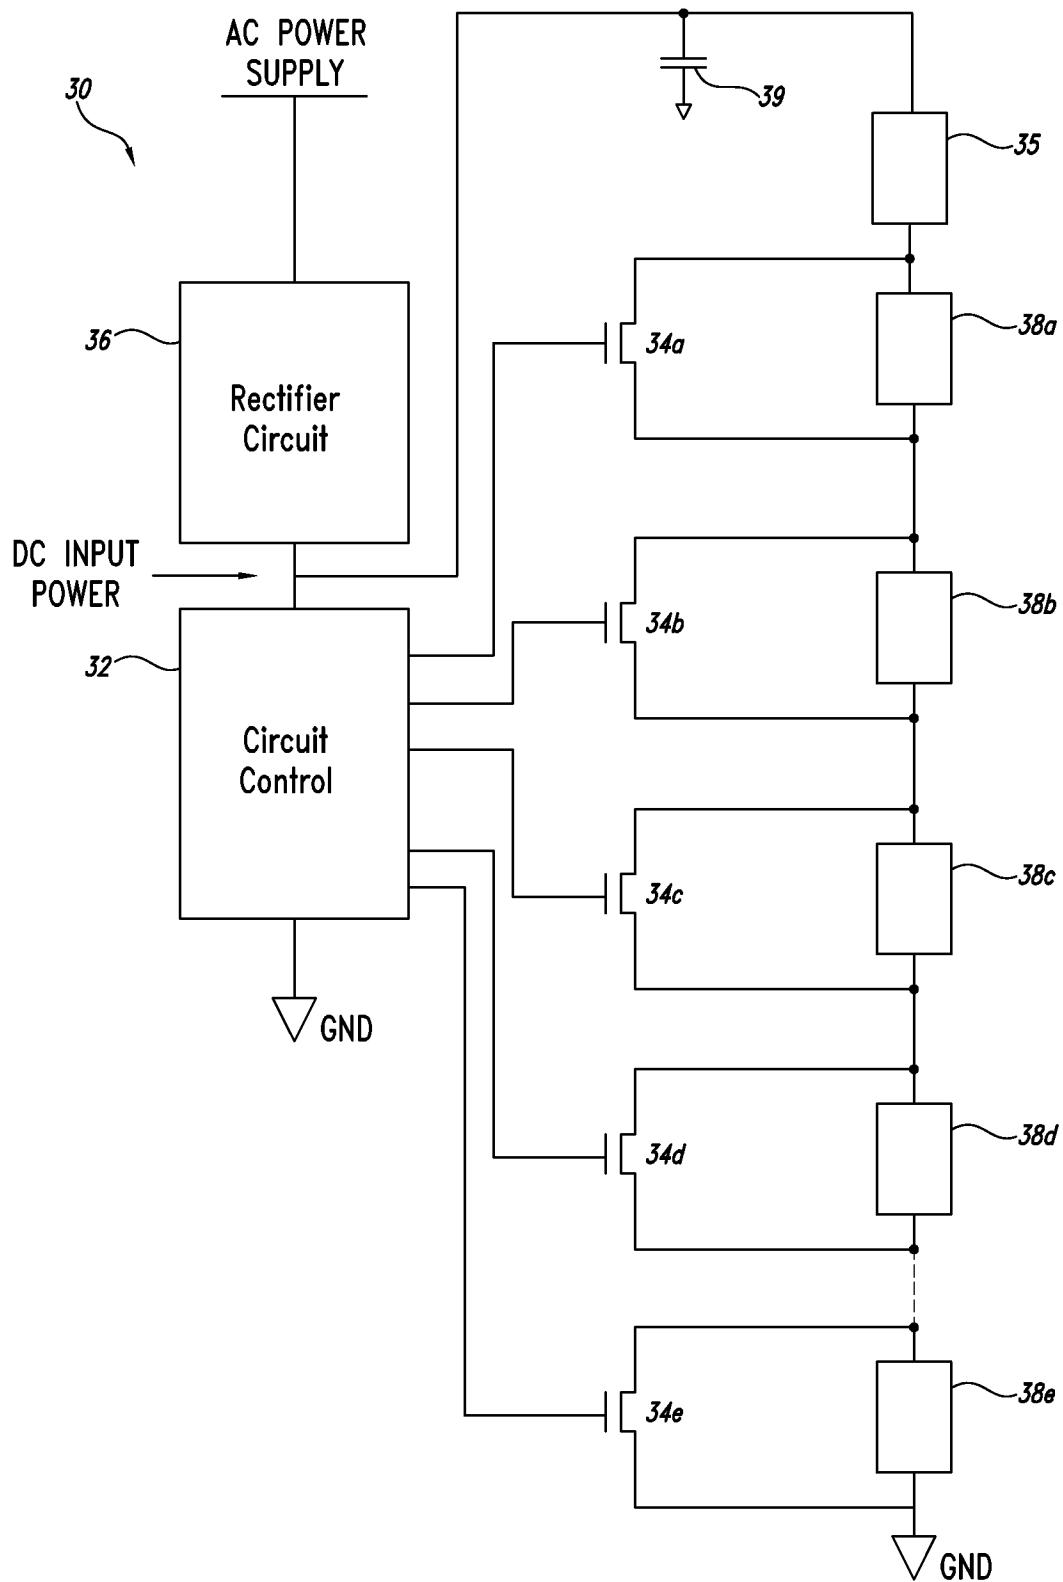


FIG. 3

9/11

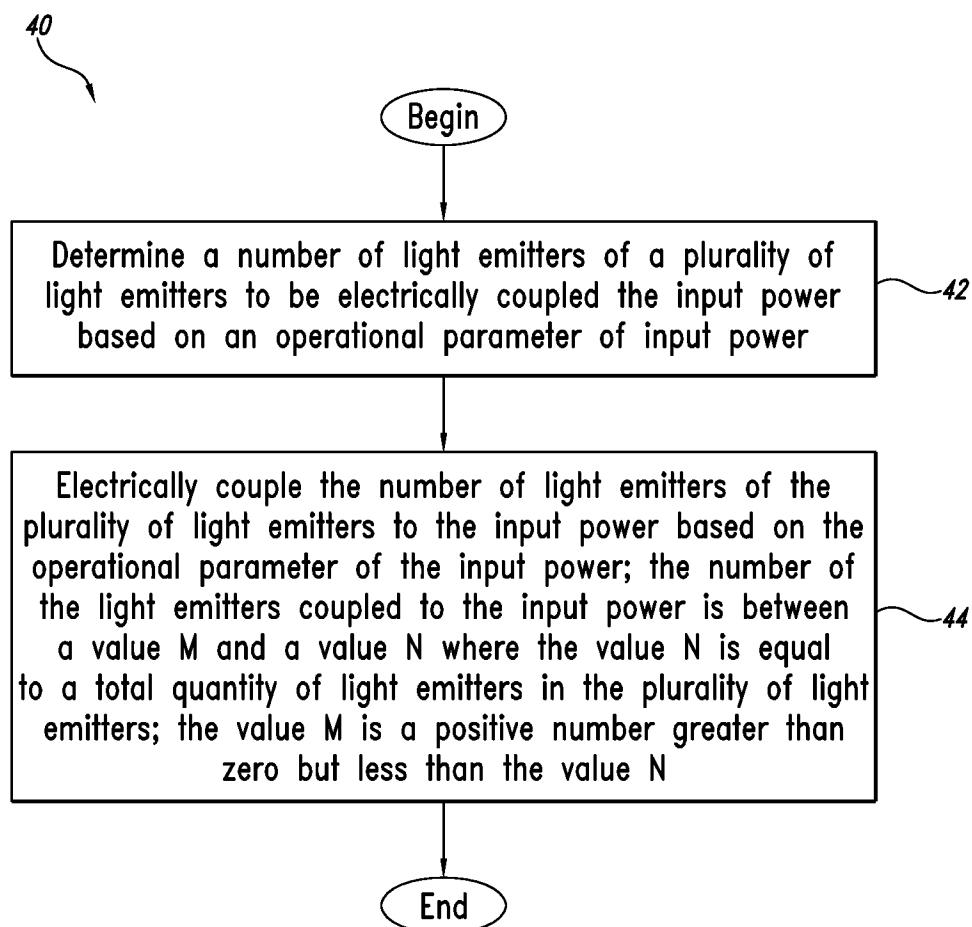


FIG. 4

10/11

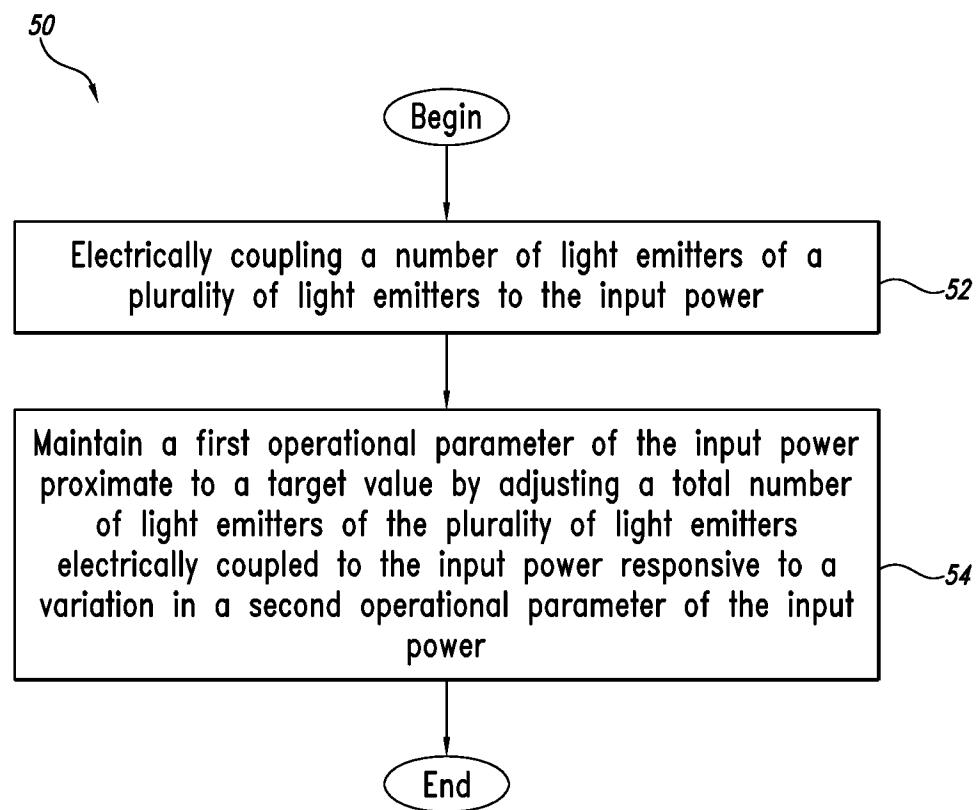


FIG. 5

11/11

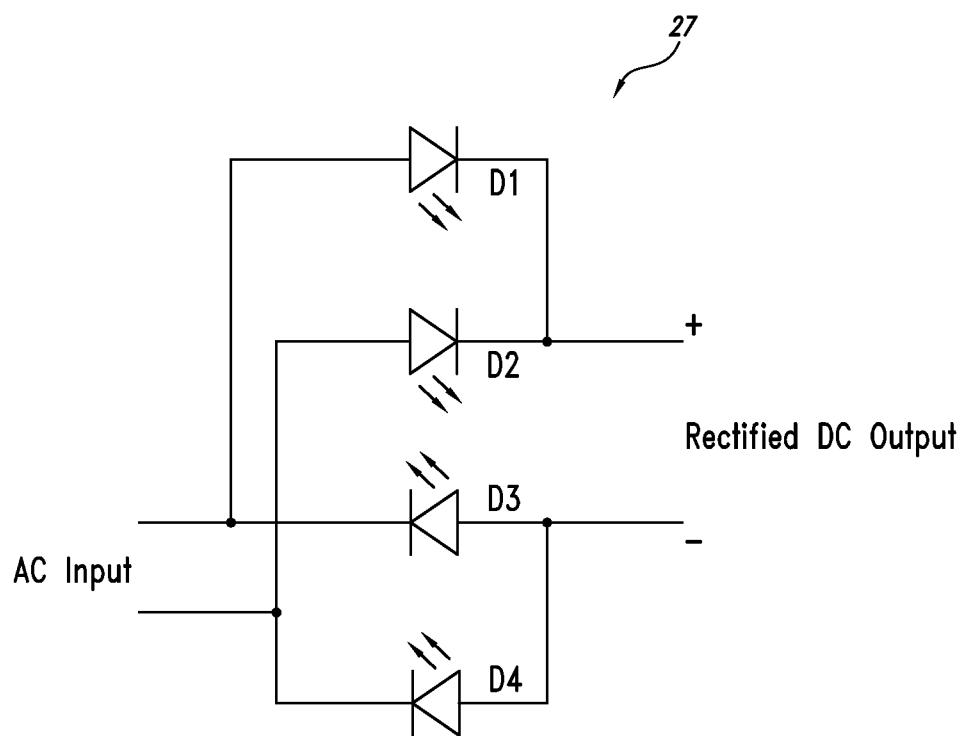


FIG. 6