



(12) PATENT

(11) 348002

(13) B1

NORWAY

(19) NO

(51) Int Cl.


E21B 17/01 (2006.01)

Norwegian Industrial Property Office

(21)	Application nr.	20170062	(86)	International Filing Date and Application Number	2014.06.18 PCT/EP2014/062899
(22)	Date of Filing	2017.01.16	(85)	Date of Entry into National Phase	2017.01.16
(24)	Date of Effect	2014.06.18	(30)	Priority	
(41)	Publicly Available	2017.01.16			
(45)	Granted	2024.06.17			
(73)	Proprietor	Statoil Petroleum AS, 4035 STAVANGER, Norge			
(72)	Inventor	Steinar Kristoffersen, Heggelikroken 14, 1352 KOLSAS, Norge Guillaume Gravey, Sofies gate 54, 0168 OSLO, Norge Øyvind Haug, Kjellergata 17 B, 2003 LILLESTRØM, Norge			
(74)	Agent or Attorney	PLOUGMANN VINGTOFT, C. J. Hambros plass 2, 0164 OSLO, Norge			

(54)	Title	Flexible line installation and removal
(56)	References	
	Cited:	WO 2011/099869 A2, WO 2004/035375 A1
(57)	Abstract	

A method of removing a flexible line deployed between an offshore platform and a subsea structure, where the platform has a landing deck on which the flexible line is installed, the landing deck facing away from the platform towards an installation side. The method comprises: decoupling a topside end of the flexible line from the landing deck; lowering the topside end from the landing deck to the sea bed using a platform mounted winch, and detaching the winch from the topside end; moving the platform in a direction away from the installation side and positioning an installation vessel on the installation side; lowering a recovery line from the installation vessel and attaching an end of the recovery line to the topside or subsea end of the riser; raising the attached topside or subsea end onto the installation vessel from the seabed using the recovery line; and recovering the flexible line onto the installation vessel, whereupon the platform can be moved back to an operating position.

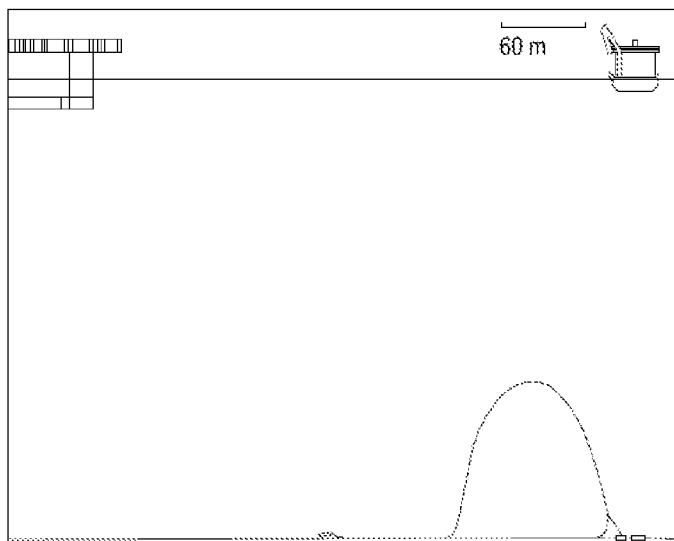

Flexible Line Installation and Removal

Technical Field

5 The present invention relates to the installation and removal of flexible lines between an offshore platform or vessel and a subsea structure. The invention is applicable, for example, to the installation and removal of flexible risers, power cables, umbilicals and the like.

10 Background

In the context of offshore hydrocarbon production, a riser is a tubular conduit that extends from a subsea structure to a production platform, for the purpose of conveying produced hydrocarbons from the well to the platform. The subsea structure may be a
15 “christmas tree”, riser base, Blowout Preventer (BOP), or some other structure.

Risers are configured in order to allow for movements of the platform relative to the subsea structure in both a horizontal and a vertical direction, for example to facilitate drilling and well maintenance operations to be performed from the platform and to
20 accommodate the effects of ocean currents, wind and waves on the risers and platform. Riser configurations include a “free hanging” configuration, a Reverse Pliant Wave configuration, a Pliant Wave configuration, a lazy S configuration, and other suitable configurations.

25 Offshore hydrocarbon production platforms may be fixed or floating. In addition to collecting produced hydrocarbons, floating production units (FPUs, a term that encompasses floating offshore hydrocarbon production platforms such as semisubmersible floating production systems; ship-shaped floating production, storage and offloading systems; tension leg platforms; and spar platforms) may also be used as
30 drilling platforms to drill multiple new subsea wells. The subsea wells may be located substantially directly underneath the FPU, with the risers connecting the FPU to the well, and the drilling apparatus may extend downwards from the centre of the FPU. It may therefore be necessary to move the FPU in order to allow new wells to be drilled and/or to allow existing wells to be maintained. The connection between the platform and the
35 subsea structures via the risers can be maintained during drilling and during the movement of the platform, thus allowing hydrocarbon production and collection to

continue. By way of example, an FPU may be moveable horizontally by a distance in the region of 80 meters in any direction relative to a central position above the subsea wells. Movement is achieved by pulling in and playing out mooring lines attached to the four corners of the FPU.

5

For riser removal and installation operations on platforms where the risers are exposed/ hanging on the platform side, the normal methodology involves the use of an installation vessel (IV) in addition to the platform itself. The IV is equipped with industry-standard laying spread (normally Vertical Laying System - VLS) and reels/ carousels/ baskets for
10 storage of risers. The IV can install the riser from both directions, i.e. either the subsea or the topside end of the riser may be installed first (subject for example to already in-place riser configuration, auxiliary equipment size, packing constraints etc.).

Figures 1 to 6 illustrate schematically various stages in the conventional riser installation
15 process in the case of a Floating Production Unit (FPU) where the riser is being installed to achieve a Pliant Wave configuration. Very generally, the process involves the following steps:

- (1) An end of a pull-in wire, suspended from the platform, is transferred from the platform to the installation vessel (Figure 1).
- 20 (2) The transferred end of the pull-in wire is attached to the bottom of the riser that is being constructed at the installation vessel, such that the pull-in wire is now suspended between the platform and the riser. This bottom end of the riser will subsequently be attached to the subsea structure and so is referred to hereinafter as the "subsea" end of the riser.
- 25 (3) The riser is fed into the water from the installation vessel and an increasing length of the riser is laid along the seabed. During this stage, the installation vessel steps away from the platform.
- (4) At this stage, the riser has adopted a flat-bottomed U-shaped configuration in the water (Figure 2). At some intermediate point in this procedure clump weight(s) and
30 anchor clamp(s) are installed at predetermined points on the riser and buoyancy modules are installed around the riser, over a certain length.
- (5) As the riser is deployed further the clump weight comes to rest on the seabed. The riser is then tethered to a preinstalled subsea anchor by attaching the anchor clamp to the subsea anchor. The installation vessel then moves back towards the platform,
35 deploying the riser in the Pliant Wave configuration (Figure 3).
- (6) The subsea end of the riser is transferred from the pull-in wire to a static wire depending from the platform (Figure 4).

- (7) The pull-in wire is transferred to the installation vessel and a second end of the riser, which will subsequently be attached to the platform and so is referred to hereinafter as the “topside” end of the riser, is attached to the pull-in wire. The topside end of the riser is also attached to an abandonment and recovery (A&R) wire depending from the installation vessel. The topside end of the riser is lowered from the installation vessel using the A&R wire until the pull-in wire is taking the weight of the riser. The A&R wire is then disconnected from the topside end of the riser, and the topside end of the riser is pulled in to the platform using the pull-in wire and is then attached to the platform at the platform’s riser balcony (Figures 4 and 5).
- (8) The installation vessel moves to the side of the platform opposite the riser balcony, and a crane wire is lowered from the installation vessel and connected to the subsea end of the riser, typically using an ROV (Figure 5).
- (9) The subsea end of the riser is disconnected from the static line depending from the platform and is lowered to the seabed in the vicinity of a subsea structure using the crane wire from the installation vessel. The subsea end of the riser may be connected to the subsea structure using an appropriate tie-in tool and/or divers and/or an ROV (Figure 6).

WO2011/099869 describes a method of installing a riser, similar to the method described above.

20

When implementing riser installation using these known procedures, it is necessary for the installation vessel to move close in to the platform’s riser balcony (typically 20-40 m away) during the transfer of the subsea end of the riser and the topside end of the riser to the platform (Figure 1), in order to maintain the integrity of the guide tube loads, maintain the bending radius of the riser, and prevent any contact between the riser and the port in the installation vessel through which it is lowered. The fact that the installation vessel must move so close to the platform is a significant disadvantage due to the risk of collision with the risers hanging from the riser balcony. Indeed, many operators/regulators define an exclusion zone in the area adjacent to the riser balcony, e.g. typically extending up to 200 m away from the riser balcony. If vessels do need to enter the exclusion zone, production and other operations must be ceased. Any cessation of production represents a significant expense.

It will be appreciated that risers may be removed using the reverse of the installation procedure described above (Figures 1 to 6) and that similar problems may be encountered.

35

It is noted that procedures similar to those used to install and remove risers may be used to install and remove other types of flexible lines, such as power cables and umbilicals. As such, the same problem is encountered, i.e. the need for an installation vessel to enter the exclusion zone and consequential shut down of operations.

5

Summary

It is an object of the present invention to overcome or at least mitigate the problems encountered with known flexible line installation and removal procedures. In particular,
10 it is an object of the invention to allow the removal and installation of a flexible line without requiring a vessel to enter an exclusion zone around a platform, by taking advantage of the ability of the platform to move.

According to a first aspect of the present invention there is provided a method of
15 removing a flexible line deployed between an offshore platform and a subsea structure, where the platform has a landing deck on which the flexible line is installed, the landing deck facing away from the platform towards an installation side. The method comprises: decoupling a topside end of the flexible line from the landing deck; lowering the topside end from the landing deck to the sea bed using a platform mounted winch, and detaching
20 the winch from the topside end; moving the platform in a direction away from the installation side and away from the topside end and positioning an installation vessel on the installation side by moving the installation vessel towards the subsea structure; lowering a recovery line from the installation vessel and attaching an end of the recovery line to the topside or subsea end of the flexible line or a subsea end of the flexible line;
25 raising the attached topside or subsea end onto the installation vessel from the seabed using the recovery line; and recovering the flexible line onto the installation vessel, whereupon the platform can be moved back to an operating position located above the subsea structure.

30 Prior to decoupling the topside end of the flexible line from the landing deck and lowering the topside end from the landing deck, the method may further comprise moving the platform in a direction towards the installation vessel.

The recovery line on the installation vessel may be extended to its maximum extent from
35 the installation vessel towards the platform.

The method may further comprise attaching the end of the recovery line to the topside or subsea end of the flexible line using a Remotely Operated Vessel, ROV.

5 The method may further comprise disconnecting the winch from the topside end of the flexible line using an ROV.

After the step of recovering the flexible line onto the installation vessel, the method may further comprise moving the installation vessel in a direction away from the landing deck and relocating the platform to said operating position.

10

According to a second aspect of the present invention there is provided a method of installing a flexible line between an offshore platform and a subsea structure, where the platform has a landing deck for landing the flexible line, the landing deck facing away from the platform towards an installation side. The method comprises: moving the platform in a direction away from the installation side and positioning the installation vessel on the installation side towards the subsea structure; lowering a topside end of the flexible line from the installation vessel; moving the installation vessel away from the topside end and away from the installation side and moving the platform in a direction towards the topside end; and installing the topside end to the landing deck and installing a subsea end of the flexible line to the subsea structure.

20

Before lowering the topside end of the flexible line from the installation vessel, the method may further comprise lowering a subsea end of the flexible line from the installation vessel using a winch mounted on the installation vessel. After lowering a subsea end of the flexible line from the installation vessel, the method may further comprise disconnecting the winch line from the subsea end of the flexible line and coupling the subsea end to the subsea structure. The method may further comprise pulling the subsea end of the flexible line to the subsea structure using an ROV or a pull in wire depending from the platform. The method may further comprise pulling the subsea end of the flexible line to the subsea structure using a pull in wire depending from the platform. The method may further comprise disconnecting the winch from the subsea end and coupling the subsea end to the subsea structure using an ROV. After moving the platform in a direction away from the installation side and prior to lowering a topside end of the flexible line from the installation vessel, the method may further comprise installing buoyancy aids and/or weights on the flexible line and tethering the flexible line to a subsea anchor. The method may further comprise attaching the end of the pull in line to the topside end of the flexible line using an ROV.

25

30

35

The flexible line may be a riser for conveying hydrocarbons from a subsea well to an offshore platform, and said landing deck may be a riser balcony.

- 5 The flexible line may be deployed between the offshore platform and the subsea structure in a pliant wave configuration.

10 An exclusion zone may surround the landing deck of the offshore platform, wherein the exclusion zone is defined such that hydrocarbon production must be ceased if a vessel enters the exclusion zone.

The platform may be moored using mooring lines and said step(s) of moving the platform may comprise pulling in and playing out the mooring lines.

- 15 Where reference is made above to the use of winches and lines, it will be appreciated that certain steps of the procedures may be carried out using a single winch or line, or using two or more winches or lines. For example, during a single step, e.g. lowering an end of the flexible line, the line may be swapped between winches and lines during the step. Multiple winches and lines may be used simultaneously. The terms "winches" and
20 "lines" are construed to cover related apparatus including, for example, "cranes", "hoists" etc.

Brief Description of the Drawings

- 25 Figures 1 to 6 illustrate schematically a prior art procedure for installing a flexible riser between a semi-submersible platform and a subsea structure;
Figure 7 illustrates schematically the area within which an FPU that is adapted to drill new wells while maintaining hydrocarbon production can move.
Figure 8(a) to (d) illustrates schematically an exclusion zone around the riser balcony of
30 an FPU and the movement of an FPU that may occur during a process of replacing a riser;
Figures 9 to 13 illustrate schematically a procedure for removing a flexible riser deployed between an FPU and a subsea structure;
Figures 14 to 17 illustrate schematically a procedure for installing a flexible riser between
35 an FPU and a subsea structure;
Figure 18 is a flow diagram further illustrating a procedure for removing a flexible riser;
and

Figure 19 is a flow diagram further illustrating a procedure for installing a flexible riser.

Detailed Description

5 In the case of deep water hydrocarbon wells, floating production units (FPUs) are most commonly used as a means of receiving hydrocarbons from the well, storing it if necessary, and delivering it to oil tankers or exporting it through export pipelines. FPUs may be of various types including, for example, semi-submersible platforms, Floating Production Storage and Offloading (FPSO) vessels, tension leg platforms, and spar
10 platforms. As has been described above, flexible risers are installed and removed between the FPU and a subsea structure, such as a Christmas tree, using an installation vessel. The riser is generally pre-constructed and mounted on a reel on the installation vessel. The riser is then lowered into the sea from the installation vessel. As also described above, FPUs may have the ability to move laterally while remaining connected
15 to the subsea wells via flexible risers to maintain production. This ability to move is necessary to allow new wells to be drilled from an FPU, or existing wells to be maintained, while maintaining hydrocarbon production. The approach presented here exploits the FPU's ability to move to remove the necessity for the installation vessel to enter an exclusion zone surrounding the riser balcony of the FPU during the operations
20 of removing and installing a riser or other flexible line. As such, safety levels can be maintained and without the need to interrupt ongoing production.

Figure 7 illustrates the area within which an FPU can move while maintaining hydrocarbon production. The FPU 1, which is shown in a central position, is secured to
25 the seabed by cables or mooring lines 5. The Figure illustrates a set of twenty four wells 3 located generally beneath the platform and arranged in a V-shaped pattern. The subsea wells 3 each comprise a subsea structure, e.g. Christmas tree, to which risers 2 are connected. In Figure 7 the centre 6 of the FPU 1 is located substantially above subsea wells 3, and risers 2 are connected between the FPU 1 and the subsea structures
30 in a Pliant Wave configuration. In Figure 7 only the portions of the risers 2 that lie along the seabed and return back from subsea anchor points to the subsea structures 3 are shown; the portions of the risers 2 extending from the platform to the subsea anchor points are not shown. The circle 4 shown in the Figures indicates the maximum extent of movement of the centre 6 of the FPU 1. The circle 4 may have a radius of, for
35 example, 80 m. The FPU 1 can be moved by shortening and lengthening the cables 5 as needed, such that the centre 6 of the FPU 1 remains within the area enclosed by the circle 4.

Figure 8(a) illustrates an exclusion zone 11 around a riser balcony of an FPU 1, where risers 2 are coupled to the riser balcony of the FPU. If any vessel enters the exclusion zone it may be necessary to depressurise the risers and cease hydrocarbon production.

5 The exclusion zone may be defined by the area enclosed by an arc 200 m from the riser balcony of the FPU 1 and two radii extending at an angle of 30° relative to a straight line defined by the edge of the riser balcony. Figure 8(b) to (d) illustrates the movement of an FPU 1 that may occur during a process of replacing a riser, where the FPU is secured to the seabed by cables or mooring lines (cables or mooring lines 5 are omitted in Figure

10 8 (a) to (d) for clarity). In Fig. 8(b) the centre 6 of the FPU 1 is located substantially above subsea wells 3; the risers 2 may be connected between the FPU 1 and the subsea structures in a Pliant Wave configuration. An installation vessel 7 is shown outside of the exclusion zone 11. As in Figure 7, the circle 4 shown in the Figures indicates the maximum extent of movement of the centre 6 of the FPU 1. As stated above, the FPU

15 1 can be moved by shortening and lengthening the cables 5 as needed. For example, in Figure 8(c) the two right-hand sets of cables have been shortened and the two left-hand sets of cables have been lengthened, relative to Figure 8(b). In Figure 8(c) the FPU 1 has moved as far as possible to the right. The installation vessel 7 has also moved to the right, to remain outside of the exclusion zone 11. In Figure 8(d) the FPU

20 1 has moved as far as possible to the left, and the installation vessel 7 has moved to a position as close as possible to the subsea wells 3 while remaining outside the exclusion zone 11 and off the riser balcony of the FPU 1. As will be described below, this movement facilitates the replacement of a riser without the need for an installation vessel 7 to enter the exclusion zone 11. As shown in Figure 8(d), it may be possible for the

25 FPU to move to a position where the centre 6 of the FPU 1, or the FPU 1, is not located above the subsea wells 3.

A procedure for removing an installed flexible riser will now be described with reference to Figures 9 to 13.

30

Figure 9 illustrates an installation vessel 7 located outside of an exclusion zone adjacent to an FPU 1. The FPU has been moved as far as possible to the right, e.g. 80 metres to the right of its centre location. As shown in Figure 9, a topside end 9 of a flexible riser 2, which in the example shown in Figure 9 had connected the FPU 1 to a subsea

35 structure 3 in a Pliant Wave configuration (other riser configurations may be used), has been decoupled from the riser balcony of the FPU 1 and partially lowered from the FPU 1 using a pull-in wire (PIW) 8. Figure 10 illustrates the topside end 9 of the riser 2

lowered still further such that the riser is laid along the seabed. Figure 11 illustrates the situation after the topside end has been landed on the seabed, and the PIW has been released and pulled back up to the platform. The PIW 8 may be disconnected from the topside end 9 of the riser 2 using a Remotely Operated Vehicle (ROV).

5

In Figure 11 the FPU 1 is shown moved as far as possible to the left, away from its central position and from the installation vessel 7. The FPU has therefore moved 160 meters to the left of its previous position, and therefore approximately 160 meters from the topside end of the riser. At this stage, the installation vessel can move to the left without entering the exclusion zone around the riser balcony, as shown in Figure 12. Indeed, as the FPU has moved 160 meters to the left of the topside end of the riser, the installation vessel can move to a position that is within 40 meters of the topside end, assuming an exclusion zone of 200 from the riser balcony, close enough for a line, for example an abandon and recovery wire 10, to be lowered from the installation vessel 7 and connected to the topside end 9, as illustrated in Figure 13. It should be noted that, typically, the abandon and recovery wire 10 is deployed from a crane located on the installation vessel. This crane may have an arm that extends 10 to 15 meters out from the installation vessel, and the crane may extend into the exclusion zone; this means that the lateral distance between the point on the installation vessel from which the abandon and recovery wire depends and the topside end of the riser may be reduced to 25 to 30 meters. The connection between the abandon and recovery wire 10 and the topside end 9 may be performed using an ROV. NB. If the installation vessel is much further away from the topside end, even though an ROV could be used to connect the abandon and recovery wire to the topside end of the riser, it would probably not be possible to lift the riser.

In Figure 13 the topside end 9 of the riser 2 is shown being winched up to the installation vessel 7. The subsea end of the riser is subsequently disconnected from the subsea structure, e.g. using an ROV, and the clump weight and anchor also removed using an ROV, such that the entire length of the riser can be winched up to the installation vessel where it is wound up on a spool. During this process, the installation vessel may move slowly to the right. At the end of this process, the installation vessel is moved out of the vicinity of the FPU, allowing the FPU to return to its central or other desired operating position (Figure 8(b)). To facilitate removal of the riser the disconnected subsea end may be mounted on a trolley, sledge, or similar apparatus.

35

Using this method the removal of a riser from an FPU can be performed without the need to stop hydrocarbon production, and without compromising safety.

Figures 9 to 13 describe a riser removal procedure in which the topside end of the riser is raised onto the installation vessel first. However, an alternative procedure is possible in which the subsea end of the riser is raised first onto the installation vessel. In this case, the procedure employs the steps illustrated in Figures 9 to 11 to disconnect and lower the topside end of the riser to the seabed, and to position the FPU and the installation vessel in their left most positions (only the FPU is shown in its leftmost position in Figure 11). At this point however, the abandon and recovery wire 10 is lowered from the installation vessel 7 and connected to the (disconnected) subsea end.

It will be appreciated that a procedure for installing a riser will follow the reverse procedure to that described with reference to Figures 9 to 13, as illustrated in Figures 14 to 17. In a first step, the FPU moves away from an installation vessel (i.e. 80 meters to the left of its central position) to allow the installation vessel to approach as close as possible to a position above the subsea wells while remaining outside of the exclusion zone around the riser balcony. The subsea end of the riser is lowered from the installation vessel to the seabed or to an intermediate position between the installation vessel and the seabed. The subsea end of the riser is transported to a subsea structure on a subsea well and is then connected to the subsea structure. The subsea end of the riser may be transported to the subsea structure using an ROV or a winch wire extending from the platform. The subsea end of the riser may be connected to the subsea structure using an ROV. An intermediate step may comprise the installation of buoyancy aids and/or weights on the riser and the tethering of the riser to achieve, for example, a Pliant Wave shape in the riser.

In Figure 14, the topside end 9 of the riser 2 is shown being lowered to the seabed from the installation vessel 7 using an abandon and recovery wire 10. The abandon and recovery wire may be lowered from a crane arm that extends 10 to 15 meters from the installation vessel. This maximises the reach and therefore minimises the distance between the point at which the topside end of the riser lands on the seabed and the subsea well, while allowing the installation vessel to remain outside the exclusion zone and thus maintain the required safe distance between the installation vessel and the FPU. The abandon and recovery wire 10 is then disconnected. The abandon and recovery wire 10 may be disconnected from the topside end 9 using an ROV. The installation vessel 7 then moves away from the FPU. Figure 15 shows the situation when

the abandon and recover wire 10 has been disconnected and the installation vessel 7 has moved away from the FPU. Figure 16 shows the situation after the FPU has subsequently returned to its original position and a pull-in wire has been lowered from the FPU and connected to the topside end of the riser. Figure 17 shows the topside end of the riser being winched up to the FPU. The topside end of the riser is then connected to the riser balcony.

As with the riser removal procedure, the installation procedure (Figures 14 to 17) may be reversed such that the topside end of the riser is deployed into the water first, and is pulled into the exclusion zone and connected to the riser balcony. The subsea end is then deployed using the manoeuvres described above.

The approaches presented here provide a reversible method for the removal and installation of a flexible element comprising a riser or other flexible line (such as a power line, umbilical or tube) between an offshore platform and a subsea structure. By exploiting the ability of an FPU to move, the approach may avoid the need for the installation vessel to enter a defined exclusion zone in the vicinity of the platform during the removal or installation process and therefore may avoid the need to shut down platform operations, such as hydrocarbon production.

Figure 18 is a flow diagram illustrating at a high level a method of removing a flexible line deployed between an offshore platform and a subsea structure. The method comprises, at step S1, decoupling a topside end of the flexible line from the landing deck. At step S2 the topside end is lowered from the landing deck to the sea bed using a platform mounted winch, and the winch is detached from the topside end. At step S3 the platform is moved in a direction away from the installation side and an installation vessel is positioned on the installation side. At step S4 a recovery line is lowered from the installation vessel and an end of the recovery line is attached to the topside end of the riser or a subsea end of the riser. At step S5 the attached topside or subsea end is raised onto the installation vessel from the seabed using the recovery line. At step S6 the flexible line is recovered onto the installation vessel, whereupon the platform can be moved back to an operating position.

Figure 19 is a flow diagram illustrating at a high level a method of installing a flexible line between an offshore platform and a subsea structure. The method comprises, at step Sa1, moving the platform in a direction away from the installation side and positioning the installation vessel on the installation side. At step Sa2 vessel topside or subsea end

of the flexible line is lowered from the installation vessel. At step Sa3 the installation vessel is moved away from the platform and the platform is moved in a direction towards the installation vessel. At step Sa4 the lowered end is installed to a subsea structure or to the landing deck.

CLAIMS:

1. A method of removing a flexible line deployed between an offshore platform and a subsea structure, where the platform has a landing deck on which the flexible line is installed, the landing deck facing away from the platform towards an installation side, the method comprising:
 - 5 decoupling (S1) a topside end of the flexible line from the landing deck;

characterised by the steps of

 - 10 lowering (S2) the topside end from the landing deck to the sea bed using a platform mounted winch, and detaching the winch from the topside end;
 - moving (S3) the platform in a direction away from the installation side and away from the topside end and positioning an installation vessel on the installation side by moving the installation vessel towards the subsea structure;
 - 15 lowering (S4) a recovery line from the installation vessel and attaching an end of the recovery line to the topside end of the flexible line or a subsea end of the flexible line;
 - raising (S5) the attached topside or subsea end onto the installation vessel from the seabed using the recovery line;
 - recovering (S6) the flexible line onto the installation vessel,
 - 20 whereupon the platform can be moved back to an operating position located above the subsea structure.
2. A method according to claim 1 and comprising, prior to decoupling the topside end of the flexible line from the landing deck and lowering the topside end from the landing deck, moving the platform in a direction towards the installation vessel.
3. A method according to any one of the preceding claims, wherein the recovery line on the installation vessel is extended to its maximum extent from the installation vessel towards the platform.
4. A method according to any one of the preceding claims and comprising attaching the end of the recovery line to the topside or subsea end of the flexible line using a Remotely Operated Vessel, ROV.
5. A method according to any one of the preceding claims and comprising disconnecting the winch from the topside end of the flexible line using an ROV.

6. A method according to any one of the preceding claims and comprising, after said step of recovering the flexible line onto the installation vessel, moving the installation vessel in a direction away from the landing deck and relocating the platform to said
5 operating position.
7. A method of installing a flexible line between an offshore platform and a subsea structure, where the platform has a landing deck for landing the flexible line, the landing deck facing away from the platform towards an installation side, the method
10 **characterised by** the steps of:
- moving (Sa1) the platform in a direction away from the installation side and positioning the installation vessel on the installation side towards the subsea structure;
 - lowering (Sa2) a topside end of the flexible line from the installation vessel;
 - 15 moving (Sa3) the installation vessel away from the topside end and away from the installation side and moving the platform in a direction towards the topside end; and
 - installing (Sa4) the topside end to the landing deck and installing a subsea end of the flexible line to the subsea structure.
- 20
8. A method according to claim 7 and comprising, before lowering the topside end of the flexible line from the installation vessel, lowering the subsea end of the flexible line from the installation vessel using a winch mounted on the installation vessel.
- 25
9. A method according to claim 8 and comprising, after lowering the subsea end of the flexible line from the installation vessel, disconnecting the winch line from the subsea end of the flexible line and coupling the subsea end to the subsea structure.
- 30
10. A method according to claim 9 and comprising pulling the subsea end of the flexible line to the subsea structure using an ROV or a pull in wire depending from the platform.
- 35
11. A method according to claim 9 and comprising pulling the subsea end of the flexible line to the subsea structure using a pull in wire depending from the platform.

12. A method according to any one of claims 9 to 11 and comprising disconnecting the winch from the subsea end and coupling the subsea end to the subsea structure using an ROV.
- 5 13. A method according to any one of claims 7 to 12 and comprising, after moving the platform in a direction away from the installation side and prior to lowering a topside end of the flexible line from the installation vessel, installing buoyancy aids and/or weights on the flexible line and tethering the flexible line to a subsea anchor.
- 10 14. A method according to any one of claims 7 to 13 and comprising attaching the end of the pull in line to the topside end of the flexible line using an ROV.
- 15 15. A method according to any one of the preceding claims, wherein the flexible line is a riser for conveying hydrocarbons from a subsea well to an offshore platform, and said landing deck is a riser balcony.
16. A method according to any one of the preceding claims, wherein the flexible line is deployed between the offshore platform and the subsea structure in a pliant wave configuration.
- 20 17. A method according to any one of the preceding claims, wherein an exclusion zone surrounds the landing deck of the offshore platform, wherein the exclusion zone is defined such that hydrocarbon production must be ceased if a vessel enters the exclusion zone.
- 25 18. A method according to any one of the preceding claims, wherein the platform is moored using mooring lines and said step(s) of moving the platform comprises pulling in and playing out the mooring lines.



PATENTKRAV:

1. Fremgangsmåte for å fjerne en fleksibel line utplassert mellom en offshoreplattform og en undersjøisk konstruksjon, hvor plattformen har et landingsdekk (landing deck) som den fleksible linen er installert på, landingsdekket er vendt bort fra plattformen mot en installasjonsside, fremgangsmåten omfattende:
 - 5 å frakople (S1) en oversideende av den fleksible linen fra landingsdekket;
- karakterisert ved trinnene**
 - 10 å senke (S2) oversideenden fra landingsdekket til havbunnen ved å anvende en plattformmontert vinsj, og løsne vinsjen fra oversideenden;
 - å bevege (S3) plattformen i en retning bort fra installasjonssiden og bort fra oversideenden og posisjonere et installasjonsfartøy på installasjonssiden ved å bevege installasjonsfartøyet mot den undersjøiske konstruksjonen;
 - 15 å senke (S4) en gjenhentingsline fra installasjonsfartøyet og feste en ende av gjenhentingslinen til oversideenden av den fleksible linen eller en undersjøisk ende av den fleksible linen;
 - å heve (S5) den festede oversiden eller den undersjøiske enden opp på installasjonsfartøyet fra havbunnen ved å anvende gjenhentingslinen;
 - 20 å gjenhente (S6) den fleksible linen opp på installasjonsfartøyet, hvorpå plattformen kan bevegges tilbake til en driftsstilling plassert over den undersjøiske konstruksjonen.
2. Fremgangsmåte ifølge krav 1, og omfattende, før frakopling av oversideenden av den fleksible linen fra landingsdekket og å senke oversideenden fra landingsdekket,
 - 25 å bevege plattformen i en retning mot installasjonsfartøyet.
3. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, hvori gjenhentingslinen på installasjonsfartøyet forlenges til sin maksimale utstrekning fra installasjonsfartøyet mot plattformen.
 - 30
4. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, og omfattende å feste enden av gjenhentingslinen til oversiden eller den undersjøiske enden av den fleksible linen ved å anvende et fjernstyrt fartøy, ROV.



5. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, og omfattende å frakoble vinsjen fra oversideenden av den fleksible linen ved å anvende et ROV.
- 5 6. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene og omfattende, etter trinnet med å gjenhente den fleksible linen opp på installasjonsfartøyet, å bevege installasjonsfartøyet i en retning bort fra landingsdekket og å relokalisere plattformen til driftsstillingen.
- 10 7. Fremgangsmåte for å installere en fleksibel line mellom en offshoreplattform og en undersjøisk konstruksjon, hvor plattformen har et landingsdekk for å lande den fleksible linen, hvor landingsdekket vender bort fra plattformen mot en installasjonsside, fremgangsmåten **karakterisert ved** trinnene:
- 15 å bevege (Sa1) plattformen i en retning bort fra installasjonssiden og å posisjonere installasjonsfartøyet på installasjonssiden mot den undersjøiske konstruksjonen;
- å senke (Sa2) en oversideende av den fleksible linen fra installasjonsfartøyet;
- å bevege (Sa3) installasjonsfartøyet bort fra oversideenden og bort fra installasjonssiden og bevege plattformen i en retning mot oversideenden; og
- 20 å installere (Sa4) oversideenden til landingsdekket og installere en undersjøisk ende av den fleksible linen til den undersjøiske konstruksjonen.
8. Fremgangsmåte ifølge krav 7, og omfattende, før oversideenden av den fleksible linen senkes fra installasjonsfartøyet, å senke den undersjøiske enden av den fleksible
- 25 linen fra installasjonsfartøyet ved å anvende en vinsj montert på installasjonsfartøyet.
9. Fremgangsmåte ifølge krav 8, og omfattende, etter å ha senket den undersjøiske enden av den fleksible linen fra installasjonsfartøyet, å frakoble vinsjlinen fra den undersjøiske enden av den fleksible linen og å kople den undersjøiske enden til den
- 30 undersjøiske konstruksjonen.
10. Fremgangsmåte ifølge krav 9, og omfattende å trekke den undersjøiske enden av den fleksible linen til den undersjøiske konstruksjonen ved å anvende et ROV eller en inntrekksvaier avhengig av plattformen.

11. Fremgangsmåte ifølge krav 9, og omfattende å trekke den undersjøiske enden av den fleksible linen til den undersjøiske konstruksjonen ved å anvende en inntrekksvaier avhengig av plattformen.
- 5 12. Fremgangsmåte ifølge et hvilket som helst av kravene 9 til 11, og omfattende å frakoble vinsjen fra den undersjøiske enden og å kople den undersjøiske enden til den undersjøiske konstruksjonen ved å anvende et ROV.
- 10 13. Fremgangsmåte ifølge et hvilket som helst av kravene 7 til 12, omfattende, etter å ha beveget plattformen i en retning bort fra installasjonssiden og før senking av en oversideende av den fleksible linen fra installasjonsfartøyet, å installere oppdriftshjelpemidler og/eller vekter på den fleksible linen og feste den fleksible linen til et undersjøisk anker.
- 15 14. Fremgangsmåte ifølge et hvilket som helst av kravene 7 til 13, og omfattende å feste enden av trekklinen til oversideenden av den fleksible linen ved å anvende et ROV.
- 20 15. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, hvori den fleksible linen er et stigerør for å transportere hydrokarboner fra en undersjøisk brønn til en offshoreplattform, og landingsdekket er en stigerørsbalkong.
- 25 16. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, hvori den fleksible linen utplasseres mellom offshoreplattformen og den undersjøiske konstruksjonen i en bøyelig bølge-konfigurasjon (pliant wave configuration).
- 30 17. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, hvori en utelukkelsessone omgir landingsdekket til offshoreplattformen, hvori utelukkelsessonen er definert slik at hydrokarbonproduksjonen må stanses dersom et fartøy kommer inn i utelukkelsessonen.
18. Fremgangsmåte ifølge et hvilket som helst av de foregående kravene, hvori plattformen fortøyes ved å anvende fortøyningslinjer og trinnet/trinnene for å bevege plattformen omfatter å trekke inn og legge ut fortøyningslinene.



1/13

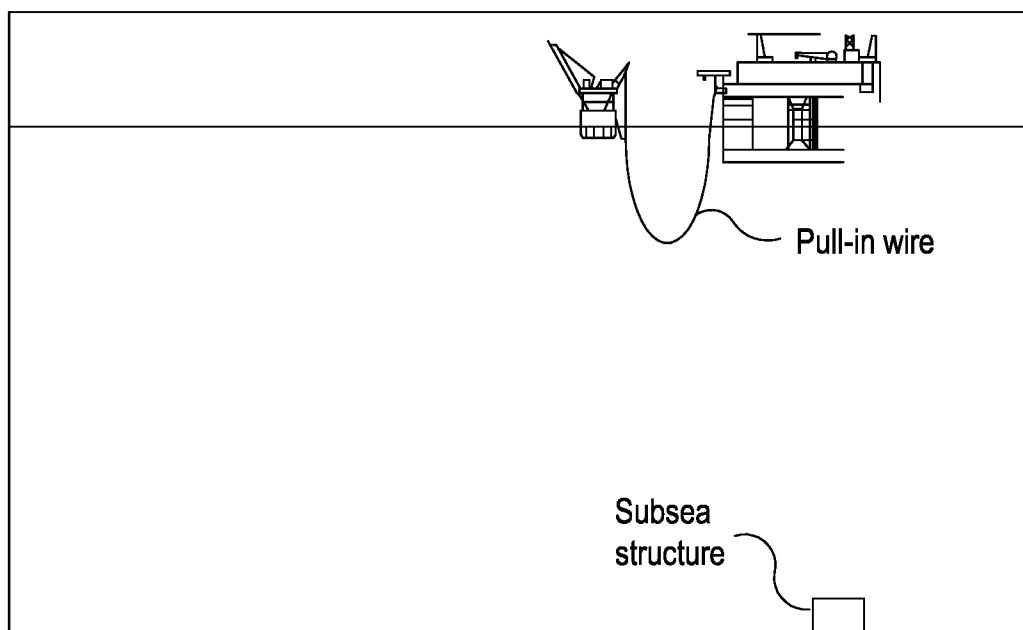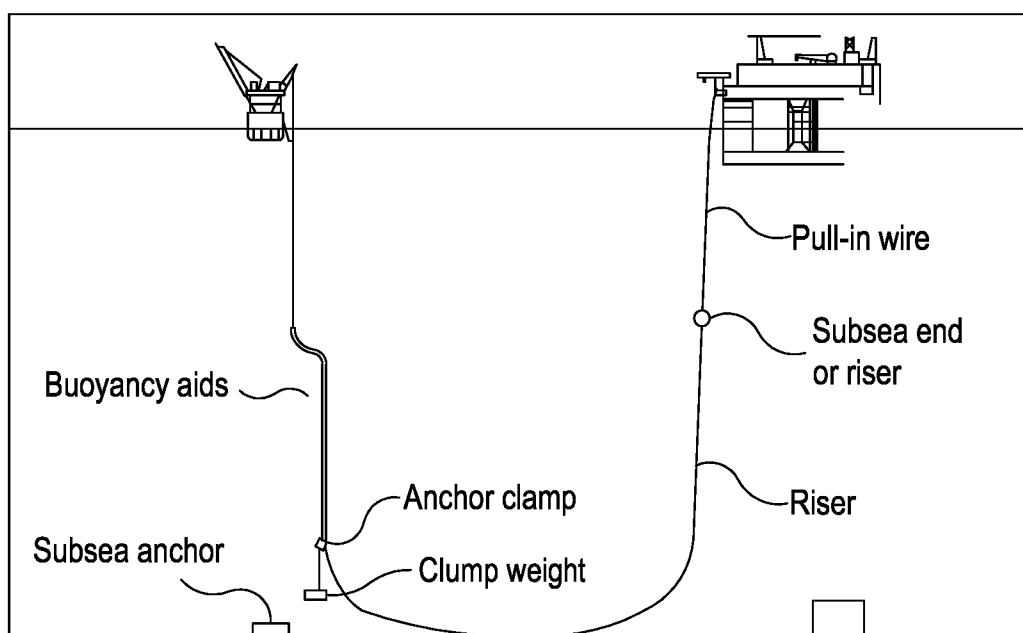Figure 1Figure 2

2/13

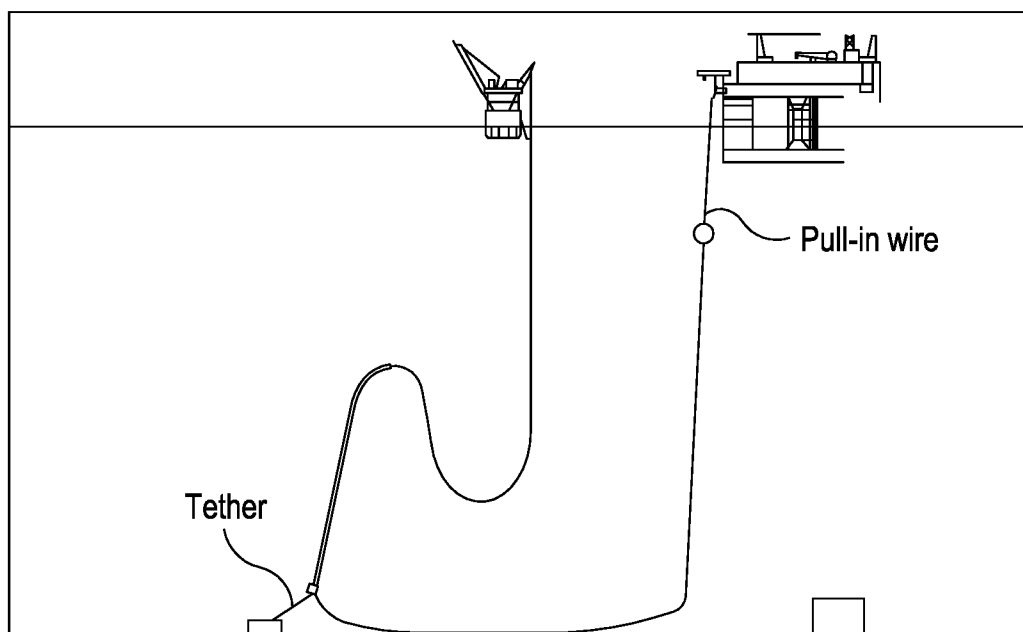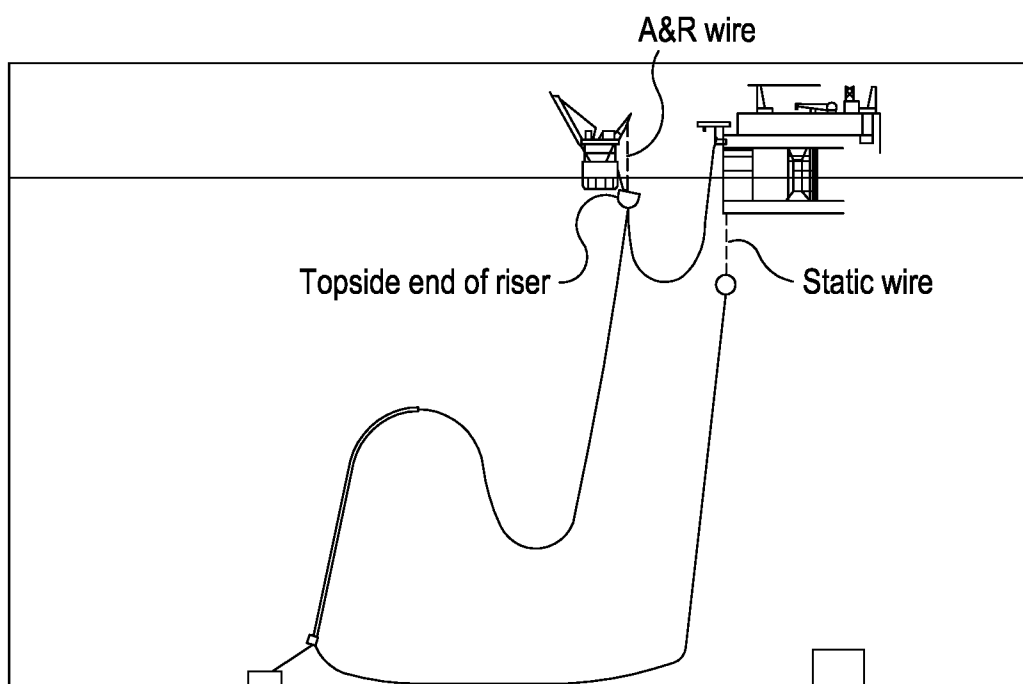Figure 3Figure 4

3/13

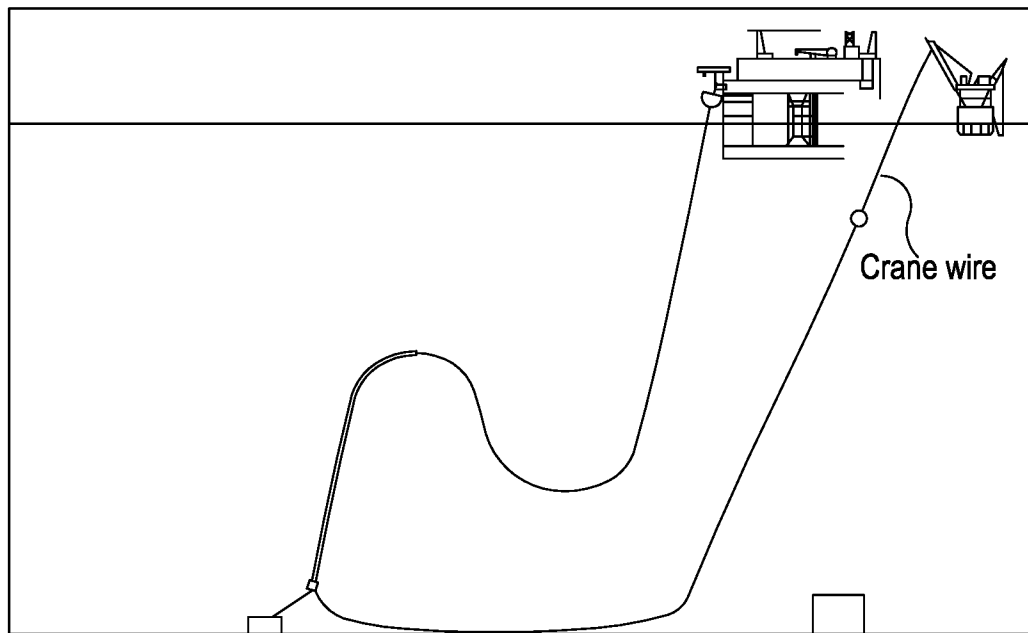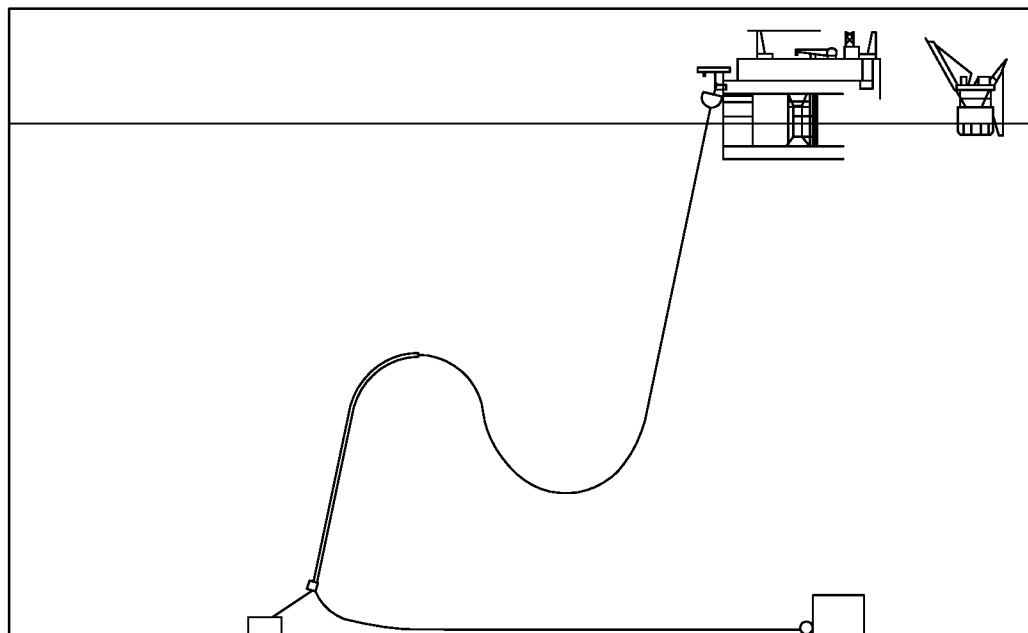Figure 5Figure 6

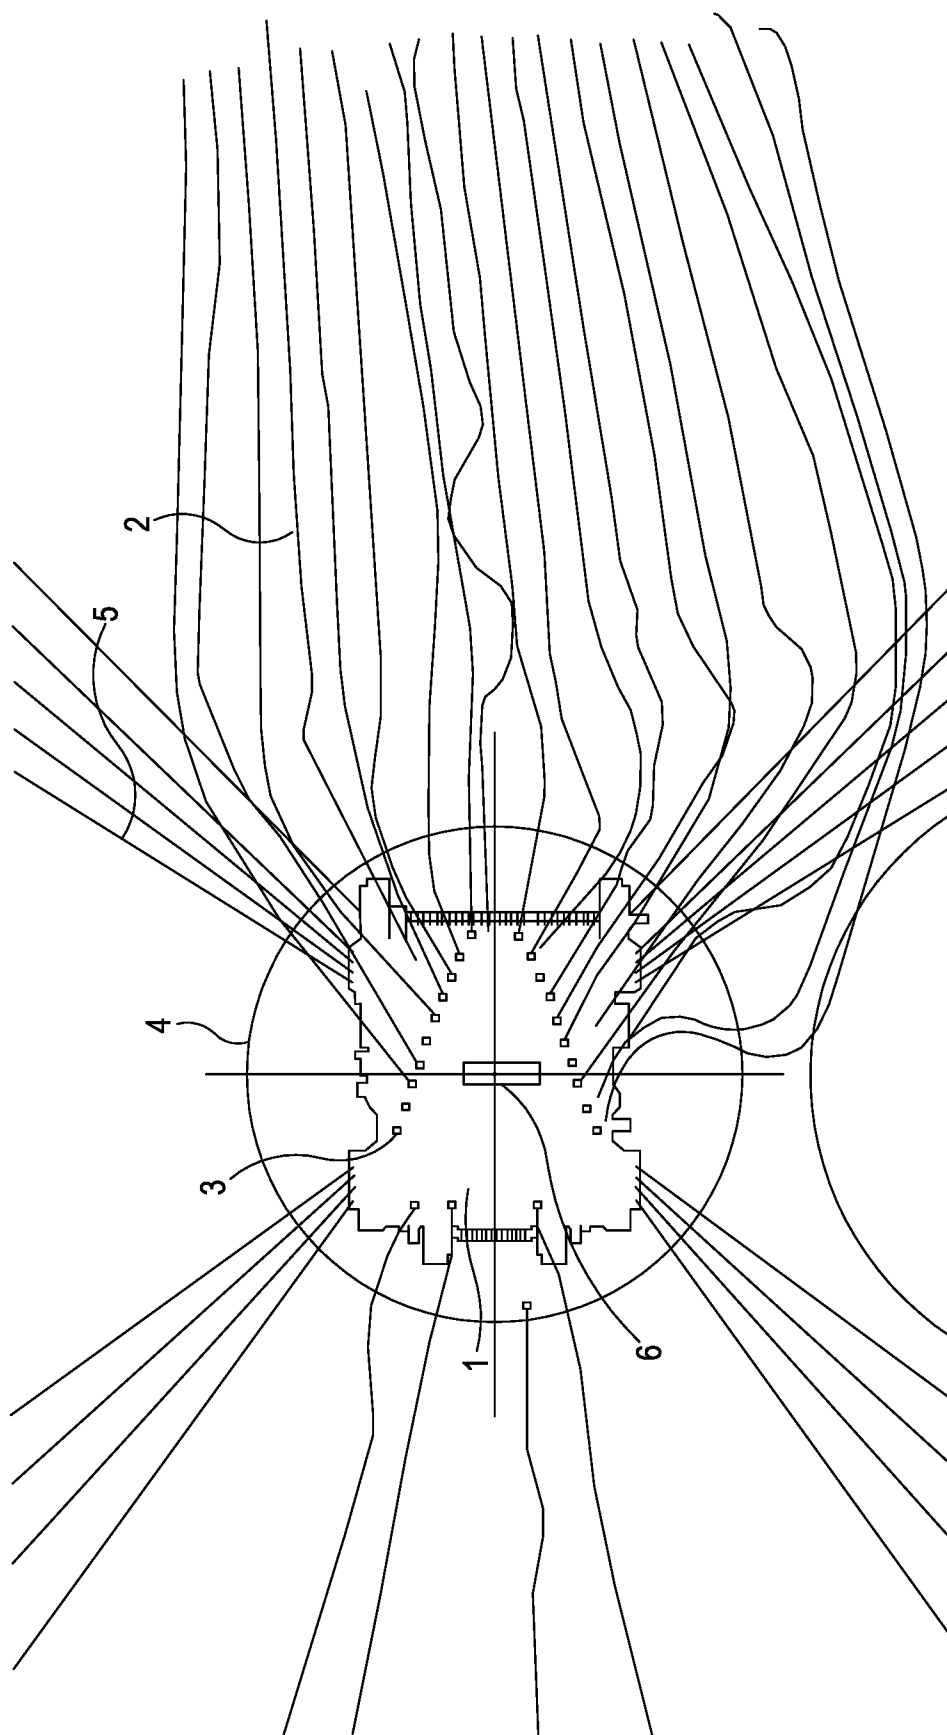
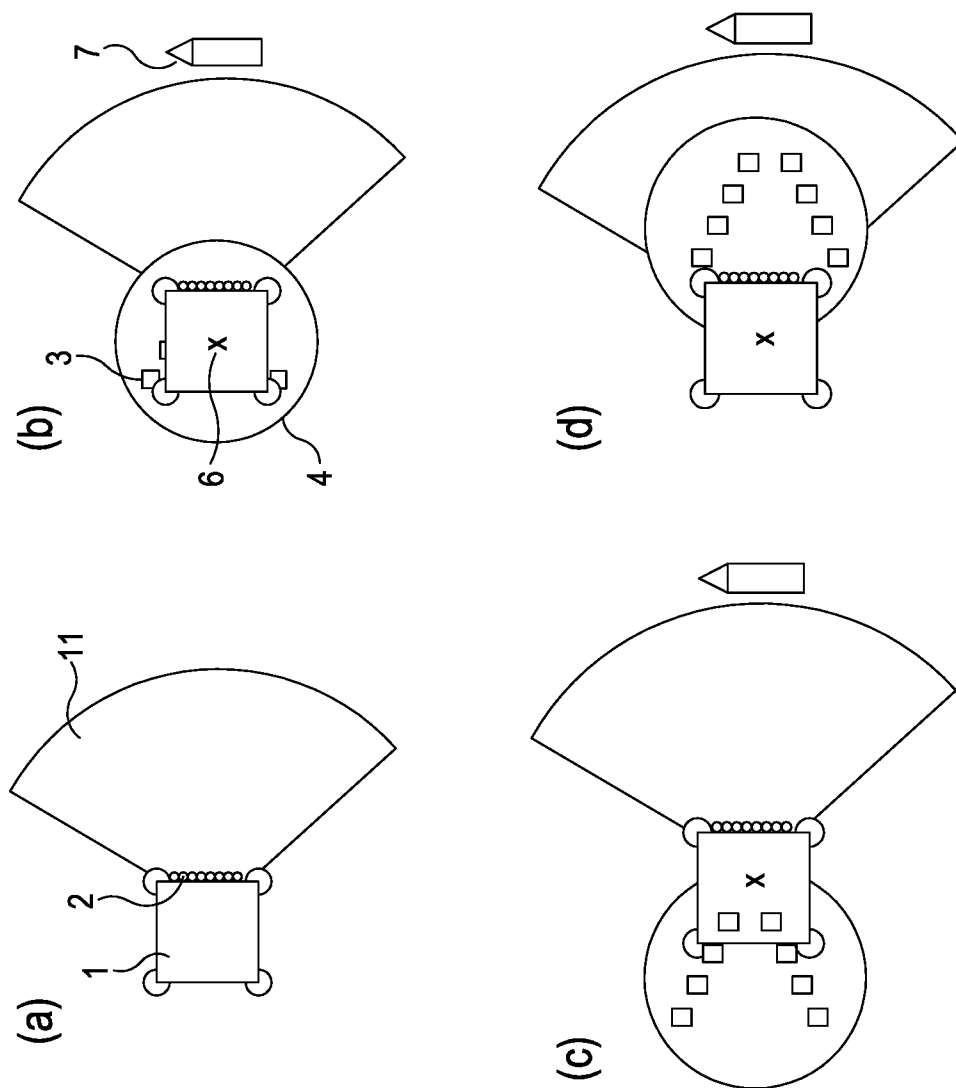
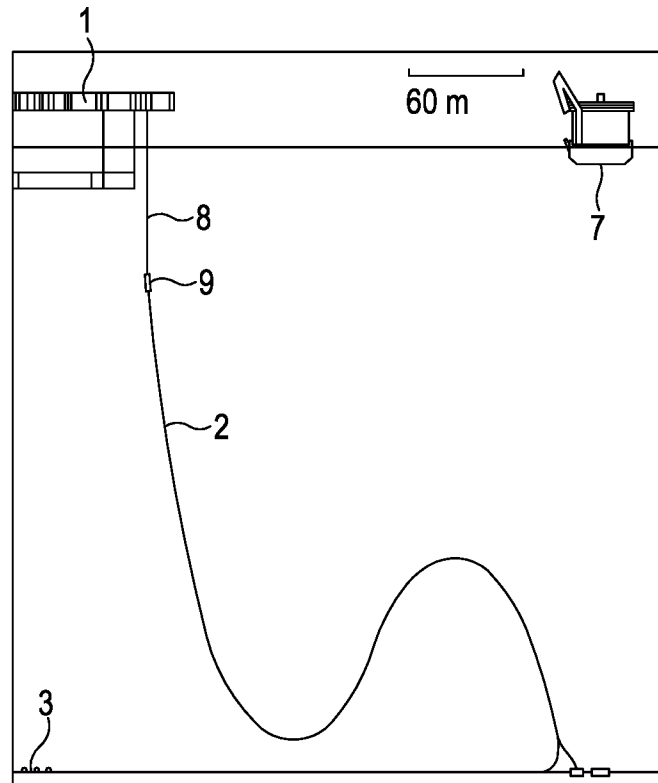
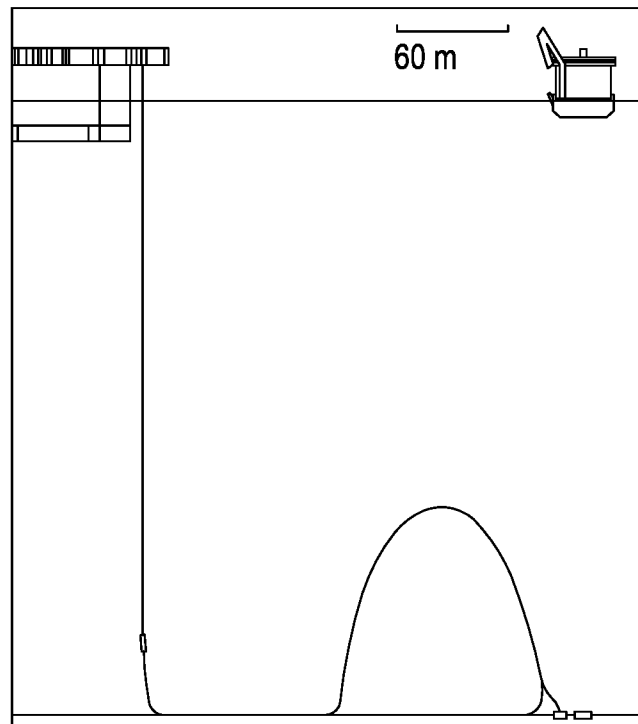


Figure 7

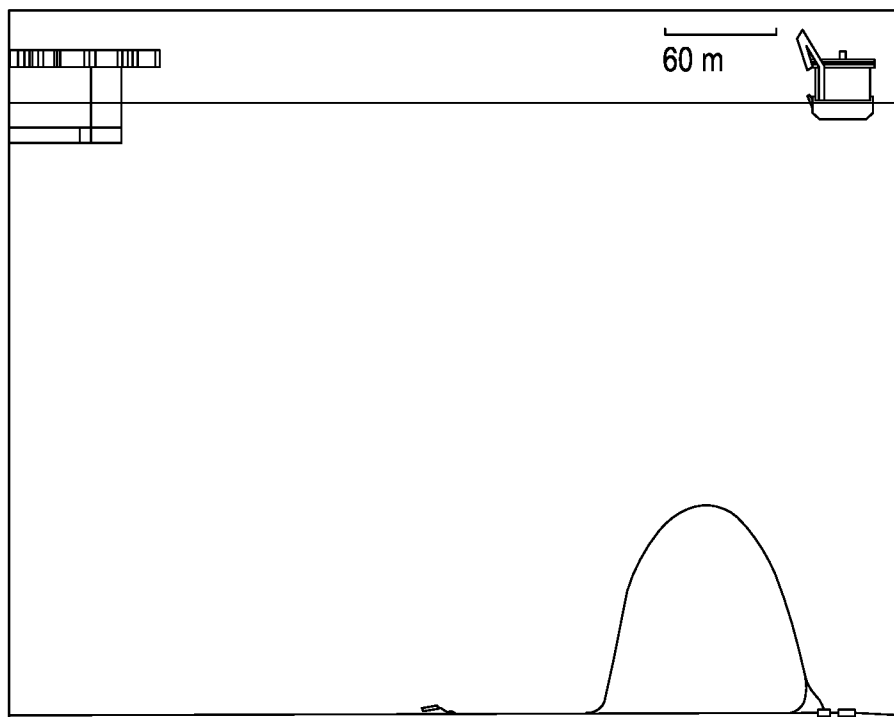
5/13

**Figure 8**

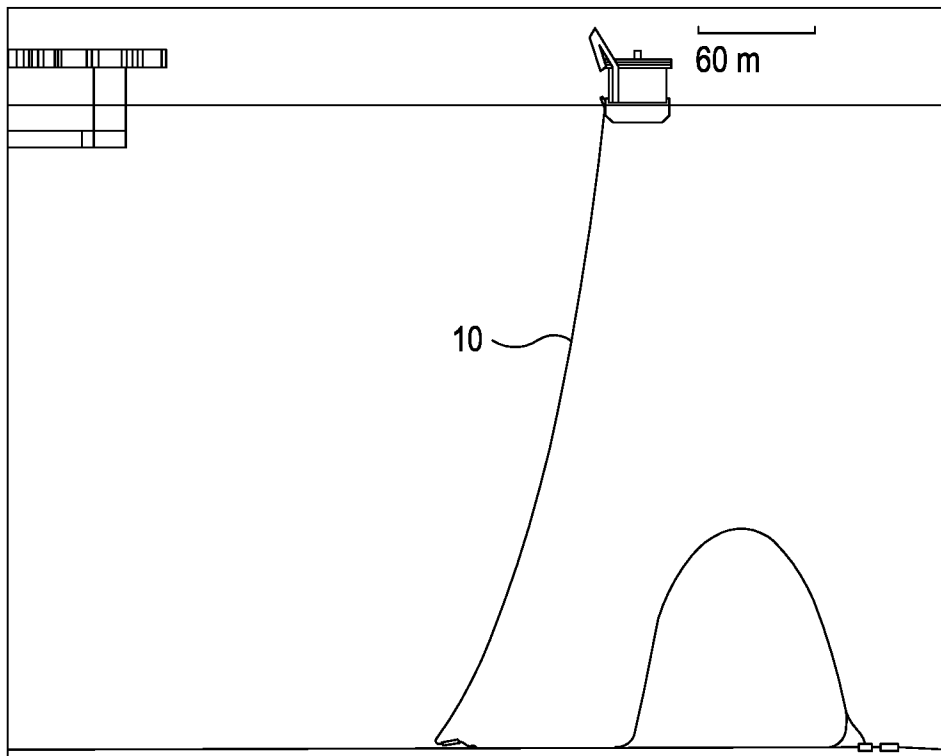
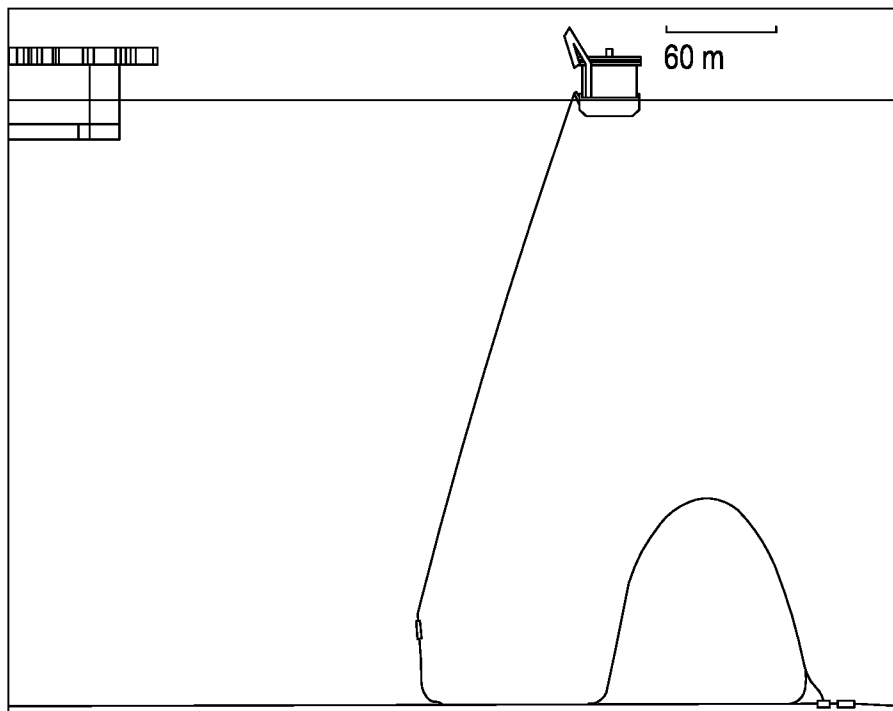
6/13

Figure 9Figure 10

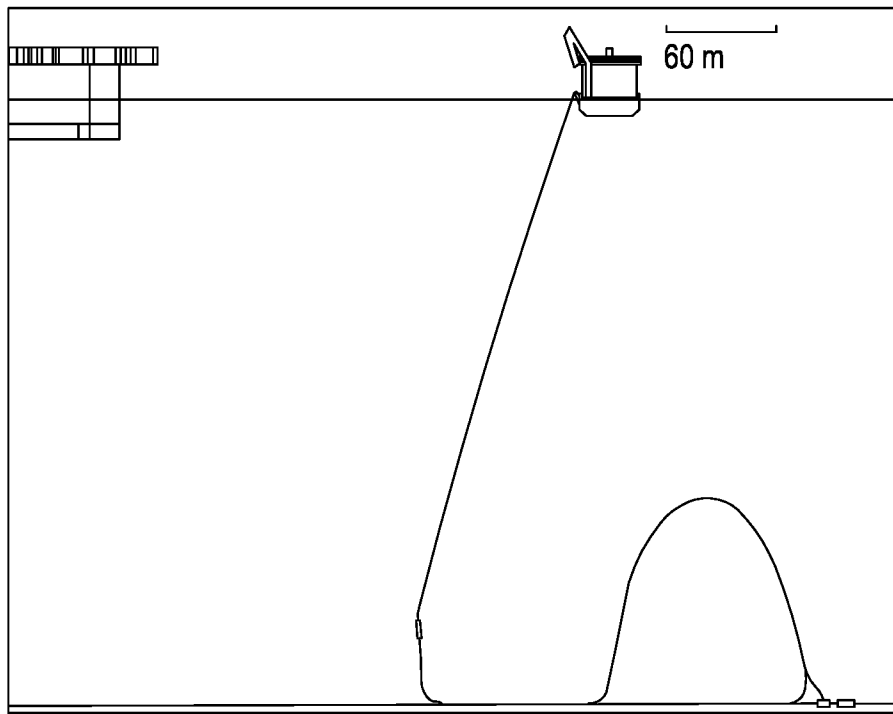
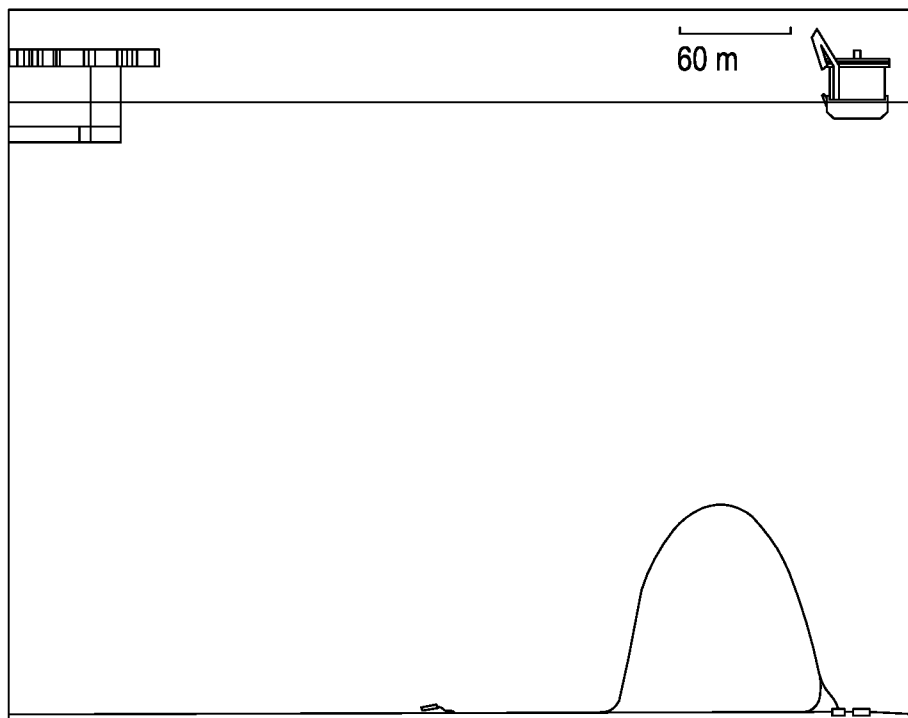
7/13

Figure 11

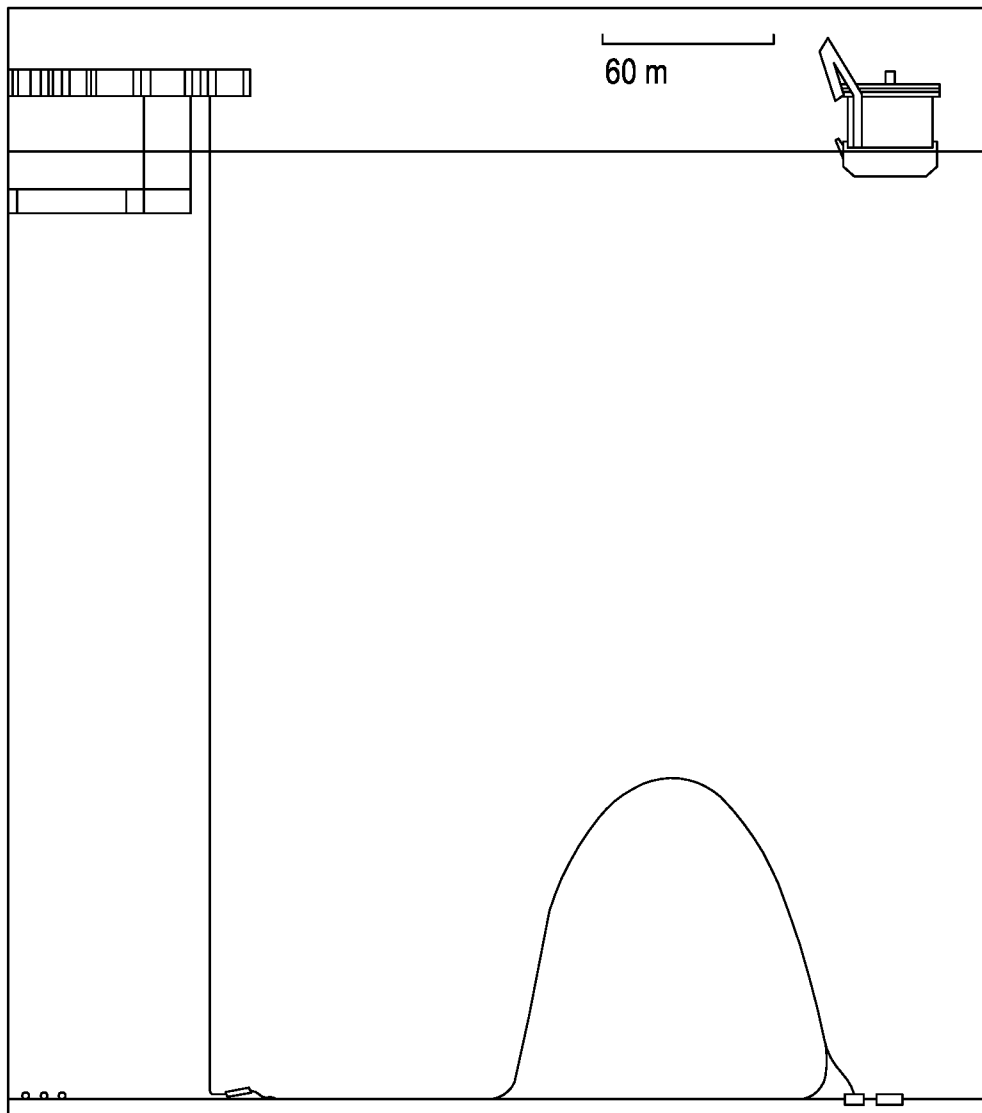
8/13

Figure 12Figure 13

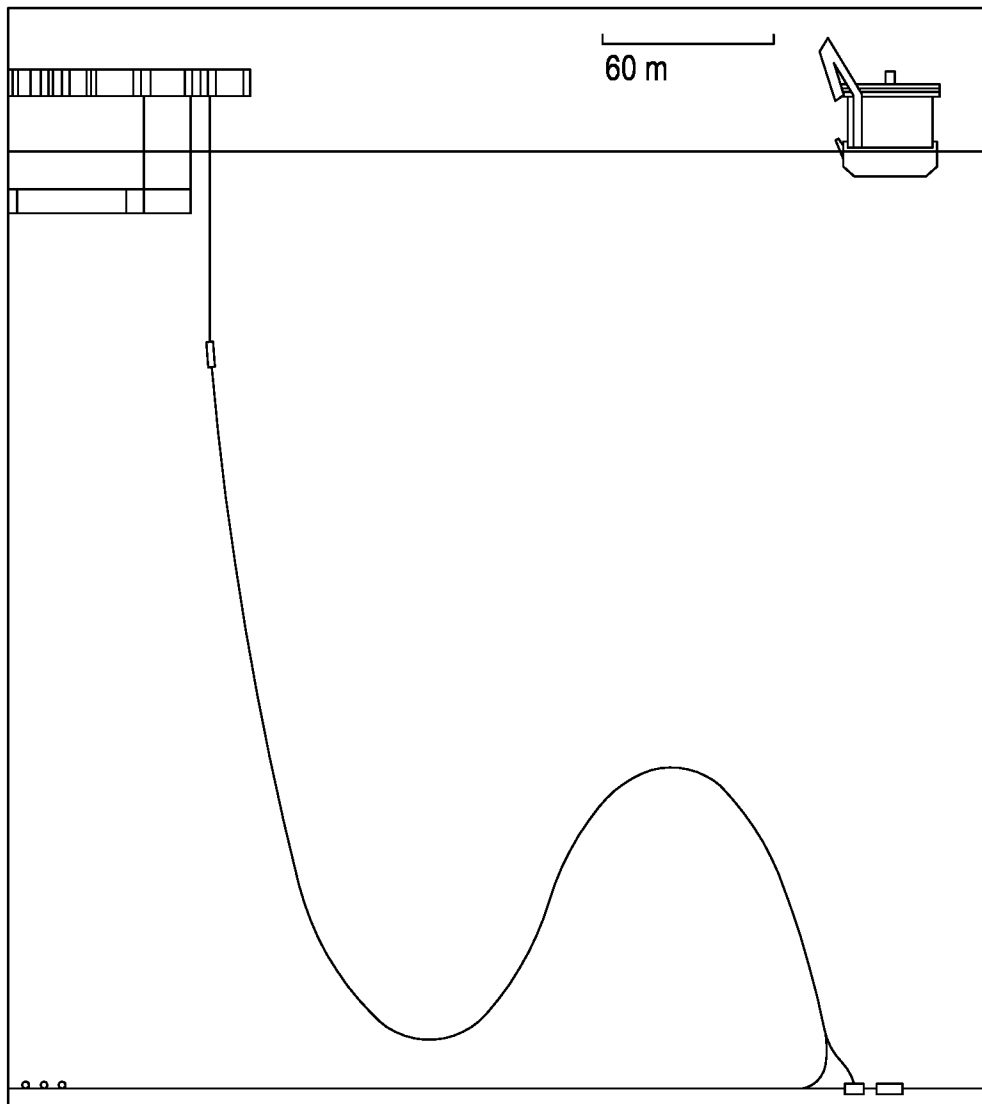
9/13

Figure 14Figure 15

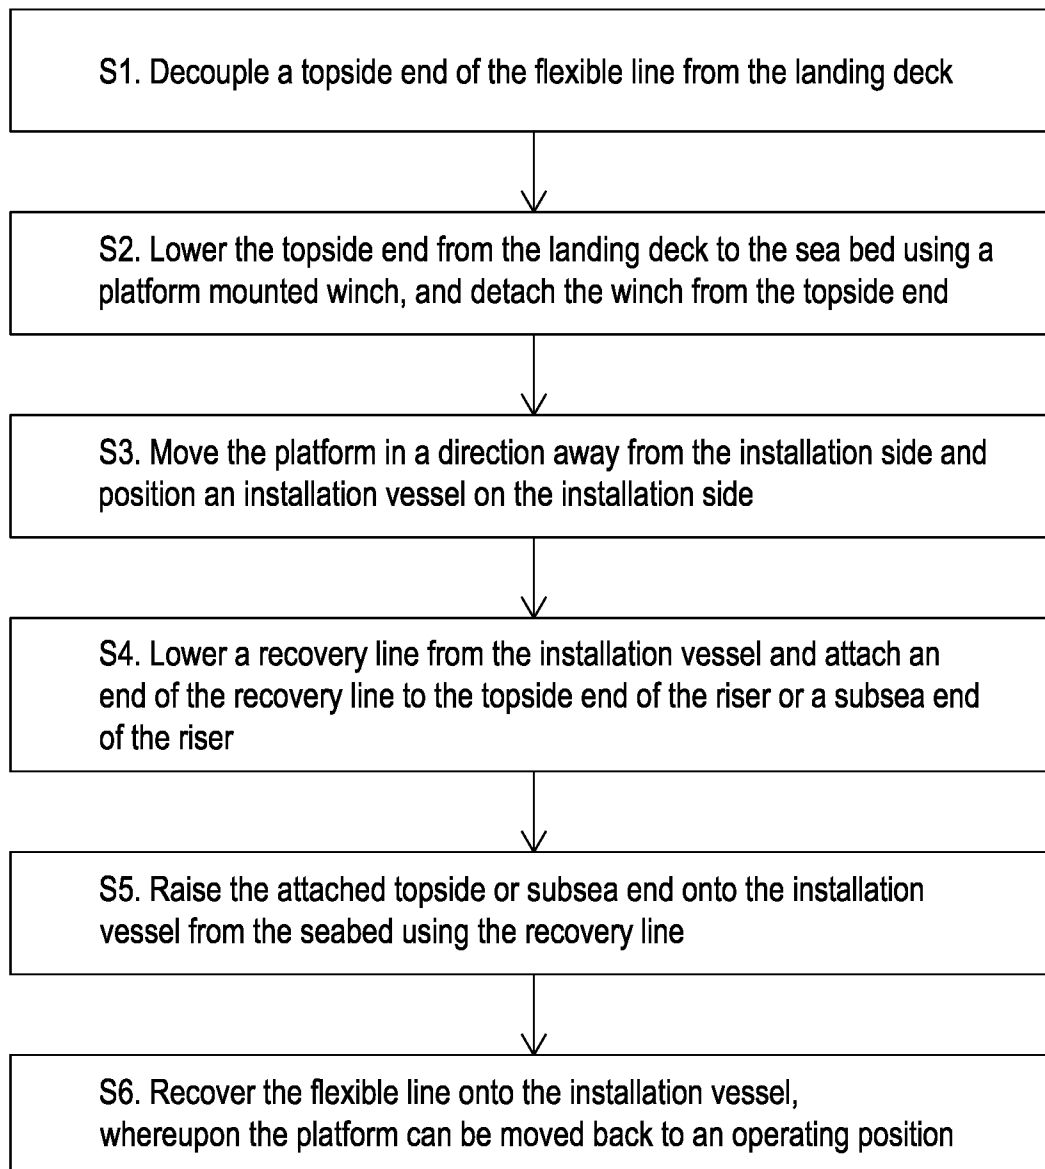
10/13

Figure 16

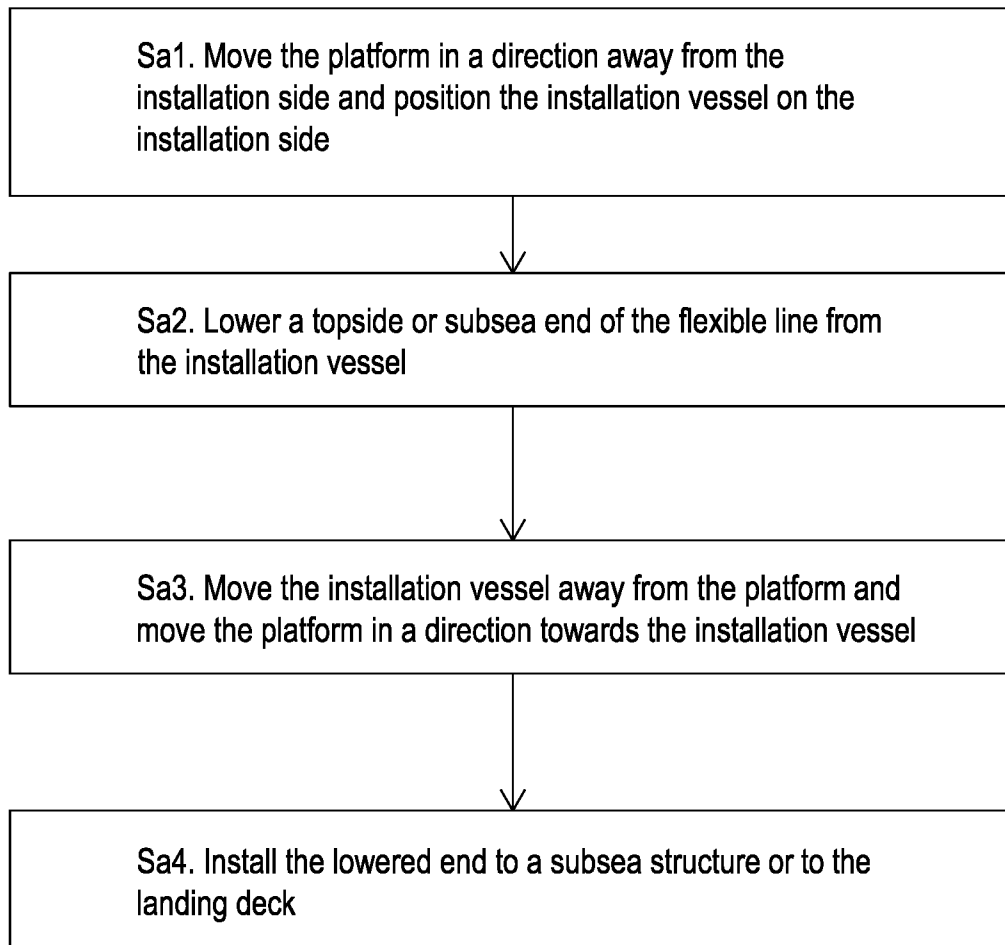
11/13

Figure 17

12/13

Figure 18

13/13

Figure 19