



(86) Date de dépôt PCT/PCT Filing Date: 2012/06/17
(87) Date publication PCT/PCT Publication Date: 2012/12/20
(85) Entrée phase nationale/National Entry: 2013/12/17
(86) N° demande PCT/PCT Application No.: US 2012/042850
(87) N° publication PCT/PCT Publication No.: 2012/174502
(30) Priorités/Priorities: 2011/06/17 (US61/498,528);
2012/06/01 (US61/654,744)

(51) Cl.Int./Int.Cl. *C08L 45/00* (2006.01),
C08F 32/02 (2006.01), *C08K 5/14* (2006.01),
C08K 5/16 (2006.01), *C08L 65/00* (2006.01)

(71) Demandeur/Applicant:
MATERIA, INC., US


(72) Inventeurs/Inventors:
WANG, LI-SHENG, US;
STEPHEN, ANTHONY R., US;
BOOTHE, PAUL W., US;
SCHULZE, TESSA, US;
GIARDELLO, MICHAEL A., US;
TRIMMER, MARK S., US;
...

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROMOTEURS D'ADHERENCE ET MODIFICATEURS DE FORMATION DE GEL POUR COMPOSITIONS
OBTENUES PAR METATHESE D'OLEFINES

(54) Title: ADHESION PROMOTERS AND GEL-MODIFIERS FOR OLEFIN METATHESIS COMPOSITIONS

FIG. 1 Effect of Cumyl Hydroperoxide (CHP) on Exotherm Time

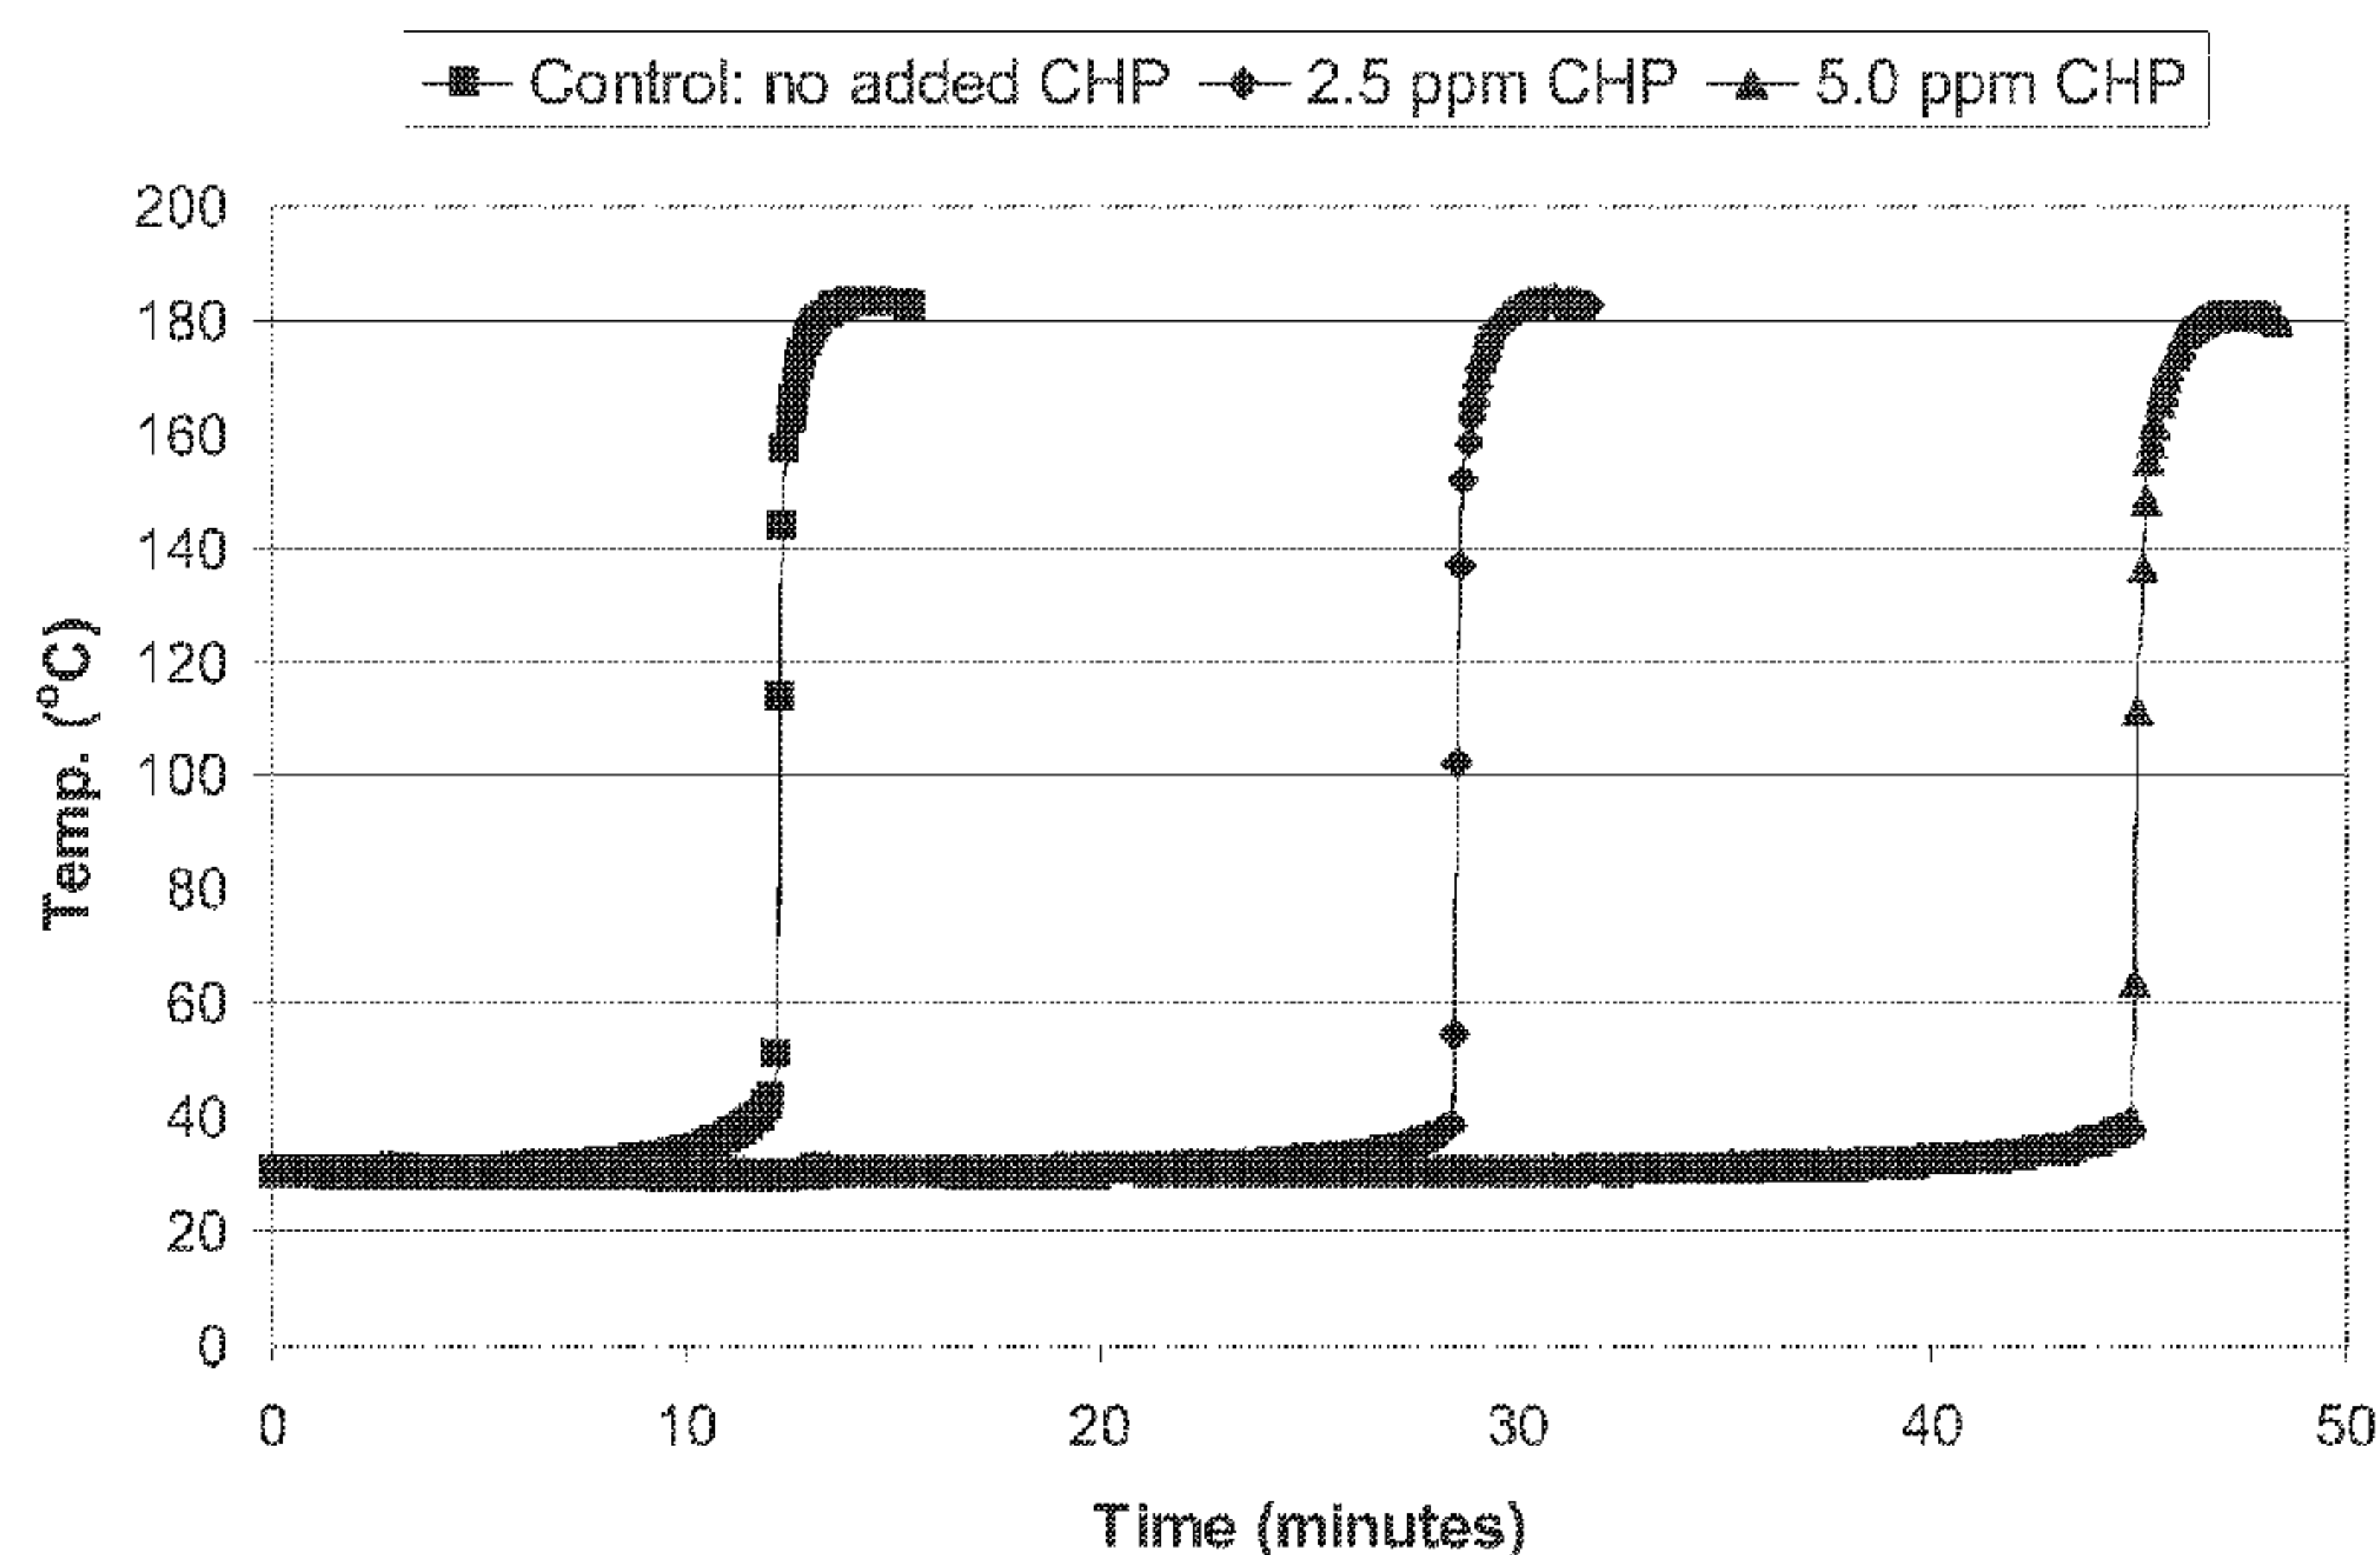

(57) Abrégé/Abstract:

This invention relates to compositions and methods for improving the adhesion of resin compositions to substrate materials, pre-treating substrate materials to improve the adhesion of resin compositions to the substrate materials, and/or controlling gel formation of resin compositions. More particularly, the invention relates to compositions and methods for improving the adhesion of ring opening metathesis polymerization (ROMP) compositions to substrate materials using adhesion promoters containing isocyanate groups in a resin composition. The invention also relates to methods for improving the adhesion of resin compositions to substrate materials by pre-treating substrate materials with adhesion promoters containing isocyanate groups. The invention further relates to a method of providing a gel-modified ROMP composition, in which a hydroperoxide is added to a ROMP polymerizable resin composition in order to control gel formation of the polymerizing resin. An improved ROMP composition is further disclosed, comprising a cyclic olefin, a ROMP metathesis catalyst, an adhesion promoter, and an added hydroperoxide gel modifier. The polymer products produced via ROMP reactions of the invention may be utilized for a wide range of materials and composite applications. The invention has utility in the fields of catalysis, organic synthesis, and polymer and materials chemistry and manufacture.

(72) Inventeurs(suite)/Inventors(continued): CRUCE, CHRISTOPHER J., US; MOTAMEDI, FARSHAD J., US;
EDGECOMBE, BRIAN, US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 December 2012 (20.12.2012)

WIPO | PCT

(10) International Publication Number
WO 2012/174502 A3

(51) International Patent Classification:

C08L 45/00 (2006.01) *C08K 5/14* (2006.01)
C08L 65/00 (2006.01) *C08F 32/02* (2006.01)
C08K 5/16 (2006.01)

(21) International Application Number:

PCT/US2012/042850

(22) International Filing Date:

17 June 2012 (17.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/498,528 17 June 2011 (17.06.2011) US
61/654,744 1 June 2012 (01.06.2012) US

(71) Applicant (for all designated States except US): **MATER-
IA, INC.** [US/US]; 60 North San Gabriel Boulevard, Pas-
adena, CA 91107 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WANG, Li-sheng**
[US/US]; 17 Rock Springs Way, Azusa, CA 91702 (US).
STEPHEN, Anthony, R. [US/US]; 1505 Fair Oaks, #B,
South Pasadena, CA 91030 (US). **BOOTHE, Paul, W.**
[US/US]; 387 14th Street, #3, Brooklyn, NY 11215 (US).
SCHULZE, Tessa [US/US]; 413 Wistaria Place, Altadena,
CA 91001 (US). **GIARDELLO, Michael, A.** [US/US];

894 South Oakland Avenue, Pasadena, CA 91106 (US).
TRIMMER, Mark, S. [US/US]; 845 Ridgeside Drive,
Monrovia, CA 91016 (US). **CRUCE, Christopher, J.**
[US/US]; 13100 Kirkham Way, #202, Poway, CA 92064
(US). **MOTAMEDI, Farshad, J.** [US/US]; 2341 Ohio
Drive, Claremont, CA 91711 (US). **EDGEcombe, Bri-
an** [US/US]; 5620 East Calle Canada, Anaheim, CA 92807
(US).

(74) Agents: **RAPHAEL, Aaron, M.** et al.; J.A. Lindeman &
Co., PLLC, 3190 Fairview Park Drive, Suite 480, Falls
Church, VA 22042 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: ADHESION PROMOTERS AND GEL-MODIFIERS FOR OLEFIN METATHESIS COMPOSITIONS

FIG. 1 Effect of Cumyl Hydroperoxide (CHP) on Exotherm Time

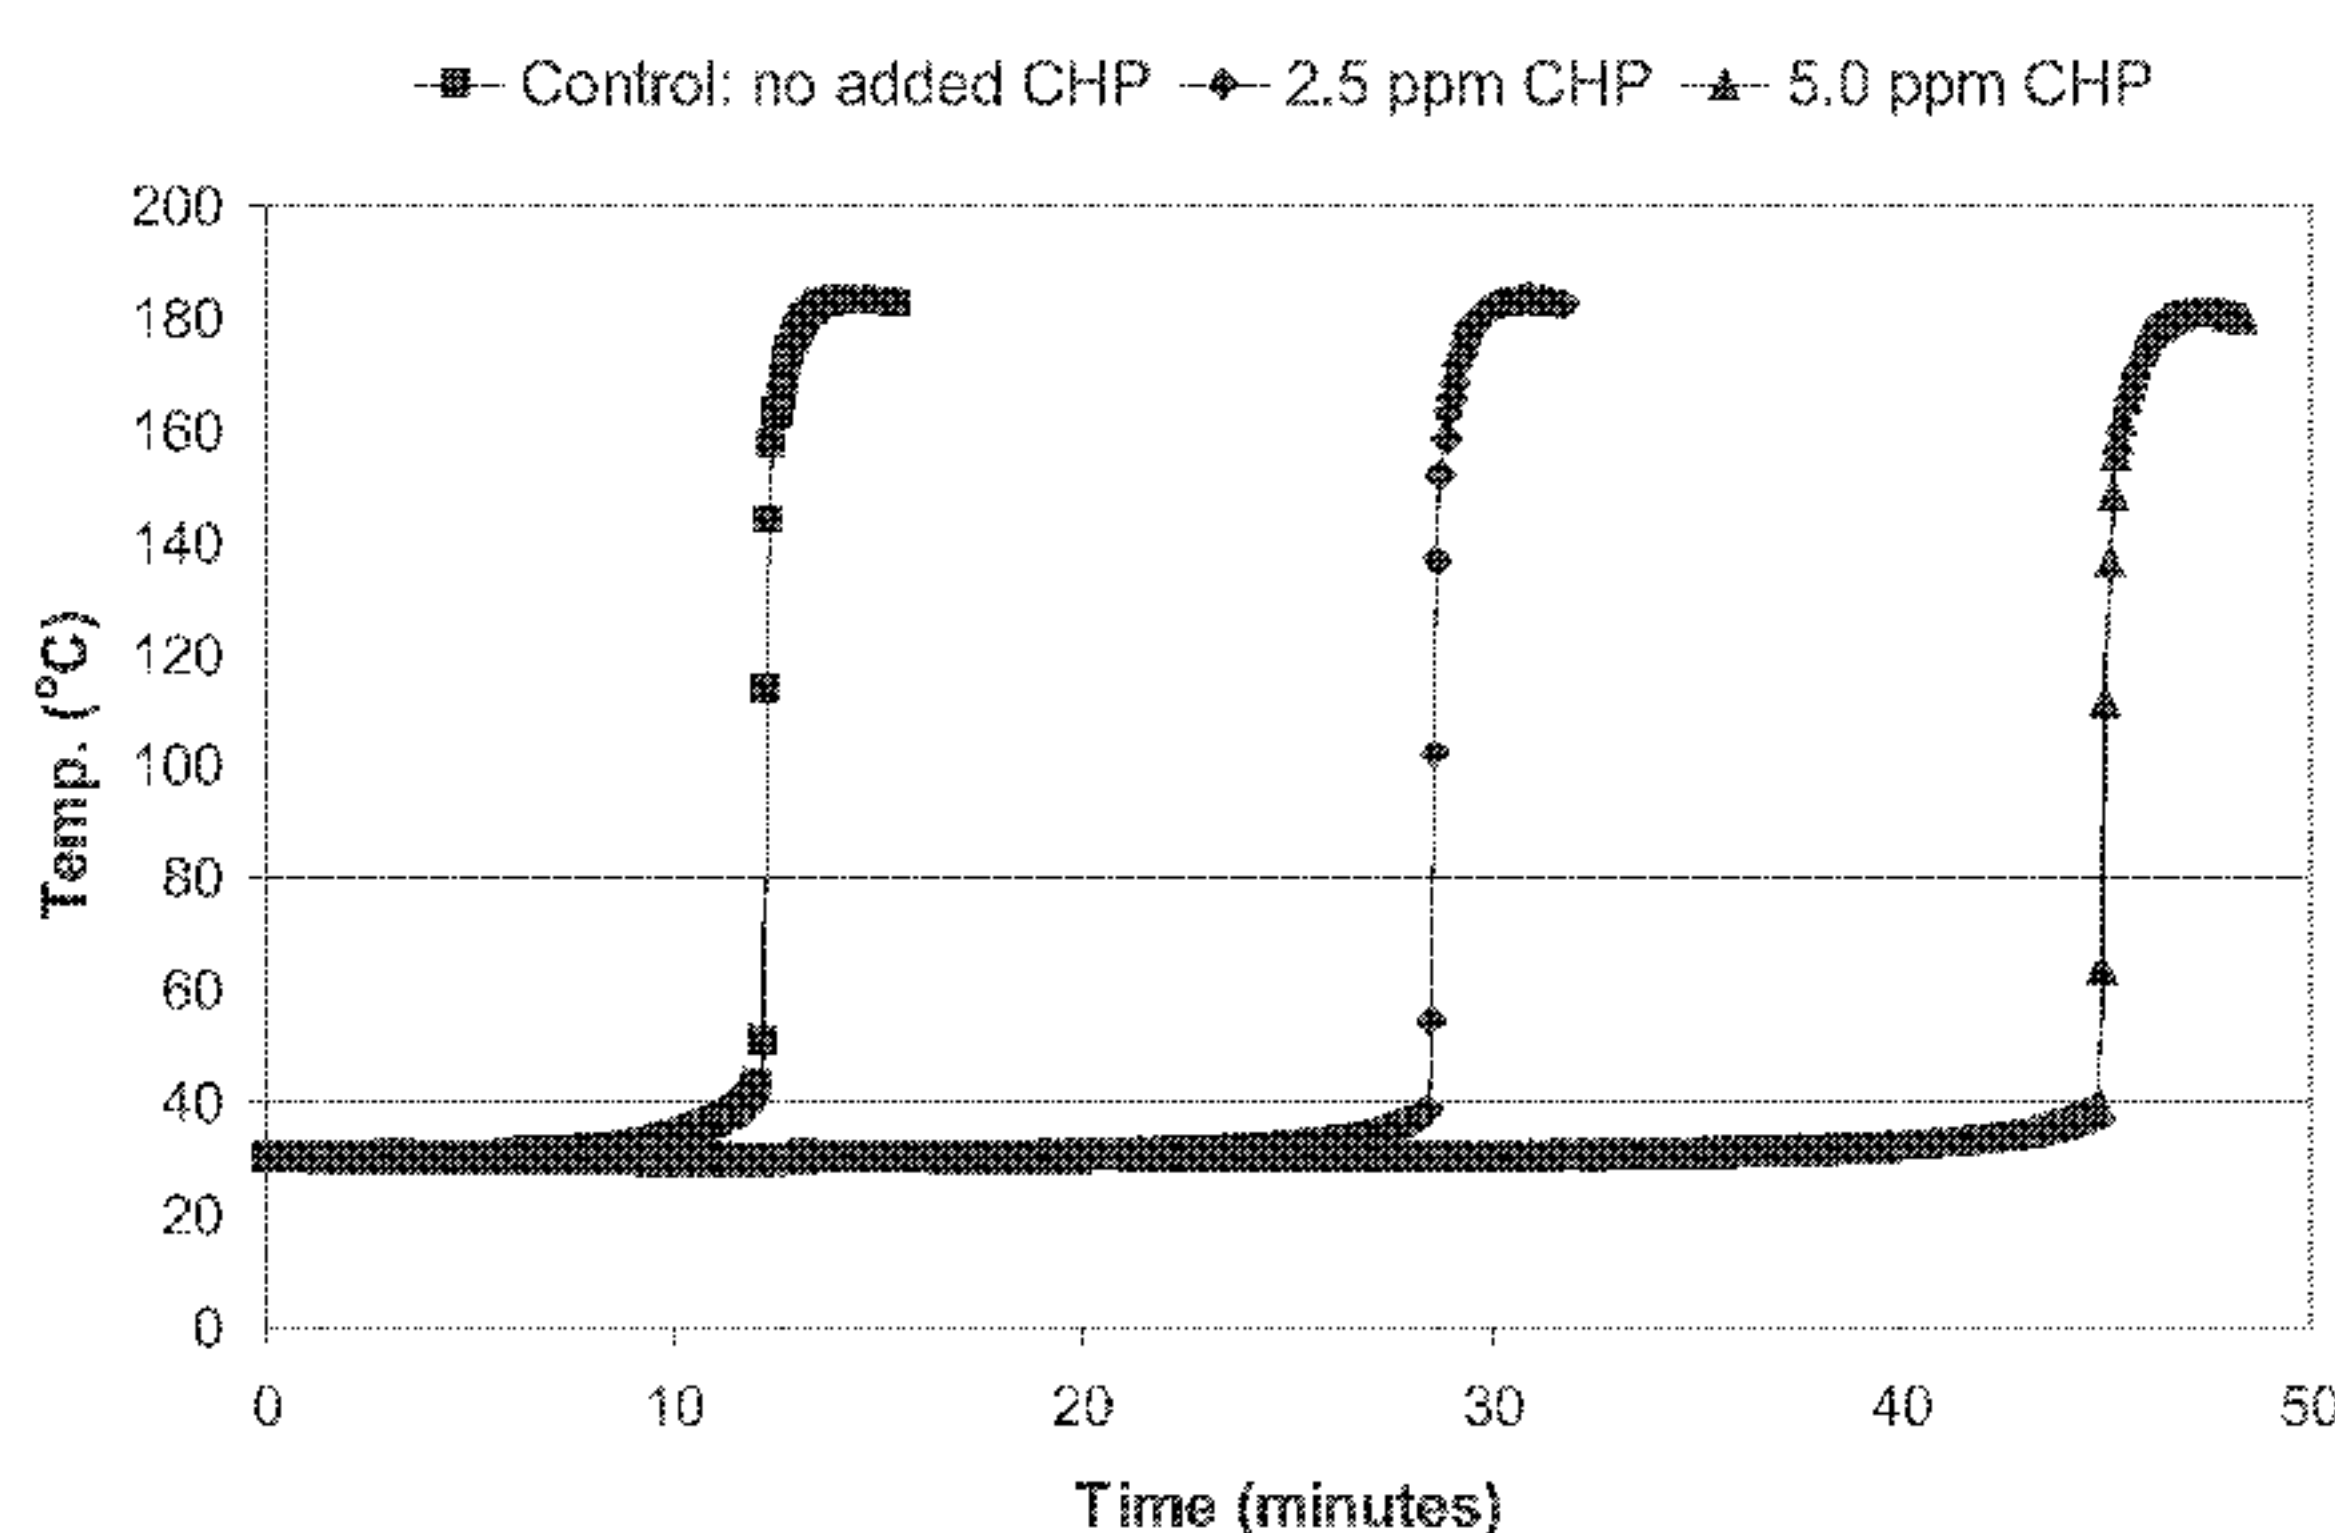

(57) Abstract: This invention relates to compositions and methods for improving the adhesion of resin compositions to substrate materials, pre-treating substrate materials to improve the adhesion of resin compositions to the substrate materials, and/or controlling gel formation of resin compositions. More particularly, the invention relates to compositions and methods for improving the adhesion of ring opening metathesis polymerization (ROMP) compositions to substrate materials using adhesion promoters containing isocyanate groups in a resin composition. The invention also relates to methods for improving the adhesion of resin compositions to substrate materials by pre-treating substrate materials with adhesion promoters containing isocyanate groups. The invention further relates to a method of providing a gel-modified ROMP composition, in which a hydroperoxide is added to a ROMP polymerizable resin composition in order to control gel formation of the polymerizing resin. An improved ROMP composition is further disclosed, comprising a cyclic olefin, a ROMP metathesis catalyst, an adhesion promoter, and an added hydroperoxide gel modifier. The polymer products produced via ROMP reactions of the invention may be utilized for a wide range of materials and composite applications. The invention has utility in the fields of catalysis, organic synthesis, and polymer and materials chemistry and manufacture.

WO 2012/174502 A3



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
7 March 2013

Published:

— *with international search report (Art. 21(3))*

Adhesion Promoters and Gel-Modifiers for Olefin Metathesis Compositions**RELATED APPLICATIONS**

This application claims the benefit of U.S. Provisional Patent Application No. 61/498,528, filed June 17, 2011, and U.S. Provisional Patent Application No. 61/654,744, filed June 1, 2012, and the contents of each are incorporated herein by reference.

TECHNICAL FIELD

[001] The present invention relates to methods and compositions for improving the adhesion of olefin metathesis compositions to substrate materials, and for catalyzing and controlling olefin metathesis reactions. More particularly, the invention relates to methods and compositions for improving the adhesion of ring opening metathesis polymerization (ROMP) compositions to substrate materials, and for catalyzing and controlling ROMP reactions and the manufacture of polymer articles via ROMP. Polymer products produced via the metathesis reactions of the invention may be utilized for a wide range of materials and composite applications. The invention has utility in the fields of catalysis, organic synthesis, and polymer and materials chemistry and manufacture.

BACKGROUND

[002] Polymer-matrix composites offer unique combinations of properties and are useful in a wide range of applications. Such composites may be fabricated utilizing either thermosetting or thermoplastic polymer matrix materials with a variety of particulate or fibrous fillers or reinforcements. It is generally advantageous to have strong adhesion between the polymer matrix material and the surfaces of the various particulate or fibrous substrates and there is considerable art related to substrate finishes and other treatments to optimize adhesion to polymer matrices. For example, in the production of long-fiber reinforced composites, improved adhesion between the polymer matrix and the fiber reinforcement leads to increased material performance. Good adhesion is particularly important where failures are likely to occur by delamination or by other adhesive failure modes.

[003] As described in, for example, U.S. Pat. Nos. 5,840,238, 6,310,121, and 6,525,125, the disclosures of each of which are incorporated herein by reference, polymers generated by olefin

metathesis processes are attractive as composite matrix materials. Of particularly beneficial use are the polymers generated by the ROMP of cyclic olefins. The low viscosity of cyclic olefin resin formulations and the ability to control ROMP kinetics (e.g., U.S. Pat. Nos. 4,708,969 and 5,939,504, the disclosures of both of which are incorporated herein by reference) facilitate composite processing and manufacture, and the corrosion resistance and high toughness of ROMP polymers leads to good composite durability. Additionally, certain properties of ROMP polymers, e.g., mechanical strength and stiffness, heat distortion temperature and solvent resistance, can be further enhanced by crosslinking induced via thermal treatment (e.g., U.S. Pat. No. 4,902,560, the disclosure of which is incorporated herein by reference) or chemically by addition of peroxides (e.g., U.S. Pat. No. 5,728,785, the disclosure of which is incorporated herein by reference).

[004] Commercially important ROMP resin formulations are generally based on readily available and inexpensive cyclic olefins such as dicyclopentadiene (DCPD), norbornenes, cyclooctadiene (COD), and various cycloalkenes. However, in contrast to traditional resin systems (e.g., epoxy, acrylate, urethane, and polyester resins) based on polar functional group chemistries, these nonpolar ROMP resins have poor intrinsic adhesion to the relatively polar surfaces of common carbon, glass, or mineral fillers and reinforcements. The addition of various silanes to such resin formulations for improvement of electrical and mechanical properties of ROMP polymers is described in U.S. Pat. Nos. 5,840,238, 6,001,909, and 7,339,006, the disclosures of each of which are incorporated herein by reference. Many widely used commercial silanes do not give optimal properties with ROMP polymers, however, and the greatest enhancements are only obtained when the silanes comprise groups with high metathesis activity (the relative reactivity of various metathesis active groups is described in J. Am. Chem. Soc., 2003, 125, 11360-11370).

[005] Polymers generated by ROMP are particularly well-suited for casting of molded parts and infusion of resin-glass and resin-wood composites, as non-limiting examples. According to one method process, the cyclic olefin monomer is blended with appropriate additives and fillers, and then mixed with an olefin metathesis catalyst. The initial resin mixture is typically a low-viscosity liquid, allowing for a wide range of resin infusion and casting techniques. As the polymerization proceeds, the resin first “gels” (increases in viscosity such that it no longer flows freely) and then “cures” as the resin reaches peak monomer conversion. The kinetics of the rate

of gel and cure of olefin metathesis polymerizations depend on monomer, catalyst, and temperature.

[006] When manufacturing articles using olefin metathesis polymerization, any pouring or infusion of catalyzed resin must be complete before the resin viscosity increases to the point that the resin no longer flows to fill the mold under the manufacturing conditions. Pouring or infusion of highly viscous (pre-gelled) or gelled resin may lead to inclusion of trapped air, or produce other defects or conditions that decrease the mechanical properties or visual appearance of the manufactured part. It would, therefore, be desirable to control the gel formation process, in particular to delay the onset of viscosity increase and the onset of the resin gel and cure states, through the use of a gel modification agent. Once the pour or infusion is complete, it would be further advantageous for the onset of polymerization to begin within a reasonable time after the mold is filled, and to proceed at a desirable rate of cure.

[007] The time during which the liquid monomer/catalyst mixture can be worked after the monomer and catalyst is mixed is called the “pot life” of the polymerization reaction mixture. The ability to control the “pot life” becomes even more important for the molding of large parts and to achieve defect-free infusion of porous materials. It would be particularly useful to be able to control the gel formation process, especially the onset of the gel state, of catalyzed ROMP reactions when such large parts are to be produced, or when defects arising from viscosity build-up are to be reduced or eliminated.

[008] Certain limited types of gel modification agents for olefin metathesis polymerizations have been disclosed. For example, U.S. Pat. No. 5,939,504 discloses the use of phosphines, pyridines, and other Lewis bases as gel modifiers. While useful, the effect of such gel modifiers in ROMP reactions can be difficult to control, particularly where relatively small changes in the onset of polymerization are desired. For example, while the addition of small amounts of tributylphosphine, a commercially attractive additive because of its low cost, may produce no noticeable change in pot life, adding a slightly greater amount may overshoot the desired effect by creating a significantly longer delay in the onset of polymerization than desired. From a practical perspective, the inability to finely control the gel formation process makes these gel modifiers less useful in the manufacture of articles of large or varying dimensions. Certain gel modifiers, such as phosphines, also oxidize quite quickly in resin thereby decreasing the ability of the modifier to extend the pot life. Resin compositions relying on phosphine compounds for

gel modification, therefore, cannot be stored for any appreciable length of time without reformulation with fresh gel modification additive.

[0009] Although acting as activators in some systems (e.g., U.S. Pat. Nos. 4,380,617 and 4,049,616), active oxygen containing compounds, including hydroperoxides, are generally considered to have a negative impact on metathesis catalyst performance. Olefins intended for use in metathesis reactions are often chemically treated (e.g., U.S. Pat. No. 5,378,783) or pre-treated with an adsorbent such as alumina or zeolites (e.g., U.S. Pat. Nos. 7,700,698; 4,943,397; and 4,584,425) to reduce the concentration of oxygen-containing impurities such as hydroperoxides. For example, U.S. Pat. No. 4,584,425 shows that hydroperoxide compounds have a significant negative impact on the ROMP of DCPD with a two part tungsten metathesis catalyst and U.S. Pat. No. 7,576,227 teaches that it is advantageous to remove hydroperoxides and other catalyst poisons to improve cross metathesis turnover number when using ruthenium alkylidene catalysts.

[0010] Hydroperoxide additives have been suggested as post-polymerization radical crosslinking initiators for ROMP polymers (e.g., U.S. Pat. Nos. 7,025,851 and 7,476,716). However, U.S. Pat. No. 5,728,785 specifically shows that ROMP of dicyclopentadiene fails in the presence of 1 wt. % (relative to dicyclopentadiene) of *tert*-butyl hydroperoxide, a level typically useful to effect post-polymerization cross-linking. Others teach that additives used in ROMP formulations should not contain hydroperoxide functionalities, so as to avoid adverse interactions with metathesis catalysts (e.g., U.S. Pat. Nos. 6,323,296 and 6,890,650, the disclosures of which are incorporated herein by reference).

[0011] Despite the advances achieved in the art, particularly in the properties of olefin metathesis polymers and their associated applications, a continuing need therefore exists for further improvement in a number of areas, including the adhesion of olefin metathesis compositions, in particular, ROMP compositions, to substrate materials, especially the wide variety of existing substrate materials that have been used with traditional resin systems, and the use of certain gel-modifiers to control the gel formation process of polymerizing ROMP compositions.

SUMMARY OF THE INVENTION

[0012] The invention is directed to addressing one or more of the aforementioned concerns and relates to the use of an adhesion promoter in a resin composition, such as a ROMP composition, or as a substrate material pre-treatment to provide useful improvements in the adhesion of a metathesis catalyzed composition to the substrate material, and to the use of a hydroperoxide gel modifier in a ROMP composition to provide useful improvements in the ability to control a ROMP reaction. More particularly, the inventors have discovered that addition of an adhesion promoter according to the invention to a resin composition, particularly a ROMP composition, allows for improvements in the adhesion of the polymerized (resin) composition to the substrate material, without adversely affecting the mechanical properties of the polymerized resin. Alternatively, a substrate material may be pre-treated with an adhesion promoter according to the invention in order to improve the adhesion of the polymerized (resin) composition to the substrate material, without adversely affecting the mechanical properties of the polymerized resin. In addition, the inventors have discovered that addition of a hydroperoxide to the reaction mixture of a ROMP composition allows for superior control over the resin gel and cure formation process, without adversely affecting the mechanical properties of the polymerized ROMP material. Furthermore, the gel modification effect of hydroperoxides is remarkably stable in resin compared to other gel modification agents known in the art.

[0013] In one embodiment, the invention provides a method for improving the adhesion of an olefin metathesis reaction, for example, a ROMP reaction, of a cyclic olefin catalyzed by an olefin metathesis catalyst (e.g., a cyclic olefin metathesis catalyst) to a substrate material, in which an adhesion promoter is combined with a cyclic olefin, an olefin metathesis catalyst (e.g., a cyclic olefin metathesis catalyst), and a substrate material thereby forming a resin composition with improved mechanical properties. In another embodiment, the invention provides a method for improving the adhesion of an olefin metathesis reaction, for example, a ROMP reaction, of a cyclic olefin catalyzed by an olefin metathesis catalyst (e.g., a cyclic olefin metathesis catalyst) to a substrate material, such as, for example, a glass substrate material, in which an adhesion promoter is combined with a cyclic olefin, an olefin metathesis catalyst (e.g., a cyclic olefin metathesis catalyst), and a substrate material, such as, for example, a glass substrate material, thereby forming a resin substrate composite material with improved properties. The invention is further directed to a ROMP composition of a cyclic olefin, which may be functionalized or

unfunctionalized and may be substituted or unsubstituted, a cyclic olefin metathesis catalyst, a hydroperoxide gel modifier, and an adhesion promoter. The inventive ROMP compositions are easy to handle and use and, when combined with a substrate material and cured, form resin substrate composite materials with improved properties. The adhesion promoter according to the invention, discussed *infra*, is generally comprised of a compound containing at least two isocyanate groups. An optionally metathesis active compound containing at least one heteroatom may be present in the ROMP composition. The resin composition is then subjected to conditions effective to promote an olefin metathesis reaction of the cyclic olefin in the presence of the olefin metathesis catalyst, the adhesion promoter, and substrate material. The resin composition may also be contacted with a substrate material, rather than, or in addition to the substrate material added to the resin composition, and then subjected to conditions effective to promote an olefin metathesis reaction of the cyclic olefin in the presence of the olefin metathesis catalyst, the adhesion promoter, and the optional added substrate material and/or in contact with the substrate material.

[0014] The invention is further directed to a resin composition, for example, a ROMP composition, of a cyclic olefin, which may be functionalized or unfunctionalized and may be substituted or unsubstituted, an olefin metathesis catalyst, an adhesion promoter, and a substrate material, such as, for example, a glass substrate material. In general, the adhesion promoter comprises a compound with at least two isocyanate groups. The adhesion promoter should be present in an amount effective to increase the adhesion of the resin composition to a substrate material when the resin composition is subjected to metathesis catalysis conditions in the presence of the substrate material. The adhesion promoter may also be a mixture of compounds, wherein each compound contains at least two isocyanates. In another embodiment, the adhesion promoter contains at least two isocyanates and contains an olefin metathesis active group. In another embodiment, the adhesion promoter contains at least two isocyanates and does not contain an olefin metathesis active group. In a further embodiment, the adhesion promoter may also contain an optional compound comprising a heteroatom-containing functional group and a metathesis active olefin.

[0015] The addition of the adhesion promoter of the invention provides beneficial improvements in the adhesion of an olefin metathesis (e.g., ROMP) composition to the substrate

material, such as, for example, a glass substrate material, as compared to a resin composition that is the same with the exception that the adhesion promoter of the invention is not included.

[0016] In another embodiment, the invention provides a method for modifying the onset of a ROMP reaction of a cyclic olefin catalyzed by a cyclic olefin metathesis catalyst, in which a hydroperoxide gel modifier is combined with a cyclic olefin and a cyclic olefin metathesis catalyst, thereby forming a ROMP composition. The ROMP composition is then subjected to conditions effective to promote a ROMP reaction of the cyclic olefin in the presence of the cyclic olefin metathesis catalyst and the added hydroperoxide gel modifier.

[0017] The invention is further directed to a ROMP composition of a cyclic olefin, which may be functionalized or unfunctionalized and may be substituted or unsubstituted, a cyclic olefin metathesis catalyst, and a hydroperoxide gel modifier. The invention is also directed to a composition comprising a cyclic olefin, which may be functionalized or unfunctionalized and may be substituted or unsubstituted, a cyclic olefin metathesis catalyst, a hydroperoxide gel modifier, and an adhesion promoter of the invention.

[0018] In general, the hydroperoxide gel modifier is added in an amount effective to increase the gel time of a ROMP reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the presence of the added hydroperoxide compared to a ROMP reaction of the same cyclic olefin catalyzed by the same cyclic olefin metathesis catalyst in the absence of the added hydroperoxide.

[0019] While the invention is of particular benefit for ring-opening metathesis polymerization (ROMP) reactions, it may also find use in combination with other metathesis reactions, such as a ring-opening cross metathesis reaction, a cross metathesis reaction, a self-metathesis reaction, an ethenolysis reaction, an alkenolysis reaction, or an acyclic diene metathesis polymerization reaction, as well as combinations of such metathesis reactions.

[0020] These and other aspects of the invention will be apparent to the skilled artisan in light of the following detailed description and examples.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] FIG. 1 depicts the effect of cumyl hydroperoxide (CHP) on exotherm time as described in the Examples.

[0022] FIG. 2 depicts the viscosity profile for ROMP of CHP-modified DCPD resin as described in the Examples.

DETAILED DESCRIPTION OF THE DISCLOSURE

Terminology and Definitions

[0023] Unless otherwise indicated, the invention is not limited to specific reactants, substituents, catalysts, reaction conditions, or the like, as such may vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not to be interpreted as being limiting.

[0024] As used in the specification and the appended claims, the singular forms “a,” “an,” and “the” include plural referents unless the context clearly dictates otherwise. Thus, for example, reference to “an α -olefin” includes a single α -olefin as well as a combination or mixture of two or more α -olefins, reference to “a substituent” encompasses a single substituent as well as two or more substituents, and the like.

[0025] As used in the specification and the appended claims, the terms “for example,” “for instance,” “such as,” or “including” are meant to introduce examples that further clarify more general subject matter. Unless otherwise specified, these examples are provided only as an aid for understanding the invention, and are not meant to be limiting in any fashion.

[0026] In this specification and in the claims that follow, reference will be made to a number of terms, which shall be defined to have the following meanings:

[0027] The term “alkyl” as used herein refers to a linear, branched, or cyclic saturated hydrocarbon group typically although not necessarily containing 1 to about 24 carbon atoms, preferably 1 to about 12 carbon atoms, such as methyl, ethyl, *n*-propyl, isopropyl, *n*-butyl, isobutyl, *t*-butyl, octyl, decyl, and the like, as well as cycloalkyl groups such as cyclopentyl, cyclohexyl, and the like. Generally, although again not necessarily, alkyl groups herein contain 1 to about 12 carbon atoms. The term “lower alkyl” refers to an alkyl group of 1 to 6 carbon atoms, and the specific term “cycloalkyl” refers to a cyclic alkyl group, typically having 4 to 8, preferably 5 to 7, carbon atoms. The term “substituted alkyl” refers to alkyl substituted with one or more substituent groups, and the terms “heteroatom-containing alkyl” and “heteroalkyl” refer to alkyl in which at least one carbon atom is replaced with a heteroatom. If not otherwise indicated, the terms “alkyl” and “lower alkyl” include linear, branched, cyclic, unsubstituted, substituted, and/or heteroatom-containing alkyl and lower alkyl, respectively.

[0028] The term “alkylene” as used herein refers to a difunctional linear, branched, or cyclic alkyl group, where “alkyl” is as defined above.

[0029] The term “alkenyl” as used herein refers to a linear, branched, or cyclic hydrocarbon group of 2 to about 24 carbon atoms containing at least one double bond, such as ethenyl, *n*-propenyl, isopropenyl, *n*-butenyl, isobutenyl, octenyl, decenyl, tetradecenyl, hexadecenyl, eicosenyl, tetracosenyl, and the like. Preferred alkenyl groups herein contain 2 to about 12 carbon atoms. The term “lower alkenyl” refers to an alkenyl group of 2 to 6 carbon atoms, and the specific term “cycloalkenyl” refers to a cyclic alkenyl group, preferably having 5 to 8 carbon atoms. The term “substituted alkenyl” refers to alkenyl substituted with one or more substituent groups, and the terms “heteroatom-containing alkenyl” and “heteroalkenyl” refer to alkenyl in which at least one carbon atom is replaced with a heteroatom. If not otherwise indicated, the terms “alkenyl” and “lower alkenyl” include linear, branched, cyclic, unsubstituted, substituted, and/or heteroatom-containing alkenyl and lower alkenyl, respectively.

[0030] The term “alkenylene” as used herein refers to a difunctional linear, branched, or cyclic alkenyl group, where “alkenyl” is as defined above.

[0031] The term “alkynyl” as used herein refers to a linear or branched hydrocarbon group of 2 to about 24 carbon atoms containing at least one triple bond, such as ethynyl, *n*-propynyl, and the like. Preferred alkynyl groups herein contain 2 to about 12 carbon atoms. The term “lower alkynyl” refers to an alkynyl group of 2 to 6 carbon atoms. The term “substituted alkynyl” refers to alkynyl substituted with one or more substituent groups, and the terms “heteroatom-containing alkynyl” and “heteroalkynyl” refer to alkynyl in which at least one carbon atom is replaced with a heteroatom. If not otherwise indicated, the terms “alkynyl” and “lower alkynyl” include linear, branched, unsubstituted, substituted, and/or heteroatom-containing alkynyl and lower alkynyl, respectively.

[0032] The term “alkoxy” as used herein refers to an alkyl group bound through a single, terminal ether linkage; that is, an “alkoxy” group may be represented as -O-alkyl where alkyl is as defined above. A “lower alkoxy” group refers to an alkoxy group containing 1 to 6 carbon atoms. Analogously, “alkenyloxy” and “lower alkenyloxy” respectively refer to an alkenyl and lower alkenyl group bound through a single, terminal ether linkage, and “alkynyloxy” and “lower alkynyloxy” respectively refer to an alkynyl and lower alkynyl group bound through a single, terminal ether linkage.

[0033] The term “aryl” as used herein, and unless otherwise specified, refers to an aromatic substituent containing a single aromatic ring or multiple aromatic rings that are fused together, directly linked, or indirectly linked (such that the different aromatic rings are bound to a common group such as a methylene or ethylene moiety). Preferred aryl groups contain 5 to 24 carbon atoms, and particularly preferred aryl groups contain 5 to 14 carbon atoms. Exemplary aryl groups contain one aromatic ring or two fused or linked aromatic rings, e.g., phenyl, naphthyl, biphenyl, diphenylether, diphenylamine, benzophenone, and the like. “Substituted aryl” refers to an aryl moiety substituted with one or more substituent groups, and the terms “heteroatom-containing aryl” and “heteroaryl” refer to aryl substituents in which at least one carbon atom is replaced with a heteroatom, as will be described in further detail *infra*.

[0034] The term “aryloxy” as used herein refers to an aryl group bound through a single, terminal ether linkage, wherein “aryl” is as defined above. An “aryloxy” group may be represented as -O-aryl where aryl is as defined above. Preferred aryloxy groups contain 5 to 24 carbon atoms, and particularly preferred aryloxy groups contain 5 to 14 carbon atoms. Examples of aryloxy groups include, without limitation, phenoxy, o-halo-phenoxy, m-halo-phenoxy, p-halo-phenoxy, o-methoxy-phenoxy, m-methoxy-phenoxy, p-methoxy-phenoxy, 2,4-dimethoxy-phenoxy, 3,4,5-trimethoxy-phenoxy, and the like.

[0035] The term “alkaryl” refers to an aryl group with an alkyl substituent, and the term “aralkyl” refers to an alkyl group with an aryl substituent, wherein “aryl” and “alkyl” are as defined above. Preferred alkaryl and aralkyl groups contain 6 to 24 carbon atoms, and particularly preferred alkaryl and aralkyl groups contain 6 to 16 carbon atoms. Alkaryl groups include, for example, p-methylphenyl, 2,4-dimethylphenyl, p-cyclohexylphenyl, 2,7-dimethylnaphthyl, 7-cyclooctylnaphthyl, 3-ethyl-cyclopenta-1,4-diene, and the like. Examples of aralkyl groups include, without limitation, benzyl, 2-phenyl-ethyl, 3-phenyl-propyl, 4-phenyl-butyl, 5-phenyl-pentyl, 4-phenylcyclohexyl, 4-benzylcyclohexyl, 4-phenylcyclohexylmethyl, 4-benzylcyclohexylmethyl, and the like. The terms “alkaryloxy” and “aralkyloxy” refer to substituents of the formula -OR wherein R is alkaryl or aralkyl, respectively, as just defined.

[0036] The term “acyl” refers to substituents having the formula -(CO)-alkyl, -(CO)-aryl, or -(CO)-aralkyl, and the term “acyloxy” refers to substituents having the formula -O(CO)-alkyl, -O(CO)-aryl, or -O(CO)-aralkyl, wherein “alkyl,” “aryl,” and “aralkyl” are as defined above.

Additionally, the term “acyl” also refers to substituents having the formula $-(CO)-alkaryl$, $-(CO)-alkenyl$, or $-(CO)-alkynyl$ and the term “acyloxy” also refers to substituents having the formula $-O(CO)-alkaryl$, $-O(CO)-alkenyl$, or $-O(CO)-alkynyl$ wherein “alkaryl”, “alkenyl,” and “alkynyl” are as defined above.

[0037] The terms “cyclic” and “ring” refer to alicyclic or aromatic groups that may or may not be substituted and/or heteroatom containing, and that may be monocyclic, bicyclic, or polycyclic. The term “alicyclic” is used in the conventional sense to refer to an aliphatic cyclic moiety, as opposed to an aromatic cyclic moiety, and may be monocyclic, bicyclic, or polycyclic.

[0038] The terms “halo” and “halogen” are used in the conventional sense to refer to a chloro, bromo, fluoro, or iodo substituent.

[0039] “Hydrocarbyl” refers to univalent hydrocarbyl radicals containing 1 to about 30 carbon atoms, preferably 1 to about 24 carbon atoms, most preferably 1 to about 12 carbon atoms, including linear, branched, cyclic, saturated, and unsaturated species, such as alkyl groups, alkenyl groups, aryl groups, and the like. The term “lower hydrocarbyl” intends a hydrocarbyl group of 1 to 6 carbon atoms, preferably 1 to 4 carbon atoms, and the term “hydrocarbylene” refers to a divalent hydrocarbyl moiety containing 1 to about 30 carbon atoms, preferably 1 to about 24 carbon atoms, most preferably 1 to about 12 carbon atoms, including linear, branched, cyclic, saturated, and unsaturated species. The term “lower hydrocarbylene” refers to a hydrocarbylene group of 1 to 6 carbon atoms. “Substituted hydrocarbyl” refers to hydrocarbyl substituted with one or more substituent groups, and the terms “heteroatom-containing hydrocarbyl” and “heterohydrocarbyl” refer to hydrocarbyl in which at least one carbon atom is replaced with a heteroatom. Similarly, “substituted hydrocarbylene” refers to hydrocarbylene substituted with one or more substituent groups, and the terms “heteroatom-containing hydrocarbylene” and “heterohydrocarbylene” refer to hydrocarbylene in which at least one carbon atom is replaced with a heteroatom. Unless otherwise indicated, the term “hydrocarbyl” and “hydrocarbylene” are to be interpreted as including substituted and/or heteroatom-containing hydrocarbyl and hydrocarbylene moieties, respectively.

[0040] The term “heteroatom-containing” as in a “heteroatom-containing hydrocarbyl group” refers to a hydrocarbon molecule or a hydrocarbyl molecular fragment in which one or more carbon atoms is replaced with an atom other than carbon, e.g., nitrogen, oxygen, sulfur,

phosphorus, or silicon, typically nitrogen, oxygen, or sulfur. Similarly, the term “heteroalkyl” refers to an alkyl substituent that is heteroatom-containing, the term “heterocyclic” refers to a cyclic substituent that is heteroatom-containing, the terms “heteroaryl” and “heteroaromatic” respectively refer to “aryl” and “aromatic” substituents that are heteroatom-containing, and the like. It should be noted that a “heterocyclic” group or compound may or may not be aromatic, and further that “heterocycles” may be monocyclic, bicyclic, or polycyclic as described above with respect to the term “aryl.” Examples of heteroalkyl groups include alkoxyaryl, alkylsulfanyl-substituted alkyl, N-alkylated amino alkyl, and the like. Examples of heteroaryl substituents include pyrrolyl, pyrrolidinyl, pyridinyl, quinolinyl, indolyl, pyrimidinyl, imidazolyl, 1,2,4-triazolyl, tetrazolyl, etc., and examples of heteroatom-containing alicyclic groups are pyrrolidino, morpholino, piperazino, piperidino, etc.

[0041] By “substituted” as in “substituted hydrocarbyl,” “substituted alkyl,” “substituted aryl,” and the like, as alluded to in some of the aforementioned definitions, is meant that in the hydrocarbyl, alkyl, aryl, or other moiety, at least one hydrogen atom bound to a carbon (or other) atom is replaced with one or more non-hydrogen substituents. Examples of such substituents include, without limitation: functional groups referred to herein as “Fn,” such as halo, hydroxyl, sulfhydryl, C₁-C₂₄ alkoxy, C₂-C₂₄ alkenyloxy, C₂-C₂₄ alkynyloxy, C₅-C₂₄ aryloxy, C₆-C₂₄ aralkyloxy, C₆-C₂₄ alkaryloxy, acyl (including C₂-C₂₄ alkylcarbonyl (-CO-alkyl) and C₆-C₂₄ arylcarbonyl (-CO-aryl)), acyloxy (-O-acyl, including C₂-C₂₄ alkylcarbonyloxy (-O-CO-alkyl) and C₆-C₂₄ arylcarbonyloxy (-O-CO-aryl)), C₂-C₂₄ alkoxycarbonyl (-(CO)-O-alkyl), C₆-C₂₄ aryloxycarbonyl (-(CO)-O-aryl), halocarbonyl (-CO)-X where X is halo), C₂-C₂₄ alkylcarbonato (-O-(CO)-O-alkyl), C₆-C₂₄ arylcarbonato (-O-(CO)-O-aryl), carboxy (-COOH), carboxylato (-COO⁻), carbamoyl (-(CO)-NH₂), mono-(C₁-C₂₄ alkyl)-substituted carbamoyl (-(CO)-NH(C₁-C₂₄ alkyl)), di-(C₁-C₂₄ alkyl)-substituted carbamoyl (-(CO)-N(C₁-C₂₄ alkyl)₂), mono-(C₁-C₂₄ haloalkyl)-substituted carbamoyl (-(CO)-NH(C₁-C₂₄ haloalkyl)), di-(C₁-C₂₄ haloalkyl)-substituted carbamoyl (-(CO)-N(C₁-C₂₄ haloalkyl)₂), mono-(C₅-C₂₄ aryl)-substituted carbamoyl (-(CO)-NH-(C₅-C₂₄ aryl)), di-(C₅-C₂₄ aryl)-substituted carbamoyl (-(CO)-N(C₅-C₂₄ aryl)₂), di-N-(C₁-C₂₄ alkyl),N-(C₅-C₂₄ aryl)-substituted carbamoyl (-(CO)-N(C₁-C₂₄ alkyl)(C₅-C₂₄ aryl)), thiocarbamoyl (-(CS)-NH₂), mono-(C₁-C₂₄ alkyl)-substituted thiocarbamoyl (-(CS)-NH(C₁-C₂₄ alkyl)), di-(C₁-C₂₄ alkyl)-substituted thiocarbamoyl (-(CS)-N(C₁-C₂₄ alkyl)₂), mono-(C₅-C₂₄ aryl)-substituted thiocarbamoyl (-(CS)-NH-(C₅-C₂₄ aryl)), di-(C₅-C₂₄ aryl)-substituted

thiocarbamoyl $-(\text{CS})-\text{N}(\text{C}_5\text{-C}_{24} \text{ aryl})_2$, di- $\text{N}-(\text{C}_1\text{-C}_{24} \text{ alkyl})$, $\text{N}-(\text{C}_5\text{-C}_{24} \text{ aryl})$ -substituted thiocarbamoyl $-(\text{CS})-\text{N}(\text{C}_1\text{-C}_{24} \text{ alkyl})(\text{C}_5\text{-C}_{24} \text{ aryl})$, carbamido $(-\text{NH}(\text{CO})-\text{NH}_2)$, cyano $(-\text{C}\equiv\text{N})$, cyanato $(-\text{O}-\text{C}\equiv\text{N})$, thiocyanato $(-\text{S}-\text{C}\equiv\text{N})$, formyl $(-\text{CO}-\text{H})$, thioformyl $(-\text{CS}-\text{H})$, amino $(-\text{NH}_2)$, mono- $(\text{C}_1\text{-C}_{24} \text{ alkyl})$ -substituted amino $(-\text{NH}(\text{C}_1\text{-C}_{24} \text{ alkyl}))$, di- $(\text{C}_1\text{-C}_{24} \text{ alkyl})$ -substituted amino $(-\text{N}(\text{C}_1\text{-C}_{24} \text{ alkyl})_2)$, mono- $(\text{C}_5\text{-C}_{24} \text{ aryl})$ -substituted amino $(-\text{NH}(\text{C}_5\text{-C}_{24} \text{ aryl}))$, di- $(\text{C}_5\text{-C}_{24} \text{ aryl})$ -substituted amino $(-\text{N}(\text{C}_5\text{-C}_{24} \text{ aryl})_2)$, $\text{C}_2\text{-C}_{24}$ alkylamido $(-\text{NH}(\text{CO})\text{-alkyl})$, $\text{C}_6\text{-C}_{24}$ arylamido $(-\text{NH}(\text{CO})\text{-aryl})$, imino $(-\text{CR}=\text{NH}$ where $\text{R} =$ hydrogen, $\text{C}_1\text{-C}_{24}$ alkyl, $\text{C}_5\text{-C}_{24}$ aryl, $\text{C}_6\text{-C}_{24}$ alkaryl, $\text{C}_6\text{-C}_{24}$ aralkyl, etc.), $\text{C}_2\text{-C}_{20}$ alkylimino $(-\text{CR}=\text{N}(\text{alkyl}))$, where $\text{R} =$ hydrogen, $\text{C}_1\text{-C}_{24}$ alkyl, $\text{C}_5\text{-C}_{24}$ aryl, $\text{C}_6\text{-C}_{24}$ alkaryl, $\text{C}_6\text{-C}_{24}$ aralkyl, etc.), arylimino $(-\text{CR}=\text{N}(\text{aryl}))$, where $\text{R} =$ hydrogen, $\text{C}_1\text{-C}_{20}$ alkyl, $\text{C}_5\text{-C}_{24}$ aryl, $\text{C}_6\text{-C}_{24}$ alkaryl, $\text{C}_6\text{-C}_{24}$ aralkyl, etc.), nitro $(-\text{NO}_2)$, nitroso $(-\text{NO})$, sulfo $(-\text{SO}_2\text{-OH})$, sulfonato $(-\text{SO}_2\text{-O}^-)$, $\text{C}_1\text{-C}_{24}$ alkylsulfanyl $(-\text{S-alkyl})$; also termed “alkylthio”), $\text{C}_5\text{-C}_{24}$ arylsulfanyl $(-\text{S-aryl})$; also termed “arylthio”), $\text{C}_1\text{-C}_{24}$ alkylsulfinyl $(-\text{(SO)-alkyl})$, $\text{C}_5\text{-C}_{24}$ arylsulfinyl $(-\text{(SO)-aryl})$, $\text{C}_1\text{-C}_{24}$ alkylsulfonyl $(-\text{SO}_2\text{-alkyl})$, $\text{C}_1\text{-C}_{24}$ monoalkylaminosulfonyl $-\text{SO}_2\text{-N(H) alkyl}$, $\text{C}_1\text{-C}_{24}$ dialkylaminosulfonyl $-\text{SO}_2\text{-N(alkyl)}_2$, $\text{C}_5\text{-C}_{24}$ arylsulfonyl $(-\text{SO}_2\text{-aryl})$, boryl $(-\text{BH}_2)$, borono $(-\text{B(OH)}_2)$, boronato $(-\text{B(OR)}_2)$ where R is alkyl or other hydrocarbyl), phosphono $(-\text{P(O)(OH)}_2)$, phosphonato $(-\text{P(O)(O}^-)_2)$, phosphinato $(-\text{P(O)(O}^-))$, phospho $(-\text{PO}_2)$, and phosphino $(-\text{PH}_2)$; and the hydrocarbyl moieties $\text{C}_1\text{-C}_{24}$ alkyl (preferably $\text{C}_1\text{-C}_{12}$ alkyl, more preferably $\text{C}_1\text{-C}_6$ alkyl), $\text{C}_2\text{-C}_{24}$ alkenyl (preferably $\text{C}_2\text{-C}_{12}$ alkenyl, more preferably $\text{C}_2\text{-C}_6$ alkenyl), $\text{C}_2\text{-C}_{24}$ alkynyl (preferably $\text{C}_2\text{-C}_{12}$ alkynyl, more preferably $\text{C}_2\text{-C}_6$ alkynyl), $\text{C}_5\text{-C}_{24}$ aryl (preferably $\text{C}_5\text{-C}_{14}$ aryl), $\text{C}_6\text{-C}_{24}$ alkaryl (preferably $\text{C}_6\text{-C}_{16}$ alkaryl), and $\text{C}_6\text{-C}_{24}$ aralkyl (preferably $\text{C}_6\text{-C}_{16}$ aralkyl). Additional functional groups referred to herein as “Fn”, include without limitation, isocyanate $(-\text{N}=\text{C}=\text{O})$, and thioisocyanate $(-\text{N}=\text{C}=\text{S})$.

[0042] By “functionalized” as in “functionalized hydrocarbyl,” “functionalized alkyl,” “functionalized olefin,” “functionalized cyclic olefin,” and the like, is meant that in the hydrocarbyl, alkyl, olefin, cyclic olefin, or other moiety, at least one hydrogen atom bound to a carbon (or other) atom is replaced with one or more functional groups such as those described hereinabove. The term “functional group” is meant to include any functional species that is suitable for the uses described herein. In particular, as used herein, a functional group would necessarily possess the ability to react with or bond to corresponding functional groups on a substrate surface.

[0043] In addition, the aforementioned functional groups may, if a particular group permits, be further substituted with one or more additional functional groups or with one or more hydrocarbyl moieties such as those specifically mentioned above. Analogously, the above-mentioned hydrocarbyl moieties may be further substituted with one or more functional groups or additional hydrocarbyl moieties as noted above.

[0044] “Optional” or “optionally” means that the subsequently described circumstance may or may not occur, so that the description includes instances where the circumstance occurs and instances where it does not. For example, the phrase “optionally substituted” means that a non-hydrogen substituent may or may not be present on a given atom, and, thus, the description includes structures wherein a non-hydrogen substituent is present and structures wherein a non-hydrogen substituent is not present.

[0045] The term “substrate material,” as used herein, is intended to generally mean any material that the resin compositions of the invention may be contacted with, applied to, or have the substrate material incorporated into the resin. Without limitation, such materials include reinforcing materials, such as filaments, fibers, rovings, mats, weaves, fabrics, knitted material, cloth or other known structures, glass fibers and fabrics, carbon fibers and fabrics, aramid fibers and fabrics, and polyolefin or other polymer fibers or fabrics. Other suitable substrate materials include metallic density modulators, microparticulate density modulators, such as microspheres, and macroparticulate density modulators, such as glass or ceramic beads.

[0046] In reference to the ROMP reaction of a cyclic olefin catalyzed by the cyclic olefin metathesis catalyst, the term “onset of a ROMP reaction” generally refers to the initial rapid increase in the viscosity of the resin composition that occurs during polymerization just prior to gelation. The progress of an olefin metathesis polymerization can be monitored by measuring the increase in viscosity as the reaction proceeds from the monomer to the gelled state.

[0047] The progress of an exothermic olefin metathesis polymerization may also be conveniently monitored by measuring the temperature increase as the metathesis reaction proceeds from the monomer to the cured state. In the context of the present invention, and as described in the examples herein, the term “time to exotherm” (or “exotherm time”) is defined as the last measured time point after which the temperature of a metathesis catalyzed resin composition increases by more than 1°C/second. As shown in FIG. 1, the initial increase in the exotherm profile is distinct allowing for a precise measurement of the exotherm onset, the

exotherm time, and the exotherm peak temperature. The exotherm peak temperature is the maximum temperature the resin reaches during the polymerization and is related to the completeness of the polymerization reaction. Lowered peak temperatures can be an indication of incomplete polymerization. In general, measurement of the exotherm profile is convenient and provides an understanding of the cure behavior and when the cured state is achieved.

[0048] The terms “pot life” and “gel time” are generally used interchangeably. Various techniques and equipment useful for determining gel time are known in the art and may be utilized in the present invention. For example, the gel behavior, including the gel time and pot life, may be determined using a viscometer, as described in the examples, or by other suitable techniques. In many cases, it is convenient and sufficient to estimate the gel time by qualitative observation of properties such as pourability or elasticity. Such techniques must necessarily allow for an increase in the gel time to be determined, such that, in the context of the present invention, the difference in gel time can be determined between ROMP compositions containing added hydroperoxide and ROMP compositions that do not contain added hydroperoxide. The skilled artisan will appreciate that measurement of the actual gel time may depend on the equipment and techniques utilized, as well the type of composition being evaluated. However, in the context of the present invention, a determination of the relative increase in gel time achieved through the addition of hydroperoxide to a ROMP composition should not be affected by the particular technique or equipment utilized to determine the gel time.

[0049] The skilled artisan will also appreciate that the “working time” (or “workable pot life”) may vary for different ROMP compositions and, for a particular ROMP composition, may also depend on the application or equipment utilized. Typically, the working time is greater than the time to onset of the polymerization (e.g., when the viscosity begins to rise rapidly), but less than the exotherm time.

Adhesion Promoter

[0050] One aspect of this invention is directed to adhesion promoters generally comprising a compound containing at least two isocyanate groups (such as, for example, methylene diphenyl diisocyanate and hexamethylene diisocyanate). In one embodiment, the adhesion promoter is a diisocyanate, triisocyanate, or polyisocyanate (i.e., containing four or more isocyanate groups). In a further embodiment, the adhesion promoter is a mixture of at least one diisocyanate,

triisocyanate, or polyisocyanate. In a more particular aspect of the invention, the adhesion promoter comprises, or is limited to, a diisocyanate compound, or mixtures of diisocyanate compounds.

[0051] In general, the adhesion promoter may be any compound having at least two isocyanate groups. Suitable adhesion promoters include, without limitation, isocyanate compounds comprising at least two isocyanate groups, and wherein the compounds are selected from hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functionalized hydrocarbyl compounds. As described above, suitable hydrocarbyl adhesion promoter compounds generally include alkyl, cycloalkyl, alkylene, alkenyl, alkynyl, aryl, cycloalkyl, alkyaryl, and aralkyl compounds. Substituted heteroatom-containing, and functionalized hydrocarbyl adhesion promoter compounds include the afore-mentioned hydrocarbyl compounds, as well as the variations thereof noted hereinabove.

[0052] In one embodiment the adhesion promoter is an alkyl diisocyanate. An alkyl diisocyanate refers to a linear, branched, or cyclic saturated or unsaturated hydrocarbon group typically although not necessarily containing 1 to about 24 carbon atoms, preferably a diisocyanate containing 2 to about 12 carbon atoms, and more preferably a diisocyanate containing 6 to 12 carbon atoms such as hexamethylene diisocyanate (HDI), octamethylene diisocyanate, decamethylene diisocyanate, and the like. Cycloalkyl diisocyanates contain cyclic alkyl group, typically having 4 to 16 carbon atoms. A preferred cycloalkyl diisocyanate containing 6 to about 12 carbon atoms are cyclohexyl, cyclooctyl, cyclodecyl, and the like. A more preferred cycloalkyl diisocyanate originates as a condensation product of acetone called 5-isocyanato-1-(isocyanatomethyl)-1,3,3-trimethyl-cyclohexane, commonly known as Isophorone diisocyanate (IPDI) and the isomers of isocyanato-[(isocyanatocyclohexyl)methyl] cyclohexane (H₁₂MDI). H₁₂MDI is derived from the hydrogenated form of the aryl diisocyanate methylene diphenyl diisocyanate (MDI).

[0053] In another embodiment, the adhesion promoter is an aryl diisocyanate. Aryl diisocyanates refers to aromatic diisocyanates containing a single aromatic ring or multiple aromatic rings that are fused together, directly linked, or indirectly linked (such that the different aromatic rings are bound to a common group such as a methylene or ethylene moiety). Preferred aryl diisocyanates contain 5 to 24 carbon atoms, and particularly preferred aryl diisocyanates

contain 5 to 14 carbon atoms. Exemplary aryl diisocyanates contain one aromatic ring or two fused or linked aromatic rings, e.g., phenyl, tolyl, xylene, naphthyl, biphenyl, diphenylether, benzophenone, and the like. Preferred aromatic diisocyanates include toluene diisocyanates, tetramethylxylene diisocyanate (TMXDI), and methylene diphenyl diisocyanate (MDI), which may comprise any mixture of its three isomers, 2,2'-MDI, 2,4'-MDI, and 4,4'-MDI.

[0054] In another embodiment, the adhesion promoter is a polymer-containing isocyanate, such as, for example, diisocyanates. Polymer-containing isocyanates refers to a polymer-containing two or more terminal and/or pendant alkyl or aryl isocyanate groups. The polymer-containing isocyanates generally have to have a minimal solubility in the resin to provide improved mechanical properties. Preferred polymer-containing isocyanates include, but are not limited to, PM200 (poly MDI), Lupranate[®] (poly MDI from BASF), Krasol[®] isocyanate terminated polybutadiene prepolymers, such as, for example, Krasol[®] LBD2000 (TDI based), Krasol[®] LBD3000 (TDI based), Krasol[®] NN-22 (MDI based), Krasol[®] NN-23 (MDI based), Krasol[®] NN-25 (MDI based), and the like. Krasol[®] isocyanate terminated polybutadiene prepolymers are available from Cray Valley.

[0055] In yet another embodiment, the adhesion promoter is a trimer of alkyl diisocyanates and aryl diisocyanates. In its simplest form, any combination of polyisocyanate compounds may be trimerized to form an isocyanurate ring containing isocyanate functional groups. Trimers of alkyl diisocyanate and aryl diisocyanates may also be referred to as isocyanurates of alkyl diisocyanate or aryl diisocyanate. Preferred alkyl diisocyanate and aryl diisocyanate trimers include, but are not limited to, hexamethylene diisocyanate trimer (HDI_t), isophorone diisocyanate trimer, toluene diisocyanate trimer, tetramethylxylene diisocyanate trimer, methylene diphenyl diisocyanate trimers, and the like. More preferred adhesion promoters are toluene diisocyanates, tetramethylxylene diisocyanate (TMXDI), and methylene diphenyl diisocyanate (MDI) including any mixture of its three isomers 2,2'-MDI, 2,4'-MDI and 4,4'-MDI; liquid MDI; solid MDI; hexamethylenediisocyanatetrimer (HDI_t); hexamethylenediisocyanate (HDI); isophorone diisocyanate (IPDI), 4,4'-methylene bis(cyclohexyl isocyanate) (H12MDI); polymeric MDI (PM200); MDI prepolymer (Lupranate[®] 5080); liquid carbodiimide modified 4,4'-MDI (Lupranate[®] MM103); liquid MDI (Lupranate[®] MI); liquid MDI (Mondur[®] ML). Even more preferred adhesion promoters are methylene diphenyl diisocyanate (MDI) including any mixture of its three isomers 2,2'-MDI, 2,4'-MDI and

4,4'-MDI; liquid MDI; solid MDI; hexamethylenediisocyanatetrimer (HDI₄); hexamethylenediisocyanate (HDI); isophorone diisocyanate (IPDI), 4,4'-methylene bis(cyclohexyl isocyanate) (H12MDI); polymeric MDI (PM200); MDI prepolymer (Lupranate® 5080); liquid carbodiimide modified 4,4'-MDI (Lupranate® MM103); liquid MDI (Lupranate® MI); liquid MDI (Mondur® ML).

[0056] In further embodiments, the adhesion promoter may include an optional compound with a heteroatom-containing functional group and a metathesis active olefin. The compound containing a heteroatom-containing functional group and a metathesis-active olefin reacts with an isocyanate group and may provide the olefin metathesis composite with improved mechanical properties. The compound containing a heteroatom-containing functional group and a metathesis-active olefin typically contains between 2 and 20 carbons with oxygen, nitrogen, sulfur, phosphorus, or silicon functional groups. Preferred compounds containing a heteroatom-containing functional group and a metathesis-active olefin typically contain between 5 and 10 carbons with hydroxyl, amine, thiol, phosphorus-containing functional groups, or silane functional groups. Phosphorous-containing functional groups include, for example, alkyl and aryl-substituted phosphonate, phosphoryl, phosphanyl, and phosphino compounds. More preferred compounds containing a heteroatom-containing functional group and a metathesis-active olefin derived from norbornenes, oxanorbornenes, cyclooctenes, and cyclooctadienes, which typically contain between 7 and 10 carbons with hydroxyl, amine, thiol, phosphorus-containing functional groups, or silane functional groups. Further preferred compounds containing a heteroatom-containing functional group and a metathesis-active olefin include, but are not limited to, 5-norbornene-2-methanol (NB-MeOH); 2-hydroxyethyl bicyclo[2.2.1]hept-2-ene-5-carboxylate (HENB); and allyl alcohol.

[0057] Any concentration of adhesion promoter which improves the mechanical properties of the olefin composite is sufficient for the invention. In general, suitable amounts of adhesion promoter range from 0.001-50 phr, particularly, from 0.05-10 phr, more particularly, 0.1-10 phr, or, even more particularly, 0.5-4.0 phr.

[0058] In one embodiment, the adhesion promoter is contacted with a cyclic olefin, an olefin metathesis catalyst, and a substrate material, such as, for example, a glass substrate material, thereby forming a resin composition, for example, a ROMP composition. The resin composition is then subjected to conditions effective to promote an olefin metathesis reaction. In a further

embodiment, the adhesion promoter may be applied to or contacted with the substrate surface, such as, for example, a glass substrate, to functionalize the surface prior to application of the resin composition. In a further embodiment, the adhesion promoter is combined with a resin composition comprising a cyclic olefin, the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to the substrate material, such as, for example, a glass substrate.

[0059] In an additional embodiment, the adhesion promoter is contacted with a cyclic olefin, an olefin metathesis catalyst, a hydroperoxide gel modifier, and a substrate material thereby forming a resin composition, for example, a ROMP composition. The resin composition is then subjected to conditions effective to promote an olefin metathesis reaction. In a further embodiment, the adhesion promoter may be applied to or contacted with the substrate surface to functionalize the surface prior to application of the resin composition. In a further embodiment, the adhesion promoter is combined with a resin composition comprising a cyclic olefin and a hydroperoxide gel modifier, the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to the substrate material.

Substrate Surfaces

[0060] The invention is generally suitable for use with any substrate material in which the addition of the adhesion promoter provides beneficial improvements in the adhesion of a resin (e.g., ROMP) composition to the substrate material as compared to a resin composition that is the same with the exception that the adhesion promoter is not included. The invention is directed to the use of any substrate material in which the surfaces of such materials are capable of reacting with the adhesion promoters of the invention having at least two isocyanate groups. The invention is particularly beneficial for use with glass and carbon material surfaces suitable for use with epoxy and methacrylate resins, including those containing finishes or sizings, in which case the finishes or sizings do not need to be removed (e.g., by washing or heat cleaning) for the inventive adhesion promoters to be effective. The invention is also suitable for use with wood and aluminum materials. Suitable substrate materials may also be selected from fibrous, woven, microparticulate, ceramic, metal, polymer, and semiconductor materials.

Method for Modifying Gel Formation

[0061] In another aspect, the invention provides a method for modifying the onset of a ROMP reaction of a cyclic olefin catalyzed by a cyclic olefin metathesis catalyst, in which a hydroperoxide gel modifier is combined with a cyclic olefin and a cyclic olefin metathesis catalyst, thereby forming a ROMP composition. The ROMP composition is then subjected to conditions effective to promote a ROMP reaction of the cyclic olefin in the presence of the cyclic olefin metathesis catalyst and the added hydroperoxide gel modifier.

[0062] The addition of an olefin metathesis catalyst to an olefinic composition can, under appropriate conditions, initiate a polymerization reaction, thereby forming a catalyzed resin. The period of time during which the catalyzed resin has sufficiently low viscosity such that the resin will flow for the manufacturing process is known as the pot life. As the polymerization reaction progresses, the viscosity of the resin increases such that the resin is no longer able to flow freely. This is known as the gel state. After the resin has achieved a gel state, the polymerization reaction continues until no further monomer is consumed under the reaction conditions. This is known as the cured state. In some embodiments, the polymerization may be exothermic, driving the polymerization to the cured state. The progress of an olefin metathesis polymerization is commonly monitored by measuring the increase in viscosity from the monomer to the gelled state, or by monitoring the temperature increase of an exothermic polymerization from the monomer to the cured state.

[0063] The onset of the gel state can be varied by many factors, including the chemical nature of the monomer, type of olefin metathesis catalyst, catalyst concentration, reaction temperature and the effect of various additives. It is often useful to be able to delay the onset of the gel state and to increase the gel time in a controlled fashion to tailor the polymerization process to the desired application or reaction conditions. Use of gel-modification additives allows the pot life of the catalyzed resin to be extended such that the resin remains fluid during the pour, cast, injection, or infusion into the mold. Gel-modification additives must offer controlled changes in the viscosity profile and time to exotherm such that the resin polymerizes efficiently once the mold is filled, to minimize mold cycle time. Ideally controlling the amount of gel modification agent allows control of the gel time over several hours. Furthermore, it is important the gel-modifying agent does not adversely affect the mechanical properties of the cured resin.

[0064] Applicants have discovered that the use of hydroperoxide-containing compounds allows the onset of the resin gel and cure states in olefin metathesis polymerizations to be delayed in a controlled manner. Although in general the hydroperoxide may be any organic hydroperoxide that is effective to delay the onset of the gel state, the hydroperoxide is typically an alkyl, for example, C₂-C₂₄ alkyl, aryl, for example, C₅-C₂₄ aryl, aralkyl, or alkaryl, for example, C₆-C₂₄ alkaryl, hydroperoxide, especially secondary or tertiary aliphatic or aromatic hydroperoxides. More specific hydroperoxides suitable for use include *tert*-butyl hydroperoxide, *tert*-amyl hydroperoxide, cumene hydroperoxide, diisopropyl benzene hydroperoxide, (2,5-dihydroperoxy)-2,5-dimethylhexane, cyclohexyl hydroperoxide, triphenylmethyl hydroperoxide, pinane hydroperoxide (e.g., Glidox[®] 500; LyondellBasell), and paramenthane hydroperoxide (e.g., Glidox[®] 300; LyondellBasell). More preferably, the hydroperoxides suitable for use include *tert*-butyl hydroperoxide and cumene hydroperoxide. Gel-modification additives may be added to the reaction mixture in the absence of solvent, or as organic or aqueous solutions. A single hydroperoxide compound may be used as the gel-modification additive, or a combination of two or more different hydroperoxide compounds may be used.

[0065] The hydroperoxide compounds can generally be added to the reaction mixture at any point prior to the onset of the gel state. Conveniently, an appropriate amount of hydroperoxide gel modifier may be added to the resin during the formulation step at which time any other additives can be included prior to coming into contact with catalyst. Unlike other gel-modification additives known in the art, hydroperoxides may be added to a stock solution of resin and have a usable shelf life of many weeks or months while substantially maintaining the gel-modification activity. Alternatively, the hydroperoxide compound can be added directly to the catalyst and/or a catalyst carrier and delivered to the resin during the catalyzation step. In another embodiment, the hydroperoxide may be added to the catalyzed resin mixture after addition of the catalyst.

[0066] The invention includes all concentrations of hydroperoxide which delay the onset of the gel-state of a particular metathesis polymerization. Advantageously, the use of hydroperoxides gel modifiers has been found to substantially maintain the properties of the cured polymer including peak exotherm temperature and mechanical properties. While not necessarily limited, the hydroperoxide concentration is advantageously between 0.01 and 1000 equivalents with respect to catalyst. In other embodiments the hydroperoxide concentration may be between

0.1 and 20 equivalents with respect to catalyst. Generally, higher concentrations of hydroperoxide will lead to longer pot life. Additionally, in other embodiments the hydroperoxide concentration may be between 0.05 and 100 equivalents with respect to catalyst. Additionally, in other embodiments the hydroperoxide concentration may be between 0.1 and 50 equivalents with respect to catalyst.

[0067] Modification of highly active polymerizations (due to higher resin temperatures, highly active metathesis catalyst, or other factors) typically requires addition of higher concentrations of hydroperoxide compounds. However, if the concentration of gel-modification agent is too high for a given catalyst or the reaction conditions, the polymerization may be incomplete, and the resin may fail to cure properly. This could result in lower exotherm temperatures or reduced mechanical properties.

[0068] The use of hydroperoxide allows for the time to the onset of the gel state to be controlled based on the concentration of added hydroperoxide gel modifier. In general, the gel time (e.g., as tracked by the time of the exotherm) can be controllably delayed by about 2 minutes or up to about 12 hours. In more specific aspects, the gel time (or time to exotherm) may be delayed for about 10 minutes up to about 6 hours, or, even more particularly, from about 20 minutes up to about 2 hours. The time to the onset of the gel state is impacted by the choice of olefin, catalyst, olefin/catalyst ratio and temperature among other factors. The desired time to the onset of the gel state is frequently dependent on the manufacturing type conditions. Under some conditions, delaying the onset of the gel state by 10-60 minutes, so the resin can be poured without trapped air or other defects, is typically sufficient. In other applications, such as the vacuum assisted resin transfer molding of large parts, delaying the onset of the gel state by 6-12 hours may be desirable.

Cyclic Olefin

[0069] In addition to the adhesion promoter and/or hydroperoxide compound, described hereinabove, resin compositions disclosed herein include one or more cyclic olefins. In general, any cyclic olefin suitable for the metathesis reactions disclosed herein may be used. Such cyclic olefins may be optionally substituted, optionally heteroatom-containing, optionally functionalized, mono-unsaturated, di-unsaturated, or poly-unsaturated C₅ to C₂₄ hydrocarbons that may be mono-, di-, or poly-cyclic. The cyclic olefin may generally be any strained or unstrained cyclic olefin, provided the cyclic olefin is able to participate in a ROMP reaction

either individually or as part of a ROMP cyclic olefin composition. While certain unstrained cyclic olefins such as cyclohexene are generally understood to not undergo ROMP reactions by themselves, under appropriate circumstances, such unstrained cyclic olefins may nonetheless be ROMP active. For example, when present as a comonomer in a ROMP composition, unstrained cyclic olefins may be ROMP active. Accordingly, as used herein and as would be appreciated by the skilled artisan, the term “unstrained cyclic olefin” is intended to refer to those unstrained cyclic olefins that may undergo a ROMP reaction under any conditions, or in any ROMP composition, provided the unstrained cyclic olefin is ROMP active.

[0070] In general, the cyclic olefin may be represented by the structure of formula (A)




wherein J and R^A are as follows:

R^A is selected from the group consisting of hydrogen, hydrocarbyl (e.g., C_1 - C_{20} alkyl, C_5 - C_{20} aryl, C_5 - C_{30} aralkyl, or C_5 - C_{30} alkaryl), substituted hydrocarbyl (e.g., substituted C_1 - C_{20} alkyl, C_5 - C_{20} aryl, C_5 - C_{30} aralkyl, or C_5 - C_{30} alkaryl), heteroatom-containing hydrocarbyl (e.g., C_1 - C_{20} heteroalkyl, C_5 - C_{20} heteroaryl, heteroatom-containing C_5 - C_{30} aralkyl, or heteroatom-containing C_5 - C_{30} alkaryl), and substituted heteroatom-containing hydrocarbyl (e.g., substituted C_1 - C_{20} heteroalkyl, C_5 - C_{20} heteroaryl, heteroatom-containing C_5 - C_{30} aralkyl, or heteroatom-containing C_5 - C_{30} alkaryl) and, if substituted hydrocarbyl or substituted heteroatom-containing hydrocarbyl, wherein the substituents may be functional groups (“Fn”) such as phosphonato, phosphoryl, phosphanyl, phosphino, sulfonato, C_1 - C_{20} alkylsulfanyl, C_5 - C_{20} aryl sulfanyl, C_1 - C_{20} alkylsulfonyl, C_5 - C_{20} arylsulfonyl, C_1 - C_{20} alkylsulfinyl, C_5 - C_{20} arylsulfinyl, sulfonamido, amino, amido, imino, nitro, nitroso, hydroxyl, C_1 - C_{20} alkoxy, C_5 - C_{20} aryloxy, C_2 - C_{20} alkoxycarbonyl, C_5 - C_{20} aryloxycarbonyl, carboxyl, carboxylato, mercapto, formyl, C_1 - C_{20} thioester, cyano, cyanato, carbamoyl, epoxy, styrenyl, silyl, silyloxy, silanyl, siloxazanyl, boronato, boryl, or halogen, or a metal-containing or metalloid-containing group (wherein the metal may be, for example, Sn or Ge). R^A may itself be one of the aforementioned groups, such that the Fn moiety is directly bound to the olefinic carbon atom indicated in the structure. In the latter case,

however, the functional group will generally not be directly bound to the olefinic carbon through a heteroatom containing one or more lone pairs of electrons, e.g., an oxygen, sulfur, nitrogen, or phosphorus atom, or through an electron-rich metal or metalloid such as Ge, Sn, As, Sb, Se, Te, etc. With such functional groups, there will normally be an intervening linkage Z^* , such that R^A then has the structure $-(Z^*)_n-Fn$ wherein n is 1, Fn is the functional group, and Z^* is a hydrocarbylene linking group such as an alkylene, substituted alkylene, heteroalkylene, substituted heteroalkene, arylene, substituted arylene, heteroarylene, or substituted heteroarylene linkage. Additionally, functional groups (“ Fn ”) may be thiocyanato, isocyanate, or thioisocyanate.

J is a saturated or unsaturated hydrocarbylene, substituted hydrocarbylene, heteroatom-containing hydrocarbylene, or substituted heteroatom-containing hydrocarbylene linkage, wherein when J is substituted hydrocarbylene or substituted heteroatom-containing hydrocarbylene, the substituents may include one or more $-(Z^*)_n-Fn$ groups, wherein n is zero or 1, and Fn and Z^* are as defined previously. Additionally, two or more substituents attached to ring carbon (or other) atoms within J may be linked to form a bicyclic or polycyclic olefin. J will generally contain in the range of approximately 5 to 14 ring atoms, typically 5 to 8 ring atoms, for a monocyclic olefin, and, for bicyclic and polycyclic olefins, each ring will generally contain 4 to 8, typically 5 to 7, ring atoms.

[0071] Mono-unsaturated cyclic olefin reactants encompassed by structure (A) may be represented by the structure (B)

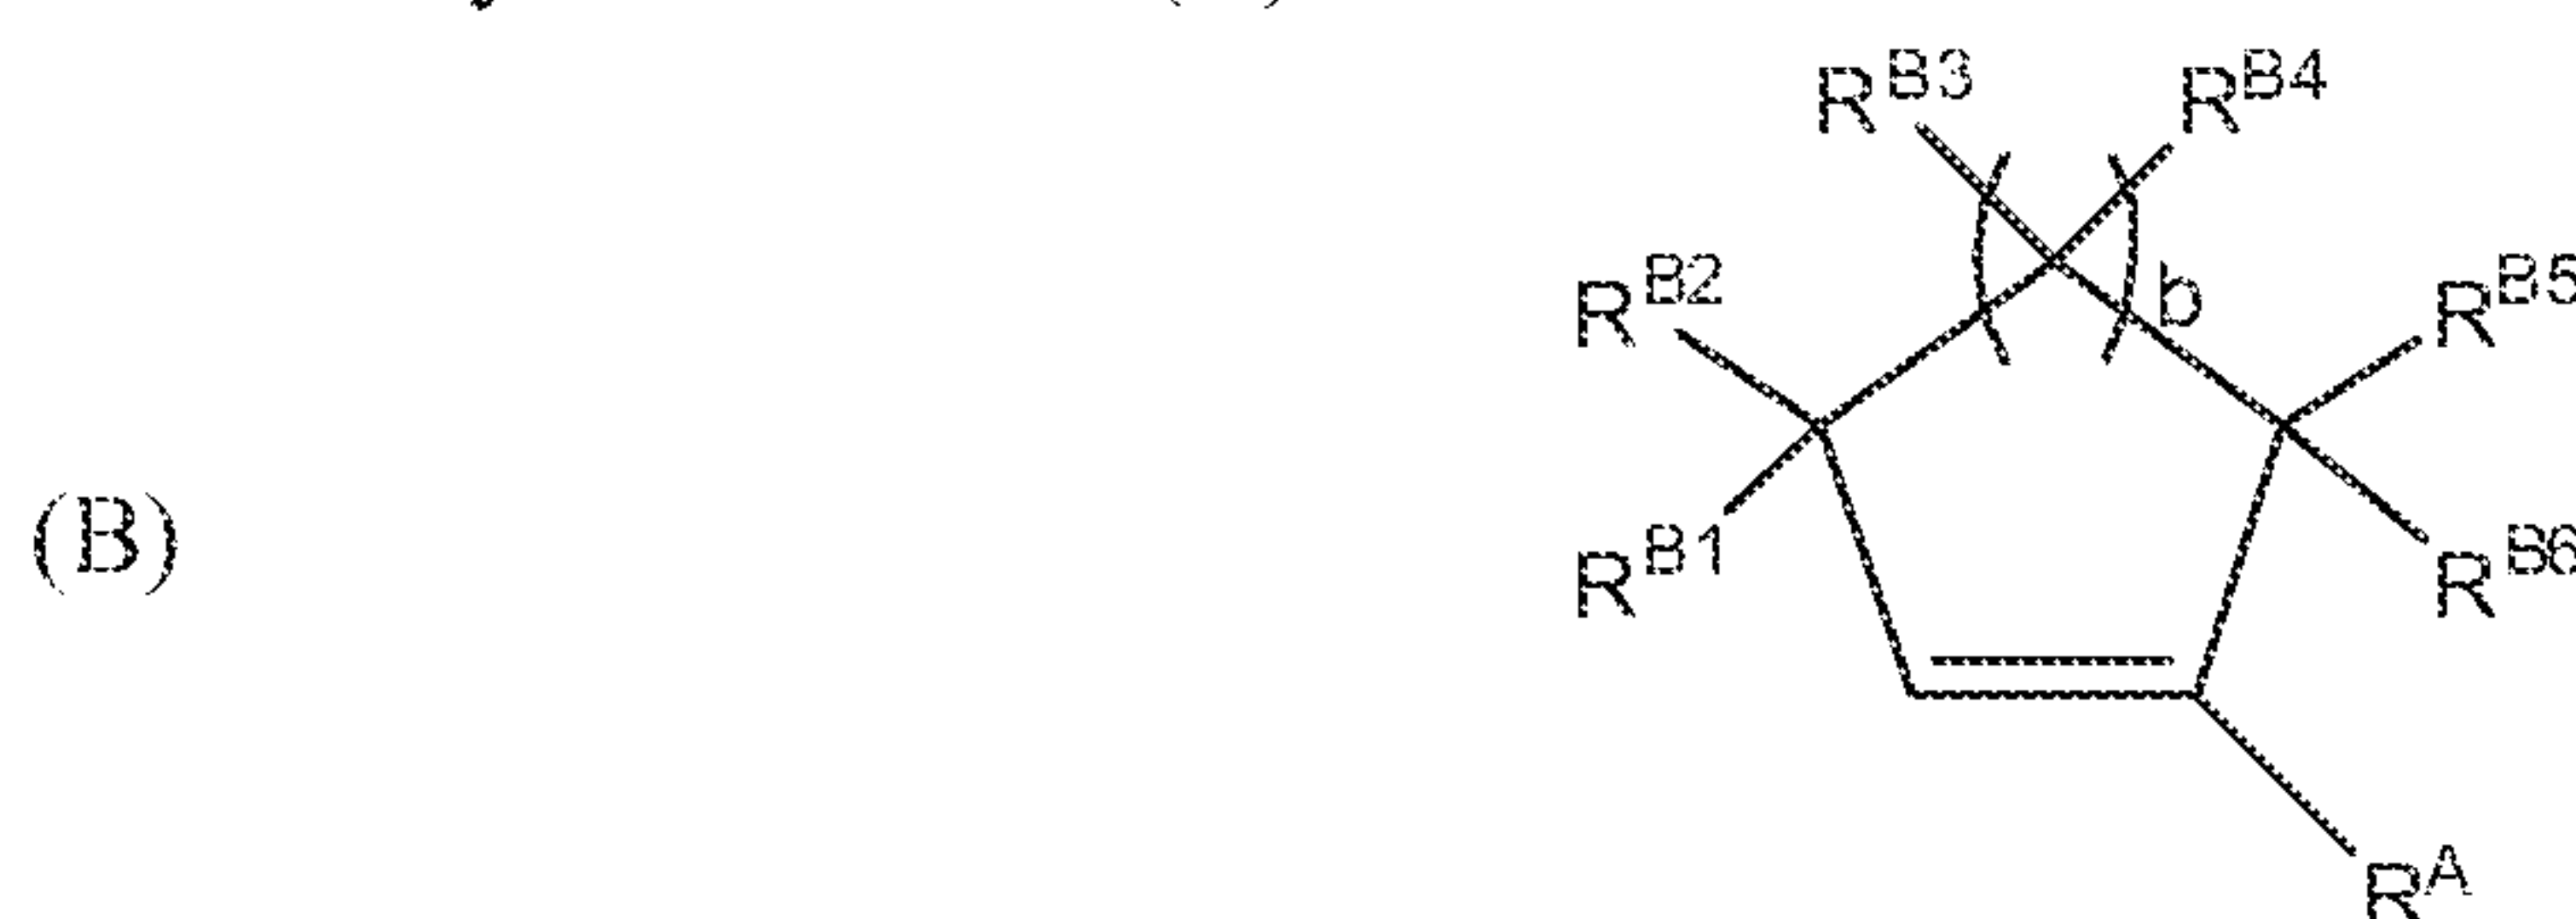


wherein b is an integer generally although not necessarily in the range of 1 to 10, typically 1 to 5, R^A is as defined above, and R^{B1} , R^{B2} , R^{B3} , R^{B4} , R^{B5} , and R^{B6} are independently selected from the group consisting of hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl and $-(Z^*)_n-Fn$ where n , Z^* and Fn are as defined previously, and wherein if any of the R^{B1} through R^{B6} moieties is substituted hydrocarbyl or substituted heteroatom-containing hydrocarbyl, the substituents may include one

or more $-(Z^*)_n$ -Fn groups. Accordingly, R^{B1} , R^{B2} , R^{B3} , R^{B4} , R^{B5} , and R^{B6} may be, for example, hydrogen, hydroxyl, C_1 - C_{20} alkyl, C_5 - C_{20} aryl, C_1 - C_{20} alkoxy, C_5 - C_{20} aryloxy, C_2 - C_{20} alkoxy carbonyl, C_5 - C_{20} aryloxy carbonyl, amino, amido, nitro, etc. Furthermore, any of the R^{B1} , R^{B2} , R^{B3} , R^{B4} , R^{B5} , and R^{B6} moieties can be linked to any other of the R^{B1} , R^{B2} , R^{B3} , R^{B4} , R^{B5} , and R^{B6} moieties to provide a bicyclic or polycyclic olefin, and the linkage may include heteroatoms or functional groups, e.g., the linkage may include an ether, ester, thioether, amino, alkylamino, imino, or anhydride moiety.

[0072] Examples of monounsaturated, monocyclic olefins encompassed by structure (B) include, without limitation, cyclopentene, cyclohexene, cycloheptene, cyclooctene, cyclononene, cyclodecene, cycloundecene, cyclododecene, tricyclodecene, tetracyclodecene, octacyclodecene, and cycloeicosene, and substituted versions thereof such as 1-methylcyclopentene, 1-ethylcyclopentene, 1-isopropylcyclohexene, 1-chloropentene, 1-fluorocyclopentene, 4-methylcyclopentene, 4-methoxy-cyclopentene, 4-ethoxy-cyclopentene, cyclopent-3-ene-thiol, cyclopent-3-ene, 4-methylsulfanyl-cyclopentene, 3-methylcyclohexene, 1-methylcyclooctene, 1,5-dimethylcyclooctene, etc.


[0073] Monocyclic diene reactants encompassed by structure (A) may be generally represented by the structure (C)

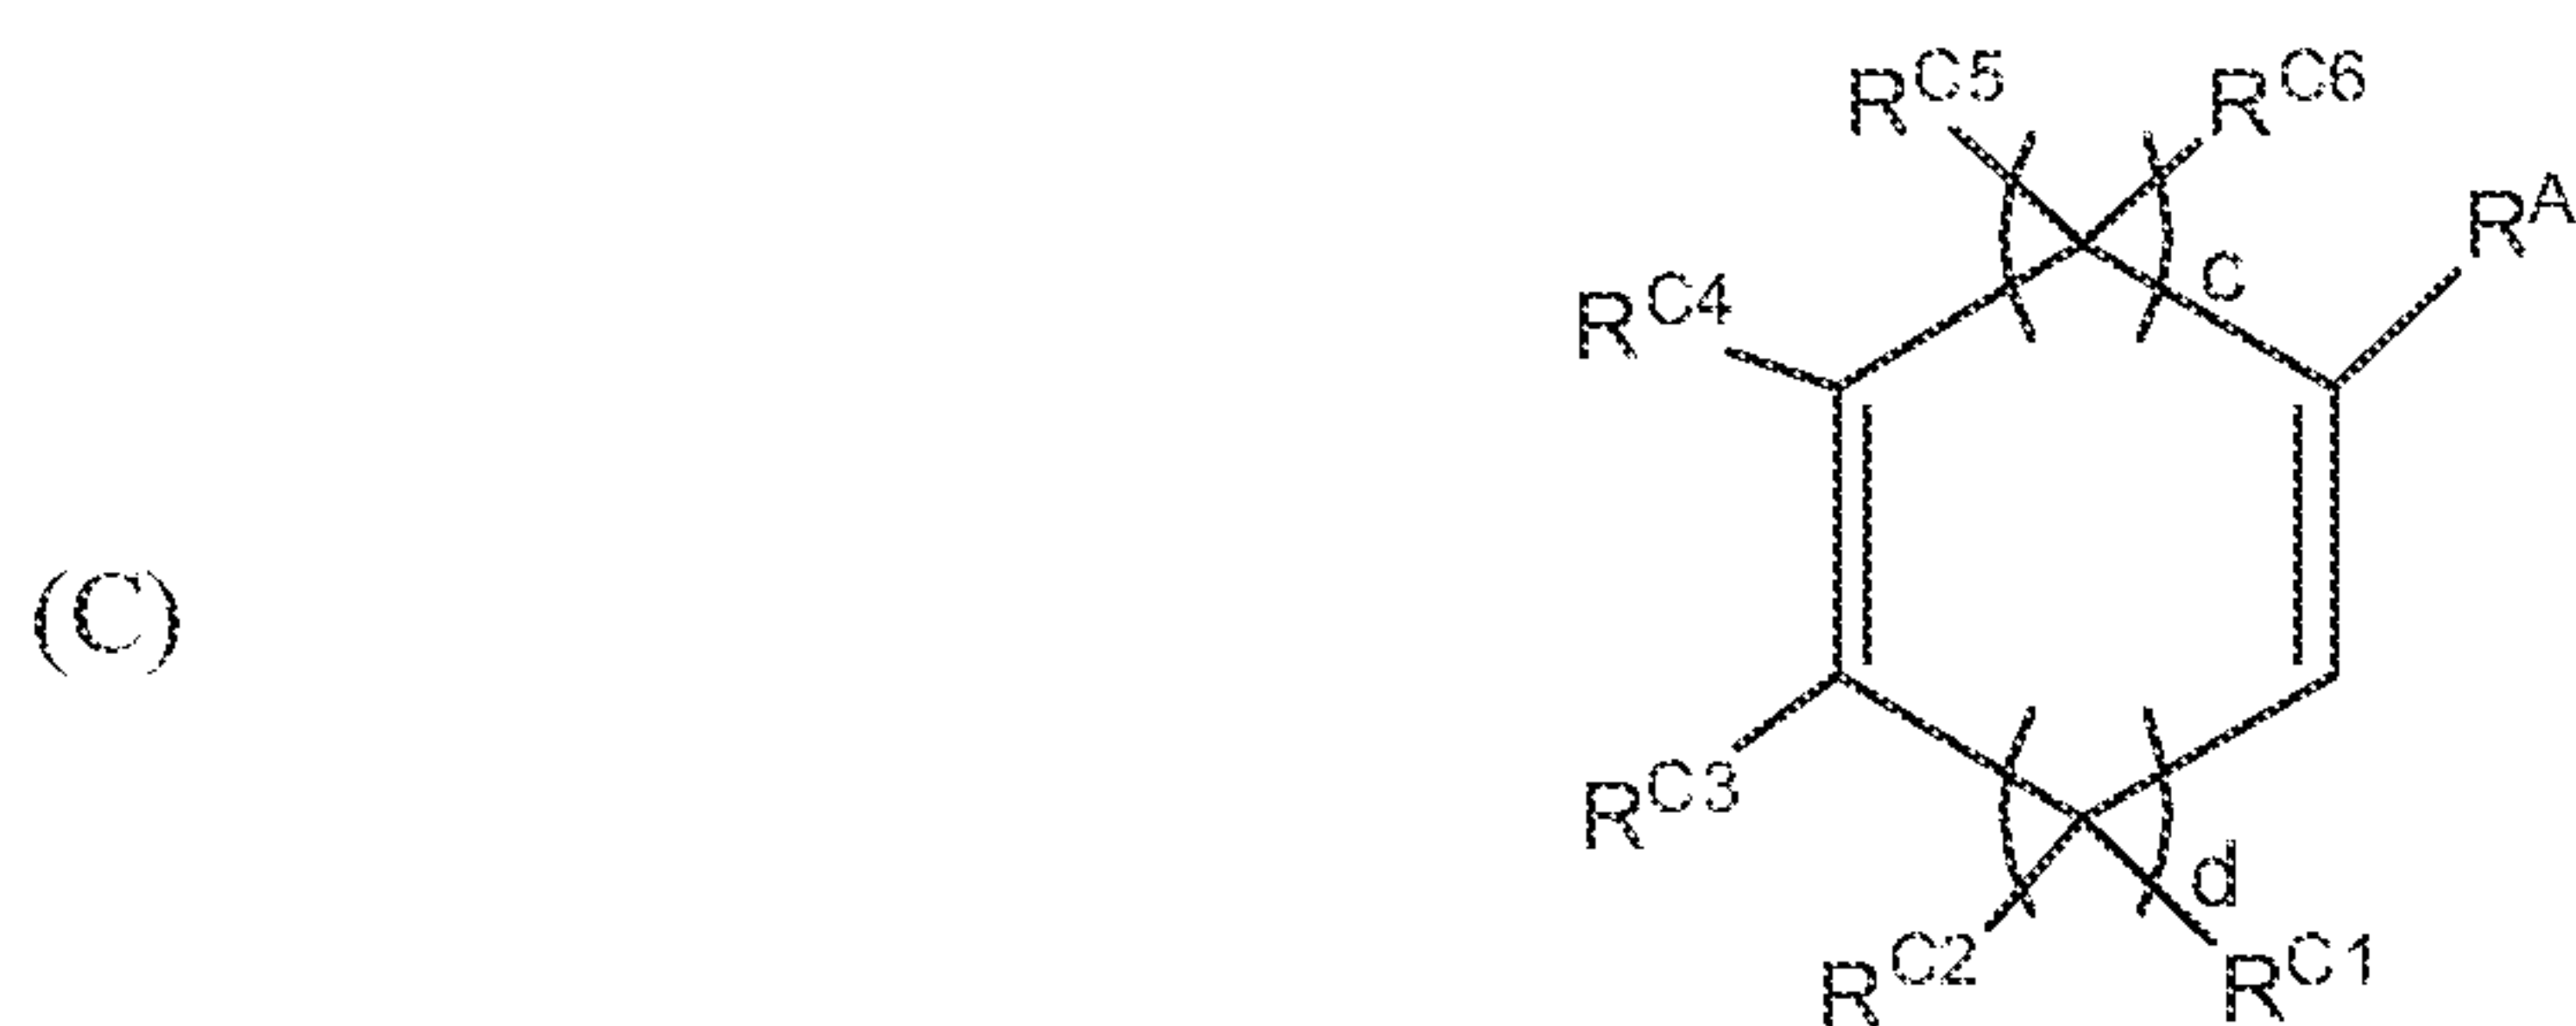


wherein c and d are independently integers in the range of 1 to about 8, typically 2 to 4, preferably 2 (such that the reactant is a cyclooctadiene), R^A is as defined above, and R^{C1} , R^{C2} , R^{C3} , R^{C4} , R^{C5} , and R^{C6} are defined as for R^{B1} through R^{B6} . In this case, it is preferred that R^{C3} and R^{C4} be non-hydrogen substituents, in which case the second olefinic moiety is tetrasubstituted. Examples of monocyclic diene reactants include, without limitation, 1,3-cyclopentadiene, 1,3-cyclohexadiene, 5-ethyl-1,3-cyclohexadiene, 1,3-cycloheptadiene, cyclohexadiene, 1,5-cyclooctadiene, 1,3-cyclooctadiene, and substituted analogs thereof. Triene


reactants are analogous to the diene structure (C), and will generally contain at least one methylene linkage between any two olefinic segments.

[0074] Bicyclic and polycyclic olefinic reactants encompassed by structure (A) may be generally represented by the structure (D)

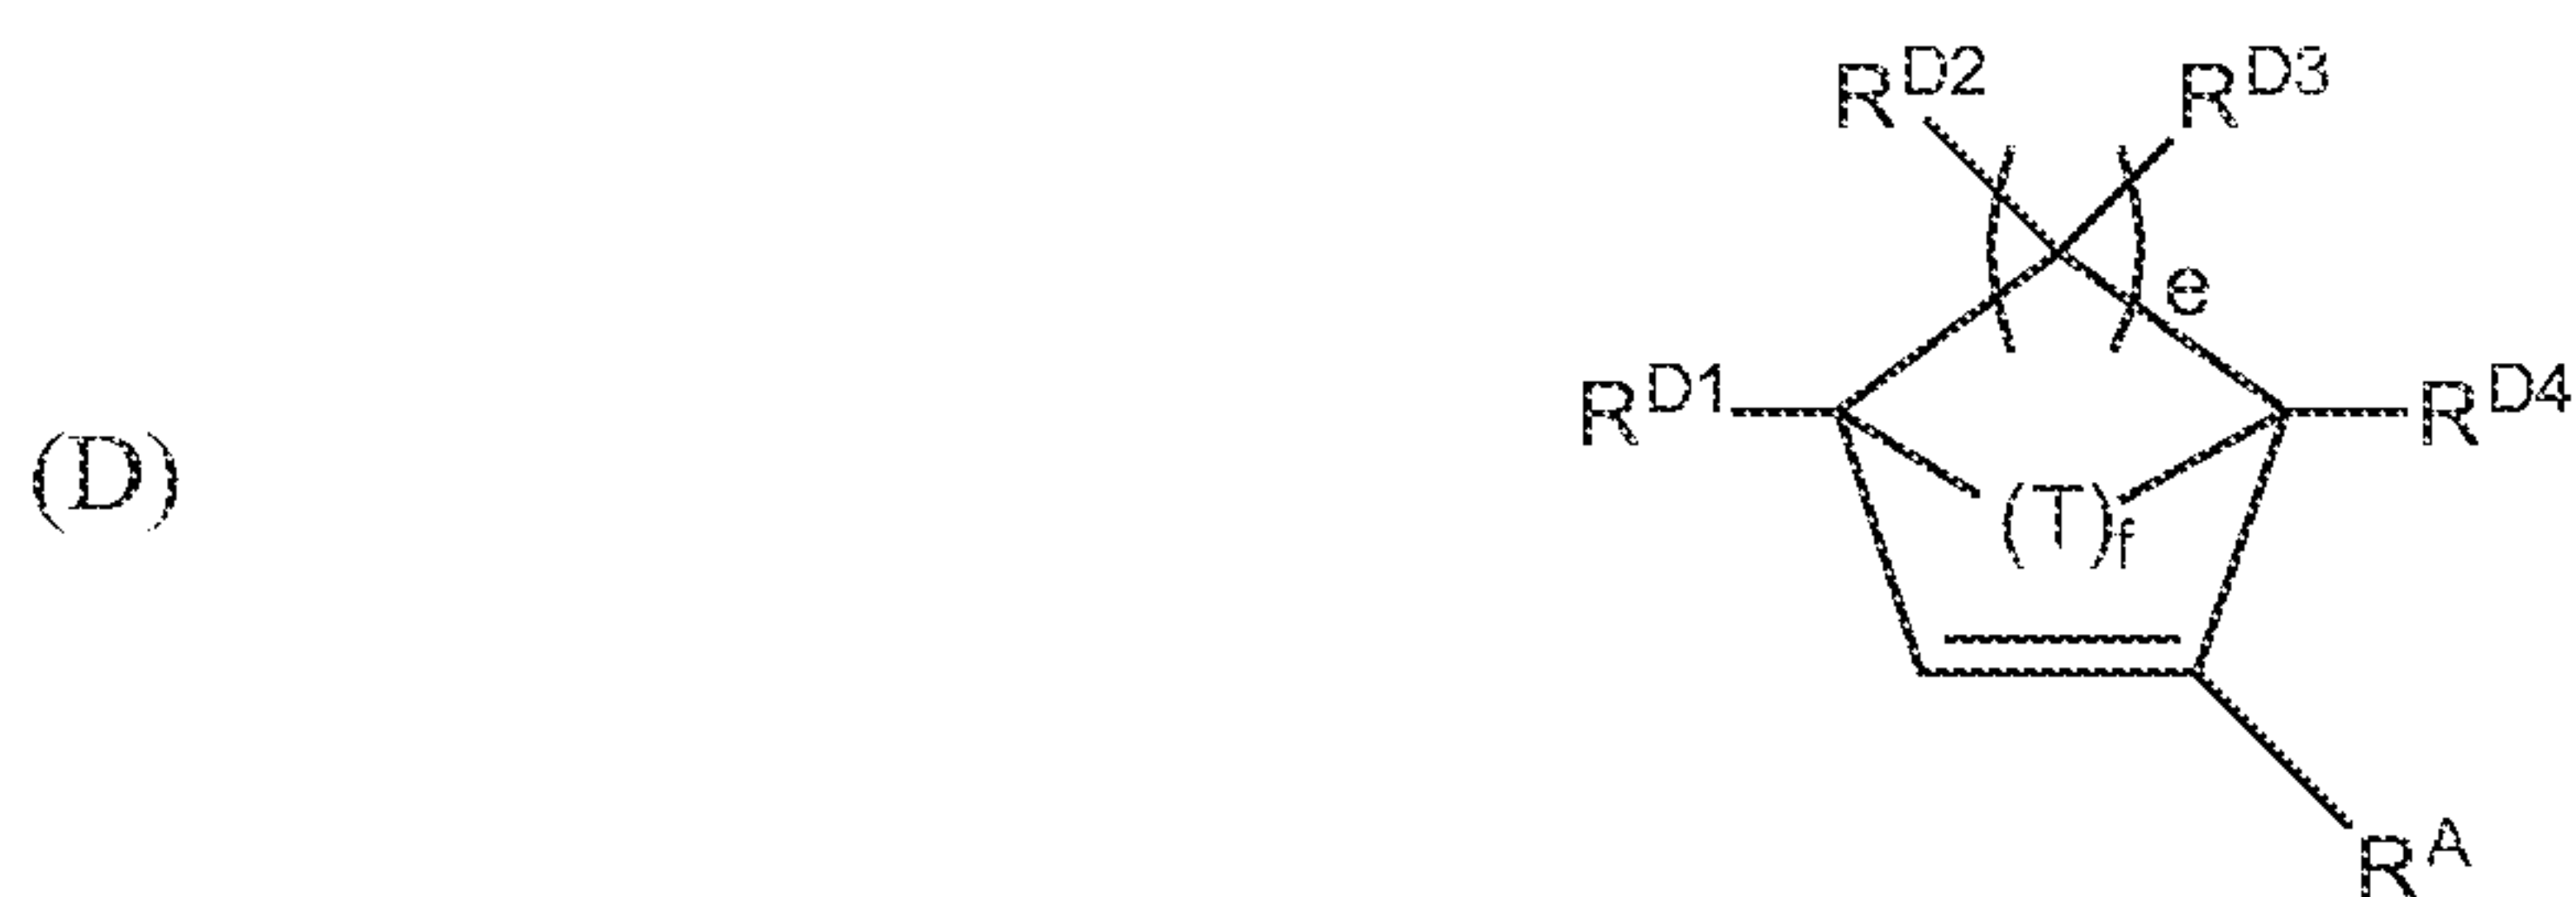

wherein e is an integer in the range of 1 to 8, typically 2 to 4, f is generally 1 or 2, T is lower alkylene, lower alkenylene, generally substituted or unsubstituted methyl or ethyl, or heteroatom, generally oxygen, sulfur, or nitrogen optionally substituted by lower alkyl or lower alkylene, R^A is as defined above, and R^{D1} , R^{D2} , R^{D3} , and R^{D4} are as defined for R^{B1} through R^{B6} . Preferred olefinic reactants within this group are in the norbornene and oxanorbornene families, having the structure (E) and (F), respectively

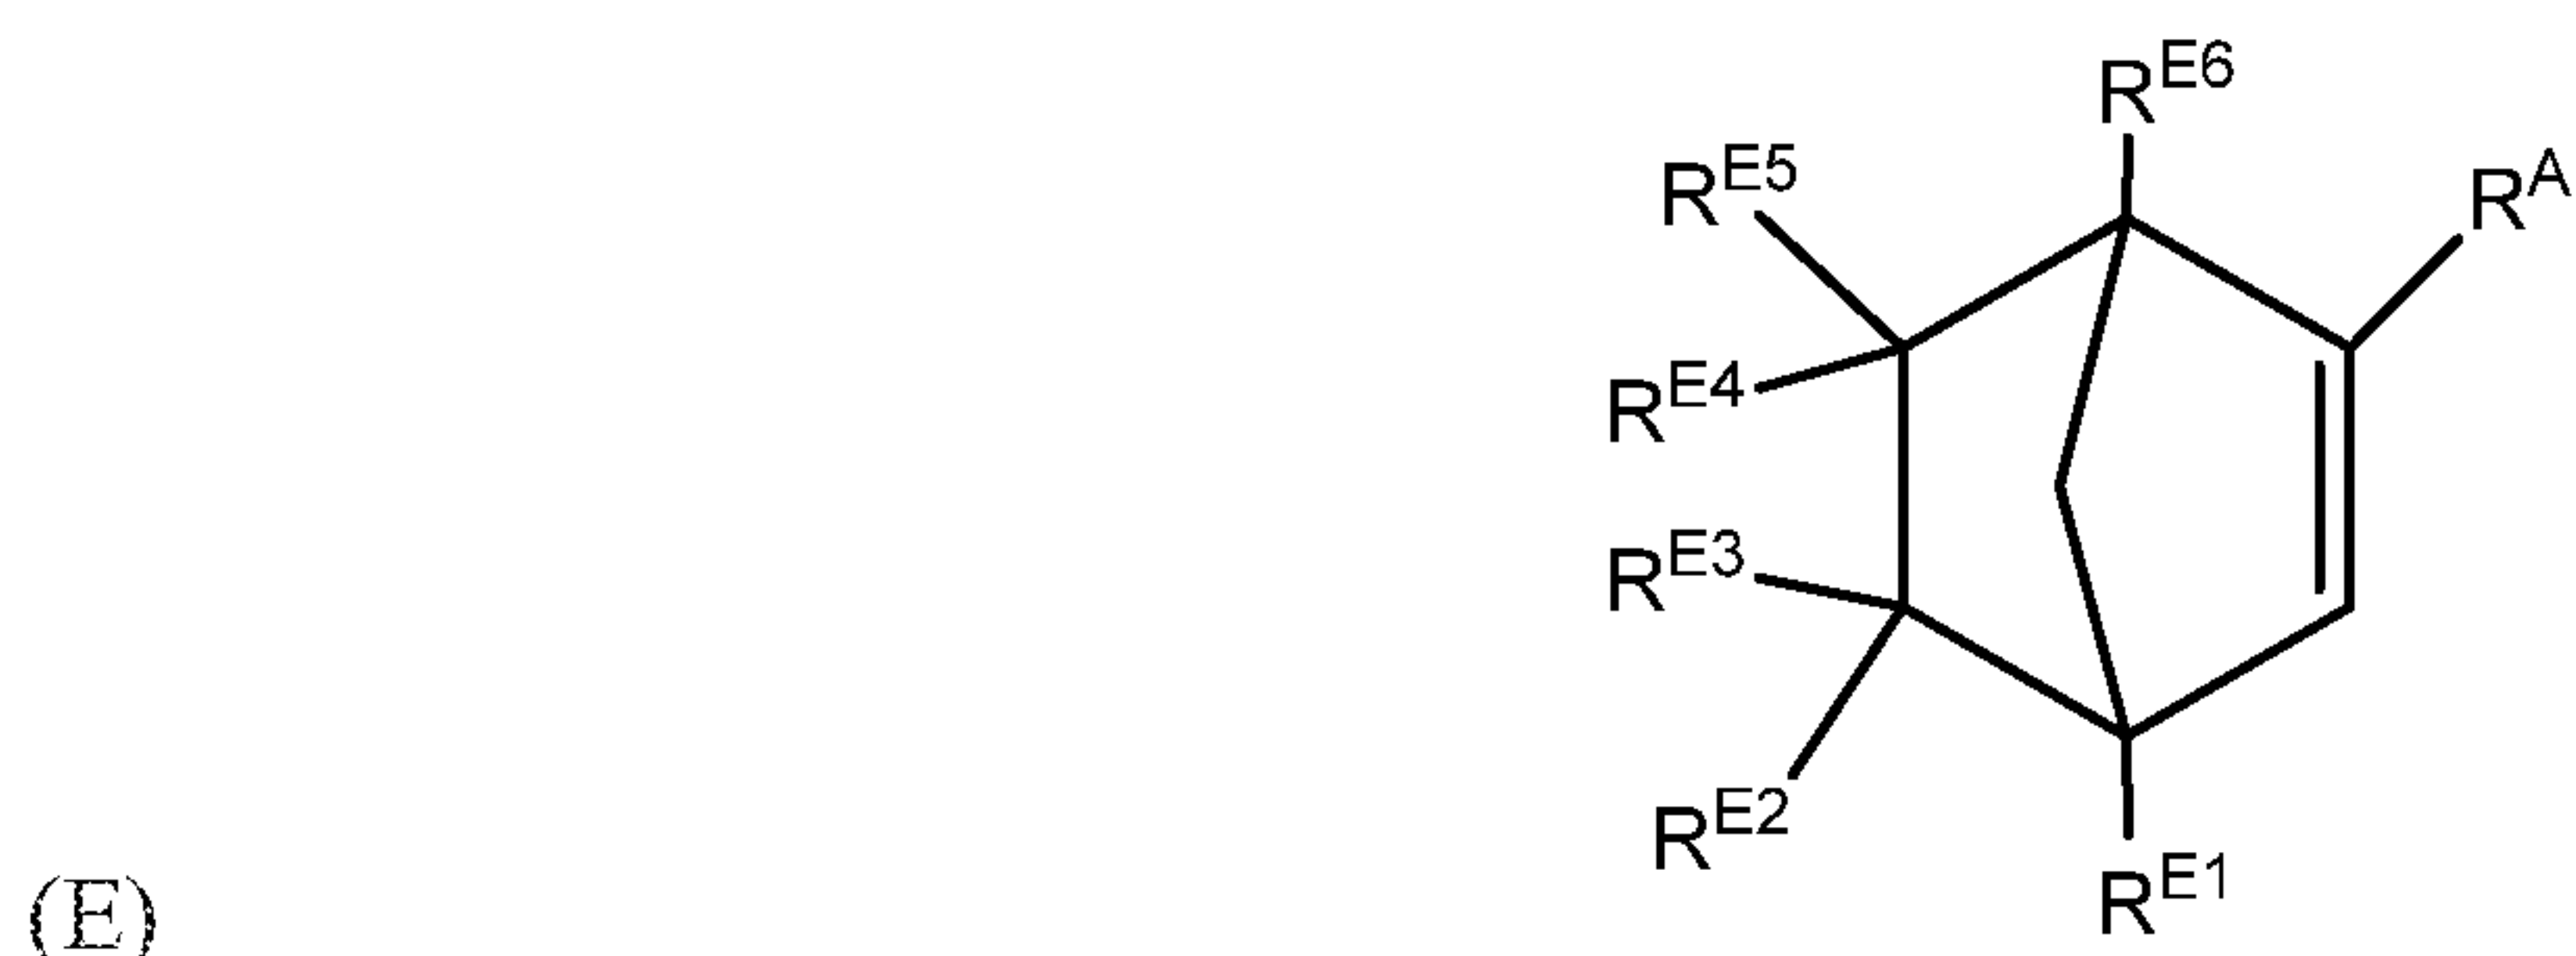

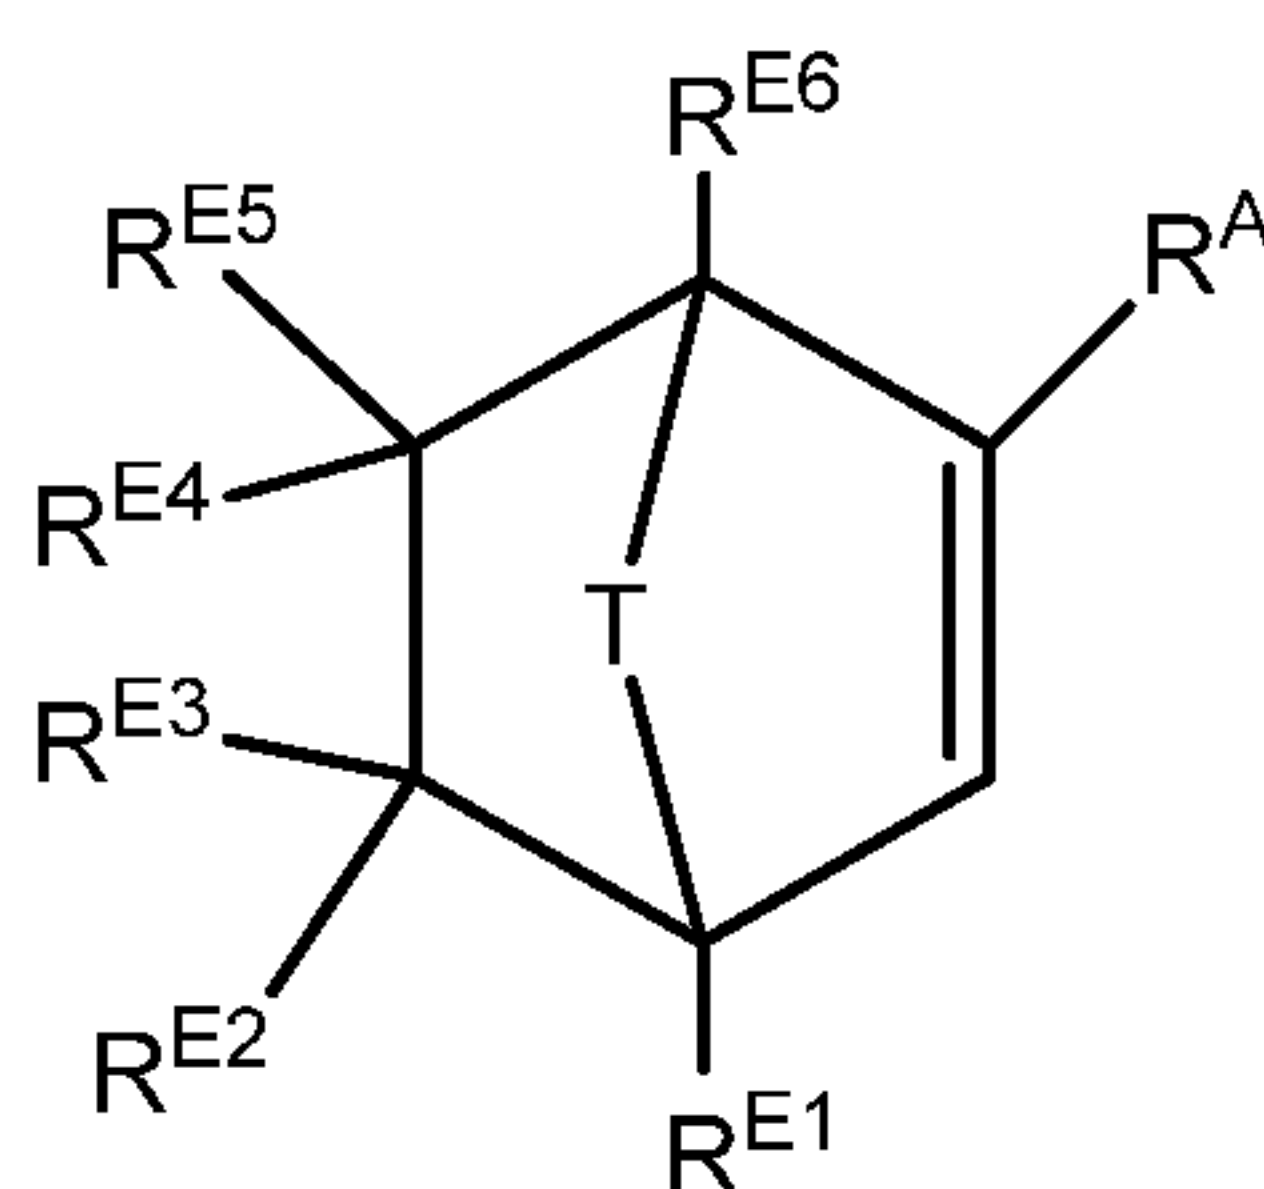

(F)

wherein R^A and T are as defined above, R^{E1} , R^{E2} , R^{E3} , and R^{E6} have the same definitions as R^{B1} through R^{B6} , and R^{E4} and R^{E5} are defined as for R^{E2} and R^{E3} , respectively.

Additionally, any of the R^{E1} , R^{E2} , R^{E3} , R^{E4} , R^{E5} , and R^{E6} moieties can be linked to any other of the R^{E1} , R^{E2} , R^{E3} , R^{E4} , R^{E5} , R^{E6} moieties to provide a bicyclic or polycyclic olefin, and the linkage may include heteroatoms or functional groups e.g., the linkage may include without limitation an ether, ester, thioether, amino, alkylamino, imino, or anhydride moiety.

[0075] Examples of bicyclic and polycyclic olefinic reactants thus include, without limitation, dicyclopentadiene, tricyclopentadiene, dicyclohexadiene, norbornene, 5-methyl-2-norbornene, 5-ethyl-2-norbornene, 5-isobutyl-2-norbornene, 5,6-dimethyl-2-norbornene, 5-phenylnorbornene, 5-benzylnorbornene, 5-acetylnorbornene, 5-methoxycarbonylnorbornene, 5-ethoxycarbonyl-1-norbornene, 5-methyl-5-methoxy-carbonylnorbornene, 5-cyanonorbornene, 5,5,6-trimethyl-2-norbornene, cyclo-hexenylnorbornene, endo, exo-5,6-dimethoxynorbornene, endo, endo-5,6-dimethoxynorbornene, endo,exo-5,6-dimethoxycarbonylnorbornene, endo, endo-5,6-dimethoxycarbonylnorbornene, 2,3-dimethoxynorbornene, norbornadiene, tricycloundecene, tetracyclododecene, 8-methyltetracyclododecene, 8-ethyl-tetracyclododecene, 8-methoxycarbonyltetracyclododecene, 8-methyl-8-tetracyclo-dodecene, 8-cyanotetracyclododecene, pentacyclopentadecene, pentacyclohexadecene, and the like.

Additional examples of bicyclic and polycyclic olefins include, without limitation, higher order oligomers of cyclopentadiene such as cyclopentadiene tetramer, cyclopentadiene pentamer, and the like; and C_2 - C_{12} hydrocarbyl substituted norbornenes such as 5-butyl-2-norbornene, 5-hexyl-2-norbornene, 5-octyl-2-norbornene, 5-decyl-2-norbornene, 5-dodecyl-2-norbornene, 5-vinyl-2-norbornene, 5-ethylidene-2-norbornene, 5-isopropenyl-2-norbornene, 5-propenyl-2-norbornene, and 5-butenyl-2-norbornene, and the like.

[0076] Preferred cyclic olefins include C_5 to C_{24} unsaturated hydrocarbons. Also preferred are C_5 to C_{24} cyclic hydrocarbons that contain one or more (typically 2 to 12) heteroatoms such

as O, N, S, or P. For example, crown ether cyclic olefins may include numerous O heteroatoms throughout the cycle, and these are within the scope of the invention. In addition, preferred cyclic olefins are C₅ to C₂₄ hydrocarbons that contain one or more (typically 2 or 3) olefins. For example, the cyclic olefin may be mono-, di-, or tri-unsaturated. Examples of cyclic olefins include cyclooctene, cyclododecene, and (c,t,t)-1,5,9-cyclododecatriene.

[0077] The cyclic olefins may also comprise multiple (typically 2 or 3) rings. For example, the cyclic olefin may be mono-, di-, or tri-cyclic. When the cyclic olefin comprises more than one ring, the rings may or may not be fused. Preferred examples of cyclic olefins that comprise multiple rings include norbornene, dicyclopentadiene, and 5-ethylidene-2-norbornene.

[0078] The cyclic olefin may also be substituted, for example, a C₅ to C₂₄ cyclic hydrocarbon wherein one or more (typically 2, 3, 4, or 5) of the hydrogens are replaced with non-hydrogen substituents. Suitable non-hydrogen substituents may be chosen from the substituents described hereinabove. For example, functionalized cyclic olefins, i.e., C₅ to C₂₄ cyclic hydrocarbons wherein one or more (typically 2, 3, 4, or 5) of the hydrogens are replaced with functional groups, are within the scope of the invention. Suitable functional groups may be chosen from the functional groups described hereinabove. For example, a cyclic olefin functionalized with an alcohol group may be used to prepare a telechelic polymer comprising pendent alcohol groups. Functional groups on the cyclic olefin may be protected in cases where the functional group interferes with the metathesis catalyst, and any of the protecting groups commonly used in the art may be employed. Acceptable protecting groups may be found, for example, in Greene et al., *Protective Groups in Organic Synthesis*, 3rd Ed. (New York: Wiley, 1999). Examples of functionalized cyclic olefins include 2-hydroxymethyl-5-norbornene, 2-[(2-hydroxyethyl)carboxylate]-5-norbornene, cycdecanol, 5-n-hexyl-2-norbornene, 5-n-butyl-2-norbornene.

[0079] Cyclic olefins incorporating any combination of the abovementioned features (i.e., heteroatoms, substituents, multiple olefins, multiple rings) are suitable for the invention disclosed herein.

[0080] The cyclic olefins useful in the invention disclosed herein may be strained or unstrained. It will be appreciated that the amount of ring strain varies for each cyclic olefin compound, and depends upon a number of factors including the size of the ring, the presence, and identity of substituents, and the presence of multiple rings. Ring strain is one factor in


determining the reactivity of a molecule towards ring-opening olefin metathesis reactions.

Highly strained cyclic olefins, such as certain bicyclic compounds, readily undergo ring opening reactions with olefin metathesis catalysts. Less strained cyclic olefins, such as certain unsubstituted hydrocarbon monocyclic olefins, are generally less reactive. In some cases, ring opening reactions of relatively unstrained (and therefore relatively unreactive) cyclic olefins may become possible when performed in the presence of the olefinic compounds disclosed herein.

[0081] A plurality of cyclic olefins may be used to prepare metathesis polymers from the olefinic compound. For example, two cyclic olefins selected from the cyclic olefins described hereinabove may be employed in order to form metathesis products that incorporate both cyclic olefins. Where two or more cyclic olefins are used, one example of a second cyclic olefin is a cyclic alkenol, i.e., a C₅-C₂₄ cyclic hydrocarbon wherein at least one of the hydrogen substituents is replaced with an alcohol or protected alcohol moiety to yield a functionalized cyclic olefin.


[0082] The use of a plurality of cyclic olefins, and in particular when at least one of the cyclic olefins is functionalized, allows for further control over the positioning of functional groups within the products. For example, the density of cross-linking points can be controlled in polymers and macromonomers prepared using the methods disclosed herein. Control over the quantity and density of substituents and functional groups also allows for control over the physical properties (e.g., melting point, tensile strength, glass transition temperature, etc.) of the products. Control over these and other properties is possible for reactions using only a single cyclic olefin, but it will be appreciated that the use of a plurality of cyclic olefins further enhances the range of possible metathesis products and polymers formed.

[0083] Further preferred cyclic olefins encompassed by structure (D) that are in the norbornene family may be generally represented by the structure (G):

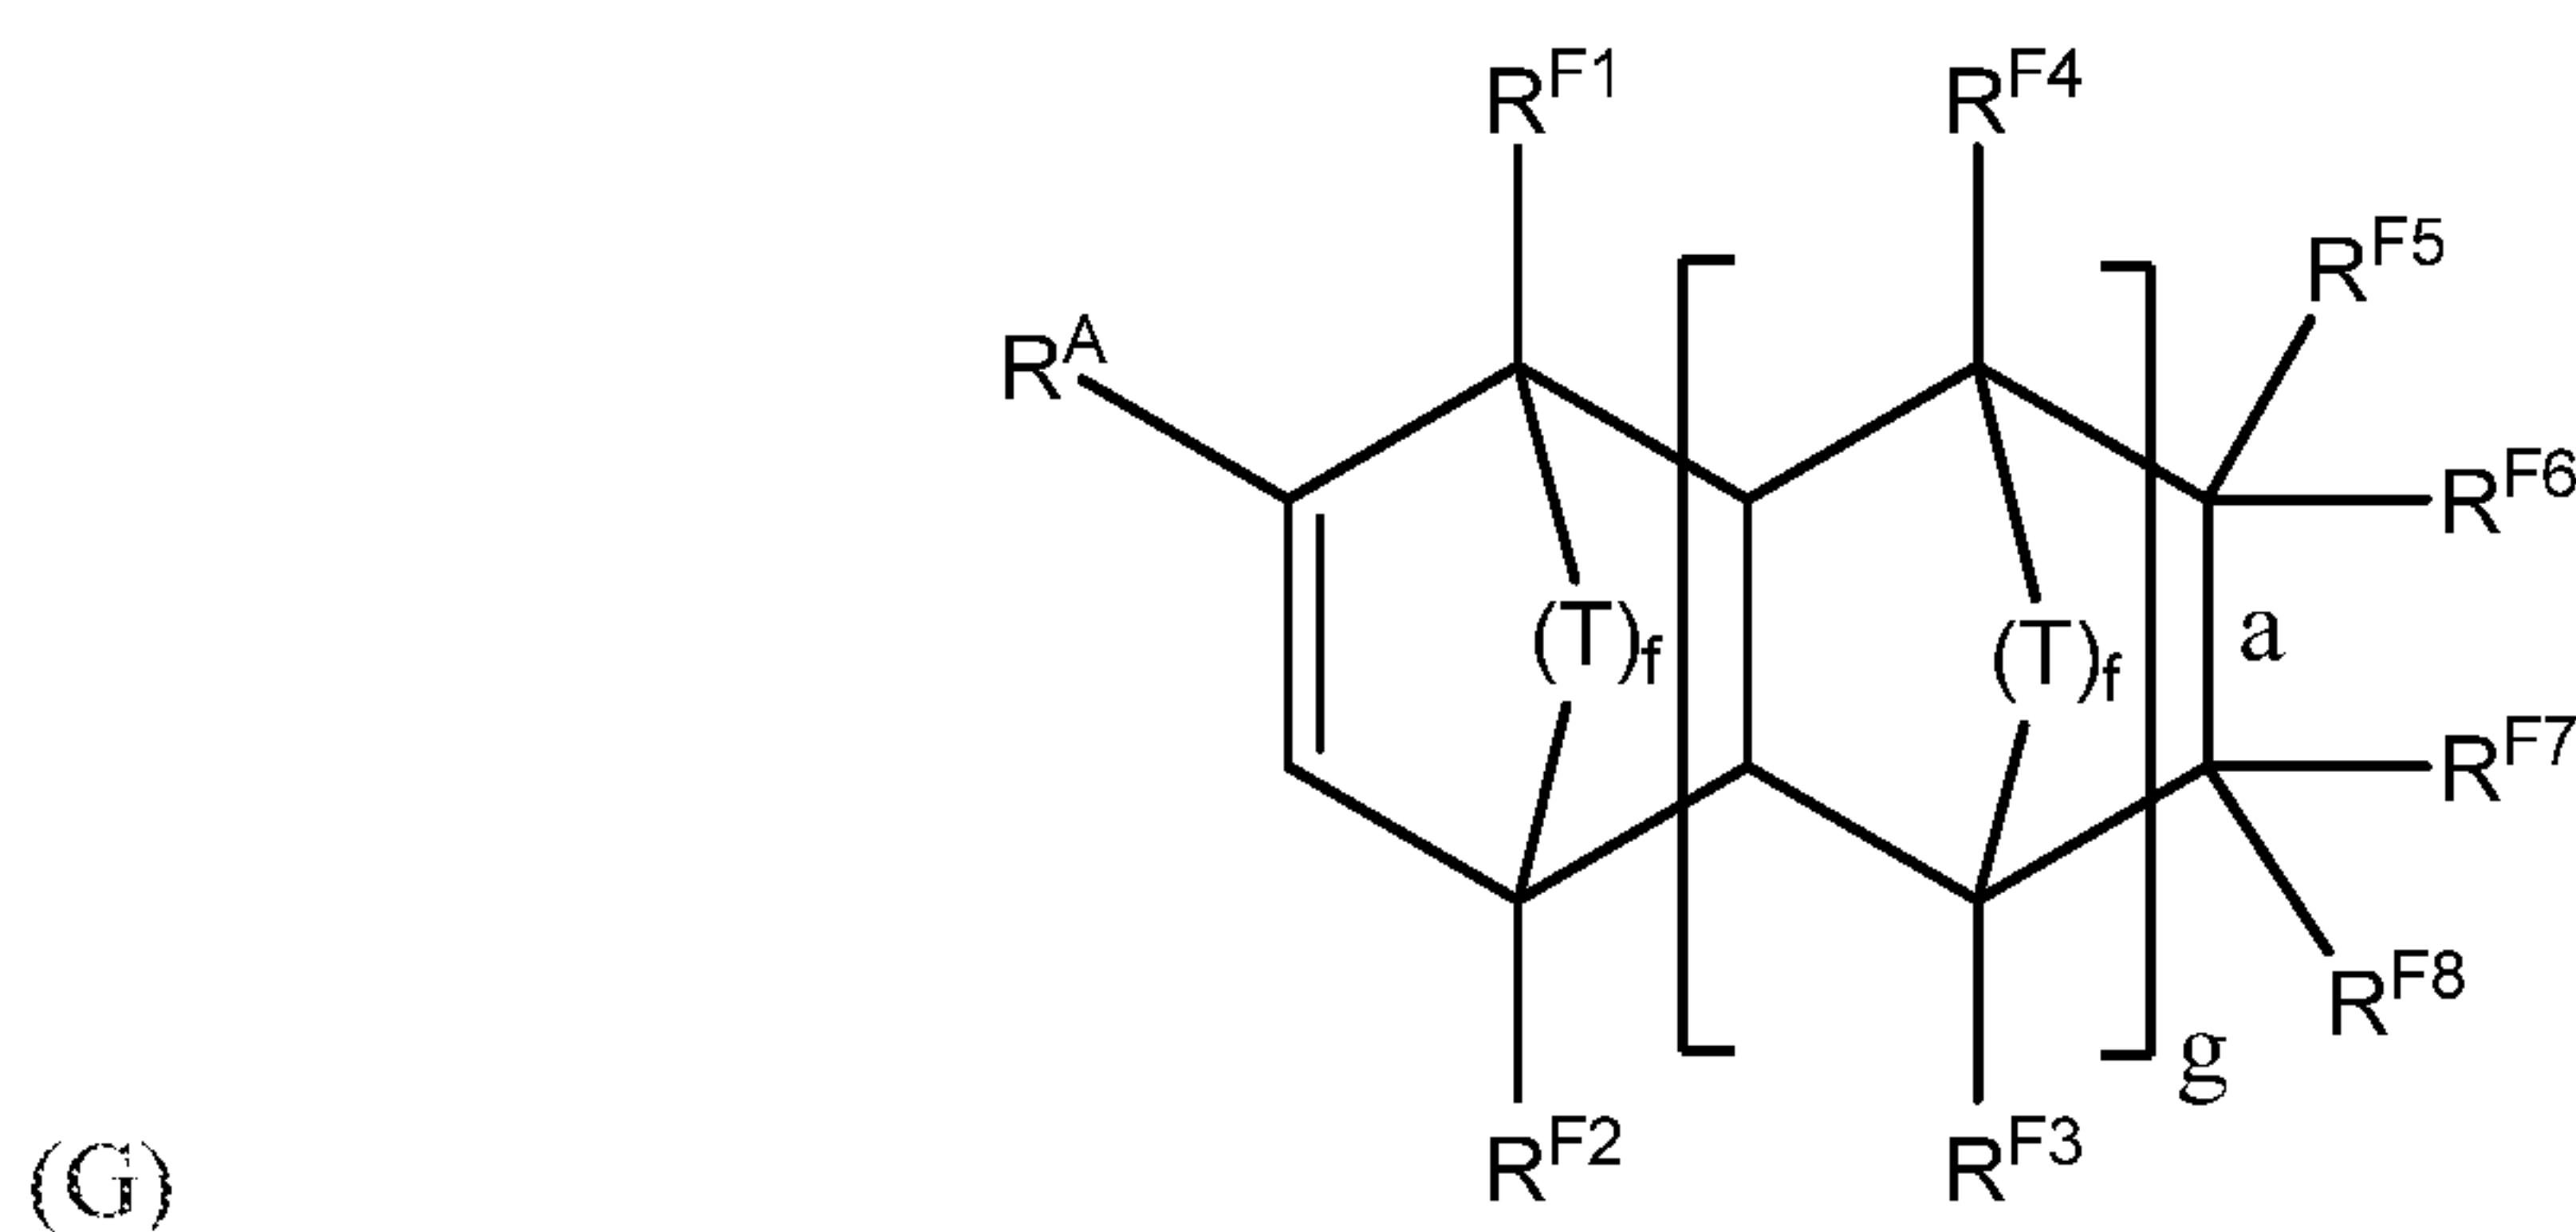

wherein R^A and T are as defined above, R^{F1} , R^{F2} , R^{F3} , R^{F4} , R^{F5} , R^{F6} , R^{F7} , and R^{F8} are as defined for R^{B1} through R^{B6} , and “a” represents a single bond or a double bond, f is generally 1 or 2, g is an integer from 0 to 5, and when “a” is a double bond one of R^{F5} , R^{F6} and one of R^{F7} , R^{F8} is not present. Furthermore, any of the R^{F5} , R^{F6} , R^{F7} , and R^{F8} moieties can be linked to any of the other R^{F5} , R^{F6} , R^{F7} , and R^{F8} moieties to provide a substituted or unsubstituted alicyclic group containing 4 to 30 ring carbon atoms or a substituted or unsubstituted aryl group containing 6 to 18 ring carbon atoms or combinations thereof and the linkage may include heteroatoms or functional groups, e.g., the linkage may include without limitation an ether, ester, thioether, amino, alkyl amino, imino, or anhydride moiety. The cyclic group can be monocyclic, bicyclic, or polycyclic. When unsaturated the cyclic group can contain monounsaturations or multiunsaturations, with monounsaturated cyclic groups being preferred. When substituted, the rings contain monosubstitution or multisubstitution wherein the substituents are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, functional groups (F_n), heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and $-(Z^*)_n-F_n$ where n is zero or 1, Z^* , and F_n are as defined above.

[0084] More preferred cyclic olefins possessing at least one norbornene moiety have the structure (H)

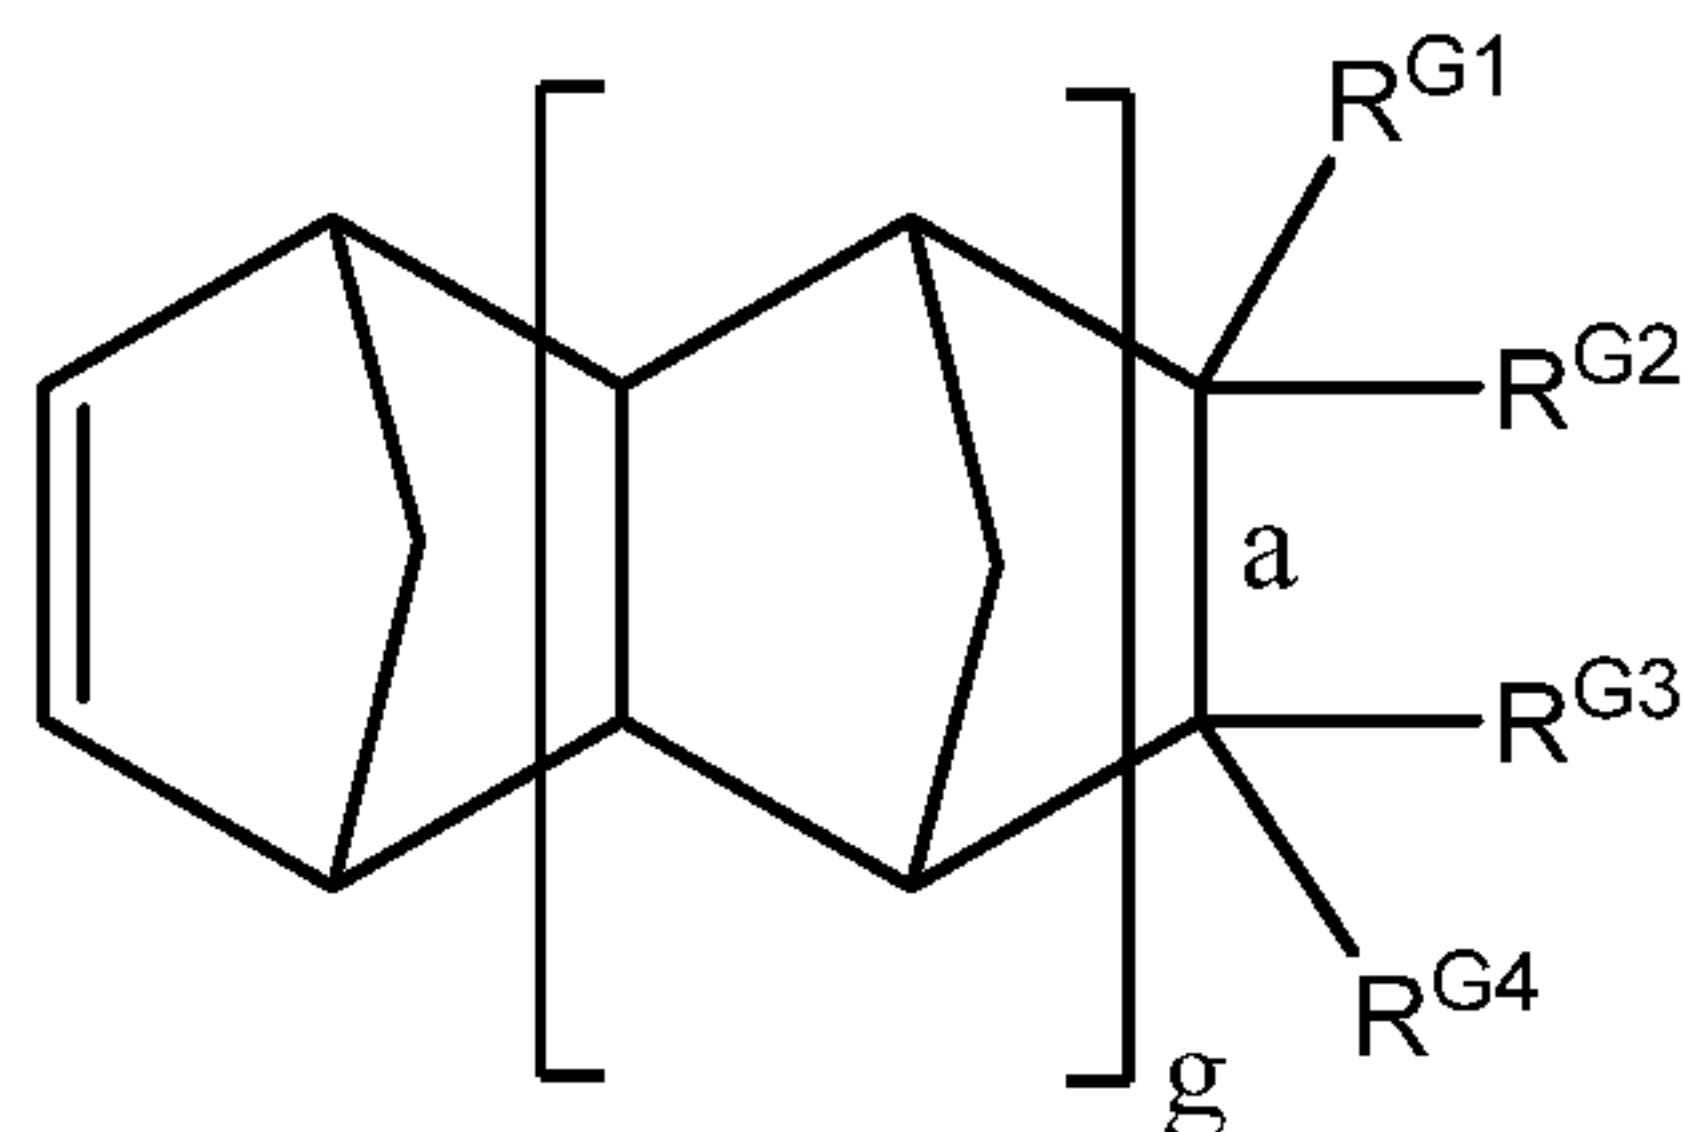


(H)

wherein, R^{G1} , R^{G2} , R^{G3} , and R^{G4} are as defined for R^{B1} through R^{B6} , and “a” represents a single bond or a double bond, g is an integer from 0 to 5, and when “a” is a double bond one of R^{G1} , R^{G2} and one of R^{G3} , R^{G4} is not present. Furthermore any of the R^{G1} , R^{G2} , R^{G3} , and R^{G4} moieties can be linked to any of the other R^{G1} , R^{G2} , R^{G3} , and R^{G4} moieties to provide a substituted or unsubstituted alicyclic group containing 4 to 30 carbon atoms or a substituted or unsubstituted aryl group containing 6 to 18 ring carbon atoms or combinations thereof and the linkage may include heteroatoms or functional groups, e.g., the linkage may include without limitation an

ether, ester, thioether, amino, alkylamino, imino, or anhydride moiety. The alicyclic group can be monocyclic, bicyclic, or polycyclic. When unsaturated the cyclic group can contain monounsaturations or multiunsaturations, with monounsaturated cyclic groups being preferred. When substituted, the rings contain monosubstitution or multisubstitution wherein the substituents are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, functional groups (Fn), heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and $-(Z^*)_n\text{-Fn}$ where n is zero or 1, Z^* , and Fn are as defined above.

[0085] One route for the preparation of hydrocarbyl substituted and functionally substituted norbornenes employs the Diels-Alder cycloaddition reaction in which cyclopentadiene or substituted cyclopentadiene is reacted with a suitable dienophile at elevated temperatures to form the substituted norbornene adduct generally shown by the following reaction Scheme 1:


SCHEME 1

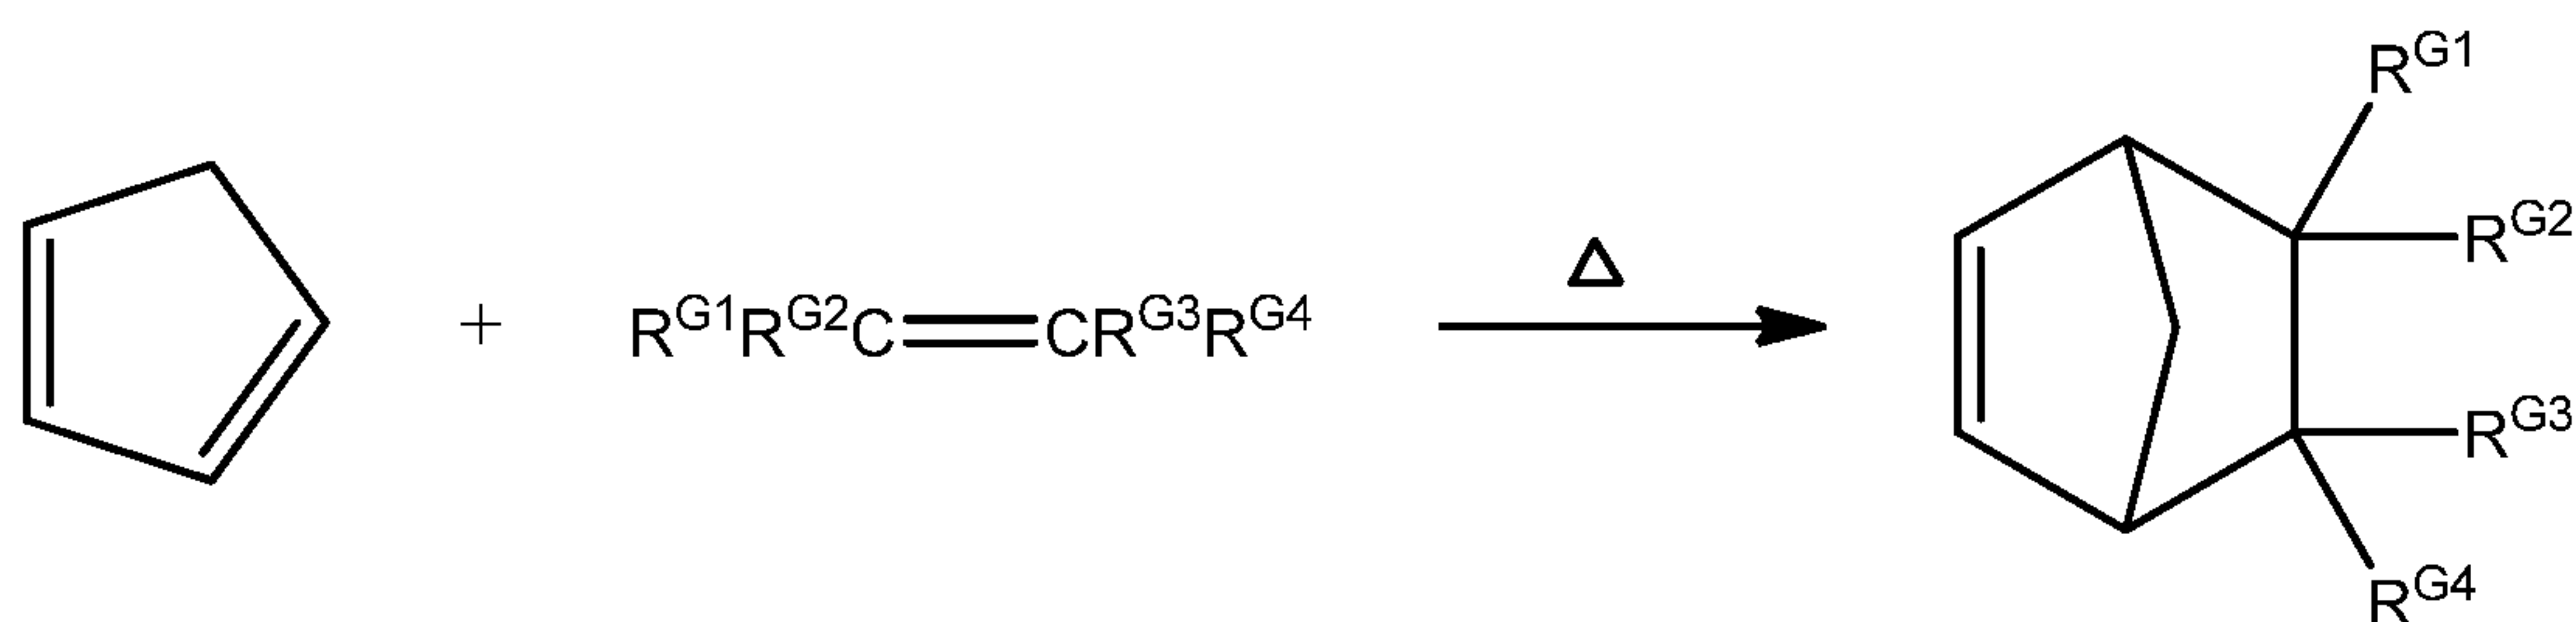

wherein R^{G1} to R^{G4} are as defined above.

[0086] Other norbornene adducts can be prepared by the thermal pyrolysis of dicyclopentadiene in the presence of a suitable dienophile. The reaction proceeds by the initial pyrolysis of dicyclopentadiene to cyclopentadiene followed by the Diels-Alder cycloaddition of cyclopentadiene and the dienophile to give the adduct shown below in Scheme 2:


SCHEME 2

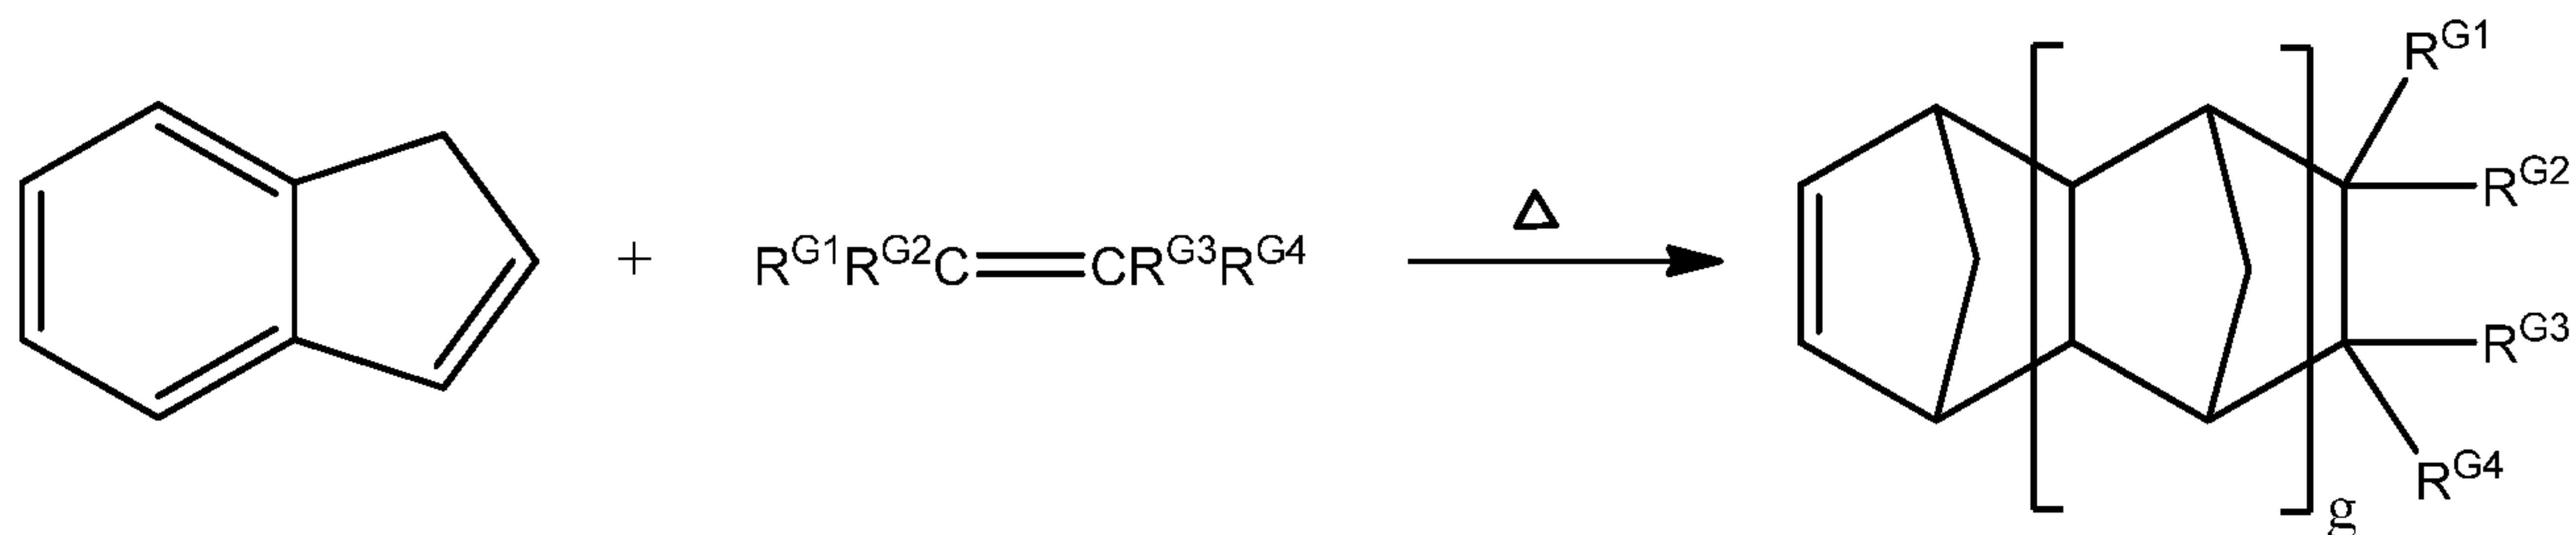

wherein g is an integer from 0 to 5, and R^{G1} to R^{G4} are as defined above.

[0087] Norbornadiene and higher Diels-Alder adducts thereof similarly can be prepared by the thermal reaction of cyclopentadiene and dicyclopentadiene in the presence of an acetylenic reactant as shown below is Scheme 3:

SCHEME 3

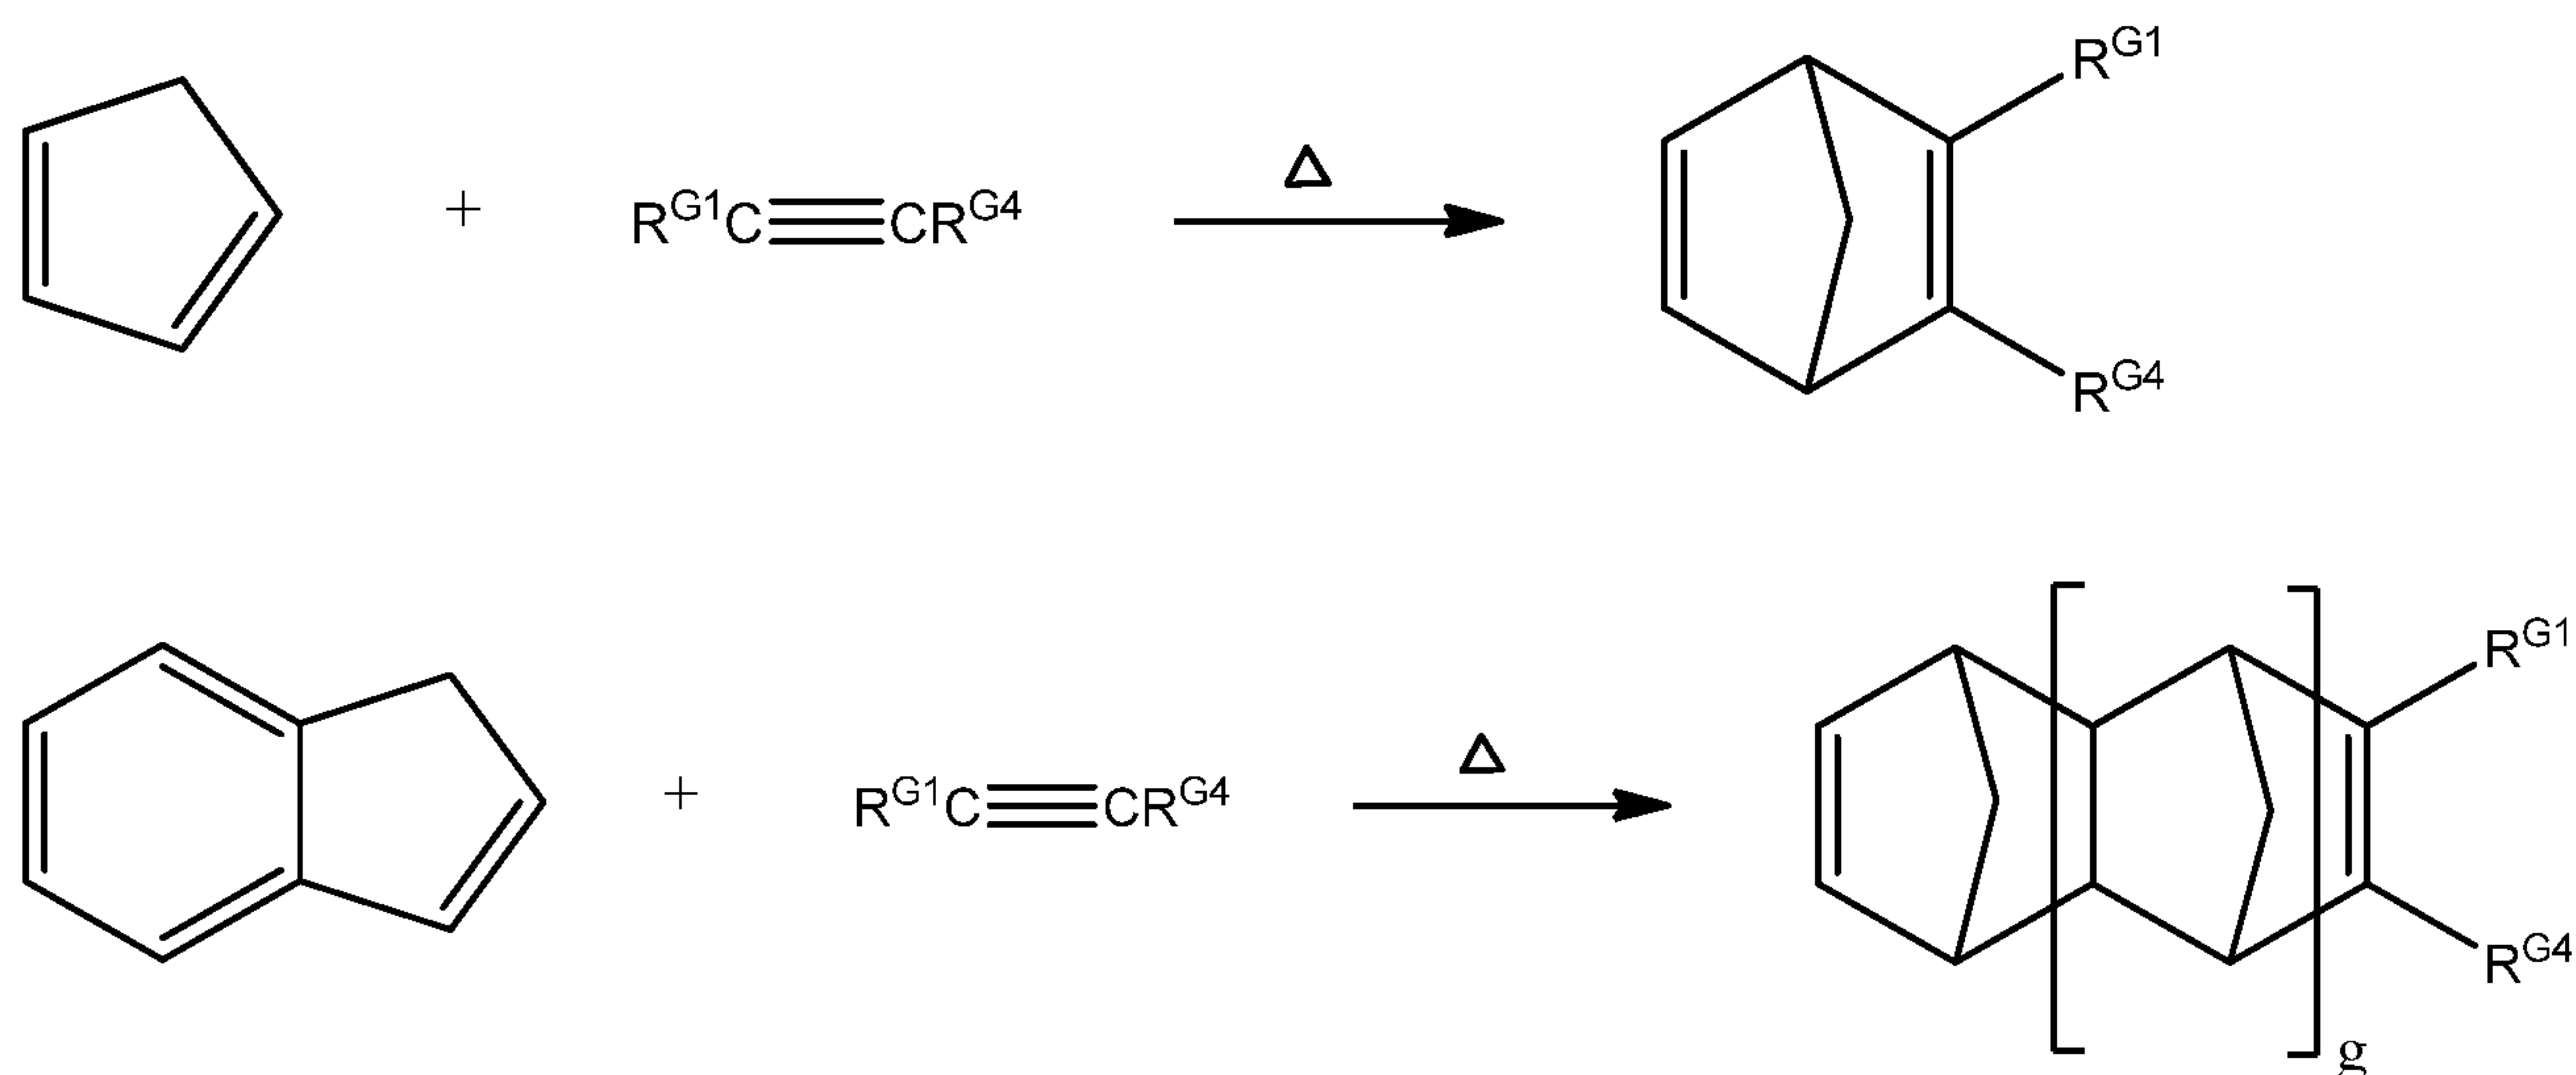


wherein g is an integer from 0 to 5, R^{G1} and R^{G4} are as defined above.

[0088] More preferred cyclic olefins include dicyclopentadiene, tricyclopentadiene, dicyclohexadiene, norbornene, 5-methyl-2-norbornene, 5-ethyl-2-norbornene, 5-isobutyl-2-norbornene, 5,6-dimethyl-2-norbornene, 5-phenylnorbornene, 5-benzylnorbornene, 5-acetylnorbornene, 5-methoxycarbonylnorbornene, 5-ethoxycarbonyl-1-norbornene, 5-methyl-5-methoxy-carbonylnorbornene, 5-cyanonorbornene, 5,5,6-trimethyl-2-norbornene, cyclohexenylnorbornene, endo, exo-5,6-dimethoxynorbornene, endo, endo-5,6-dimethoxynorbornene, endo, exo-5,6-dimethoxycarbonylnorbornene, endo, endo-5,6-dimethoxycarbonylnorbornene, 2,3-dimethoxynorbornene, norbornadiene, tricycloundecene, tetracyclododecene, 8-methyltetracyclododecene, 8-ethyl-tetracyclododecene, 8-methoxycarbonyltetracyclododecene, 8-methyl-8-tetracyclo-dodecene, 8-cyanotetracyclododecene, pentacyclopentadecene, pentacyclohexadecene, higher order oligomers of cyclopentadiene such as cyclopentadiene tetramer, cyclopentadiene pentamer, and the like; and C_2 - C_{12} hydrocarbyl substituted norbornenes such as 5-butyl-2-norbornene, 5-hexyl-2-norbornene, 5-octyl-2-norbornene, 5-decyl-2-norbornene, 5-dodecyl-2-norbornene, 5-vinyl-2-norbornene, 5-ethylidene-2-norbornene, 5-isopropenyl-2-norbornene, 5-propenyl-2-norbornene, and 5-butenyl-2-norbornene, and the like. Even more preferred cyclic olefins include

dicyclopentadiene, tricyclopentadiene, and higher order oligomers of cyclopentadiene, such as cyclopentadiene tetramer, cyclopentadiene pentamer, and the like, tetracyclododecene, norbornene, and C₂-C₁₂ hydrocarbyl substituted norbornenes, such as 5-butyl-2-norbornene, 5-hexyl-2-norbornene, 5-octyl-2-norbornene, 5-decyl-2-norbornene, 5-dodecyl-2-norbornene, 5-vinyl-2-norbornene, 5-ethylidene-2-norbornene, 5-isopropenyl-2-norbornene, 5-propenyl-2-norbornene, 5-butenyl-2-norbornene, and the like.

Olefin Metathesis Catalyst

[0089] The olefin metathesis catalyst complex according to the invention is preferably a Group 8 transition metal complex having the structure of formula (I)

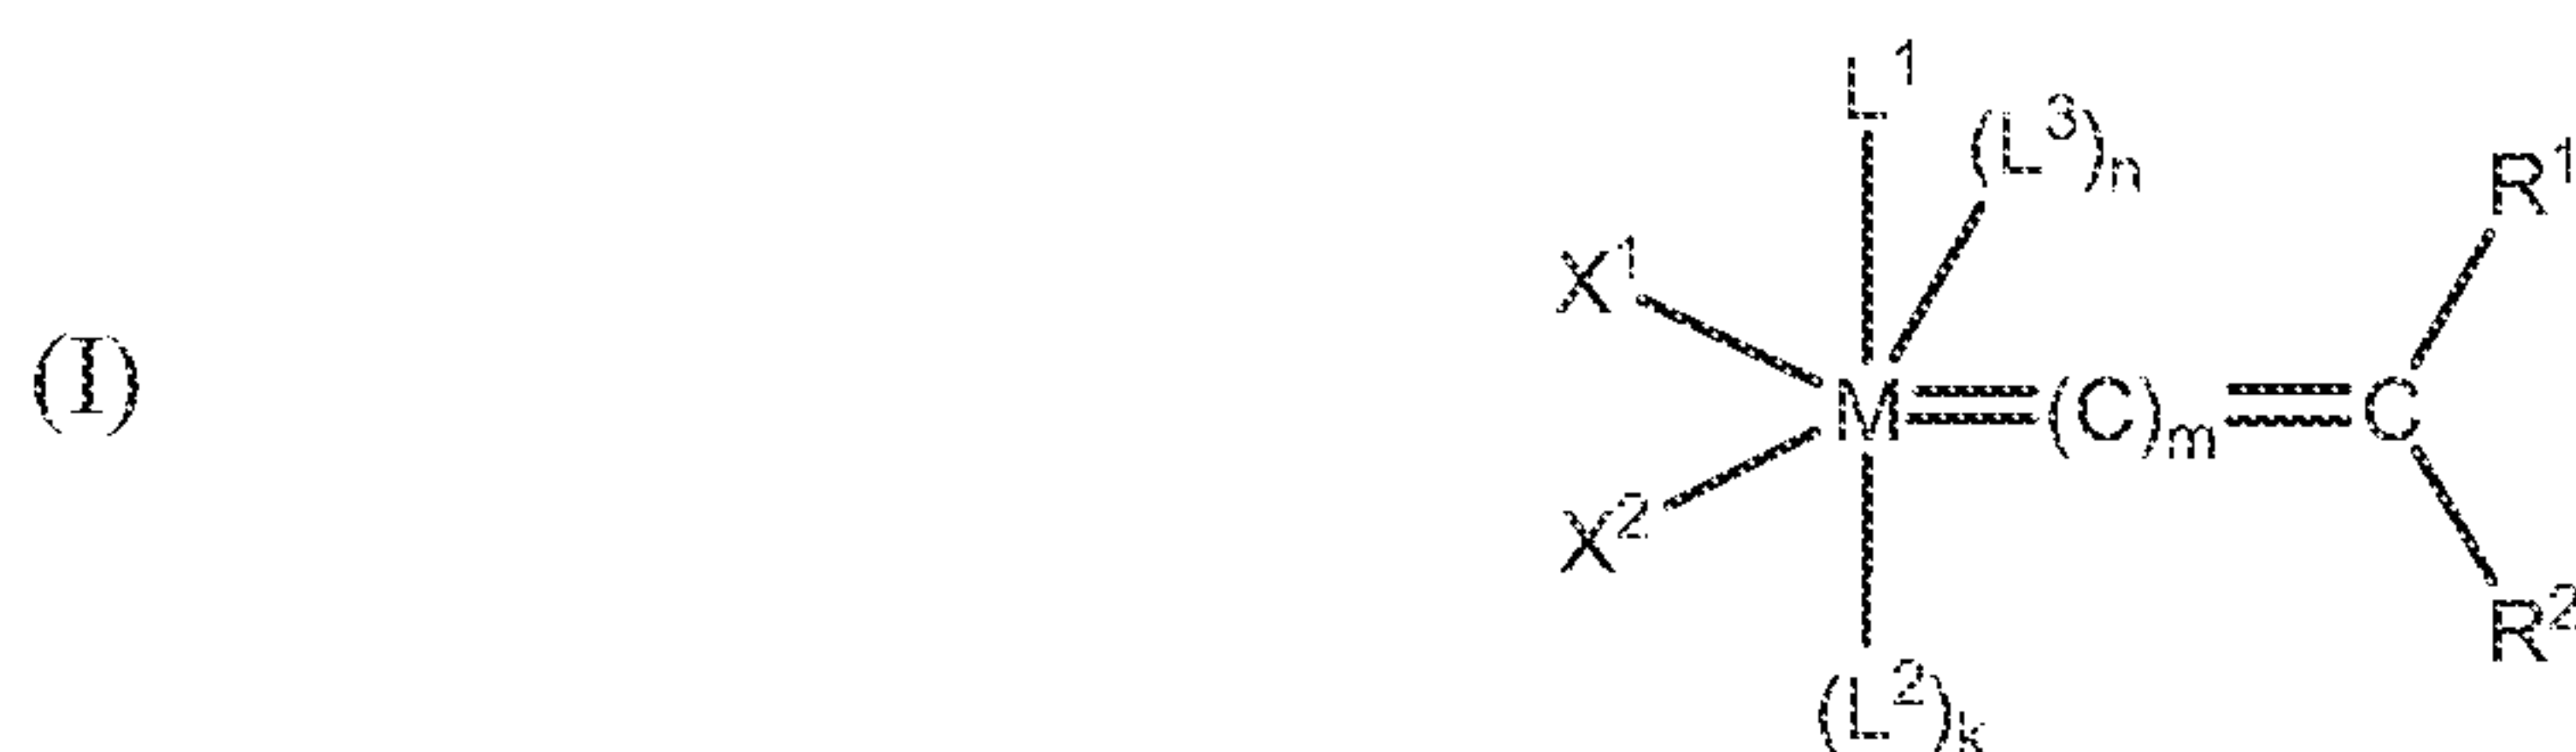

in which:

M is a Group 8 transition metal;

L¹, L², and L³ are neutral electron donor ligands;

n is 0 or 1, such that L³ may or may not be present;

m is 0, 1, or 2;

k is 0 or 1;

X¹ and X² are anionic ligands; and

R¹ and R² are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups,

wherein any two or more of X¹, X², L¹, L², L³, R¹, and R² can be taken together to form one or more cyclic groups, and further wherein any one or more of X¹, X², L¹, L², L³, R¹, and R² may be attached to a support.

[0090] Additionally, in formula (I), one or both of R¹ and R² may have the structure -(W)_n-U⁺V⁻, in which W is selected from hydrocarbylene, substituted hydrocarbylene, heteroatom-containing hydrocarbylene, or substituted heteroatom-containing hydrocarbylene; U is a

positively charged Group 15 or Group 16 element substituted with hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, or substituted heteroatom-containing hydrocarbyl; V is a negatively charged counterion; and n is zero or 1. Furthermore, R¹ and R² may be taken together to form an indenylidene moiety.

[0091] Preferred catalysts contain Ru or Os as the Group 8 transition metal, with Ru particularly preferred.

[0092] Numerous embodiments of the catalysts useful in the reactions disclosed herein are described in more detail *infra*. For the sake of convenience, the catalysts are described in groups, but it should be emphasized that these groups are not meant to be limiting in any way. That is, any of the catalysts useful in the invention may fit the description of more than one of the groups described herein.

[0093] A first group of catalysts, then, are commonly referred to as First Generation Grubbs-type catalysts, and have the structure of formula (I). For the first group of catalysts, M and m are as described above, and n, X¹, X², L¹, L², L³, R¹, and R² are described as follows.

[0094] For the first group of catalysts, n is 0, and L¹ and L² are independently selected from phosphine, sulfonated phosphine, phosphite, phosphinite, phosphonite, arsine, stibine, ether, amine, amide, imine, sulfoxide, carboxyl, nitrosyl, pyridine, substituted pyridine, imidazole, substituted imidazole, pyrazine, and thioether. Exemplary ligands are trisubstituted phosphines. Preferred trisubstituted phosphines are of the formula PR^{H1}R^{H2}R^{H3}, where R^{H1}, R^{H2}, R^{H3} are each independently substituted or unsubstituted aryl or C₁-C₁₀ alkyl, particularly primary alkyl, secondary alkyl, or cycloalkyl. In the most preferred, L¹ and L² are independently selected from the group consisting of trimethylphosphine (PMe₃), triethylphosphine (PEt₃), tri-n-butylphosphine (PnBu₃), tri(ortho-tolyl)phosphine (P-o-tolyl₃), tri-*tert*-butylphosphine (P-*tert*-Bu₃), tricyclopentylphosphine (PCyclopentyl₃), tricyclohexylphosphine (PCy₃), triisopropylphosphine (P-i-Pr₃), triisobutylphosphine (P-i-Bu₃), trioctylphosphine (POct₃), triphenylphosphine (PPh₃), tri(pentafluorophenyl)phosphine (P(C₆F₅)₃), methyldiphenylphosphine (PMePh₂), dimethylphenylphosphine (PMe₂Ph), and diethylphenylphosphine (PEt₂Ph). Alternatively, L¹ and L² are independently selected from phosphabicycloalkane (e.g. monosubstituted 9-phosphabicyclo-[3.3.1]nonane, or monosubstituted 9-phosphabicyclo[4.2.1]nonane such as cyclohexylphoban, isopropylphoban, ethylphoban, methylphoban, butylphoban, pentylphoban, and the like.

[0095] X^1 and X^2 are anionic ligands, and may be the same or different, or are linked together to form a cyclic group, typically although not necessarily a five- to eight-membered ring. In preferred embodiments, X^1 and X^2 are each independently hydrogen, halide, or one of the following groups: C_1 - C_{20} alkyl, C_5 - C_{24} aryl, C_1 - C_{20} alkoxy, C_5 - C_{24} aryloxy, C_2 - C_{20} alkoxycarbonyl, C_6 - C_{24} aryloxycarbonyl, C_2 - C_{24} acyl, C_2 - C_{24} acyloxy, C_1 - C_{20} alkylsulfonato, C_5 - C_{24} arylsulfonato, C_1 - C_{20} alkylsulfanyl, C_5 - C_{24} arylsulfanyl, C_1 - C_{20} alkylsulfinyl, or C_5 - C_{24} arylsulfinyl. Optionally, X^1 and X^2 may be substituted with one or more moieties selected from C_1 - C_{12} alkyl, C_1 - C_{12} alkoxy, C_5 - C_{24} aryl, and halide, which may, in turn, with the exception of halide, be further substituted with one or more groups selected from halide, C_1 - C_6 alkyl, C_1 - C_6 alkoxy, and phenyl. In more preferred embodiments, X^1 and X^2 are halide, benzoate, C_2 - C_6 acyl, C_2 - C_6 alkoxycarbonyl, C_1 - C_6 alkyl, phenoxy, C_1 - C_6 alkoxy, C_1 - C_6 alkylsulfanyl, aryl, or C_1 - C_6 alkylsulfonyl. In even more preferred embodiments, X^1 and X^2 are each halide, CF_3CO_2 , CH_3CO_2 , CFH_2CO_2 , $(CH_3)_3CO$, $(CF_3)_2(CH_3)CO$, $(CF_3)(CH_3)_2CO$, PhO , MeO , EtO , tosylate, mesylate, or trifluoromethane-sulfonate. In the most preferred embodiments, X^1 and X^2 are each chloride. Alternatively X^1 and X^2 are independently NO_3 , $-N=C=O$, or $-N=C=S$.


[0096] R^1 and R^2 are independently selected from hydrogen, hydrocarbyl (e.g., C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, C_6 - C_{24} aralkyl, etc.), substituted hydrocarbyl (e.g., substituted C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, C_6 - C_{24} aralkyl, etc.), heteroatom-containing hydrocarbyl (e.g., heteroatom-containing C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, C_6 - C_{24} aralkyl, etc.), and substituted heteroatom-containing hydrocarbyl (e.g., substituted heteroatom-containing C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, C_6 - C_{24} aralkyl, etc.), and functional groups. R^1 and R^2 may also be linked to form a cyclic group, which may be aliphatic or aromatic, and may contain substituents and/or heteroatoms. Generally, such a cyclic group will contain 4 to 12, preferably 5, 6, 7, or 8 ring atoms.

[0097] In preferred catalysts, R^1 is hydrogen and R^2 is selected from C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, and C_5 - C_{24} aryl, more preferably C_1 - C_6 alkyl, C_2 - C_6 alkenyl, and C_5 - C_{14} aryl. Still more preferably, R^2 is phenyl, vinyl, methyl, isopropyl, or t-butyl, optionally substituted with one or more moieties selected from C_1 - C_6 alkyl, C_1 - C_6 alkoxy, phenyl, and a functional group F_n as defined earlier herein. Most preferably, R^2 is phenyl or vinyl substituted with one or more


moieties selected from methyl, ethyl, chloro, bromo, iodo, fluoro, nitro, dimethylamino, methyl, methoxy, and phenyl. Optimally, R^2 is phenyl or $-C=C(CH_3)_2$.

[0098] Any two or more (typically two, three, or four) of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 can be taken together to form a cyclic group, including bidentate or multidentate ligands, as disclosed, for example, in U.S. Pat. No. 5,312,940, the disclosure of which is incorporated herein by reference. When any of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 are linked to form cyclic groups, those cyclic groups may contain 4 to 12, preferably 4, 5, 6, 7 or 8 atoms, or may comprise two or three of such rings, which may be either fused or linked. The cyclic groups may be aliphatic or aromatic, and may be heteroatom-containing and/or substituted. The cyclic group may, in some cases, form a bidentate ligand or a tridentate ligand. Examples of bidentate ligands include, but are not limited to, bisphosphines, dialkoxides, alkylidiketones, and aryldiketones.

[0099] A second group of catalysts, commonly referred to as Second Generation Grubbs-type catalysts, have the structure of formula (I), wherein L^1 is a carbene ligand having the structure of formula (II)

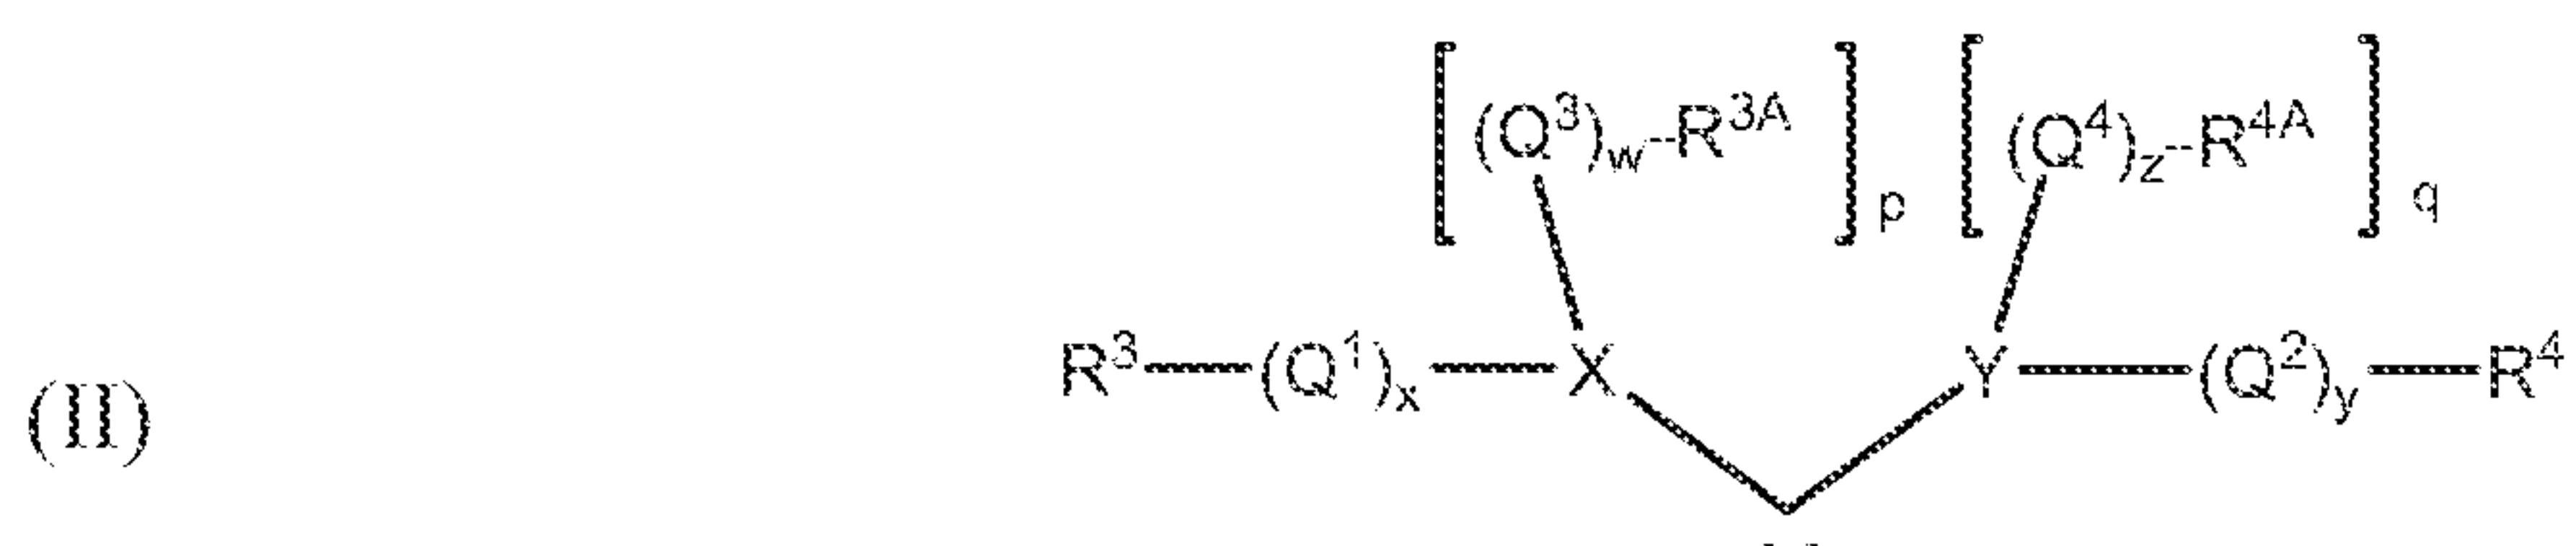

such that the complex may have the structure of formula (III)

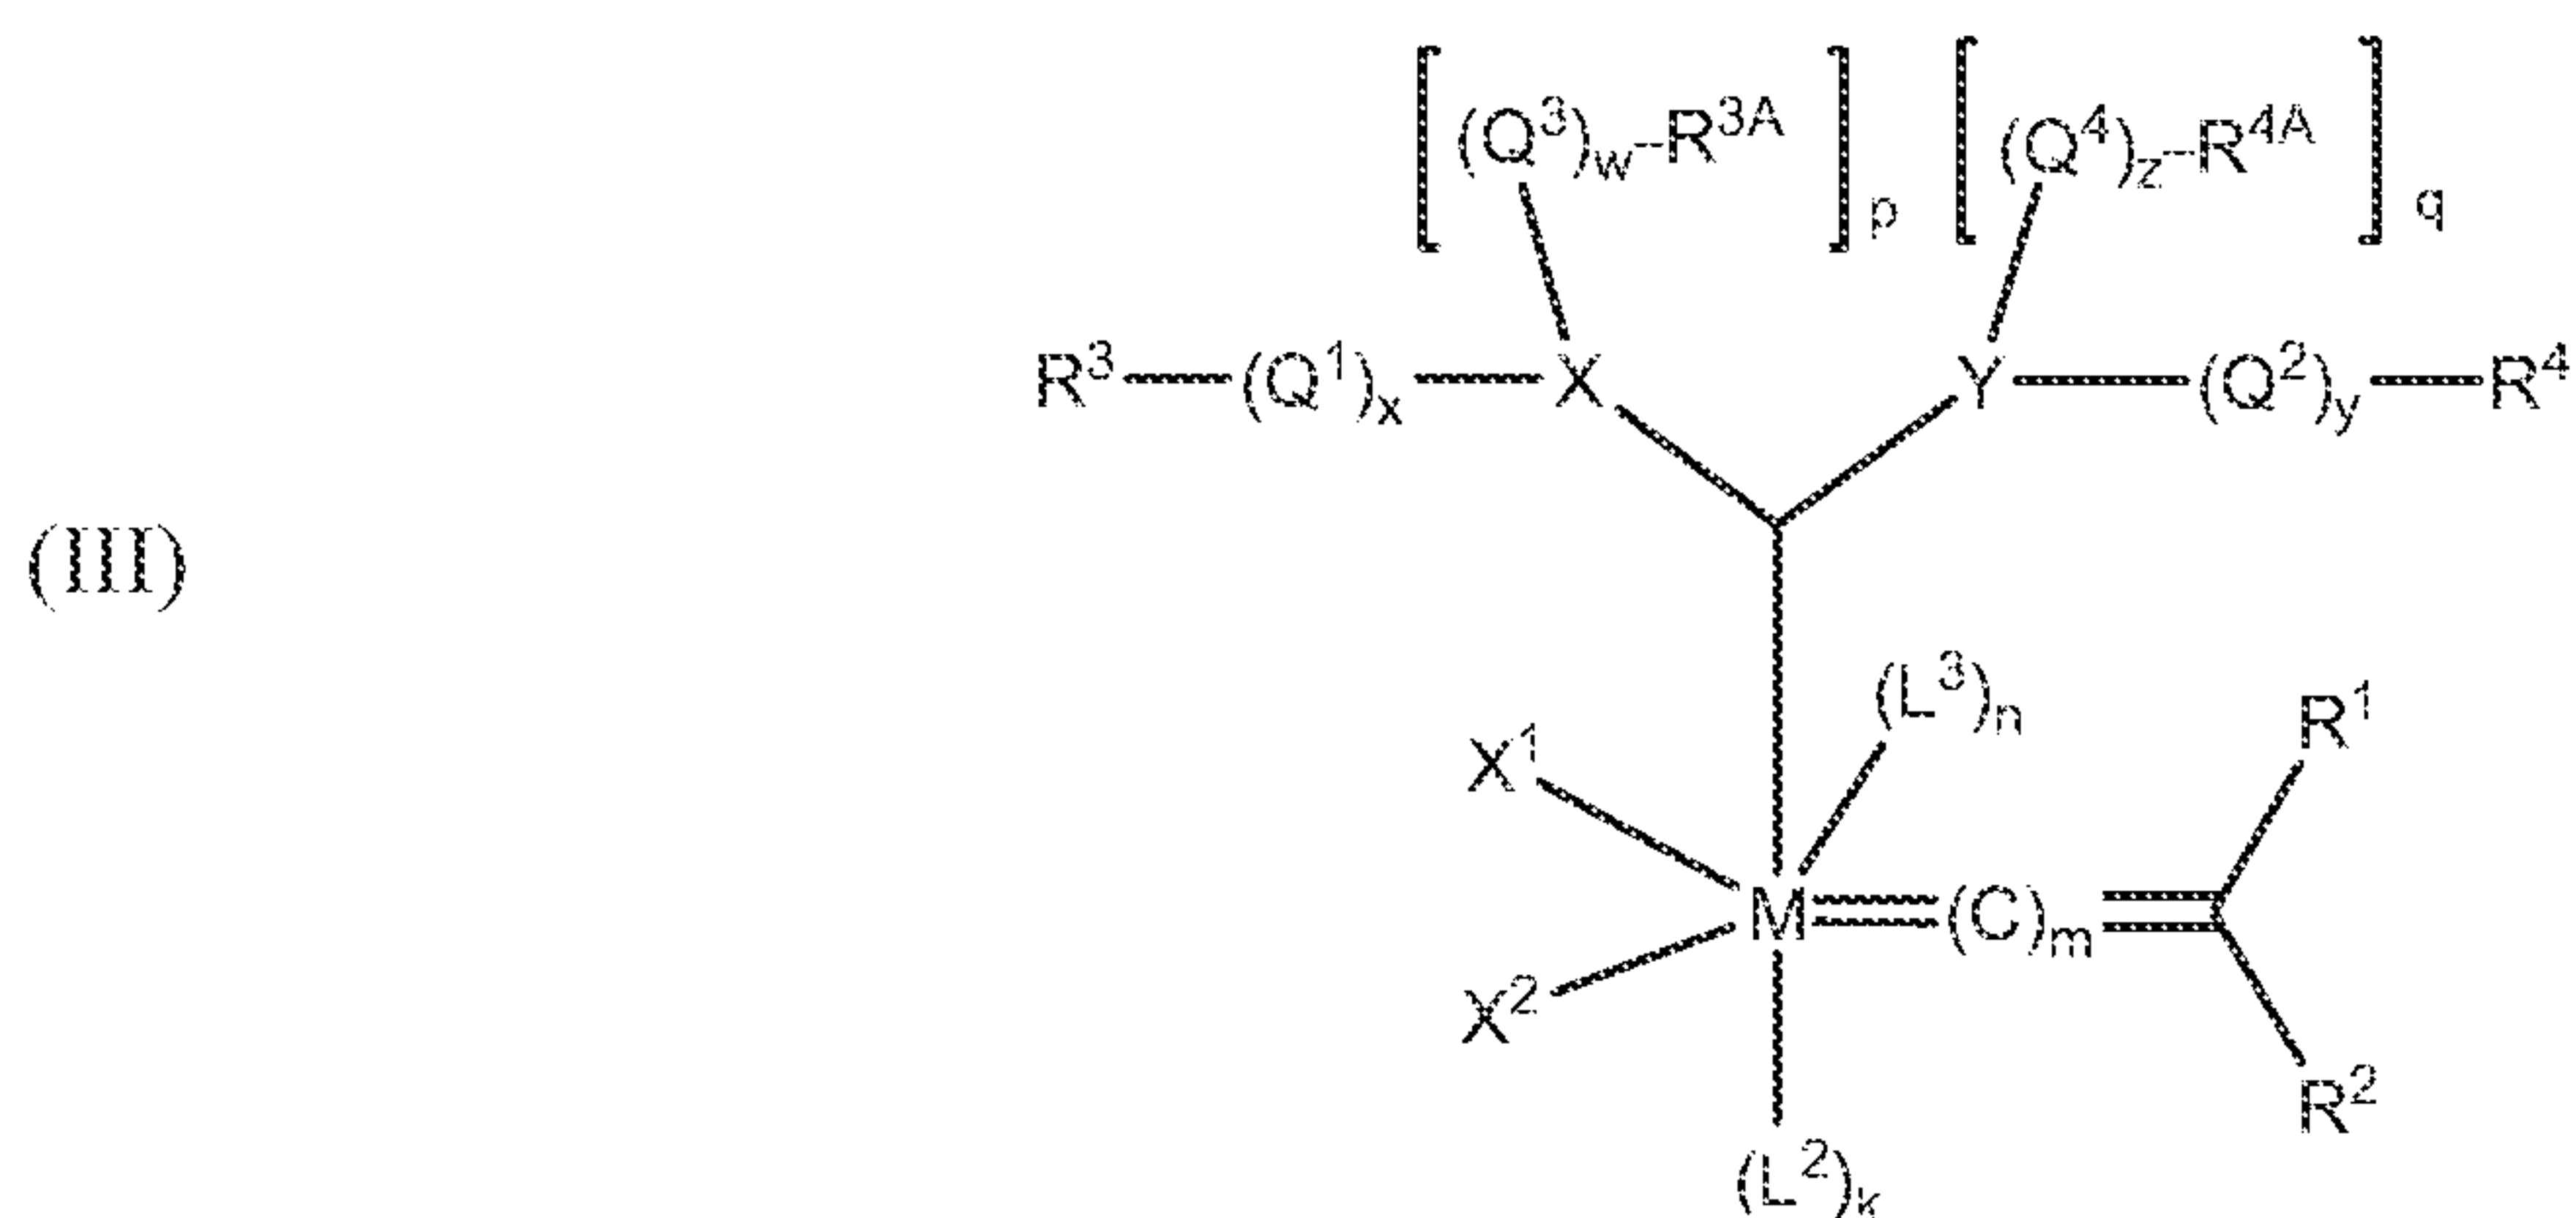

wherein M , m , n , X^1 , X^2 , L^2 , L^3 , R^1 , and R^2 are as defined for the first group of catalysts, and the remaining substituents are as follows;

X and Y are heteroatoms typically selected from N, O, S, and P. Since O and S are divalent, p is necessarily zero when X is O or S, q is necessarily zero when Y is O or S, and k is zero or 1. However, when X is N or P, then p is 1, and when Y is N or P, then q is 1. In a preferred embodiment, both X and Y are N;


Q^1 , Q^2 , Q^3 , and Q^4 are linkers, e.g., hydrocarbylene (including substituted hydrocarbylene, heteroatom-containing hydrocarbylene, and substituted heteroatom-containing hydrocarbylene, such as substituted and/or heteroatom-containing alkylene) or $-(CO)-$, and w, x, y, and z are independently zero or 1, meaning that each linker is optional. Preferably, w, x, y, and z are all zero. Further, two or more substituents on adjacent atoms within Q^1 , Q^2 , Q^3 , and Q^4 may be linked to form an additional cyclic group; and

R^3 , R^{3A} , R^4 , and R^{4A} are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, and substituted heteroatom-containing hydrocarbyl. In addition, X and Y may be independently selected from carbon and one of the heteroatoms mentioned above. Also, L^2 and L^3 may be taken together to form a single bidentate electron-donating heterocyclic ligand. Furthermore, R^1 and R^2 may be taken together to form a indenylidene moiety. Moreover, X^1 , X^2 , L^2 , L^3 , X, and Y is further coordinated to boron or to a carboxylate.

[00100] In addition, any two or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , R^2 , R^3 , R^{3A} , R^4 , R^{4A} , Q^1 , Q^2 , Q^3 , and Q^4 can be taken together to form a cyclic group, and any one or more of X^1 , X^2 , L^2 , L^3 , Q^1 , Q^2 , Q^3 , Q^4 , R^1 , R^2 , R^3 , R^{3A} , R^4 , and R^{4A} may be attached to a support. Any two or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , R^2 , R^3 , R^{3A} , R^4 , and R^{4A} can also be taken to be $-A-Fn$, wherein “A” is a divalent hydrocarbon moiety selected from alkylene and arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein the aryl portion of the of arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and Fn is a functional group, or together to form a cyclic group, and any one or more of X^1 , X^2 , L^2 , L^3 , Q^1 , Q^2 , Q^3 , Q^4 , R^1 , R^2 , R^3 , R^{3A} , R^4 , and R^{4A} may be attached to a support.


[00101] Preferably, R^{3A} and R^{4A} are linked to form a cyclic group so that the carbene ligand has the structure of formula (IV)


(IV)

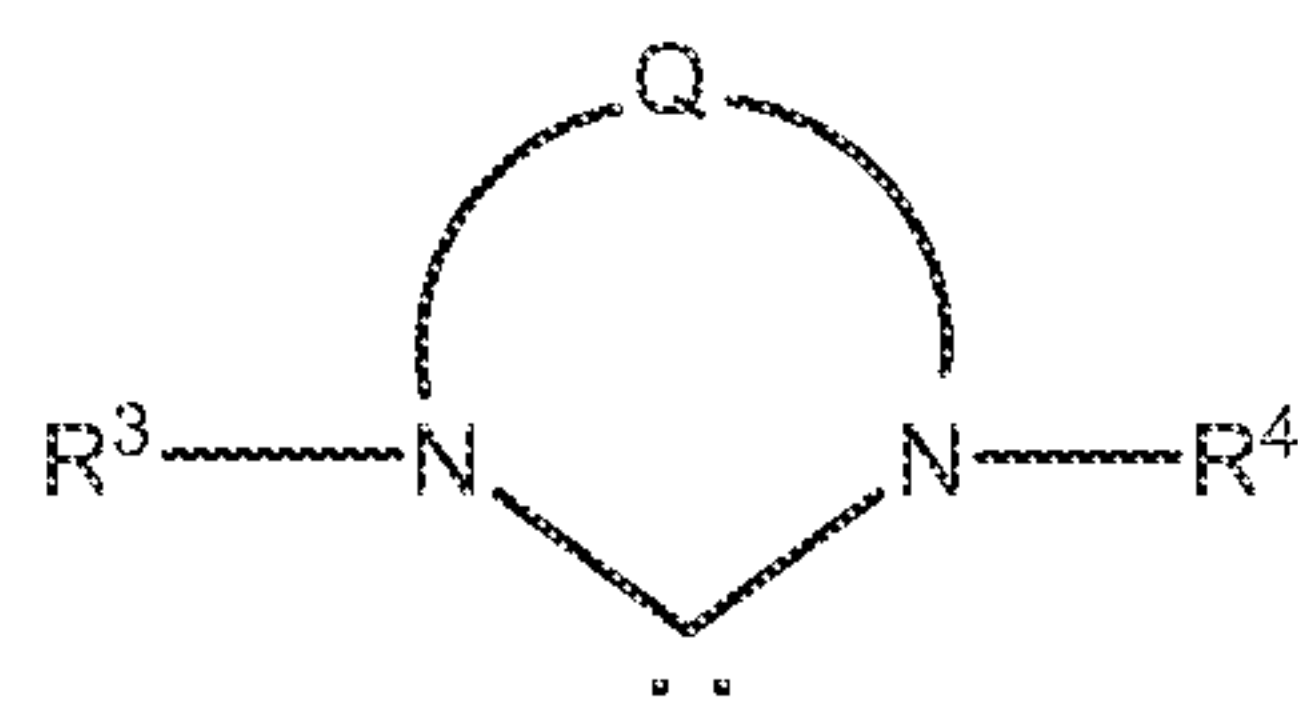


wherein R^3 and R^4 are defined above, with preferably at least one of R^3 and R^4 , and more preferably both R^3 and R^4 , being alicyclic or aromatic of one to about five rings, and optionally containing one or more heteroatoms and/or substituents. Q is a linker, typically a hydrocarbylene linker, including substituted hydrocarbylene, heteroatom-containing hydrocarbylene, and substituted heteroatom-containing hydrocarbylene linkers, wherein two or more substituents on adjacent atoms within Q may also be linked to form an additional cyclic structure, which may be similarly substituted to provide a fused polycyclic structure of two to about five cyclic groups. Q is often, although not necessarily, a two-atom linkage or a three-atom linkage.

[00102] Examples of N-heterocyclic carbene (NHC) ligands and acyclic diaminocarbene ligands suitable as L^1 thus include, but are not limited to, the following where DIPP is diisopropylphenyl and Mes is 2,4,6-trimethylphenyl:

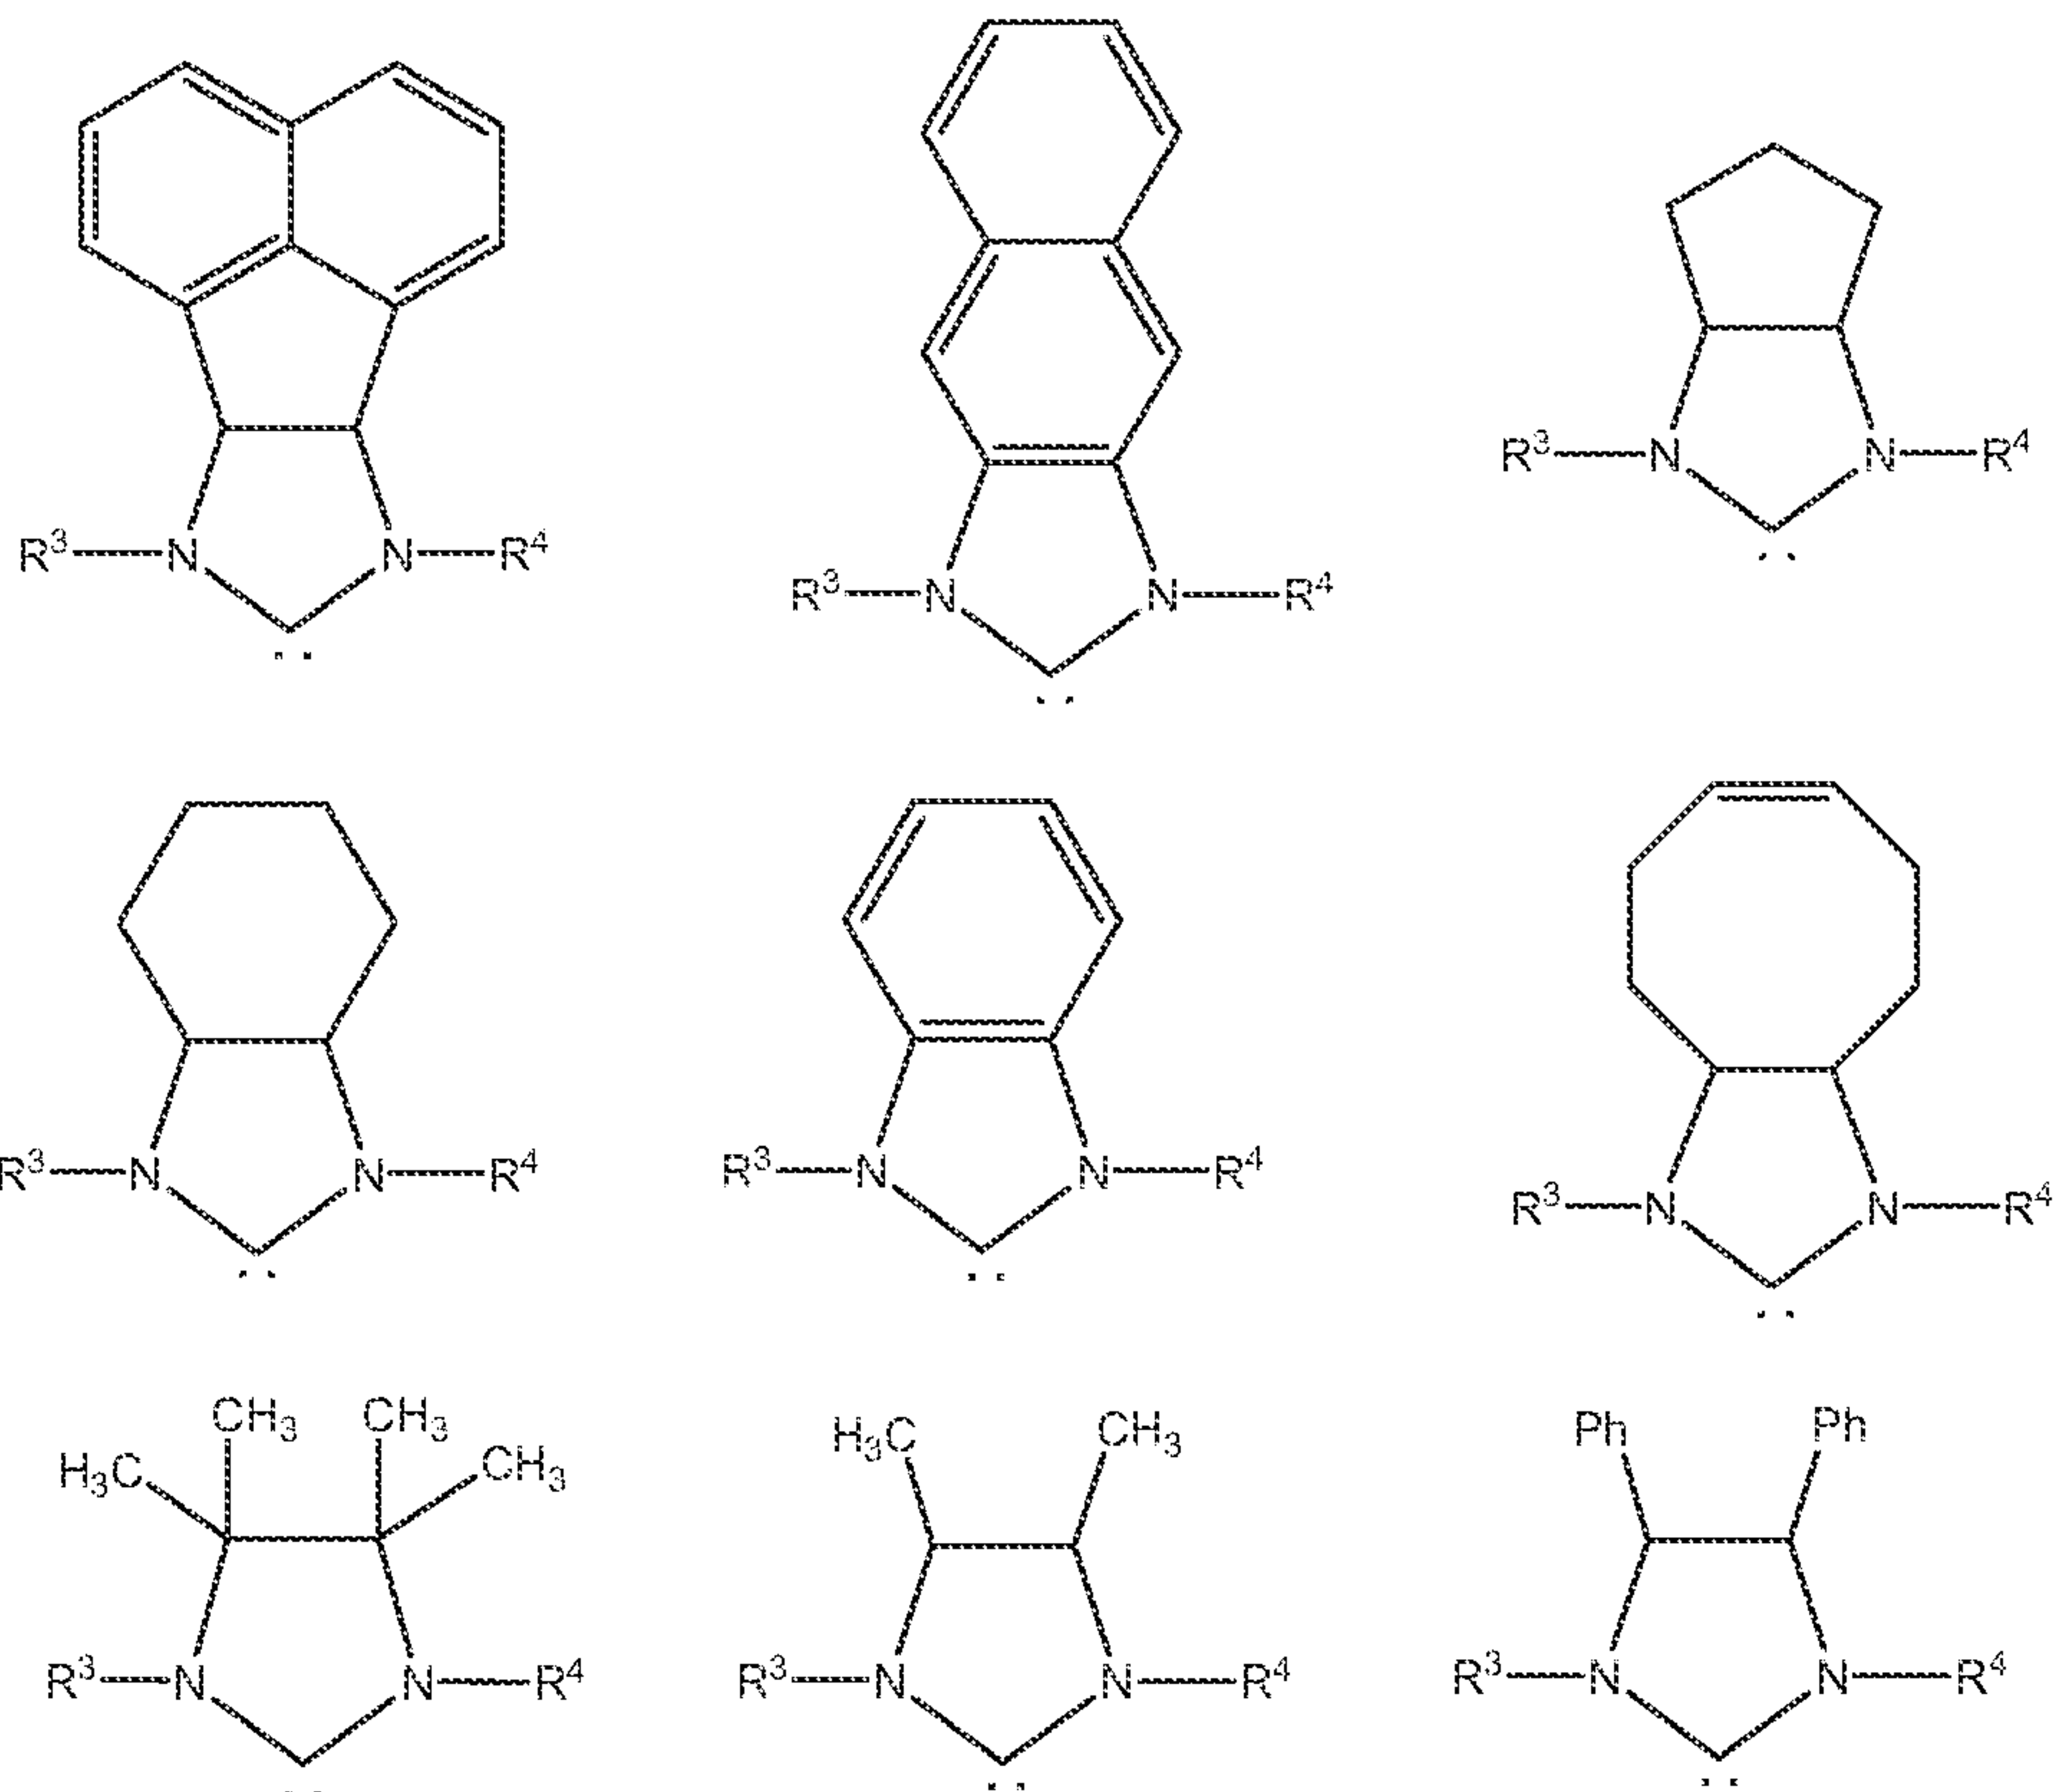

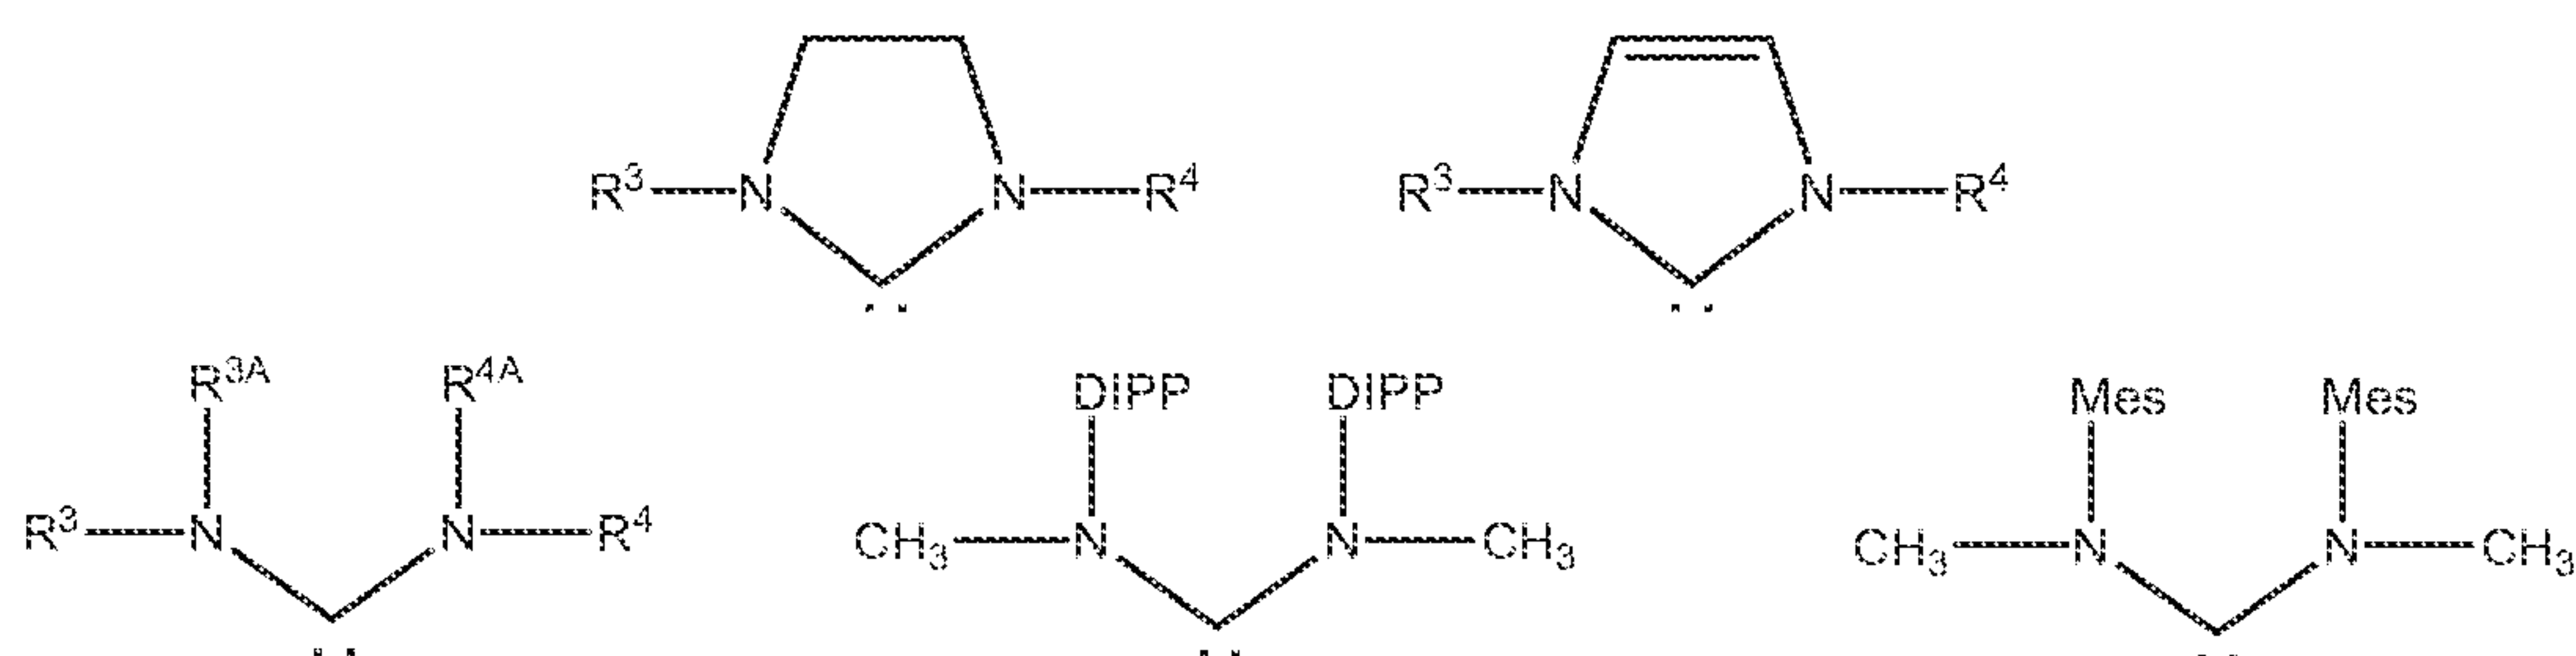

[00103] Additional examples of NHC ligands and acyclic diaminocarbene ligands suitable as L^1 thus include, but are not limited to the following:

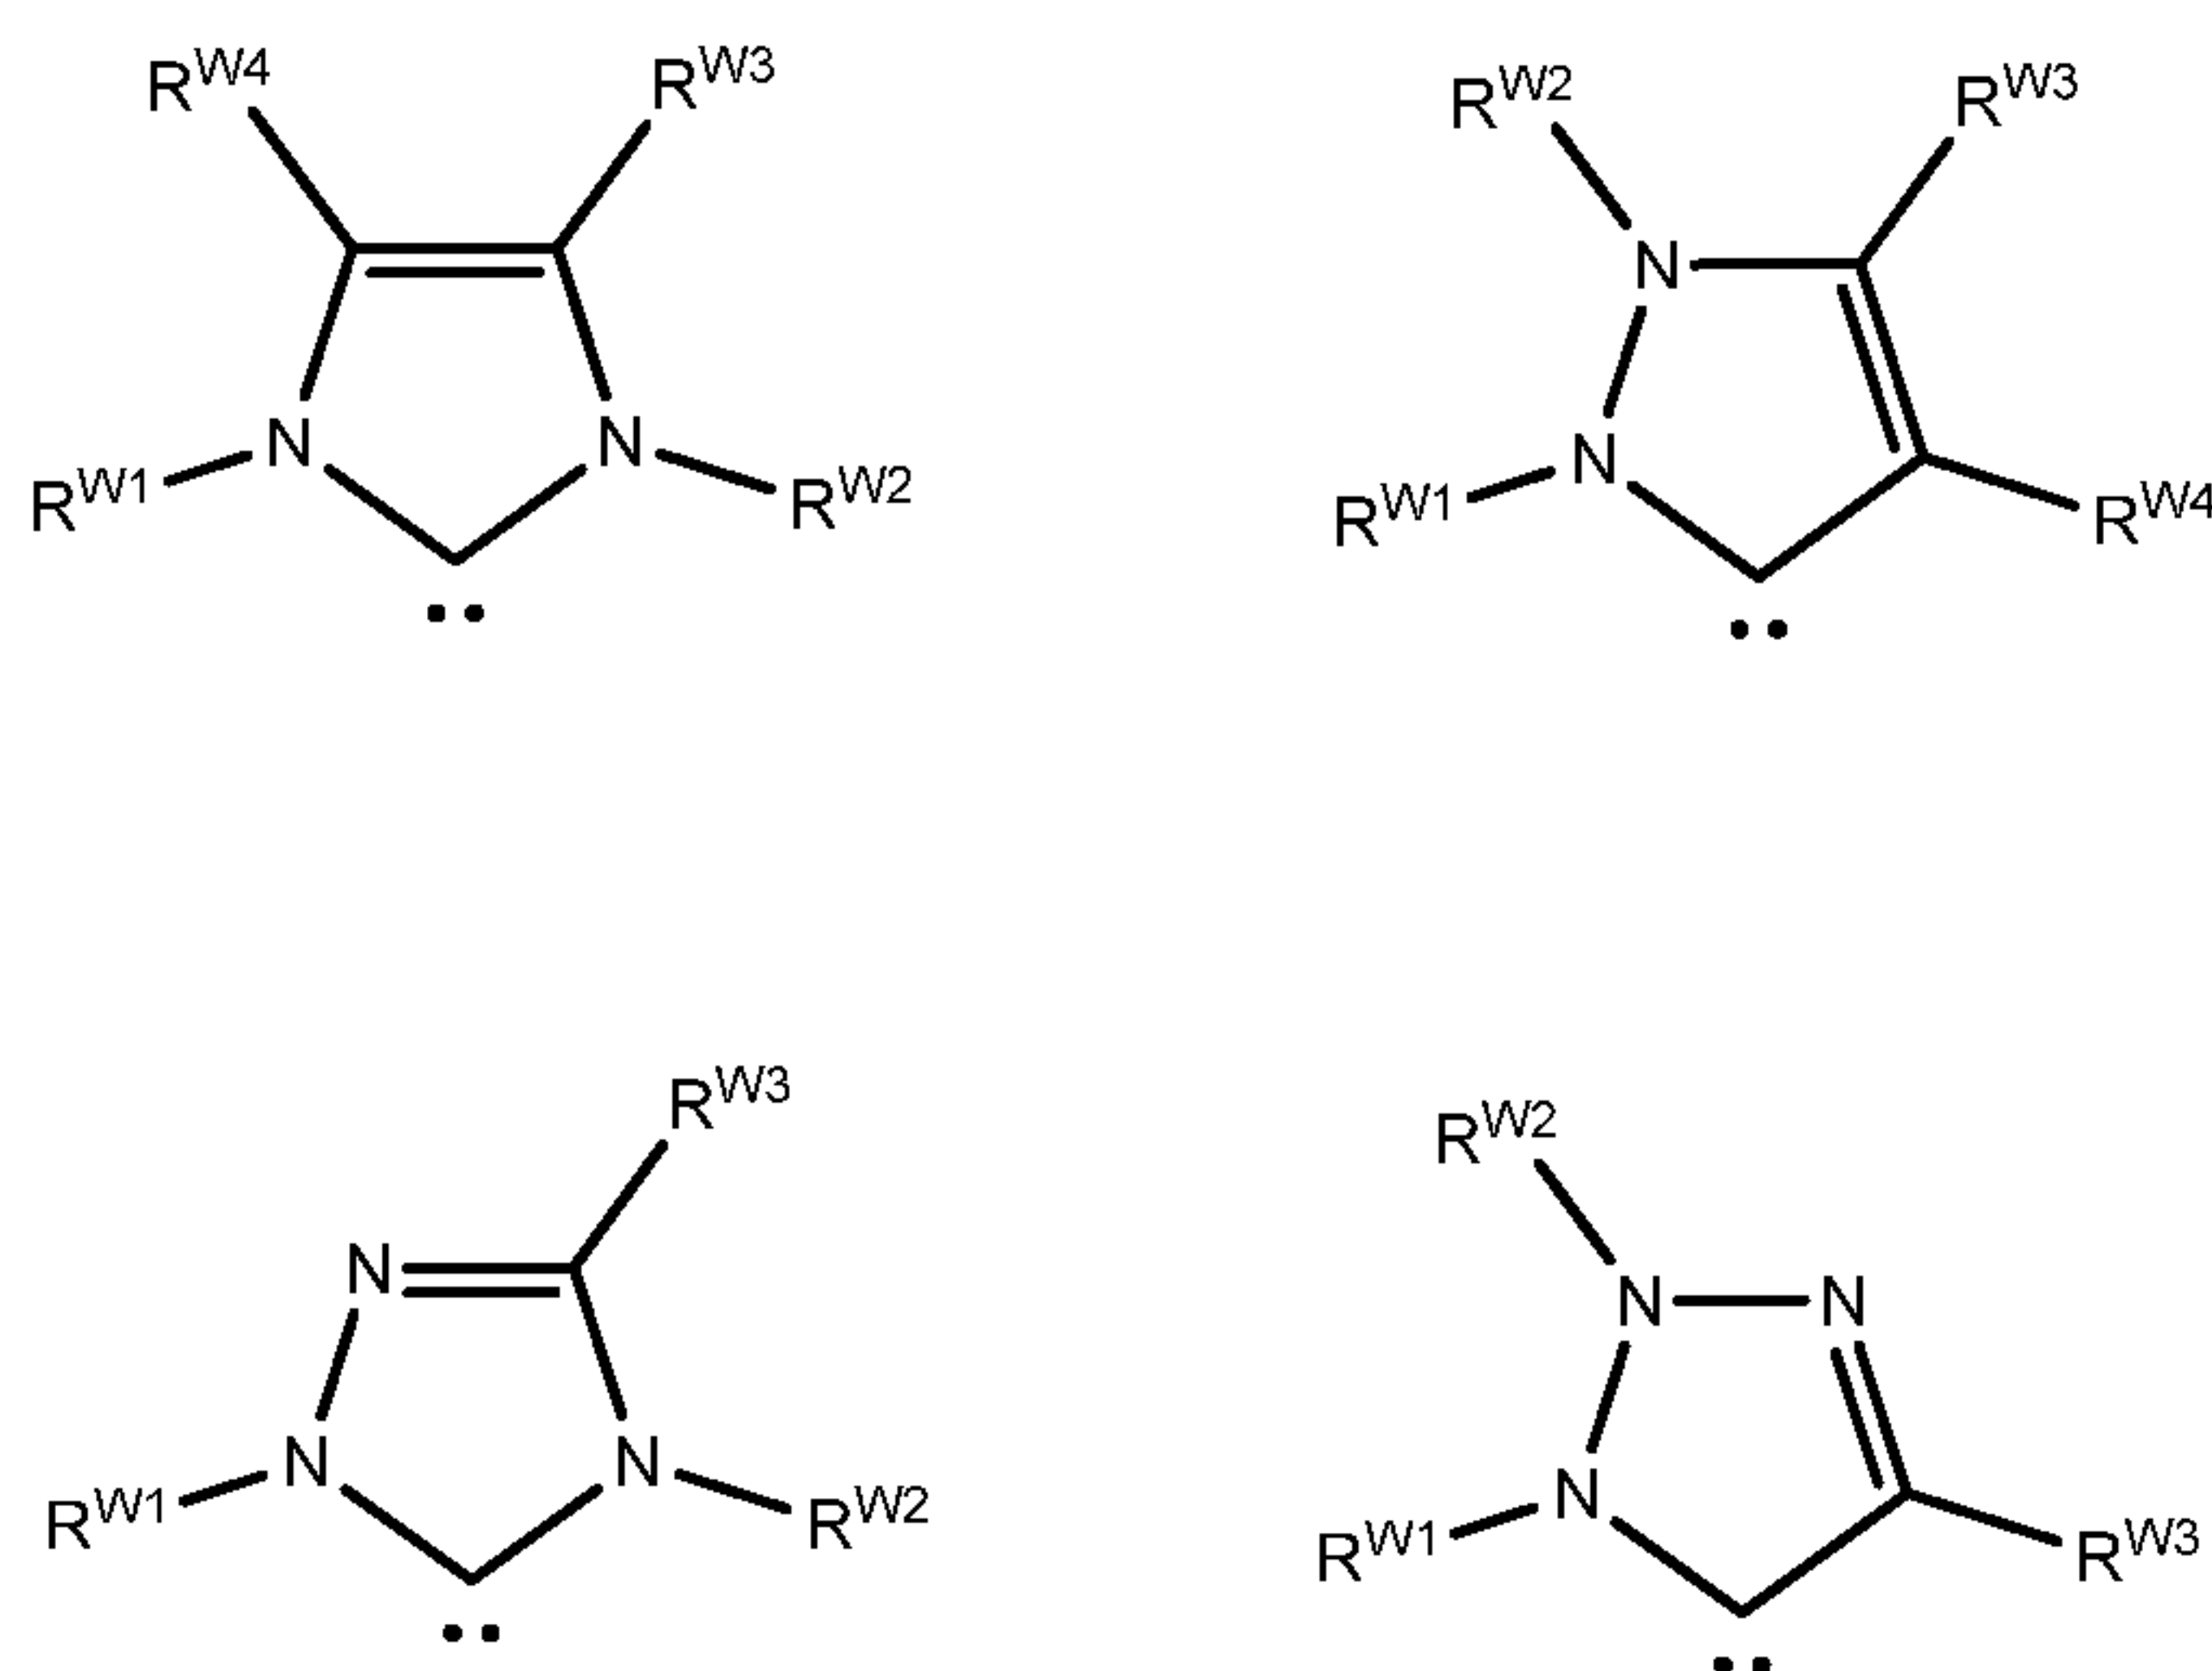


wherein R^{W1} , R^{W2} , R^{W3} , R^{W4} are independently hydrogen, unsubstituted hydrocarbyl, substituted hydrocarbyl, or heteroatom containing hydrocarbyl, and where one or both of R^{W3} and R^{W4} may be independently selected from halogen, nitro, amido, carboxyl, alkoxy, aryloxy, sulfonyl, carbonyl, thio, or nitroso groups.

[00104] Additional examples of NHC ligands suitable as L^1 are further described in U.S. Pat. Nos. 7,378,528; 7,652,145; 7,294,717; 6,787,620; 6,635,768; and 6,552,139 the disclosures of which are incorporated herein by reference.

[00105] Additionally, thermally activated N-Heterocyclic Carbene Precursors as disclosed in U.S. Pat. No. 6,838,489, the contents of which are incorporated herein by reference, may also be used with the present invention.

[00106] When M is ruthenium, then, the preferred complexes have the structure of formula (V)

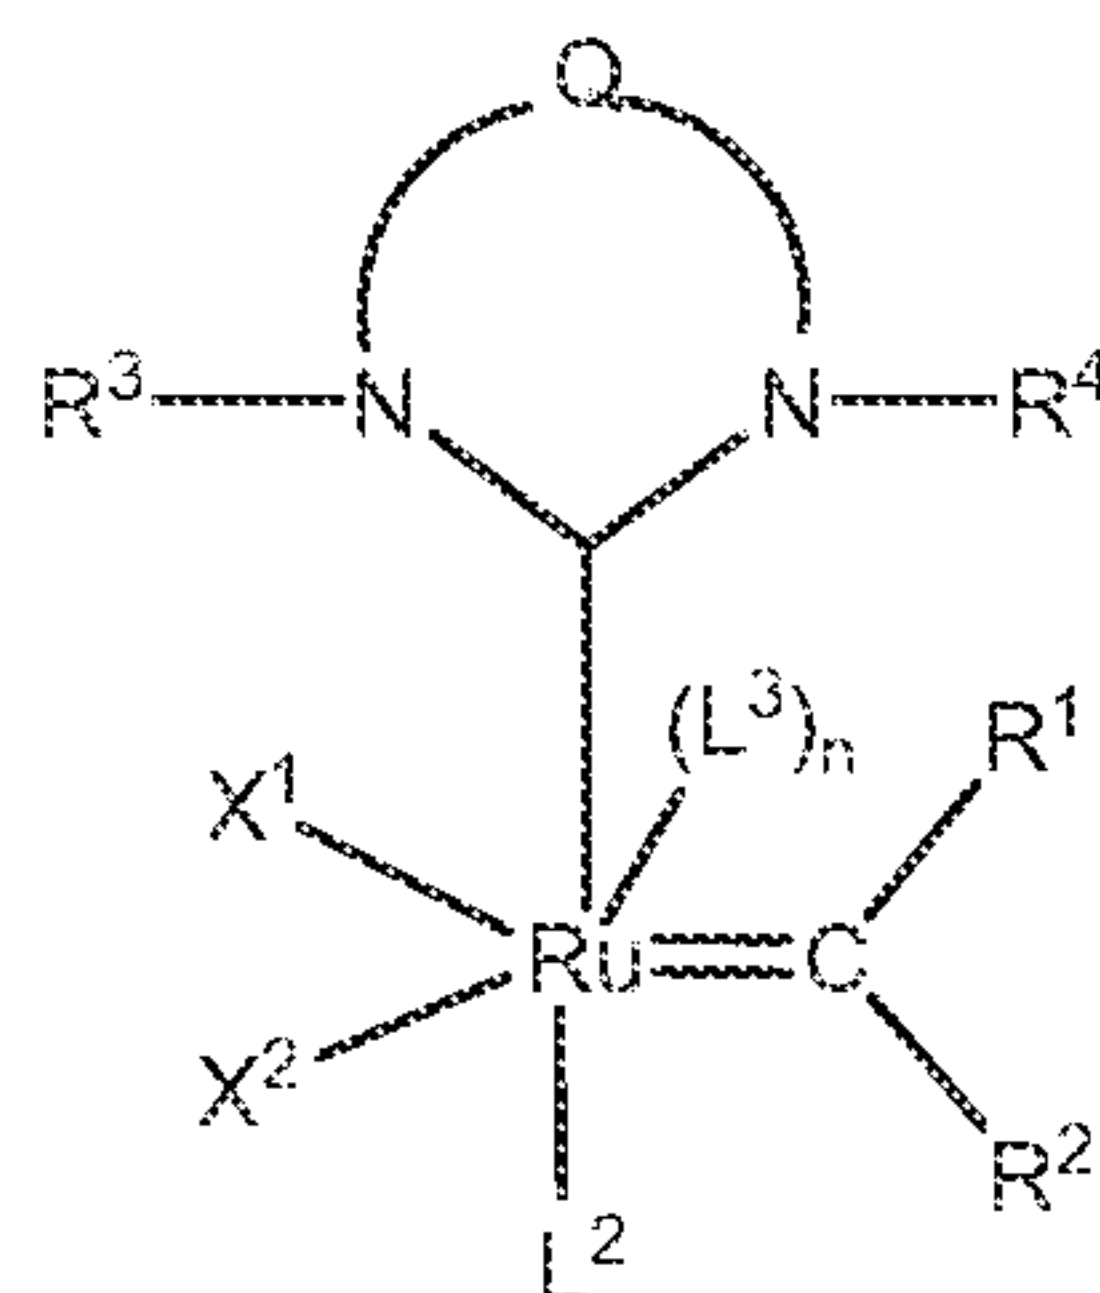

[00107] In a more preferred embodiment, Q is a two-atom linkage having the structure - $\text{CR}^{11}\text{R}^{12}-\text{CR}^{13}\text{R}^{14}$ - or $-\text{CR}^{11}=\text{CR}^{13}-$, preferably $-\text{CR}^{11}\text{R}^{12}-\text{CR}^{13}\text{R}^{14}-$, wherein R^{11} , R^{12} , R^{13} , and R^{14} are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups. Examples of functional groups here include carboxyl, C_1 - C_{20} alkoxy, C_5 - C_{24} aryloxy, C_2 - C_{20} alkoxycarbonyl, C_5 - C_{24} alkoxycarbonyl, C_2 - C_{24} acyloxy, C_1 - C_{20} alkylthio, C_5 - C_{24} arylthio, C_1 - C_{20} alkylsulfonyl, and C_1 - C_{20} alkylsulfinyl, optionally substituted with one or more moieties selected from C_1 - C_{12} alkyl, C_1 - C_{12} alkoxy, C_5 - C_{14} aryl, hydroxyl, sulfhydryl, formyl, and halide. R^{11} , R^{12} , R^{13} , and R^{14} are preferably independently selected from hydrogen, C_1 - C_{12} alkyl, substituted C_1 - C_{12} alkyl, C_1 - C_{12} heteroalkyl, substituted C_1 - C_{12} heteroalkyl, phenyl, and substituted phenyl. Alternatively, any two of R^{11} , R^{12} , R^{13} , and R^{14} may be linked together to form a substituted or unsubstituted, saturated or unsaturated ring structure, e.g., a C_4 - C_{12} alicyclic group or a C_5 or C_6 aryl group, which may itself be substituted, e.g., with linked or fused alicyclic or aromatic groups, or with other substituents. In one further aspect, any one or more of R^{11} , R^{12} , R^{13} , and R^{14} comprises one or more of the linkers. Additionally, L^2 may be $\text{L}^2_{(k)}$, wherein k is zero or 1. R^3 and R^4 may be unsubstituted phenyl or phenyl substituted with one or more substituents selected from C_1 - C_{20} alkyl, substituted C_1 - C_{20} alkyl, C_1 - C_{20} heteroalkyl, substituted C_1 - C_{20} heteroalkyl, C_5 - C_{24} aryl, substituted C_5 - C_{24} aryl, C_5 - C_{24} heteroaryl, C_6 - C_{24} aralkyl, C_6 - C_{24} alkaryl, or halide. Furthermore, X^1 and X^2 may be halogen.

[00108] When R^3 and R^4 are aromatic, they are typically although not necessarily composed of one or two aromatic rings, which may or may not be substituted, e.g., R^3 and R^4 may be phenyl, substituted phenyl, biphenyl, substituted biphenyl, or the like. In one preferred

embodiment, R^3 and R^4 are the same and are each unsubstituted phenyl or phenyl substituted with up to three substituents selected from C_1 - C_{20} alkyl, substituted C_1 - C_{20} alkyl, C_1 - C_{20} heteroalkyl, substituted C_1 - C_{20} heteroalkyl, C_5 - C_{24} aryl, substituted C_5 - C_{24} aryl, C_5 - C_{24} heteroaryl, C_6 - C_{24} aralkyl, C_6 - C_{24} alkaryl, or halide. Preferably, any substituents present are hydrogen, C_1 - C_{12} alkyl, C_1 - C_{12} alkoxy, C_5 - C_{14} aryl, substituted C_5 - C_{14} aryl, or halide. As an example, R^3 and R^4 are mesityl (i.e., Mes as defined herein).

[00109] In a third group of catalysts having the structure of formula (I), M, m, n, X^1 , X^2 , R^1 , and R^2 are as defined for the first group of catalysts, L^1 is a strongly coordinating neutral electron donor ligand such as any of those described for the first and second group of catalysts, and L^2 and L^3 are weakly coordinating neutral electron donor ligands in the form of optionally substituted heterocyclic groups. Again, n is zero or 1, such that L^3 may or may not be present. Generally, in the third group of catalysts, L^2 and L^3 are optionally substituted five- or six-membered monocyclic groups containing 1 to 4, preferably 1 to 3, most preferably 1 to 2 heteroatoms, or are optionally substituted bicyclic or polycyclic structures composed of 2 to 5 such five- or six-membered monocyclic groups. If the heterocyclic group is substituted, it should not be substituted on a coordinating heteroatom, and any one cyclic moiety within a heterocyclic group will generally not be substituted with more than 3 substituents.

[00110] For the third group of catalysts, examples of L^2 and L^3 include, without limitation, heterocycles containing nitrogen, sulfur, oxygen, or a mixture thereof.

[00111] Examples of nitrogen-containing heterocycles appropriate for L^2 and L^3 include pyridine, bipyridine, pyridazine, pyrimidine, bipyridamine, pyrazine, 1,3,5-triazine, 1,2,4-triazine, 1,2,3-triazine, pyrrole, 2H-pyrrole, 3H-pyrrole, pyrazole, 2H-imidazole, 1,2,3-triazole, 1,2,4-triazole, indole, 3H-indole, 1H-isoindole, cyclopenta(b)pyridine, indazole, quinoline, bisquinoline, isoquinoline, bisisoquinoline, cinnoline, quinazoline, naphthyridine, piperidine, piperazine, pyrrolidine, pyrazolidine, quinuclidine, imidazolidine, picolyimine, purine, benzimidazole, bisimidazole, phenazine, acridine, and carbazole. The nitrogen-containing heterocycles may be optionally substituted on a non-coordinating heteroatom with a non-hydrogen substituent.

[00112] Examples of sulfur-containing heterocycles appropriate for L^2 and L^3 include thiophene, 1,2-dithiole, 1,3-dithiole, thiepin, benzo(b)thiophene, benzo(c)thiophene, thionaphthene, dibenzothiophene, 2H-thiopyran, 4H-thiopyran, and thioanthrene.

[00113] Examples of oxygen-containing heterocycles appropriate for L^2 and L^3 include 2H-pyran, 4H-pyran, 2-pyrone, 4-pyrone, 1,2-dioxin, 1,3-dioxin, oxepin, furan, 2H-1-benzopyran, coumarin, coumarone, chromene, chroman-4-one, isochromen-1-one, isochromen-3-one, xanthene, tetrahydrofuran, 1,4-dioxan, and dibenzofuran.

[00114] Examples of mixed heterocycles appropriate for L^2 and L^3 include isoxazole, oxazole, thiazole, isothiazole, 1,2,3-oxadiazole, 1,2,4-oxadiazole, 1,3,4-oxadiazole, 1,2,3,4-oxatriazole, 1,2,3,5-oxatriazole, 3H-1,2,3-dioxazole, 3H-1,2-oxathiole, 1,3-oxathiole, 4H-1,2-oxazine, 2H-1,3-oxazine, 1,4-oxazine, 1,2,5-oxathiazine, o-isooxazine, phenoxazine, phenothiazine, pyrano[3,4-b]pyrrole, indoxazine, benzoxazole, anthranil, and morpholine.

[00115] Preferred L^2 and L^3 ligands are aromatic nitrogen-containing and oxygen-containing heterocycles, and particularly preferred L^2 and L^3 ligands are monocyclic N-heteroaryl ligands that are optionally substituted with 1 to 3, preferably 1 or 2, substituents. Specific examples of particularly preferred L^2 and L^3 ligands are pyridine and substituted pyridines, such as 3-bromopyridine, 4-bromopyridine, 3,5-dibromopyridine, 2,4,6-tribromopyridine, 2,6-dibromopyridine, 3-chloropyridine, 4-chloropyridine, 3,5-dichloropyridine, 2,4,6-trichloropyridine, 2,6-dichloropyridine, 4-iodopyridine, 3,5-diiodopyridine, 3,5-dibromo-4-methylpyridine, 3,5-dichloro-4-methylpyridine, 3,5-dimethyl-4-bromopyridine, 3,5-dimethylpyridine, 4-methylpyridine, 3,5-diisopropylpyridine, 2,4,6-trimethylpyridine, 2,4,6-triisopropylpyridine, 4-(*tert*-butyl)pyridine, 4-phenylpyridine, 3,5-diphenylpyridine, 3,5-dichloro-4-phenylpyridine, and the like.


[00116] In general, any substituents present on L^2 and/or L^3 are selected from halo, C_1 - C_{20} alkyl, substituted C_1 - C_{20} alkyl, C_1 - C_{20} heteroalkyl, substituted C_1 - C_{20} heteroalkyl, C_5 - C_{24} aryl, substituted C_5 - C_{24} aryl, C_5 - C_{24} heteroaryl, substituted C_5 - C_{24} heteroaryl, C_6 - C_{24} alkaryl, substituted C_6 - C_{24} alkaryl, C_6 - C_{24} heteroalkaryl, substituted C_6 - C_{24} heteroalkaryl, C_6 - C_{24} aralkyl, substituted C_6 - C_{24} aralkyl, C_6 - C_{24} heteroaralkyl, substituted C_6 - C_{24} heteroaralkyl, and functional groups, with suitable functional groups including, without limitation, C_1 - C_{20} alkoxy, C_5 - C_{24} aryloxy, C_2 - C_{20} alkylcarbonyl, C_6 - C_{24} arylcarbonyl, C_2 - C_{20} alkylcarbonyloxy, C_6 - C_{24} arylcarbonyloxy, C_2 - C_{20} alkoxycarbonyl, C_6 - C_{24} aryloxycarbonyl, halocarbonyl, C_2 - C_{20} alkylcarbonato, C_6 - C_{24} arylcarbonato, carboxy, carboxylato, carbamoyl, mono-(C_1 - C_{20} alkyl)-substituted carbamoyl, di-(C_1 - C_{20} alkyl)-substituted carbamoyl, di-N-(C_1 - C_{20} alkyl), N-(C_5 - C_{24} aryl)-substituted carbamoyl, mono-(C_5 - C_{24} aryl)-substituted carbamoyl, di-(C_6 - C_{24} aryl)-

substituted carbamoyl, thiocarbamoyl, mono-(C₁-C₂₀ alkyl)-substituted thiocarbamoyl, di-(C₁-C₂₀ alkyl)-substituted thiocarbamoyl, di-N-(C₁-C₂₀ alkyl)-N-(C₆-C₂₄ aryl)-substituted thiocarbamoyl, mono-(C₆-C₂₄ aryl)-substituted thiocarbamoyl, di-(C₆-C₂₄ aryl)-substituted thiocarbamoyl, carbamido, formyl, thioformyl, amino, mono-(C₁-C₂₀ alkyl)-substituted amino, di-(C₁-C₂₀ alkyl)-substituted amino, mono-(C₅-C₂₄ aryl)-substituted amino, di-(C₅-C₂₄ aryl)-substituted amino, di-N-(C₁-C₂₀ alkyl),N-(C₅-C₂₄ aryl)-substituted amino, C₂-C₂₀ alkylamido, C₆-C₂₄ arylamido, imino, C₁-C₂₀ alkylimino, C₅-C₂₄ arylimino, nitro, and nitroso. In addition, two adjacent substituents may be taken together to form a ring, generally a five- or six-membered alicyclic or aryl ring, optionally containing 1 to 3 heteroatoms and 1 to 3 substituents as above.

[00117] Preferred substituents on L² and L³ include, without limitation, halo, C₁-C₁₂ alkyl, substituted C₁-C₁₂ alkyl, C₁-C₁₂ heteroalkyl, substituted C₁-C₁₂ heteroalkyl, C₅-C₁₄ aryl, substituted C₅-C₁₄ aryl, C₅-C₁₄ heteroaryl, substituted C₅-C₁₄ heteroaryl, C₆-C₁₆ alkaryl, substituted C₆-C₁₆ alkaryl, C₆-C₁₆ heteroalkaryl, substituted C₆-C₁₆ heteroalkaryl, C₆-C₁₆ aralkyl, substituted C₆-C₁₆ aralkyl, C₆-C₁₆ heteroaralkyl, substituted C₆-C₁₆ heteroaralkyl, C₁-C₁₂ alkoxy, C₅-C₁₄ aryloxy, C₂-C₁₂ alkylcarbonyl, C₆-C₁₄ arylcarbonyl, C₂-C₁₂ alkylcarbonyloxy, C₆-C₁₄ arylcarbonyloxy, C₂-C₁₂ alkoxy carbonyl, C₆-C₁₄ aryloxy carbonyl, halocarbonyl, formyl, amino, mono-(C₁-C₁₂ alkyl)-substituted amino, di-(C₁-C₁₂ alkyl)-substituted amino, mono-(C₅-C₁₄ aryl)-substituted amino, di-(C₅-C₁₄ aryl)-substituted amino, and nitro.

[00118] Of the foregoing, the most preferred substituents are halo, C₁-C₆ alkyl, C₁-C₆ haloalkyl, C₁-C₆ alkoxy, phenyl, substituted phenyl, formyl, N,N-di(C₁-C₆ alkyl)amino, nitro, and nitrogen heterocycles as described above (including, for example, pyrrolidine, piperidine, piperazine, pyrazine, pyrimidine, pyridine, pyridazine, etc.).


[00119] In certain embodiments, L² and L³ may also be taken together to form a bidentate or multidentate ligand containing two or more, generally two, coordinating heteroatoms such as N, O, S, or P, with preferred such ligands being diimine ligands of the Brookhart type. One representative bidentate ligand has the structure of formula (VI)

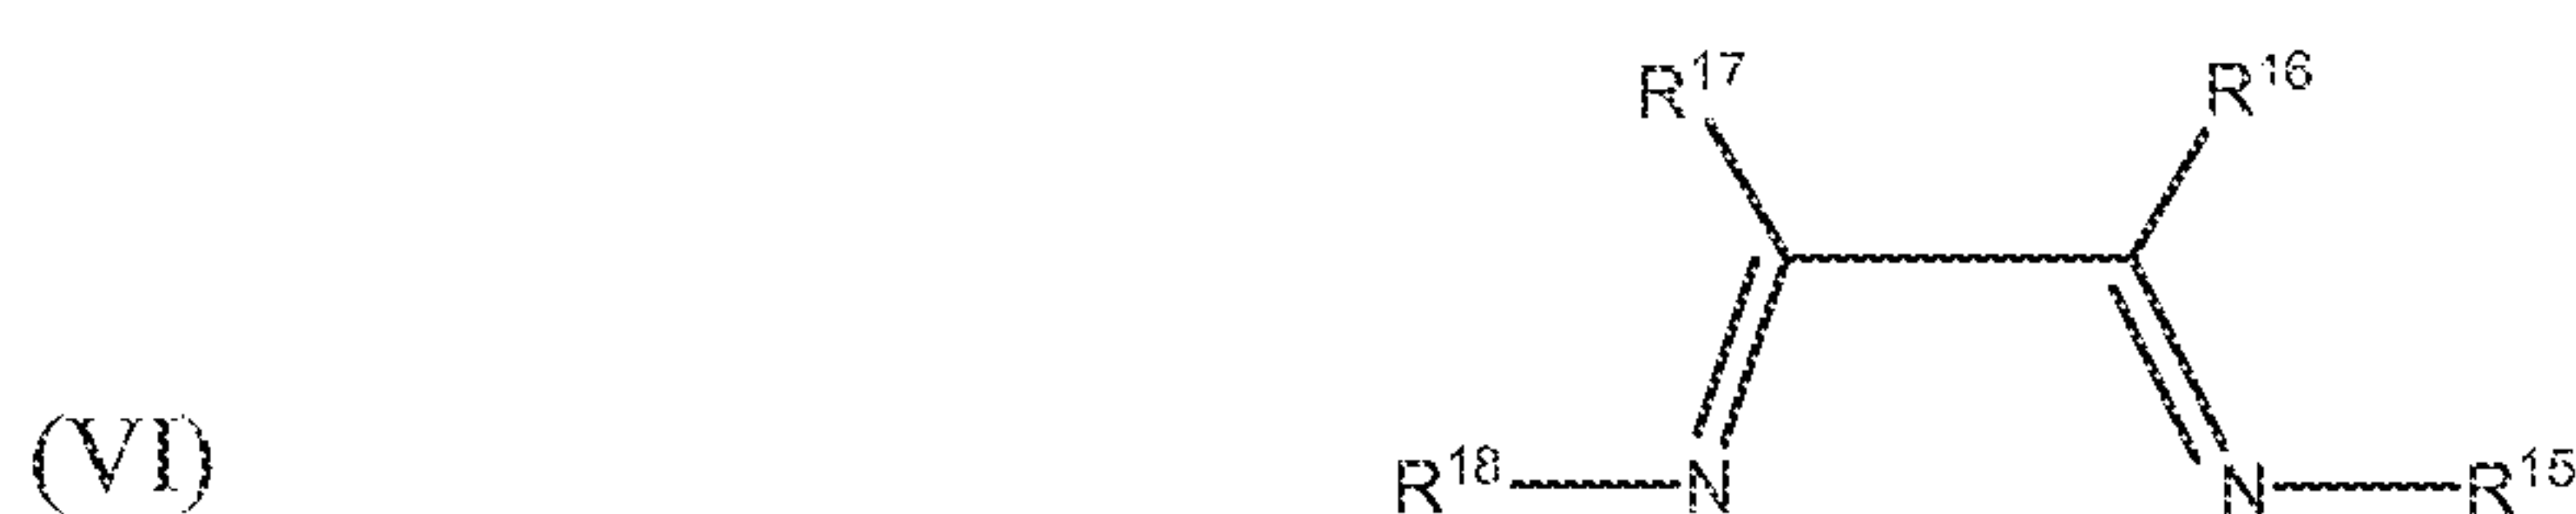

wherein R^{15} , R^{16} , R^{17} , and R^{18} hydrocarbyl (e.g., C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, or C_6 - C_{24} aralkyl), substituted hydrocarbyl (e.g., substituted C_1 - C_{20} alkyl, C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_5 - C_{24} aryl, C_6 - C_{24} alkaryl, or C_6 - C_{24} aralkyl), heteroatom-containing hydrocarbyl (e.g., C_1 - C_{20} heteroalkyl, C_5 - C_{24} heteroaryl, heteroatom-containing C_6 - C_{24} aralkyl, or heteroatom-containing C_6 - C_{24} alkaryl), or substituted heteroatom-containing hydrocarbyl (e.g., substituted C_1 - C_{20} heteroalkyl, C_5 - C_{24} heteroaryl, heteroatom-containing C_6 - C_{24} aralkyl, or heteroatom-containing C_6 - C_{24} alkaryl), or (1) R^{15} and R^{16} , (2) R^{17} and R^{18} , (3) R^{16} and R^{17} , or (4) both R^{15} and R^{16} , and R^{17} and R^{18} , may be taken together to form a ring, i.e., an N-heterocycle. Preferred cyclic groups in such a case are five- and six-membered rings, typically aromatic rings.

[00120] In a fourth group of catalysts that have the structure of formula (I), two of the substituents are taken together to form a bidentate ligand or a tridentate ligand. Examples of bidentate ligands include, but are not limited to, bisphosphines, dialkoxides, alkylidiketones, and arylidiketones. Specific examples include $-P(Ph)_2CH_2CH_2P(Ph)_2-$, $-As(Ph)_2CH_2CH_2As(Ph)_2-$, $-P(Ph)_2CH_2CH_2C(CF_3)_2O-$, binaphtholate dianions, pinacolate dianions, $-P(CH_3)_2(CH_2)_2P(CH_3)_2-$, and $-OC(CH_3)_2(CH_3)_2CO-$. Preferred bidentate ligands are $-P(Ph)_2CH_2CH_2P(Ph)_2-$ and $-P(CH_3)_2(CH_2)_2P(CH_3)_2-$. Tridentate ligands include, but are not limited to, $(CH_3)_2NCH_2CH_2P(Ph)CH_2CH_2N(CH_3)_2$. Other preferred tridentate ligands are those in which any three of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 (e.g., X^1 , L^1 , and L^2) are taken together to be cyclopentadienyl, indenyl, or fluorenyl, each optionally substituted with C_2 - C_{20} alkenyl, C_2 - C_{20} alkynyl, C_1 - C_{20} alkyl, C_5 - C_{20} aryl, C_1 - C_{20} alkoxy, C_2 - C_{20} alkenyloxy, C_2 - C_{20} alkynyloxy, C_5 - C_{20} aryloxy, C_2 - C_{20} alkoxycarbonyl, C_1 - C_{20} alkylthio, C_1 - C_{20} alkylsulfonyl, or C_1 - C_{20} alkylsulfinyl, each of which may be further substituted with C_1 - C_6 alkyl, halide, C_1 - C_6 alkoxy or with a phenyl group optionally substituted with halide, C_1 - C_6 alkyl, or C_1 - C_6 alkoxy. More preferably, in compounds of this type, X , L^1 , and L^2 are taken together to be cyclopentadienyl or indenyl, each optionally substituted with vinyl, C_1 - C_{10} alkyl, C_5 - C_{20} aryl, C_1 - C_{10} carboxylate, C_2 - C_{10} alkoxycarbonyl, C_1 - C_{10} alkoxy, or C_5 - C_{20} aryloxy, each optionally substituted with C_1 - C_6 alkyl, halide, C_1 - C_6 alkoxy or with a phenyl group optionally substituted with halide, C_1 - C_6 alkyl or C_1 - C_6 alkoxy. Most preferably, X , L^1 and L^2 may be taken together to be cyclopentadienyl, optionally substituted with vinyl, hydrogen, methyl, or phenyl. Tetradentate ligands include, but are not limited to $O_2C(CH_2)_2P(Ph)(CH_2)_2P(Ph)(CH_2)_2CO_2$, phthalocyanines, and porphyrins.

[00121] Complexes wherein Y is coordinated to the metal are examples of a fifth group of catalysts, and are commonly called “Grubbs-Hoveyda” catalysts. Grubbs-Hoveyda metathesis-active metal carbene complexes may be described by the formula (VII)

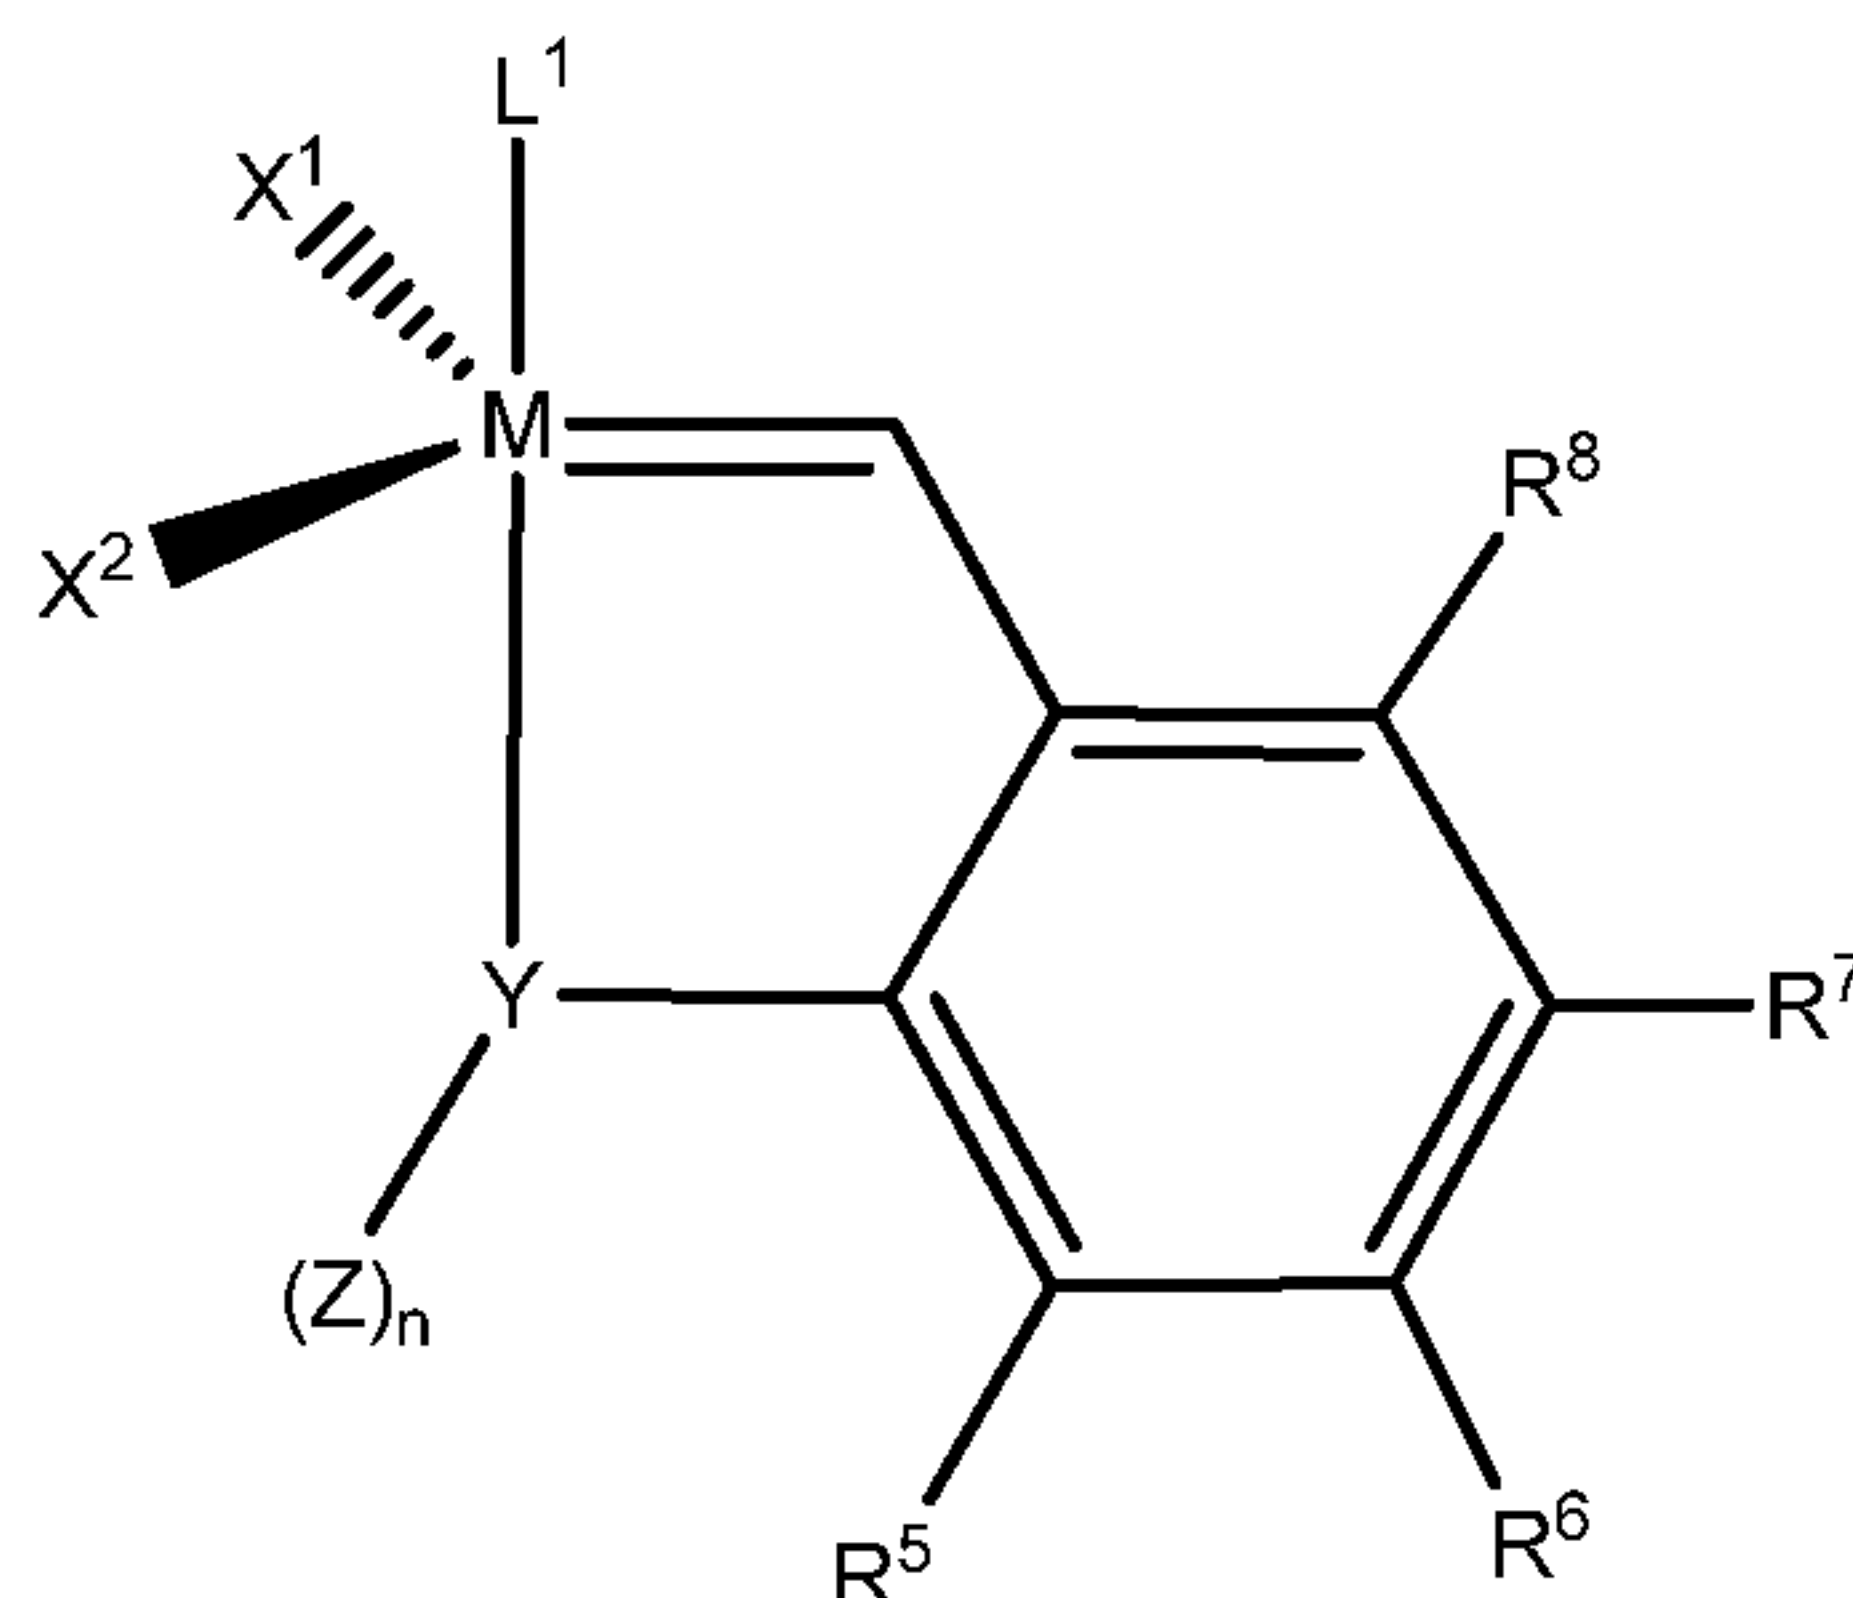

(VII)

wherein,

M is a Group 8 transition metal, particularly Ru or Os, or, more particularly, Ru;

X¹, X², and L¹ are as previously defined herein;

Y is a heteroatom selected from N, O, S, and P; preferably Y is O or N;


R⁵, R⁶, R⁷, and R⁸ are each, independently, selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane, siloxane, phosphine, phosphate, borate, or -A-Fn, wherein “A” and Fn have been defined above; and any combination of Y, Z, R⁵, R⁶, R⁷, and R⁸ can be linked to form one or more cyclic groups;

n is 0, 1, or 2, such that n is 1 for the divalent heteroatoms O or S, and n is 2 for the trivalent heteroatoms N or P; and

Z is a group selected from hydrogen, alkyl, aryl, functionalized alkyl, functionalized aryl where the functional group(s) may independently be one or more of the following: alkoxy, aryloxy, halogen, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, trifluoroamide, sulfide, disulfide, carbamate, silane, siloxane, phosphine, phosphate, or borate; methyl, isopropyl, sec-butyl, t-butyl, neopentyl, benzyl, phenyl

and trimethylsilyl; and wherein any combination or combinations of X^1 , X^2 , L^1 , Y , Z , R^5 , R^6 , R^7 , and R^8 may be linked to a support. Additionally, R^5 , R^6 , R^7 , and R^8 may independently be thioisocyanate, cyanato, or thiocyanato. Additionally, Z may independently be thioisocyanate, cyanato, or thiocyanato.


[00122] In general, Grubbs-Hoveyda complexes useful in the invention contain a chelating alkylidene moiety of the formula (VIII)

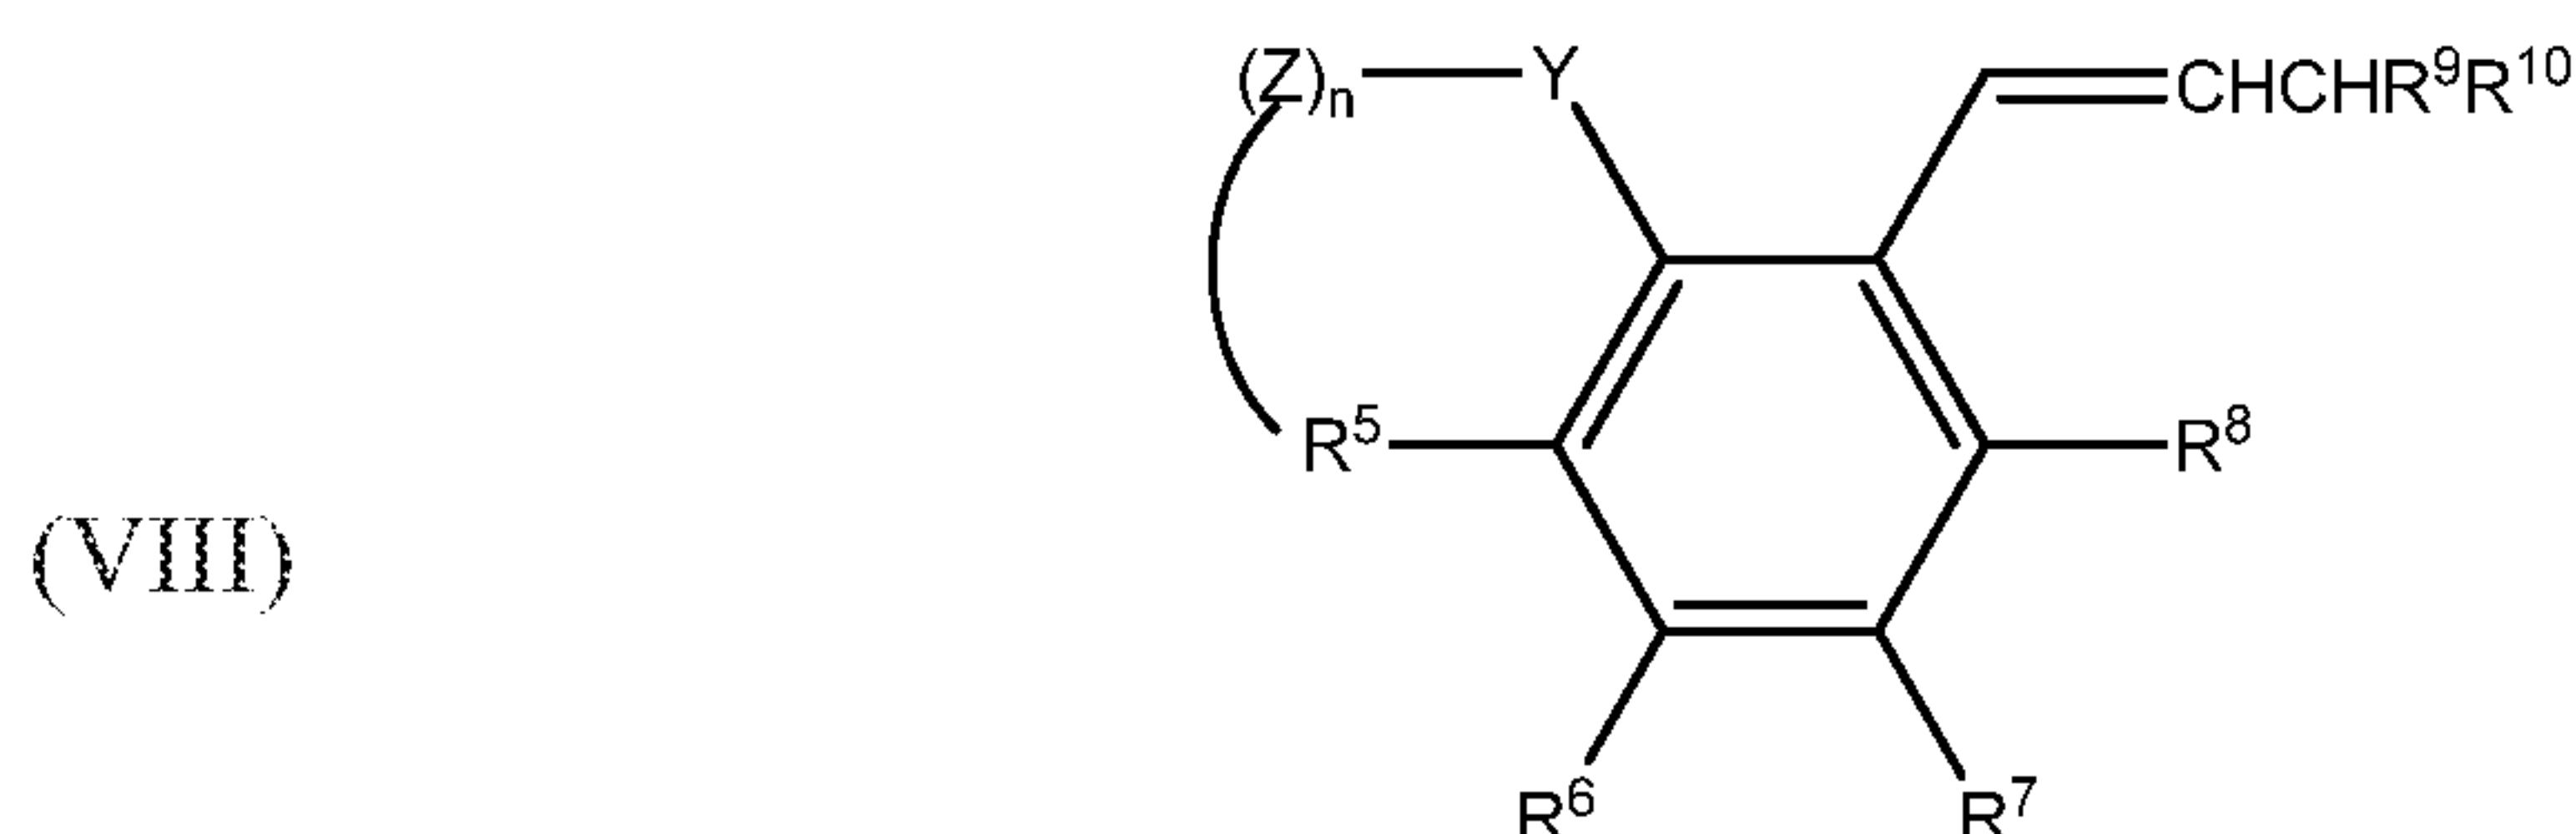


wherein Y , n , Z , R^5 , R^6 , R^7 , and R^8 are as previously defined herein;

Y , Z , and R^5 can optionally be linked to form a cyclic structure; and

R^9 and R^{10} are each, independently, selected from hydrogen or a substituent group selected from alkyl, aryl, alkoxy, aryloxy, C_2 - C_{20} alkoxy carbonyl, or C_1 - C_{20} trialkylsilyl, wherein each of the substituent groups is substituted or unsubstituted; and wherein any combination or combinations of Z , Y , R^5 , R^6 , R^7 , R^8 , R^9 , and R^{10} may be linked to a support. The chelating alkylidene moiety may be derived from a ligand precursor having the formula

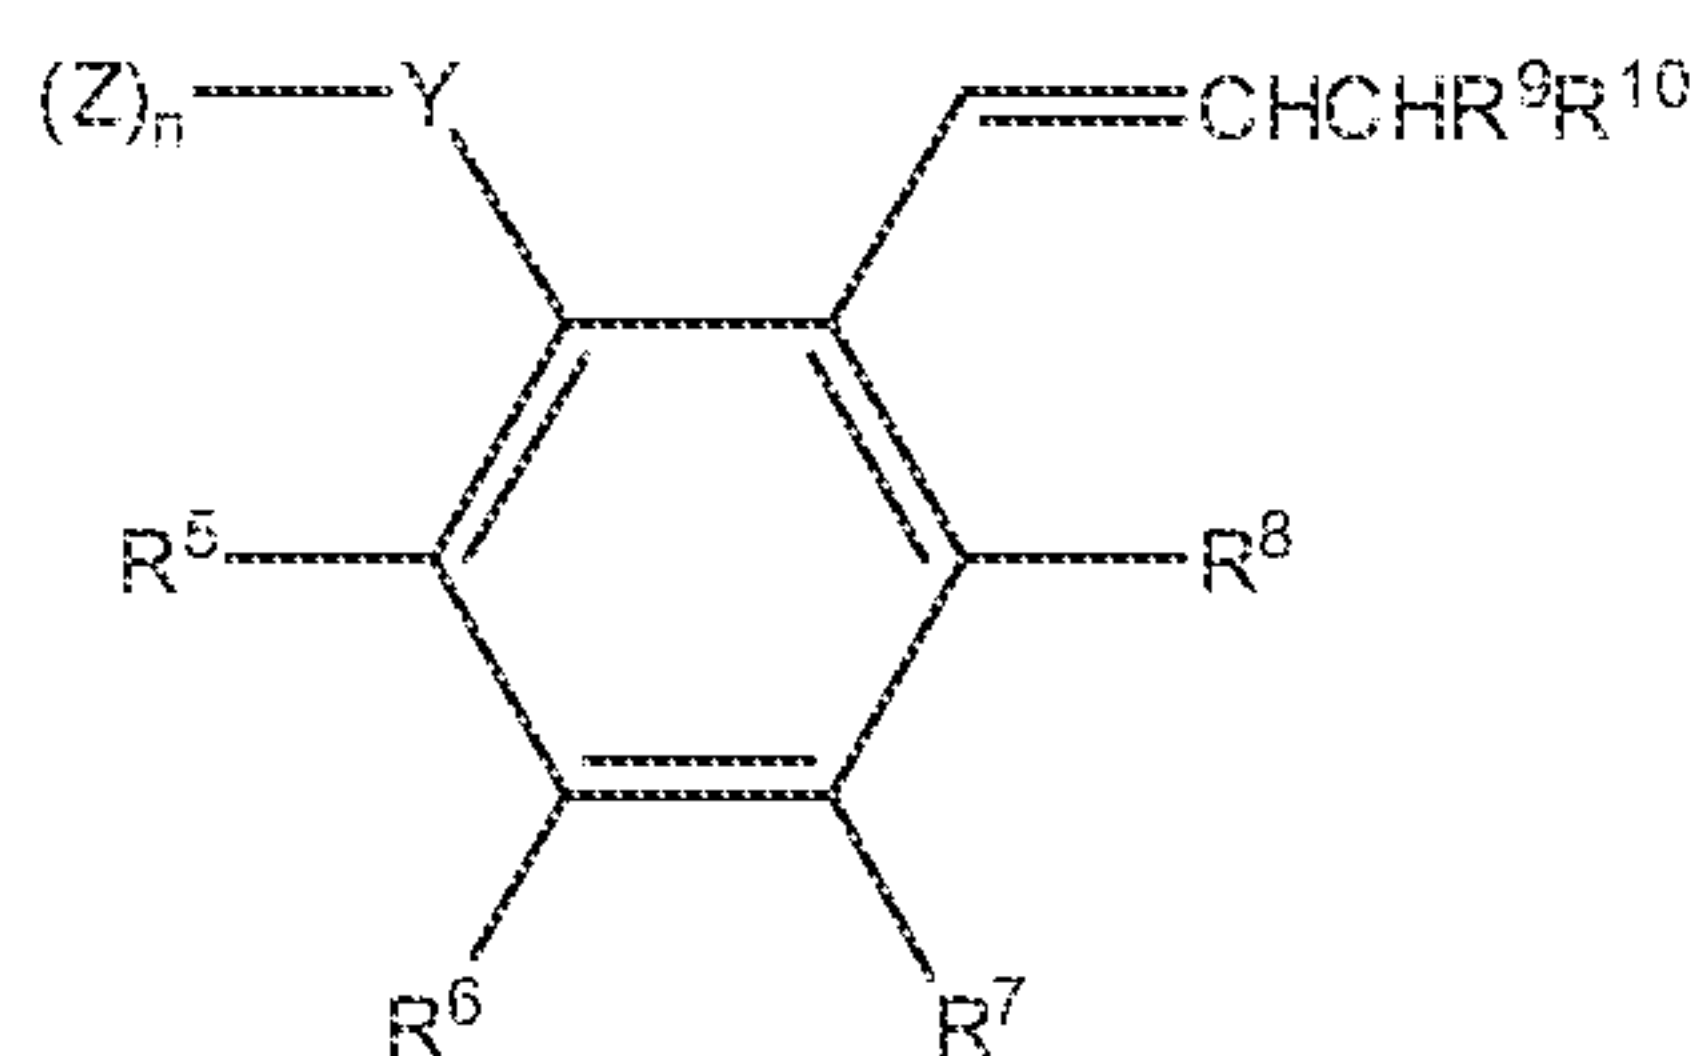


[00123] Examples of complexes comprising Grubbs-Hoveyda ligands suitable in the invention include:

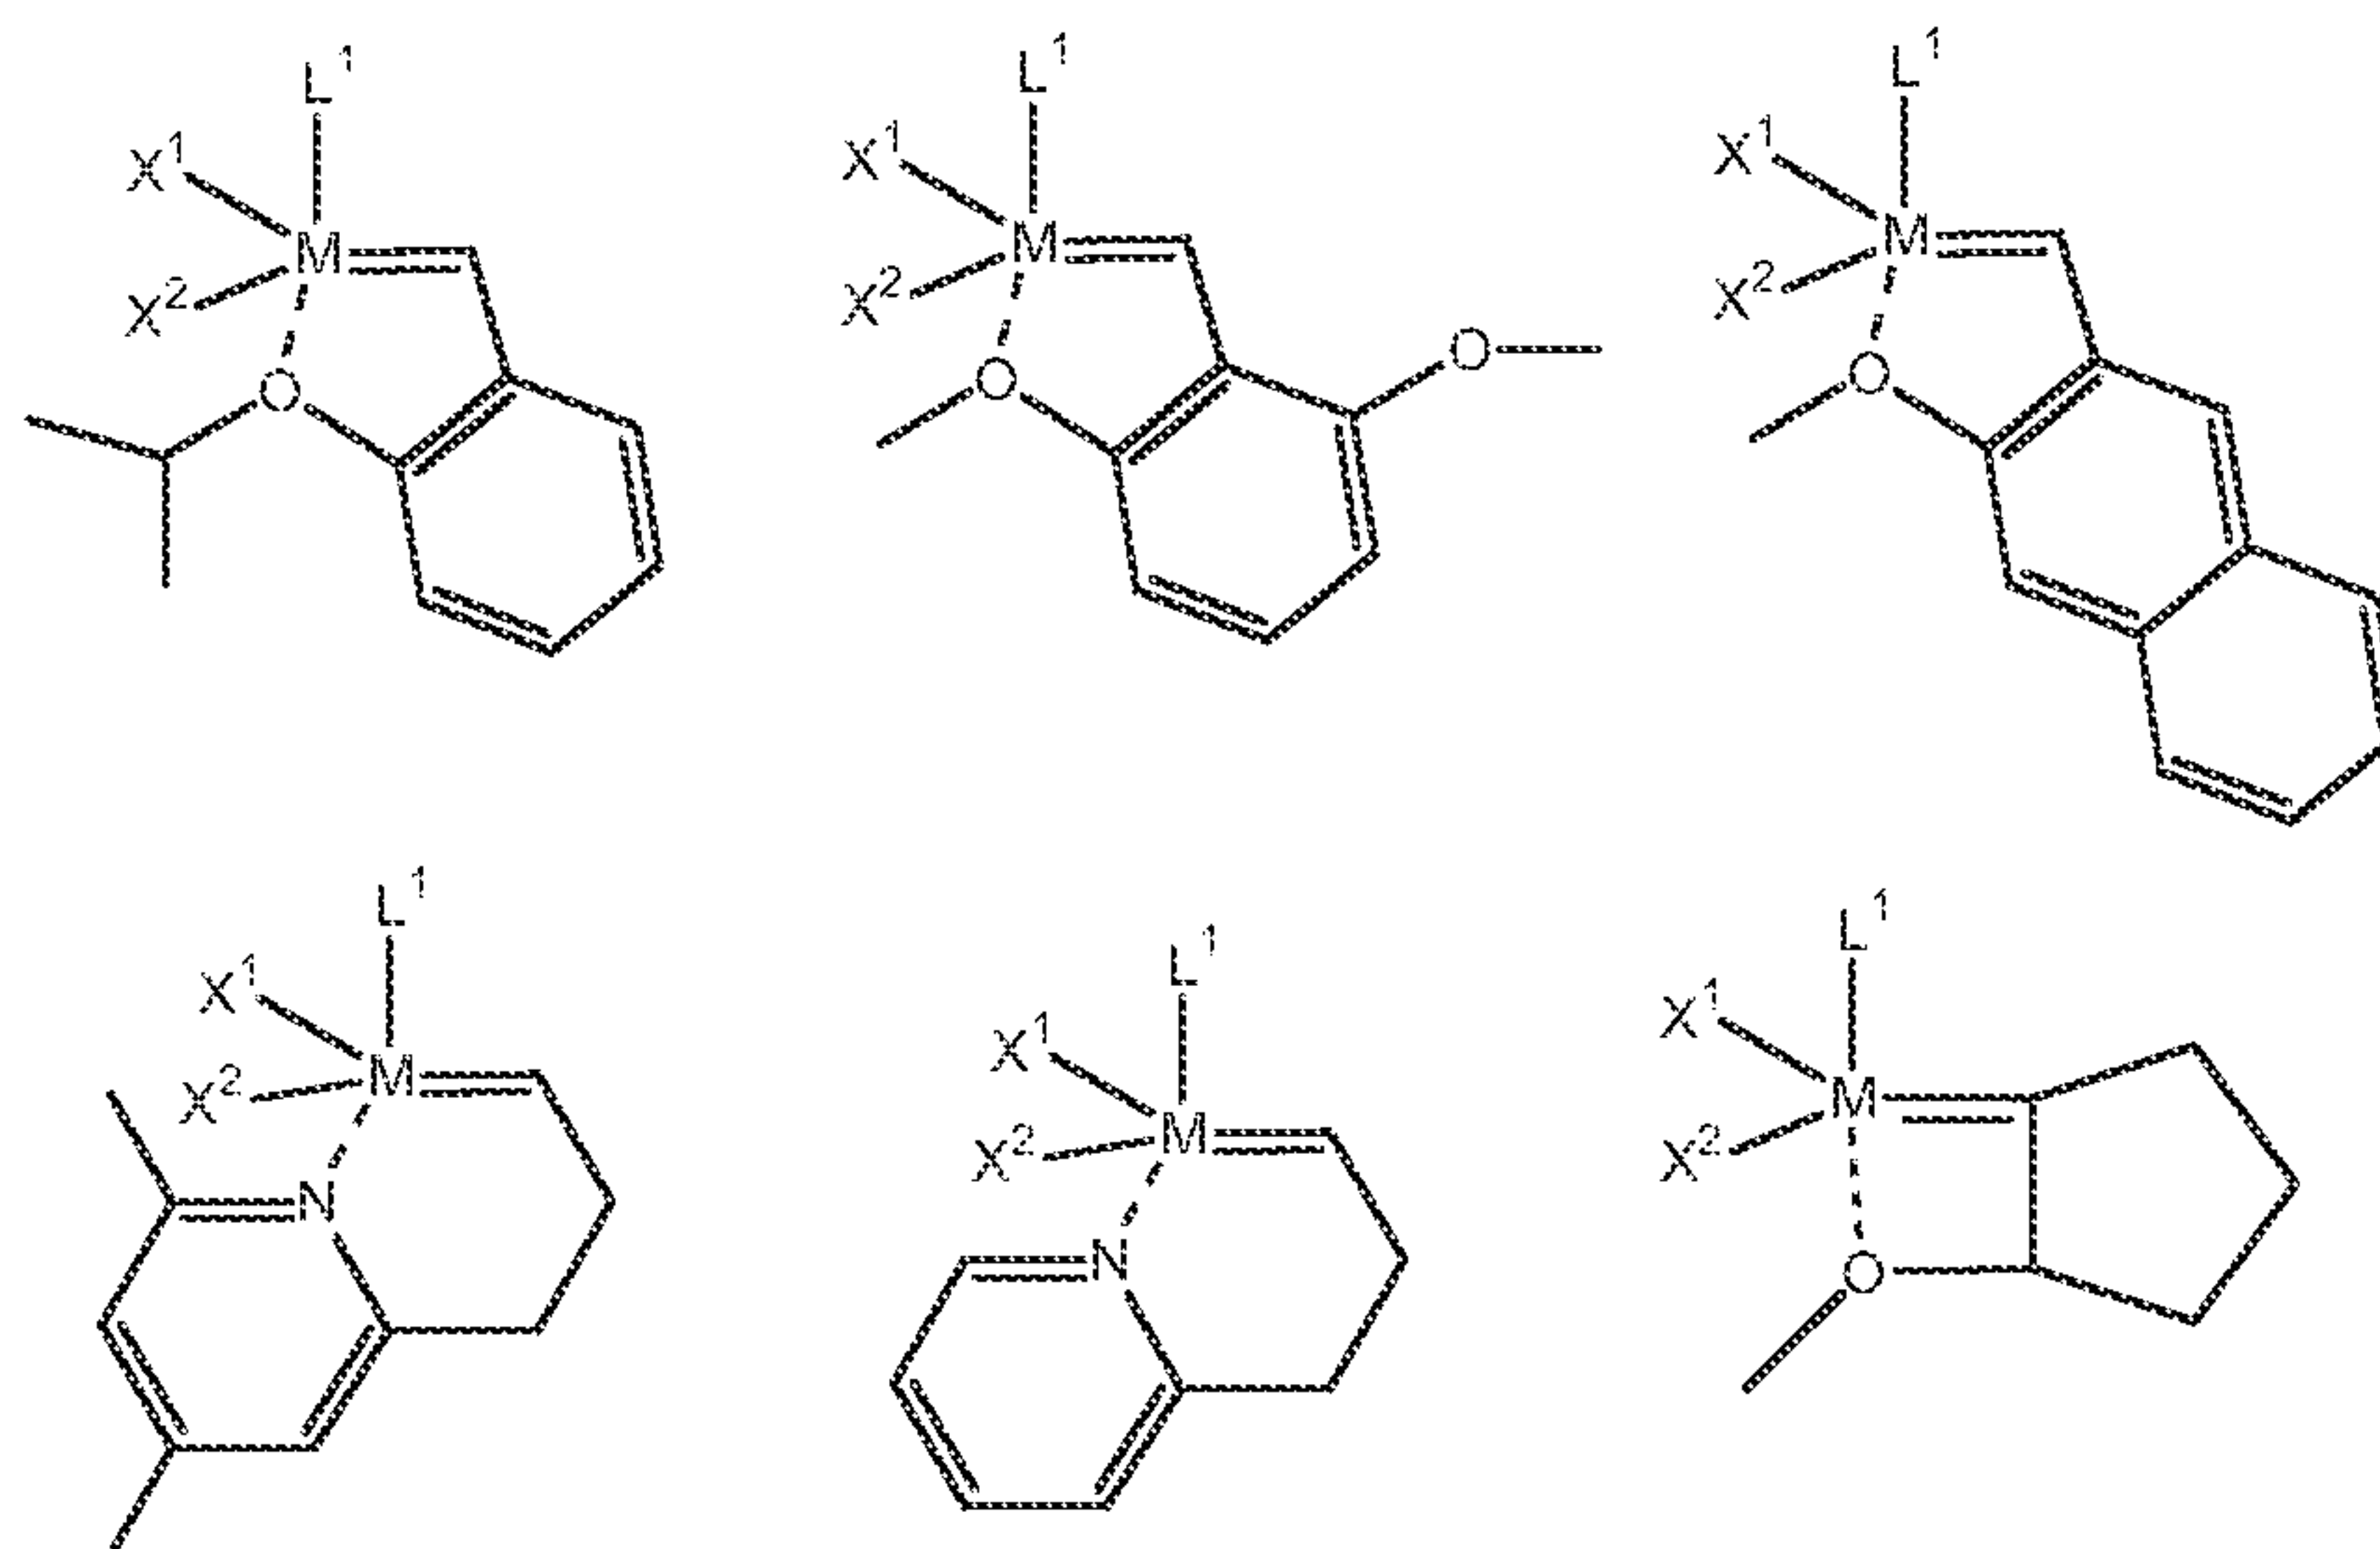


wherein, L^1 , X^1 , X^2 , and M are as described for any of the other groups of catalysts. Suitable chelating carbenes and carbene precursors are further described by Pederson et al. (U.S. Pat. Nos. 7,026,495 and 6,620,955, the disclosures of both of which are incorporated herein by reference) and Hoveyda et al. (U.S. Pat. No. 6,921,735 and WO0214376, the disclosures of both of which are incorporated herein by reference).

[00124] Other useful complexes include structures wherein L^2 and R^2 according to formulae (I), (III), or (V) are linked, such as styrenic compounds that also include a functional group for attachment to a support. Examples in which the functional group is a trialkoxysilyl functionalized moiety include, but are not limited to, the following:

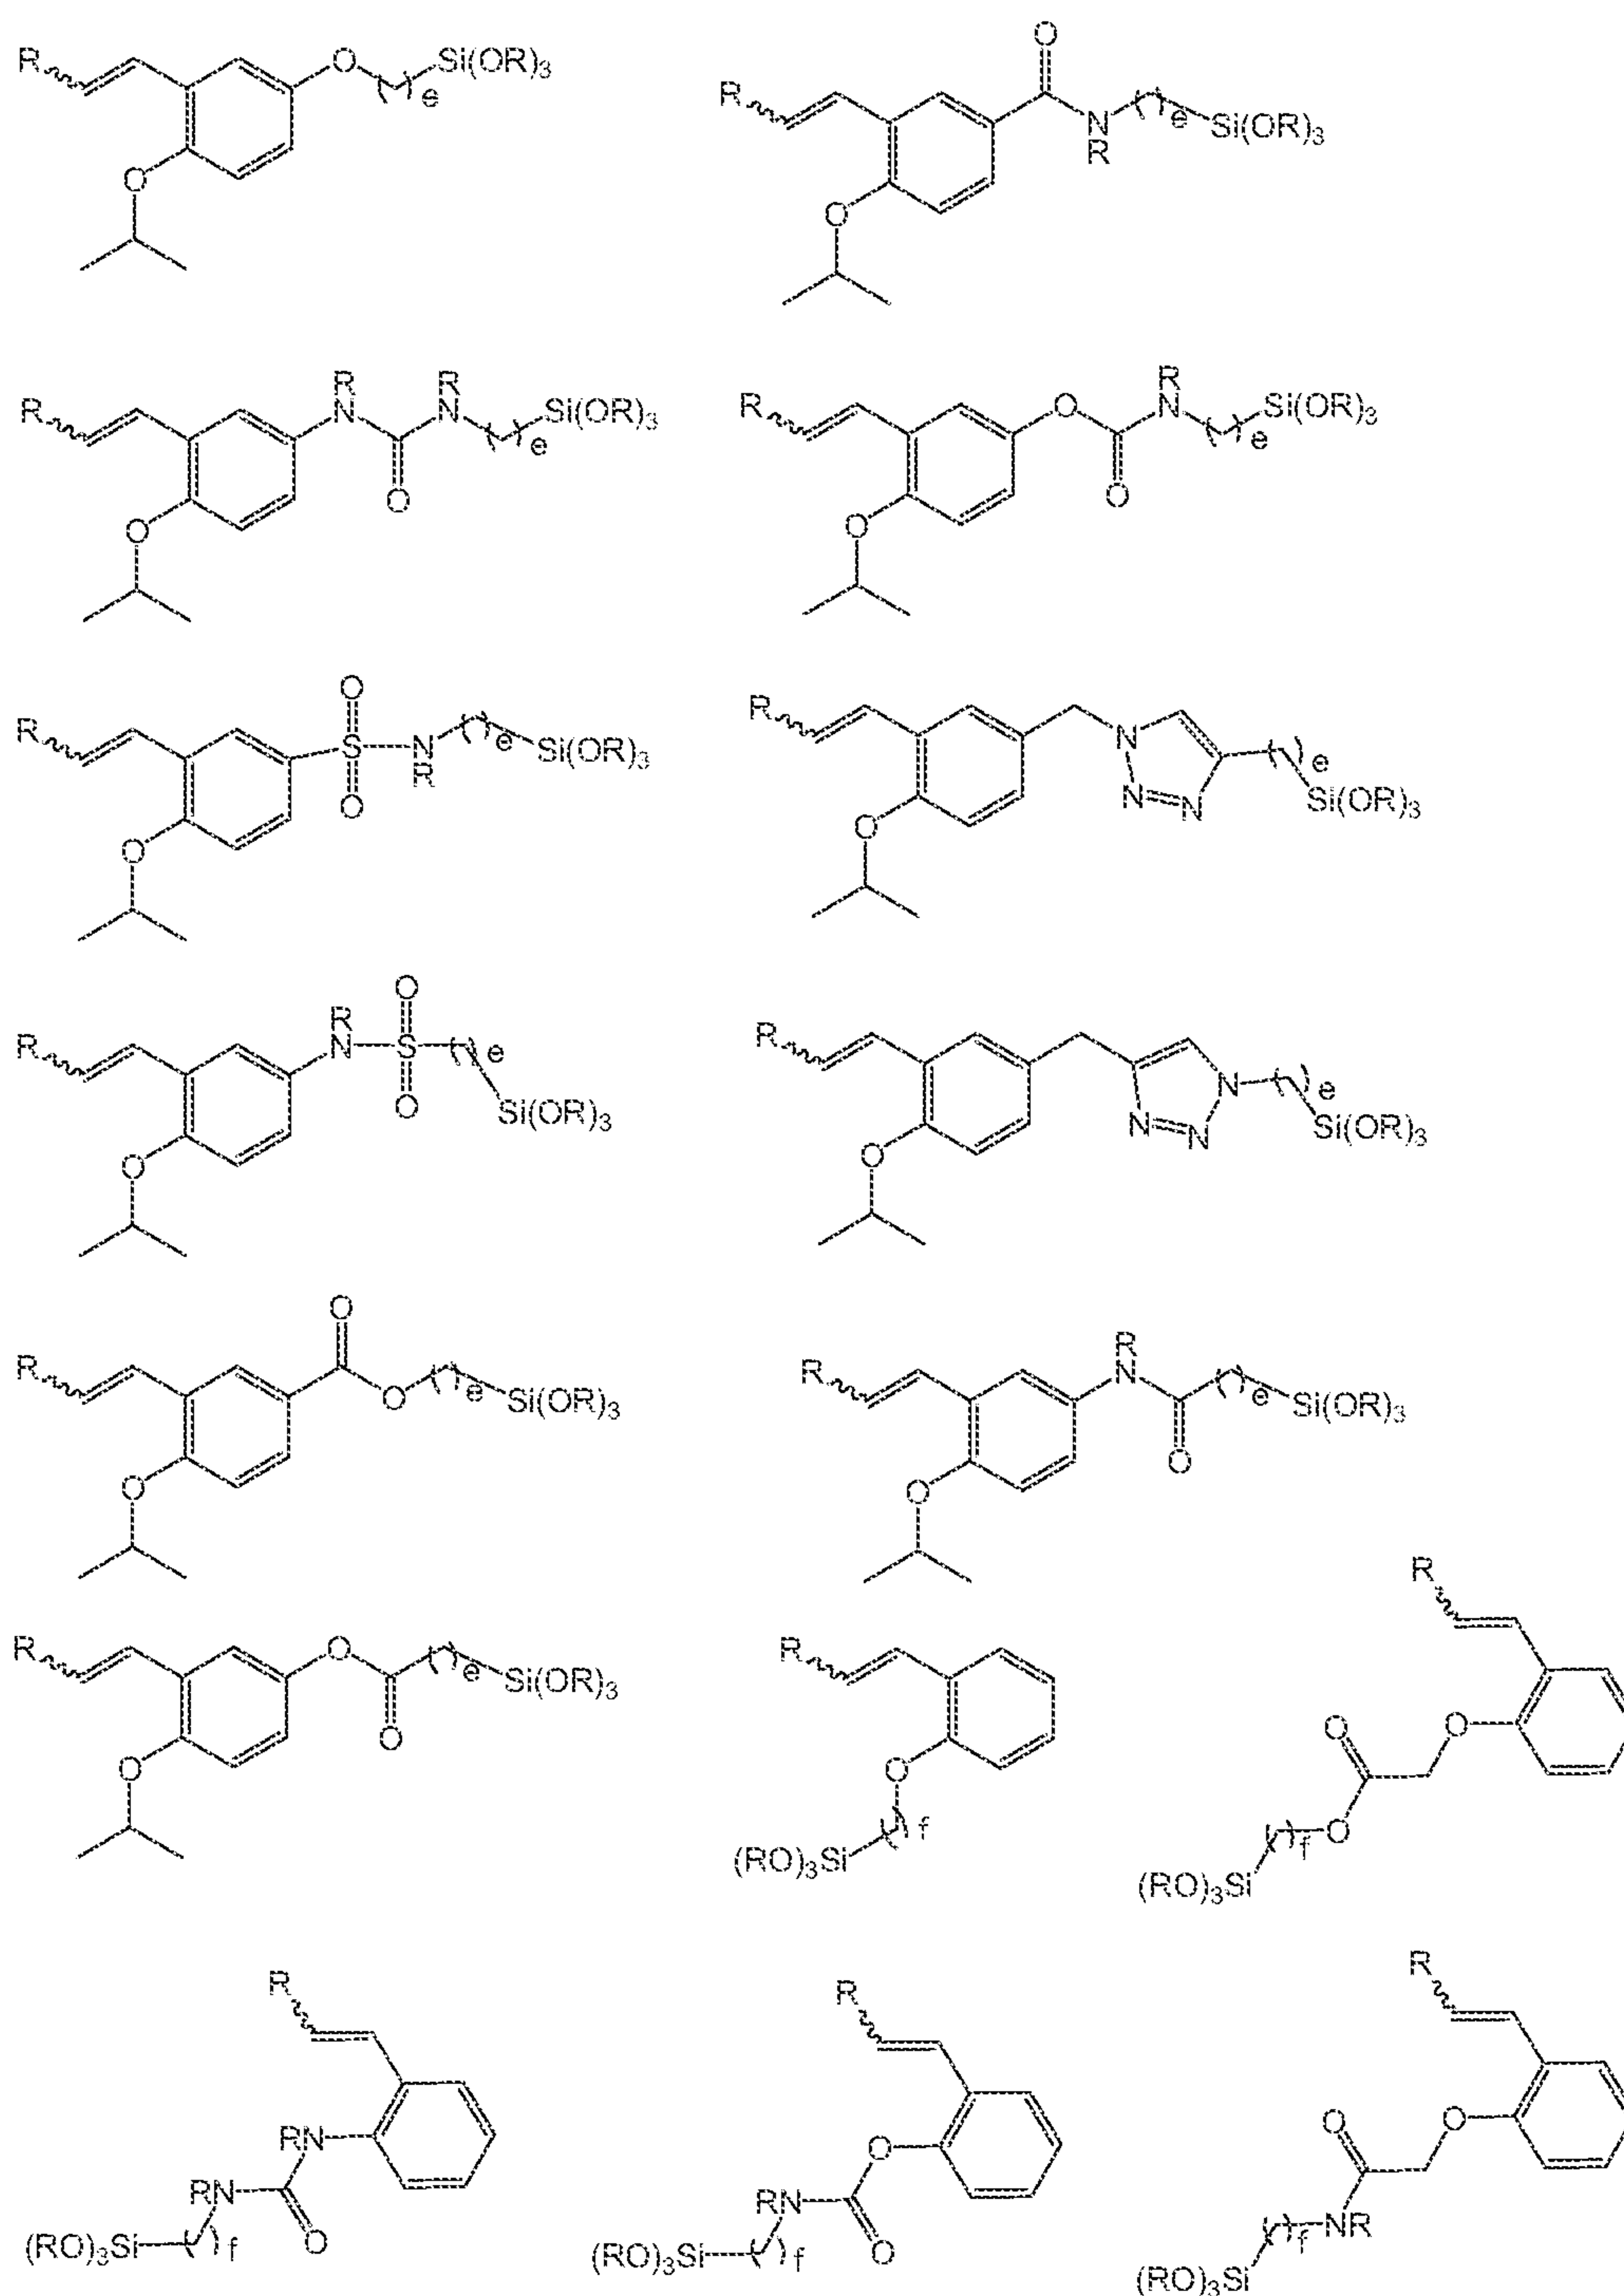

[00125] Further examples of complexes having linked ligands include those having linkages between a neutral NHC ligand and an anionic ligand, a neutral NHC ligand and an alkylidene ligand, a neutral NHC ligand and an L^2 ligand, a neutral NHC ligand and an L^3 ligand, an anionic ligand and an alkylidene ligand, and any combination thereof. While the possible structures are too numerous to list herein, some suitable structures based on formula (III) include:

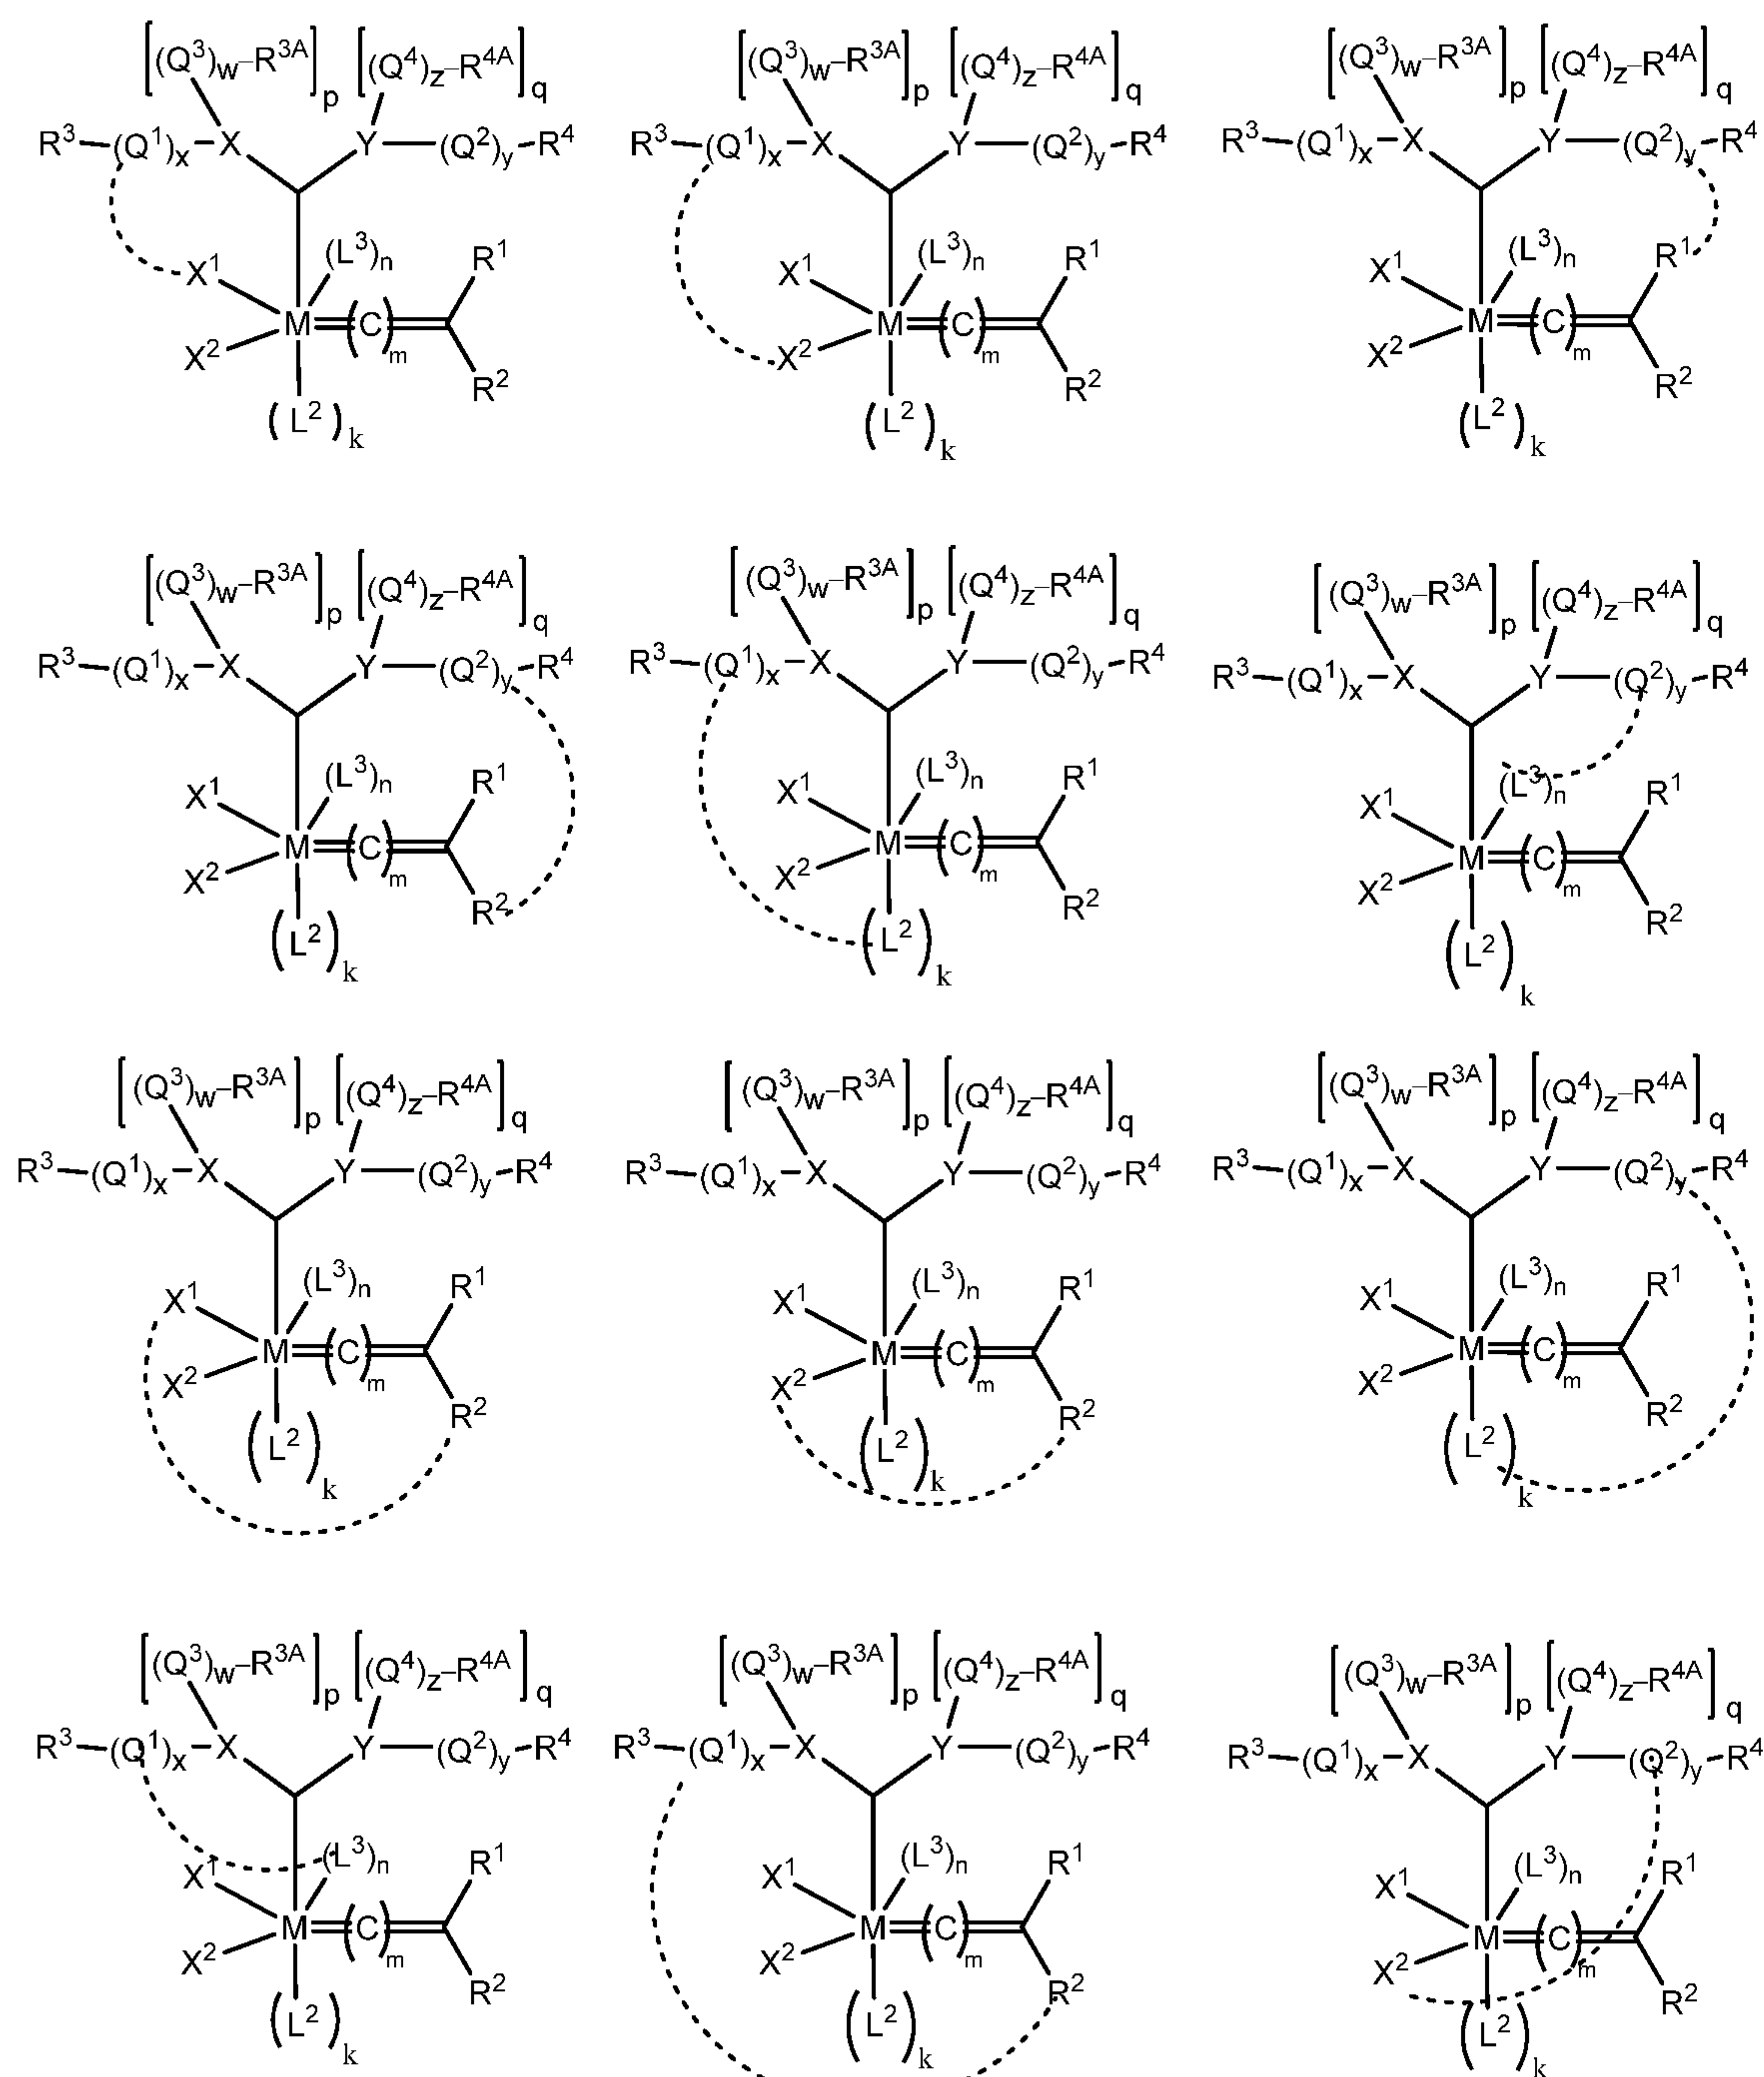





[00126] In addition to the catalysts that have the structure of formula (I), as described above, other transition metal carbene complexes include, but are not limited to:


neutral ruthenium or osmium metal carbene complexes containing metal centers that are formally in the +2 oxidation state, have an electron count of 16, are penta-coordinated, and are of the general formula (IX);

neutral ruthenium or osmium metal carbene complexes containing metal centers that are formally in the +2 oxidation state, have an electron count of 18, are hexa-coordinated, and are of the general formula (X);

cationic ruthenium or osmium metal carbene complexes containing metal centers that are formally in the +2 oxidation state, have an electron count of 14, are tetra-coordinated, and are of the general formula (XI); and

cationic ruthenium or osmium metal carbene complexes containing metal centers that are formally in the +2 oxidation state, have an electron count of 14 or 16, are tetra-coordinated or penta-coordinated, respectively, and are of the general formula (XII)

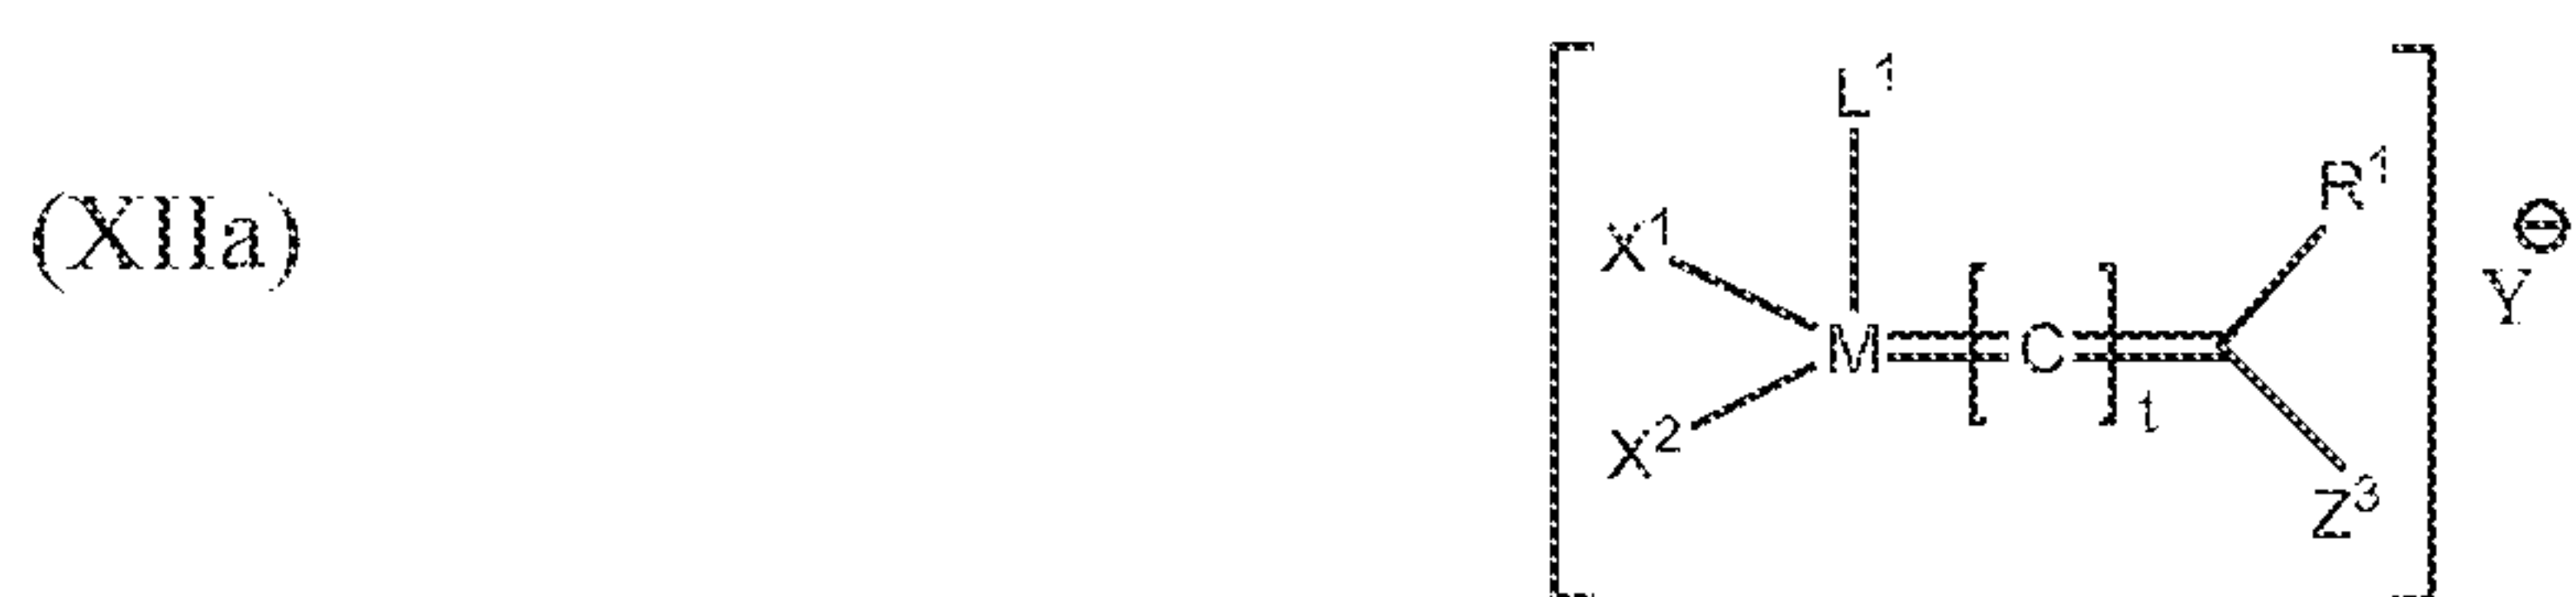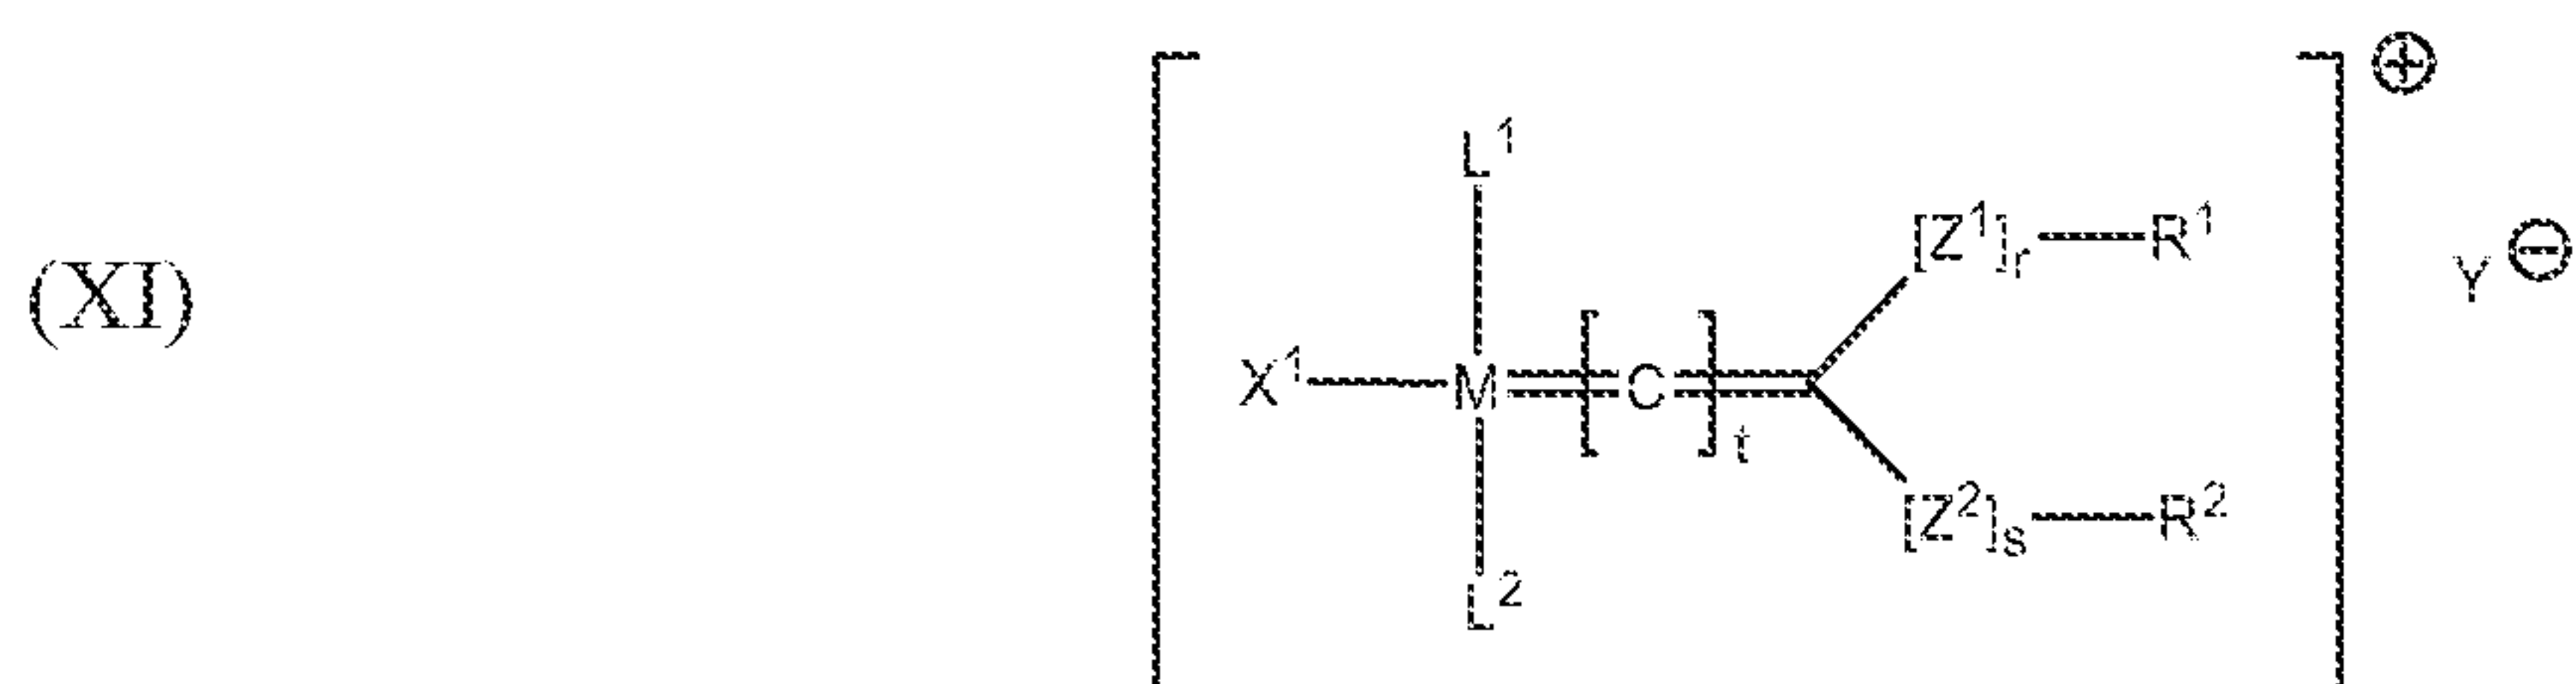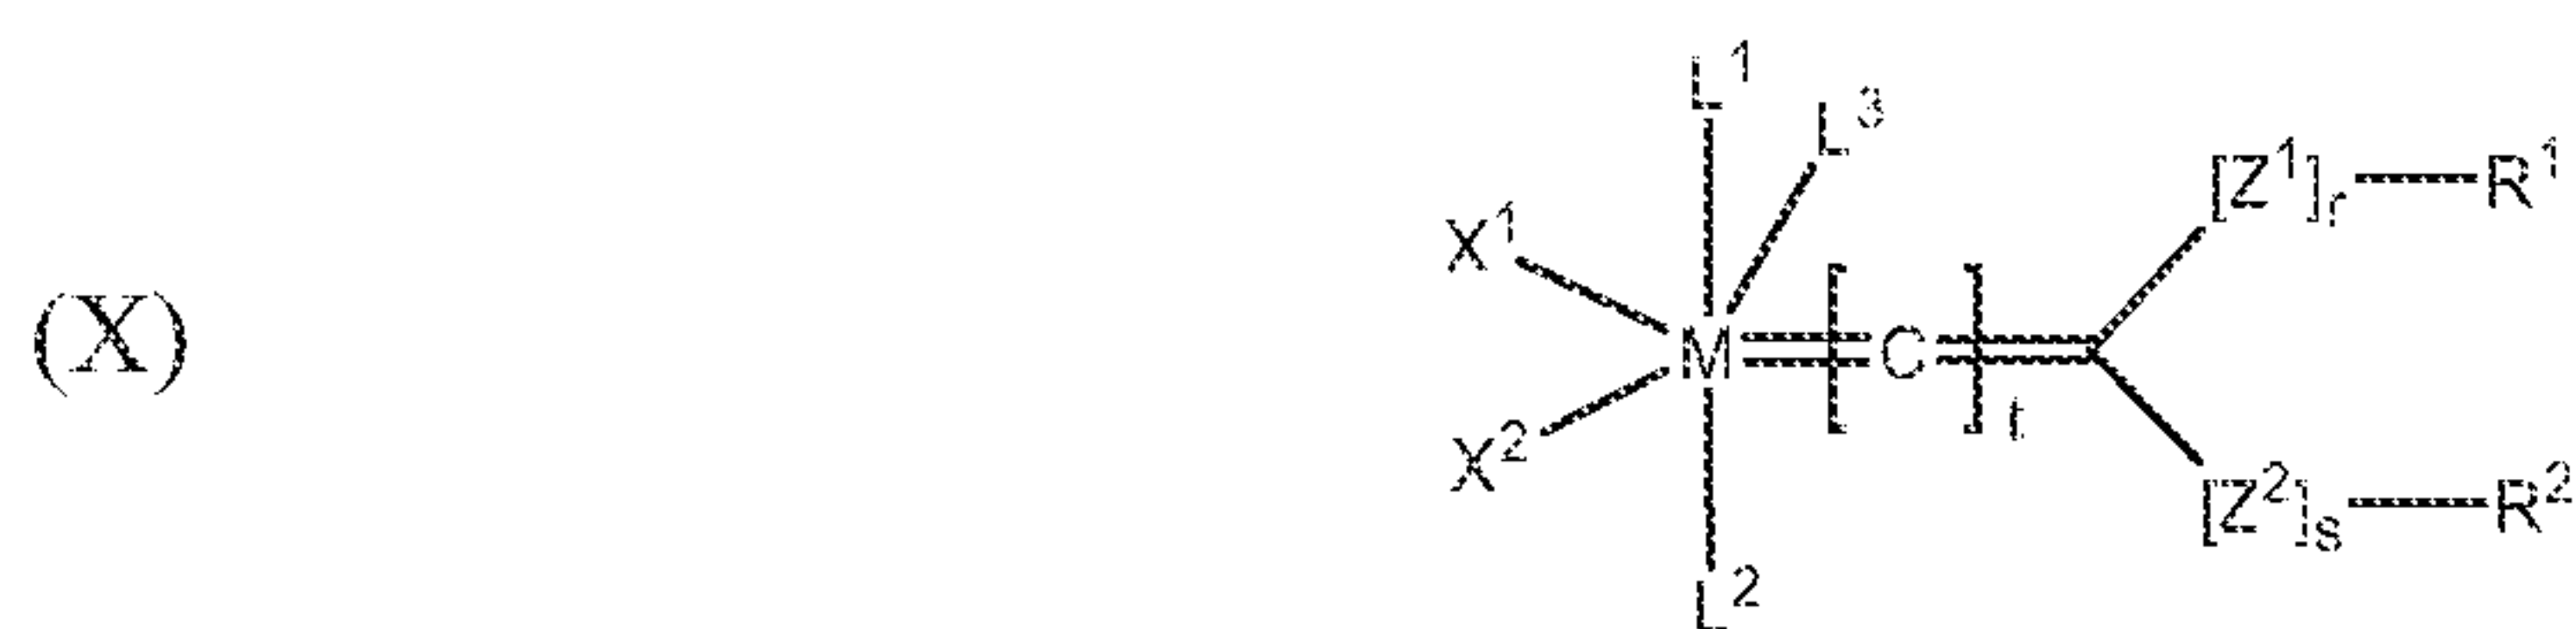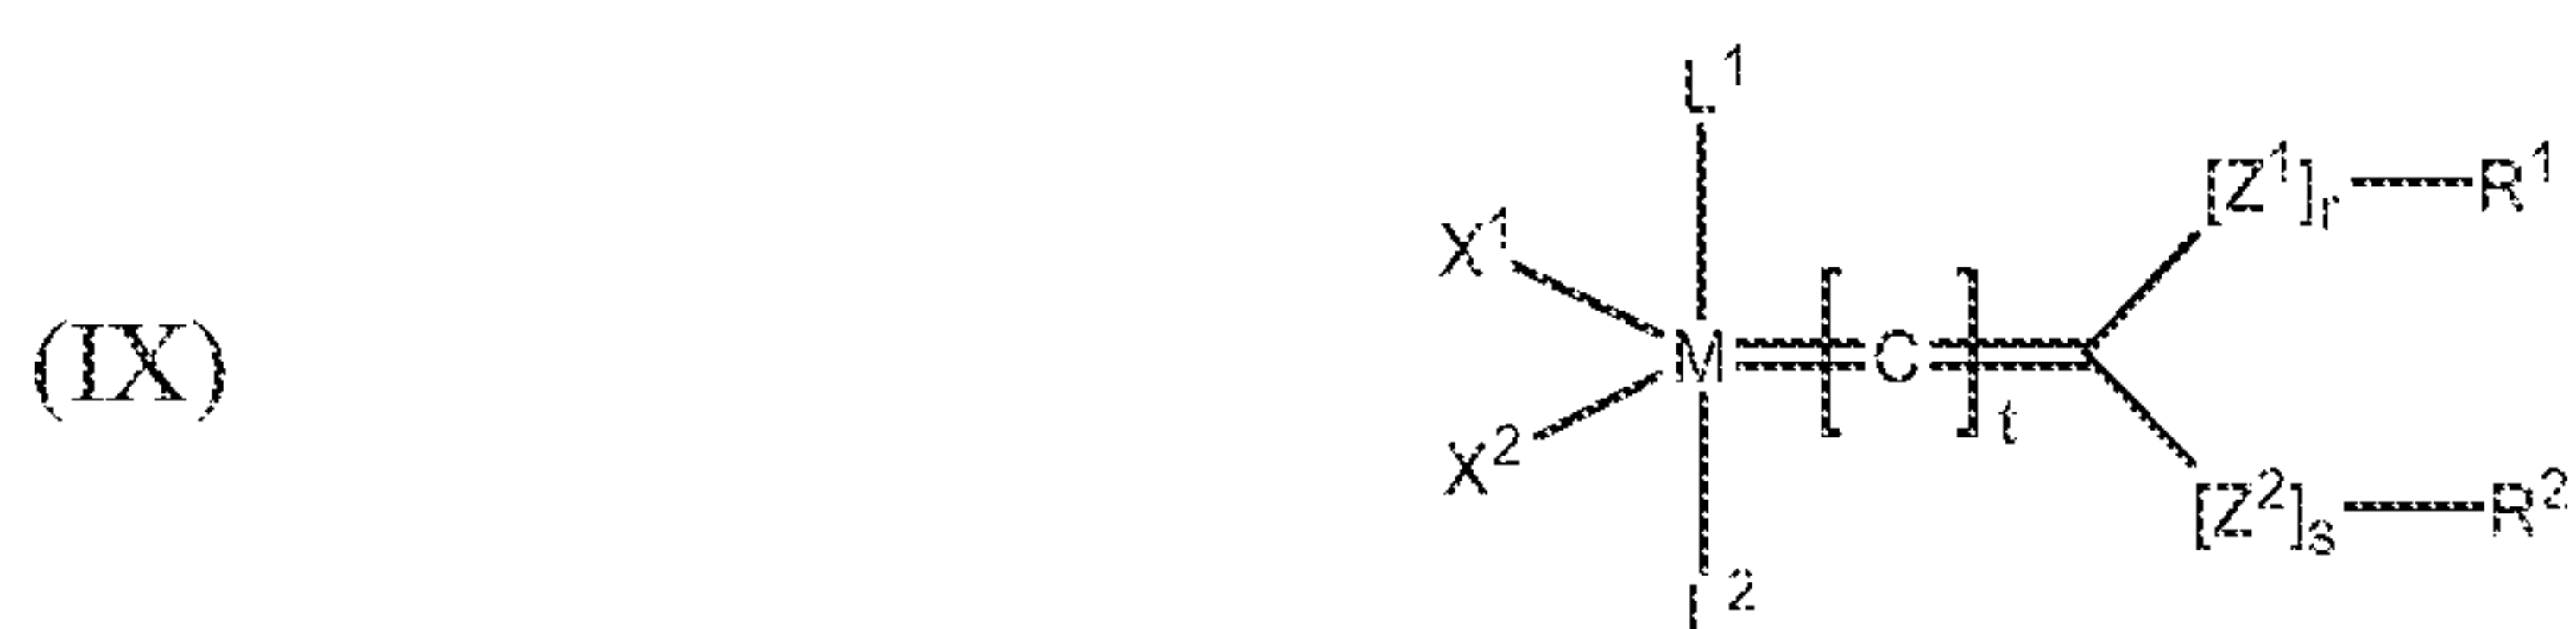

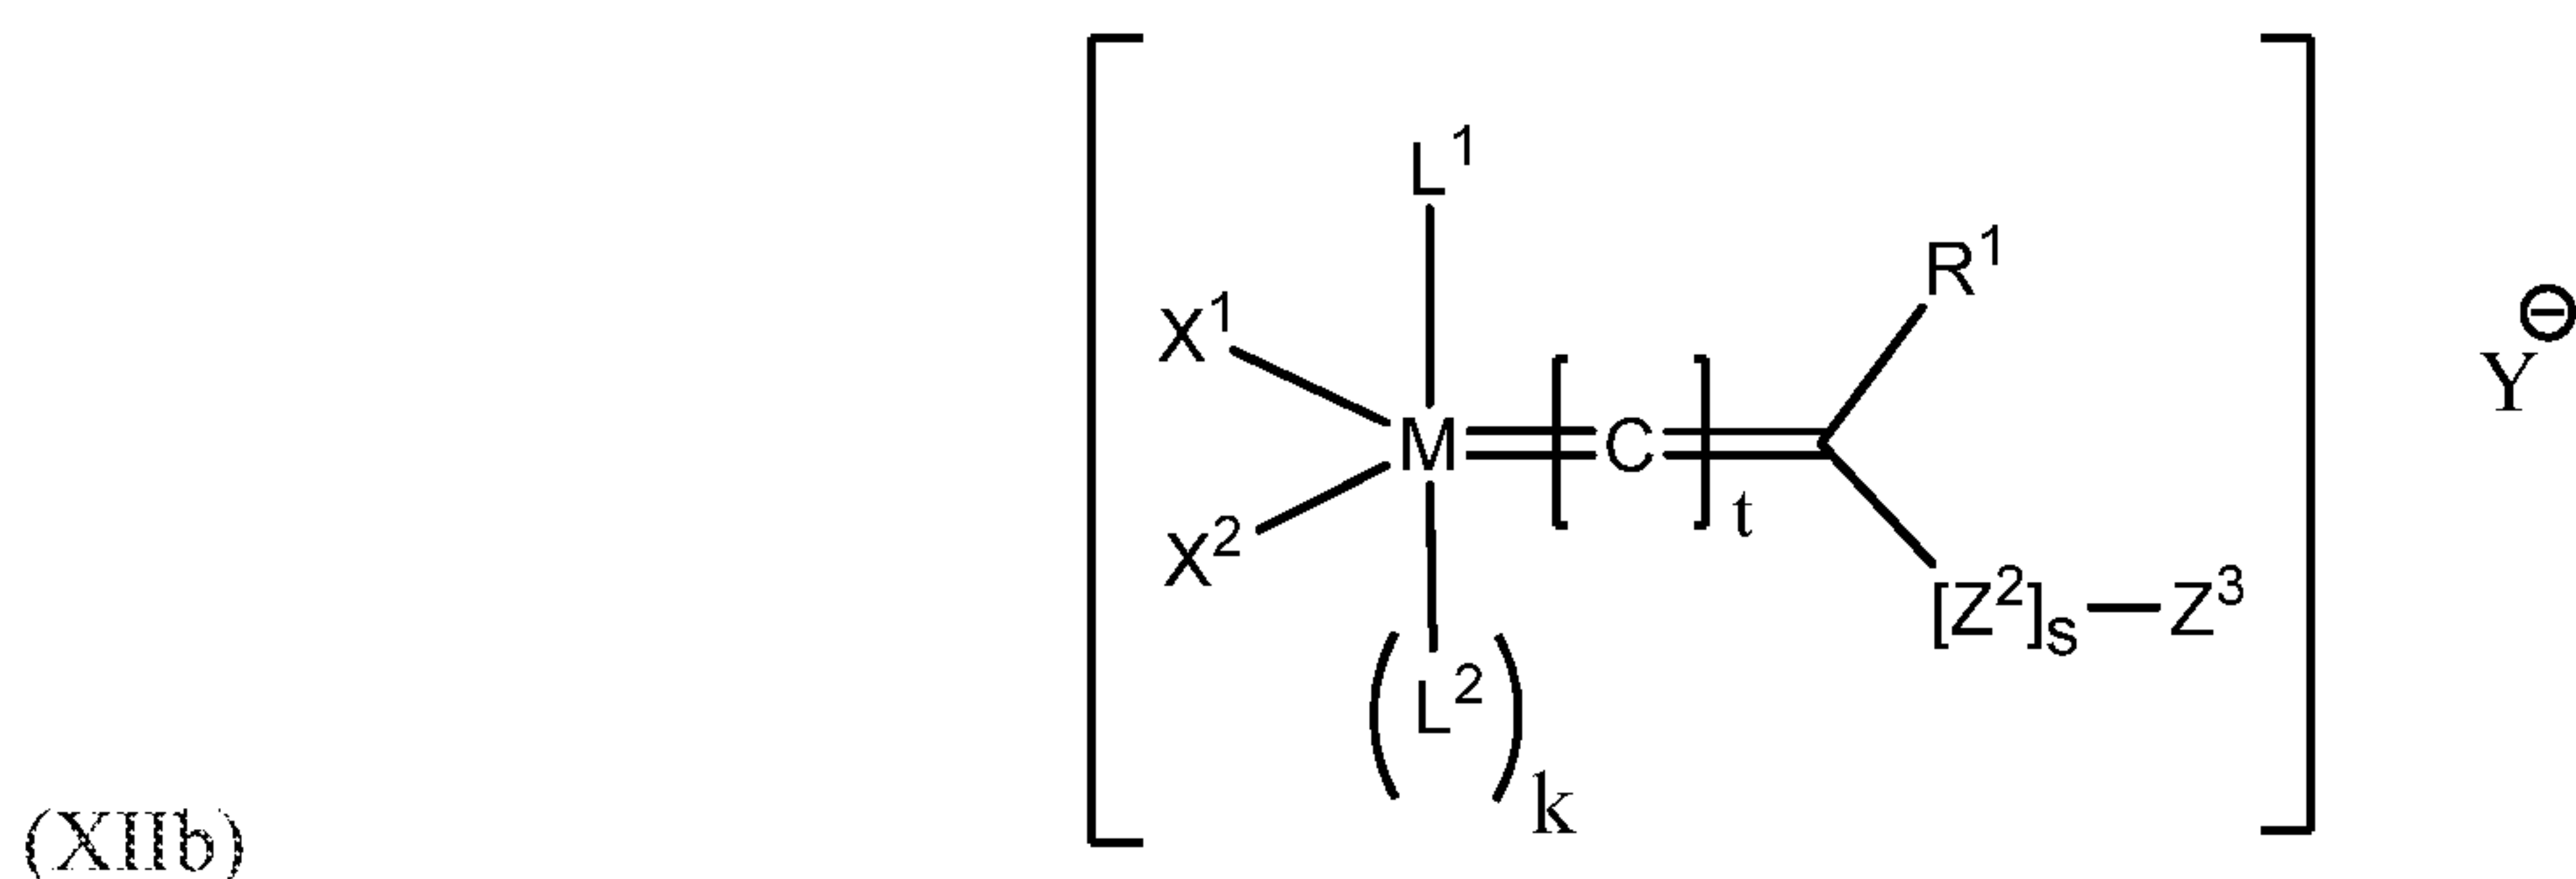

wherein:

M, X¹, X², L¹, L², L³, R¹, and R² are as defined for any of the previously defined groups of catalysts;

r and s are independently zero or 1;

t is an integer in the range of zero to 5;

k is an integer in the range of zero to 1;


Y is any non-coordinating anion (e.g., a halide ion, BF₄⁻, etc.);

Z¹ and Z² are independently selected from -O-, -S-, -NR²-, -PR²-, -P(=O)R²-, -P(OR²)-, -P(=O)(OR²)-, -C(=O)-, -C(=O)O-, -OC(=O)-, -OC(=O)O-, -S(=O)-, and -S(=O)₂-;

Z³ is any cationic moiety such as -P(R²)₃⁺ or -N(R²)₃⁺; and

any two or more of X¹, X², L¹, L², L³, Z¹, Z², Z³, R¹, and R² may be taken together to form a cyclic group, e.g., a multidentate ligand, and wherein any one or more of X¹, X², L¹, L², L³, Z¹, Z², Z³, R¹, and R² may be attached to a support. Additionally, Z¹ and Z² may also be an optionally substituted and/or optionally heteroatom-containing C₁-C₂₀ hydrocarbylene linkage.

[00127] Additionally, another group of olefin metathesis catalysts that may be used in the invention disclosed herein, is a Group 8 transition metal complex having the structure of formula (XIII):

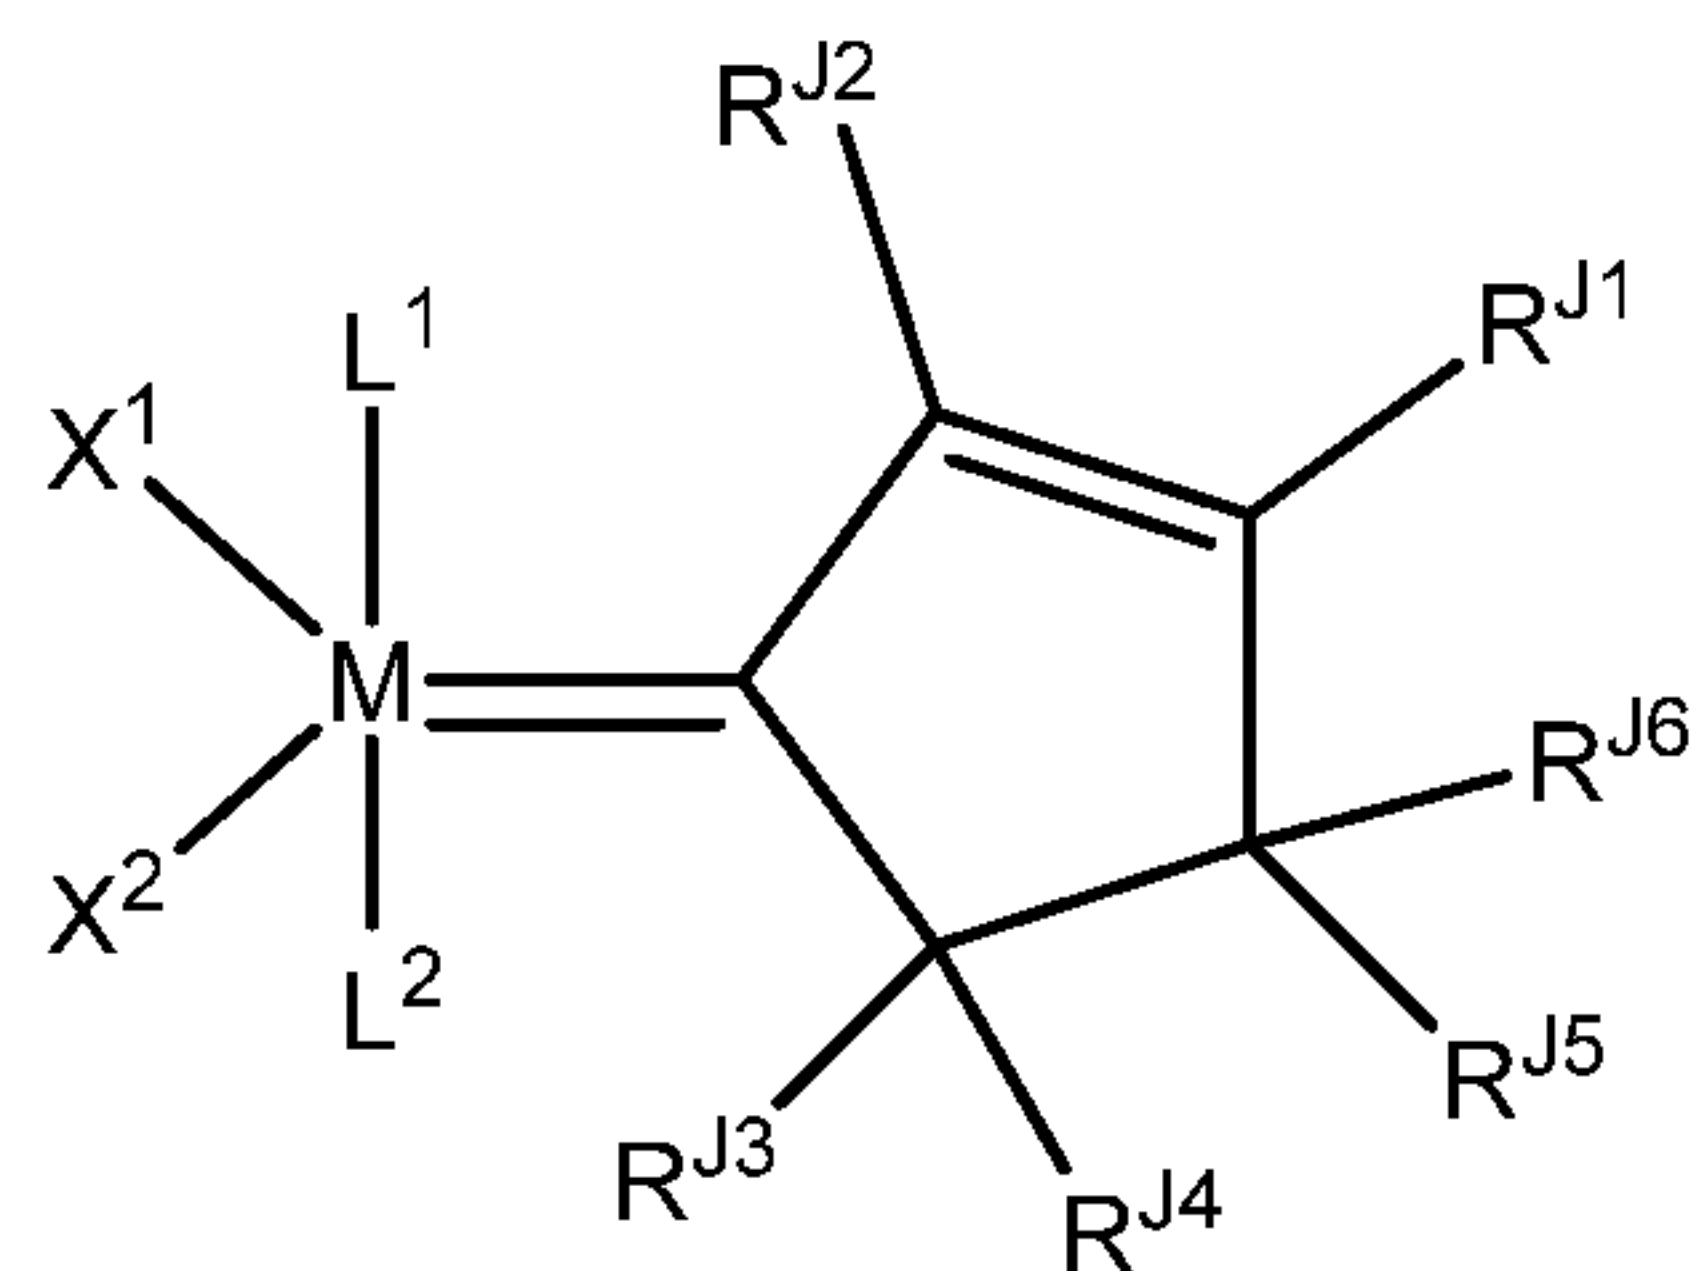


(XIII)

wherein M is a Group 8 transition metal, particularly ruthenium or osmium, or more particularly ruthenium;

X^1 , X^2 , L^1 , and L^2 are as defined for the first and second groups of catalysts defined above; and

R^{J1} , R^{J2} , R^{J3} , R^{J4} , R^{J5} , and R^{J6} are each independently selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, thioisocyanate, cyanato, thiocyanato, hydroxyl, ester, ether, thioether, amine, alkylamine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane, siloxane, phosphine, phosphate, borate, or $-A-Fn$, wherein "A" is a divalent hydrocarbon moiety selected from alkylene and arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein the aryl portion of the arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and Fn is a functional group, or any one or more of the R^{J1} , R^{J2} , R^{J3} , R^{J4} , R^{J5} , and R^{J6} may be linked together to form a cyclic group, or any one or more of the R^{J1} , R^{J2} , R^{J3} , R^{J4} , R^{J5} , and R^{J6} may be attached to a support.

[00128] Additionally, one preferred embodiment of the Group 8 transition metal complex of formula (XIII) is a Group 8 transition metal complex of formula (XIV):

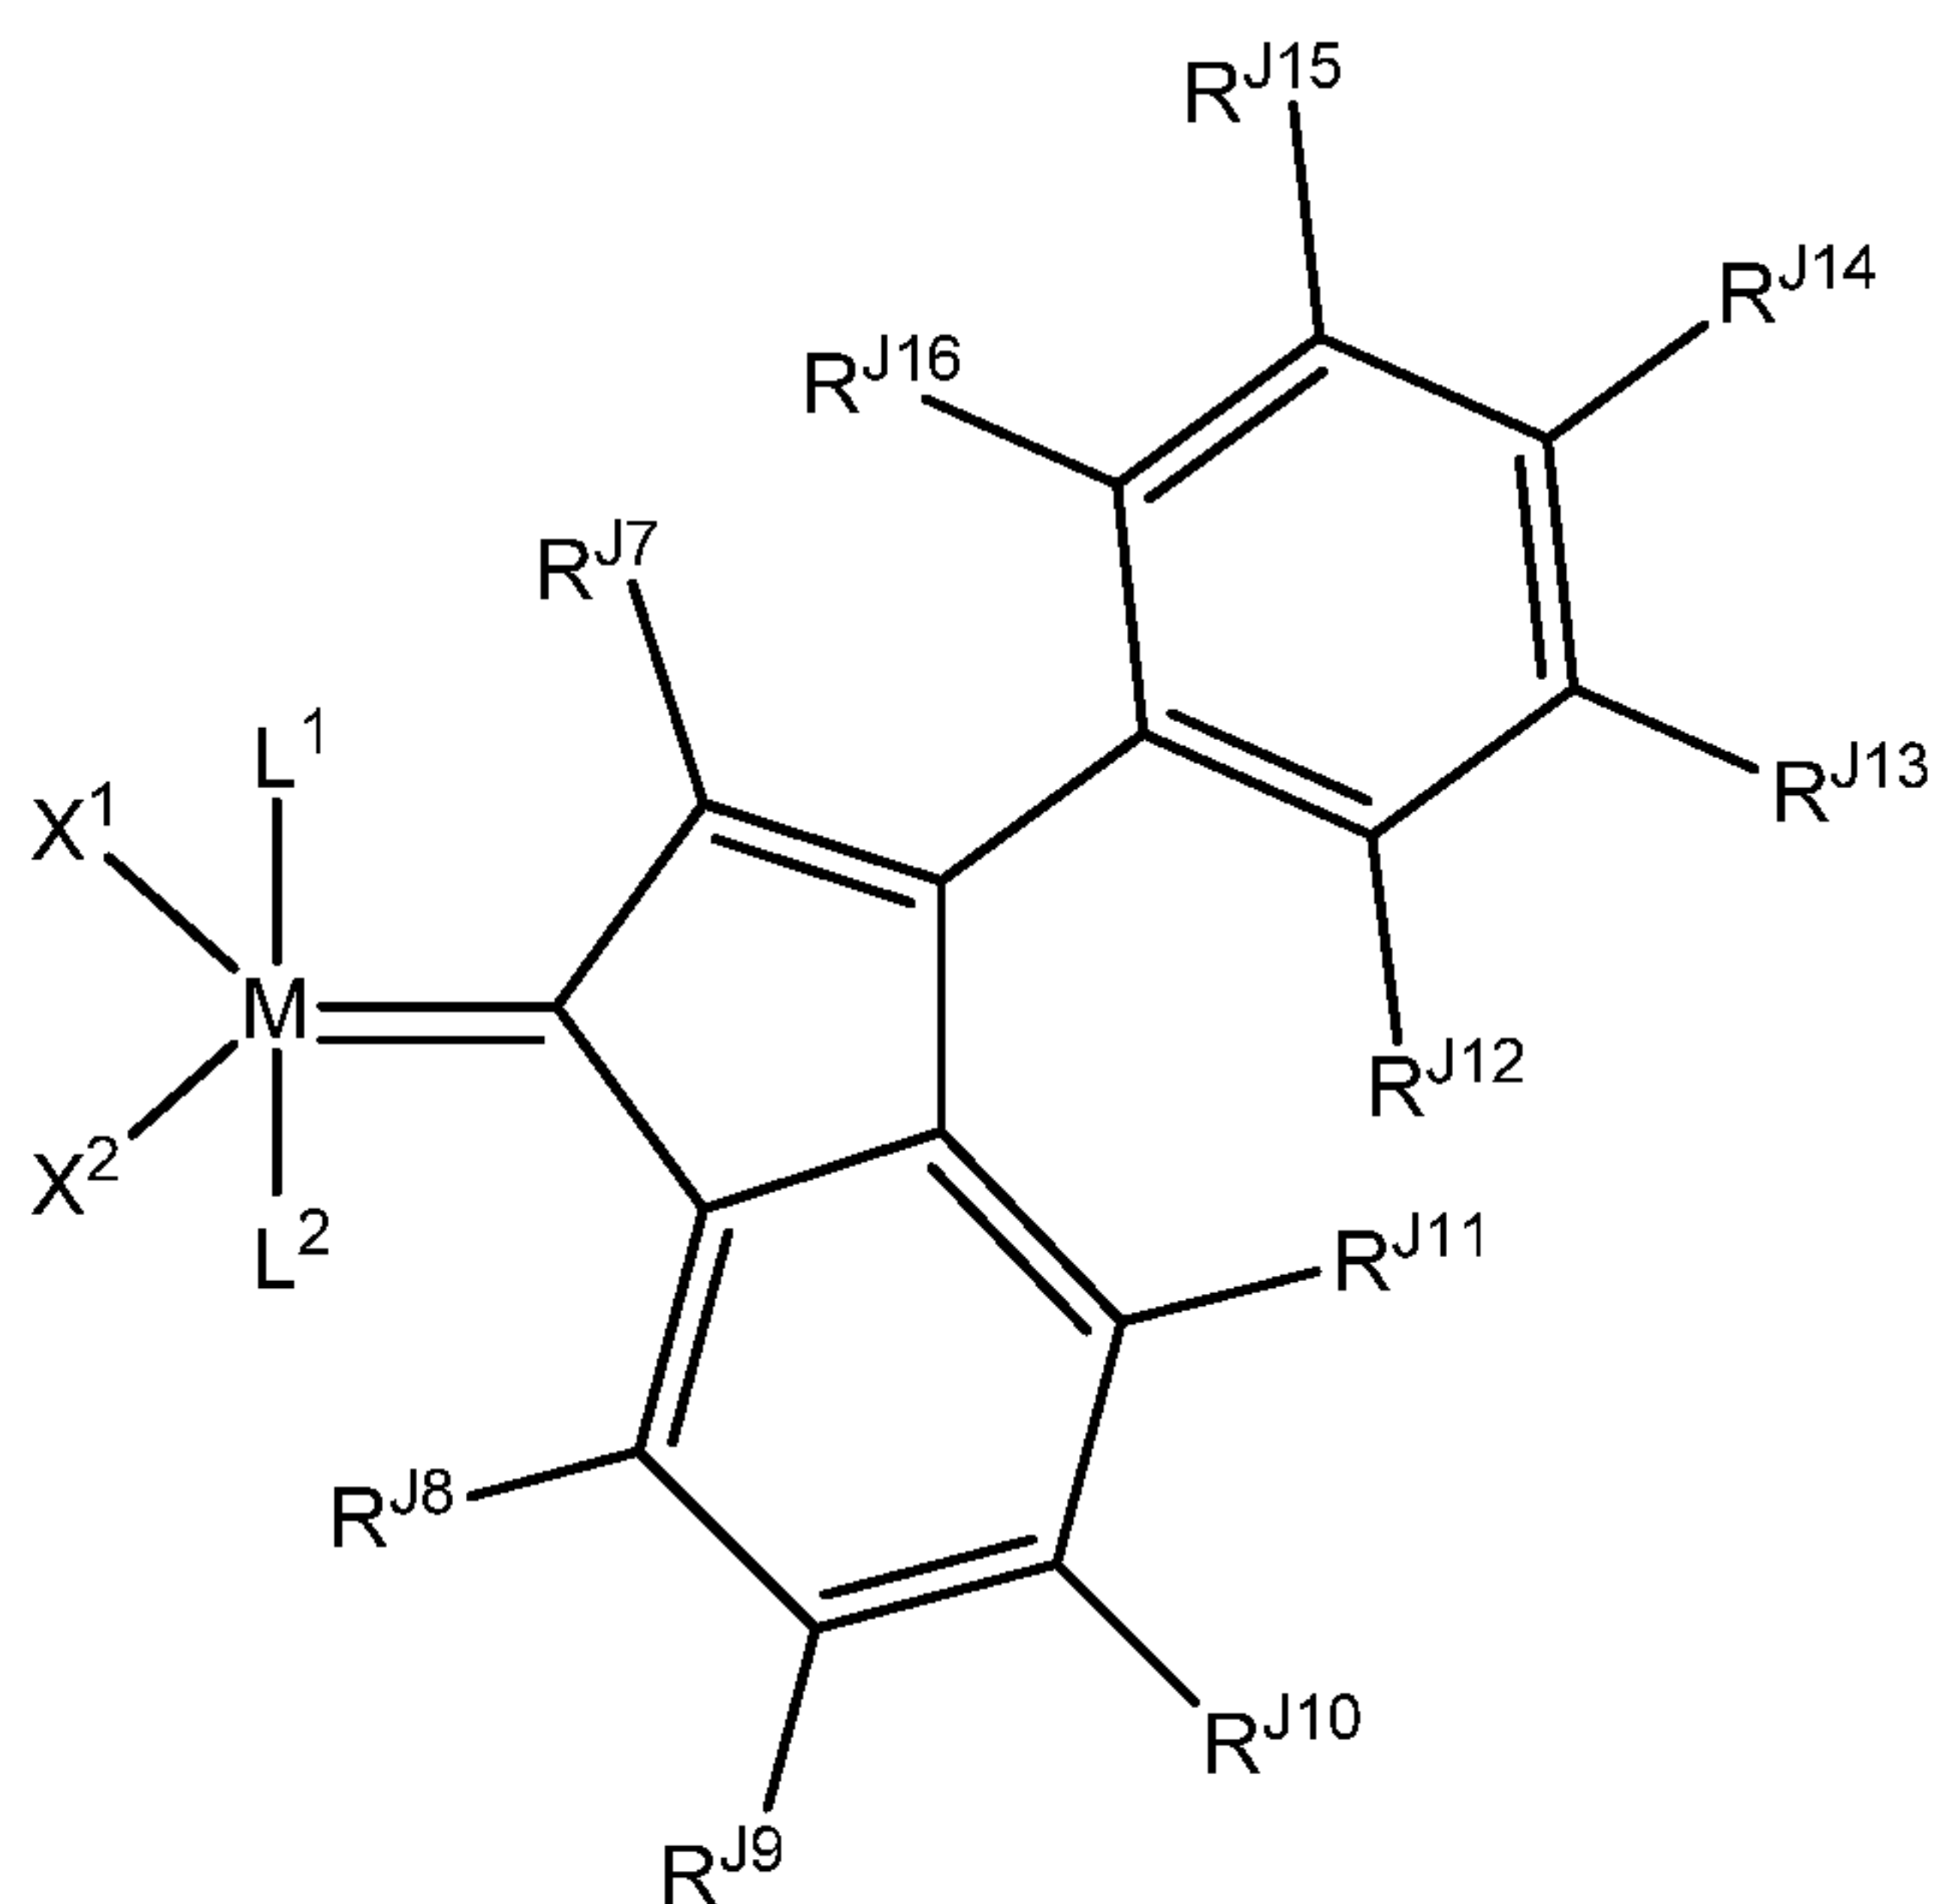


(XIV)

wherein M, X¹, X², L¹, L², are as defined above for Group 8 transition metal complex of formula XIII; and

R^{J7}, R^{J8}, R^{J9}, R^{J10}, R^{J11}, R^{J12}, R^{J13}, R^{J14}, R^{J15} and R^{J16} are as defined above for R^{J1}, R^{J2}, R^{J3}, R^{J4}, R^{J5}, and R^{J6} for Group 8 transition metal complex of formula XIII or any one or more of the R^{J7}, R^{J8}, R^{J9}, R^{J10}, R^{J11}, R^{J12}, R^{J13}, R^{J14}, R^{J15} and R^{J16} may be linked together to form a cyclic group, or any one or more of the R^{J7}, R^{J8}, R^{J9}, R^{J10}, R^{J11}, R^{J12}, R^{J13}, R^{J14}, R^{J15} and R^{J16} may be attached to a support.


[00129] Additionally, another preferred embodiment of the Group 8 transition metal complex of formula (XIII) is a Group 8 transition metal complex of formula (XV):

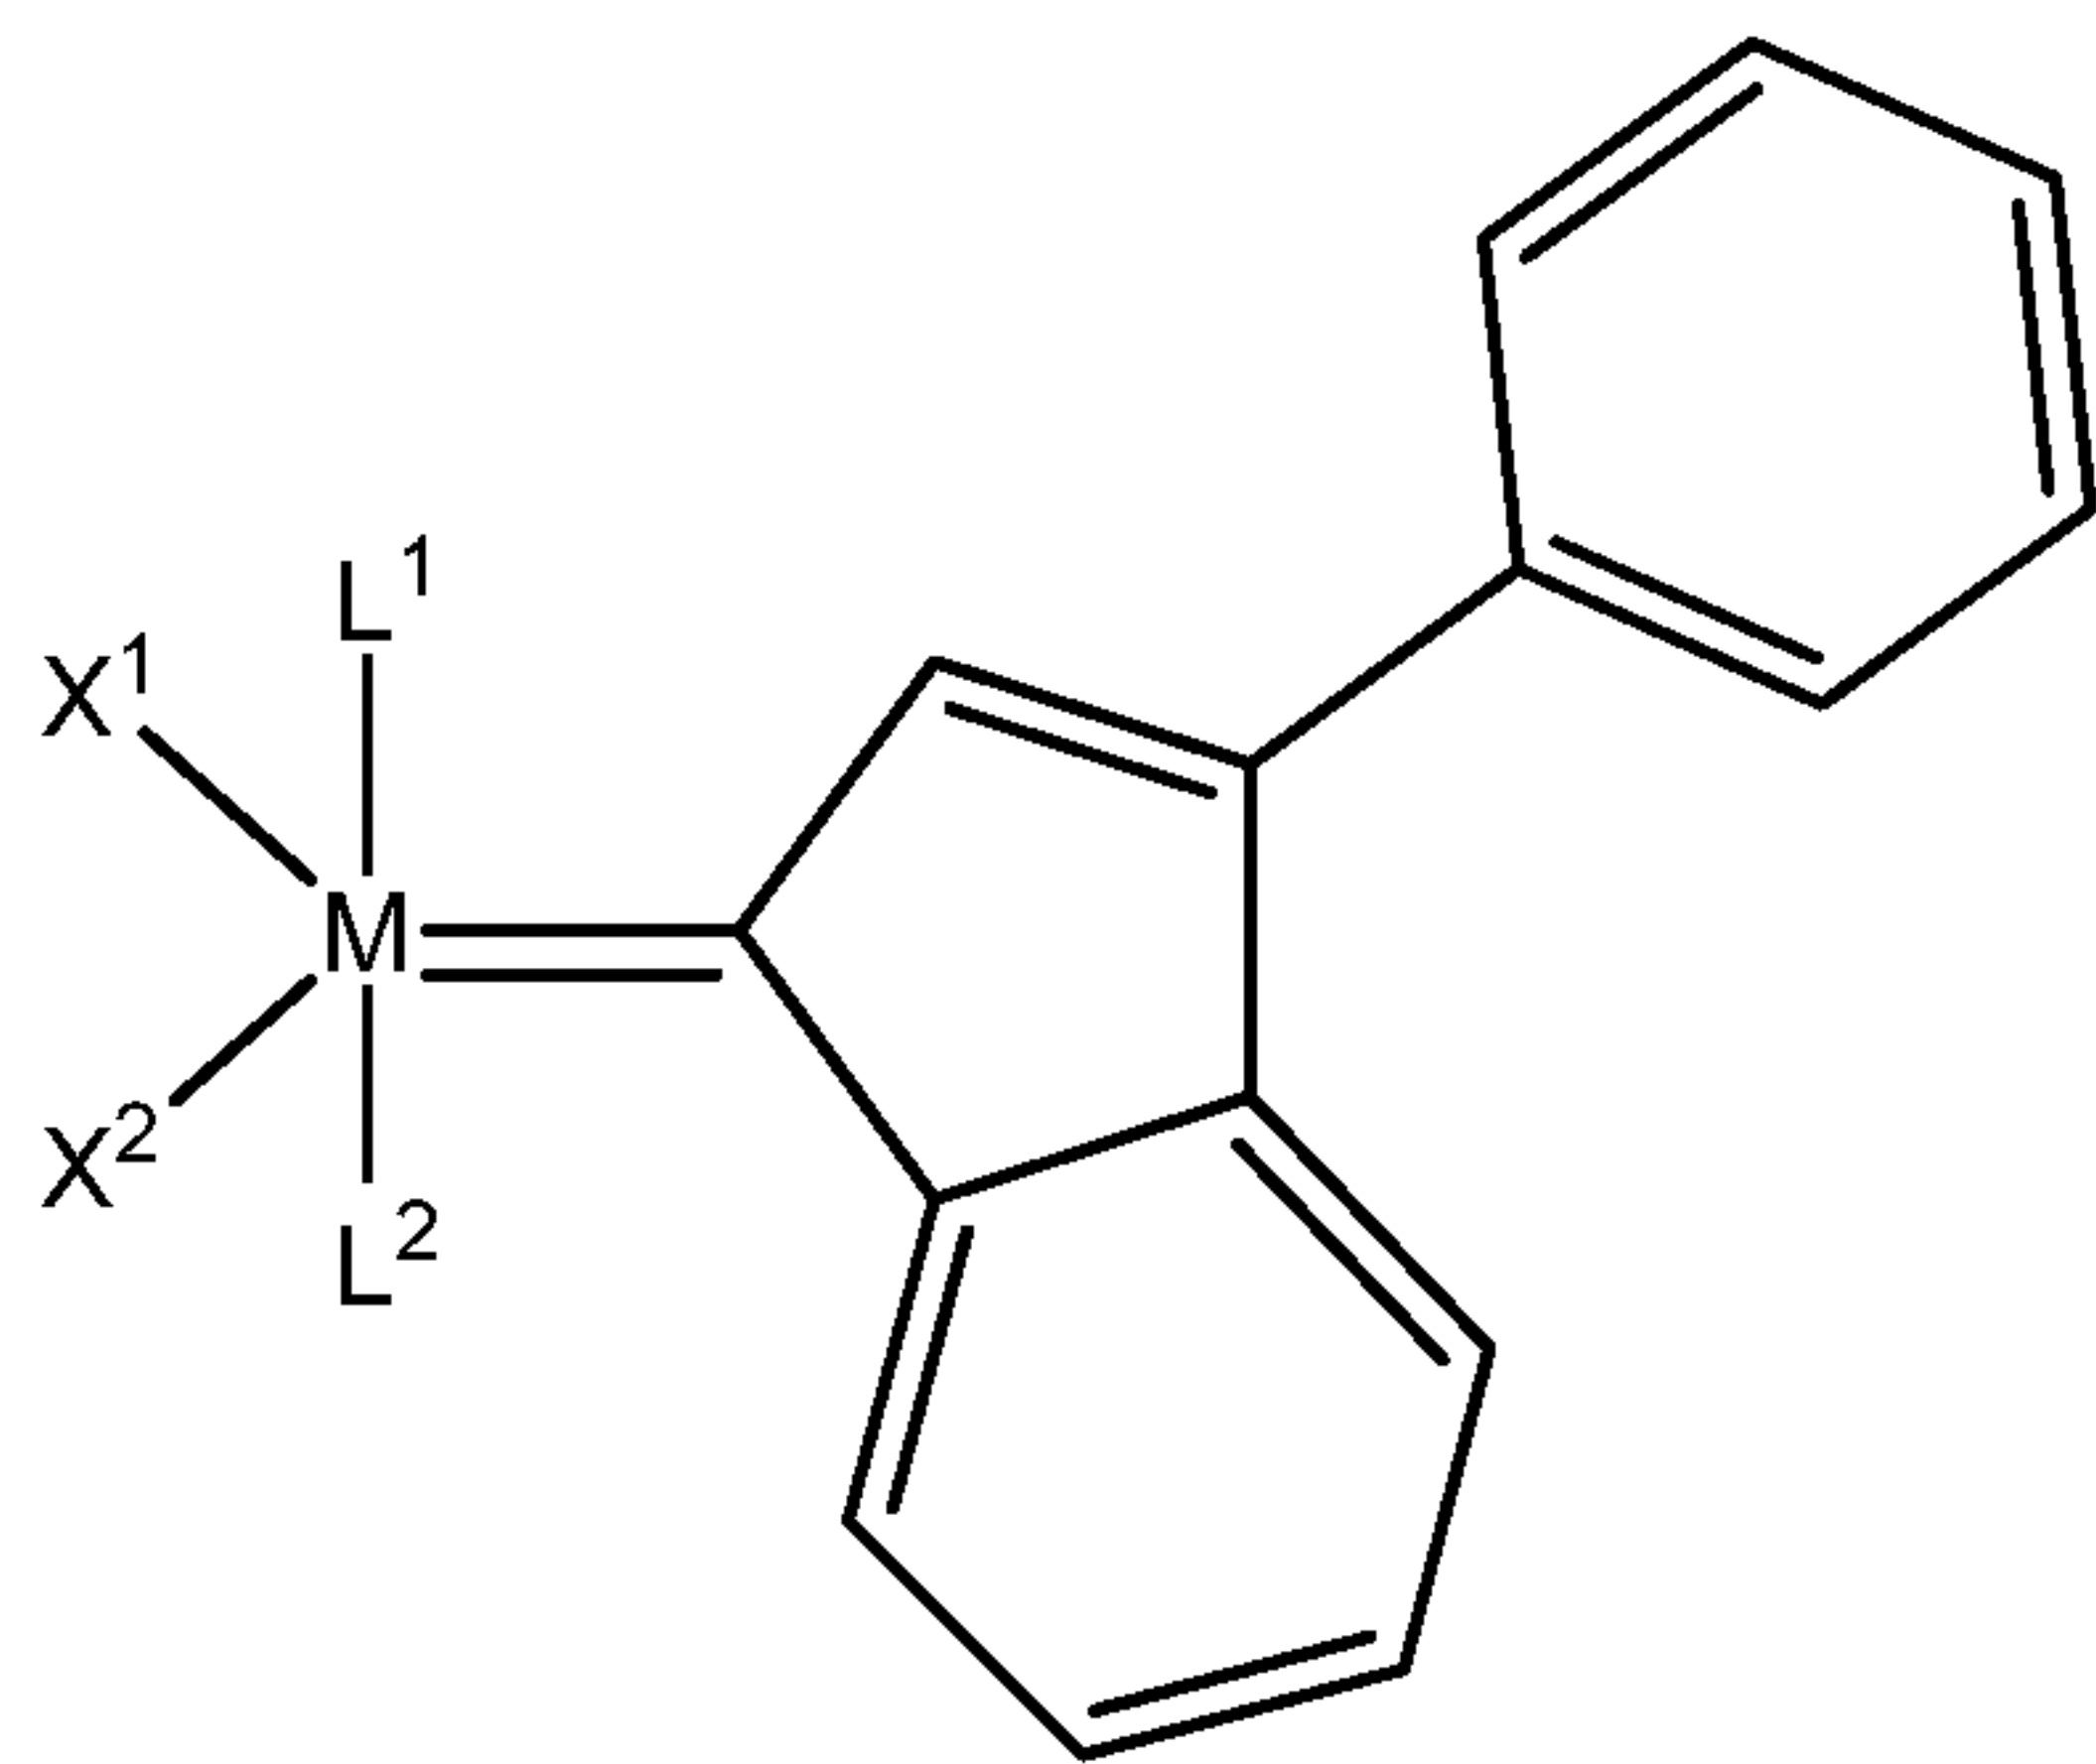

(XV)

wherein M, X¹, X², L¹, L², are as defined above for Group 8 transition metal complex of formula (XIII).

[00130] Additionally, another group of olefin metathesis catalysts that may be used in the invention disclosed herein, is a Group 8 transition metal complex comprising a Schiff base ligand having the structure of formula (XVI):

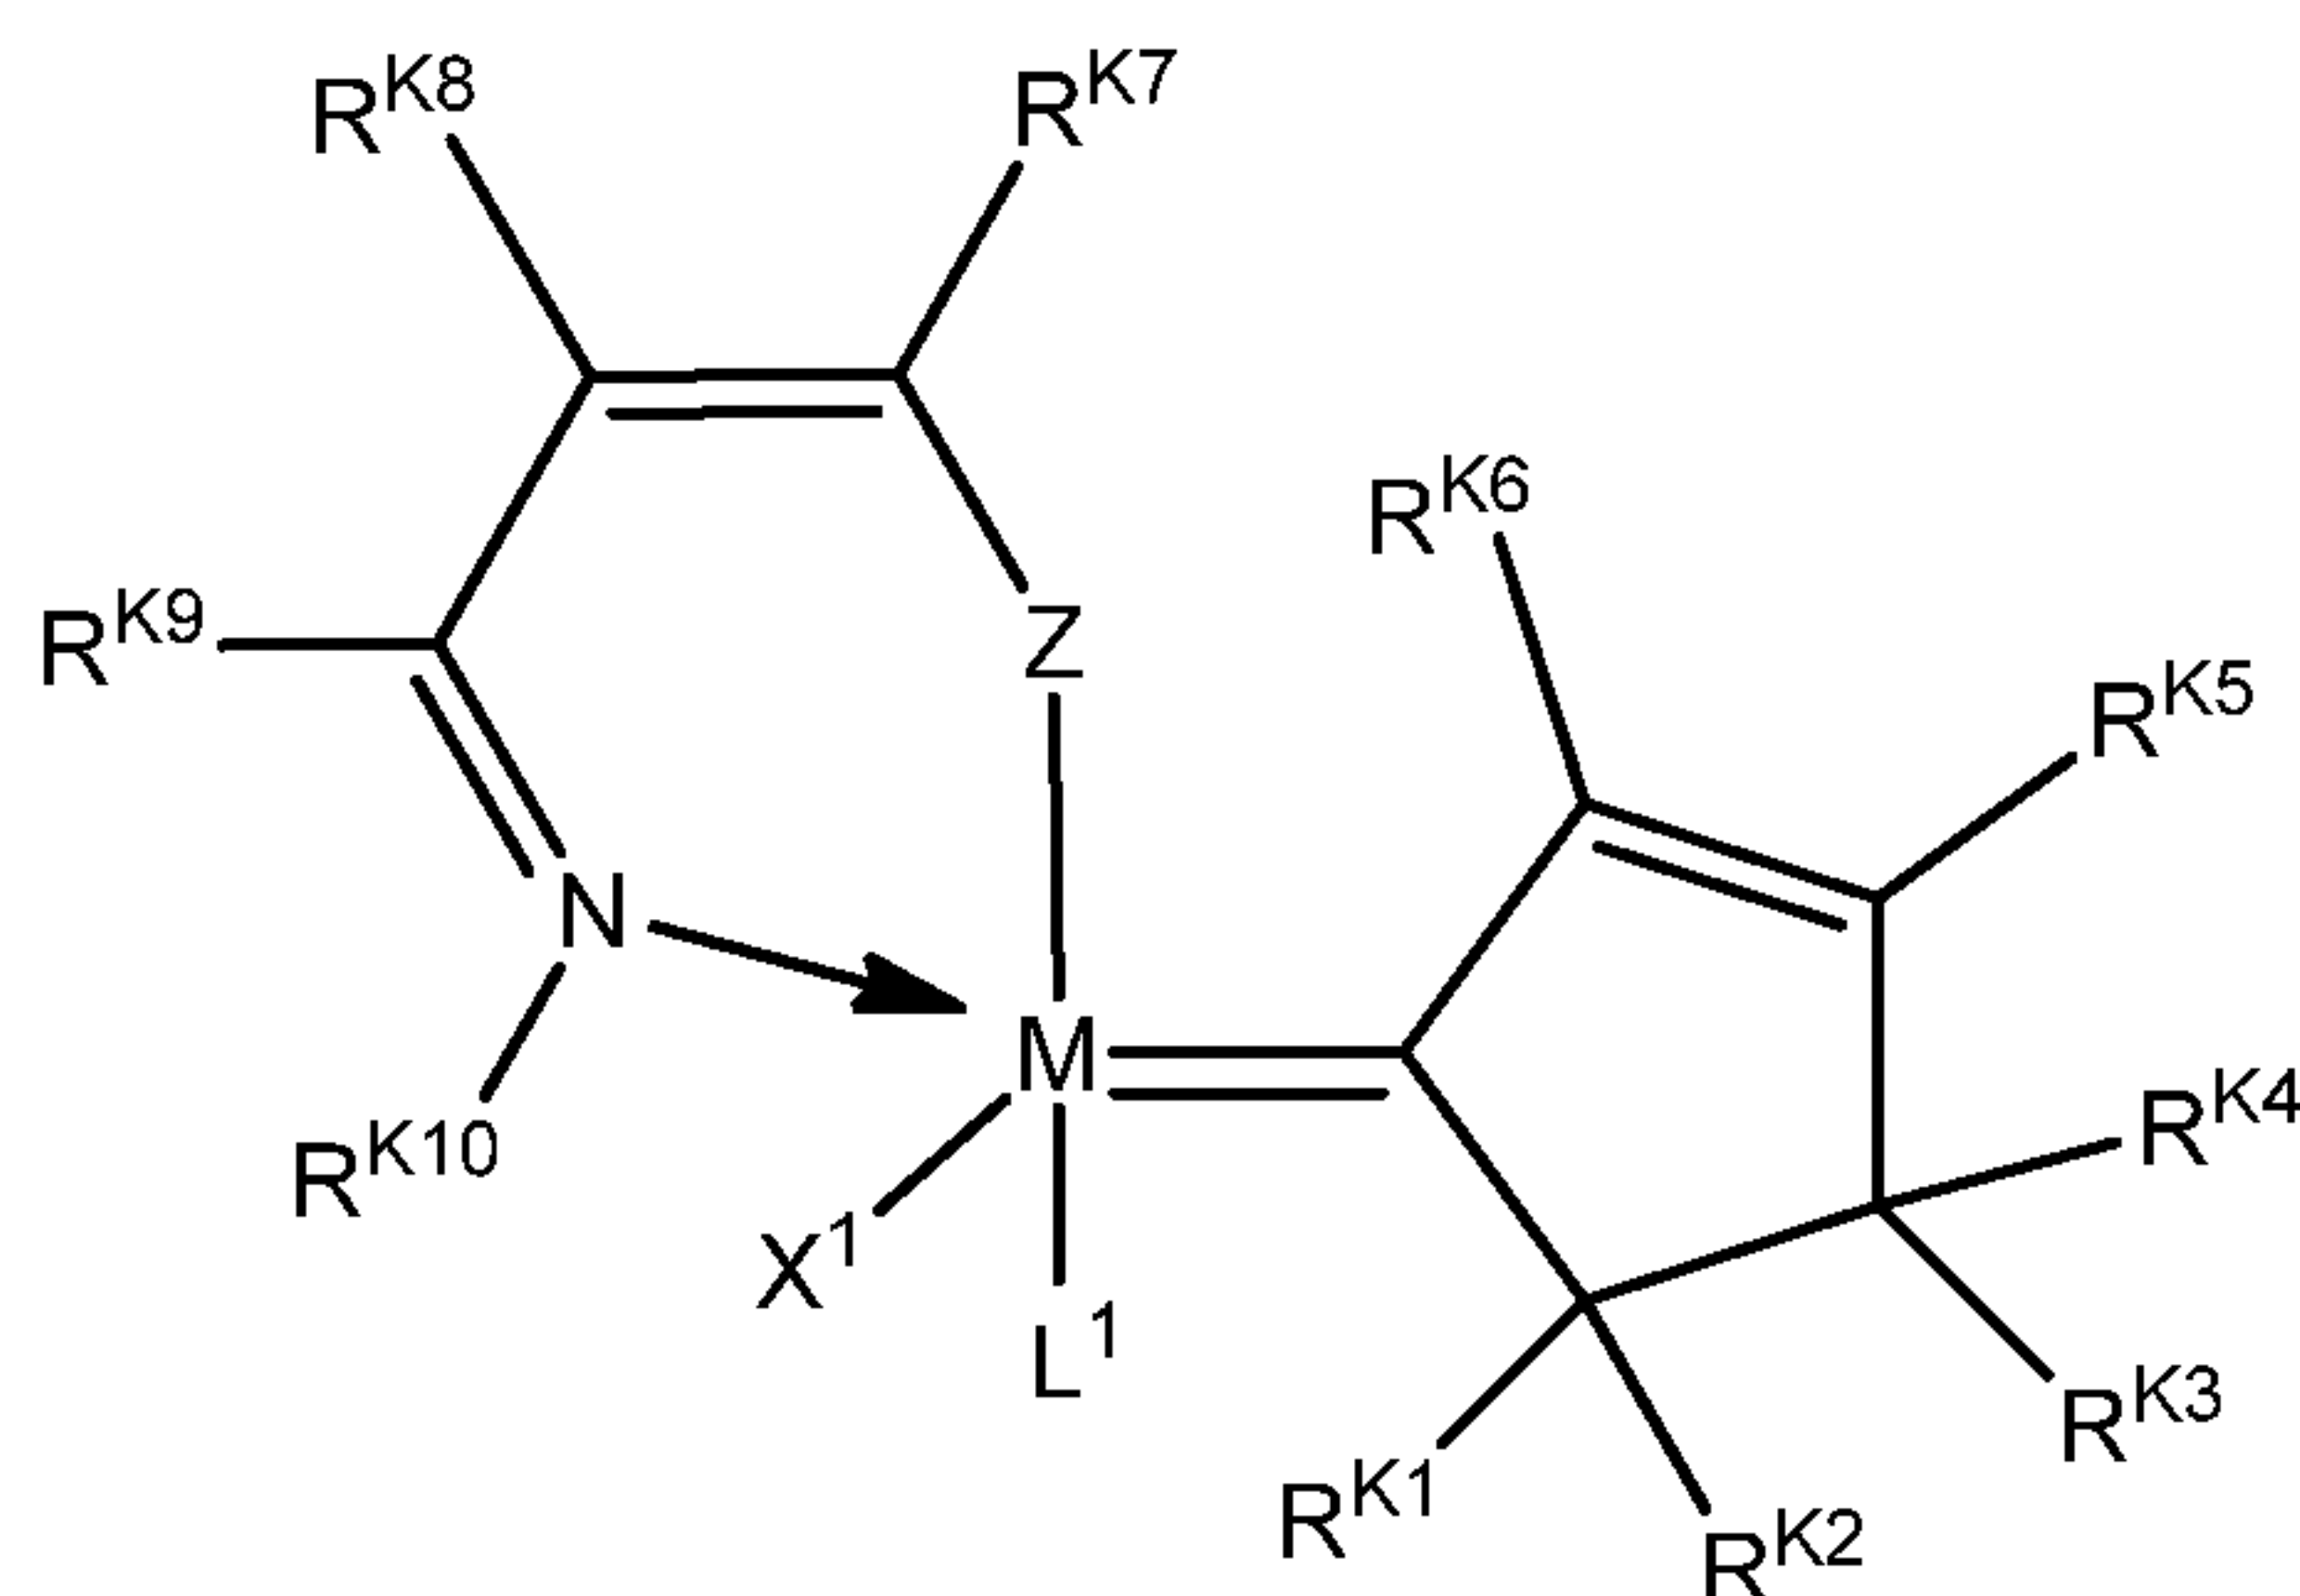

(XVI)

wherein M is a Group 8 transition metal, particularly ruthenium or osmium, or more particularly, ruthenium;


X¹ and L¹ are as defined for the first and second groups of catalysts defined above;

Z is selected from the group consisting of oxygen, sulfur, selenium, NR^{K11}, PR^{K11}, AsR^{K11}, and SbR^{K11}; and

R^{K1}, R^{K2}, R^{K3}, R^{K4}, R^{K5}, R^{K6}, R^{K7}, R^{K8}, R^{K9}, R^{K10}, and R^{K11} are each independently selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, thioisocyanate, cyanato, thiocyanato, hydroxyl, ester, ether, thioether, amine, alkylamine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane,

siloxane, phosphine, phosphate, borate, or $-A-Fn$, wherein “A” is a divalent hydrocarbon moiety selected from alkylene and arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein the aryl portion of the arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and F_n is a functional group, or any one or more of the R^{K1} , R^{K2} , R^{K3} , R^{K4} , R^{K5} , R^{K6} , R^{K7} , R^{K8} , R^{K9} , R^{K10} , and R^{K11} may be linked together to form a cyclic group, or any one or more of the R^{K1} , R^{K2} , R^{K3} , R^{K4} , R^{K5} , R^{K6} , R^{K7} , R^{K8} , R^{K9} , R^{K10} , and R^{K11} may be attached to a support.

[00131] Additionally, one preferred embodiment of the Group 8 transition metal complex of formula (XVI) is a Group 8 transition metal complex comprising a Schiff base ligand having the structure of formula (XVII):

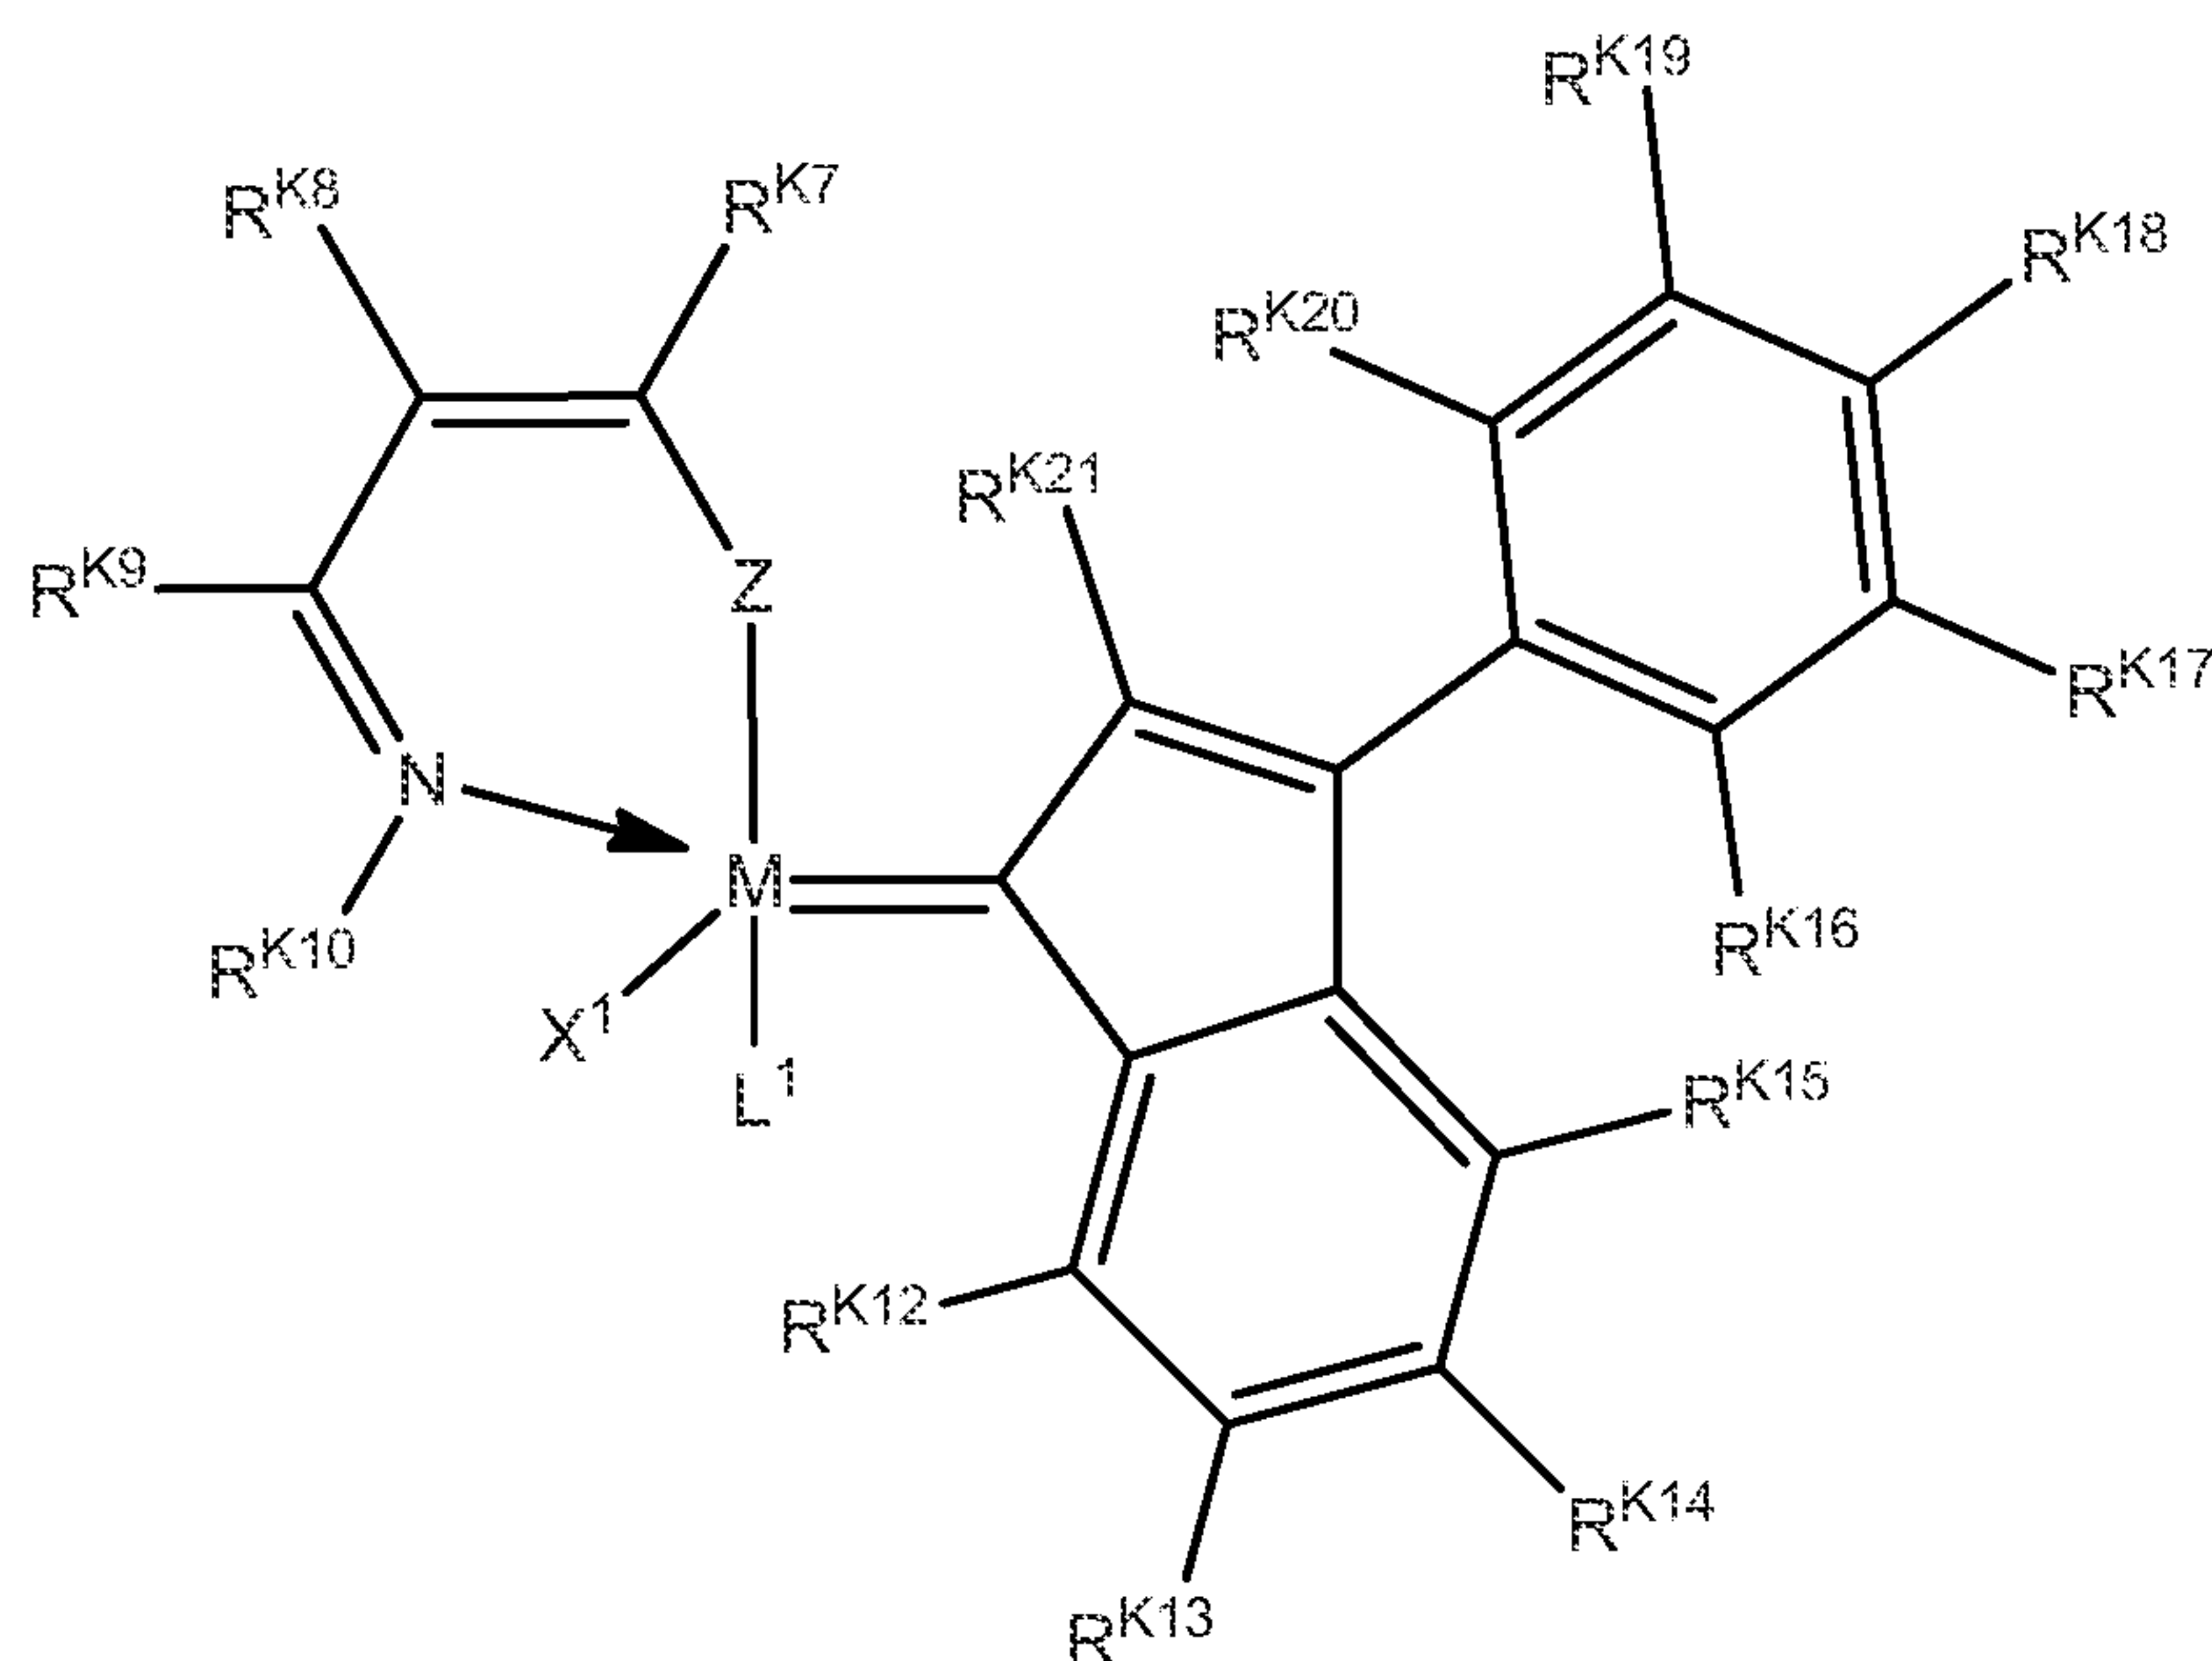


(XVII)

wherein M , X^1 , L^1 , Z , R^{K7} , R^{K8} , R^{K9} , R^{K10} , and R^{K11} are as defined above for Group 8 transition metal complex of formula XVI; and

R^{K12} , R^{K13} , R^{K14} , R^{K15} , R^{K16} , R^{K17} , R^{K18} , R^{K19} , R^{K20} , and R^{K21} are as defined above for R^{K1} , R^{K2} , R^{K3} , R^{K4} , R^{K5} , and R^{K6} for Group 8 transition metal complex of formula XVI, or any one or more of the R^{K7} , R^{K8} , R^{K9} , R^{K10} , R^{K11} , R^{K12} , R^{K13} , R^{K14} , R^{K15} , R^{K16} , R^{K17} , R^{K18} , R^{K19} , R^{K20} , and

R^{K21} may be linked together to form a cyclic group, or any one or more of the R^{K7} , R^{K8} , R^{K9} , R^{K10} , R^{K11} , R^{K12} , R^{K13} , R^{K14} , R^{K15} , R^{K16} , R^{K17} , R^{K18} , R^{K19} , R^{K20} , and R^{K21} may be attached to a support.


[00132] Additionally, another preferred embodiment of the Group 8 transition metal complex of formula (XVI) is a Group 8 transition metal complex comprising a Schiff base ligand having the structure of formula (XVIII):

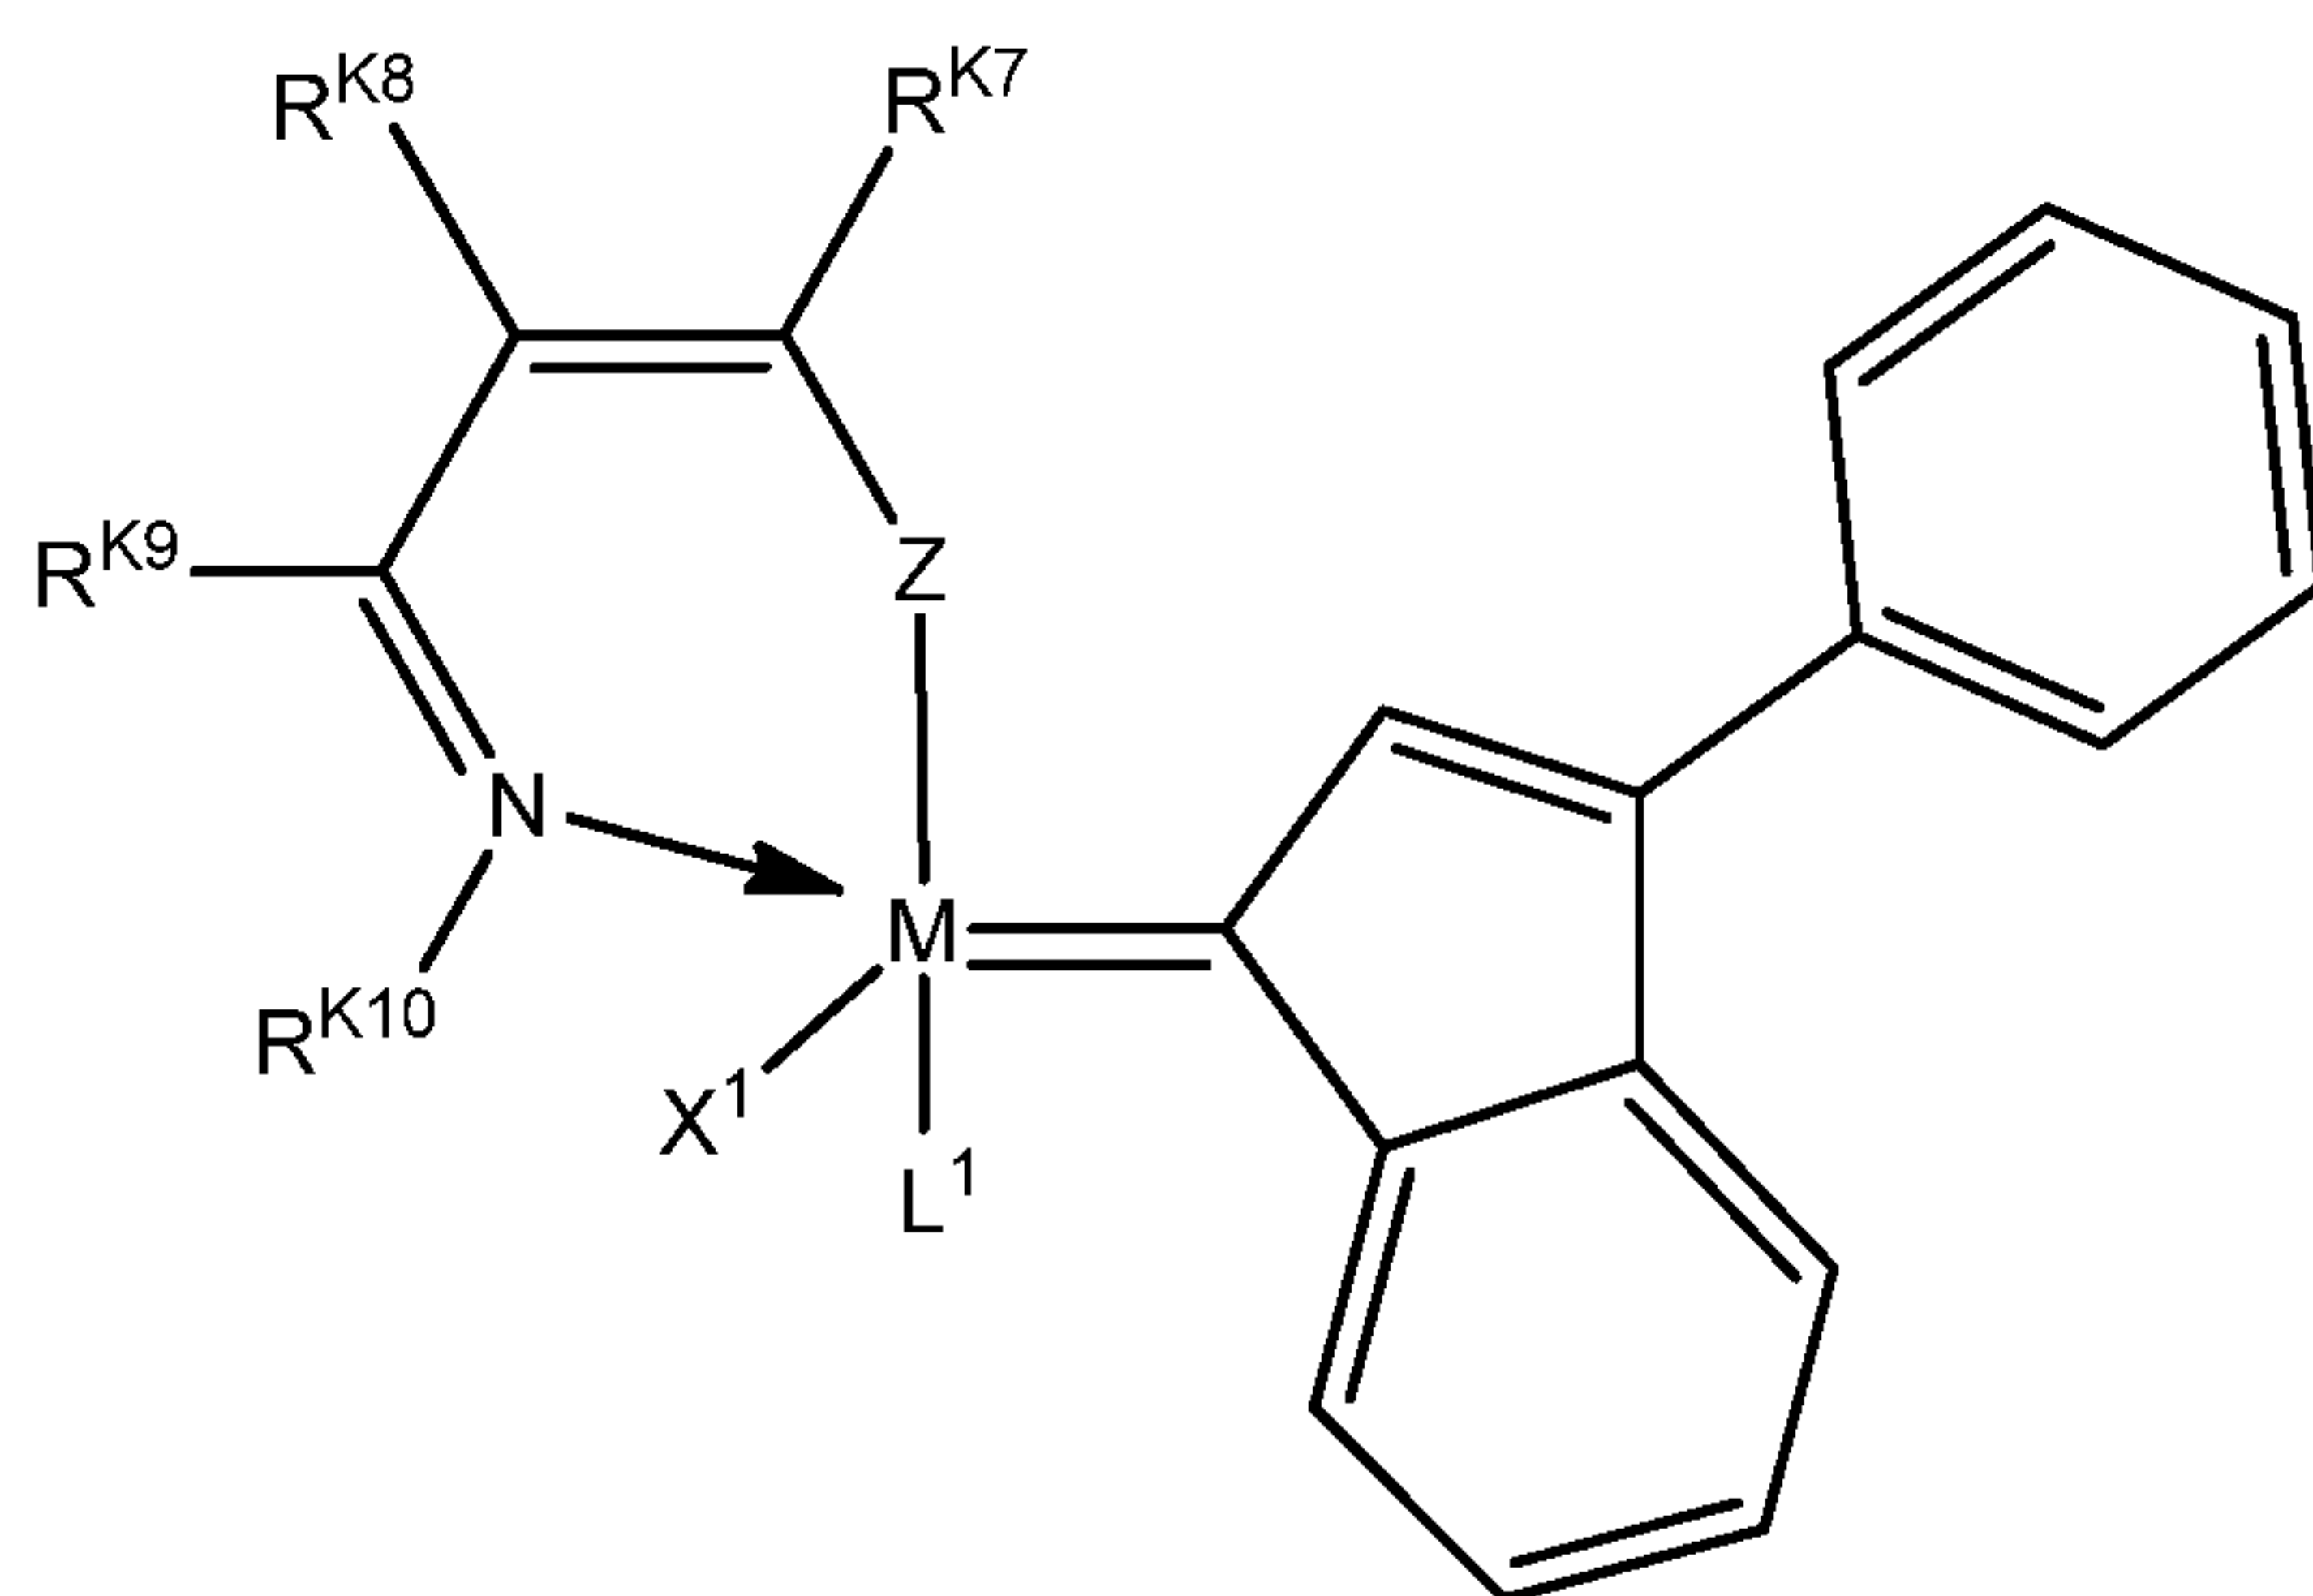

(XVIII)

wherein M, X^1 , L^1 , Z, R^{K7} , R^{K8} , R^{K9} , R^{K10} , and R^{K11} , are as defined above for Group 8 transition metal complex of formula XVI.

[00133] Additionally, another group of olefin metathesis catalysts that may be used in the invention disclosed herein, is a Group 8 transition metal complex comprising a Schiff base ligand having the structure of formula (XIX):

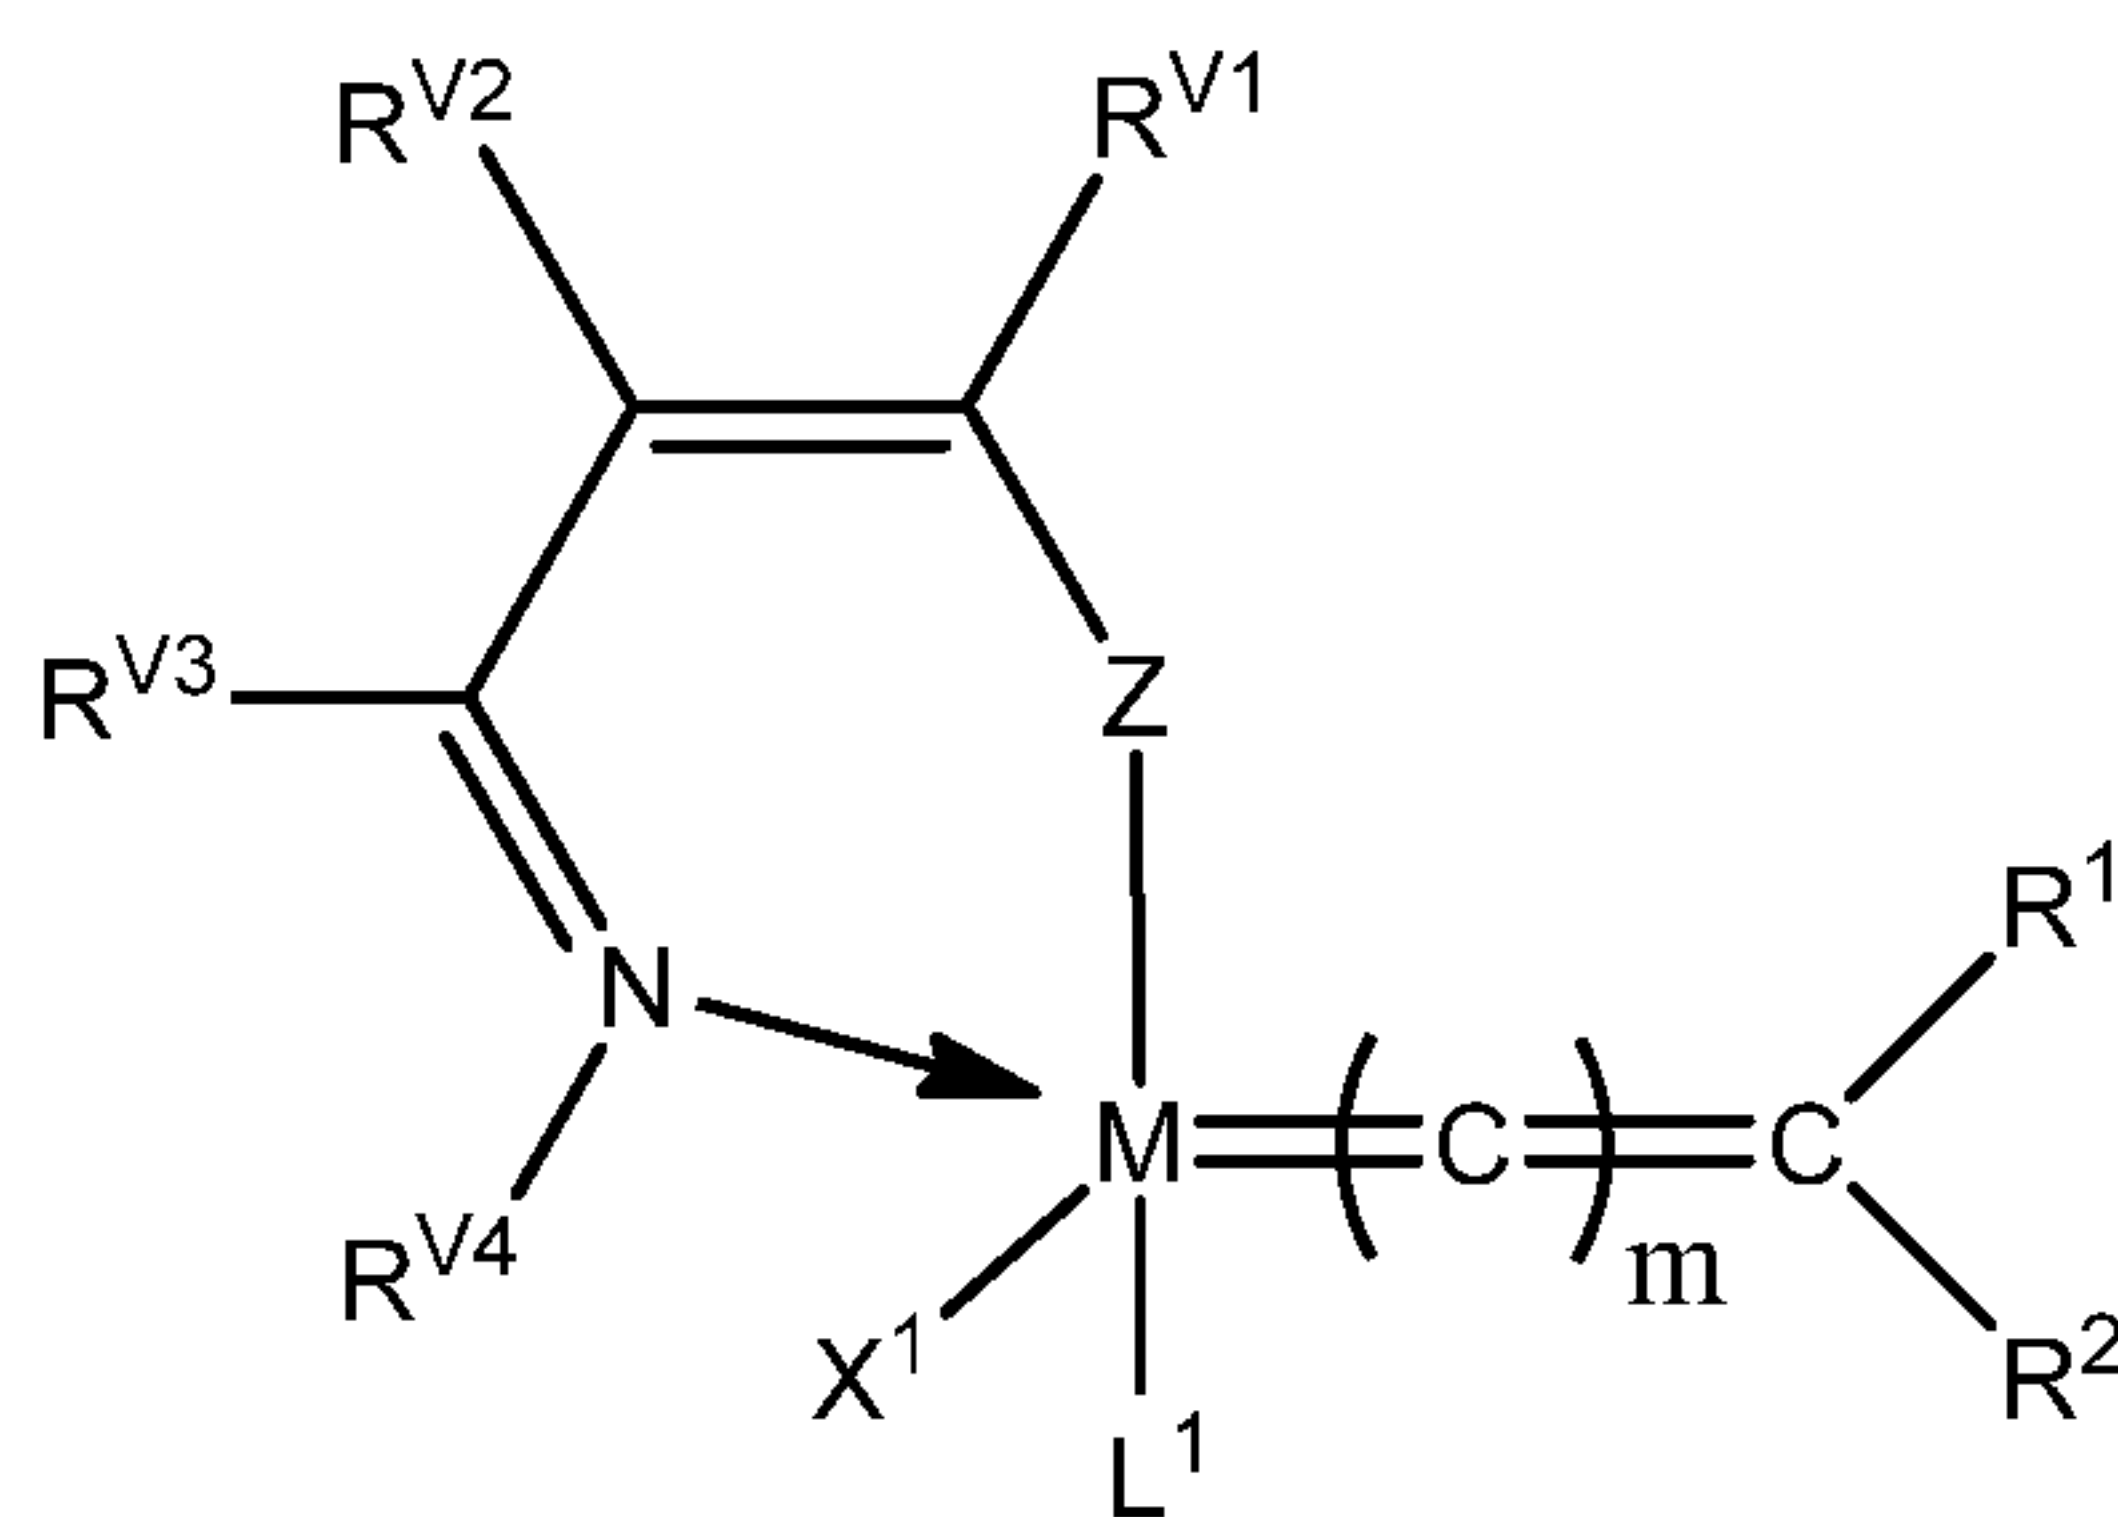

(XIX)

wherein M is a Group 8 transition metal, particularly ruthenium or osmium, or more particularly, ruthenium;

X^1 , L^1 , R^1 , and R^2 are as defined for the first and second groups of catalysts defined above;

Z is selected from the group consisting of oxygen, sulfur, selenium, NR^{V5} , PR^{V5} , AsR^{V5} , and SbR^{V5} ;

m is 0, 1, or 2; and

R^{V1} , R^{V2} , R^{V3} , R^{V4} , and R^{V5} are each independently selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, thioisocyanate, cyanato, thiocyanato, hydroxyl, ester, ether, thioether, amine, alkylamine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane, siloxane, phosphine, phosphate, borate, or $-A-Fn$, wherein "A" is a divalent hydrocarbon moiety selected from alkylene and arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein the aryl portion of the arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and Fn is a functional group, or any one or more of the R^{V1} , R^{V2} , R^{V3} , R^{V4} , and R^{V5} may be linked together to form a cyclic group, or any one or more of the R^{V1} , R^{V2} , R^{V3} , R^{V4} , and R^{V5} may be attached to a support.


[00134] In addition, catalysts of formulas (XVI) to (XIX) may be optionally contacted with an activating compound, where at least partial cleavage of a bond between the Group 8 transition metal and at least one Schiff base ligand occurs, wherein the activating compound is either a metal or silicon compound selected from the group consisting of copper (I) halides; zinc compounds of the formula $Zn(R^{Y1})_2$, wherein R^{Y1} is halogen, C_{1-7} alkyl or aryl; tin compounds represented by the formula $SnR^{Y2}R^{Y3}R^{Y4}R^{Y5}$ wherein each of R^{Y2} , R^{Y3} , R^{Y4} and R^{Y5} is independently selected from the group consisting of halogen, C_{1-20} alkyl, C_3-C_{10} cycloalkyl, aryl,













benzyl and C₂₋₇ alkenyl; and silicon compounds represented by the formula SiR^{Y6}R^{Y7}R^{Y8}R^{Y9} wherein each of R^{Y6}, R^{Y7}, R^{Y8}, R^{Y9} is independently selected from the group consisting of hydrogen, halogen, C₁₋₂₀ alkyl, halo, C₁₋₇ alkyl, aryl, heteroaryl, and vinyl.










In addition, catalysts of formulas (XVI) to (XIX) may be optionally contacted with an activating compound where at least partial cleavage of a bond between the Group 8 transition metal and at least one Schiff base ligand occurs, wherein the activating compound is an inorganic acid such as hydrogen iodide, hydrogen bromide, hydrogen chloride, hydrogen fluoride, sulfuric acid, nitric acid, iodic acid, periodic acid, perchloric acid, HOClO, HOClO₂ and HOIO₃. In addition, catalysts of formulas (XVI) to (XIX) may be optionally contacted with an activating compound where at least partial cleavage of a bond between the Group 8 transition metal and at least one Schiff base ligand occurs, wherein the activating compound is an organic acid such as sulfonic acids including but not limited to methanesulfonic acid, aminobenzenesulfonic acid, benzenesulfonic acid, naphthalenesulfonic acid, sulfanilic acid and trifluoromethanesulfonic acid; monocarboxylic acids including but not limited to acetoacetic acid, barbituric acid, bromoacetic acid, bromobenzoic acid, chloroacetic acid, chlorobenzoic acid, chlorophenoxyacetic acid, chloropropionic acid, cis-cinnamic acid, cyanoacetic acid, cyanobutyric acid, cyanophenoxyacetic acid, cyanopropionic acid, dichloroacetic acid, dichloroacetylacetic acid, dihydroxybenzoic acid, dihydroxymalic acid, dihydroxytartaric acid, dinicotinic acid, diphenylacetic acid, fluorobenzoic acid, formic acid, furancarboxylic acid, furoic acid, glycolic acid, hippuric acid, iodoacetic acid, iodobenzoic acid, lactic acid, lutidinic acid, mandelic acid, α-naphtoic acid, nitrobenzoic acid, nitrophenylacetic acid, o-phenylbenzoic acid, thioacetic acid, thiophene-carboxylic acid, trichloroacetic acid, and trihydroxybenzoic acid; and other acidic substances such as but not limited to picric acid and uric acid.


[00135] In addition, other examples of catalysts that may be used with the present invention are located in the following disclosures, each of which is incorporated herein by reference, U.S. Pat. Nos. 7,687,635; 7,671,224; 6,284,852; 6,486,279; and 5,977,393; International Publication Number WO2010/037550; and U.S. Pat. App. Nos. 12/303,615; 10/590,380; 11/465,651 (Publication No. U.S. 2007/0043188); and 11/465,651 (Publication No. U.S. 2008/0293905 Corrected Publication); and European Pat. Nos. EP1757613B1 and EP1577282B1.


[00136] Non-limiting examples of catalysts that may be used to prepare supported complexes and in the reactions disclosed herein include the following, some of which for convenience are identified throughout this disclosure by reference to their molecular weight:

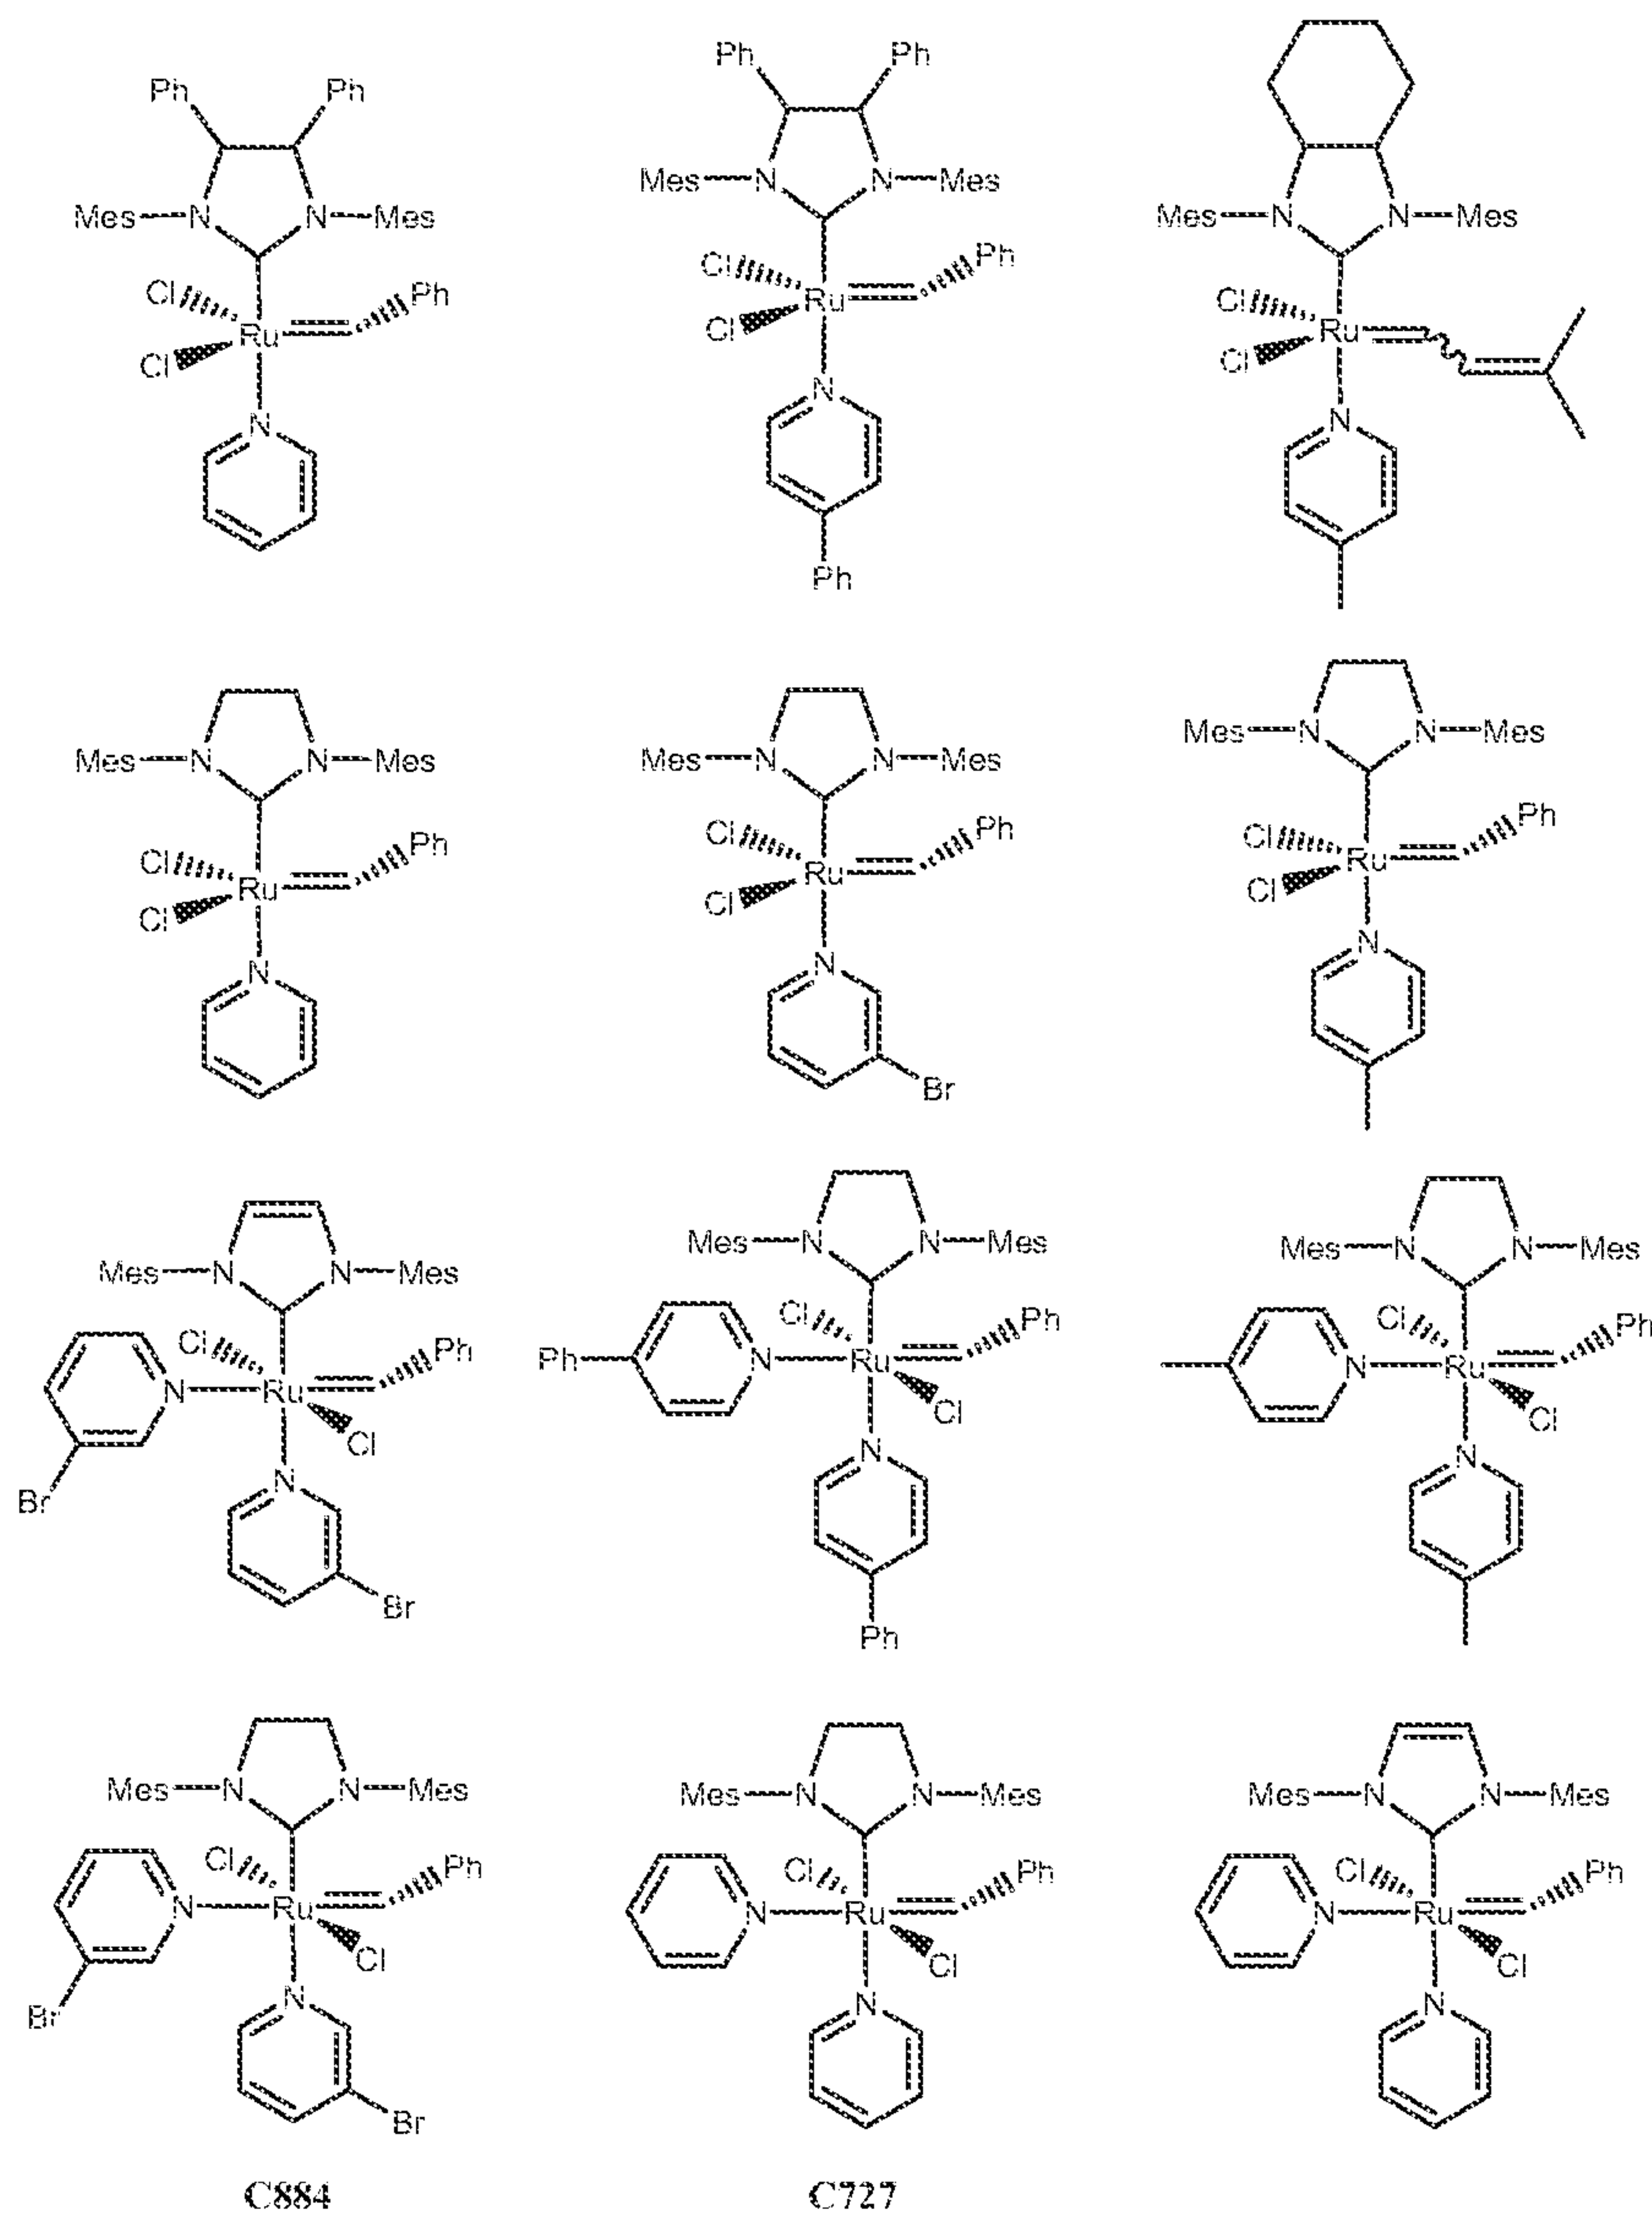

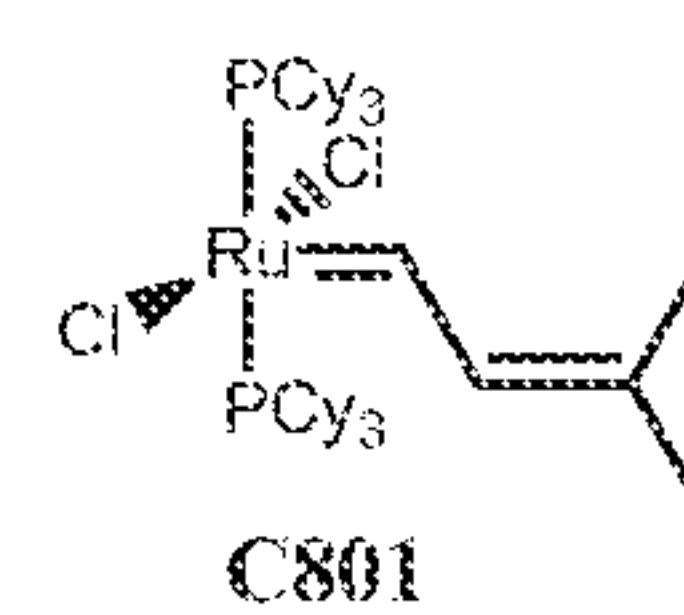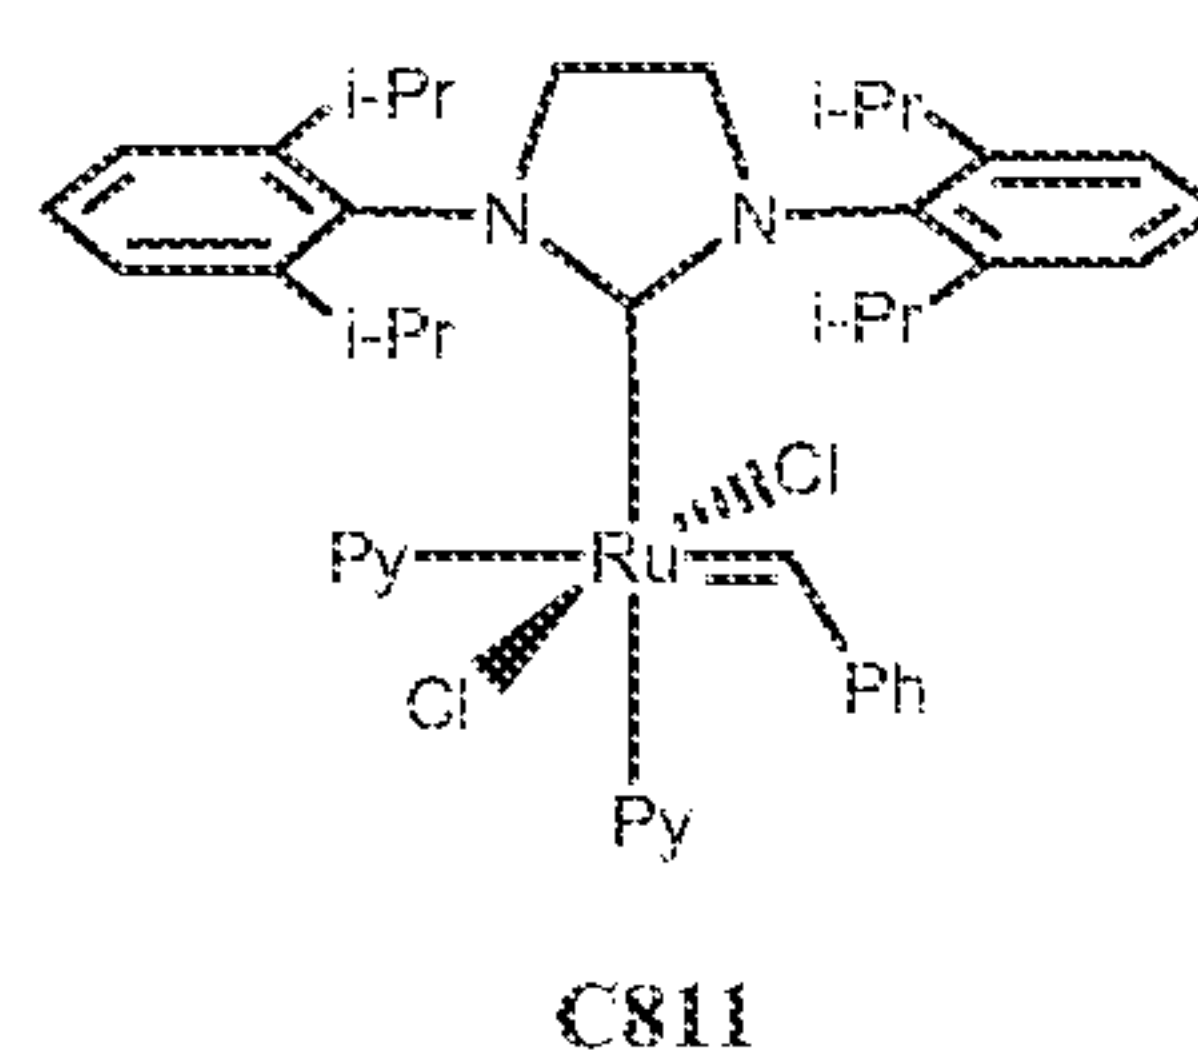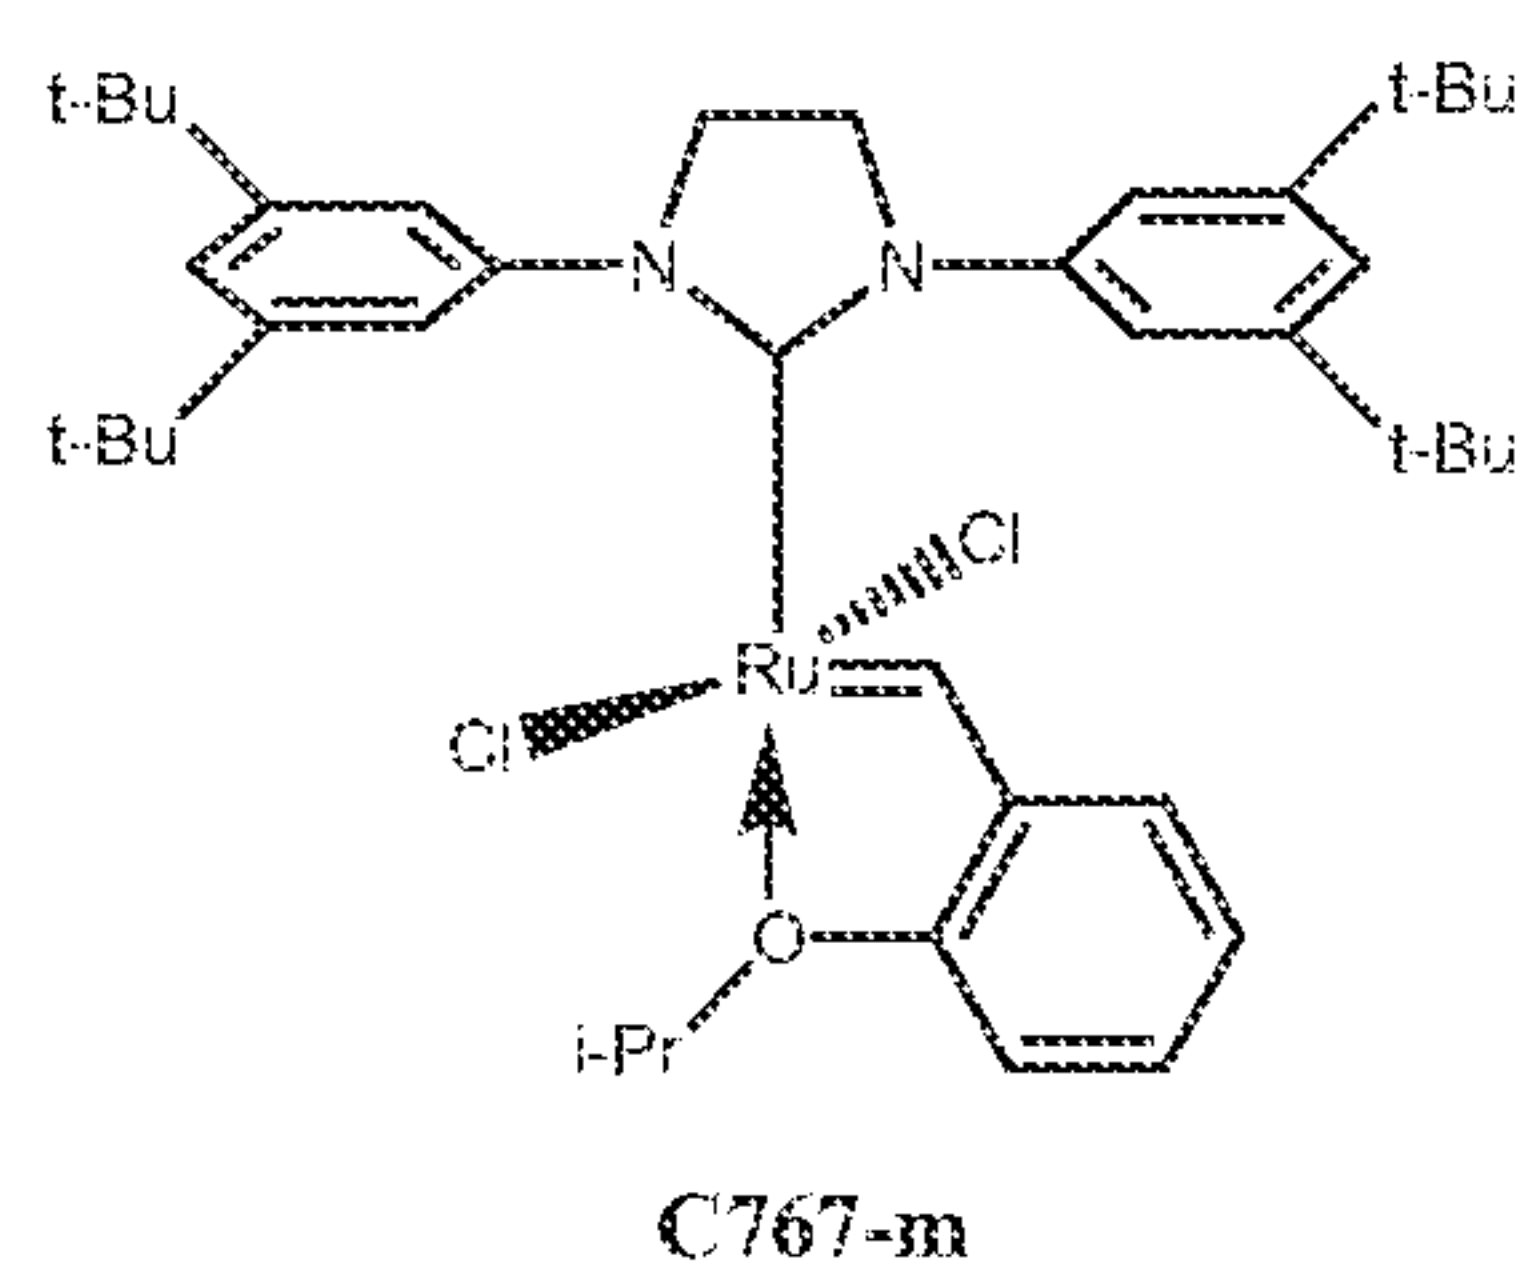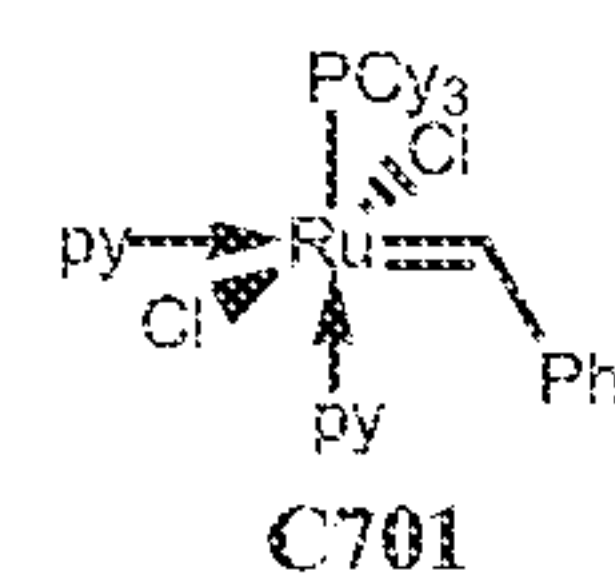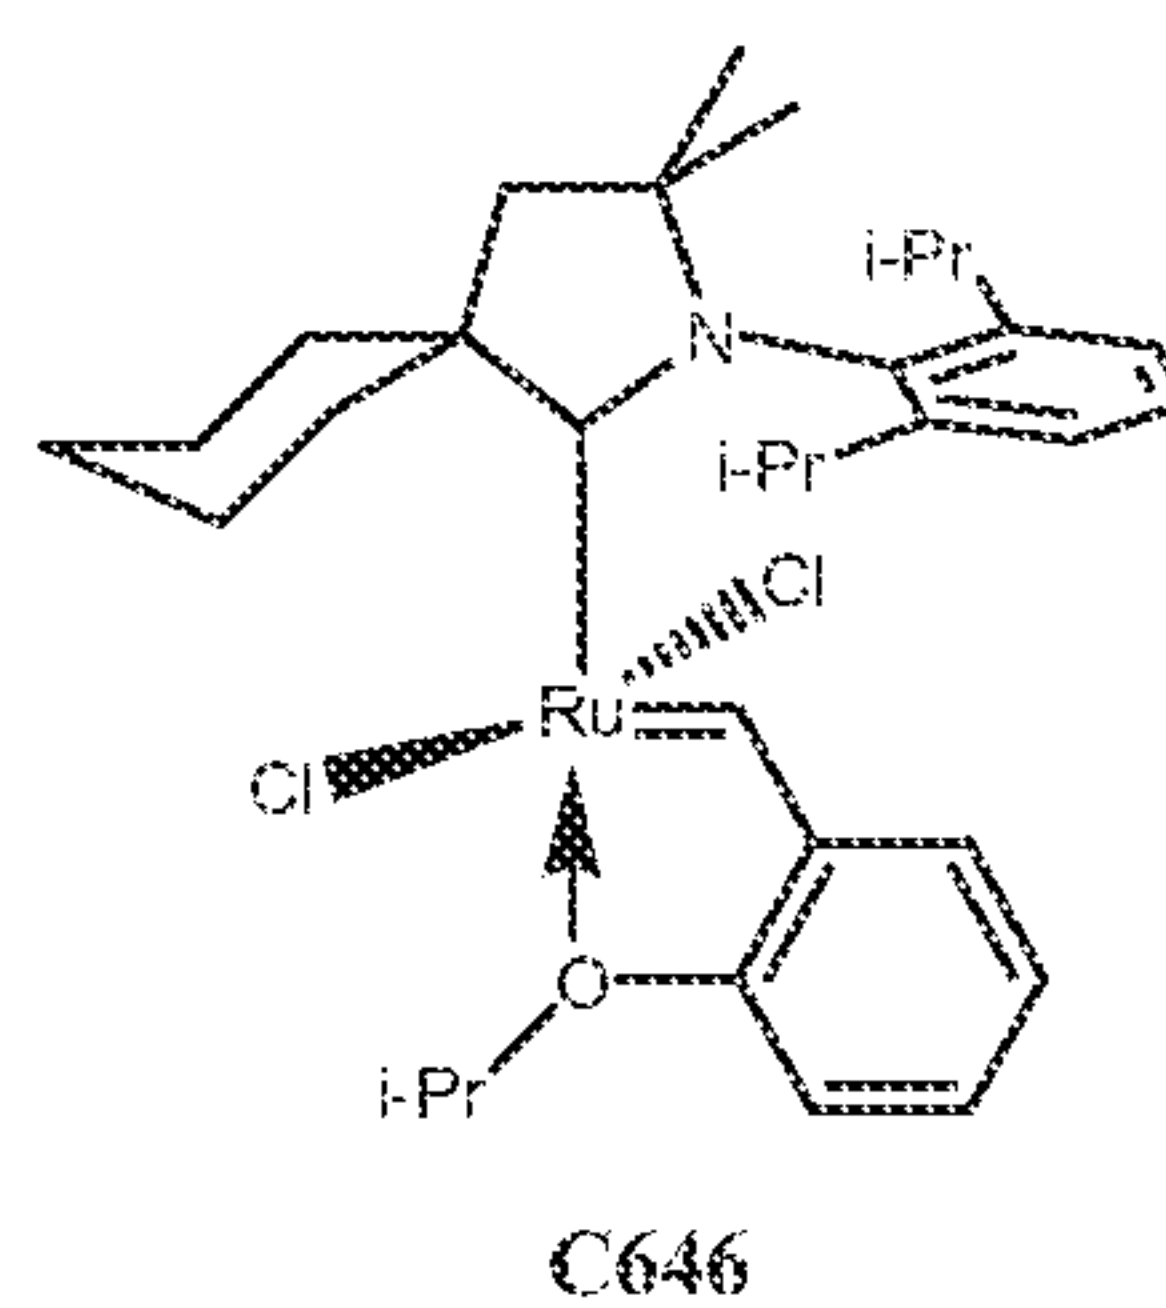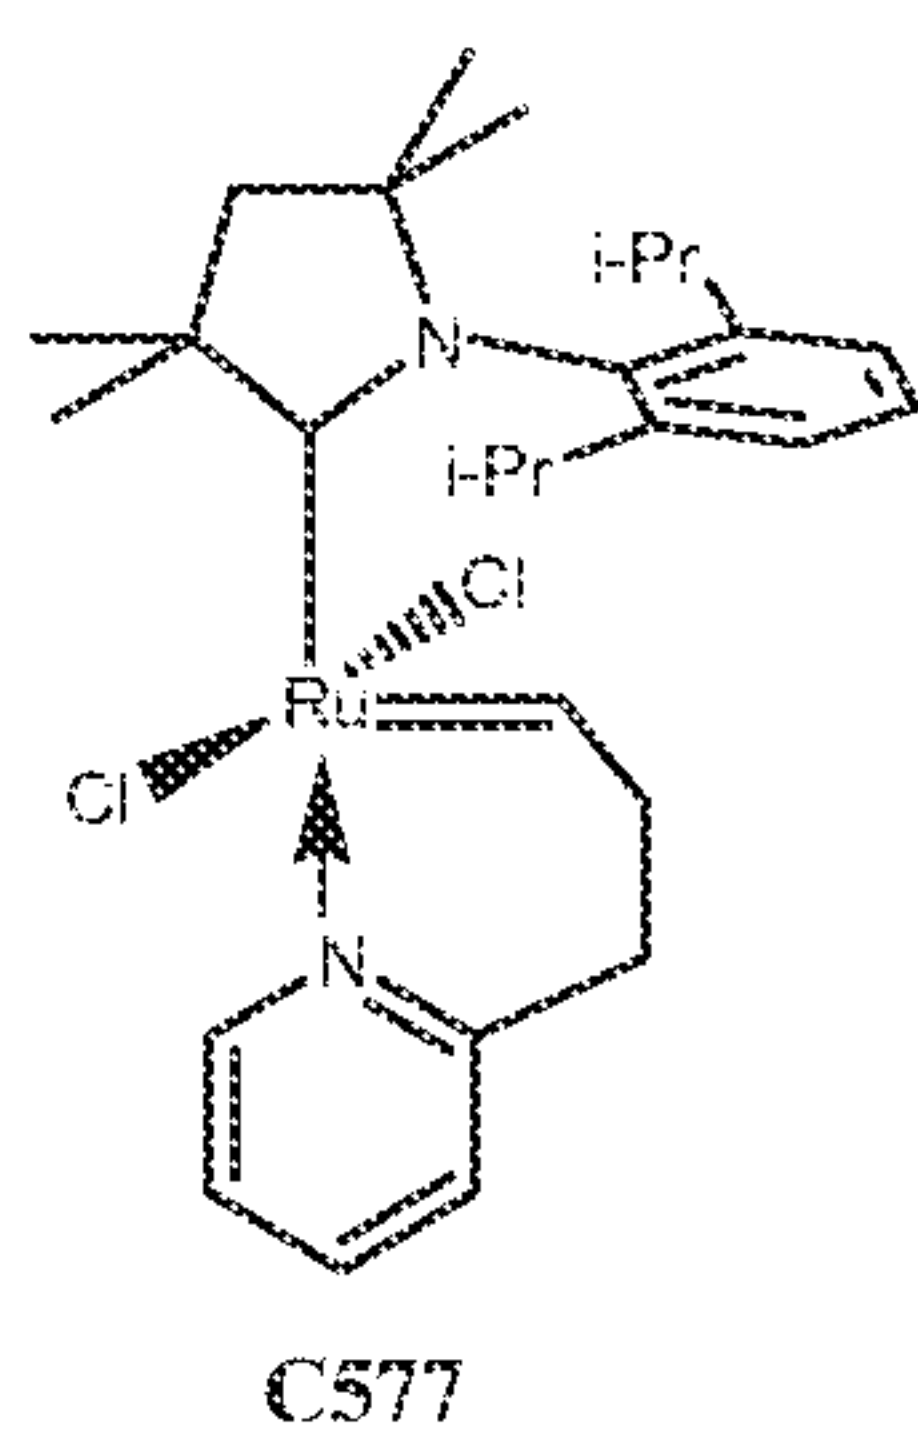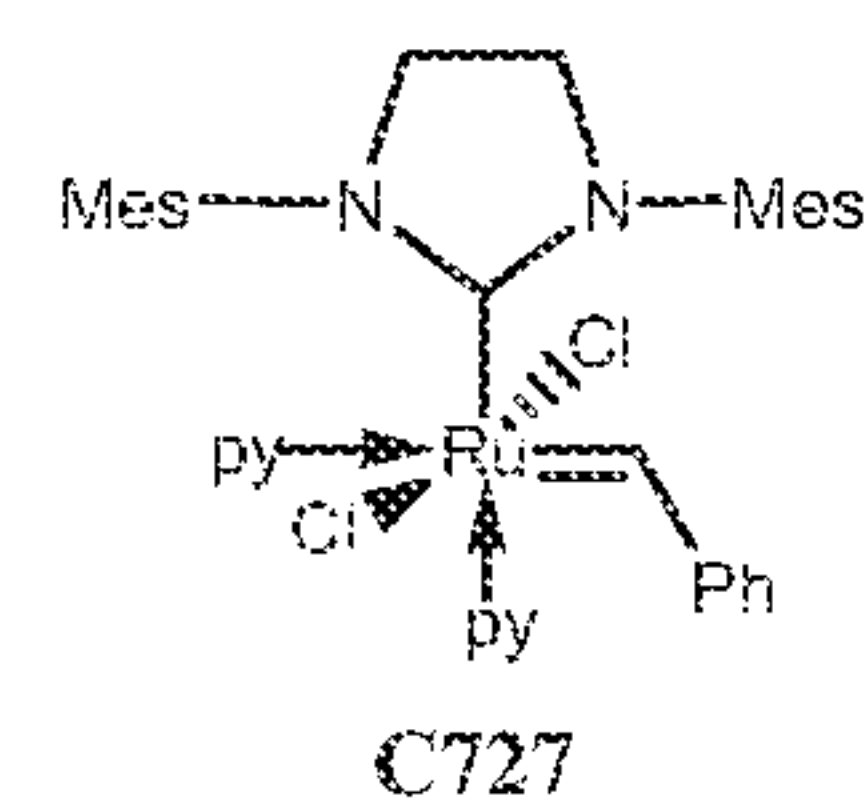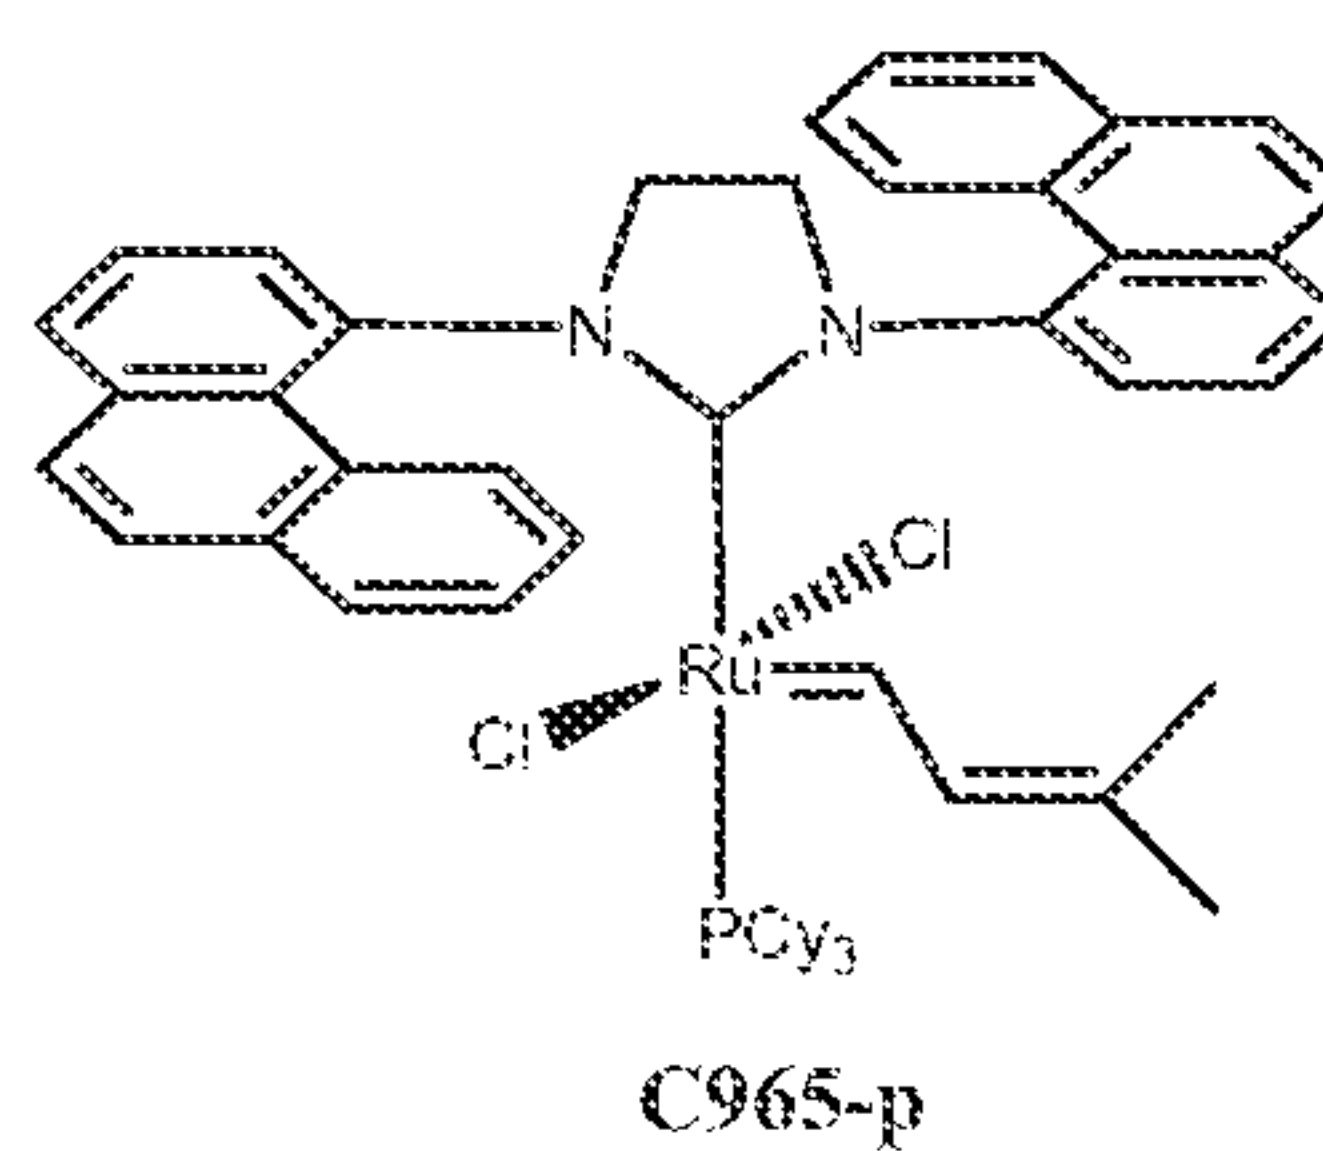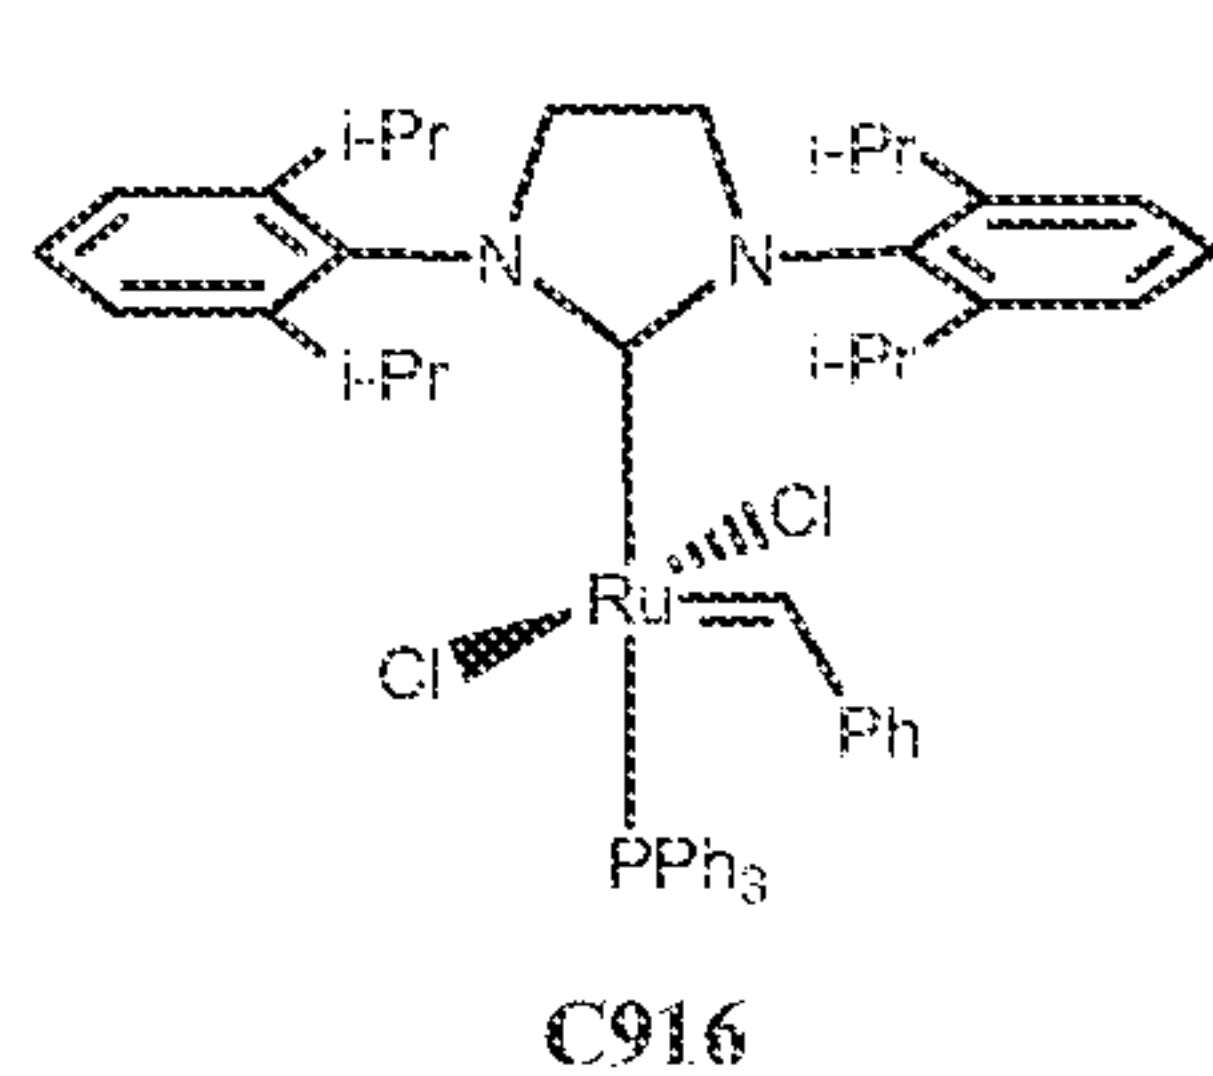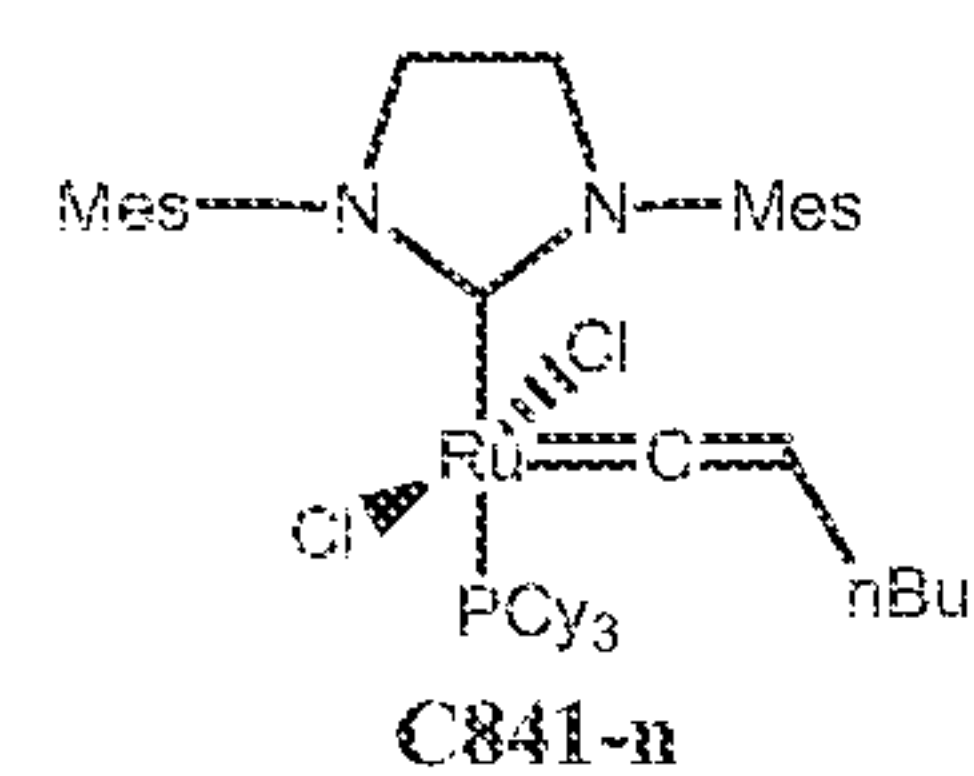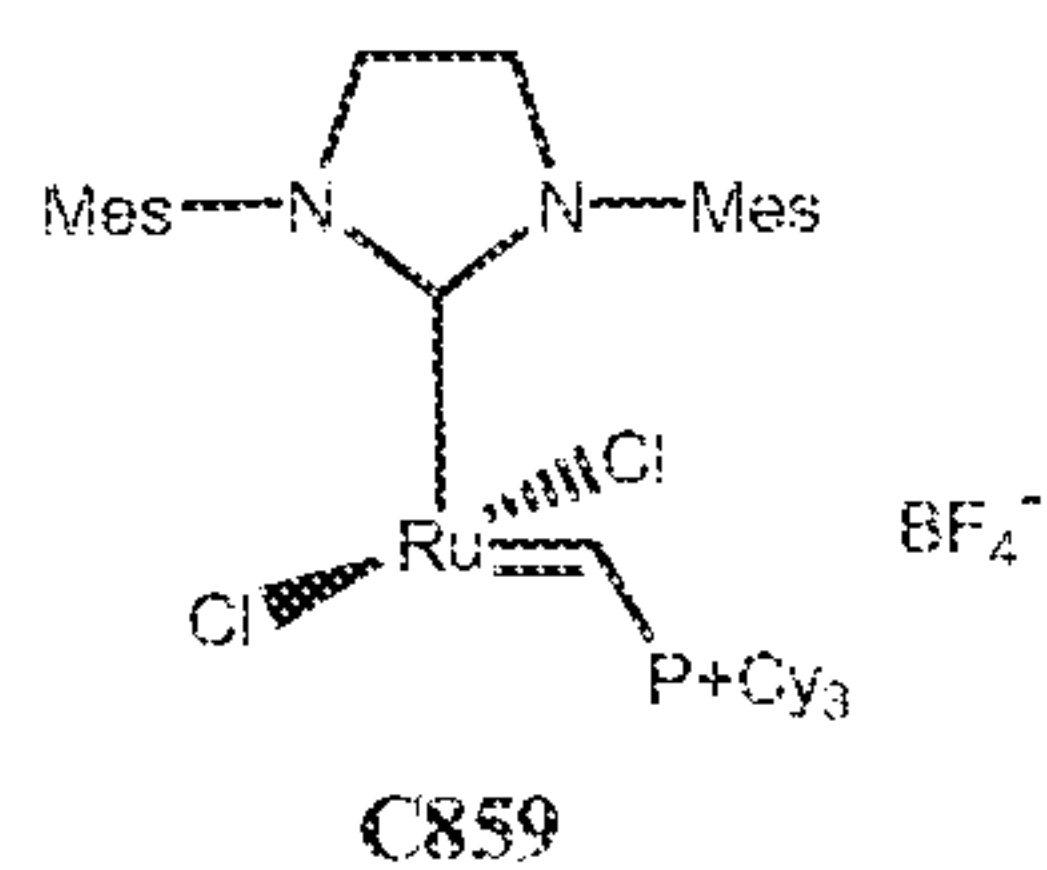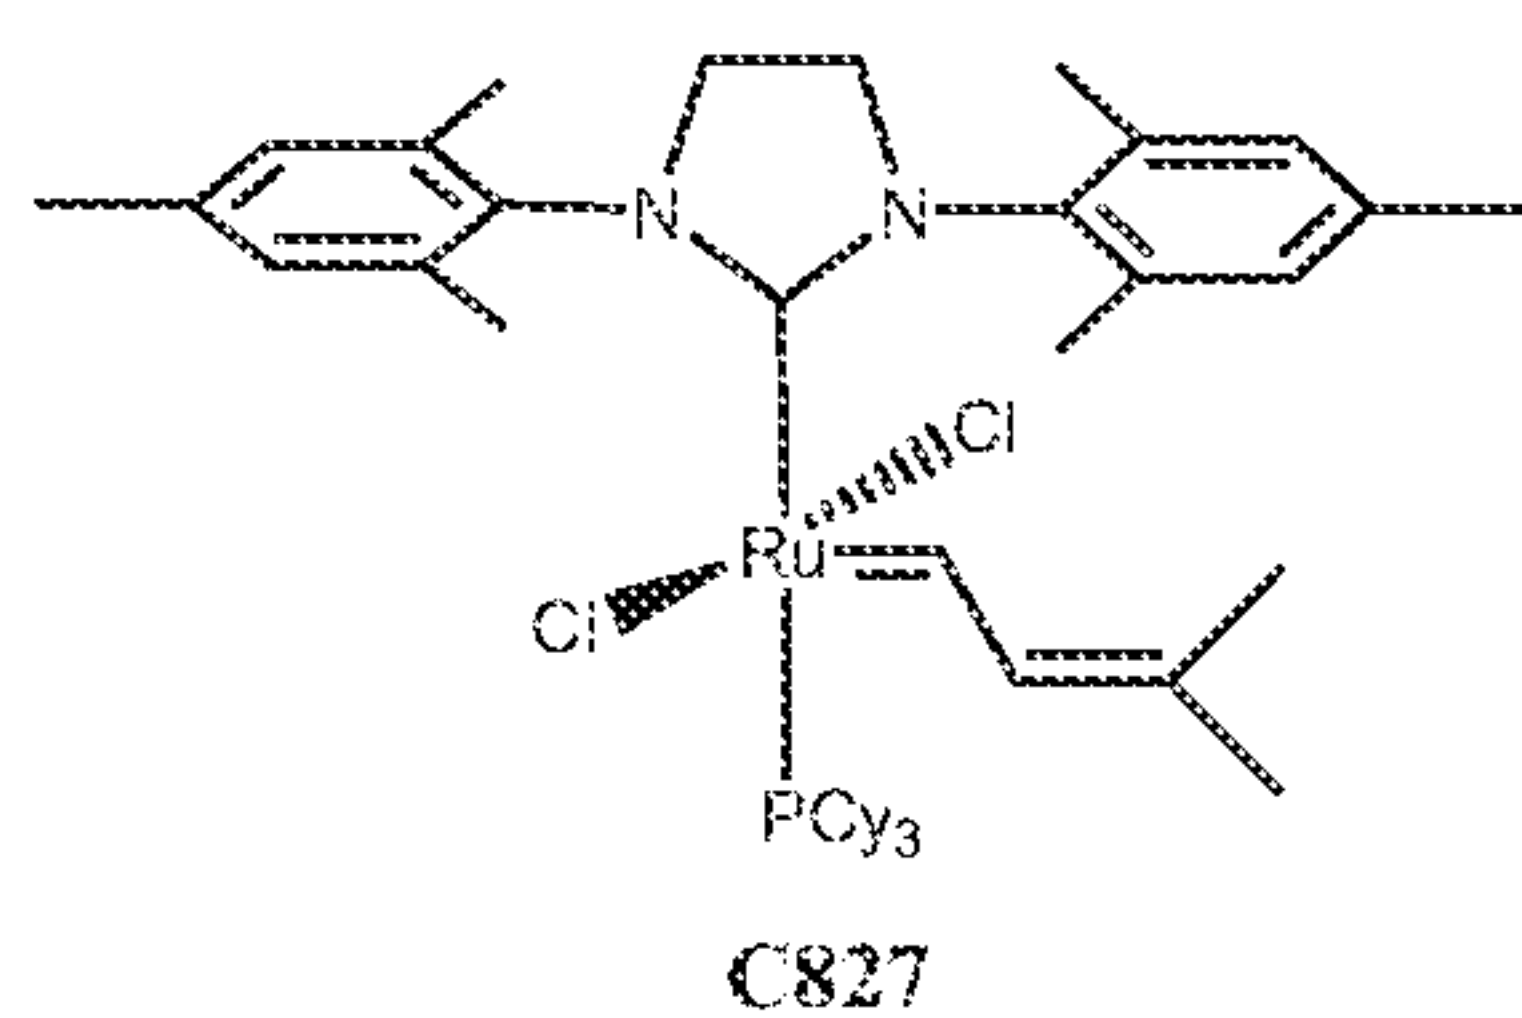


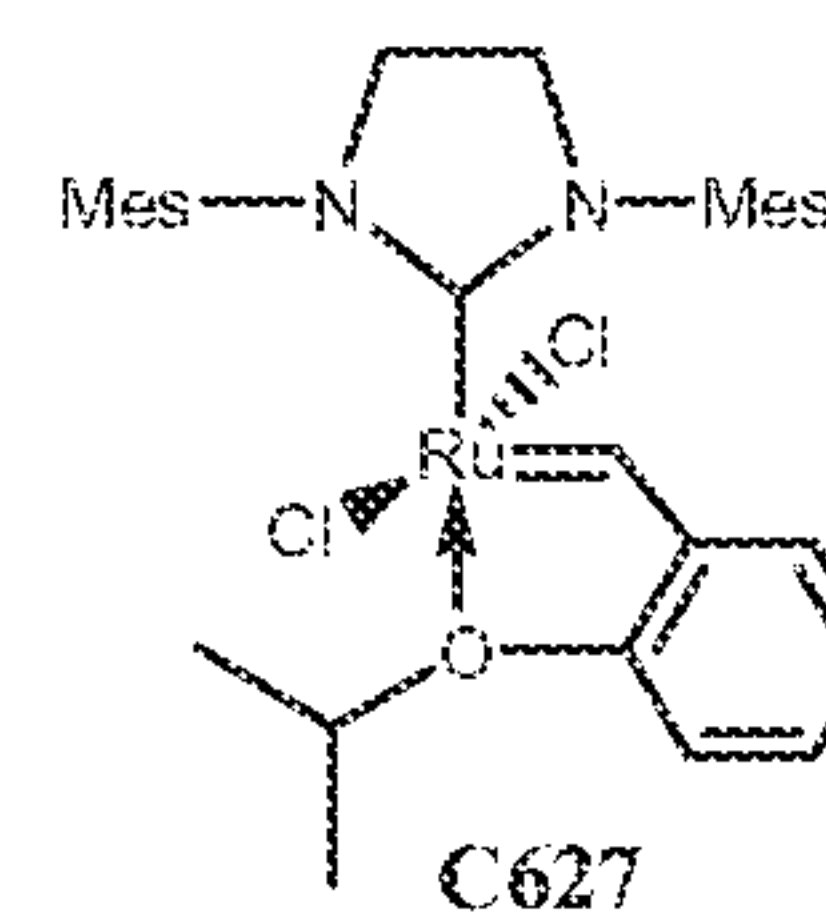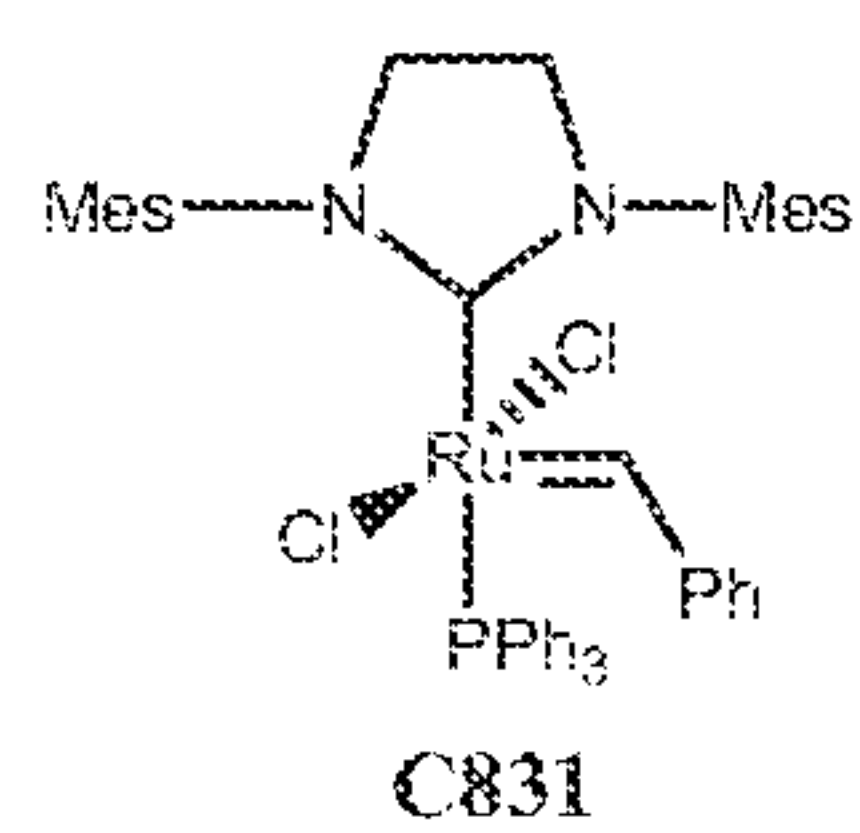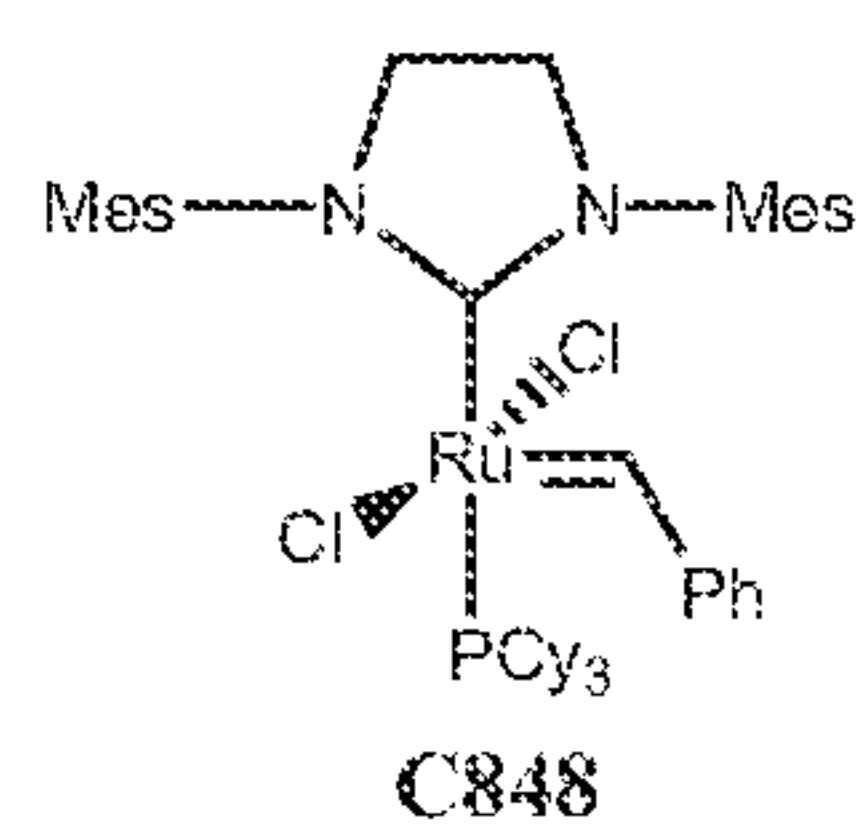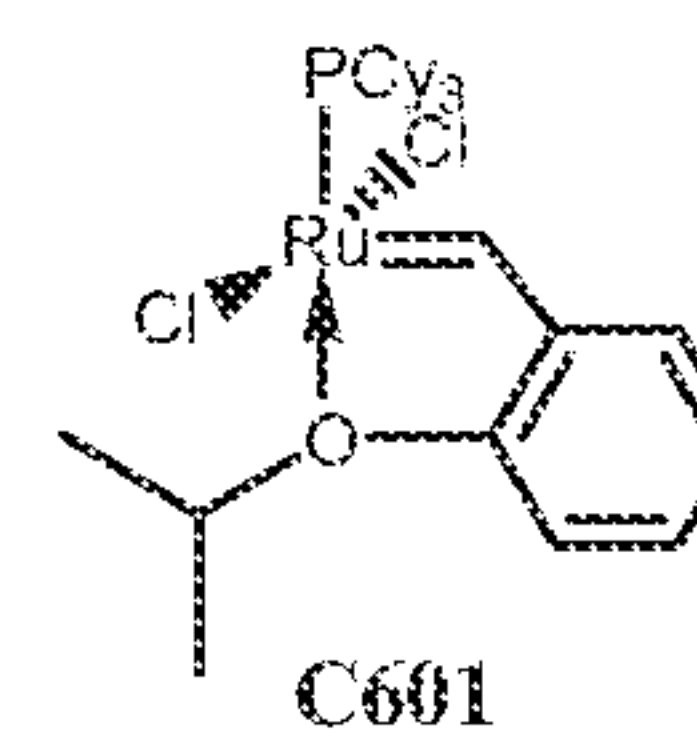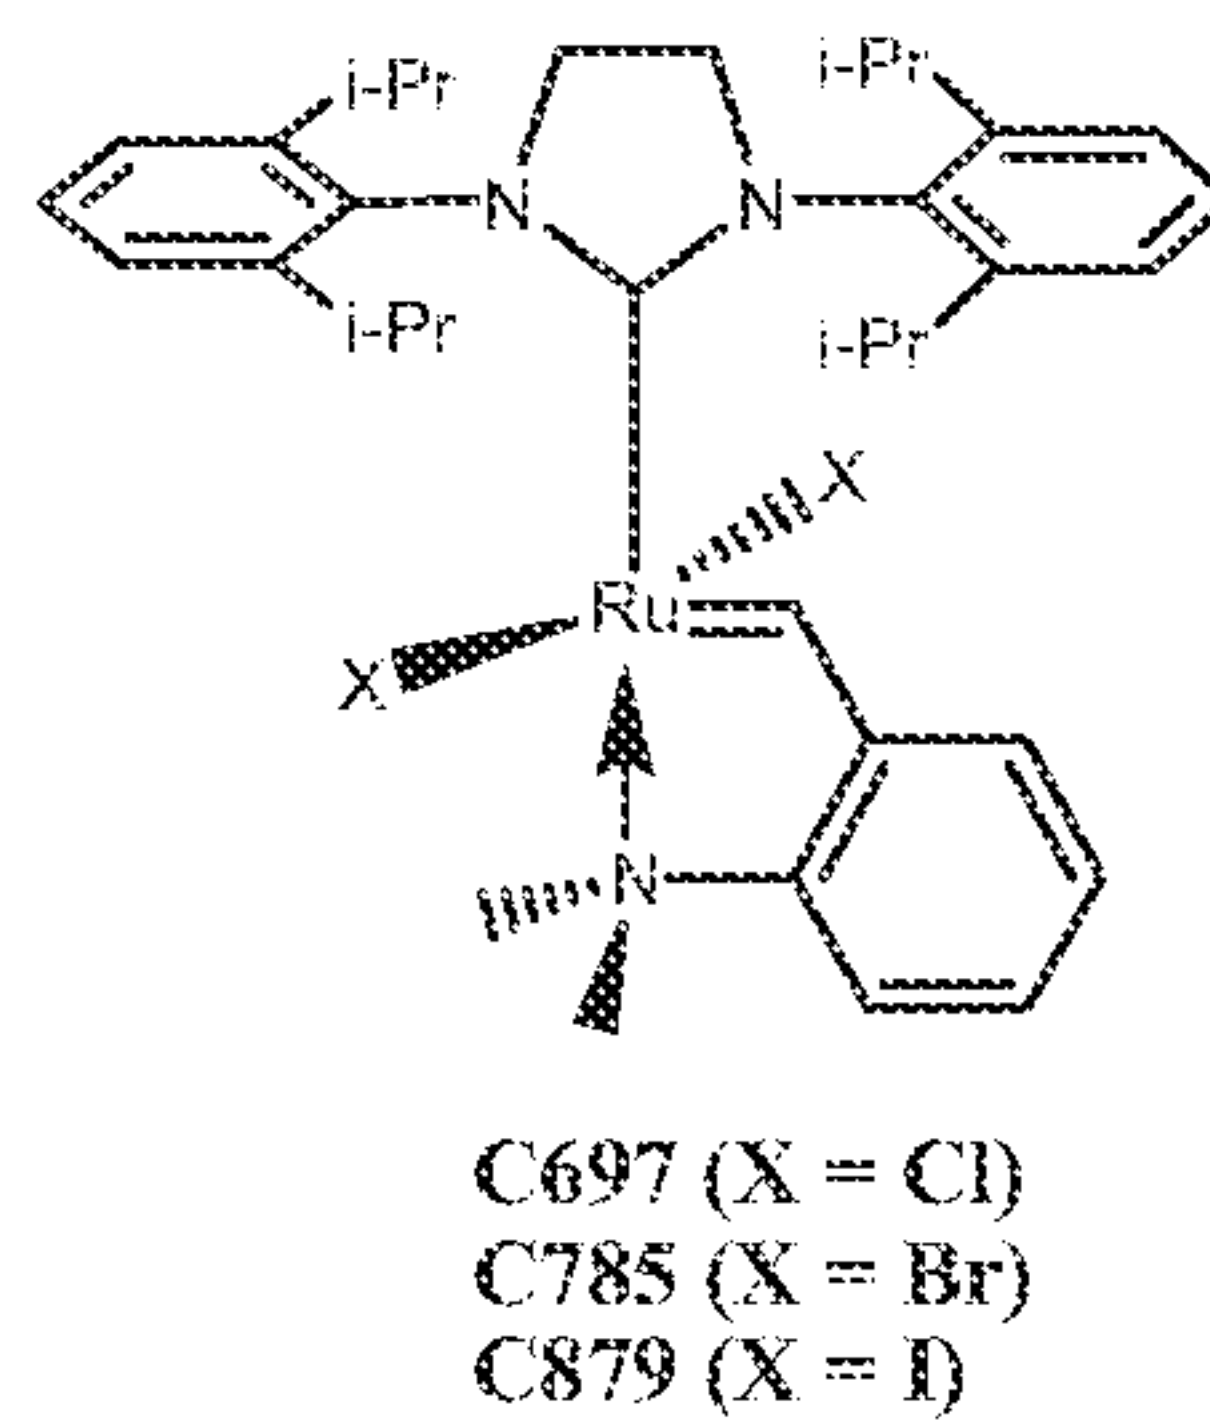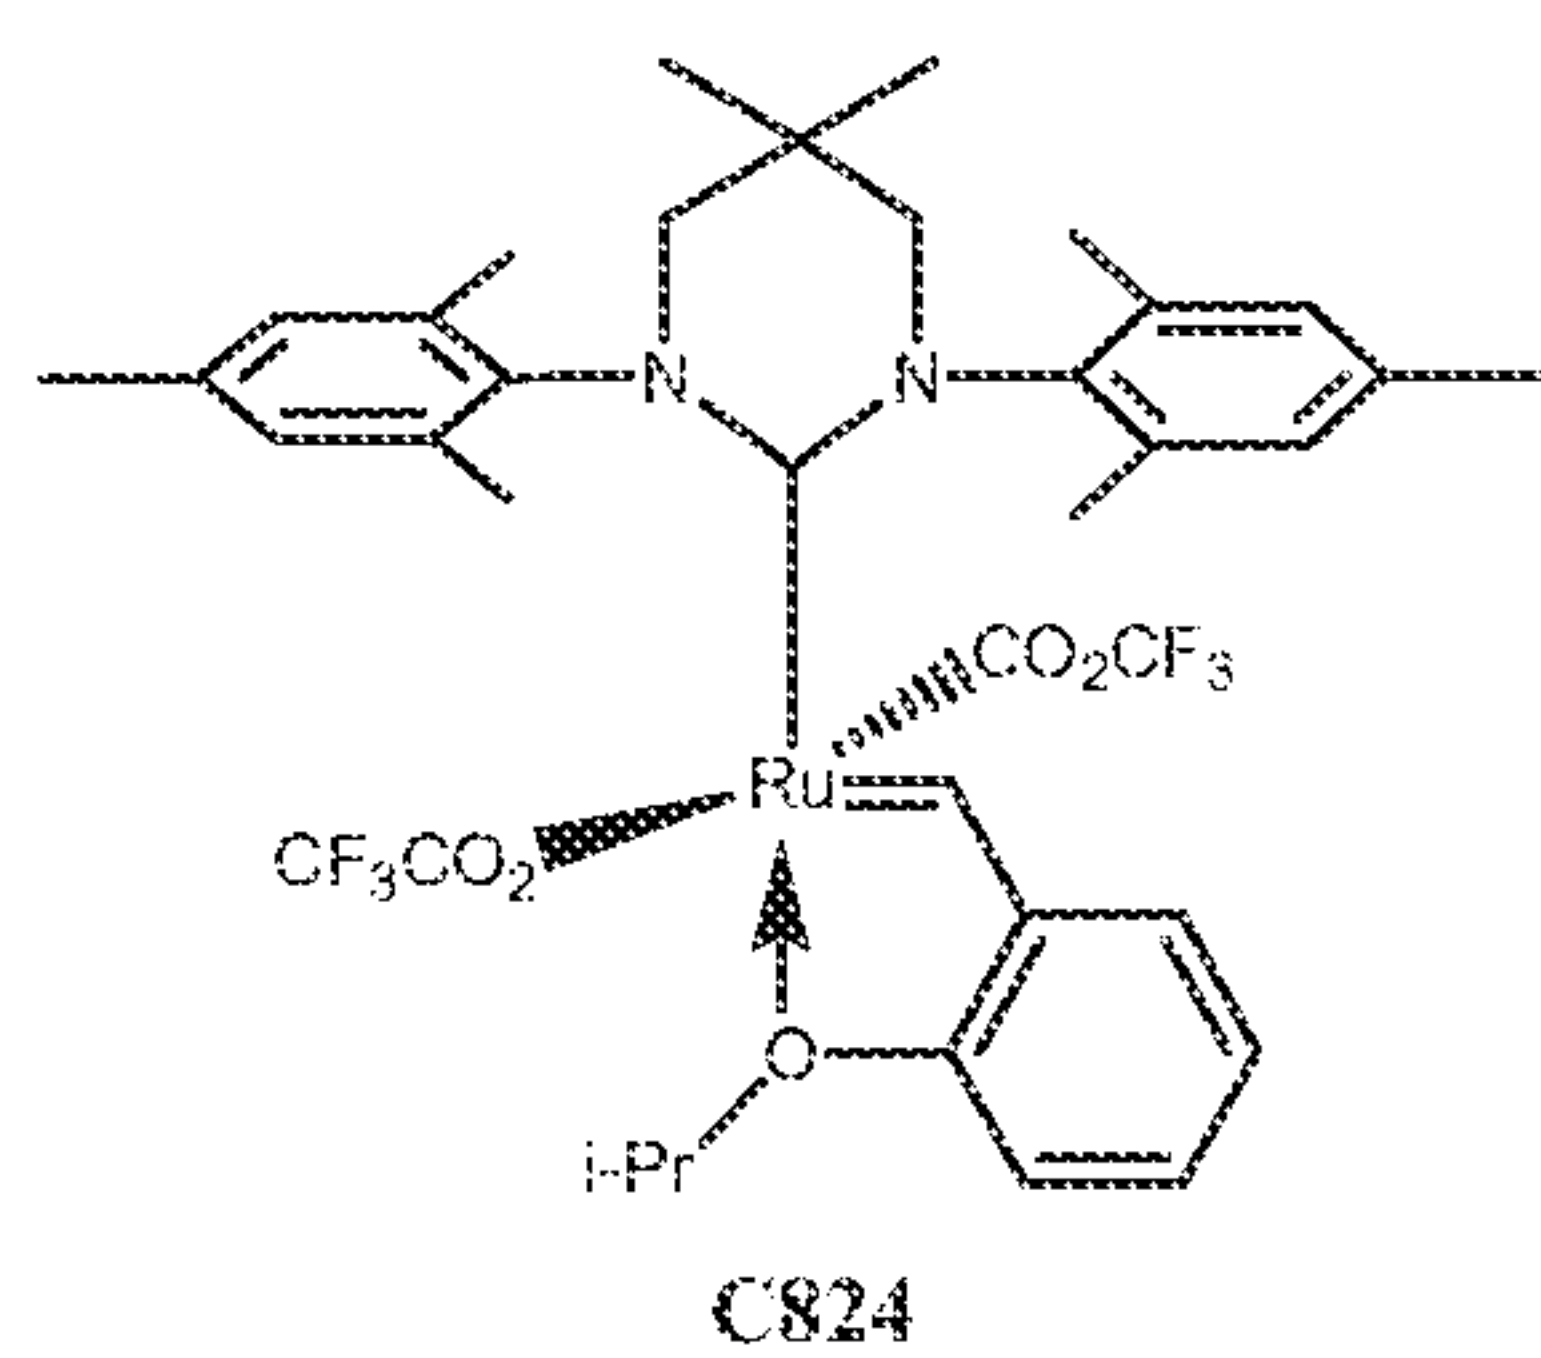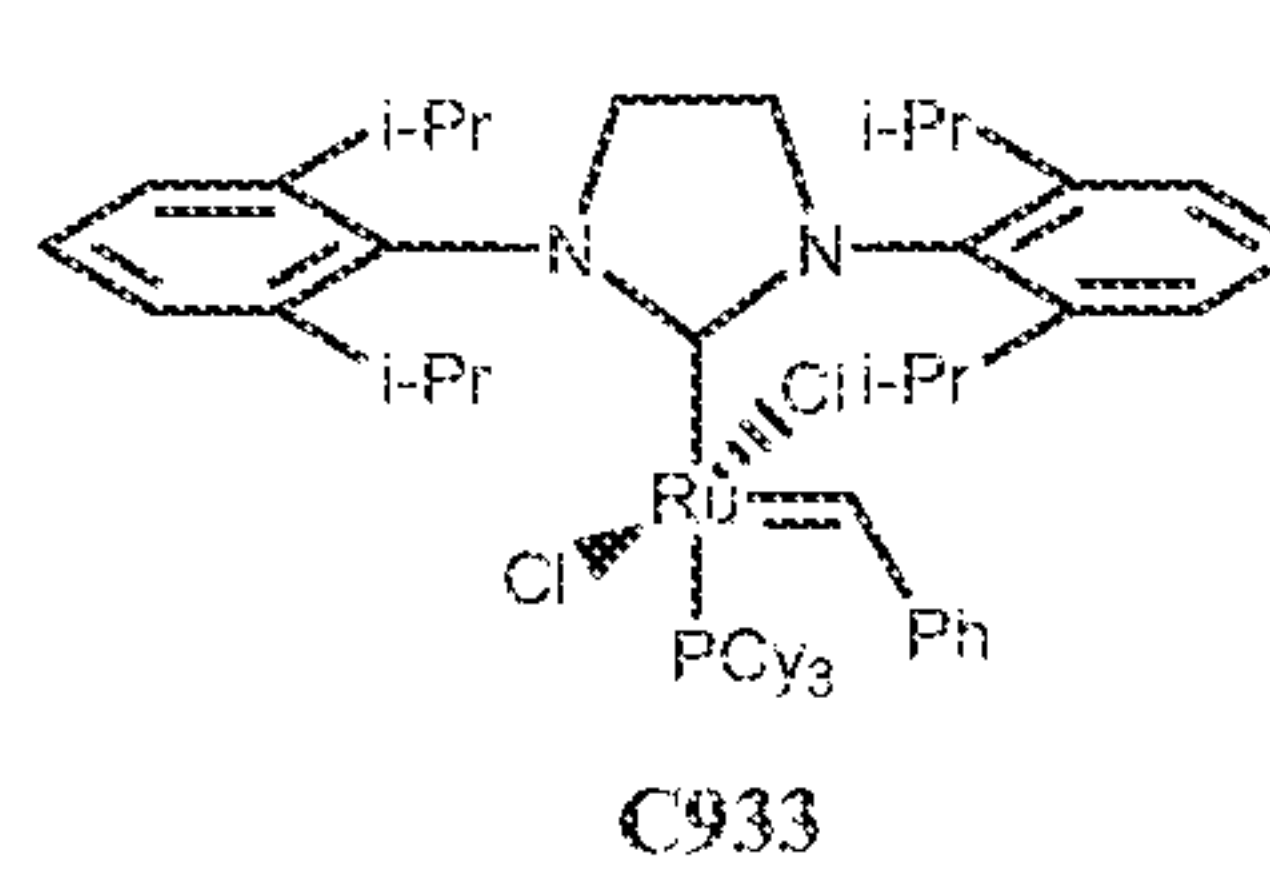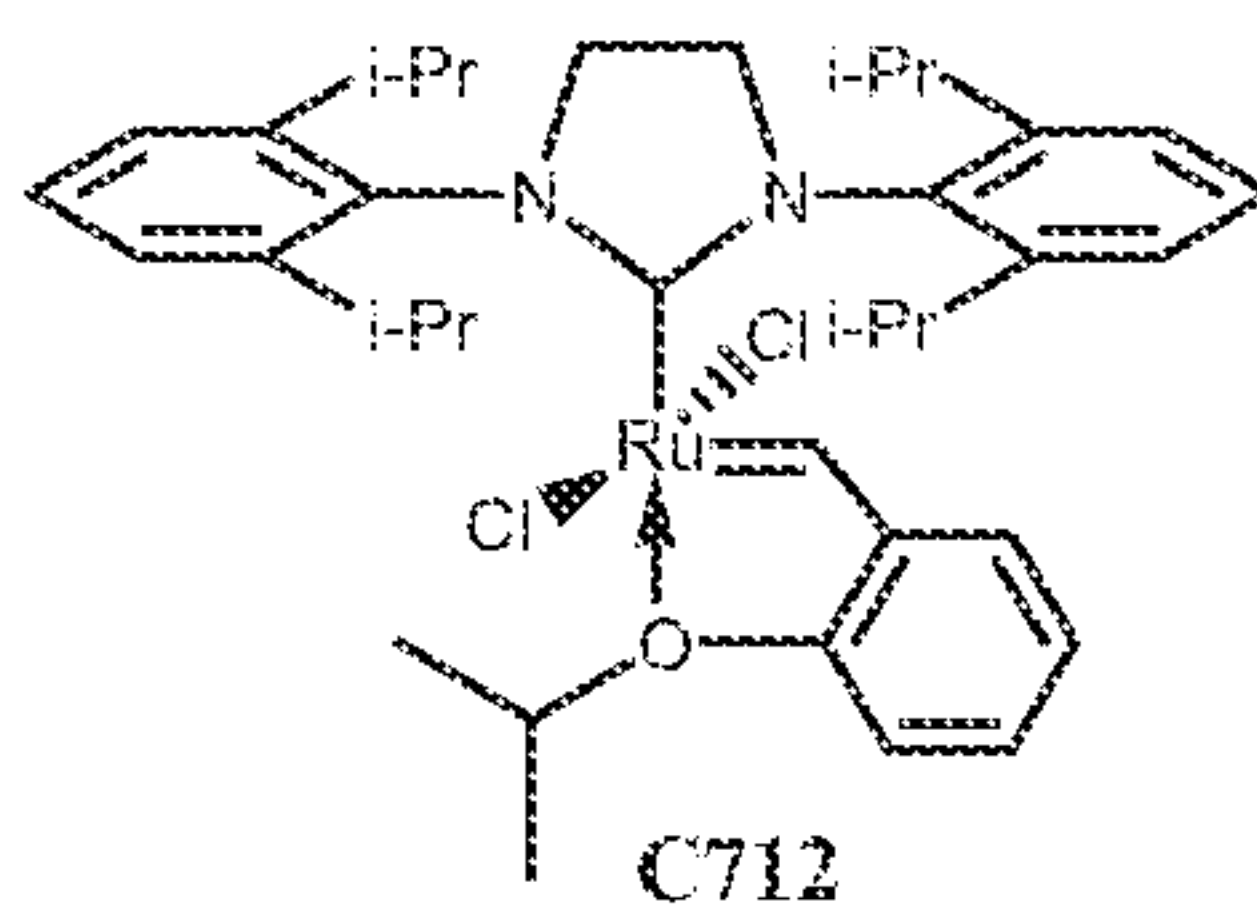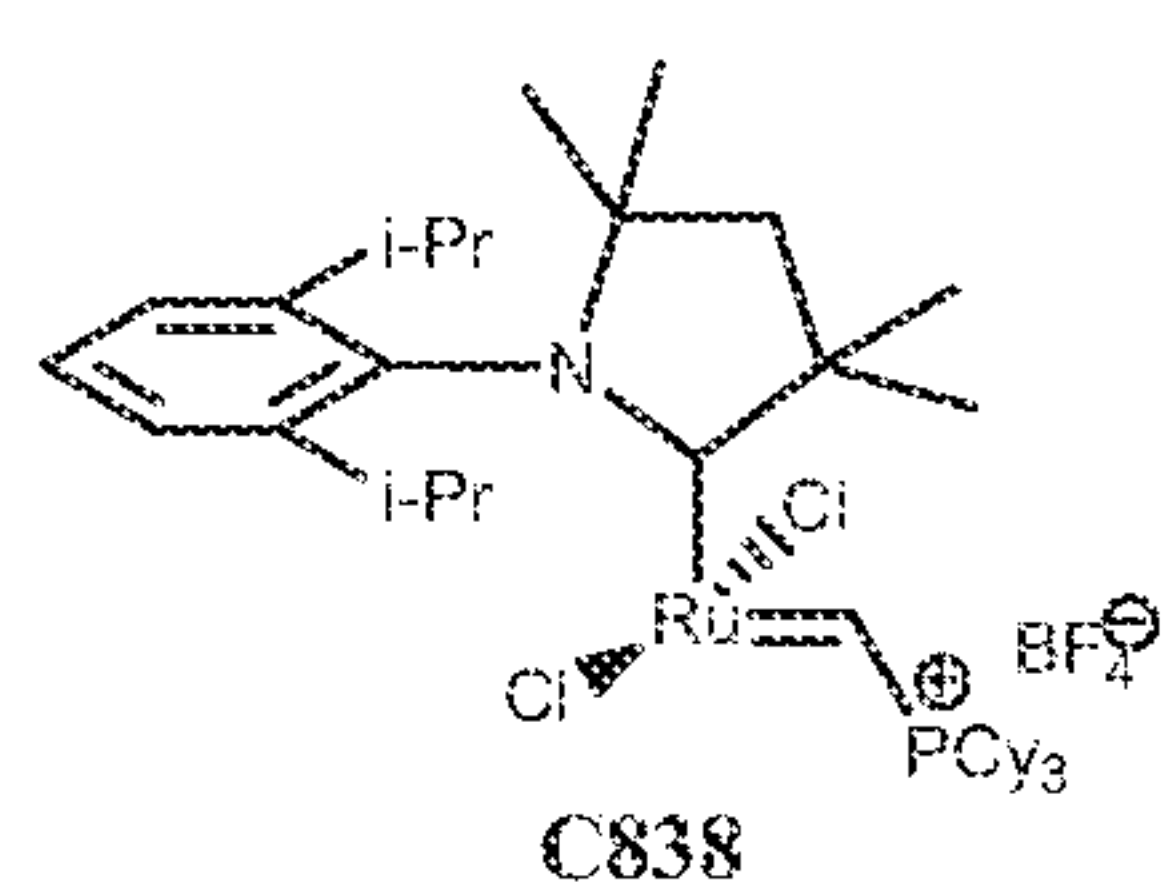

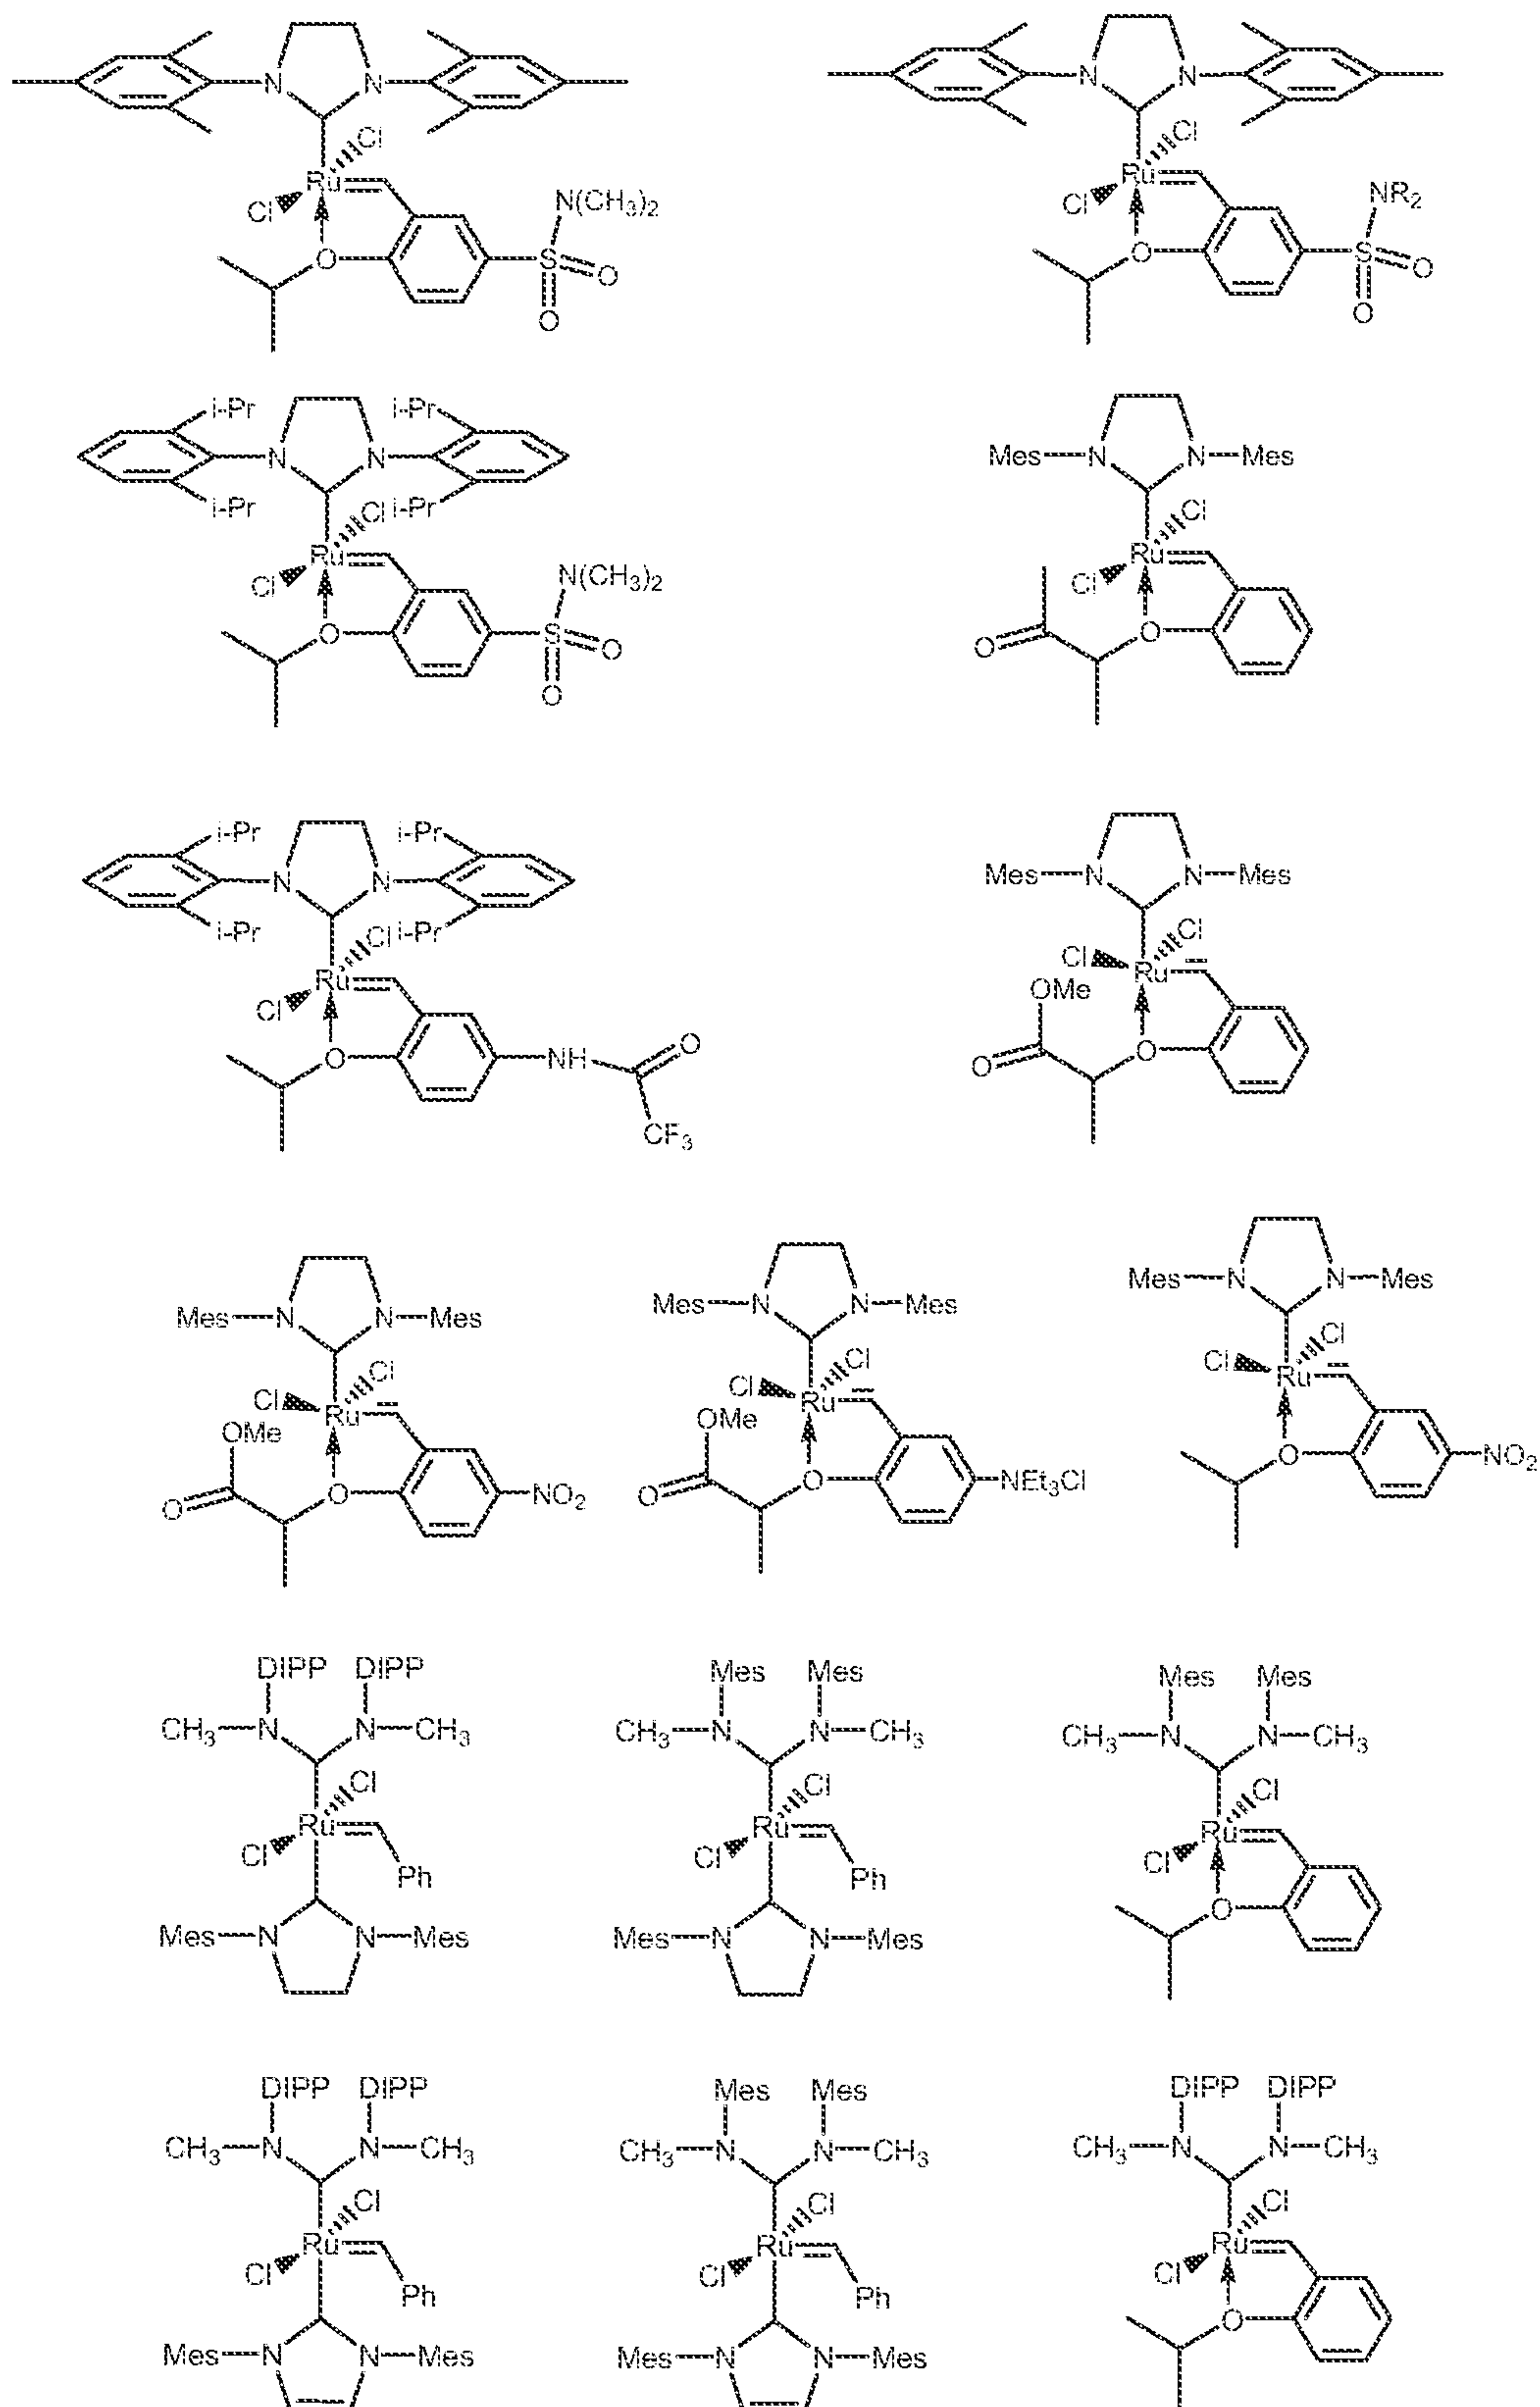

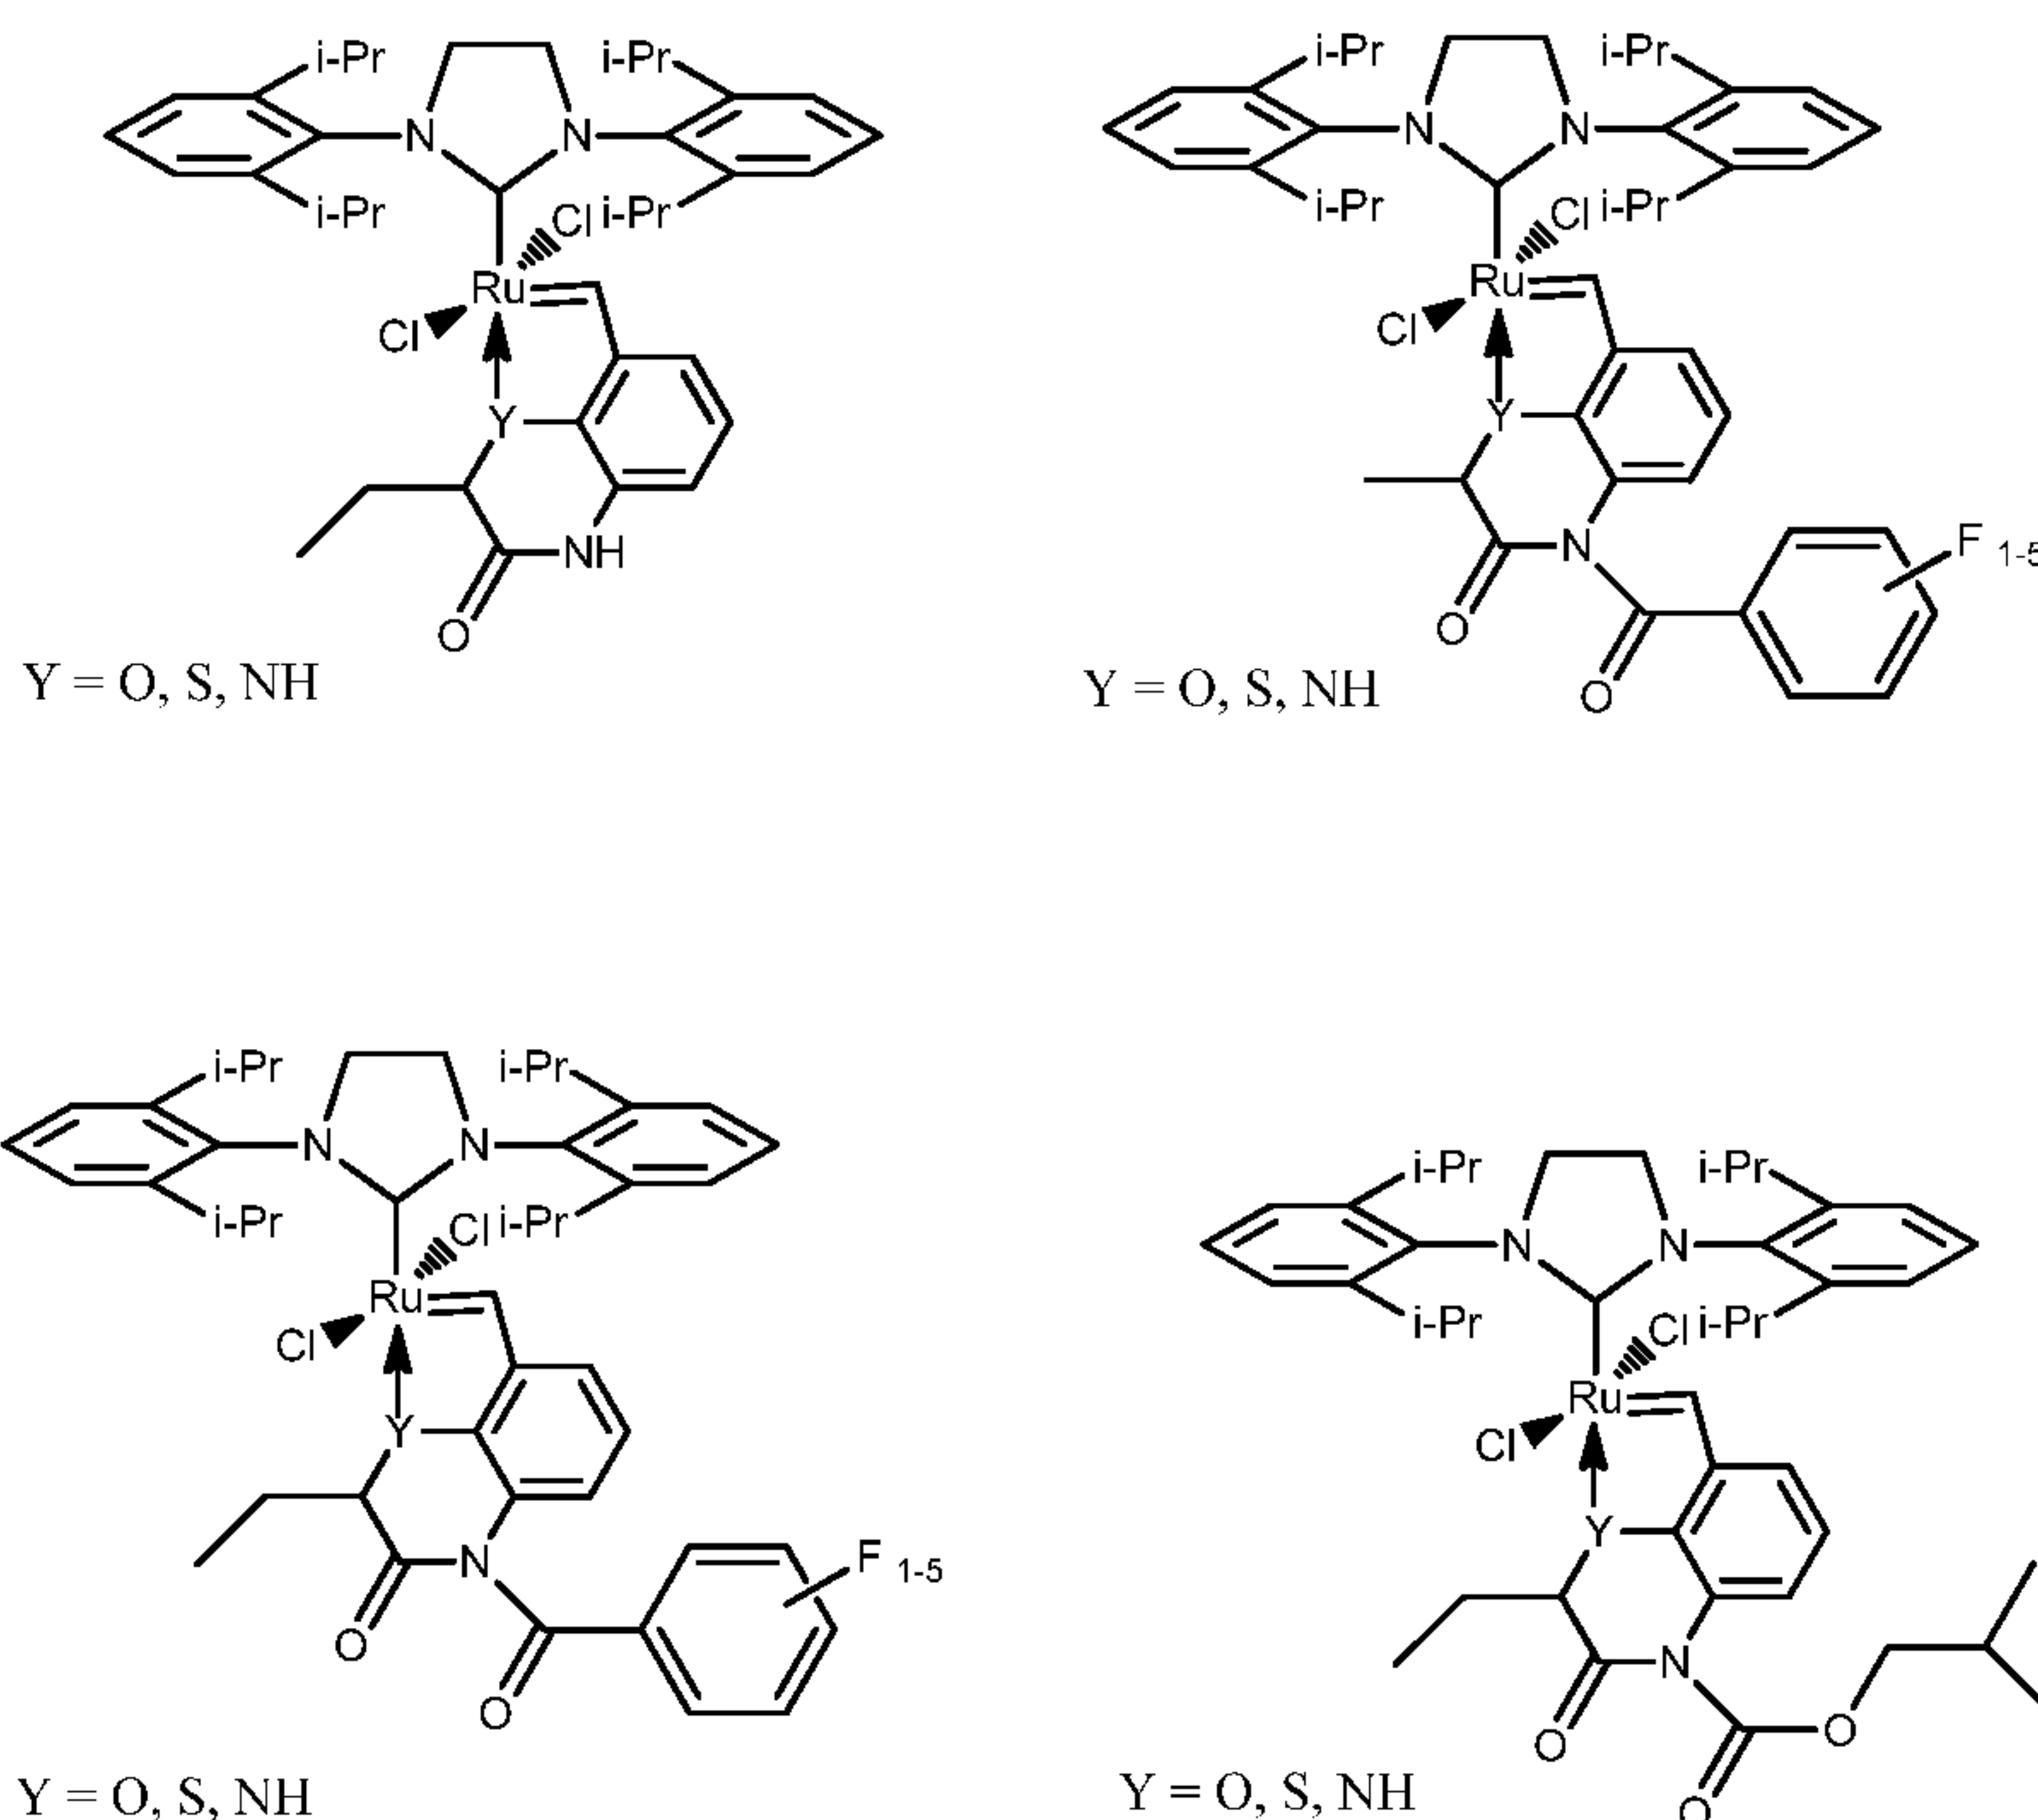

[00137] Additional non-limiting examples of catalysts that may be used to prepare supported complexes and in the reactions disclosed herein include the following,

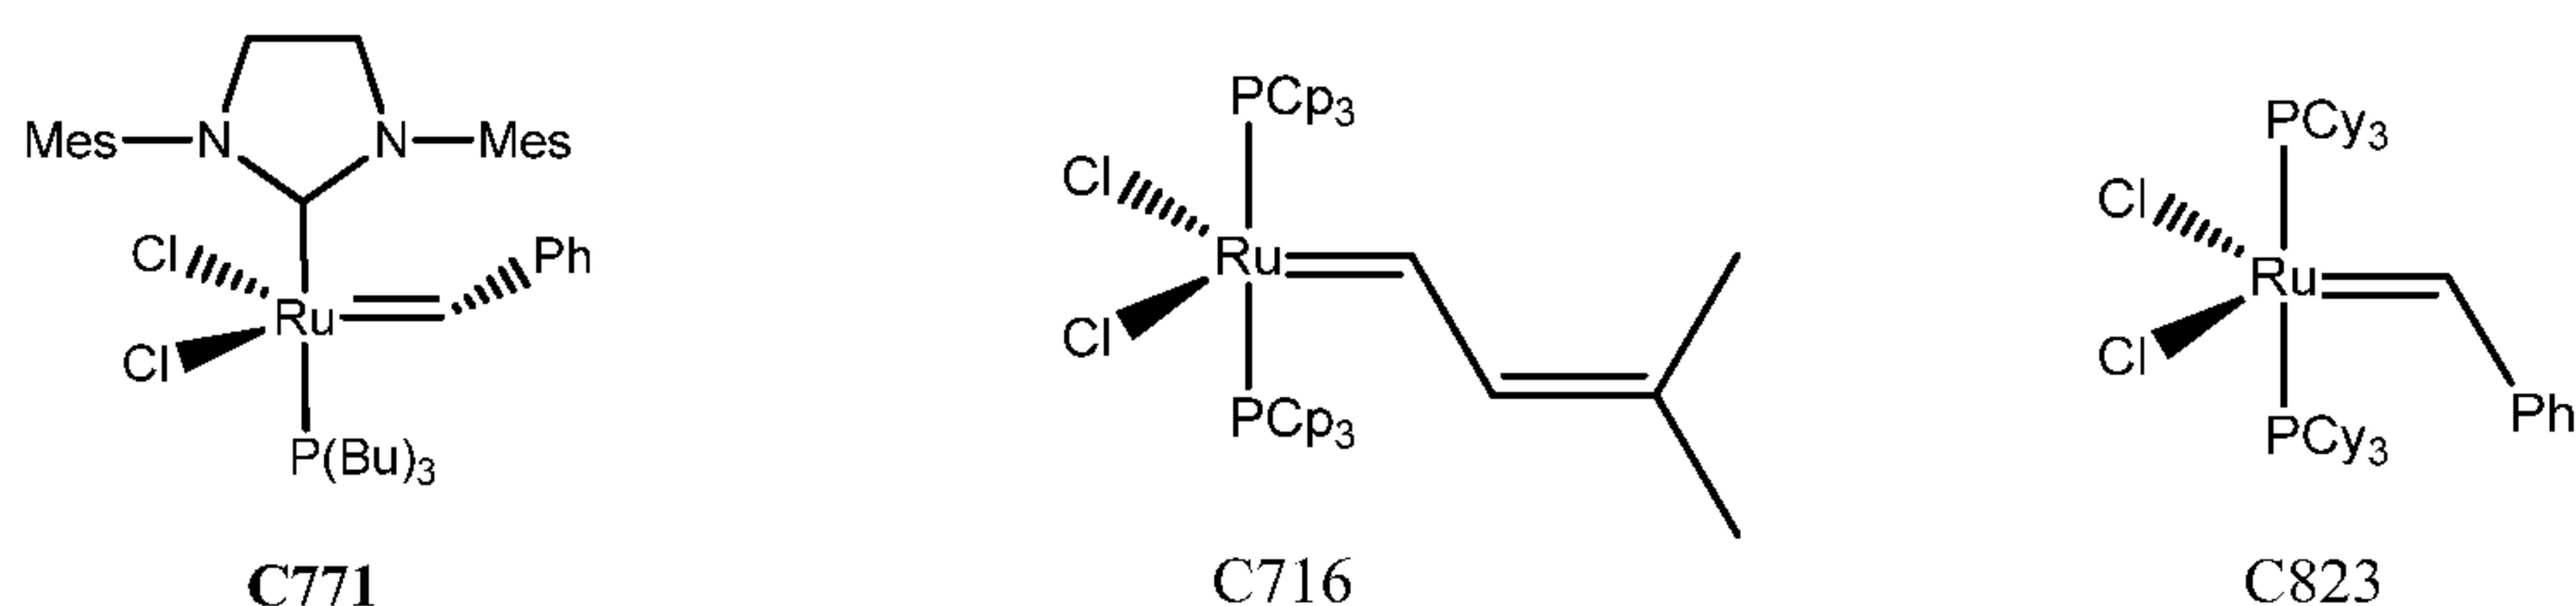



[00138] In the foregoing molecular structures and formulae, Ph represents phenyl, Cy represents cyclohexyl, Me represents methyl, Bu represents *n*-butyl, *i*-Pr represents isopropyl, py represents pyridine (coordinated through the N atom), Mes represents mesityl (i.e., 2,4,6-trimethylphenyl), DiPP and DiPP represents 2,6-diisopropylphenyl, MiPP represents 2-isopropylphenyl. Additionally, *t*-Bu represents *tert*-butyl, and Cp represents cyclopentyl.

[00139] Further examples of catalysts useful to prepare supported complexes and in the reactions disclosed herein include the following: ruthenium (II) dichloro (3-methyl-2-butenylidene) bis(tricyclopentylphosphine) (C716); ruthenium (II) dichloro (3-methyl-2-butenylidene) bis(tricyclohexylphosphine) (C801); ruthenium (II) dichloro(phenylmethylene) bis(tricyclohexylphosphine) (C823); ruthenium (II) (1,3-bis-(2,4,6-trimethylphenyl)-2-


imidazolidinylidene) dichloro (phenylmethylene) (triphenylphosphine) (C830), and ruthenium (II) dichloro (phenylvinylidene) bis(tricyclohexylphosphine) (C835); ruthenium (II) dichloro (tricyclohexylphosphine) (o-isopropoxyphenylmethylene) (C601), and ruthenium (II) (1, 3-bis-(2, 4, 6,-trimethylphenyl)-2-imidazolidinylidene) dichloro (phenylmethylene) bis-(3-bromopyridine) (C884)).






[00140] Still further catalysts useful in ROMP reactions, and/or in other metathesis reactions, such as ring-closing metathesis, cross metathesis, ring-opening cross metathesis, self-metathesis, ethenolysis, alkenolysis, acyclic diene metathesis polymerization, and combinations thereof, include the following structures:

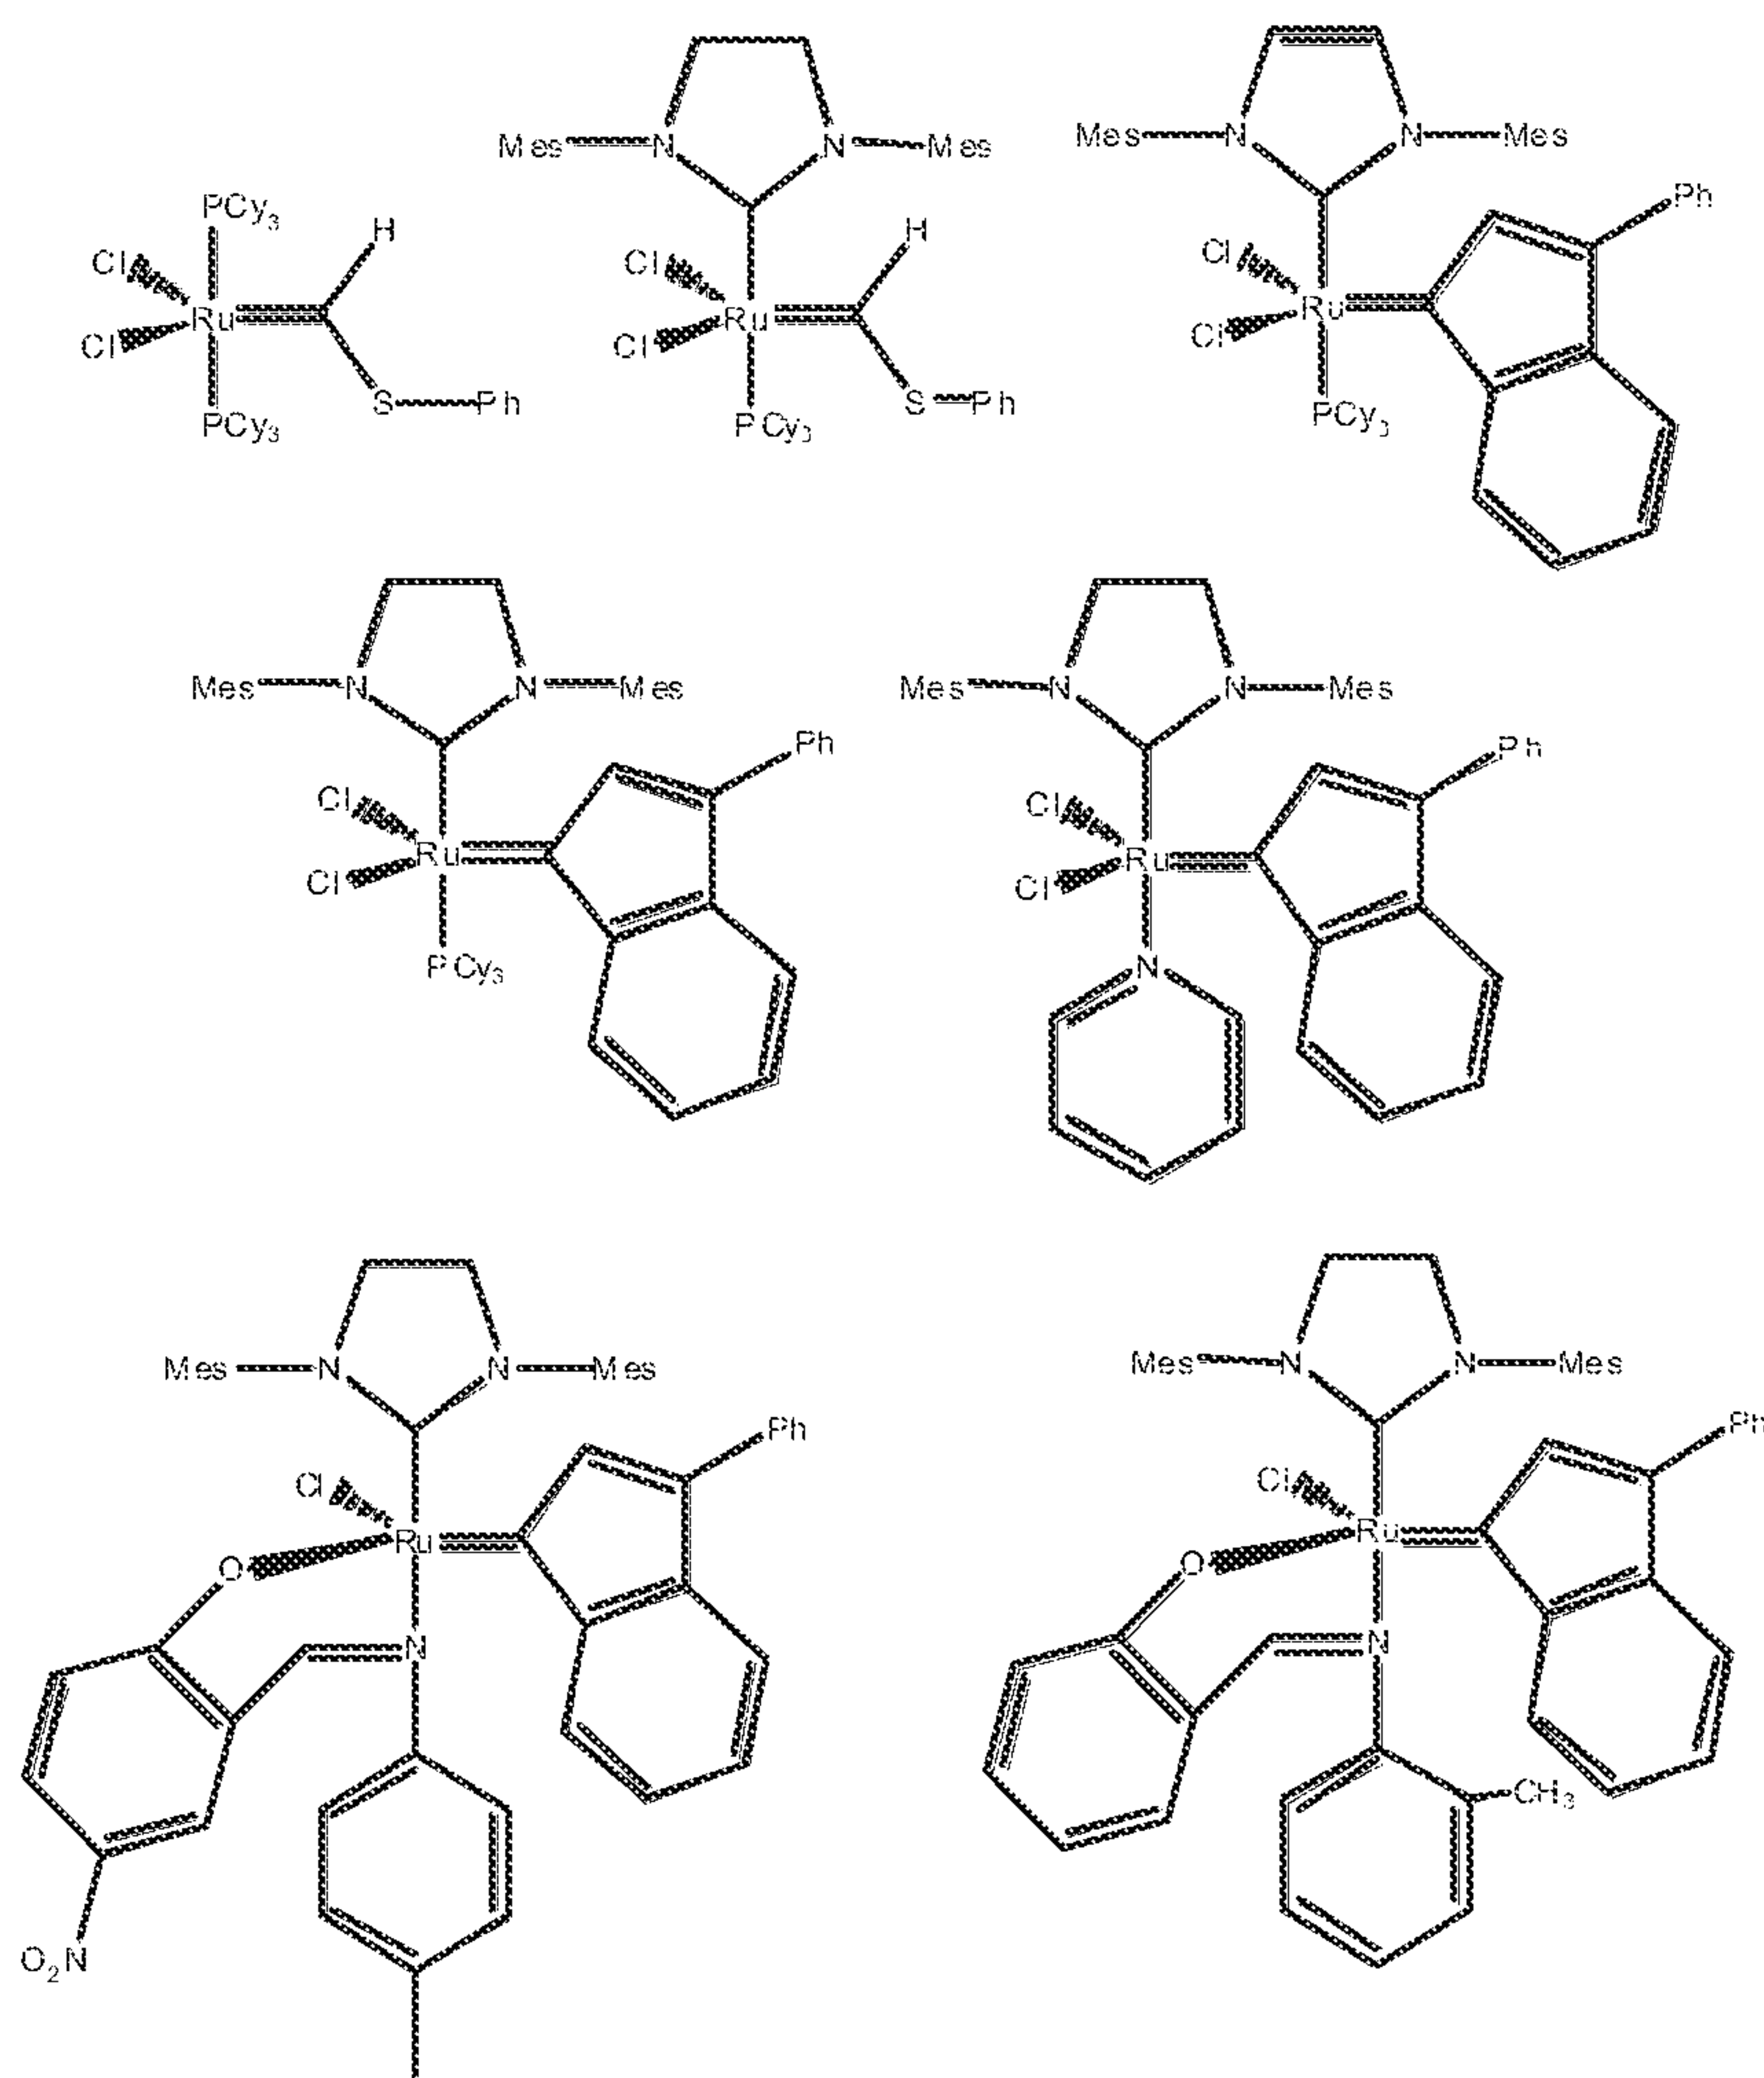

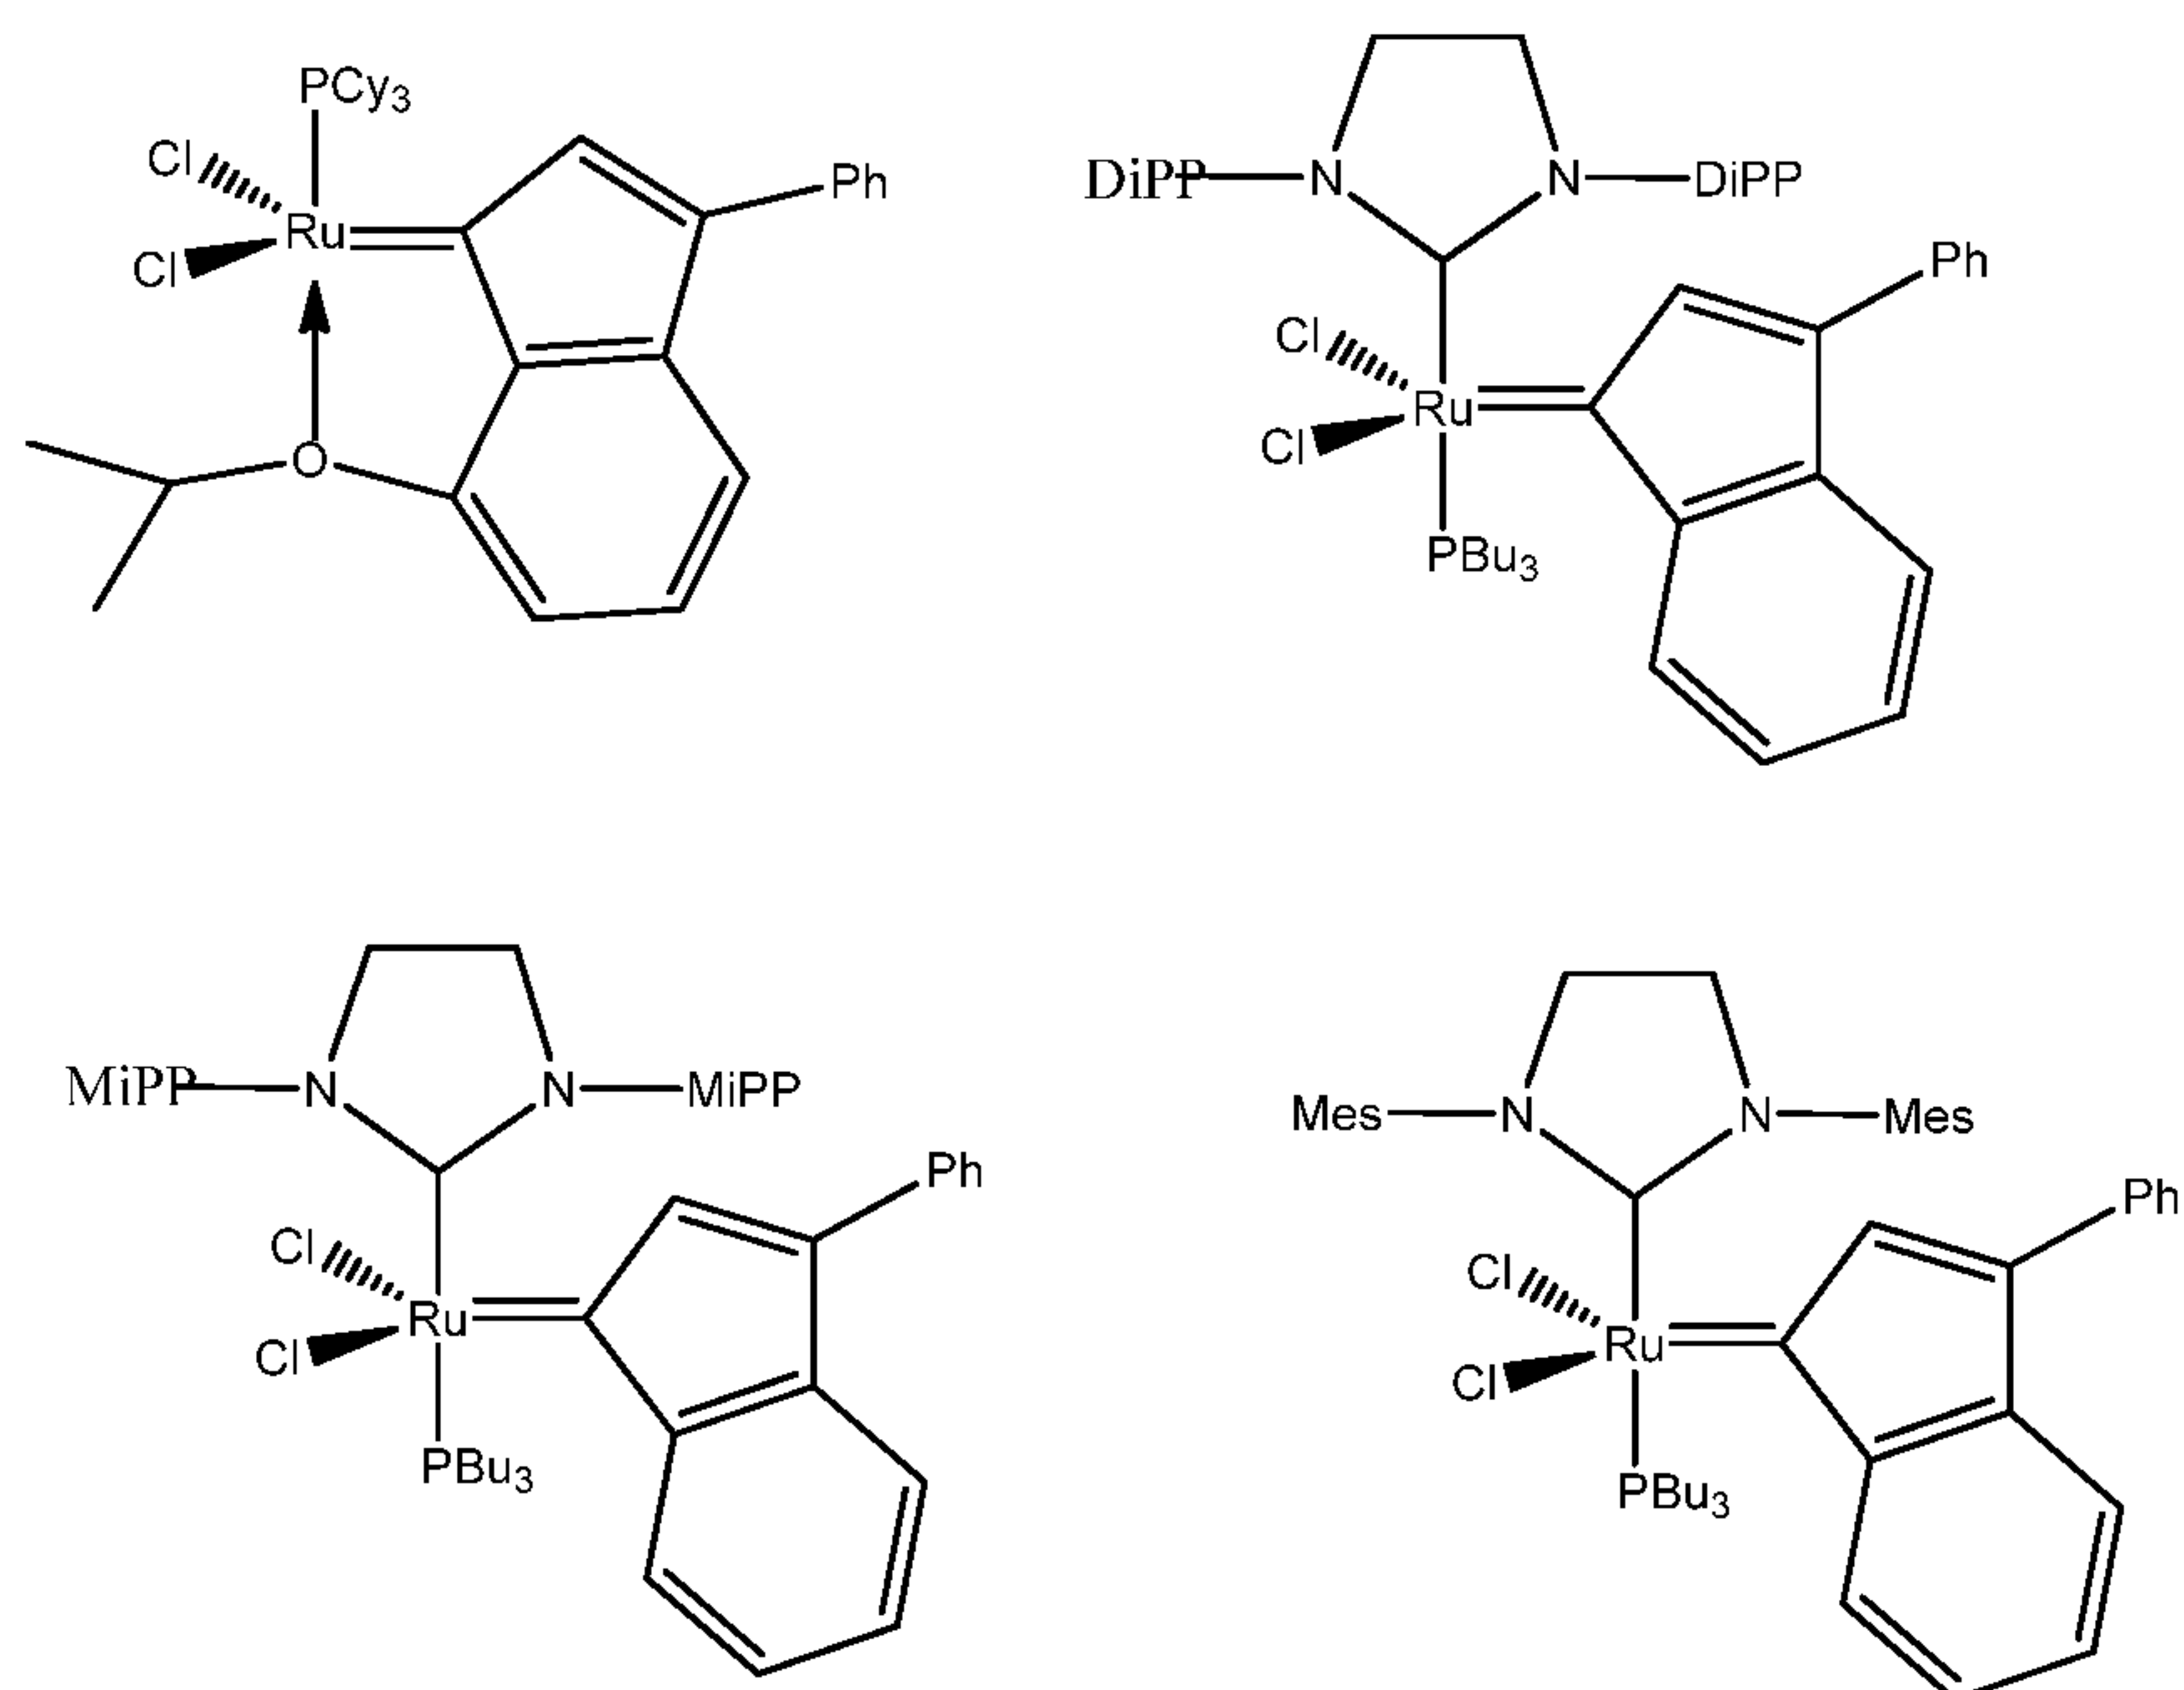

[00141] Additional, non-limiting examples of catalysts that may be used to prepare supported complexes and in the reactions disclosed herein include the following

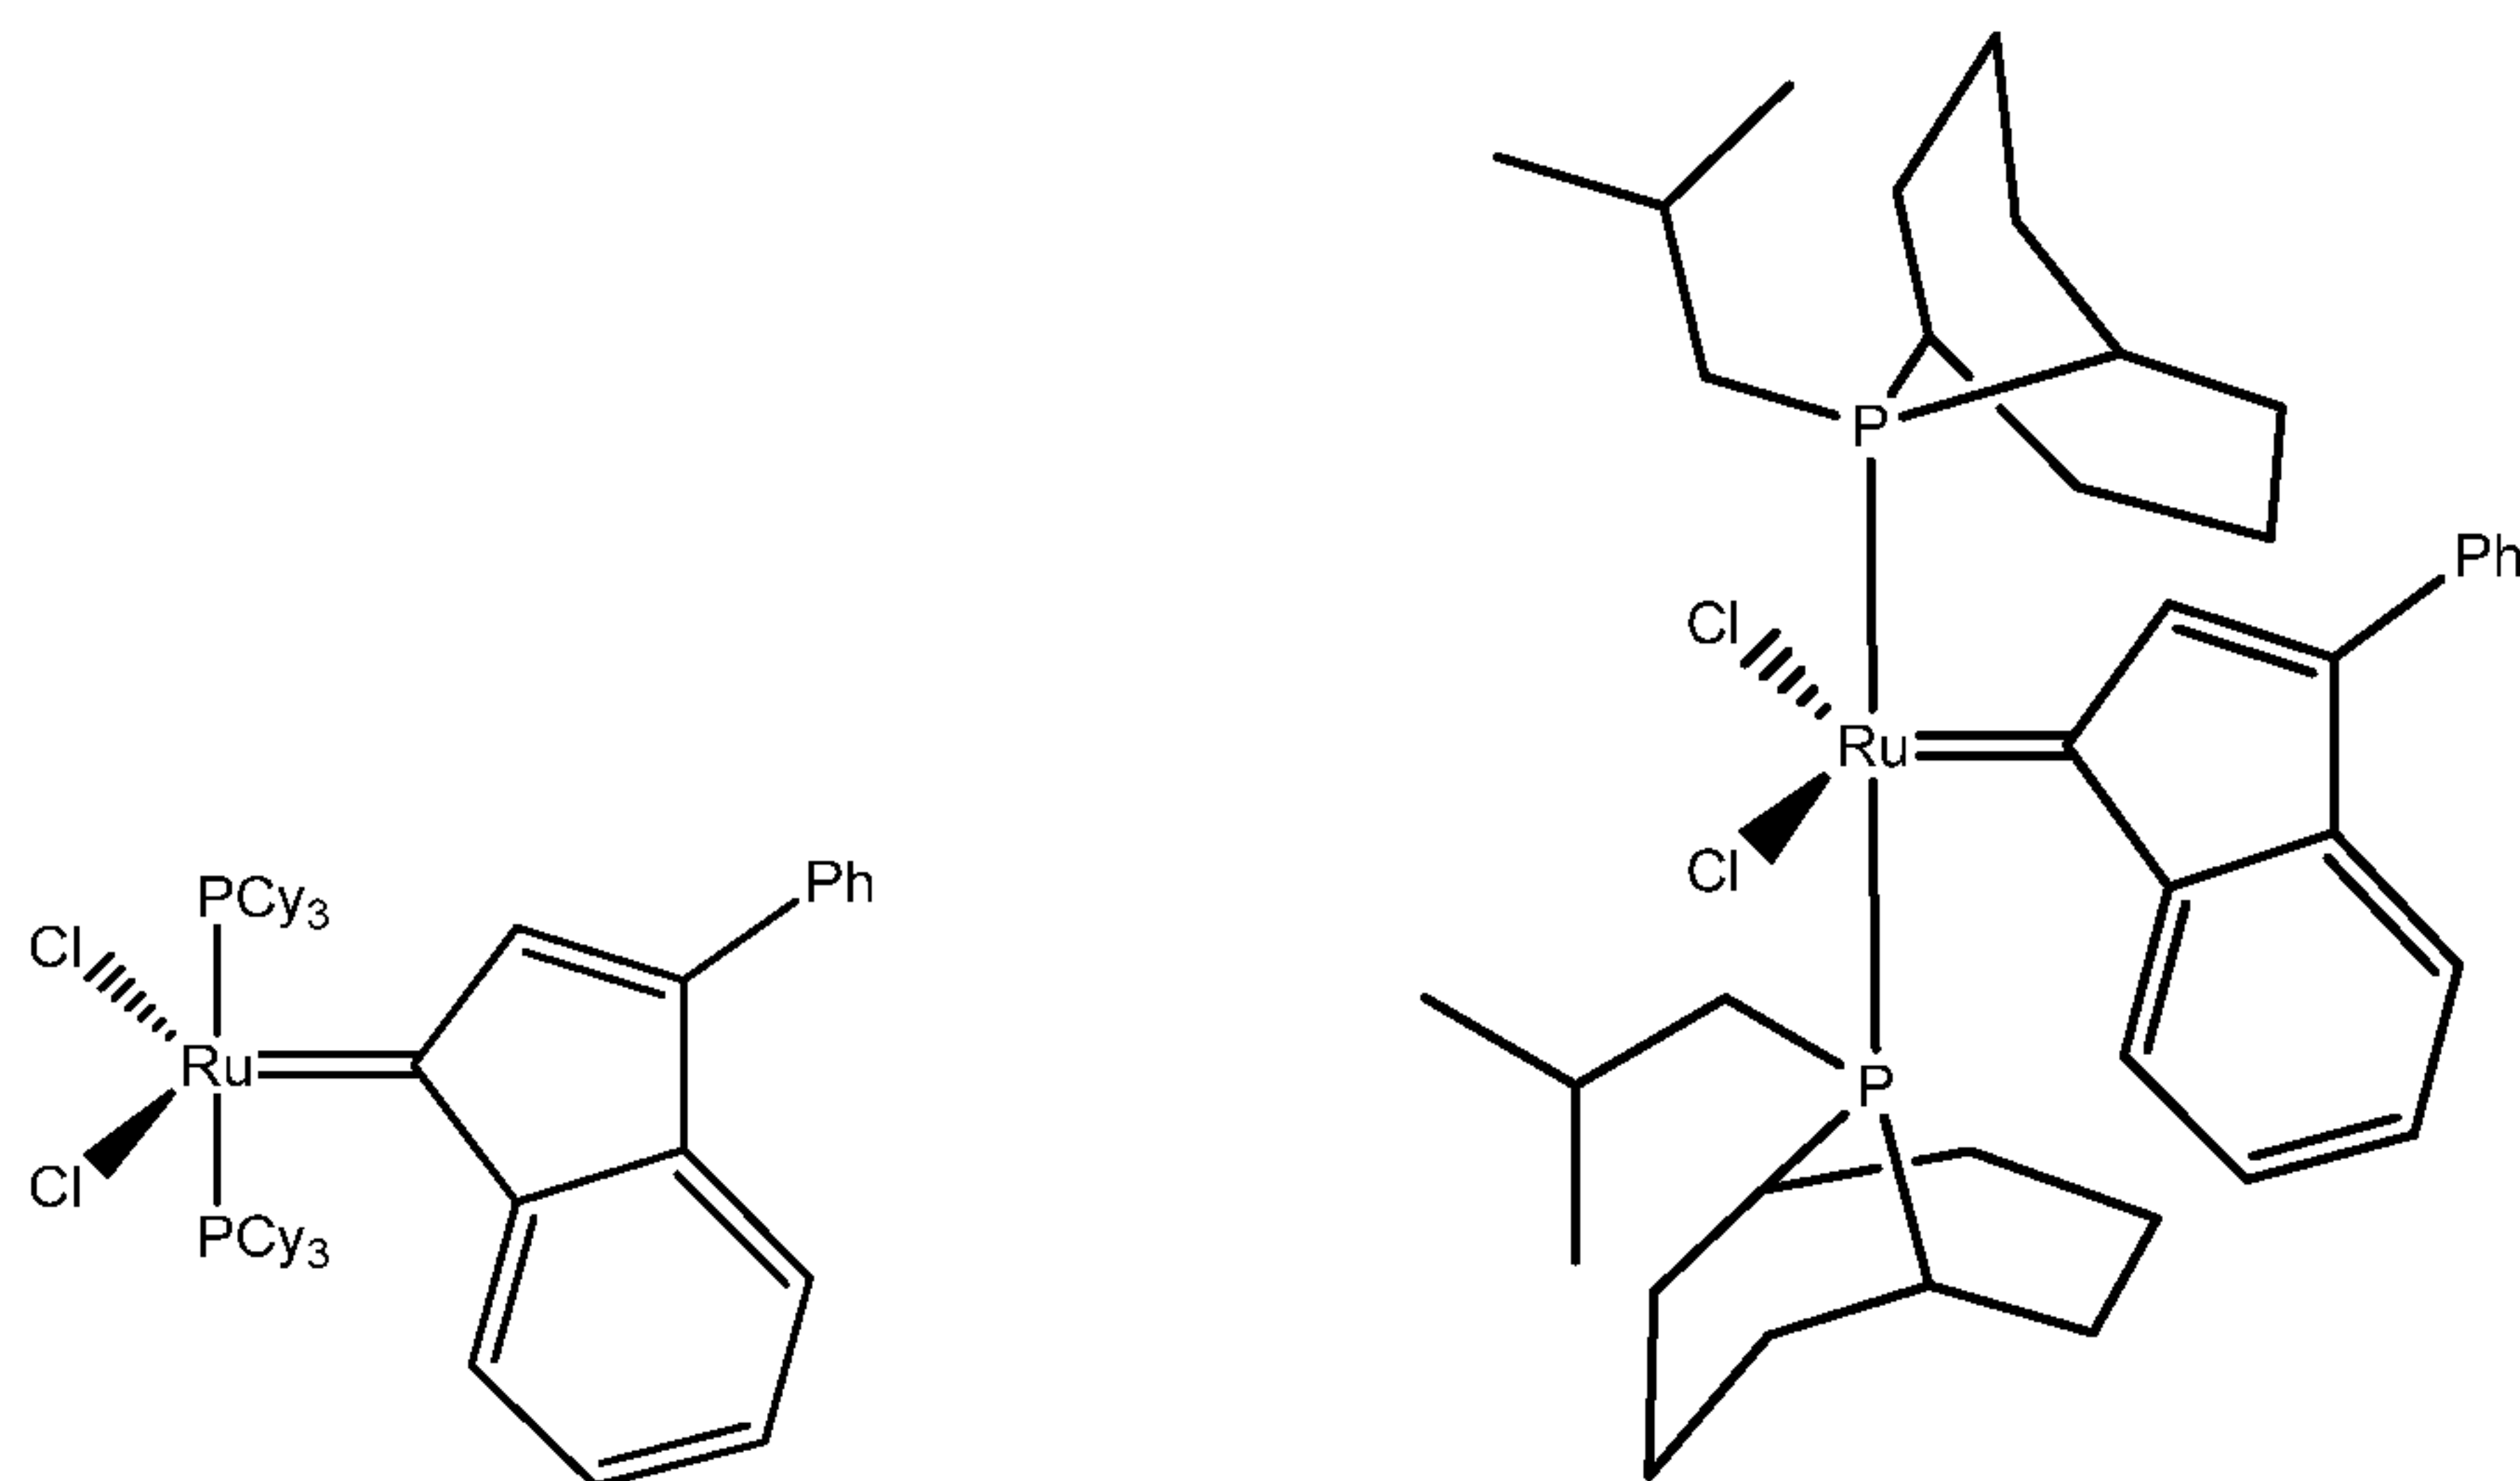

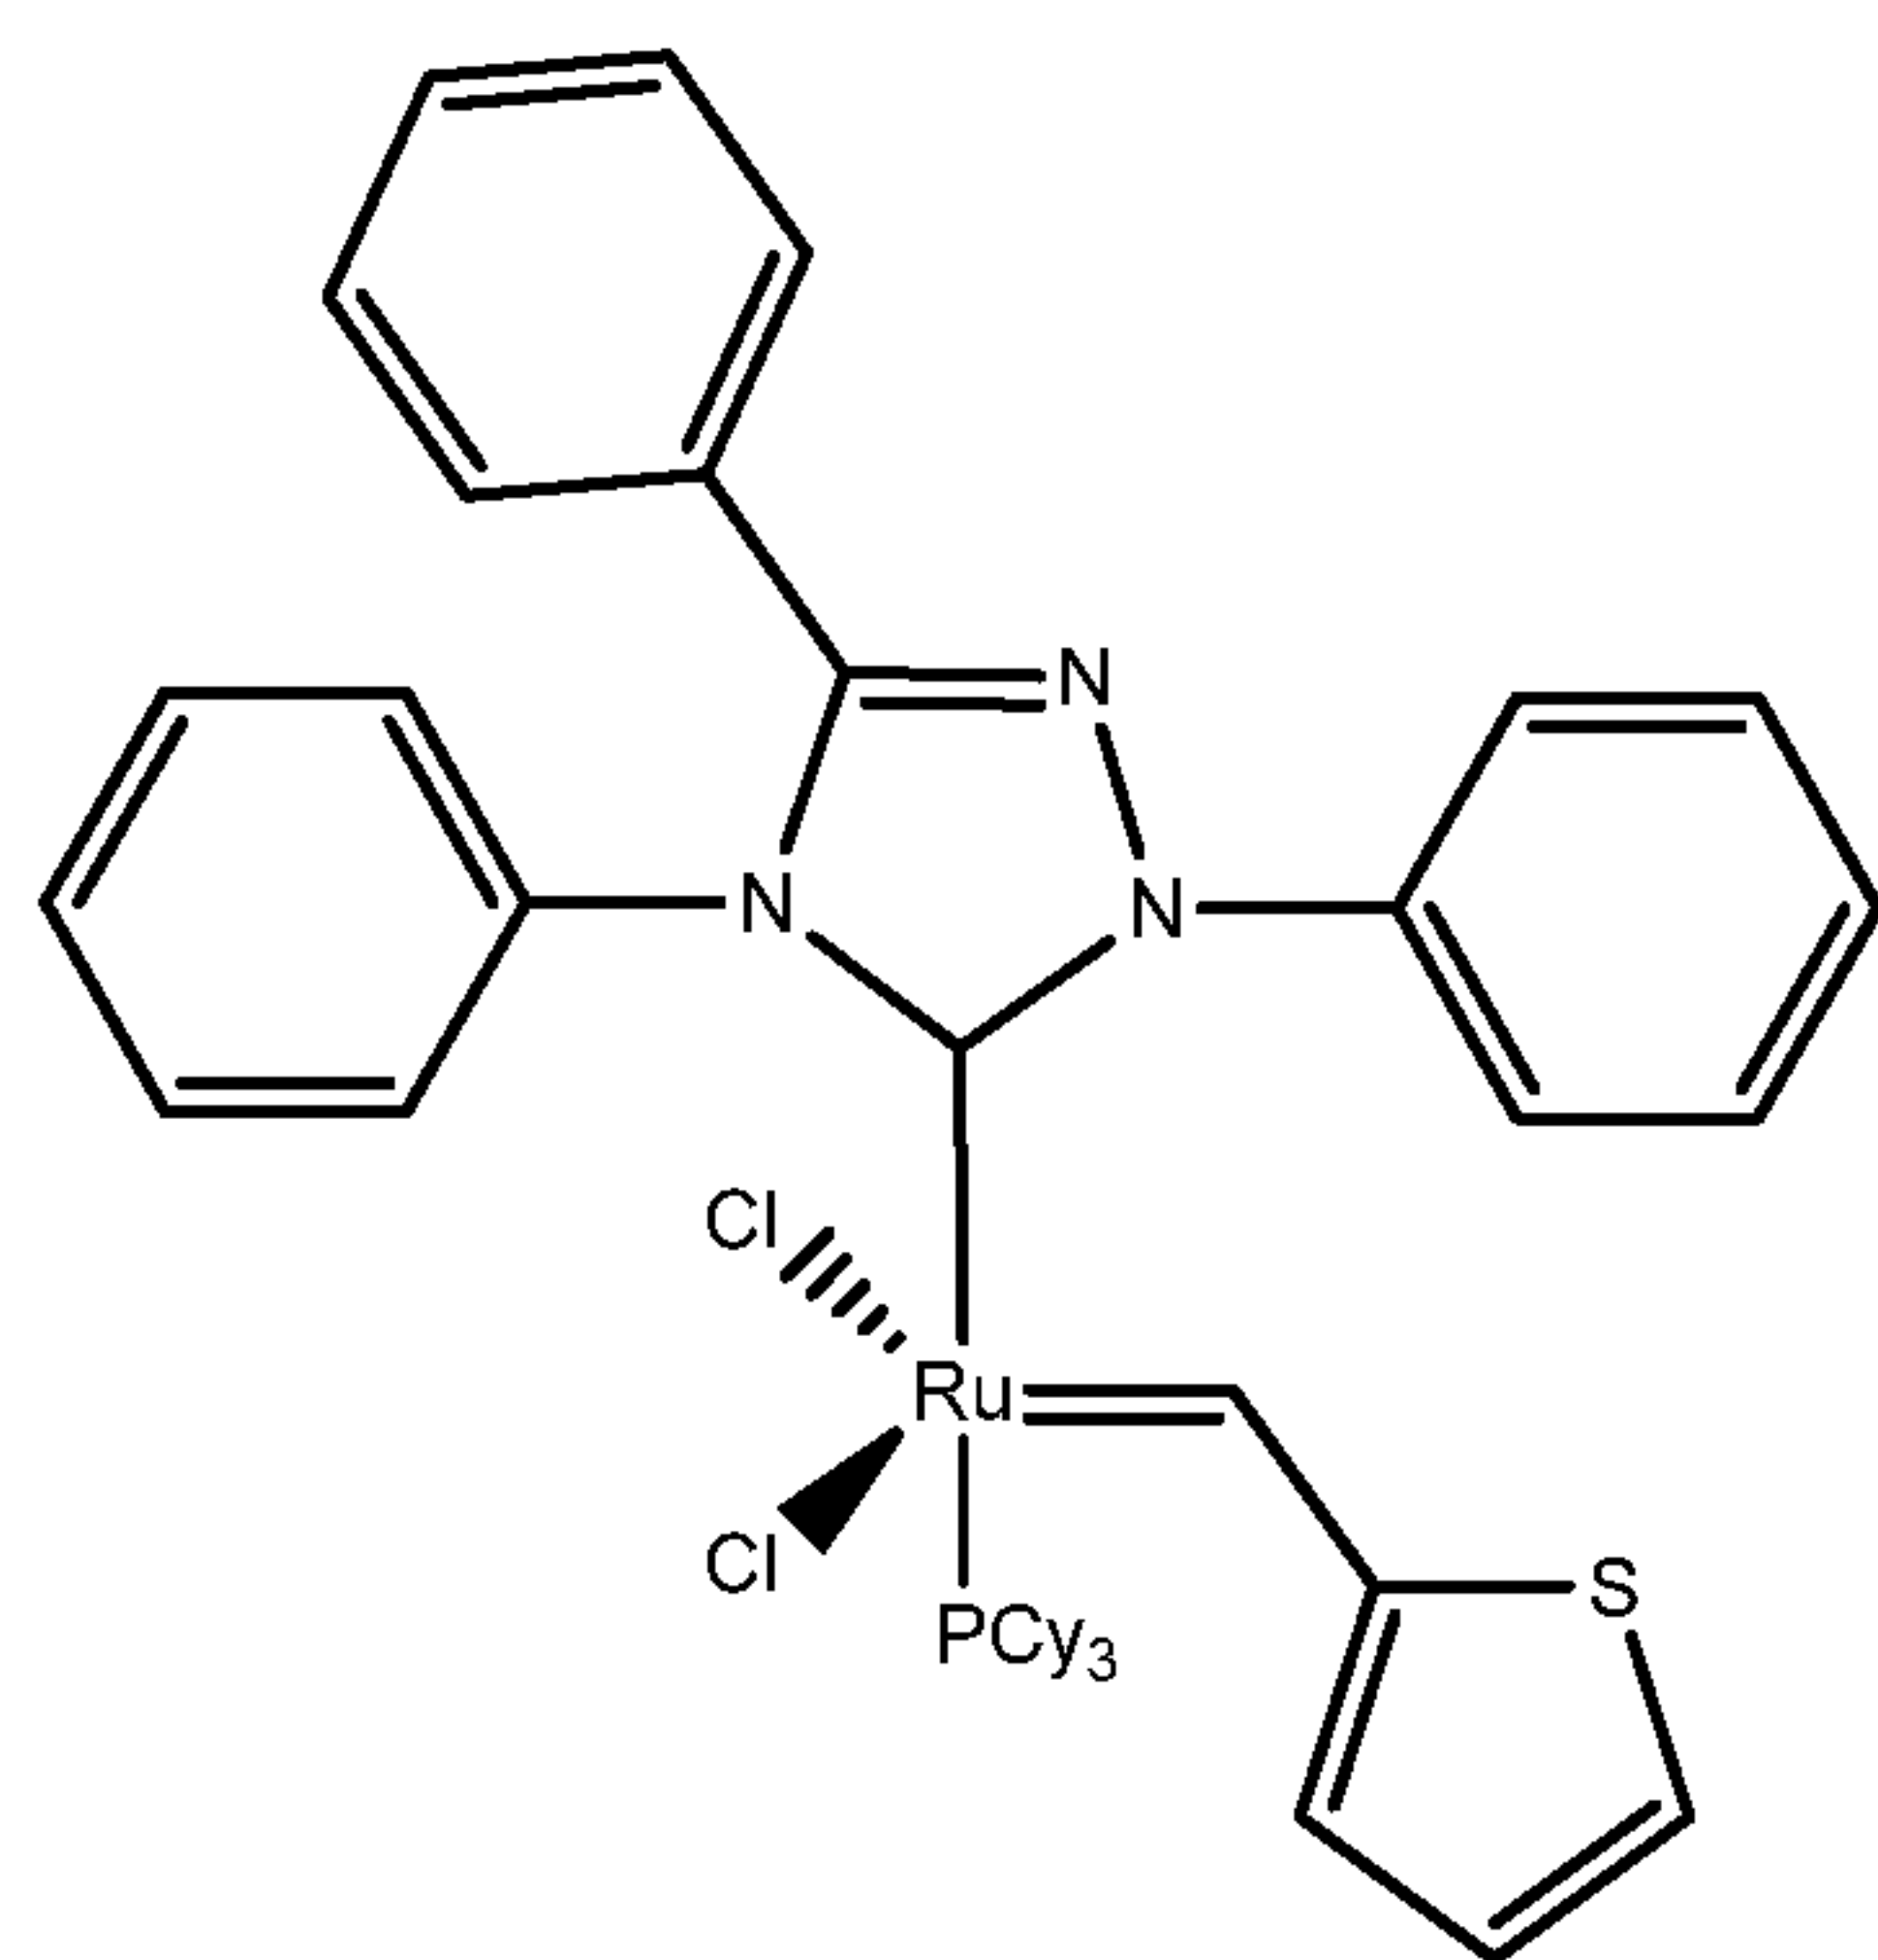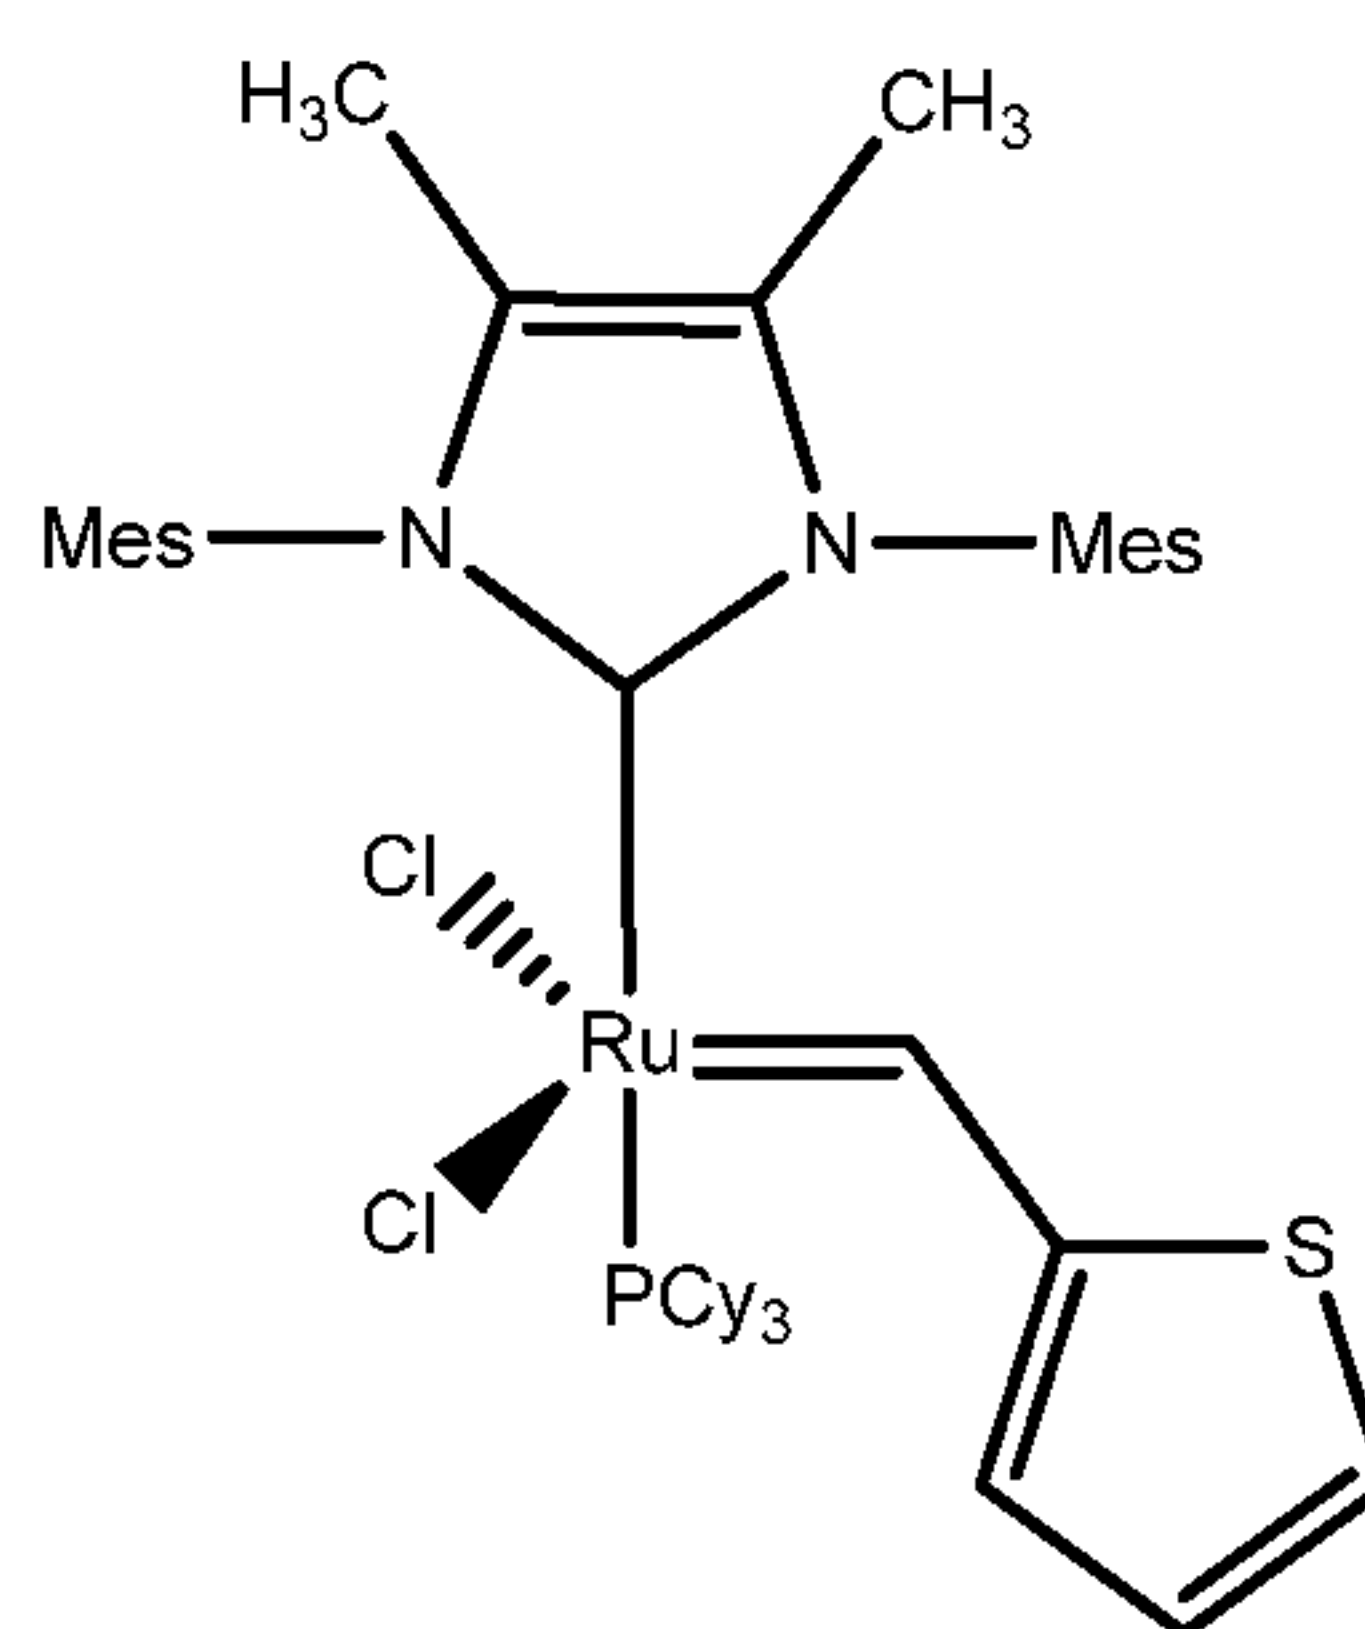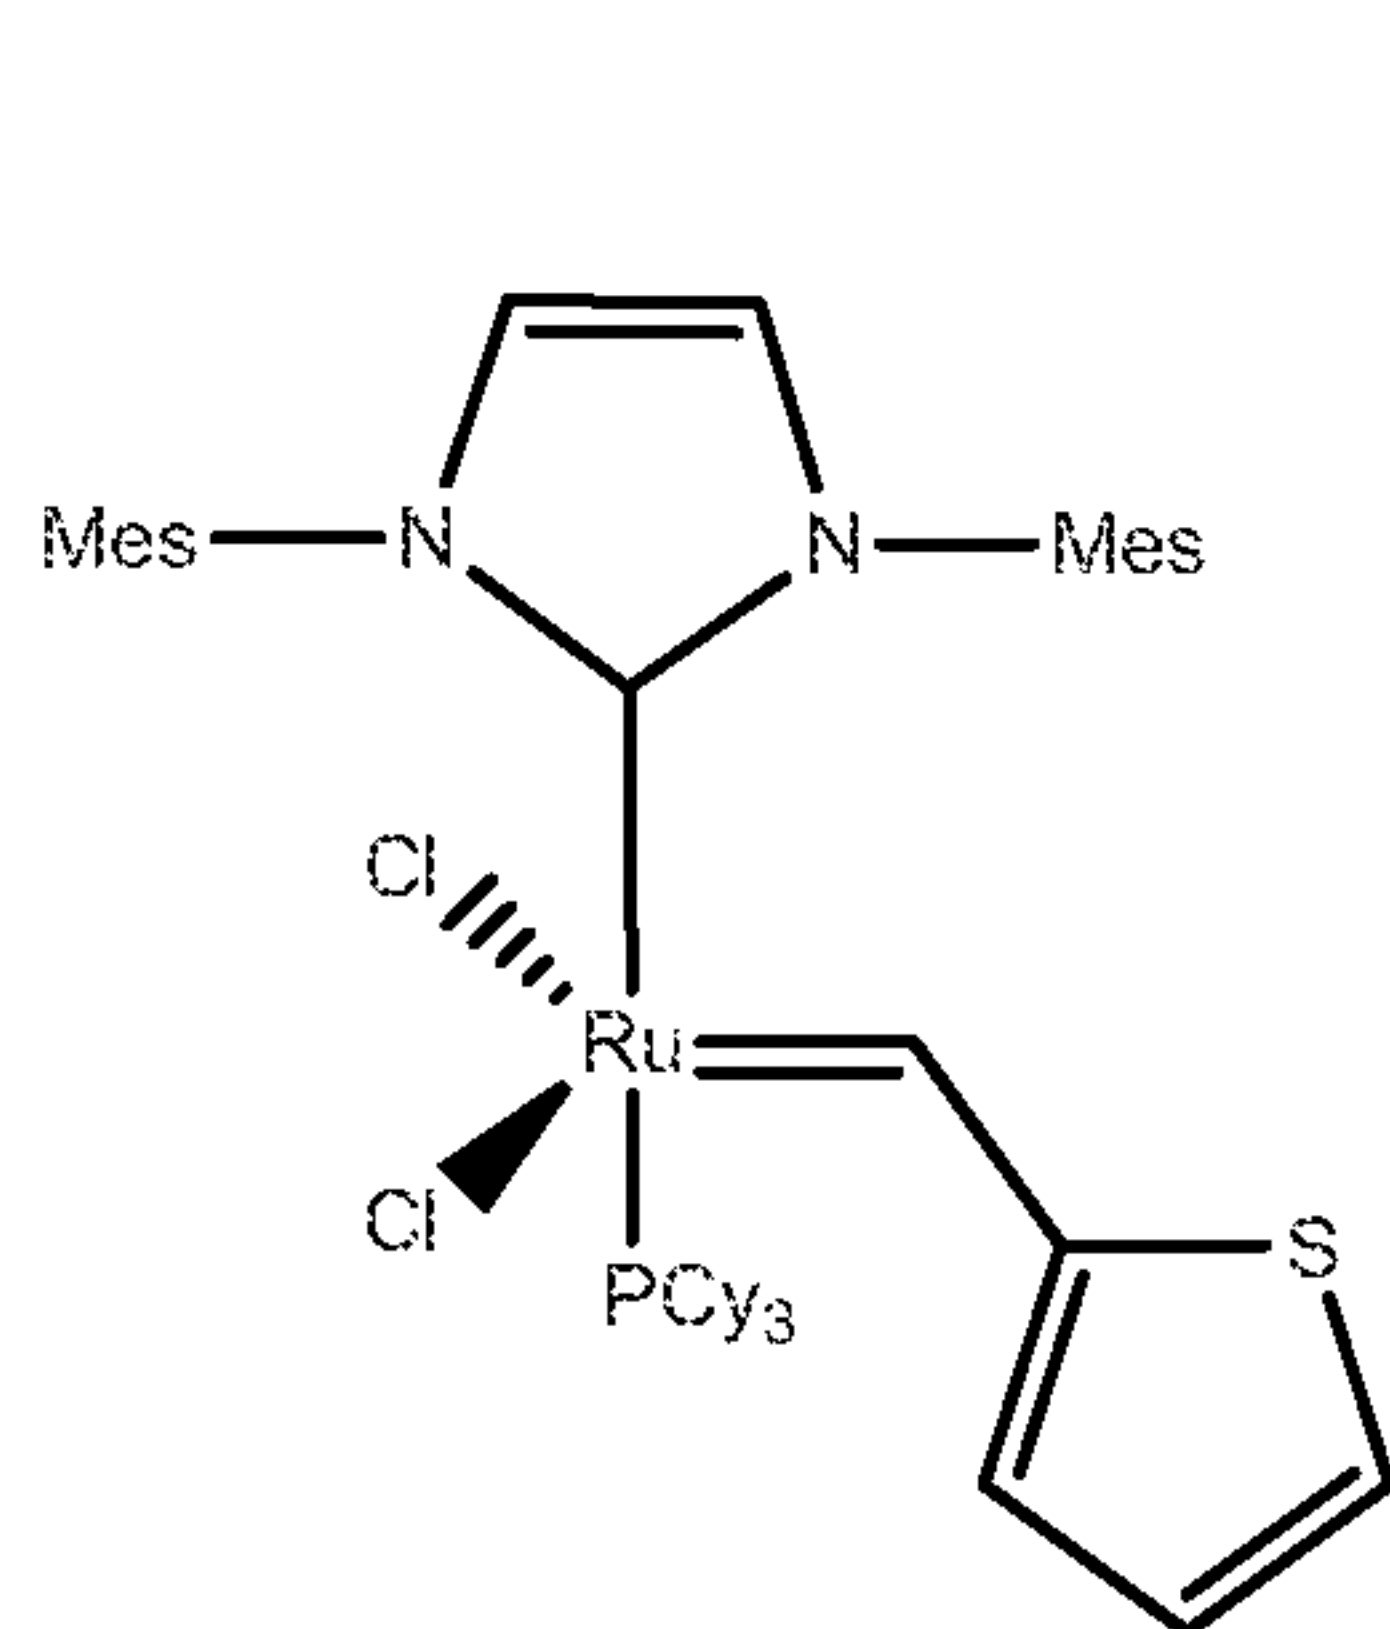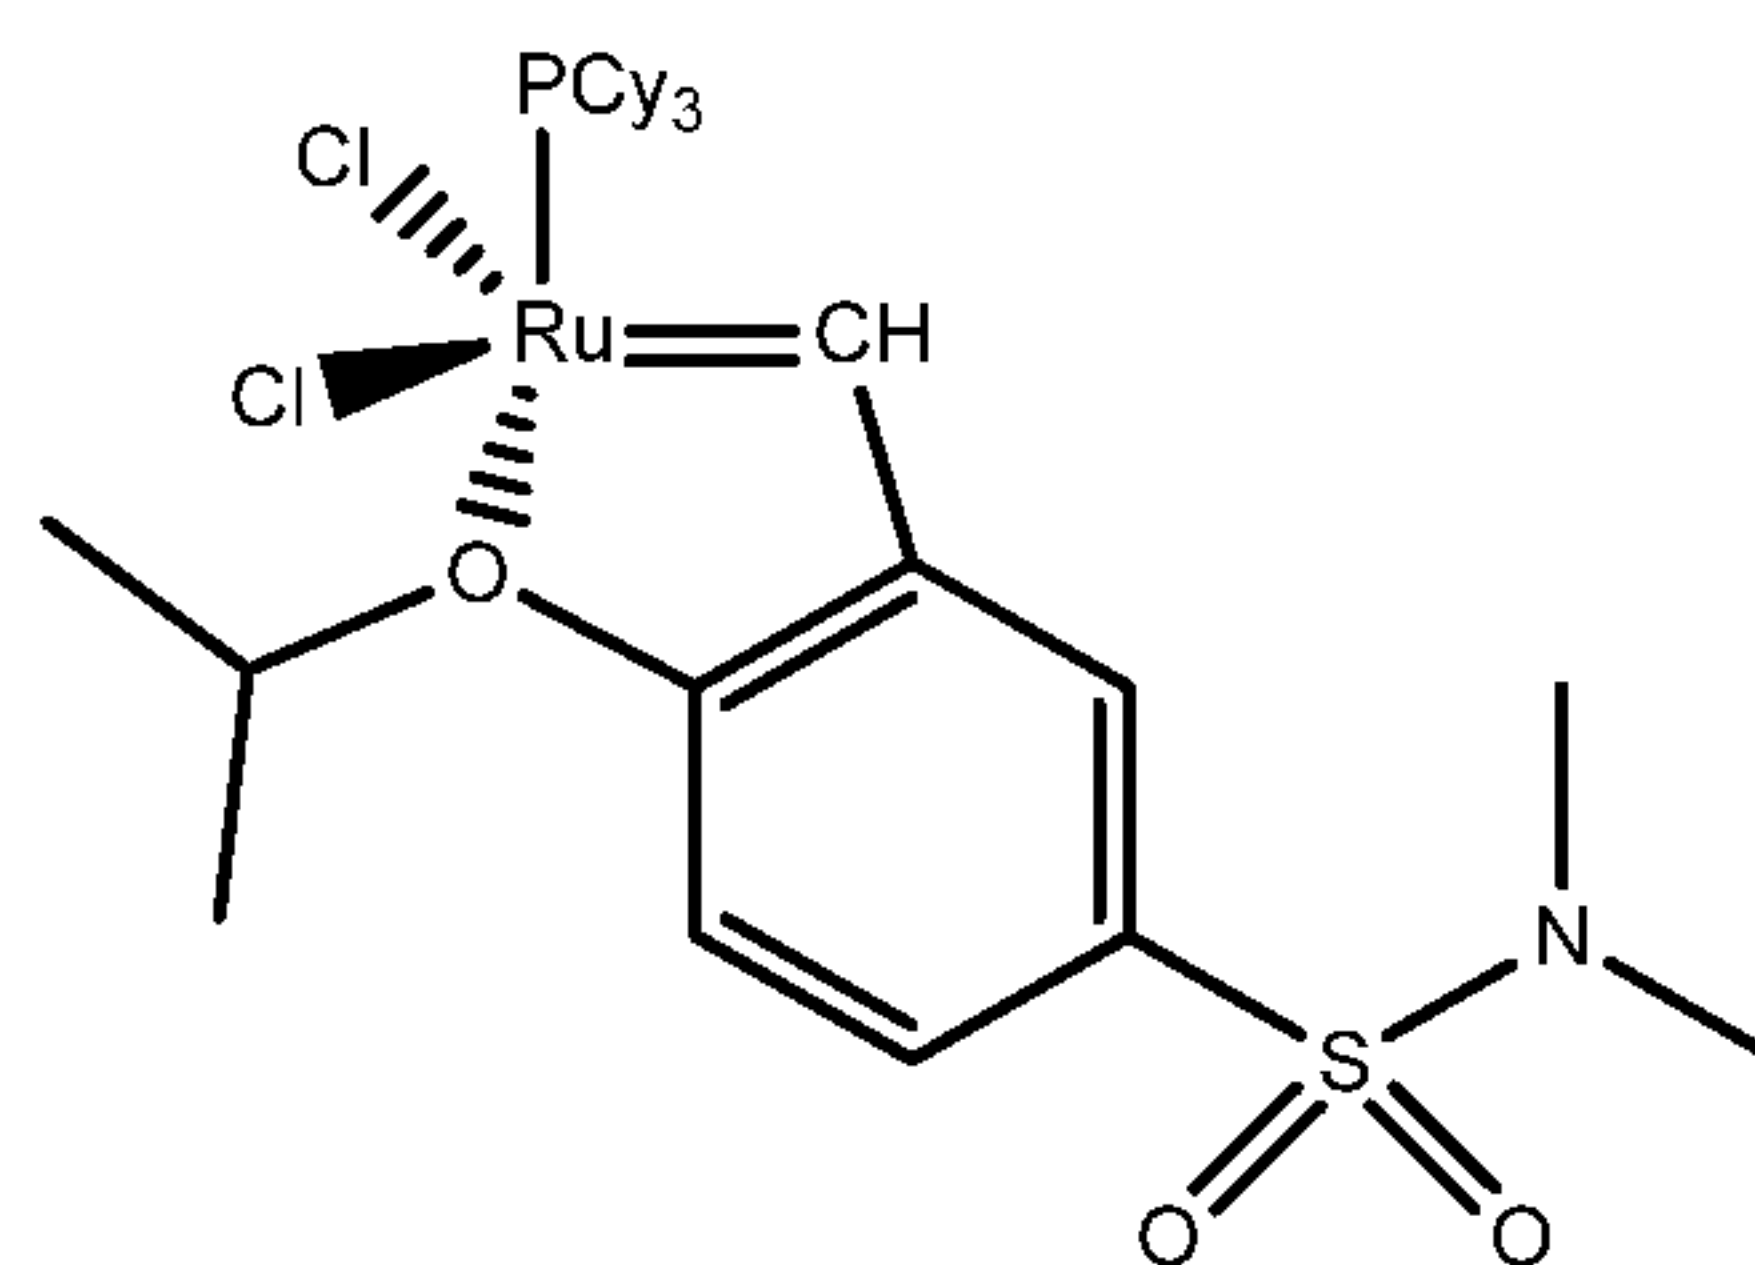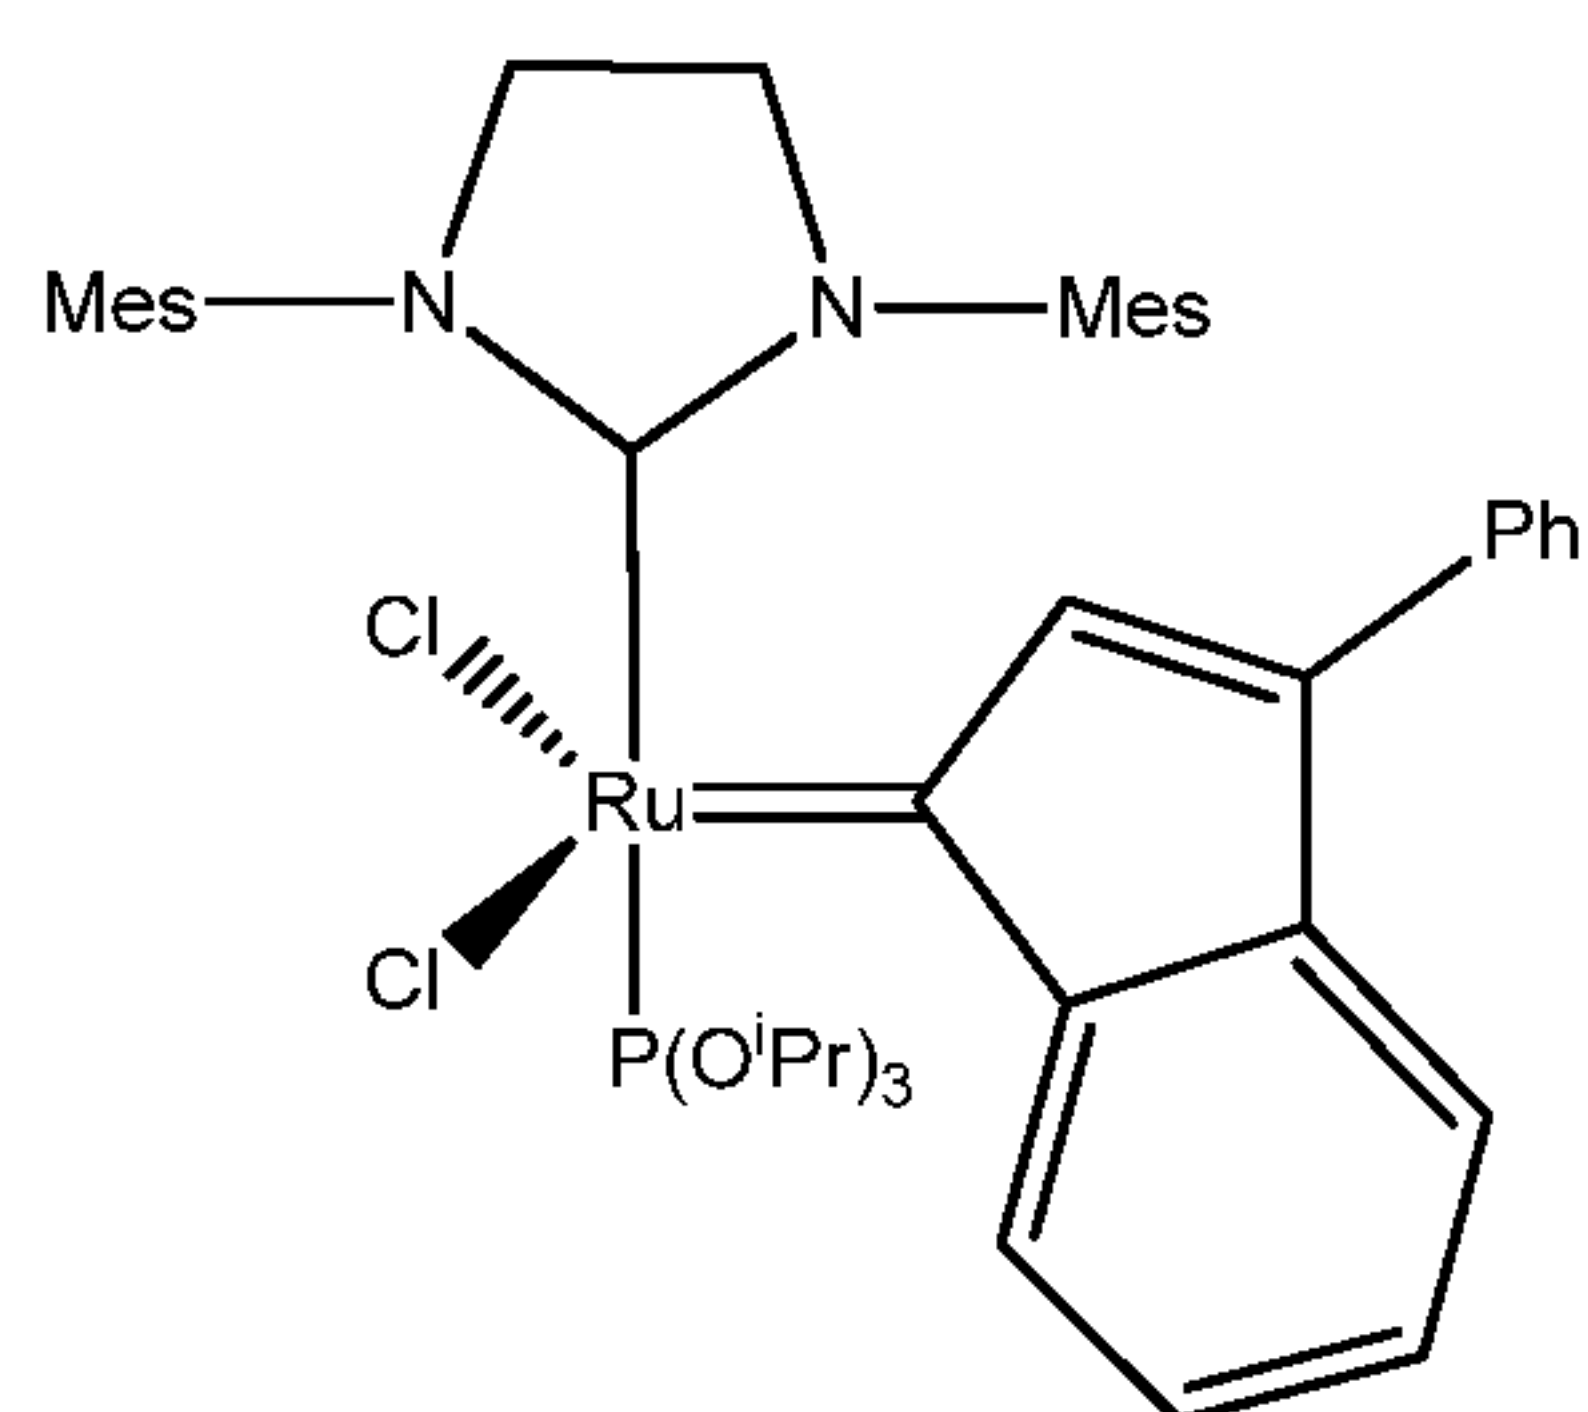


[00142] In general, the transition metal complexes used as catalysts herein can be prepared by several different methods, such as those described by Schwab et al. (1996) *J. Am. Chem. Soc.* 118:100-110, Scholl et al. (1999) *Org. Lett.* 6:953-956, Sanford et al. (2001) *J. Am. Chem. Soc.* 123:749-750, U.S. Pat. No. 5,312,940, and U.S. Pat. No. 5,342,909, the disclosures of each of which are incorporated herein by reference. Also see U.S. Pat. Pub. No. 2003/0055262 to

Grubbs et al., filed April 16, 2002, for “Group 8 Transition Metal Carbene Complexes as Enantioselective Olefin Metathesis Catalysts,” International Patent Publication No. WO 02/079208, and U.S. Pat. No. 6,613,910 to Grubbs et al., filed April 2, 2002, for “One-Pot Synthesis of Group 8 Transition Metal Carbene Complexes Useful as Olefin Metathesis Catalysts,” the disclosures of each of which are incorporated herein by reference. Preferred synthetic methods are described in International Patent Publication No. WO 03/11455A1 to Grubbs et al. for “Hexacoordinated Ruthenium or Osmium Metal Carbene Metathesis Catalysts,” published February 13, 2003, the disclosure of which is incorporated herein by reference.

[00143] Preferred olefin metathesis catalysts are Group 8 transition metal complexes having the structure of formula (I) commonly called “First Generation Grubbs” catalysts, formula (II) commonly called “Second Generation Grubbs” catalysts, or formula (VII) commonly called “Grubbs-Hoveyda” catalysts.

[00144] More preferred olefin metathesis catalyst has the structure of formula (I)

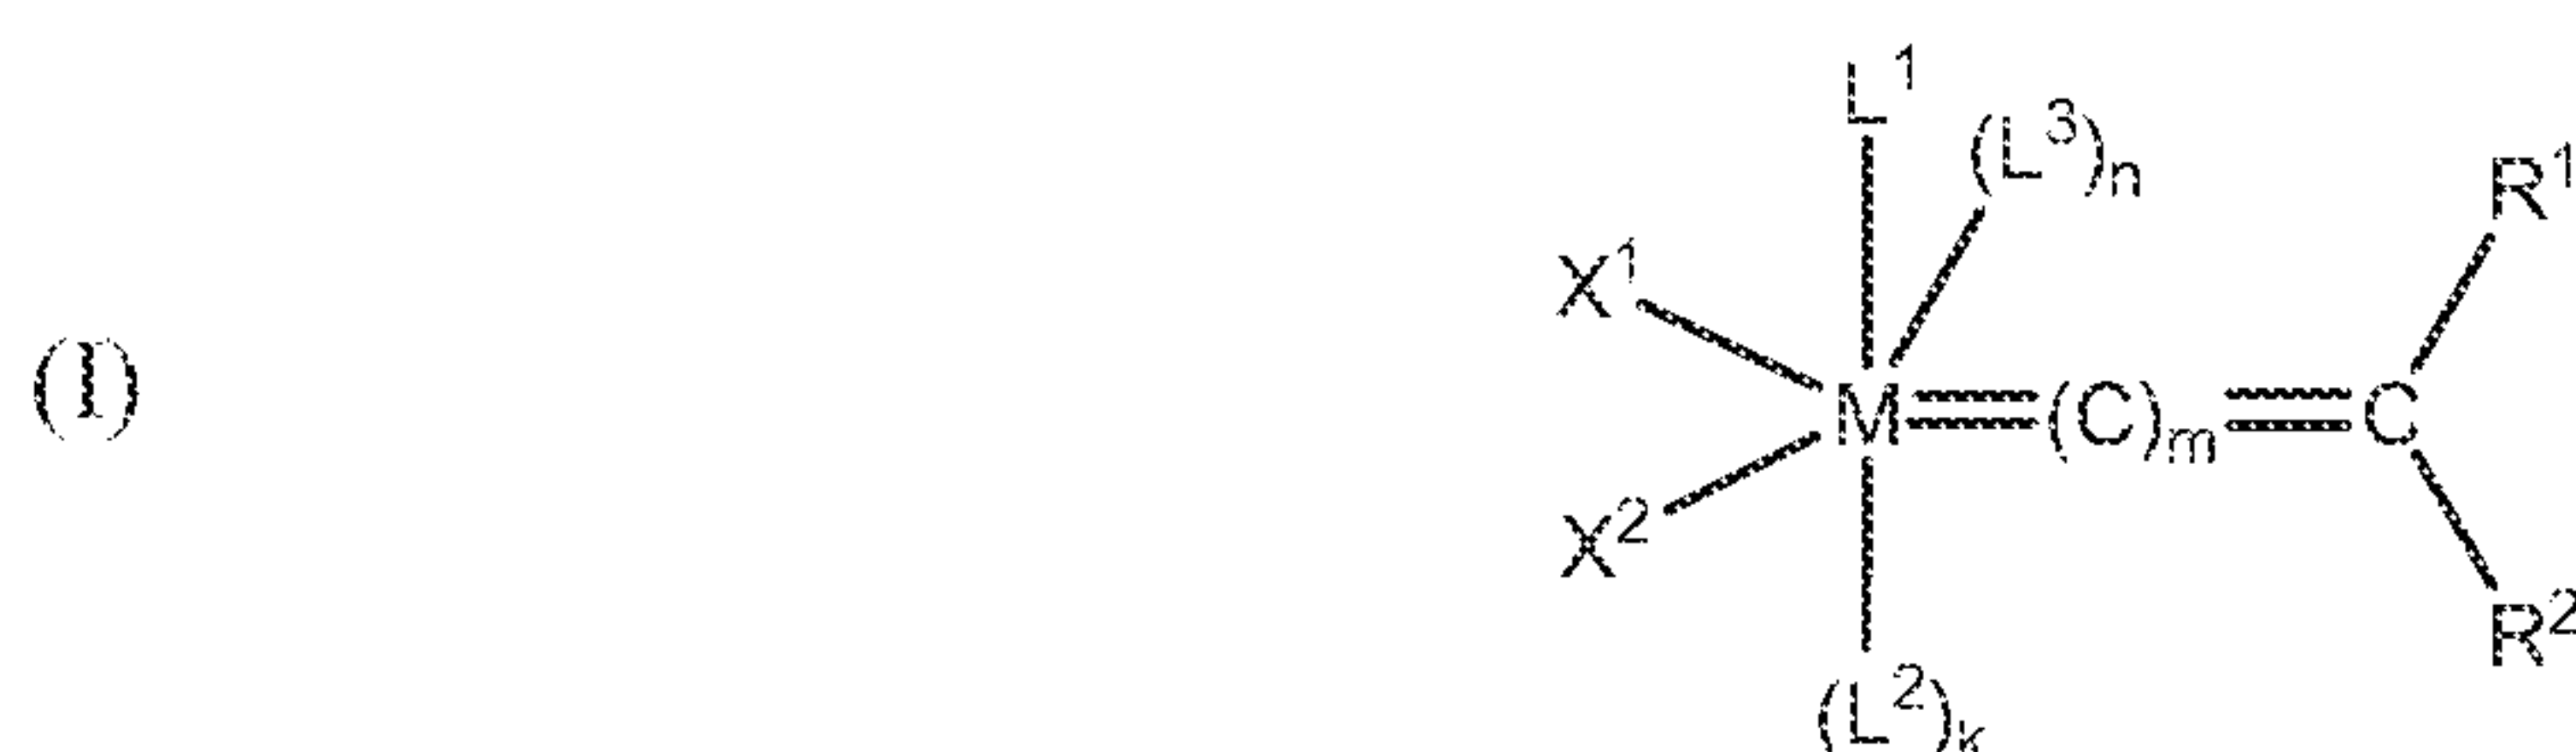

in which:

M is a Group 8 transition metal;

L^1 , L^2 , and L^3 are neutral electron donor ligands;

n is 0 or 1;

m is 0, 1, or 2;


k is 0 or 1;

X^1 and X^2 are anionic ligands; and

R^1 and R^2 are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups,

wherein any two or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 can be taken together to form one or more cyclic groups, and further wherein any one or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 may be attached to a support.

[00145] Most preferred olefin metathesis catalyst has the structure of formula (I)

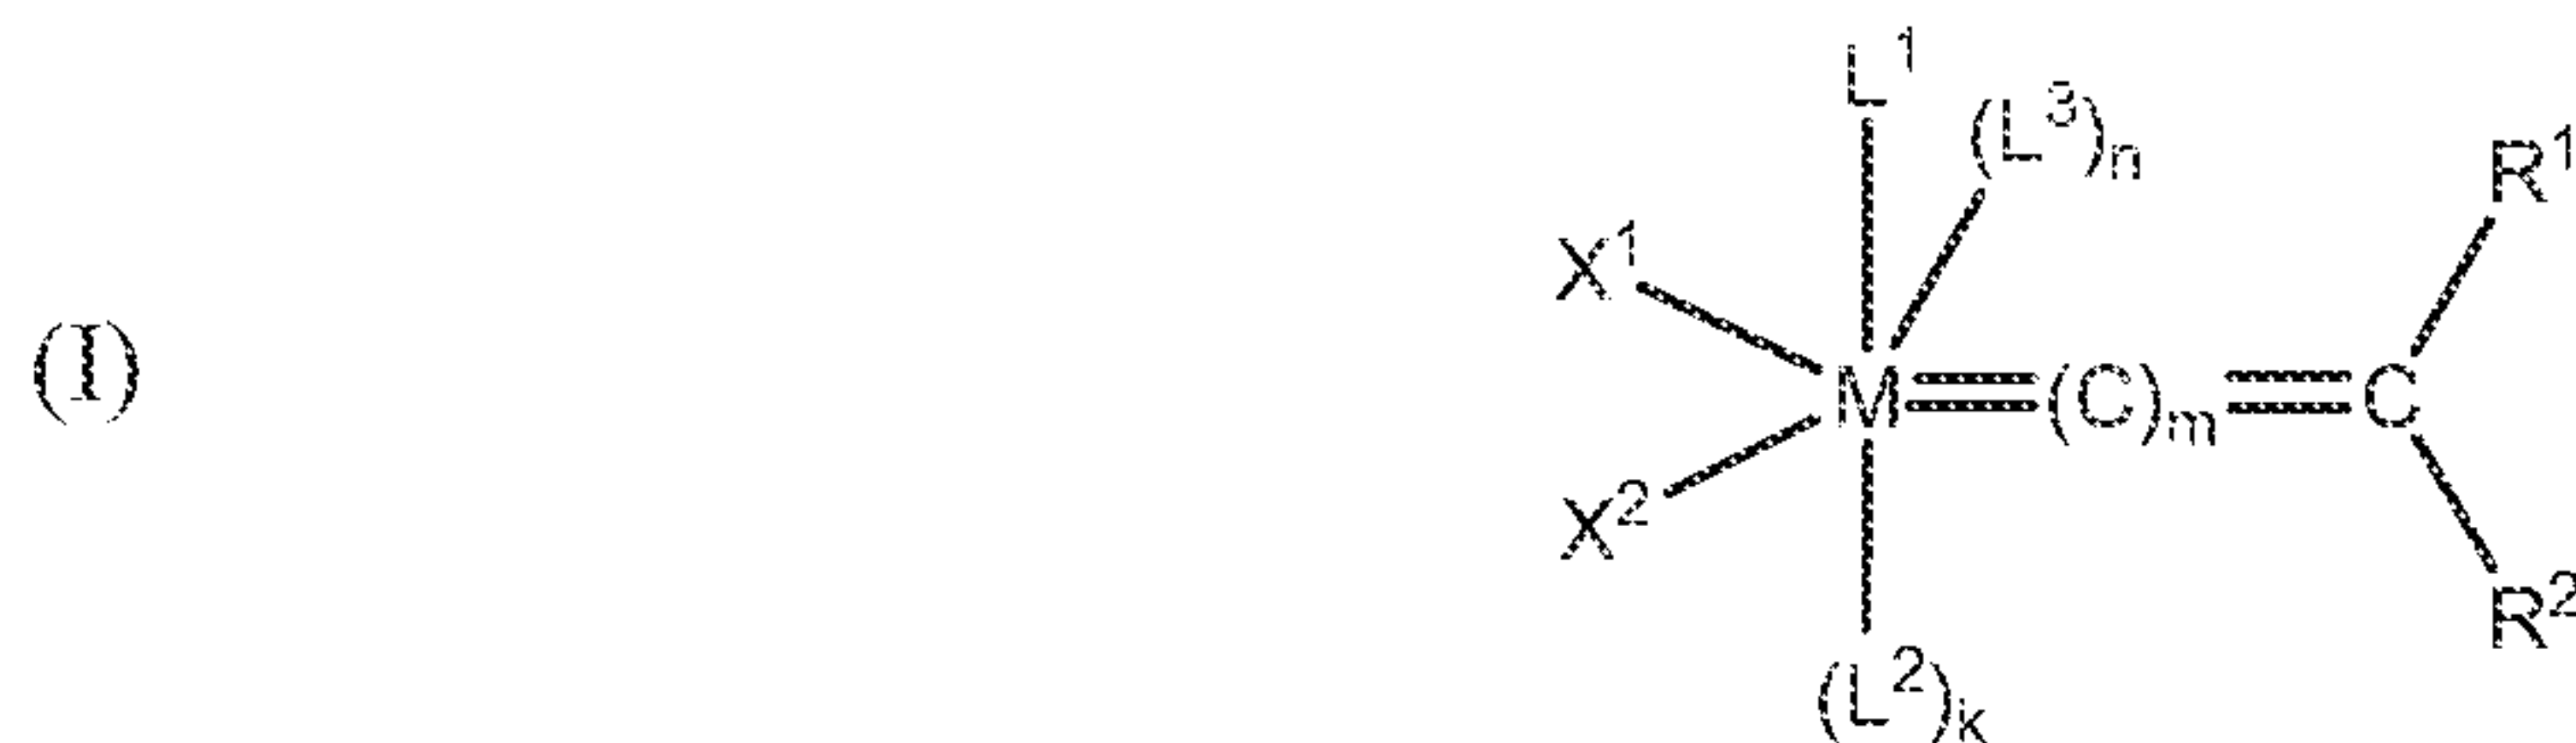

in which:

M is ruthenium;

n is 0;

m is 0;

k is 1;

L^1 and L^2 are trisubstituted phosphines independently selected from the group consisting of tri-n-butylphosphine ($Pn-Bu_3$), tricyclopentylphosphine (PCp_3), tricyclohexylphosphine (PCy_3), triisopropylphosphine ($P-i-Pr_3$), triphenylphosphine (PPh_3), methyldiphenylphosphine ($PMePh_2$), dimethylphenylphosphine (PMe_2Ph), and diethylphenylphosphine (PEt_2Ph); or L^1 is an N-heterocyclic carbene selected from the group consisting of 1,3-bis(2,4,6-trimethylphenyl)-4,5-dihydroimidazol-2-ylidene, 1,3-bis(2,4,6-trimethylphenyl)-2-imidazolidinylidene, 1,3-bis(2,6-di-isopropylphenyl)-4,5-dihydroimidazol-2-ylidene, and 1,3-bis(2,6-di-isopropylphenyl)-2-imidazolidinylidene and L^2 is a trisubstituted phosphine selected from the group consisting of tri-n-butylphosphine ($Pn-Bu_3$), tricyclopentylphosphine (PCp_3), tricyclohexylphosphine (PCy_3), triisopropylphosphine ($P-i-Pr_3$), triphenylphosphine (PPh_3), methyldiphenylphosphine ($PMePh_2$), dimethylphenylphosphine (PMe_2Ph), and diethylphenylphosphine (PEt_2Ph);

X^1 and X^2 are chloride; and

R^1 is hydrogen and R^2 is phenyl or $-C=C(CH_3)_2$ or thienyl; or R^1 and R^2 are taken together to form 3-phenyl-1H-indene.

[00146] Suitable supports for any of the catalysts described herein may be of synthetic, semi-synthetic, or naturally occurring materials, which may be organic or inorganic, e.g., polymeric, ceramic, or metallic. Attachment to the support will generally, although not necessarily, be covalent, and the covalent linkage may be direct or indirect. Indirect covalent linkages are typically, though not necessarily, through a functional group on a support surface. Ionic attachments are also suitable, including combinations of one or more anionic groups on the metal

complexes coupled with supports containing cationic groups, or combinations of one or more cationic groups on the metal complexes coupled with supports containing anionic groups.

[00147] When utilized, suitable supports may be selected from silicas, silicates, aluminas, aluminum oxides, silica-aluminas, aluminosilicates, zeolites, titanias, titanium dioxide, magnetite, magnesium oxides, boron oxides, clays, zirconias, zirconium dioxide, carbon, polymers, cellulose, cellulosic polymers amylose, amylosic polymers, or a combination thereof. The support preferably comprises silica, a silicate, or a combination thereof.

[00148] In certain embodiments, it is also possible to use a support that has been treated to include functional groups, inert moieties, and/or excess ligands. Any of the functional groups described herein are suitable for incorporation on the support, and may be generally accomplished through techniques known in the art. Inert moieties may also be incorporated on the support to generally reduce the available attachment sites on the support, e.g., in order to control the placement, or amount, of a complex linked to the support.

[00149] The metathesis catalysts that are described *infra* may be utilized in olefin metathesis reactions according to techniques known in the art. The catalyst is typically added to the reaction medium as a solid, or as a suspension wherein the catalyst is suspended in an appropriate liquid. It will be appreciated that the amount of catalyst that is used (i.e., the “catalyst loading”) in the reaction is dependent upon a variety of factors such as the identity of the reactants and the reaction conditions that are employed. It is therefore understood that catalyst loading may be optimally and independently chosen for each reaction. In general, however, the catalyst will be present in an amount that ranges from a low of about 0.1 ppm, 1 ppm, or 5 ppm, to a high of about 10 ppm, 15 ppm, 25 ppm, 50 ppm, 100 ppm, 200 ppm, 500 ppm, or 1000 ppm relative to the amount of an olefinic substrate. Additionally, the catalyst may be added to the reaction medium or resin composition as a solution. Additionally, when the catalyst is added to the reaction medium or resin composition as a suspension, the catalyst is suspended in an appropriate liquid, such as a dispersing carrier such as mineral oil, paraffin oil, soybean oil, triisopropylbenzene, or any hydrophobic liquid which has a sufficiently high viscosity so as to permit effective dispersion of the catalyst, and which is sufficiently inert and which has a sufficiently high boiling point so that it does not act as a low-boiling impurity in the olefin metathesis reaction.

[00150] The catalyst will generally be present in an amount that ranges from a low of about 0.00001 mol%, 0.0001 mol%, or 0.0005 mol%, to a high of about 0.001 mol%, 0.0015 mol%, 0.0025 mol%, 0.005 mol%, 0.01 mol%, 0.02 mol%, 0.05 mol%, or 0.1 mol% relative to the olefinic substrate.

[00151] When expressed as the molar ratio of monomer to catalyst, the catalyst (the “monomer to catalyst ratio”), loading will generally be present in an amount that ranges from a low of about 10,000,000:1, 1,000,000:1, or 200,00:1, to a high of about 100,000:1 66,667:1, 40,000:1, 20,000:1, 10,000:1, 5,000:1, or 1,000:1.

Cyclic Olefin (Resin) Compositions and Articles

[00152] Cyclic olefin resin, particularly ROMP, compositions according to the invention, generally comprise one or more cyclic olefins, an olefin metathesis catalyst, an adhesion promoter, and a substrate material, such as, for example, a glass substrate material; one or more cyclic olefins, an olefin metathesis catalyst, an adhesion promoter, and a hydroperoxide gel modifier; or one or more cyclic olefins, an olefin metathesis catalyst, and a hydroperoxide gel modifier. In another embodiment, cyclic olefin resin, particularly ROMP, compositions according to the invention, generally comprise one or more cyclic olefins, an olefin metathesis catalyst, an adhesion promoter, and a heteroatom-functionalized substrate. The cyclic olefins described hereinabove are suitable for use and may be functionalized or unfunctionalized, and may be substituted or unsubstituted. In general, particularly advantageous results may be obtained for ROMP resin compositions wherein the adhesion promoter is present in an amount effective to increase the adhesion of the ROMP composition to a substrate material when the ROMP composition is subjected to metathesis catalysis conditions in the presence of a substrate material. Additionally, cyclic olefin resin compositions according to the invention may also comprise one or more cyclic olefins and an adhesion promoter, where the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to a substrate, such as, for example, a glass substrate. Additionally, cyclic olefin resin compositions according to the invention may also comprise one or more cyclic olefins and an adhesion promoter, where the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to a substrate, wherein the substrate may be a functionalized substrate, such as, for example, a heteroatom-functionalized substrate, such as, for

example, an amino-functionalized substrate. Furthermore, cyclic olefin resin compositions according to the invention may also comprise one or more cyclic olefins, an adhesion promoter, and a hydroperoxide gel modifier, where the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to a substrate. In addition, cyclic olefin resin compositions according to the invention may also comprise one or more cyclic olefins and a hydroperoxide gel modifier, where the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to a substrate.

[00153] The amounts of the adhesion promoter in the resin composition may vary over a wide range and may vary depending on the manufacturing operation or the particular end-use application. Generally, any level of adhesion promoter which produces a desired increase in mechanical properties is of particular interest. When formulated or combined with a resin composition, the concentration of the adhesion promoter typically ranges from 0.05-10 phr, more particularly, from 0.5-4.0 phr. In a preferred aspect of the invention, increased mechanical properties may be obtained for resin compositions comprising the adhesion promoter and substrate materials, or resin compositions comprising the adhesion promoter that are applied to substrate materials, compared to resin compositions without the adhesion promoter. For example, the inclusion of the adhesion promoter in resin compositions according to the invention may provide an improvement in mechanical properties, such as interlaminar shear strength (ILSS), of at least about 10% compared to the same resin composition that does not contain the adhesion promoter. Preferably, the use of the adhesion promoter provides at least a 2% improvement in an adhesion property (e.g., ILSS, as described in the examples), more particularly at least a 5%, or 10%, or 15%, or 20%, or 30%, or 40%, or 50%, or 80% improvement in the adhesion property compared to the adhesion property value (e.g., ILSS) obtained for the same resin composition that does not include the adhesion promoter. In particular aspects of the invention, substrate materials may advantageously comprise an aminosilane-treated substrate.

[00154] The amounts of hydroperoxide gel modifier in the resin composition may vary over a wide range and may vary depending on the manufacturing operation or the particular end-use application. Generally, any level of hydroperoxide gel modifier which delays the onset of the gel-state of a particular metathesis polymerization is of particular interest. When formulated or combined with a resin composition, the concentration of the hydroperoxide gel modifier

typically ranges between 0.01 and 1000 equivalents with respect to catalyst, such as, for example, between 0.05 and 100 equivalents with respect to catalyst, such as, for example, between 0.1 and 50 equivalents with respect to catalyst, such as, for example, between 0.1 and 20 equivalents with respect to catalyst.

[00155] Resin compositions of the invention may be optionally formulated with additives. The amount of additives present in the resin compositions may vary depending on the particular type of additive used. The concentration of the additives in the resin compositions typically ranges from, for example, 0.001-85 percent by weight, particularly, from 0.1-75 percent by weight, or, even more particularly, from 2-60 percent by weight. Suitable additives include, but are not limited to, additional gel modifiers, hardness modulators, antioxidants, stabilizers, fillers, binders, plasticizers, pigments, flame retardants, dyes, fibers and reinforcement materials, including sized reinforcements and substrates, such as those treated with finishes, coatings, coupling agents, film formers, and/or lubricants.

[00156] Resin compositions of the invention may be optionally formulated without a crosslinker, for example, a crosslinker selected from dialkyl peroxides, diacyl peroxides, and peroxyacids.

[00157] Additionally, suitable impact modifiers or elastomers include without limitation natural rubber, butyl rubber, polyisoprene, polybutadiene, polyisobutylene, ethylene-propylene copolymer, styrene-butadiene-styrene triblock rubber, random styrene-butadiene rubber, styrene-isoprene-styrene triblock rubber, styrene-ethylene/butylene-styrene copolymer, styrene-ethylene/propylene-styrene copolymer, ethylene-propylene-diene terpolymers, ethylene-vinyl acetate, and nitrile rubbers. Preferred impact modifiers or elastomers are polybutadiene Diene 55AC10 (Firestone), polybutadiene Diene 55AM5 (Firestone), EPDM Royalene 301T, EPDM Buna T9650 (Bayer), styrene-ethylene/butylene-styrene copolymer Kraton G1651H, Polysar Butyl 301 (Bayer), polybutadiene Taktene 710 (Bayer), styrene-ethylene/butylene-styrene Kraton G1726M, Ethylene-Octene Engage 8150 (DuPont-Dow), styrene-butadiene Kraton D1184, EPDM Nordel 1070 (DuPont-Dow), and polyisobutylene Vistanex MML-140 (Exxon). Such materials are normally employed in the resin composition at levels of about 0.10 phr to 10 phr, but more preferably at levels of about 0.1 phr to 5 phr. Various polar impact modifiers or elastomers can also be used.

[00158] Additionally, antioxidants and antiozonants include any antioxidant or antiozonant used in the rubber or plastics industry. An "Index of Commercial Antioxidants and Antiozonants, Fourth Edition" is available from Goodyear Chemicals, The Goodyear Tire and Rubber Company, Akron, Ohio 44316. Suitable stabilizers (i.e. antioxidants or antiozonants) include without limitation: 2,6-di-*tert*-butyl-4-methylphenol (BHT); styrenated phenol, such as Wingstay S (Goodyear); 2- and 3-*tert*-butyl-4-methoxyphenol; alkylated hindered phenols, such as Wingstay C (Goodyear); 4-hydroxymethyl-2,6-di-*tert*-butylphenol; 2,6-di-*tert*-butyl-4-sec-butylphenol; 2,2'-methylenebis(4-methyl-6-*tert*-butylphenol); 2,2'-methylenebis(4-ethyl-6-*tert*-butylphenol); 4,4'-methylenebis(2,6-di-*tert*-butylphenol); miscellaneous bisphenols, such as Cyanox 53 and Permanax WSO; 2,2'-ethylidenebis(4,6-di-*tert*-butylphenol); 2,2'-methylenebis(4-methyl-6-(1-methylcyclohexyl)phenol); 4,4'-butylidenebis(6-*tert*-butyl-3-methylphenol); polybutylated Bisphenol A; 4,4'-thiobis(6-*tert*-butyl-3-methylphenol); 4,4'-methylenebis(2,6-dimethylphenol); 1,1'-thiobis(2-naphthol); methylene bridged polyaklylphenol, such as Ethyl antioxidant 738; 2,2'-thiobis(4-methyl-6-*tert*-butylphenol); 2,2'-isobutylidenebis(4,6-dimethylphenol); 2,2'-methylenebis(4-methyl-6-cyclohexylphenol); butylated reaction product of p-cresol and dicyclopentadiene, such as Wingstay L; tetrakis(methylene-3,5-di-*tert*-butyl-4-hydroxyhydrocinnamate)methane, i.e., Irganox 1010; 1,3,5-trimethyl-2,4,6-tris(3,5-di-*tert*-butyl-4-hydroxybenzyl)benzene, e.g., Ethanox 330; 4,4'-methylenebis(2,6-di-*tert*-butylphenol), e.g. Ethanox 4702 or Ethanox 4710; 1,3,5-tris(3,5-di-*tert*-butyl-4-hydroxybenzyl)isocyanurate, i.e., Good-rite 3114, 2,5-di-*tert*-amylhydroquinone, *tert*-butylhydroquinone, tris(nonylphenylphosphite), bis(2,4-di-*tert*-butyl)pentaerythritol)diphosphite, distearyl pentaerythritol diphosphite, phosphited phenols and bisphenols, such as Naugard 492, phosphite/phenolic antioxidant blends, such as Irganox B215; di-n-octadecyl(3,5-di-*tert*-butyl-4-hydroxybenzyl)phosphonate, such as Irganox 1093; 1,6-hexamethylene bis(3-(3,5-di-*tert*-butyl-4-hydroxyphenyl)propionate), such as Irganox 259, and octadecyl-3,5-di-*tert*-butyl-4-hydroxyhydrocinnamate, i.e., Irganox 1076, tetrakis(2,4-di-*tert*-butylphenyl)4,4'-biphenylylenediphosphonite, diphenylamine, and 4,4'-diemthoxydiphenylamine. Such materials are normally employed in the resin composition at levels of about 0.10 phr to 10 phr, but more preferably at levels of about 0.1 phr to 5 phr.

[00159] Suitable reinforcing materials include those that add to the strength or stiffness of a polymer composite when incorporated with the polymer. Reinforcing materials can be in the

form of filaments, fibers, rovings, mats, weaves, fabrics, knitted material, cloth, or other known structures. Suitable reinforcement materials include glass fibers and fabrics, carbon fibers and fabrics, aramid fibers and fabrics, polyolefin fibers or fabrics (including ultrahigh molecular weight polyethylene fabrics such as those produced by Honeywell under the Spectra trade name), and polyoxazole fibers or fabrics (such as those produced by the Toyobo Corporation under the Zylon[®] trade name). Reinforcing materials containing surface finishes, sizings, or coatings are particularly suitable for the described invention including Ahlstrom glass roving (R338-2400), Johns Manville glass roving (Star ROV[®]-086), Owens Corning rovings (OCV 366-AG-207, R25H-X14-2400, SE1200-207, SE1500-2400, SE2350-250), PPG glass rovings (Hybon[®] 2002, Hybon[®] 2026), Toho Tenax[®] carbon fiber tow (HTR-40), and Zoltek carbon fiber tow (Panex[®] 35). Furthermore, any fabrics prepared using reinforcing materials containing surface finishes, sizings or coatings are suitable for the invention. Advantageously, the invention does not require the expensive process of removing of surface finishes, sizings, or coatings from the reinforcing materials. Additionally, glass fibers or fabrics may include without limitation A-glass, E-glass or S-glass, S-2 glass, C-glass, R-glass, ECR-glass, M-glass, D-glass, and quartz, and silica/quartz. Preferred glass fiber reinforcements are those with finishes formulated for use with epoxy, vinyl ester, and/or polyurethane resins. When formulated for use with a combination of these resin types, the reinforcements are sometimes described as “multi-compatible.” Such reinforcements are generally treated during their manufacture with organosilane coupling agents comprising vinyl, amino, glycidoxy, or methacryloxy functional groups (or various combinations thereof) and are coated with a finish to protect the fiber surface and facilitate handling and processing (e.g., spooling and weaving). Finishes typically comprise a mixture of chemical and polymeric compounds such as film formers, surfactants, and lubricants. Especially preferred glass reinforcements are those containing some amount of amino-functionalized silane coupling agent. Especially preferred finishes are those comprising and epoxy-based and/or polyurethane-based film formers. Examples of preferred glass-fiber reinforcements are those based on Hybon[®] 2026, 2002, and 2001 (PPG) multi-compatible rovings; Ahlstrom R338 epoxysilane-sized rovings; StarRov[®] 086 (Johns Manville) soft silane sized multi-compatible rovings; OCV[™] 366, SE 1200, and R25H (Owens Corning) multi-compatible rovings; OCV[™] SE 1500 and 2350 (Owens Corning) epoxy-compatible rovings; and Jushi Group multi-compatible glass rovings (752 type, 396 type, 312 type, 386 type). Additional suitable polymer fibers and fabrics may

include without limitation one or more of polyester, polyamide (for example, NYLON polamide available from E.I. DuPont, aromatic polyamide (such as KEVLAR aromatic polyamide available from E.I. DuPont, or P84 aromatic polyamide available from Lenzing Aktiengesellschaft), polyimide (for example KAPTON polyimide available from E.I. DuPont, polyethylene (for example, DYNEEMA polyethylene from Toyobo Co., Ltd.). Additional suitable carbon fibers may include without limitation AS2C, AS4, AS4C, AS4D, AS7, IM6, IM7, IM9, and PV42/850 from Hexcel Corporation; TORAYCA T300, T300J, T400H, T600S, T700S, T700G, T800H, T800S, T1000G, M35J, M40J, M46J, M50J, M55J, M60J, M30S, M30G and M40 from Toray Industries, Inc.; HTS12K/24K, G30-500 3k/6K/12K, G30-500 12K, G30-700 12K, G30-7000 24K F402, G40-800 24K, STS 24K, HTR 40 F22 24K 1550tex from Toho Tenax, Inc.; 34-700, 34-700WD, 34-600, 34-600WD, and 34-600 unsized from Grafil Inc.; T-300, T-650/35, T-300C, and T-650/35C from Cytec Industries.

[00160] Other suitable fillers include, for example, metallic density modulators, microparticulate density modulators, such as, for example, microspheres, and macroparticulate density modulators, such as, for example, glass or ceramic beads. Metallic density modulators include, but are not limited to, powdered, sintered, shaved, flaked, filed, particulated, or granulated metals, metal oxides, metal nitrides, and/or metal carbides, and the like. Preferred metallic density modulators include, among others, tungsten, tungsten carbide, aluminum, titanium, iron, lead, silicon oxide, aluminum oxide, boron carbide, and silicon carbide. Microparticulate density modulators include, but are not limited to, glass, metal, thermoplastic (either expandable or pre-expanded) or thermoset, and/or ceramic/silicate microspheres. Macroparticulate density modulators include, but are not limited to, glass, plastic, or ceramic beads; metal rods, chunks, pieces, or shot; hollow glass, ceramic, plastic, or metallic spheres, balls, or tubes; and the like.

[00161] The invention is also directed to articles manufactured from a resin composition comprising a cyclic olefin, an olefin metathesis catalyst, such as a ROMP catalyst, the adhesion promoter, and a substrate material, such as, for example, a glass substrate material; a cyclic olefin, an olefin metathesis catalyst, such as a ROMP catalyst, the adhesion promoter, and the hydroperoxide gel modifier; and a cyclic olefin, an olefin metathesis catalyst, such as a ROMP catalyst, and the hydroperoxide gel modifier. Articles may include, but are not limited to, those formed by standard manufacturing techniques including casting, centrifugal casting, pultrusion,

molding, rotational molding, open molding, reaction injection molding (RIM), resin transfer molding (RTM), pouring, vacuum impregnation, surface coating, filament winding and other methods known to be useful for production of polymer articles. Molded parts include but are not limited to reaction injection molding, resin transfer molding, and vacuum assisted resin transfer molding. Furthermore, the compositions and articles of manufacture of the invention are not limited to a single polymer-surface interface but include also multilayers and laminates containing multiple polymer-surface interfaces. The invention is also suitable for manufacture of articles by the infusion of the resin into a porous material. Such porous materials include but are not limited to wood, cement, concrete, open-cell and reticulated foams and sponges, papers, cardboards, felts, ropes or braids of natural or synthetic fibers, and various sintered materials. Additionally, other manufacturing techniques include without limitation cell casting, dip casting, continuous casting, embedding, potting, encapsulation, film casting or solvent casting, gated casting, mold casting, slush casting, extrusion, mechanical foaming, chemical foaming, physical foaming, compression molding or matched die molding, spray up, Vacuum Assisted Resin Transfer Molding (VARTM), Seeman's Composite Resin Infusion Molding Process (SCRIMP), blow molding, in mold coating, in-mold painting or injection, vacuum forming, Reinforced Reaction Injection Molding (RRIM), Structural Reaction Injection Molding (SRIM), thermal expansion transfer molding (TERM), resin injection recirculation molding (RICM), controlled atmospheric pressure resin infusion (CAPRI), hand-layup. For manufacturing techniques requiring the use of a RIM or impingement style mixhead, including without limitation RIM, SRIM, and RRIM, articles of manufacture may be molded using a single mixhead or a plurality of mixheads as well as a plurality of material injection streams (e.g. two resin streams and one catalyst stream).

[00162] Additionally, the invention is also directed to articles manufactured from a resin composition comprising a cyclic olefin and an adhesion promoter, where the resin composition is combined with an olefin metathesis catalyst, and the resulting resin composition is applied to a substrate, which may be, for example, a functionalized substrate, such as, for example, a heteroatom-functionalized substrate, such as, for example, an amino-functionalized substrate.

[00163] Furthermore, the present invention also allows for the molding of articles of manufacture of any configuration, weight, size, thickness, or geometric shape. Examples of articles of manufacture include without limitation any molded or shaped article for use as an

aerospace component, a marine component, an automotive component, a sporting goods component, an electrical component, an industrial component, medical component, or military component. In one embodiment an article may be a turbine component used on aircraft or general power generation. In one embodiment, turbine components may include without limitation one or more of an inlet, a pylon, a pylon fairing, an acoustic panel, a trust reverser panel, a fan blade, a fan containment case, a bypass duct, an aerodynamic cowl, or an airfoil component. In one embodiment, an article may be a turbine blade component or may be a turbine blade. In one embodiment, an article may be a wind rotor blade, tower, spar cap, tower, or nacelle for wind turbines. In one embodiment, an article may be an airframe component. Examples of aerospace components may include without limitation one or more of fuselage skin, wing, fairing, doors, access panel, aerodynamic control surface, or stiffener. In one embodiment an article may be an automotive component. Examples of automotive components may include without limitation one or more of body panel, fender, spoiler, truck bed, protective plate, hood, longitudinal rail, pillar, or door. Examples of industrial components may include without limitation one or more of risers platforms, impact protection structures for oil and gas; bridges, pipes, pressure vessels, power poles, coils, containers, reinforcement structures for concrete architectures and roads, or radiators. Examples of electrical components may include without limitation one or more wound articles, such as coils of electric motors. In one embodiment, an article may be an eddy-current shielding component of a magnetic resonance imaging system or shielding component for any electromagnetic radiation. In one embodiment, an article may be a military component including without limitation ballistics resistant armor for personnel or vehicles, or ballistics resistant structures for protecting personnel or equipment. In one embodiment, an article may be a sporting goods component including without limitation an arrow shaft, a tennis racket frame, a hockey stick, compound bow limbs, or a golf club shaft.

[00164] Resin compositions according to the invention may further comprise a sizing composition, or be used to provide improved adhesion to substrate materials that are sized with certain commercial silanes commonly used in the industry. As is known in the art, glass fibers are typically treated with a chemical solution (e.g., a sizing composition) soon after their formation to reinforce the glass fibers and protect the strands' mechanical integrity during processing and composite manufacture. Sizing treatments compatible with olefin metathesis catalysts and polydicyclopentadiene composites have been described in U.S. Pat. Nos. 6,890,650

and 6,436,476, the disclosures of both of which are incorporated herein by reference. However, these disclosures are based on the use of specialty silane treatments that are not commonly used in industrial glass manufacture. By comparison, the current invention may provide improved mechanical properties for polymer-glass composites that are sized with silanes commonly used in the industry.

[00165] Glass sizing formulations typically comprise at least one film former (typically a film forming polymer), at least one silane, and at least one lubricant. Any components of a sizing formulation that do not interfere with or substantially decrease the effectiveness of the metathesis catalyst or olefin polymerization reaction are considered to be compatible with the current invention and may generally be used herein.

[00166] Film formers that are compatible with ROMP catalysts include epoxies, polyesters, polyurethanes, polyolefins, and/or polyvinyl acetates. Other common film formers that do not adversely affect the performance of the olefin metathesis catalyst may also be used. Film formers are typically used as nonionic, aqueous emulsions. More than one film former may be used in a given sizing formulation, to achieve a desired balance of glass processability and composite mechanical properties.

[00167] More particularly, the film former may comprise a low molecular weight epoxy emulsion, defined as an epoxy monomer or oligomer with an average molecular weight per epoxide group (EEW) of less than 500, and/or a high molecular weight epoxy emulsion, defined as an epoxy monomer or oligomer with an average molecular weight per epoxide group (EEW) of greater than 500. Examples of suitable low molecular weight products include aqueous epoxy emulsions produced by Franklin International, including Franklin K8-0203 (EEW 190) and Franklin E-102 (EEW 225-275). Other examples of low molecular weight epoxy emulsions are available from Hexion, including EPI-REZ™ 3510-W-60 (EEW 185-215), and EPI-REZ™ 3515-W-60 (EEW 225-275). Further examples of low molecular weight epoxy emulsions are available from COIM, including Filco 309 (EEW 270) and Filco 306 (EEW 330). Further examples of low molecular weight epoxy emulsions are available from DSM, including Neoxil® 965 (EEW 220-280) and Neoxil® 4555 (EEW 220-260). Examples of suitable high molecular weight epoxy emulsion products include epoxy emulsions produced by Hexion, including EPI-REZ™ 3522-W-60 (EEW 615-715).

[00168] Aqueous emulsions of modified epoxies, polyesters, and polyurethanes may also be used in the film former. Examples of suitable modified epoxy products include emulsions produced by DSM, including Neoxil[®] 2626 (a plasticized epoxy with an EEW of 500-620), Neoxil[®] 962/D (an epoxy-ester with an EEW of 470-550), Neoxil[®] 3613 (an epoxy-ester with an EEW of 500-800), Neoxil[®] 5716 (an epoxy-novolac with an EEW of 210-290), Neoxil[®] 0035 (a plasticized epoxy-ester with an EEW of 2500), and Neoxil[®] 729 (a lubricated epoxy with an EEW of 200-800). Further examples of modified epoxy emulsions are available from COIM, including Filco 339 (an unsaturated polyester-epoxy with an EEW of 2000) and Filco 362 (an epoxy-ester with an EEW of 530). Examples of suitable polyester products include emulsions produced by DSM, including Neoxil[®] 954/D, Neoxil[®] 2635, and Neoxil[®] 4759 (unsaturated bisphenolic polyesters). Additional suitable products from DSM include Neoxil[®] 9166 and Neoxil[®] 968/60 (adipate polyesters). Further examples of suitable products include emulsions produced by COIM, including Filco 354/N (unsaturated bisphenolic polyester), Filco 350 (unsaturated polyester), and Filco 368 (saturated polyester). Examples of suitable polyurethane products include emulsions produced by Bayer Material Science, including Baybond[®] 330 and Baybond[®] 401.

[00169] The film former may also comprise polyolefins or polyolefin-acrylic copolymers, polyvinylacetates, modified polyvinylacetates, or polyolefin-acetate copolymers. Suitable polyolefins include, but are not limited to, polyethylenes, polypropylenes, polybutylenes, and copolymers thereof, and the polyolefins may be oxidized, maleated, or otherwise treated for effective film former use. Examples of suitable products include emulsions produced by Michelman, including Michem[®] Emulsion 91735, Michem[®] Emulsion 35160, Michem[®] Emulsion 42540, Michem[®] Emulsion 69230, Michem[®] Emulsion 34040M1, Michem[®] Prime 4983R, and Michem[®] Prime 4982SC. Examples of suitable products include emulsions produced by HB Fuller, including PD 708H, PD 707, and PD 0166. Additional suitable products include emulsions produced by Franklin International, including Duracet[®] 637. Additional suitable products include emulsions produced by Celanese, including Vinamul[®] 8823 (plasticized polyvinylacetate), Dur-O-Set[®] E-200 (ethylene-vinyl acetate copolymer), Dur-O-Set[®] TX840 (ethylene-vinyl acetate copolymer), and Resyn[®] 1971 (epoxy-modified polyvinylacetate).

[00170] While not limited thereto, preferred film formers include low- and high-molecular weight epoxies, saturated and unsaturated polyesters, and polyolefins, such as Franklin K80-203, Franklin E-102, Hexion 3510-W-60, Hexion 3515-W-60, and Michelman 35160.

[00171] Nonionic lubricants may also be added to the sizing composition. Suitable nonionic lubricants that are compatible with ROMP compositions include esters of polyethylene glycols and block copolymers of ethylene oxide and propylene oxide. More than one nonionic lubricant may be used in a given sizing formulation if desired, e.g., to achieve a desired balance of glass processability and composite mechanical properties.

[00172] Suitable lubricants may contain polyethylene glycol (PEG) units with an average molecular weight between 200 and 2000, preferably between 200-600. These PEG units can be esterified with one or more fatty acids, including oleate, tallate, laurate, stearate, and others. Particularly preferred lubricants include PEG 400 dilaurate, PEG 600 dilaurate, PEG 400 distearate, PEG 600 distearate, PEG 400 dioleate, and PEG 600 dioleate. Examples of suitable products include compounds produced by BASF, including MAPEG[®] 400 DO, MAPEG[®] 400 DOT, MAPEG[®] 600 DO, MAPEG[®] 600 DOT, and MAPEG[®] 600 DS. Additional suitable products include compounds produced by Zschimmer & Schwarz, including Mulsifan 200 DO, Mulsifan 400 DO, Mulsifan 600 DO, Mulsifan 200 DL, Mulsifan 400 DL, Mulsifan 600 DL, Mulsifan 200 DS, Mulsifan 400 DS, and Mulsifan 600 DS. Additional suitable products include compounds produced by Cognis, including Agnique[®] PEG 300 DO, Agnique[®] PEG 400 DO, and Agnique[®] PEG 600 DO.

[00173] Suitable nonionic lubricants also include block copolymers of ethylene oxide and propylene oxide. Examples of suitable products include compounds produced by BASF, including Pluronic[®] L62, Pluronic[®] L101, Pluronic[®] P103, and Pluronic[®] P105.

[00174] Cationic lubricants may also be added to the sizing composition. Cationic lubricants that are compatible with ROMP include modified polyethyleneimines, such as Emery 6760L produced by Pulcra Chemicals.

[00175] Silane coupling agent may optionally be added to the sizing composition, non-limiting examples including, methacrylate, acrylate, amino, or epoxy functionalized silanes along with alkyl, alkenyl, and norbornenyl silanes.

[00176] Optionally, the sizing composition may contain one or more additives for modifying the pH of the sizing resin. One preferred pH modifier is acetic acid.

[00177] The sizing composition may optionally contain other additives useful in glass sizing compositions. Such additives may include emulsifiers, defoamers, cosolvents, biocides, antioxidants, and additives designed to improve the effectiveness of the sizing composition. The sizing composition can be prepared by any method and applied to substrate materials for use herein, such as glass fibers or fabric, by any technique or method.

[00178] In a preferred embodiment, the metathesis reactions disclosed herein are carried out under a dry, inert atmosphere. Such an atmosphere may be created using any inert gas, including such gases as nitrogen and argon. The use of an inert atmosphere is optimal in terms of promoting catalyst activity, and reactions performed under an inert atmosphere typically are performed with relatively low catalyst loading. The reactions disclosed herein may also be carried out in an oxygen-containing and/or a water-containing atmosphere, and in one embodiment, the reactions are carried out under ambient conditions. The presence of oxygen or water in the reaction may, however, necessitate the use of higher catalyst loadings as compared with reactions performed under an inert atmosphere. Where the vapor pressure of the reactants allows, the reactions disclosed herein may also be carried out under reduced pressure.

[00179] The reactions disclosed herein may be carried out in a solvent, and any solvent that is inert towards cross-metathesis may be employed. Generally, solvents that may be used in the metathesis reactions include organic, protic, or aqueous solvents, such as aromatic hydrocarbons, chlorinated hydrocarbons, ethers, aliphatic hydrocarbons, alcohols, water, or mixtures thereof. Example solvents include benzene, toluene, p-xylene, methylene chloride, 1,2-dichloroethane, dichlorobenzene, chlorobenzene, tetrahydrofuran, diethylether, pentane, methanol, ethanol, water, or mixtures thereof. In a preferred embodiment, the reactions disclosed herein are carried out neat, i.e., without the use of a solvent.

[00180] It will be appreciated that the temperature at which a metathesis reaction according to methods disclosed herein is conducted can be adjusted as needed, and may be at least about -78°C, -40°C, -10°C, 0°C, 10°C, 20°C, 25°C, 35 °C, 50°C, 70°C, 100°C, or 150°C, or the temperature may be in a range that has any of these values as the upper or lower bounds. In a preferred embodiment, the reactions are carried out at a temperature of at least about 35°C, and in another preferred embodiment, the reactions are carried out at a temperature of at least about 50°C.

EXPERIMENTAL

[00181] In the following examples, efforts have been made to ensure accuracy with respect to numbers used (e.g., amounts, temperature, etc.) but some experimental error and deviation should be accounted for. Unless indicated otherwise, temperature is in degrees C and pressure is at or near atmospheric.

[00182] The following examples are to be considered as not being limiting of the invention as described herein, and are instead provided as representative examples of the adhesion promoter and gel modification compositions of the invention and the methods for their use.

EXAMPLES

Materials and Methods

[00183] All glassware was oven dried and reactions were performed under ambient conditions unless otherwise noted. All solvents and reagents were purchased from commercial suppliers and used as received unless otherwise noted.

[00184] Dicyclopentadiene (Ultrene[®] 99) (DCPD) was obtained from Cymetech Corporation. A modified DCPD base resin containing 20-25% tricyclopentadiene (and small amounts of higher cyclopentadiene homologs) was prepared by heat treatment of Ultrene[®] 99 as generally described in U.S. Pat. No. 4,899,005.

[00185] Solid MDI (4,4'-methylene diphenyl diisocyanate) was used as received from Sigma Aldrich (98% purity). Liquid MDI (50/50 mixture of 4,4'-MDI and 2,4'-MDI) was used as received from Bayer Material Science (Mondur[®] ML). Hexamethylenediisocyanurate (hexamethylenediisocyanatetrimer, HDIt, CAS# 3779-63-3) was used as received from Bayer Material Science (Desmodur[®] N3300A). HDI (hexamethylenediisocyanate or diisocyanatohexane, CAS#822-06-0) was used as received from Sigma Aldrich (98% purity), Acros Organics (99+% purity), TCI America (98% purity), or Bayer Material Science (Desmodur[®] H, 99.5% purity). Isophorone diisocyanate (IPDI) was used as received from Sigma Aldrich (98% purity). Meta-tetramethylxylylene diisocyanate (TMXDI[®]) was used as received from Cytec. H12MDI (4,4'-Methylenebis(cyclohexyl isocyanate), was used as received from Sigma Aldrich (90% purity). Polymeric MDI (PM200) was used as received from Yantai Wanhua Polyurethane Company. Lupranate[®] 5080 (MDI prepolymer), Lupranate[®] MI (liquid MDI), and Lupranate[®] MM103 (liquid carbodiimide modified 4,4'-MDI) were used as received from BASF. Additionally, 4-Benzylphenyl isocyanate (CAS# 1823-37-6, purity 97%) and 2-

biphenyl isocyanate (CAS# 17337-13-2, purity 98%) were used as received from Sigma Aldrich.

[00186] NB-MeOH (5-Norbornene-2-methanol, CAS#95-12-5) was used as received from Sigma Aldrich or prepared by literature methods. HENB (2-hydroxyethyl bicyclo[2.2.1]hept-2-ene-5-carboxylate) was prepared by literature methods. Allyl alcohol, 2-ethyl hexanol, and 1-octanol were used as received from Sigma Aldrich. DCPD-OH (dicyclopentadiene alcohol) was used as received from Texmark.

[00187] Metathesis catalysts were prepared by standard methods and include [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(3-methyl-2-butenylidene)(tricyclohexylphosphine) ruthenium (II) (C827), ruthenium (II) dichloro (3-methyl-2-butenylidene) bis(tricyclohexylphosphine) (C801), ruthenium (II) dichloro (tricyclohexylphosphine) (o-isopropoxyphenylmethylene) (C601), [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(benzylidene)(tri(*n*-butyl)phosphine) ruthenium (II) (C771), and [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(phenylindenylidene)(tri(*n*-butyl)phosphine) ruthenium (II) (C871). Ethanox[®] 4702 antioxidant (4,4'-methylenebis (2,6-di-tertiary-butylphenol), Albemarle Corporation) was used where indicated.

[00188] Cumene hydroperoxide (CHP) was used as received from Sigma Aldrich (88% purity, unless otherwise specified) or Syrgis Performance Initiators (Norox[®] CHP, 85%). CHP was added to resin formulations as a 1,000 ppm concentration stock solution in DCPD. *tert*-Butyl hydroperoxide was used as received from Sigma Aldrich (5.5M solution in decane). mCPBA (3-chloroperoxybenzoic acid), benzoyl peroxide (97% purity), di-*tert*-butyl peroxide (98% purity), and tri-*n*-butylphosphine (TNBP) were used as received from Sigma Aldrich. Triphenyl phosphine (TPP) was used as received from Arkema. Additionally, mineral oil used to prepare the catalyst suspensions was Crystal Plus 70FG.

[00189] Glass rovings and fabrics were used as supplied by Ahlstrom (R338-2400), Johns Manville (Star ROV[®]-086), Owens Corning (OCV 366-AG-207, R25H-X14-2400, SE1200-207, SE1500-2400, SE2350-250), and PPG (Hybon[®] 2002, Hybon[®] 2026). Toho Tenax[®] HTR40 carbon fiber roving was used as received.

[00190] Additives to the resin are reported as ppm, which is defined as the weight in grams of additive per million grams of resin, or as phr, which is defined as the weight in grams of the additive per hundred grams of resin.

[00191] Roving wrap composites were prepared using a small-scale variation of a hand layup technique. Glass roving was saturated with catalyzed dicyclopentadiene resin and layered into a 1/4" x 6" bar mold under moderate tension. The bar mold was compressed to achieve approximately 50% fiber volume at 1/8" thickness, and held with C-clamps during the oven cure process. Roving wrap composites were heated from room temperature to 120°C at 1°C/min, and held at 120°C for two hours.

[00192] Glass composite laminates were prepared using the VARTM process. The laminate was constructed by cutting and arranging plies of glass fabric on an aluminum tool to achieve approximately 50% fiber volume at 1/8" thickness. A rigid plate was placed on top of the ply stack to ensure that pressure was applied evenly across the surface. Using braided tubing, an infusion inlet and outlet vent were positioned appropriately near the glass fabric. A sheet of vacuum bagging film and tacky tape was used to create an air-tight cover on the glass and the tubing and evacuated to a vacuum level of between 25 inches-Hg to 28 inches-Hg. A mixture of resin and catalyst was degassed *in vacuo* for 15 minutes and then back-filled with argon. The mixture was then infused in to the glass fabric, driven by the pressure gradient between the ambient pressure and the evacuated glass fabric assembly. After the infusion was complete, the composite laminate was heated from room temperature to 75°C at a heating rate of 1°C/min, and then the composite laminate was heated to 120°C and held at that temperature for two hours.

[00193] Gel modifier ppm is defined as the grams of gel modifier per million grams of resin. Corrections for gel modifier purity were made. With regard to other formulation additives, PHR is defined as the weight of the additive per hundred grams of base resin.

[00194] Viscosity profiles were measured on a Brookfield LVDVII viscometer, and data was analyzed by Wingather V3.0-1 software. Measurements were made with Spindle #1 set to 50 RPM on 400 g samples equilibrated to 20-25°C. Data points were logged at two-second to two-minute intervals, depending on experimental timescale. Temperatures were measured using J-type thermocouples, sampling at five second intervals and collected by Omega 2.0 OM-CP series data logging software.

[00195] The mechanical properties were measured using standard techniques. All values reported are the average of 3 samples. Interlaminar shear strength (ILSS) at 10% strain was measured by the short-beam shear method according to ASTM D2344 on 1" x 1/4" x 1/8" samples. The ILSS values were reported in units of pounds per square inch (psi). Interlaminar shear strength (ILSS) is a measure of the adhesion and/or compatibility between polymer matrix and fiber reinforcement in a composite. The following criteria, based on interlaminar shear strength values, was used to characterize the adhesion and/or compatibility between the polymer matrix and the glass or carbon fiber reinforcement materials. Composites having poor adhesion and/or compatibility between the polymer matrix and fiber reinforcement were characterized as having ILSS values less than about 3000 psi suggesting a lack of covalent adhesion between the polymer matrix and fiber reinforcement. Composites having moderate adhesion and/or compatibility between the polymer matrix and fiber reinforcement were characterized as having ILSS values from about 3000 psi to about 6000 psi suggesting minimal to no covalent adhesion between the polymer matrix and fiber reinforcement. Composites having superior adhesion and/or compatibility between the polymer matrix and fiber reinforcement were characterized as having ILSS values greater than about 6000 psi suggesting a higher degree of covalent adhesion between the polymer matrix and fiber reinforcement. Heat deflection temperature was measured according to ASTM D648 on 5" x 1/2" x 1/4" samples. Flexural peak strength and flexural modulus were tested according to ASTM D790 using 5" x 1/2" x 1/4" samples. Izod pendulum impact resistance was tested according to ASTM D526 using 2.5" x 1/2" x 1/4" samples. All samples were stored and tested at ambient room conditions.

Synthesis of HENB (2-hydroxyethyl bicyclo[2.2.1]hept-2-ene-5-carboxylate)

[00196] HEA (2-hydroxyethyl acrylate) (640 g, 1.0 mol eq.) was added to a 3L round bottom flask containing toluene (1 kg). DCPD (dicyclopentadiene) (1.5 kg) was added to a separate 3L round bottom flask, and the 3L flask containing DCPD was affixed with a Vigreux column and distillation head connected to a condenser. The 3L flask containing HEA and toluene was connected to the condenser. The DCPD was heated to > 160 °C under an inert atmosphere to "crack" the DCPD and form CPD (cyclopentadiene). The CPD (740 g, 2.0 mol eq.) was added dropwise to the HEA/toluene mixture at 10 - 40 °C under an inert atmosphere. Conversion of HEA to HENB (2-hydroxyethyl bicyclo[2.2.1]hept-2-ene-5-carboxylate) was monitored by GC (gas chromatography). Toluene and reformed DCPD (364 g) were removed from the reaction

mixture by vacuum distillation to give the desired HENB product as a colorless liquid (1004 g, quantitative yield, approx. 98% purity).

Examples 1(a-l)-4(a-l)

Roving Composites Prepared with Isocyanate Adhesion Agents

[00197] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, and 2 phr of the appropriate isocyanate adhesion promoter. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass roving (Examples 1(a-l) PPG2002; Examples 2(a-l) PPG2026; Examples 3(a-l) Ahlstrom R338-2400; Examples 4(a-l) Star ROV[®]-086) were saturated with the catalyzed dicyclopentadiene resin and layered into a 1/4" x 6" bar mold under moderate tension. The bar mold was compressed to achieve approximately 50% fiber volume at 1/8" thickness, and held with C-clamps during the oven cure process. Roving wrap composites were heated from room temperature to 120°C at 1°C/min, and held at 120°C for two hours. The ILSS of the resulting composites were measured (Table 1). Samples without adhesion promoter (Examples 1a, 2a, 3a, 4a) all had poor mechanical properties. Generally, all the tested adhesion promoters improved the mechanical properties of the PPG2026 composites. Several adhesion promoters improved the mechanical properties of all four composites testing: 4,4'-MDI (c), the 4,4'-MDI/2,4'-MDI mixture (b), and hexamethylenediisocyanurate (HDI, d) (Table 1).

Table 1. ILSS for Roving Composites Prepared with Isocyanate Adhesion Promoter					
Example	Adhesion Promoter	ILSS (psi)			
		1 PPG 2002	2 PPG2026	3 Ahlstrom R338- 2400	4 Star ROV [®] - 086
a	None	1376	3574	1464	1347
b	4,4'-MDI/2,4'-MDI	6760	7886	6313	6499
c	4,4'-MDI	7012	6890	6417	6279

d	HDI	5461	6714	5129	4933
e	H12MDI	not tested	6931	not tested	1837
f	HDI	2604	7007	3719	2837
g	IPDI	not tested	6811	2730	2329
h	TMXDI[®]	not tested	5622	1888	1848
i	PM200 PolyMDI	7124	7985	7318	7052
j	Lupranate[®] 5080	5075	7083	6105	4957
k	Lupranate[®] MI	6974	8683	7168	6484
l	Lupranate[®] MM103	6822	7609	6948	6009

“Not tested” samples were damaged during fabrication so ILSS could not be evaluated.

Examples 5(a-h)-8(a-h)

Roving Composites Prepared with Isocyanate Adhesion Agents and HENB

[00198] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 2 phr of the appropriate diisocyanate adhesion promoter, and 2 phr of HENB. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings (Examples 5(a-h) PPG2002; Examples 6(a-h) PPG2026; Examples 7(a-h) Ahlstrom R338-2400; Examples 8(a-h) Star ROV[®]-086) were prepared as described in Example 1. The ILSS of the resulting composites were measured (Table 2). In most cases the addition of HENB further improved the mechanical properties of the resulting composites compared with those using the diisocyanate adhesion promoter alone (1b-1h, 2b-2h, 3b-3h, and 4b-4h from Table 1). HENB alone did not improve adhesion (5h-8h).

Table 2. ILSS for Roving Composites Prepared with Isocyanate Adhesion Promoter and HENB					
Example	Adhesion Promoter	ILSS (psi)			
		5 PPG 2002	6 PPG2026	7 Ahlstrom R338- 2400	8 Star ROV[®]- 086
a	4,4'-MDI/2,4'-MDI	7895	8052	8330	8093
b	4,4'-MDI	7334	6736	7596	7450
c	HDIt	7489	7525	7848	7143
d	H12MDI	not tested	6153	not tested	2524
e	HDI	6570	7307	7468	6966
f	IPDI	4367	7002	4912	4376
g	TMXDI[®]	2102	5809	3186	3160
h	HENB with no adhesion promoter	1047	2263	not tested	1269

Examples 10(a-f); 11(a-f)

Roving Composites Prepared with Isocyanate Adhesion Agents

[00199] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, and either 2 phr of 4,4'-MDI/2,4'-MDI (Examples 10(a-f)) or HDIt (examples 11(a-f)) diisocyanate adhesion promoter. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings were prepared as described in Example 1. The ILSS of the resulting composites were measured (Tables 3 and 4). 4,4'-MDI/2,4'-MDI and HDIt are effective adhesion promoters for all rovings tested, which were indicated for use with epoxy resins.

Table 3. ILSS for Glass Rovings Prepared with 4,4'-MDI/2,4'-MDI			
Example	Glass Roving	Adhesion promoter	ILSS
1b	PPG 2002	4,4'-MDI/2,4'-MDI	6760
2b	PPG 2026	4,4'-MDI/2,4'-MDI	7886
3b	Ahlstrom R338-2400	4,4'-MDI/2,4'-MDI	6313
4b	Star ROV[®]-086	4,4'-MDI/2,4'-MDI	6499
10a	OCV 366-AG-207	4,4'-MDI/2,4'-MDI	7462
10b	OCV R25H-X14-2400	4,4'-MDI/2,4'-MDI	6004
10c	OCV SE1200-207	4,4'-MDI/2,4'-MDI	7776
10d	OCV SE1500-2400	4,4'-MDI/2,4'-MDI	8071
10e	OCV SE2350-250	4,4'-MDI/2,4'-MDI	6611
10f	OCV SE8380-113	4,4'-MDI/2,4'-MDI	2061

Table 4. ILSS for Glass Rovings Prepared with HDIt			
Example	Glass Roving	Adhesion promoter	ILSS
1d	PPG 2002	HDIt	5461
2d	PPG 2026	HDIt	6714
3d	Ahlstrom R338-2400	HDIt	5129
4d	Star ROV[®]-086	HDIt	4933
11a	OCV 366-AG-207	HDIt	5039
11b	OCV R25H-X14-2400	HDIt	5666
11c	OCV SE1200-207	HDIt	4846

11d	OCV SE1500-2400	HDIt	4894
11e	OCV SE2350-250	HDIt	5360
11f	OCV SE8380-113	HDIt	1711

Examples 12(a-g)-15(a-g)

Roving Composites Prepared with HDIt Adhesion Promoter and Various Alcohols

[00200] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 2 phr of HDIt adhesion promoter, and 2 phr of various alcohols. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings (Examples 12(a-g) PPG2002; Examples 13(a-g) PPG2026; Examples 14(a-g) Ahlstrom R338-2400; Examples 15(a-g) Star ROV[®]-086) were prepared as described in Example 1. The ILSS of the resulting composites were measured (Table 5).

Table 5. ILSS for Roving Composites prepared with HDIt Adhesion promoter and Various Alcohols

Example	Alcohol	ILSS (psi)			
		12 PPG 2002	13 PPG2026	14 Ahlstrom R338- 2400	15 Star ROV[®]- 086
a	None	5461	6714	5129	4933
b	HENB	7489	7525	7848	7143
c	NBMeOH	6882	7011	7244	6658
d	Allyl alcohol	6487	4611	7344	6337
e	DCPD-OH	2902	6715	4104	2741
f	2-ethyl hexanol	1630	4616	2000	1601
g	1-octanol	1543	3272	1663	1419

Examples 16(a-f)-19(a-f)**[00201] Composite Rovings with 1 phr Adhesion Promoter**

Resin was prepared using DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 1 phr of the 4,4'-MDI/2,4'-MDI or HDIt adhesion promoter, and 1 phr of optional alcohol compounds. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings (Examples 16(a-f) PPG2002; Examples 17(a-f) PPG2026; Examples 18(a-f) Ahlstrom R338-2400; Examples 19(a-f) Star ROV[®]-086) were prepared as described in Example 1. The ILSS of the resulting composites were measured (Table 6). At 1 phr, 4,4'-MDI/2,4'-MDI was an effective adhesion promoter, and the addition of 1 phr HENB or NBMeOH improved the performance of the adhesion promoter. HDIt improved the properties of the composite significantly for PPG 2026 and Ahlstrom R338-2400 and slightly for two rovings (PPG 2002 and Star-ROV-086). The addition of HENB and NBMeOH improved the efficacy of the adhesion promoter (Table 6).

Table 6. ILSS for Composite Rovings with 1 phr Adhesion Promoter

Example	Adhesion Promoter	Alcohol	ILSS (psi)			
			16 PPG 2002	17 PPG2026	18 Ahlstrom R338-2400	19 Star ROV [®] - 086
a	4,4'-MDI/2,4'-MDI	None	6760	6550	4912	5309
b	4,4'-MDI/2,4'-MDI	HENB	7560	7065	6798	7431
c	4,4'-MDI/2,4'-MDI	NBMeOH	7368	7089	6782	6857
d	HDIt	None	2767	6378	4687	2567
e	HDIt	HENB	6034	7030	6528	5546

f	HDIt	NBMeOH	5296	5585	6451	4514
----------	-------------	---------------	------	------	------	------

Examples 20(a-k)-23(a-k)

Composite Rovings with Various Loadings of Adhesion Promoter and HENB

[00202] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 0.1, 0.5, or 2 phr of the MDI adhesion promoter (4,4'-MDI/2,4'-MDI), and 0, 0.1, 0.5, 1, or 2 phr of HENB. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings (Examples 20(a-k) PPG2002; Examples 21(a-k) PPG2026; Examples 22(a-k) Ahlstrom R338-2400; Examples 23(a-k) Star ROV[®]-086) were prepared using a small-scale variation of a hand layup technique. Glass roving was saturated with catalyzed dicyclopentadiene resin and layered into a 1/4" x 6" bar mold under moderate tension. The bar mold was compressed to achieve approximately 58% fiber volume at 1/8" thickness, and held with C-clamps during the oven cure process. Roving wrap composites were heated from room temperature to 120°C at 1°C/min, and held at 120°C for two hours. The ILSS of the resulting composites were measured (Table 7).

Table 7. ILSS for Composite Rovings with Various Adhesion Promoter and HENB Loadings

Example	phr Adhesion Promoter(4,4'-MDI/2,4'-MDI)	phr HENB	ILSS (psi)			
			20 PPG 2002	21 PPG2026	22 Ahlstrom R338-2400	23 Star ROV [®] -086
a	0.1	0	1331	4556	1814	1370
b	0.1	0.1	1585	2452	3186	2232
c	0.1	2.0	2616	4476	4303	3245
d	0.5	0	3760	7086	3603	3205
e	0.5	0.5	5816	5523	6170	5087

f	0.5	2.0	6325	6755	6603	5969
g	2.0	0	6760	7886	6313	6499
h	2.0	0.1	7439	7561	7790	7466
i	2.0	0.5	7317	6948	7684	7692
j	2.0	1.0	7244	7487	7704	7392
k	2.0	2.0	7895	8052	8330	8093

Examples 24(a-d)-26(a-d)

VARTM with Adhesion Promoter and Commercial Fabrics

[00203] The modified DCPD (containing 20-25% tricyclopentadiene) was formulated with 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 2 phr 4,4'-MDI/2,4'-MDI, and with and without 2 phr HENB (24(a,b), 25(a,b), 26(a,b)). The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. VARTM samples were prepared using commercial unidirectional fabrics including Vectorply ELR 2410 fabric (made from PPG 2026 roving), fabric based on Ahlstrom R338, and fabric based on OC SE-1500. The composite laminates were cured for 120°C for 2 hours. The ILSS of the resulting composites were measured (Table 8). The modified DCPD (containing 20-25% tricyclopentadiene) was formulated with 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, and 2 phr 2-biphenyl isocyanate (24 (c)) or 2 phr 4-benzylphenyl isocyanate (24 (d)). The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. VARTM samples were prepared using commercial unidirectional fabric Vectorply ELR 2410 fabric (made from PPG 2026 roving). The ILSS of the resulting composites were measured (Table 8). The diisocyanate containing compositions (24(a,b), 25(a,b), 26(a,b)) showed superior adhesion, while the compositions containing the monoisocyanates (24c, 24d) demonstrated poor adhesion.

Table 8. ILSS for VARTM with Adhesion Promoter and Commercial Fabrics				
Example	Adhesion promoter	ILSS (psi)		
		24 PPG 2026 Fabric	25 Ahlsrom R338 Fabric	26 OC SE 1500 Fabric
a	4,4'-MDI/2,4'-MDI	8452	8468	8538
b	4,4'-MDI/2,4'-MDI and HENB	8512	8429	8819
c	2-biphenyl isocyanate	3494	not tested	not tested
d	4-benzylphenyl isocyanate	3806	not tested	not tested

Example 27(a-c):**Unidirectional Composite Wraps with Carbon Fiber**

[00204] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, and 2 phr Ethanox[®] 4702 antioxidant. Samples with no adhesion promoter (a), 2 phr 4,4'-MDI/2,4'-MDI (b), and 2 phr 4,4'-MDI/2,4'-MDI and 2 phr HENB (c) were prepared. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Carbon-fiber tow composites based on Toho Tenax[®] HTR40 were prepared as described in Example 1. The ILSS of the resulting composites were measured (Table 9). The isocyanate adhesion promoter is effective for carbon rovings.

Table 9. ILSS for Carbon Roving Composites		
Example	Adhesion promoter	ILSS (psi)
a	None	1844
b	4,4'-MDI/2,4'-MDI	5399
c	4,4'-MDI/2,4'-MDI and HENB	7907

Example 28(a-e)**VARTM with Adhesion Promoter and a Range of Catalysts**

[00205] The modified DCPD (containing 20-25% tricyclopentadiene) was formulated with 2 phr 4702 Ethanox[®], 2 phr 4,4'-MDI/2,4'-MDI, and with the inhibitor described in Table 10. The resin was catalyzed by the addition of the catalyst listed in Table 10 (monomer to catalyst ratio between 5,000:1 and 45,000:1 as listed in Table 10) in a suspension of mineral oil. VARTM samples were prepared using commercial fabric Vectorply ELR 2410 (made from PPG 2026 roving). The ILSS of the resulting composites were measured (Table 10). For a range of catalysts, the adhesion promoter improves the physical properties of the composites when compared to Example 2(a).

Table 10. ILSS for VARTM with MDI and Various Catalysts				
Example	Catalyst	Monomer to Catalyst Ratio	Inhibitor	ILSS (psi)
a	C771	30,000:1	none	8755
b	C801	5,000:1	TPP (0.1 phr)	7104
c	C871	45,000:1	none	8168
d	C601	5,000:1	none	4715
e	C827	30,000:1	CHP (20 ppm)	8452

Example 29 (a-h)**VARTM with Adhesion Promoter and Carbon Fabric**

[00206] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, and 2 phr Ethanox[®] 4702 antioxidant. Samples with varying isocyanate adhesion promoter compositions were prepared. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. VARTM samples were prepared using Zoltek UD500 carbon fabric. The ILSS of the resulting composites were measured (Table 11).

Table 11. ILSS for Zoltek UD500 Carbon Fabric Composites			
Example	Adhesion promoter	HENB	ILSS (psi)
a	None	None	1634
b	2phr 4,4'-MDI/2,4'-MDI	None	4945
c	4phr 4,4'-MDI/2,4'-MDI	None	5615
d	None	2 phr	1563
e	2 phr 4,4'-MDI/2,4'-MDI	2 phr	8664
f	4phr 4,4'-MDI/2,4'-MDI	2 phr	8807
g	2 phr HDIt	None	4639
h	2 phr HDIt	2 phr	7156

Examples 30(a-f)-32(a-f):

Roving Composites Prepared with 4,4'-MDI/2,4'-MDI Adhesion Promoter and Various Alcohols

[00207] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox[®] 4702 antioxidant, 2 phr of 4,4'-MDI/2,4'-MDI adhesion promoter, and 2 phr of various alcohols. The resin was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. Roving wrap composites based on glass rovings (Examples 30(a-f) PPG2002; Examples 31(a-f) PPG2026; Examples 32(a-f) Star ROV[®]-086) were prepared as described in Example 1. The ILSS of the resulting composites were measured (Table 12).

Table 12. ILSS for Roving Composites prepared with 4,4'-MDI/2,4'-MDI Adhesion promoter and Various Alcohols				
Example	Alcohol	ILSS (psi)		
		30 PPG 2002	31 PPG2026	32 Star ROV[®]- 086
a	None	6760	7886	6499
b	HENB	7093	7392	7460
c	NBMeOH	5804	5603	6280
d	Allyl alcohol	2407	2270	2454
e	DCPD-OH	2736	4367	2698
f	1-octanol	1966	2244	1461

Example 33

Effect of cumene hydroperoxide on the onset of the gel state

[00208] A plastic 250 mL beaker was charged with 100 g of dicyclopentadiene base resin (containing 20-25% tricyclopentadiene) and 0-100 ppm cumene hydroperoxide (CHP) was added as a 1000 ppm concentration stock solution in resin. The beaker was placed in an oil bath, and a temperature probe was placed in the reaction vessel. Once the sample was equilibrated to the test temperature (30°C) the metathesis catalyst was added. Polymerizations 33a-33h were catalyzed by the addition of 9.6 mg of catalyst C827 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (monomer to catalyst ratio 60,000:1). Polymerizations 33i-33m were catalyzed by the addition 19.2 mg of catalyst C827 suspended in 2 g of mineral oil (monomer to catalyst ratio 30,000:1). The temperatures of the reaction mixtures were monitored over the course of the polymerizations. The exotherm time is related to the onset of polymerization. Peak exotherm temperature is related to the completeness of the polymerization reaction. Lowered peak temperatures are an indication of incomplete polymerization. The exotherm times and peak temperatures for the unmodified and modified polymerizations can be seen in Table 13.

Increasing concentrations of CHP in the resin resulted in increased time to reach polymerization exotherm, with no significant drop in exotherm peak temperature. At both catalyst concentrations, addition of CHP effectively modifies the onset of polymerization, and the delay time can be controlled over several hours by controlling the amount of CHP added. FIG. 1 shows the temperature profiles of examples 33a-33c with 0, 2.5, and 5 ppm CHP. The gel-modification of the invention is particularly useful, because it increases the workable pot life of the catalyzed resin without otherwise necessarily changing the overall temperature profile of the polymerization.

Table 13: Gel Modification by Cumene Hydroperoxide (CHP)

Example	CHP concentration (ppm)	CHP:catalyst molar ratio	Exotherm Time (min)	Exotherm Peak Temperature (°C)
33a	0	0.00	11.4	183
33b	2.5	0.14	28.6	182
33c	5	0.28	43.3	180
33d	10	0.57	67.0	179
33e	25	1.42	121.9	184
33f	50	2.84	167.4	184
33g	75	4.26	179.2	182
33h	100	5.68	209.0	180
33i	0	0.00	8.5	199
33j	10	0.26	37.1	197
33k	20	0.52	67.1	196
33l	40	1.04	110.3	192
33m	50	1.30	137.7	191

33a-33h: monomer/C827 = 60,000:1

33i-33m: monomer/C827 = 30,000:1

Example 34

Effect of cumene hydroperoxide (CHP) on DCPD polymerization viscosity profile

[00209] Dicyclopentadiene base resin (containing 20-25% tricyclopentadiene) was filtered through activated alumina and silica gel to remove any contaminants. A plastic 500mL beaker was charged with 400 g of the filtered resin as a control. Additional plastic 500mL beakers were charged with 400 g of the filtered resin and 4, 25, or 100 ppm cumene hydroperoxide (CHP) was added as a 1000 ppm concentration stock solution in resin. Each resin sample was equilibrated at 23-25°C, and catalyzed by addition of 9.6 mg of C827 suspended in 2 g of mineral oil. Viscosity profiles are shown in FIG. 2, in which the cure profile of the filtered control sample is shown along with the cure profiles of CHP-modified resin compositions having CHP concentrations of 4, 25 and 100 ppm. The reaction modification of the invention is particularly useful because it increases the workable pot life of the catalyzed resin and allows for low viscosity characteristics to be retained for a longer period of time.

Example 35

Mechanical properties of unmodified and modified polyDCPD plaques

[00210] To evaluate mechanical properties of polydicyclopentadiene (polyDCPD) formulations, 200 g of dicyclopentadiene base resin (containing 20-25% tricyclopentadiene) was formulated with 2 PHR Ethanox[®] 4702 antioxidant and 0-100 ppm cumene hydroperoxide, equilibrated to 30°C and catalyzed by the addition of 19.2 mg of C827 suspended in 2 g of mineral oil. After mixing, the catalyzed resin was poured into a 10x10x0.5" glass and aluminum mold and placed in a 40°C oven until exotherm (Example 35a-d). After cure, the polyDCPD panels were cut into samples for measurement of Heat Deflection Temperature (HDT, ASTM D648), Izod Pendulum Impact Resistance (ASTM D526), and Flexural properties (ASTM D790). As shown in Table 14, there is no significant deviation in panel mechanical properties over a range of hydroperoxide-to-catalyst ratios.

Table 14: Effect of hydroperoxide gel modification on polyDCPD mechanical properties

Example	CHP concentration (ppm)	CHP moles	CHP:catalyst molar ratio	HDT °C	Izod (ft- lb/in)	Flex. Peak (ksi)	Flex. Mod. (ksi)
35a	0	0.00E+00	0.00	138.0	1.1	13.0	304
35b	20	2.63E-05	1.04	140.7	1.1	12.9	307
35c	50	6.57E-05	2.61	140.0	1.0	13.0	306
35d	100	1.31E-04	5.21	142.1	1.2	12.7	302

Example 36**Storage stability of phosphine gel modifier**

[00211] A stock resin formulation was prepared by mixing dicyclopentadiene base resin (containing 20-25% tricyclopentadiene) with 2 PHR Ethanox[®] 4702 antioxidant and 0.5 PHR of a 0.15 wt% solution of TNBP in dicyclopentadiene as the gel modifier. An exotherm trial was conducted on a 100 g aliquot of this resin equilibrated to 40°C according to the procedure outlined in Example 33, using C771 as the olefin metathesis catalyst (monomer to catalyst ratio 15,000:1) dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (Example 36a). The remainder of the stock formulation was sparged with nitrogen, sealed, and stored at room temperature. Further exotherm trials were conducted according to the procedure of Example 36a on 100 g aliquots at 4-hour, 8-hour, and 24-hour intervals (Examples 36b-36d). The effectiveness of the phosphine at delaying the onset of polymerization dropped sharply over these time intervals, with near-total loss of pot life extension within 24 hours. (Table 15).

Example 37**Storage stability of cumene hydroperoxide gel modifier**

[00212] A stock resin formulation was prepared by mixing dicyclopentadiene base resin (containing 20-25% tricyclopentadiene) with 2 PHR Ethanox[®] 4702 antioxidant and 23 ppm of cumene hydroperoxide in dicyclopentadiene as the reaction gel-modifier. An exotherm trial was conducted on a 100 g aliquot of this resin equilibrated to 30°C according to the procedure outlined in Example 33, using 19.2 mg of C827 as the olefin metathesis catalyst (monomer to catalyst ratio 30,000:1) suspended in 2 g of mineral oil (Example 37a). The remainder of the

stock formulation was sparged with nitrogen, sealed, and stored at room temperature. Further exotherm trials were conducted according to the procedure outlined in Example 37a on 100 g aliquots at 15-day (360 hour), 35-day (840 hour), and 90-day (2,160 hour) intervals (Table 15). Unlike the standard phosphine gel modified resin (Example 36), the ability of cumene hydroperoxide to delay the onset of polymerization remains stable. The cumene hydroperoxide modified resin retained 84% of the delayed exotherm time effect after 90 days, with no significant change in peak exotherm temperature.

Table 15: Storage stability of phosphine and hydroperoxide gel modifiers

Example	Gel Modifier	Time aged (hours)	Exotherm Time (min)	Exotherm Peak Temperature (°C)
36a*	TNBP	0	50.4	203
36b	TNBP	4	40.0	203
36c	TNBP	8	32.7	203
36d	TNBP	24	14.8	203
37a	CHP	0	68.5	191
37b	CHP	360	64.8	193
37c	CHP	840	61.4	190
37d	CHP	2,160	57.7	195

* unmodified exotherm time for this resin was 10.9 minutes

Examples 36a-36b: C771; monomer to catalyst ratio = 15,000:1; 40°C

Examples 37a-37d: C827; monomer to catalyst ratio = 30,000:1; 30°C

Example 38

Gel Modification by other hydroperoxides (TBHP)

[00213] An exotherm trial was conducted according to the procedure outlined in Example 33, using 40°C as the oil bath and resin temperature. The resin was formulated with 0-21 ppm of *tert*-butyl hydroperoxide (TBHP), and the reaction polymerization was catalyzed by the addition of 9.6 mg of C827 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (Examples 38a-

38e). The exotherm time and exotherm peak temperature can be seen in Table 16. Addition of increasing amounts of TBHP resulted in increasing times to reach polymerization exotherm and no significant drop in exotherm peak temperature.

Table 16: Gel modification by *tert*-Butyl Hydroperoxide

Example	TBHP concentration (ppm)	TBHP:catalyst molar ratio	Exotherm Time (min)	Exotherm Peak Temperature (°C)
38a	0	0.00	11.1	192
38b	3	0.28	21.8	190
38c	6.2	0.54	28.8	189
38d	10.5	0.93	35.5	188
38e	21.0	1.85	58.3	187

Example 39

CHP gel modification of resins with 1st gen catalysts

[00214] An exotherm trial was conducted according to the procedure outlined in Example 33, using 0-100 ppm cumene hydroperoxide and resin equilibrated to 30°C. The reaction polymerization was catalyzed by the addition of first generation ruthenium metathesis catalyst C801 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (monomer to catalyst ratio 5,000:1) (Examples 39a-39d). The exotherm times and exotherm peak temperatures can be seen in Table 17. Addition of increasing amounts of CHP resulted in increasing times to reach polymerization exotherm and no significant drop in exotherm peak temperature.

Example 40

CHP gel modification of resin formulated with 2nd gen catalyst

[00215] An exotherm trial was conducted according to the procedure outlined in Example 33, using 0-50 ppm cumene hydroperoxide and resin equilibrated to 60°C. The reaction polymerization was catalyzed by the addition of 2nd generation metathesis catalyst C771 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (monomer to catalyst ratio 60,000:1) (Examples 40a-40d). The exotherm times and exotherm peak temperatures can be

seen in Table 17. Addition of increasing amounts of CHP resulted in increasing times to reach polymerization exotherm and no significant drop in exotherm peak temperature.

Table 17: Gel modification by CHP using 1st and 2nd generation ruthenium catalysts

Example	catalyst	CHP concentration (ppm)	CHP:catalyst molar ratio	Exotherm Time (min)	Exotherm Peak Temperature (°C)
39a	c801	0	0.000	1.9	190
39b	c801	20	0.109	2.7	192
39c	c801	50	0.274	3.5	194
39d	c801	100	0.544	5.2	196
40a	c771	0	0.00	17.5	199
40b	c771	10	0.680	35.0	197
40c	c771	20	1.303	36.9	198
40d	c771	50	3.285	44.6	200

39a-39d: 30°C, C801, monomer to catalyst ratio = 5,000:1

40a-40d: 60°C, C771, monomer to catalyst ratio = 60,000:1

Example 41

Hydroperoxide gel modification at higher loadings

[00216] Exotherm trials were conducted according to the procedure outlined in Example 33 using 0-5,000 ppm of CHP. The resin was equilibrated to 60°C to speed the rate of polymerization. The reaction polymerization was catalyzed by the addition of 9.6 mg of metathesis catalyst C827 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (Examples 41a-d). The exotherm times and exotherm peak temperatures can be seen in Table 18. Comparison of exotherm times and exotherm peak temperatures show increasing time required to reach polymerization exotherm, demonstrating that the onset of polymerization may be effectively delayed with high CHP:catalyst ratios if reaction conditions require. However, as hydroperoxide concentrations reach high levels, overall exotherm peak temperatures do start to decline (Example 41c), demonstrating some negative impact of high levels of cumene hydroperoxide on polymerization completeness. Once the loading of hydroperoxide becomes

too high for a given set of polymerization conditions, the polymerization will fail to exotherm (Example 41d). The upper concentration limit for effective use of hydroperoxide compounds as gel modification agents will vary, depending on metathesis catalyst, olefin resin, and reaction conditions. However, as shown by Examples 33b-33g and Examples 41b-41d, there is a wide range of hydroperoxide:catalyst molar ratios that give useful modification of the onset of polymerization. The time to reach the gel and cure states can be controlled over a wide range for a given polymerization.

Table 18: Gel modification using CHP at higher concentrations

Example	CHP concentration (ppm)	CHP:catalyst molar ratio	Exotherm Time (min)	Exotherm Peak Temperature (°C)
41a	0	0.00	1.0	204
41b	1,000	64.35	22.9	191
41c	2,000	128.70	30.6	161
41d	5,000	321.74	failed to cure after 120 minutes	

Example 42

Effect of benzoyl peroxide – diacyl peroxides are not gel modifiers

[00217] Exotherm trials were conducted according to the procedure outlined in Example 33 using 0-2000 ppm of benzoyl peroxide and resin equilibrated at 40°C. The reaction polymerization was catalyzed by the addition of metathesis catalyst C827 dissolved in a mixture of 1 g of toluene and 2 g of mineral oil (monomer to catalyst ratio 60,000:1) (Examples 42a-42f). The exotherm times and exotherm peak temperatures can be seen in Table 19. Increasing amounts of benzoyl peroxide resulted in no significant delay of the onset of the polymerization (exotherm time) until relatively large ratios of peroxide:catalyst. At such extremely high concentrations of benzoyl peroxide, the exotherm peak temperature dropped dramatically. This indicates that the di-acyl peroxide functional group is not an effective gel modifier compared to the hydroperoxide functional group.

Example 43**Effect of mCPBA – peroxycarboxylic acids are not gel modifiers**

[00218] Exotherm trials were conducted according to the procedure outlined in Example 42, with the addition 20-2,000 ppm of mCPBA (3-chloroperoxybenzoic acid) to the resin formulation prior to addition of catalyst (Examples 43a-43d). No significant delay of the exotherm was noted at any concentration of mCPBA (Table 19). The exotherm time accelerated somewhat, and the exotherm peak temperature dropped dramatically. This indicates that the peroxycarboxylic acid functional group does not act to moderate the onset of polymerization as the hydroperoxide functional group does.

Example 44**Effect of di-*tert*-butyl peroxide – dialkyl peroxides are not gel modifiers**

[00219] An exotherm trial was conducted according to the procedure outlined in Example 42, with the addition of 10,000 ppm di-*tert*-butyl peroxide. Only a very minor modification of the exotherm is observed, even at this high peroxide:catalyst ratio (Table 19). This indicates that dialkyl peroxide functional group does not act in the same gel modifying fashion as the hydroperoxide functional group.

Table 19: Gel modification using other types of peroxides

Example	Modifier	modifier concentration (ppm)	modifier:catalyst molar ratio	Exotherm Time (min)	Exotherm Peak Temperature (°C)
42a	benzoyl peroxide	0	0.00	11.1	192
42b	benzoyl peroxide	2	0.09	11.5	191
42c	benzoyl peroxide	11.6	0.41	10.2	191
42d	benzoyl peroxide	24	0.85	11.5	188
42e	benzoyl	1,000	35.59	18.3	146

	peroxide				
42f	benzoyl peroxide	2,000	71.18	29.2	128
43a	mCPBA	20	1.00	10.8	190
43b	mCPBA	100	5.00	8.9	184
43c	mCPBA	1,000	49.95	4.7	168
43d	mCPBA	2,000	99.91	4.1	163
44	di- <i>tert</i> -butyl peroxide	10,000	589.53	14.8	201

Examples 45(a-c) and 46(a-c)

[00220] Resin was prepared using the modified DCPD (containing 20-25% tricyclopentadiene), 20 ppm CHP, 2 phr Ethanox® 4702 antioxidant and either no adhesion promoter and no alcohol compound (Examples 45a, 46a), or 2 phr diisocyanate adhesion promoter (4,4'-MDI/2,4'-MDI) (Examples 45b, 46b) or 2 phr diisocyanate adhesion promoter (4,4'-MDI/2,4'-MDI) and 2 phr alcohol compound (HENB) (Examples 45c, 46c). The resin in Examples 45a and 46a was catalyzed by the addition of C827 (monomer to catalyst ratio 60,000:1) in a suspension of mineral oil. The resin in Examples 45b, 46b, 45c, and 46c was catalyzed by the addition of C827 (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. VARTM samples were prepared using the following glass fabrics (Hexcel 7781-F12; heat cleaned, no silane coupling agents); (BGF 7781-497A; amino- and methacrylate-silane coupling agents only). The ILSS of the resulting composites were measured (Table 20). The heat cleaned glass fabric with no silane coupling agent (Hexcel 7781-F12) showed (i) poor adhesion without adhesion promoter and alcohol (Example 45a); (ii) moderate adhesion with adhesion promoter alone (Example 45b); and (iii) moderate adhesion with adhesion promoter and alcohol (Example 45c). The multicompatible glass with amino- and methacrylate-silane coupling agent only (BGF 7781-497A) showed (i) moderate adhesion without adhesion promoter and alcohol (Example 46a); (ii) moderate adhesion with adhesion promoter alone (Example 46b); and (iii) superior adhesion with adhesion promoter and alcohol (Example 46c). Commercially available glass fabric and/or fiber with a complete sizing composition (e.g. film formers, lubricants, silane coupling agents, etc.) showed poor adhesion without adhesion promoter and

alcohol (Table 1. Examples 1a-4a), showed superior adhesion with adhesion promoter alone (Table 1. Examples 1b-4b & Table 8. Examples 24a-26a) and superior adhesion with adhesion promoter and alcohol (Table 2. Examples 5a-8a & Table 8. Examples 24b-26b).

Table 20. ILSS for VARTM with Adhesion Promoter and Fabrics Having Various Sizing				
Example	Adhesion Promoter	Alcohol	ILSS (psi)	
			45 Hexcel 7781-F12	46 BGF 7781-497A
a	None	None	2178	3342
b	2 phr 4,4'-MDI/2,4'-MDI	None	3094	4059
c	2 phr 4,4'-MDI/2,4'-MDI	2 phr HENB	5122	7465

Examples 47(a-e) and 48(a-e)

[00221] Resin was prepared using 150 grams of dicyclopentadiene (containing 20-25% tricyclopentadiene) and 2 phr Ethanox® 4702 and either 20,000 ppm di-*tert*-butyl peroxide (Examples 47a, 48a), or 20,000 ppm cumene hydroperoxide (Examples 47b, 48b), or 2000 ppm di-*tert*-butyl peroxide (Examples 47c, 48c), or 2000 ppm cumene hydroperoxide (Examples 47d, 48d), or no peroxide (Examples 47e, 48e). The prepared resin was equilibrated to 30°C and combined with C827 catalyst (monomer to catalyst ratio 30,000:1) in a suspension of mineral oil. After mixing, the combined resin was poured into a 5" x 7" x 1/4" aluminum mold placed in a 30°C oven. Before exotherm, the uncured polymer was removed from the mold and then post-cured for 2 hours at either 180°C or 200°C. Examples 47b and 48b, containing 20,000 ppm cumene hydroperoxide did not polymerize after 18 hours at 30°C; therefore, no polymer samples were available for measuring glass transition temperature (T_g). Glass transition temperature (T_g) was measured by thermal mechanical analysis (TMA) according to ISO 11359-2 on 1/4" x 1/4" x 1/4" samples. Cumene hydroperoxide (CHP) (80% purity) was used as received from Sigma Aldrich. Di-*tert*-butyl peroxide (98% purity) was used as received from Sigma Aldrich.

[00222] The data in Table 21 shows (i) that alkyl hydroperoxides, such as CHP, are gel modifiers and dialkyl peroxides, such as di-*tert*-butyl peroxide, are not gel modifiers; and (ii) dialkyl peroxides, such as di-*tert*-butyl peroxide, increase polymer cross-linking leading to higher T_g and alkyl hydroperoxides, such as CHP, do not increase polymer cross-linking.

Table 21: Effect of peroxides on gel time and polymer cross-linking						
Example	Post Cure Temperature	Peroxide	Peroxide Concentration (ppm)	Peroxide:Catalyst Molar Ratio	Tg (°C)	Gel Time (min)
47a	180°C	di- <i>tert</i> -butyl peroxide	20,000	590.78	148	5.7
47b	180°C	CHP	20,000	567.72	NR	NR
47c	180°C	di- <i>tert</i> -butyl peroxide	2000	59.08	152	4.6
47d	180°C	CHP	2000	56.77	133	225.7
47e	180°C	None	None	None	131	4.3
48a	200°C	di- <i>tert</i> -butyl peroxide	20,000	590.78	161	5.7
48b	200°C	CHP	20,000	567.72	NR	NR
48c	200°C	di- <i>tert</i> -butyl peroxide	2000	59.08	155	4.6
48d	200°C	CHP	2000	56.77	145	225.7
48e	200°C	None	None	None	156	4.3

NR= no reaction

[00223] It is to be understood that while the invention has been described in conjunction with specific embodiments thereof, that the description above as well as the examples that follow are intended to illustrate and not limit the scope of the invention. Other aspects, advantages, and modifications within the scope of the invention will be apparent to those skilled in the art to which the invention pertains.

The claimed invention is:

1. A composition, comprising:
 - at least one cyclic olefin;
 - at least one cyclic olefin metathesis catalyst;
 - at least one adhesion promoter comprising at least one compound containing at least two isocyanate groups; and
 - and at least one hydroperoxide gel modifier, in an amount effective to increase the gel time of a cyclic olefin metathesis reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the hydroperoxide gel modifier.
2. A composition, comprising:
 - at least one cyclic olefin;
 - at least one cyclic olefin metathesis catalyst; and
 - at least one hydroperoxide gel modifier, in an amount effective to increase the gel time of a cyclic olefin metathesis reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the hydroperoxide gel modifier.
3. A composition, comprising:
 - at least one cyclic olefin;
 - at least one cyclic olefin metathesis catalyst;
 - at least one adhesion promoter comprising at least one compound containing at least two isocyanate groups; and
 - at least one glass substrate.
4. A method for improving the adhesion of a resin composition to a substrate material, comprising:
 - combining at least one adhesion promoter, at least one cyclic olefin, at least one hydroperoxide gel modifier, and at least one olefin metathesis catalyst to form the resin composition,
 - contacting the resin composition with the substrate material, and
 - subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups,

wherein the at least one hydroperoxide gel modifier is present in an amount effective to increase the gel time of a cyclic olefin metathesis reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the hydroperoxide gel modifier.

5. A method for improving the adhesion of a resin composition to a glass substrate material, comprising:

combining at least one adhesion promoter, at least one cyclic olefin, and at least one olefin metathesis catalyst to form the resin composition,

contacting the resin composition with the glass substrate material, and

subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups.

6. A method for improving the adhesion of a resin composition to a glass substrate material, comprising:

combining at least one cyclic olefin, at least one olefin metathesis catalyst, at least one adhesion promoter, and at least one glass substrate material to form the resin composition, and

subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups.

7. A method for improving the adhesion of a resin composition to a substrate material, comprising:

combining at least one cyclic olefin, at least one olefin metathesis catalyst, at least one adhesion promoter, at least one hydroperoxide gel modifier, and at least one substrate material to form the resin composition, and

subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups,

wherein the at least one hydroperoxide gel modifier is present in an amount effective to increase the gel time of a cyclic olefin metathesis reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the hydroperoxide gel modifier.

8. A method for improving the adhesion of a resin composition to a glass substrate material, comprising:

combining at least one cyclic olefin and at least one olefin metathesis catalyst to form the resin composition,

contacting at least one adhesion promoter with at least one surface of the glass substrate material,

applying the resin composition to the at least one surface of the glass substrate material, and

subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups.

9. A method for improving the adhesion of a resin composition to a substrate material, comprising:

combining at least one cyclic olefin, at least one hydroperoxide gel modifier, and at least one olefin metathesis catalyst to form the resin composition,

contacting at least one adhesion promoter with at least one surface of the substrate material,

applying the resin composition to the at least one surface of the substrate material, and
subjecting the resin composition to conditions effective to promote an olefin metathesis reaction of the cyclic olefin,

wherein the at least one adhesion promoter comprises at least one compound containing at least two isocyanate groups,

wherein the at least one hydroperoxide gel modifier is present in an amount effective to increase the gel time of a cyclic olefin metathesis reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the hydroperoxide gel modifier.

10. A method for modifying the onset of a ROMP reaction of a cyclic olefin catalyzed by a cyclic olefin metathesis catalyst, comprising:

combining a hydroperoxide gel modifier with a cyclic olefin and a cyclic olefin metathesis catalyst, thereby forming a ROMP composition, and

subjecting the ROMP composition to conditions effective to promote a ROMP reaction of the cyclic olefin in the presence of the cyclic olefin metathesis catalyst and the added hydroperoxide gel modifier,

wherein the hydroperoxide is added in an amount effective to increase the gel time of the ROMP reaction of the cyclic olefin catalyzed by the cyclic olefin metathesis catalyst in the absence of the added hydroperoxide.

11. In a ROMP reaction of an olefin composition comprising a cyclic olefin and an olefin metathesis catalyst, wherein the ROMP reaction of the cyclic olefin is catalyzed by the olefin metathesis catalyst, the improvement comprising adding a hydroperoxide gel modifier to the olefin composition, in an amount effective to increase the gel time of the ROMP reaction of the cyclic olefin catalyzed by the olefin metathesis catalyst in the absence of the added hydroperoxide.

12. An article of manufacture comprising at least one resin composition containing at least one cyclic olefin, at least one olefin metathesis catalyst, and at least one adhesion promoter comprising at least one compound containing at least two isocyanate groups.

13. An article of manufacture comprising at least one resin composition containing at least one cyclic olefin, at least one olefin metathesis catalyst, at least one adhesion promoter comprising at least one compound containing at least two isocyanate groups, and at least one hydroperoxide gel modifier.

14. An article of manufacture comprising at least one resin composition containing at least one cyclic olefin, at least one olefin metathesis catalyst, and at least one hydroperoxide gel modifier.
15. Use of at least one compound containing at least two isocyanate groups as an adhesion promoter for adhering a metathesis-polymerized resin composition to a glass substrate material.
16. Use of at least one compound containing at least two isocyanate groups as an adhesion promoter and at least one hydroperoxide gel modifier for adhering a metathesis-polymerized resin composition to a substrate material
17. Use of at least one hydroperoxide gel modifier for modifying the onset of a ROMP reaction of a cyclic olefin catalyzed by a cyclic olefin metathesis catalyst.
18. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin is functionalized.
19. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin is substituted.
20. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin contains at least one heteroatom.
21. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin is mono-unsaturated, di-unsaturated, or poly-unsaturated.
22. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin is selected from strained cyclic olefins, unstrained cyclic olefins, acyclic olefins, dienes, and unsaturated polymers, or combinations thereof, wherein the cyclic olefin may contain a functional group, or be substituted with a group, selected from


halogen, hydroxyl, hydrocarbyl, alkoxy, alkenyloxy, alkynyloxy, aryloxy, aralkyloxy, alkaryloxy, acyl, acyloxy, alkoxycarbonyl, alkylcarbonato, arylcarbonato, carboxy, carboxylato, carbamoyl, alkyl-substituted carbamoyl, haloalkyl-substituted carbamoyl, aryl-substituted carbamoyl, thiocarbamoyl alkyl-substituted thiocarbamoyl, aryl-substituted thiocarbamoyl, carbamido, cyano, cyanato, thiocyanato, formyl, thioformyl, amino, alkyl-substituted amino, aryl-substituted amino, alkylamido, arylamido, imino, alkylimino, arylimino, nitro, nitroso, sulfo, sulfonato, alkylsulfanyl, arylsulfanyl, alkylsulfinyl, arylsulfinyl, alkylsulfonyl, alkylaminosulfonyl, arylsulfonyl, boryl, borono, boronato, phosphono, phosphonato, phosphinato, phospho, phosphino, or a combination thereof.

23. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin is selected from cyclobutene, cycloheptene, cyclooctene, cyclononene, cyclodecene, cyclooctadiene, cyclononadiene, cyclododecatriene, tetracyclododecadiene, substituted norbornenes, substituted dicyclopentadienes, dicyclopentadiene, tricyclopentadiene, dicyclohexadiene, norbornene, 5-methyl-2-norbornene, 5-ethyl-2-norbornene, 5-isobutyl-2-norbornene, 5,6-dimethyl-2-norbornene, 5-phenylnorbornene, 5-benzylnorbornene, 5-acetylnorbornene, 5-methoxycarbonylnorbornene, 5-ethoxycarbonyl-1-norbornene, 5-methyl-5-methoxy-carbonylnorbornene, 5-cyanonorbornene, 5,5,6-trimethyl-2-norbornene, cyclo-hexenylnorbornene, endo, exo-5,6-dimethoxynorbornene, endo, endo-5,6-dimethoxynorbornene, endo,exo-5,6-dimethoxycarbonylnorbornene, endo, endo-5,6-dimethoxycarbonylnorbornene, 2,3-dimethoxynorbornene, norbornadiene, tricycloundecene, tetracyclododecene, 8-methyltetracyclododecene, 8-ethyl-tetracyclododecene, 8-methoxycarbonyltetracyclododecene, 8-methyl-8-tetracyclo-dodecene, 8-cyanotetracyclododecene, pentacyclopentadecene, or pentacyclohexadecene, or a combination thereof.

24. The composition, method, reaction, article of manufacture, and use of claim 23, wherein the at least one cyclic olefin is selected from cyclobutene, cycloheptene, cyclooctene, cyclononene, cyclodecene, cyclooctadiene, cyclononadiene, norbornene, dicyclopentadiene, or a combination thereof.

25. The composition, method, reaction, article of manufacture, and use of claim 24, wherein the at least one cyclic olefin is dicyclopentadiene.

26. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin metathesis catalyst is a Group 8 transition metal complex having the structure of formula (I)

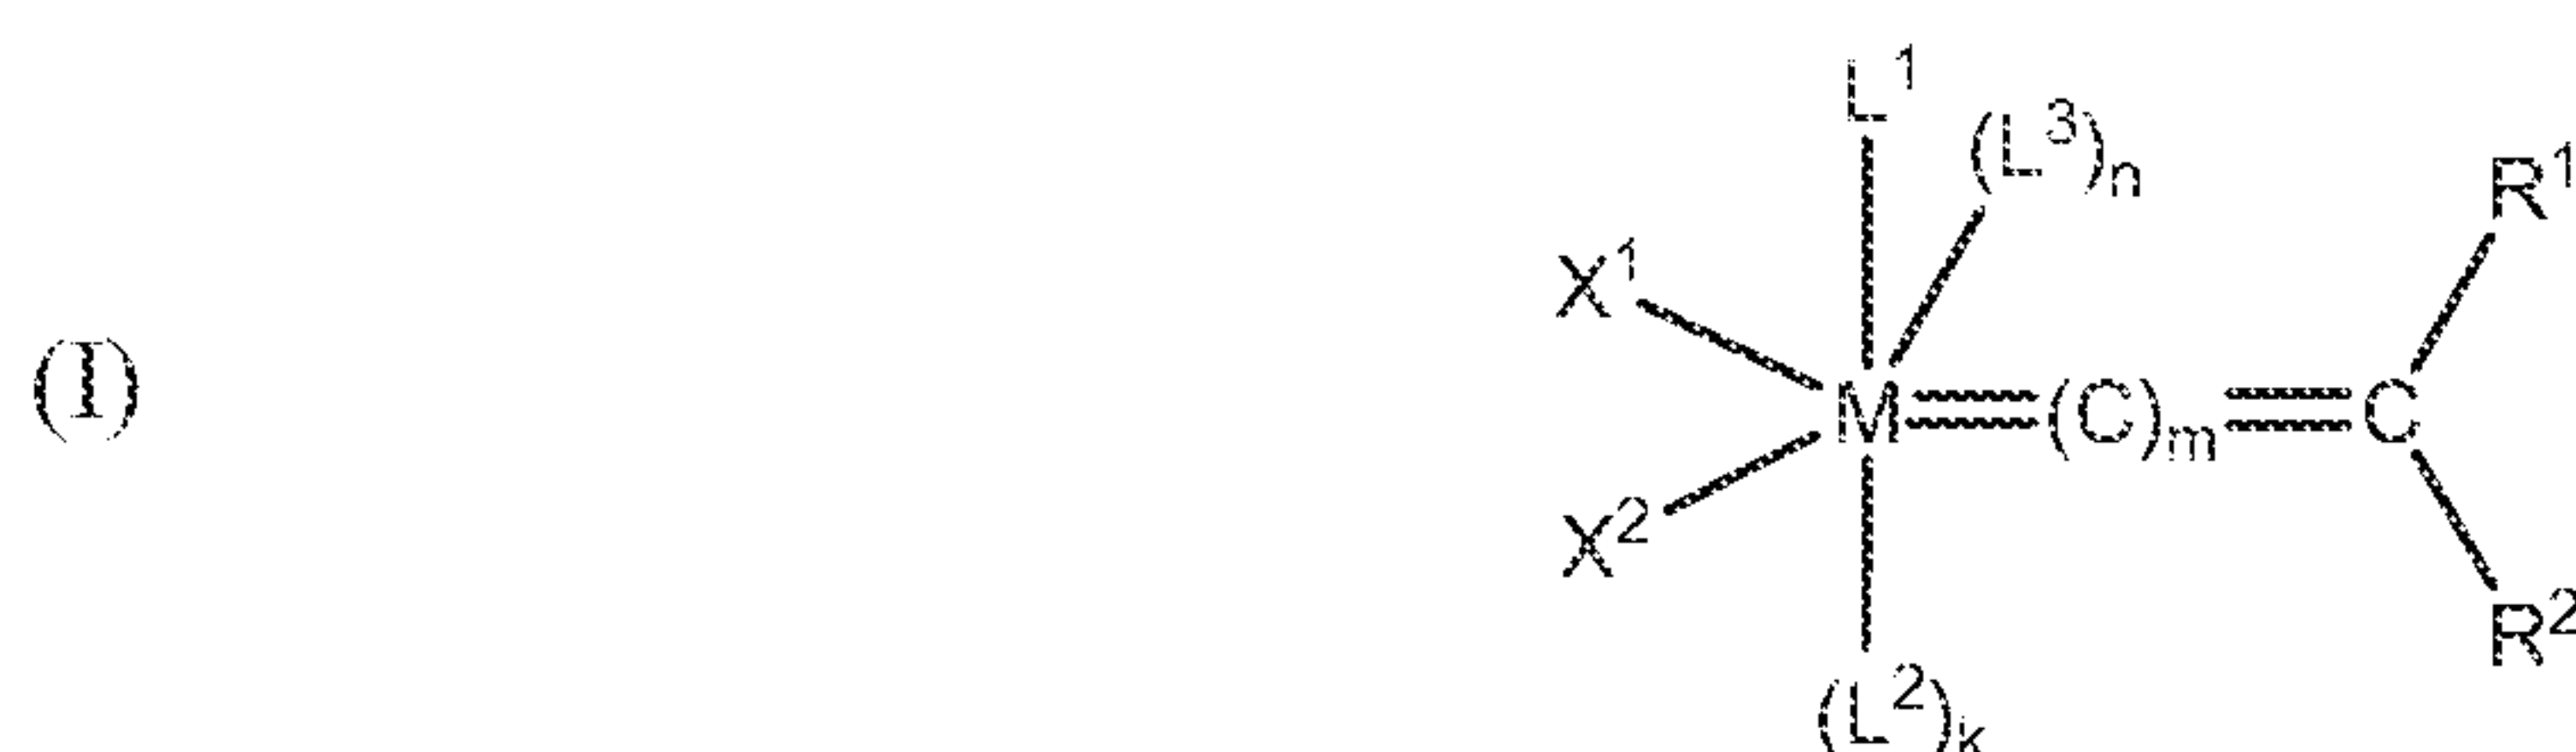

in which:

M is a Group 8 transition metal;

L^1 , L^2 , and L^3 are independently selected from neutral electron donor ligands;

n is 0 or 1, such that L^3 may or may not be present;

m is 0, 1, or 2;

k is 0 or 1;


X^1 and X^2 are independently anionic ligands; and

R^1 and R^2 are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups; wherein one or both of R^1 and R^2 may have the structure $-(W)_n-U^+V^-$, in which W is selected from hydrocarbylene, substituted hydrocarbylene, heteroatom-containing hydrocarbylene, or substituted heteroatom-containing hydrocarbylene; U is a positively charged Group 15 or Group 16 element substituted with hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, or substituted heteroatom-containing hydrocarbyl; V is a negatively charged counterion; and n is zero or 1,

wherein any two or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 can be taken together to form one or more cyclic groups, and further wherein any one or more of X^1 , X^2 , L^1 , L^2 , L^3 , R^1 , and R^2 may be attached to a support.

27. The composition, method, reaction, article of manufacture, and use of claim 26, wherein at least one of L^1 , L^2 , and L^3 is an N-heterocyclic carbene ligand.

28. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin metathesis catalyst has the structure

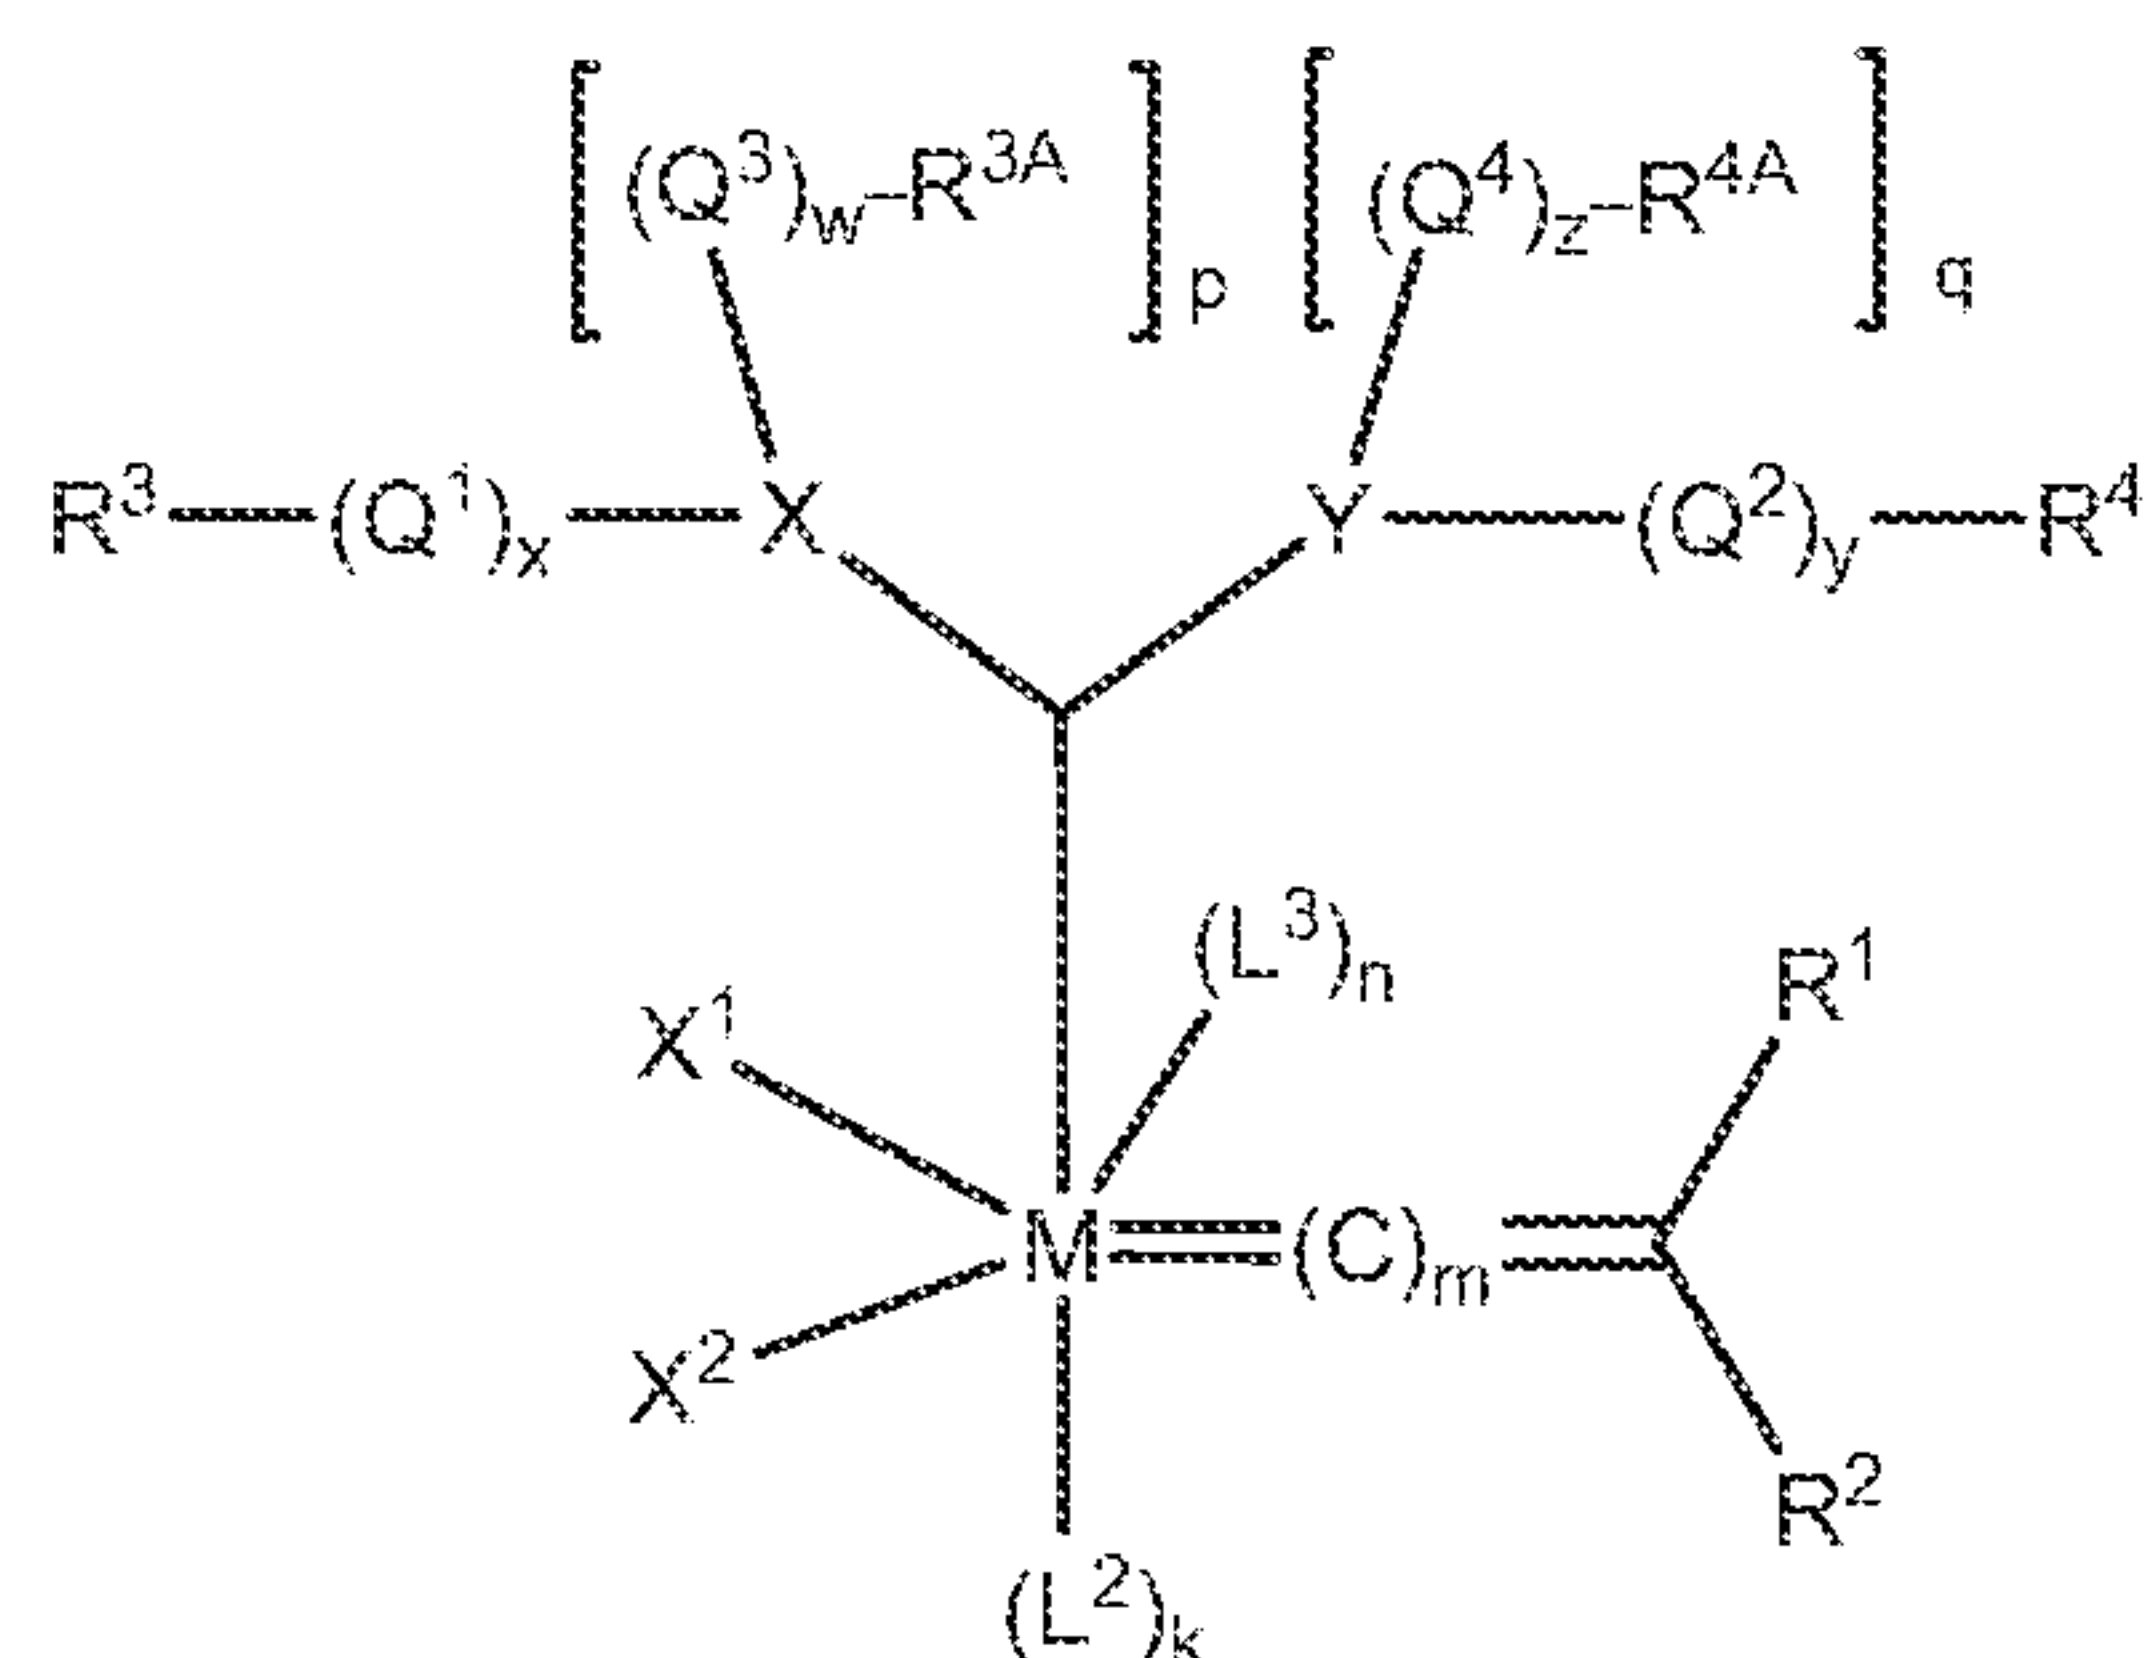

wherein,

M is a Group 8 transition metal;

n is 0 or 1;

m is 0, 1, or 2;

k is 0 or 1;

X^1 and X^2 are independently selected from anionic ligands;

L^2 and L^3 are independently selected from neutral electron donor ligands, or may be taken together to form a single bidentate electron-donating heterocyclic ligand;

R^1 and R^2 are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups;

X and Y are independently selected from C, N, O, S, and P;

p is zero when X is O or S, and p is 1 when X is N or P;

q is zero when Y is O or S, and q is 1 when Y is N or P;

Q^1 , Q^2 , Q^3 , and Q^4 are independently selected from hydrocarbylene, substituted hydrocarbylene, heteroatom-containing hydrocarbylene, substituted heteroatom-containing hydrocarbylene, and $-(CO)-$, and further wherein two or more substituents on adjacent atoms within Q may be linked to form an additional cyclic group;


w, x, y, and z are independently zero or 1; and

R^3 , R^{3A} , R^4 , and R^{4A} are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, and substituted heteroatom-containing hydrocarbyl,

wherein any two or more of X^1 , X^2 , L^2 , L^3 , R^1 , R^2 , Q^1 , Q^2 , Q^3 , Q^4 , R^3 , R^{3A} , R^4 , and R^{4A} can be taken together to form a cyclic group, and further wherein any one or more of X^1 , X^2 , L^2 , L^3 , Q^1 , Q^2 , Q^3 , Q^4 , R^1 , R^2 , R^3 , R^{3A} , R^4 , and R^{4A} may be attached to a support.

29. The composition, method, reaction, article of manufacture, and use of claim 28, wherein R^1 and R^2 are taken together to form an indenylidene moiety

30. The composition, method, reaction, article of manufacture, and use of claim 28, wherein M is ruthenium, w, x, y, and z are zero, X and Y are N, and R^{3A} and R^{4A} are linked to form -Q-, such that the complex has the structure

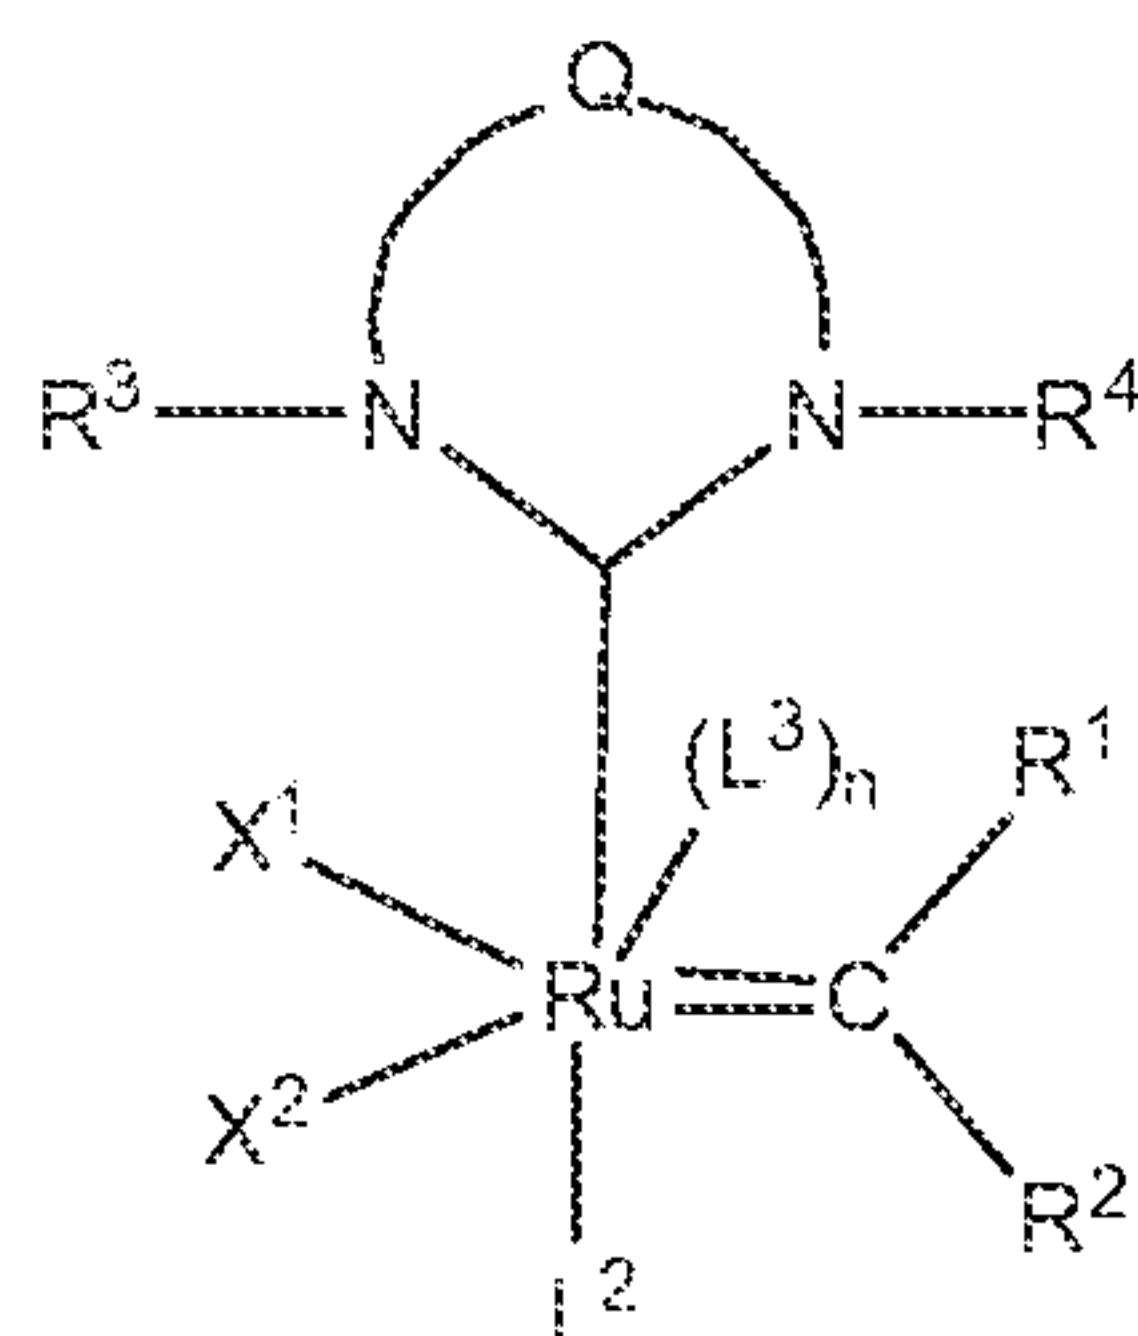

wherein Q is a hydrocarbylene, substituted hydrocarbylene, heteroatom-containing hydrocarbylene, or substituted heteroatom-containing hydrocarbylene linker, and further wherein two or more substituents on adjacent atoms within Q may be linked to form an additional cyclic group.

31. The composition, method, reaction, article of manufacture, and use of claim 30, wherein:
 X^1 and X^2 are halo;

Q is $-CR^{11}R^{12}-CR^{13}R^{14}-$ or $-CR^{11}=CR^{13}-$, wherein R^{11} , R^{12} , R^{13} , and R^{14} are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups,

or wherein any two of R^{11} , R^{12} , R^{13} , and R^{14} may be linked together to form a substituted or unsubstituted, saturated or unsaturated ring; and

R^3 and R^4 are aromatic.

32. The composition, method, reaction, article of manufacture, and use of claims 30 or 31, wherein:

Q is $-CR^{11}R^{12}-CR^{13}R^{14}-$ wherein R^{11} , R^{12} , R^{13} , and R^{14} are independently selected from hydrogen, C_1 - C_{12} alkyl, substituted C_1 - C_{12} alkyl, C_1 - C_{12} heteroalkyl, substituted C_1 - C_{12} heteroalkyl, phenyl, and substituted phenyl; and

R^3 and R^4 are unsubstituted phenyl or phenyl substituted with one or more substituents selected from C_1 - C_{20} alkyl, substituted C_1 - C_{20} alkyl, C_1 - C_{20} heteroalkyl, substituted C_1 - C_{20} heteroalkyl, C_5 - C_{24} aryl, substituted C_5 - C_{24} aryl, C_5 - C_{24} heteroaryl, C_6 - C_{24} aralkyl, C_6 - C_{24} alkaryl, or halide.

33. The composition, method, reaction, article of manufacture, and use of claim 28, wherein two or more of X^1 , X^2 , L^2 , L^3 , R^1 , R^2 , Q^1 , Q^2 , Q^3 , Q^4 , R^3 , R^{3A} , R^4 , and R^{4A} together form a cyclic group.


34. The composition, method, reaction, article of manufacture, and use of claim 33, wherein the cyclic group is formed from R^1 and/or R^2 taken together with one or more of X^1 , X^2 , L^2 , L^3 , Q^1 , Q^2 , Q^3 , Q^4 , R^3 , R^{3A} , R^4 , and R^{4A} .

35. The composition, method, reaction, article of manufacture, and use of claim 33, wherein the cyclic group is formed from R^1 and/or R^2 taken together with one or more of L^2 , L^3 , R^3 , R^{3A} , R^4 , and R^{4A} .

36. The composition, method, reaction, article of manufacture, and use of claim 28, wherein one or more of X^1 , X^2 , L^2 , L^3 , X, and Y is further coordinated to boron or to a carboxylate.

37. The composition, method, reaction, article of manufacture, and use of claim 28, wherein R^3 and R^4 are mesityl.

38. The composition, method, reaction, article of manufacture, and use of claim 27, wherein the N-heterocyclic carbene ligand has the structure

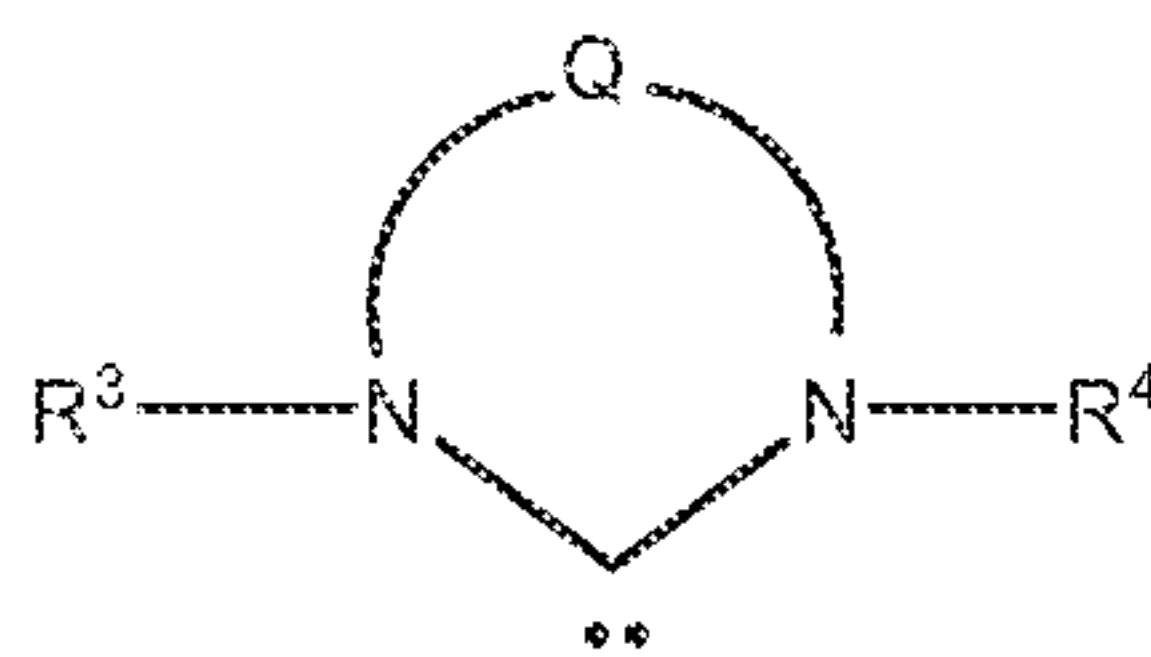

wherein,

Q is $-\text{CR}^{11}\text{R}^{12}-\text{CR}^{13}\text{R}^{14}-$ or $-\text{CR}^{11}=\text{CR}^{13}-$, wherein R^{11} , R^{12} , R^{13} , and R^{14} are independently selected from hydrogen, hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, and functional groups, or wherein any two of R^{11} , R^{12} , R^{13} , and R^{14} may be linked together to form a substituted or unsubstituted, saturated or unsaturated ring; and

R^3 and R^4 are unsubstituted phenyl or phenyl substituted with one or more substituents selected from $\text{C}_1\text{-C}_{20}$ alkyl, substituted $\text{C}_1\text{-C}_{20}$ alkyl, $\text{C}_1\text{-C}_{20}$ heteroalkyl, substituted $\text{C}_1\text{-C}_{20}$ heteroalkyl, $\text{C}_5\text{-C}_{24}$ aryl, substituted $\text{C}_5\text{-C}_{24}$ aryl, $\text{C}_5\text{-C}_{24}$ heteroaryl, $\text{C}_6\text{-C}_{24}$ aralkyl, $\text{C}_6\text{-C}_{24}$ alkaryl, or halide.

39. The composition, method, reaction, article of manufacture, and use of claim 26, wherein one or more of L^1 , L^2 , and L^3 is selected from nitrogen-containing heterocycles, sulfur-containing heterocycles, and oxygen-containing heterocycles.


40. The composition, method, reaction, article of manufacture, and use of claim 26, wherein L^2 and L^3 are selected from nitrogen-containing heterocycles.

41. The composition, method, reaction, article of manufacture, and use of claim 40, wherein L^2 and L^3 are selected from pyridine, bipyridine, pyridazine, pyrimidine, bipyridamine, pyrazine, 1,3,5-triazine, 1,2,4-triazine, 1,2,3-triazine, pyrrole, 2H-pyrrole, 3H-pyrrole, pyrazole, 2H-imidazole, 1,2,3-triazole, 1,2,4-triazole, indole, 3H-indole, 1H-isoindole, cyclopenta(b)pyridine, indazole, quinoline, bisquinoline, isoquinoline, bisisoquinoline, cinnoline, quinazoline, naphthyridine, piperidine, piperazine, pyrrolidine, pyrazolidine, quinuclidine, imidazolidine, picolyimine, purine, benzimidazole, bisimidazole, phenazine, acridine, carbazole, any of which is optionally substituted on a non-coordinating heteroatom with a non-hydrogen substituent.

42. The composition, method, reaction, article of manufacture, and use of claim 41, wherein L^2 and L^3 are selected from pyridine and substituted pyridines.

43. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin metathesis catalyst comprises a chelating alkylidene ligand.

44. The composition, method, reaction, article of manufacture, and use of claim 43, wherein the chelating ligand is derived from a ligand precursor having the formula

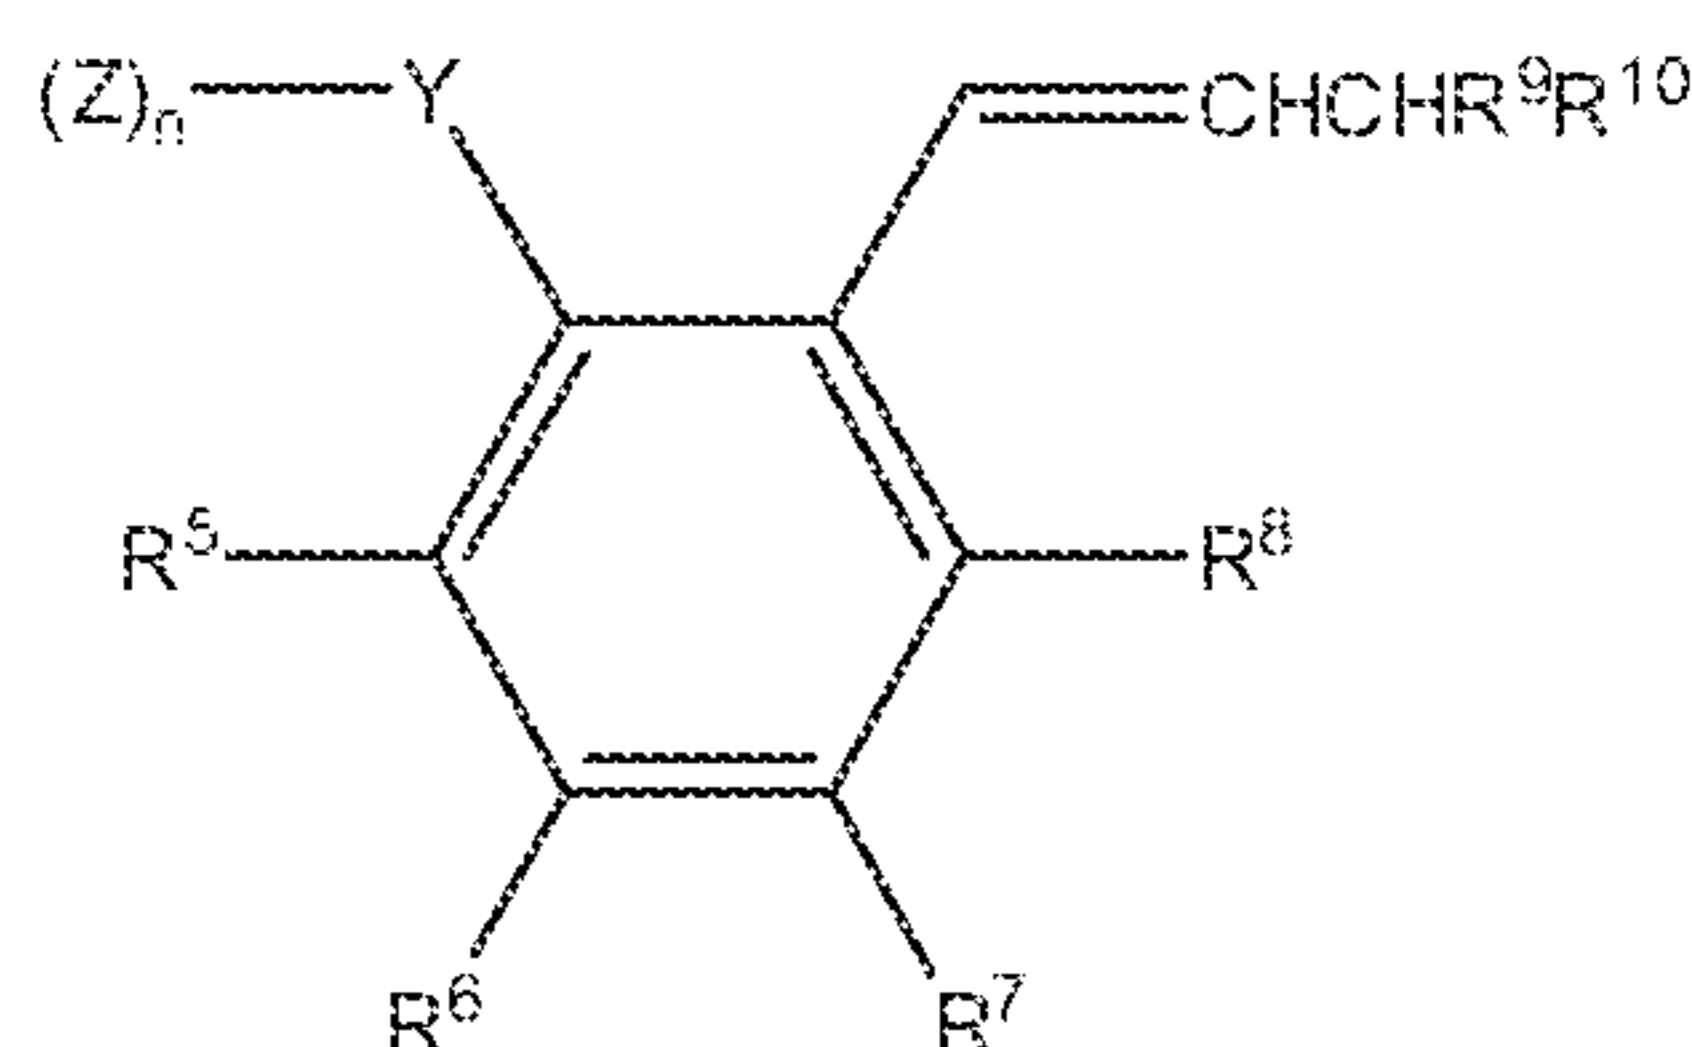

wherein,

Y is a heteroatom selected from N, O, S, and P;


n is 1 or 2, such that n is 1 for the divalent heteroatoms O or S, and n is 2 for the trivalent heteroatoms N or P;

Z is a group selected from hydrogen, alkyl, aryl, functionalized alkyl, functionalized aryl where the functional group(s) may independently be one or more of the following: alkoxy, aryloxy, halogen, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, trifluoroamide, sulfide, disulfide, carbamate, silane, siloxane, phosphine, phosphate, or borate; methyl, isopropyl, sec-butyl, t-butyl, neopentyl, benzyl, phenyl and trimethylsilyl; and

R⁵, R⁶, R⁷, and R⁸ are each, independently, selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane, siloxane, phosphine, phosphate, borate, or -A-Fn, wherein A is a divalent hydrocarbon moiety selected from alkylene and arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein

the aryl portion of the of arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and Fn is a functional group; and any combination of R^5 , R^6 , R^7 , and R^8 can be linked to form one or more cyclic groups; R^9 and R^{10} are each, independently, selected from hydrogen or a substituent group selected from alkyl, aryl, alkoxy, aryloxy, C_2 - C_{20} alkoxycarbonyl, or C_1 - C_{20} trialkylsilyl, wherein each of the substituent groups is substituted or unsubstituted; and wherein any combination or combinations of Z, Y, R^5 , R^6 , R^7 , R^8 , R^9 , and R^{10} may be linked to a support.

45. The composition, method, reaction, article of manufacture, and use of claim 44, wherein the at least one cyclic olefin metathesis catalyst has the structure

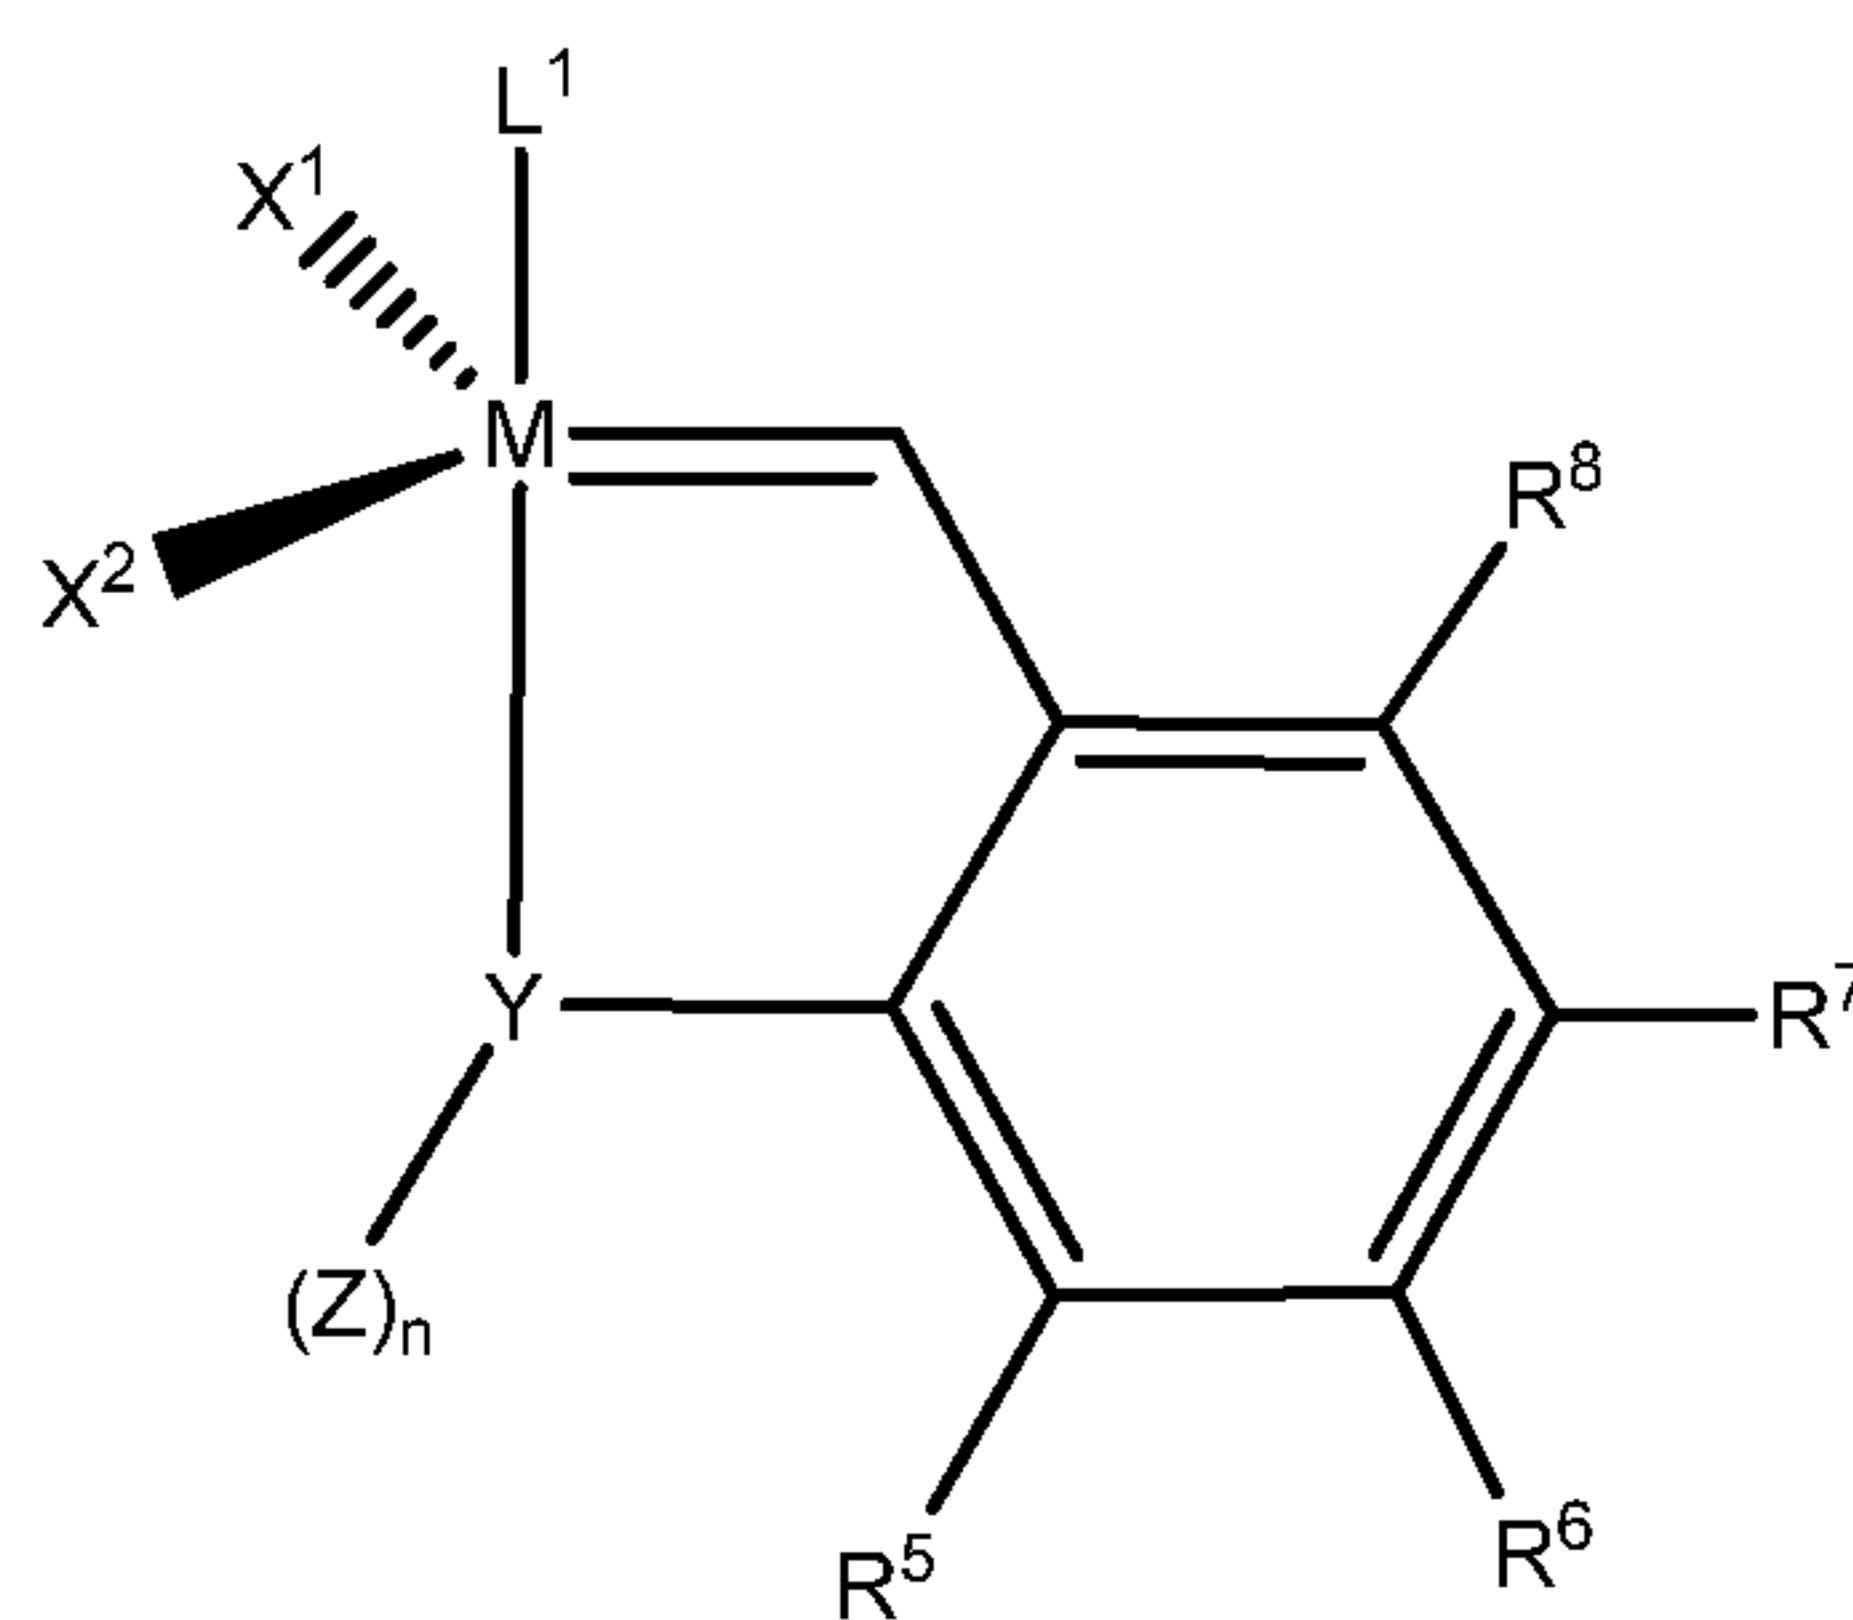

wherein,

M is a Group 8 transition metal;

X^1 and X^2 are independently anionic ligands;

L^1 is selected from neutral electron donor ligands;

Y is a heteroatom selected from N, O, S, and P;

R^5 , R^6 , R^7 , and R^8 are each, independently, selected from the group consisting of hydrogen, halogen, alkyl, alkenyl, alkynyl, aryl, heteroalkyl, heteroatom containing alkenyl, heteroalkenyl, heteroaryl, alkoxy, alkenyloxy, aryloxy, alkoxycarbonyl, carbonyl, alkylamino, alkylthio, aminosulfonyl, monoalkylaminosulfonyl, dialkylaminosulfonyl, alkylsulfonyl, nitrile, nitro, alkylsulfinyl, trihaloalkyl, perfluoroalkyl, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, halogen-substituted amide, trifluoroamide, sulfide, disulfide, sulfonate, carbamate, silane, siloxane, phosphine, phosphate, borate, or $-A-Fn$, wherein A is a divalent hydrocarbon moiety selected from alkylene and

arylalkylene, wherein the alkyl portion of the alkylene and arylalkylene groups can be linear or branched, saturated or unsaturated, cyclic or acyclic, and substituted or unsubstituted, wherein the aryl portion of the of arylalkylene can be substituted or unsubstituted, and wherein hetero atoms and/or functional groups may be present in either the aryl or the alkyl portions of the alkylene and arylalkylene groups, and Fn is a functional group; and any combination of R⁵, R⁶, R⁷, and R⁸ can be linked to form one or more cyclic groups;

n is 1 or 2, such that n is 1 for the divalent heteroatoms O or S, and n is 2 for the trivalent heteroatoms N or P; and

Z is a group selected from hydrogen, alkyl, aryl, functionalized alkyl, functionalized aryl where the functional group may independently be one or more of the following: alkoxy, aryloxy, halogen, carboxylic acid, ketone, aldehyde, nitrate, cyano, isocyanate, hydroxyl, ester, ether, amine, imine, amide, trifluoroamide, sulfide, disulfide, carbamate, silane, siloxane, phosphine, phosphate, or borate; methyl, isopropyl, sec-butyl, t-butyl, neopentyl, benzyl, phenyl and trimethylsilyl; and wherein any combination or combinations of X¹, X², L¹, Y, Z, R⁵, R⁶, R⁷, and R⁸ may be linked to a support.

46. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claim 17, wherein the at least one cyclic olefin metathesis catalyst is selected from the group consisting of [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(3-methyl-2-butenylidene)(tricyclohexylphosphine) ruthenium (II), ruthenium (II) dichloro (tricyclohexylphosphine) (o-isopropoxyphenylmethylene), [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(benzylidene)(tri(*n*-butyl)phosphine) ruthenium (II), and [1,3-bis-(2,4,6-trimethylphenyl)-2-imidazolidinylidene]dichloro(phenylindenylidene)(tri(*n*-butyl)-phosphine) ruthenium (II).

47. The composition of claims 1 or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12 or 13, or the use of claims 15 or 16, wherein the at least one compound containing at least two isocyanate groups is a compound selected from hydrocarbyl, substituted hydrocarbyl, heteroatom-containing hydrocarbyl, substituted heteroatom-containing hydrocarbyl, functionalized hydrocarbyl compounds, or mixtures thereof.

48. The composition of claims 1 or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12 or 13, or the use of claims 15 or 16, wherein the at least one compound containing at least two isocyanate groups is selected from at least one diisocyanate, triisocyanate, polyisocyanate compound, or mixtures thereof.

49. The composition, method, article of manufacture, or use of claim 48, wherein the at least one compound containing at least two isocyanate groups is a diisocyanate compound or mixtures thereof.

50. The composition, method, article of manufacture, or use of claim 49, wherein the diisocyanate compound does not contain an olefin metathesis active group.

51. The composition, method, article of manufacture, or use of claim 50, wherein the diisocyanate compound is selected from methylene diphenyl diisocyanate, hexamethylene diisocyanate, or mixtures thereof.

52. The composition, method, article of manufacture, or use of claim 50, wherein the at least one diisocyanate compound is selected from at least one alkyl diisocyanate, at least one cycloalkyl diisocyanate, at least one aryl diisocyanate, at least one polymer-containing diisocyanate, or mixtures thereof.

53. The composition, method, article of manufacture, or use of claim 52, wherein the at least one alkyl diisocyanate is selected from hexamethylene diisocyanate, octamethylene diisocyanate, decamethylene diisocyanate, or mixtures thereof.

54. The composition, method, article of manufacture, or use of claim 52, wherein the at least one cycloalkyl diisocyanate is selected from at least one cyclohexyl diisocyanate, cyclooctyl diisocyanate, cyclodecyl diisocyanate, or mixtures thereof.

55. The composition, method, article of manufacture, or use of claim 54, wherein the at least one cycloalkyl diisocyanate is selected from 5-isocyanato-1-(isocyanatomethyl)-1,3,3-trimethylcyclohexane, isocyanato-[(isocyanatocyclohexyl)methyl] cyclohexane, or mixtures thereof.

56. The composition, method, article of manufacture, or use of claim 52, wherein the at least one aryl diisocyanate is selected from tetramethylxylene diisocyanate, methylene diphenyl diisocyanate, or mixtures thereof.

57. The composition, method, article of manufacture, or use of claim 52, wherein the at least one polymer-containing diisocyanate is selected from at least one poly-methylene diphenyl diisocyanate (poly MDI) or isocyanate terminated polybutadiene prepolymers.

58. The composition, method, article of manufacture, or use of claim 52, wherein the at least one alkyl diisocyanate, at least one aryl diisocyanate, or mixtures thereof are reacted to form a trimer.

59. The composition, method, article of manufacture, or use of claim 58, wherein the trimer is selected from hexamethylene diisocyanate trimer, isophorone diisocyanate trimer, toluene diisocyanate trimer, tetramethylxylene diisocyanate trimer, or methylene diphenyl diisocyanate trimer.

60. The composition of claims 1 or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12 or 13, or the use of claims 15 or 16, wherein the at least one adhesion promoter is present in an amount effective to increase the adhesion of the composition to the at least one substrate material, when the composition has been contacted with, and polymerized in the presence of, the at least one substrate material.

61. The composition of claims 1 or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12 or 13, or the use of claims 15 or 16, wherein the at least one adhesion promoter is present in an amount ranging from 0.001 to 50 phr.

62. The composition of claims 1 or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12 or 13, or the use of claims 15 or 16, wherein the at least one adhesion promoter further comprises at least one compound containing at least one heteroatom-containing functional group and at least one metathesis-active olefin.

63. The composition, method, article of manufacture, or use of claim 62, wherein the at least one heteroatom-containing functional group is a hydroxyl, amine, thiol, phosphorus-containing functional group, or silane functional group.

64. The composition, method, article of manufacture, or use of claim 62, wherein the at least one compound containing at least one heteroatom-containing functional group and at least one metathesis-active olefin is selected from 5-norbornene-2-methanol or 2-hydroxyethyl bicyclo[2.2.1]hept-2-ene-5-carboxylate.

65. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the hydroperoxide gel modifier content ranges from 0.01 to 1000 ppm.

66. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the hydroperoxide gel modifier content ranges from 0.05 to 100 ppm.

67. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the hydroperoxide gel modifier content ranges from 0.1 to 20 ppm.

68. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the gel time is increased by from about 2 minutes to about 12 hours.

69. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the gel time is increased by from about 10 minutes to about 6 hours.

70. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the gel time is increased by from about 20 minutes to about 2 hours.

71. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein

the hydroperoxide gel modifier is selected from alkyl hydroperoxides, aryl hydroperoxides, alkaryl hydroperoxides, or combinations thereof.

72. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the hydroperoxide gel modifier is selected from C₂-C₂₄ alkyl hydroperoxides, C₅-C₂₄ aryl hydroperoxides, C₆-C₂₄ alkaryl hydroperoxides, or combinations thereof.

73. The composition of claims 1 or 2, the methods of claims 4, 7, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claims 16 or 17, wherein the hydroperoxide gel modifier is selected from *tert*-butyl hydroperoxide, *tert*-amyl hydroperoxide, cumene hydroperoxide, diisopropyl benzene hydroperoxide, (2,5-dihydroperoxy)-2,5-dimethylhexane, paramenthane hydroperoxide, triphenylmethyl hydroperoxide, pinane hydroperoxide, or combinations thereof.

74. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, or 9, the articles of manufacture of claims 12, 13, or 14, or the use of claims 16 or 17, wherein the composition is selected from a ring-opening metathesis polymerization composition, a ring-opening cross metathesis composition, a cross metathesis composition, a self-metathesis reaction, an ethenolysis reaction, an alkenolysis reaction, an acyclic diene metathesis polymerization composition, or combinations thereof.

75. The composition of claims 1 or 2, the methods of claims 10 or 11, the reaction of claim 11, the articles of manufacture of claims 13 or 14, or the use of claim 17, further comprising at least one substrate material.

76. The composition, method, reaction, article of manufacture, or use of claim 75, wherein the at least one substrate material comprises a functionalized substrate material.

77. The composition, method, reaction, article of manufacture, or use of claim 76, wherein the functionalized substrate material comprises a heteroatom-functionalized substrate material.

78. The composition, method, reaction, article of manufacture, or use of claim 77, wherein the heteroatom-functionalized substrate material comprises an amino functionalized substrate material.

79. The composition, method, reaction, article of manufacture, or use of claim 75, wherein the at least one substrate material is selected from reinforcing materials, glass fibers, glass fabrics, carbon fibers, carbon fabrics, aramid fibers, aramid fabrics, polyolefin fibers, polyolefin fabrics, polymer fibers, or polymer fabrics.

80. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, or 10, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claims or 15, 16, or 17, further comprising at least one additive.


81. A substrate having at least one surface coated with the composition of claims 1, 2, or 3.

82. The composition of claims 1, 2, or 3, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claims 16 or 17, wherein the composition has been subjected to conditions effective to promote an olefin metathesis reaction of the cyclic olefin.

83. The composition of claims 1, 2, or 3, the methods of claims 4, 5, 6, 7, 8, 9, 10, or 11, the reaction of claim 11, the articles of manufacture of claims 12, 13, or 14, or the use of claims 15, 16, or 17, wherein a crosslinker selected from dialkyl peroxides, diacyl peroxides, and peroxyacids is excluded.

Sheet 1/2

FIG. 1 Effect of Cumyl Hydroperoxide (CHP) on Exotherm Time

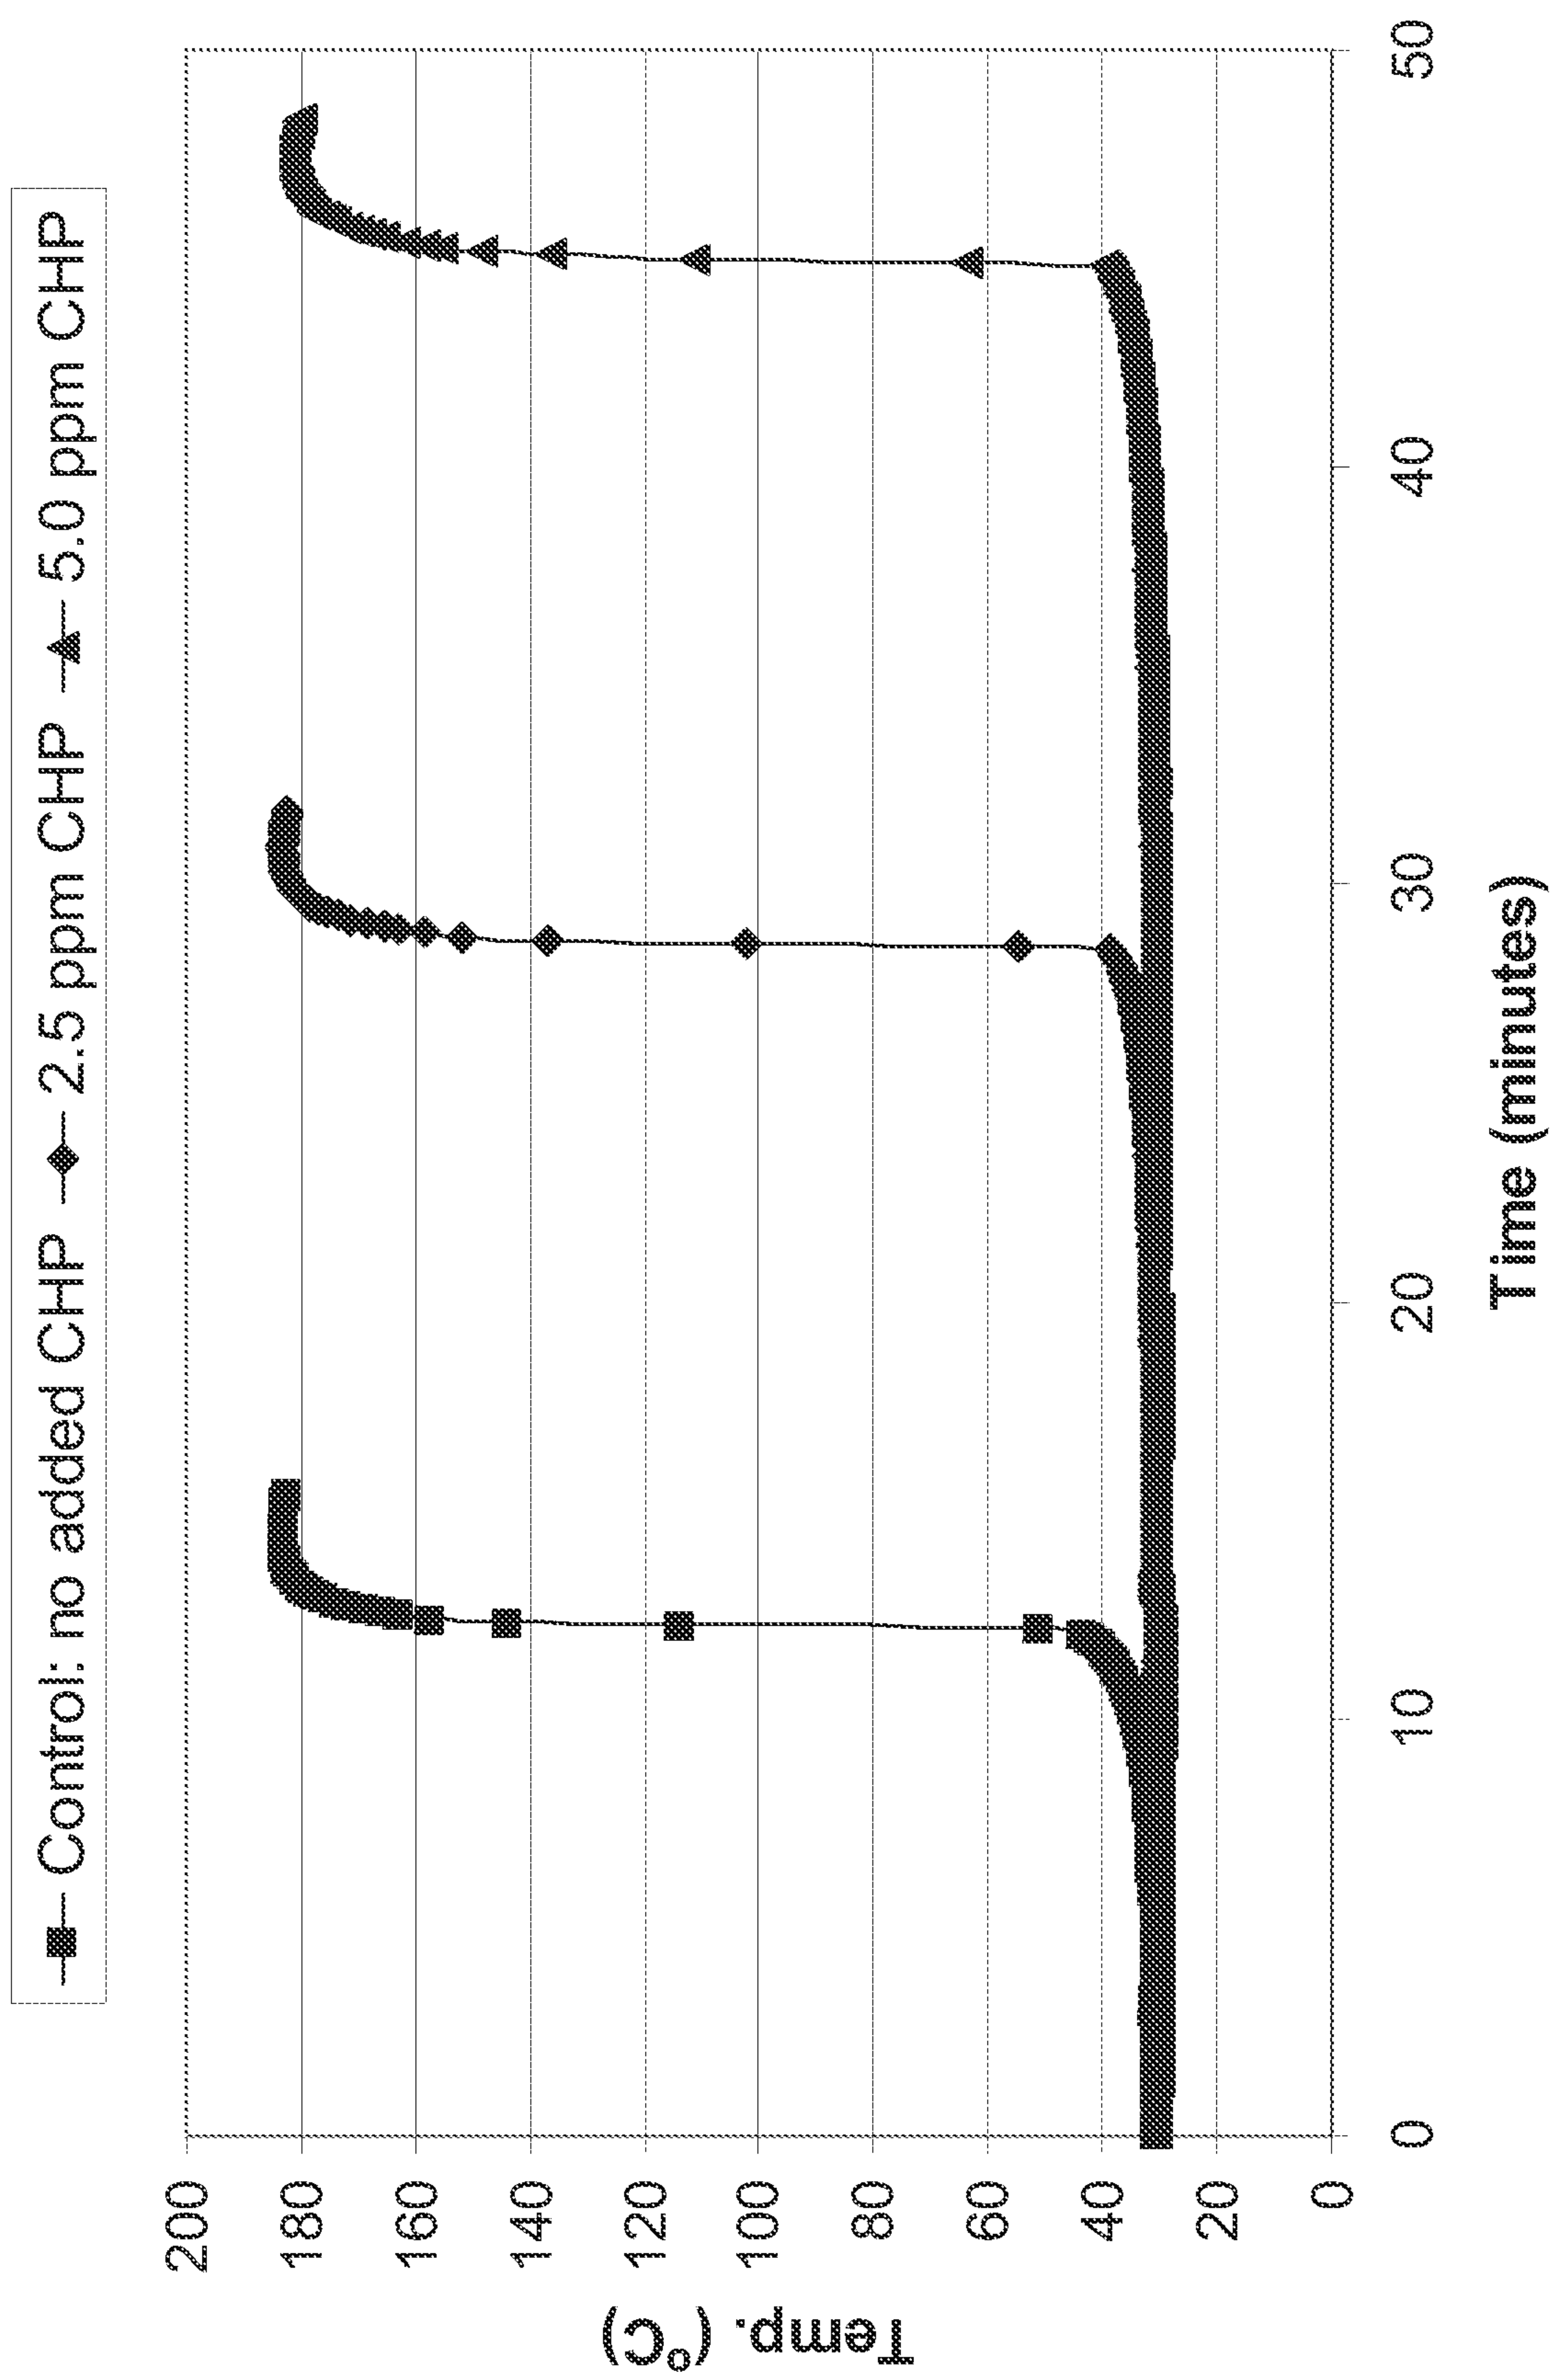

Sheet 2/2

FIG. 2 Viscosity Profile of CHP-modified DCPD Resin

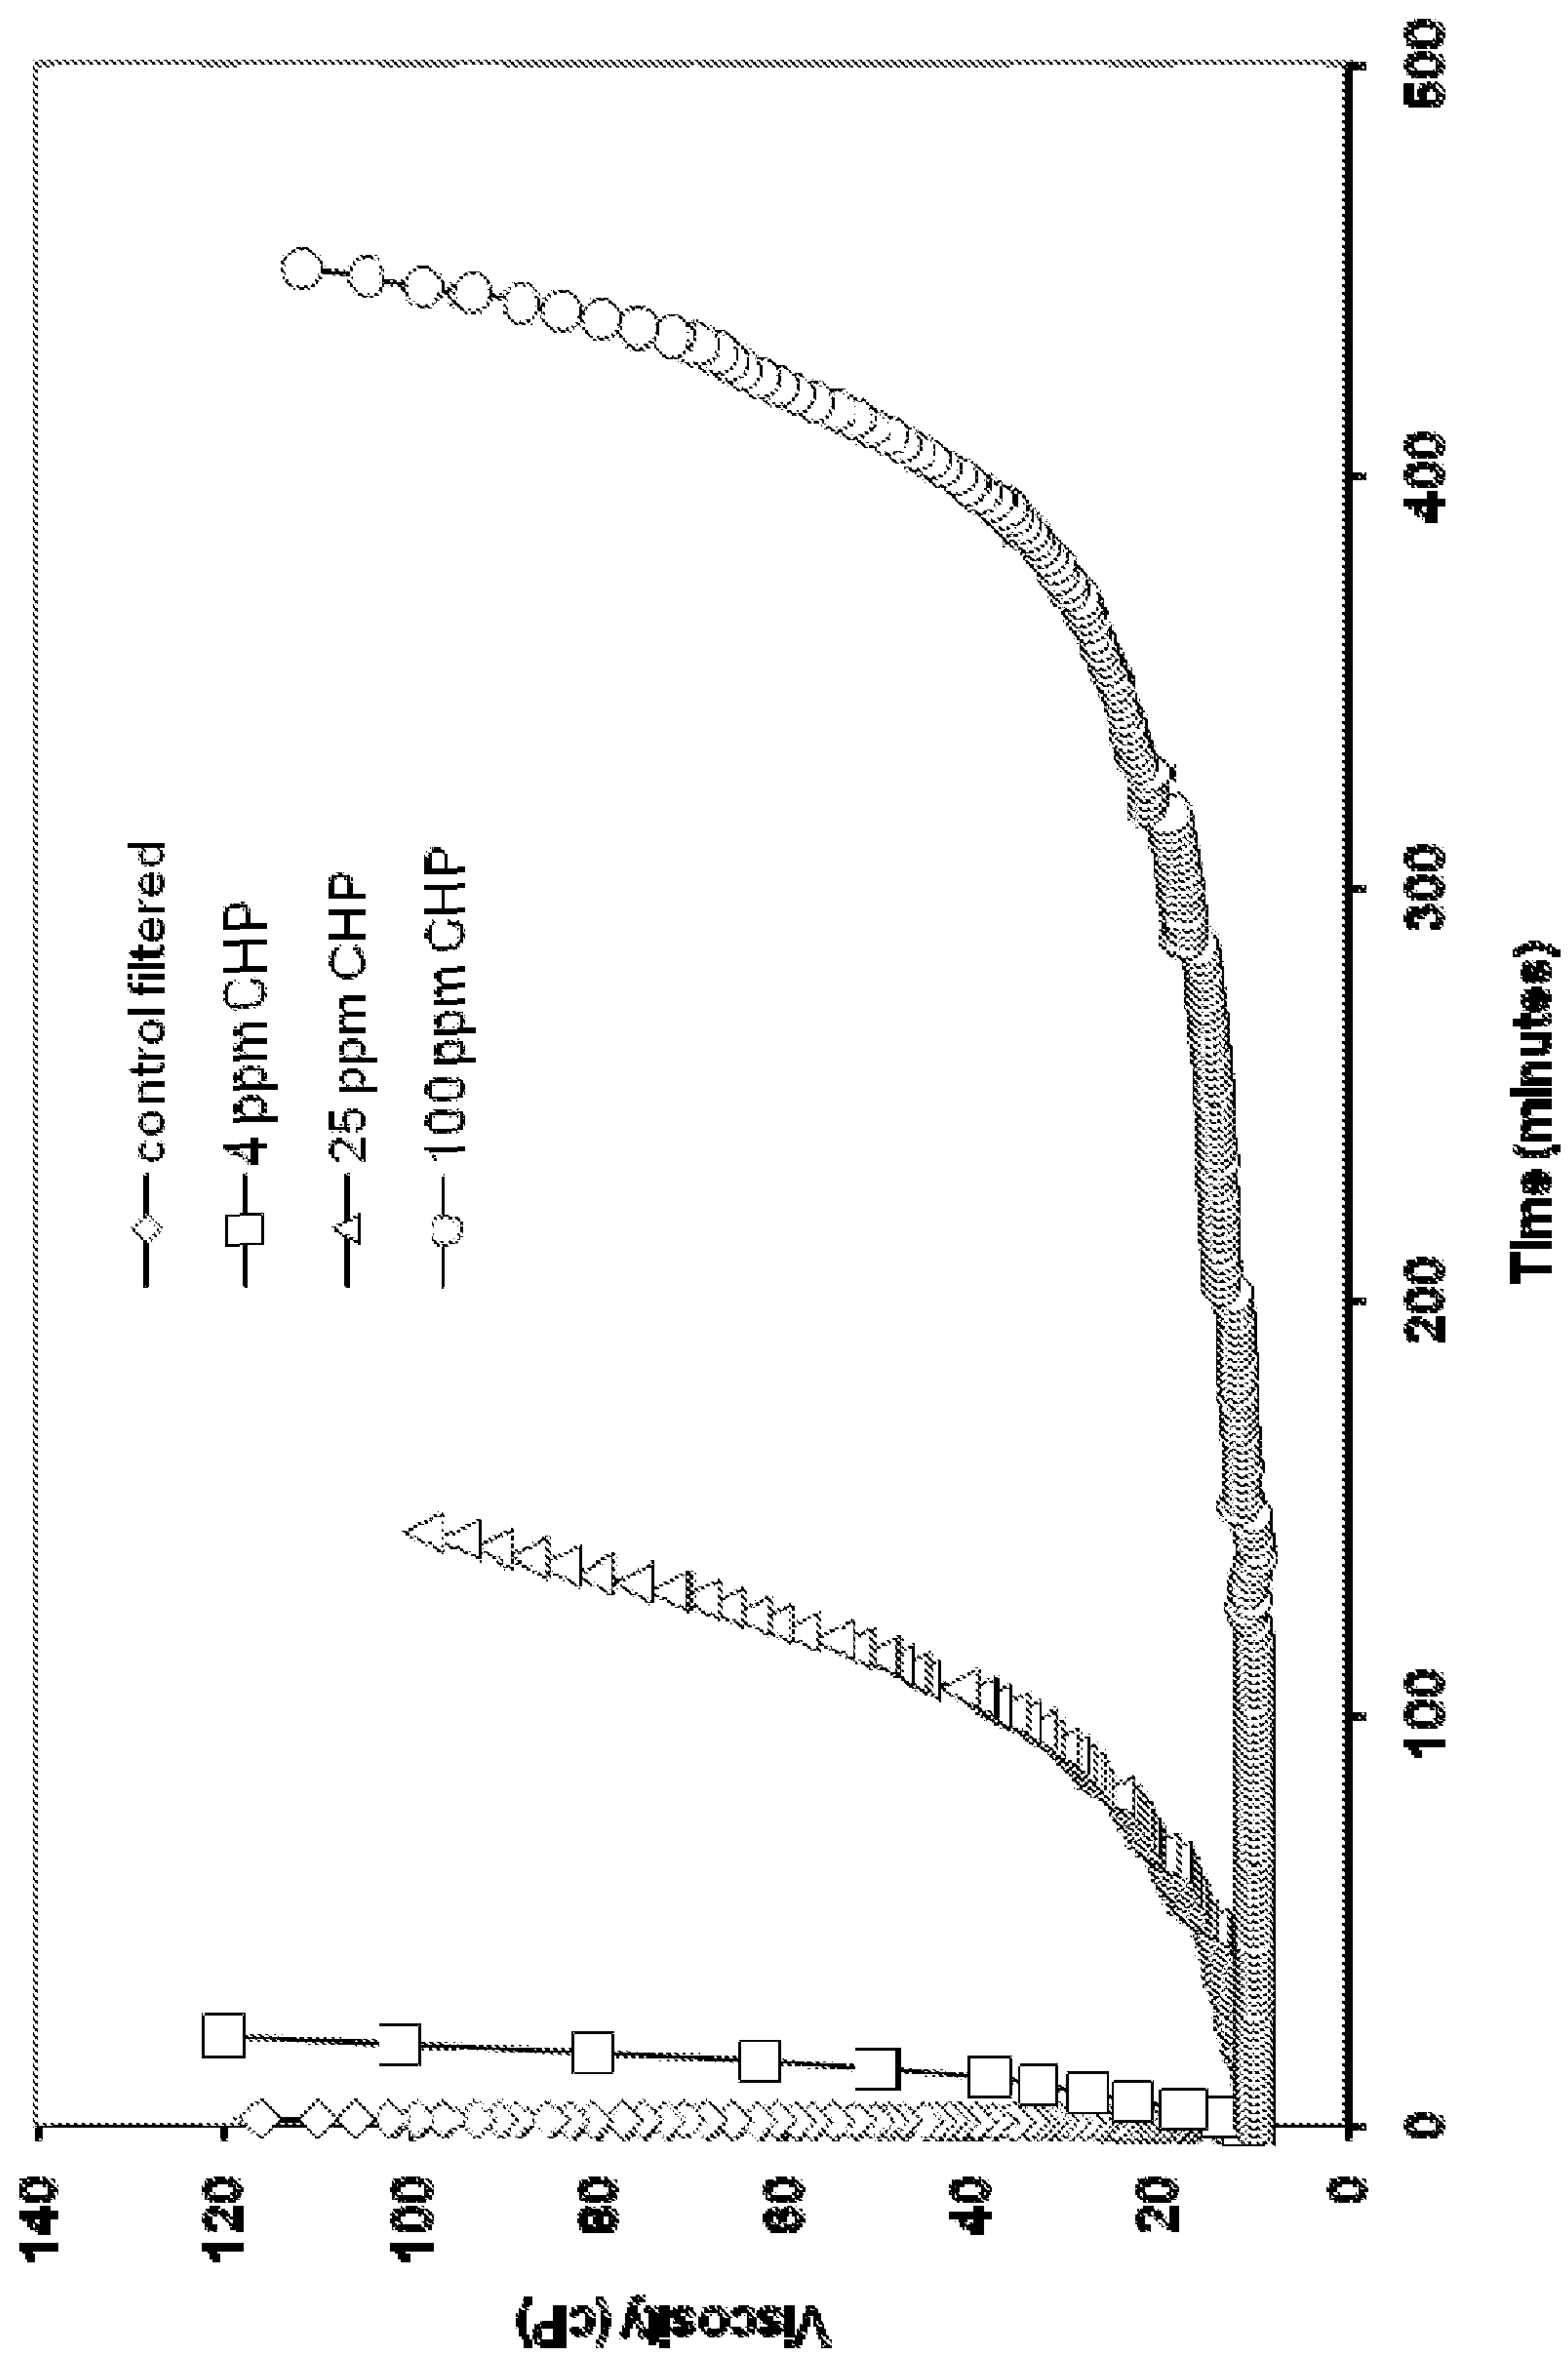


FIG. 1 Effect of Cumyl Hydroperoxide (CHP) on Exotherm Time

