

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/029664 A1

(51) International Patent Classification⁷: **G01V 3/28, 3/20**

(21) International Application Number:
PCT/US2003/030440

(22) International Filing Date:
26 September 2003 (26.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/414,174 27 September 2002 (27.09.2002) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRENKEL, Michael, A.** [—/US]; 1130 Pennbury Drive, Houston, TX 77094 (US). **GELDMACHER, Ingo, M.** [—/US]; 20922 Manon Lane, Spring, TX 77388 (US).

(74) Agents: **RIDDLE, J., Albert** et al.; Baker Hughes Incorporated, 3900 Essex Lane, Suite 1200, Houston, TX 77027 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,

[Continued on next page]

(54) Title: A METHOD FOR RESISTIVITY ANISOTROPY DETERMINATION IN NEAR VERTICAL WELLS

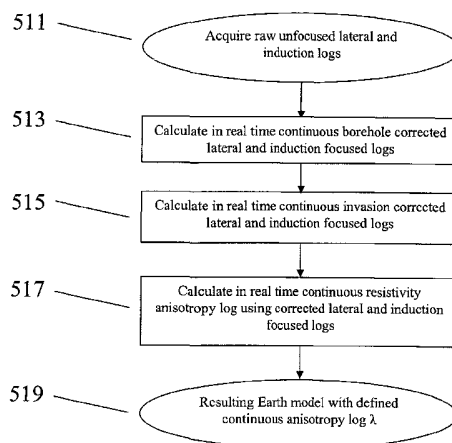

(57) Abstract: A method is disclosed for real-time (well-site) resistivity anisotropy determination using array lateral logs or any other unfocused, lateral-type measurements, and array induction logs or any other focused, induction-type measurements. Near-vertical wells with a deviation angle of less than 30 degrees are considered. Since with a lateral log, at each logging depth the injected current has both horizontal and vertical components, the data contains information related to both horizontal (R_h) and vertical (R_v) resistivities. With array induction tool, the induced current in near-vertical wells has only a horizontal component, and the induction data contain information related to R_h only. Having those two data sets acquired in the same well, it is possible to instantly estimate the formation resistivity anisotropy using square of a ratio between borehole and invasion corrected lateral and induction focused logs.

WO 2004/029664 A1



- TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A METHOD FOR RESISTIVITY ANISOTROPY DETERMINATION IN NEAR VERTICAL WELLS

5 Michael A. Frenkel & Ingo M. Geldmacher

BACKGROUND OF THE INVENTION

Field of the Invention

10 [0001] The invention is directed to resistivity anisotropy interpretation systems and methods for well logging application and, in one particular aspect, to a data interpretation system and method that is usable to determine formation parameters and reservoir descriptions in real-time.

Description of the Related Art

15 [0002] The production of hydrocarbons from subsurface formations typically commences by forming a borehole through the earth to a subsurface reservoir thought to contain hydrocarbons. From the borehole, various physical, chemical, and mechanical properties are "logged" for the purpose of determining the nature and characteristics, including for example, the porosity, permeability, saturation, and depth of the subsurface formations
20 encountered. One such logging technique commonly used in the industry is referred to as induction logging. Induction logging measures the conductivity or its inverse, the resistivity, of a formation. Formation conductivity is one possible indicator of the presence or absence of a significant accumulation of hydrocarbons, because, generally speaking, hydrocarbons are relatively poor conductors of electricity. On the other hand,
25 formation water, which is typically salty, is a relatively good conductor of electricity. Thus, induction logging tools can obtain information that, properly interpreted, indicates the presence or absence of hydrocarbons.

[0003] These induction (also known as electromagnetic induction) well logging instruments were first introduced by Doll, H.G., "Introduction to Induction Logging and Application to Logging of Wells Drilled with Oil Based Mud", Journal of Petroleum Technology, vol. 1, pp.148-62, Society of Petroleum Engineers, Richardson Tex. (1949).

5 Induction well logging instruments typically include a sonde having one or more transmitter coils and one or more receiver coils at axially spaced apart locations. Induction well logging instruments also typically include a source of alternating current (AC) which is conducted through the transmitter coils. The AC passing through the transmitter coils induces a magnetic field within the surrounding formations, causing a
10 flow of eddy currents within the earth formations. In general, the magnitude of the eddy currents is proportional to the electrical conductivity (the inverse of the electrical resistivity) of the earth formations surrounding the instrument. The eddy currents, in turn, induce a magnetic field that is coupled to the one or more receiver coils, thereby inducing in the receiver coil(s) a voltage signal with magnitude and phase dependent
15 upon the electrical characteristics of the adjacent formation.

[0004] Induction logging technology has evolved significantly since its introduction by Doll. In recent years, induction devices consisting of several complex coil combinations have been replaced by tools with multiple arrays. See, for example, Beard, D. R. et al.,
20 "Practical Applications of a New Multichannel and Fully Digital Spectrum Induction System, 1996 SPE Annual Technical Conference and Exhibition, Denver, Colorado, SPE-36504, Oct. 6-9, 1996, pp. 99-109, which is referred to, for example, in U.S. Patent No. 6,219,619 issued to Xiao et al. Each array consists of one transmitter and a pair of receiver coils. These new induction devices are commonly referred to as array-type
25 induction tools.

[0005] The older style induction tools attempt to focus the tool response using carefully selected coil arrangements. The focusing therefore is fixed by the tool design, i.e. these

- tools are “hardware-focused”. A hardware focusing method have been proposed by Moran and Chemali (see, for example, J.H. Moran and R. Chemali, 1985, “Focused resistivity logs”, in *Developments in Geophysical Exploration Methods*, v.6, A.A. Fitch, ed., Applied Science Publishers, Ltd., London, p. 225-260). In the new array-type
- 5 induction tools, the measurements from various arrays are combined through a software algorithm to achieve focusing of the signal response, i.e. these tools are “software-focused”. This processing produces a set of curves with predetermined depth of investigation, and vertical resolution.
- 10 [0006] Using software-based focusing provides greater flexibility for handling various logging environments and for creating more reliable induction logs. However, the quality and accuracy of the final focused logs is dependent on the accuracy of the software focusing method. Current software focusing methods have been proposed by Barber (see T. D. Barber et al., “Using a Multiarray Induction Tool To Achieve High-Resolution
- 15 Logs With Minimum Environmental Effects”, 66th Annual Technical Conference and Exhibition of the Society of Petroleum Engineers, Dallas, Texas, SPE-22725, Oct. 6-9, 1991, pp. 637-651.) and by Zhou (see Zhou et al., “Numerical Focusing of Induction Logging Measurements”, 12th Workshop in Electromagnetic Induction in Earth, International Union Geodesy and Geophysics, Aug. 8-14, 1994, Brest, France, p. 10.) ,
- 20 are referred to, for example, in U.S. Patent No. 6,219,619 issued to Xiao et al. The software focusing methods provide reliable estimates of the true formation resistivity, R_t (R_h).
- [0007] U.S. Patent No. 5,452,761 to Beard et al., the contents of which are fully
- 25 incorporated herein by reference, discloses an apparatus and method for digitally processing signals received by an induction logging tool comprising a transmitter and a plurality of receivers. The received voltages are digitized at a sampling rate well above the maximum frequency of interest. The digitizing window is synchronized to a cycle of

the oscillating current signal. Corresponding samples obtained in each cycle are cumulatively summed over a large number of such cycles. The summed samples form a stacked signal. Stacked signals generated for corresponding receiver coils are transmitted to a computer for spectral analysis. Transmitting the stacked signals instead of all the
5 individually sampled signals reduces the amount of data that needs to be stored or transmitted. A Fourier analysis is performed on the stacked signals to derive the amplitudes of in-phase and quadrature components of the receiver voltages at the frequencies of interest. From the component amplitudes, the conductivity of the formation can be accurately derived.

10

[0008] The effect of formation anisotropy on resistivity logging measurements have long been recognized. *Kunz and Moran* studied the anisotropic effect on the response of a conventional logging device in a borehole perpendicular to the bedding plane of a thick anisotropic bed. U.S. Patent No. 6,219,619, issued to *Xiao et al.*, discloses a method of
15 software focusing for array-type induction logging tools using an inhomogeneous background formation model in a vertical well. Using this inhomogeneous background formation model, the formation response of the induction logging tool can be split into two portions: a background response, and a certain "response residue". The background response is obtained as computer simulated measurements of the inhomogeneous
20 background model. The response residue is the difference between raw measurements and the background responses. *Xiao '619* reduces nonlinearity effects and thereby improves the focusing method. The method of *Xiao '619* requires a significant amount of processing time for forward modeling, data inversion, skin effect corrections, etc. This limits their effectiveness as a method for real-time analysis.

25

[0009] Another technique used in oil exploration and well logging is a lateral log. Lateral logging techniques are taught in Doll, H.G., "The Laterolog", Paper 3198, in Transactions of the AIME, v 192, p. 305-316, 1951, and in Doll, H.G., "The

Microlaterolog”, Paper 3492, in Transactions of the AIME, v 198, p. 17-32. Generally, the laterolog is an electrode device with multiple current electrodes configured in several different ways to produce several different responses. A current-emitting and current-return electrodes (A and B) are placed close together on the sonde, with a measure
5 electrode (M) several feet away, and a measure return (N) far away. This arrangement is sensitive to the potential gradient between A and B. The Array Lateral Log technology of data measurements and interpretation is taught in *Hakvoort et. al* paper “Field Measurements and Inversion Results of the High-Definition Lateral Log”, Paper C, in Transactions of the SPWLA, 1998.

10

[0010] U.S. Patent No. 6,060,885, issued to Tabarovsky et al., discloses a differential array instrument and a method for determining selected parameters of an earth formation surrounding a borehole. The invention includes an instrument mandrel carrying a single source electrode for injecting an electrical current of a predetermined value into the
15 formation surrounding the borehole, and an array of measurement electrodes uniformly and vertically spaced from the source electrode along the instrument mandrel. The uniformly and vertically spaced electrodes are adapted to derive first and second difference potentials between electrodes. The first and second difference potentials are derived in response to current from the source electrode traveling generally vertically in
20 an orientation generally parallel to the axis of the borehole in the formation to successive ones of the predetermined groups of selected measuring electrodes. The plurality of first and second difference potentials may be correlated to a plurality of values representative of the selected formation parameters. The plurality of values representative of the selected formation parameters may provide a profile of the selected parameters over an
25 increasing radial distance from the borehole. The lateral log is generally not designed for differentiating horizontal and vertical resistivities in a formation having resistivity anisotropy.

- [0011] Typically, measured data needs to be corrected for effects of the borehole and of invasion. U.S. Patent No. 6,381,542, issued to Zhang et al., the contents of which are incorporated herein by reference, discloses a method for real-time borehole correction of resistivity logging data. In the first stage, the entire range of possibilities of earth models relevant to borehole compensation is sampled and a suit of tool responses is generated, with and without the borehole. A wide range tool response including the borehole effects is input to a neural net and the neural net is trained to produce the corresponding borehole-free response. Once the neural net has been trained, in the second stage, the neural net is validated by using as input tool responses that were not used in the training of the neural net and comparing the output of the neural net to the corresponding borehole-free response. If the agreement is good, then the neural net has been validated and may be used to process subsequently acquired data that includes borehole effects. The borehole corrected measurements may be inverted using an additional neural net.
- [0012] Typical resistivity methods use an inversion of the obtained data. Some improved methods for data inversion, including data obtained in anisotropic rock formations, are described in U.S. Patent No. 5,889,729, issued to *Frenkel* et al.; in Hagiwara T. and Zea H., 1999, "Identifying and quantifying resistivity anisotropy in vertical boreholes", 40th Annual Logging Symposium, paper Z.; and in Griffiths R., Barber T., and Faivre O., 2000, "Optimal evaluation of formation resistivities using array induction and array laterolog tools", 41st Annual Logging Symposium, paper BBB. *Frenkel* et al. teaches a method for rapid, well-site inversion of resistivity logs. The paper by Hagiwara et al. teaches a method of identifying and estimating resistivity anisotropy in vertical holes. The method is derived from 2D modeling of electric- and induction-log responses. Resistivity anisotropy can be estimated preferably from the difference between these electric- and induction-log resistivity measurements. The paper of Griffiths et al. uses an improved information content of the array measurements, better defines borehole effects, and thus either flags or more accurately corrects data. The authors of Hagiwara et al. and

Griffiths et al. suggest using the joint interpretation of focused, Dual Laterolog-type (DLL-type), galvanic logs and conventional array induction-type logs. However, since focused galvanic measurements are not very sensitive to changes of the formation resistivity in the vertical direction (R_v), the techniques offered in Hagiwara et al. and in
5 Griffiths et al. cannot provide reliable anisotropy estimates.

[0013] Further methods of determining resistivity are outlined in Yang, 2001, "Determining resistivity anisotropy by joint lateral and induction logs", SPWLA 42nd Annual Logging Symposium, paper CC. Yang suggests a joint 2-D inversion of lateral
10 and induction logs, however, this inversion process is time consuming and is not applicable for real-time conditions. Rosato and Beck (see Rosato V. and Beck J., 1997, "Real-time interpretation of MWD anisotropy in high angle wells, Offshore Gulf of Mexico", SPWLA 38th Annual Logging Symposium, paper T.) present a method of quick anisotropy determination using previously stored data tables, which include age,
15 deposition environment, and anisotropy ratios at various dip angles. After deciding which well type lithologic boundaries and anisotropy ratios are expected, a pre-drill model can be constructed to assist in real-time interpretation of a high-angle well.

[0014] To correctly determine the anisotropy distribution around the borehole, one must
20 apply time-consuming, inversion-type processing, which is only practical at data processing centers having sufficient computer power. There is a need for a real-time method of approximating the resistivity anisotropy at the well-site. The present invention satisfies this need.

SUMMARY OF THE INVENTION

25 [0015] The present invention is a method of determining an anisotropic resistivity parameter of an earth formation using measurements obtained with an unfocused differential array resistivity tool (lateral log) and measurements made with an induction logging tool without performing an inversion of said induction log. In a preferred

embodiment of the invention, the induction measurements are obtained with a focused induction logging tool.

- 5 [0016] The processing includes applying borehole and invasion corrections on a point-by-point basis to the lateral log to give an estimate of a vertical resistivity and applying borehole and invasion corrections to the induction measurements to give an estimate of a horizontal resistivity.

BRIEF DESCRIPTION OF THE DRAWINGS

- 10 [0017] The present invention is best understood with reference to the following figures in which like numerals refer to like elements.
- FIG. 1 (prior art) is an illustration showing an induction logging tool positioned in a borehole for measuring the conductivity of the adjacent formation.
- FIG. 2 (prior art) is a side elevational view of one embodiment of the differential lateral
15 array resistivity logging instrument showing the electrode array distribution and relative spacing.
- FIG. 3 (prior art) is a schematic of one subarray of the apparatus of Fig 2.
- FIG. 4 (prior art) shows borehole size corrections for the method of the apparatus of Fig 2.
- 20 FIG. 5a (prior art) is a flowchart of a method of anisotropy determination used in prior art.
- FIG. 5b is a flowchart of the method of anisotropy determination of the invention.
- FIG. 6 is a field example of the method of the invention tested against anisotropy derived from the multicomponent induction data.
- 25 FIG. 7 shows a configuration of tools suitable for use with the method of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Referring now to Figure 1, an induction logging tool **20** suitable for use in the invention described herein is shown positioned in a borehole **22** penetrating earth formations **54**. The tool **20**, which is suspended in the borehole **22** by means of a wireline cable **24**, includes a borehole sonde **34** and an electronic circuitry section **32**. The tool **20** is lowered into the borehole **22** by a cable **24**, which preferably passes over a sheave **30** located at the surface of the borehole **22**. The cable **24** is typically spooled onto a drum (not shown). The cable **24** includes insulated electric conductors for transmitting electrical signals. The electronic circuitry section **32** of the tool **20** receives signals from the sonde section **34** to perform various analog and digital functions, as will be described later.

[0019] The sonde **34** preferably includes a plurality of coils **40 – 52**. Coil **46** is a transmitter coil for transmitting an oscillating signal into the adjacent surrounding geological formation **54**. Preferably, a square wave signal is supplied to the coil **46**. However, it is contemplated that any of a number of oscillating voltage signals having multiple frequency components can be used. Further, it is desirable that, on occasion, a single-frequency signal, such as a sinusoidal signal, is used. The oscillating voltage signal applied to the coil **46** generates a current in coil **46**, which in turn generates an electromagnetic field in the surrounding formation **54**. The electromagnetic field, in turn, induces eddy currents, which flow coaxially with respect to the borehole **22**. The magnitudes of the eddy currents are proportional to the conductivity of the surrounding formation **54**. The remaining coils, **40, 42, 44, 47, 48, 50, and 52** are receiver coils in which signals are induced by the electric fields caused by the eddy currents produced in the formation. As the tool **20** is raised in the borehole **22**, the conductivity of the surrounding formation **54** can be determined from the received signals in order that a bed

or layer **55** having a conductivity indicative of the possibility of containing hydrocarbons may be located.

[0020] The electronic circuitry section **32** includes a converter circuit **60**, a stacker circuit **62**, a random access memory (RAM) **63**, and a telemetry circuit **61**. The converter circuit **60** comprises a plurality of pre-amplifiers, filters, and analog-to-digital (A/D) converters for receiving signals from the receiver coils **40 - 52** and transforming them into digitized signals for further processing by the stacker circuit **62**. The analog voltage signals provided by the receiver coils **40 - 52** are digitally sampled according to a predetermined sampling rate in the period defined by the fundamental frequency of the transmitter signal, which in this embodiment is approximately 10kHz.

[0021] The sampling is repeated over a large number of transmitter voltage signal cycles, such as at least 1,024 cycles, to improve the signal-to-noise ratio of the received signals. To reduce the amount of data that must be stored or transmitted, corresponding digital samples taken in each of the transmitter cycles are summed. The summed digital signal samples corresponding to each of the plurality of receiver coils form corresponding stacked signal samples, which are store in the RAM **63**. The stacked signals corresponding to the plurality of receiver coils **40 - 52** can then be retrieved from the RAM **63** and can be transmitted by the telemetry circuitry **61** through the cable **24** to a computer **64** which forms part of the surface equipment **26**, where Fourier analyses of the stacked signals can be performed.

[0022] An induction device, such as, for example, High-Definition Induction Log (HDIL), utilizes vertical (z-directed) transmitter and receiver array coils (coil centers are in-line with the tool axis). Therefore, the induced current in near-vertical wells has only a horizontal component, and the induction data contain information related to horizontal resistivity (R_h) only. The HDIL is an array-type induction logging tool that collects data

at multiple frequencies and various transmitter-receiver spacings. A focusing algorithm converts the HDIL measurements into Vertical Resolution Matched (VRM) logs, which provide estimation of the true R_h .

- 5 [0023] Referring now to Figure 2, an embodiment of the differential array instrument 10 suitable for use in the invention is shown. One such device, the High-Definition Lateral Log (HDLL), is an array-type, unfocused galvanic logging tool. The HDLL has a single current injection electrode and measures a set of lateral resistivity logs (RL). The instrument 210 has an elongated mandrel or body 212, a single source electrode 232
- 10 located near the upper end of the instrument housing, and several groups of identical measuring electrodes 234, 234', and 234'' uniformly distributed along the axis of the tool mandrel, which allow for performing a number of measurements at each logging depth as will be hereinafter further described.
- 15 [0024] In Figure 2, the instrument 210 includes a mandrel 212 carrying a single source electrode 232 and a plurality of measuring electrodes 233, 235, 236, 237, etc. vertically spaced in equal increments along the axis of the mandrel 212. The number of measuring electrodes chosen for this example is 36, which including the source electrode, makes a total of 37 electrodes which are marked 1-37 in Figure 2. In the embodiment of Figure 2,
- 20 a group 234 of three successive electrodes 233, 235, and 236 are used to obtain measurements, for instance, of first potential difference, D_1 . For measurement of said first potential difference, the source electrode 232 injects an electrical current of a predetermined value into the formation and it is received by successive lower vertical groups of three electrodes as at 234' and 234''. The 36 measuring electrodes produce 12
- 25 measurements from successive electrode groups 234, 234', 234'', etc. for measuring the first potential differences, thus: at 234- $D_1^{(1)}$, at 234'- $D_1^{(i)}$, and at 234''- $D_1^{(12)}$. Examining the electrode group identified as 234', the first vertically disposed measurement electrode is identified as j-1 (233'), the center electrode is identified as j (235'), and the third or

lower electrode is identified as $j+1$ (236'). The first potential difference $D_1^{(j)}$ is calculated as:

$$D_1^{(j)} = \frac{V_{j+1} - V_{j-1}}{2}.$$

Accordingly, each measurement unit provides first difference D_1 at each depth level. The
5 differential conductance is also available at each logging depth.

[0025] The anisotropy coefficient (λ) is defined as a ratio of vertical (R_v) over horizontal (R_h) resistivity: $\lambda = R_v / R_h$. Since, at each logging depth, the injected current has both
horizontal and vertical components, the data contains information related to both R_h and
10 R_v . Resistivity values obtained through a lateral logging device can be considered as the mean resistivity R , where

$$R = \sqrt{R_h R_v}.$$

[0026] Figure 3 shows a schematic of a lateral (unfocused) device or one subarray of the
15 embodiment of Figure 2 (HDLL). The electrode A (300) is the source, and the electrode B (310) is the return. The return can be located on the surface or far away from the source. The injected current flows radially in the vicinity of the electrode A (300) if the surrounding formation has constant resistivity and is isotropic. The voltage drop between two dashed spheres 304 and 306 is measured by the use of the electrodes M (314) and N
20 (316). In reality, due to the layered structure of the formation and its anisotropic properties, the current has both horizontal and vertical components at any point of the formation.

[0027] Figure 4 shows a typical chart of borehole size corrections for an HDLL lateral
25 subarray. To estimate anisotropy in real-time, it is possible to perform borehole corrections of the RL (HDLL) and VRM (HDIL) logs using such pre-calculated

correction charts. Having the two corrected logs, we then instantly estimate the formation anisotropy using a ratio between the RL and VRM logs. The calculations are performed at each logging point to provide a continuous anisotropy log.

5 [0028] A method disclosed by Yang (2001) "Determining resistivity anisotropy by joint lateral and induction logs", SPWLA 42nd Annual Logging Symposium, paper CC) is shown in Figure 5a. Yang obtains a value of resistivity anisotropy using unfocused lateral log and focused induction log data. Raw unfocused lateral log data and focused induction log data are acquired (box 501). From the induction log data, the interpreter
10 can determine a value for formation thickness, h (box 503). This value of thickness can be used in a 2-D inversion of induction log data (box 505) to determine a value of horizontal resistivity (R_h). This inversion eliminates mud and shoulder-bed effects. Values of horizontal resistivity and formation thickness obtained can then be substituted into an inversion of lateral log data (box 507). This results in a value for formation
15 resistivity anisotropy, λ (box 509).

[0029] The real-time anisotropy estimation process of the present invention is outlined in the diagram of Figure 5b. Raw data is obtained from the unfocused lateral log (HDLL) and from the array induction log (HDIL), as shown in box 511. In box 513, both lateral
20 and induction logs are calculated having corrections for borehole effects. Borehole effects can be determined from results such as those shown in Figure 4 (HDLL) or from Zhang '542 (HDIL). Borehole corrections can be applied on a point-by-point basis. In box 515, calculations are made to correct both the lateral and induction logs for invasion effects. In case of a significant effect of invasion, an auxiliary Microlaterolog (MLL)
25 data is required to perform a proper invasion correction. Calculation of a continuous

resistivity anisotropy log is performed next in box **517** using the following formula

$$\lambda = \left(\frac{\sqrt{R_h R_v}}{R_h} \right)^2$$

In the method of the present invention, the value of mean resistivity $\sqrt{R_h R_v}$ is the value obtained from corrected laterolog values (HDLL) of box **515** and the value of horizontal
 5 resistivity R_h is the value obtained from corrected induction tool values (HDIL) of box **515**. The calculations performed in box **517** result in an anisotropic Earth model (box **519**). Thus, using the method of the present invention, parameters of interest such as the horizontal and vertical resistivities and anisotropy factors can be determined at a plurality of depths. The method of the present invention should furnish reasonable anisotropy
 10 estimates in thick sand/shale formations where the shoulder bed effects are small.

[0030] This method of the present invention does not use an inversion as in *Yang*. Corrections for borehole (box **513**) and invasion (box **515**) are made without inversion. In *Yang*, invasion and borehole effects are corrected for via the inversion of the induction
 15 log data (box **505**). Since the method of the present invention does not use an inversion process, said method increases computation speed and operational reliability over methods, such as those used in *Yang*, which uses an inversion process. Also, the method of the present invention enables a point-by-point calculation of anisotropy. Calculations made by inversion processes in prior art, such as in *Yang*, are confined to formation
 20 layers.

[0031] The method described with reference to **Fig. 5b** can be simplified and accelerated. As before, we get R_h from the deep reading borehole corrected induction focused logs (VRM). Then, instead of determining a mean resistivity from the lateral logs, a chart
 25 based log correction for the borehole and, if necessary, invasion effects, is applied. This

method should thus furnish reasonable anisotropy estimates in thick sand/shale formations where the shoulder bed effects are small.

[0032] Figure 6 shows an example of real-time anisotropy estimation using array laterolog (HDLL) and array induction (HDIL) measurements acquired in a vertical offshore well in the Mediterranean region. This field example is used to evaluate the accuracy of the suggested real-time anisotropy estimation method of the present invention by comparing its results with the results of anisotropy estimation acquired in the same well through use of a multi-array resistance measuring device, known as 3DEXSM. 3DEXSM is discussed in U.S. Patent Application No. 10/091,310 by Zhang et al., having the same assignee as the present application. The 3DEXSM device contains three transmitters and three receivers directed along orthogonal axes (x,y,z) with the z-component along the longitudinal axis of the drilling tool.

[0033] Fig. 6 shows the results of using the two methods of the present invention described above in comparison with inversion of 3DEX data. Track 1 601 shows the caliper and gamma ray data. Track 2 603 shows the density and neutron logs. 609 in track 3 605 shows the results obtained using the method described above with reference to Fig. 5b. 611 of track 3 shows the results obtained by inversion of 3DEX data. As can be seen, there is reasonable agreement between 609 and 611.

[0034] An exemplary configuration of tools for use with the present invention is shown in Figure 7. Shown in the figure is a rig 710 on the surface that is positioned over a subterranean formation of interest 712. The rig 710 can be a part of a land or offshore a well production/construction facility. A wellbore 714 formed below the rig 710 includes a cased portion 716 and an open hole portion 718. In certain instances (e.g., during drilling, completion, work-over, etc.), a logging operation is conducted to collect information relating to the formation 712 and the wellbore 714. Typically, a tool system

800 is conveyed downhole via a wireline 810 to measure one or more parameters of interest relating to the wellbore 714 and/or the formation 712. The tool system 800 can include one or more modules 802 a,b, each of which has a tool or a plurality of tools 804 a,b, adapted to perform one or more downhole tasks. For use with the present invention, 5 these modules could include, e.g., a differential array resistivity device and an induction logging device. The term "module" should be understood to be a device such as a sonde or sub that is suited to enclose, house, or otherwise support a device that is to be deployed into a wellbore. While two modules 802 a,b and two associated tools 804 a,b, are shown, it should be understood that a greater or fewer number may be used.

10 [0035] In certain embodiments, the tool system 800 can include telemetry equipment 850, a local or downhole controller 852 and a downhole power supply 854. The telemetry equipment 850 provides two-way communication for exchanging data signals between a surface controller 812 and the tool system 800 as well as for transmitting control signals from the surface processor 812 to the tool system 800. The processing of the data may be 15 done entirely downhole, entirely uphole, or a combination of the two. It should further be noted that while the string of tools shown in Fig. 7 is conveyed on a wireline, conveyance may be done by coiled tubing in near horizontal wellbores.

[0036] With relatively minor modifications, the present invention may also be used in 20 Measurement-While-Drilling (MWD) applications wherein the sensor modules are conveyed downhole on a drilling tubular such as a drillstring or coiled tubing.

[0037] While the foregoing disclosure is directed to the preferred embodiments of the invention, various modifications will be apparent to those skilled in the art. While specific embodiments of the microresistivity tool and induction logging tool have been 25 discussed above, it is to be understood that the tools may be used either on a wireline or in an MWD environment. It is to be further understood that the anisotropy measurements discussed above with reference to an induction logging tool may also be obtained using a

propagation resistivity tool. It is intended that all variations within the scope and spirit of the appended claims be embraced by the foregoing disclosure.

CLAIMS

What is claimed is:

- 1 1. A method of determining a resistivity parameter of interest of an anisotropic earth
2 formation, the method comprising:
3 (a) obtaining a plurality of unfocused differential array resistivity
4 measurement (lateral log) over a depth interval;
5 (b) obtaining a plurality of induction resistivity measurements with an
6 induction logging tool over said depth interval;
7 (c) processing said plurality of unfocused differential array resistivity
8 measurements and said plurality of induction resistivity measurements and
9 obtaining therefrom said parameter of interest, said processing excluding
10 an inversion of said induction log
11
- 1 2. The method of claim 1 wherein said parameter of interest comprises a mean
2 resistivity of said earth formation.
3
- 1 3. The method of claim 1 wherein said parameter of interest comprises a vertical
2 resistivity of said earth formation.
3
- 1 4. The method of claim 1 wherein said parameter of interest comprises a horizontal
2 resistivity of said earth formation.
3
- 1 5. The method of claim 1 wherein said plurality of induction measurements
2 comprises focused measurements.
3
- 1 6. The method of claim 1 wherein said processing further comprises applying a
2 borehole correction and an invasion correction to said lateral log
3

- 1 7. The method of claim 1 wherein said processing further comprises applying a
2 borehole correction and an invasion correction to said induction log and obtaining
3 a horizontal resistivity.
4
- 1 8. The method of claim 7 further comprising determining an anisotropy factor from
2 a mean resistivity and a horizontal resistivity.
3
- 1 9. The method of claim 1 further comprising making measurements with a micro-
2 laterolog and using said micro-laterolog measurements in said processing.
3
- 1 10. An apparatus for use in a borehole in an anisotropic earth formation for
2 determining a resistivity parameter of said earth formation, the apparatus
3 comprising:
4 (a) an unfocused differential array resistivity measuring device for obtaining a
5 a plurality of unfocused differential resistivity measurements (lateral log)
6 over a depth interval;
7 (b) an induction resistivity measuring device for obtaining a plurality of
8 induction resistivity measurements over said depth interval;
9 (c) a processor for processing said plurality of unfocused differential array
10 resistivity measurements and said plurality of induction resistivity
11 measurements and obtaining therefrom obtaining said parameter of
12 interest, said processing excluding an inversion of said induction log.
13
- 1 11. The apparatus of claim 10 wherein said parameter of interest comprises a vertical
2 resistivity of said earth formation.
3
- 1 12. The apparatus of claim 10 wherein said parameter of interest comprises a
2 horizontal resistivity of said earth formation.

3

1 13. The apparatus of claim 10 wherein said plurality of induction measurements
2 comprises focused measurements.

3

1 14. The apparatus of claim 10 wherein said processor further applies a borehole
2 correction and an invasion correction to said lateral log.

3

1 15. The apparatus of claim 14 wherein said processor further comprises applies a
2 borehole correction and an invasion correction to said induction log and obtains
3 a horizontal resistivity.

4

1 16. The apparatus of claim 15 wherein said processor further determines an
2 anisotropy factor from a mean resistivity and said horizontal resistivity.

3

1 17. The apparatus of claim 10 further comprising making measurements with a
2 micro- laterolog and using said micro-laterolog measurements in said processing.

3

1 18. The apparatus of claim 10 wherein said processor performs said processing
2 substantially in real time

3

1 19. The apparatus of claim 10 wherein said processor is at a surface location.

2

1 20 The apparatus of claim 10 wherein said processor is at a downhole location.


2

1 21. The apparatus of claim 10 wherein said induction resistivity device is an array
2 device.

3

- 1 22. The apparatus of claim 10 wherein said induction resistivity device comprises a
2 plurality of coils with an axis substantially parallel to an axis of said resistivity
3 device.
4
- 1 23. A system for use in a borehole in an anisotropic earth formation for determining a
2 resistivity parameter of said earth formation, the system comprising:
3 (a) an unfocused differential array resistivity measuring device for obtaining a
4 a plurality of unfocused differential resistivity measurements (lateral log)
5 over a depth interval;
6 (b) an induction resistivity measuring device for obtaining a plurality of
7 induction resistivity measurements over said depth interval;
8 (c) a processor for processing said plurality of unfocused differential array
9 resistivity measurements and said plurality of induction resistivity
10 measurements and obtaining therefrom obtaining said parameter of
11 interest, said processing excluding an inversion of said induction log; and
12 (d) conveyance device for conveying said unfocused differential array
13 resistivity measuring device and said induction resistivity device into said
14 borehole.
15
- 1 22. The system of claim 21 wherein said conveyance device comprises a wireline.
2
- 1 23. The system of claim 21 wherein said conveyance device comprises coiled tubing.
2
- 1 24. The system of claim 21 wherein said conveyance device comprises a drilling
2 tubular.
3
- 1 25. The system of claim 21 wherein said processor is at a surface location.
2

- 1 26. The system of claim 21 wherein said processor is at a downhole location.
2
- 1 27. The system of claim 21 wherein said induction device comprises coils with axes
2 substantially parallel to an axis of the borehole.

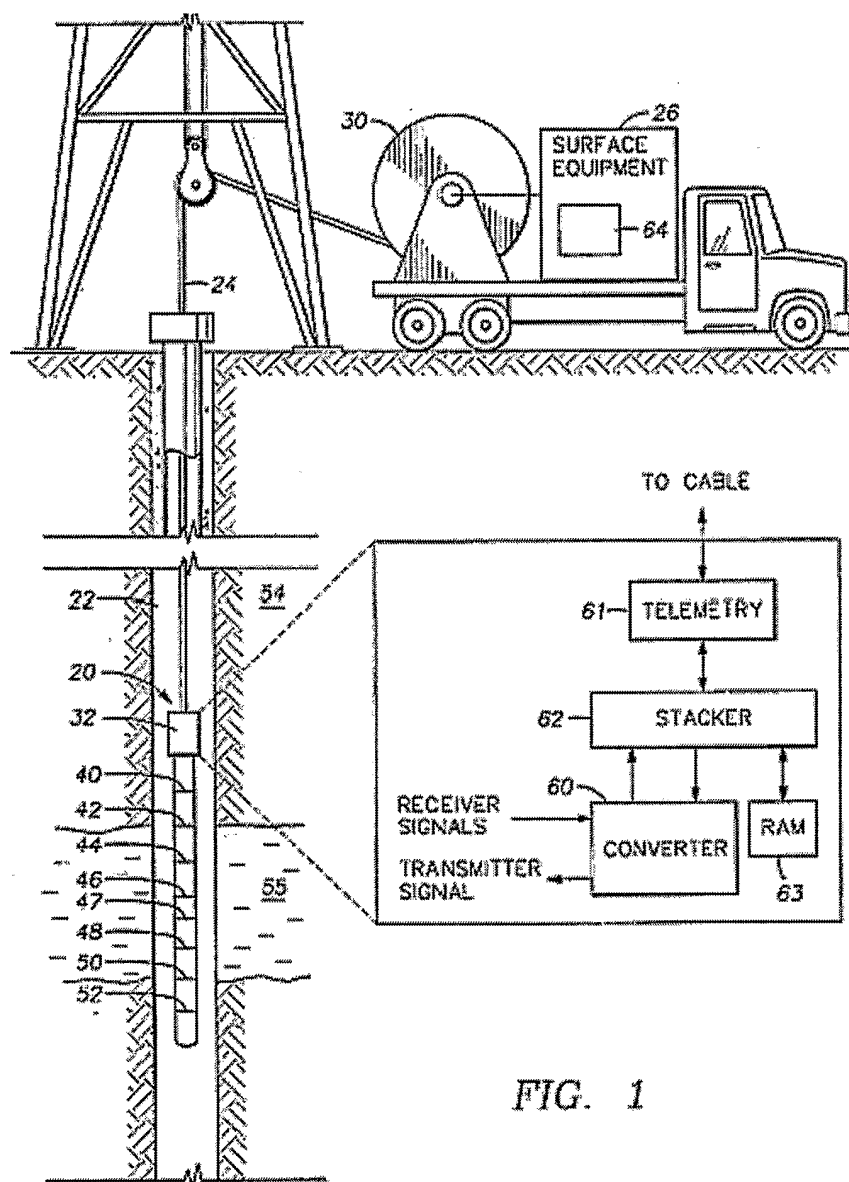

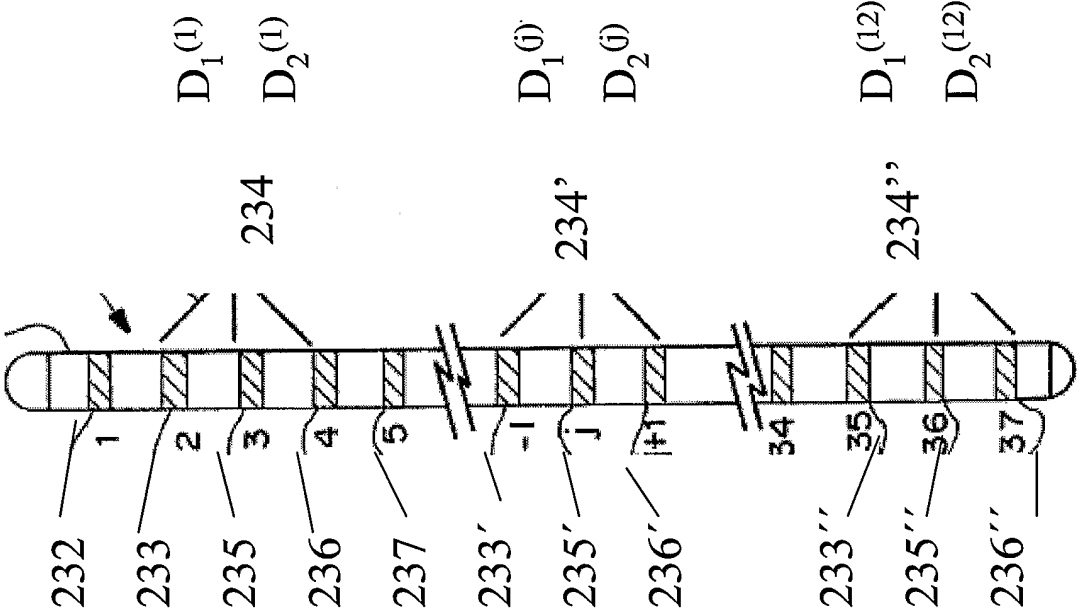


Figure 2 Prior art

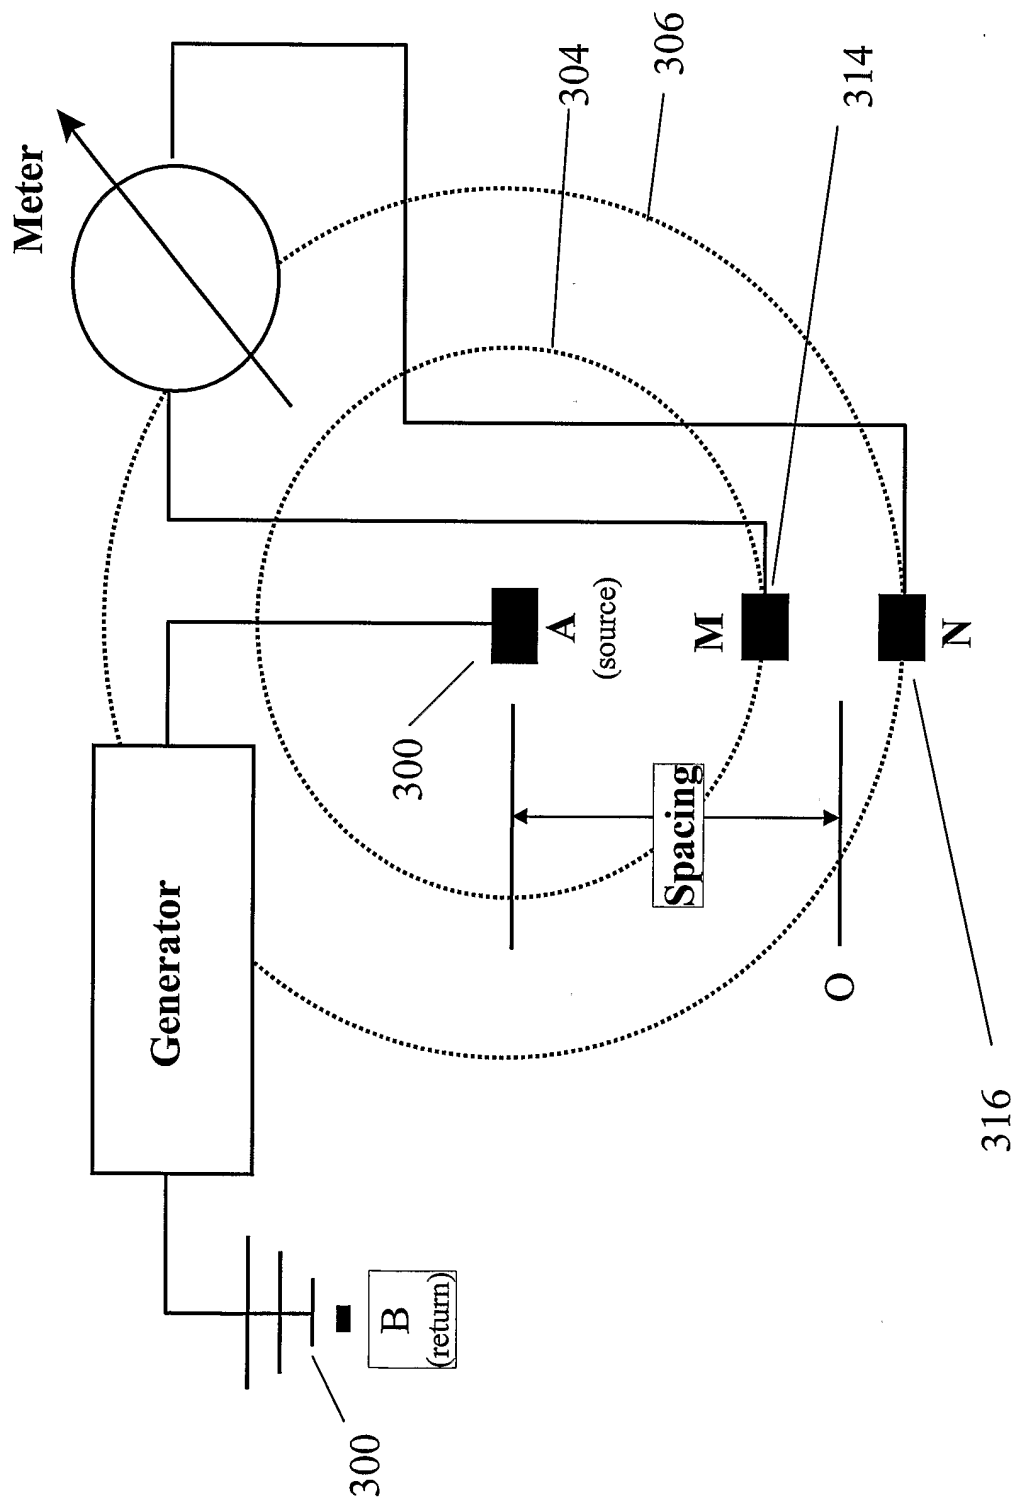


Figure 3 (prior art)

Borehole Size Correction for an HDLL lateral subarray

K = 53.883; Tool Centered

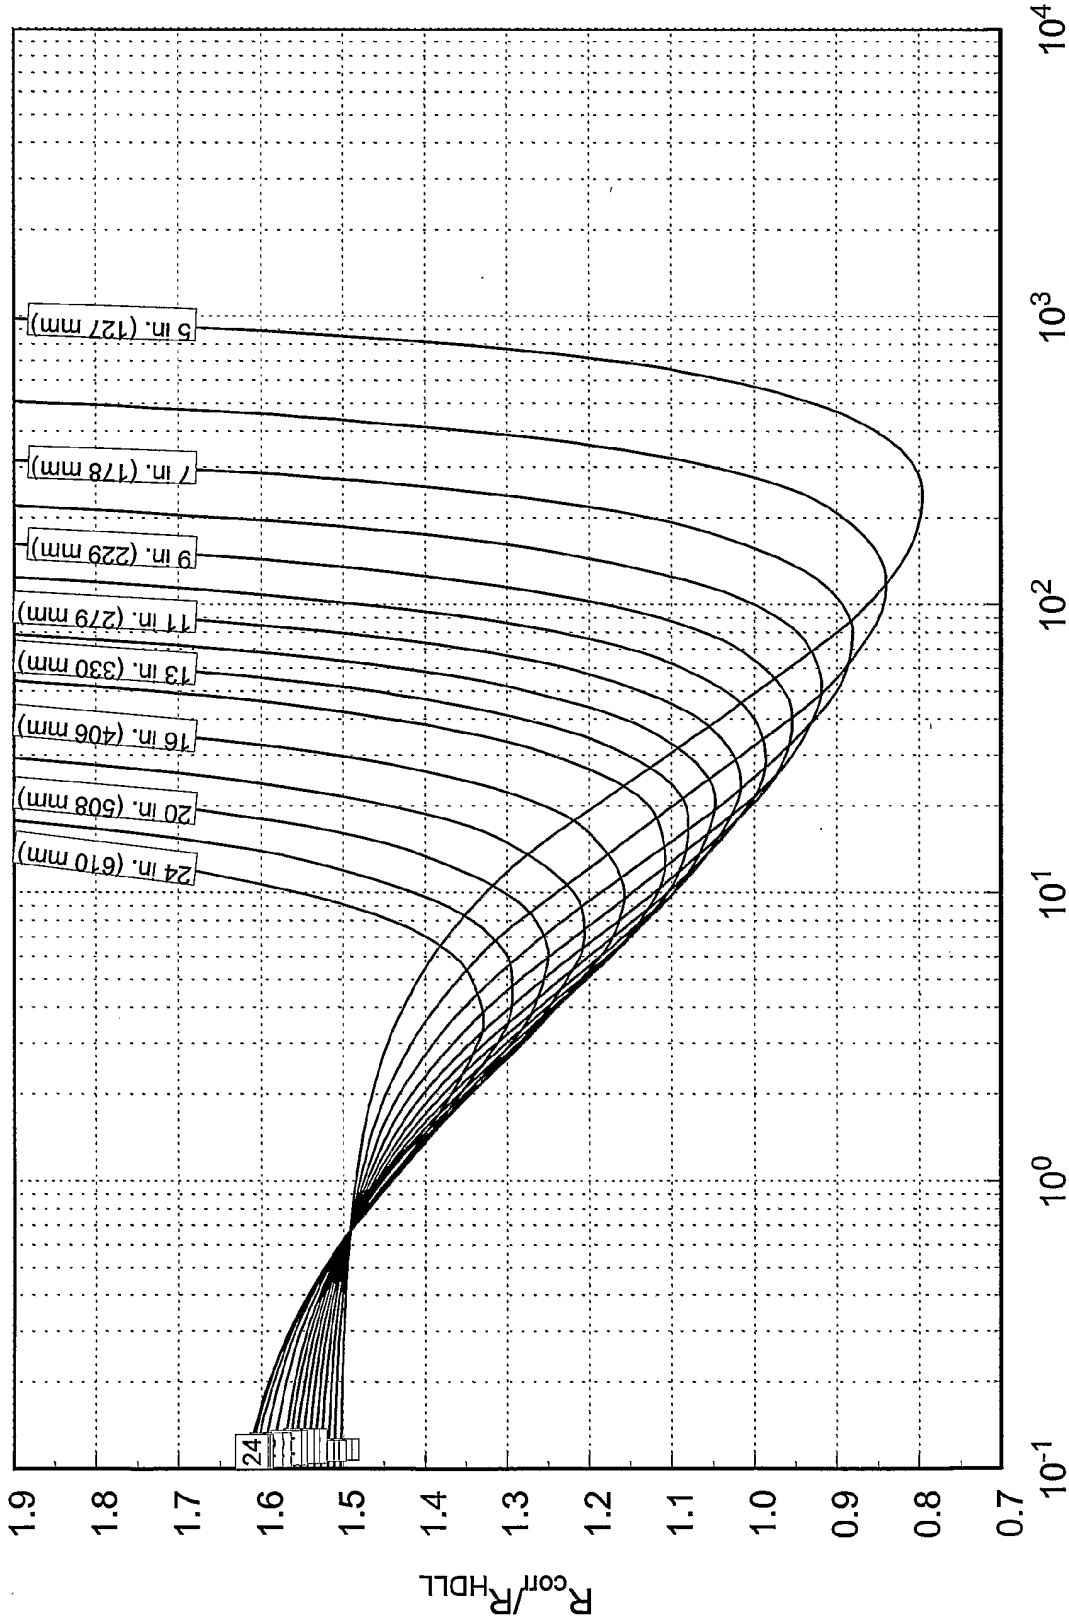
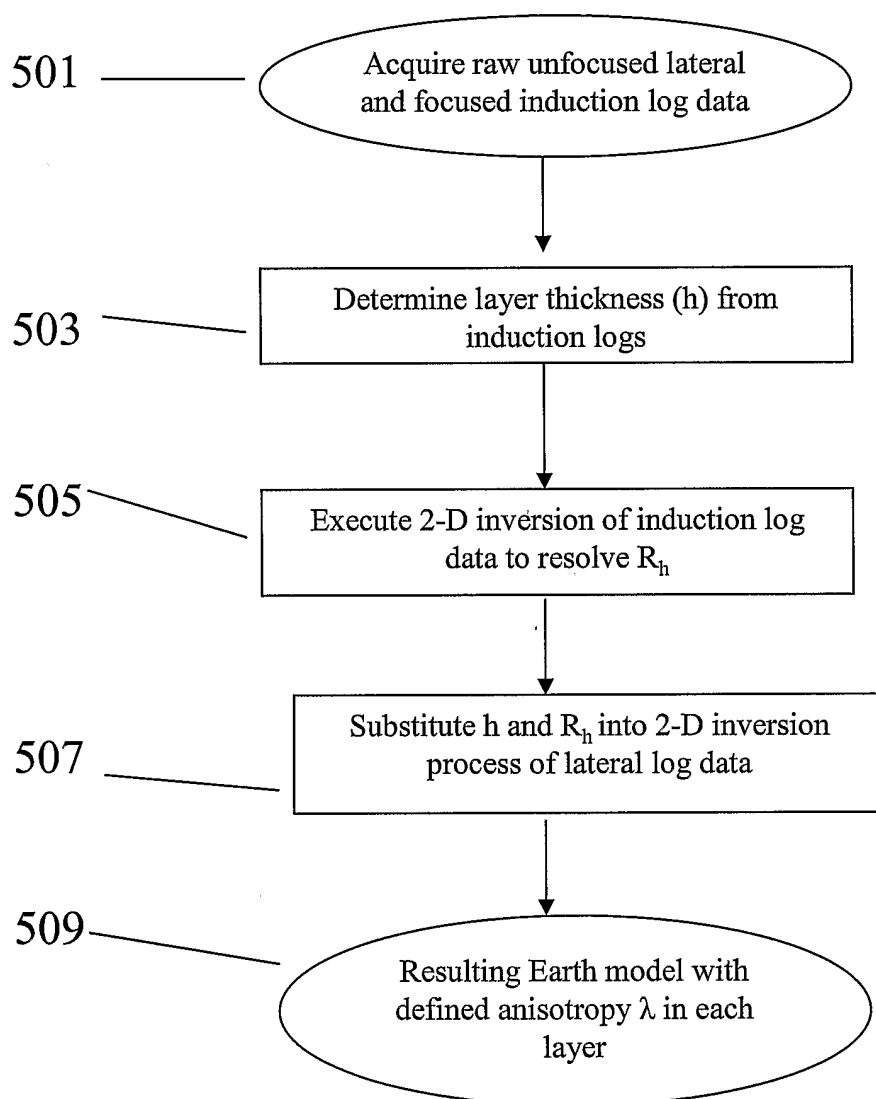
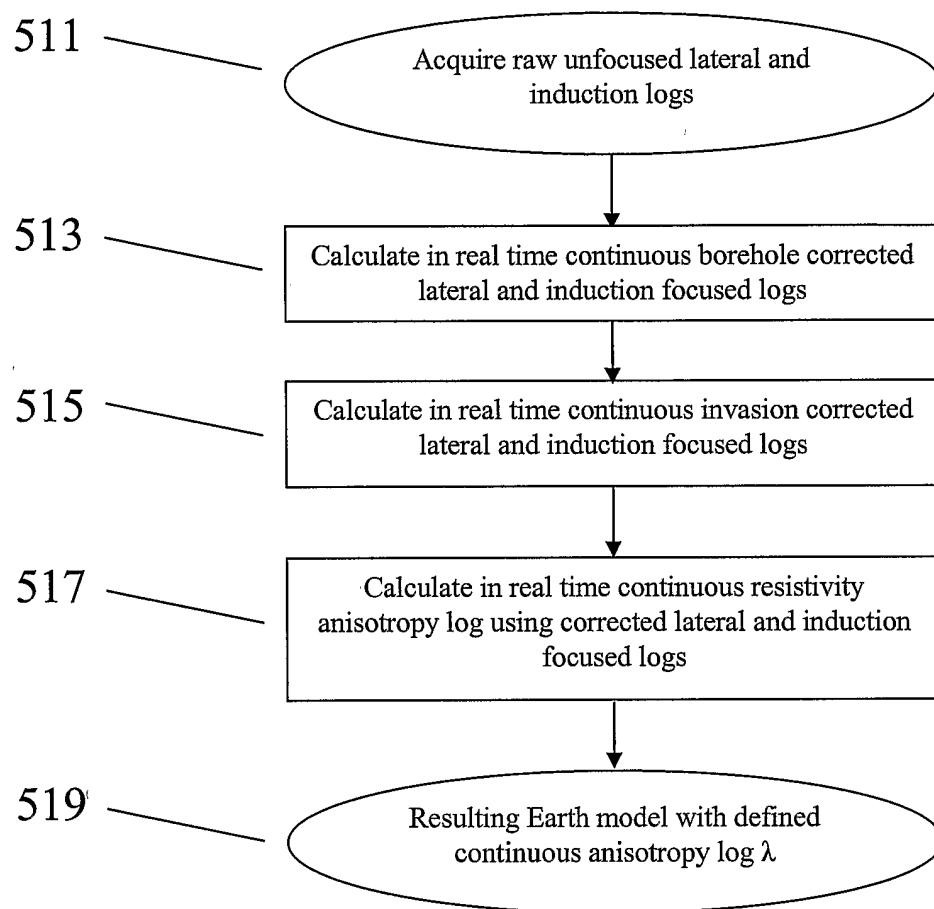


Figure 4 (prior art)

R_{HDLL}/R_{mud}

**Figure 5a (prior art)**

**Figure 5b**

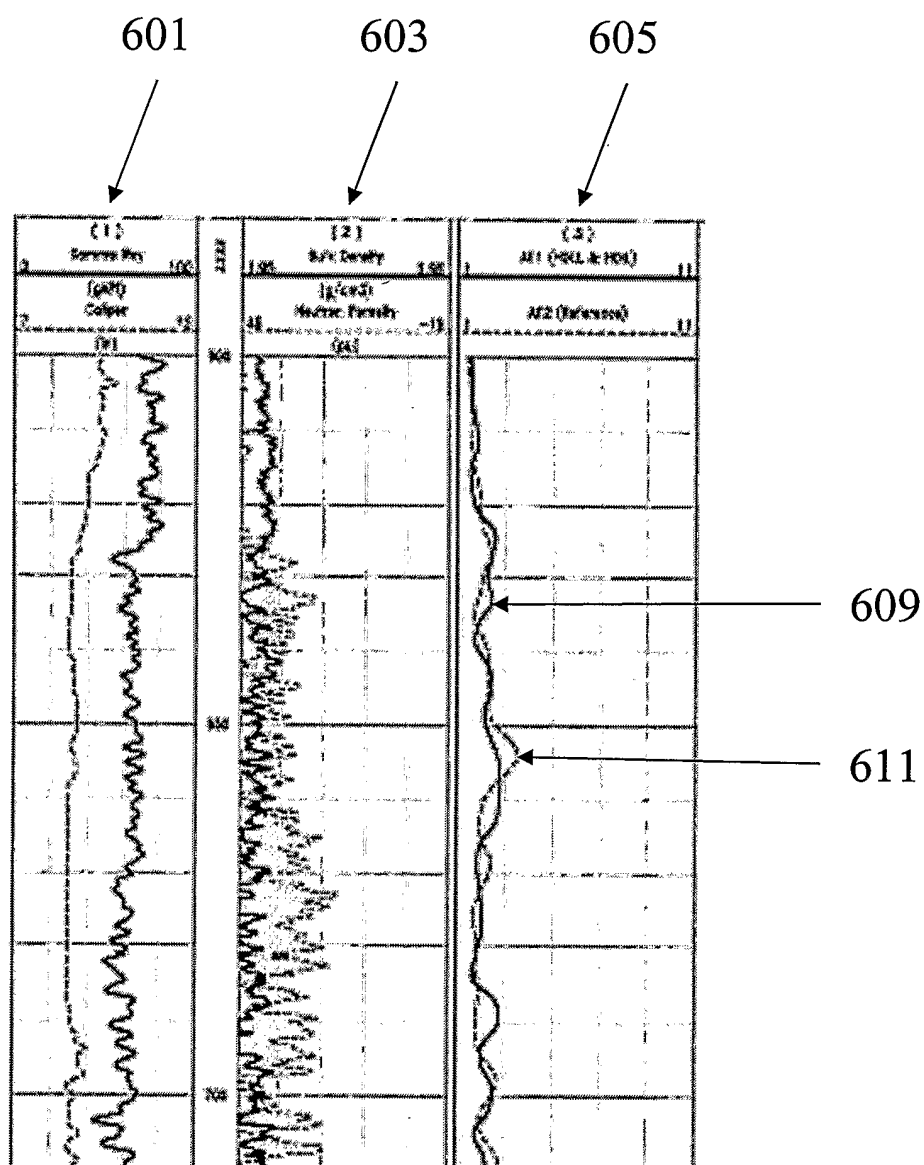


Figure 6

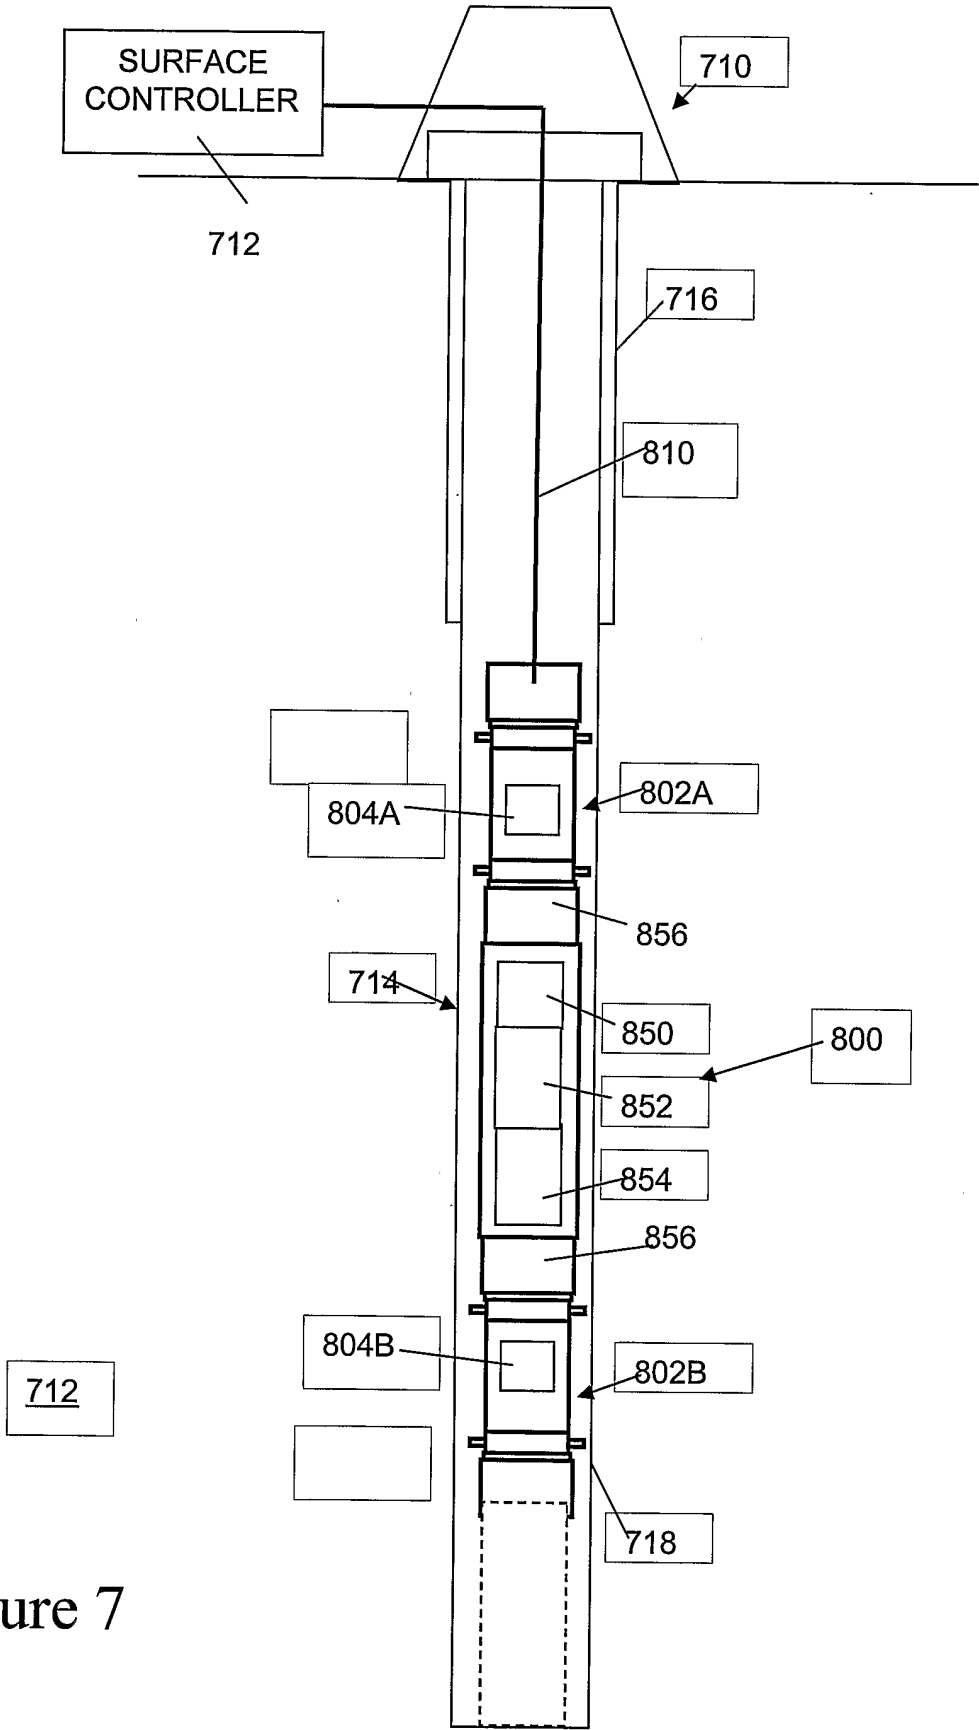


Figure 7

INTERNATIONAL SEARCH REPORT

PCT/US 03/30440

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01V3/28 G01V3/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 368 915 A (SCHLUMBERGER LTD) 15 May 2002 (2002-05-15) page 6, line 1 - line 7 page 7, line 17 - line 20	1-4, 6-8, 10-12, 14-16, 18-27
Y	-----	9, 17
Y	WO 95/03557 A (WESTERN ATLAS INT INC) 2 February 1995 (1995-02-02) page 14, line 20 - page 15, line 4 ----- -/-	9, 17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 February 2004

Date of mailing of the international search report

01/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Swartjes, H

INTERNATIONAL SEARCH REPORT

PCT/US 03/30440

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PROC SPE ANNU TECH CONF EXHIB; PROCEEDINGS - SPE ANNUAL TECHNICAL CONFERENCE AND EXHIBITION; FORMATION EVALUATION AND RESERVOIR GEOLOGY 1997 SOCIETY OF PETROLEUM ENGINEERS (SPE), RICHARDSON, TX, USA, vol. OMEGA, no. part 1, 1997, pages 275-286, XP002269829 abstract	1-4, 6-8, 10-12, 14-16, 18-27
A	----- US 4 482 959 A (MINNE JEAN-CLAUDE) 13 November 1984 (1984-11-13) column 2, line 49 - column 3, line 6 -----	1, 10, 23

INTERNATIONAL SEARCH REPORT

PCT/US 03/30440

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
GB 2368915	A	15-05-2002	AU	767715 B2	20-11-2003
			AU	4808401 A	06-12-2001
			NO	20012730 A	03-01-2002
WO 9503557	A	02-02-1995	CA	2144438 A1	02-02-1995
			EP	0665958 A1	09-08-1995
			NO	951007 A	19-05-1995
			WO	9503557 A1	02-02-1995
			US	5883515 A	16-03-1999
US 4482959	A	13-11-1984	NONE		