




(22) Date de dépôt/Filing Date: 2010/11/05  
 (41) Mise à la disp. pub./Open to Public Insp.: 2011/05/09  
 (45) Date de délivrance/Issue Date: 2012/07/03  
 (30) Priorité/Priority: 2009/11/09 (EP09175438.2)

(51) Cl.Int./Int.Cl. *H03L 7/099* (2006.01),  
*H04W 56/00* (2009.01), *H04W 88/02* (2009.01)  
 (72) Inventeurs/Inventors:  
 CANPOLAT, ONUR, CA;  
 ONOCHIE, FRANCIS CHUKWUEMEKA, CA  
 (73) Propriétaire/Owner:  
 RESEARCH IN MOTION LIMITED, CA  
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MACHINE A STATUT NONLINEAIRE PAR HYSTERESIS AVEC SEUILS SUPERPOSES POUR UN  
 CONTROLE AUTOMATIQUE DES FREQUENCES  
 (54) Title: HYSTERESIS NONLINEAR STATE MACHINE WITH OVERLAPPING THRESHOLDS FOR AUTOMATIC  
 FREQUENCY CONTROL

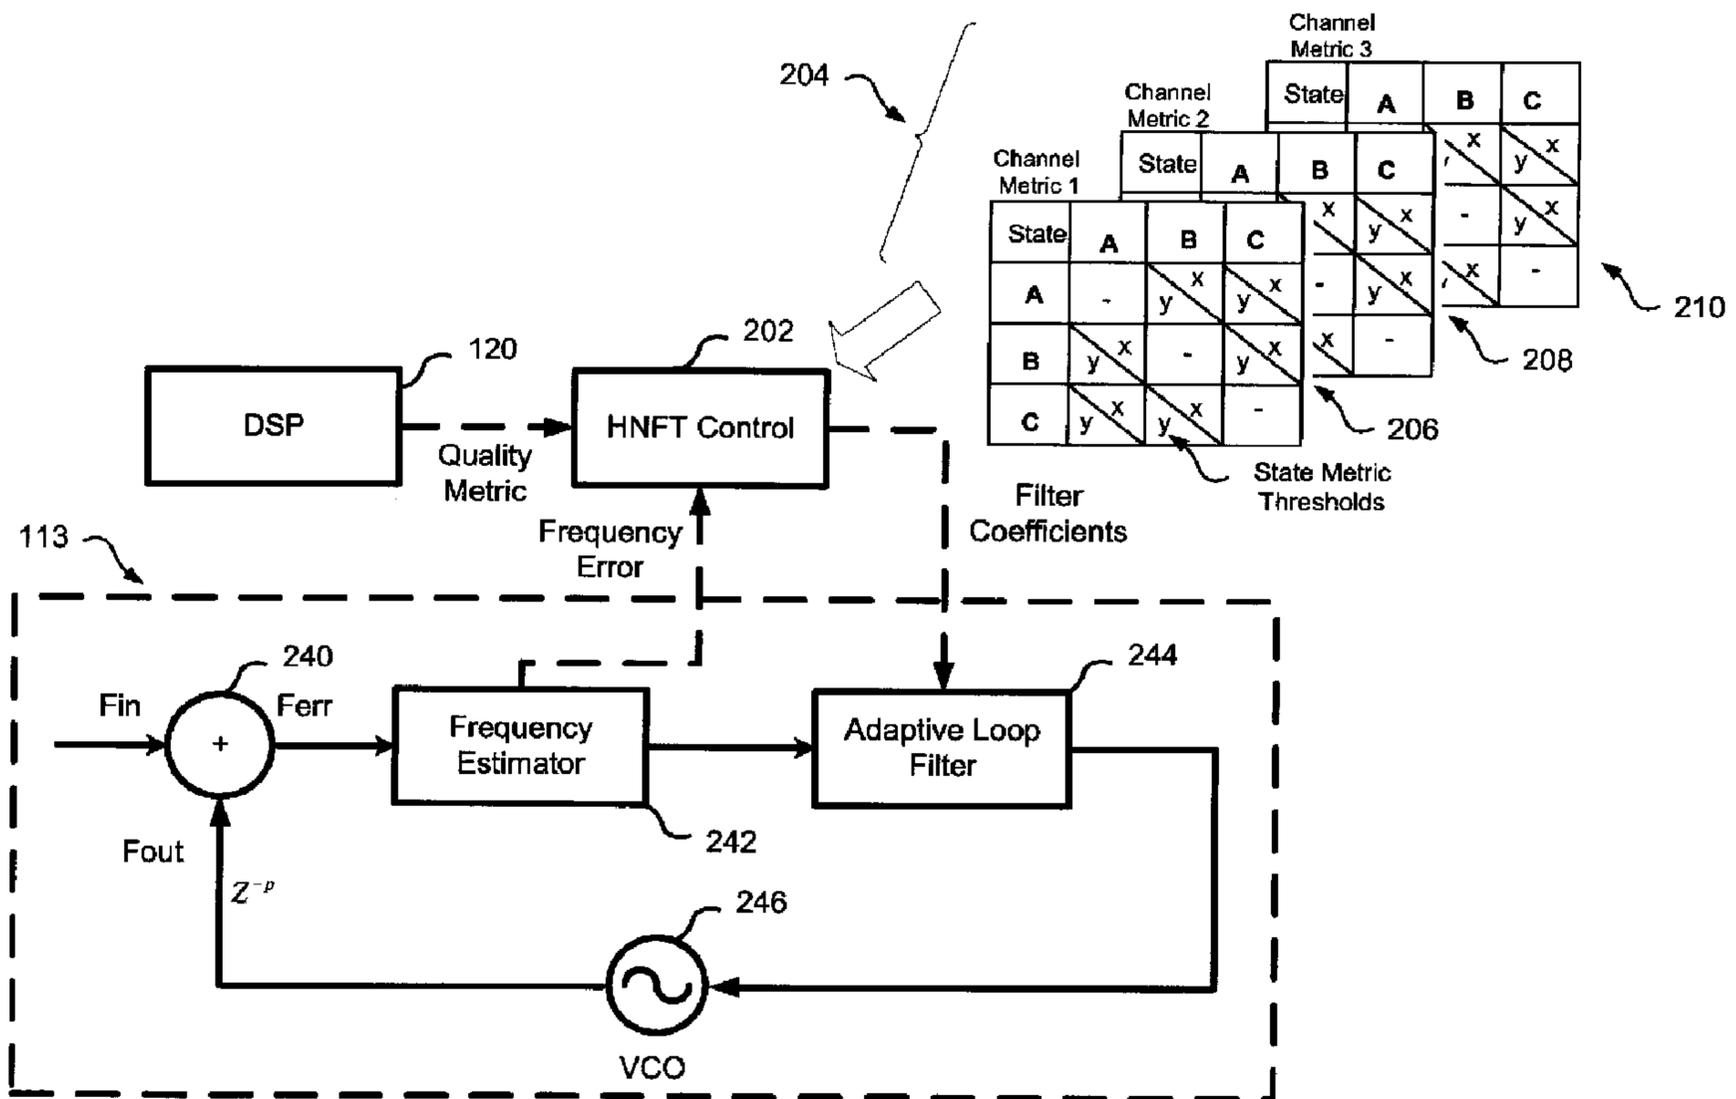

(57) Abrégé/Abstract:

A method and apparatus for non-linear frequency control tracking of a control loop of a voltage controlled oscillator (VCO) in a wireless mobile device receiver is provided. A channel metric based on one or more channel quality indicators associated with a



(57) **Abrégé(suite)/Abstract(continued):**

received radio frequency channel is determined and a state metric associated with the current operating state of the control loop are determined. One or more state metric threshold value associated with the determined channel metric, providing hysteresis between operating states, are determined wherein each state metric threshold value is associated with a transition to a possible operating state of the control loop. The control loop transitions from the current operating state to the operating state associated with an exceeded state metric threshold value. Coefficients are provided to an adaptive loop filter of the control loop, wherein the coefficients coefficient are associated with the transitioned operating state.

## ABSTRACT

A method and apparatus for non-linear frequency control tracking of a control loop of a voltage controlled oscillator (VCO) in a wireless mobile device receiver is provided. A channel metric based on one or more channel quality indicators associated with a received radio frequency channel is determined and a state metric associated with the current operating state of the control loop are determined. One or more state metric threshold value associated with the determined channel metric, providing hysteresis between operating states, are determined wherein each state metric threshold value is associated with a transition to a possible operating state of the control loop. The control loop transitions from the current operating state to the operating state associated with an exceeded state metric threshold value. Coefficients are provided to an adaptive loop filter of the control loop, wherein the coefficients coefficient are associated with the transitioned operating state.

**HYSTERESIS NONLINEAR STATE MACHINE WITH**  
**OVERLAPPING THRESHOLDS FOR AUTOMATIC FREQUENCY**  
**CONTROL**

**TECHNICAL FIELD**

5 [0001] The present disclosure relates to frequency tracking in wireless mobile devices and in particular to improving the performance of tracking in automatic frequency control of voltage controlled oscillator in the frequency tracking process.

**BACKGROUND**

10 [0002] In wireless mobile devices, conventional non-linear control system for automatic frequency control (AFC) of a voltage-controlled oscillator (VCO) is required for synchronization with a received radio frequency channel. This requires frequent switching or correction depending on the operating state of the wireless device. Variability in the RF channel quality during different phases such as initialization, cell hand-offs or deep channel fades can require frequent switching  
15 back and forth between control states which can lead to instability and phase jitter in the tracking process. In VCO control system the adjustment of the filter coefficients in the adaption process has to ensure optimum tracking performance for both transient and steady state response as well as stability. The inability to provide the appropriate filter coefficients based upon the current operating state in the wireless  
20 devices results in processing delays and inefficient resource utilization.

[0003] Accordingly, methods and apparatus that enable improved automatic frequency control remains highly desirable.

**SUMMARY**

25 [0004] In accordance with the present disclosure there is provided a method of non-linear frequency control tracking of a control loop of a voltage controlled oscillator (VCO) in a wireless mobile device receiver. A channel metric based on one or more channel quality indicators associated with a received radio frequency channel is determined. A state metric associated with the current operating state of

the control loop is determined. One or more state metric threshold values associated with the determined channel metric, the one or more state metric threshold values selected from a plurality of state metric threshold values each associated with a transition to a possible operating state of the control loop, from the  
5 current operating state is determined. It is then determined if one of the one or more state metric threshold values has been exceeded based upon the determined state metric, wherein the state metric threshold is defined for each transition between each of operating states. The control loop then transitions from the current operating state to the operating state associated with the exceeded threshold value.  
10 At least one coefficient is provided to an adaptive loop filter of the control loop, the at least one coefficient associated with the transitioned operating state. The state metric thresholds values is associated with the operating states provide overlapping region between common operating states to provide hysteresis for operating state transitions.

15 [0005] In accordance with another aspect of the present disclosure there is provided an apparatus for providing hysteresis non-linear frequency tracking of a control loop in a frequency generator of a wireless mobile device having a voltage controlled oscillator (VCO) and an adaptive loop filter. The apparatus comprising a memory and a processor. The processor providing coefficients to an adaptive loop  
20 filter from a plurality of coefficients, each of the plurality of coefficients associated with an operating state of the frequency generator. The operating state is determined by determining a channel metric based upon one or more channel quality indicators associated with a received radio frequency channel. A state metric associated with the control loop based on the operating state of the control loop is  
25 determined. One or more state metric threshold values associated with the determined channel metric from a table stored in the memory, the one or more state metric threshold values selected from a plurality of state metric thresholds values each associated with a transition to a possible operating state of the control loop from the current operating state is determined. If one of the one or more state  
30 metric threshold values is determined to have been exceeded based upon the determined state metric, wherein the state metric threshold is defined for each transition between each of operating states. The control loop then transitions from

current operating state to the operating state associated with the exceeded threshold value. The state metric thresholds associated with the operating states provide overlapping region between common operating states to provide hysteresis for operating state transitions.

5

### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0006] Further features and advantages of the present disclosure will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

10 [0007] FIG. 1 shows a block diagram representation of wireless mobile device;

[0008] FIG. 2 shows a representation of a hysteresis non-linear frequency control loop;

15 [0009] FIG. 3 shows a representation of overlapping thresholds used at state transitions in a hysteresis two-state machine;

[0010] FIG. 4 shows a hysteresis three-operating state diagram for non-linear frequency tracking;

[0011] FIG. 5 shows hysteresis four-operating state diagram for non-linear frequency tracking; and

20 [0012] FIG. 6 shows a method for hysteresis non-linear frequency tracking.

[0013] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

### **DETAILED DESCRIPTION**

25 [0014] Embodiments are described below, by way of example only, with reference to Figs. 1-6.

[0015] The present disclosure provide a system and apparatus for providing non-linear frequency tracking of a frequency generator in a wireless device using overlapping thresholds in state transitions to create hysteresis between operating states. The hysteresis state machine controls the adaptive loop filter coefficients during the frequency tracking process. The ability to change the adaptive loop filter coefficients results in fast transient response for reaching the steady state and narrows the loop bandwidth to minimize the output phase jitter due to noisy frequency estimates.

[0016] Figure 1 is a block diagram of a wireless mobile device **100** incorporating a communication subsystem having both a receiver **112** and a transmitter **114**, as well as associated components such as one or more embedded or internal antenna elements **116** and **118**, frequency generator **113** which also includes a control loop for tuning a voltage controlled oscillator (VCO), and a processing module such as a digital signal processor (DSP) **120**. The particular design of the communication subsystem will be dependent upon the communication network in which the device is intended to operate in a wireless network such as GSM, CDMA, HSPA, or 3GPP LTE network.

[0017] The wireless mobile device **100** performs synchronization, registration or activation procedures by sending and receiving communication signals over the network **102**. Signals received by antenna **116** through communication network **102** are input to receiver **112**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection and the like, and in the example system shown in Figure 1, analog to digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation, decoding and synchronization to be performed in the DSP **120**.

[0018] In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by DSP **120** and input to transmitter **114** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network **102** via antenna **118**. DSP **120** not

only processes communication signals, but also provides for VCO AFC control, as well as receiver and transmitter control.

[0019] Wireless device **100** preferably includes a radio processor **111** and a control processor **138** which together control the overall operation of the device.  
5 DSP **120** may be located within radio processor **111**. Communication functions are performed through radio processor **111**. If the DSP **120** is separate from radio processor **111**, functions of the VCO AFC control may be shared in whole or in part between the processors.

[0020] Radio processor **111** interacts with receiver **112** and transmitter **114**,  
10 and further with the subscriber identity module **164**. The radio processor **111** may also interact with flash memory **162**, random access memory (RAM) **160**, which may be external components or integrated within the radio processor **111**.

[0021] Control processor **138** interacts with further device subsystems such as the display **122**, flash memory **140**, random access memory (RAM) **136**, auxiliary  
15 input/output (I/O) subsystems **128**, serial port **130**, keyboard **132** or a touch interface, other communications **142**, other device subsystems generally designated as **144** and transmits and receives audio from a speaker **170** and a microphone **172**.

[0022] Some of the subsystems shown in Figure 1 perform communication-related functions, whereas other subsystems may provide "resident" or on-device  
20 functions. Notably, some subsystems, such as keyboard **132** and display **122**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list.

[0023] Software used by radio processor **111** and microprocessor **138** is  
25 preferably stored in a persistent store such as flash memory **140** and **162**, which may instead be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **136** and RAM **160**.

[0024] As shown, flash memory **140** can be segregated into different areas for computer programs **146**, device state **148**, address book **150**, other personal information management (PIM) **152** and other functionality generally designated as **154**. These different storage types indicate that each program can allocate a portion  
5 of flash memory **140** for their own data storage requirements. Control processor **138**, in addition to its operating system functions, preferably enables execution of software applications on the mobile station.

[0025] For voice communications, overall operation of wireless mobile device **100** is similar, except that received signals would preferably be output to the  
10 speaker **170** or headset and signals for transmission would be generated by the microphone **172**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile network **102**.

[0026] Serial port **130** in Figure 1 would normally be implemented in a personal digital assistant (PDA)-type wireless mobile device for which  
15 synchronization with a user's desktop computer (not shown) may be desirable, but is an optional device component. Such a port **130** would enable a user to set preferences through an external device or software application and would extend the capabilities of wireless mobile device **100** by providing for information or software downloads to wireless mobile device **100** other than through a wireless  
20 communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication.

[0027] Other device subsystems **144**, such as a short-range communications subsystem, is a further optional component which may provide for communication  
25 between wireless mobile device **100** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **144** may include an infrared device and associated circuits and components or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

[0028] The mobile device **100** further includes an Hysteresis Non-Linear Frequency Tracking (HNFT) Control **202**, as described further herein, for controlling the frequency generator **113**.

[0029] Figure 2 provides an overall control loop model with Hysteresis Nonlinear Frequency Tracking (HNFT) Control as provided in wireless mobile device **100**. The frequency generator **113** generates a signal provided to the receiver **112** and transmitter **114**. The frequency generator **113** compares the output signal of a VCO **246**, having frequency ( $F_{out}$ ), with the incoming signal, having frequency ( $F_{in}$ ), from the received RF channel at a phase detector **240**. The output of the phase detector **240** is provided to a frequency estimator **242** to estimate the frequency difference between the two signals. The output of the frequency estimator **242** is noisy and requires filtering by an adaptive loop filter **244**. However the bandwidth of the filter **244** can be adjusted by providing optimum coefficients based upon the order and type of the filter selected to improve system performance.

[0030] The HNFT control **202** module provides the ability to determine the appropriate coefficients for the adaptive loop filter based upon channel and state metrics. The control loop can then change from different states of operation based upon the current operating environment of the wireless device to provide more accurate VCO **246** control and limit possible instability and phase jitter that can result from coefficients that are inappropriate for current channel characteristics. The HNFT control **202** receives channel quality indicators from the DSP **120** such as but not limited to signal-to-noise ratio of the received channel, bit-error rate of the received channel, a received signal strength measurements, and carrier-to-interference-plus-noise ratios ( $C/I+N$ ) to determine a channel metric. The channel metric can be determined by generating a weighted function of one or more of the channel quality indicators, where each of the channel quality indicators is assigned a different weight to determining the channel metric function. The selection of the channel quality indicators may be based upon possible output data available from the DSP terms of channel quality in processing the received signal. In addition the decision of which parameter to use may be related to the received signal type or RF characteristics associated with the operation of the wireless device on the network.

[0031] A state metric is also determined based upon the received frequency error but may also include a weighted function of the current channel metric and/or weightings associated with one or more previous states that the HNFT has transitioned through. The previous state values may also be weighted based upon a time value in relation to how long ago the previous state transition occurred. Knowledge of the previous operating state may be useful when determining the optimal operating state, and so the filter coefficients, during operational transitions such as initialization, hand-offs or fades where the signal characteristics can vary considerably and benefit from further defining which state may be desirable or undesirable if as the transition occurs.

[0032] Each operating state is associated with filter coefficients which are provided to the adaptive loop filter **244** when transitioning to the determined state by the HNFT control module **202**. The HNFT control module **202** utilizes the determined channel metric to select an associated channel metric table **204** which may comprise multiple sub-tables **206**, **208**, **210** each associated with a channel metric values or a range of channel metric values. Each table provides state metric threshold values defining transitions between operating states. The threshold values are used for determining when to transitions from one operating state to the next state in relation to the determined state metric for a given channel metric or a range of channel metrics. Each of the operating states have defined filter coefficients associated with the operating state to change the filtering properties of the adaptive loop filter **244**. The number of coefficients is based upon the order and operation of the adaptive loop filter. The table defines a different threshold value for transitioning from a first operating state to a second operating state and a transitioning from the second operating state to the first operating state.

[0033] Figure 3 is an example of an operating state transition from fast to slow and slow to fast states in the state machine. In the simplest implementation two operating state transitions, operating state A **310** and operating state B **320** would be provided. The operating states may represent a fast tracking state and a slow tracking state respectively and each have different filter coefficient requirements associated with the operating state. When the control loop is in the fast tracking

state A **310**, a lower threshold is determined for when to transition to the slow tracking state B **320**. The threshold is based upon the determined channel and state metrics. This threshold is not the same as when the control loop is in slow tracking state B **320** and the channel and state metric varies sufficiently to require a state change to the fast tracking state A **310**. The overlapping between states **302** provides an upper threshold **304** and lower threshold **306** where hysteresis occurs in the state transitions to ensure that filter coefficients are not loaded prematurely to reduce instability and phase jitter. As shown in the figure there is an overlapping region where both states can operate separately to reduce phase jittering and switching operating states back and forth.

[0034] Figure 4 & 5 show a three and four operating state diagrams respectively including an initialization state in accordance with the present disclosure. The states are not limited to the ones provided and can be expanded to include additional states based upon the filter requirements such as the order of the filter and overall performance requirements.

[0035] Figure 4 shows a hysteresis three operating state diagrams for non-linear frequency tracking **400**. Initialization state **402** provides filter coefficients for an initialization phase **403** to optimize single acquisition. To move from the initialization state a threshold (I to A) is defined, there is no hysteresis back to the initialization state as it is assumed that the initialization state will only occur at start-up and will not be transitioned back to during normal operation. It should be understood that an initialization operating state **402** may not be required by the HNFT control module **202** based upon how the operating states are defined in relation to the channel and state metric. For each of the operating states, associated thresholds are defined in the table **204** for each defined channel metric or channel metric ranges.

[0036] Operating state A **404** having filter coefficients A **405** would have two state metric threshold states associated with it for a given channel metric:

[0037] moving to state B threshold is (A to B)

30 [0038] moving to state C threshold is (A to C)

[0039] Operating state B **406** having filter coefficients B **407** would have two state metric threshold states associated with it for a given channel metric:

[0040] moving to state A threshold is (B to A)

[0041] moving to state C threshold is (B to C)

5 [0042] Operating state C **408** having filter coefficients C **409** would have two state metric threshold states associated with it for a given channel metric:

[0043] moving to state A threshold is (C to A)

[0044] moving to state B threshold is (C to B)

10 [0045] In a three-state machine, the HNFT control provides state metric thresholds to transition to and from each operating state based upon the associated determined channel metric.

[0046] Figure 5 shows a hysteresis four operating state diagram for non-linear frequency tracking **500**. Initialization state **502** provides filter coefficients for an initialization phase **503** to optimize single acquisition. To move from the initialization state a threshold (I to A) is defined, there is no hysteresis back to the initialization state as it is assumed that the initialization state will only occur at start-up and will not be transitioned back to during normal operation. It should be understood that an initialization operating state **502** may not be required by the HNFT control module **202** based upon how the operating states are defined in relation to the channel and state metric . For each of the operating states associated state metric thresholds are defined in the table **204**.

15  
20

[0047] Operating state A **504** having filter coefficients A **505** would have three state metric threshold states associated with it for a given channel metric:

[0048] moving to state B threshold is (A to B)

25 [0049] moving to state C threshold is (A to C)

[0050] moving to state D threshold is (A to D)

[0051] Operating state B **506** having filter coefficients B **507** would have three state metric threshold states associated with it for a given channel metric:

[0052] moving to state A threshold is (B to A)

[0053] moving to state C threshold is (B to C)

5 [0054] moving to state D threshold is (B to D)

[0055] Operating state C **508** having filter coefficients C **509** would have three state metric threshold states associated with it for a given channel metric:

[0056] moving to state A threshold is (C to A)

[0057] moving to state B threshold is (C to B)

10 [0058] moving to state D threshold is (C to D)

[0059] Operating state D **510** having filter coefficients C **511** would have three state metric threshold states associated with it for a given channel metric:

[0060] moving to state A threshold is (D to A)

[0061] moving to state B threshold is (D to B)

15 [0062] moving to state C threshold is (D to C)

[0063] Figure 6 is a method of non-linear frequency control of a control loop of a voltage controlled oscillator (VCO) provided by a frequency generator in a wireless mobile device. The method may be implemented by a processor resident within the wireless mobile device such as the DSP **120**, by a dedicated processor, or  
 20 utilizing processing power of radio processor **111** or control processor **138**. If the mobile wireless device is in the initialization phase **600**, it loads initialization coefficients in to the adaptive loop filter as a default filter configuration. When the defined threshold for the channel metric is exceeded during the initialization state, the HNFT control **202** transitions to the first operating state. A channel metric  
 25 associated with a received radio frequency channel is then determined **602**. The channel metric generated as a weighted function of one or more channel quality

indicators provided by the DSP **120**. A state metric associated with the control loop is determined **604** as a weighted function of one or more parameters. The state metric may include a weighting of the frequency error of the VCO in relation to the received radio frequency channel, a weighted function of the determined channel metric, one or more previous state metrics associated with a previous operating state weighted by time relative to the current operating state. The time parameter provides a weight component to the previous operating state metric wherein the time parameter decreases the weighting of the previous operating state metric based on received radio frequency channel characteristics.

10 [0064] One or more state metric threshold values is then determined **606** based on the determined channel metric. The one or more state metric threshold values can be selected based upon the associated operating states transitions. The state metric threshold values can be provided in a table **204** defining operating state transitions for each of the states in the control loop. The state metric threshold

15 defines the state metric value that must be exceeded in order to transition to the next operating state based upon the channel metric value. The channel metric table **204** can be stored in memory **162** or **160** or may be resident within the DSP. If the one of the one or more threshold values is exceeded **608**, based on the determined state metric, the control loop transitions to the operating state, YES at **608**,

20 associated with the threshold **610**. For a new operating state, at least one coefficient is loaded **612** to the adaptive loop filter of the control loop. Depending on the order adaptive filter, the number of coefficients provided may vary for each operating state. The state metric threshold values are selected to provide a hysteresis function to transitions between operating states to remove instability and

25 improved transient response. The method continues with the channel metric again being determined at **602**. If thresholds are not exceeded, NO at **608**, the channel metric is again determined at **602** until a transition occurs.

[0065] While a particular embodiment of the present method and apparatus for Hysteresis Non-Linear Frequency Tracking has been described herein, it will be

30 appreciated by those skilled in the art that changes and modifications may be made

thereto without departing from the disclosure in its broadest aspects and as set forth in the following claims.

**CLAIMS:**

1. A method of non-linear frequency control tracking of a control loop of a voltage controlled oscillator (VCO) (246) in a wireless mobile device (100) receiver, the method comprising:
  - determining (602) a channel metric based on one or more channel quality indicators associated with a received radio frequency channel;
  - determining (604) a state metric associated with the current operating state of the control loop;
  - determining (606) one or more state metric threshold values associated with the determined channel metric, the one or more state metric threshold values selected from a plurality of state metric threshold values each associated with a transition to a possible operating state of the control loop, from the current operating state;
  - determining (608) if one of the one or more state metric threshold values has been exceeded based upon the determined state metric, wherein the state metric threshold values is defined for each transition between each of operating states;
  - transitioning (610) from the current operating state to the operating state associated with the exceeded state metric threshold value; and
  - providing (612) at least one coefficient to an adaptive loop filter of the control loop, the at least one coefficient associated with the transitioned operating state;wherein the state metric threshold values associated with the operating states provide overlapping region between common operating states to provide hysteresis for operating state transitions.

2. The method of claim 1 wherein determining if one of the one or more state metric threshold values associated with the determined channel metric is performed by a lookup in a table defining state metric threshold values for each transition between the plurality of operating states.
3. The method of claim 2 wherein the lookup table comprises one or more sub-tables each table associated with a channel metric value or a range of channel metric values, the table defining the plurality of state metric thresholds for each transition to and from operating states.
4. The method of any one of claims 1 to 3 wherein the channel metric is based upon one or more channel quality indicators determined for the received radio frequency channel.
5. The method of claim 4 wherein the channel metric is a function of one or more channel quality indicators selected from a signal-to-noise ratio of the received channel, bit-error rate of the received channel, a received signal strength measurements, and carrier-to-interference-plus-noise ratios (C/I+N) wherein each channel quality indicator has an associated weighting in determining the channel metric.
6. The method of any one of claims 1 to 5 wherein the state metric comprises a function of a frequency error between the frequency of the received radio frequency channel and an output frequency of the VCO.
7. The method of claim 6, wherein the state metric is further a function of at least one of:
  - a weighted function of the current channel metric; and
  - one or more previous operating state metrics weighted by a time parameter, wherein the time parameter decreases the weighting of the previous operating state metric.

8. The method of any one of claims 1 to 7 wherein when determining one or more state metric threshold values is associated with an initialization state, providing default initialization coefficients defined for the adaptive loop filter and wherein only one threshold is defined for the channel metric and wherein the initialization state occurs during mobile wireless device start-up.
9. An apparatus (202) for providing hysteresis non-linear frequency tracking of a control loop in a frequency generator (113) of a wireless mobile device (100) having a voltage controlled oscillator (VCO) (246) and an adaptive loop filter, the apparatus comprising:
  - a memory (160, 162) ;
  - a processor (120, 111) for providing coefficients to an adaptive loop filter (244) from a plurality of coefficients, each of the plurality of coefficients associated with an operating state of the frequency generator (113) wherein the operating state is determined by:
    - determining (602) a channel metric based upon one or more channel quality indicators associated with a received radio frequency channel;
    - determining (604) a state metric associated with the control loop based on the operating state of the control loop;
    - determining (606) one or more state metric threshold values associated with the determined channel metric from a table stored in the memory, the one or more state metric threshold values selected from a plurality of state metric threshold values each associated with a transition to a possible operating state of the control loop from the current operating state;
    - determining (608) if one of the one or more state metric threshold values has been exceeded based upon the determined state metric, wherein the state metric threshold is defined for each transition between each of operating states; and

transitioning (610) from the current operating state to the operating state associated with the exceeded state metric threshold value; wherein the state metric threshold values associated with the operating states provide overlapping region between common operating states to provide hysteresis for operating state transitions.

10. The apparatus of claim 9 wherein the channel metric is based upon one or more channel quality indicators determined for the received radio frequency channel.
11. The apparatus of claim 10 wherein the channel metric is a function of one or more channel quality indicators selected from a signal-to-noise ratio of the received channel, bit-error rate of the received channel, a received signal strength measurements, and carrier-to-interference-plus-noise ratios (C/I+N) wherein each channel quality indicator has an associated weighting in determining the channel metric.
12. The apparatus of any one of claims 9 to 11 wherein the state metric comprises a function of a frequency error between the frequency of the received radio frequency channel and an output frequency of the VCO.
13. The apparatus of claim 12, wherein the state metric is further a function of at least one of:  
a weighted function of the current channel metric; and  
one or more previous operating state metrics weighted by a time parameter, wherein the time parameter decreases the weighting of the previous operating state metric.
14. The apparatus of any one of claims 9 to 13 wherein determining if one of the one or more state metric threshold values has been exceeded based upon the channel metric is performed by a lookup in a table defining one or more state metric threshold values for each of the plurality of operating states.

15. The apparatus of claim 14 wherein the lookup table comprises one or more sub-tables each table associated with a channel metric value or a range of channel metric values, the table defining the plurality of state metric threshold values for each transition to and from operating states.

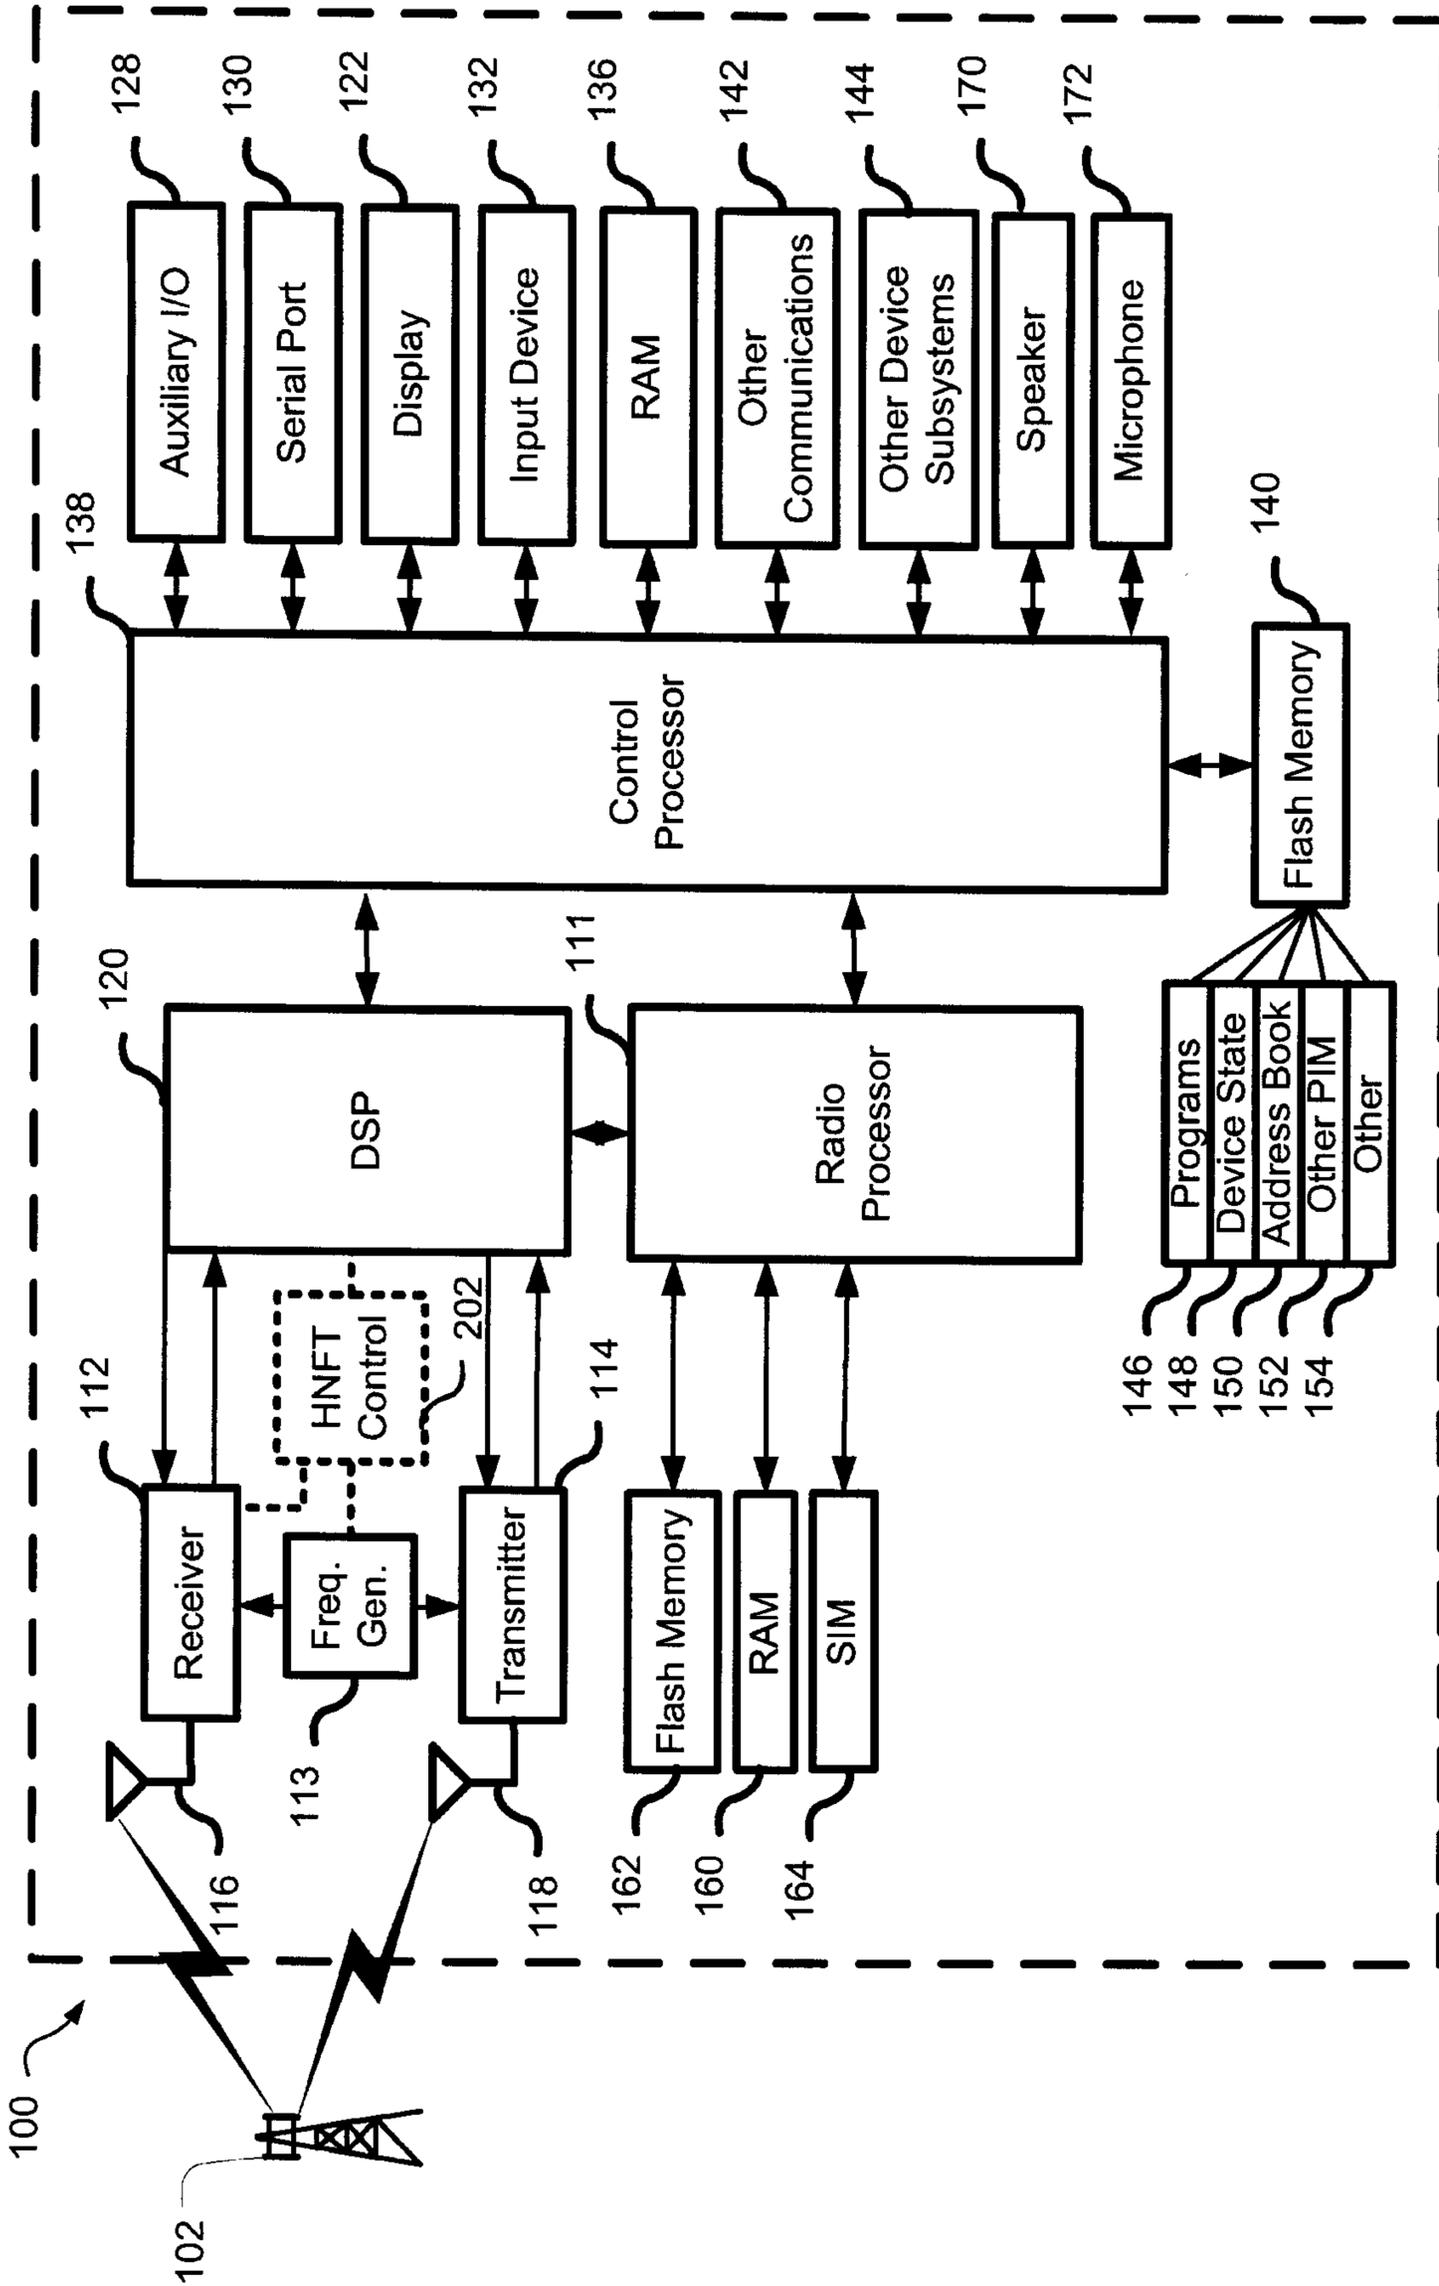


Figure 1



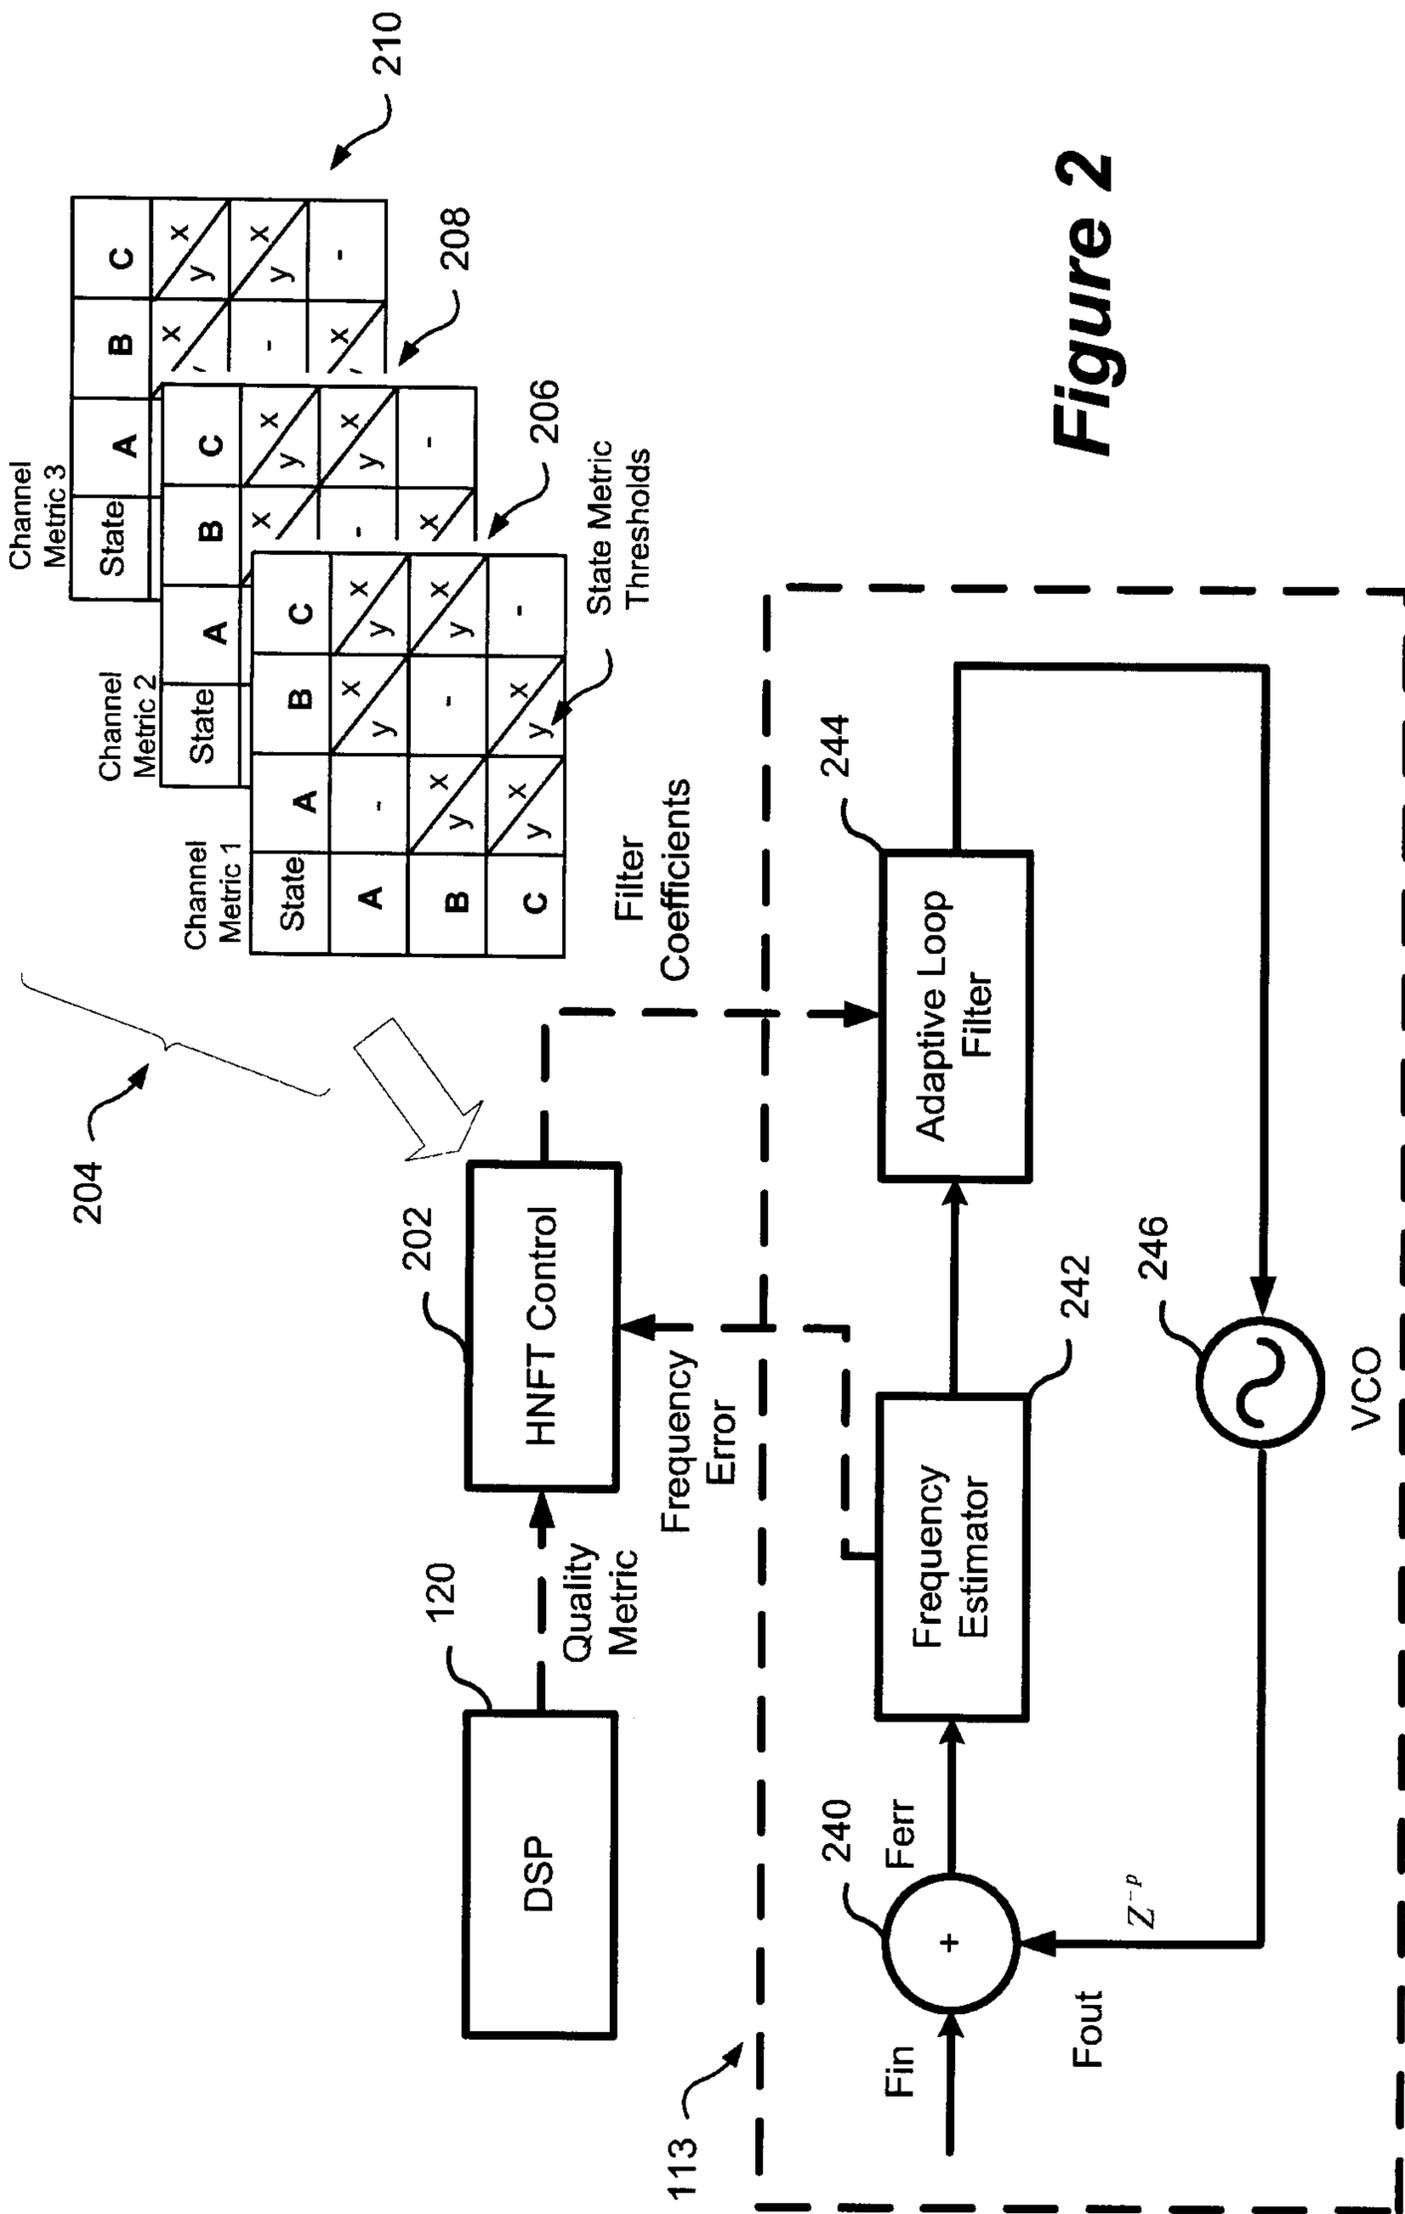



Figure 2

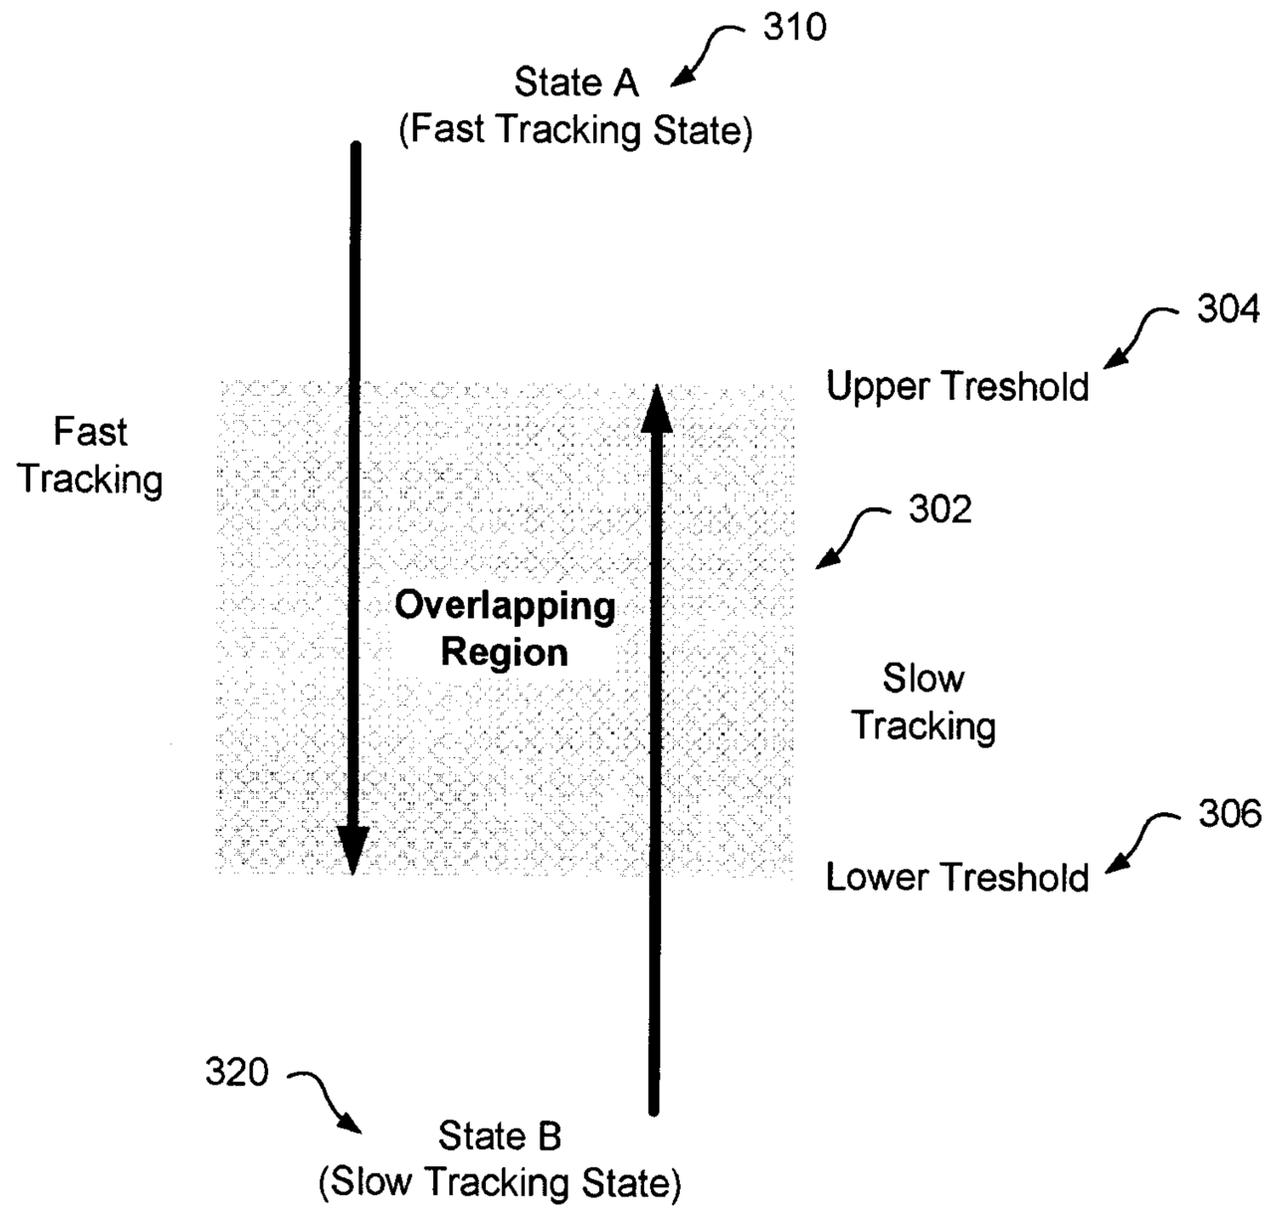


**Figure 3**

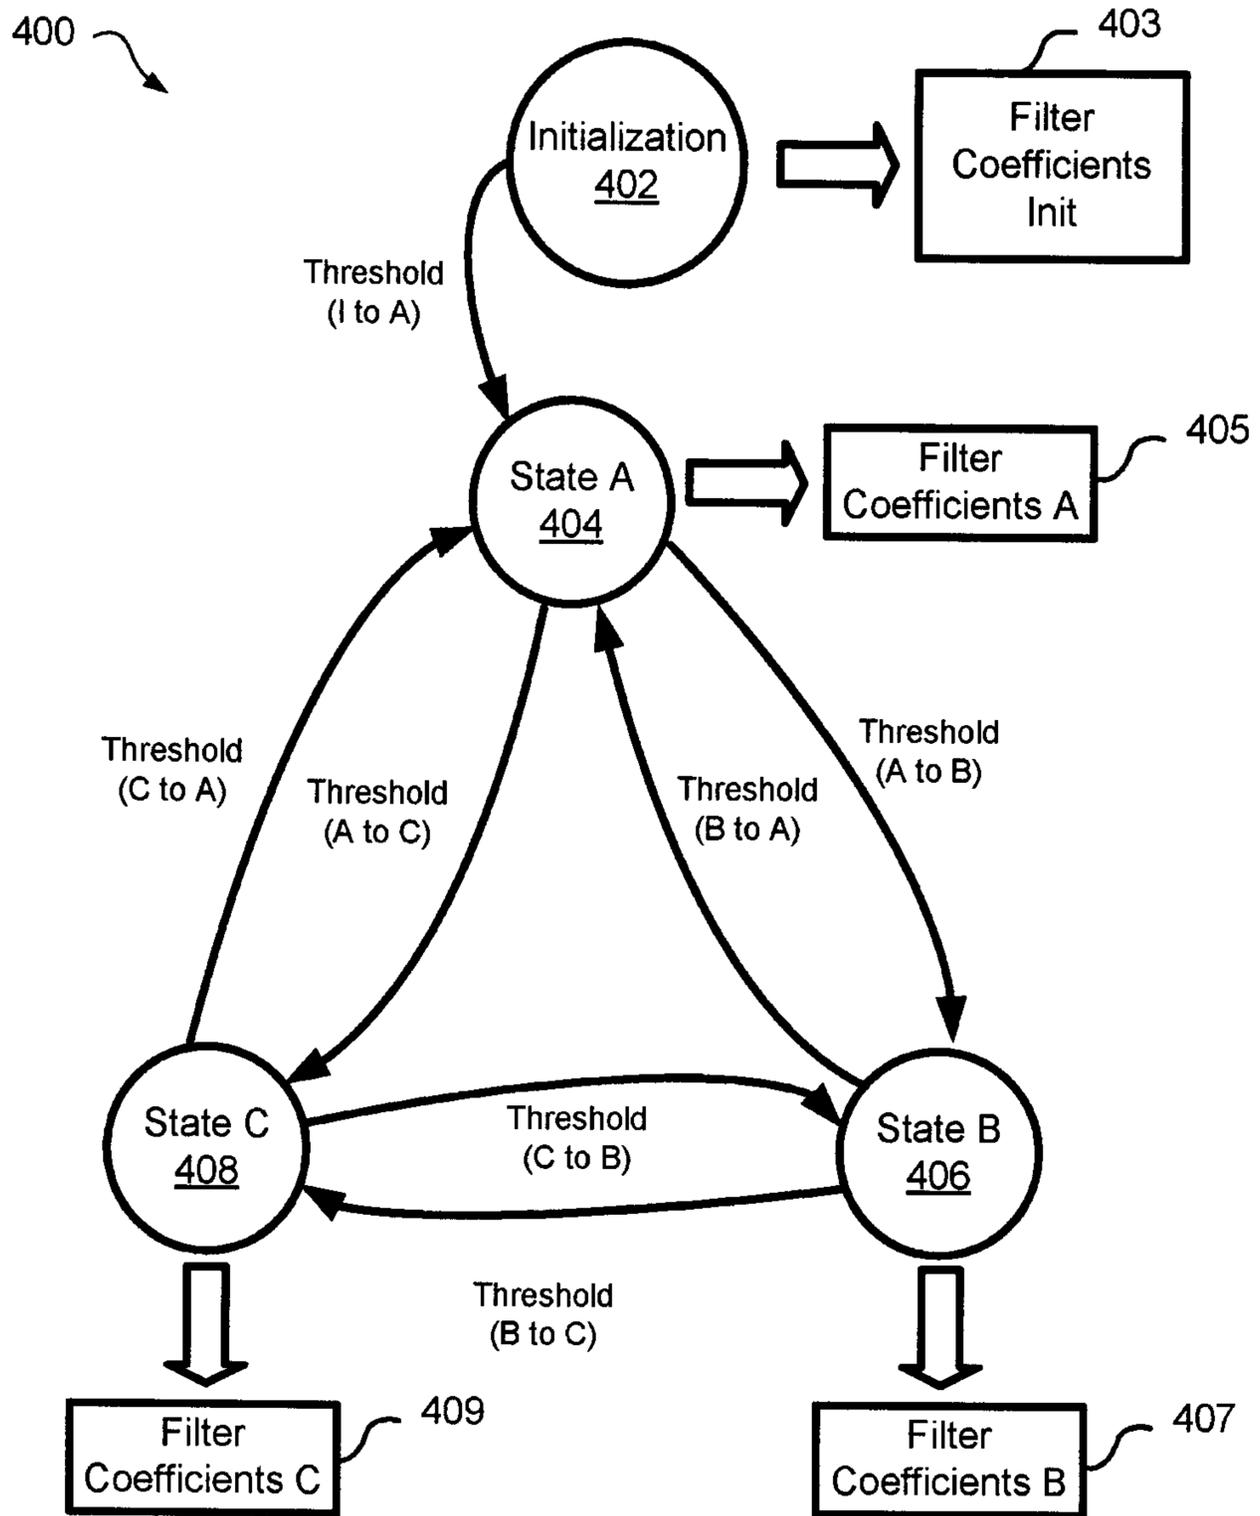

**Figure 4**

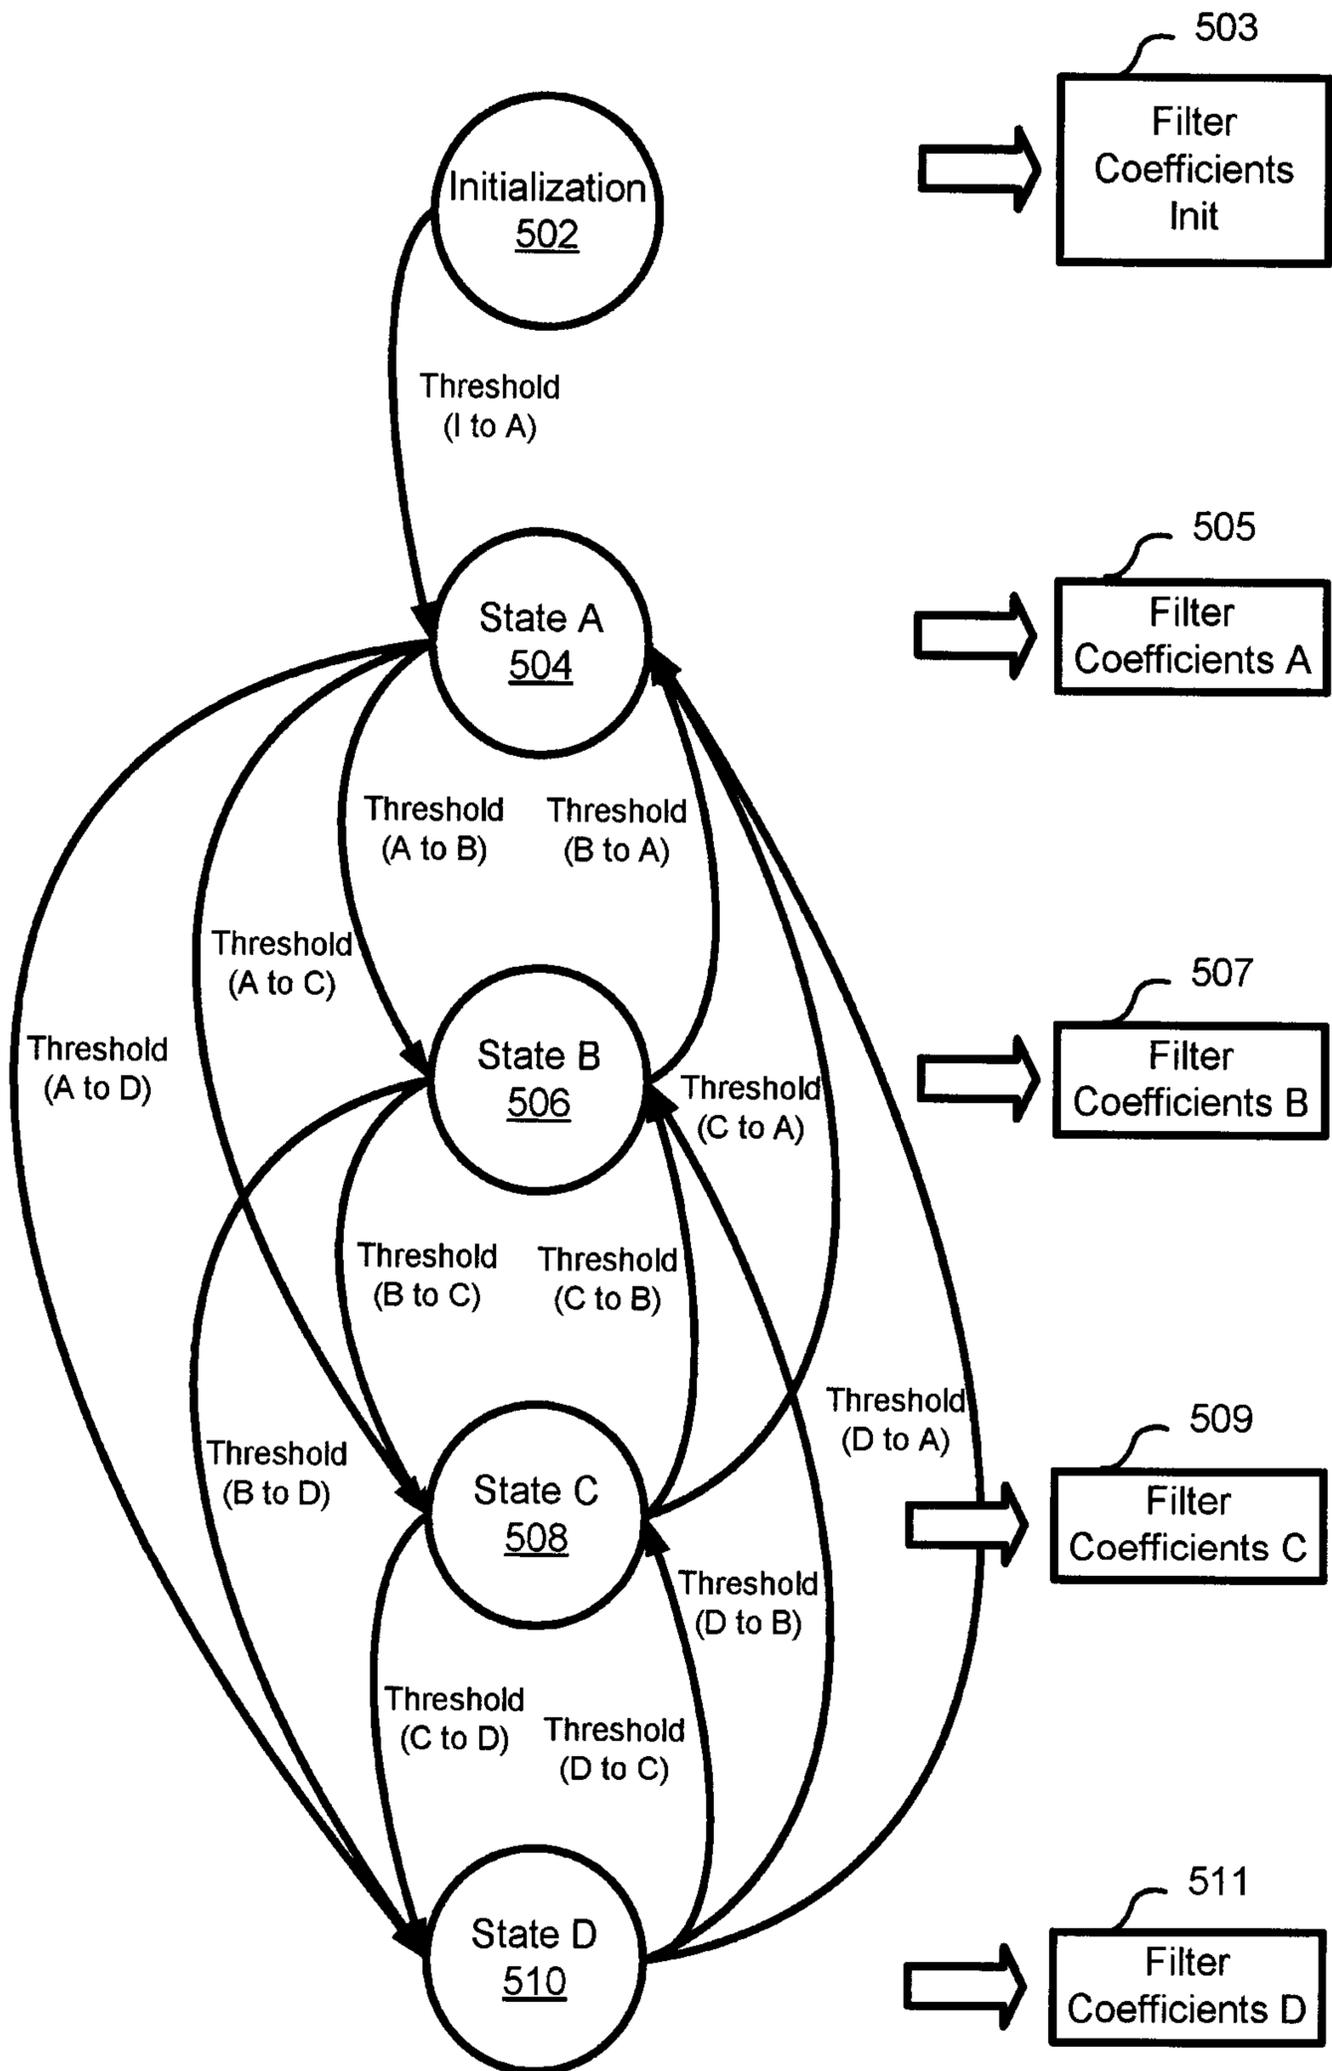

**Figure 5**

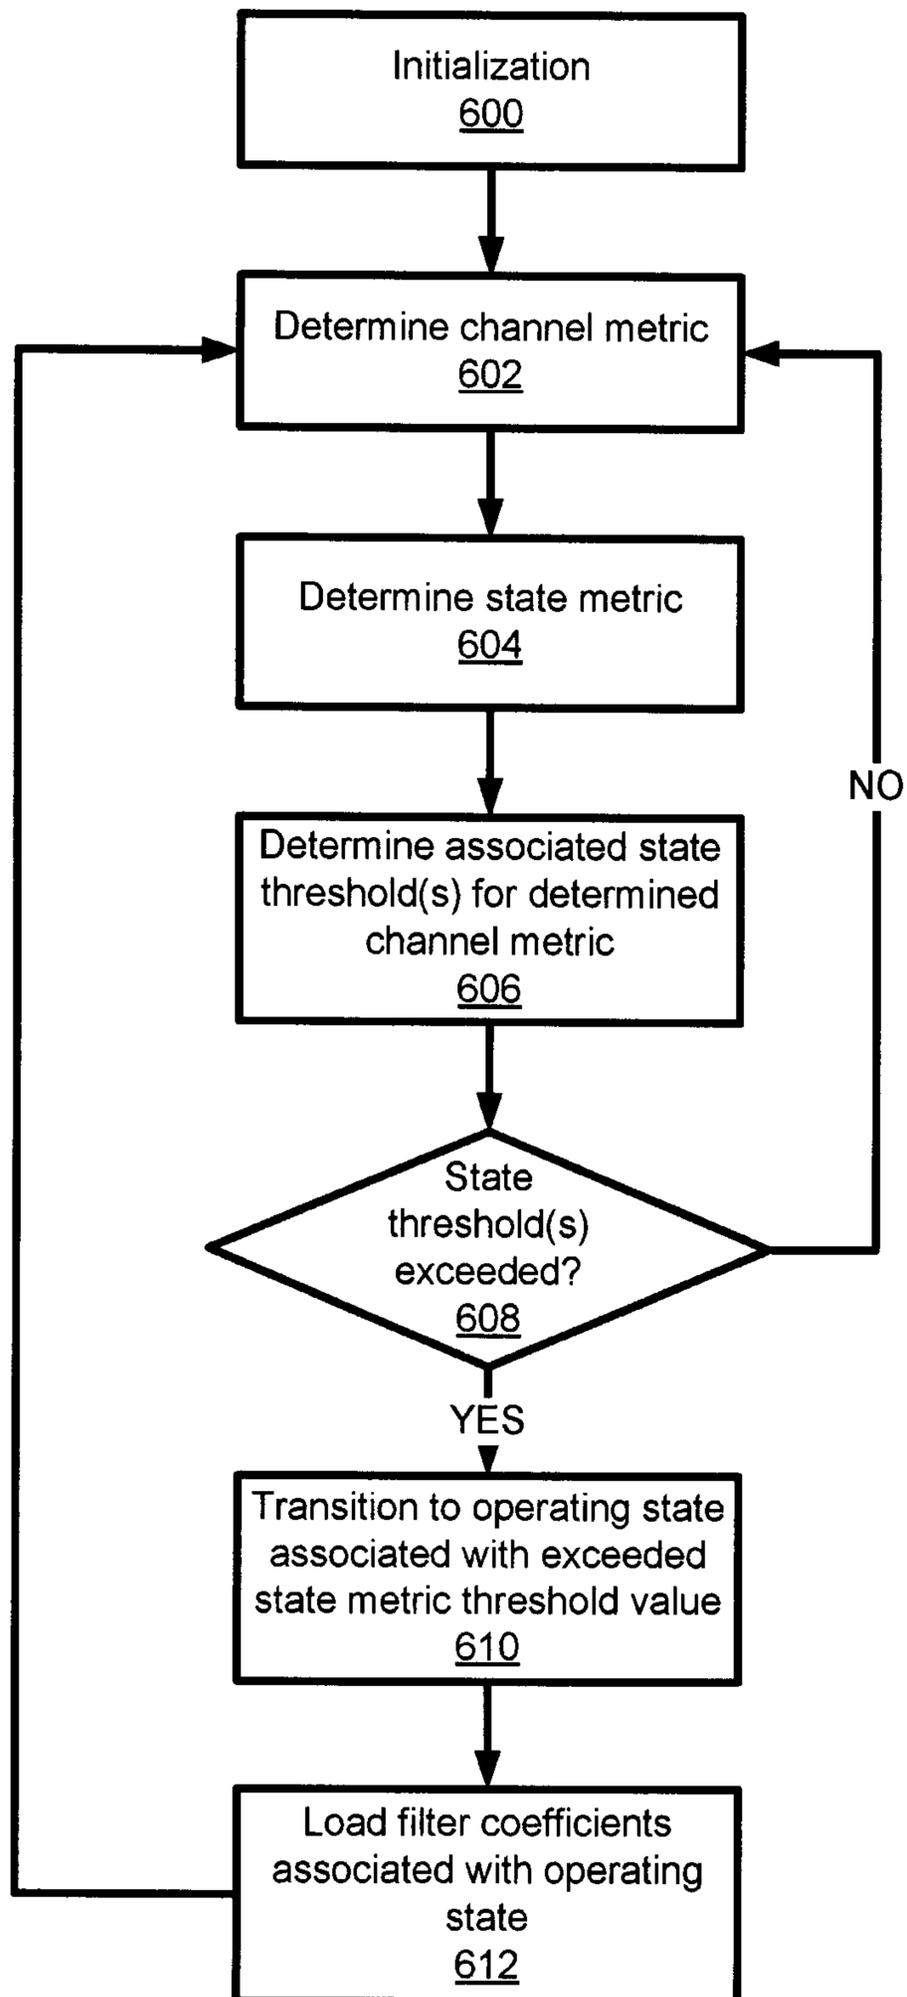

**Figure 6**

