



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2014/09/08

(41) Mise à la disp. pub./Open to Public Insp.: 2015/03/19

(62) Demande originale/Original Application: 2 924 498

(30) Priorité/Priority: 2013/09/16 (US14/028426)

(51) Cl.Int./Int.Cl. *H05B 37/02* (2006.01),
G08C 17/02 (2006.01), *H01H 9/00* (2006.01),
H04B 7/15 (2006.01), *H04N 5/44* (2011.01)


(71) Demandeur/Applicant:
ECHOSTAR TECHNOLOGIES L.L.C., US

(72) Inventeurs/Inventors:
SMITH, GEORGE HORKAN, US;
MCCARTHY, BERNARD ANTHONY, III, US

(74) Agent: MARKS & CLERK

(54) Titre : INTERRUPTEUR D'ECLAIRAGE DE DOMOTIQUE FACILE A INSTALLER

(54) Title: EASY-INSTALL HOME AUTOMATION LIGHT SWITCH

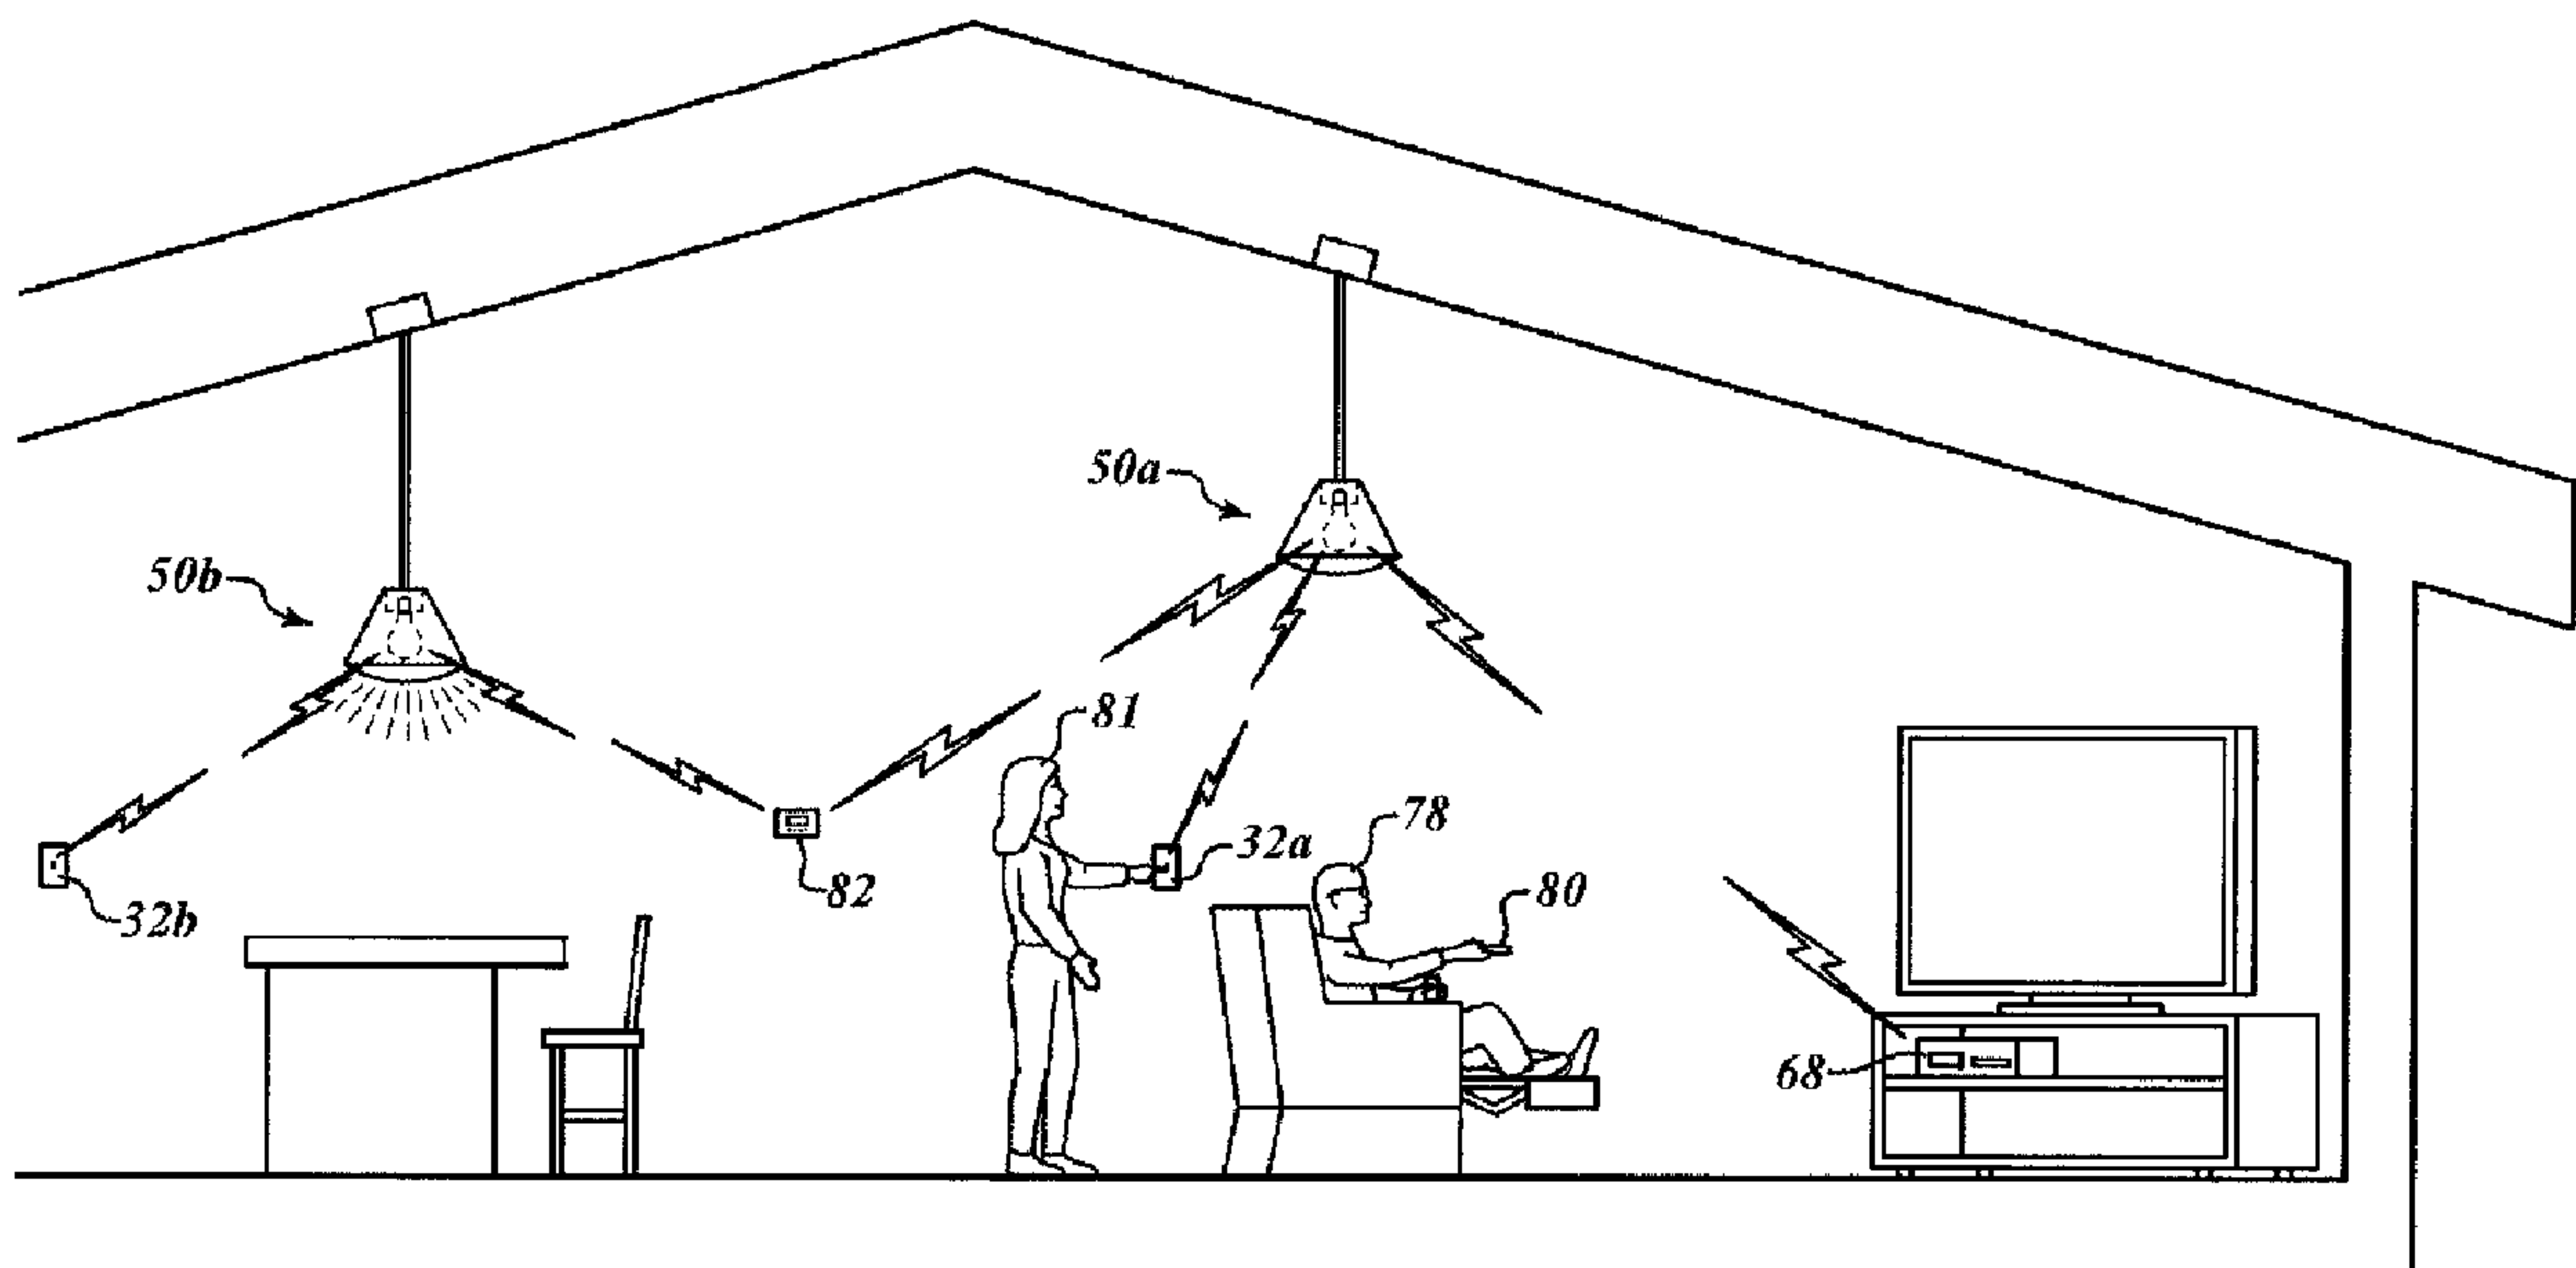

(57) Abrégé/Abstract:

A television receiver comprises a receiver configured to receive a control signal; control circuitry coupled to the receiver and configured to determine that a light switch plate is wirelessly paired with a light assembly; a transmitter coupled to the control circuitry, wherein the transmitter is configured to: transmit the control signal to the light assembly to turn on or off the light assembly; and transmit status request signals to a plurality of appliances with wireless capability, wherein the receiver is configured to receive status signals indicating respective current statuses of the plurality of appliances; and a memory coupled to the control circuitry, the memory configured to store the respective current statuses of the plurality of appliances.

ABSTRACT

A television receiver comprises a receiver configured to receive a control signal; control circuitry coupled to the receiver and configured to determine that a light switch plate is wirelessly paired with a light assembly; a transmitter coupled to the control circuitry, wherein the transmitter is configured to: transmit the control signal to the light assembly to turn on or off the light assembly; and transmit status request signals to a plurality of appliances with wireless capability, wherein the receiver is configured to receive status signals indicating respective current statuses of the plurality of appliances; and a memory coupled to the control circuitry, the memory configured to store the respective current statuses of the plurality of appliances.

