

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 March 2006 (30.03.2006)

PCT

(10) International Publication Number
WO 2006/032121 A1

(51) International Patent Classification:
H02P 5/00 (2006.01)

(21) International Application Number:
PCT/BR2005/000198

(22) International Filing Date:
21 September 2005 (21.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PI 0404081-3 22 September 2004 (22.09.2004) BR

(71) Applicant (for all designated States except US): **MULTI-BRÁS S.A. ELETRODOMÉSTICOS** [BR/BR]; Avenida das Nações Unidas, 12.995 - 32° andar, 04578-000 São Paulo - SP (BR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MARTINS, André Luis** [BR/BR]; Av. Paulo Correia Silva, 790, 13575-420 São Carlos - SP (BR).


(74) Agents: **ARNAUD, Antonio M.P.** et al.; Rua José Bonifácio, 93 - 9th floor, 01003-901 São Paulo - SP (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF CONTROLLING THE SPEED OF AN ELECTRIC MOTOR

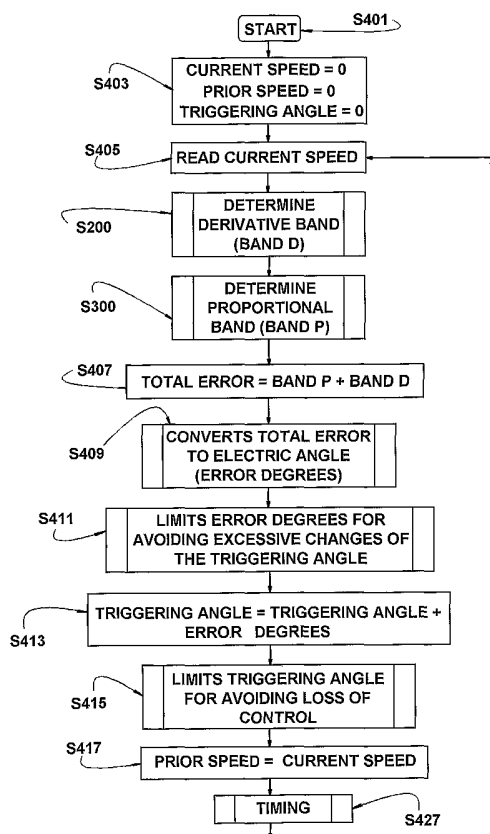

(57) Abstract: A method of controlling the speed of an electric motor, said method being a digital method designed to control the speed of an induction motor that is powered by a triac device to a preset speed, in which the speed of the motor is measured and a digital numerical value representative of the mathematical first derivative of motor speed is calculated. A determination is made of the digital numerical value of the motor speed first derivative relative to a range, or band, of values. An error signal also is computed that is proportional to the error between the measured current motor speed and the preset speed and a determination is made of the digital numerical value of this error signal relative to a range, or band, of values that includes a value corresponding to that of the motor operating at the preset speed. If the value of each of the two signals is within its respective band, then the two numerical values are added to produce a total error signal whose value is then converted to a signal to correct the triac triggering angle to that needed to obtain the preset motor speed.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD OF CONTROLLING THE SPEED OF AN ELECTRIC MOTOR

Field of the Invention

The invention relates to a method of controlling the speed of an electric motor that is powered by a semiconductor device of the triac type, by controlling
5 the angle of the triggering signal applied to the triac.

Background of the Invention

Induction motors are single-phase motors with a series
10 excitation commutator and are frequently used in the field of domestic electrical appliances, for example for driving the rotating drum of a clothes washing or drying machine. Such motors are often powered by a semiconductor triac device. It is often desired to
15 control the speed of such a motor to increase the efficiency of its operation.

Known methods for controlling the speed of rotation of a universal motor use a tachometric generator coupled to the motor to supply an output electrical signal
20 that is representative of the motor speed and a triac, whose triggering angle determines the RMS (root mean square) voltage applied to the motor windings. Digital control methods are used to control the motor speed based on the principal that a triggering angle
25 difference of the triac is proportional to the motor speed difference.

One such control method is disclosed in U.S. Patent 6,633,149 in which a method for digital control of a universal motor, in particular for electrical
30 household appliances, measures the motor rotation speed, determines the difference between the measured speed and a preset (desired) speed, and controls the motor on the basis of this difference. This method further estimates at least one of the values of the
35 resisting torque of the motor and the current in the

motor windings. While such a method is useful, it is relatively complicated to implement particularly in household appliances, such as a laundry machine, where reduced cost is a paramount goal. Accordingly, a need
5 exists for a method of controlling the speed of a motor powered by a triac that is easy to perform and relatively inexpensive to implement.

Summary of the Invention

In accordance with the invention, a novel method is
10 provided for controlling the speed of a motor that is powered by a triac device to achieve a desired preset speed. According to the invention, a digital method is provided in which the speed of the motor is measured and a signal is produced from which a digital
15 numerical value representative of the mathematical first derivative of motor speed is derived. A determination is made of the digital numerical value of the motor speed derivative relative to a range, or band, of values of the motor speed derivative. An
20 error signal is also computed that is proportional to the error between the measured current motor speed and the preset speed. A determination is made of the digital numerical value of the motor speed error signal relative to a range, or band, of values that
25 includes a value corresponding to that of the motor operating at the preset speed.

If the value of the motor speed derivative related signal or motor speed error signal is outside of the value of its respective range or band, which
30 corresponds to an unrealistic value of motor speed, then the microprocessor program forces the value to zero. This avoids making a motor speed correction of an unrealistic value. Therefore, the motor speed error to be corrected to achieve the preset speed will
35 always be in a range of realistic values.

If the value of each of the two signals is within its respective range or band, then the two numerical values are added to produce a total error signal whose value is then converted to a signal to correct the triac triggering angle to that needed to obtain the preset motor speed. Provisions also are made to prevent over control of the triac triggering angle so that it will not become unstable.

Brief Description of the Drawings

Other objects and advantages of the present invention will become more apparent upon reference to the following description and annexed drawings, in which: Figure 1 is a schematic block diagram showing an application of the present invention; Figures 2 and 3 are flow charts showing the production of signals to be used in computing the triac triggering angle correction; and Figure 4 is a flow chart showing the production of the signal that corrects the triac triggering angle to achieve the preset motor speed.

Detailed Description of the Invention

Figure 1 shows a device 1, such as the rotating tub of a household appliance washing machine that is rotated by an electric motor 3. Motor 3 is powered by a conventional triac semiconductor device 4 that operates from a suitable power supply (not shown). In such triac devices, a triggering signal is applied to its gate electrode. The electrical angle, or time, of application of the triggering signal controls the triac conduction time and thereby its output power which in turn controls the speed of motor 3. All of this is well known in the art.

A tachometer 5 of a conventional construction is connected, such as to the rotating shaft of the motor 3, to measure the motor speed and produce a signal

that corresponds to the current motor speed. The current motor speed signal produced by the tachometer 5 preferably is in digital form and is applied to the input of a controller 7. The controller 7 is a device, 5 such as a conventional microprocessor, that can perform calculations and has a memory section for storing data. The controller 7 is also programmed with the necessary data, such as preset motor speed and triac triggering angle needed to achieve said preset 10 speed, as well as instructions to perform various steps, described below, and to produce an output signal. In the present invention, the controller 7 output signal is applied to a digital to analog converter 8 that produces an electrical signal applied 15 to the triac gate electrode to control its triggering angle.

As explained above, the speed of motor 3 is to be controlled to a preset speed by setting the electrical angle of triggering the triac 4 that supplies the 20 electrical current to operate the motor. The control of the motor speed in accordance with the invention makes use of a range, or band, of the mathematical first derivative of the motor speed. The invention also makes use of a range, or band, of a mathematical 25 value that is proportional to the difference, or error, between the current motor speed and the preset speed. The former range is hereafter called the Derivative Band and the latter range the Proportional Band.

30 Figures 2 and 3 depict how the Derivative Band and Proportional Band signal values are derived by the controller 7 for use in controlling the speed of motor 3. In figure 2, the production S200 of the motor speed derivative signal value is described. The first step 35 S201 is to calculate the value of the mathematical

first derivative of the motor current speed, which can be expressed as ds/dt . This is calculated by the controller 7 first storing the digital value of the current motor speed measured by the tachometer 5 at one time and subtracting this value from the value of measured current motor speed. This quantity is divided by the elapsed time between the two speed measurements to produce a digital quantity corresponding to the first derivative of the motor speed.

A value, hereafter called Yield D, is next computed. This is done by comparing the motor speed derivative value determined in S201 against a range of Yield D values of the motor speed derivative that is stored in the controller 7. The Yield D values are in a range from 0 to high with a median value. These are numerical digital values stored in a table in the memory section of controller 7. In S203, the motor speed derivative value determined in S201 is compared with both the current motor speed, used in S201, and the Yield D stored range of values. In the determination in S203, if both the motor speed derivative value is higher than the stored value range and the motor current speed is greater than zero (S201), then the Yield D value is output as 0 in S204. That is, in this case the motor speed derivative is in the high end of the Band D range, but not too high, and outside of the range of being a realistic value. An S204 Yield D value of 0 is output to S211. In S211, the Band D value is calculated as:

Band D = Derivative (S201) x Yield D (1)

If both the S203 conditions are met, then the final Band D value (S211) would be zero, since the S203 output value is zero.

If the conditions of S203 are not met, then the Yield D value determination passes to S205. In S205, there

is a test for a condition of the presence of a high numerical value for the motor speed derivative of S201. If this condition is met, then in S206 a digital value corresponding to Yield D= High is output to S211
5 for the Band D calculation of equation (1).

If neither of the S203 and S205 tests is met, then the derivative value of S201 is output to S207. If the derivative value is in the median (middle) of this stored range of values, then in S208 a digital
10 numerical value of Yield D= Median range is output to S211 for use in the Band D calculation of equation (1). If the value of the motor speed derivative does not satisfy any of the S203, S205 and S207 conditions, then in S210 a numerical digital value of Yield D =
15 Low is passed to S211 for the Band D calculation. The calculation of the Band D value in S211 is concluded using equation (1) and this digital numerical value is available in S213 to be used in a manner to be described with respect to figure 4.

20 Referring now to figure 3, S300 shows the determination of a Band P proportional error value that is accomplished in a manner similar to that of calculating the Band D value. In S301, an Error P is calculated as:

$$25 \quad \text{Error P} = \text{Current Speed} - \text{Preset Speed} \quad (2)$$

where the current speed value is provided by the tachometer 5 and the preset speed is a value programmed in the controller 7. The controller 7 is also programmed with a table of values of a Yield P
30 value that corresponds to the calculated values of Error P.

Determination of Yield P and the subsequent calculation of the Band P result are carried out only if the procedure of S201, S203, S205 and S207-S208
35 (figure 2) has determined that the value of Yield D is

in the median value range. If this condition exists, as determined in S303, the Yield D = median value is received from S208 of figure 2. This means that the motor is operating at a speed at which a correction
5 can be made to achieve the preset speed. If this motor speed prevails, then the Error P value determined in S301 is processed further. If the Yield D value is outside of the median value range, that is, Yield D is either 0, high or low, then there is no calculation of
10 the Band P value.

The Error P value that passes in S303 is tested in S305 and S307 to determine if it is of either a low or high value. An Error P value at the low end of the range produces in S306 a Yield P = Low signal of a
15 predetermined digital value that is applied to a Band P calculation step S331. If the S303 determination is that the Error P value is not in the low end of the error P range, then Error P is again tested in S307 to determine if it is in the high end of this range. If
20 it is, then S308 supplies the corresponding numerical digital value of Yield P= High to the Band P calculation step S331.

If the Error P value is neither Low (S305) nor High (S307), then Error P is output to S309 which is also
25 supplied with the motor speed derivative signal value of S201. If the value of the motor speed derivative signal is in the low part of its range, then the Error P value is passed to S311 to determine both if the value of Error P is positive and the motor speed
30 derivative (of S201) is negative. In S309, the low numerical value of the motor speed derivative signal is set directly from the stored table referred to in Figure 2. If in S311 the result is negative, then the Error P value is further tested in S313 to determine
35 both if Error P (S301) is negative and the motor speed

derivative (S201) is positive. A positive result of either of S311 or S313 causes a Yield P= Low numerical value to be outputted in S315 to the Band P calculation step S331. If both S311 and S313 are
5 negative, then the Error P value is passed to S331 for the Band P calculation.

The Band P value is calculated as:

$$\text{Band P} = \text{Error P} \times \text{Yield P} \quad (3)$$

where,

10 Error P is produced in S301, S303, and S305, and Yield P is produced in one of S306, S308 or S315. The calculation of the Band P value is completed in accordance with equation (3) and is available at S333. Figure 4 shows the production of the signal used to
15 control the triggering of the triac 4 using the Band D and Band P values of figures 2 and 3 (S213 and S331). After the start in S401, the controller 7 in S403 activates its memory and calculating sections to set the current motor speed and stored value of prior
20 speed, both measured by the tachometer 5, to zero. The electrical triggering angle of the triac 4 also is set to zero. In S405, the current motor speed value is supplied by the tachometer and this value is also supplied to S427 where calculation of the triggering
25 angle control for the triac 4 takes place.

The determination and calculation of the Band D and Band P values described with respect to figure 2 (S200) and figure 3 (S300) takes place. These values are added in S407 to produce:

$$\text{Total Error} = \text{Band D} + \text{Band P} \quad (4)$$

The Total Error is roughly proportional to the difference that the triac 4 triggering angle deviates from the preset value needed to produce the preset motor speed. Both the Band D and Band P values are
35 related to the difference in actual motor speed

relative to the preset speed.

In S409, the Total Error value of S407 is converted to the electrical angle needed to be used to correct the triac 4 triggering angle to achieve the preset motor speed. If appropriate, the electrical degree triggering angle error value from S409 is limited in S411 to less than a preset value to prevent production of a signal that would result in excessive changes in the triac 4 triggering angle. As noted above, the controller 7 is programmed with a reference numerical digital value that corresponds to the correct triggering angle for the triac 4 to achieve the preset motor speed.

S413 performs the calculation of:

Trig. Angle = Preset Trig. Angle + Error (S411) (5)
which is the final value to be used to control the triac 4 triggering angle. The digital value of the Preset Triggering Angle is programmed in the controller 7. The Triggering Angle value of S413 is limited in S415 to a value that would not cause loss of control of the triac 4.

In S417, the prior motor speed value in S201 is changed to the current speed value to be available for the next motor speed first derivative calculation in S201, also made available in S301.

The output of S413 is applied to a timing control circuit S427 which applies a digital signal to the D/A converter 8 that produces an analog signal that is applied to the triac 4 that controls its triggering angle and therefore the motor speed to obtain the preset speed.

It should be understood that the acquisition of the various data parameters, such as motor speed derivative and speed difference and calculation of the Band D, Band P and total error values can be effected

as often and as many times as necessary. All of this is within the microprocessor 7 operating program, so long as it is within the operating capability of the microprocessor.

5 Specific features of the invention are shown in one or more of the drawings for convenience only, as each feature may be combined with other features in accordance with the invention. Alternative embodiments will be recognized by those skilled in the art and are
10 included within the scope of the appended claims. Accordingly, the above description should be construed as illustrating and not limiting the scope of the invention and all obvious changes and modifications are to be considered within the scope of the appended
15 claims.

CLAIMS

1. A method of controlling the speed of an electric motor powered by a triac to maintain a preset speed, by varying the electrical angle at which the triac is triggered, characterized in that it comprises the steps of:
- producing a signal related to the first derivative of the motor speed;
 - producing a signal related to the difference in value between the motor current speed and the preset speed (Error P); and
 - producing a control signal based on said first derivative related signal and said Error P related signal to adjust the triac electrical triggering angle to operate the motor at the preset speed.
2. The method as claimed in claim 1, characterized in that the step of producing said first derivative related signal comprises:
- measuring the motor speed at different times and calculating the first derivative of the measured motor speed;
 - determining a yield value (Yield D) of the value of the first derivative from a numerical range of values; and
 - producing a band (Band D) value as the product of the value of said calculated first derivative and said Yield D value.
3. The method as claimed in claim 1, characterized in that the step of producing said signal related to the Error P value comprises:
- determining a yield value (Yield P) of the value of the Error P signal from a numerical range of values; and
 - producing a band (Band P) value as the product of the value of said Error P value and said Yield P

value.

4. The method as claimed in claim 2, characterized in that the step of producing said signal related to said Error P value comprises:

- 5 - determining a yield value (Yield P) of the Error P value from a numerical range of values; and
 - producing a band (Band P) value as the product of the value of said Error P signal and said Yield P value.

10 5. The method as claimed in claim 4, characterized in that the step of producing said control signal comprises:

- producing a signal of the sum of said Band D and said Band P values (Total Error); and
15 - converting said Total Error signal into a signal which corresponds to the error of the triac electrical triggering angle needed to achieve the motor preset speed.

20 6. The method as claimed in claim 2, characterized in that the step of determining said Yield D value includes having zero, median and high values.

 7. The method as claimed in claim 4, characterized in that, in the step of determining said Yield D value which includes having zero, median and high values, is
25 carried out the step of determining said Yield P value only if said Yield D value is of median value.

 8. The method as claimed in claim 7, characterized in that the step of determining said Yield P value includes having values of low and high corresponding
30 to low and high values of Error P. .

 9. The method as claimed in claim 8, characterized in that if the Yield P value is in neither of low or high and the first derivative of the motor speed is of a low value, a Yield P of a low value is produced if
35 either of the conditions of Error P being of positive

sign and the first derivative of the motor speed is of negative value, or the Error P being of positive sign and the first derivative is of positive value.


10. The method as claimed in claim 8, characterized in
5 that if the Yield P value is neither low or high and the first derivative of the motor speed is of a low value, no Yield P value is produced if both of the conditions exist that the Error P value is of positive sign and the first derivative of the motor speed is of
10 negative value and Error P is of positive sign and the first derivative of the motor speed is of positive value.

11. The method as claimed in claim 5, characterized in that it further comprises the step of limiting the
15 Total Error signal to limit excessive changes of the triac electrical triggering angle.

12. The method as claimed in claim 5, characterized in that it further comprises the step of computing the final triac electrical triggering angle by adding the
20 triac electrical triggering angle of said Total Error to the electric triggering angle that produces the current motor speed.

13. The method as claimed in claim 12, characterized in that it further comprises the step of limiting the
25 final triac electrical triggering angle to avoid loss of control.

1/4

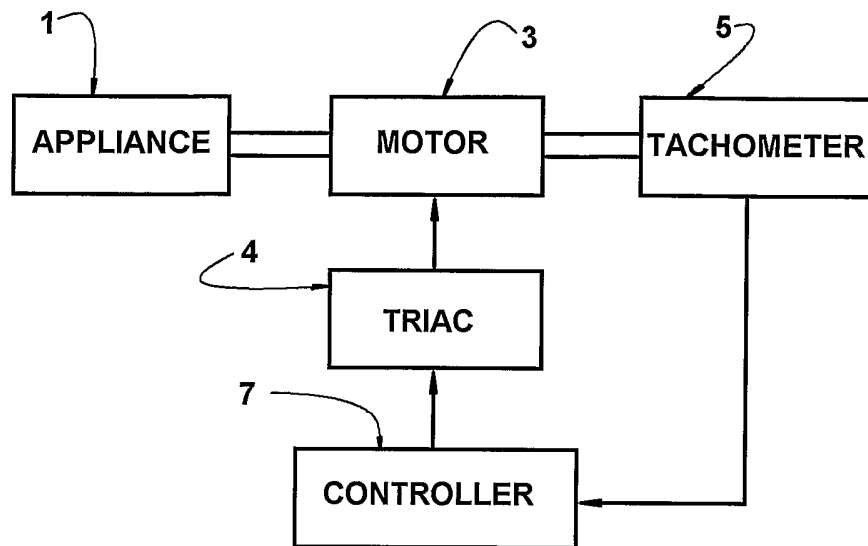**FIG. 1**

2/4

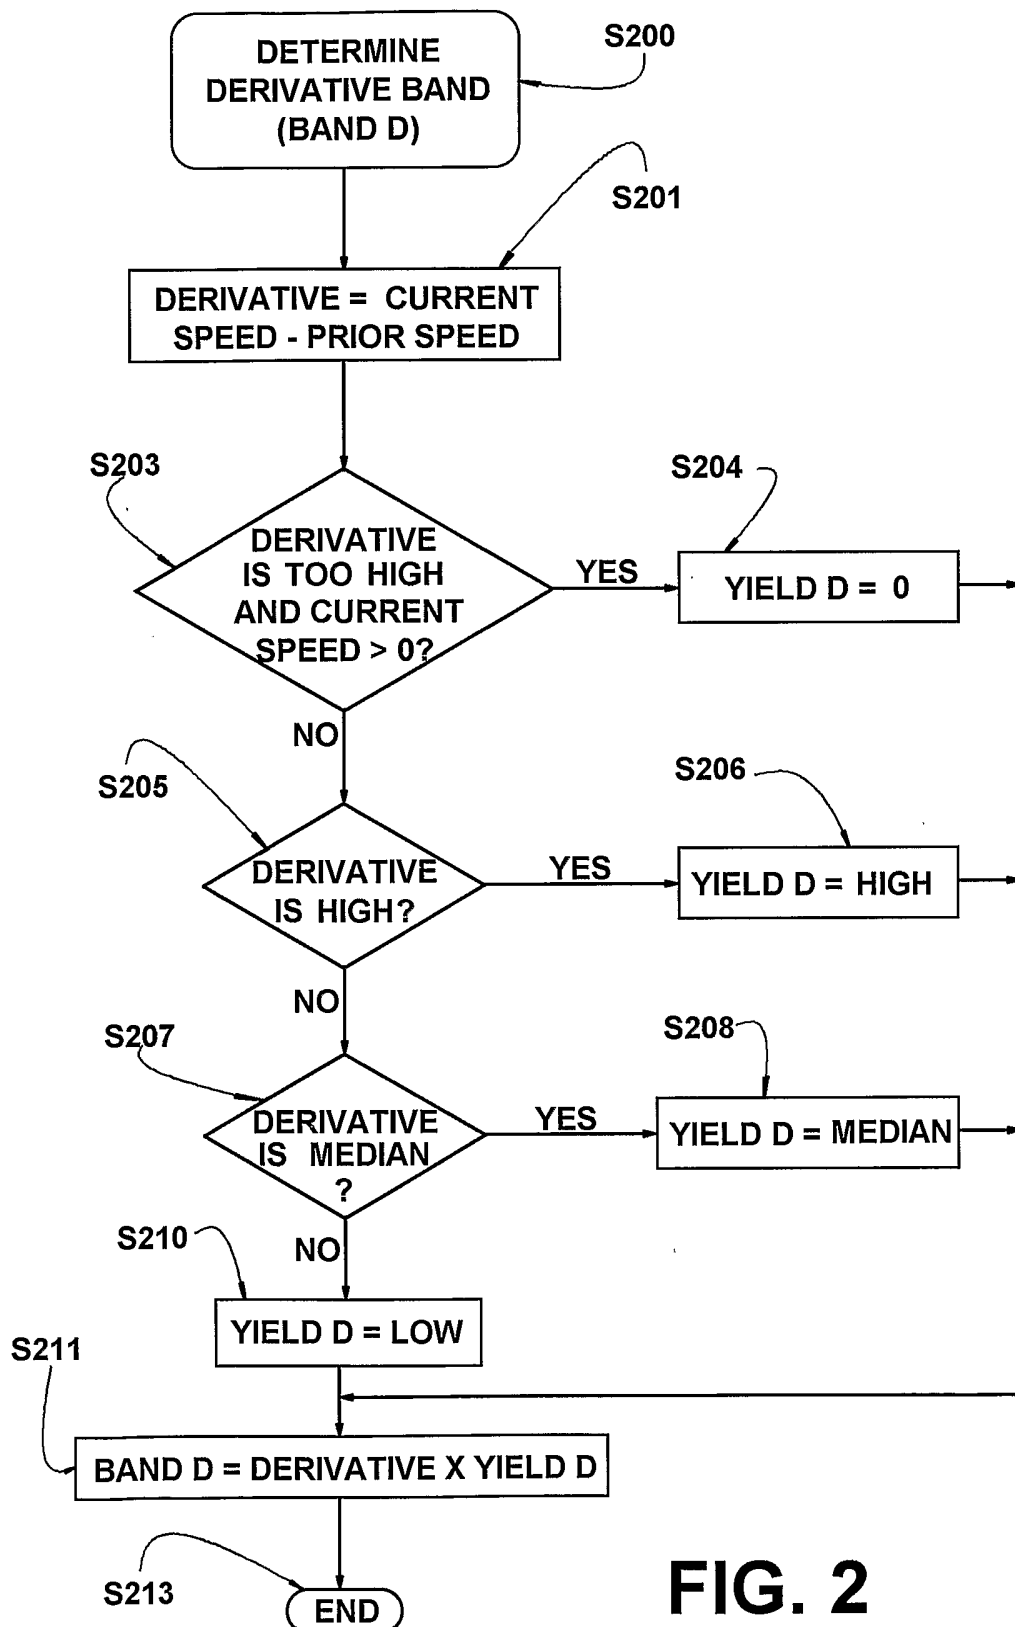


FIG. 2

3/4

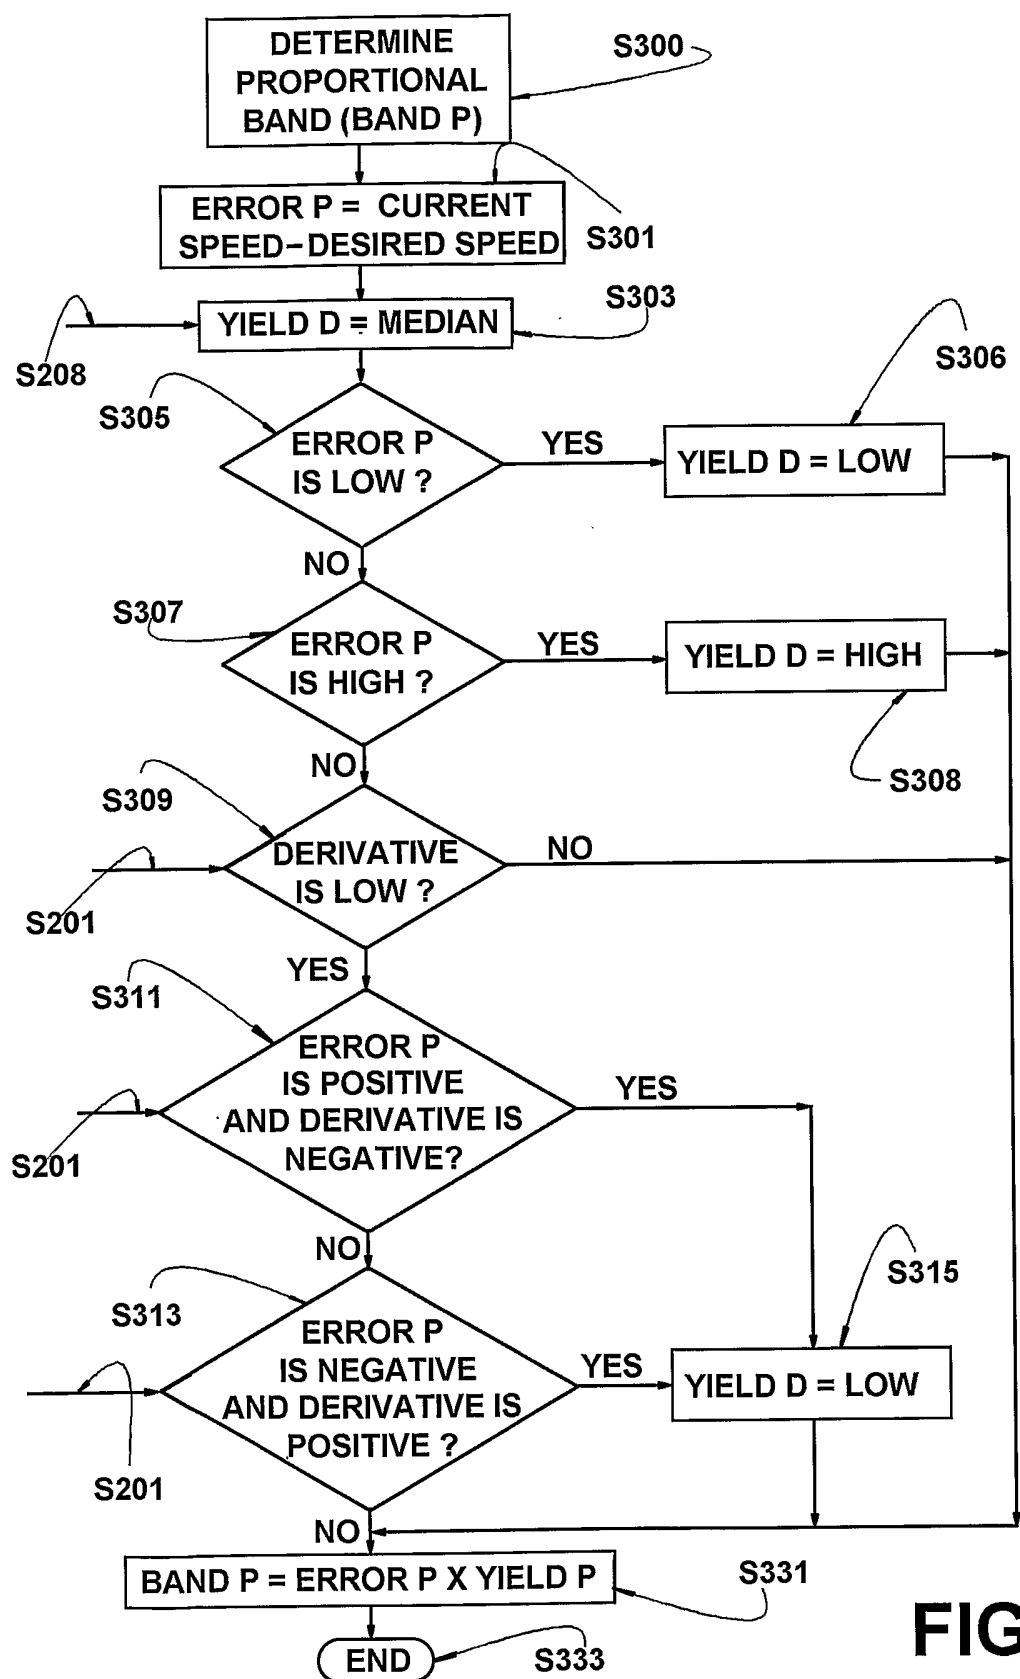
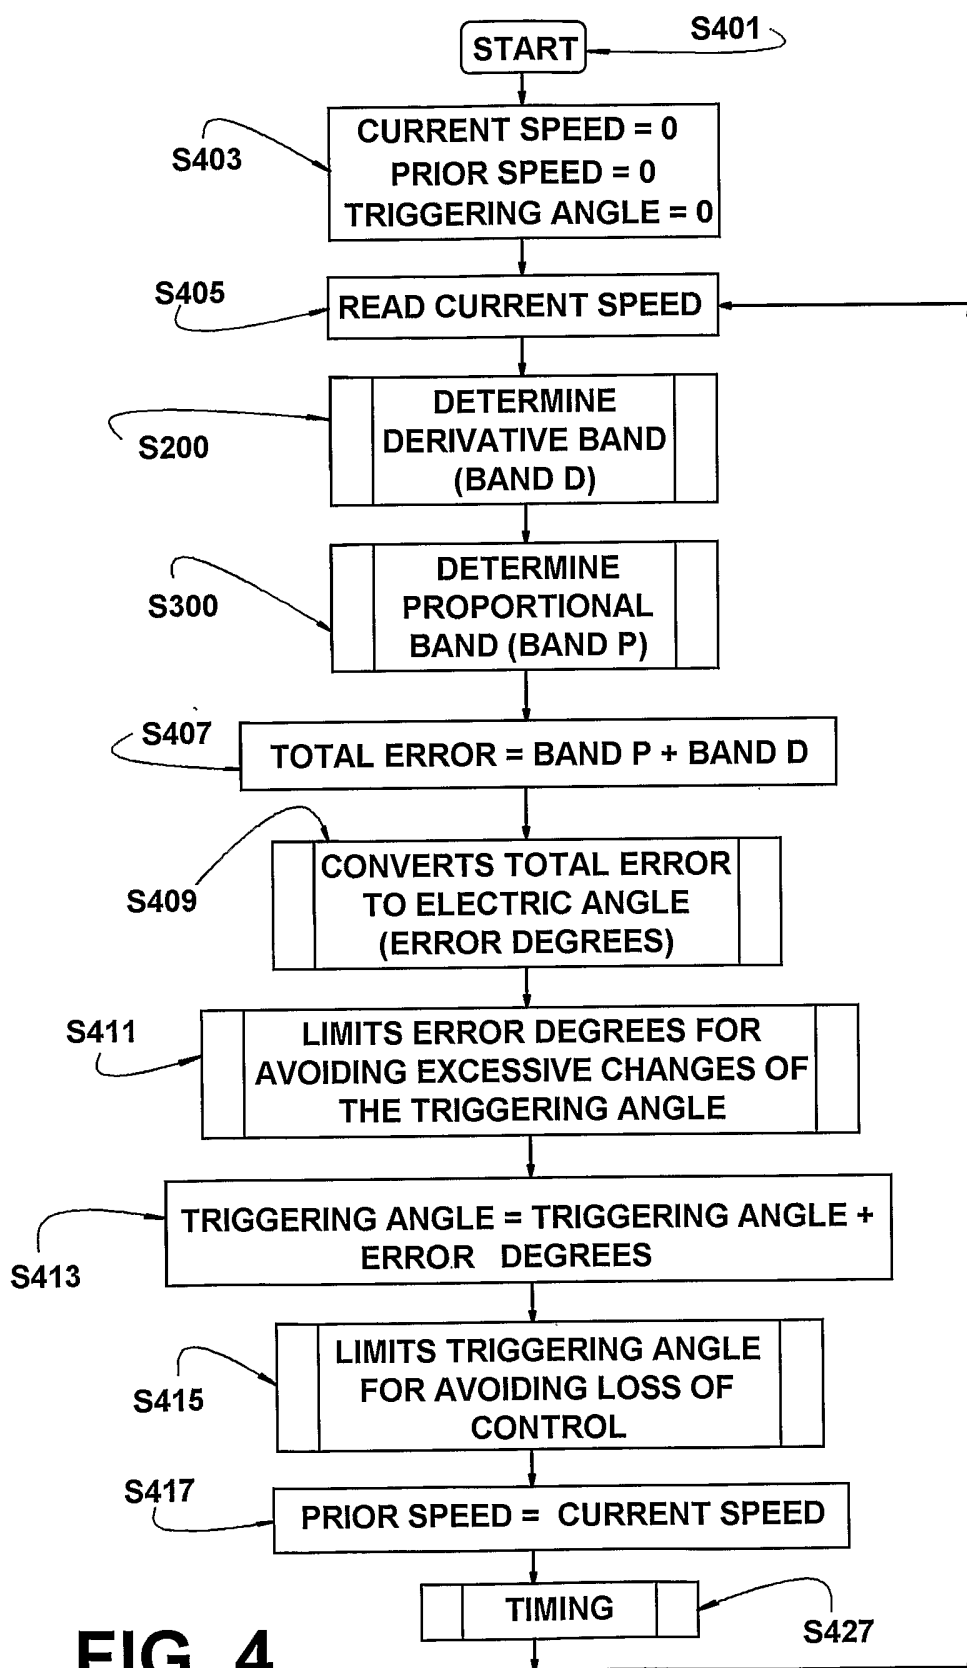


FIG. 3

4/4

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International Application No
PCT/BR2005/000198

A. CLASSIFICATION OF SUBJECT MATTER

H02P5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 633 149 B1 (FOUREYS PHILLIPPE) 14 October 2003 (2003-10-14) cited in the application column 8, line 44 - column 9, line 18 figures 1-3 -----	1-13



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

18 November 2005

Date of mailing of the international search report

29/11/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Roider, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BR2005/000198

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6633149	B1	14-10-2003	AU 1664300 A	12-07-2000
			EP 1142099 A1	10-10-2001
			WO 0038310 A1	29-06-2000
			FR 2787650 A1	23-06-2000