




(86) Date de dépôt PCT/PCT Filing Date: 2012/04/04  
(87) Date publication PCT/PCT Publication Date: 2012/10/11  
(45) Date de délivrance/Issue Date: 2022/02/15  
(85) Entrée phase nationale/National Entry: 2013/09/23  
(86) N° demande PCT/PCT Application No.: US 2012/032200  
(87) N° publication PCT/PCT Publication No.: 2012/138782  
(30) Priorité/Priority: 2011/04/04 (US61/471,496)

(51) Cl.Int./Int.Cl. *A61N 1/05* (2006.01),  
*A61N 1/372* (2006.01), *A61N 1/378* (2006.01)  
(72) Inventeurs/Inventors:  
LARSON, PATRICK, US;  
ANDRESEN, CHAD, US;  
PERRYMAN, LAURA TYLER, US  
(73) Propriétaire/Owner:  
STIMWAVE TECHNOLOGIES INCORPORATED, US  
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : CONDUCTEUR IMPLANTABLE  
(54) Title: IMPLANTABLE LEAD

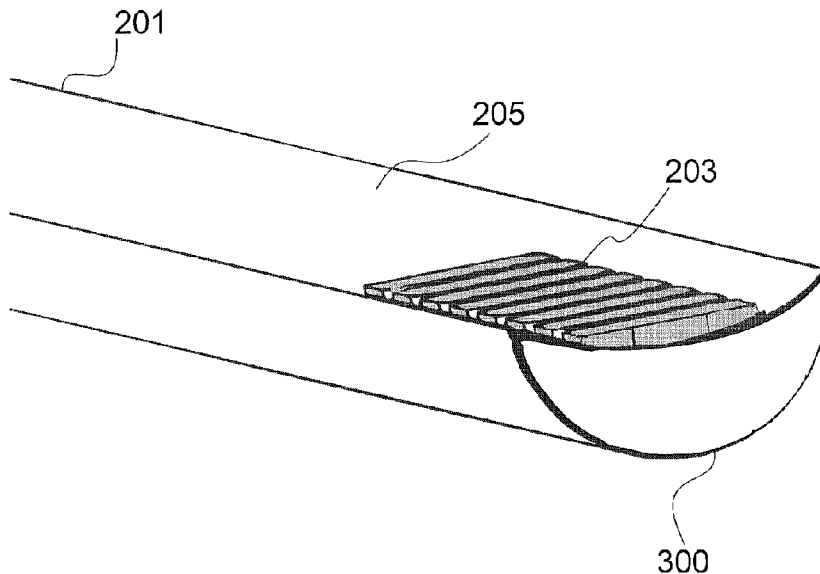

(57) **Abrégé/Abstract:**

An implantable wireless lead includes an enclosure, the enclosure housing: one or more electrodes configured to apply one or more electrical pulses to a neural tissue; a first antenna configured to: receive, from a second antenna and through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator lead; one or more circuits electrically connected to the first antenna, the circuits configured to: create the one or more electrical pulses suitable for stimulation of the neural tissue using the electrical energy contained in the input signal; and supply the one or more electrical pulses to the one or more electrodes, wherein the enclosure is shaped and arranged for delivery into a subject's body through an introducer or a needle.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(10) International Publication Number  
**WO 2012/138782 A1**

(43) International Publication Date  
11 October 2012 (11.10.2012)

WIPO | PCT

- (51) International Patent Classification:  
*A61N 1/00* (2006.01)
- (21) International Application Number:  
PCT/US2012/032200
- (22) International Filing Date:  
4 April 2012 (04.04.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
61/471,496 4 April 2011 (04.04.2011) US
- (71) Applicant (for all designated States except US): **STIM-WAVE TECHNOLOGIES INCORPORATED** [US/US]; 9375 E. Shea Blvd., Suite 147, Scottsdale, Arizona 85260 (US).
- (72) Inventors; and
- (71) Applicants : **LARSON, Patrick** [US/US]; 8332 East Rose Lane, Scottsdale, Arizona 85250 (US). **ANDRESEN, Chad** [US/US]; 29761 N 69th Lane, Peoria, Arizona 85383 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **PERRYMAN, Laura, Tyler** [US/US]; 10401 E McDowell Mtn Ranch Rd., Suite 2335, Scottsdale, Arizona 85255 (US).
- (74) Agent: **GREENE, Kevin, E.**; Fish & Richardson P.C., P. O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: IMPLANTABLE LEAD

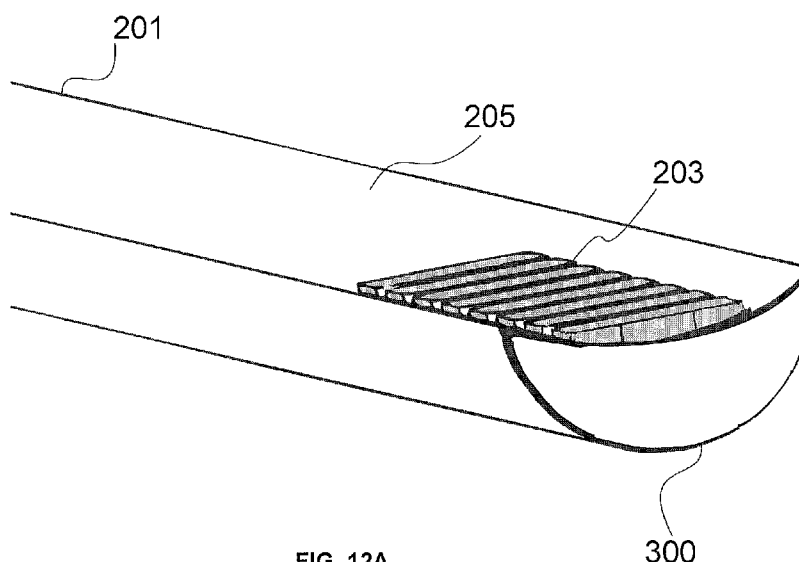


FIG. 12A

(57) Abstract: An implantable wireless lead includes an enclosure, the enclosure housing: one or more electrodes configured to apply one or more electrical pulses to a neural tissue; a first antenna configured to: receive, from a second antenna and through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator lead; one or more circuits electrically connected to the first antenna, the circuits configured to: create the one or more electrical pulses suitable for stimulation of the neural tissue using the electrical energy contained in the input signal; and supply the one or more electrical pulses to the one or more electrodes, wherein the enclosure is shaped and arranged for delivery into a subject's body through an introducer or a needle.

WO 2012/138782 A1

**WO 2012/138782 A1**



- 
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

## **IMPLANTABLE LEAD**

### **TECHNICAL FIELD**

This description is related to implantable neural stimulators.

5

### **BACKGROUND**

A variety of therapeutic intra-body electrical stimulation techniques can treat neuropathic conditions. These techniques may utilize a subcutaneous battery operated implantable pulse generator (IPG) connected to one or more implantable wired leads. These leads have numerous failure modes, including mechanical dislodgement, impingement of the lead-extension tubing, infection, and uncomfortable irritation from the IPG and extension tubing. Various types of spinal cord stimulation (SCS) leads have been used to provide therapeutic pain relief. These lead configurations often include cylindrical percutaneous leads and paddle lead form factors. Cylindrical percutaneous leads typically have diameters in the range of 1.3 mm and contain a number of circular electrodes used for effectiveness testing during a trial implant period, and in many cases for the permanent implantation. Paddle leads, however, contain electrodes with a greater surface area directionally targeted for control over the excitation of the nerve bundles and may require surgical laminotomy.

20

### **SUMMARY**

Certain exemplary embodiments can provide an implantable neural stimulator for modulating neural tissue in a patient, the implantable neural stimulator comprising: an enclosure shaped and configured for delivery into the patient's body through an introducer or needle; one or more electrodes housed within the enclosure and configured to apply one or more electrical impulses to neural tissue; a first antenna housed within the enclosure and configured to receive, wirelessly from a second antenna through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator; and a circuit coupled to the first antenna and the electrodes and configured to generate the electrical impulses suitable for modulation of neural tissue solely using the electrical energy contained in the input signal received wirelessly from the second antenna and to supply the electrical impulses to the one or more electrodes.

30

Some embodiments provide an implantable neural stimulator wireless lead. The wireless lead includes: an enclosure; the enclosure housing; a) one or more electrodes configured to apply one or more electrical pulses to a neural tissue; b) a first antenna configured to receive, from a second antenna through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator lead; c) one or more circuits electrically connected to the first antenna, the circuits configured to create the one or more electrical pulses suitable for

stimulation of the neural tissue using the electrical energy contained in the input signal, and supply the one or more electrical pulses to the one or more electrodes, wherein the enclosure is shaped and arranged for delivery into a subject's body through an introducer or a needle.

Embodiments may include one or more features. For example, a portion of the enclosure may leave the electrodes in a non-direct contact with the neural tissue after the lead has been delivered into the subject's body. The enclosure can be semi-cylindrical in shape and the electrodes may include at least one directional electrode that directs a current path associated with the one or more electrical pulses to a direction that is substantially perpendicular to the neural tissue. The electrodes may include a semi-cylindrical array of electrodes. The electrodes may be made of at least one of: platinum, platinum-iridium, gallium-nitride, titanium-nitride, iridium-oxide, or combinations thereof. The electrodes can include two to sixteen electrodes, each having a longitudinal length between 1.0 and 6.0 mm and a width between 0.4 and 3.0 mm. The electrodes are spaced between 1 mm to 6 mm apart and have a combined surface area of between  $0.8 \text{ mm}^2$  to  $60.00 \text{ mm}^2$ .

The lead may be a paddle-style lead. Specifically, the lead can be a paddle lead with a height between 1.3 mm and 2.0 mm, and a width between 2.0 mm and 4.0 mm. The lead can be shaped concavely to secure a lateral position on the neural tissue after the lead has been delivered into the subject's body. The lateral position may be with regard to a dorsal aspect of the subject's spinal cord. For example, the lead has a concave profile between 1.0 mm and 1.5 mm, and a concave edge between 0.2 mm and 0.3 mm.

The lead can be delivered into an epidural space of a subject's body. The delivery can be through a needle, such as, for example, a tuohy needle, no larger than gauge 14. The lead may be delivered to treat a neural tissue associated with the spinal column.

The enclosure can further house a lumen to operate a navigating stylet during delivery of the enclosure. The enclosure may further include a distal tip. The distal tip can be rounded with a length of between 0.5 mm and 2.0 mm. The distal tip can also be pointed with a length of between 2.0 and 6.0 mm. The enclosure may have an external coating of bio-compatible polymer, the polymer includes at least one of: polymethylmethacrylate (PMMA), polydimethylsiloxane (PDMS), parylene, polyurethane, polytetrafluoroethylene (PTFE), or polycarbonate. The enclosure may further have an external coating of silicone elastomer. The enclosure can further house antenna coupling contacts, the antenna contacts

being electrically connected to the antennas and the circuit and configured to couple the antenna with the surrounding tissue. The antenna coupling contacts can include two to eight antenna-coupling pairs. The antenna coupling contacts may be located proximal, relative to the electrodes, in the enclosure. The antenna coupling contacts can each have a longitudinal  
5 length of between 1.0 mm and 6.0 mm, and a width of between 1.0 mm to 2.5 mm. The antenna coupling contacts can be spaced between 30 mm and 80 mm apart. At least one of the antennas can be constructed as a conductive trace contained on one of the circuits. At least one of the antennas can be fabricated as a conductive wire connected to one of the circuits. The circuits can be flexible circuits. The flexible circuits are capable of undergoing  
10 a bend radius of under 0.5 mm. The flexible circuits can be placed proximal, relative to the electrodes, in the enclosure. The flexible circuits can include a waveform conditioning circuit.

Some embodiments provide a method of treating neurological pain. The method includes: providing an implantable neural stimulator lead including an enclosure that houses:  
15 one or more electrodes; a first antenna configured to receive, from a second antenna and through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator lead; one or more flexible circuits electrically connected to the first antenna, the flexible circuits configured to:  
20 create the one or more electrical pulses suitable to be applied at the electrodes using the electrical energy contained in the input signal; and supply the one or more electrical pulses to the one or more electrodes, and implanting the neural stimulator lead into a subject's body through an introducer or a needle.

Embodiments may include one or more of the following features. For example, a portion of the enclosure may leave the electrodes in a non-direct contact with a neural tissue  
25 after the lead has been implanted into the subject's body. The electrodes can include at least one directional electrode that confines a current path associated with the one or more electrical pulses in a direction substantially perpendicular to the neural tissue. The needle can be a tuohy needle no larger than gauge 14.

## DESCRIPTION OF DRAWINGS

FIG 1 illustrates two wireless paddle leads being implanted through an introducer into the epidural space.

5 FIG 2 illustrates a wireless paddle lead being implanted through an introducer into a human body.

FIG. 3 illustrates a wireless paddle lead in place against the dura of the spinal cord.

FIG. 4A illustrates an example of an introducer.

FIG. 4B shows a cross-sectional view of the introducer illustrated in Fig. 4A.

FIG. 5A illustrates another example of an introducer.

10 FIG. 5B shows a cross-sectional view of the introducer illustrated in Fig. 5A.

FIG. 6A illustrates the distal tip of a wireless paddle lead.

FIG. 6B shows cross-sectional views of the distal ends of three embodiments of a wireless paddle lead.

15 FIGS. 7A and 7B respectively illustrate the dorsal and ventral sides of an embodiment of a wireless paddle lead.

FIG. 7C illustrates the ventral side of another embodiment of the wireless paddle lead.

FIG. 8 illustrates an embodiment of a cylindrical and a semi-cylindrical wireless lead being placed in the epidural space using a needle.

20 FIG 9 illustrates an example of a cylindrical or semi-cylindrical wireless lead being implanted in the epidural space using a needle.

FIG. 10 illustrates a cylindrical or semi-cylindrical wireless lead placed against the dura in the spinal column.

FIG. 11A-11C illustrate cross-sectional views of a semi-cylindrical lead, a cylindrical lead, and a paddle lead, respectively, while those leads are placed against the dura.

25 FIGS. 12A-12B illustrate perspective and profile views, respectively, of an embodiment of a wireless semi-cylindrical lead.

FIG. 13A-13C variously illustrate the electronic components included in two embodiments of the wireless lead.

30 FIG. 14A-14B illustrate a cross-sectional view of a fully cylindrical wireless lead or a semi-cylindrical wireless lead.



FIG. 14C illustrates a cross-sectional view towards the distal end of a semi-cylindrical wireless lead.

FIG. 15 illustrates an embodiment of a cylindrical wireless lead.

## DETAILED DESCRIPTION

Spinal cord stimulation may treat chronic neuropathic pain, especially low back pain and radiculopathy, vascular insufficiency in the feet or hands, angina, and more. In various implementations, a neural stimulation system can send electrical stimulation to targeted nerve tissue with neither cables nor inductive coupling to power the passive implanted stimulator. This can be used to treat pain or a variety of other modalities. The targeted nerve tissues may be, for example, in the spinal column including the spinothalamic tracts, dorsal horn, dorsal root ganglia, dorsal roots, dorsal column fibers, and peripheral nerves bundles leaving the dorsal column or brainstem, as well as any cranial nerves, abdominal, thoracic, or trigeminal ganglia nerves, nerve bundles of the cerebral cortex, deep brain and any sensory or motor nerves.

The neural stimulation system can include an implantable lead that includes an enclosure that houses one or more conductive antennas (for example, dipole or patch antennas), internal circuitry for frequency waveform and electrical energy rectification, and one or more electrode pads allowing for neural stimulation of tissue. The neural stimulation system may receive microwave energy from an external source. The implantable lead may be 1.3 mm diameter or smaller. Particular implementations of the circuitry, antennas and pads are described in PCT Application PCT/US2012/023029.

In various embodiments, the implantable lead is powered wirelessly (and therefore does not require a wired connection) and contains the circuitry necessary to receive the pulse instructions from a source external to the body. For example, various embodiments employ internal dipole (or other) antenna configuration(s) to receive RF power through electrical radiative coupling. This can allow such leads to produce electrical currents capable of stimulating nerve bundles without a physical connection to an implantable pulse generator (IPG) or use of an inductive coil. This can be advantageous relative to designs that employ inductive coils to receive RF power through inductive coupling and then transfer the received

power to a large IPG device for recharging, particularly since the the large IPG device for recharging can be as large as 100 mm by 70 mm.

Furthermore, the electrical radiative coupling mechanism (for example, a dipole antenna) can be utilized to improve the form factor of a wireless lead and allow for miniature diameters, as small as 30 microns. For example, some implementations of the wireless lead, such as those discussed in association with Figs 7-15, can have diameters of less than 1.3 mm, and as small as 500 microns while still providing the same functionality as wired spinal cord stimulation leads.

Electrical radiative coupling also allows for the transmission and reception of energy at greater depths with less degradation in efficiency than inductive coil techniques. This can provide an advantage over devices that employ inductive coupling since the efficiency of such implants is highly dependent on the distance separating the external transmitter coil and the implanted receiver coil.

Various embodiments can also include distinct advantages over wired leads in regards to ease of insertion, cross connections, elimination of extension wires, and no requirement for an implantable pulse generator in order to administer a chronic therapy. Various implementations also may have an associated lower overall cost compared to existing implantable neural modulation systems due to the elimination of the implantable pulse generator, and this may lead to wider adoption of neural modulation therapy for patients as well as reduction in overall cost to the healthcare system.

FIG. 1 illustrates two wireless paddle leads **200** (described in more detail below) being implanted through an extended-width introducer **202** into the epidural space. A lead **200** may be advanced and guided into the epidural space utilizing the extension tubing **201** with a handle for manipulating the lead **200**. The introducer **202** has an entry point **100** above lumbar spinal column **103** (shown in FIG. 2). Once the introducer **202** is removed, the wireless paddle lead **200** can be anchored in place subcutaneously at entry point **100**. Thereafter, extension tubing **201** may remain implanted and may run from the skin placement to the wireless paddle leads **200**.

In some embodiments, the tubing **201** contains a lumen for a stylet (otherwise referred to as an “injector lead wire,” a “guide-wire,” a “navigation wire,” or “a steer wire”), which can be used for placing the lead **200**. The stylet may be made of metal and can

provide steerability strength during implantation of the wireless paddle lead **200**. After the wireless paddle lead **200** has been successfully deployed, the metal stylet may be removed. As will be discussed in association with FIG. **7C**, this lumen, or other lumens in tubing **201**, can be used to also house electronic circuitry.

5           FIG. **2** illustrates a wireless paddle lead **200** being placed through an introducer **202** typically in the lumbar region in between the L1 and L2 vertebrae. For example, the introducer **202** may be inserted through a small incision in the skin **105** and in between the vertebrae **103**. In certain other embodiments, multiple wireless paddle leads **200**, wireless cylindrical leads **400** (as will be discussed in association with FIGS. 8-15) and wireless semi-cylindrical leads **300** (as will be discussed in association with FIGS. 8-15) can be inserted  
10           through the same channel of introducer **202**. Wireless paddle leads **200**, cylindrical leads **400** or semi-cylindrical leads **300** for spinal cord stimulation applications can then be implanted and placed against the dura **104** of the spinal column **102**, as described in association with FIG. **3** below.

15           In certain embodiments, wireless paddle leads **200**, cylindrical leads **400** or semi-cylindrical leads **300** may be adapted to be located within the epidural space of the spinal column, near or on the dura of the spinal column, in tissue in close proximity to the spinal column, in tissue located near the dorsal horn, dorsal root ganglia, dorsal roots, dorsal column fibers and/or peripheral nerve bundles leaving the dorsal column of the spine.

20           In certain embodiments, wireless paddle leads **200**, cylindrical leads **400** or semi-cylindrical leads **300** can be adapted to be placed and secured to stimulate nerves leaving the spinal column for the treatment of a variety of conditions, such as, for example, pain, angina, peripheral vascular disease, gastrointestinal disorders. In other embodiments, wireless paddle leads **200** can be adapted to treat other conditions via neural stimulation of nerve  
25           bundles emanating from the spine. “Spinal cord tissue” and “nerve bundles emanating from the spine” generally refer to, without limitation, the nerve bundles ranging from spinal column levels C1 to L5, dorsal horn, dorsal root ganglia, dorsal roots, dorsal column fibers and peripheral nerve bundles leaving the dorsal column.

30           FIG. **3** illustrates a wireless paddle lead **200** in place against the dura **104** of the spinal cord after being implanted into the human body for spinal cord stimulation applications. The small incision at the skin **105** can be stitched with a suture or sterile strip after placement of

the anchoring mechanism **106**. Wireless paddle leads shown here may have electrodes that confine the current path in a direction generally perpendicular to the dura, as will be discussed in association with FIG. **11C**. This directionality may be desirable to zero in on a target particular tissue and to reduce electrical charges for efficacious stimulation.

5           FIGS. **4A** illustrates an example of an introducer **214** that can fit in between two vertebrae without the need for a surgical laminotomy or removal of any bone tissue. The introducer **214** includes a handle **212** for use by the medical staff during the insertion procedure. The width of each handle can be between about 8 mm and about 15 mm. The length of each handle can be between about 10 mm and about 18 mm. The thickness of the  
10           handle may be between about 2.5mm and about 6 mm. The introducer **214** has an inner channel **215** that can house, for example, two wireless paddle leads **200** placed one at a time, sequentially through the same introducer channel. As illustrated, the example wireless paddle lead **200** can have a flat tip.

            FIG. **4B** shows a cross-sectional view of the introducer illustrated in FIG. **4A**. This  
15           cross-sectional view may also be known as a profile view.

            FIG. **5A** illustrates another example introducer **214** that can fit through the vertebrae without the need for a surgical laminotomy or removal of any bone tissue. The introducer **214** includes a handle **212** for use by the medical staff during the insertion procedure. The introducer **214** has an inner channel **217** that can house, for example, two slim factor wireless  
20           paddle leads **220** placed one on top of the other. The two slim factor wireless paddle leads **220** can be stacked vertically in the inner channel **217** at the same time. As illustrated, the example wireless paddle lead **220** can have a pointed tip **219** that aids in directing the paddle lead through the tight epidural space of a smaller patient. The example wireless paddle lead **220** can also have a flat tip that aids in laying the electrode columns parallel with the spine  
25           from a fluoroscopic view or rounded tip that aids in both laying the electrode columns parallel with the spine and in directing the paddle lead through the epidural space.

            FIG. **5B** shows a cross-sectional view of the introducer illustrated in FIG. **5A**. This cross-sectional view may also be known as a profile view.

            FIG. **6A** illustrates the distal tip of a wireless paddle lead **200**. The wireless paddle  
30           lead **200** may include, for example, four electrodes **203** and the spacers between the electrodes. The wireless paddle lead **200** can include between two to sixteen electrodes **203**

located on the distal end of the lead (not shown). The distal tip may have a height of between about 1.3 mm and about 2.0 mm, and a width between about 2.0 mm and about 4.0 mm. The electrodes 203 may have a longitudinal length between about 1.0 mm and about 6.0 mm from the distal tip toward the proximal tip and a width of between about 0.4mm and about 3.0 mm. The total electrode surface area of the lead 200 may be between about 0.8 mm<sup>2</sup> and about 60.0 mm<sup>2</sup>. The spacing between the electrodes 203 may be between about 1 mm and about 6 mm from distal to proximal.

The various leads described herein may include anywhere from one to sixteen electrodes, any of which can be designated by the programmer as either a cathode or an anode. For example, electrodes 203 can include multiple cathodes coupled to the targeted tissue as well as at least one anode. The electrode array can receive electrical stimulation waveform pulses ranging from 0 to 10V peak amplitude at a pulse width reaching up to a maximum of 1 millisecond. The polarity of the electrodes can produce various volume conduction distributions from the cathodes to the anodes to inhibit or excite surrounding nerve tissue, which may include A-δ and/or primary or secondary c-fiber afferents. To minimize electrode impedance, the electrodes may be made of a conductive, corrosion resistant, biocompatible material such as, for example, platinum, platinum-iridium, gallium-nitride, titanium-nitride, or iridium-oxide.

Excluding the electrodes 203, which are coupled to the surrounding tissue, the remaining portions of the wireless lead embodiments described herein may be insulated from surrounding body tissue partially or totally by an external coating layer of biocompatible dielectric material with a low dielectric constant. Materials with rigidity similar to that of tissue can be used to reduce the risk of migration and the development of fibrous scar tissue. Such fibrous scar tissue can increase electrode-tissue impedance. If the electrode-tissue impedance can be kept low, less energy may be consumed to achieve stimulation of the targeted tissues.

In certain embodiments, the wireless paddle lead 200 can have a rounded tip 211 at the distal end. Rounded tip 211 can be a non-conductive tip. Rounded tip 211 can have a length of between 0.5 mm and 2.0 mm, and a smooth finish for navigating the lead through the epidural space.

In certain embodiments, the wireless paddle lead **200** can have a pointed tip **219** at the distal end. Pointed tip **219** can be a non-conductive tip. Pointed tip **219** can have a length of between about 2.0 mm and about 6.0 mm. Pointed tip **219** can enhance the steering capability when the wireless paddle **200** is being deployed.

5           FIG. **6B** shows the cross-sectional views of the distal end of three embodiments of a wireless paddle lead. For example, in certain embodiments, the wireless paddle lead **200** may be a slim factor wireless paddle lead **220**. As illustrated in Fig. **6B**, the slim factor wireless paddle lead **220** can be thinner than a regular wireless paddle lead **221**. For example, slim-factor wireless paddle lead may be between about 1.0 mm and about 1.3 mm  
10 in height, which can allow multiple slim-factor wireless paddle leads to be implanted simultaneously or sequentially through an introducer **214**. For example, in certain embodiments, wireless paddle leads **200** may be a slim-factor concave wireless paddle lead **207** having a concave profile of between about 1.0 mm and 1.5 mm, concave edges of about 0.2 mm by about 0.3 mm. The concave profile may refer to the height of the slim-factor  
15 concave wireless paddle lead **207**. The concave edge may refer to the dimension of the concave shape corner the slim-factor concave wireless paddle lead **207**. The slim factor concave wireless paddle lead **207** may be placed as close as possible to the dorsal spinal column.

In certain embodiments, at least one additional wireless lead may be placed in parallel  
20 or offset with the initial wireless lead. In some embodiments, the wireless leads may be activated sequentially. In other embodiments, wireless leads can be activated simultaneously.

FIGS. **7A** and **7B** respectively illustrate the dorsal and ventral sides of an implementation of a wireless paddle lead **200**. For example, electrodes **203** and between two to eight antenna coupling contacts **222** may be placed on different sides of the wireless  
25 paddle lead **200**. As discussed in association with FIG. **6A**, two to sixteen electrodes **203** can be located on the distal end and embedded into the electrically insulative material **205** of the wireless lead **200**.

For example, antenna **208** may be coupled to tissue through the antenna coupling contacts **222** located on the ventral side of the wireless paddle lead **200**. The antenna can be,  
30 for example, a dipole antenna. Some embodiments may have only one dipole antenna, other embodiments may have multiple antennas of any given length. For example, without

limitation, some embodiments may have between two and ten dipole antennas, while other embodiments can have more than ten dipole antennas or more than twenty dipole antennas. In some embodiments, a dipole antenna can range from about 100 microns to about 10 cm in length. In other embodiments, an antenna can consist of any linear dipole configuration  
5 ranging from about 20 microns to about 3 mm in thickness. The antenna 208 may also be a folded dipole antenna instead of straight dipole antenna.

Antenna 208 may be configured to receive RF energy from exterior antennas. RF wave propagation energy is divided into two regions, the radiative region and the reactive region. The radiative region is within  $2D^2/\lambda$  and the radiated power varies with distance  
10 from the antenna. For a short dipole antenna, the reactive component is approximately  $\lambda/2\pi$ . The induced field for antennas placed in biological tissue is a function of body geometry, tissue properties, and the exposure conditions. The efficiency of the RF waveform inside a lossy media, such as body tissue, is attenuated by the tissue as it propagates. To increase the power efficiency of a small antenna in lossy matter, the dipole antenna configuration can be  
15 optimized at high frequencies to minimize losses, such as, for example, from about 800 MHz to 5.8 GHz or greater.

The antenna coupling contacts 222 in certain embodiments may have a longitudinal length between about 1.0 mm and about 6.0 mm from the distal tip toward the proximal tip and a width of between about 1.0 mm to about 2.5 mm. The spacing between the antenna  
20 coupling contacts 222 may be between about 30 mm and about 80 mm. The antenna coupling contracts 222 may improve the efficiency of the radiative coupling between internal antenna 208 and the antenna(s) (not depicted) located externally to the body. The antenna coupling contracts 222 may be made of noncorrosive metals, such as, for example, platinum, platinum-iridium, gallium-nitride, titanium-nitride, or iridium-oxide.

Antenna coupling contacts 222 may be connected by conducting wires 210 to the  
25 antenna(s) 208 and the waveform conditioning circuit 209. Waveform conditioning circuitry 209 may include, for example electronic components such as, for example diodes, resistors and capacitors. Waveform conditioning circuitry 209 can use the incoming energy to provide a stimulation waveform to the electrodes for excitation of nerve tissue. In some  
30 embodiments, frequencies from about 800 MHz to about 5.8 GHz may be received by the implanted antenna 208. The stimulating waveform released into the tissue from electrodes

**203** is rectified to provide waveforms at lower frequencies, e.g., at typically from about 5 Hz to about 1000 Hz.

Waveform conditioning circuitry **209** is configured to rectify the waveform signal received by implanted antenna **208**. Waveform conditioning circuitry **209** may also have  
5 charge balance microelectronics to prevent the corrosion of the electrodes. To minimize reflection of the energy back from the electrodes into the circuitry, waveform-conditioning circuitry **209** may include isolation circuits to block high frequency signals.

FIG. **7C** illustrates the ventral side of another embodiment of a wireless paddle lead **200**, in which the implanted antenna **208** is separated from the distal end **205** of wireless  
10 paddle lead **200**. In some embodiments, the implanted antenna **208** may be placed remotely from the distal end **205** of the wireless paddle lead **200** and inside a lumen in extension tubing **201** within the lead body. In some embodiments, the implanted antenna **208** may be the extension line of one of the antenna coupling contacts **304**. In some embodiments, antenna coupling contacts **304** may be located proximal to the electrodes **203**. Antennas **208**  
15 may be further connected to the waveform conditioning circuitry **209** via shielded wiring **210**. The waveform conditioning circuitry **209** may be directly wired to the electrodes **203** (located on the ventral side).

In some embodiments, the wireless leads described herein may have multiple layers. These layers can include, without limitation, encasing material close to the electrodes with a  
20 biocompatible compound that elicits minimal scar tissue formation. In addition, layers may include polymers such as, without limitation, polymethacrylate (PMMA), polydimethylsiloxane (PDMS), parylene, polyurethane, polytetrafluoroethylene (PTFE), or polycarbonate. Another layer of a material that may be included contains a small relative permeability and low conductivity located above the antennas **208** to allow for optimal  
25 coupling with an exterior antenna (not depicted). Yet another layer can comprise a coating of a silicone elastomer to assist in preventing migration of the wireless lead to the surrounding tissue.

FIGS. **8** and **9** illustrates an example of a wireless cylindrical lead **400** or a wireless semi-cylindrical lead **300** being implanted in the epidural space using needles **301**.  
30 Cylindrical wireless leads may also be referred to as circumferential leads, while semi-cylindrical wireless leads may also be referred to as semi-circumferential or semi-elliptical



wireless leads. Wireless cylindrical leads **400** or wireless semi-cylindrical leads **300** can be introduced into the body through needle **301**. The needle **301** may be a tuohy needle, 14-Gauge, or smaller (for example, 22 Gauge). Alternatively, the wireless leads **300** and **400** may be introduced into the epidural space through an introducer **202** (see, for example, Fig. 1). Introducers **202** or needle **301** may be inserted through the outer skin of the body through a small incision in the skin **105** and in between the vertebrae **103** at no more than a 45-degree angle, lateral to the spinous processes off the midline, and placed against the dura **104** of the spinal column **102** to lie perpendicularly to the spinal cord. The wireless leads **300** or **400** can contain extension tubings **201** that terminate just under the entry point **100** of the skin. The wireless lead may be guided upwards in the epidural space according to the angle of introducer or needle insertion. After the wireless lead has been placed, a subcutaneous anchor is used to stop vertical and horizontal migration of the wireless lead.

FIG. **10** illustrates embodiments of a cylindrical wireless lead **300** or semi-cylindrical wireless lead **400** after being implanted. A cylindrical **300** or semi-cylindrical **400** wireless lead may be placed against the dura **104** of the spinal cord and the small incision at the skin **105** is stitched with a suture or sterile strip after placement of the anchoring mechanism **106**.

FIG. **11A-11C** respectively illustrate the cross-sectional views of the placement of a wireless semi-cylindrical lead **300**, a wireless cylindrical lead **400**, and a wireless paddle lead **200** after successful implantation in relation to the dura **104** of the spinal cord **101**.

FIG. **11A** shows the placement of a wireless semi-cylindrical lead **300** relative to the dura **104** of the spinal cord **101**. The wireless semi-cylindrical (also referred to as half-circumferential or half-elliptical) lead **300** may have electrodes that are straight, as depicted in FIG. **12A**, or that are concave and half-cylindrical in shape. Semi-cylindrical electrodes can match the shape of the enclosure. The semi-cylindrical shape of the enclosure of lead **300** may help the lead to mechanically conform to the contour of the spinal column **102**. The shape of the enclosure can also assist in targeting the electrical volume conduction inward towards the dura **104**, and avoid radiating energy outwards towards the ligaments, vertebrae and skin (non-excitabile tissue). More generally, the conducting field generated by the electrodes is uni-directional in nature because the conducting field culminates mainly in the enclosure and electrode faces are pointed in one direction. By removing the unnecessary emission from over 270 degrees of a cylindrical electrode (see, for example, in FIGS. **14B**

and 15) radiating towards non-excitabile tissue, the semi-cylindrical wireless lead **300** can reduce the amount of energy required for a successful stimulation. Therefore, the benefits of the example semi-cylindrical wireless lead **300** may include the directional delivery of stimulation energy as confined by the shape of the electrode.

5           FIG. **11B** shows the placement of a wireless cylindrical lead **400** relative to the dura 104 of the spinal cord **101** after successful implantation. As depicted, the wireless cylindrical lead 400 is placed against dura **104**.

          FIG. **11C** shows the placement of a wireless paddle lead **200** relative to the dura 104 of the spinal cord **101** after successful implantation. As depicted, the wireless paddle lead  
10       200 is placed against dura **104**. Wireless paddle lead 200 may have electrodes that confine the current path in a direction generally perpendicular to the dura. This directionality may be desirable to zero in on a target particular tissue and to reduce electrical charges for efficacious stimulation

          FIGS. **12A** and **12B** illustrate perspective and profile views, respectively, of an  
15       implementation of a wireless semi-cylindrical lead **300**. The semi-cylindrical lead **300** can have, in certain embodiments between two to sixteen electrodes **203** at the distal end **205**, each with a diameter typically between about 0.8 mm and about 1.4 mm, and concave ventral aspects with bend radiuses typically between about 0.6 mm and about 3.0 mm. The electrodes **203** may have longitudinal lengths between about 1.0 mm and about 6.0 mm from  
20       the distal tip towards the proximal tip with widths typically between about 0.4 mm and about 1.0 mm. The total electrode surface area of the wireless lead **300** is typically between about 0.8 mm<sup>2</sup> and about 60.0 mm<sup>2</sup>. The spacing between the electrode contacts is typically between about 1.0 mm and about 6.0 mm. The distal tip of the lead body may be a non-conductive tip that is pointed with a length of between about 0.5 mm and about 2.0 mm, and  
25       a smooth finish for navigating the lead through the epidural space.

          The wireless semi-cylindrical lead **300** may include between two to eight antenna coupling contacts **304**, as illustrated in association with FIG. **7C**, that are wired to the implanted antenna(s) **208** and the flexible circuits **206** (as illustrated in association with  
30       FIGS. **12** and **13**). The antenna coupling contacts **304** may be proximal of the electrodes **203**. The antenna coupling pads **304** may have a longitudinal length of between about 1 mm and about 6 mm from the distal tip to the proximal tip. The spacing between the antenna

coupling contacts **304** is typically between 30 mm and 80 mm. In some embodiments, small antenna coupling contacts **303**, to be discussed in association with FIG. **13C**, may be used. Antenna coupling contacts **303** may have a diameter between about 0.2 mm and about 0.6 mm.

5           Embodiments of wireless leads described herein can have a larger surface area directed towards the dura mater than existing percutaneous leads. This increased surface area can lower the tissue to electrode impedance values and can lead to larger currents for stimulation.

FIGS. **13A-13C** variously illustrate electronic components included in two different  
10           embodiments of the wireless lead, namely, a wireless semi-cylindrical lead **300** and a wireless cylindrical lead **400**.

FIG. **13A** shows an example wireless lead (e.g. a wireless semi-cylindrical lead **300** or a wireless cylindrical lead **400**) with extension tubing **201**. The tubing **201** may house electrodes **203**, implanted antenna **208**, waveform conditioning circuitry **209**, and wires **210**.  
15           As discussed above in association with FIGS. **7A-7B**, the waveform conditioning circuitry **209** can include components for rectifying the received RF energy and for charge balancing the waveform for tissue stimulation.

One or more flexible circuits **206** may be used to carry various parts of the electronic components. For instance, the flexible circuits **206** may include the waveform conditioning  
20           circuitry **209** and implantable antenna(s) **208**. The flex circuit may also include portions of the wires **210**, which connect the electronics, such as circuitry **209**, to the electrodes **203**. The flexible circuits **206** may be between about 15 mm and about 90 mm long, and about 0.7 mm and about 2.0 mm wide. The total height of the flexible circuit **206** with the waveform conditioning circuitry **209** may be between about 0.2 mm and about 0.4 mm. The flexible  
25           circuit **206**, when placed inside of the cylindrical wireless lead **400** may undergo a bend radius under about 0.5 mm. As illustrated in Fig. **13A**, in some embodiments, the flexible circuit **206** may contain a conductive trace to act as an antenna **208**.

FIG. **13B** shows another example of a wireless lead (e.g. a wireless semi-cylindrical lead **300** and a wireless cylindrical lead **400**) encapsulated that includes tubing **201**. The  
30           tubing houses antenna(s) **208** and the waveform conditioning circuitry **209**, both of which may be formed on a flex circuit **206** similar to the flex circuit described with respect to FIG.

**13A.** At least a portion of the wires **210** may be formed on the flex circuit as well. Wires **210** connect, for example, the circuitry **209** to the electrodes (not shown in FIG. **13B**). Wires **210** also connect the antenna **208** to tissue exposed ring antenna coupling contacts **304**. Tissue exposed ring antenna coupling contacts **304** can be circumferential rings with outer diameter between about 0.8 mm and about 1.4 mm, and longitudinal lengths between about 0.5 mm and about 6.0 mm.

FIG. **13C** shows yet another example wireless lead (e.g. a wireless semi-cylindrical lead **300** and a wireless cylindrical lead **400**) with extension tubing **201**. The extension tubing **201** houses antenna(s) **208** and the waveform conditioning circuitry **209**, both of which may be formed on a flex circuit **206** similar to the flex circuit described with respect to FIG. **13A**. At least a portion of the wires **210** may be formed on the flex circuit as well. Wires **210** connect, for example, the circuitry **209** to the electrodes (not shown in FIG. **13C**). Wires **210** also connect the antenna **208** to tissue exposed small antenna coupling contacts **303**. Tissue exposed small antenna coupling contacts **303** may be made of a conductive cylindrical piece of metal of diameter between about 0.2 mm and about 0.6 mm and thickness of between about 0.2 mm and about 0.6 mm. Tissue exposed small antenna coupling contacts **303** may contact tissue and can be embedded into the electrically insulative material **205**.

FIG. **14A** illustrates a cross-sectional view of an embodiment of a fully cylindrical wireless lead **400** or a semi-cylindrical wireless lead **300** at a position proximal to the distal tip. The embodiment shown is a multi-lumen extrusion **305** having a center lumen **204** and multiple orbital lumens **306** (for example, one to ten or more). The multi-lumen extrusion **305** may be proximal to the single-lumen extrusion **307**, shown in the right graph, on one wireless lead (for example, a fully cylindrical wireless lead **400** or a semi-cylindrical wireless lead **300**). The multi-lumen extrusion **305** may act as backbone for guiding the conducting wires **210**, housed in side lumens **306**, and a stylet (as discussed in association with Fig. **1**) placed through the center lumen **204**. The multi-lumen plastic extrusion **305** can be made up of between one to ten or more orbital lumens **306**, each with inner diameters of between about 0.1 mm and about 0.6 mm. The multi-lumen plastic extrusion **305** may have an outer diameter of between about 0.8 mm and about 1.4 mm. In certain embodiments, the multi-lumen extrusion **305** may be ablated (i.e., heated to be deformed) to a final outer diameter of

between about 0.6 mm and about 0.9 mm which allows the extrusion **305** to connect male to female into a single lumen extrusion **307**, as shown in the right graph. A navigation stylet may be placed inside the inner lumen **204** to guide the wireless lead into the epidural space. The inner lumen **204** maintains a clear channel without obstruction and may be fused with  
5 the single lumen extrusion **307** at the interconnection between extrusions **305** and **307** and after the above-mentioned ablation.

FIG. **14B** illustrates a cross-sectional view of another embodiment of a fully cylindrical wireless lead **400** or a semi-cylindrical wireless lead **300** at a position proximal to the distal tip. This embodiment is a single-lumen extrusion **307**, which may have inner  
10 diameter of between about 0.3 mm and about 1.4 mm. The single lumen extrusion **307** may be pulled around the outside of, for example, the wireless semi-cylindrical lead **300** and heat formed to match an outer diameter of between about 0.8 mm and about 1.4 mm. The single lumen extrusion **307** can leave sufficient empty space for the flexible circuit **206** to be encapsulated inside. The inner lumen **204** may be offset by a distance indicated by **308**  
15 inside the single lumen **307** to provide a gap space for the flexible circuit **206**. Conducting wires **210** from the side lumens **306** may connect to terminal features (not depicted) on the flexible circuit **206**. The gap space inside the single-lumen extrusion **307** between the flexible circuit **206** and inner lumen **204** may be back-filled with a biocompatible polymer to give added rigidity for protecting the flexible circuit components **206** and conducting wires  
20 **210**.

FIG. **14C** illustrates a cross-sectional view towards the distal end of a semi-cylindrical wireless lead **300**. For a semi-cylindrical wireless lead **300**, the concave multi-lumen extrusion **309** may house the conducting wires **210** running from the flex circuit **206** to the electrodes **203**. The concave shape of multi-lumen extrusion **309** may allow semi-cylindrical  
25 wireless lead **300** to conform to the curvature of the spinal cord. The bend radius of the concave dorsal aspect is between about 0.6 mm and about 3.0 mm. The concave multi-lumen extrusion **309** may contain between one and ten or more orbital lumens **306** acting as channels for conducting wires and a central lumen **204** for the stylet. The lumens **204** and **306** may have inner diameters of between 0.1 mm and 0.6 mm. The orbital lumens **306** may  
30 be drilled into from the dorsal side during manufacturing to create channels to connect the conducting wires **210** to the electrodes **203**.

Fig. 15 illustrates an example of a fully circumferential wireless lead. The cylindrical wireless lead **400** may have between two and sixteen cylindrical electrodes **203** on its distal end with a diameter between about 0.8 mm and about 1.4 mm for epidural spinal cord stimulation applications. The electrodes **203** may have a longitudinal length of between about 1.0 mm and about 6.0 mm from the distal tip toward the proximal tip. The spacing between the electrode contacts may be between about 1.0 mm and about 6.0 mm. The total electrode surface area of the cylindrical wireless lead body **400** may be between about 1.6 mm<sup>2</sup> and about 60.0 mm<sup>2</sup>. The distal tip of the cylindrical wireless lead body **400** may be a non-conductive tip that is rounded with a length of between about 0.5 mm and about 1.0 mm, with a smooth finish for navigating the lead through the epidural space. Between two to eight tissue exposed ring antenna coupling contacts **304** may be proximal to the electrodes **203**. The tissue exposed circular antenna coupling contacts **304** may have a longitudinal length of between about 1.0 mm and about 6.0 mm from the distal tip toward the proximal tip. The spacing between the tissue-exposed circular antenna coupling contacts **304** may be between about 30 mm and about 80 mm. In certain embodiments, tissue exposed small antenna coupling contacts **303** with a diameter between about 0.2 mm and about 0.6 mm may be used in lieu of the illustrated tissue exposed small antenna coupling contacts **303**. Extension tubing **201**, as discussed in association with FIGS 1, 7C, 8 and 9, can provide an enclosure that houses, for example, flex circuitry **206**. Flex circuitry **206** has been discussed in association with FIGS 13A to 13C. Extension tubing **201** may include a center lumen **204**. As discussed in association with FIG 14A, a stylet can be placed through center lumen **204** to provide guidance during implantation of lead **400** into, for example, through a lumen in to a human body.

Various implementations of the technology may allow placement of wireless lead in the epidural space, between the dura mater and arachnoid membranes, or subdurally in the intrathecal space, where significant reactions and scarring would be minimized. Insertion in any of these locations may be done by injecting the device from a smaller gauge needle (e.g., 14 to 22-gauge needle or out of a cannula steered to the proper position by a removable stylet). In some implementations, once in position, no further skin incisions or placement of extensions, receivers or implanted pulse generators are needed. Various implementations of the wireless neural modulation system may have significant advantages due to the small size

and lack of extension wires for transfer of energy, allowing placement with minimal trauma and long term effective therapy in places where larger implantable devices could cause more scar tissue and tissue reactions that may affect efficacy and safety.

5 A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made. Accordingly, other implementations are within the scope of the following claims.

What is claimed is:

1. An implantable neural stimulator for modulating neural tissue in a patient, the implantable neural stimulator comprising:

5 an enclosure shaped and configured for delivery into the patient's body through an introducer or needle;

one or more electrodes housed within the enclosure and configured to apply one or more electrical impulses to neural tissue;

10 a first antenna housed within the enclosure and configured to wirelessly receive from a second antenna through electrical radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable neural stimulator, the first antenna being one of a dipole antenna and a patch antenna; and

15 a circuit coupled to the first antenna and the electrodes and configured to generate the electrical impulses suitable for modulation of neural tissue solely using the electrical energy contained in the input signal received wirelessly from the second antenna and to supply the electrical impulses to the one or more electrodes.

2. The implantable neural stimulator of claim 1 wherein the enclosure comprises a fixed length for the electrodes and the circuit of no greater than 14 cm and an additional portion that  
20 can be adjusted to any length a portion to space the electrodes from the neural tissue after the implantable neural stimulator has been delivered into the patient's body.

3. The implantable neural stimulator of claim 1 wherein the enclosure comprises a cylindrical or semi-cylindrical shape and the electrodes are directionally configured to direct a  
25 current associated with the electrical impulses in a direction that is substantially perpendicular to the neural tissue.

4. The implantable neural stimulator of claim 3 wherein the electrodes comprise a cylindrical or semi-cylindrical array of electrodes.



5. The implantable neural stimulator of claim 1 wherein the neural tissue is associated with the spinal column.

6. The implantable neural stimulator of claim 1 wherein the electrodes comprise two to sixteen electrodes, each having a longitudinal length of about 1.0 to 6.0 mm and a width of about 0.4 to 3.0 mm.

7. The implantable neural stimulator of claim 6 wherein the electrodes are spaced between about 1 mm to 6 mm apart and have a combined surface area of between about 0.8 mm<sup>2</sup> to 60.00 mm<sup>2</sup>.

8. The implantable neural stimulator of claim 1 further comprising a paddle-styled lead having a concave shape configured to secure a lateral position on the neural tissue after the implantable neural stimulator has been delivered into the patient's body.

9. The implantable neural stimulator of claim 1 wherein the enclosure has a height of about 1.3 mm to 2.0 mm and a width of about 2.0 mm to 4.0 mm.

10. The implantable neural stimulator of claim 8 wherein the enclosure has a concave profile between about 1.0 mm to 1.5 mm and a concave edge of about 0.2 mm to 0.3 mm.

11. The implantable neural stimulator of claim 8 wherein the lateral position is with regard to a dorsal aspect of a spinal cord of the patient.

12. The implantable neural stimulator of claim 1 wherein the enclosure is sized and shaped for delivery into an epidural space of the patient's body.

13. The implantable neural stimulator of claim 1 wherein the enclosure is sized and shaped for delivery through a tuohy needle having a diameter no larger than gauge 14.

14. The implantable neural stimulator of claim 1 wherein the enclosure further comprises a lumen configured to receive a navigating stylet for delivery of the implantable neural stimulator into the patient's body.

5 15. The implantable neural stimulator of claim 1 wherein the enclosure comprises a rounded distal tip with a length of between about 0.5 mm to 2.0 mm.

16. The implantable neural stimulator of claim 1 wherein the enclosure comprises a pointed distal tip having a length of between about 2.0 to 6.0 mm.

10

17. The implantable neural stimulator of claim 1 further comprising a plurality of antenna coupling contacts housed within the enclosure and electrically coupled to the antenna and the circuit, wherein the antenna coupling contacts are configured to electrically couple the antenna with tissue surrounding the enclosure.

15

18. The implantable neural stimulator of claim 17 wherein the antenna coupling contacts comprise 2 to 8 antenna coupling pairs located proximal to the electrode within the enclosure.

19. The implantable neural stimulator of claim 17 wherein the antenna coupling contacts  
20 each have a longitudinal length of about 1.0 mm to 6.0 mm and a width of about 1.0 mm to 2.5 mm.

20. The implantable neural stimulator of claim 17 wherein the antenna coupling contacts are spaced between about 30 and 80 mm apart.

25

21. The implantable neural stimulator of claim 1 wherein the circuit is a flexible circuit capable of undergoing a bend radius of under 0.5 mm.

22. The implantable neural stimulator of claim 21 wherein the flexible circuit comprises a  
30 waveform conditioning circuit configured to provide a stimulation waveform to the electrode.

23. An implantable wireless stimulator device comprising:  
an enclosure including an extension tubing with a center lumen and at least one orbital lumen, the center lumen accommodating a navigating stylet during the delivery of the enclosure into a subject's body, the enclosure housing:

5 one or more electrodes configured to apply one or more electrical pulses to the subject's neural tissue;

a first antenna, being one of a dipole antenna and a patch antenna,  
configured to:

wirelessly receive, from a second antenna and through electrical  
10 radiative coupling, an input signal containing electrical energy, the second antenna being physically separate from the implantable wireless stimulator device; and

one or more circuits electrically connected to the first antenna, the circuits configured to:

15 create the one or more electrical pulses suitable for stimulation of the neural tissue using the electrical energy contained in the input signal; and

supply the one or more electrical pulses to the one or more electrodes, wherein the enclosure is shaped and arranged for  
20 delivery into a subject's body through an introducer or a needle.

24. The wireless stimulator device of claim 23, wherein the enclosure further houses antenna coupling contacts, wherein the one or more circuits include waveform conditioning circuitry, wherein the antenna coupling contacts are connected by conducting wires to the antenna and the  
25 waveform conditioning circuitry, wherein the conducting wires are each enclosed in a respective orbital lumen, wherein the waveform conditioning circuitry uses the electrical energy contained in the input signal to create the one or more electrical pulses for application at the one or more electrodes to stimulate neural tissue.

25. The wireless stimulator device of claim 24, wherein the waveform conditioning circuitry includes at least one of diodes, resistors and capacitors.
26. The wireless stimulator device of claim 24, wherein the waveform conditioning circuitry  
5 comprises charge balance microelectronics to reduce a risk of corrosion of the electrodes.
27. The wireless stimulator device of claim 24, wherein the waveform conditioning circuitry comprises isolation circuits.
- 10 28. The wireless stimulator device of claim 24, wherein the antenna coupling contacts are located proximal, relative to the electrodes, in the enclosure.
29. The wireless stimulator device of claim 23, wherein the extension tubing includes  
15 between one and ten or more orbital lumens, each with an inner diameter between about 0.1 mm and about 0.6 mm.
30. The wireless stimulator device of claim 23, wherein the extension tubing with one or  
more orbital lumens is fused with a single-lumen extension tubing, and wherein the extension  
tubing with one or more orbital lumens is located more proximally than the single-lumen  
20 extension tubing.
31. The wireless stimulator device of claim 23, wherein the extension tubing with one or  
more orbital lumens has an outer diameter between about 0.8 mm and about 1.4 mm.
- 25 32. The wireless stimulator device of claim 23, wherein a portion of the enclosure leaves the electrodes in a non-direct contact with the neural tissue after the wireless neural stimulator has been delivered into the subject's body.
33. The wireless stimulator device of claim 23, wherein the electrodes are made of at least  
30 one of:

platinum, platinum-iridium, gallium-nitride, titanium-nitride, iridium-oxide, or combinations thereof.

34. The wireless stimulator device of claim 23, wherein the enclosure has an external coating  
5 of biocompatible polymer, the polymer includes at least one of:

polymethylmethacrylate (PMMA), polydimethylsiloxane (PDMS), parylene,  
polyurethane, polytetrafluoroethylene (PTFE), or polycarbonate.

35. The wireless stimulator device of claim 23, wherein the enclosure has an external coating  
10 of silicone elastomer.

36. The wireless stimulator device of claim 23, wherein the wireless stimulator device is a  
passive device.

37. The wireless stimulator device of claim 23, wherein at least one of the antennas is  
15 constructed as a conductive trace contained on one of the one or more circuits.

38. The wireless stimulator device of claim 23, wherein at least one of the antennas is  
fabricated as a conductive wire connected to one of the one or more circuits.

39. The wireless stimulator device of claim 24, wherein the one or more circuits, including  
20 the waveform conditioning circuitry, are flexible circuits.

40. The wireless stimulator device of claim 39, wherein the flexible circuits are placed  
25 proximal, relative to the electrodes, in the enclosure.

41. An implantable neural stimulator for modulating neural tissue in a patient, the  
implantable neural stimulator comprising:

an enclosure shaped and configured for delivery into the patient's body through an  
30 introducer or needle, the enclosure including an extension tubing shaped to conform to a  
curvature of the patient's spinal cord, the enclosure housing:

one or more electrodes configured to apply one or more electrical pulses to the subject's neural tissue associated with the patient's spinal cord;  
a first antenna, being one of a dipole antenna and a patch antenna, configured to:  
wirelessly receive, from a second antenna through electrical radiative  
coupling, an input signal containing electrical energy, the second antenna being  
physically separate from the implantable neural stimulator; and  
a circuit coupled to the first antenna and the electrodes and configured to:  
generate the one or more electrical pulses suitable for modulation  
of neural tissue solely using the electrical energy contained in the input  
signal received wirelessly from the second antenna; and  
supply the one or more electrical pulses to the one or more  
electrodes.

42. The implantable wireless stimulator device of claim 41, wherein the extension tubing is shaped concavely to conform to the curvature of the patient's spinal cord.

43. The implantable wireless stimulator device of claim 42, wherein the concavely shaped extension tubing has a dorsal aspect with a bend radius between about 0.6 mm and about 3.0 mm.

44. The implantable wireless stimulator device of claim 41, wherein the extension tubing includes between one and ten or more orbital lumens, each with an inner diameter between about 0.1 mm and about 0.6 mm, and an outer diameter between about 0.8 mm and about 1.4 mm.

45. The implantable wireless stimulator device of claim 44, wherein the extension tubing includes a center lumen that accommodates a navigating stylet during the delivery of the enclosure into the subject's body through the introducer or a needle.

46. The implantable wireless stimulator device of claim 45, wherein the extension tubing with one or more orbital lumens is fused with a single-lumen extension tubing, and wherein the extension tubing with one or more orbital lumens is located more proximally than the single-

lumen extension tubing.

47. The implantable wireless stimulator device of claim 41, wherein the enclosure further houses antenna coupling contacts, wherein the circuit includes waveform conditioning circuitry, wherein the antenna coupling contacts are connected by conducting wires to the antenna and the waveform conditioning circuitry, wherein the conducting wires are each enclosed in a respective orbital lumen, wherein the waveform conditioning circuitry uses the electrical energy contained in the input signal to create the one or more electrical pulses for application at the one or more electrodes to modulate neural tissue.

48. The implantable wireless stimulator device of claim 47, wherein the waveform conditioning circuitry comprises one or more diodes, one or more resistors, and one or more capacitors.

49. The implantable wireless stimulator device of claim 47, wherein the waveform conditioning circuitry comprises:  
charge balance circuitry to reduce a risk of corrosion of the electrodes, and isolation circuitry.

50. The wireless stimulator device of claim 49, wherein the antenna coupling contacts are located proximal, relative to the electrodes, in the enclosure.

51. The wireless stimulator device of claim 41, wherein a portion of the enclosure leaves the electrodes in a non-direct contact with the neural tissue after the wireless neural stimulator has been delivered into the subject's body.

52. The wireless stimulator device of claim 41, wherein the electrodes are made of at least one of:

platinum, platinum-iridium, gallium-nitride, titanium-nitride, iridium-oxide, or combinations thereof.

53. The wireless stimulator device of claim 41, wherein the enclosure has an external coating of biocompatible polymer, the polymer includes at least one of:

polymethylmethacrylate (PMMA), polydimethylsiloxane (PDMS), parylene, polyurethane, polytetrafluoroethylene (PTFE), or polycarbonate.

5

54. The wireless stimulator device of claim 41, wherein the enclosure has an external coating of silicone elastomer.

55. The wireless stimulator device of claim 41, wherein at least one of the antennas is constructed as a conductive trace contained on the circuit.

10

56. The wireless stimulator device of claim 41, wherein at least one of the antennas is fabricated as a conductive wire connected to the circuit.

57. The wireless stimulator device of claim 42, wherein the circuit is flexible and placed proximal, relative to the electrodes, in the enclosure.

15

58. An implantable neural stimulator comprising:

one or more electrodes configured to apply one or more stimulation pulses to a neural tissue;

20

an antenna configured to wirelessly receive, through electrical radiative coupling, an input signal containing electrical energy, the antenna being one of a dipole antenna and a patch antenna; and

a circuit coupled to the antenna and the one or more electrodes, wherein the circuit is configured to:

25

apply the electrical energy contained in the input signal to create the one or more stimulation pulses suitable for stimulating the neural tissue; and  
supply the one or more stimulation pulses to the one or more electrodes.

59. The implantable neural stimulator of claim 58, wherein the implantable neural stimulator is packaged to fit inside an introducer or a needle having a diameter no larger than

30



gauge 13.

60. The implantable neural stimulator of claim 59, wherein the implantable neural stimulator comprises an enclosure that includes a lumen configured to accommodate a navigating stylet when the enclosure is inserted into the introducer or the needle.

61. The implantable neural stimulator of claim 60, wherein the enclosure further comprises at least one orbital lumen.

62. The implantable neural stimulator of claim 61, wherein the lumen is located in a single-lumen extension tubing, the at least one orbital lumen are located in an extension tubing, and wherein the extension tubing is located more proximally than the single-lumen extension tubing.

63. The implantable neural stimulator of claim 62, wherein the enclosure further encloses a plurality of antenna coupling contacts, wherein the antenna coupling contacts are electrically coupled to the antenna and the circuit.

64. The implantable neural stimulator of claim 63, wherein the antenna coupling contacts comprise 2 to 8 antenna coupling pairs located proximal to the electrode within the enclosure.

65. The implantable neural stimulator of claim 63, wherein the antenna coupling contacts are connected by conducting wires to the antenna and the circuit, wherein each of the conducting wires is enclosed in a respective orbital lumen.

66. The implantable neural stimulator of claim 60, wherein the enclosure is sized and shaped for delivery into an epidural space of a patient.

67. The implantable neural stimulator of claim 66, wherein the enclosure has a concave shape configured to secure a lateral position on the neural tissue after the implantable neural stimulator has been implanted inside the patient.

68. The implantable neural stimulator of claim 67, wherein the lateral position is with regard to a dorsal aspect of a spinal cord column of the patient.

69. The implantable neural stimulator of claim 60, wherein the enclosure comprises a rounded distal tip or a pointed distal tip.

70. The implantable neural stimulator of claim 58, wherein the electrodes are directionally configured to direct a current associated with the one or more stimulation pulses in a direction that is substantially perpendicular to the neural tissue.

71. The implantable neural stimulator of claim 58 wherein the one or more electrodes comprise a cylindrical or semi-cylindrical array of electrodes.

72. The implantable neural stimulator of claim 58, wherein the circuit comprises: one or more diodes, one or more resistors, and one or more capacitors.

73. The implantable neural stimulator of claim 72, wherein the circuit further comprises: charge balance circuitry, and isolation circuitry.

74. The implantable neural stimulator of claim 72, wherein the circuit is sufficiently flexible to bend over a radius of under 0.5 mm.

75. The implantable neural stimulator of claim 72, wherein the circuit is placed proximal, relative to the electrodes.

76. The implantable neural stimulator of claim 58, wherein the antenna comprises a conductive trace.

77. The implantable neural stimulator of claim 58, wherein the antenna comprises a conductive wire.

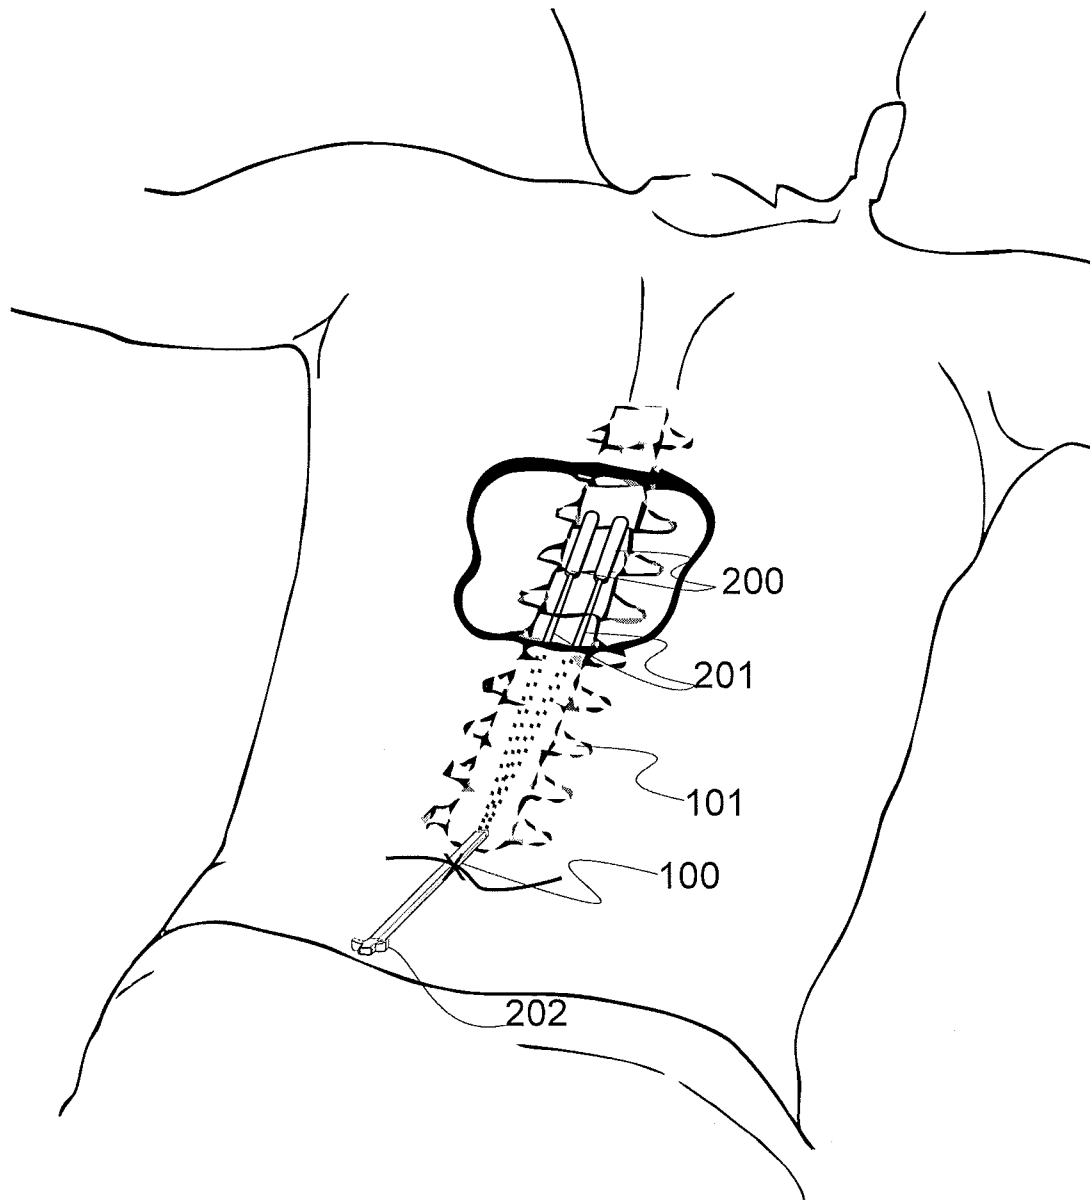


FIG. 1

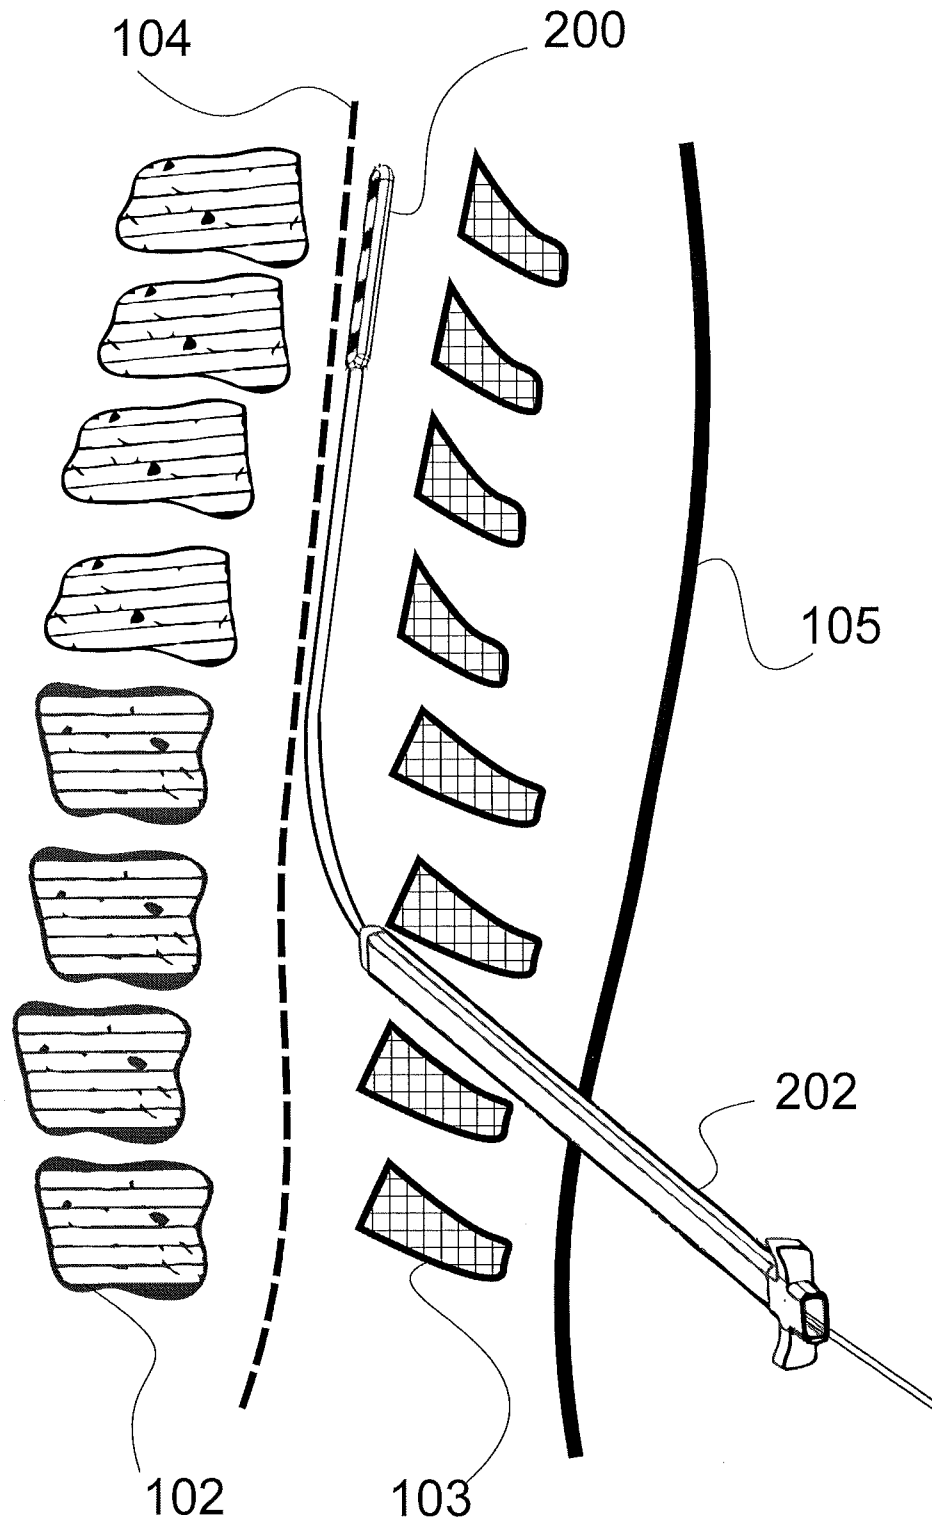


FIG. 2

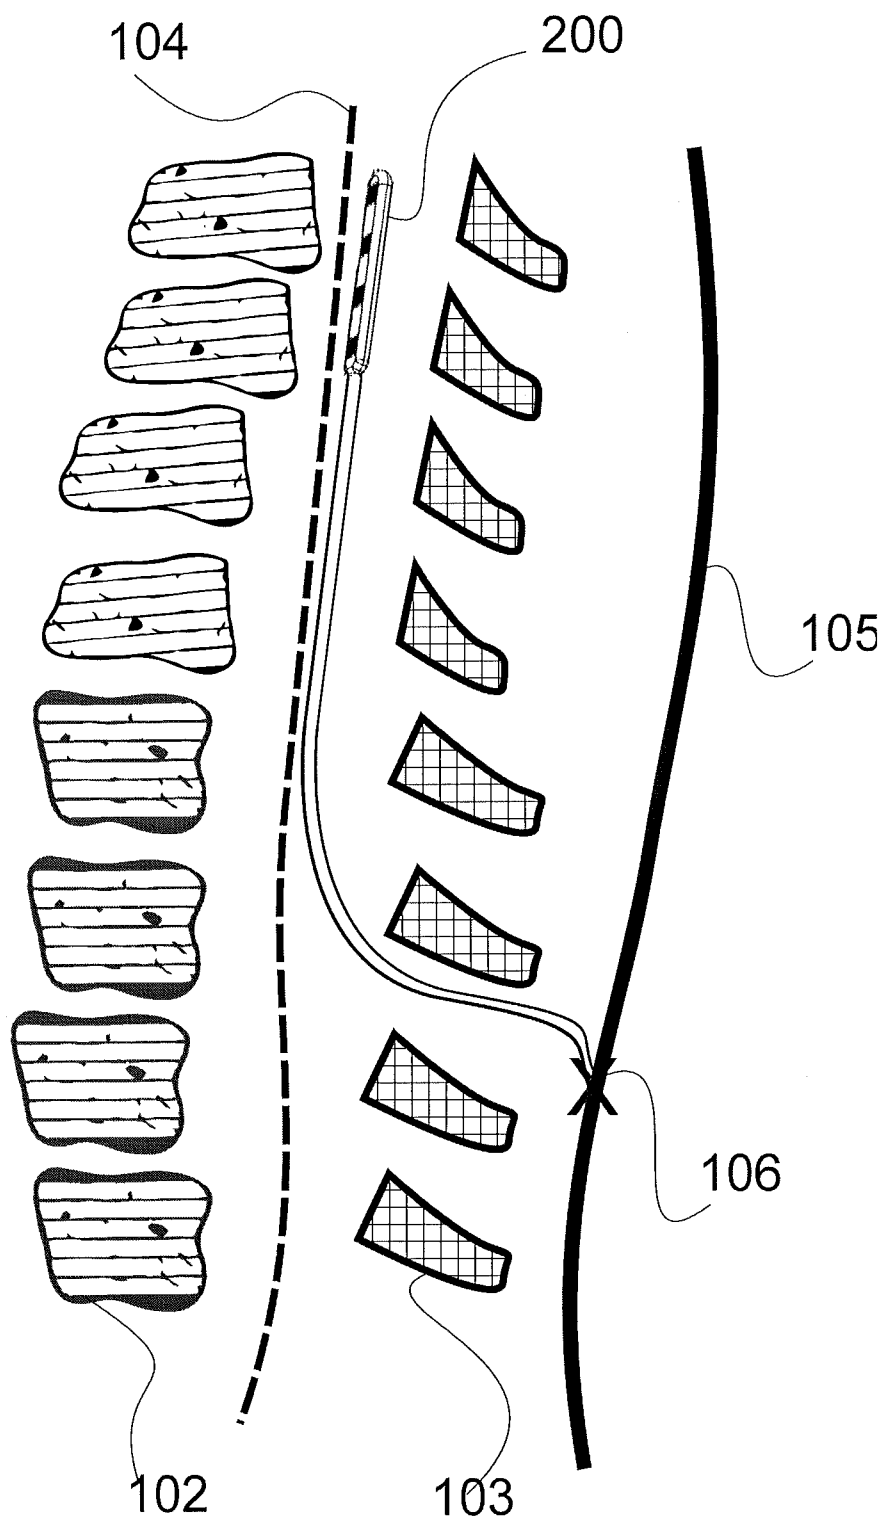


FIG. 3

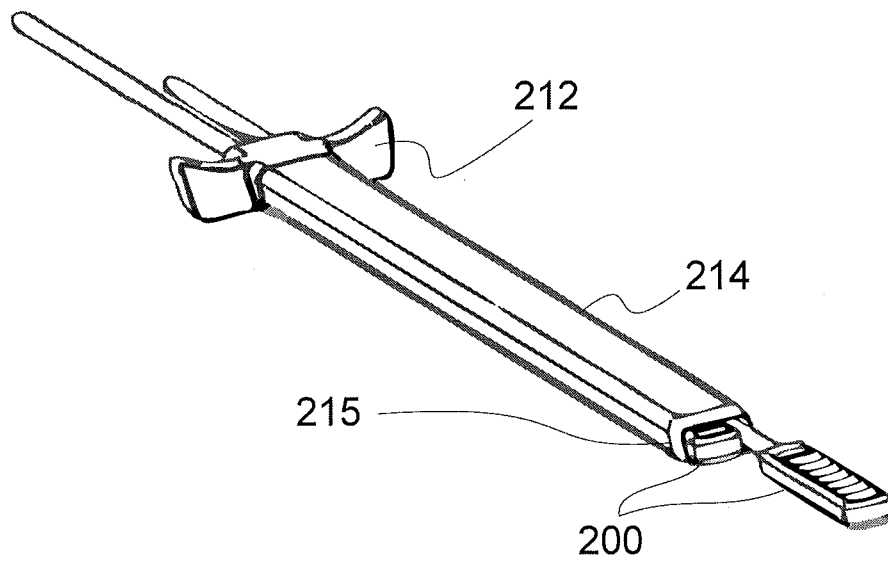


FIG. 4A

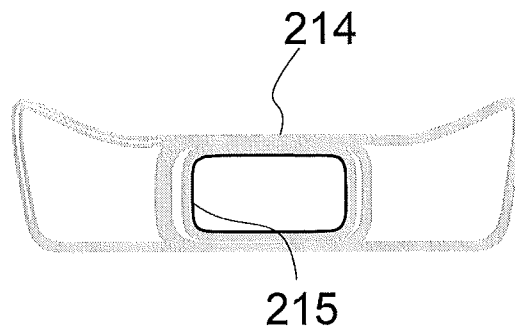


FIG. 4B

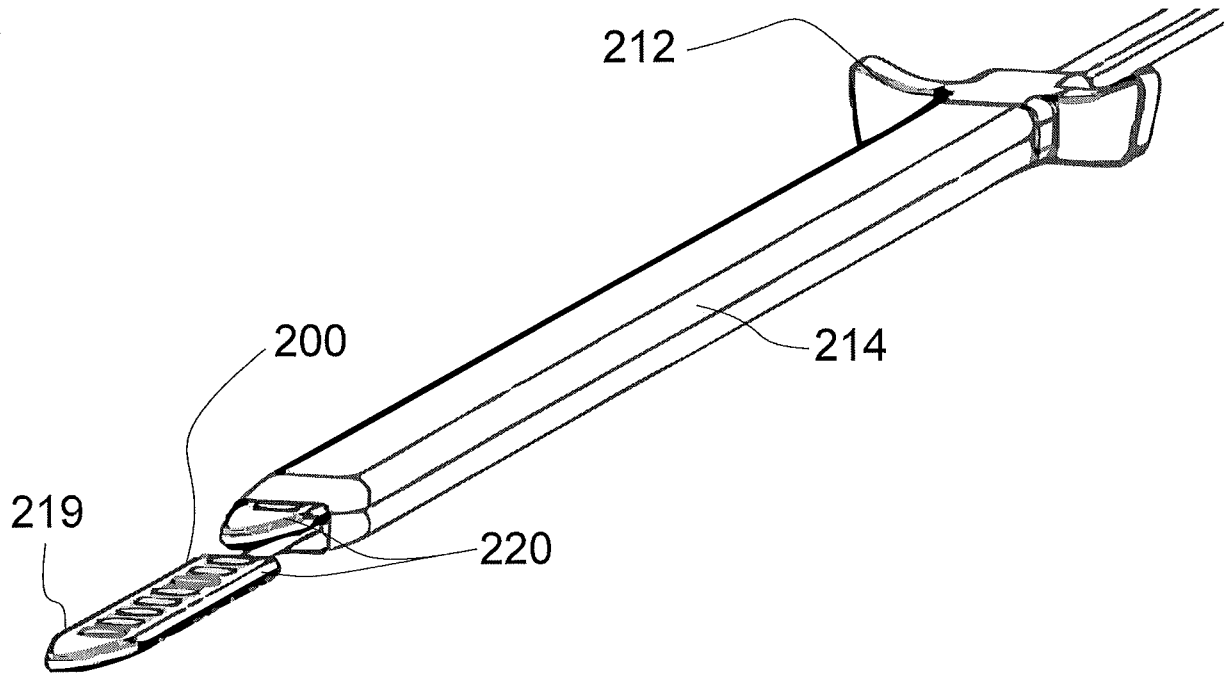


FIG. 5A

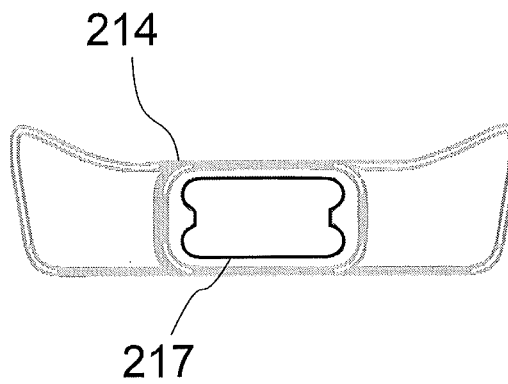


FIG. 5B

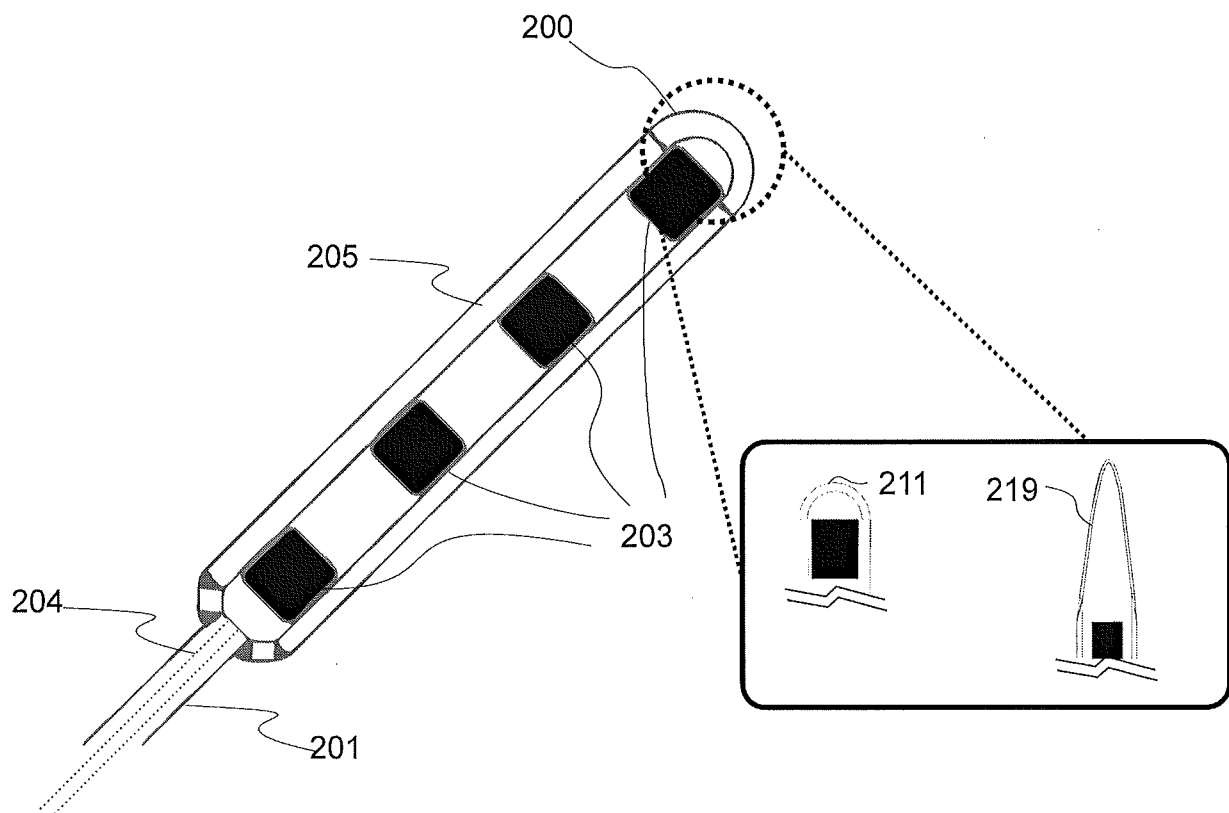


FIG. 6A

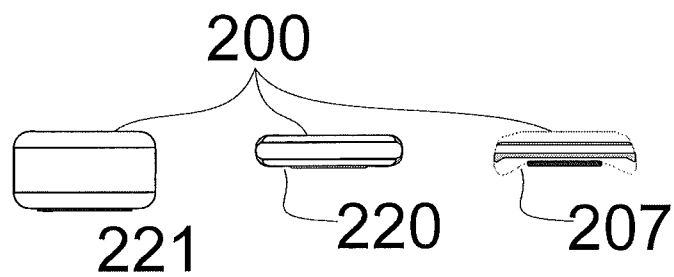


FIG. 6B



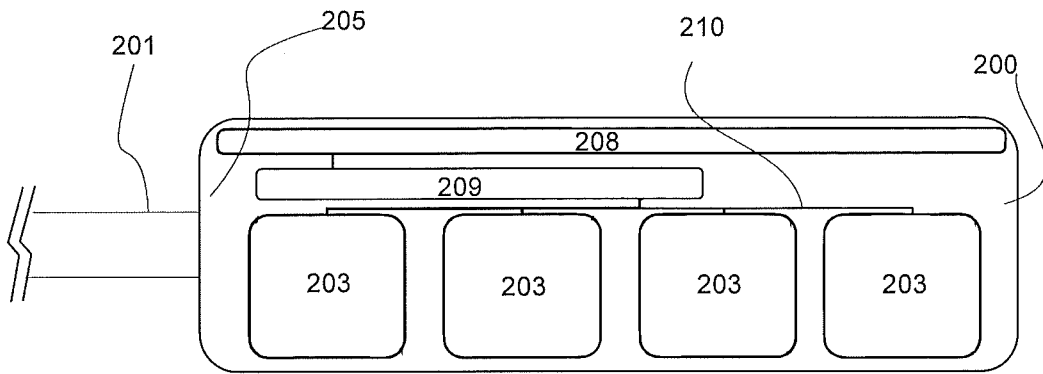


FIG. 7A

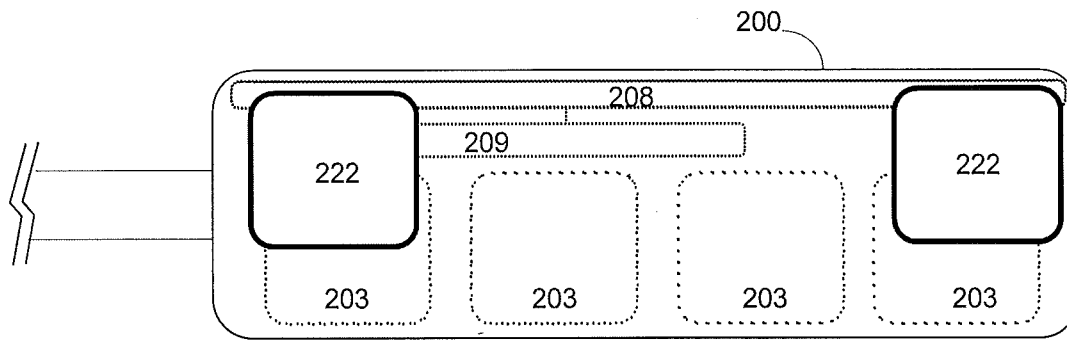


FIG. 7B

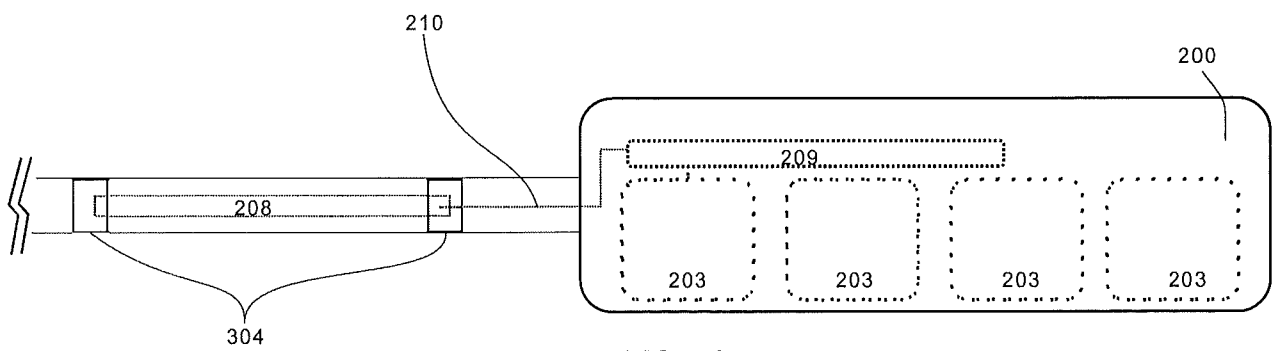


FIG. 7C

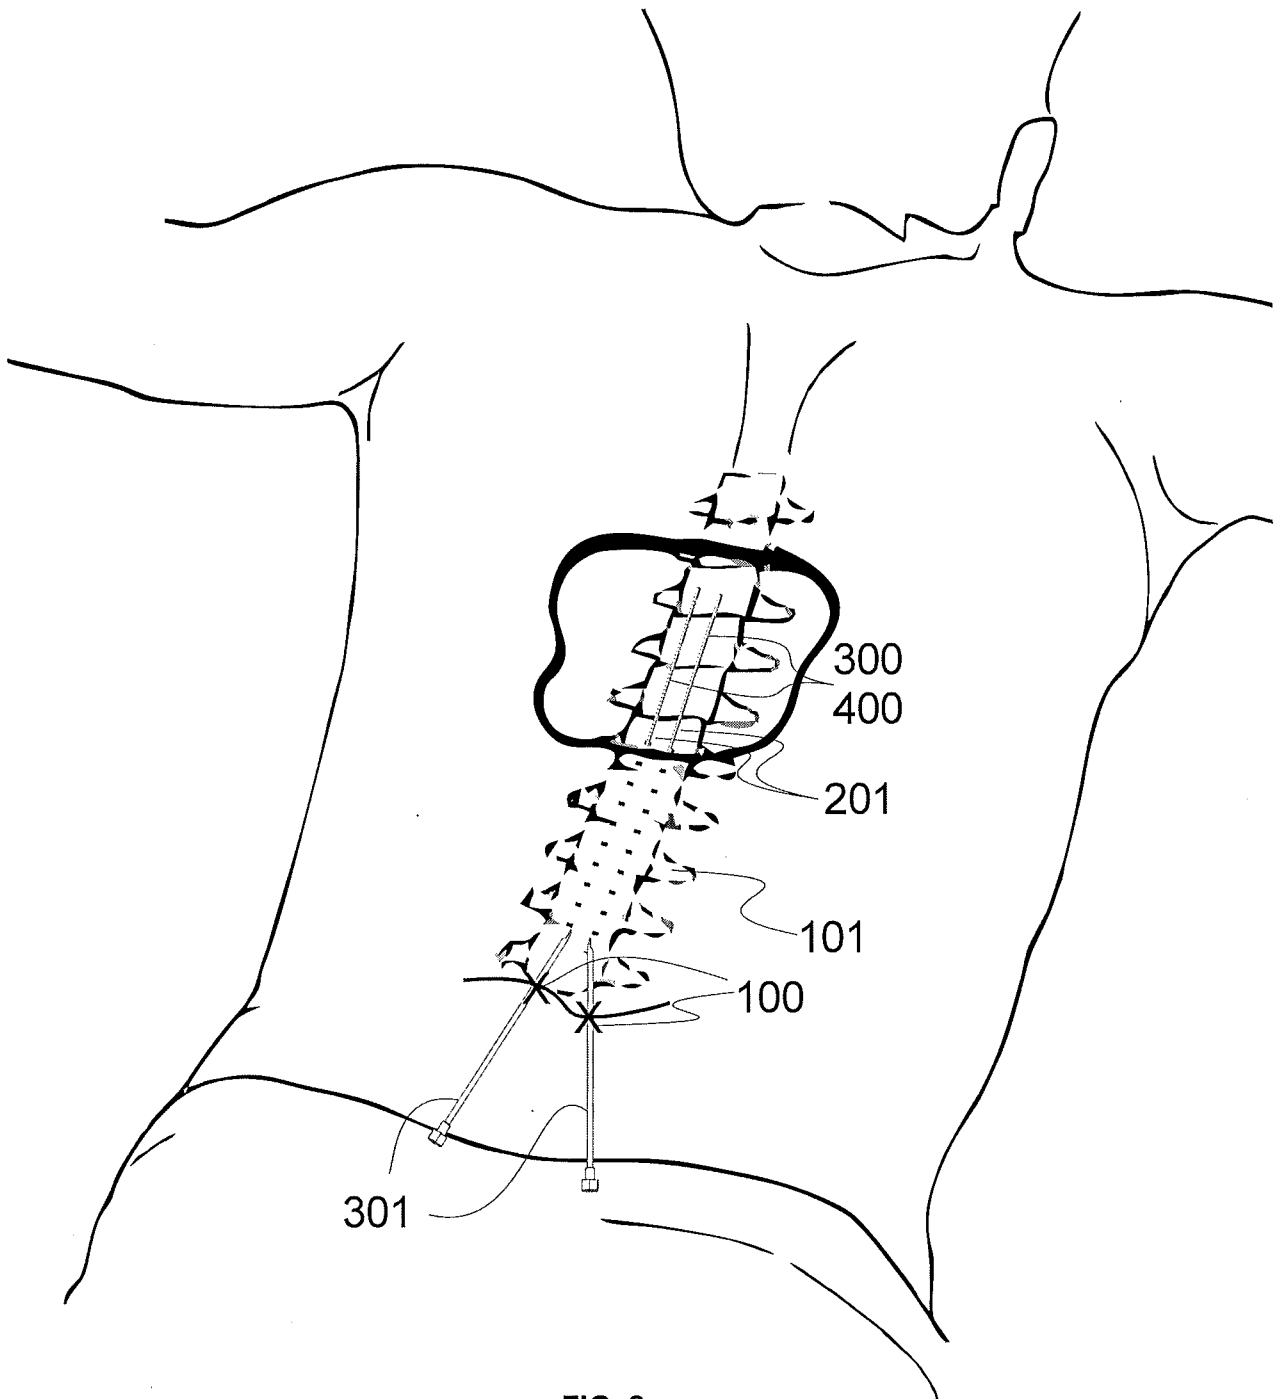


FIG. 8

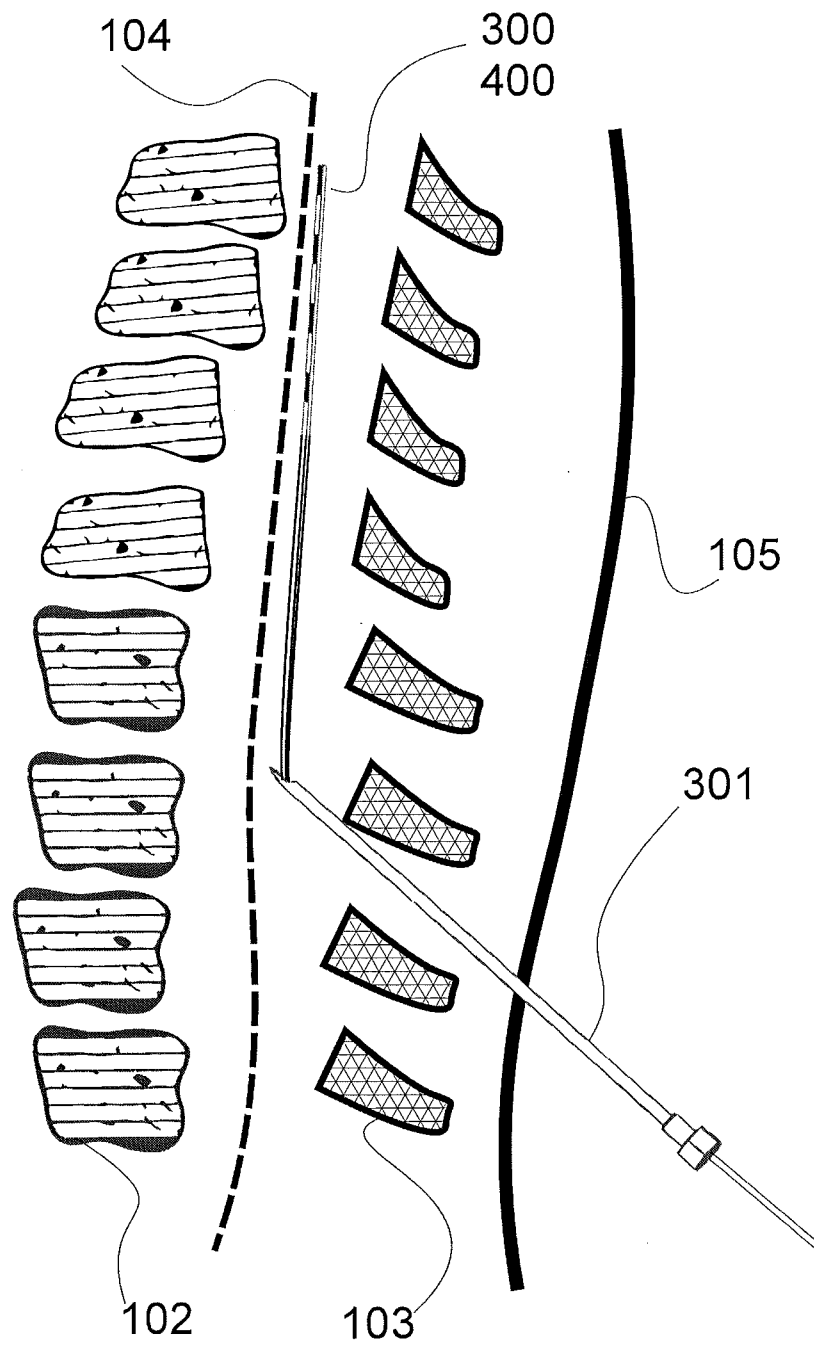


FIG. 9

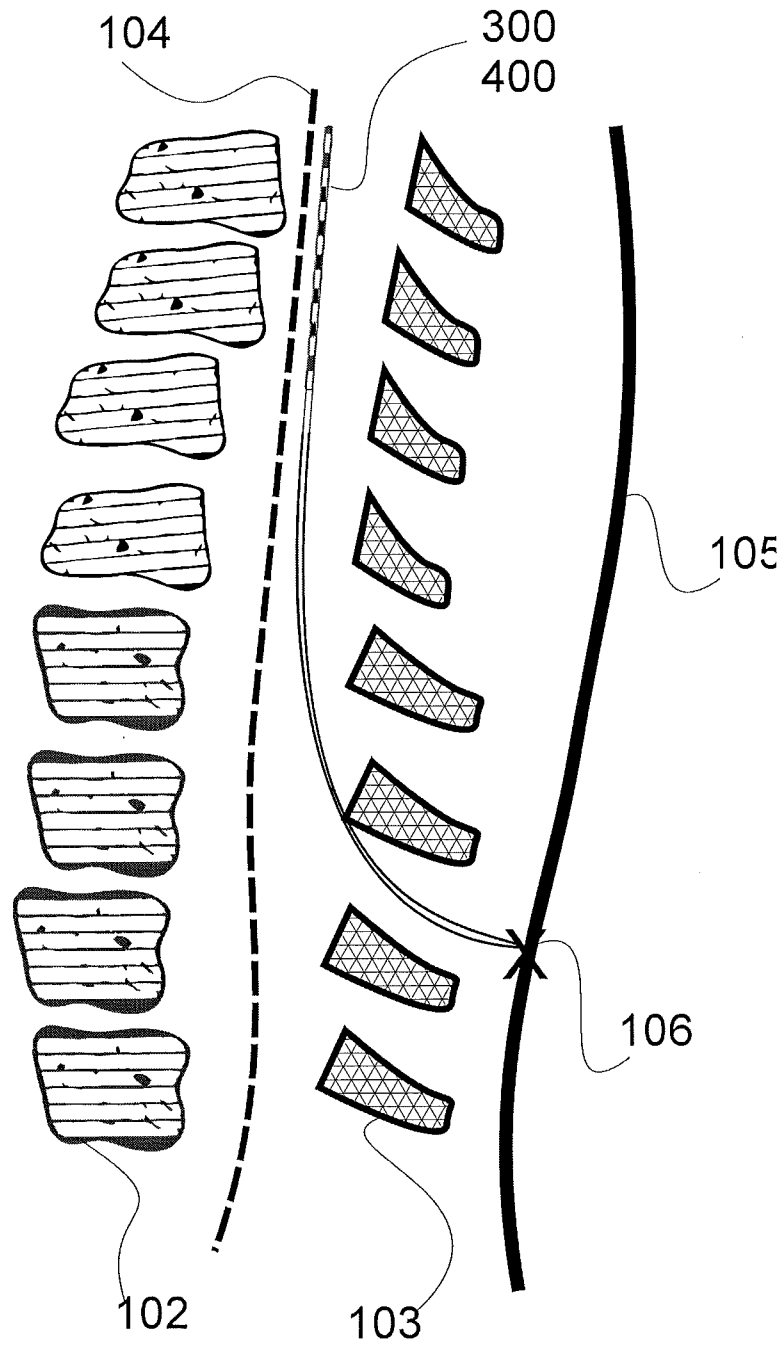
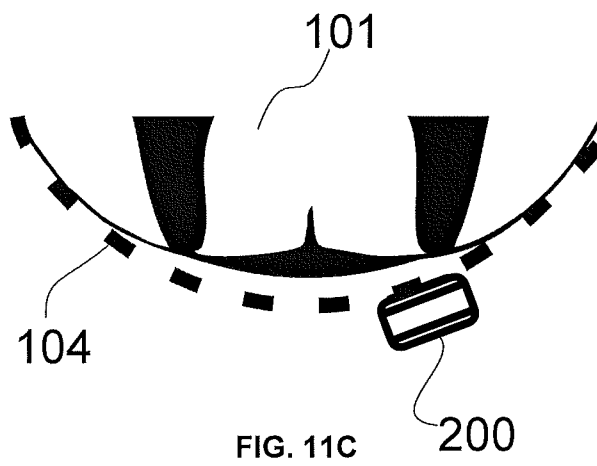
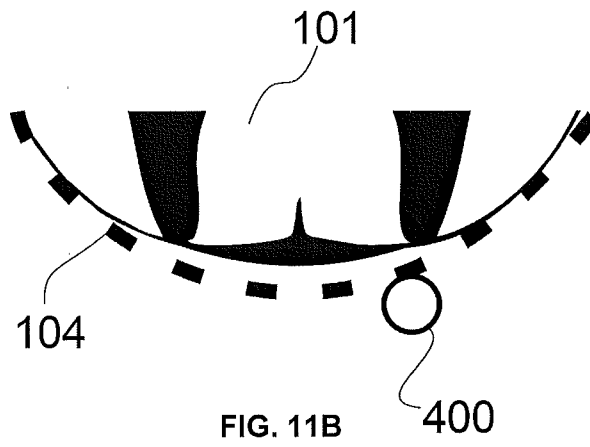
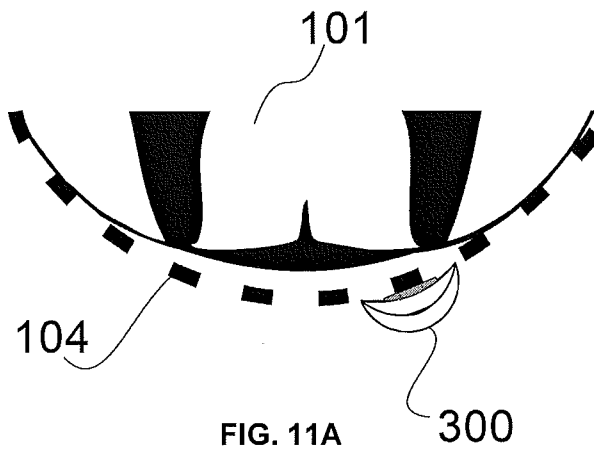


FIG. 10



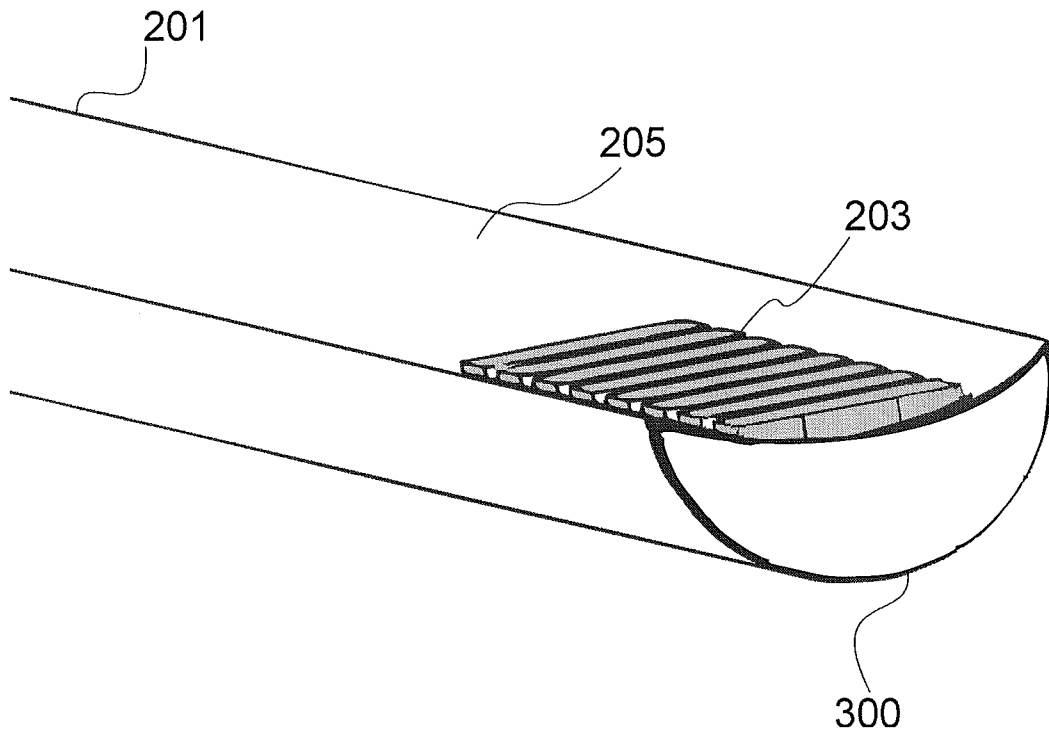


FIG. 12A

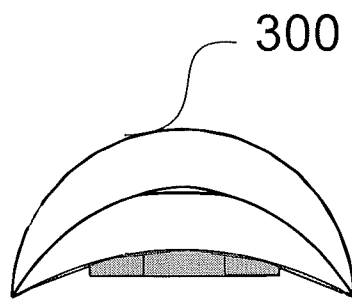


FIG. 12B

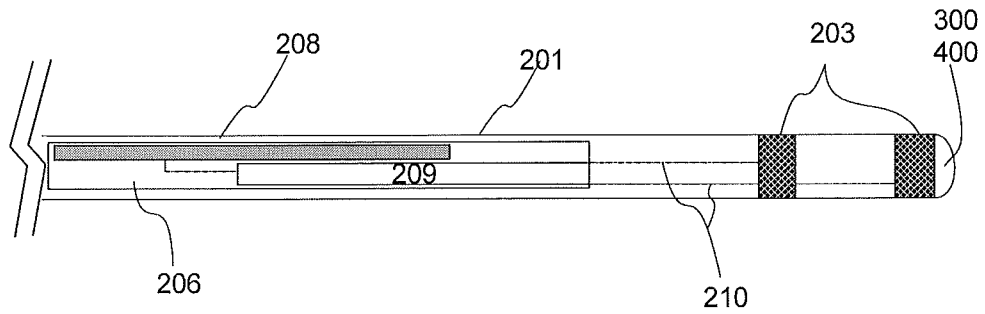


FIG. 13A

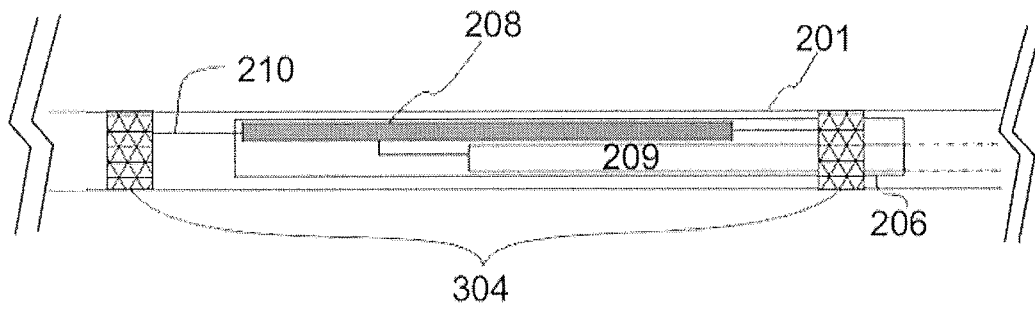


FIG. 13B

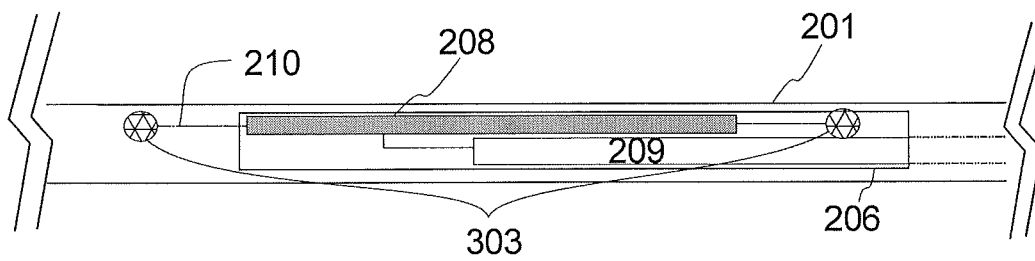


FIG. 13C

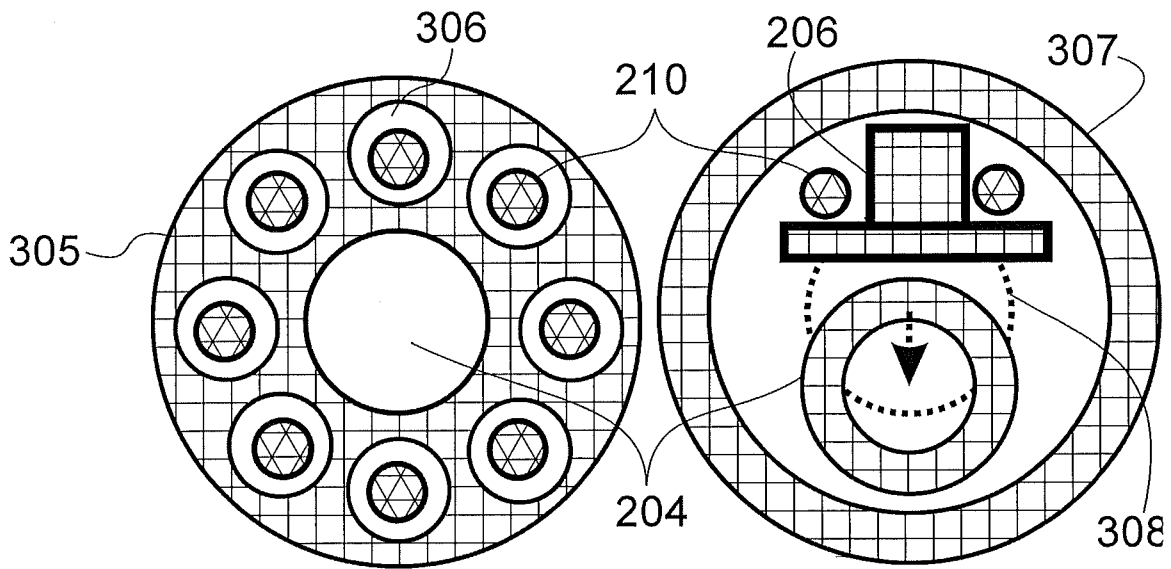


FIG. 14A

FIG. 14B

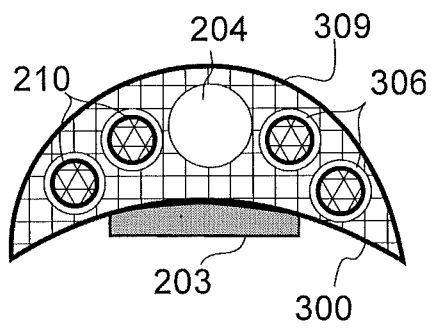


FIG. 14C



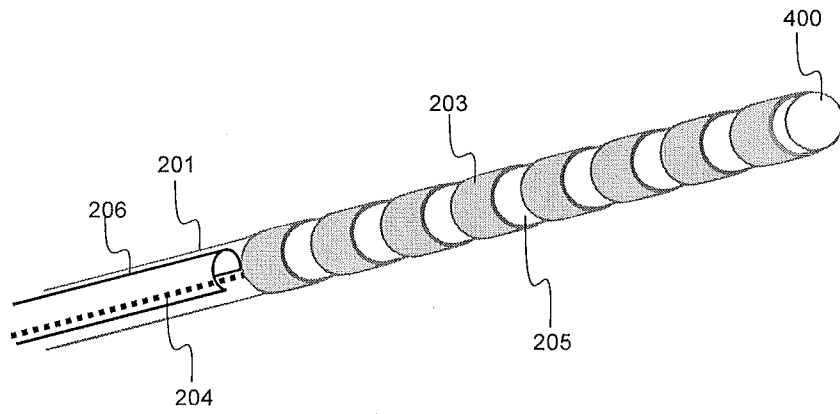


FIG. 15

