



(51) International Patent Classification:

B62D 25/08 (2006.01) **B62D 29/00** (2006.01)

(21) International Application Number:

PCT/EP2017/067436

(22) International Filing Date:

11 July 2017 (11.07.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16181590.7 28 July 2016 (28.07.2016) EP

(71) Applicants: **RENAULT S.A.S.** [FR/FR]; 13-15 Quai Le Gallo, 92100 Boulogne Billancourt (FR). **GEORG FISCHER GMBH & CO KG** [AT/AT]; Essling 41, 8934 Altenmarkt, St. Gallen (AT). **GEORG FISCHER DRUCKGUSS GMBH** [AT/AT]; Wiener Strasse 41-43, 3130 Herzogenburg (AT). **GEORG FISCHER GMBH** [DE/DE]; Schlesinger Strasse 1, 58791 Werdohl (DE). **GEORG FISCHER AUTOMOTIVE (SUZHOU) CO., LTD.** [CN/CN]; No. 117 Changyang Street, Suzhou, 215021 (CN).

(72) Inventors: **DETTLING, Michael**; Malteserring 39, 78056 Villingen-Schwenningen (DE). **PHILIPP, Stephan**; Sagenbuck 11, 78262 Gailingen (DE). **BUCH, Christophe**; Kornblumenweg 11, 78333 Stockach (DE). **GIRAULT, Edouard**; 34 Route de Nonancourt, 27810 Marcilly sur Eure (FR). **CARRIE, Julien**; avenue des Etats-Unis, 78000 Versailles (FR).

(74) Agent: **FENNER, Seraina**; Georg Fischer AG Amstler-Laffon-Strasse 9, 8201 Schaffhausen (CH).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

(54) Title: LOAD-BEARING STRUCTURAL

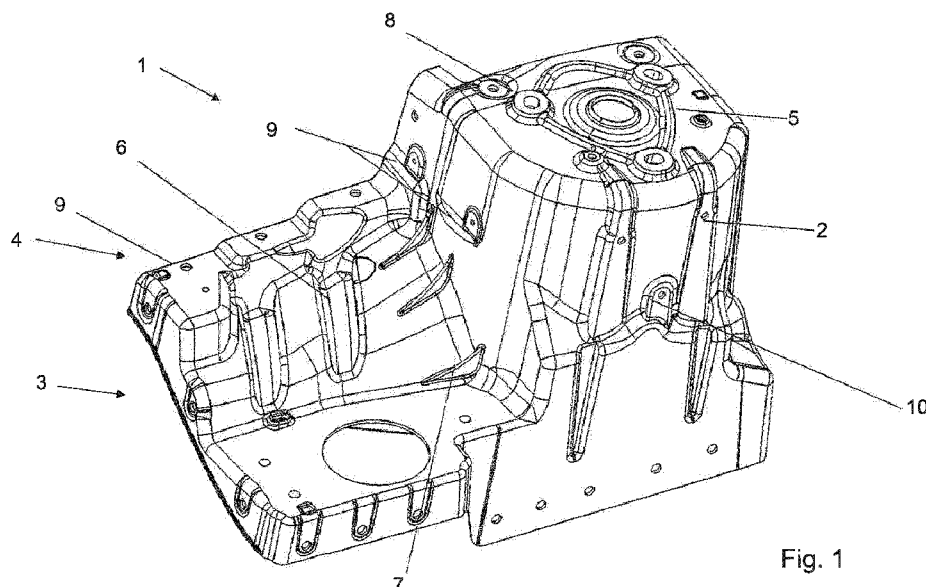


Fig. 1

(57) Abstract: Load-bearing structural component (1) in particular of a motor vehicle including a strut-dome (2) to hold the strut and an engine support (3) to fasten an engine wherein the load-bearing structural component (1) is formed in one-piece as a single part.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

5 Load-bearing structural

The invention relates to a load-bearing structural component in particular of a motor vehicle including a strut-dome to holding of the strut and an engine support to fasten an engine.

10

Load-bearing structural components must have a lowest possible weight nevertheless they should have the required stability and stiffness to be able to provide optimal protection to passengers and pedestrians. A further aspect is to protect the components against premature corrosion and ageing process.

15

WO 2011/104449 A1 discloses a front portion of a vehicle structure including a wheel housing and a suspension support with an improved rigidity wherein the front portion including walls which are welded together.

The disadvantages of this vehicle structure are the high producing time and the high producing cost due to the welding process.

20

It is the object of the invention to propose a device that is inexpensive to manufacture and has a comparatively low weight with an improved stiffness.

25 This object is achieved according to the invention in that the load-bearing structural component is formed as one single part respectively one-piece.

The inventive load-bearing structural component includes a strut-dome to hold the strut. The strut-dome has a suspension bracket on which the strut is fixed. The suspension bracket includes fixing points to assembling of the strut. Due to the thin wall thickness of the strut-dome respectively to the suspension bracket are fixing points cast-on. The fixing points have broader respectively thicker wall thickness than the strut-dome respectively the suspension bracket to increase the strength in the area of the fixing points.

30

35 The inventive load-bearing structural component includes an engine support receptive to fasten an engine. The engine support and the strut-dome are one-piece.

5 Preferably, the load-bearing structural component respectively the engine support includes a water-tank support. That means, the load-bearing structural component includes a strut-dome, with a suspension bracket and an engine support preferably with a water-tank support and is fabricated in a single piece, which reduces the producing time because time-consuming producing steps as welding of separate
10 walls can be avoided.

Preferably, the inventive load-bearing structural component is a cast part, whereby the producing of different parts and the following welding process of them can be avoided. This allows an economical manufacture.

15

Advantageous the load-bearing structural component is made in light metal alloy preferably in aluminum- or magnesium alloy. This brings the advantage of a light part with enough stiffness and strength. Furthermore there is no problem with corrosion at contact surfaces at mounted parts.

20

To increasing the stiffness of the load-bearing structural component are grooves applied on it, preferably in the area of the engine support.

In a preferred embodiment has the load-bearing structural component reinforcing ribs to support the load-bearing structural component in the main load carrying area. The reinforcing ribs are arranged in the transition area between the strut-dome and the engine support in a preferred embodiment.

In a further embodiment are reinforcing ribs on the bottom side of the engine support arranged to increase the stiffness and to improve the load ability. There can be also mounting points which allow mounting motor parts directly on the engine support.

A further advantage of the invented load-bearing structural component are the integrated mounting points which allow assembling further motor components like
35 water-tank directly on the load-bearing structural component without welding of further reinforcement parts or sheets.

- 5 An exemplary embodiment of the invention is described by way of the Figures, the invention not being restricted to only the exemplary embodiment, in which:

Figure 1 shows a three-dimensional view of the invented load-bearing structural component from the upper side and

10

Figure 2 shows a three-dimensional view of the invented load-bearing structural component from the bottom side.

- 15 Figure 1 shows a three-dimensional view of the invented load-bearing structural component (1) from the upper side. The load-bearing structural component (1) includes a strut-dome (2) which holds the strut (not shown) and an engine support (3) to mount an engine on it. The load-bearing structural component (1) is a single part that means the engine support (3) and the strut-dome is one piece.

- 20 The strut-dome (2) has a suspension bracket (5) which has fixing points (8) to assembly the strut. Because of the thin wall thickness of the load-bearing structural component (1) are the fixing points (8) in their cross section thicker to get enough strength.

- The load-bearing structural component (1) is a cast part. Preferably, the load-bearing structural component (1) is made of light metal alloy because of the weight reducing and the avoiding of corrosion; to prefer is aluminum- or also magnesium alloy but others are also possible.

- 25 As shown in figure 1 the load-bearing structural component (1) has reinforcing ribs (7) to support respectively to reinforce the area with the highest load which is given by the geometry of the load-bearing structural component (1). The reinforcing ribs (7) are placed between the strut-dome (2) and the engine support (3) to reinforce the transition area.

- A further possibility to reinforce the load-bearing structural component (1) is the arrangement of grooves (6) in the cast part. These moulded grooves (6) respectively channels generate a kind of ribbing in the load-bearing structural component (1) which increase the stiffness of the part. Preferably are the grooves (6) arranged in the engine support (3).

35

5 The load-bearing structural component (1) has mounting points (9),(10) for the assembly of further motor parts like a water-tank and others on it. The benefit of the mounting points (9) is that they are included in the cast part, preferably to fix the additional motor parts directly on the load-bearing structural component (1) without further required sheets.

10

Figure 2 shows the bottom of the load-bearing structural component (1). The reinforcing ribs (7) support the load behavior of the load-bearing structural component (1) especially at the engine support (3). The load becomes a better distribution on the engine support (3). Furthermore there are also mounting points (7)

15 placed to fix motor parts.

5

Reference numbers

	1	load-bearing structural component
	2	strut-dome
10	3	engine support
	4	water-tank support
	5	suspension bracket
	6	groove
	7	reinforcing ribs
15	8	fixing points
	9	mounting points
	10	mounting points

5

Claims

1. Load-bearing structural component (1) in particular of a motor vehicle
10 including a strut-dome (2) to holding of the strut and an engine support (3) to fasten an engine characterized in that the load-bearing structural component (1) is formed as one single part respectively one-piece.
2. Load-bearing structural component (1) according to Claim 1, characterized to
15 that the load-bearing structural component (1) respectively the engine support (3) including a water-tank support (4).
3. Load-bearing structural component (1) according to either of Claims 1 or 2,
characterized to that the load-bearing structural component (1) is a cast part.
4. Load-bearing structural component (1) according to one of Claims 1 to 3,
20 characterized to that the load-bearing structural component (1) is made of light metal alloy.
5. Load-bearing structural component (1) according to one of Claims 1 to 4,
characterized to that the load-bearing structural component (1) has reinforcing
ribs (7) preferably in the transition area between the strut-dome (2) and the
engine support (3).
- 25 6. Load-bearing structural component (1) according to one of Claims 1 to 5,
characterized to that reinforcing ribs (7) are arranged on the bottom side of the
engine support (3).
7. Load-bearing structural component (1) according to one of Claims 1 to 6,
30 characterized to that the load-bearing structural component (1) has grooves (6)
to increase the stiffness.
8. Load-bearing structural component (1) according to Claim 7, characterized to
that the grooves (6) are arranged on engine support (3).

- 5 9. Load-bearing structural component (1) according to one of Claims 1 to 8, characterized to that the load-bearing structural component (1) has integrated mounting points (8).

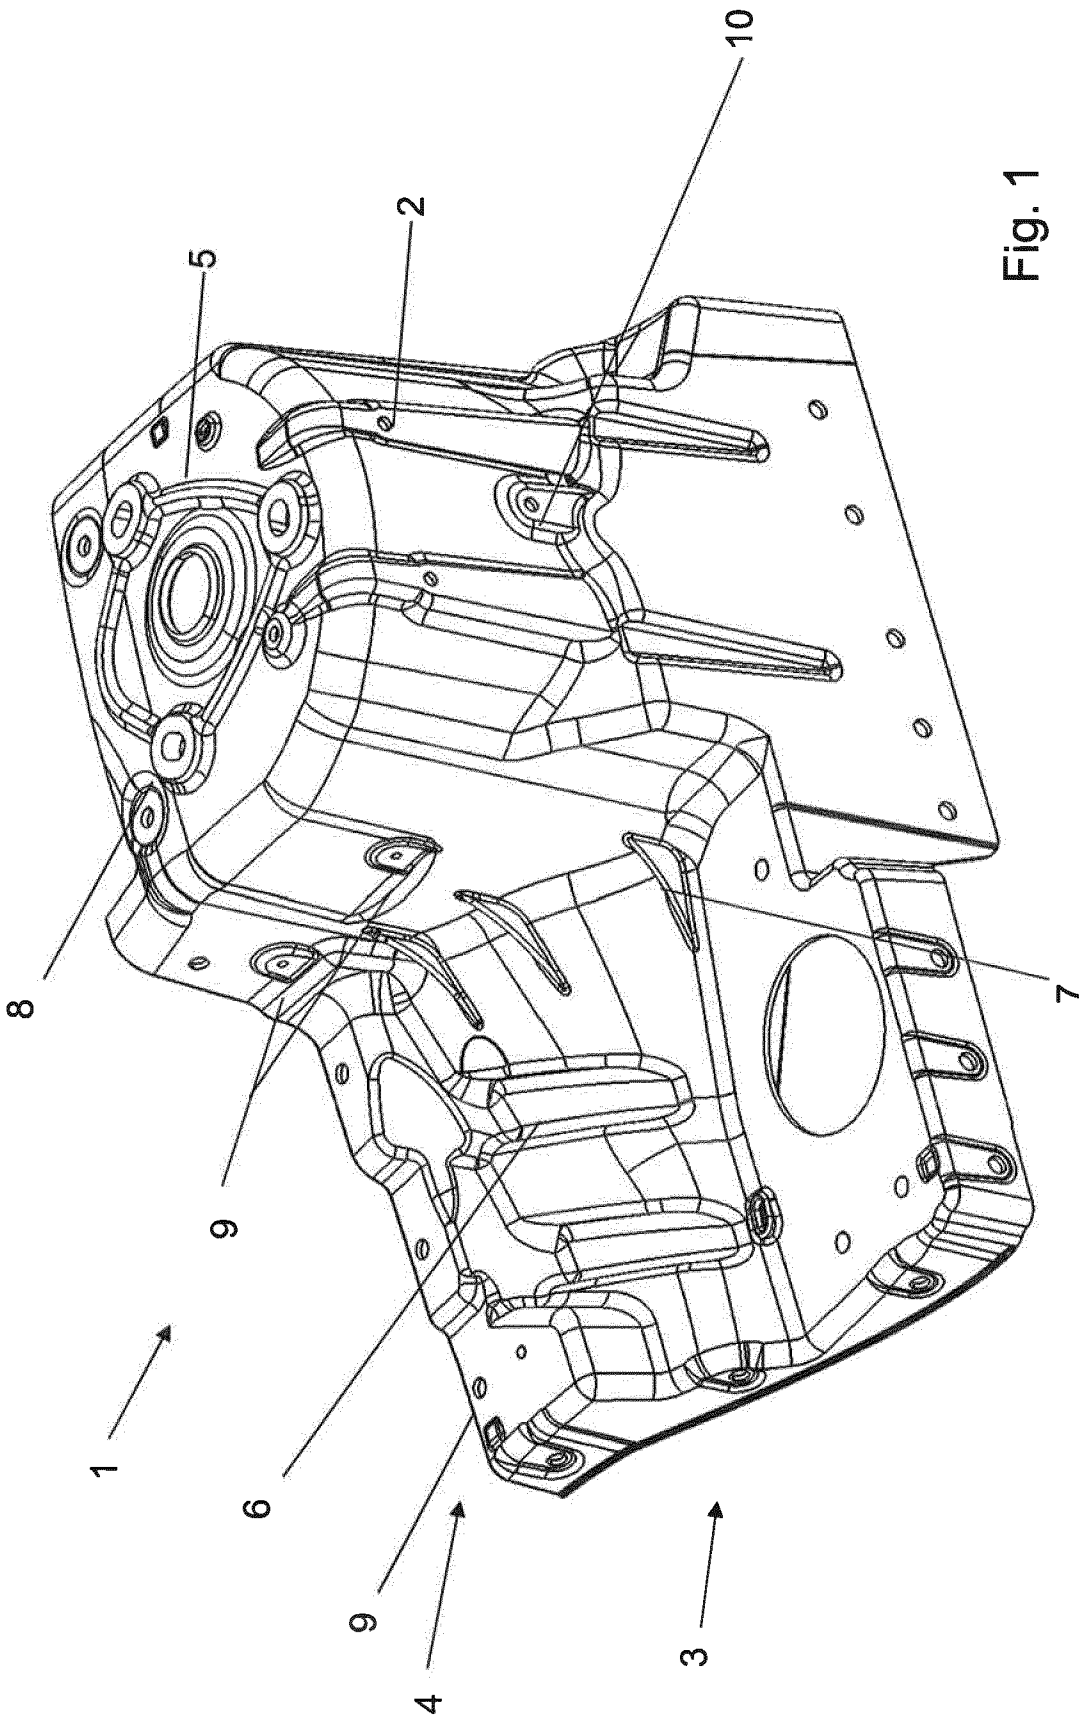


Fig. 1

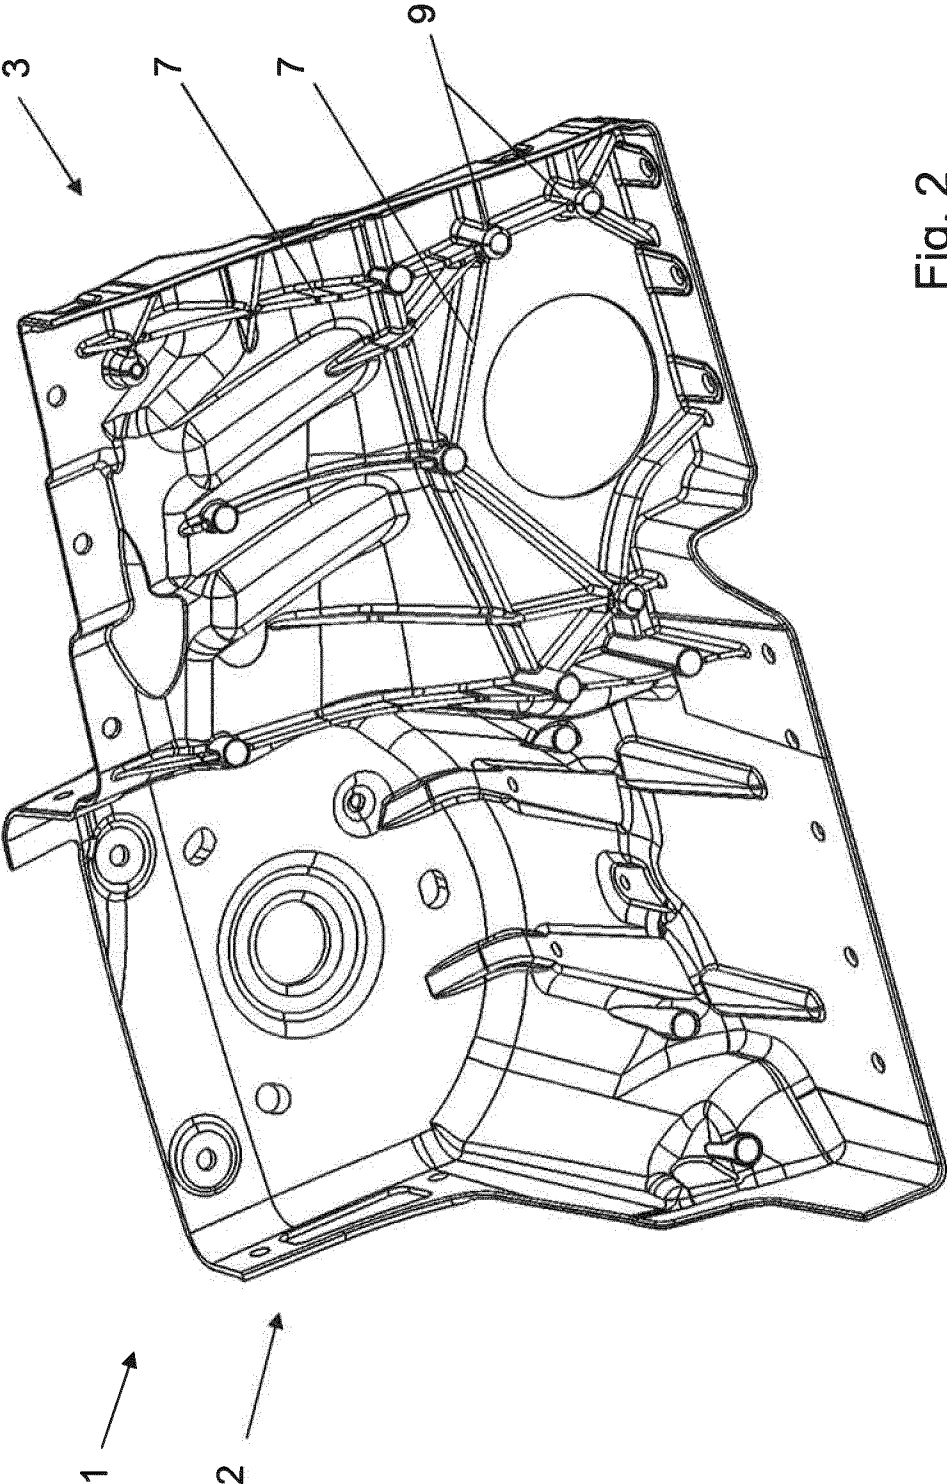


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/067436

A. CLASSIFICATION OF SUBJECT MATTER
INV. B62D25/08 B62D29/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B62D B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 10 2009 015637 A1 (DEUTSCH ZENTR LUFT & RAUMFAHRT [DE]; GRATZ ENGINEERING GMBH [DE]) 7 October 2010 (2010-10-07) paragraph [0108] - paragraph [0111]; figures 3,4,9	1-9
X	----- WO 2015/063569 A1 (TOYOTA MOTOR CO LTD [JP]) 7 May 2015 (2015-05-07) paragraph [0030]; figure 2	1,3-9
A	paragraph [0036] paragraph [0047] - paragraph [0048]; figures 3,4 -----	2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 September 2017

Date of mailing of the international search report

28/09/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Burley, James

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/067436

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 102009015637 A1	07-10-2010	NONE	

WO 2015063569 A1	07-05-2015	EP 3063052 A1	07-09-2016
		JP 5915622 B2	11-05-2016
		JP 2015085801 A	07-05-2015
		US 2016244103 A1	25-08-2016
		WO 2015063569 A1	07-05-2015
