



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
19.04.2006 Bulletin 2006/16

(51) Int Cl.:
H04L 27/26 (2006.01) H04L 1/00 (2006.01)

(21) Application number: **00917854.2**

(86) International application number:
PCT/US2000/006392

(22) Date of filing: **10.03.2000**

(87) International publication number:
WO 2000/054473 (14.09.2000 Gazette 2000/37)

(54) **SEAMLESS RATE ADAPTIVE MULTICARRIER MODULATION SYSTEM AND PROTOCOLS**

STUFENLOSES RATENADAPTIVES MEHRTRÄGER-MODULATIONSSYSTEM UND
PROTOKOLLE

SYSTEME ET PROTOCOLES DE MODULATION A PORTEUSES MULTIPLES A DEBIT ADAPTATIF
SANS COUPURE

(84) Designated Contracting States:
DE FR GB

(30) Priority: **12.03.1999 US 124222 P**
22.10.1999 US 161115 P
19.01.2000 US 177081 P

(43) Date of publication of application:
12.12.2001 Bulletin 2001/50

(73) Proprietor: **AWARE, INC.**
Bedford, MA 01730 (US)

(72) Inventor: **TZANNES, Marcos, C.**
Orinda, CA 94563 (US)

(74) Representative: **Gesthuysen, von Rohr & Eggert**
Patentanwälte
Postfach 10 13 54
45013 Essen (DE)

(56) References cited:
WO-A-98/57472 WO-A-98/59476
US-A- 5 644 573

- **ATUNGSIRI S A ET AL: "MULTIRATE CODING
FOR MOBILE COMMUNICATIONS LINK
ADAPTION" IEE PROCEEDINGS:
COMMUNICATIONS, vol. 144, no. 3, 1 June 1997
(1997-06-01), pages 211-216, XP000659758 UK
ISSN: 1350-2425**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates generally to communication systems and methods using multicarrier modulation- More particularly, the invention relates to communication multicarrier systems and methods using rate adaptive multicarrier modulation. In particular, the present invention relates to a method using multicarrier modulation in a multicarrier transmission system according to the preamble of claim 1 or 7 to a multicarrier transmission system according to the preamble of claim 27 and to a receiver according to the preamble of claim 30.

[0002] Multicarrier modulation (or Discrete Multitone Modulation (DMT)) is a transmission method that is being widely used for communication over difficult media. Multicarrier modulation divides the transmission frequency band into multiple subchannels (carriers), with each carrier individually modulating a bit or a collection of bits. A transmitter modulates an input data stream containing information bits with one or more carriers and transmits the modulated information. A receiver demodulates all the carriers in order to recover the transmitted information bits as an output data stream.

[0003] Multicarrier modulation has many advantages over single carrier modulation. These advantages include, for example, a higher immunity to impulse noise, a lower complexity equalization requirement in the presence of multipath, a higher immunity to narrow band interference, a higher data rate and bandwidth flexibility Multicarrier modulation is being used in many applications to obtain these advantages, as well as for other reason. Applications include Asymmetric Digital Subscriber Line (ADSL) systems, Wireless LAN systems, Power Line communications systems; and other applications. ITU standards G.992.1 and G.992.2 and the ANSI T1.413 standard specify standard implementations for ADSL transceivers that use multicarrier modulation.

[0004] The block diagram 100 for a standard compliant ADSL DMT transmitter known in the art is shown in Figure 1. Figure 1 shows three layers: the Modulation layer 110, the Framing/FEC layer 120, and the ATM TC layer 140, which are described below.

[0005] The Modulation layer 110 provides functionality associated with DMT modulation. DMT modulation is implemented using an Inverse Discrete Fourier Transform (IDFT) 112. The IDFT 112 modulates bits from the Quadrature Amplitude Modulation (QAM) 114 encoder into the multicarrier subchannels. ADSL multicarrier transceivers modulate a number of bits on each subchannel, the number of bits depending on the Signal to Noise Ratio (SNR) of that subchannel and the Bit Error Rate (BER) requirement of the link. For example, if the required BER is 1×10^{-7} (i.e., one bit in ten million is received in error on average) and the SNR of a particular subchannel is 21.5 dB, then that subchannel can modulate 4 bits, since 21.5 dB is the required SNR to transmit 4 QAM bits with a 1×10^{-7} BER. Other subchannels can have a different SNR and therefore may have a different number of bits allocated to them at the same BER. The ITU and ANSI ADSL standards allow up to 15 bits to be modulated on one carrier.

[0006] A table that specifies how many bits are allocated to each subchannel for modulation in one DMT symbol is called a Bit Allocation Table (BAT). A DMT symbol is the collection of analog samples generated at the output of the IDFT by modulating the carriers with bits according to the BAT. The BAT is the main parameter used in the Modulation layer 110 of Figure 1. The BAT is used by the QAM 114 and IDFT 112 blocks for encoding and modulation. Table 1 shows an example of a BAT for a DMT system with 16 subchannels.

Table 1: Example of BAT for multicarrier system with 16 subchannels

Subchannel Number	Bits per Subchannel
1	5
2	9
3	3
4	2
5	4
6	0
7	5
8	7
9	8
10	3
11	0
12	5

Table continued

Subchannel Number	Bits per Subchannel
13	6
14	8
15	4
16	3
Total bits Per DMT symbol	80

[0007] In ADSL systems the DMT symbol rate is approximately 4 kHz. This means that a new DMT symbol modulating a new set of bits, using the modulation BAT, is transmitted every 250 microseconds. If the BAT in table 1, which specifies 80 bits modulated in one DMT symbol, were used at a 4 kHz DMT symbol rate the bit rate of the system would be 4000*80=320 kilobits per second (kbps). The BAT determines the data rate of the system and is dependent on the transmission channel characteristics, i.e. the SNR of each subchannel in the multicarrier system. A channel with low noise (high SNR on each subchannel) will have many bits modulated on each DMT carrier and will thus have a high bit rate. If the channel conditions are poor, the SNR will be low and the bits modulated on each carrier will be few, resulting in a low system bit rate. As can be seen in Table 1, some subchannels may actually modulate zero bits. An example is the case when a narrow band interferer (such as AM broadcast radio) is present at a subchannel's frequency and causes the SNR in that subchannel to be too low to carry any information bits.

[0008] The ATM TC layer 140 includes an Asynchronous Transfer Mode Transmission Convergence (ATM TC) block 142 that transforms bits and bytes in cells into frames.

[0009] The next layer in an ADSL system is the Frame/FEC layer 120, which provides functionality associated with preparing a stream of bits for modulation, as shown in Figure 1. This layer contains the Interleaving (INT) block 122, the Forward Error Correction (FEC) block 124, the scrambler (SCR) block 126, the Cyclic Redundancy Check (CRC) block 128 and the ADSL Framer block 130. Interleaving and FEC coding provide impulse noise immunity and a coding gain. The FEC 124 in the standard ADSL system is a Reed-Solomon (R-S) code. The scrambler 126 is used to randomize the data bits. The CRC 128 is used to provide error detection at the receiver. The ADSL Framer 130 frames the received bits from the ATM framer 142. The ADSL framer 130 also inserts and extracts overhead bits from module 132 for modem to modem overhead communication channels (known as EOC and AOC channels in the ADSL standards).

[0010] The key parameters in the Framer/FEC layer 120 are the size of the R-S codeword, the size (depth) of the interleaver (measured in number of R-S codewords) and the size of the ADSL frame. As examples, a typical size for an R-S codeword may be 216 bytes, a typical size for interleaver depth may be 64 codewords, and the typical size of the ADSL frame may be 200 bytes. It is also possible to have an interleaving depth equal to one, which is equivalent to no interleaving. In order to recover the digital signal that was originally prepared for transmission using a transmitter as discussed above, it is necessary to deinterleave the codewords by using a deinterleaver that performs the inverse process to that of the interleaver, with the same depth parameter. In the current ADSL standards there is a specific relationship between all of these parameters in a DMT system. Specifically, the BAT size, N_{BAT} (total number of bits in a DMT symbol) is fixed to be an integer divisor of the R-S codeword size, N_{FEC} , as expressed in equation (1):

$$N_{FEC} = S \times N_{BAT}, \text{ where } S \text{ is a positive integer greater than } 0. \quad (1)$$

[0011] This constraint can also be expressed as: One R-S codeword contains an integer number of DMT symbols. The R-S codeword contains data bytes and parity (checkbytes). The checkbytes are overhead bytes that are added by the R-S encoder and are used by the R-S decoder to detect and correct bit errors. There are R checkbytes in a R-S codeword. Typically, the number of checkbytes is a small percentage of the overall codeword size, e.g., 8%. Most channel coding methods are characterized by their coding gain, which is defined as the system performance improvement (in dB) provided by the code when compared to an uncoded system. The coding gain, of the R-S codeword depends on the number of checkbytes and the R-S codeword size. A large R-S codeword (greater than 200 bytes in a DMT ADSL system) along with a 16 checkbytes (8% of 200 bytes) will provide close to the maximum coding gain of 4 dB. If the codeword size is smaller and/or the percentage of checkbyte overhead is high (e.g. >30%) the coding gain may be very small or even negative. In general, it is best to have the ADSL system operating with the largest possible R-S codeword (the maximum possible is 255 bytes) and approximately 8% redundancy.

[0012] There is also a specific relationship between the number of bytes in an ADSL frame, N_{FRAME} , and the R-S

codeword size, N_{FEC} that is expressed in equation (2):

$$N_{FEC} = S \times N_{FRAME} + R; \quad \text{where } R \text{ is the number of R-S checkbytes in a codeword and} \quad (2)$$

S is the same positive integer in Equation (1).

It is apparent from equating the right-hand sides of equations (1) and (2) that the relationship expressed in equation (3) results :

$$N_{BAT} = N_{FRAME} + R / S. \quad (3)$$

The ADSL standard requires that the ratio (R / S) is an integer, i.e. there is an integer number of R-S checkbytes in every DMT-symbol (N_{BAT}). As described above, ADSL frames contain overhead bytes (not part of the payload) that are used for modem to modem communications. A byte in an ADSL frame that is used for the overhead channel cannot be used for the actual user data communication, and therefore the user data rate decreases accordingly. The information content and format of these channels is described in the ITU and ANSI standards. There are several framing modes defined in ADSL standards. Depending on the framing mode, there are more or fewer overhead bytes in one ADSL frame. For example, standard Framing Mode 3 has 1 overhead byte per ADSL frame.

[0013] Equations (1), (2) and (3) demonstrate that the parameter restrictions imposed by the standards result in the following conditions:

1. All DMT symbols have a fixed number of overhead framing bytes that are added at the ADSL framer. For example, in framing mode #3 there is 1 overhead framing byte per DMT symbol.
2. There is a minimum of 1 R-S checkbyte per DMT symbol.
3. The maximum number of checkbytes according to ITU Standard G.992.2 (8) and ITU Standards G.992.2 and T1.413 (16) limits the maximum codeword size to $8 \times N_{BAT}$ for G.992.2, and to $16 \times N_{BAT}$ for G.992.1 and T1.413.
4. An ADSL modem cannot change the number of bits in a DMT symbol (N_{BAT}) without making the appropriate changes to the number of bytes in a R-S codeword (N_{FEC}) and an ADSL frame (N_{FRAME}).

The above four restrictions cause performance limitations in current ADSL systems.

[0014] In particular, because of condition # 1 every DMT symbol has a fixed number of overhead framing bytes. This is a problem when the data rate is low and the overhead framing bytes consume a large percentage of the possible throughput resulting in a lower payload. For example, if the data rate supported by the line is 6.144 Mbps, this will result in a DMT symbol with about 192 bytes per symbol ($192 \times 8 \times 4000 = 6144000$ bps). In this case, one overhead framing byte would consume 1/192 or about 0.5% of the available throughput. But if the data rate is 128 kbps or 4 bytes per symbol the overhead framing byte will consume 1/4 or 25% of the available throughput. Clearly this is undesirable.

[0015] Condition #2 will cause the same problems as condition # 1. In this case, the overhead framing byte is replaced by the R-S checkbyte.

[0016] Condition #3 will not allow the construction of large codewords when the data rate is low. R-S codewords in ADSL can have a maximum of 255 bytes. The maximum coding gain is achieved when the codeword size is near the maximum 255 bytes. When the data rate is low, e.g. 128 kbps or 4 bytes per symbol, the maximum codeword size will be $8 \times 4 = 32$ bytes for G.992.2 systems and $16 \times 4 = 64$ bytes for G.992.1 and T1.413 systems. In this case the coding gain will be substantially lower than for large codewords approaching 255 bytes.

[0017] In general, if the data rate is low, e.g. 128 kbps or 4 bytes per symbol, the above conditions will result in 1 byte being used for overhead framing, and 1 byte being consumed by a R-S checkbyte. Therefore 50% of the available throughput will not be used for payload and the R-S codeword size will be at most 64 bytes, resulting in negligible coding gain.

[0018] Condition #4 effects the ability of the modem to adapt its transmission parameters on-line in a dynamic manner.

[0019] G.992.1 and T1.413 specify a mechanism to do on-line rate adaptation, called Dynamic Rate Adaptation (DRA), but it is clearly stated in these standards that the change in data rate will not be seamless. In general current ADSL DMT modems use Bit Swapping and dynamic rate adaptation (DRA) as methods for on-line adaptation to channel changes. Bit Swapping is specified in the ITU and ANSI standards as method for modifying the number of bits allocated to a particular. Bit Swapping is seamless, i.e., it does not result in an interruption in data transmission and reception. But,

Bit Swapping does not allow the changing of data rates. Bit Swapping only allows the changing the number of bits allocated to carriers while maintaining the same data rate. This is equivalent to changing the entries in the BAT table without allowing the total number of bits (N_{BAT}) in the BAT to increase or decrease.

[0020] WO 98/57472 A1, which forms the starting point of the present invention, discloses an adaptive algorithm for bit swapping to update bit allocation tables in a multicarrier modulation system. The margins for the subchannels are varied until the total number of the respective bit allocation table corresponds to the bit number related to the respective bit transmission rate.

[0021] DRA enables a change in data rate, but is not seamless. DRA is also very slow because it requires the modem located in the Central Office (CO) to make the final decision on the data rate configuration. This model, with (the CO being the master), is common among ADSL modems that are designed to provide a service offered by the telephone company, and controlled by the telephone company.

[0022] Both Bit Swapping and DRA use a specific protocol that is specified in ANSI T1.413, G.992.1 and G.992.2. for negotiating the change. This protocol negotiates the parameters using messages that are sent via an AOC channel, which is an embedded channel. This protocol is sensitive to impulse noise and high noise levels. If the messages are corrupted the transmitter and receiver can enter a state where they are using different transmission parameters (e.g., BAT, data rate, R-S codeword length, interleaver depth, etc). When two communication modems enter a state of mismatched transmission parameters, data will be received in error and the modems will eventually be required to take drastic measures (such as full reinitialization) in order to restore error free transmission. Drastic measures such as full reinitialization will result in the service being dropped for approximately 10 seconds, which is the time required for a standards compliant ADSL modem to complete a full initialization.

[0023] A transceiver has both a transmitter and a receiver. The receiver includes the receiver equivalent blocks of the transmitter shown in figure 1. The receiver has modules that include a decoder a deinterleaver and a demodulator. In operation, the receiver accepts a signal in analog form that was transmitted by a transmitter, optionally amplifies the signal in an amplifier, filters the signal to remove noise components and to separate the signal from other frequencies, converts the analog signal to a digital signal through the use of an analog to digital converter, demodulates the signal to generate the received bits stream from the carrier subchannels by the use of a demodulator, deinterleaves the bits stream by the use of a deinterleaver, performs the FEC decoding to correct errors in the bit stream by use of an FEC decoder, descrambles the bit stream by use of a descrambler, and detects bit errors in the bit stream by use of a CRC. Various semiconductor chip manufacturers supply hardware and software that can perform the functions of a transmitter or a receiver, or both.

[0024] The article "Multirate coding for mobile communications link adaptation" of S.A. Atungisiri et al., published in IEE Proc.-Commun. Vol. 144, No. 3, June 1997, pages 211 to 216, discloses a mobile communication system and method, wherein speech data are transmitted via a channel with a constant transmission rate of 13 kbit/s. Depending on the channel conditions, the rate of the speech data is varied between 4,8, 6,8, 8,0 and 9,6 kbit/s and the error correction data are respectively varied in order to obtain a constant transmission bit rate.

[0025] It is an object of the present invention to provide an improved method using multicarrier modulation in a multicarrier transmission system, an improved multicarrier transmission system and an improved receiver in a multicarrier transmission system which overcome the problems discussed above.

[0026] The above object is achieved by a method according to claim 1 or 7 a multicarrier transmission system according to claim 27 or a receiver according to claim 30. Preferred embodiments or subject of the subclaims.

[0027] According to the principles of the invention ADSL DMT systems and methods are provided that change transmission bit rates in a seamless manner during operation. The ADSL DMT systems and methods operate according to protocols that allow the seamless change of transmission bit rates during operation to be initiated by either the transmitter or the receiver. The ADSL DMT systems and methods provide for seamless changes of transmission bit rates during operation that change transmission bit rates between power levels that range from full power to low power.

[0028] In one aspect the invention relates to a method, for seamlessly changing a transmission bit rate in a multicarrier transmission system. The method involves providing a plurality of codewords that have a specified codeword size, and that include a specified number of parity bits for forward error correction. The method also involves providing a specified interleaving parameter for interleaving the plurality of codewords. The method also comprises transmitting a first plurality of codewords at a first transmission bit rate, changing the first transmission bit rate to a second transmission bit rate, and transmitting a second plurality of codewords at the second transmission bit rate, wherein the specified interleaving parameter, the specified codeword size, and the specified number of parity bits for forward error correction used for the first plurality of codewords are used for the second plurality of codewords to achieve a seamless change in transmission bit rate.

[0029] In one embodiment, transmitting at the first transmission bit rate involves allocating a first number of bits to a first DMT symbol as determined by a first bit allocation table. Transmitting at the second transmission bit rate involves allocating a second number of bits to a second DMT symbol as determined by a second bit allocation table. In a further embodiment, an average parity bit ratio for DMT symbols transmitted at the first and the second transmission rates is

substantially constant. A parity bit ratio is the number of parity bits in a DMT symbol divided by the total number of bits in the bit allocation table used for that DMT symbol.

[0030] In another aspect the invention relates to another method for seamlessly changing a transmission bit rate in a multicarrier transmission system. The method includes providing a plurality of codewords that have a specified codeword size, with a specified number of parity bits for forward error correction included in each codeword. The method involves allocating the bits of a first plurality of codewords to carrier subchannels using a first allocation table for transmitting such codewords at a first transmission bit rate, and transmitting the first plurality of codewords at the first transmission bit rate. The method includes allocating the bits of a second plurality of codewords to carrier subchannels using a second allocation table for transmitting such codewords at a second transmission bit rate, and changing transmission from the first transmission bit rate to the second transmission bit rate by transmitting the second plurality of codewords. The specified codeword size and the specified number of parity bits for forward error correction used when transmitting each of the first plurality of codewords are used when transmitting each of the second plurality of codewords to achieve a seamless change in transmission bit rate.

[0031] In one embodiment, the method further involves interleaving the first plurality and the second plurality of codewords according to a specified interleaving parameter. The specified interleaving parameter used to interleave the first plurality of codewords is the same specified interleaving parameter used to interleave the second plurality of codewords. In another embodiment, transmitting at the first transmission bit rate includes allocating a first number of bits to a first DMT symbol as determined by the first bit allocation table. Transmitting at the second transmission bit rate includes allocating a second number of bits to a second DMT symbol as determined by the second bit allocation table. In still another embodiment, an average parity bit ratio for DMT symbols transmitted at the first and the second transmission rates is substantially constant.

[0032] In a further aspect the invention relates to another method for seamlessly changing a reception bit rate in a multicarrier transmission system. The method involves providing a plurality of codewords having a specified codeword size, each codeword including a specified number of parity bits for forward error correction. The method includes receiving a first plurality of codewords from carrier subchannels at a first reception bit rate, and demodulating the bits of the first plurality of codewords using a first allocation table. The method includes changing reception from the first reception bit rate to the second reception bit rate, receiving a second plurality of codewords from carrier subchannels at the second reception bit rate, and demodulating the bits of the second plurality of codewords using a second allocation table. The specified interleaving parameter, the specified codeword size, and the specified number of parity bits for forward error correction used when demodulating each of the first plurality of codewords is used when demodulating each of the second plurality of codewords to achieve a seamless change in reception rate. In one embodiment, an average parity bit ratio for DMT symbols received at the first and the second reception rates is substantially constant.

[0033] In yet another aspect, the invention relates to a further method for seamlessly changing a transmission bit rate in a multicarrier transmission system. The method involves providing a plurality of codewords that have a specified codeword size, and that include a specified number of parity bits for forward error correction. The method includes providing a specified deinterleaving parameter. The method involves receiving a first plurality of codewords at a first reception bit rate, changing the first reception bit rate to a second reception bit rate, and receiving a second plurality of codewords at the second reception bit rate. The specified deinterleaving parameter, the specified codeword size, and the specified number of parity bits for forward error correction used for the first plurality of codewords are used for the second plurality of codewords to achieve a seamless change in reception bit rate.

[0034] In one embodiment, receiving at the first reception bit rate includes demodulating a first number of bits of a first DMT symbol as determined by a first bit allocation table. Receiving at the second reception bit rate includes demodulating a second number of bits of a second DMT symbol as determined by a second bit allocation table. In another embodiment, an average parity bit ratio for DMT symbols received at the first and the second reception rates is substantially constant.

[0035] In yet another aspect, the invention relates to a multicarrier transmission system for seamlessly changing a transmission bit rate. The multicarrier transmission system includes an encoder producing a plurality of codewords that have a specified codeword size and that include a specified number of parity bits for forward error correction. The multicarrier transmission system includes, in communication with the encoder, an interleaver that interleaves the plurality of codewords according to a specified interleaving parameter. The multicarrier transmission system includes a modulator in communication with the interleaver. The modulator allocates the bits of each interleaved codeword to carrier subchannels to achieve transmission at a first transmission bit rate and changes the bit allocation to achieve transmission at a second transmission bit rate. The specified interleaving parameter, specified codeword size, and the specified number of parity bits for forward error correction remain unchanged after the modulator changes the allocation of bits to achieve transmission at the second transmission bit rate, thereby achieving a seamless change in transmission bit rate.

[0036] In one embodiment, the modulator transmits a first DMT symbol having a first number of bits, determined by a first bit allocation table, at the first transmission bit rate, and transmits a second DMT symbol having a second number of bits, determined by a second bit allocation table, at the second transmission rate. In another embodiment, the modulator transmits a first DMT symbol at the first transmission bit rate and a second DMT symbol at the second transmission

rate. In this embodiment, an average parity bit ratio for DMT symbols transmitted at the first and the second transmission rates is substantially constant.

[0037] In a still further aspect, the invention relates to a receiver in a multicarrier transmission system for seamlessly changing reception bit rate. The receiver includes a demodulator operating at a first reception bit rate to produce a first plurality of interleaved codewords and changing operation to a second reception bit rate to produce a second plurality of interleaved codewords. Each codeword has a specified codeword size and includes a specified number of parity bits for error correction. The receiver includes, in communication with the demodulator, a deinterleaver that deinterleaves the first and the second plurality of interleaved codewords according to a specified interleaving parameter. The receiver also includes a decoder in communication with the demodulator to receive and decode the first and the second plurality of deinterleaved codewords. In order to achieve a seamless change in reception bit rate, the specified interleaving parameter used to deinterleave the first plurality of interleaved codewords is the same specified interleaving parameter used to deinterleave the second plurality of interleaved codewords, and the specified codeword size and the specified number of parity bits for error correction used to decode the first plurality of deinterleaved codewords are the same specified codeword size and specified number of parity bits for error correction used to decode the second plurality of deinterleaved codewords.

[0038] In one embodiment, the demodulator receives a first DMT symbol at the first reception bit rate and a second DMT symbol at the second reception bit rate. The first DMT symbol has a first number of bits determined by a first bit allocation table and the second DMT symbol has a second number of bits determined by a second bit allocation table. In another embodiment, an average parity bit ratio for DMT symbols received at the first and the second reception rates is substantially constant.

[0039] In another aspect, the invention relates to a method for modulating data in a multicarrier transmission system. The method involves providing a stream of digital subscriber line (DSL) codewords for transmission to a receiver, each DSL codeword having a specified number of bits. The method also involves modulating the stream of codewords to form discrete multitone (DMT) symbols having a number of bits determined by a transmission rate capability of the multicarrier transmission system. According to the method, the number of bits in the DSL codewords is a non-integer multiple of the number of bits in the DMT symbols.

[0040] In yet another aspect, the invention relates to a method for seamlessly changing a transmission bit rate in a multicarrier transmission system. The method involves providing a plurality of codewords that have a specified codeword size, and that include a specified number of parity bits for forward error correction. The method includes transmitting a first plurality of codewords at a first transmission bit rate, changing the first transmission bit rate to a second transmission bit rate, and transmitting a second plurality of codewords at the second transmission bit rate. In order to achieve a seamless change in transmission bit rate, the specified codeword size and the specified number of parity bits for forward error correction used for the first plurality of codewords are used for the second plurality of codewords.

[0041] In a still further aspect, the invention relates to another method for seamlessly changing a reception bit rate in a multicarrier transmission system. The method involves providing a plurality of codewords that have a specified codeword size, and that include a specified number of parity bits for forward error correction. The method includes receiving a first plurality of codewords at a first reception bit rate using a first bit allocation table, changing the first reception bit rate to a second reception bit rate using a second bit allocation table, and receiving a second plurality of codewords at the second reception bit rate. In order to achieve a seamless change in reception bit rate, the specified codeword size and the specified number of parity bits for forward error correction used for the first plurality of codewords are used for the second plurality of codewords and the number of bits in the first bit allocation table is different than the number of bits in the second bit allocation table.

[0042] In one aspect, the invention relates to a method for seamlessly changing a transmission bit rate. The method employs a multicarrier transmission system that includes a transmitter and a receiver. The transmitter and receiver use a first bit allocation table to transmit a plurality of codewords at a first transmission bit rate, the plurality of codewords having a specified codeword size and including a specified number of parity bits for forward error correction, and a specified interleaving parameter for interleaving the plurality of codewords. The method involves transmitting a message to change the transmission bit rate from the first transmission bit rate to a second transmission bit rate. The method involves using a second bit allocation table at the receiver and at the transmitter for transmitting at the second transmission bit rate. The method includes synchronizing use of the second bit allocation table between the transmitter and receiver, and transmitting codewords at the second transmission bit rate using the same specified interleaving parameter, specified codeword size, and specified number of parity bits for forward error correction that are used to transmit codewords at the first transmission bit rate to achieve a seamless change in transmission bit rate.

[0043] In one embodiment, the message contains the second bit allocation table. In another embodiment, the receiver transmits the message to the transmitter. In still another embodiment, the method includes storing a plurality of bit allocation tables at the transmitter and at the receiver. In this embodiment, the message specifies which one of the stored bit allocation tables is to be used as the second bit allocation table. In a further embodiment, the transmitter transmits the message to the receiver. In another embodiment, the synchronizing includes sending a flag signal. In a

further embodiment the flag signal is a predefined signal. In a still further embodiment, the predefined signal is a sync symbol with a predefined phase shift. In a different embodiment, the predefined signal is an inverted sync symbol.

[0044] In another embodiment, the method further involves using the first bit allocation table for transmitting a plurality of DMT symbols at the first transmission bit rate and switching to the second bit allocation table for transmitting the plurality of the DMT symbols at the second transmission bit rate. In this embodiment, the second bit allocation table is used for transmission starting with a predetermined one of the DMT symbols that follows the transmission of the flag signal. In another embodiment, the predetermined DMT symbol is the first DMT symbol that follows the transmission of the flag signal. In a further embodiment, the transmitter transmits the flag signal to the receiver. In a still further embodiment, the receiver transmits the flag signal to the transmitter. In yet a further embodiment, each bit allocation table specifies a transmission power level for each carrier subchannel. In another embodiment, each bit allocation table specifies an allocation of bits to carrier subchannels for each latency path in a multiple latency path multicarrier system.

[0045] In one aspect, the invention relates to a method for seamlessly entering a second power mode from a first power mode. The method uses a multicarrier transmission system that includes a transmitter and a receiver. The transmitter and receiver use a first bit allocation table to transmit a plurality of codewords at a first transmission bit rate in a first power mode. The plurality of codewords have a specified codeword size and include a specified number of parity bits for forward error correction, and a specified interleaving parameter for interleaving the plurality of codewords. The method involves storing a second bit allocation table at the receiver and at the transmitter for transmitting codewords at a second transmission in the second power mode. The method includes synchronizing use of the second bit allocation table between the transmitter and receiver, and entering the second power mode by using the second bit allocation table to transmit codewords. In order to achieve a seamless change in power mode, the specified interleaving parameter, the specified codeword size, and the specified number of parity bits for forward error correction used to transmit codewords in the first power mode are also used to transmit codewords in the second power mode.

[0046] In one embodiment, the synchronizing includes sending a flag signal. In another embodiment, the flag signal is a predefined signal. In a further embodiment, the predefined signal is a sync symbol with a predefined phase shift. In a still further embodiment, the predefined signal is an inverted sync symbol. In another embodiment, the transmitter transmits the flag signal to the receiver. In a different embodiment, the receiver transmits the flag signal to the transmitter. In another embodiment, the second power mode is a low power mode.

[0047] In another embodiment, the method further involves allocating zero bits to carrier signals to achieve a transmission bit rate of approximately zero kilobits per second in the low power mode. In another embodiment, the method further includes transmitting a pilot tone for timing recovery when operating in the low power mode. In still another embodiment, the method further comprises periodically transmitting a sync symbol when operating in the low power mode.

[0048] In still another embodiment, the method further includes using the first bit allocation table for transmitting a plurality of DMT symbols in the first power mode and switching to the second bit allocation table for transmitting the plurality of the DMT symbols in the second power mode. The second bit allocation table is used for transmission starting with a predetermined one of the DMT symbols that follows the transmission of the flag signal. In another embodiment, the predetermined DMT symbol is the first DMT symbol that follows the transmission of the flag signal.

[0049] In another embodiment, the second power mode is a full power mode. In still another embodiment, the first power mode is a full power mode, and the second power mode is a low power mode. In another embodiment, the first power mode is a low power mode, and the second power mode is a full power mode.

Brief Description of the Drawings

[0050] The objects and features of the invention can be better understood with reference to the drawings described below. The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention.

Figure 1 is a block diagram for a standard compliant ADSL DMT transmitter known in the prior art.

Figure 2 is an exemplary embodiment of an ADSL frame and R-S codeword.

Figure 3 is a block diagram for a dual latency ADSL DMT transmitter.

Figure 4 is a flow chart that depicts an embodiment of a process in which a Normal Seamless Rate Adaptive (NSRA) transmission bit rate change is initiated by a receiver according to the principles of the invention.

Figure 5 is a flow chart that depicts an embodiment of a process in which a Normal Seamless Rate Adaptive (NSRA) transmission bit rate change is initiated by a transmitter according to the principles of the invention.

Figure 6 is a flow chart that depicts an embodiment of a process in which a Fast Seamless Rate Adaptive (FSRA) transmission bit rate change is initiated by a receiver according to the principles of the invention.

Figure 7 is a flow chart that depicts an embodiment of a process in which a Fast Seamless Rate Adaptive (FSRA) transmission bit rate change is initiated by a transmitter according to the principles of the invention.

Detailed Description

[0051] The principles of the invention may be employed using transceivers that include a transmitter, such as that described in Figure 1 above, and a receiver. In general terms, an ADSL system includes both a transmitter and a receiver for each communication in a particular direction. In the discussion that follows, an ADSL DMT transmitter accepts digital input and transmits analog output over a transmission line, which can be a twisted wire pair, for example. The transmission can also occur over a medium that includes other kinds of wires, fiber optic cable, and/or wireless connections. In order to utilize the transmitted signal, a second transceiver at the remote end of the transmission line includes a receiver that converts the received analog signal into a digital data stream for use by devices such as computers or digital televisions, for example. For bidirectional communication using a pair of transceivers, each transceiver includes a transmitter that sends information to the receiver of the other member of the pair, and a receiver that accepts information transmitted by the transmitter of the other member of the pair.

[0052] This invention describes a DMT system with the capability to adapt the system bit rate on-line in a seamless manner. The DMT system also provides a robust and fast protocol for completing this seamless rate adaptation. The DMT system also provides a framing and encoding method with reduced overhead compared to conventional DMT systems. This new framing and encoding method also enables a system with seamless rate adaptation capability.

[0053] It may be desirable to change the modem data rate after training due to a change in the channel characteristics or because the application running over ADSL has changed. Examples of changing channel characteristics include changes in the noise on the line, changes in the crosstalk from other services in the bundle or on the same line, changes in the levels and presence of Radio Frequency Interference ingress, changes in the line impedance due to temperature changes, changes in the state of equipment on the line (e.g. a phone going from on-hook to off hook, or vice versa), and the like. Examples of changes in applications include power down modes for a PC, a user changing from Internet browsing to two-way video conferencing, a user changing from internet browsing to voice over DSL with or without internet browsing, and the like. It is often desirable or required to change the data rate of the modem. It is highly desirable that this data rate change occurs in a "seamless" manner, i.e., without data bit errors or an interruption in service. However DMT ADSL modems specified in the prior art standards are not capable of performing seamless data rate adaptation.

[0054] Condition #4 described previously, does not allow the size of the BAT to change without modifying the R-S coding, interleaving and framing parameters. If the BAT, and N_{BAT} , could be modified during operation, i.e., if more or fewer bits were allocated to carriers in a DMT symbol, the data rate could be changed. Condition #4 requires that when the number of bits N_{BAT} in the BAT changes the size of the R-S codeword (and therefore interleaving parameters) must also be modified. Modifying the interleaving and coding parameters on-line requires re-initializing the interleaver. Re-initialization of the interleaver always results in a "flushing" of the interleave memory. This flushing of memory will result in data errors and the transition will not be seamless.

[0055] In order to allow a DMT ADSL transmission system to change data rate seamlessly, the invention relates to the following:

1. a more efficient method for framing and encoding the data, that results in less overhead data bits per DMT symbol, thereby increasing the user bit rate;
2. a new ADSL system with the ability to dynamically adapt the data rate on-line (e.g., during operation) in a seamless manner; and
3. a new robust and fast protocol for completing such a seamless rate adaptation, so a data rate change can occur successfully even in the presence of high levels of noise.

Constant Percentage Overhead Framing

[0056] In one embodiment, a framing method is described that decreases the overhead (non-payload) data in DMT ADSL systems. Figure 2 shows a diagram 200 representative of an ADSL frame and R-S codeword that includes at least one framing overhead byte 202, one or more payload bytes 204, and one or more checkbytes 206. This framing method also enables seamless rate adaptation. As described above current ADSL systems place restrictions and requirements on the ADSL frames, R-S codewords and DMT symbols. A system implemented according to the principles of the invention de-couples ADSL frames and R-S codewords from DMT symbols. This decoupling results in a system that has lower overhead data per DMT symbol and also can complete online rate adaptations in a seamless manner. According to the principles of the invention, ADSL frames and R-S codewords are constructed to have the same length and to be aligned (see Figure 2). The R-S codeword is made sufficiently large enough to maximize the coding gain. The size of the R-S codeword (and therefore ADSL frame) can be negotiated at startup or fixed in advance. A fixed number of R-S checkbytes and overhead framing bytes are included in an ADSL frame. These parameters can also be negotiated at startup or fixed in advance.

[0057] Unlike DMT symbols of the prior art, DMT symbols produced in accordance with the principles of the invention are not aligned with ADSL frames and R-S codewords. Also the number of bits in a DMT symbol depends solely on the data rate requirements and configurations and is de-coupled from the R-S codeword size, the interleaver depth and the ADSL frame size. The number of bits in a DMT symbol dictates the data rate of the modem independently of the other framing, coding or interleaving restrictions. Since overhead bytes are added at the ADSL frame layer, a DMT symbol does not necessarily contain a fixed number of overhead bytes. As the data rate gets lower, for example 128 kbps, the overhead data remains low. In particular, this framing method assigns a fixed percentage of overhead data to the data stream, rather than a fixed number of overhead bytes. This percentage does not change when the data rate of the modem changes, (as is the case with current ADSL modems). Consider the following examples of conventional standard compliant framing methods.

Prior Art Example # 1:

[0058] The line capacity is 192 bytes per DMT symbol (6.144 Mbps). The codeword size is 192, which includes 16 checkbytes and 1 overhead framing byte, (assuming ANSI T1.413 framing mode #3). The total framing overhead (i.e., checkbytes + overhead framing bytes) per DMT symbol is $16+1 = 17$, and therefore the framing overhead is $17/192 = 8.8\%$ of the available throughput. In this case the framing overhead is reasonable.

Prior Art Example #2:

[0059] The line capacity is 4 bytes (128 kbps). The codeword is constructed from 16 DMT symbols and is $16 \times 4 = 64$ bytes. There are 16 R-S checkbytes (1 checkbyte per DMT symbol) and there is 1 overhead framing byte (assuming ANSI T1.413 framing mode #3). The total framing overhead (checkbytes + overhead framing bytes) per DMT symbol is $1+1 = 2$ bytes, and therefore the framing overhead is $2/4 = 50\%$ of the available throughput. This is highly inefficient.

[0060] Examples of embodiments of the framing method of the invention provide the following results, called the Constant Percentage Overhead Method:

Example #1:

[0061] This is exactly the same as the standard compliant training example (Prior Art Example #1) given above. Codeword sizes, DMT symbol sizes and overhead are the same. Therefore the framing overhead is $17/192 = 8.8\%$ of the available throughput as well.

Example #2:

[0062] The line capacity is 4 bytes (128 kbps). The codeword is constructed independently of the DMT symbol and therefore could be set to 192 bytes, (as an example). This is also the size of the ADSL frame. We use 16 R-S bytes and 1 overhead framing byte per codeword or ADSL frame. There are $192/4 = 48$ DMT symbols in 1 codeword. The total overhead (checkbytes + overhead framing bytes) per 48 DMT symbols is $1+16 = 17$ bytes or $17/48 = 0.35$ bytes per 1 DMT symbol. The framing overhead is $0.35/4 = 8.8\%$ of the available throughput.

[0063] From examples #1 and #2, it is apparent that the principles of the invention provide a method to achieve a framing overhead that is a constant percentage of the available throughput regardless of the data rate or the line capacity. In these examples, the framing overhead was 8.8% for both 6 Mbps and 128 kbps.

Seamless Rate Adaptation (SRA) system

[0064] Another benefit of the framing method described in this invention is that it enables seamless on-line rate adaptation. Seamless Rate Adaptation (SRA) is accomplished by changing the DMT symbol BAT, i.e. the number of bits allocated to each subchannel in the multicarrier system. As shown above modifying the BAT changes the number of bits per DMT symbol and results in a change in the data bit rate of the system. In one embodiment, the DMT symbol size is changed without modifying any of the RS coding, interleaving and framing parameters. This is possible because the Constant Percentage Overhead framing method described above removes the restrictions imposed by the prior art on the relation between DMT symbols and R-S codewords or ADSL frames. Since the R-S coding and interleaving parameters do not change, interleaver flushing and other problems associated with changing the parameters associated with these functions do not occur. The transceiver can adapt the data rate without errors or service interruption. The only parameter that needs to be adapted is the BAT.

[0065] The BAT needs to be changed at the transmitter and the receiver at exactly the same time, i.e., on exactly the same DMT symbol. If the transmitter starts using the new BAT for transmission before the receiver does, the data is not

demodulated correctly and bit errors occur. Also, if the receiver changes to a new BAT before the transmitter does, the same errors can occur. For this reason the transition to the use of the new BAT for transmission and reception needs to be synchronized at the transmitter and the receiver. In one embodiment, the principles of the invention provide a protocol that enables the synchronized transition to the use of the new BAT.

[0066] It is also very important that this protocol is very robust in the presence of channel noise. For example, if the protocol fails and the receiver does not switch to the new BAT at the same time as the transmitter, then bit errors occur and the transition is not seamless. Furthermore, if the transmitter and receiver are using different BATs, it is very difficult to re-establish an error free link without performing a re-initialization of the connection, which results in an interruption in service of up to 10 seconds.

[0067] It is also important that the transition between BATs occurs very quickly, because the need to operate at a new data rate is usually instantaneous. As an example, at a constant data rate a sudden decrease in the channel SNR will increase the number of bits received in error. A change in data rate is required because of the reception of many bits in error. In this situation, it is desirable to change the data rate as soon as possible to get out of the state of receiving bits in error. As another example, a change in the applications being transported over the ADSL link can require a change in the data rate. For example if one user is browsing the Internet and then another user wishes to make a voice call over the flow of data bits using the Voice over DSL capability of the ADSL connection, it is necessary to quickly change the data rate of the system to accommodate the telephone call in addition to the existing traffic.

[0068] It is apparent from these requirements that it is necessary for the SRA protocol to provide:

- a. a method for synchronizing the transmitter and receiver transition to the new BAT;
- b. robust transition to the new data rate; and
- c. fast transition to the new data rate.

[0069] The principles of the invention provide two protocols that satisfy these requirements for seamless rate adaptation. The protocols are called the Normal SRA protocol and the Fast SRA protocol.

Normal SRA (NSRA) protocol

[0070] Either the transmitter or the receiver can initiate the Normal SRA (NSRA) protocol.

Receiver Initiated NSRA

[0071] The receiver initiated NSRA involves the following steps:

1. During initialization the transmitter and the receiver exchange information describing their maximum and minimum data rate capabilities. This corresponds to the maximum and minimum number of bits per DMT symbol.
2. During operation, the receiver determines that the data rate should be increased or decreased.
3. If the new data rate is within the transmitter's rate capabilities, the receiver proceeds to step 4.
4. The receiver sends the new BAT and the new data rate to the transmitter using the AOC or EOC channel. This corresponds to "NSRA Request" by the receiver.
5. The transmitter receives the "NSRA Request".
6. The transmitter uses an inverted synchronization (sync) symbol as a flag to signal the receiver that the new BAT is going to be used. The new BAT is used for transmission on the first frame, or a finite number of frames, following the inverted sync symbol. The inverted sync symbol operates as a rate adaptation "SRA Go" message sent by the transmitter.
7. The receiver detects the inverted sync symbol ("SRA Go") and the new BAT is used for reception on the first frame, or a finite number of frames, following the inverted sync symbol.

[0072] Figure 4 shows a flow chart 400 depicting an embodiment of a process in which a Normal Seamless Rate Adaptive (NSRA) transmission bit rate change is initiated by a receiver according to the principles of the invention. In Figure 4, the steps described in action boxes 410 through 470 correspond to the preceding discussion.

Transmitter Initiated NSRA

[0073] The transmitter initiated NSRA involves the following steps:

1. During initialization the transmitter and the receiver exchange information describing their maximum and minimum capabilities regarding data rate. This corresponds to the maximum and minimum number of bits per DMT symbol.

2. The transmitter determines that the data rate should be increased or decreased.
3. If the new desired data rate is within the receiver's rate capability then the transmitter proceeds to step 4.
4. The transmitter sends to the receiver the new desired data rate using the EOC or AOC channel. This is an "NSRA Request" message.
5. The receiver receives the NSRA request message. If the channel can support the new data rate then the receiver proceeds to step 6. If the channel can not support the new data rate then the receiver sends an "SRA Deny" message back to the transmitter using the EOC or AOC channel.
6. The receiver sends the new BAT to the transmitter using the AOC or EOC channel based on the new data rate. This corresponds to an "NSRA Grant" request by the receiver.
7. The transmitter receives the "NSRA Grant".
8. The transmitter uses an inverted sync symbol as a flag to signal the receiver that the new BAT is going to be used. The new table is used for transmission on the first frame, or a finite number of frames, following the inverted sync symbol. The inverted sync signal operates as a rate adaptation "SRA Go" message sent by the transmitter.
9. The receiver detects the inverted sync symbol ("SRA Go") and the new table is used for reception on the first frame, or a finite number of frames, following the inverted sync symbol.

[0074] Figure 5 shows a flow chart 500 depicting an embodiment of a process in which a Normal Seamless Rate Adaptive (NSRA) transmission bit rate change is initiated by a transmitter according to the principles of the invention. In Figure 5, the steps described in action boxes 510 through 590 correspond to the preceding discussion.

[0075] The rate adaptation only involves changing the number of bits in a DMT symbol by changing the BAT, and not the R-S codeword size, interleaver depth, or the ADSL frame size. This can be done without any interruption in data flow or introduction of data errors.

[0076] This protocol of the invention is faster than conventional rate adaptation methods because it does not require an extended handshake between the transmitter and the receiver in order to approve the new transmission parameters and rates. No extended handshake is needed because the data rate capabilities are known in advance and negotiated during startup. Also, the other parameters (such as R-S codeword length, interleaver depth, etc) are not changed during the data rate change using the new framing method.

[0077] This protocol of the invention is more robust than conventional rate adaptation techniques because it does not use the EOC or AOC channel to send the "SRA Go" message for synchronizing the transition to the new data rate. In conventional rate adaptation techniques, messages sent over the EOC and AOC channel can easily become corrupted by noise on the line. These overhead channels are multiplexed into the data stream at the framer and therefore are transmitted with quadrature amplitude modulation over a finite number of DMT subchannels. Impulse noise or other noise that occurs on the line can easily cause bit errors in the AOC channel message; the message can be lost. If the "SRA Go" message is corrupted and not received by the receiver, then the receiver does not know if the SRA request was granted or not. The transmitter, on the other hand, assumes the "SRA Go" message was received and switches to the new data rate and transmission parameters. The receiver, which did not receive the grant message, does not know when to switch to the new rate. The modems are unsynchronized and data errors occur.

[0078] The protocol of the invention is robust because, unlike conventional rate adaptation techniques, the "SRA Go" message is not sent via an EOC or AOC message that can easily be corrupted. Instead the grant of the rate adaptation request is communicated via an inverted sync symbol. The sync symbol is defined in the ANSI and ITU standards as fixed non-data carrying DMT symbol that is transmitted every 69 symbols. The sync symbol is constructed by modulating all the DMT carriers with a predefined PN sequence using basic QPSK (2 bit QAM) modulation. This signal, which is used throughout the modem initialization process, has special autocorrelation properties that make possible the detection of the sync symbol and the inverted sync symbol even in highly noisy environments. An inverted sync symbol is a sync symbol in which the phase information in the QAM signal is shifted by 180 degrees. Other phase shifts (other than 180 degrees) of the sync symbol can be used as well for the SRA Go message. Using the sync symbol for the "SRA Go" message makes the rate adaptation protocol very robust even in the noisiest environments.

Fast SRA (FSRA) protocol using stored BATs

[0079] The Fast SRA (FSRA) protocol seamlessly changes the data rate on the line faster than the NSRA protocol. This is important for certain applications that are activated and de-activated instantaneously over time or when sudden channel changes occur. In the FSRA protocol, "stored BATs" are used to speed up the SRA handshake and enable quick changes in data rate. Unlike profiles used in G.992.2, the stored BAT does not contain the R-S coding and interleaving parameters since these parameters are not effected when a rate change occurs using constant percentage overhead framing.

[0080] The BATs are exchanged using NSRA described in the previous section. After the one time NSRA is complete, and a BAT that is based on that particular channel condition or application condition is stored by both transceivers, the

FSRA protocol can use the stored BAT to complete fast on-line rate adaptation. Stored BATs are labeled so that both the transmitter and receiver simply need to notify the other which table is to be used without actually having to transmit the information again. For example, the stored BAT may be numbered. The transmitter or receiver simply needs to tell the other transceiver which BAT table number is to be used for subsequent transmission. Either the receiver or the transmitter can initiate the FSRA protocol.

Receiver-Initiated FSRA

[0081] The receiver-initiated FSRA protocol involves the following steps:

1. The receiver determines that the data rate should be increased or decreased.
2. If a stored BAT matches the new channel and/or application condition the receiver proceeds to step 3. If there is no stored BAT that matches the condition, an NSRA is initiated (as described above).
3. The receiver sends a message to the transmitter specifying which stored BAT is to be used for transmission based on the new channel and/or application condition. This corresponds to an "FSRA Request" by the receiver.
4. The transmitter receives the "FSRA Request".
5. The transmitter uses an inverted sync symbol as a flag to signal the receiver that the requested stored BAT will be used for transmission. The stored BAT is used for transmission on the first frame, or a finite number of frames, following the inverted sync symbol. The inverted sync signal corresponds to a rate adaptation "SRA Go" message sent by the transmitter.
6. The receiver detects the inverted sync symbol ("SRA Go") and the new BAT is used for reception on the first frame, or a finite number of frames, following the inverted sync symbol.

[0082] Figure 6 shows a flow chart 600 depicting an embodiment of a process in which a Fast Seamless Rate Adaptive (FSRA) transmission bit rate change is initiated by a receiver according to the principles of the invention. In Figure 6, the steps described in action boxes 610 through 660 correspond to the preceding discussion.

Transmitter-initiated FSRA

[0083] The transmitter-initiated FSRA protocol involves the following steps:

1. The transmitter determines that the data rate should be increased or decreased.
2. If a stored BAT matches the new channel or/and application condition, the transmitter proceeds to step 3. If there are no stored BAT that matches the condition then an NSRA is initiated (as described above).
3. The transmitter sends a message to the receiver specifying which stored BAT is to be used for transmission, based on the new channel and/or application condition. This corresponds to an "FSRA Request" by the transmitter.
4. The receiver receives the "FSRA Request".
5. The receiver sends back to the transmitter the "FSRA Grant" message to grant the "FSRA request".
6. The transmitter receives the "FSRA Grant".
7. The transmitter uses an inverted sync symbol as a flag to signal the receiver that the requested stored BAT will be used for transmission. The specified stored BAT is used for transmission on the first frame, or a finite number of frames, following the inverted sync symbol. The inverted sync signal corresponds to a rate adaptation "SRA Go" message sent by the transmitter.
8. The receiver detects the inverted sync symbol ("SRA Go") and the new BAT is used for reception on the first frame, or a finite number of frames, following the inverted sync symbol.

[0084] Figure 7 shows a flow chart 700 depicting an embodiment of a process in which a Fast Seamless Rate Adaptive (FSRA) transmission bit rate change is initiated by a transmitter according to the principles of the invention. In Figure 7, the steps described in action boxes 710 through 780 correspond to the preceding discussion.

[0085] The FSRA protocol can be completed very quickly. It requires only the exchange of two messages (FSRA grant and FSRA Request) and an inverted sync symbol. FSRA is faster than NSRA because the BAT is stored and need not be exchanged. As in the NSRA protocol, the FSRA protocol is also very robust in noisy environments since it uses inverted sync symbols for the "SRA Go".

Use of SRA protocols for power management (entering and exiting low power modes)

[0086] Full power mode is used during normal operations of the transceiver. Low power transmission modes are often used in transceivers in order to conserve power in cases when data does not need to be transmitted over the line. Many

modems have low power modes or "sleep" modes that enable a transceiver to operate at a significantly lower power level when the transmission requirements are reduced. Many modems also have protocols that enable them to enter and exit these low power modes very quickly so that the user is not negatively effected by the modem's transition into the low power mode state. The SRA protocols provided of the invention are used to enter and exit from low power modes in a very fast and seamless manner.

[0087] There are two basic types of low power mode (LPM):

Low Data Rate LPM

[0088] This is low power mode with a very low data rate (e.g. 32 kbps). Only a few of the subchannels are active. The data connection is maintained. The pilot tone may also be transmitted in order to maintain loop timing.

Zero Data Rate LPM

[0089] This is a low power mode with an effectively 0 kbps data rate, i.e., no subchannels are modulating data. A data connection is not maintained. The pilot tone may also be transmitted in this case in order to maintain loop timing.

[0090] In both the Low Data Rate LPM and the Zero Data Rate LPM, the sync symbol, which is sent in normal full power mode every 69 symbols, may be on or off. If the sync symbol is still transmitted during the low power mode, the receiver can use the sync symbol to monitor for channel changes and other fluctuations on the line. However transmission of the sync symbol every 69 symbols can cause non-stationary crosstalk and could be detrimental to other signals on the same telephone wire or in the same wire bundle. If the sync symbol is not transmitted during low power mode, there is no non-stationary crosstalk on the telephone wire or the wire bundle. However, in this case the receiver is not able to monitor the channel with the sync symbol.

Entering low power mode using FSRA

1. Receiver-initiated transition into low power mode

[0091] The receiver initiates the transition to low power mode using the receiver-initiated FSRA protocol. A receiver initiating the transition to low power mode uses a stored BAT corresponding to the low power mode. The stored BAT table for the low power mode may enable either a Low Data Rate LPM or a Zero Data Rate LPM. The low power mode BAT can be predefined by the system or can be exchanged and stored using the NSRA process. In either case the receiver uses the receiver-initiated FSRA protocol to designate the low power mode BAT and synchronously switch to using that BAT for transmission.

2. Transmitter-initiated transition into low power mode

[0092] There are two ways the transmitter can use the transmitter-initiated FSRA protocol to enter into the low power mode. In one embodiment, the transmitter can use the entire transmitter-initiated FSRA process and request the transition. As in the case of receiver-initiated transition into low power mode, transmitter initiating the transition to low power mode uses a stored BAT for the low power mode. The stored BAT table for the low power mode can enable either a Low Data Rate LPM or a Zero Data Rate LPM. The low power mode BAT can be predefined by the system or can be exchanged and stored using the NSRA process. In either case the transmitter uses the transmitter-initiated FSRA protocol to designate the low power mode BAT and synchronously switches to the low power mode using that BAT for transmission.

[0093] In a second embodiment, the transmitter can transition directly to step 7 of the transmitter initiated FSRA protocol described above, and send the inverted sync symbol to indicate transition into the low power mode. The receiver detects the inverted sync and transitions to the low power mode. In this case, since an FSRA request has not been sent by the transmitter, the receiver recognizes that an inverted sync symbol received without a FSRA request transmitted indicates that the transmitter is switching to low power mode. The low power mode BAT is (predefined by the system) or is identified and stored previously so that both the transmitter and the receiver use the BAT. In an alternative second embodiment, in step 7 the transmitter sends a different signal that is predefined by the transmitter and the receiver to be the signal used for transition into low power mode without an "FSRA request." For example, the transmitter may send a sync symbol with 45 degree phase rotation, rather than the inverted (180 degree) sync symbol. A sync symbol with a 45 degree phase rotation indicates that the transmitter is transitioning into low power mode using the stored BAT associated with the low power mode on the first frame, or a finite number of frames, following the sync symbol with a 45 degree rotation.

[0094] The transmitter-initiated entry into low power mode as defined in the second embodiment has the advantage that it does not require the reverse channel to make the transition. The reverse channel is defined as the communications

channel in the opposite direction, i.e., here, the communications channel used to send the FSRA messages from the receiver to the transmitter. This is advantageous because the reverse channel may already be in low power mode with no data connection. If there is no data ready to be sent the transmitter can simply transition to low power mode. This is an important power savings technique since the transmitter consumes a large portion of the power, as it is required to send the signal down the line. Transmitter-initiated transition into low power modes is also useful in "soft modem" (PC host based) implementations. In a soft modem implementation, the host processor is performing the modem transceiver functions and many other PC applications at the same time. If the host processor must perform another task that does not allow it to run the ADSL transmitter, the processor can quickly transition the transmitter to the low power mode by sending the inverted sync symbol, or the sync symbol with 45 degree rotation. After this the host processor resources can be consumed by the other task. The ADSL transmitter sends no signal (0 kbps) onto the line.

[0095] The transmitter-initiated and receiver-initiated protocols described above enable the communication system to enter a low power mode in each direction (upstream and downstream) separately or in both directions together. The cases described above each focus on one direction. The protocols can be combined to accomplish transition in both directions at the same time. As an example, assume that the customer premise transceiver (CPT) is designed to enter into a low power mode in response to a PC that is also entering a similar state. The CPT first uses receiver-initiated low power mode transition to put the downstream (CO to CPT direction) into low power mode. Afterwards the CPT uses the transmitter-initiated low power mode transition to put the upstream (CPT to CO direction) into low power mode.

Exiting low power mode

1. Receiver-initiated exit from power mode

[0096] According to the SRA protocols, there are two embodiments the receiver can use to exit the low power mode-. In the first embodiment, receiver-initiated exit from low power mode can be accomplished using the receiver initiated NSRA or FSRA protocol if the low power mode still has at least a slow data connection in the reverse direction (Low data rate LPM). This is necessary because the receiver must be capable of sending the SRA request back to the transmitter along with the BAT to be used. If the transmitter has not turned off the sync symbol in low power mode the NSRA or FSRA protocols would be used as described above. If the transmitter sync symbol is turned off while in low power mode, the "SRA Go" is sent by the transmitter by turning the sync symbol back on. The receiver detects the presence of the sync symbol (with or without inversion) as a flag to synchronize the change in data rate.

[0097] In a second embodiment, there is no data connection in the reverse direction (Zero Data Rate LPM). The receiver initiates an exit by first completing a "transmitter-initiated exit from low power mode" (described below) in the reverse direction. This enables the data connection in the reverse direction. The receiver uses the receiver initiated NSRA or FSRA protocol to exit from low power mode in it's own direction. As described above, if the transmitter sync symbol is turned off while in low power mode, the "SRA Go" is sent by the transmitter by turning the sync symbol back on. The receiver detects the presence of the sync symbol (with or without inversion) as a flag to synchronize the change in data rate.

2. Transmitter-initiated exit from low power mode

[0098] According to the SRA protocols, there are two embodiments the transmitter can use to exit from low power mode. In the first embodiment, the transmitter uses the entire transmitter initiated FSRA or NSRA process and requests the transition. This requires that there is a data connection in both directions (Low data rate LPM) so the protocol messages can be exchanged. As in the receiver-initiated exit from low power mode, if the transmitter has not turned off the sync symbol in low power mode the NSRA or FSRA protocols would be used as described above. If the transmitter had turned the sync symbol off while in low power mode, then the "SRA Go" is sent by the transmitter by turning the sync symbol back on. The receiver detects the presence of the sync symbol (with or without inversion) as a flag to synchronize the change in data rate.

[0099] In the second embodiment, the transmitter can exit the low power mode by transitioning directly to step 7 of the transmitter initiated FSRA protocol. The transmitter sends the inverted sync symbol to indicate transition out of the low power mode. This requires that a sync symbol be sent during the low power mode. This protocol does not require a low data rate LPM. The receiver detects the inverted sync and exits the low power mode. The receiver is designed to recognize that an inverted sync symbol received without a FSRA request indicates the transmitter is exiting from low power mode. The full power mode BAT is identified and stored previously in the connection so that both the transmitter and the receiver have the BAT. For example, the BAT to be used upon exiting a low power mode can be defined by the system to default to the BAT of the last full power connection. Alternatively, the transmitter can send a different signal that is predefined by the transmitter and the receiver to be the signal used for transition out of low power mode without an "FSRA request". For example, the transmitter can send a sync symbol with 45 degree phase rotation, rather than

the inverted (180 degree) sync symbol. When the receiver detects the sync symbol with a 45 degree phase rotation, the receiver recognizes that the transmitter is transitioning out of low power mode using the stored BAT associated with the full power mode on the first frame, or a finite number of frames, following the sync symbol with a 45 degree rotation. If the transmitter had turned the sync symbol off while in low power mode, then the "SRA Go" is sent by the transmitter by turning the sync symbol back on. The receiver detects the presence of the sync symbol (with or without a phase shift) as a flag to synchronize the change in data rate.

[0100] Although throughout this description the BAT is defined to be a table that specifies the number of bits allocated to each subchannel, the BAT can also contain other parameters associated with allocating bits to subchannels in a multicarrier system. An example of an additional parameter is the Fine Gain per subchannel as defined in the ANSI and ITU standards. In this case, when the BAT is exchanged during the NSRA protocol or the BAT is stored during the FSRA protocol, the BAT also contains the Fine Gain value for each subchannel.

[0101] The seamless rate adaptive system and associated protocols also applies to DMT systems that implement dual (or multiple) latency paths. A dual latency system is defined in the ITU and ANSI standards as a DMT system that supports two data streams with different latency specifications in the Framing/FEC block. Figure 3 shows a standard ADSL DMT system 300 that implements dual latency, as an example of a system having a plurality of latencies. The system 300 includes three layers: the Modulation layer 310, the Framing/FEC layer 320, and the ATM TC layer 340, which are similar but not identical to the three layers described above in relation to Figure 1.

[0102] The Modulation layer 310 provides functionality associated with DMT modulation. The DMT modulation is implemented using a Inverse Discrete Fourier Transform (IDFT) 112. The IDFT 112 modulates bits from the dual input Quadrature Amplitude Modulation (QAM) 314 encoder into the multicarrier subchannels. The operation of the Modulation layer 310 is analogous to that of Modulation layer 110 of Figure 1, with the difference that the Modulation layer 310 has multiple inputs, rather than only one input.

[0103] The Framing/FEC layer 320 shown in Figure 3 has two paths. This layer contains a first path that includes the same blocks as in the Framing/FEC layer 120 of Figure 1, namely the Interleaving (INT) block 122, the Forward Error Correction (FEC) block 124, the scrambler (SCR) block 126, the Cyclic Redundancy Check (CRC) block 128 and the ADSL Framing block 130. The layer further contains a second path that includes a second one of each of the Forward Error Correction (FEC) block 124', the scrambler (SCR) block 126', the Cyclic Redundancy Check (CRC) block 128' and the ADSL Framing block 130'. The Framing/FEC layer 320 provides functionality associated with preparing a stream of bits for modulation. The new lower path through the Framing/FEC layer 320 has a different amount of latency than the original upper path corresponding to Fig. 1, because the lower path does not perform interleaving on the data stream. Dual latency is used to send different application bit streams with different latency requirements through the ADSL DMT modem. As an example, an application that can tolerate high latency (e.g., video on demand) may be sent through the upper high latency path with interleaving whereas the an application with low latency requirements (e.g., voice) may be sent through the lower low latency path without interleaving.

[0104] The ATM TC layer 340 includes an ATM TC block 342 having multiple inputs and multiple outputs that transforms bits and bytes in cells into frames for each path.

[0105] The seamless rate adaptation system and method of the present invention applies to a system with dual latency, or even multiple latency, as well. In the case of dual latency, the FEC and interleaving parameters for both paths are decoupled from the DMT symbol size. The BAT contains, in addition to the number of bits allocated to each subchannel, the data rate for each latency path in the form of bits per DMT symbol. When seamless rate adaptations are performed using the FSRA and NSRA protocols the BAT also indicates the data rate for each latency path. For example, if the dual latency system runs with 1.536 Mbps on the interleaved path (high latency upper path) and 256 kbps in the non-interleaved path (low latency lower path) and an SRA is initiated, then the SRA protocol specifies the new BAT containing the number of bits per subchannel and also the new data rate for each latency path. At a 4 kHz DMT symbol rate, a system running at $1.536 \text{ Mbps} + 256 \text{ kbps} = 1.792 \text{ Mbps}$ $1792000/4000 = 448$ total bits per symbol. The BAT specifies that $1536000/4000 = 384$ bits per symbol are allocated to the interleaved path and $256000/4000 = 64$ bits per symbol are allocated to the non-interleaved path. In the example, when an SRA is performed, the new data rate for the interleaved path can be 1.048 Mbps ($1048000/4000 = 262$ bits per symbol) and the new data rate for the non-interleaved path can be 128 kbps ($128000/4000 = 32$ bits per DMT symbol), resulting in a total throughput rate of 1.176 kbps (or 294 total bits per DMT symbol). The NSRA and FSRA protocols combined with the framing method specified herein complete this data rate change in both latency paths in a seamless manner. It is also possible to not change the data rate on both latency paths. For example one may want to keep the 256 kbps low latency path at a constant data rate because it is carrying voice data (multiple telephone calls) that can not operate at a lower rate, whereas the 1.536 Mbps path may be carrying internet access data that can tolerate a rate change. In this example, during the SRA the data rate of the low latency path is kept constant at 256 kbps whereas the data rate of the high latency path changes.

[0106] While the invention has been disclosed in connection to ADSL systems it can also be applied to any system that utilizes multicarrier modulation. In general this invention applies to any system in which different numbers of bits are modulated on the carriers.

[0107] While the invention has been particularly shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the scope of the invention as defined by the appended claims.

Claims

1. Method using multicarrier modulation in a multicarrier transmission system (100, 300), the method comprising:

providing a plurality of codewords (200) having a specified codeword size and including a specified number of parity bits (206) for forward error correction; and
transmitting a first plurality of the codewords (200) at a first transmission bit rate using a first allocation of bits;

characterized in

that the first transmission bit rate is changed to a second transmission bit rate using a second allocation of bits and that a second plurality of the codewords (200) is transmitted at the second bit rate, wherein the specified codeword size and specified number of parity bits (206) for forward error correction used for the first plurality of codewords (200) are used for the second plurality of codewords to achieve a seamless change in transmission bit rate.

2. Method according to claim 1, **characterized in that** the first plurality of codewords (200) and the second plurality of codewords (200) are interleaved according to a specified interleaving parameter, wherein the specified interleaving parameter used to interleave the first plurality of codewords (200) is the same specified interleaving parameter used to interleave the second plurality of codewords (200).

3. Method according to claim 1 or 2, **characterized in that** the transmission at the first transmission bit rate comprises allocating a first number of bits to a first discrete multitone (DMT) symbol as determined by a first bit allocation table, and that the transmission at the second transmission bit rate comprises allocating a second number of bits to a second DMT symbol as determined by a second bit allocation table.

4. Method according to claim 3, **characterized in that** an average parity bit ratio for DMT symbols transmitted at the first and the second transmission rates is substantially constant, where the parity bit ratio is the number of the parity bits (206) in a DMT symbol divided by a total number of bits in the bit allocation table used for that DMT symbol.

5. Method according to claim 3 or 4, **characterized in that** the DMT symbols are de-coupled from the codeword size.

6. Method according to any one of the preceding claims, **characterized in that** the bits of the first plurality of codewords (200) are allocated to carrier subchannels using a first bit allocation table for transmitting such codewords (200) at the first transmission bit rate, and that the bits of the second plurality of codewords (200) are allocated to carrier subchannels using a second bit allocation table for transmitting such codewords (200) at the second transmission bit rate.

7. Method using multicarrier modulation in a multicarrier system (100, 300), the method comprising:

providing a plurality of codewords (200) having a specified codeword size, each codeword (200) including a specified number of parity bits (206) for forward error correction,
receiving a first plurality of codewords (200) from carrier subchannels at a first reception bit rate;
demodulating the bits of the first plurality of codewords (200) using a first bit allocation table;

characterized in

that the second plurality of codewords (200) are received from carrier subchannels at a second reception bit rate, wherein the bits of the second plurality of codewords (200) are demodulated using a second bit allocation table, wherein the specified codeword size and the specified number of parity bits (206) for forward error correction used for demodulating the bits of the first plurality of codewords (200) are used for demodulating the bits of the second plurality of codewords (200) to achieve a seamless change in reception rate.

8. Method according to claim 7, **characterized in that** the first plurality of codewords (200) and the second plurality of codewords (200) is deinterleaved according to a specified deinterleaving parameter, wherein the specified deinterleaving parameter used to deinterleave the first plurality of codewords (200) is the same specified deinterleaving

parameter used to deinterleave the second plurality of codewords (200).

9. Method according to claim 8, **characterized in that** receiving at the first reception bit rate comprises demodulating a first number of bits of a first DMT symbol as determined by the first bit allocation table, and that receiving at the second reception bit rate comprises demodulating a second number of bits of a second DMT symbol as determined by the second bit allocation table.
10. Method according to any one of the preceding claims, **characterized in that** a system of digital subscriber line (DSL) codewords (200) for transmission to a receiver is provided, and that the codewords (200) are modulated to form discrete multitone (DMT) symbols having a number of bits determined by a transmission rate capability of the multicarrier transmission system (100, 300), in particular wherein the number of bits in the codewords (200) is a non-integer multiple of the number of bits in the DMT symbols.
11. Method according to any one of the preceding claims, **characterized in that** the first plurality of codewords (200) are received at a first reception bit rate using a first bit allocation table and that the second plurality of codewords (200) is received at a second reception bit rate, wherein the specified codeword size and the specified number of parity bits (206) for forward error correction used for the first plurality of codewords (200) are used for the second plurality of codewords (200) and the number of bits in the first bit allocation table is different than the number of bits in the second allocation table to achieve a seamless change in reception bit rate.
12. Method according to any one of the preceding claims, **characterized in that** the multicarrier transmission system (100, 300) includes a transmitter and a receiver, wherein the transmitter and receiver use a first bit allocation table to transmit the first plurality of codewords (200) at the first transmission bit rate, wherein a message to change the transmission bit rate from the first transmission to the second transmission bit rate is transmitted, wherein a second bit allocation table is used at the receiver and at the transmitter for transmitting at the second transmission bit rate, wherein use of the second bit allocation table is synchronized between the transmitter and receiver, and wherein codewords (200) are transmitted at the second bit transmission rate using the same specified codeword size and specified number of parity bits (206) for forward error correction that are used to transmit codewords (200) at the first transmission bit rate to achieve a seamless change in transmission bit rate.
13. Method according to claim 12, **characterized in that** the message contains the second bit allocation table, preferably wherein the receiver transmits the message to the transmitter.
14. Method according to claim 12 or 13, **characterized in that** a plurality of bit allocation tables are stored at the transmitter and the receiver, wherein the message specifies which one of the stored bit allocation tables is to be used as the second bit allocation table.
15. Method according to claim 14, **characterized in that** the transmitter transmits the message to the receiver or the receiver transmits the message to the transmitter.
16. Method according to any one of claims 12 to 15, **characterized in that** the synchronizing includes sending a flag signal, preferable wherein the flag signal is a predefined signal, in particular a sync symbol with a predefined phase shift or an inverted sync symbol.
17. Method according to claims 16, **characterized in that** the first bit allocation table is used for transmitting a plurality of discrete multitone (DMT) symbols at the first transmission bit rate and switching to the second bit allocation table for transmitting the plurality of DMT symbols at the second transmission bit rate, wherein the second bit allocation table is used for transmission starting with a predetermined one of the DMT symbols that follows the transmission of the flag signal.
18. Method according to claim 17, **characterized in that** the predetermined DMT symbol is the first DMT symbol that follows the transmission of the flag signal,
19. Method according to any one of claims 16 to 18, **characterized in that** the transmitter transmit the flag signal to the receiver or the receiver transmits the flag signal to the transmitter.
20. Method according to any one of claims 12 to 19, **characterized in that** each bit allocation table specifies a transmission power level for each carrier subchannel or an allocation of bits to carrier subchannels for each latency path

in a multiple latency path multicarrier system

21. Method according to any one of the preceding claims, **characterized in that** the plurality of codewords (200) has specified interleaving parameter for interleaving the plurality of codewords (200) and that the multicarrier transmission system (100, 300) includes a transmitter and a receiver, wherein the transmitter and receiver use a first bit allocation table to transmit the first plurality of codewords (200) at the first transmission bit rate in a first power mode, wherein a second bit allocation table is stored at the receiver and at the transmitter for transmitting the second plurality of codewords (200) at a second transmission in a second power mode, wherein use of the second bit allocation table is synchronized between the transmitter and the receiver, and wherein the second power mode is entered by using the second bit allocation table to transmit codewords (200), wherein the specified interleaving parameter, the specified codeword size and the specified number of parity bits (206) for forward error correction used to transmit the first plurality of codewords (200) in the first power mode are also used to transmit the second plurality of codewords (200) in the second power mode to achieve a seamless change in power mode and to seamlessly enter the second power mode.

22. Method according to claim 21, **characterized in that** the synchronizing includes sending a flag signal, preferably wherein the flag signal is a predefined signal, in particular a sync symbol with a predefined phase shift or an inverted sync symbol.

23. Method according to claim 22, **characterized in that** the transmitter transmits the flag signal to the receiver or the receiver transmits the flag signal to the transmitter.

24. Method according to any one of claims 21 to 23, **characterized in that** the second power mode is a low power mode, preferably wherein zero bits are allocated to carrier signals to achieve a transmission bit rate of approximately zero kilobits per second in the low power mode, or wherein a pilot tone is transmitted for timing recovery when operating in the low power mode, or wherein a sync symbol is periodically transmitted when operating in the low power mode.

25. Method according to claim 22 or 23, **characterized in that** the first bit allocation table is used for transmitting a plurality of discrete multitone (DMT) symbols in the first power mode and switching to the second bit allocation table for transmitting the plurality of the DMT symbols in the second power mode, wherein the second bit allocation table is used for transmission starting with a predetermined one of the DMT symbols that follows the transmission of the flag signal.

26. Method according to claim 25, **characterized in that** the predetermined DMT symbol is the first DMT symbol that follows the transmission of the flag signal, preferably wherein the second power mode is a full power mode, or wherein the first power mode is a full power mode and the second power mode is a low power mode, or wherein the first power mode is a low power mode and the second power mode is a full power mode.

27. Multicarrier transmission system (100, 300) for seamlessly changing a transmission bit rate, comprising:

an encoder producing a plurality of codewords (200) having a specified codeword size and including a specified number of parity bits (206) for forward error correction;

an interleaver (122) in communication with the encoder, the interleaver (122) interleaving the plurality of codewords (200) according to a specified interleaving parameter; and

a modulator (110, 310) in communication with the interleaver (122), the modulator (110, 310) allocating the bits of each interleaved codeword (200) to carrier subchannels to achieve transmission at a first transmission bit rate;

characterized in

that the modulator (110, 310) changes the bit allocation to achieve transmission at a second transmission bit rate, wherein the specified codeword size and the specified number of parity bits (206) for forward error correction remain unchanged after the modulator (110, 310) changes the allocation of bits to achieve transmission at the second transmission bit rate, thereby achieving a seamless change in transmission bit rate.

28. Multicarrier transmission system according to claim 27, **characterized in that** the modulator (110, 310) transmits a first discrete multitone (DMT) symbol having a first number of bits, determined by a first bit allocation table, at the first transmission bit rate; and a second DMT symbol having a second number of bits, determined by a second bit allocation table, at the second transmission rate.

29. Multicarrier transmission system according to claim 28, **characterized in that** an average parity bit ratio for DMT symbols transmitted at the first and second transmission rate is substantially constant, where the parity bit ratio is the number of parity bits (206) in a DMT symbol divided by the total number of bits in the bit allocation table used for that DMT symbol.

30. Multicarrier transmission system according to any one of claim 27 to 29, **characterized in that** the specified interleaving parameter remains unchanged after the modulator (110, 710) changes the allocation of bits.

31. Receiver in a multicarrier transmission system (100, 300) for seamlessly changing reception bit rate, wherein the receiver comprises:

a demodulator operating at a first reception bit rate using a first allocation of bits to produce a first plurality of interleaved codewords (200), each codeword (200) having a specified codeword size and including a specified number of parity bits (206) for error correction,
a deinterleaver in communication with the demodulator, the deinterleaver deinterleaving the codewords (200) according to a specified interleaving parameter;
a decoder in communication with the deinterleaver to receive and decode the plurality of deinterleaved codewords (200);

characterized in

that the demodulator changes operation to a second reception bit rate using a second allocation of bits to produce a second plurality of interleaved codewords (200), wherein the specified codeword size and the specified number of parity bits (206) for error correction used to decode the first plurality of deinterleaved codewords (200) are the same specified codeword size and specified number of parity bits (206) for error correction used to decode the second plurality of deinterleaved codewords (200) to achieve seamless change in reception bit rate.

32. Receiver according to claim 30, **characterized in that** the demodulator receives a first discrete multitone (DMT) symbol at the first reception bit rate and a second DMT symbol at the second reception bit rate, the first DMT symbol having a first number of bits determined by a first bit allocation table and the second DMT symbol having a second number of bits determined by a second bit allocation table.

33. Receiver according to claim 31, **characterized in that** an average parity bit ratio for DMT symbols received by the demodulator at the first and the second reception bit rates is substantially constant, where the parity bit ratio is a number of parity bits (206) in a DMT symbol divided by a total number of bits in the bit allocation table used for that DMT symbol.

34. Receiver according to any one of claims 31 to 33, **characterized in that** the specified interleaving parameter used to deinterleave the first plurality of interleaved codewords (200) is the same specified interleaving parameter used to deinterleave the second plurality of deinterleaved codewords (200)

Patentansprüche

1. Verfahren zur Verwendung von Mehrträgermodulation in einem Mehrträger-Übertragungssystem (100, 300), mit den folgenden Schritten:

Bereitstellen einer Vielzahl von Codewörtern (200), die eine spezifizierte Codewortgröße aufweisen und eine spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur enthalten; und
Senden einer ersten Vielzahl der Codewörter (200) mit einer ersten Übertragungsbitrate unter Verwendung einer ersten Zuteilung von Bit;

dadurch gekennzeichnet, daß

die erste Übertragungsbitrate in eine zweite Übertragungsbitrate unter Verwendung einer zweiten Zuteilung von Bit umgeändert wird und daß eine zweite Vielzahl der Codewörter (200) mit der zweiten Bitrate gesendet wird, wobei die spezifizierte Codewortgröße und die spezifizierte Anzahl der Paritätsbit (206) zur Vorwärtsfehlerkorrektur, die für die erste Vielzahl von Codewörtern (200) verwendet werden, für die zweite Vielzahl von Codewörtern benutzt wird, um eine nahtlose Änderung der Übertragungsbitrate zu erzielen.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, daß** die erste Vielzahl von Codewörtern (200) und die zweite Vielzahl von Codewörtern (200) gemäß einem spezifizierten Verschachtelungsparameter verschachtelt werden, wobei der zum Verschachteln der ersten Vielzahl von Codewörtern (200) verwendete spezifizierte Verschachtelungsparameter derselbe spezifizierte Verschachtelungsparameter ist, mit dem die zweite Vielzahl von Codewörtern (200) verschachtelt wird.

3. Verfahren nach Anspruch 1 oder 2, **dadurch gekennzeichnet, daß** die Übertragung mit der ersten Übertragungsbitrate das Zuteilen einer ersten Anzahl von Bit zu einem ersten diskreten Mehrfrequenz-(DMT-)Symbol wie durch eine erste Bitzuteilungstabelle bestimmt umfaßt und die Übertragung mit der zweiten Übertragungsbitrate das Zuteilen einer zweiten Anzahl von Bit zu einem zweiten DMT-Symbol wie durch eine zweite Bitzuteilungstabelle bestimmt umfaßt.

4. Verfahren nach Anspruch 3, **dadurch gekennzeichnet, daß** ein mittleres Paritätsbitverhältnis für mit der ersten und der zweiten Übertragungsrate gesendete DMT-Symbole im wesentlichen konstant ist, wobei das Paritätsbitverhältnis die Anzahl der Paritätsbit (206) in einem DMT-Symbol dividiert durch die Gesamtzahl der Bit in der für dieses DMT-Symbol verwendeten Bitzuteilungstabelle ist.

5. Verfahren nach Anspruch 3 oder 4, **dadurch gekennzeichnet, daß** die DMT-Symbole von der Codewortgröße entkoppelt werden.

6. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die Bit der ersten Vielzahl von Codewörtern (200) unter Verwendung einer ersten Bitzuteilungstabelle zum Senden solcher Codewörter (200) mit der ersten Übertragungsbitrate Trägersubkanälen zugeteilt werden und die Bit der zweiten Vielzahl von Codewörtern (200) unter Verwendung einer zweiten Bitzuteilungstabelle zum Senden solcher Codewörter (200) mit der zweiten Übertragungsbitrate Trägersubkanälen zugeteilt werden.

7. Verfahren zur Verwendung der Mehrträgermodulation in einem Mehrträgersystem (100, 300), mit den folgenden Schritten:

Bereitstellen einer Vielzahl von Codewörtern (200), die eine spezifizierte Codewortgröße aufweisen, wobei jedes Codewort (200) eine spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur enthält;
Empfangen einer ersten Vielzahl von Codewörtern (200) von Trägersubkanälen mit einer ersten Empfangsbitrate;
Demodulieren der Bit der ersten Vielzahl von Codewörtern (200) unter Verwendung einer ersten Bitzuteilungstabelle;

dadurch gekennzeichnet, daß

die zweite Vielzahl von Codewörtern (200) mit einer zweiten Empfangsbitrate von Trägersubkanälen empfangen werden, wobei die Bit der zweiten Vielzahl von Codewörtern (200) unter Verwendung einer zweiten Bitzuteilungstabelle demoduliert werden, wobei die spezifizierte Codewortgröße und die spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur, die zur Demodulation der Bit der ersten Vielzahl von Codewörtern (200) verwendet werden, zur Demodulation der Bit der zweiten Vielzahl von Codewörtern (200) verwendet werden, um eine nahtlose Änderung der Empfangsrate zu erzielen.

8. Verfahren nach Anspruch 7, **dadurch gekennzeichnet, daß** die erste Vielzahl von Codewörtern (200) und die zweite Vielzahl von Codewörtern (200) gemäß einem spezifizierten Entschachtelungsparameter entschachtelt werden, wobei der zum Entschachteln der ersten Vielzahl von Codewörtern (200) verwendete Entschachtelungsparameter derselbe spezifizierte Entschachtelungsparameter ist, mit dem die zweite Vielzahl von Codewörtern (200) entschachtelt wird.

9. Verfahren nach Anspruch 8, **dadurch gekennzeichnet, daß** das Empfangen mit der ersten Empfangsbitrate ein Demodulieren einer ersten Anzahl von Bit eines ersten DMT-Symbols wie durch die erste Bitzuteilungstabelle bestimmt umfaßt und das Empfangen mit der zweiten Empfangsbitrate das Demodulieren einer zweiten Anzahl von Bit eines zweiten DMT-Symbols wie durch die zweite Bitzuteilungstabelle bestimmt umfaßt.

10. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** ein System von Codewörtern (200) des digitalen Teilnehmeranschlusses (DSL) zur Übertragung zu einem Empfänger bereitgestellt wird und daß die Codewörter (200) moduliert werden, um diskrete Mehrfrequenz-(DMT-) Symbole mit einer Anzahl von Bit

zu bilden, die durch eine Übertragungsratenfähigkeit des Mehrträger-Übertragungssystems (100, 300) bestimmt wird, wobei insbesondere die Anzahl der Bit in den Codewörtern (200) ein nichtganzzahliges Vielfaches der Anzahl der Bit in den DMT-Symbolen ist.

- 5 11. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die erste Vielzahl von Codewörtern (200) mit einer ersten Empfangsbitrate unter Verwendung einer ersten Bitzuteilungstabelle empfangen wird und die zweite Vielzahl von Codewörtern (200) mit einer zweiten Empfangsbitrate empfangen wird, wobei die spezifizierte Codewortgröße und die spezifizierte Anzahl der Paritätsbit (206) zur Vorwärtsfehlerkorrektur, die für die erste Vielzahl von Codewörtern (200) verwendet werden, für die zweite Vielzahl von Codewörtern (200) verwendet werden und die Anzahl der Bit in der ersten Bitzuteilungstabelle von der Anzahl von Bit in der zweiten Zuteilungstabelle verschieden ist, um eine nahtlose Änderung der Empfangsbitrate zu erzielen.
- 10 12. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** das Mehrträger-Übertragungssystem (100, 300) einen Sender und einen Empfänger enthält, wobei der Sender und der Empfänger zum Senden der ersten Vielzahl von Codewörtern (200) mit der ersten Übertragungsbitrate eine erste Bitzuteilungstabelle verwenden, wobei eine Nachricht, die Übertragungsbitrate von der ersten zu der zweiten Übertragungsbitrate zu wechseln, gesendet wird, wobei im Empfänger und im Sender zum Senden mit der zweiten Übertragungsbitrate eine zweite Bitzuteilungstabelle verwendet wird, wobei die Verwendung der zweiten Bitzuteilungstabelle zwischen Sender und Empfänger synchronisiert wird, und wobei Codewörter (200) mit der zweiten Bitübertragungsrate unter Verwendung derselben spezifizierten Codewortgröße und spezifizierten Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur wie beim Senden von Codewörtern (200) mit der ersten Übertragungsbitrate gesendet werden, um eine nahtlose Änderung der Übertragungsbitrate zu erzielen.
- 15 13. Verfahren nach Anspruch 12, **dadurch gekennzeichnet, daß** die Nachricht die zweite Bitzuteilungstabelle enthält, wobei vorzugsweise der Empfänger die Nachricht zum Sender sendet.
- 20 14. Verfahren nach Anspruch 12 oder 13, **dadurch gekennzeichnet, daß** im Sender und im Empfänger eine Vielzahl von Bitzuteilungstabellen gespeichert wird, wobei die Nachricht spezifiziert, welche der gespeicherten Bitzuteilungstabellen als die zweite Bitzuteilungstabelle verwendet werden soll.
- 25 15. Verfahren nach Anspruch 14, **dadurch gekennzeichnet, daß** der Sender die Nachricht zum Empfänger sendet oder der Empfänger die Nachricht zum Sender sendet.
- 30 16. Verfahren nach einem der Ansprüche 12 bis 15, **dadurch gekennzeichnet, daß** das Synchronisieren das Senden eines Flag-Signals umfaßt, wobei vorzugsweise das Flag-Signal ein vordefiniertes Signal ist, insbesondere ein Sync-Symbol mit einer vordefinierten Phasenverschiebung oder ein invertiertes Sync-Symbol.
- 35 17. Verfahren nach Anspruch 16, **dadurch gekennzeichnet, daß** die erste Bitzuteilungstabelle zum Senden einer Vielzahl von diskreten Mehrfrequenz-(DMT-)Symbolen mit der ersten Übertragungsbitrate verwendet und zum Senden der Vielzahl von DMT-Symbolen mit der zweiten Übertragungsbitrate zu der zweiten Bitzuteilungstabelle gewechselt wird, wobei die zweite Bitzuteilungstabelle für die Übertragung beginnend mit einem vorbestimmten der DMT-Symbole verwendet wird, das der Übertragung des Flag-Signals folgt.
- 40 18. Verfahren nach Anspruch 17, **dadurch gekennzeichnet, daß** das vorbestimmte DMT-Symbol das erste DMT-Symbol ist, das der Übertragung des Flag-Signals folgt.
- 45 19. Verfahren nach einem der Ansprüche 16 bis 18, **dadurch gekennzeichnet, daß** der Sender das Flag-Signal zum Empfänger oder der Empfänger das Flag-Signal zum Sender sendet.
- 50 20. Verfahren nach einem der Ansprüche 12 bis 19, **dadurch gekennzeichnet, daß** jede Bitzuteilungstabelle einen Sendeleistungspegel für jeden Trägersubkanal oder eine Zuteilung von Bit zu Trägersubkanälen für jeden Latenzweg in einem Mehrträgersystem mit mehreren Latenzwegen spezifiziert.
- 55 21. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, daß** die Vielzahl von Codewörtern (200) einen spezifizierten Verschachtelungsparameter zum Verschachteln der Vielzahl von Codewörtern (200) aufweist und daß das Mehrträger-Übertragungssystem (100, 300) einen Sender und einen Empfänger enthält, wobei der Sender und der Empfänger zum Senden der ersten Vielzahl von Codewörtern (200) mit der ersten Übertragungsbitrate in einem ersten Power-Modus eine erste Bitzuteilungstabelle verwenden, wobei in dem Empfänger

und in dem Sender zum Senden der zweiten Vielzahl von Codewörtern (200) mit einer zweiten Übertragung in einem zweiten Power-Modus eine zweite Bitzuteilungstabelle gespeichert wird, wobei die Verwendung der zweiten Bitzuteilungstabelle zwischen Sender und Empfänger synchronisiert wird und wobei durch Verwendung der zweiten Bitzuteilungstabelle zum Senden von Codewörtern (200) in den zweiten Power-Modus eingetreten wird, wobei der spezifizierte Verschachtelungsparameter, die spezifizierte Codewortgröße und die spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur, die zum Senden der ersten Vielzahl von Codewörtern (200) in dem ersten Power-Modus verwendet werden, auch zum Senden der zweiten Vielzahl von Codewörtern (200) in dem zweiten Power-Modus verwendet werden, um eine nahtlose Änderung des Power-Modus zu erzielen und nahtlos in den zweiten Power-Modus einzutreten.

22. Verfahren nach Anspruch 21, **dadurch gekennzeichnet, daß** das Synchronisieren das Senden eines Flag-Signals umfaßt, wobei vorzugsweise das Flag-Signal ein vordefiniertes Signal ist, insbesondere ein Sync-Symbol mit einer vordefinierten Phasenverschiebung oder ein invertiertes Sync-Symbol.

23. Verfahren nach Anspruch 22, **dadurch gekennzeichnet, daß** der Sender das Flag-Signal zum Empfänger sendet oder der Empfänger das Flag-Signal zum Sender sendet.

24. Verfahren nach einem der Ansprüche 21 bis 23, **dadurch gekennzeichnet, daß** der zweite Power-Modus ein Low-Power-Modus ist, wobei vorzugsweise Trägersignalen null Bit zugeteilt werden, um eine Übertragungsbitrate von ungefähr null Kilobit pro Sekunde im Low-Power-Modus zu erzielen oder wobei bei Betrieb im Low-Power-Modus zur Timing-Wiederherstellung ein Pilotton gesendet wird, oder wobei beim Betrieb im Low-Power-Modus periodisch ein Sync-Symbol gesendet wird.

25. Verfahren nach Anspruch 22 oder 23, **dadurch gekennzeichnet, daß** die erste Bitzuteilungstabelle zum Senden einer Vielzahl von diskreten Mehrfrequenz-(DMT-)Symbolen in dem ersten Power-Modus verwendet und zum Senden der Vielzahl von DMT-Symbolen in dem zweiten Power-Modus zu der zweiten Bitzuteilungstabelle gewechselt wird, wobei die zweite Bitzuteilungstabelle für die Übertragung beginnend mit einem vorbestimmten der DMT-Symbole verwendet wird, das der Übertragung des Flag-Signals folgt.

26. Verfahren nach Anspruch 25, **dadurch gekennzeichnet, daß** das vorbestimmte DMT-Symbol das erste DMT-Symbol ist, das der Übertragung des Flag-Signals folgt, wobei vorzugsweise der zweite Power-Modus ein Full-Power-Modus ist oder wobei der erste Power-Modus ein Full-Power-Modus und der zweite Power-Modus ein Low-Power-Modus ist oder wobei der erste Power-Modus ein Low-Power-Modus und der zweite Power-Modus ein Full-Power-Modus ist.

27. Mehrträger-Übertragungssystem (100, 300) zum nahtlosen Ändern einer Übertragungsbitrate, umfassend:

einen Codierer, der eine Vielzahl von Codewörtern (200) produziert, die eine spezifizierte Codewortgröße aufweisen und eine spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur enthalten;
einen mit dem Codierer kommunizierenden Verschachteler (122), wobei der Verschachteler (122) die Vielzahl von Codewörtern (200) gemäß einem spezifizierten Verschachtelungsparameter verschachtelt; und
einen mit dem Verschachteler (122) kommunizierenden Modulator (110, 310), wobei der Modulator (110, 310) die Bit jedes verschachtelten Codeworts (200) Trägersubkanälen zuteilt, um Übertragung mit einer ersten Übertragungsbitrate zu erzielen;

dadurch gekennzeichnet, daß

der Modulator (110, 310) die Bitzuteilung ändert, um Übertragung mit einer zweiten Bitrate zu erzielen, wobei die spezifizierte Codewortgröße und die spezifizierte Anzahl von Paritätsbit (206) zur Vorwärtsfehlerkorrektur unverändert bleiben, nachdem der Modulator (110, 310) die Zuteilung der Bit geändert hat, um Übertragung mit der zweiten Übertragungsbitrate zu erzielen, wodurch eine nahtlose Änderung der Übertragungsbitrate erzielt wird.

28. Mehrträger-Übertragungssystem nach Anspruch 27, **dadurch gekennzeichnet, daß** der Modulator (110, 310) ein erstes diskretes Mehrfrequenz-(DMT-) Symbol mit einer ersten Anzahl von Bit wie durch eine erste Bitzuteilungstabelle bestimmt mit der ersten Übertragungsbitrate sendet; und ein zweites DMT-Symbol mit einer zweiten Anzahl von Bit wie durch eine zweite Bitzuteilungstabelle bestimmt mit der zweiten Übertragungsrate sendet.

29. Mehrträger-Übertragungssystem nach Anspruch 28, **dadurch gekennzeichnet, daß** ein mittleres Paritätsbitverhältnis für mit der ersten und der zweiten Übertragungsrate gesendete DMT-Symbole im wesentlichen konstant ist,

wobei das Paritätsbitverhältnis die Anzahl der Paritätsbit (206) in einem DMT-Symbol dividiert durch die Gesamtzahl der Bit in der für dieses DMT-Symbol verwendeten Bitzuteilungstabelle ist.

30. Mehrträger-Übertragungssystem nach einem der Ansprüche 27 bis 29, **dadurch gekennzeichnet, daß** der spezifizierte Verschachtelungsparameter unverändert bleibt, nachdem der Modulator (110, 710) die Zuteilung von Bit ändert.

31. Empfänger in einem Mehrträger-Übertragungssystem (100, 300) zum nahtlosen Ändern der Empfangsbitrate, wobei der Empfänger folgendes umfaßt:

einen Demodulator, der mit einer ersten Empfangsbitrate unter Verwendung einer ersten Zuteilung von Bit arbeitet, um eine erste Vielzahl von verschachtelten Codewörtern (200) zu produzieren, wobei jedes Codewort (200) eine spezifizierte Codewortgröße aufweist und eine spezifizierte Anzahl von Paritätsbit (206) zur Fehlerkorrektur enthält;

einen mit dem Demodulator kommunizierenden Entschachteler, wobei der Entschachteler die Codewörtern (200) gemäß einem spezifizierten Verschachtelungsparameter entschachtelt;

einen mit dem Entschachteler kommunizierenden Decodierer zum Empfangen und Decodieren der Vielzahl entschachtelter Codewörter (200);

dadurch gekennzeichnet, daß

der Demodulator den Betrieb zu einer zweiten Empfangsbitrate unter Verwendung einer zweiten Zuteilung von Bit wechselt, um eine zweite Vielzahl von verschachtelten Codewörtern (200) zu produzieren, wobei die spezifizierte Codewortgröße und die spezifizierte Anzahl von Paritätsbit (206) zur Fehlerkorrektur, die zum Decodieren der ersten Vielzahl von entschachtelten Codewörtern (200) verwendet werden, dieselbe spezifizierte Codewortgröße und spezifizierte Anzahl von Paritätsbit (206) zur Fehlerkorrektur sind, die zum Decodieren der zweiten Vielzahl entschachtelter Codewörter (200) verwendet werden, um eine nahtlose Änderung der Empfangsbitrate zu erzielen.

32. Empfänger nach Anspruch 30, **dadurch gekennzeichnet, daß** der Demodulator ein erstes diskretes Mehrfrequenz-(DMT-)Symbol mit der ersten Empfangsbitrate und ein zweites DMT-Symbol mit der zweiten Empfangsbitrate empfängt, wobei das erste DMT-Symbol eine erste Anzahl von Bit aufweist, die durch eine erste Bitzuteilungstabelle bestimmt wird, und das zweite DMT-Symbol eine zweite Anzahl von Bit aufweist, die durch eine zweite Bitzuteilungstabelle bestimmt wird.

33. Empfänger nach Anspruch 31, **dadurch gekennzeichnet, daß** ein mittleres Paritätsbitverhältnis für durch den Demodulator mit der ersten und der zweiten Empfangsbitrate empfangene DMT-Symbole im wesentlichen konstant ist, wobei das Paritätsbitverhältnis eine Anzahl von Paritätsbit (206) in einem DMT-Symbol dividiert durch eine Gesamtzahl von Bit in der für dieses DMT-Symbol verwendeten Bitzuteilungstabelle ist.

34. Empfänger nach einem der Ansprüche 31 bis 33, **dadurch gekennzeichnet, daß** der zum Entschachteln der ersten Vielzahl von verschachtelten Codewörtern (200) verwendete spezifizierte Verschachtelungsparameter derselbe spezifizierte Verschachtelungsparameter ist, mit dem die zweite Vielzahl von entschachtelten Codewörtern (200) entschachtelt wird.

Revendications

1. Procédé utilisant une modulation à plusieurs porteuses dans un système de transmission à ondes porteuses multiples (100, 300), le procédé comprenant le fait de :

procurer une multitude de mots codés (200) possédant une longueur spécifiée de mot codé et englobant un nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour ; et transmettre une première multitude de mots codés (200) à un premier débit binaire de transmission en utilisant une première attribution de bits ;

caractérisé en ce que

le premier débit binaire de transmission subit une modification pour passer à un deuxième débit binaire de transmission en utilisant une deuxième attribution de bits et **en ce qu'**une deuxième multitude de mots codés (200) est transmise au deuxième débit binaire, la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206)

pour la correction d'erreurs sans voie de retour que l'on utilise pour la première multitude de mots codés (200) sont utilisés pour la deuxième multitude de mots codés dans le but d'obtenir un changement ininterrompu en ce qui concerne le débit binaire de transmission.

5 2. Procédé selon la revendication 1, **caractérisé en ce que** la première multitude de mots codés (200) et la deuxième multitude de mots codés (200) sont soumises à un entrelacement conformément à un paramètre d'entrelacement spécifié, le paramètre d'entrelacement spécifié utilisé pour l'entrelacement de la première multitude de mots codés (200) étant identique au paramètre d'entrelacement spécifié utilisé pour soumettre à un entrelacement la deuxième multitude de mots codés (200).

10 3. Procédé selon la revendication 1 ou 2, **caractérisé en ce que** la transmission au premier débit binaire de transmission comprend l'attribution d'un premier nombre de bits à un premier symbole de multitonnalité discrète (DMT), comme déterminé par une première table d'attribution de bits, et **en ce que** la transmission au deuxième débit binaire de transmission comprend l'attribution d'un deuxième nombre de bits au deuxième symbole DMT comme déterminé par une deuxième table d'attribution de bits.

15 4. Procédé selon la revendication 3, **caractérisé en ce que** le taux moyen de bits de parité pour des symboles DMT transmis au premier débit et au deuxième débit de transmission est essentiellement constant, le taux de bits de parité étant égal au nombre de bits de parité (206) dans un symbole DMT divisé par le nombre total de bits dans la table d'attribution de bits utilisée pour ce symbole DMT.

20 5. Procédé selon la revendication 3 ou 4, **caractérisé en ce que** les symboles DMT sont soumis à un découplage par rapport à la longueur de mot codé.

25 6. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** les bits de la première multitude de mots codés (200) sont attribués à des voies intermédiaires d'ondes porteuses utilisant une première table d'attribution de bits pour la transmission desdits mots codés (200) au premier débit binaire de transmission, et **en ce que** les bits de la deuxième multitude de mots codés (200) sont attribués à des voies intermédiaires d'ondes porteuses utilisant une deuxième table d'attribution de bits pour la transmission desdits mots codés (200) au deuxième débit binaire de transmission.

30 7. Procédé utilisant une modulation à plusieurs porteuses dans un système de transmission à ondes porteuses multiples (100, 300), le procédé comprenant le fait de :

35 procurer une multitude de mots codés (200) possédant une longueur spécifiée de mot codé, chaque mot codé (200) englobant un nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour ;
recevoir une première multitude de mots codés (200) à partir de voies intermédiaires d'ondes porteuses à un premier débit binaire de réception ;
démoduler les bits de la première multitude de mots codés (200) en utilisant une première table d'attribution de bits ;

caractérisé en ce que

45 la deuxième multitude de mots codés (200) est reçue à partir de voies intermédiaires d'ondes porteuses à un deuxième débit binaire de réception, les bits de la deuxième multitude de mots codés (200) étant démodulés en utilisant une deuxième table d'attribution de bits, la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour, que l'on utilise pour la démodulation des bits de la première multitude de mots codés (200), étant utilisés pour la démodulation des bits de la deuxième multitude de mots codés (200) afin d'obtenir un changement ininterrompu du débit de réception.

50 8. Procédé selon la revendication 7, **caractérisé en ce que** la première multitude de mots codés (200) et la deuxième multitude de mots codés (200) sont soumis à un désentrelacement conformément à un paramètre spécifié de désentrelacement, le paramètre spécifié de désentrelacement utilisé pour le désentrelacement de la première multitude de mots codés (200) étant identique au paramètre de désentrelacement spécifié que l'on utilise pour le désentrelacement de la deuxième multitude de mots codés (200).

55 9. Procédé selon la revendication 8, **caractérisé en ce que** la réception au premier débit binaire de réception comprend la démodulation d'un premier nombre de bits d'un premier symbole DMT comme déterminé par la première table d'attribution de bits, et **en ce que** la réception au deuxième débit binaire de réception comprend la démodulation

de deuxième nombre de bits d'un deuxième symbole DMT comme déterminé par la deuxième table d'attribution de bits.

10. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce qu'on procure un système de mots codés (200) de ligne d'abonné numérique (DSL) à des fins de transmission à un récepteur, et en ce que les mots codés (200) sont soumis à une modulation pour former des symboles de multitonnalité discrète (DMT) possédant un nombre de bits déterminés et via une capacité de débit de transmission du système de transmission à ondes porteuses multiples (100, 300), en particulier dans lequel le nombre de bits dans les mots codés (200) est un multiple non entier du nombre de bits dans les symboles DMT.**

11. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la première multitude de mots codés (200) est reçue à un premier débit binaire de réception en utilisant une première table d'attribution de bits et **en ce que** la deuxième multitude de mots codés (200) est reçue à un deuxième débit binaire de réception, la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour, que l'on utilise pour la première multitude de mots codés (200), étant utilisés pour la deuxième multitude de mots codés (200), et le nombre de bits dans la première table d'attribution de bits est différent du nombre de bits dans la deuxième table d'attribution de bits afin d'obtenir un changement ininterrompu du débit binaire de réception.

12. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le système de transmission à ondes porteuses multiples (100, 300) englobe un émetteur et un récepteur, un émetteur et le récepteur utilisant une première table d'attribution de bits pour transmettre la première multitude de mots codés (200) au premier débit binaire de transmission, un message pour modifier le débit binaire de transmission pour le faire passer du premier débit binaire de transmission au deuxième débit binaire de transmission étant transmis, une deuxième table d'attribution de bits étant utilisée au récepteur et à l'émetteur pour la transmission au deuxième débit binaire de transmission, l'utilisation de la deuxième table d'attribution de bits faisant l'objet d'une synchronisation entre l'émetteur et le récepteur, des mots codés (200) étant transmis au deuxième débit binaire de transmission en utilisant une longueur spécifiée de mot codé et un nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour, qui sont identiques à celles et à celui utilisés pour la transmission de mots codés (200) au premier débit binaire de transmission afin d'obtenir un changement ininterrompu du débit binaire de transmission.

13. Procédé selon la revendication 12, **caractérisé en ce que** le message contient la deuxième table d'attribution de bits, de préférence dans lequel le récepteur transmet le message à l'émetteur.

14. Procédé selon la revendication 12 ou 13, **caractérisé en ce qu'une** multitude de tables d'attribution de bits sont mémorisées à l'émetteur et au récepteur, le message spécifiant la table d'attribution de bits mémorisée qui doit être utilisée à titre de deuxième table d'attribution de bits.

15. Procédé selon la revendication 14, **caractérisé en ce que** l'émetteur transmet le message au récepteur ou le récepteur transmet le message à l'émetteur.

16. Procédé selon l'une quelconque des revendications 12 à 15, **caractérisé en ce que** la synchronisation englobe l'envoi d'un signal en drapeau, de préférence dans lequel le signal en drapeau est un signal prédéfini, en particulier un symbole de synchronisation comportant un décalage de phase prédéfini ou bien un symbole de synchronisation inversé.

17. Procédé selon la revendication 16, **caractérisé en ce que** la première table d'attribution de bits est utilisée pour la transmission d'une multitude de symboles de multitonnalité discrète (DMT) au premier débit binaire de transmission et pour la commutation à la deuxième table d'attribution de bits pour la transmission de la multitude de symboles DMT au deuxième débit binaire de transmission, la deuxième table d'attribution de bits étant utilisée pour la transmission en démarrant avec un symbole DMT prédéterminé qui permet la transmission du signal en drapeau.

18. Procédé selon la revendication 17, **caractérisé en ce que** le symbole DMT prédéterminé représente le premier symbole DMT qui suit la transmission du signal en drapeau.

19. Procédé selon l'une quelconque des revendications 16 à 18, **caractérisé en ce que** l'émetteur transmet le signal en drapeau au récepteur ou le récepteur transmet le signal en drapeau à l'émetteur.

20. Procédé selon l'une quelconque des revendications 12 à 19, **caractérisé en ce que** chaque table d'attribution de bits spécifie un niveau de puissance de transmission pour chaque voie intermédiaire d'ondes porteuses ou une attribution de bits à des voies intermédiaires d'ondes porteuses pour chaque voie de délai de transit dans un système à ondes porteuses multiples du type comportant de multiples voies de délai de transit.

21. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la multitude de mots codés (200) possède un paramètre d'entrelacement spécifié pour l'entrelacement de la multitude de mots codés (200) et **en ce que** le système de transmission à ondes porteuses multiples (100, 300) englobe un émetteur et un récepteur, l'émetteur et le récepteur utilisant une première table d'attribution de bits pour la transmission de la première multitude de mots codés (200) au premier débit binaire de transmission dans un premier mode de puissance, une deuxième table d'attribution de bits étant mémorisée au récepteur et à l'émetteur pour la transmission de la deuxième multitude de mots codés (200) à un deuxième débit de transmission dans un deuxième mode de puissance, l'utilisation de la deuxième table d'attribution de bits étant soumise à une synchronisation entre l'émetteur et le récepteur, et dans lequel le deuxième mode de puissance est entré en utilisant la deuxième table d'attribution de bits pour la transmission de mots codés (200), le paramètre d'entrelacement spécifié, la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour, que l'on utilise pour la transmission de la première multitude de mots codés (200) dans le premier mode de puissance sont également utilisés pour la transmission de la deuxième multitude de mots codés (200) dans le deuxième mode de puissance pour obtenir une modification ininterrompue en ce qui concerne le mode de puissance et une entrée en continu dans le deuxième mode de puissance.

22. Procédé selon la revendication 21, **caractérisé en ce que** la synchronisation englobe l'émission d'un signal en drapeau, de préférence dans lequel le signal en drapeau représente un signal prédéfini, en particulier un symbole de synchronisation comportant un décalage de phase prédéfini ou bien un symbole de synchronisation inversé.

23. Procédé selon la revendication 22, **caractérisé en ce que** l'émetteur transmet le signal en drapeau au récepteur ou le récepteur transmet le signal en drapeau à l'émetteur.

24. Procédé selon l'une quelconque des revendications 21 à 23, **caractérisé en ce que** le deuxième mode de puissance est un mode de faible puissance, de préférence dans lequel zéro bit est attribué à des signaux porteurs pour obtenir un débit binaire de transmission d'approximativement 0 Kb par seconde dans le mode de faible puissance, 1 ou bien dans lequel une fréquence pilote est transmise pour la récupération du rythme lorsqu'on travaille dans le mode de faible puissance, ou bien dans lequel un symbole de synchronisation est transmis de manière périodique lorsqu'on travaille dans le mode de faible puissance.

25. Procédé selon la revendication 22 ou 23, **caractérisé en ce que** la première table d'attribution de bits est utilisée pour la transmission d'une multitude de symboles de multitonnalité discrète (DMT) dans le premier mode de puissance et pour la commutation à la deuxième table d'attribution de bits pour la transmission de la multitude de symboles DMT dans le deuxième mode de puissance, la deuxième table d'attribution de bits étant utilisée pour la transmission en démarrant avec un symbole DMT prédéterminé qui suit la transmission du signal en drapeau.

26. Procédé selon la revendication 25, **caractérisé en ce que** le symbole DMT prédéterminé représente le premier symbole DMT qui suit la transmission du signal en drapeau, de préférence dans lequel le deuxième mode de puissance est un mode de pleine puissance, ou bien dans lequel le premier mode de puissance est un mode de pleine puissance et le deuxième mode de puissance est un mode de faible puissance, ou bien dans lequel le premier mode de puissance est un mode de faible puissance et le deuxième mode de puissance est un mode de pleine puissance.

27. Système de transmission à ondes porteuses multiples (100, 300) pour la modification en continu d'un débit binaire de transmission, comprenant :

un encodeur produisant plusieurs mots codés (200) possédant une longueur spécifiée de mot codé et englobant un nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour :

un dispositif d'entrelacement (122) en communication avec l'encodeur, le dispositif d'entrelacement 122 soumettant la multitude de mots codés (200) à un entrelacement conformément à un paramètre d'entrelacement spécifié ; et

un modulateur (110, 310) en communication avec le dispositif d'entrelacement (122), le modulateur (110,

310) attribuant les bits de chaque mot codé (200) soumis à un entrelacement à des voies intermédiaires d'ondes porteuses pour obtenir une transmission à un premier débit binaire de transmission ;

caractérisé en ce que

le modulateur (110, 310) modifie l'attribution de bits pour obtenir une transmission à un deuxième débit binaire de transmission, la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour restant inchangés une fois que le modulateur (110, 310) a modifié l'attribution de bits pour obtenir une transmission au deuxième débit binaire de transmission, pour ainsi obtenir un changement ininterrompu quant au débit binaire de transmission.

28. Système de transmission à ondes porteuses multiples selon la revendication 27, **caractérisé en ce que** le modulateur (110, 310) transmet un premier symbole de multitonnalité discrète (DMT) possédant un premier nombre de bits, déterminé par une première table d'attribution de bits, au premier débit binaire de transmission ; et un deuxième symbole DMT possédant un deuxième nombre de bits déterminé par une deuxième table d'attribution de bits au deuxième débit binaire de transmission.

29. Système de transmission à ondes porteuses multiples selon la revendication 28, **caractérisé en ce qu'un** taux moyen de bits de parité pour des symboles DMT transmis au premier débit et au deuxième débit de transmission est essentiellement constant, le taux de bits de parité étant égal au nombre de bits de parité (206) dans un symbole DMT divisé par le nombre total de bits dans la table d'attribution de bits utilisée pour ce symbole DMT.

30. Système de transmission à ondes porteuses multiples selon l'une quelconque des revendications 27 à 29, **caractérisé en ce que** le paramètre d'entrelacement spécifié reste inchangé après la modification de l'attribution de bits par le modulateur (110, 310).

31. Récepteur dans un système de transmission à ondes porteuses multiples (100, 300) pour la modification en continu du débit binaire de réception, le récepteur comprenant :

un démodulateur travaillant à un premier débit binaire de réception en utilisant une première attribution de bits pour obtenir une première multitude de mots codés entrelacés (200), chaque mot codé (200) possédant une longueur spécifiée de mot codé et englobant un nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour ;

un dispositif de désentrelacement en communication avec le démodulateur, le dispositif de désentrelacement soumettant les mots codés (200) à un désentrelacement conformément à un paramètre d'entrelacement spécifié ;

un décodeur en communication avec le dispositif de désentrelacement pour la réception et le décodage de la multitude de mots codés (200) qui ont été soumis à un désentrelacement ;

caractérisé en ce que

le démodulateur procède à un changement de fonctionnement pour passer à un deuxième débit binaire de réception en utilisant une deuxième attribution de bits afin d'obtenir une deuxième multitude de mots codés entrelacés (200), la longueur spécifiée de mot codé et le nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour, que l'on utilise pour le décodage de la première multitude de mots codés (200) qui ont été soumis à un désentrelacement représentant la même longueur spécifiée de mots codés et le même nombre spécifié de bits de parité (206) pour la correction d'erreurs sans voie de retour que l'on utilise pour le décodage de la deuxième multitude de mots codés (200) qui ont été soumis à un désentrelacement pour obtenir une modification en continu du débit binaire de réception.

32. Récepteur selon la revendication 30, **caractérisé en ce que** le démodulateur reçoit un premier symbole de multitonnalité discrète (DMT) au premier débit binaire de réception et un deuxième symbole DMT au deuxième débit binaire de réception, le premier symbole DMT possédant un premier nombre de bits déterminé par une première table d'attribution de bits et le deuxième symbole DMT possédant un deuxième nombre de bits déterminé par une deuxième table d'attribution de bits.

33. Récepteur selon la revendication 31, **caractérisé en ce qu'un** taux moyen de bits de parité pour des symboles DMT transmis au premier débit et au deuxième débit de transmission est essentiellement constant, le taux de bits de parité étant égal au nombre de bits de parité (206) dans un symbole DMT divisé par le nombre total de bits dans la table d'attribution de bits utilisée pour ce symbole DMT.

34. Récepteur selon l'une quelconque des revendications 31 à 33, **caractérisé en ce que** le paramètre d'entrelacement spécifié que l'on utilise pour soumettre à un désentrelacement la première multitude de mots codés entrelacés (200) est égale au paramètre d'entrelacement spécifié que l'on utilise pour le désentrelacement de la deuxième multitude de mots codés (200) qui ont été soumis à un désentrelacement.

5

10

15

20

25

30

35

40

45

50

55

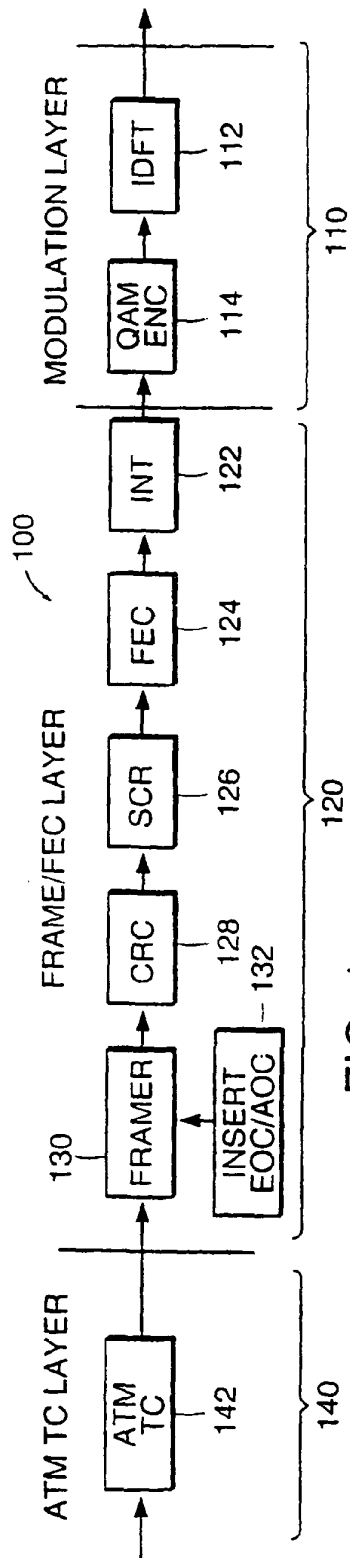


FIG. 1: ADSL DMT BLOCK DIAGRAM

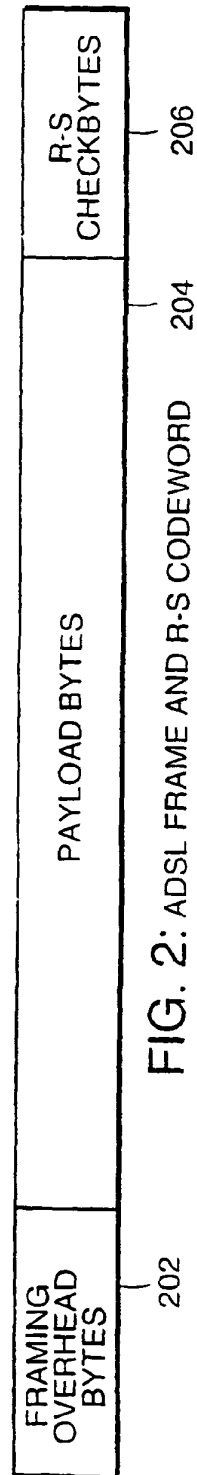


FIG. 2: ADSL FRAME AND R-S CODEWORD

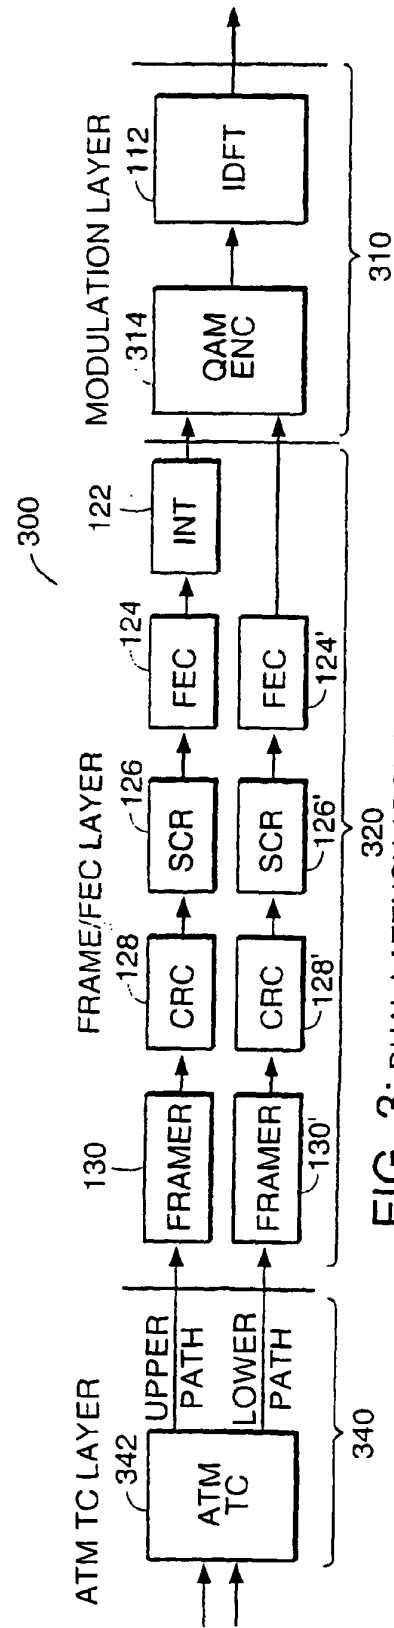


FIG. 3: DUAL LATENCY ADSL DMT BLOCK DIAGRAM

FIG. 4

Receiver Initiated NSRA

400

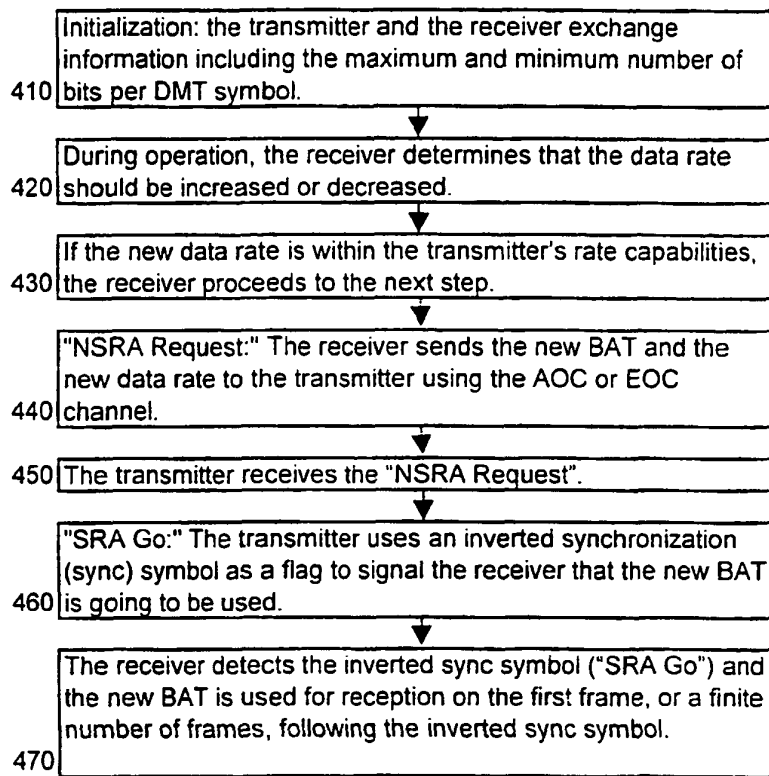


FIG. 5

Transmitter Initiated NSRA

500

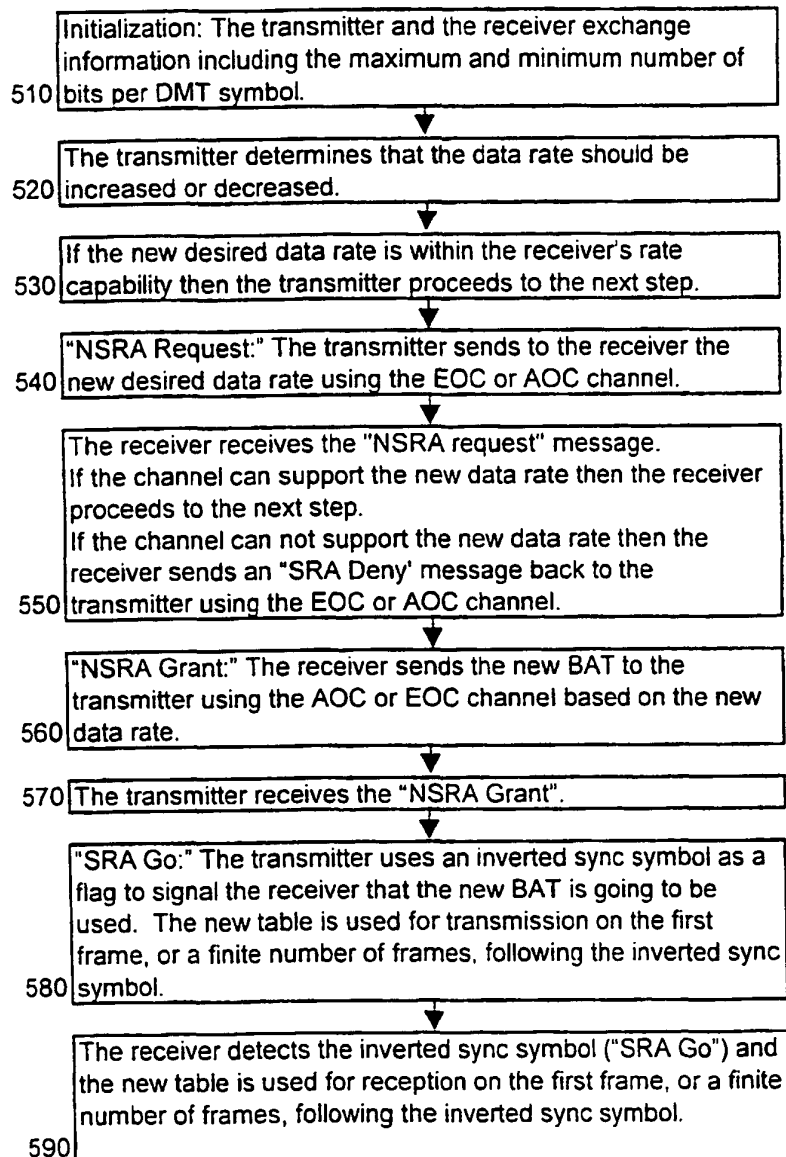


FIG. 6

Receiver Initiated FSRA

600

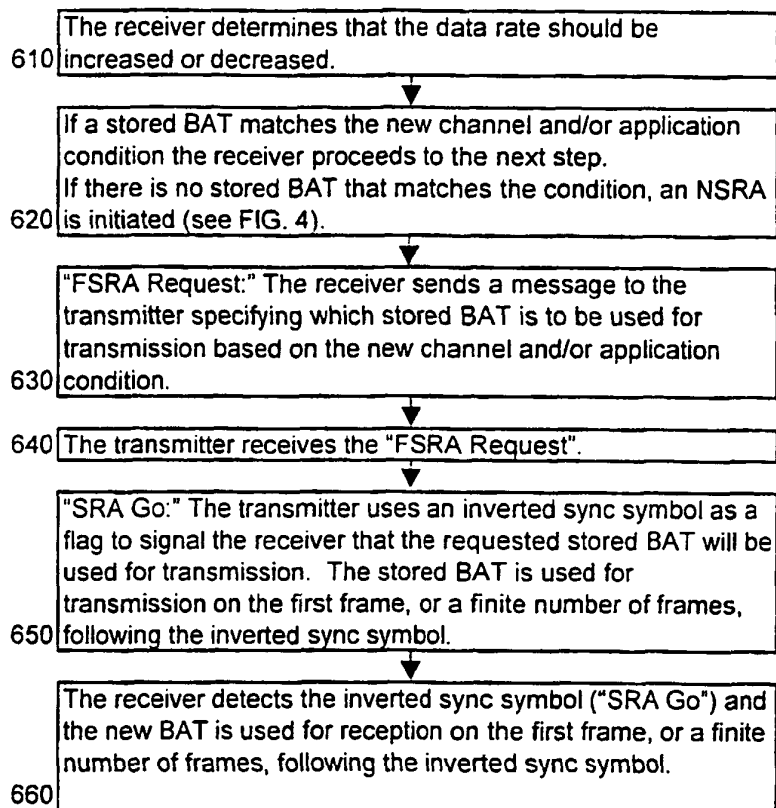


FIG. 7

Transmitter Initiated FSRA

700

