

(Model.)

J. G. MATTELIN.

LOCK.

No. 299,486.

Patented May 27, 1884.

Fig. 1.

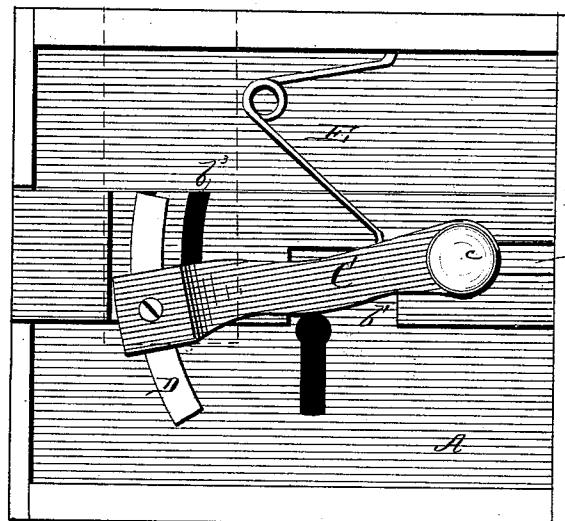


Fig. 2.

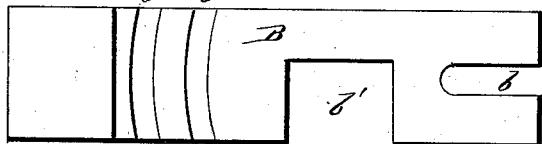


Fig. 4.



Fig. 3.




Fig. 5.




Fig. 6.





Fig. 6.



INVENTOR
Jones G. Mattelin

WITNESSES:

C. S. Garman

H. C. Mc Arthur

Per

Harrison
ATTORNEY.

UNITED STATES PATENT OFFICE.

JONAS G. MATTELIN, OF CHICAGO, ILLINOIS.

LOCK.

SPECIFICATION forming part of Letters Patent No. 299,486, dated May 27, 1884.

Application filed June 1, 1883. (Model.)

To all whom it may concern:

Be it known that I, JONAS G. MATTELIN, a citizen of the United States, residing at Chicago, in the county of Cook and State of Illinois, have invented certain new and useful Improvements in Locks, of which the following is a specification, to wit:

This invention relates to locks; and it consists in certain peculiarities of construction and arrangement of the same, substantially as will be hereinafter more fully described.

In order to enable others skilled in the art to which my invention appertains to make and use the same, I will now proceed to describe its construction and operation, referring to the accompanying drawings, in which—

Figure 1 is a plan view with one of the side plates removed. Figs. 2 and 3 are views of the lock-bolt. Figs. 4 and 5 are views of the locking-arm; Fig. 6, the key, and Fig. 7 shows the adjustable locking slide or dog.

A represents a lock-case, of suitable size and shape, provided with a lock-bolt, B, formed with a slot, b, in its rear end and a notch, b', in one side of its shank, as clearly shown in Fig. 2. In rear of its head this bolt is also formed with two curved grooves, b² b³, extending across its face, as shown. Upon a stud, c, which is secured to the case and projects 30 through the slotted end of the lock-bolt, is pivoted the locking-arm C, having a groove in its under side near the outer end, in which is placed a curved locking-dog, D, formed with a downwardly-projecting flange, d, at each 35 end, the space between these flanges being exactly the width of the lock-bolt. The arm C

is provided with a suitable spring, E, bearing against the case A, and adapted to hold it in proper position.

It will be readily understood by reference 40 to the drawings that when the key is turned the arm C is pushed back till the opening between the flanges d on the dog coincides with the lock-bolt, when the key contacts with said bolt and shoots it forward or backward, as the 45 case may be, and the spring immediately throws the arm C forward, the flange upon one end of the dog engaging with one of the grooves in the bolt and locking it either forward or back. The lock may thus be changed at any 50 time, should a key be lost, so that the old one would not fit, and any one finding and attempting to use it would be foiled by not knowing the adjustment of the dog, and consequent change to be made in the key.

Having thus fully described my invention, 55 what I claim as new, and desire to secure by Letters Patent, is—

In a lock, a lock-bolt provided with transverse grooves and notches for engagement with the key, in combination with a movable spring-actuated arm carrying a locking dog or slide adapted to be adjusted in the arm and secured by a set-screw, and formed with a notch, as shown, substantially as and for the purpose 65 set forth.

In testimony whereof I affix my signature in presence of two witnesses.

JONAS G. MATTELIN.

Witnesses:

W. C. MCARTHUR,
FRANK JOHNSON.