

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number
WO 2008/140734 A1

(51) International Patent Classification:
H04B 14/06 (2006.01)

(74) Agents: **DUJMICH, Louis, C.** et al.; Ostrolenk, Faber, Gerb & Soffen LLP, 1180 Avenue of the Americas, New York, NY 10036 (US).

(21) International Application Number:
PCT/US2008/005892

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 8 May 2008 (08.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/916,636 8 May 2007 (08.05.2007) US

(71) Applicant (for all designated States except US): **INTERNATIONAL RECTIFIER CORPORATION** [US/US]; 233 Kansas Street, El Segundo, California 90245 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Wenkai** [CN/US]; 133 Ayrault Road, East Greenwich, Rhode Island 02818 (US). **BOYDEN, Ken** [US/US]; 727 Camino Manzanitas, Thousand Oaks, California 91360 (US). **HAMZE, Rami** [US/US]; University Avenue, #12, Los Gatos, California 95032 (US).

Published:
— with international search report

(54) Title: DIGITAL PWM MODULATOR WITH FAST DYNAMIC RESPONSE AND FINE RESOLUTION

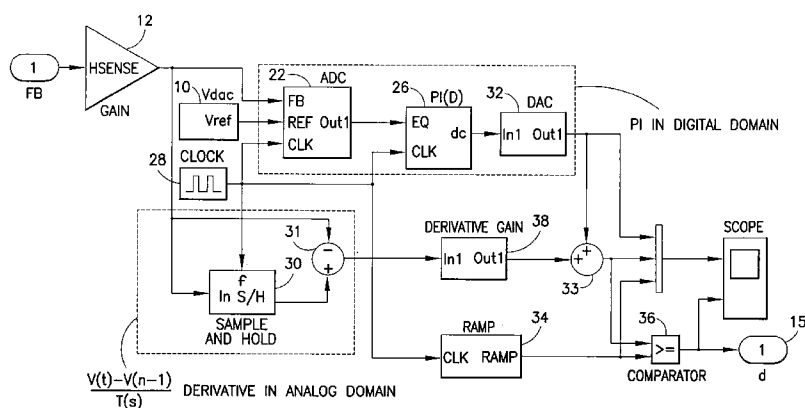


FIG.2(a)

(57) Abstract: A pulse width (PWM) controller for a voltage converter having at least one switch, an Analog to Digital Converter (ADC) circuit for digitizing inputted state variables including a feedback voltage from an output of the voltage converter and a reference voltage for setting the output of the voltage converter and providing a digital error signal, and a Proportional Integration and Derivation (PID) circuit receiving the digital error signal and providing a digital duty cycle signal. The controller including a Digital to Analog Converter (DAC) circuit for converting the digital duty cycle signal into an analog DAC output signal; and a comparator circuit for comparing a first signal including the DAC output signal with a reference signal for generating a pulse width modulated control signal for controlling the switching of the at least one switch of the voltage converter.

**DIGITAL PWM MODULATOR WITH FAST
DYNAMIC RESPONSE AND FINE RESOLUTION**

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is based on and claims priority to U.S. Provisional Patent Application Serial No. 60/916,636, filed on May 8, 2007 and entitled DIGITAL PWM MODULATOR WITH FAST DYNAMIC RESPONSE AND FINE RESOLUTION, the entire contents of which are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to digital controllers and more particularly to preventing degradation of dynamic performance of digital controllers due to phase lagging.

[0003] Most of the digital controllers of power converters developed up to now are based on a conventional architecture in which Analog-to-Digital Converters (ADCs) digitize the ADCs' state variables. In these digital controllers, a digital control algorithm determines a duty-cycle, which is used to drive a digital Pulse Width Modulator (PWM) for providing a Proportional Integration and Derivation (PID) compensation signal. Such PID compensation signal introduces undesired phase lagging due to the sampling effect and control delays, which include latency delay and clock based signal processing. The phase lagging leads to degraded dynamic performance of the digital controllers.

[0004] One of major challenges in digital control are quantization effects. The DPWM and ADC are two major quantizers in digital-controlled power converters. The duty cycle exported by the DPWM can only have discrete values, and the resolution of the discrete duty cycle ultimately determines the resolution of the output voltage. If there is no desired output voltage value inside the zero-error bin of the ADC, limit

cycle oscillations will happen. A high DPWM resolution can greatly reduce the limit cycle oscillations. Therefore, a high frequency and high-resolution design of the DPWM becomes a major challenge in the implementation of the digitally controlled power converters having reasonable die size.

[0005] Further, light load efficiency is becoming a more and more important factor in choosing PWM controllers. Currently, to achieve a high-frequency and high resolution DPWM, high clock frequencies have to be used, making the related power consumption intolerable as compared to analog counterparts to the PWM controllers.

SUMMARY OF THE INVENTION

[0006] It is an object of the present invention to provide a dedicated derivative control that reduces sampling effects and control delays, enables high dynamic performance, improving the bandwidth limitation of conventional digital control solutions, while maintaining all the potential advantages of digital controllers.

[0007] It is another object of the present invention to eliminate a limited cycle that is due to fine PWM resolution generated by comparing a Ramp signal and an output of PID compensation in an analog domain.

[0008] It is still another object of the present invention to introduce a feed forward control in the analog domain using an input voltage controlled ramp.

[0009] It is yet another object of the present invention to substantially decrease the power consumption of a PWM controller by maintaining the frequency of the system clock the same as the switching frequency.

[0010] It is further another object of the present invention to decrease the die size and power consumption of the PWM controller by enabling the use of windowed ADC and DAC with a fewer number of bits.

[0011] Provided is a pulse width (PWM) controller for a voltage converter having at least one switch, an Analog to Digital Converter (ADC) circuit for digitizing inputted state variables including a feedback voltage from an output of the voltage converter and a reference voltage for setting the output of the voltage converter and

providing a digital error signal, and a Proportional Integration and Derivation (PID) circuit receiving the digital error signal and providing a digital duty cycle signal. The controller including a Digital to Analog Converter (DAC) circuit for converting the digital duty cycle signal into an analog DAC output signal; and a comparator circuit for comparing a first signal including the DAC output signal with a reference signal for generating a pulse width modulated control signal for controlling the switching of the at least one switch of the voltage converter.

[0012] Other features and advantages of the present invention will become apparent from the following description of the invention that refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Figure 1(a) is a block diagram of a conventional analog voltage mode PWM controller;

[0014] Figure 1(b) is a block diagram of a conventional digital PWM corresponding to the analog voltage mode PWM controller of Figure 1(a);

[0015] Figure 2(a) is a block diagram of a preferred embodiment of a digital PWM controller of the present invention;

[0016] Figure 2(b) is a block diagram of a PID circuit used in the preferred embodiment of the digital PWM controller of Figure (2a);

[0017] Figure 3(a) is a graph illustrating PWM, Ramp, Proportional Integration and Derivative signals generated during the operation of the PWM controller of the present invention;

[0018] Figures 3(b) and 3(c) are graphs illustrating examples of step-up and step-down transient performance with the PWM controller of the present invention; and

[0019] Figure 4 is a block diagram of a preferred embodiment of a digital PWM controller of the present invention when the RAMP signal is replaced by an inductor current waveform to achieve current mode control.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0020] Figure 1(a) illustrates a conventional analog voltage mode PWM having a circuit 10 for providing a reference voltage value V_{ref} , an amplifier circuit 12 for receiving a feed back voltage value FB from the voltage converter (not shown) and providing a gain value to a circuit 14, which adds the inverse of the gain value and the reference voltage value V_{ref} , which sets the converter output voltage. The calculated difference between the reference and a real output of the feed back voltage value FB is fed into a PID compensation circuit 16, e.g., an error amplifier, that executes a transfer function in the frequency domain that provides a product of $[k(s+c)(s+d)]/[(s+a)(s+b)]$, which is the compensation desired to be carried out in the embodiment. A comparator 20 compares the output of the PID 16 compensation circuit with a saw-tooth waveform 18 and provides a resulting digital PWM duty-cycle signal 15. This is provided to control the switches of the converter.

[0021] Figure 1(b) shows an implementation of a corresponding digital PWM. The illustrated controller includes an ADC 22 to digitize the converter state variables, e.g., the feed back voltage value FB from the amplifier circuit 12, and the reference voltage value V_{ref} received from the circuit 10, synchronized to the clock signal from a clock circuit 28. A PID compensation circuit 26 receives the clock signal from the clock circuit 28 and an output error value D_{err} from the ADC 22 and uses a digital control algorithm to determine the duty-cycle (dc), which, after a delay generated by a counter/delay circuit 24 generates a driving digital PWM signal 15. This architecture simply duplicates the analog approach discussed with reference to Figure 1(a). As illustrated, in the conventional digital PWMs, an output PWM signal 15 is generated by a counter or delay cell in the digital domain.

[0022] A digital PWM controller of the present invention, an example of which is illustrated in Figure 2(a), provides a novel approach of using a Digital to Analog Converter (DAC) circuit 32 to convert the digitized duty cycle signal into the analog domain and compare in a comparator 34 the thus converted output signal with a RAMP signal from an analog RAMP circuit 36 to generate the output PWM signal 15.

[0023] The behavior of the PWM generation of the inventive circuit of Figure 2(a) is the same as that of an analog PWM. Therefore, theoretically PWM resolution is infinite. To compensate for the sampling effect and delays in the digital domain, an analog derivative gain circuit 38 processes a term determined by a sample and hold circuit 30, which is added to the output of the DAC circuit 32. The sample and hold circuit 30 receives the clock and feedback signals and before delivery to the derivative gain circuit 38, its output is summed by summer 31 with the inverse of the undelayed feedback signal at 31. The derivative analog signal is calculated in accordance with the following formula: $(V(t)-V(n-1))/T(s)$. With such arrangement, the delay on the derivative action is minimized, potentially enabling wide-bandwidth controllers. The output of gain circuit 38 is then provided to summer 33 for summing with the output of the DAC 32.

[0024] In an implementation of the inventive controller any kind of the ADC circuit 22 may be used. That is because, since the inventive controller mainly handles proportional and integration compensation which relates DC accuracy, speed is no longer a high priority. A trade-off among cost, power consumption, and resolution is preferred. Further, since the output is always around the reference V_{dac} , a window based ADC is recommended.

[0025] Also, a low pass filter may be implemented after the output of the DAC circuit 32, and thus the inventive controller may use a DAC circuit with a fewer number of bits. The windowed ADC circuit 22 and the DAC circuit 32 with a fewer number of bits can be used to decrease the die size and power consumption.

[0026] Although a dedicated derivative control is introduced, a moderate digital derivative term in the digital PID circuit 26, as shown in Figure 2(b), may still be used in an actual application. The circuit 26 includes sample and hold circuits 40, 42, and 44, all receiving the clock signal and a voltage value. The voltage value to the sample and hold circuit 42 is provided by a delay circuit 41, which receives its input from the sample and hold circuit 40. The voltage signal to the sample and hold circuit 44 is provided by a delay circuit 43, which input is a sum of the outputs of the sample and hold circuits 40 and 44. Finally, the output signal of the PID circuit 26 is a sum of an

output from amplifier 61 (gain K_p) from the sample and hold circuit 40, output from amplifier 60 (gain K_d) from the sample and hold circuits 40 and 42, and an output from amplifier 62 (gain K_i) from the sample and hold circuits 40 and 44.

[0027] The Ramp signal from the ramp circuit 34 (Figure 2a) is synchronized with the system clock 28 and is kept within analog domain. Therefore, there is no need to have a clock frequency higher than the converter switching frequency, substantially decreasing the power consumption of the PWM controller.

[0028] Figure 3(a) illustrates the PWM, Ramp, Proportional Integration and Derivative signals generated during the operation of the PWM controller of Figure 2(a). Also, Figures 3(b) and 3(c) respectively illustrate step-up and step-down transient performance of such PWM controller.

[0029] Finally, as illustrated in Figure 4, the digital PWM controller of the invention can be extended into a current mode control. This is achieved when the RAMP signal is replaced by an inductor current waveform, for example, a pre-condition signal 50 summed with a ramp compensation signal 52, to enable the PWM controller of the present invention to achieve current mode control.

[0030] Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention not be limited by the specific disclosure herein.

WHAT IS CLAIMED IS:

1. A pulse width (PWM) controller for a voltage converter having at least one switch, an Analog to Digital Converter (ADC) circuit for digitizing inputted state variables including a feedback voltage from an output of the voltage converter and a reference voltage for setting the output of the voltage converter and providing a digital error signal, and a Proportional Integration and Derivation (PID) circuit receiving the digital error signal and providing a digital duty cycle signal, the controller comprising:

a Digital to Analog Converter (DAC) circuit for converting the digital duty cycle signal into an analog DAC output signal; and

a comparator circuit for comparing a first signal comprising the DAC output signal with a reference signal for generating a pulse width modulated control signal for controlling the switching of the at least one switch of the voltage converter.

2. The controller of claim 1, further comprising:

a derivative generating circuit for receiving a second signal comprising the feedback voltage and producing a derivative of the feedback voltage; and

a summing circuit for summing the DAC output signal and the derivative of the feedback voltage in the first signal and providing the first signal to said comparator circuit.

3. The controller of claim 2, further comprising:

a sample and hold circuit for receiving the feedback voltage and producing a delayed feedback voltage and

a further summing circuit for summing the delayed feedback voltage and the feedback voltage and producing the second signal.

4. The controller of claim 3, further comprising a gain compensation circuit for providing gain to said derivative of the feedback voltage.

5. The controller of claim 3, further comprising an analog ramp circuit for generating the reference signal for the comparator circuit.

6. The controller of claim 5, further comprising:
a circuit for providing the reference voltage;
a circuit for receiving the feedback voltage from the voltage converter; and
a clock generator circuit for synchronizing the ADC, the PID, the derivative generating circuit and the ramp circuit.
7. The controller of claim 4, wherein the first signal is provided to the comparator circuit to be compared with the reference signal for producing the PWM control signal.
8. The controller of claim 4, wherein the sample and hold circuit further receives a clock signal.
9. The controller of claim 8, wherein the output of the derivative generating circuit is calculated in accordance with the formula $(V(t)-V(n-1))/T(s)$ in the frequency domain.
10. The controller of claim 1, wherein the ADC circuit is window based.
11. The controller of claim 1, further comprising a low pass filter circuit to filter the output of the DAC circuit,
12. The controller of claim 11, wherein the DAC circuit allows a fewer number of bits to be used.
13. The controller of claim 1, wherein a window based ADC circuit and a DAC circuit with a fewer number of bits can be used to decrease die size and power consumption.
14. The controller of claim 6, wherein the clock frequency of the clock generator is the same as a switching frequency of the voltage converter.

15. The controller of claim 2, wherein the reference signal for the comparator circuit comprises an artificial analog ramp signal.

16. The controller of claim 2, wherein the referenced signal for the comparator circuit comprises a signal generated from a current through an output inductor of the voltage converter.

17. The controller of claim 1, wherein the PID circuit comprises:
first and second delay circuits providing outputs; and
first, second, and third sample and hold circuits providing outputs, wherein the first sample and hold circuit receiving the digital error signal, the second sample and hold circuit receiving the output of the first delay circuit, the third sample and hold circuit receiving the output of the second delay circuit, the first delay circuit receiving the output of the first sample and hold circuit, and the second delay circuit receives a sum of the outputs of the first and third sample and hold circuits.

18. The controller of claim 17, wherein the digital duty cycle signal is a sum of the output of the first sample and hold circuit K_p , a sum of the outputs of the first and second sample and hold circuits K_d , and a sum of the outputs of the first and third sample and hold circuits K_i .

19. The controller of claim 2, wherein the reference signal is synchronized with the system a clock and is kept within the analog domain to limit a need to have a clock frequency higher than the switching frequency, thereby decreasing the power consumption of the controller.

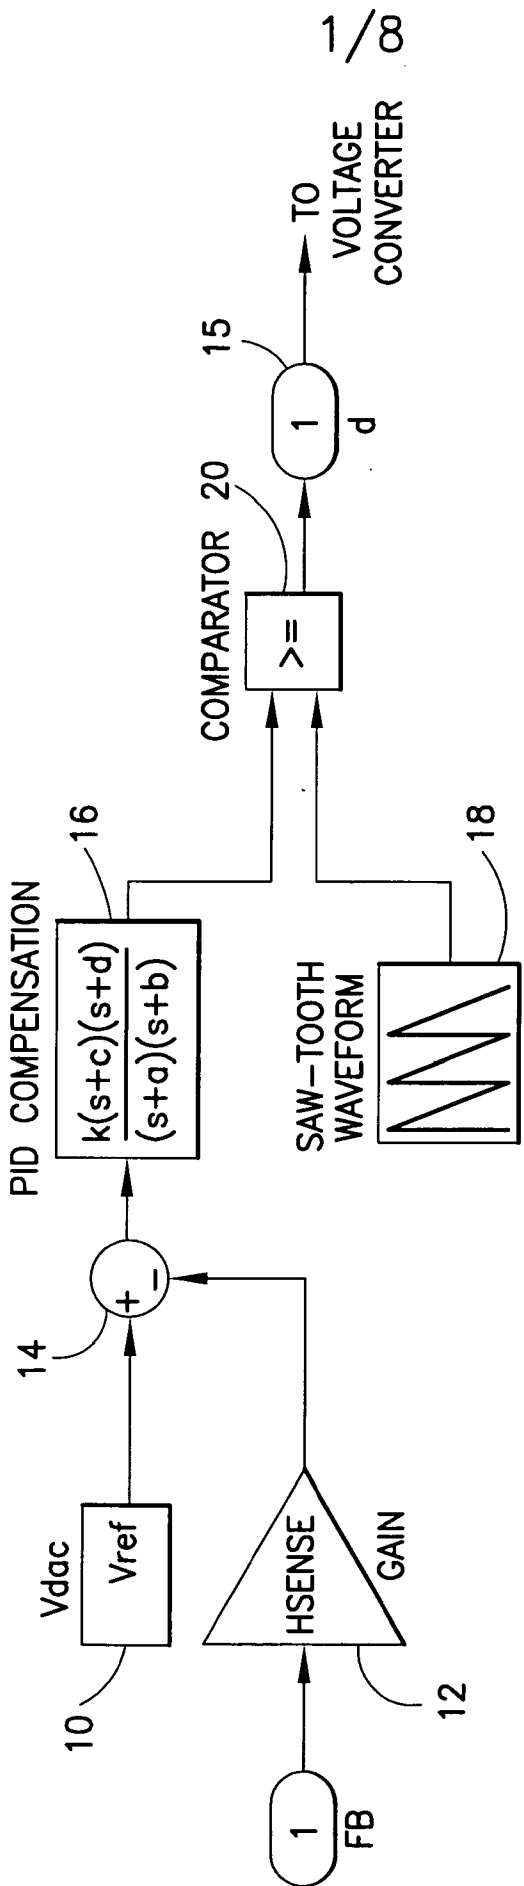


FIG.1(a)
PRIOR ART

2/8

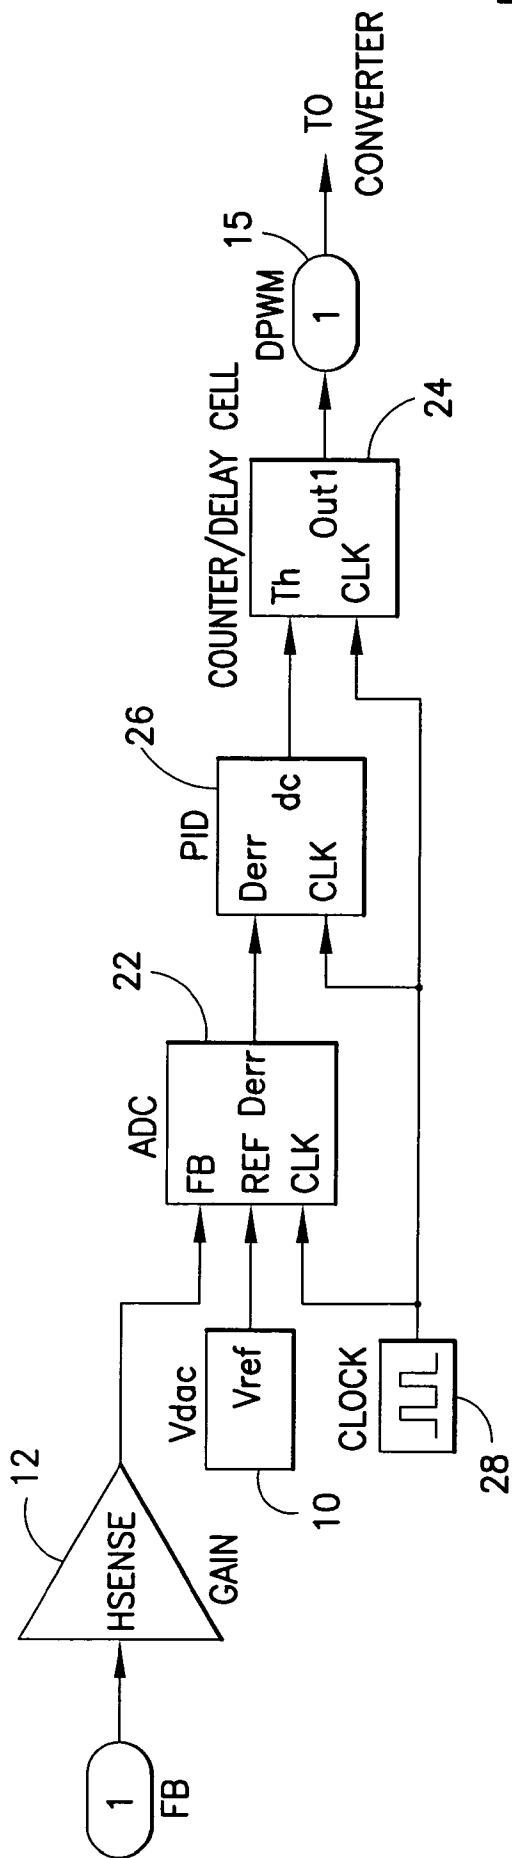


FIG.1(b)
PRIOR ART

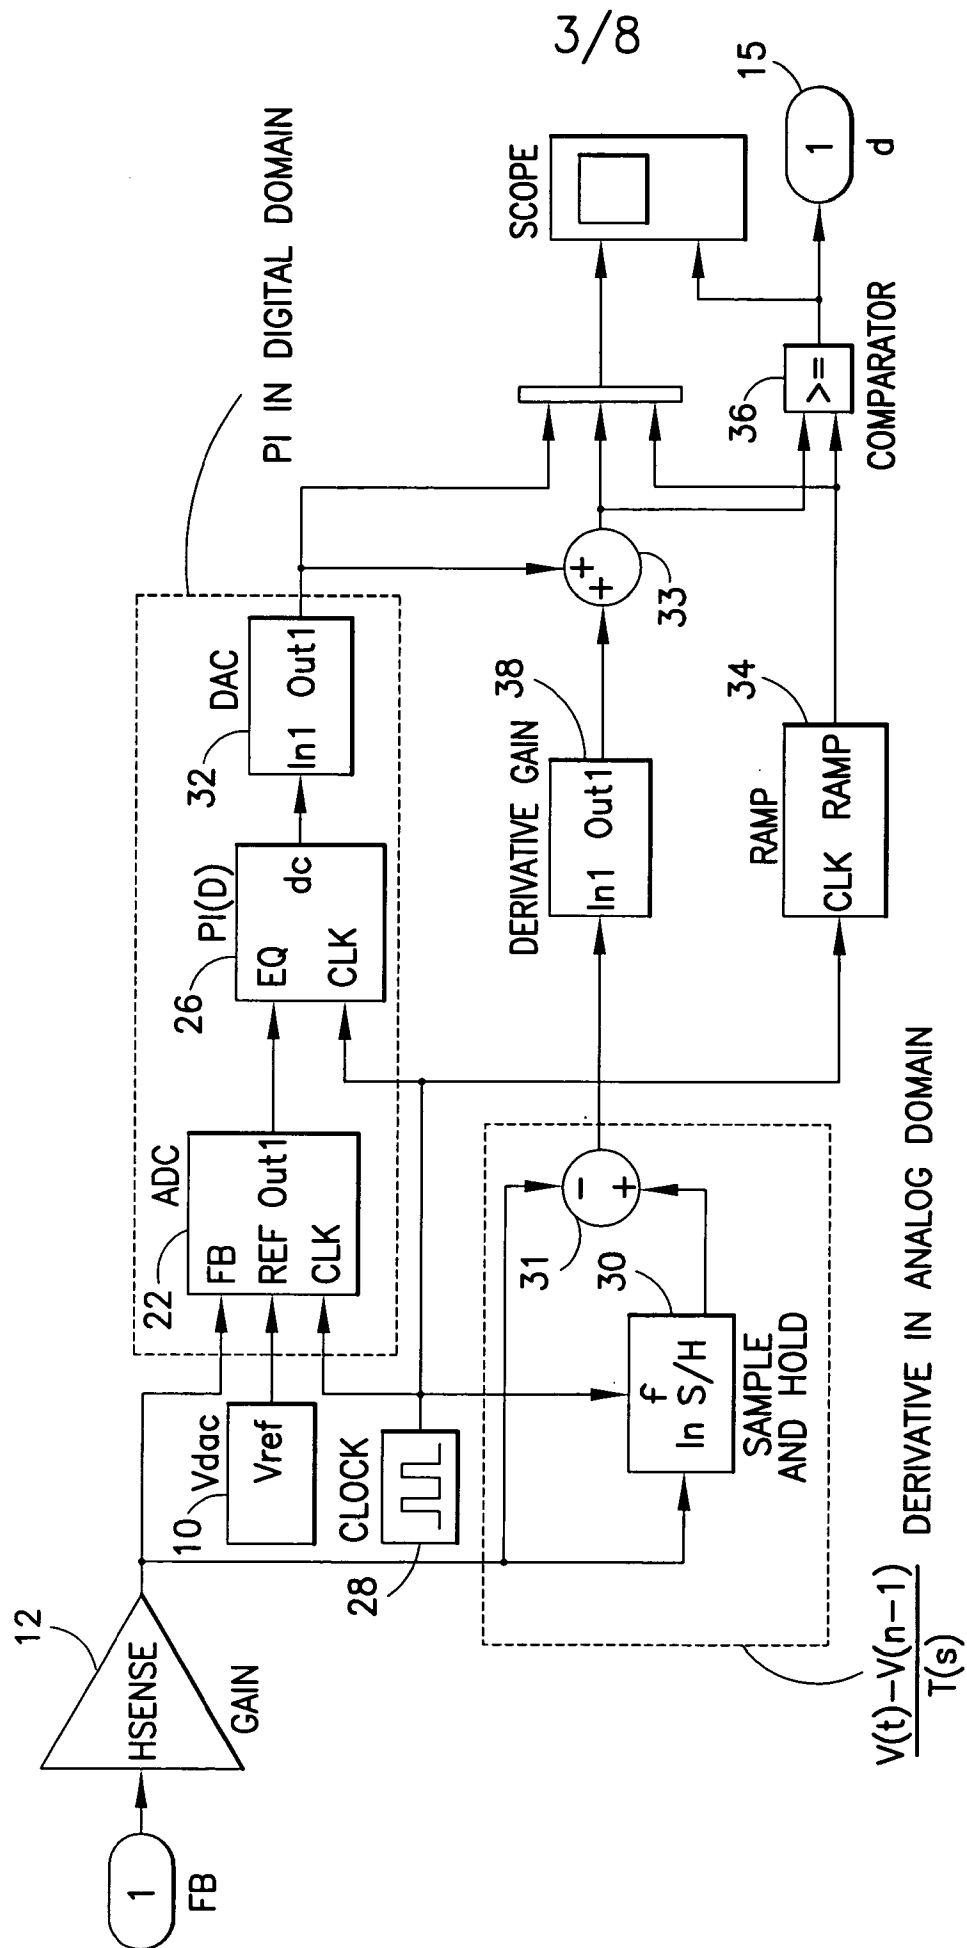


FIG.2(a)

4/8

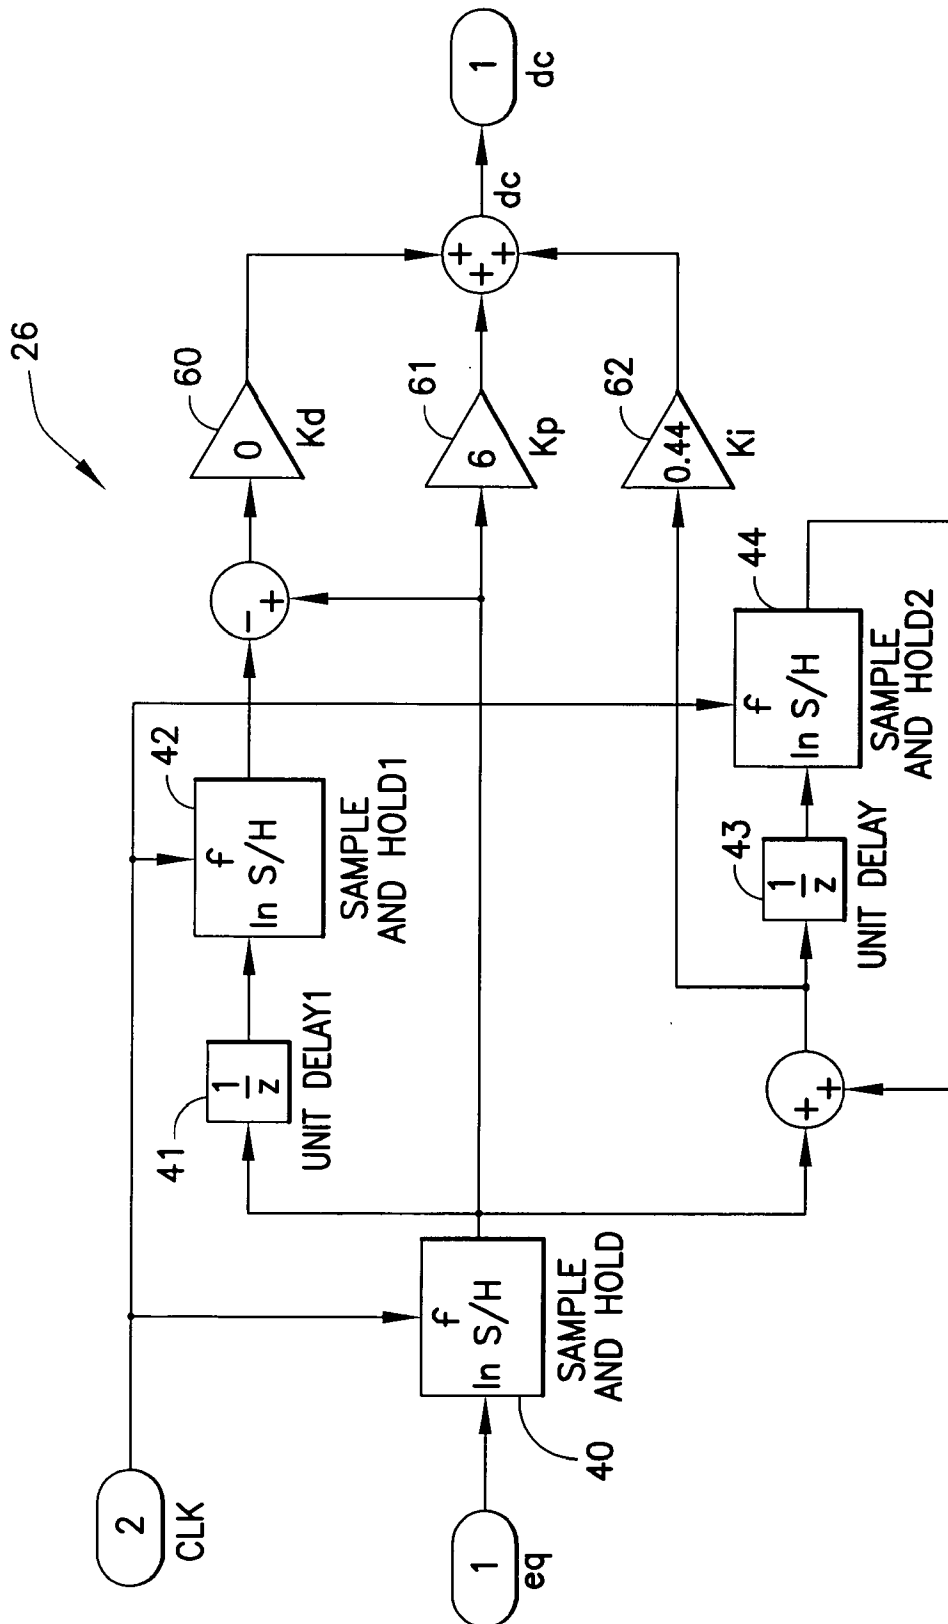


FIG.2(b)

5/8

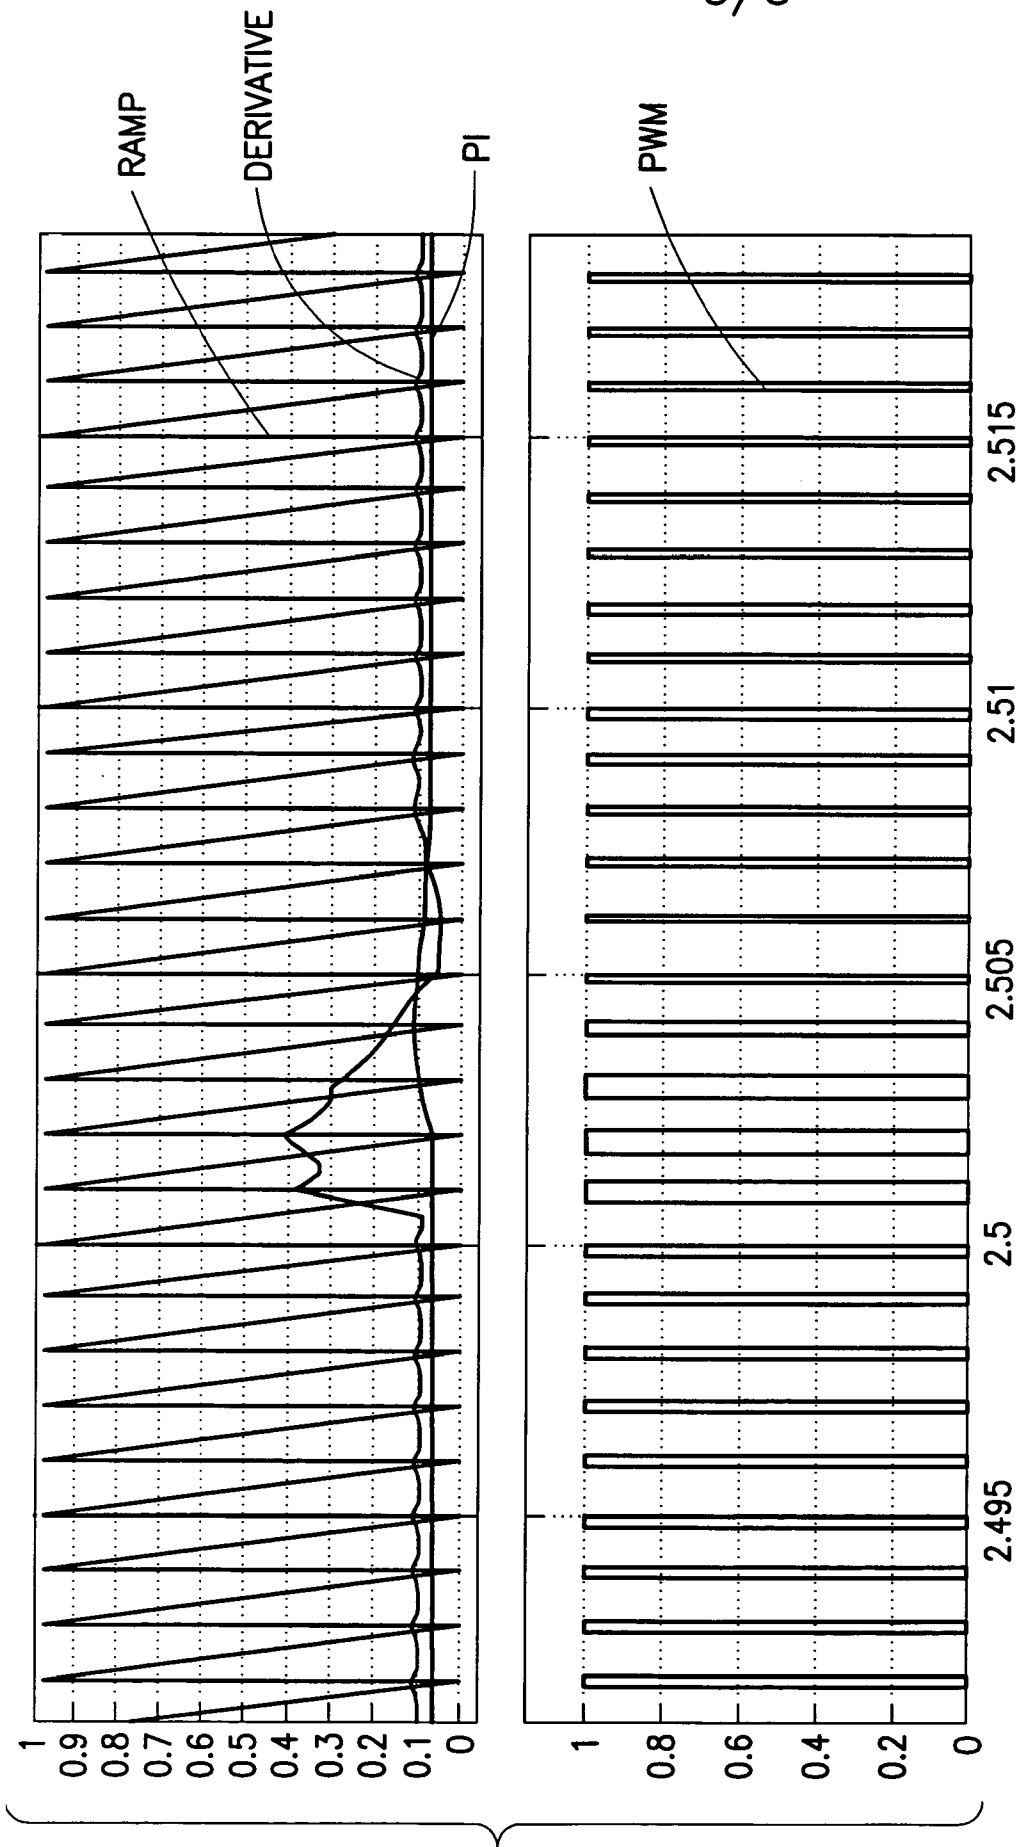


FIG.3(a)

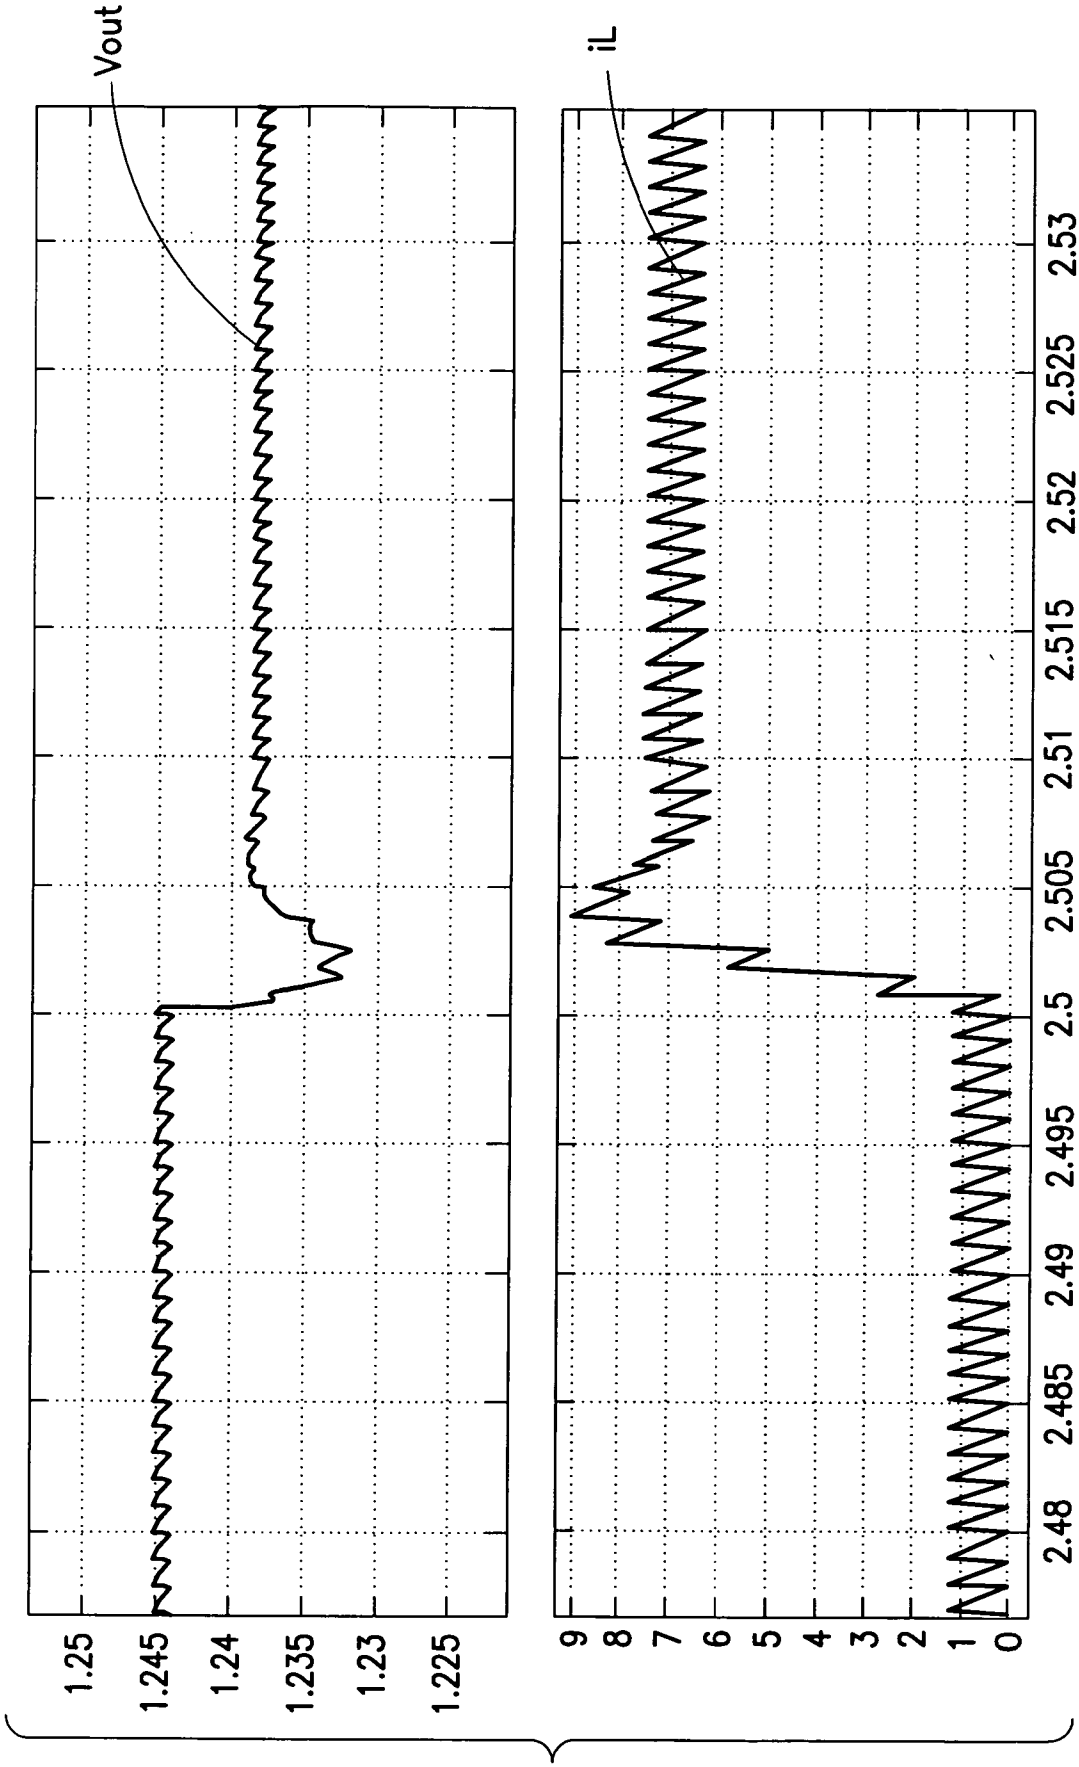


FIG.3(b)

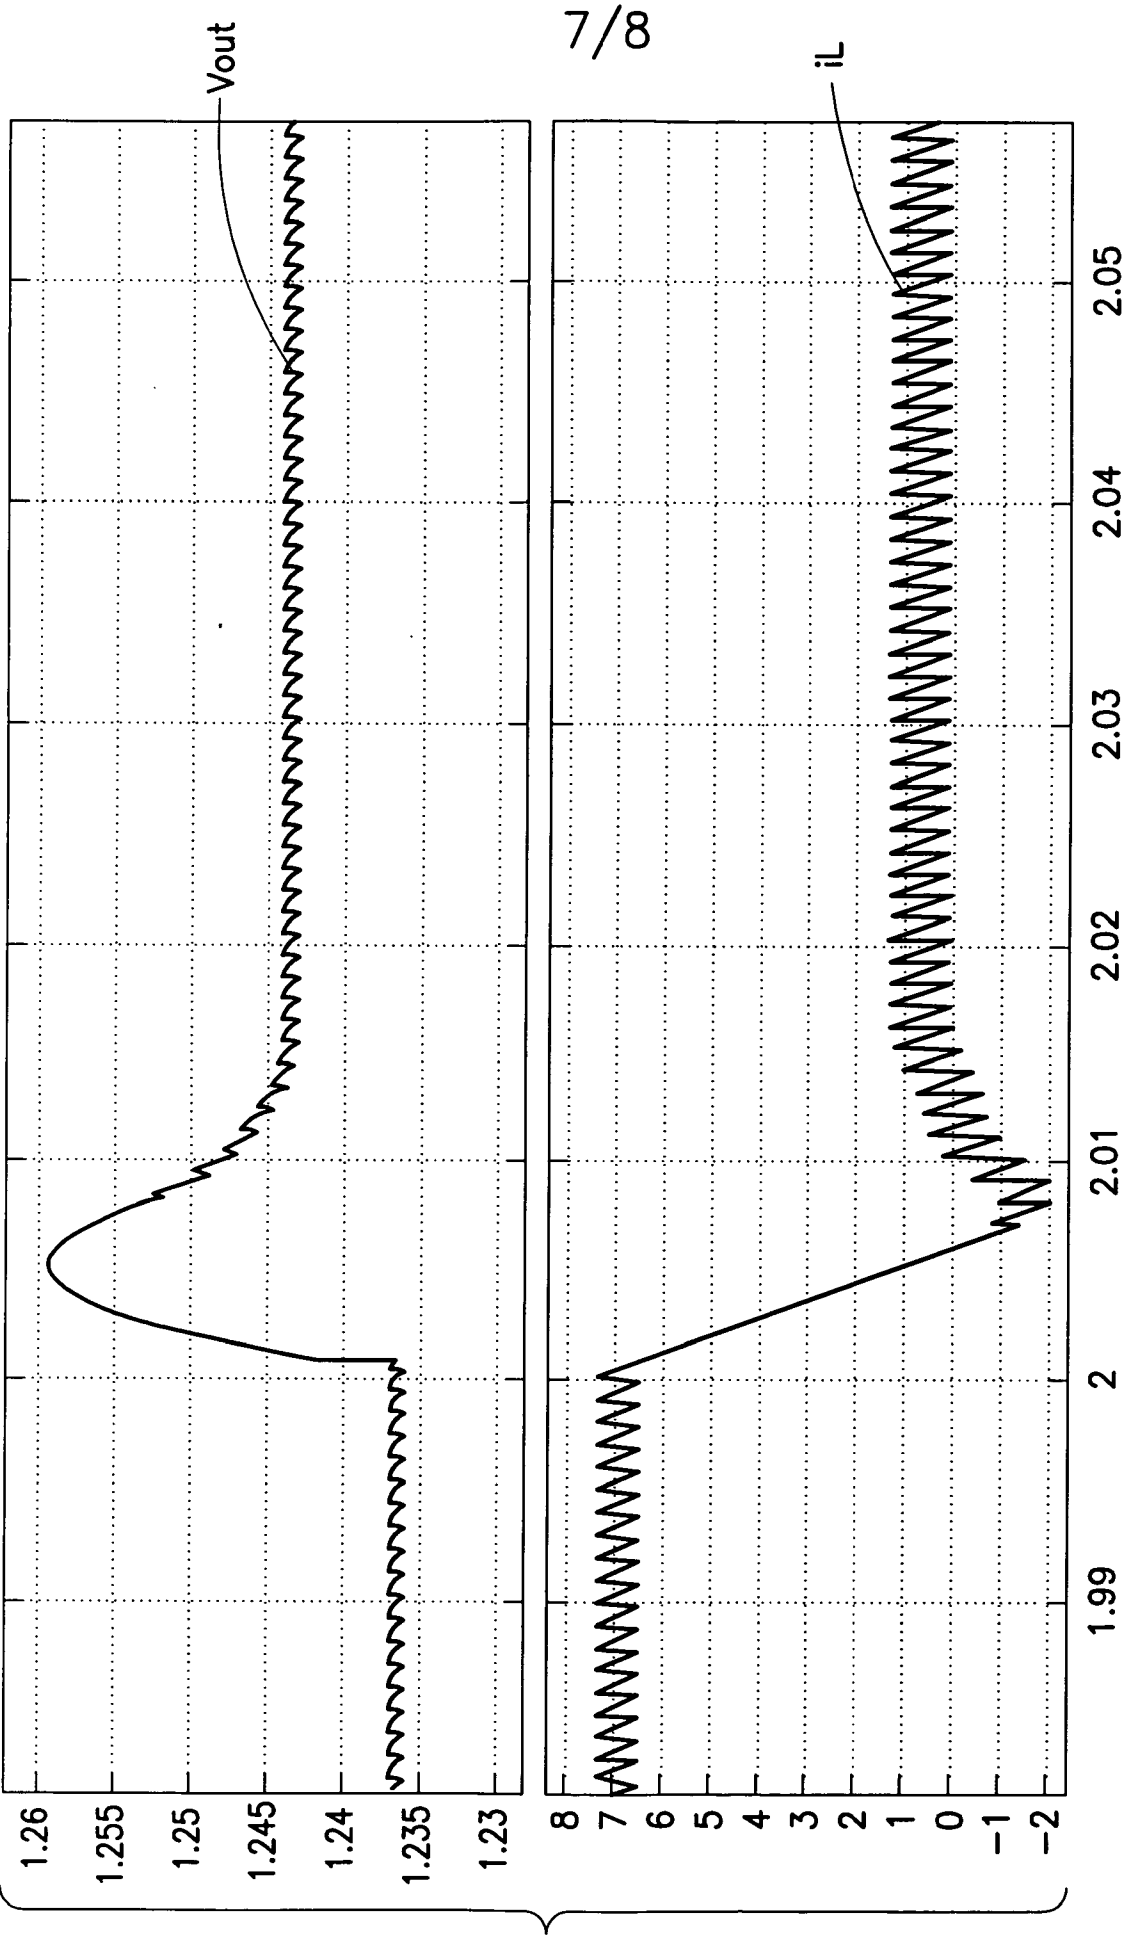


FIG.3(c)

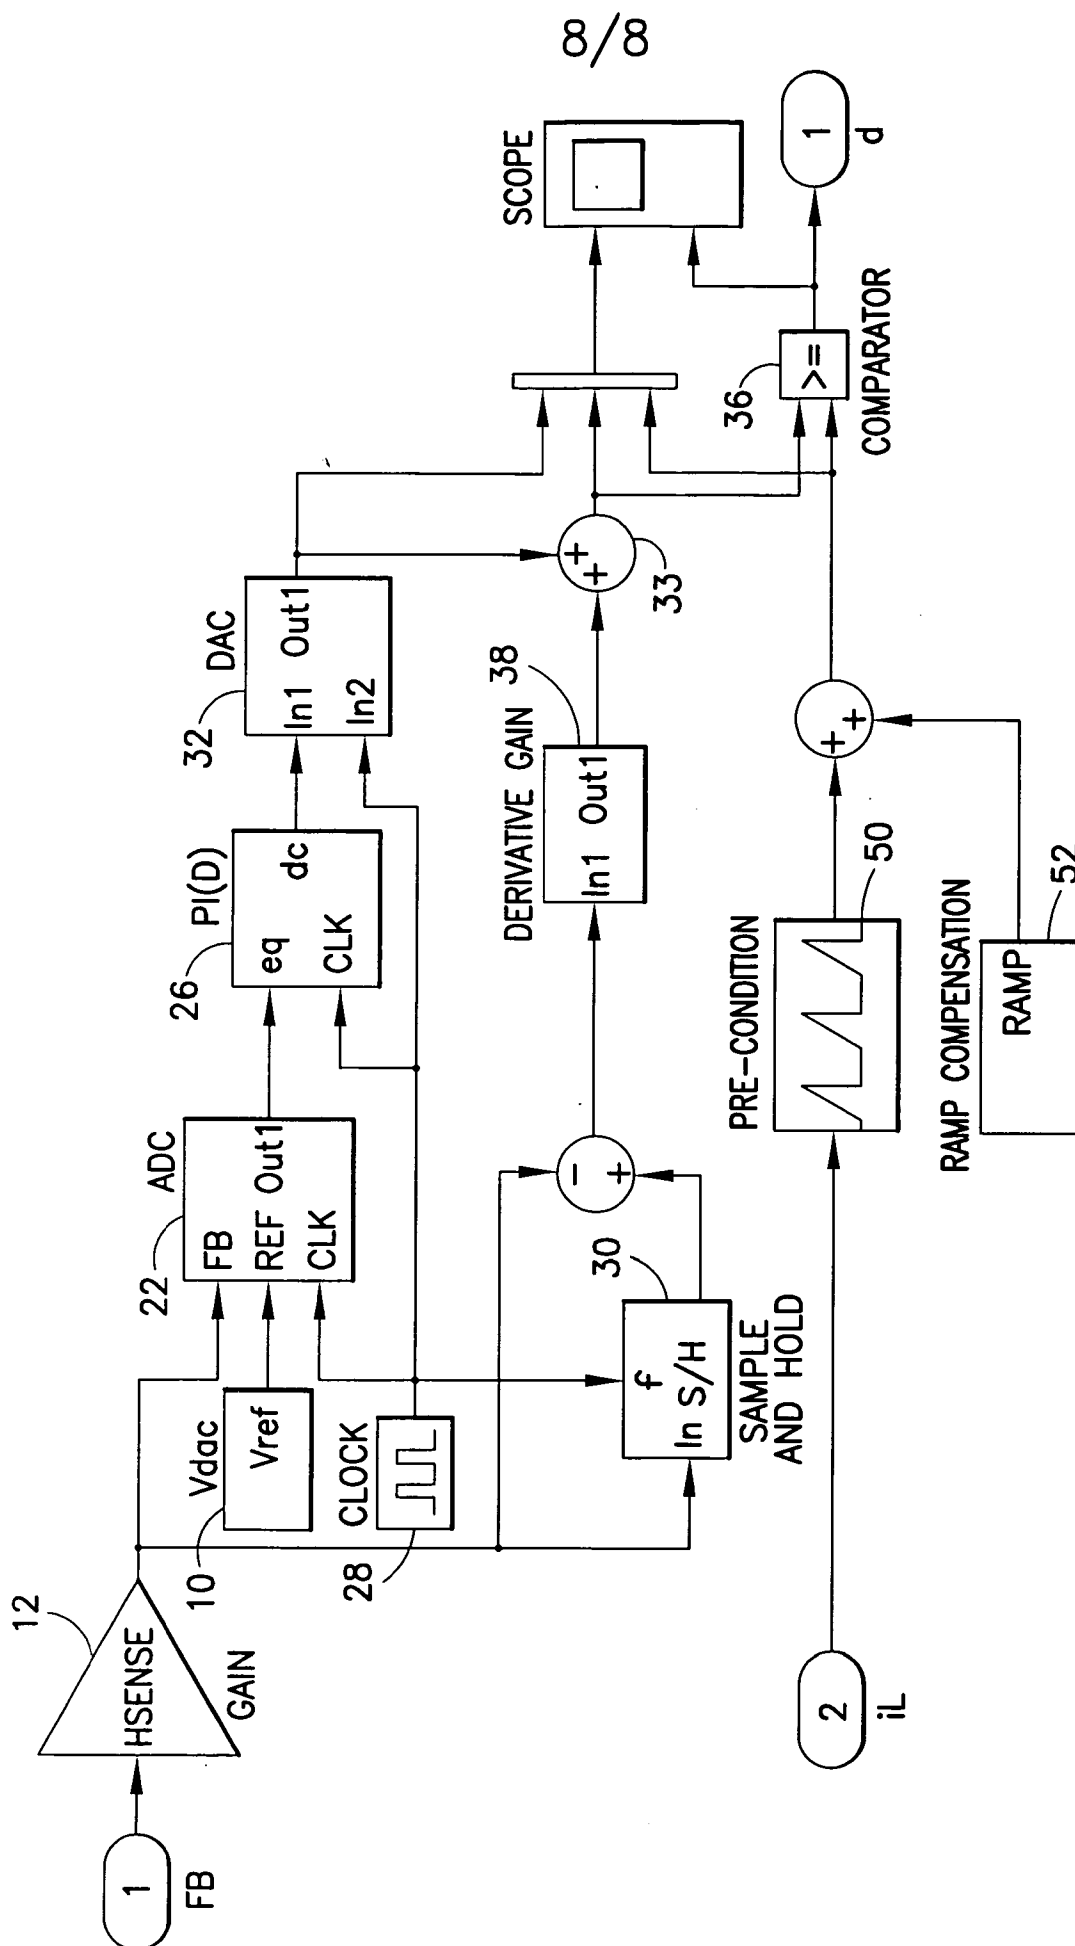


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/05892

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H04B 14/06 (2008.04)

USPC - 375/252

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): H04B 14/06 (2008.04)

USPC: 375/252

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
375/238, 244, 252; 714/746, 798; 341/120, 122 (keyword limited - see terms below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST(PGPB, USPT, EPAB, JPAB); Google; Search Terms: PWM, pulse width modulator, ADC, analog to digital converter, DAC, digital to analog converter, duty cycle, reference signal, generating circuit, summing circuit, delay circuit, feedback voltage, feedback, voltage, analog ramp, analog, ramp, derivative, gain, compensation

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2006/0023781 A1 (LEUNG et al.) 02 February 2006 (02.02.2006), entire document, especially para. [0004]-[0005], [0018], [0030], [0054], [0082]-[0086], [0088], [0090]-[0094], [0099]-[0100], [0102], [0106], [0108]-[0109], [0111], [0122], [0124], [0126], [0130], [0134]-[0135], [0142], [0161], [0163], [0171], [0174]-[0175], [0200], and [0204].	1-2, 10-13, 17-19 ----- 3-9, 14-16
Y	US 7,157,889 B2 (KERNAHAN et al.) 02 January 2007 (02.01.2007), entire document, especially col 1, ln 64-66, col 2, ln 6-8, ln 49-52, col 4, ln 40-43, col 5, ln 39-40, col 9, ln 65, col 11, ln 19-24, col 14, ln 53, col 18, ln 4-5, ln 30-31, col 20, ln 42-43, col 22, ln 9, col 37, ln 17-18, col 44, ln 32-33, col 45, ln 25-29, col 46, ln 14-18, col 47, ln 6-8, ln 41-44, col 52, ln 17-23, col 56, ln 63, col 57, ln 57, col 60, ln 24, col 65, ln 9, col 66, ln 17-20, col 67, ln 27-30, col 68, ln 29-31, col 70, ln 62, col 71, ln 1-5, col 79, ln 1-5, ln 45-46, col 80, ln 45-46, col 91, ln 40-44, col 98, ln 33-34, col 103, ln 29, ln 54-56, col 104, ln 4, col 106, ln 11-12, col 111, ln 4, ln 38, col 112, ln 25, and col 113, ln 54.	3-9, 14-16
A	US 5,311,548 A (NIKOLAUS) 10 May 1994 (10.05.1994), entire document	1-19
A	US 2006/0055388 A1 (TANG et al.) 16 March 2006 (16.03.2006), entire document	1-19

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 2008 (21.08.2008)

Date of mailing of the international search report

29 AUG 2008

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774