



(86) Date de dépôt PCT/PCT Filing Date: 2008/03/20
(87) Date publication PCT/PCT Publication Date: 2008/09/25
(85) Entrée phase nationale/National Entry: 2009/09/18
(86) N° demande PCT/PCT Application No.: US 2008/003649
(87) N° publication PCT/PCT Publication No.: 2008/115538
(30) Priorité/Priority: 2007/03/20 (US60/895,768)

(51) Cl.Int./Int.Cl. *H02J 7/04* (2006.01),
H02J 7/00 (2006.01)
(71) Demandeur/Applicant:
ENERDEL, INC., US
(72) Inventeur/Inventor:
HARTZOG, CHAD, US
(74) Agent: GOUDREAU GAGE DUBUC

(54) Titre : SYSTEME ET PROCEDE POUR EQUILIBRER UN ETAT DE CHARGE DE CELLULES CONNEXTEES EN SERIE

(54) Title: SYSTEM AND METHOD FOR BALANCING A STATE OF CHARGE OF SERIES CONNECTED CELLS

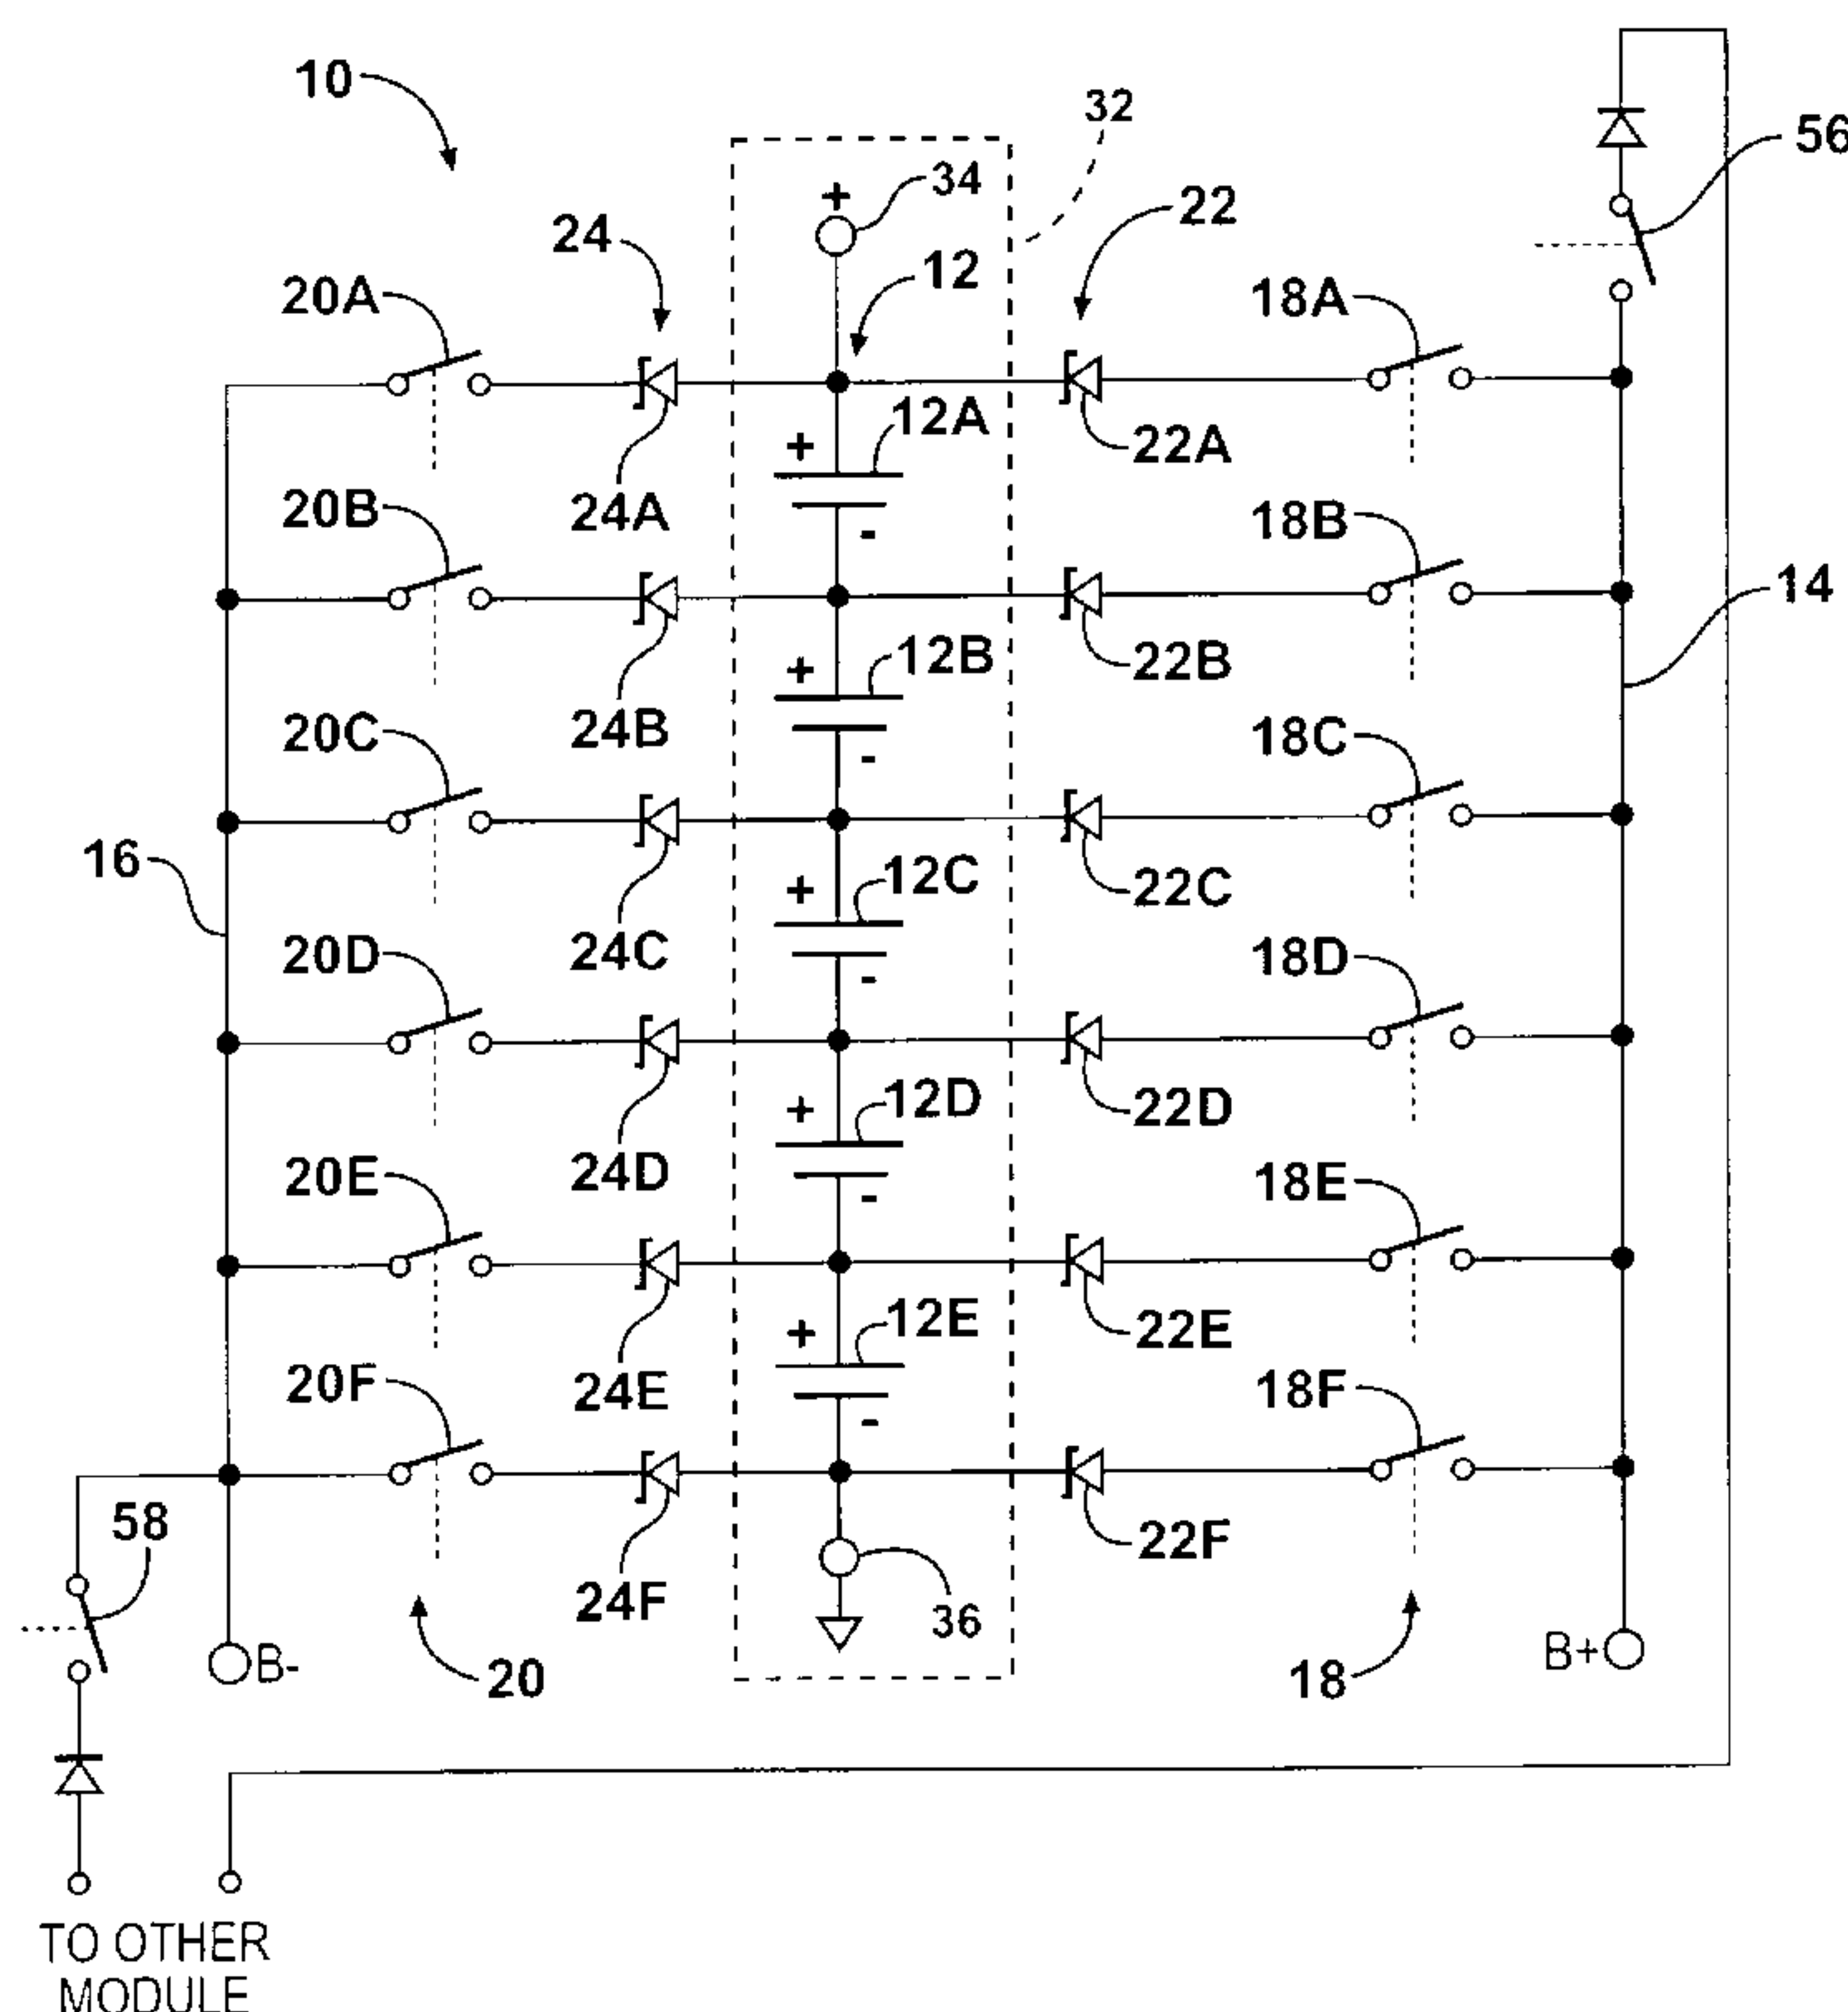


FIG - 1

(57) **Abrégé/Abstract:**

A system and method for charging an undercharged cell of a bank of series connected cells utilizes a charging circuit. The charging circuit includes an inductor that receives current from the entire bank of cells and then provides current to the undercharged cell. Pulse width modulation is utilized to turn the switches on and off to regulate the current that flows to the inductor and thus is provided to the undercharged cell.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 September 2008 (25.09.2008)

PCT

(10) International Publication Number
WO 2008/115538 A1

(51) International Patent Classification:
H02J 7/04 (2006.01) *H02J 7/00* (2006.01)

(74) Agents: ENGLISH, Trent, K. et al.; Howard & Howard Attorneys, P.C., 39400 Woodward Avenue, Suite 101, Bloomfield Hills, MI 48304-5151 (US).

(21) International Application Number:
PCT/US2008/003649

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 20 March 2008 (20.03.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/895,768 20 March 2007 (20.03.2007) US

(71) Applicant (*for all designated States except US*): EN-ERDEL, INC. [US/US]; 8740 Hague Road, Bldg.7, Indianapolis, IN 46256 (US).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): HARTZOG, Chad [US/US]; 118 St. Louis Court, Kokomo, IN 46902 (US).

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR BALANCING A STATE OF CHARGE OF SERIES CONNECTED CELLS

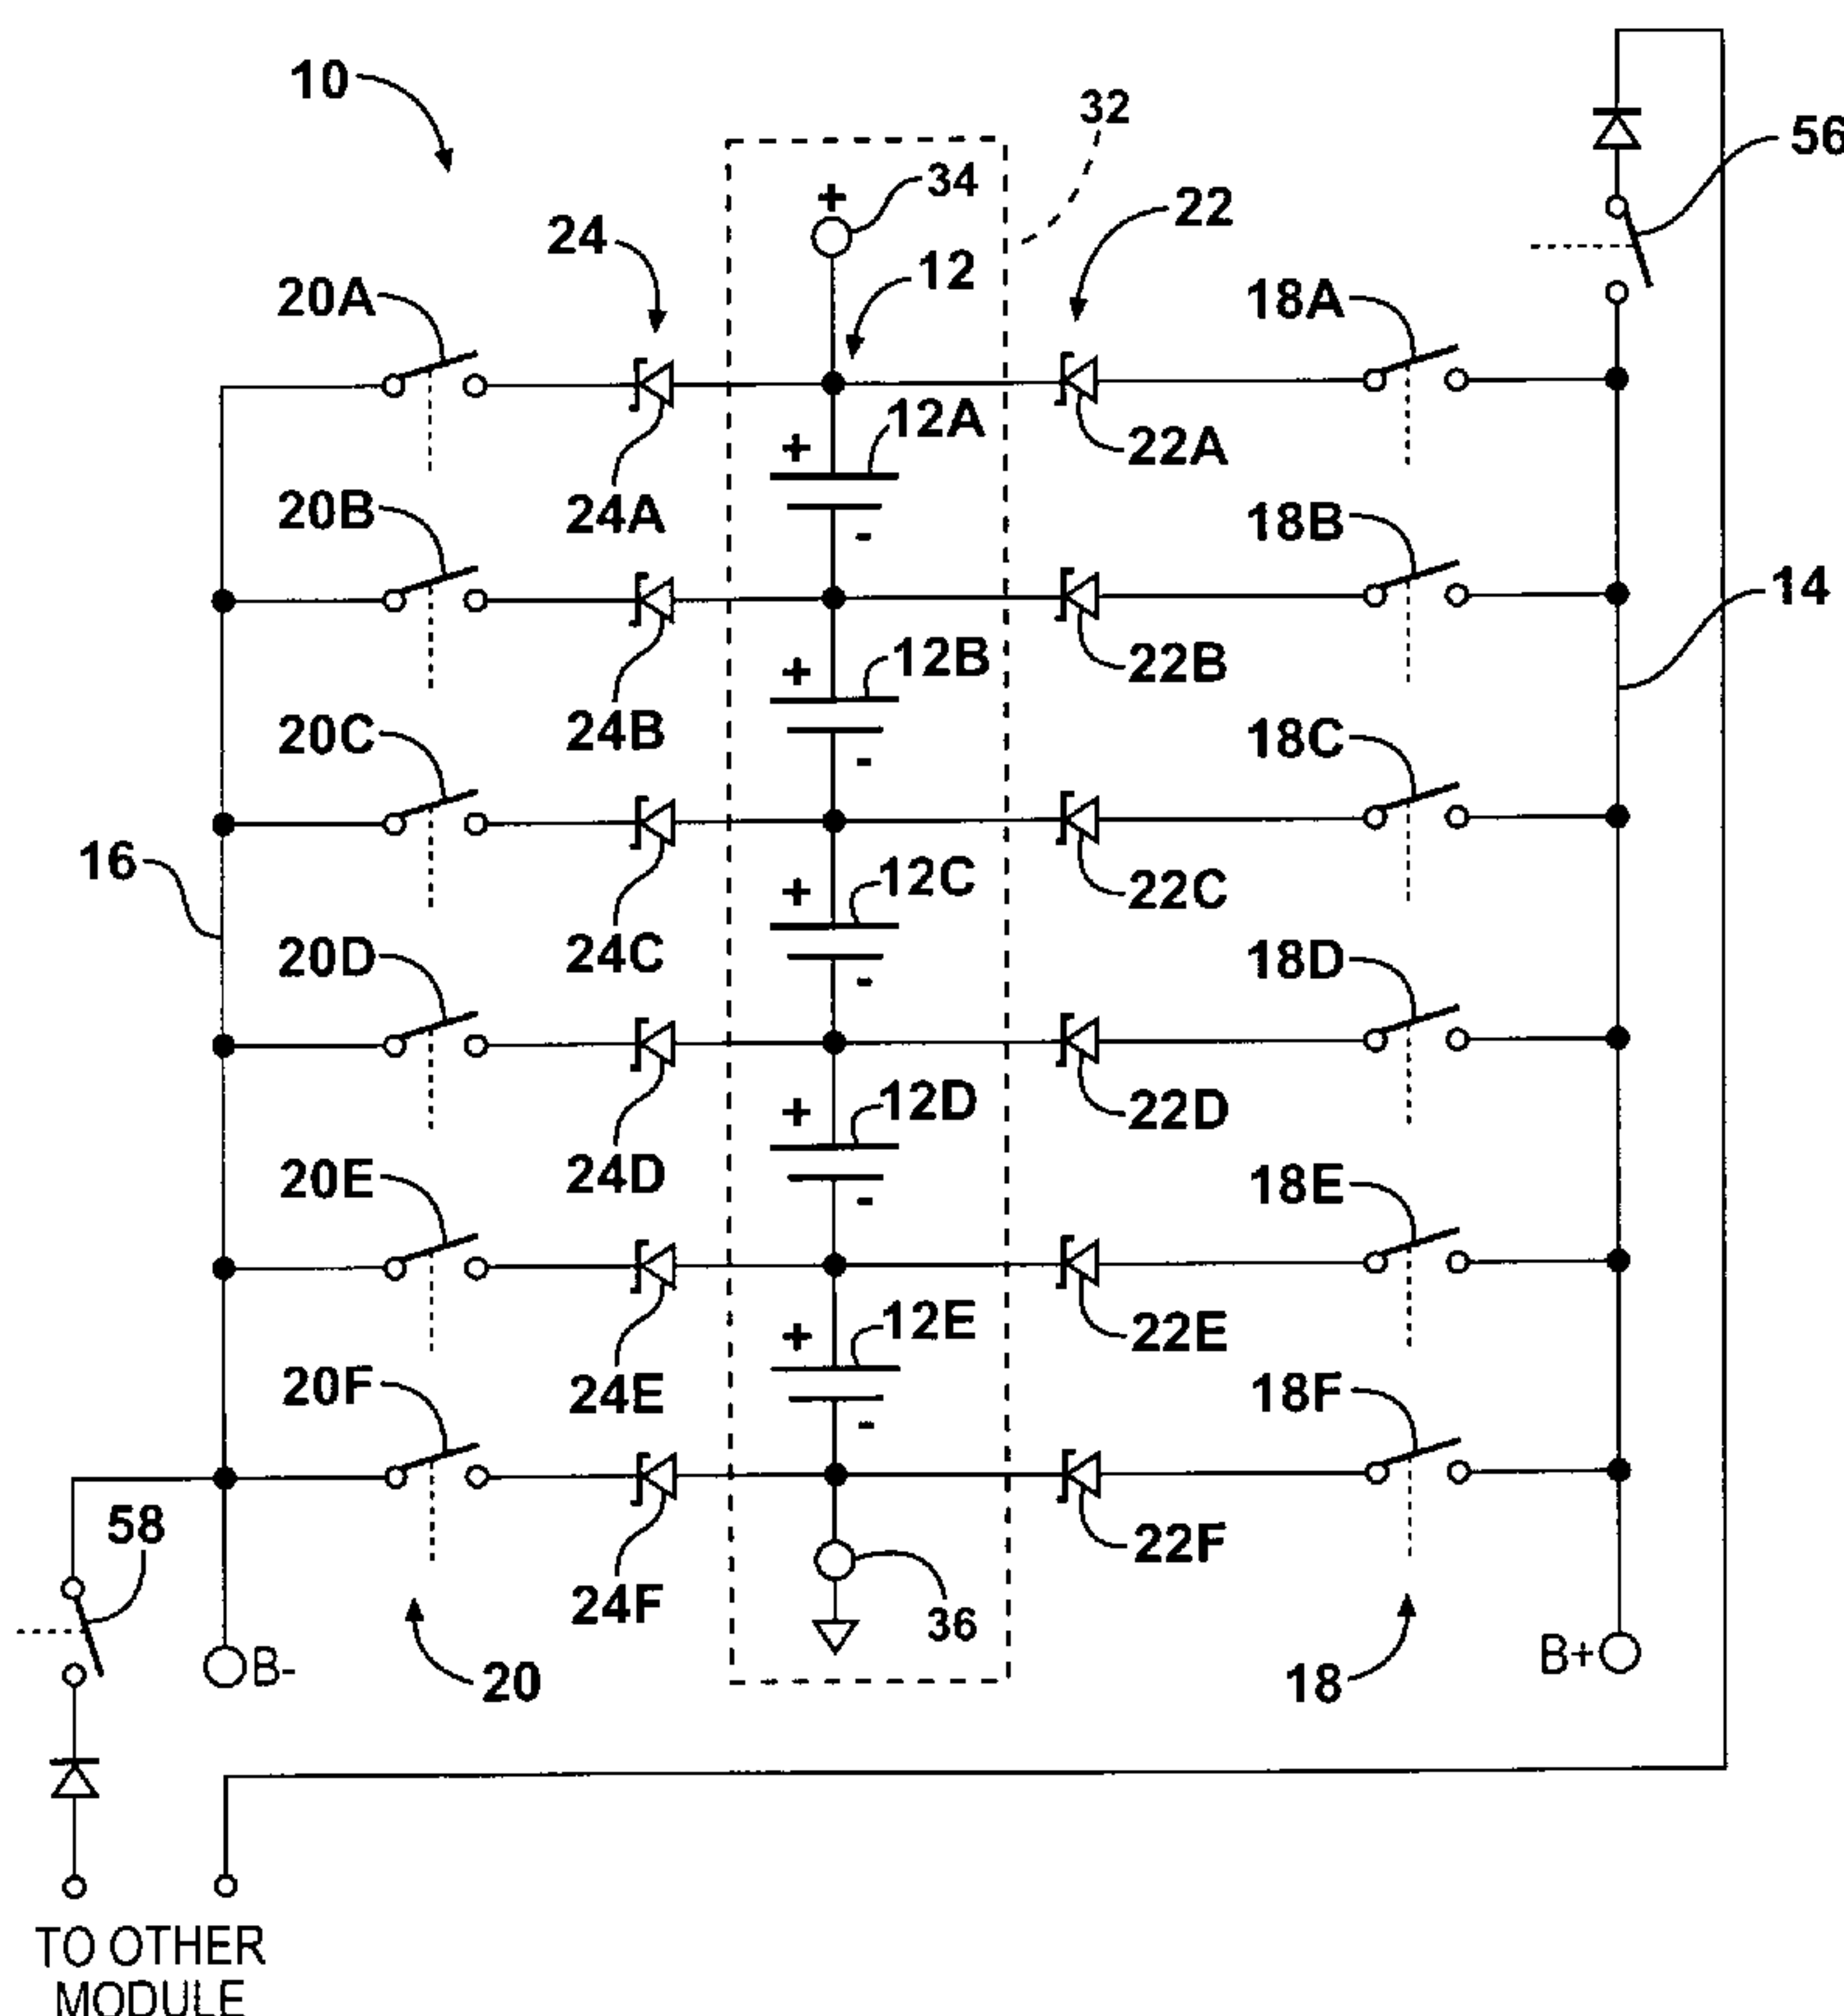

(57) Abstract: A system and method for charging an undercharged cell of a bank of series connected cells utilizes a charging circuit. The charging circuit includes an inductor that receives current from the entire bank of cells and then provides current to the undercharged cell. Pulse width modulation is utilized to turn the switches on and off to regulate the current that flows to the inductor and thus is provided to the undercharged cell.

FIG - 1

WO 2008/115538 A1

WO 2008/115538 A1



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

SYSTEM AND METHOD FOR BALANCING A STATE OF CHARGE OF SERIES CONNECTED CELLS

CROSS REFERENCE TO RELATED APPLICATION

5 **[0001]** This application claims the benefit of U.S. Provisional
Application No. 60/895,768 filed March 20, 2007, which is incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 **[0002]** The subject invention relates generally to a system and method
of balancing a state of charge (SOC) of a plurality of cells connected in series.

2. Description of the Related Art

[0003] Electric vehicles and hybrid-electric vehicles typically utilize
numerous cells (i.e., batteries) for powering electric loads such as drive motors and
15 other electric equipment. These cells are often connected together in a series
relationship, as is well known to those skilled in the art, to provide higher voltages.

[0004] Due to variations between individual cells, such series-
connected cells require periodic balancing, i.e., charge equalization, to maintain a
steady voltage, prevent premature failure, and provide maximum power to the load.
20 Various systems and techniques have been developed to address this necessity. For
example, active cell balancing methods include charge shunting, where current is
shunted around fully charged cells; charge shuttling, where charge is removed from
one cell and delivered to another cell; energy converters, where inductors or
transformers move energy from a cell or group of cells to another cell or group of

cells; and energy dissipation, where charge is removed from the cells with the highest charge.

[0005] Particularly, the use of energy converters, such as inductive charge shuttling, to shuttle current between individual cells is commonly used. However, inductive charge shuttling techniques are typically “open loop” techniques, i.e., the current delivered to the cell to be charged is based on the tolerance of the inductor and generally not variable.

[0006] As it is advantageous to vary the amount of current provided to the cell based on the current charge of the cell, there remains an opportunity for a method and system for balancing a state of charge of a cell based on the current charge of the cell.

SUMMARY OF THE INVENTION AND ADVANTAGES

[0007] The subject invention includes a system for balancing a state of charge (SOC) of a plurality of cells connected in series. The system includes a positive bus and a negative bus. The system also includes a plurality of positive bus switches with each positive bus switch electrically connected to the positive bus and to one of the cells for electrically connecting the positive bus to a positive side of the one of the cells. The system further includes a plurality of negative bus switches with each negative bus switch electrically connected to the negative bus and to one of the cells for electrically connecting the negative bus to a negative side of the one of the cells. A charging circuit is electrically connected to a voltage source and the busses for charging an undercharged cell of the plurality of cells. The charging circuit includes an inductor having a first side electrically connected to the negative bus and a second side electrically connected to the positive bus. A first switch is electrically

connected to the first side of the inductor and a positive terminal of a voltage source. A second switch is electrically connected to the second side of the inductor and a negative terminal of the voltage source. The system also includes a controller in communication with the first and second switches for activating the first and second switches to transfer energy from the voltage source to the inductor and deactivating the first and second switches to transfer energy from the inductor to the undercharged cell of the plurality of cells.

[0008] The subject invention also provides a method of balancing a state of charge (SOC) of a plurality of cells connected in series. The method includes the step of identifying an undercharged cell from the plurality of cells to charge. The method also includes the steps of electrically connecting a positive side of the undercharged cell to a positive bus and electrically connecting a negative side of the undercharged cell to a negative bus. An inductor is electrically connected to a voltage source during a first time period. The inductor is electrically disconnected from the voltage source in response to an elapse of the first time period. The method also includes the step of maintaining the disconnection of the inductor from the plurality of cells for a second time period corresponding generally to the time for the inductor to discharge energy to the undercharged cell.

[0009] By selectively connecting and disconnecting the inductor from the voltage source, the system and method of the subject invention provides a controlled amount of current to charge the undercharged cell. This controlled amount of current may be varied based on the amount of charge on the undercharged cell. Accordingly, the speed at which the undercharged cell is charged is increased over that of the prior art. Furthermore, the system and method of the subject invention does not waste energy that occurs in charge shunting or energy dissipation techniques.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0011] Figure 1 is a block electrical schematic diagram of the system showing a plurality of cells, a positive bus, a negative bus, a plurality of bus switches, and a plurality of bus diodes;

10 [0012] Figure 2 is a block electrical schematic diagram of the system showing a controller and a charging circuit; and

[0013] Figure 3 is a flowchart diagram showing a method of the subject invention.

15 DETAILED DESCRIPTION OF THE INVENTION

[0014] Referring to the Figures, wherein like numerals indicate corresponding parts throughout the several views, a system **10** and method **100** for balancing a state of charge (SOC) in a plurality of cells **12** connected in series is shown. Those skilled in the art realize that a “cell” is commonly referred to as a
20 “battery”. However, for purposes of consistency, the term cell **12** shall be used throughout and should not be regarded as limiting in any way.

[0015] Each cell **12** includes a positive side (i.e., a cathode) and a negative side (i.e., an anode) as is known to those skilled in the art. Referring to Figure 1, the plurality of cells **12** are electrically connected together in series. That is,
25 the negative side of a first cell **12A** is electrically connected to the positive side of a

second cell **12B**, the negative side of the second cell **12B** is electrically connected to the positive side of a third cell **12C**, and so on. Furthermore, each cell **12** may actually be multiple physical cells **12** connected in series and/or parallel. The cells **12** may be implemented in a vehicle (not shown), such as an electrically driven vehicle or a hybrid-electric vehicle. However, those skilled in the art realize that the cells **12** may be implemented in other environments including non-vehicle applications.

[0016] In the illustrated embodiments of the invention, five cells **12** are connected in series, and labeled sequentially from the first cell **12A** through a fifth cell **12E**. Of course, any number, type, or capacity of cells **12** may be utilized with the subject invention, and the use of five cells **12** in the illustrated embodiment should not be regarded as limiting. The system **10** may include one or more voltage sensors (not shown) electrically connected to the cells **12** for sensing the voltage of each cell **12**. Alternatively, the voltage sensors may be a part of an external device (not shown) that is in communication with the system **10** of the illustrated embodiment.

[0017] In the illustrated embodiment, the system **10** includes a positive bus **14** and a negative bus **16**. A plurality of positive bus switches **18** are electrically connected to the positive bus **14** and plurality of negative bus switches **20** are electrically connected to the negative bus **16**. Accordingly, the positive bus **14** may be implemented as the electrical connections between the positive bus switches **18** and the negative bus **16** may be implemented as the electrical connections between the negative bus switches **20**.

[0018] The bus switches **18**, **20** serve to electrically connect the busses **14**, **16** to the cells. Specifically, in the illustrated embodiments, each positive bus switch **18** electrically connects the positive bus **14** to a positive side of one of the cells

12 and each negative bus switch **20** electrically connects the negative bus **16** to a negative side of one of the cells **12**.

[0019] The bus switches **18, 20** are shown in Figure 1 with a generic electrical switch symbol. Preferably, the bus switches **18, 20** are implemented with
5 transistors, such as metal-oxide-semiconductor field-effect transistors (MOSFETs). Of course, other alternative techniques for implementing the bus switches **18, 20** are realized by those skilled in the art, such as, but not limited to, mechanical-type switches.

[0020] In the illustrated embodiment, the system **10** also includes a
10 plurality of positive bus diodes **22** and a plurality of negative bus diodes **24**. Each positive bus diode **22** is electrically connected between each positive bus switch **18** and each cell **12** to allow current flow from the positive bus **14** to the cell **12**. Each negative bus diode **24** is electrically connected between each negative bus switch **20** and each cell **12** to allow current flow from the cell **12** to the negative bus **16**. For
15 purposes of illustration, the positive bus switches **18** are labeled sequentially from a first positive bus switch **18A** through a sixth positive bus switch **18F** and the negative bus switches **20** are labeled sequentially from a first negative bus switch **20A** through a sixth negative bus switch **20F**. The positive bus diodes **22** are labeled sequentially from a first positive bus diode **22A** to a sixth positive bus diode **22F** and the negative
20 bus diodes **24** are labeled sequentially from a first negative bus diode **24A** to a sixth negative bus diode **24F**. In Figure 1, the bus diodes **22, 24** are shown as Zener diodes. However, other suitable diode types may also be acceptable.

[0021] In an alternative embodiment (not shown), the system **10** includes a plurality of field-effect transistors (FETs) (not shown) instead of the diodes
25 **22, 24** of the illustrated embodiment. Specifically, the FETs are electrically

connected between each bus switch **18, 20** and each cell **12**. This alternative embodiment configuration allows bidirectional flow of current between the cells **12** and the busses **14, 16**. This allows the shuttling of current between the cells **12**. Preferably, the FETs are high-speed FETs, which are well known by those skilled in the art.

[0022] The system **10** of the illustrated embodiment also includes a controller **28** for controlling the SOC balancing, i.e., the charging and discharging, of the cells **12**. The controller **28** may be implemented with multiple electronic devices or may be packaged in one microchip, as is well known to those skilled in the art.

[0023] The system **10** also includes a charging circuit **30**. The charging circuit **30** facilitates the charging of the various cells **12**. The charging circuit **30** is electrically connected to a voltage source **32** for receiving electric current. The voltage source **32** includes a positive terminal **34** and a negative terminal **36**. In the illustrated embodiments, the series-connected cells **12** act as the voltage source **32**. However, in other embodiments, the voltage source **32** may be an external source (not shown) such as other battery packs or power supplies. The charging circuit **30** is also electrically connected to the busses **14, 16**. The charging circuit **30** supplies electric current to the busses **14, 16** for charging an undercharged cell **12**, as described in detail below.

[0024] The charging circuit **30** includes an inductor **38** having a first side **40** and a second side **42**. The first side **40** is electrically connected to the negative bus **16** and the second side **42** is electrically connected to the positive bus **14**. The inductor **38** may be implemented as a pair of inductors connected in series. One suitable inductor **38** has an inductance of about 47 uH, such as the DR125-470 manufactured by Cooper-Bussman.

[0025] The charging circuit 30 also includes a first switch 44 and a second switch 46. The first switch 44 is electrically connected between the first side 40 of the inductor 38 and the positive terminal 34 of the voltage source 32. As such, the first switch 44 electrically connects and disconnects the inductor 38 from the voltage source 32. The second switch 46 is electrically connected between the second side 42 of the inductor 38 and the negative terminal 36 of the voltage source 32. Accordingly, the second switch 36 also electrically connects and disconnects the inductor 38 from the voltage source 32. The controller 28 is in communication with the first and second switches 44, 46 for activating the first and second switches 44, 46 to transfer energy from the voltage source 32 to the inductor 38. The controller 28 also controls deactivation of the first and second switches 44, 46 to transfer energy from the inductor 38 to the undercharged cell 12 of the plurality of cells 12, as is further described below.

[0026] Preferably, the first and second switches 44, 46 are implemented with transistors, such as MOSFETs having a gate, a source, and a drain. With respect to the first switch 44, the gate is electrically connected to the controller 32, the source is electrically connected to the positive terminal 34 of the voltage source 32, and the drain is electrically connected to the first side 40 of the inductor 38. With respect to the second switch 46, the gate is electrically connected to the controller 32, the source is electrically connected to the second side 42 of the inductor 38, and the drain is electrically connected to the negative terminal 36 of the voltage source 32.

[0027] The charging circuit 30 further includes a current sensor 48 electrically connected between the second switch 46 and the negative terminal 36 of the voltage source 32. The current sensor 48 is in communication with the controller

28 for sensing an amount of current flowing through the inductor 38. As such, the amount of current that is to be delivered to the undercharged cell 12 may be regulated.

[0028] In the illustrated embodiment, the current sensor 48 is implemented as a resistor 40. Those skilled in the art refer to this resistor 50 as a
5 “current sense resistor”. The voltage across the resistor 40 is communicated to the controller 28. The controller then computes the current flowing through the resistor 40, and thus generally the current flowing through the inductor 38.

[0029] In the illustrated embodiments, the charging circuit 30 also includes a charging diode 52. The charging diode 52 has an anode (not numbered)
10 electrically connected to the second side 42 of the inductor 38 and a cathode (not numbered) electrically connected to the positive bus 14. The charging diode 52 allows current to flow from the inductor 38 to the positive bus 14, but generally prevents current from flowing from the positive bus 14 to the inductor 38. The charging diode 52 is preferably implemented as a Zener diode; however, other types
15 of diodes may also be suitable. Also in the illustrated embodiments, the charging circuit 30 includes a capacitor 54 electrically connected between the positive bus 14 and the negative bus 16.

[0030] The system 10 may also include a positive bus transfer switch 56 and a negative bus transfer switch 58. The positive bus transfer switch 56 is
20 electrically connected to the positive bus 14 and the negative bus transfer switch 58 is electrically connected to the negative bus 16. These transfer switches 56, 58 may be utilized to electrically connect the busses 14, 16 to an external bank of cells (not shown). Therefore, the cells 12 may be used to charge other, external cells. The transfer switches 56, 58 may also be utilized to transfer energy, i.e., electric current, to

an external system (not shown). The transfer switches **56, 68** may further be utilized to gather energy from an external system (not shown).

[0031] The method **100** of the subject invention may utilize the system **10** described above. However, those skilled in the art realize alternative techniques for implementing the method **100**. Therefore, the method **100** described herein should not be read as limited only to use with the system **10** described herein.

[0032] The method **100** includes the step **102** of identifying an undercharged cell **12** from the plurality of cells **12** to charge. That is, determining which of the cells **12** is most in need of charging. Those skilled in the art comprehend multiple techniques for performing this step. One technique includes the utilization of voltage detection circuits (not shown) which are electrically connected to each cell **12**. These voltage detection circuits determine a voltage of each cell **12** and are in communication with the controller.

[0033] Once it is determined which of the cells **12** is to be charged, the method continues with the step of **104** of electrically connecting a positive side of the undercharged cell **12** to the positive bus **14**. This step **104** may be achieved by closing the positive bus switch **18** electrically connected to the positive side of the undercharged cell **12** such that current may flow from the positive bus **14** to the undercharged cell **12**.

[0034] The method also includes the step **106** of electrically connecting a negative side of the undercharged cell **12** to the negative bus **16**. Again, this step **106** may be achieved by closing the negative bus switch **20** electrically connected to the negative side of the undercharged cell **12**.

[0035] The method further includes the step **108** of electrically connecting the inductor **38** to the voltage source **32** during a first time period. As

such, the inductor 38 receives electric current from the voltage source 32. Specifically, current flows from the first side 40 to the second side 42 of the inductor 38. This step 108 is accomplished by closing the first and second switches 44, 46 to allow current to flow through them, i.e., activating the MOSFETs.

5 [0036] The method also includes the step 110 of electrically disconnecting the inductor 38 from the voltage source 32 in response to an elapse of the first time period. This is accomplished by opening the first and second switches 44, 46, i.e., deactivating the MOSFETs, thus preventing current from flowing.

 [0037] The first time period is determined by the amount of current
10 flowing through the charging circuit 30 in general and the inductor 38 in particular. Said another way, the first and second switches 44, 46 permit the flow of current until the current reaches a predetermined level. The predetermined level corresponds to the desired rate of current flow to charge the undercharged cell 12. To determine the amount of current flowing through the inductor, the method 100 also includes the step
15 112 of sensing the current flowing through the inductor 38. In the illustrated embodiment, this step 112 is implemented with the current sensor 48 disposed between the second switch 46 and the second terminal 36 of the voltage source 32.

 [0038] The method 100 further includes the step 114 of maintaining the disconnection of the inductor 38 from the plurality of cells 12 for a second time
20 period. The second time period corresponds generally to the time for the inductor 38 to discharge energy to the undercharged cell 12. Preferably, the second time period may be adjusted based on the voltage of the undercharged cell 12 in comparison to the other cells 12.

 [0039] The steps 104, 106, 108, 110, 112, 114 of electrically
25 connecting the inductor 38, sensing the current, electrically disconnecting the inductor

38, and maintaining the disconnection in response to the undercharged cell 12 remaining undercharged with respect to the plurality of cells 12 are repeated as necessary to fully charge the undercharged cell 12. The first and second time periods may be varied based on the changing charge of the undercharged cell 12. As such, a pulse-width modulation (PWM), based on the charged of the undercharged cell 12, is performed by the charging circuit 30.

[0040] The present invention has been described herein in an illustrative manner, and it is to be understood that the terminology which has been used is intended to be in the nature of words of description rather than of limitation. Obviously, many modifications and variations of the invention are possible in light of the above teachings. The invention may be practiced otherwise than as specifically described within the scope of the appended claims.

CLAIMS

What is claimed is:

1. A method of balancing a state of charge (SOC) of a plurality of cells
5 connected in series, said method comprising:

identifying an undercharged cell from the plurality of cells to charge;

electrically connecting a positive side of the undercharged cell to a
positive bus;

electrically connecting a negative side of the undercharged cell to a
10 negative bus;

electrically connecting an inductor to a voltage source during a first
time period;

electrically disconnecting the inductor from the voltage source in
response to an elapse of the first time period; and
15 maintaining the disconnection of the inductor from the plurality of
cells for a second time period corresponding generally to the time for the inductor to
discharge energy to the undercharged cell.
2. A method as set forth in claim 1 wherein the voltage source is further
defined as the plurality of cells.
- 20 3. A method as set forth in claim 1 wherein the voltage source is further
defined as an external system.
4. A method as set forth in claim 1 further comprising the step of sensing
a current flowing through the inductor.
5. A method as set forth in claim 4 wherein said step of electrically
25 disconnecting the inductor from the voltage source is further defined as electrically

disconnecting the inductor from the voltage source in response to the current flowing through the inductor reaching a predetermined level.

6. A method as set forth in claim 1 further comprising the step of determining whether the undercharged cell is undercharged with respect to the other
5 cells of the plurality of cells.

7. A method as set forth in claim 6 further comprising the step of repeating said steps of electrically connecting an inductor, sensing a current, electrically disconnecting the inductor, and maintaining the disconnection in response to the undercharged cell remaining undercharged with respect to the plurality of cells.

8. A system for balancing a state of charge (SOC) of a plurality of cells connected in series, said system comprising:

a positive bus and a negative bus;

a plurality of positive bus switches with each positive bus switch
5 electrically connected to said positive bus and to one of the cells for electrically connecting said positive bus to a positive side of the one of the cells;

a plurality of negative bus switches with each negative bus switch electrically connected to said negative bus and to one of said cells for electrically connecting said negative bus to a negative side of the one of said cells;

10 a charging circuit electrically connected to a voltage source and said busses for charging an undercharged cell of the plurality of cells;

said charging circuit including

an inductor having a first side electrically connected to said negative bus and a second side electrically connected to said positive bus,

15 a first switch electrically connected to said first side of said inductor and a positive terminal of a voltage source, and

a second switch electrically connected to said second side of said inductor and a negative terminal of the voltage source; and

a controller in communication with said first and second switches for
20 activating said first and second switches to transfer energy from the voltage source to said inductor and deactivating said first and second switches to transfer energy from said inductor to the undercharged cell of the plurality of cells.

9. A system as set forth in claim 7 further comprising a current sensor electrically connected between said second switch and the negative side of the voltage

source and in communication with said controller for sensing an amount of current flowing through said inductor.

10. A system as set forth in claim 7 wherein said charging circuit further includes a charging diode having an anode electrically connected to said second side of said inductor a cathode electrically connected to said positive bus.

11. A system as set forth in claim 10 wherein said charging circuit further includes a capacitor electrically connected between said positive bus and said negative bus.

12. A system as set forth in claim 7 wherein said first switch is further defined as a first MOSFET having a gate electrically connected to said controller, a source electrically connected to a positive side of said voltage source, and a drain electrically connected to said first side of said inductor.

13. A system as set forth in claim 7 wherein said second switch is further defined as a second MOSFET having a gate electrically connected to said controller, a source electrically connected to a said second side of said inductor, and a drain electrically connected to said negative side of said voltage source.

14. A system as set forth in claim 7 further comprising a plurality of positive bus diodes wherein each positive bus diode is electrically connected between said positive bus and one of the cells for preventing current from flowing from the one of the cells to said positive bus.

15. A system as set forth in claim 7 further comprising a plurality of negative bus diodes wherein each negative bus diode is electrically connected between said negative bus and one of the cells for preventing current from flowing from said negative bus to the one of the cells.

16. A system as set forth in claim 7 further comprising a positive bus transfer switch electrically connected to said positive bus and a negative bus transfer switch electrically connected to said negative bus for electrically connecting said busses to an external bank of cells and/or an external system.

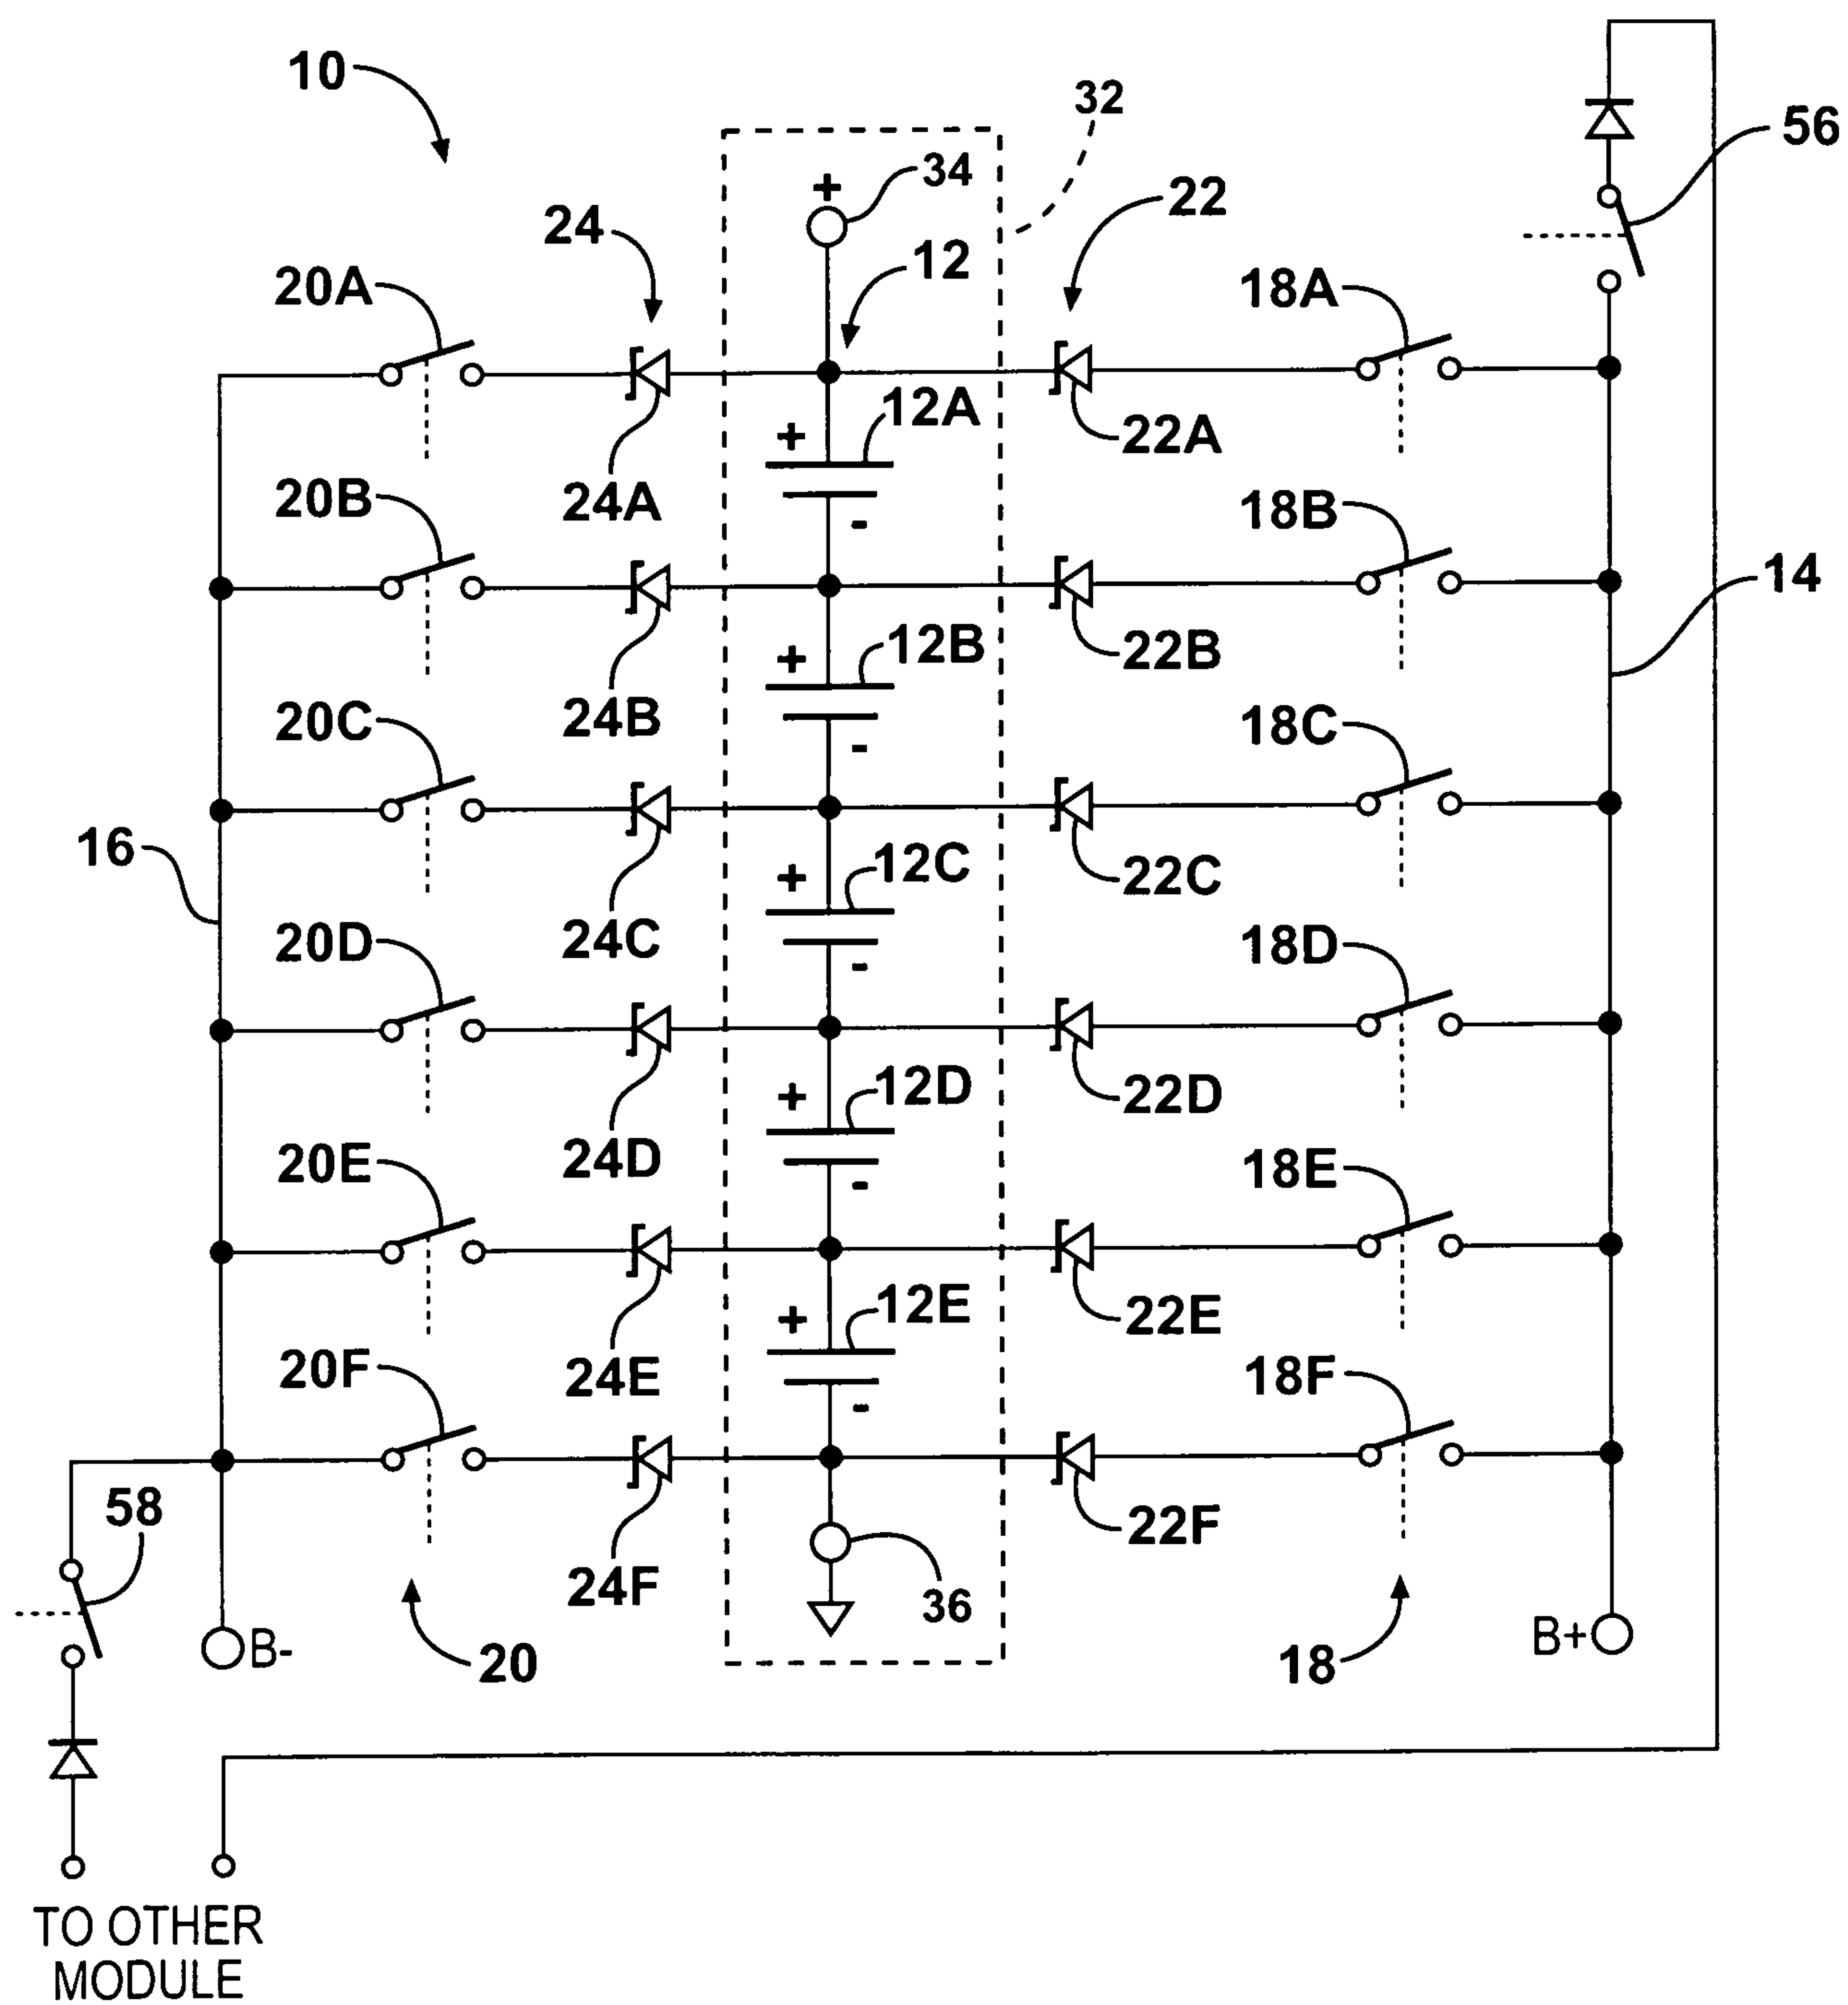


FIG - 1

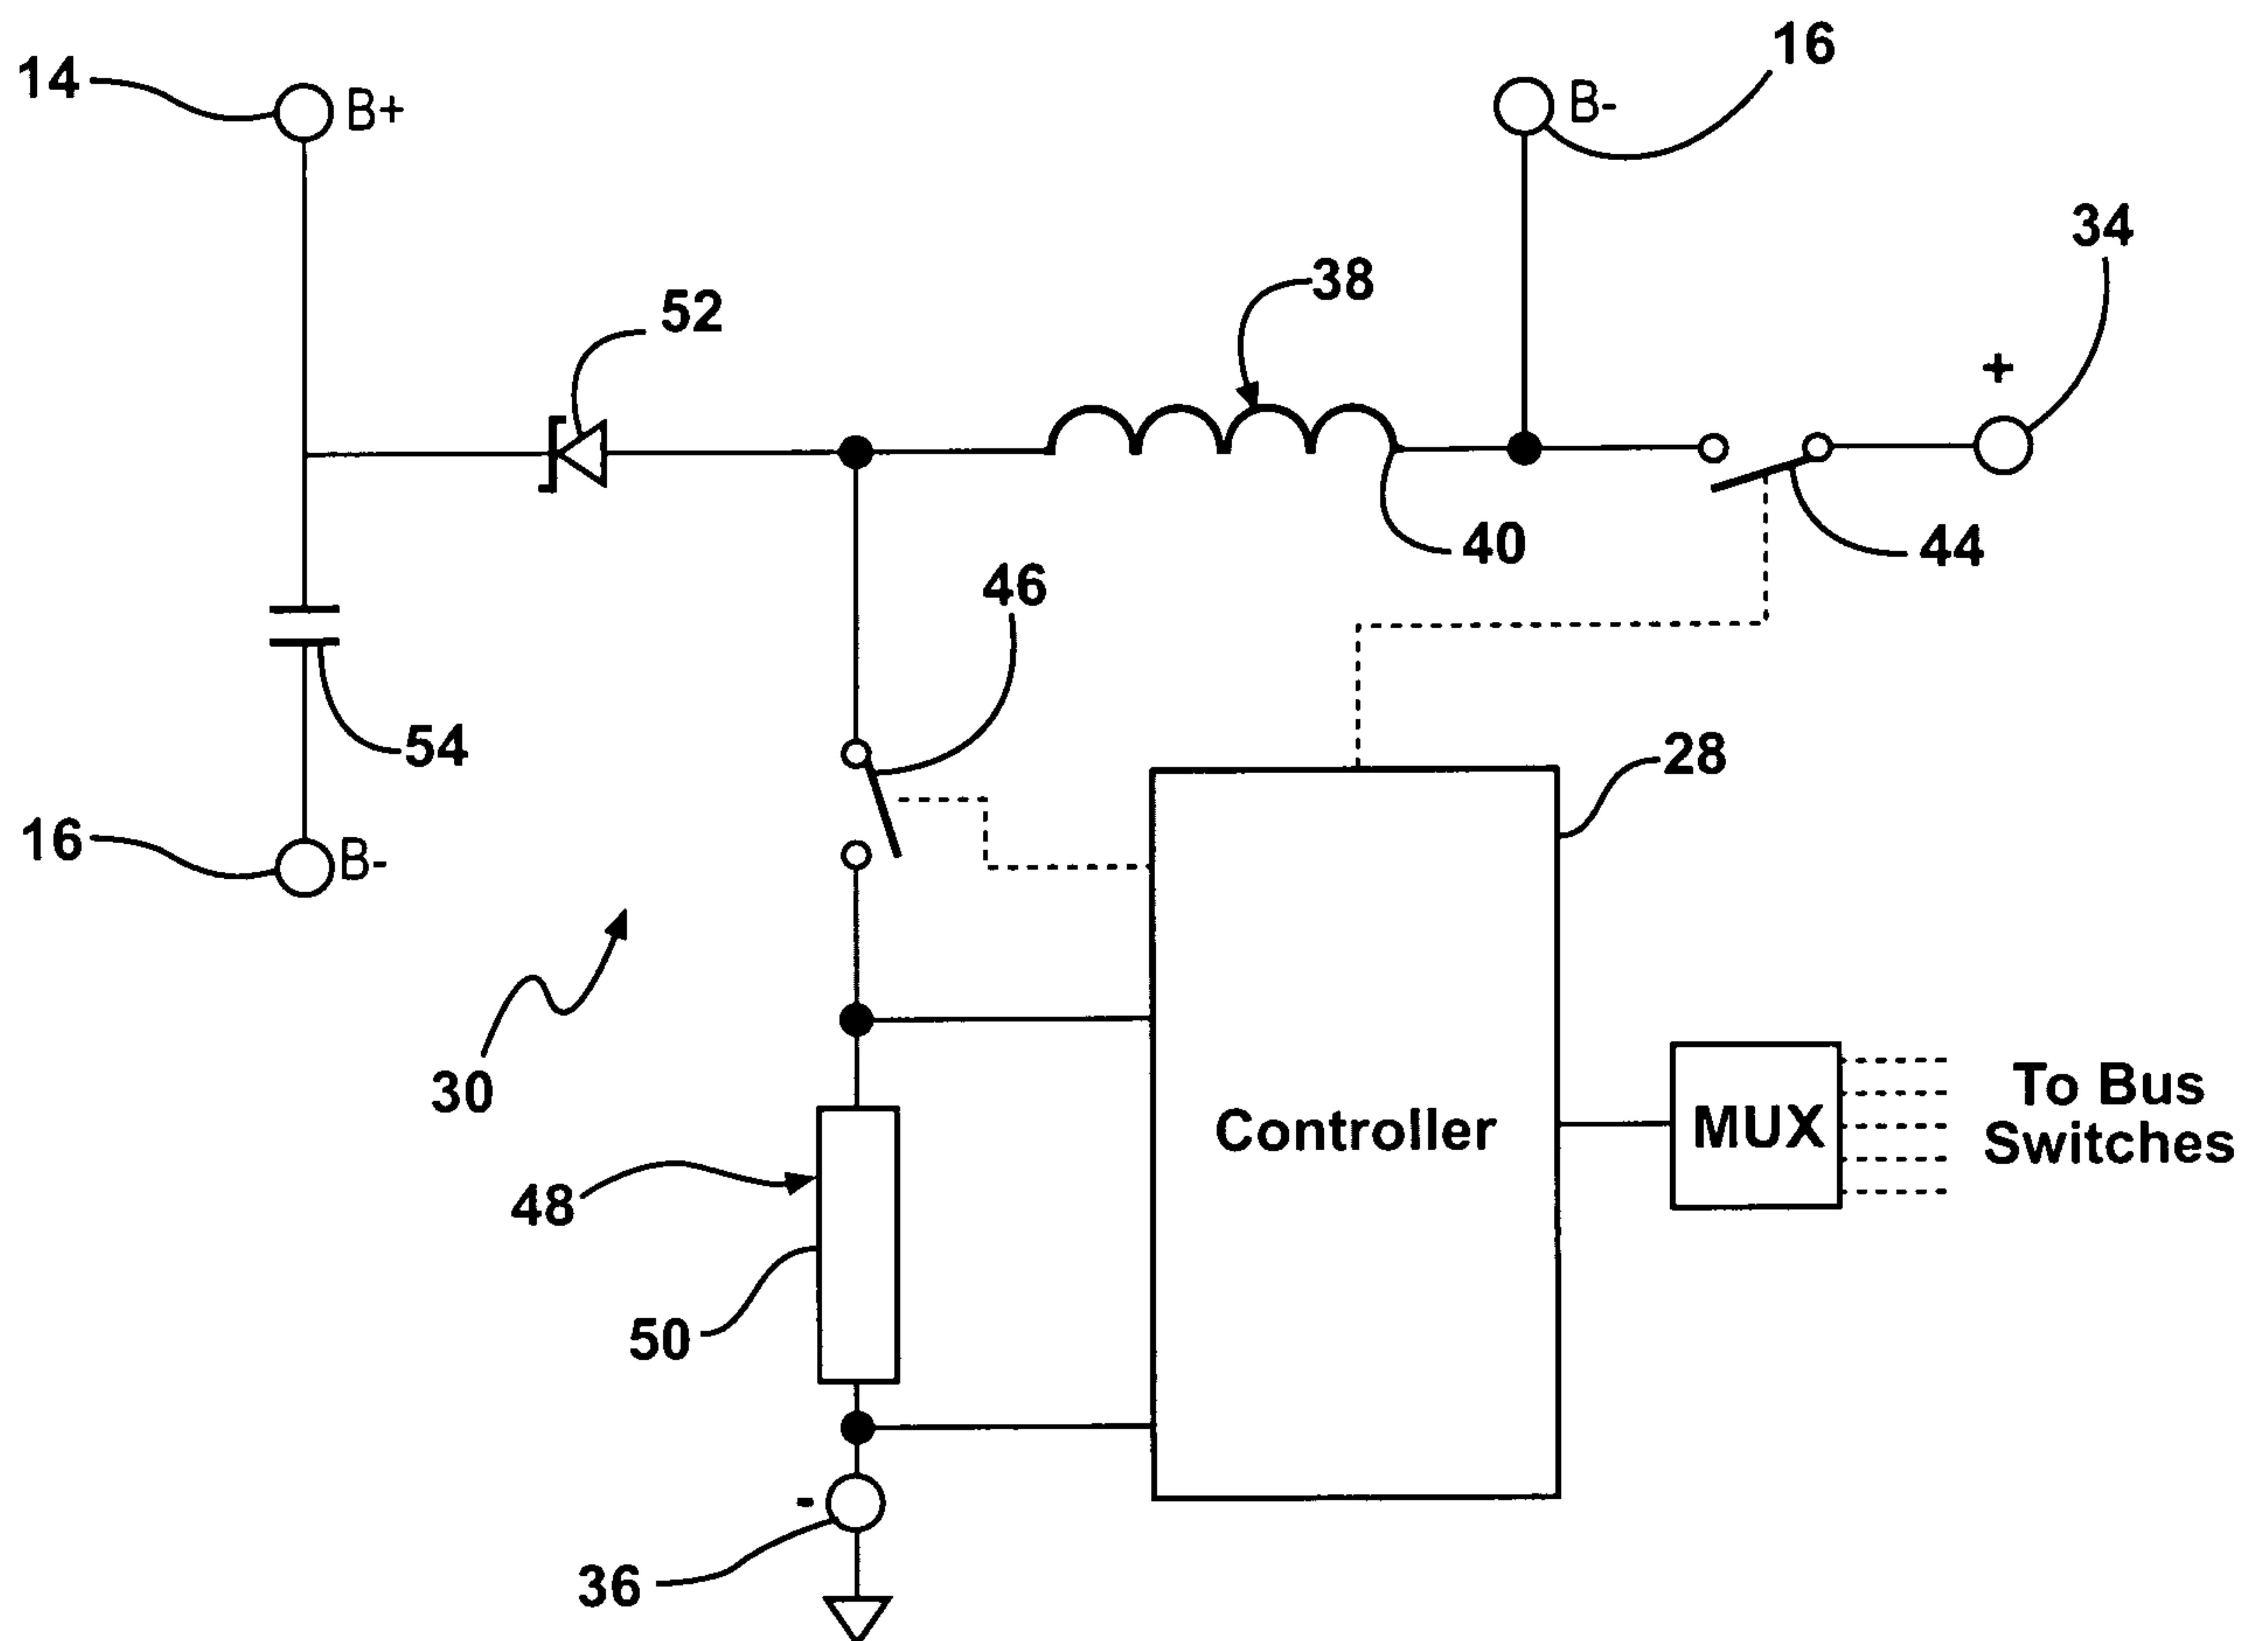


FIG - 2

3/3

