



- (51) **International Patent Classification:**
H04B 7/04 (2006.01) *H04J 11/00* (2006.01)
- (21) **International Application Number:**
PCT/KR2013/000466
- (22) **International Filing Date:**
21 January 2013 (21.01.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/588,668 20 January 2012 (20.01.2012) US
61/672,251 16 July 2012 (16.07.2012) US
- (71) **Applicant:** LG ELECTRONICS INC. [KR/KR]; 20 Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721 (KR).
- (72) **Inventors:** KIM, Kijun; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). SOHN, Ilsoo; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). SEO, Hanbyul; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). PARK,


Jonghyun; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). KIM, Eun-sun; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). KIM, Hyungtae; LG Institute, #533 Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR).

(74) **Agents:** KIM, Yong In et al.; KBK & Associates, 7th Floor, Hyundai Building, 175-9 Jamsil-dong, Songpa-ku, Seoul 138-861 (KR).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) **Title:** METHOD AND APPARATUS FOR TRANSMITTING MEASUREMENT REPORT IN A WIRELESS COMMUNICATION SYSTEM

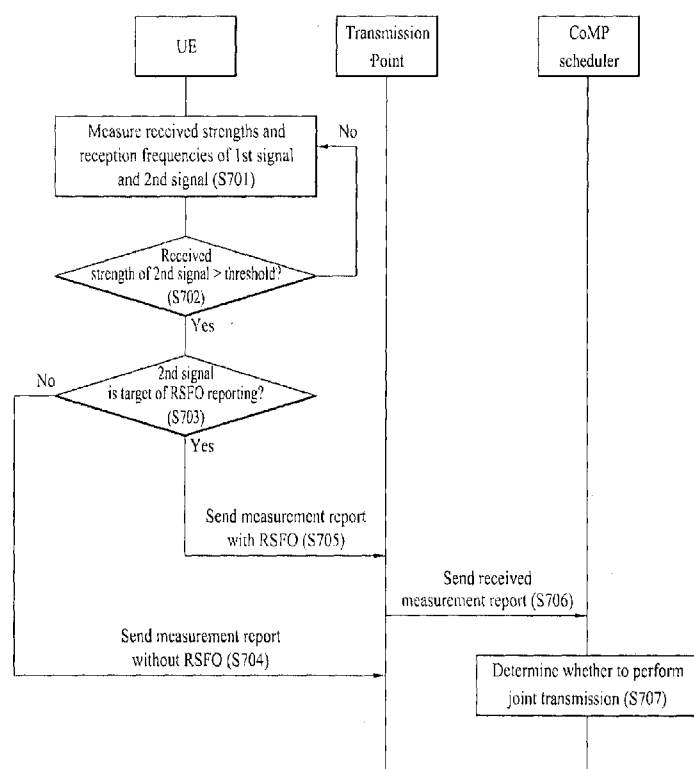

(57) **Abstract:** A method and apparatus for transmitting a measurement report in a wireless communication system are disclosed. The method for transmitting a measurement report at a UE in the wireless communication system includes measuring received strengths and reception frequencies of first and second signals, and transmitting a measurement report including a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold. The frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

【DESCRIPTION】**【Invention Title】****METHOD AND APPARATUS FOR TRANSMITTING MEASUREMENT
REPORT IN A WIRELESS COMMUNICATION SYSTEM**5 **【Technical Field】**

[0001] The present invention relates to a wireless communication system, and more particularly, to a method and apparatus for transmitting a measurement report.

【Background Art】

[0002] Wireless communication systems have been widely deployed in order to
10 provide various types of communication services including voice or data. In general, a
wireless communication system is a multiple access system that can support
communication with multiple users by sharing available system resources (a bandwidth,
transmission power, etc.). Examples of multiple access systems include Code Division
Multiple Access (CDMA), Frequency Division Multiple Access (FDMA), Time
15 Division Multiple Access (TDMA), Orthogonal Frequency Division Multiple Access
(OFDMA), Single Carrier Frequency Division Multiple Access (SC-FDMA), Multi
Carrier Frequency Division Multiple Access (MC-FDMA), etc.

【Disclosure】**【Technical Problem】**

20 [0003] An object of the present invention devised to solve the conventional
problem is to provide techniques related to a method for including the frequency offset
of each transmission point in a measurement report, when the measure report is
transmitted.

[0004] It will be appreciated by persons skilled in the art that the objects that
25 could be achieved with the present invention are not limited to what has been
particularly described hereinabove and the above and other objects that the present
invention could achieve will be more clearly understood from the following detailed

description.

【Technical Solution】

[0005] In an aspect of the present invention, a method for transmitting a measurement report at a User Equipment (UE) in a wireless communication system includes measuring received strengths and reception frequencies of first and second signals, and transmitting a measurement report including a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold. The frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.

[0006] In another aspect of the present invention, a UE in a wireless communication system includes a transmission module, and a processor. The processor is configured to measure received strengths and reception frequencies of first and second signals, and transmit a measurement report including a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold. The frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.

[0007] In another aspect of the present invention, a method for receiving a measurement report at a transmission point in a wireless communication system includes receiving a measurement report from a UE that has received first and second signals. The measurement report includes a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold, and the frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.

[0008] In a further aspect of the present invention, a transmission point in a wireless communication system includes a reception module and a processor. The processor is configured to receive a measurement report from a UE that has received first and second signals, and the measurement report includes a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold, and the frequency offset is used to

~~support cooperative transmission of transmission points transmitting the first and~~
second signals.

[0009] The above aspects of the present invention may include all or a part of the followings.

5 [0010] The support of cooperative transmission may include at least one of determination as to whether the transmission points are to perform cooperative transmission, determination of a cooperative transmission scheme of the transmission points, or correction of transmission frequencies of one or more of the transmission points.

10 [0011] The first signal may be a cell-specific reference signal transmitted by a first transmission point being a serving cell of the UE and the second signal may be a cell-specific reference signal transmitted by a second transmission point being neighbor cell of the serving cell.

[0012] The second transmission point may be included in a neighbor cell list
15 received from the first transmission point.

[0013] The second transmission point may be indicated in a neighbor cell list received from the first transmission point by the first transmission point.

[0014] The first and second signals may be Channel State Information-Reference Signals (CSI-RSs).

20 [0015] The first and second signals may be indicated for frequency offset reporting in a CSI-RS list related to cooperative transmission.

[0016] The first signal may be a first CSI-RS listed in the CSI-RS list.

[0017] The CSI-RS list may include a plurality of CSI-RS configurations.

[0018] The measurement report may further include a Reference Signal Time
25 Difference (RSTD) between the transmission points transmitting the first and second signals, and the RSTD may be used to support the cooperative transmission.

[0019] The RSTD may be the difference between the starts of subframes received from the transmission points.

[0020] The cooperative transmission may be joint transmission.

30 **【Advantageous Effects】**

[0021] According to the present invention, ~~a more effective Coordinated~~ MultiPoint (CoMP) transmission can be performed, taking into account a frequency offset incurred by an oscillator error of a transmission point.

[0022] It will be appreciated by persons skilled in the art that the effects that
5 can be achieved with the present invention are not limited to what has been particularly described hereinabove and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings.

【Description of Drawings】

10 [0023] The accompanying drawings, which are included to provide a further understanding of the invention, illustrate embodiments of the invention and together with the description serve to explain the principle of the invention.

[0024] In the drawings:

[0025] FIG. 1 illustrates the structure of a radio frame;

15 [0026] FIG. 2 illustrates the structure of a downlink resource grid for the duration of one downlink slot;

[0027] FIG. 3 illustrates the structure of a downlink subframe;

[0028] FIG. 4 illustrates the structure of an uplink subframe;

[0029] FIG. 5 is a view referred to for describing Reference Signals (RSs);

20 [0030] FIG. 6 is a view referred to for describing Channel State Information-RSs (CSI-RSs);

[0031] FIGS. 7, 8 and 9 are views referred to for describing an embodiment of the present invention; and

[0032] FIG. 10 is a block diagram of a transmission apparatus and a reception
25 apparatus.

【Best Mode】

[0033] The embodiments of the present invention described hereinbelow are combinations of elements and features of the present invention. The elements or features may be considered selective unless otherwise mentioned. Each element or

~~feature may be practiced without being combined with other elements or features.~~

Further, an embodiment of the present invention may be constructed by combining parts of the elements and/or features. Operation orders described in embodiments of the present invention may be rearranged. Some constructions or features of any one
5 embodiment may be included in another embodiment and may be replaced with corresponding constructions or features of another embodiment.

[0034] In the embodiments of the present invention, a description is made, centering on a data transmission and reception relationship between a Base Station (BS) and a User Equipment (UE). The BS is a terminal node of a network, which
10 communicates directly with a UE. In some cases, a specific operation described as performed by the BS may be performed by an upper node of the BS.

[0035] Namely, it is apparent that, in a network comprised of a plurality of network nodes including a BS, various operations performed for communication with a UE may be performed by the BS or network nodes other than the BS. The term 'BS'
15 may be replaced with the term 'fixed station', 'Node B', 'evolved Node B (eNode B or eNB)', 'Access Point (AP)', etc. The term 'relay' may be replaced with the term 'Relay Node (RN)' or 'Relay Station (RS)'. The term 'terminal' may be replaced with the term 'UE', 'Mobile Station (MS)', 'Mobile Subscriber Station (MSS)', 'Subscriber Station (SS)', etc.

20 [0036] Specific terms used for the embodiments of the present invention are provided to help the understanding of the present invention. These specific terms may be replaced with other terms within the scope and spirit of the present invention.

[0037] In some cases, to prevent the concept of the present invention from being ambiguous, structures and apparatuses of the known art will be omitted, or will be
25 shown in the form of a block diagram based on main functions of each structure and apparatus. Also, wherever possible, the same reference numbers will be used throughout the drawings and the specification to refer to the same or like parts.

[0038] The embodiments of the present invention can be supported by standard documents disclosed for at least one of wireless access systems, Institute of Electrical
30 and Electronics Engineers (IEEE) 802, 3rd Generation Partnership Project (3GPP), 3GPP Long Term Evolution (3GPP LTE), LTE-Advanced (LTE-A), and 3GPP2. Steps

~~or parts that are not described to clarify the technical features of the present invention~~
can be supported by those documents. Further, all terms as set forth herein can be explained by the standard documents.

[0039] Techniques described herein can be used in various wireless access systems such as Code Division Multiple Access (CDMA), Frequency Division Multiple Access (FDMA), Time Division Multiple Access (TDMA), Orthogonal Frequency Division Multiple Access (OFDMA), Single Carrier-Frequency Division Multiple Access (SC-FDMA), etc. CDMA may be implemented as a radio technology such as Universal Terrestrial Radio Access (UTRA) or CDMA2000. TDMA may be implemented as a radio technology such as Global System for Mobile communications (GSM)/General Packet Radio Service (GPRS)/Enhanced Data Rates for GSM Evolution (EDGE). OFDMA may be implemented as a radio technology such as IEEE 802.11 (Wi-Fi), IEEE 802.16 (WiMAX), IEEE 802.20, Evolved-UTRA (E-UTRA) etc. UTRA is a part of Universal Mobile Telecommunications System (UMTS). 3GPP LTE is a part of Evolved UMTS (E-UMTS) using E-UTRA. 3GPP LTE employs OFDMA for downlink and SC-FDMA for uplink. LTE-A is an evolution of 3GPP LTE. WiMAX can be described by the IEEE 802.16e standard (Wireless Metropolitan Area Network (WirelessMAN)-OFDMA Reference System) and the IEEE 802.16m standard (WirelessMAN-OFDMA Advanced System). For clarity, this application focuses on the 3GPP LTE and LTE-A systems. However, the technical features of the present invention are not limited thereto.

[0040] With reference to FIG. 1, the structure of a radio frame will be described below.

[0041] In a cellular Orthogonal Frequency Division Multiplexing (OFDM) wireless packet communication system, uplink and/or downlink data packets are transmitted in subframes. One subframe is defined as a predetermined time period including a plurality of OFDM symbols. The 3GPP LTE standard supports a type-1 radio frame structure applicable to Frequency Division Duplex (FDD) and a type-2 radio frame structure applicable to Time Division Duplex (TDD).

[0042] FIG. 1(a) illustrates the type-1 radio frame structure. A downlink radio frame is divided into 10 subframes. Each subframe is further divided into two slots in

~~the time domain. A unit time during which one subframe is transmitted is defined as a~~
Transmission Time Interval (TTI). For example, one subframe may be 1ms in duration
and one slot may be 0.5ms in duration. A slot includes a plurality of OFDM symbols
in the time domain and a plurality of Resource Blocks (RBs) in the frequency domain.

5 Because the 3GPP LTE system adopts OFDMA for downlink, an OFDM symbol
represents one symbol period. An OFDM symbol may be referred to as an SC-FDMA
symbol or symbol period. An RB is a resource allocation unit including a plurality of
contiguous subcarriers in a slot.

[0043] The number of OFDM symbols in one slot may vary depending on a
10 Cyclic Prefix (CP) configuration. There are two types of CPs: extended CP and
normal CP. In the case of the normal CP, one slot includes 7 OFDM symbols. In the
case of the extended CP, the length of one OFDM symbol is increased and thus the
number of OFDM symbols in a slot is smaller than in the case of the normal CP. Thus
when the extended CP is used, for example, 6 OFDM symbols may be included in one
15 slot. If channel state gets poor, for example, during fast movement of a UE, the
extended CP may be used to further decrease Inter-Symbol Interference (ISI).

[0044] In the case of the normal CP, one subframe includes 14 OFDM symbols
because one slot includes 7 OFDM symbols. The first two or three OFDM symbols of
each subframe may be allocated to a Physical Downlink Control CHannel (PDCCH)
20 and the other OFDM symbols may be allocated to a Physical Downlink Shared Channel
(PDSCH).

[0045] FIG. 1(b) illustrates the type-2 radio frame structure. A type-2 radio
frame includes two half frames, each having 5 subframes, a Downlink Pilot Time Slot
(DwPTS), a Guard Period (GP), and an Uplink Pilot Time Slot (UpPTS). Each
25 subframe is divided into two slots. The DwPTS is used for initial cell search,
synchronization, or channel estimation at a UE. The UpPTS is used for channel
estimation and acquisition of uplink transmission synchronization to a UE at an eNB.
The GP is a period between an uplink and a downlink, which eliminates uplink
interference caused by multipath delay of a downlink signal. One subframe includes
30 two slots irrespective of the type of a radio frame.

[0046] The above-described radio frame structures are purely exemplary and

~~thus it is to be noted that the number of subframes in a radio frame, the number of slots~~
in a subframe, or the number of symbols in a slot may vary.

[0047] FIG. 2 illustrates the structure of a downlink resource grid for the duration of one downlink slot. A downlink slot includes 7 OFDM symbols in the time domain and an RB includes 12 subcarriers in the frequency domain, which does not limit the scope and spirit of the present invention. For example, a downlink slot may include 7 OFDM symbols in the case of the normal CP, whereas a downlink slot may include 6 OFDM symbols in the case of the extended CP. Each element of the resource grid is referred to as a Resource Element (RE). An RB includes 12x7 REs. The number of RBs in a downlink slot, N^{DL} depends on a downlink transmission bandwidth. An uplink slot may have the same structure as a downlink slot.

[0048] FIG. 3 illustrates the structure of a downlink subframe. Up to three OFDM symbols at the start of the first slot in a downlink subframe are used for a control region to which control channels are allocated and the other OFDM symbols of the downlink subframe are used for a data region to which a PDSCH is allocated. Downlink control channels used in the 3GPP LTE system include a Physical Control Format Indicator CHannel (PCFICH), a Physical Downlink Control CHannel (PDCCH), and a Physical Hybrid automatic repeat request (HARQ) Indicator CHannel (PHICH). The PCFICH is located in the first OFDM symbol of a subframe, carrying information about the number of OFDM symbols used for transmission of control channels in the subframe. The PHICH delivers an HARQ ACKnowledgment/Negative ACKnowledgment (ACK/NACK) signal in response to an uplink transmission. Control information carried on the PDCCH is called Downlink Control Information (DCI). The DCI transports uplink or downlink scheduling information, or uplink transmission power control commands for UE groups. The PDCCH delivers information about resource allocation and a transport format for a Downlink Shared CHannel (DL-SCH), resource allocation information about an Uplink Shared CHannel (UL-SCH), paging information of a Paging CHannel (PCH), system information on the DL-SCH, information about resource allocation for a higher-layer control message such as a Random Access Response transmitted on the PDSCH, a set of transmission power control commands for individual UEs of a UE group, transmission power control

~~information, Voice Over Internet Protocol (VoIP) activation information, etc.~~ A plurality of PDCCHs may be transmitted in the control region. A UE may monitor a plurality of PDCCHs. A PDCCH is formed by aggregating one or more consecutive Control Channel Elements (CCEs). A CCE is a logical allocation unit used to provide a PDCCH at a coding rate based on the state of a radio channel. A CCE includes a plurality of RE groups. The format of a PDCCH and the number of available bits for the PDCCH are determined according to the correlation between the number of CCEs and a coding rate provided by the CCEs. An eNB determines the PDCCH format according to DCI transmitted to a UE and adds a Cyclic Redundancy Check (CRC) to control information. The CRC is masked by an Identifier (ID) known as a Radio Network Temporary Identifier (RNTI) according to the owner or usage of the PDCCH. If the PDCCH is directed to a specific UE, its CRC may be masked by a cell-RNTI (C-RNTI) of the UE. If the PDCCH is for a paging message, the CRC of the PDCCH may be masked by a Paging Indicator Identifier (P-RNTI). If the PDCCH carries system information, particularly, a System Information Block (SIB), its CRC may be masked by a system information ID and a System Information RNTI (SI-RNTI). To indicate that the PDCCH carries a Random Access Response in response to a Random Access Preamble transmitted by a UE, its CRC may be masked by a Random Access-RNTI (RA-RNTI).

[0049] FIG. 4 illustrates the structure of an uplink subframe. An uplink subframe may be divided into a control region and a data region in the frequency domain. A Physical Uplink Control CHannel (PUCCH) carrying uplink control information is allocated to the control region and a Physical Uplink Shared Channel (PUSCH) carrying user data is allocated to the data region. To maintain the property of a single carrier, a UE does not transmit a PUSCH and a PUCCH simultaneously. A PUCCH for a UE is allocated to an RB pair in a subframe. The RBs of the RB pair occupy different subcarriers in two slots. Thus it is said that the RB pair allocated to the PUCCH is frequency-hopped over a slot boundary.

[0050] Reference Signals (RSs)

[0051] In a wireless communication system, a packet is transmitted on a radio channel. In view of the nature of the radio channel, the packet may be distorted during

~~the transmission. To receive the signal successfully, a receiver should compensate for~~
the distortion of the received signal using channel information. Generally, to enable
the receiver to acquire the channel information, a transmitter transmits a signal known
to both the transmitter and the receiver and the receiver acquires knowledge of channel
5 information based on the distortion of the signal received on the radio channel. This
signal is called a pilot signal or an RS.

[0052] In the case of data transmission and reception through multiple antennas,
knowledge of channel states between Transmission (Tx) antennas and Reception (Rx)
antennas is required for successful signal reception. Accordingly, an RS should be
10 transmitted through each Tx antenna.

[0053] RSs may be divided into downlink RSs and uplink RSs. In the current
LTE system, the uplink RSs include:

[0054] i) DeModulation-Reference Signal (DM-RS) used for channel
estimation for coherent demodulation of information delivered on a PUSCH and a
15 PUCCH; and

[0055] ii) Sounding Reference Signal (SRS) used for an eNB or a network to
measure the quality of an uplink channel in a different frequency.

[0056] The downlink RSs are categorized into:

[0057] i) Cell-specific Reference Signal (CRS) shared among all UEs of a cell;

20 [0058] ii) UE-specific RS dedicated to a specific UE;

[0059] iii) DM-RS used for coherent demodulation of a PDSCH, when the
PDSCH is transmitted;

[0060] iv) Channel State Information-Reference Signal (CSI-RS) carrying CSI,
when downlink DM-RSs are transmitted;

25 [0061] v) Multimedia Broadcast Single Frequency Network (MBSFN) RS used
for coherent demodulation of a signal transmitted in MBSFN mode; and

[0062] vi) positioning RS used to estimate geographical position information
about a UE.

[0063] RSs may also be divided into two types according to their purposes: RS
30 for channel information acquisition and RS for data demodulation. Since its purpose
lies in that a UE acquires downlink channel information, the former should be

~~transmitted in a broad band and received even by a UE that does not receive downlink~~
 data in a specific subframe. This RS is also used in a situation like handover. The
 latter is an RS that an eNB transmits along with downlink data in specific resources. A
 UE can demodulate the data by measuring a channel using the RS. This RS should be
 5 transmitted in a data transmission area.

[0064] CRSs serve two purposes, that is, channel information acquisition and
 data demodulation. A UE-specific RS is used only for data demodulation. CRSs are
 transmitted in every subframe in a broad band and CRSs for up to four antenna ports are
 transmitted according to the number of Tx antennas in an eNB.

10 [0065] For example, if the eNB has two Tx antennas, CRSs for antenna ports 0
 and 1 are transmitted. In the case of four Tx antennas, CRSs for antenna ports 0 to 3
 are respectively transmitted.

[0066] FIG. 5 illustrates patterns in which CRSs and DRSs are mapped to a
 downlink RB pair, as defined in a legacy 3GPP LTE system (e.g. conforming to
 15 Release-8). An RS mapping unit, i.e. a downlink RB pair may include one subframe
 in time by 12 subcarriers in frequency. That is, an RB pair includes 14 OFDM
 symbols in time in the case of the normal CP (see FIG. 5(a)) and 12 OFDM symbols in
 time in the case of the extended CP (see FIG. 5(b)).

[0067] In FIG. 5, the positions of RSs in an RB pair for a system where an eNB
 20 supports four Tx antennas are illustrated. Reference numerals 0, 1, 2 and 3 denote the
 REs of CRSs for first to fourth antenna ports, antenna port 0 to antenna port 3,
 respectively, and reference character 'D' denotes the positions of DRSs.

[0068] CSI-RS

[0069] CSI-RS is an RS used for channel measurement in an LTE-A system
 25 supporting up to eight antenna ports on downlink. CSI-RS differs in this aspect from
 CRS used for both channel measurement and data demodulation and thus it is not
 necessary to transmit CSI-RSs in every subframe like CRSs. CSI-RS is used in
 Transmission Mode 9. For data demodulation, DM-RS is used.

[0070] More specifically, CSI-RSs may be transmitted through 1, 2, 4 or 8
 30 antenna ports. Antenna port 15 may be used for one antenna port, antenna ports 15
 and 16 for two antenna ports, antenna ports 15 to 18 for four antenna ports, and antenna

ports 15 to 22 for eight antenna ports.

[0071] CSI-RSs may be generated by the following [Equation 1].

[0072] [Equation 1]

$$r_{l,n_s}(m) = \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m)) + j \frac{1}{\sqrt{2}}(1 - 2 \cdot c(2m+1)), \quad m = 0, 1, \dots, N_{\text{RB}}^{\text{max,DL}} - 1$$

5 Where $r_{l,n_s}(m)$ denotes the generated CSI-RSs, $c(i)$ denotes a pseudo-random sequence, n_s is a slot number, l is an OFDM symbol index, and $N_{\text{RB}}^{\text{max,DL}}$ denotes the maximum number of RBs in a downlink bandwidth.

[0073] The CSI-RSs generated by [Equation 1] may be mapped to REs on a per-antenna port basis by the following equation.

10 [0074] [Equation 2]

$$a_{k,l}^{(p)} = w_{l''} \cdot r_{l,n_s}(m')$$

$$k = k' + 12m + \begin{cases} -0 & \text{for } p \in \{15, 16\}, \text{ normal cyclic prefix} \\ -6 & \text{for } p \in \{17, 18\}, \text{ normal cyclic prefix} \\ -1 & \text{for } p \in \{19, 20\}, \text{ normal cyclic prefix} \\ -7 & \text{for } p \in \{21, 22\}, \text{ normal cyclic prefix} \\ -0 & \text{for } p \in \{15, 16\}, \text{ extended cyclic prefix} \\ -3 & \text{for } p \in \{17, 18\}, \text{ extended cyclic prefix} \\ -6 & \text{for } p \in \{19, 20\}, \text{ extended cyclic prefix} \\ -9 & \text{for } p \in \{21, 22\}, \text{ extended cyclic prefix} \end{cases}$$

$$l = l' + \begin{cases} l'' & \text{CSI reference signal configurations 0 - 19, normal cyclic prefix} \\ 2l'' & \text{CSI reference signal configurations 20 - 31, normal cyclic prefix} \\ l'' & \text{CSI reference signal configurations 0 - 27, extended cyclic prefix} \end{cases}$$

$$w_{l''} = \begin{cases} 1 & p \in \{15, 17, 19, 21\} \\ (-1)^{l''} & p \in \{16, 18, 20, 22\} \end{cases}$$

$$l'' = 0, 1$$

$$m = 0, 1, \dots, N_{\text{RB}}^{\text{DL}} - 1$$

$$m' = m + \left\lfloor \frac{N_{\text{RB}}^{\text{max,DL}} - N_{\text{RB}}^{\text{DL}}}{2} \right\rfloor$$

[0075] In [Equation 2], k' and l' may be determined according to CSI-RS

configurations as illustrated in [Table 1].

[0076] [Table 1]

	CSI RS Configuration	Number of CSI RSs configured					
		1 or 2		4		8	
		(k', l')	$n_s \bmod 2$	(k', l')	$n_s \bmod 2$	(k', l')	$n_s \bmod 2$
Frame structure type 1 and 2	0	(9,5)	0	(9,5)	0	(9,5)	0
	1	(11,2)	1	(11,2)	1	(11,2)	1
	2	(9,2)	1	(9,2)	1	(9,2)	1
	3	(7,2)	1	(7,2)	1	(7,2)	1
	4	(9,5)	1	(9,5)	1	(9,5)	1
	5	(8,5)	0	(8,5)	0		
	6	(10,2)	1	(10,2)	1		
	7	(8,2)	1	(8,2)	1		
	8	(6,2)	1	(6,2)	1		
	9	(8,5)	1	(8,5)	1		
	10	(3,5)	0				
	11	(2,5)	0				
	12	(5,2)	1				
	13	(4,2)	1				
	14	(3,2)	1				
	15	(2,2)	1				
	16	(1,2)	1				
	17	(0,2)	1				
	18	(3,5)	1				
	19	(2,5)	1				
Frame structure type 2 only	20	(11,1)	1	(11,1)	1	(11,1)	1
	21	(9,1)	1	(9,1)	1	(9,1)	1
	22	(7,1)	1	(7,1)	1	(7,1)	1
	23	(10,1)	1	(10,1)	1		
	24	(8,1)	1	(8,1)	1		

	25	(6,1)	1	(6,1)	1		
	26	(5,1)	1				
	27	(4,1)	1				
	28	(3,1)	1				
	29	(2,1)	1				
	30	(1,1)	1				
	31	(0,1)	1				

[0077] CSI-RSs are mapped to REs on a per-antenna port basis according to a specific CSI-RS configuration by [Equation 1] and [Equation 2]. For example, in the case of CSI-RS Configuration 0, CSI-RSs are mapped in the manner illustrated in FIG. 6.

[0078] As described before, CSI-RSs are transmitted in a specific subframe, not in every subframe. Specifically, CSI-RSs may be transmitted in a subframe satisfying the following [Equation 3], referring to a CSI-RS subframe configuration as illustrated in [Table 2] below.

[0079] [Table 2]

CSI-RS-SubframeConfig $I_{\text{CSI-RS}}$	CSI-RS periodicity $T_{\text{CSI-RS}}$ (subframes)	CSI-RS subframe offset $\Delta_{\text{CSI-RS}}$ (subframes)
0 – 4	5	$I_{\text{CSI-RS}}$
5 – 14	10	$I_{\text{CSI-RS}} - 5$
15 – 34	20	$I_{\text{CSI-RS}} - 15$
35 – 74	40	$I_{\text{CSI-RS}} - 35$
75 – 154	80	$I_{\text{CSI-RS}} - 75$

[0080] [Equation 3]

$$(10n_f + \lfloor n_s/2 \rfloor - \Delta_{\text{CSI-RS}}) \bmod T_{\text{CSI-RS}} = 0$$

where $T_{\text{CSI-RS}}$ denotes the transmission period of CSI-RSs, $\Delta_{\text{CSI-RS}}$ is an offset, n_f is a system frame number, and n_s is a slot number.

[0081] These CSI-RSs may be signaled to a UE in a CSI-RS config Information Element (IE) described in [Table 3] below.

[0082] [Table 3]

CSI-RS-Config-r10 ::=		SEQUENCE {
csi-RS-r10		CHOICE {
release		NULL,
setup		SEQUENCE {
antennaPortsCount-r10		ENUMERATED {an1,
an2, an4, an8},		
resourceConfig-r10		INTEGER (0..31),
subframeConfig-r10		INTEGER (0..154),
p-C-r10		
INTEGER (-8..15)		
}		
}		
		OPTIONAL,
-- Need ON		
zeroTxPowerCSI-RS-r10		CHOICE {
release		NULL,
setup		SEQUENCE {
zeroTxPowerResourceConfigList-r10		BIT STRING (SIZE (16)),
zeroTxPowerSubframeConfig-r10		INTEGER (0..154)
}		
}		
		OPTIONAL
-- Need ON		
}		

[0083] In [Table 3], 'antennaPortsCount-r10' indicates the number of antennas through which CSI-RSs are transmitted (one of 1, 2, 4 and 8 is selected), and 'resourceConfig-r10' specifies REs carrying the CSI-RSs in one RB in the time-frequency domain. 'subframeConfig-r10' indicates a subframe carrying the CSI-RSs and the ratio of a CSI-RS Energy Per Resource Element (EPRE) to a PDSCH EPRE. In addition, the eNB transmits information about zero-power CSI-RSs.

[0084] In the CSI-RS Config IE, 'resourceConfig-r10' indicates the positions of the CSI-RSs. Specifically, 'resourceConfig-r10' indicates the positions of symbols and subcarriers carrying the CSI-RSs in one RB according to a CSI-RS configuration

number ranging from 0 to 31 in [Table 1].

[0085] CSI Feedback

[0086] Multiple Input Multiple Output (MIMO) schemes may be categorized into open-loop MIMO and closed-loop MIMO. A MIMO transmitter performs MIMO transmission without CSI feedback from a MIMO receiver in the open-loop MIMO scheme, whereas the MIMO transmitter performs MIMO transmission based on CSI feedback from the MIMO receiver in the closed-loop MIMO scheme. To obtain the multiplexing gain of MIMO Tx antennas, each of the transmitter and the receiver may perform beamforming based on CSI in the closed-MIMO scheme. The transmitter (e.g. an eNB) may allocate an uplink control channel or uplink shared channel to the receiver (e.g. a UE) so that the receiver can feedback CSI to the transmitter.

[0087] The receiver may feedback a Rank Indicator (RI), a Precoding Matrix Index (PMI), and a Channel Quality Indicator (CQI) as CSI to the transmitter.

[0088] An RI is information about a channel rank. The channel rank is the number of layers (or streams) carrying different information in the same time-frequency resources. Because the RI depends dominantly on the long-term fading of a channel, it may be fed back in a longer period than a PMI and a CQI.

[0089] A PMI is information about a precoding matrix used for transmission at the transmitter, reflecting the spatial characteristics of a channel. Precoding refers to mapping between transmission layers and Tx antennas and thus a layer-antenna mapping relationship may be determined according to a precoding matrix. The PMI indicates the index of a UE-preferred precoding matrix for the eNB, which is determined based on a metric such as Signal to Interference plus Noise Ratio (SINR). To reduce the feedback overhead of precoding information, the transmitter and the receiver may preliminarily share a codebook including a plurality of precoding matrices and thus the receiver may feedback only the index of a specific precoding matrix selected from the codebook.

[0090] Acquisition of an additional multi-user diversity using Multi-User MIMO (MU-MIMO) is under consideration in a system supporting an extended antenna configuration (e.g. an LTE-A system). In MU-MIMO, an interference channel exists between UEs multiplexed in an antenna domain. Therefore, when the eNB transmits a

~~downlink signal based on CSI feedback received from one UE, it needs to perform the~~
downlink transmission in a manner that avoids interference with other UEs. Hence,
for a reliable MU-MIMO operation, CSI should be fed back with more accuracy than
for a Single-User MIMO (SU-MIMO) operation.

[0091] To enable more accurate CSI measurement and reporting, a new CSI
feedback scheme may be used by improving conventional CSI including an RI, a PMI,
and a CQI. For example, precoding information fed back by a receiver may be
indicated by a combination of two PMIs. One of the two PMIs (a first PMI) may be
referred to as W1 having a long term and/or wideband property and the other PMI (a
second PMI) may be referred to as W2 having a short term and/or subband property. A
final PMI may be determined by a function of W1 and W2. For example, let the final
PMI be denoted by W. Then it may be defined that $W=W1*W2$ or $W=W2*W1$.

[0092] A CQI is information representing channel quality or channel strength.
The CQI may be represented as the index of a predetermined Modulation and Coding
Scheme (MCS). That is, a CQI index feedback indicates a modulation scheme and a
code rate. In general, the CQI reflects a received SINR that can be obtained when an
eNB configures a spatial channel using a PMI.

[0093] The current LTE/LTE-A system defines 'CSI reference resource' related
to channel measurement for the above-described CSI feedback/reporting. The CSI
reference resource is defined by a group of physical RBs corresponding to a frequency
band for which a CQI is calculated in the frequency domain. From a time perspective,
for CSI transmission/reporting in subframe n , the CSI reference resource is defined by a
single downlink subframe, $n-n_{CQI\_ref}$. i) For periodic CSI reporting, $n-n_{CQI\_ref}$ is the
smallest value greater than or equal to 4, which is a valid downlink subframe. ii) For
aperiodic CSI reporting, $n-n_{CQI\_ref}$ is typically the reference resource in the same valid
downlink subframe as a corresponding CSI request in a DCI format for uplink
transmissions. iii) For aperiodic CSI reporting triggered by a Random Access
Response Grant carrying a CSI request, $n-n_{CQI\_ref}$ equals 4. A downlink subframe is
considered valid when it is configured as a downlink subframe for a particular UE, it is
not an MBSFN subframe except for Transmission Mode 9, it contains a DwPTS with a
predetermined size or larger, it does not fall within a configured measurement gap for

that UE, and for periodic CSI reporting, it should be an element of a CSI subframe set when that UE is configured with CSI subframe sets. A higher layer may configure CSI subframe sets ($C_{\text{CSI},0}$, $C_{\text{CSI},1}$) for the UE. The current standard defines that the CSI reference resource is included in one of the two CSI subframe sets ($C_{\text{CSI},0}$, $C_{\text{CSI},1}$), not
5 in both.

[0094] Coordinated Multi-Point (CoMP)

[0095] To satisfy enhanced system performance requirements for the 3GPP LTE-A system, CoMP transmission and reception technology known as co-MIMO, collaborative MIMO or network MIMO has been proposed. The CoMP technology
10 can increase the performance of UEs located at a cell edge and average sector throughput.

[0096] It is known that Inter-Cell Interference (ICI) generally degrades the performance of a UE at a cell edge and average sector throughput in a multi-cellular environment with a frequency reuse factor of 1. To offer an appropriate throughput
15 performance to a cell-edge UE in an environment constrained by interference, a simple ICI mitigation technique such as UE-specific power control-based Fractional Frequency Reuse (FFR) is used in the legacy LTE system. However, it may be preferred to reduce the ICI or reuse the ICI as a desired signal for the UE, rather than to decrease the utilization of frequency resources per cell. For this purpose, CoMP transmission
20 techniques may be adopted.

[0097] Downlink CoMP schemes are classified largely into Joint Processing (JP), and Coordinated Scheduling/Beamforming (CS/CB).

[0098] According to the JP scheme, each point (eNB) of a CoMP cooperation unit may use data. The CoMP cooperation unit refers to a set of eNBs used for a
25 CoMP transmission operation. The JP scheme is further branched into joint transmission and dynamic cell selection.

[0099] Joint transmission is a technique of transmitting PDSCHs from a plurality of points (a part or the whole of a CoMP cooperation unit) at one time. That is, a plurality of transmission points may simultaneously transmit data to a single UE.
30 The joint transmission scheme can improve the quality of a received signal coherently or non-coherently and actively eliminate interference with other UEs, as well.

~~[00100] Dynamic cell selection is a technique of transmitting a PDSCH from one~~
point of a CoMP cooperation unit at one time. That is, one point of the CoMP
cooperation unit transmits data to a single UE at a given time point, while the other
points of the CoMP cooperation unit do not transmit data to the UE at the time point.

5 A transmission point to transmit data to a UE may be dynamically selected.

[00101] Meanwhile, in the CS/CB scheme, a CoMP cooperation unit may
perform cooperative beamforming for data transmission to a single UE. While only a
serving cell transmits data to the UE, user scheduling/beamforming may be determined
through coordination among cells of the CoMP cooperation unit.

10 [00102] Uplink CoMP reception refers to reception of an uplink signal through
cooperation among a plurality of geographically separate points. Uplink CoMP
schemes include Joint Reception (JR) and Coordinated Scheduling/Beamforming
(CS/CB).

[00103] In JR, a plurality of reception points receive a signal transmitted on a
15 PUSCH. CS/CB is a technique in which while only one point receives a PUSCH, user
scheduling/beamforming is determined through coordination among cells of a CoMP
cooperation unit.

[00104] In this CoMP system, multi-cell eNBs can support data for a UE. In
addition, the eNBs support one or more UEs simultaneously in the same radio
20 frequency resources, thereby increasing system performance. The eNBs may also
operate in Space Division Multiple Access (SDMA) based on CSI between a UE and
the eNBs.

[00105] A serving eNB and one or more cooperative eNBs are connected to a
scheduler through a backbone network in the CoMP system. The scheduler may
25 receive channel information about the channel states between a UE and the cooperative
eNBs, measured by each cooperative eNB and operate based on the channel information.
For example, the scheduler may schedule information for cooperative MIMO for the
serving eNB and the one or more cooperative eNBs. That is, the scheduler may
transmit a command directly to each eNB in regard to the cooperative MIMO operation.

30 [00106] As noted from the above description, it can be said that a CoMP system
operates as a virtual MIMO system by grouping a plurality of cells into one group.

~~Basically, the CoMP system adopts a MIMO communication scheme using multiple antennas.~~

[00107] Measurement/Measurement Report

[00108] A measurement report is used for many techniques designed to ensure the mobility of UEs (handover, random access, cell search, etc.) or for one of the techniques. Since the measurement report needs a certain degree of coherent demodulation, a UE may perform measurement after acquiring synchronization and physical layer parameters, except for measurement of a received signal strength. The measurement report conceptually covers Radio Resource Management (RRM) measurement of measuring the signal strengths or signal strengths to total reception power of a serving cell and neighbor cells, including Reference Signal Received Power (RSRP), Received Signal Strength Indicator (RSSI), and Reference Signal Received Quality (RSRQ), and Radio Link Monitoring (RLM) measurement of measuring link quality with respect to the serving cell to thereby determine whether a radio link has been failed.

[00109] RSRP is defined as the linear average over the power contributions of REs that carry downlink CRSs.

[00110] RSSI is defined as the linear average of the total received power of a UE. The RSSI is measured from OFDM symbols carrying RSs for antenna port 0, including interference and noise power from neighbor cells. If a specific subframe is indicated for RSRQ measurement by higher-layer signaling, the RSSI is measured over all OFDM symbols of the indicated subframe.

[00111] RSRQ is defined as $(N \times \text{RSRP} / \text{RSSI})$, where N is the number of RBs over the measurement bandwidth of RSSI.

[00112] A measurement report is made basically using CRSs. In the present invention, a measurement report may be based on CRS, CSI-RS or DMRS, alone or in combination. The measurement report may be performed for a specific antenna port(s) from among antenna ports through which RSs are transmitted or for a specific RS configuration. For example, in the case of CSI-RS, a plurality of RS configurations may be allocated to the same subframe and each RS configuration may include 2-port, 4-port, or 8-port CSI-RSs and may be transmitted at a different transmission time.

[00113] ~~Transmission of a measurement report may be determined by the~~
following conditions for event-based measurement report decision:

- i) when the measurement of a serving cell becomes larger than an absolute threshold;
- 5 ii) when the measurement of the serving cell becomes smaller than the absolute threshold;
- iii) when the measurement of a neighbor cell becomes larger than the measurement of the serving cell by an offset;
- iv) when the measurement of the neighbor cell becomes larger than the
10 absolute threshold; and
- v) when the measurement of the serving cell becomes smaller than the absolute threshold and the measurement of the neighbor cell becomes larger than another absolute threshold.

Herein, the measurements may be the afore-described RSRP values.

15 [00114] Alternatively, it may be regulated that a measurement report is transmitted only when each of the above-described conditions for measurement report decision is kept satisfied for a predetermined time or longer.

[00115] In the CoMP environment, the network may determine to transmit a signal by an afore-described CoMP transmission scheme based on information included
20 in a measurement report received from a UE. Especially in joint transmission (hereinafter, referred to as CoMP JT), the UE may calculate a phase offset for each signal to reinforce signals transmitted from a plurality of transmission points and eNBs may transmit beamforming signals in CoMP JT based on the reported phase offsets.

[00116] To transmit or receive a radio signal in an RF band, a carrier frequency
25 may be generated from an oscillator. UEs should be synchronized to a serving eNB, for data transmission and reception. This process involves adjusting a carrier frequency to the oscillation frequency of the serving eNB. An error may occur to an actual operation of an oscillator in a transmission point. For example, if an eNB uses an oscillator having an allowed error of 0.05PPM, a carrier frequency error of up to

~~100MHz may occur to a 2-GHz carrier frequency. The eNB may have a carrier frequency between (2G-100)Hz and (2G+100)Hz.~~

[00117] In CoMP JT, a plurality of transmission points may use different oscillators because they transmit signals at the same time. That is, a UE may receive the signals from the plurality of transmission points in different carrier frequencies. If the UE is synchronized to its transmission point, that is, a serving eNB, the signals received from the other transmission points may have frequency offsets. In this example, the UE may experience a maximum frequency offset Δf of 200Hz in CoMP JT. The UE transitions a signal having a carrier frequency offset in an RF band to a pass band. Even though the signal having a carrier frequency offset is subjected to a carrier frequency elimination process, it is not perfectly eliminated and instead, it may serve as a residual frequency. This may be formulated as $S(t)e^{j2\pi\Delta ft}$. That is, the phase of a received signal $s(t)$ continuously changes over time and the phase variation rate is determined by the carrier frequency offset Δf .

[00118] The phase offset information report aiming at maximized reinforcement of signals received at a UE in CoMP JT may become inaccurate in the presence of a carrier frequency offset. Moreover, a time gap τ may exist between the time of reporting channel information from the UE by estimating channels between the UE and transmission points and the time of receiving signals in CoMP JT. In case a carrier frequency offset is generated, a signal is transmitted on a channel distorted with a phase variation of $e^{j2\pi\Delta f\tau}$ relative to the reported channel information. The channel distortion renders the UE-reported phase offset information inaccurate.

[00119] This means that CoMP JT efficiency cannot be maximized by performing CoMP JT without considering a frequency offset. Accordingly, the present invention proposes to report carrier frequency offset information to maximize the effectiveness of cooperative transmission (the afore-described CoMP transmission schemes, particularly CoMP JT) between two or more transmission points. Specifically, a UE may estimate carrier frequency offsets between the transmission points and report frequency offset information to a network through a transmission point (e.g. a serving cell).

[00120] A carrier frequency offset is the difference between the reception

~~frequencies of signals (e.g. CRSs or CSI-RSs as described later) transmitted by two or~~
more transmission points. The carrier frequency offset may be defined as a Reference
Signal Frequency Offset (RSFO) as described in [Table 4] below.

[00121] [Table 4]

Definition	Reference signal frequency offset (RSFO), is defined as the difference between carrier frequency of the TP transmitting the corresponding RS and that of the reference TP For RSFO determination, CSR or CSI-RS may be considered. The reference transmission point for RSFO shall/may be a transmission point that currently serves the UE.
Application	RRC_IDLE intra-frequency RRC_IDLE inter-frequency RRC_CONNECTED intra-frequency RRC_CONNECTED inter-frequency

5

[00122] A carrier frequency offset report may be transmitted in a measure report
by Layer 3 (L3) signaling or may be transmitted by Layer 1/Layer 2 (L1/L2) signaling
(e.g. included in a CSI report). Inclusion of a carrier frequency offset report in a
measurement report will first be described below.

10 [00123] FIG. 7 is a flowchart illustrating an operation for reporting an RSFO
measurement according to an embodiment of the present invention.

[00124] Referring to FIG. 7, a UE may measure the received strengths (e.g.
RSRPs) and/or reception frequencies of first and second signals (S701). As described
later, the first and second signals may be CRSs or CSI-RSs. It is assumed herein that
15 the first signal is a reference signal for RSFO determination.

[00125] The UE may compare the received strength of the second signal with a
threshold (S702). If the received strength of the second signal exceeds the threshold,
the UE may determine whether the second signal is the target of RSFO reporting(S703).

[00126] If the UE determines that the second signal is the target of RSFO
20 reporting, the UE may measure RSFO and transmit a measurement report including the

~~RSFO to a transmission point (S705). The measurement report may include~~
measurements used in the legacy LTE/LTE-A systems, such as an RSRP, in addition to
the RSFO. On the contrary, if the UE determines that the second signal is not the
target of RSFO reporting, the UE may transmit a measurement report without the RSFO
5 to the transmission point (S704).

[00127] Upon receipt of the measurement report including the RSFO, the
transmission point may transmit the received measurement report to a CoMP scheduler
(S706). The CoMP scheduler is a physical or logical entity incorporated into a
network entity such as a Mobility Management Entity (MME), a Serving GateWay
10 (SGW), a Packet data network GateWay (PGW), etc., or an independent entity. Or the
CoMP scheduler may be a physical or logical entity incorporated into a main
transmission point among a plurality of transmission points forming a CoMP cluster.

[00128] The CoMP scheduler may determine whether to perform CoMP JT
through transmission points related to the first and second signals based on the
15 measurement report including the RSFO (S707). The CoMP scheduler may define
transmission points having strong signals determined based on RSRPs/RSRQs reported
by the UE as a CoMP measurement set. Further, to increase the gain of CoMP JT, the
CoMP scheduler may select transmission points having small carrier frequency offsets
with respect to one another. The CoMP measurement set may be determined semi-
20 statically and may be indicated to the UE by Radio Resource Control (RRC) signaling.
Or if the CoMP scheduler configures a CoMP measurement set with transmission points
having large carrier frequency offsets, it may predict that phase offset information to be
fed back from the UE will be inaccurate. Therefore, the CoMP scheduler may
command the UE not to transmit phase offset information in addition to channel
25 information by an RRC signal, thereby decreasing unnecessary feedback overhead. In
another example, an eNB may correct the transmission frequency of an oscillator used
in each of transmission points based on RSFO reports received from a plurality of UEs
so that the transmission frequencies of signals transmitted from the transmission points
are almost identical.

30 [00129] While not shown, the above-described measurement report may further
include a Reference Signal Time Difference (RSTD) defined as the difference between

~~the times of RSs transmitted by the transmission points related to the first and second signals.~~ The RSTD may be defined as described in [Table 5] below and apply to RRC-IDLE/RRC-CONNECTED state of intra-frequency/inter-frequency.

[00130] [Table 5]

Definition	The relative timing difference between the neighbour cell j and the reference cell i, defined as $T_{\text{SubframeRxj}} - T_{\text{SubframeRxi}}$, where: $T_{\text{SubframeRxj}}$ is the time when the UE receives the start of one subframe from cell j, $T_{\text{SubframeRxi}}$ is the time when the UE receives the corresponding start of one subframe from cell i that is closest in time to the subframe received from cell j. The reference point for the observed subframe time difference shall/may be the antenna connector of the UE.
Application	RRC_IDLE intra-frequency, RRC_IDLE inter-frequency, RRC_CONNECTED intra-frequency, RRC_CONNECTED inter-frequency

5

[00131] Now a description will be given of a case where the first and second signals are CRSs in FIG. 7, with reference to FIG. 8.

[00132] In FIG. 8, a UE 820, a first transmission point 810 being a serving cell of the UE 820, and a second transmission point 811 being a neighbor cell of the first transmission point 810 are illustrated. It is assumed that the first transmission point 810 transmits a CRS as the first signal and the second transmission point 811 transmits a CRS as the second signal.

[00133] In this case, the transmission point 810 being the serving cell may be a reference cell for RSFO measurement. The RSFO may refer to the difference (i.e. offset) between the carrier frequency of the CRS transmitted by the second transmission point 811 and the carrier frequency of the CRS transmitted by the first transmission point 810.

[00134] For this operation, an eNB may transmit information about CRSs

~~transmitted by adjacent/neighbor transmission points on which RSFOs are to be~~
measured, a neighbor CRS list, or a neighbor physical cell Identifier (ID) list to a UE
and the UE may report only RSFO information about the CRSs included in the list to
the eNB. That is, the afore-described second signal may be listed in the neighbor CRS
5 list or the second transmission point 811 may be listed in the neighbor physical cell ID
list.

[00135] It may be individually indicated whether an RSFO needs to be measured
for a CRS transmitted by a specific transmission point in neighbor cell information
included in a neighbor cell list transmitted for mobility management by the serving cell.
10 That is, the first transmission point may indicate the second transmission point in the
neighbor cell list.

[00136] The UE measures the RSRPs of CRSs received from neighbor cells. If
any of the RSRPs exceeds a predetermined threshold, the UE reports the RSRP. If at
least the neighbor cell or CRS form a specific neighbor cell is subject to RSFO
15 measurement, the UE may report the RSFO measurement along with the RSRP. If at
least the neighbor cell or CRS form a specific neighbor cell is subject to RSFO
measurement, the UE may report measurement without RSFO.

[00137] Meanwhile, the first and second signals may be CSI-RSs. In the case
where a plurality of transmission points transmit CSI-RSs, a CSI-RS list related to
20 cooperative transmission for RSFO measurement, called CoMP Resource Management
Set (CRMS) may be defined. A CRMS configuration may include 'CSI-RS config' of
CSI-RSs included in the CRMS. Since some CSI-RSs are transmitted at different
positions, they may differ in both RSRP and RSFO due to use of different oscillators.
On the other hand, some CSI-RSs are transmitted at the same positions by sharing the
25 same oscillator and thus they may differ only in received signal energy due to different
antenna beam patterns. That is, two CSI-RSs may be identical in RSFO and different
in RSRP. To reduce the overhead of RRM measurement/reporting and UE
measurement complexity in such various cases, an eNB may indicate CSI-RSs which
are RSFO measurement targets in a CSI-RS list to a UE, when the eNB sets a CRMS
30 configuration for the UE. A reference RS for RSFO measurement may be the first
CSI-RS listed in a CSI-RS list of the CRMS. The UE measures the RSRPs of CSI-RSs.

~~If any of the RSRPs exceeds a predetermined threshold, the UE reports the RSRP of a~~
corresponding CSI-RS. If the CSI-RS has already been indicated as an RSFO
measurement target, the UE may report the RSFO related to the CSI-RS as well as the
RSRP of the CSI-RS. If the CSI-RS is not an RSFO measurement target, the UE
5 reports only the RSRP of the CSI-RS.

[00138] FIG. 9 is a view referred to for describing a case where first and second
signals are CSI-RSs. If the first and second signals are CSI-RSs, this may imply that
RRM measurement is performed on CSI-RSs. Referring to FIG. 9, a first transmission
point 910 as a serving cell of a UE, a second transmission point 911 being a neighbor
10 cell of the first transmission point 910, and a third transmission point 912 that may be a
distributed antenna of the first transmission point 910, a Remote Radio Head (RRH), or
a picocell are illustrated, by way of example. It is assumed that the first transmission
point 910 transmits CSI-RSs according to a first CSI-RS configuration (CSI-RS config
#1), the second transmission point 911 transmits CSI-RSs according to a second CSI-RS
15 configuration (CSI-RS config #2), and the third transmission point 912 transmits CSI-
RSs according to a third CSI-RS configuration (CSI-RS config #3). A CSI-RS config
includes 'antennaPortsCount-r10' specifying the number of antennas (1, 2, 4 or 8)
through which CSI-RSs are transmitted, 'resourceConfig-r10' indicating REs carrying
the CSI-RSs in one RB in the time-frequency resources, and 'subframeConfig-r10'
20 indicating a subframe carrying the CSI-RSs.

[00139] In the exemplary environment illustrated in FIG. 9, a CRMS may
include CSI-RS config #1, CSI-RS config #2, and CSI-RS config #3 and CSI-RS config
#1 and CSI-RS config #2 may be indicated for RSFO measurement in the CRMS. In
the case where the first signal is a CSI-RS transmitted according to CSI-RS config #1
25 and the second signal is a CSI-RS transmitted according to CSI-RS config #2, if the
RSRP of the second signal exceeds a threshold, the UE may include the frequency offset
between the first and second signals, that is, an RSFO in an measurement report. In
the case where the first signal is a CSI-RS transmitted according to CSI-RS config #1
and the second signal is a CSI-RS transmitted according to CSI-RS config #3, even
30 though the RSRP of the second signal exceeds a threshold, the UE does not report the
RSFO because the second signal is not indicated for RSFO measurement.

[00140] ~~Inclusion of an RSFO in a measurement report has been described above.~~

Now a description will be given of methods for transmitting an RSFO by L1/L2 signaling. Afore-given descriptions (e.g. the descriptions of CRSs and CSI-RSs for RSFO measurement, etc.) other than a description of the RSFO signaling methods are
5 still apply in the following description.

[00141] An RSFO may be fed back according to a carrier frequency offset change rate. The RSFO may be included in a periodic PUCCH-based CSI report or an aperiodic PUSCH-based CSI report. The reporting period and method of carrier frequency offset information may be set independently of other periodic CSI reporting
10 periods/patterns. That is, an RSFO may be reported in a shorter or longer period than a CSI reporting period. Aside from an aperiodic CSI report, RSFO-only reporting may be triggered aperiodically.

[00142] The overhead of RSFO transmission may be controlled by setting various quantization levels. For example, if a carrier frequency offset ranges from -
15 100Hz to 100Hz, 4-bit information is required for 16-level quantization. In another example, a carrier frequency offset may be fed back in the form of an 'up/down command'. Given 2 bits, the 'up/down command' may be represented as +3, +1, -1 or -3 and the carrier frequency offset may be calculated by accumulating the value of the 'up/down command' to the previous RSFO. However, this is purely exemplary. Thus
20 various 'up/down command' values may be set in every feedback period, taking into account a carrier frequency offset variation.

[00143] FIG. 10 is a block diagram of a transmission point and a UE according to an embodiment of the present invention.

[00144] Referring to FIG. 10, a transmission point 1010 according to the present
25 invention may include an Rx module 1011, a Tx module 1012, a processor 1013, a memory 1014, and a plurality of antennas 1015. The plurality of antennas 1015 are used to support MIMO transmission and reception. The Rx module 1011 may receive uplink signals, data and information from a UE. The Tx module 1012 may transmit downlink signals, data and information to a UE. The processor 1013 may provide
30 overall control to the operations of the transmission point 1010.

[00145] In accordance with an embodiment of the present invention, the

~~processor 1013 may process necessary information in the afore-described measurement~~
report, handover, random access, etc.

[00146] Besides, the processor 1013 processes information received by the transmission point 1010 and information to be transmitted from the transmission point 1010. The memory 1014 may store the processed information for a predetermined time and may be replaced with a component such as a buffer (not shown).

[00147] A UE 1020 according to the present invention may include an Rx module 1021, a Tx module 1022, a processor 1023, a memory 1024, and a plurality of antennas 1025. The plurality of antennas 1025 are used to support MIMO transmission and reception. The Rx module 1021 may receive downlink signals, data and information from an eNB. The Tx module 1022 may transmit uplink signals, data and information to an eNB. The processor 1023 may provide overall control to the operations of the UE 1020.

[00148] In accordance with an embodiment of the present invention, the processor 1023 may process necessary information in the afore-described measurement report, handover, random access, etc.

[00149] Besides, the processor 1023 processes information received by the UE 1020 and information to be transmitted from the UE 1020. The memory 1024 may store the processed information for a predetermined time and may be replaced with a component such as a buffer (not shown).

[00150] One or more of the above-described embodiments of the present invention may apply to the configurations of the transmission point and the UE, independently or in combination. Redundant descriptions are avoided for clarity.

[00151] The description of the transmission point 1010 may apply to a relay as a downlink transmission entity or an uplink reception entity, and the description of the UE 1020 may apply to the relay as a downlink reception entity or an uplink transmission entity in FIG. 10.

【Mode for Invention】

[00152] Various embodiments have been described in the best mode for carrying out the invention.

【Industrial Applicability】

[00153] The embodiments of the present invention are applicable to various mobile communication systems.

[00154] The embodiments of the present invention may be achieved by various means, for example, hardware, firmware, software, or a combination thereof. In a hardware configuration, an embodiment of the present invention may be achieved by one or more ASICs (application specific integrated circuits), DSPs (digital signal processors), DSDPs (digital signal processing devices), PLDs (programmable logic devices), FPGAs (field programmable gate arrays), processors, controllers, microcontrollers, microprocessors, etc.

[00155] In a firmware or software configuration, an embodiment of the present invention may be implemented in the form of a module, a procedure, a function, etc. Software code may be stored in a memory unit and executed by a processor. The memory unit is located at the interior or exterior of the processor and may transmit and receive data to and from the processor via various known means.

[00156] The detailed description of the preferred embodiments of the present invention is given to enable those skilled in the art to realize and implement the present invention. While the present invention has been described referring to the preferred embodiments of the present invention, those skilled in the art will appreciate that many modifications and changes can be made to the present invention without departing from the spirit and essential characteristics of the present invention. For example, the structures of the above-described embodiments of the present invention can be used in combination. The above embodiments are therefore to be construed in all aspects as illustrative and not restrictive. Therefore, the present invention intends not to limit the embodiments disclosed herein but to give a broadest range matching the principles and new features disclosed herein.

[00157] Those skilled in the art will appreciate that the present invention may be carried out in other specific ways than those set forth herein without departing from the spirit and essential characteristics of the present invention. The above embodiments are therefore to be construed in all aspects as illustrative and not

~~restrictive. The scope of the invention should be determined by the appended claims~~
and their legal equivalents, not by the above description, and all changes coming
within the meaning and equivalency range of the appended claims are intended to be
embraced therein. Therefore, the present invention intends not to limit the
5 embodiments disclosed herein but to give a broadest range matching the principles
and new features disclosed herein. It is obvious to those skilled in the art that claims
that are not explicitly cited in each other in the appended claims may be presented in
combination as an embodiment of the present invention or included as a new claim by a
subsequent amendment after the application is filed.

10

【CLAIMS】

【Claim 1】 A method for transmitting a measurement report at a User Equipment (UE) in a wireless communication system, the method comprising:

measuring received strengths and reception frequencies of first and second
5 signals; and

transmitting a measurement report including a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold,

wherein the frequency offset is used to support cooperative transmission of
10 transmission points transmitting the first and second signals.

【Claim 2】 The method according to claim 1, wherein the support of cooperative transmission includes at least one of determination as to whether the transmission points are to perform cooperative transmission, determination of a cooperative transmission scheme of the transmission points, or correction of transmission
15 frequencies of one or more of the transmission points.

【Claim 3】 The method according to claim 1, wherein the first signal is a cell-specific reference signal transmitted by a first transmission point being a serving cell of the UE and the second signal is a cell-specific reference signal transmitted by a second transmission point being neighbor cell of the serving cell.

20 【Claim 4】 The method according to claim 3, wherein the second transmission point is included in a neighbor cell list received from the first transmission point.

【Claim 5】 The method according to claim 3, wherein the second transmission point is indicated in a neighbor cell list received from the first transmission point by the first transmission point.

~~【Claim 6】 The method according to claim 1, wherein the first and second signals~~
are Channel State Information-Reference Signals (CSI-RSs).

5 【Claim 7】 The method according to claim 6, wherein the first and second signals
are indicated for frequency offset reporting in a CSI-RS list related to cooperative
transmission.

 【Claim 8】 The method according to claim 7, wherein the first signal is a first
CSI-RS listed in in the CSI-RS list.

 【Claim 9】 The method according to claim 8, wherein the CSI-RS list includes a
plurality of CSI-RS configurations.

10 【Claim 10】 The method according to any of claims 1, 2, 3 and 6, wherein the
measurement report further includes a Reference Signal Time Difference (RSTD)
between the transmission points transmitting the first and second signals, and
wherein the RSTD is used to support the cooperative transmission.

 【Claim 11】 The method according to claim 10, wherein the RSTD is the difference
15 between the starts of subframes received from the transmission points.

 【Claim 12】 The method according to any of claims 1, 2, 3 and 6, wherein the
cooperative transmission is joint transmission.

 【Claim 13】 A User Equipment (UE) in a wireless communication system, comprising:
a transmission module; and
20 a processor,
wherein the processor is configured to measure received strengths and reception
frequencies of first and second signals, and transmit a measurement report including a
frequency offset between the first and second signals, if the received strength of the

~~second signal is equal to or larger than a predetermined threshold, and the frequency~~
offset is used to support cooperative transmission of transmission points transmitting the first and second signals.

【Claim 14】 A method for receiving a measurement report at a transmission point in a wireless communication system, the method comprising:

receiving a measurement report from a User Equipment (UE) that has received first and second signals,

wherein the measurement report includes a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold, and the frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.


【Claim 15】 A transmission point in a wireless communication system, comprising:

a reception module; and

a processor,

wherein the processor is configured to receive a measurement report from a User Equipment (UE) that has received first and second signals, and the measurement report includes a frequency offset between the first and second signals, if the received strength of the second signal is equal to or larger than a predetermined threshold, and the frequency offset is used to support cooperative transmission of transmission points transmitting the first and second signals.

FIG. 1

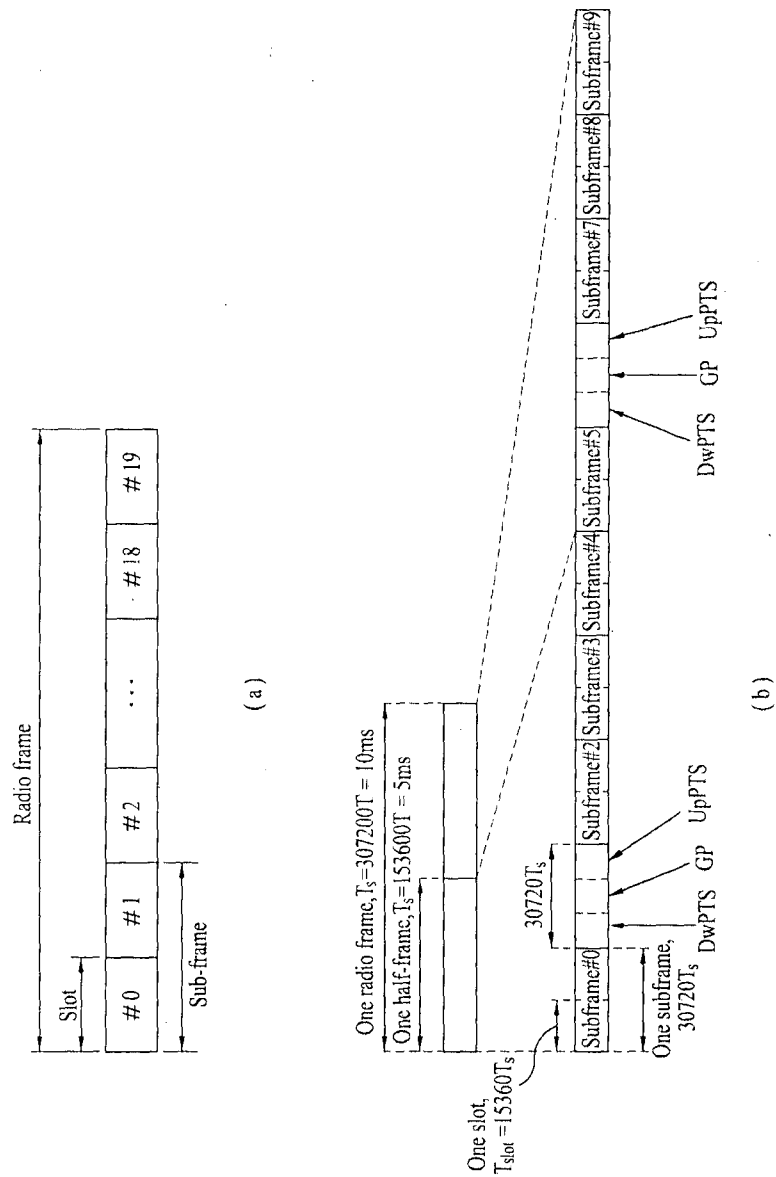

2/9

FIG. 2

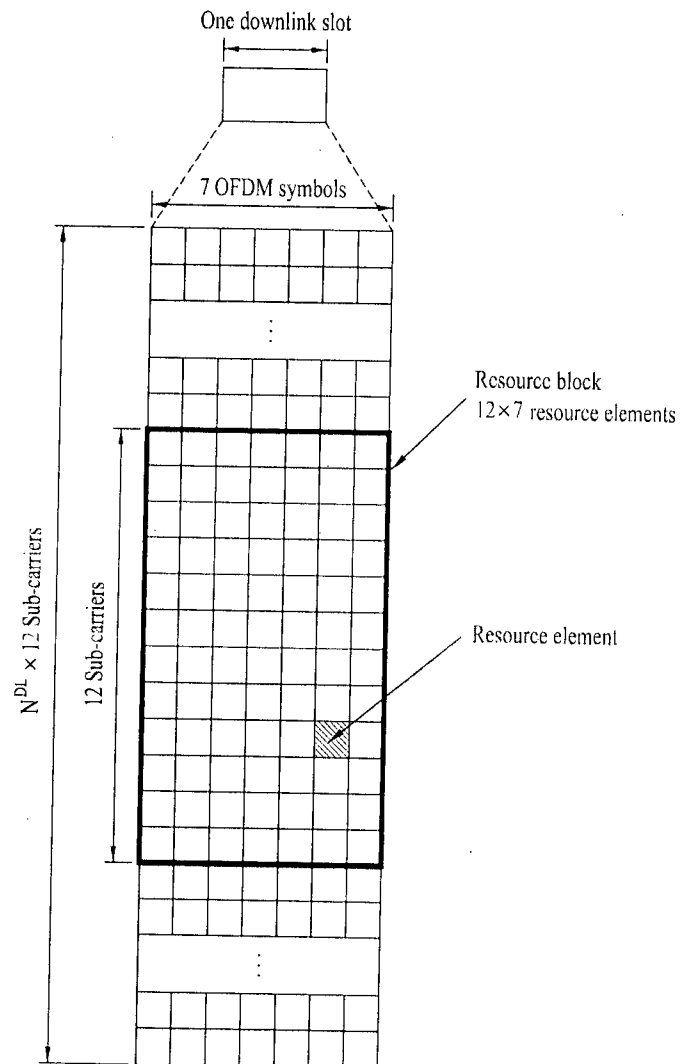


FIG. 3

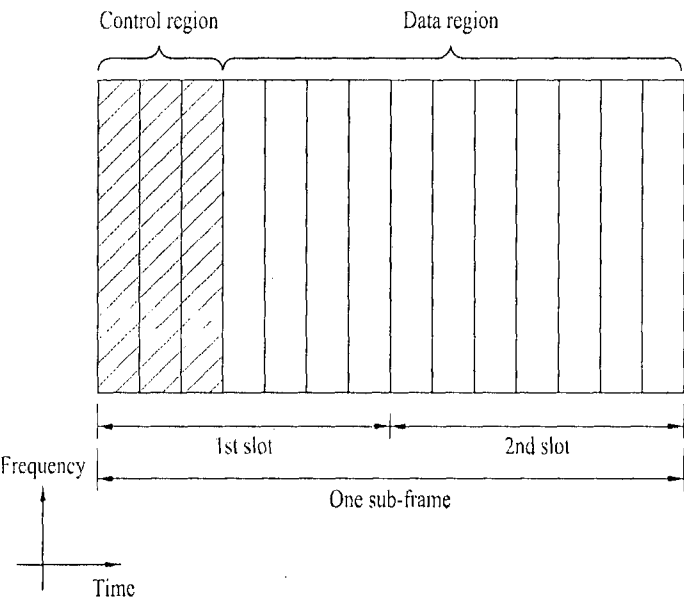


FIG. 4

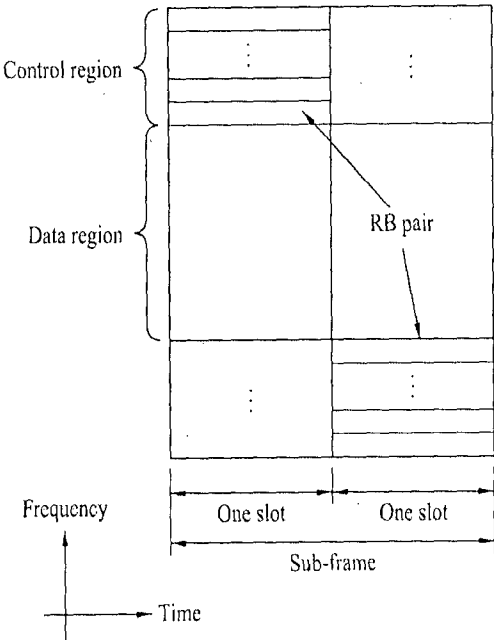


FIG. 5




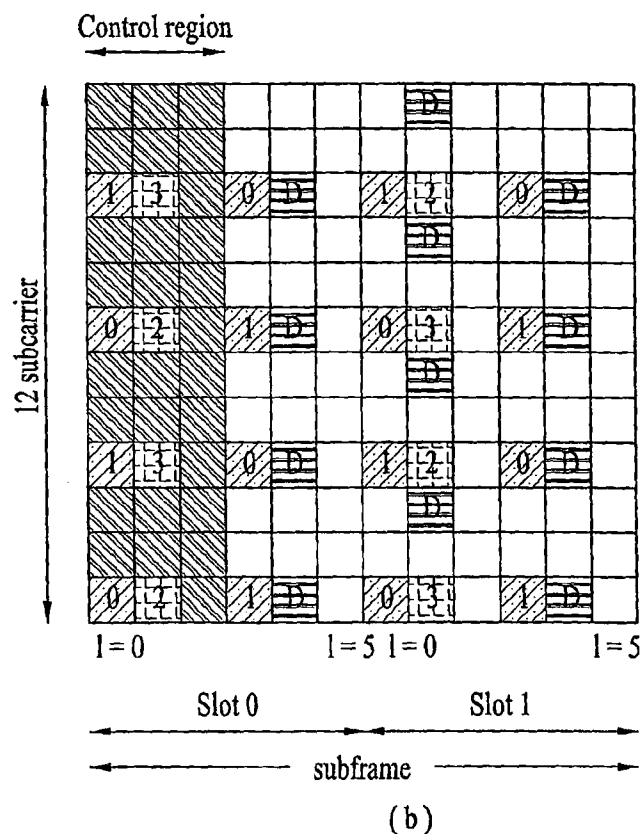


FIG. 6

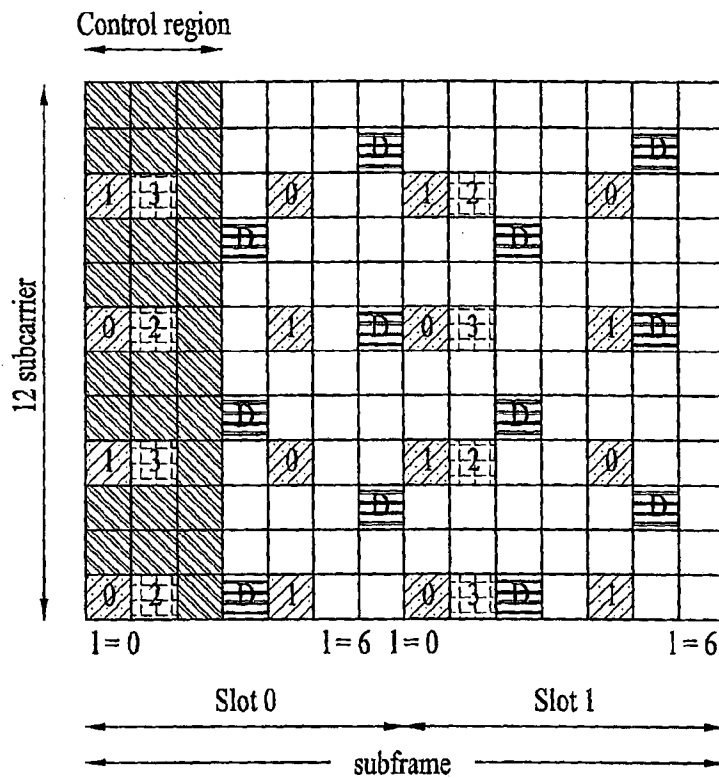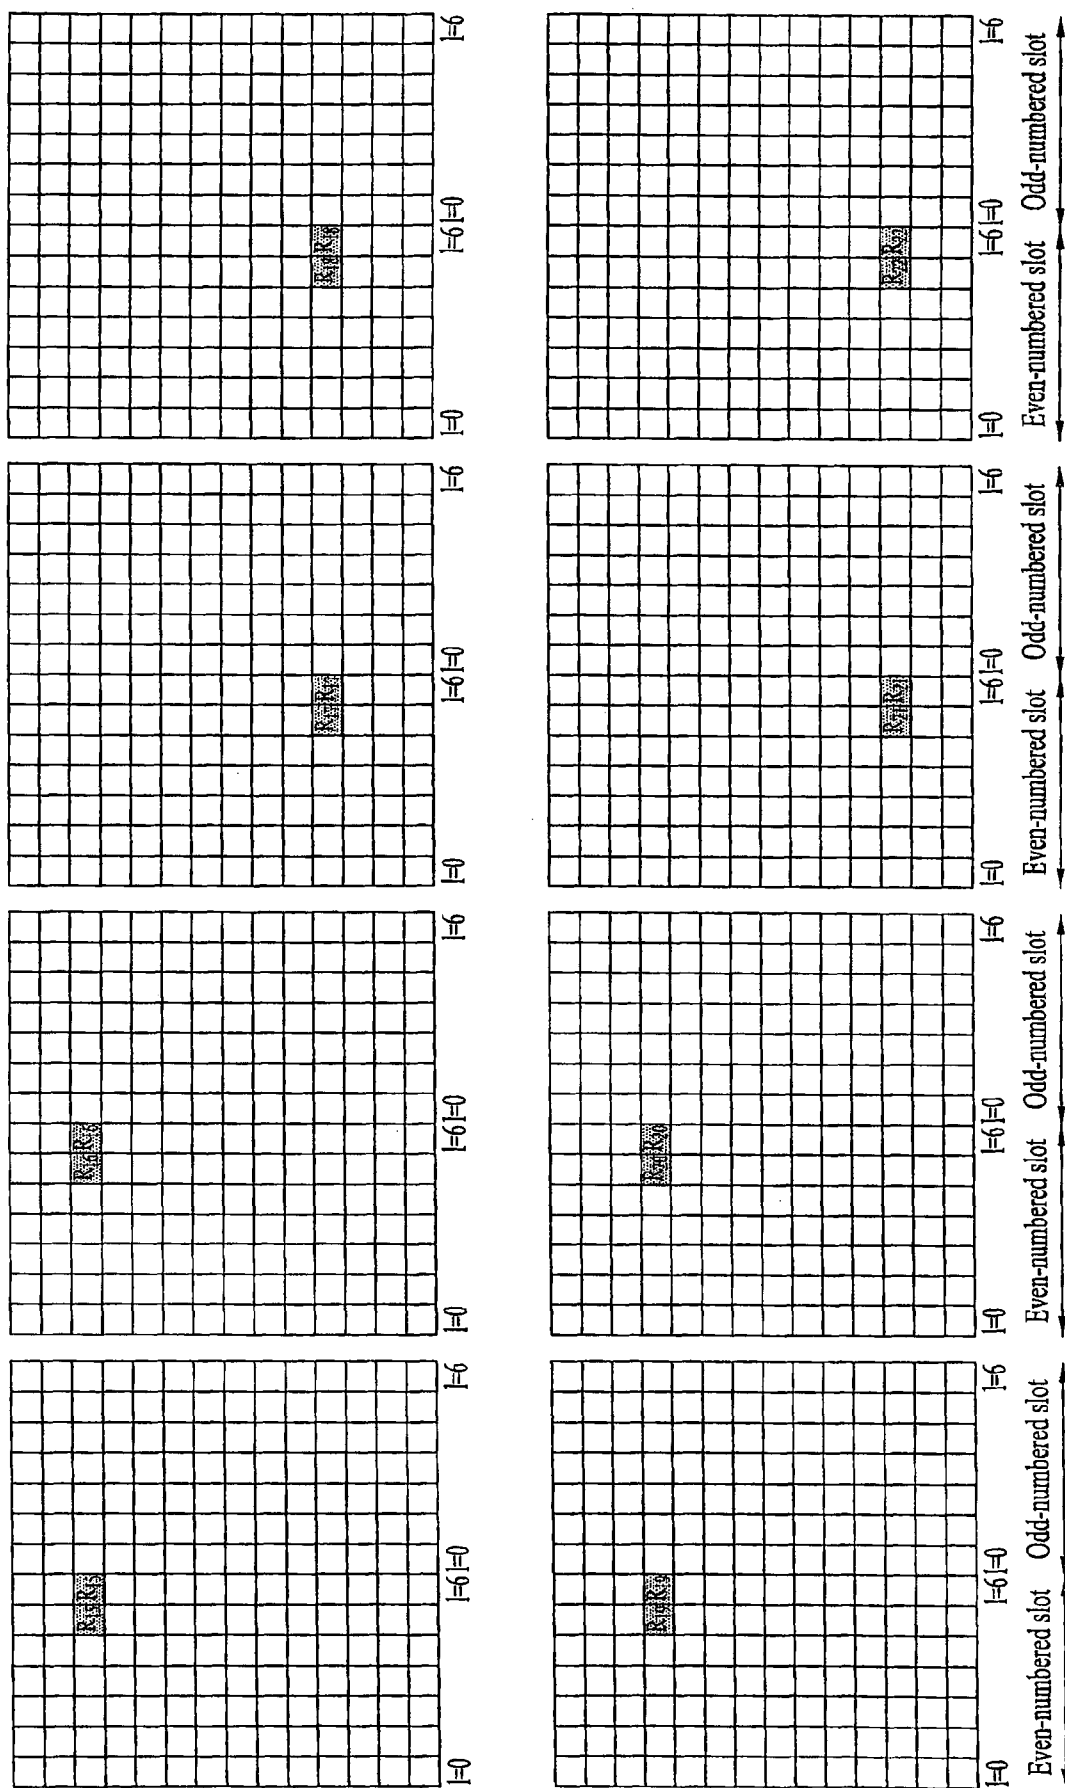

7/9

FIG. 7

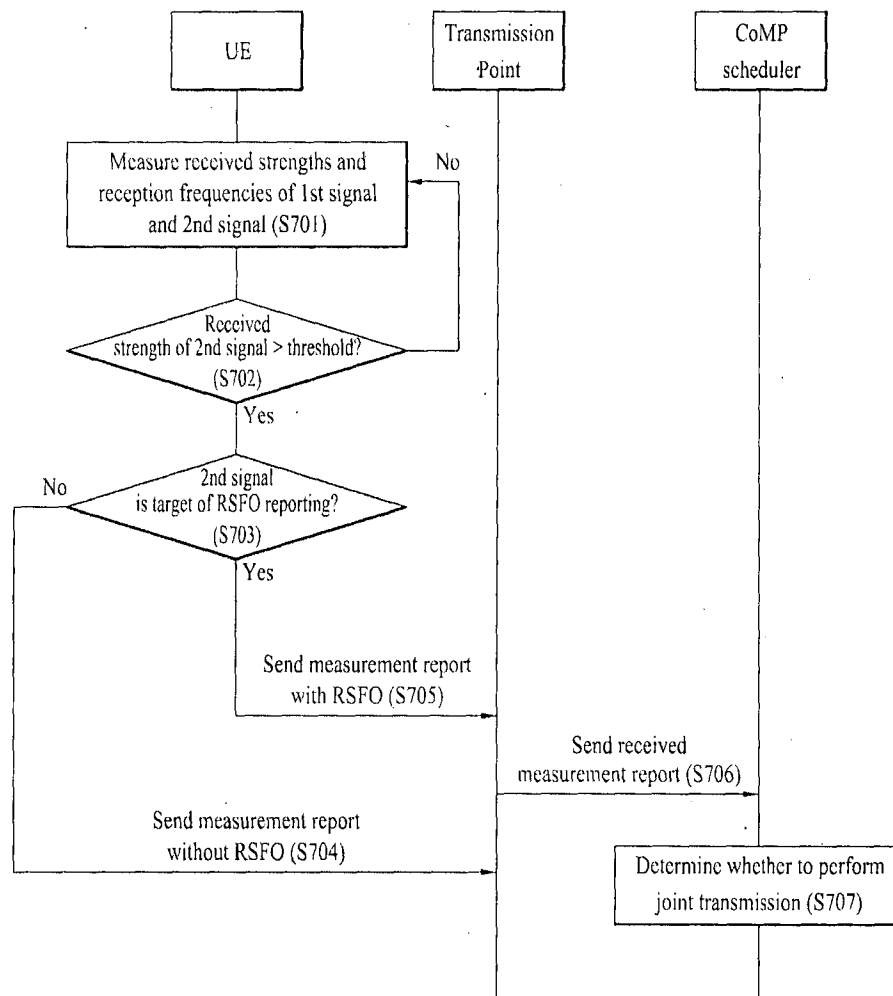

8/9

FIG. 8



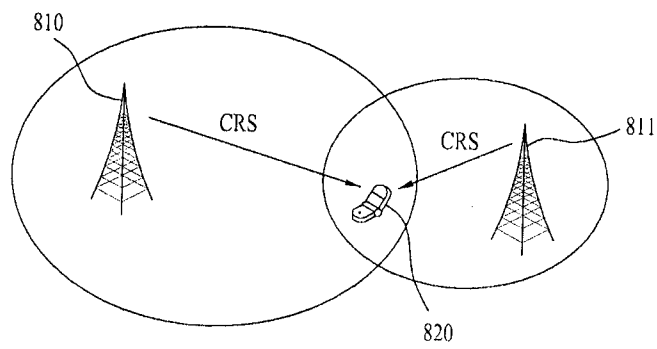


FIG. 9

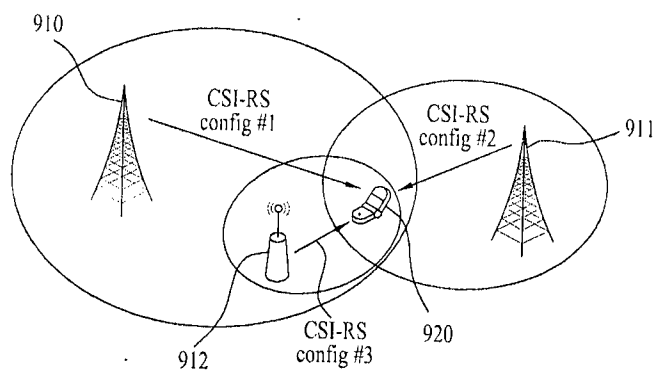

9/9

FIG. 10

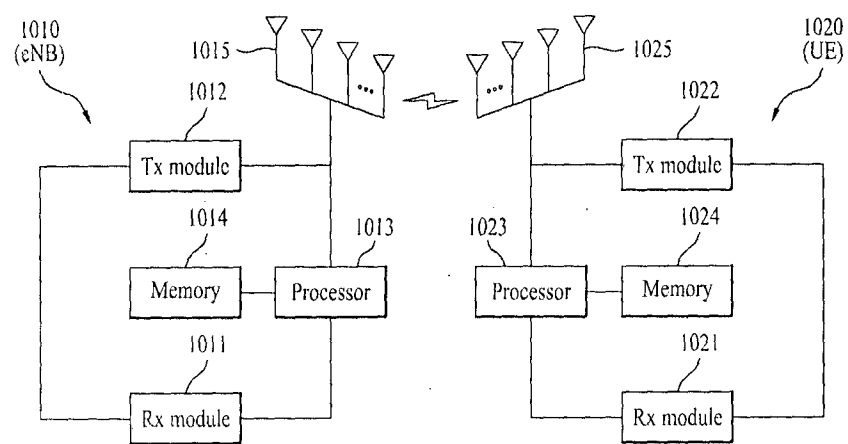

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR2013/000466**A. CLASSIFICATION OF SUBJECT MATTER*****H04B 7/04(2006.01)i, H04J 11/00(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04B 7/04; H04Q 7/00; H04B 17/00; H04J 11/00; H04W 56/00; H04W 4/08; H04L 7/027; H04B 1/16; H04B 7/216; H04L 27/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: COMP, Frequency Offset, RSSI, measurement report, oscillator error, CRS(Cell-Specific Reference Signal), CSI-RS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2011-0286376 A1 (YOO, TAESANG et al.) 24 November 2011 See paragraphs 48-52, 72-73, 76-78; claims 11, 16-20; and figures 7, 12.	1-4, 13-15 5-12
A	US 2003-0099215 A1 (O`SHEA, HELENA) 29 May 2003 See paragraphs 38-43; and figures 1, 5.	1-15
A	JP 2011-249921 A (MITSUBISHI ELECTRIC ENGINEERING CO., LTD.) 08 December 2011 See paragraphs 17-26; claim 3; and figure 3.	1-15
A	KR 10-2008-0078110 A (SAMSUNG ELECTRONICS CO., LTD.) 27 August 2008 See paragraphs 7-10, 46; and figures 1-2.	1-15
A	KR 10-2009-0094705 A (SAMSUNG ELECTRONICS CO., LTD.) 08 September 2009 See paragraphs 30-34; and figure 1.	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 April 2013 (29.04.2013)

Date of mailing of the international search report

30 April 2013 (30.04.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

LEE, Dong Yun

Telephone No. 82-42-481-8734



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/000466

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011-0286376 A1	24.11.2011	EP 2502453 A2 KR 10-2012-0095446 A WO 2011-063291 A2 WO 2011-063291 A3	26.09.2012 28.08.2012 26.05.2011 18.08.2011
US 2003-0099215 A1	29.05.2003	AU 2002-356995 A1 BR 0214408 A IL 161985 A IL 161985 D0 KR 10-0961017 B1 US 7580390 B2 WO 03-047302 A1	10.06.2003 01.02.2005 30.11.2010 20.11.2005 01.06.2010 25.08.2009 05.06.2003
JP 2011-249921 A	08.12.2011	JP 04988898 B2	01.08.2012
KR 10-2008-0078110 A	27.08.2008	None	
KR 10-2009-0094705 A	08.09.2009	None	