

(22) Date de dépôt/Filing Date: 2006/01/31

(41) Mise à la disp. pub./Open to Public Insp.: 2006/08/04

(45) Date de délivrance/Issue Date: 2009/04/14

(30) **Priorité/Priority:** 2005/02/04 (ITRM 2005 A 000048)

(51) Cl.Int./Int.Cl. *B21D 9/16* (2006.01),
B21D 11/22 (2006.01), *B21D 7/16* (2006.01)


(72) Inventeurs/Inventors:
CAPORUSSO, ALESSANDRO, IT;
GIORGIO, MARIO, IT

(73) Propriétaire/Owner:
CML INTERNATIONAL S.P.A., IT

(74) **Agent:** GOWLING LAFLEUR HENDERSON LLP

(54) Titre : CINTREUSE A BRAS DE CINTRAGE COMPACT

(54) Title: BENDING MACHINE WITH A COMPACT BEND ARM

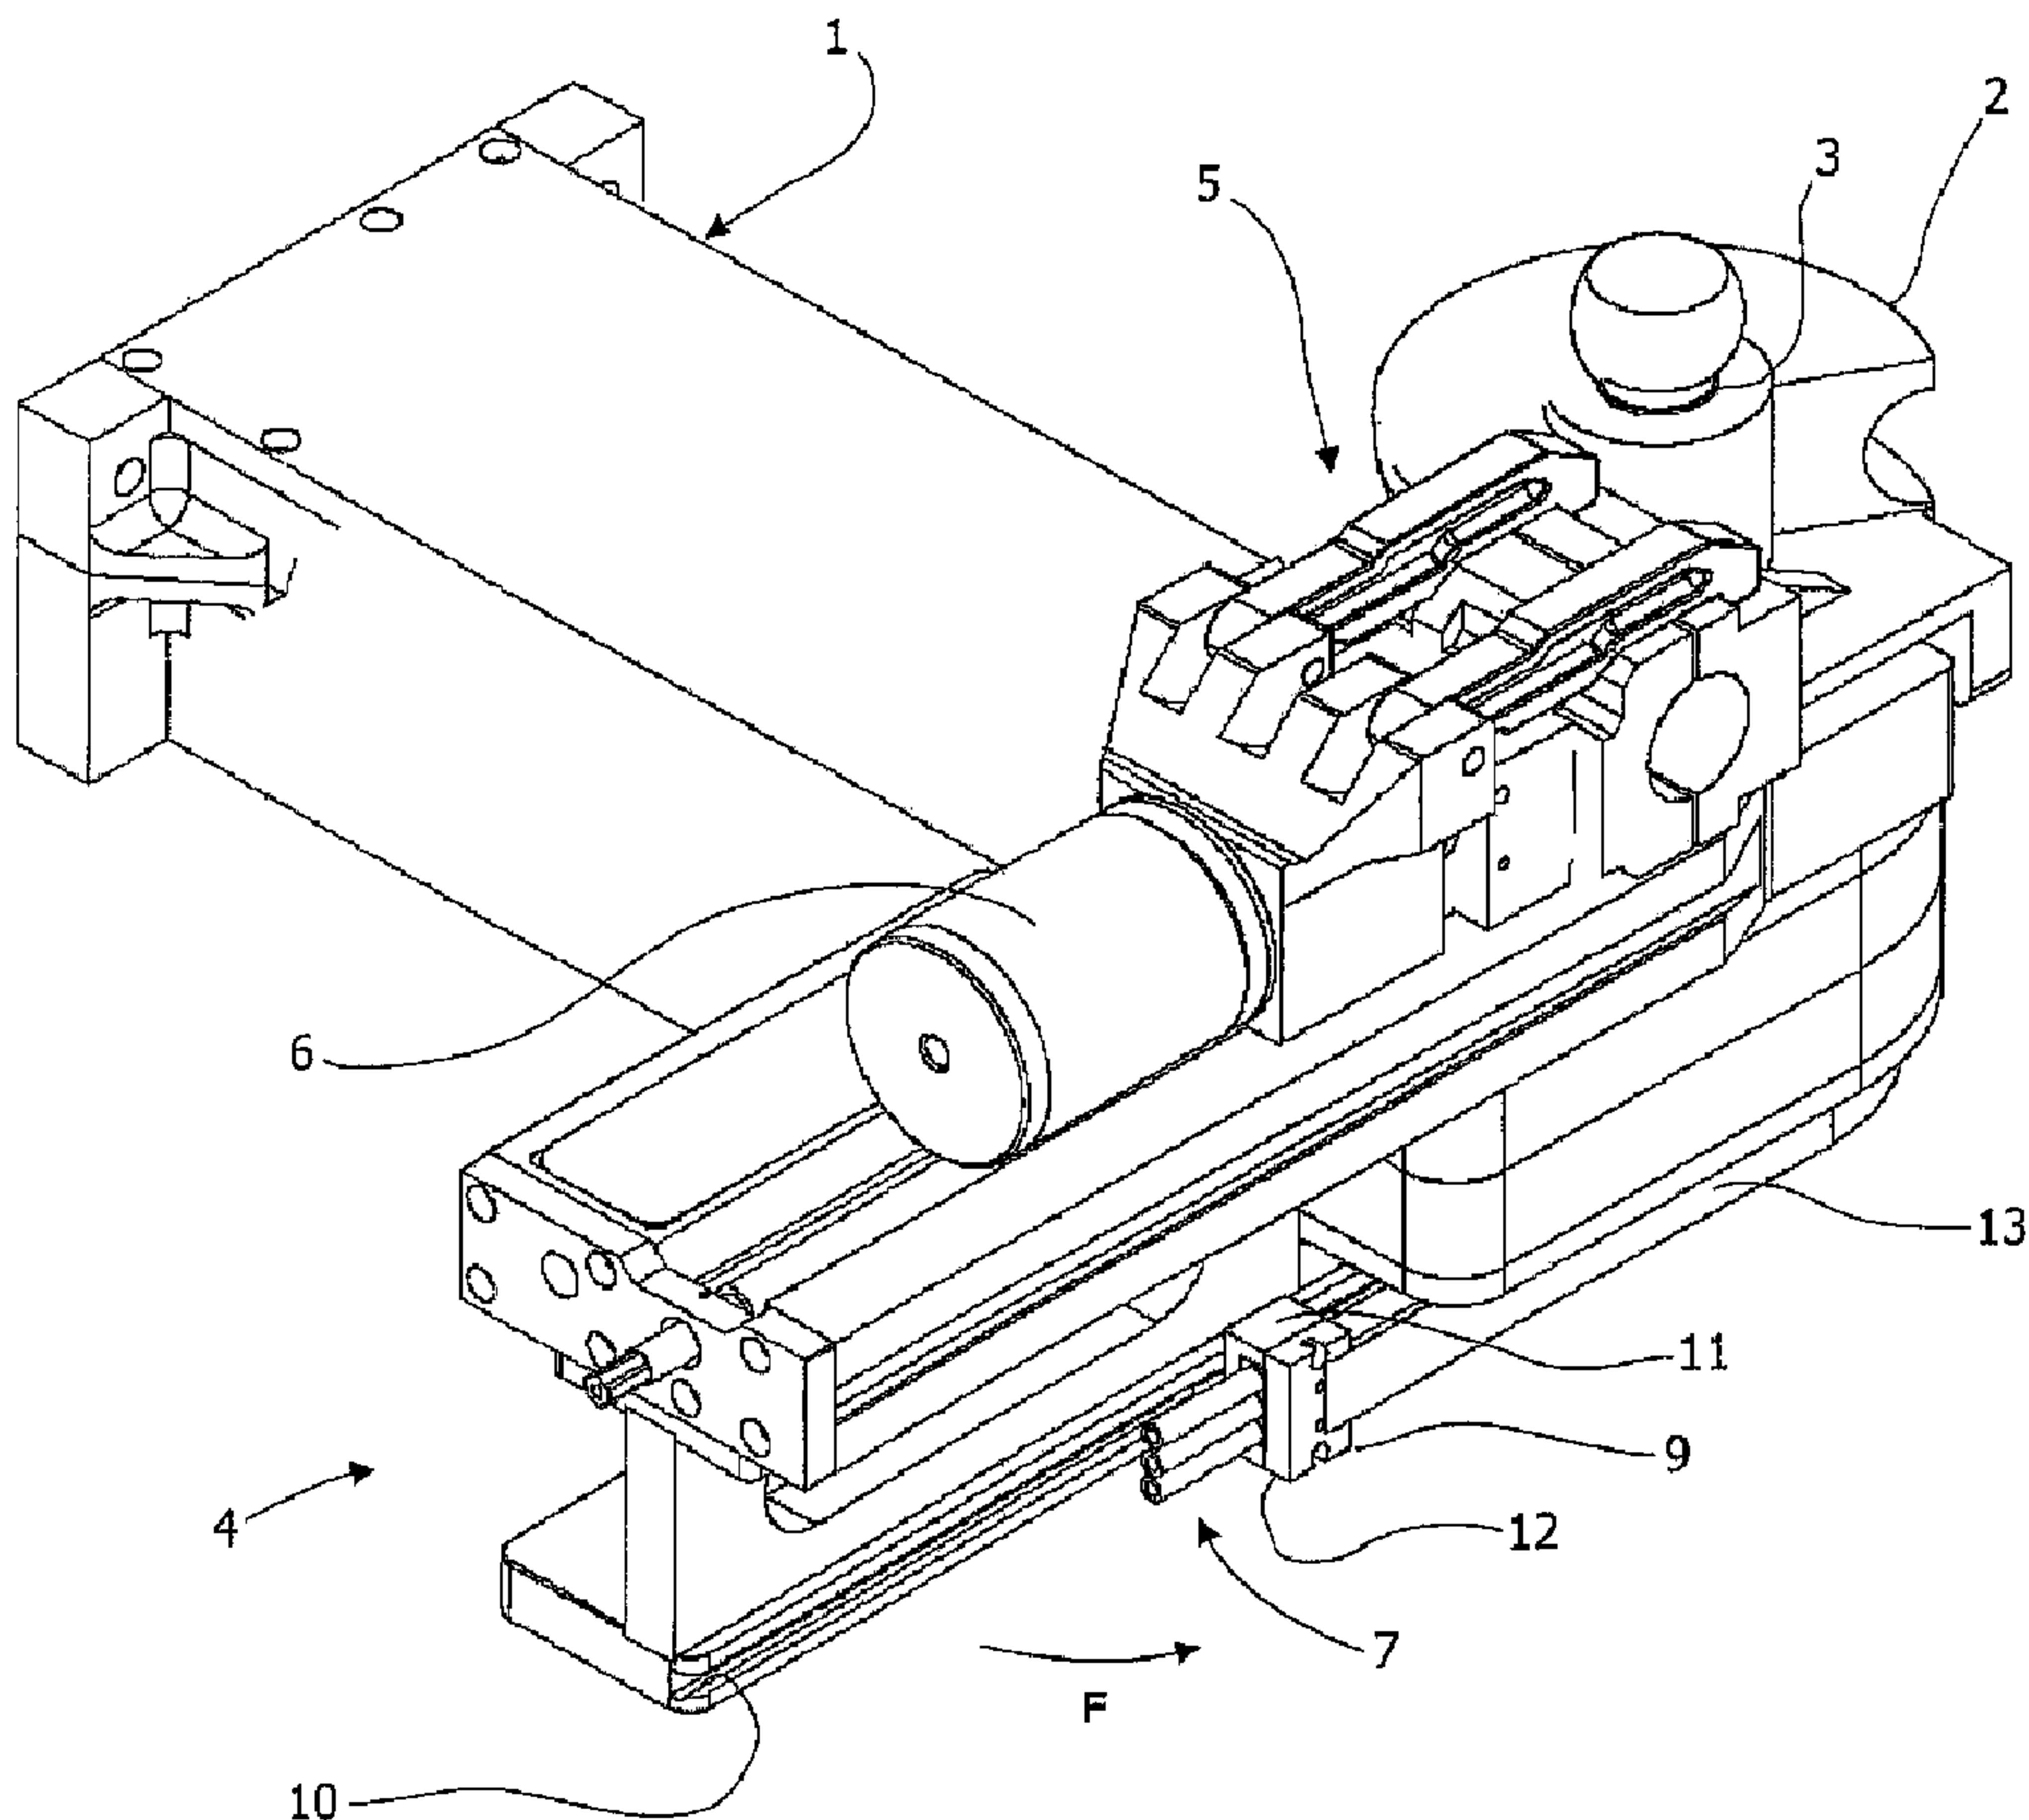

(57) **Abrégé/Abstract:**

A bending machine with a compact bend arm includes in a bend arm (4) being mounted on a rotating spindle (3) a cylinder which is fed with a pressured fluid through hoses (7) being part of a hydraulic circuit connected to a source of pressured fluid and of an

(57) **Abrégé(suite)/Abstract(continued):**

electric circuit. Each of the hoses (7), which are side by side, comprises a curved section (7a) around the rotating spindle (3), the curved section (7a) being radiused at one end to a section (7b) parallel to the bend arm (4), and at the other end to a section (7c) directed to the rest of the bending machine, to which hoses (7) are retained. In the section (7b) parallel to the bend arm (4) the plurality of hoses (7) are clamped on a slider (9) slidable in a prismatic guide (10) which is provided in the bend arm (4).

ABSTRACT

A bending machine with a compact bend arm includes in a bend arm (4) being mounted on a rotating spindle (3) a cylinder which is fed with a pressured fluid through hoses (7) being part of a hydraulic circuit connected to a source of pressured fluid and of an electric circuit. Each of the hoses (7), which are side by side, comprises a curved section (7a) around the rotating spindle (3), the curved section (7a) being radiused at one end to a section (7b) parallel to the bend arm (4), and at the other end to a section (7c) directed to the rest of the bending machine, to which hoses (7) are retained. In the section (7b) parallel to the bend arm (4) the plurality of hoses (7) are clamped on a slider (9) slidable in a prismatic guide (10) which is provided in the bend arm (4).

TITLE OF THE INVENTION :

Bending machine with a compact bend arm

NAMES OF INVENTORS :

5 Alessandro Caporusso; Mario Giorgio

FIELD OF THE INVENTION

The present invention relates to a bending machine with a compact bend arm.

10 **BACKGROUND OF THE INVENTION**

Bending machines have a bending device comprising a bend die or matrix and a bend arm both able to turn around on an axis and being provided with co-operating counteracting members. These counteracting members clamp a section of a workpiece immediately after the section to be bent, according to a feeding direction of the workpiece in the bending machine. The workpiece is bent by causing both the matrix and the bend arm to move around the axis from an initial position to an end position. When a bending operation ends, the matrix is caused to return to the initial position. In fixed radius bending machines such counteracting members comprise clamping jaws.

20 In order to allow workpieces to be bent into small radius curves and with various tilts, it should be desirable that a bending machine has a small size bending device. Further, it should be realized that the risk that certain bending operations cannot be performed, because they are hindered by parts of the bending device or of the rest of the bending machine, must be greatly reduced. Among such parts that would interfere with a bending operation there are both hoses of a hydraulic feeding circuit for cylinders situated on the bend arm, and wires of an electric circuit.

SUMMARY OF THE INVENTION

30 An object of the present invention is to allow bending operations to be performed without any hindrance or obstacle of hoses of a hydraulic feeding circuit and electric wires.

A further object of the invention is to improve the reliability of a bending machine operation.

Therefore, in order to achieve the above objects the invention provides a bending machine with a compact bend arm, including in a bend arm being mounted on a rotating spindle at least a double-acting cylinder which is fed with a pressured fluid through a plurality of hoses being part of a hydraulic circuit connected to a source of pressured fluid and of an electric circuit, each of the hoses, which are side by side, comprising a curved section around the rotating spindle, the curved section being radiused at one end to a section parallel to the bend arm, and at the other end to a section directed to the rest of the bending machine, to which the plurality of hoses are retained; in the section parallel to the bend arm the plurality of hoses being clamped on a slider slidable in a prismatic guide which is provided in the bend arm.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described referring to a preferred embodiment thereof in connection with the enclosed drawings, in which:

FIGURE 1 shows a fragmentary perspective view of a bending machine in which the present invention is embodied, only a matrix and a bend arm of the bending machine being represented in an initial position of bending operation;

FIGURE 2 shows a bottom plan view of the bending machine in **FIGURE 1**; and

FIGURE 3 shows a fragmentary perspective view of a bending machine in which the present invention is embodied, with the matrix and the bend arm being positioned in the initial bending operation.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

With reference to the drawings, in **FIGURE 1** there is shown a bending machine in a fragmentary perspective view. On a support bench 1 which is connected to the rest of the bending machine (not shown), a bend die or matrix 2 is mounted around a rotating spindle 3, and a bend arm generally indicated as 4, is mounted around the same rotating spindle 3. A vice 5 using a double-acting cylinder 6 to clamp a section of a pipe to be bent (not shown) in its start or initial bending position is situated on the bend arm 4. After a set angle rotation of the rotating spindle 3 by driving means (not

shown), a bending pipe operation on the matrix is performed for a pipe section corresponding to said set angle.

Two hoses feeding a pressured fluid for the double-acting cylinder 6 and a hose
5 for wires of an electric circuit are shown in **FIGURE 1** and generally indicated as 7. Of course, the plurality of hoses can be different from a number of three. For clarity sake, hoses 7 are shown as cut. However, it should be understood that they extend to the double-acting cylinder 6 and other served parts.

10 According to the invention, hoses 7 have a feature that they do not remain hanging from the bend arm 4, as in prior art bending machines. In such a way there are not dangerous hindrances or obstacles to a bending operation, since, as explained below, hoses 7 are kept adjoined to the bend arm 4.

15 As best seen in **FIGURE 2**, which is a fragmentary bottom plan view of the bending device, hoses 7 are arranged in a generally parallel, preferably side by side vertical relationship, i.e. beside the bend arm 4.

As mounted on the bend arm 4, hoses 7 have a curved section 7a with a concavity
20 facing the rotating spindle 3. The curved section 7a is radiused at one end thereof to a section 7b parallel to the bend arm 4, and at the other end to a section 7c respectively, directed to the rest of the bending machine.

As seen in **FIGURE 3**, which is a fragmentary perspective view, shown inside the
25 bending machine are hoses which are retained at least in a point of the bending device, e.g. by two brackets 8, 8 facing each other (**FIGURE 2**). In their section 7b parallel to the bend arm 4, hoses 7 are clamped by a slider 9 slidable in a prismatic guide 10 (**FIGURE 1**) which is provided on the bend arm 4 in an external lateral underside thereof, toward an arrow F indicating a direction in which the bend arm 4 rotates from
30 its start position shown in **FIGURE 1**.

The slider 9 has an U-shaped base plate 11, which is provided in its bottom with engagement projections (not shown) for a slidable joint with the prismatic guide 10,

and a closure element 12 adapted to be fixed by screws to sides of the U-shaped base plate 11 to enclose and clamp the hoses 7.

5 A protective flexible tape member 13 is provided opposite the bending machine beside the hoses 7. The protective flexible tape member 13 is fixed at one end to the slider 9, e.g. by a screw 14 (**FIGURE 2**) and at the other end thereof is constrained to swing around a sliding guide in the form of a pin 15 on which also hoses 7 abut laterally. Advantageously the flexible tape member 13 is made of a spring steel.

10 In the operation of the bending machine, the bend arm 4 is rotated in the direction of the arrow F to bend a pipe which is clamped by the vice 5. When the bend arm 4 rotates, hoses 7 being retained by brackets 8, 8 underneath the support bench 1 are caused to extend parallel to a side of the bend arm 4. Hoses 7 really extend but without projecting downward from the bend arm 4, since they are clamped by the slider 9
15 slidable in the prismatic guide 10. The protective flexible tape member 13 protects hoses 7 as well as helps the slider 9 slide in the prismatic guide 10.

In such a way the bend arm 4 does not rise in its bulkiness in the pipe bending operation, and there is no risk that hoses of the hydraulic circuit are caught by a pipe
20 while being bent. It should be appreciated that in such a way the reliability of the operator of the bending machine is more improved. As shown in **FIGURE 3**, hoses 7 continue inside the bending machine through an extension of its support bench 1 to both a source of pressured fluid and a hydraulic unit that are not described in detail.

25 The invention has been described by way of example, and variations and changes can be made without departing from the scope of the enclosed claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

5 1. A bending machine with a compact bend arm, including in the bend arm being
mounted on a rotating spindle at least a double-acting cylinder which is fed with a
pressured fluid through a plurality of hoses being part of a hydraulic circuit connected
to a source of pressured fluid and of an electric circuit, characterised in that each of the
hoses, which are side by side, comprises a curved section around the rotating spindle,
the curved section being radiused at one end to a section parallel to the bend arm, and
10 at the other end to a section directed to the rest of the bending machine, to which the
plurality of hoses are retained; in the section parallel to the bend arm the plurality of
hoses being clamped on a slider slidable in a prismatic guide which is provided in the
bend arm.

15 2. The bending machine according to claim 1, characterised in that a protective
flexible tape member is attached opposite the bending machine beside the plurality of
hoses, the protective flexible tape member being fixed at one end to said slider, and at
the other end thereof being constrained to abut against a sliding guide of the plurality
of hoses.

20

3. The bending machine according to claim 2, characterised in that the protective
flexible tape member is made of a spring steel.

25 4. The bending machine according to any one of claims 1 to 2, characterised in that the
hoses of the plurality of hoses are in a side by side, vertical relationship in the bend
arm.



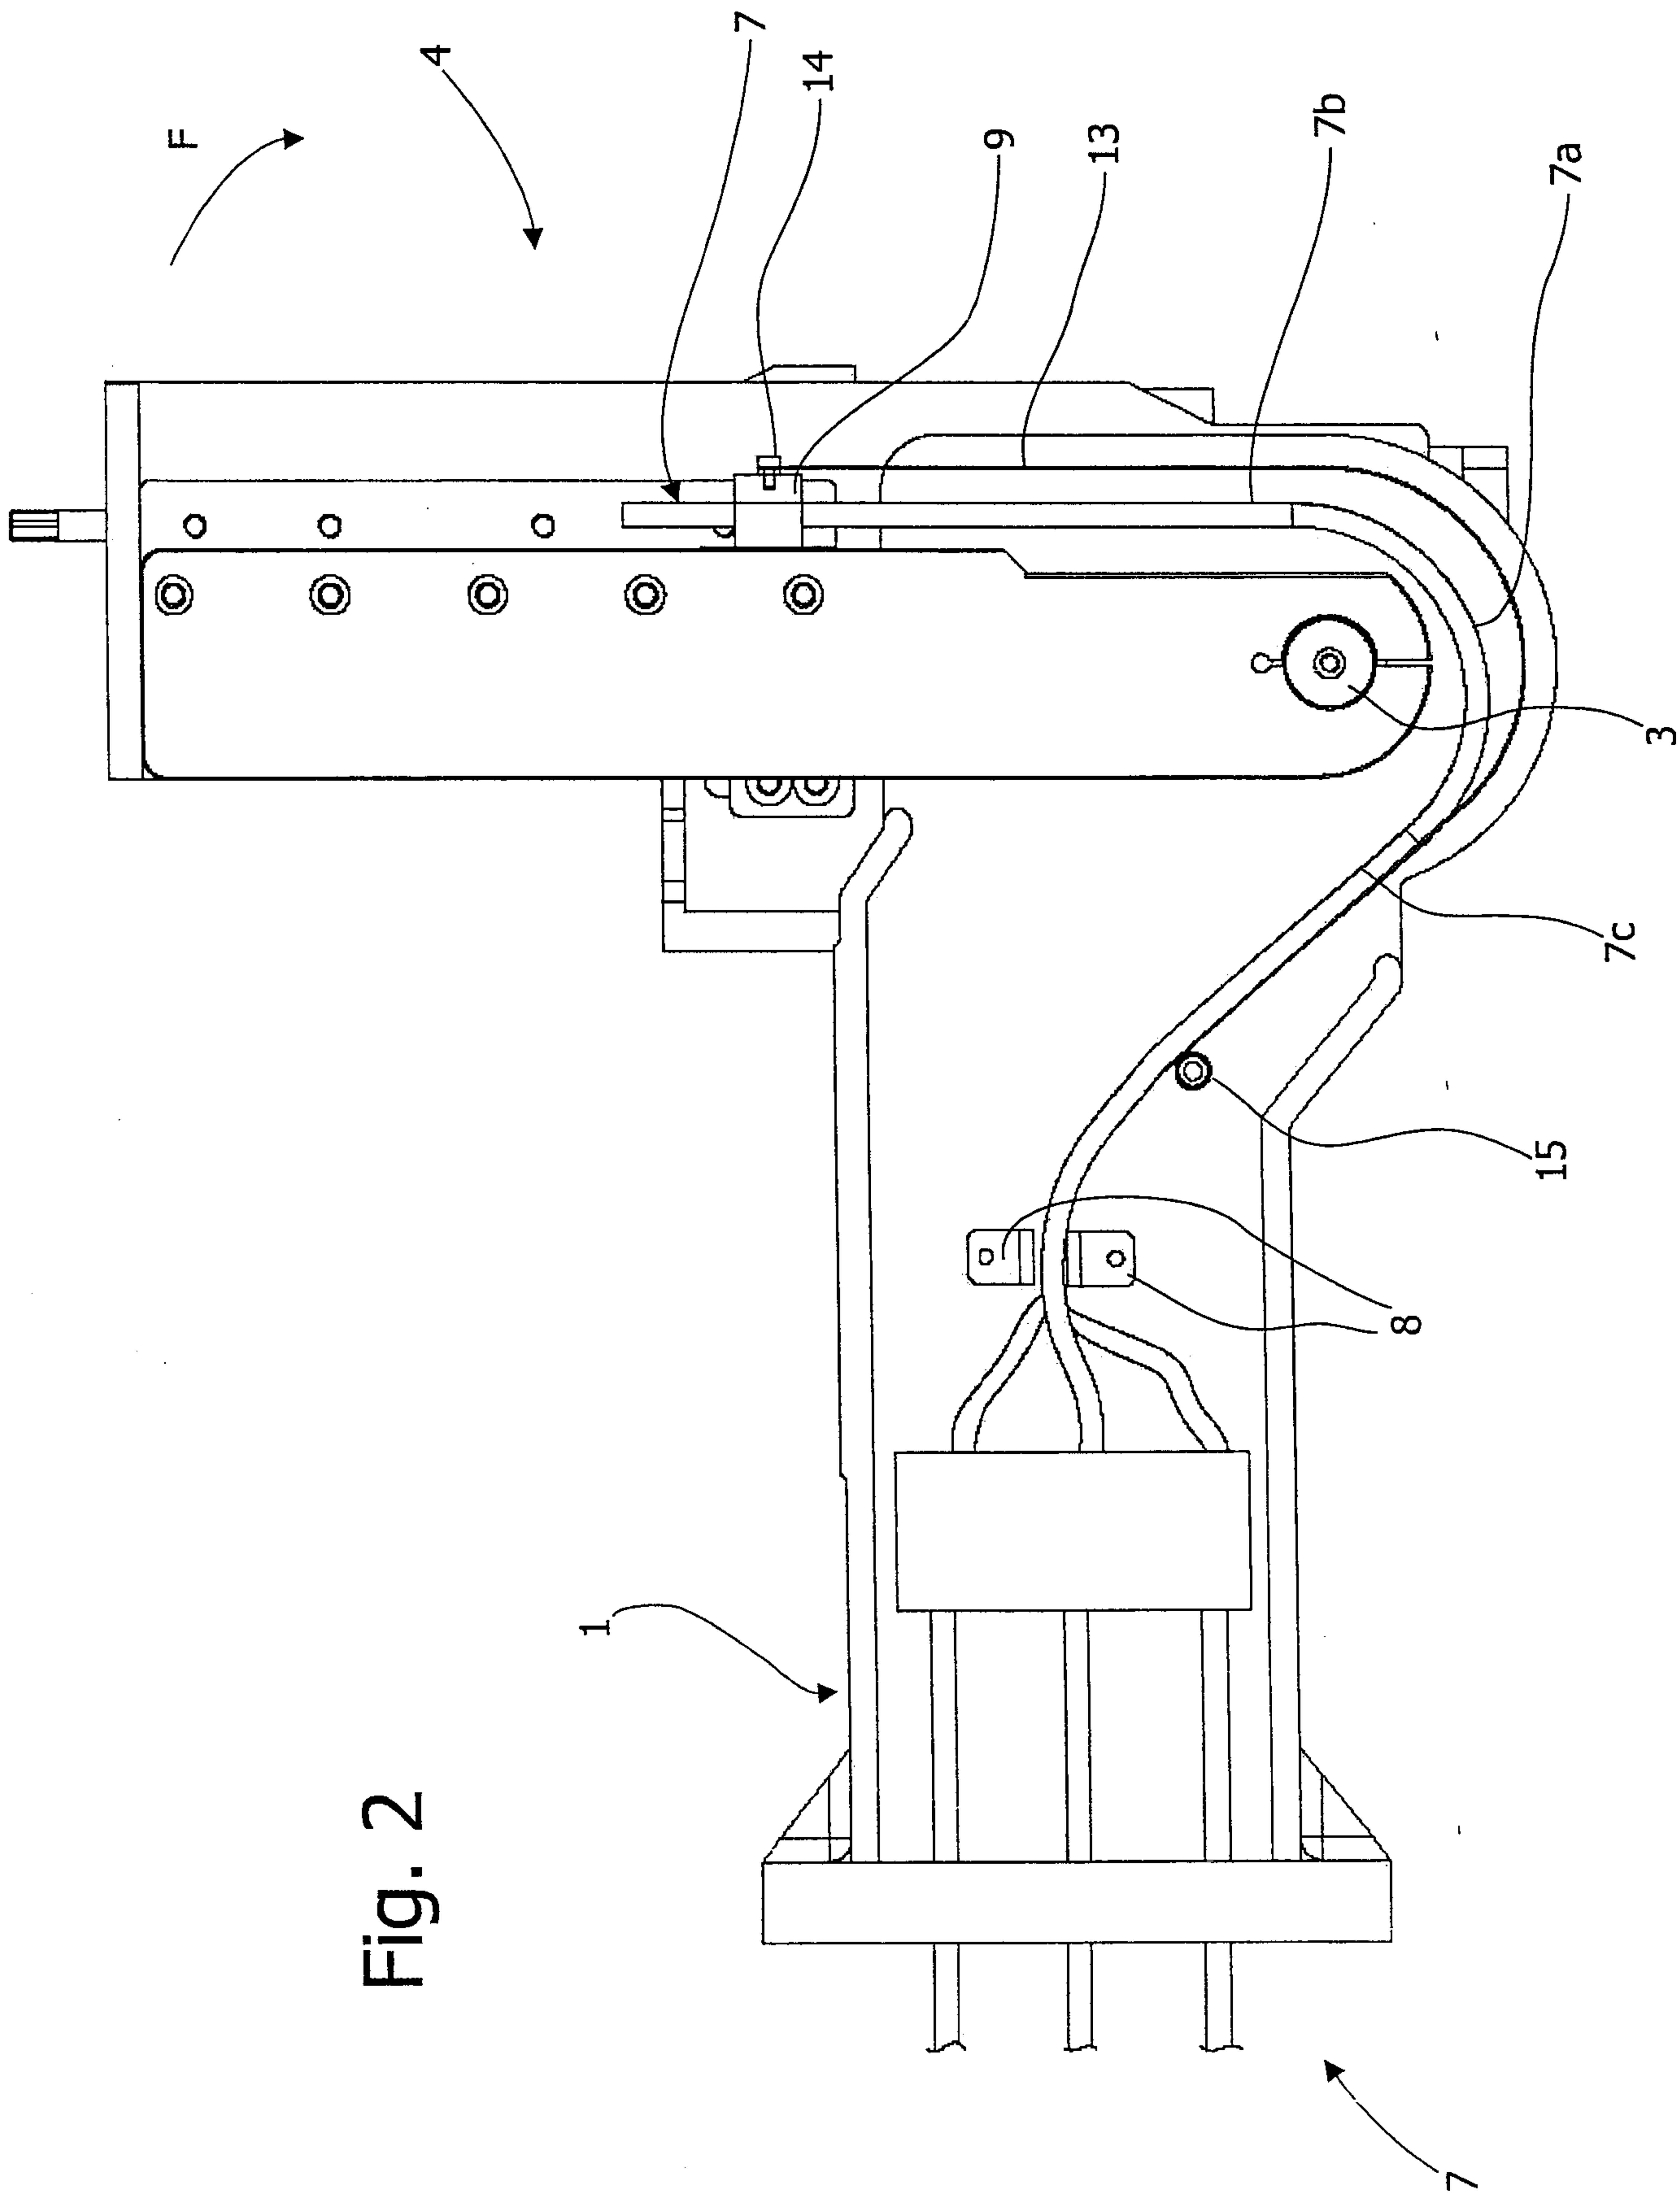


Fig. 2

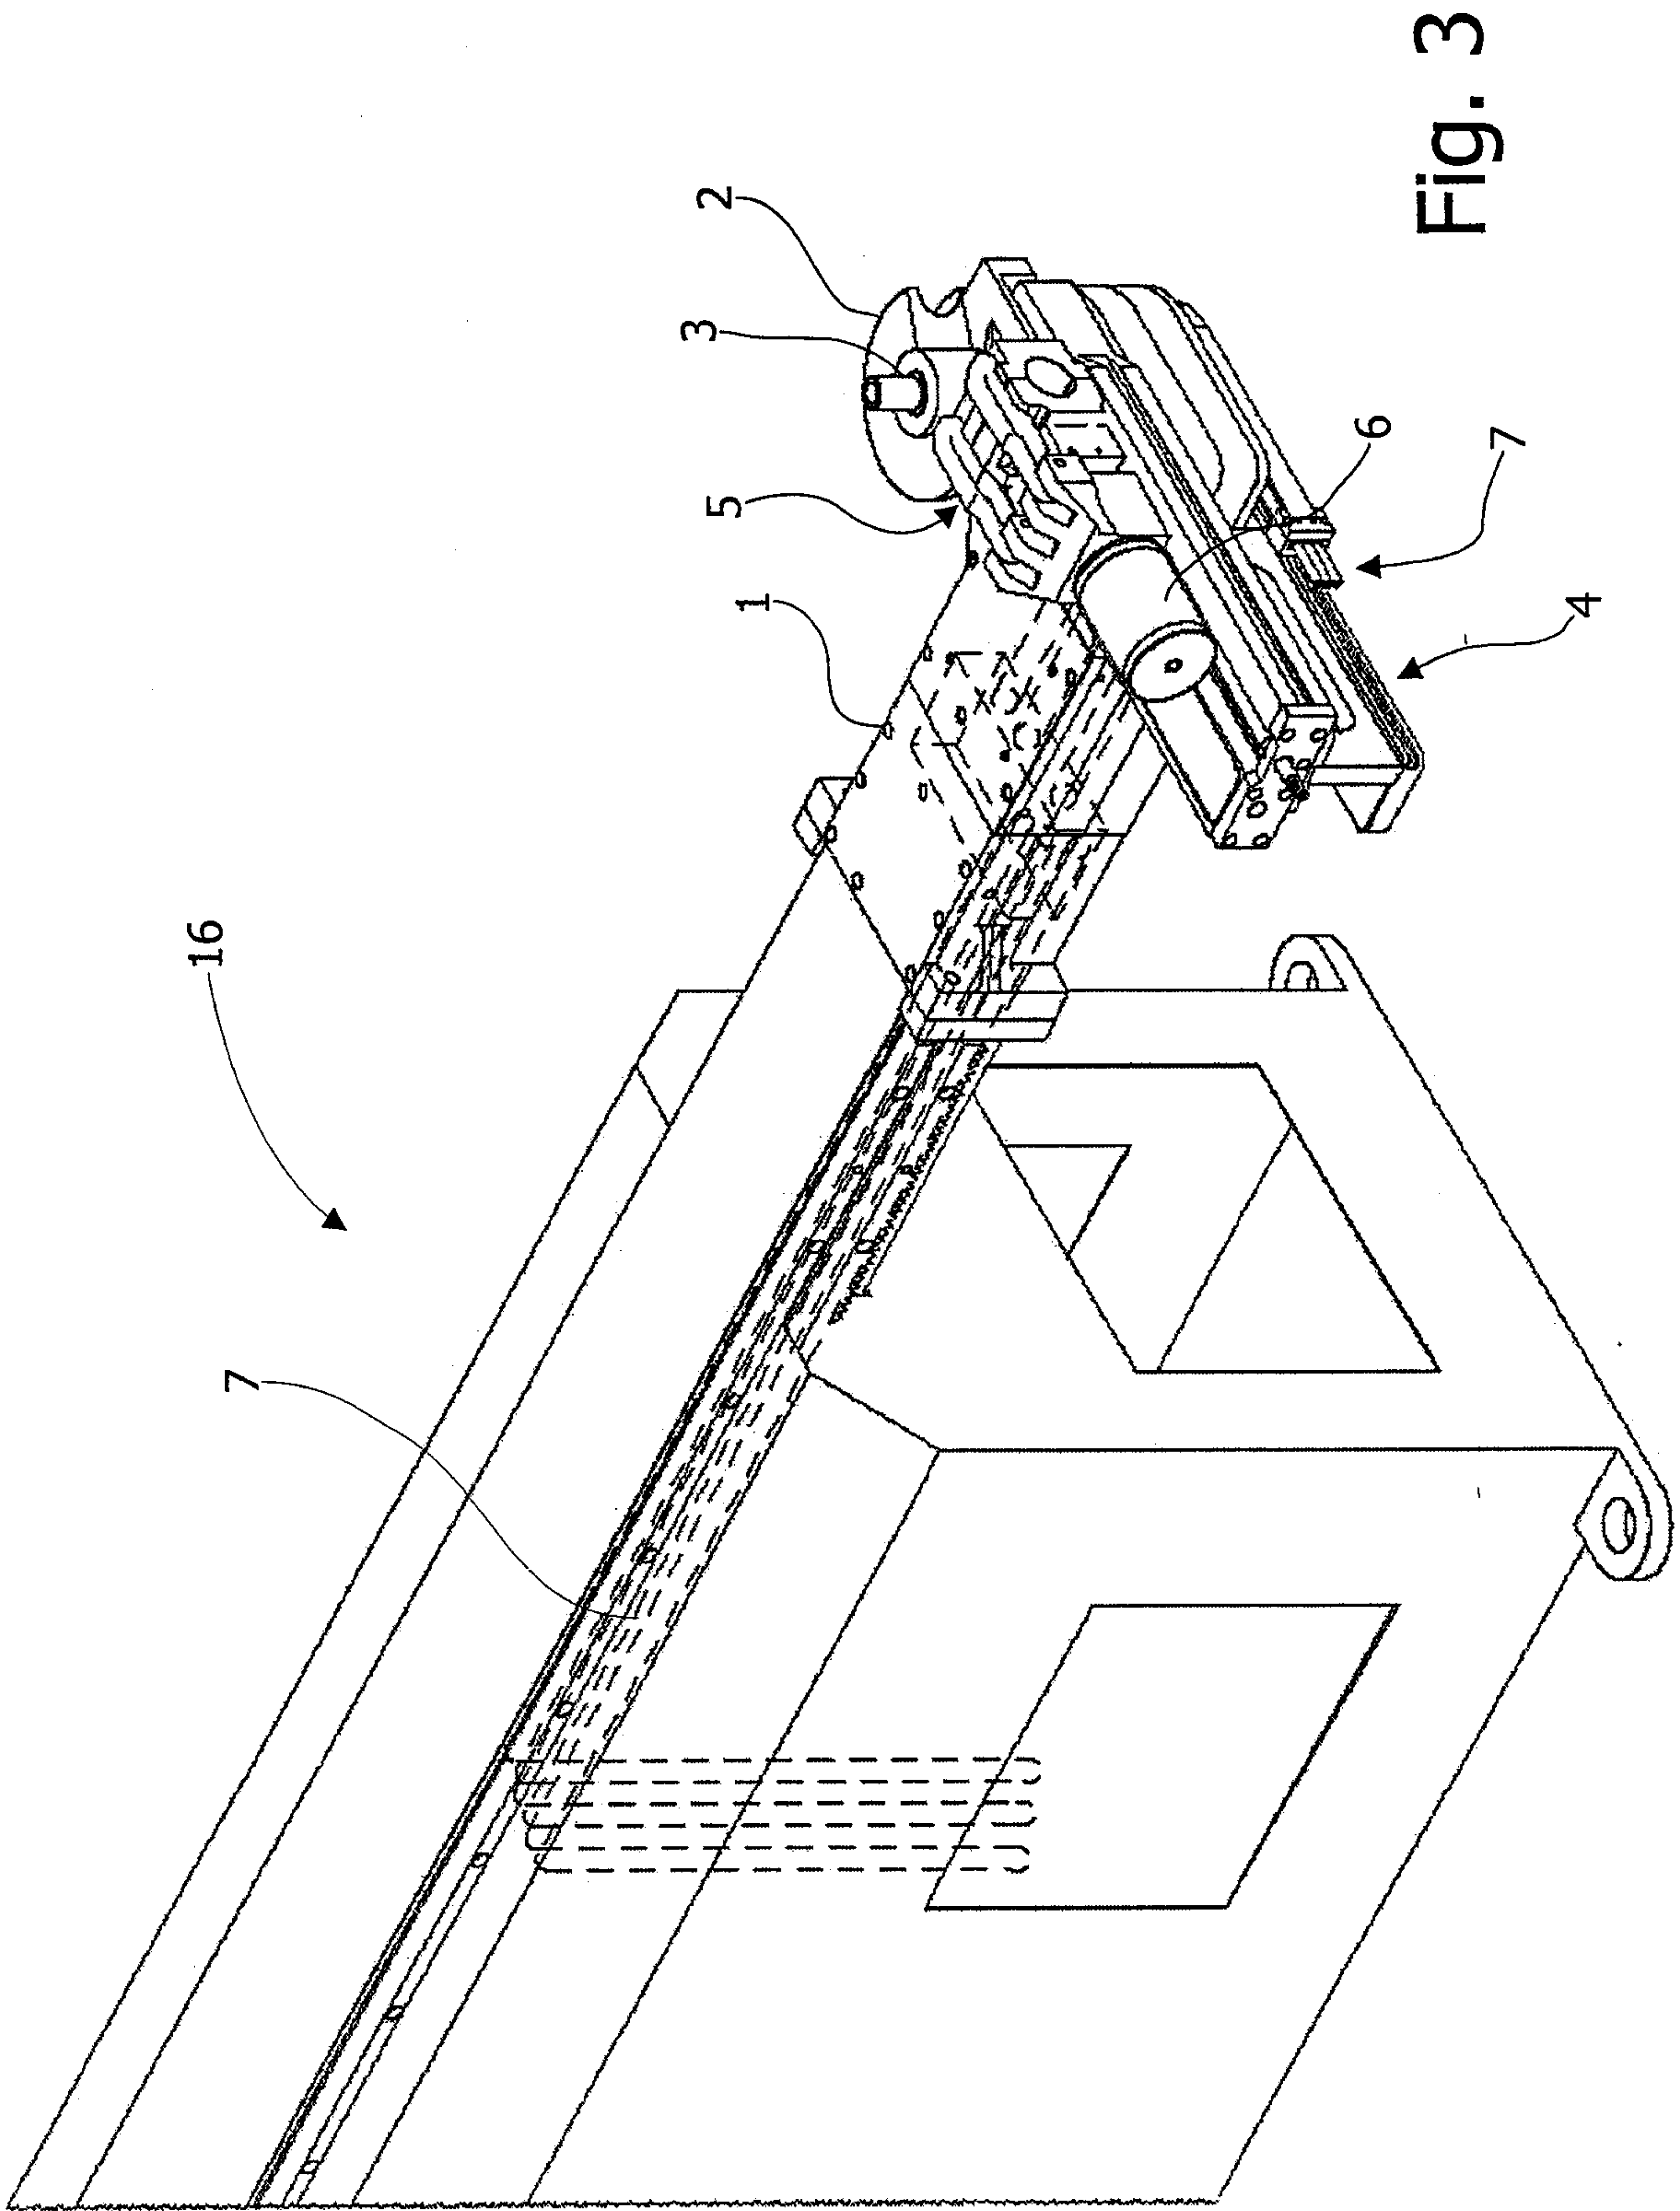


Fig. 3

