



(51) International Patent Classification:

C10G 50/02 (2006.01) C10G 69/06 (2006.01)

B01J 31/18 (2006.01) C10G 69/12 (2006.01)

(21) International Application Number:

PCT/US2019/046696

(22) International Filing Date:

15 August 2019 (15.08.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/721,255 22 August 2018 (22.08.2018) US

(71) Applicant: **EXXONMOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Ammandale, NJ 08801-0900 (US).


(72) Inventors: **HO, Suzzy, C.**; 1066 Stuart Road, Princeton, NJ 08540 (US). **CAO, Guang**; 253 Christopher Drive, Princeton, NJ 08540 (US). **IDE, Matthew, S.**; 1 Woods

End Drive, Doylestown, PA 18902 (US). **LUO, Shifang**; 7 Pinehurst Circle, Ammandale, NJ 08801 (US). **GUNTHER, William, R.**; 22 Alexandra Way, Clinton, NJ 08809 (US). **CANICH, Jo Ann, M.**; 15710 Mesa Verde, Houston, TX 77059 (US).

(74) Agent: **YARNELL, Scott F.** et al.; ExxonMobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Ammandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: MANUFACTURING HYDROCARBONS

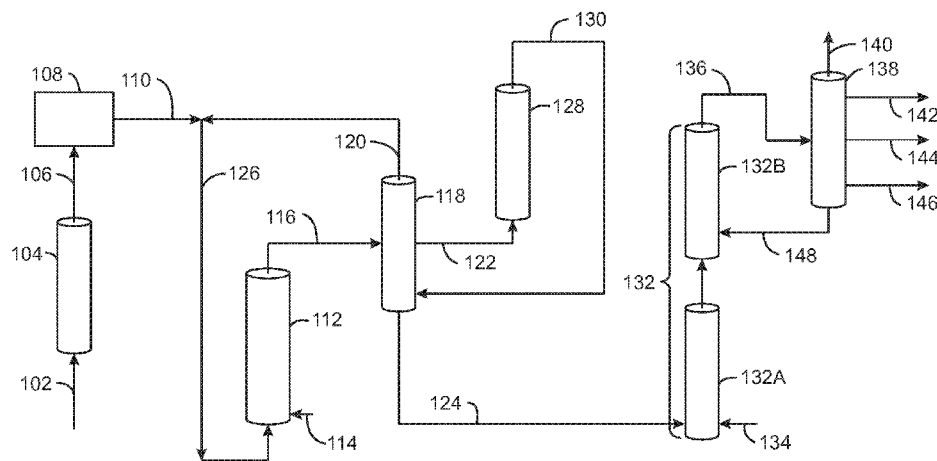

100
FIG. 1(A)

(57) Abstract: Systems and a method for manufacturing a base stock from a hydrocarbon stream are provided. An example method includes cracking the hydrocarbon stream to form a raw product stream, separating an ethylene stream from the raw product stream, and oligomerizing the ethylene stream to form a raw oligomer stream. A Light olefinic stream is distilled from the raw oligomer stream and oligomerized the light olefinic stream with the ethylene stream. A heavy olefinic stream is distilled from the raw oligomer stream. The heavy olefinic stream is to form a hydro-processed and distilled to form the base stock.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

- 1 -

MANUFACTURING HYDROCARBONS**FIELD**

[0001] The techniques described herein provide systems and methods for manufacturing a base stock from a hydrocarbon stream. The hydrocarbon stream is processed in to generate a mixture of compounds that are purified to isolate ethylene, which is then oligomerized and hydro-processed to form the base stock.

BACKGROUND

[0002] This section is intended to introduce various aspects of the art, which may be associated with exemplary examples of the present techniques. This description is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present techniques. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

[0003] High molecular weight paraffins suitable for the production of high quality hydrocarbon fluids and distillate fuel are typically in short supply or expensive to manufacture. In addition, the oligomerization of olefins is typically performed with high purity feed streams, such as polymer grade ethylene.

[0004] The production of higher molecular weight linear paraffins and isoparaffins, for example, to form base oil stocks, from hydrocarbon streams may involve numerous steps, which affect the costs for the final products. One example of the production of these compounds is the production of syngas, CO and H₂ by steam reforming of methane, followed by methanol synthesis. The methanol may then be converted to olefins via a methane-to-olefins (MTO) process. The olefins are further oligomerized to higher molecular weight hydrocarbons. In another example, syngas is produced for use in Fischer-Tropsch reactions which preferentially synthesize linear high molecular weight products. However, these options may be economically problematic due to the need to first produce syngas.

[0005] Some previous research activities have focused on using impure ethylene feeds to produce polyalphaolefins (PAOs). For example, U.S. Patent Application Publication No. 2010/0249474 by Nicholas et al. discloses a “process for oligomerizing dilute ethylene.” As described in the publication, a fluid catalytic cracking process (FCC) may provide a dilute ethylene stream, as heavier hydrocarbons are processed. The ethylene in the dilute ethylene stream may be oligomerized using a catalyst, such as an amorphous silica-alumina base with a Group VIII or VIB metal that is resistant to feed impurities such as hydrogen sulfide, carbon

- 2 -

oxides, hydrogen and ammonia. About 40 wt. %, or greater, of the ethylene in the dilute ethylene stream can be converted to heavier hydrocarbons.

[0006] Further, U.S. Patent Application Publication No. 2014/0275669 by Daage et al., discloses the “production of lubricant base oils from dilute ethylene feeds.” As described in this publication, a dilute ethylene feed, for example, formed while cracking heavier hydrocarbons, may be oligomerized to form oligomers for use as fuels or lubricant base oils. The oligomerization of the impure dilute ethylene is performed with a zeolitic catalyst. The zeolitic catalyst is resistant to the presence of poisons such as sulfur and nitrogen in the ethylene feed. Diluents such as light paraffins, may be present without interfering with the process.

[0007] The feed used for both processes described above is derived from the processing of oil in a fluid catalytic cracker (FCC). In an FCC, heavier hydrocarbons, such as crude oil fractions with a molecular weight of about 200 to about 600, or higher, are contacted with a catalyst at high temperatures to form lower molecular weight compounds. The byproduct gases from the FCC include olefins that may be used to form the oligomers.

[0008] The oligomerization of blends of ethylene with co-monomers, such as 1-hexene, 1-heptene, 1-octene, 1-dodecene, and 1-hexadecene, has been explored. For example, U.S. Patent No. 7,238,764 describes a process for the co-oligomerization of ethylene and alpha olefins. The co-oligomerization of the alpha olefins with ethylene is performed in the presence of a metal catalyst system. The metal catalyst system may include bis-aryliminepyridine MX_a complexes, $[\text{bis-aryliminepyridine MY}_{p.L_b}^+][\text{NC}^-]_q$ complexes, or both. The process is carried out in an ethylene pressure of less than about 2.5 megapascals (MPa).

SUMMARY

[0009] In an embodiment, the present invention provides a system for manufacturing a base stock from a hydrocarbon stream. The system includes a steam cracker configured to form a raw product stream from the hydrocarbon stream. A purification system is configured to separate an ethylene stream from the raw product stream. An oligomerization reactor is configured to oligomerize the ethylene stream to form a raw oligomer stream. A distillation column is configured to separate the raw oligomer stream into: a light olefinic stream, wherein the distillation column is configured to blend the light olefinic stream with the ethylene stream provided to the oligomerization reactor; an intermediate olefinic stream; and a heavy olefinic stream; a hydro-processing reactor configured to hydro-process the heavy olefinic stream to form a hydro-processed stream; and a product distillation column configured to separate the hydro-processed stream to form the base stock.

- 3 -

[0010] In another embodiment, the present invention provides a method for manufacturing a base stock from a hydrocarbon stream. The method includes cracking the hydrocarbon stream to form a raw product stream, separating an ethylene stream from the raw product stream, and oligomerizing the ethylene stream to form a raw oligomer stream. A light olefinic stream is distilled from the raw oligomer stream and the light olefinic stream is oligomerized with the ethylene stream. A heavy olefinic stream is distilled from the raw oligomer stream and hydro-processed to form a hydro-processed stream. The hydro-processed stream is distilled to form the base stock.

[0011] In another embodiment, the present invention provides a system for manufacturing a base oil stock from a hydrocarbon stream. The system includes a steam cracker to form a raw product stream from the hydrocarbon stream. A purification system is configured to separate an ethylene stream from the raw product stream. An oligomerization reactor is configured to convert the ethylene stream to a raw oligomer stream by contacting the ethylene stream with a homogenous catalyst. A distillation column is configured to recover a light olefinic stream from the raw oligomer stream, combine the light olefinic stream with the ethylene stream to form a blended stream, and feed the blended stream to the oligomerization reactor. The distillation column is configured to separate an intermediate olefinic stream from the raw oligomer stream and send the intermediate olefinic stream to a dimerization reactor or an alkylation reactor. The distillation column is configured to separate a heavy olefinic stream from the raw oligomer stream. A hydro-processing reactor is configured to demetallate the heavy olefinic stream, to crack the heavy olefinic stream, to form isomers in the heavy olefinic stream, or to hydrogenate olefinic bonds in the heavy olefinic stream, or any combinations thereof. A product distillation column is configured to separate the heavy olefinic stream to form a plurality of base stock streams.

DESCRIPTION OF THE DRAWINGS

[0012] The advantages of the present techniques are better understood by referring to the following detailed description and the attached drawings.

[0013] **Fig. 1(A)** is a simplified block diagram of a system for producing base oil stocks from a hydrocarbon feedstock, in accordance with examples.

[0014] **Fig. 1(B)** is a simplified block diagram of a system for purifying an raw product stream formed from a hydrocarbon feedstock, in accordance with examples.

[0015] **Fig. 2** is a simplified block diagram of another system for producing base oil stocks from a hydrocarbon feedstock, in accordance with examples.

- 4 -

[0016] **Fig. 3** is a process flow diagram of a method for producing base oil stocks from a steam cracking process, in accordance with examples.

[0017] **Fig. 4** is a drawing of related homogeneous catalysts, having different ligands, that may be used for the oligomerization or dimerization processes, in accordance with examples.

[0018] **Fig. 5** is a plot of the Schultz-Flory distribution of a product that includes different carbon numbers, in accordance with examples.

[0019] **Fig. 6** is a plot of the effect of the change in carbon number composition on a weight fraction of a product as the Schultz-Flory distribution changes, in accordance with examples.

[0020] **Figs. 7(A) and 7(B)** are plots of gas chromatograms illustrating the changes caused by dimerization of an alpha olefin mixture, in accordance with examples.

[0021] **Figs. 8(A) and 8(B)** are plots of gas chromatograms illustrating the changes caused by hydroisomerization of an alpha olefin mixture, in accordance with examples.

[0022] **Fig. 9** is a plot of DEPT-135 C-13 NMR spectra illustrating the changes caused by hydroisomerization of an alpha olefin mixture, in accordance with examples.

DETAILED DESCRIPTION

[0023] In the following detailed description section, specific embodiments of the present techniques are described. However, to the extent that the following description is specific to a particular embodiment or a particular use of the present techniques, this is intended to be for exemplary purposes only and simply provides a description of the exemplary embodiments. Accordingly, the techniques are not limited to the specific embodiments described below, but rather, include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

[0024] Recent improvements in the production of hydrocarbons, for example, the use of hydraulic fracturing and tertiary oil recovery techniques, have resulted in the increased availability of lower molecular weight hydrocarbons, termed light hydrocarbon streams herein. These include natural gas and natural gas liquids (NGL), which may include methane, ethane, propane, and butane, along with other hydrocarbon and heteroatom contaminants. The use of the lower molecular weight hydrocarbons as feedstocks for chemical processes may provide economic benefits. However, upgrading the lower molecular weight feedstocks to increase the molecular weight may pose challenges.

[0025] The techniques described herein disclose a method for producing high molecular weight molecules from a raw olefin stream that may include olefins, paraffins, hydrogen, and carbon monoxide. The raw olefin stream is provided by a steam cracking reactor, or cracker,

- 5 -

which may be controlled to provide a higher molecular weight feed stock from a light hydrocarbon stream. The light hydrocarbon stream has an API gravity of at least 45, at least 50, at least 55, at least 60, at least 65, or at least 70 according to various embodiments of the present invention. Further, the hydrogen content of the starting raw hydrocarbons may be greater than or equal to 14 %, or, in some examples, greater or equal to 16 %. In some examples, the light hydrocarbon stream may also include compounds having two to four, two to six, two to 12, or two to 20, or more, carbon atoms. In some examples, the feed is a natural gas liquids (NGL) stream. In other examples, the feed includes methane, ethane, propane, or butane. In some examples, the light hydrocarbon feedstock has an API gravity of between about 45 and 55 and includes molecules with carbon chains of about two to 25 carbon atoms in length, among others. In other examples, the light hydrocarbon feedstock has an API gravity of between about 55 and 65 and includes molecules with about two to 10 carbon atoms, among others. In other examples, the light hydrocarbon feedstock has an API gravity of between about 55 and 65 and includes molecules with about two to 10 carbon atoms, among others. In yet other examples, the light hydrocarbon feedstock has an API gravity of between about 65 and 75 and includes molecules with about two to five carbon atoms, among others.

[0026] The light hydrocarbon stream may be sourced from any number of hydrocarbon formations, including, for example, tight gas formations. These may include the Clinton, Medina, and Tuscarora formations in Appalachia, the Berea sandstone in Michigan, the Bossier, Cotton Valley, Olmos, Vicksburg, and Wilcox Lobo formations along the Gulf Coast, the Granite Wash and Atoka formations in the Midcontinent, the Canyon formation and other formations, in the Permian Basin, and the Mesaverde and Niobrara formations in multiple Rocky Mountain basins. Any number of other formations may be used to provide the light hydrocarbon stream, such as the Rotliegend Group of formations in Germany and the Netherlands, the Eagle Ford group in Texas, and the Bakken formations in Montana, North Dakota, Saskatchewan, and Manitoba.

[0027] As used herein, "hydrocarbon fluids" refers to isoparaffinic hydrocarbons in a naphtha, distillate, and base stock range of molecular weights. As used herein, "base stock" or "base oil stock" refers to semi-synthetic or synthetic isoparaffins that may be used in the production of compounds in a lubricant range of molecular weights. Lightly or highly branched paraffinic molecules are useful as hydrocarbon fluids or transportation fuels. Group I base oil stocks or base oils are defined as base oils with less than 90 wt. % saturated molecules and/or at least 0.03 wt. % sulfur content. Group I base oil stocks also have a viscosity index (VI) of at least 80 but less than 120. Group II base oil stocks or base oils contain at least 90 wt. % saturated

- 6 -

molecules and less than 0.03 wt. % sulfur. Group II base oil stocks also have a viscosity index of at least 80 but less than 120. Group III base oil stocks or base oils contain at least 90 wt. % saturated molecules and less than 0.03 wt. % sulfur, with a viscosity index of at least 120. Other hydrocarbons that may be coproduced with base oil stocks include gasoline, diesel fuels, distillates, and other hydrocarbon fluids.

[0028] Further, the base oil stocks may be referred to as light neutral (LN), medium neutral (MN), and heavy neutral (HN), for example, as determined by viscosity. The term “neutral” generally indicates the removal of most nitrogen and sulfur atoms to lower reactivity in the final oil. The base oil stocks are generally classified by viscosity, measured at 100 °C as a kinematic viscosity under the techniques described in ASTM D445. The viscosity may be reported in millimeters²/second (centistokes, cSt). The base oil stocks may also be classified by boiling point range, for example, determined by simulated distillation on a gas chromatograph, under the techniques described in ASTM D 2887.

[0029] It may be noted that the viscosity ranges and boiling point ranges described herein are merely examples, and may change, depending on the content of linear paraffins, branched paraffins, cyclic hydrocarbons, and the like. A light neutral base oil stock may have a kinematic viscosity of about 4 cSt to about 6 cSt and may have a boiling point range of about 380 °C to about 450 °C. A medium neutral base oil stock may have a kinematic viscosity of about 6 cSt to about 10 cSt and a boiling point range of about 440 °C to about 480 °C. A heavy neutral base oil stock may have a kinematic viscosity of about 10 cSt to about 20 cSt, or higher, and a boiling point range of about 450 °C to about 565 °C.

[0030] As used herein “cracking” is a process that uses decomposition and molecular recombination of organic compounds to produce a greater number of molecules than were initially present. In cracking, a series of reactions take place accompanied by a transfer of hydrogen atoms between molecules. Cracking may be performed in a thermal cracking process, a steam cracking process, a catalytic cracking process, or a hydrocracking process, among others. For example, naphtha, a hydrocarbon mixture that is generally a liquid having molecules with about five to about twelve carbon atoms, may undergo a thermal cracking reaction to form ethylene and H₂ among other molecules. In some examples, the free radicals formed during the cracking process may form compounds that are more complex than those in the feed.

[0031] As used herein, a “catalyst” is a material that increases the rate of specific chemical reactions under certain conditions of temperature and pressure. Catalysts may be heterogeneous, homogenous, and bound. A heterogeneous catalyst is a catalyst that has a different phase from

- 7 -

the reactants. The phase difference may be in the form of a solid catalyst with liquid or gaseous reactants or in the form of immiscible phases, such as an aqueous acidic catalyst suspended in droplets in an organic phase holding the reactants. A heterogeneous catalyst may be bound, such as a zeolite bound with alumina or another metal oxide. A homogeneous catalyst is soluble in the same phase as the reactants, such as an organometallic catalyst dissolved in an organic solvent with a reactant.

[0032] The processed impure feed stream is then introduced to a reaction zone in an oligomerization reactor where a homogeneous catalyst, for example, as described with respect to **Fig. 4**, is used to generate oligomers in an oligomerization process. The oligomerization reaction forms oligomers by reacting small molecule olefins, such as ethylene and propylene, termed monomers, to form a short chain or oligomer. The oligomers may include two to 50 monomers, or more, depending on the reaction conditions used. The oligomers may be linear alpha-olefins with a Schulz-Flory (S-F) distribution. As used herein, an S-F distribution is a probability distribution that describes the relative ratios of oligomers of different lengths that occur in an ideal step-growth oligomerization process. Generally, shorter oligomers are favored over longer oligomers.

[0033] However, the S-F distribution of the olefinic products may be controlled by the selection of an organic ligand on the catalyst, or through the selection of reaction conditions such as temperature and pressure. These choices may be used to enhance the production of either light LAOs or heavier, base stock range molecules. The product olefins may then be split into light olefinic (C12-), medium olefinic (C12 – C22), and heavy olefinic (C24+) fractions, for example, through conventional distillation. It may be noted that the olefinic fractions may not be pure olefins, but may include other compounds with similar boiling points, such as paraffinic compounds. The light fraction may include C4, C6, C8, C10, and C12 LAOs, the medium fraction may be sent to a dimerization or alkylation reactor using a catalyst selected from a variety of heterogeneous or homogeneous catalysts, and the heavy fraction may be sent to a demetallation zone or stage then to a hydrocracking/hydroisomerization (HDC/HDI) reactor to produce the high quality (Group III) base stock.

[0034] The ability to control the S-F distribution makes the targeted production of particular products possible. In some examples, an S-F distribution of about 0.75 to about 0.91 is targeted to make various wax and base stock products with carbon numbers of at least 24. In other examples, an S-F distribution of about 0.83 to about 0.87 is targeted to make products having about 24 to about 50 carbon atoms, such as lower viscosity base stocks. In further examples, an

- 8 -

S-F distribution of about 0.6 to about 0.75 is targeted to make products having about four to about 22 carbon atoms, such as various linear alpha olefins. The relation of S-F distribution to various carbon numbers is discussed with respect to **Fig. 6**.

[0035] The techniques described may use hydrocarbon feedstocks, such as an oil from hydraulic fracturing or standard fields, to produce high value base stock. The techniques may also use hydro-processing to perform demetallation during the production of alpha-olefins, when using a metal containing homogeneous catalyst, which may lower the cost over an aqueous quench and extraction process that uses waste water separation and treatment.

[0036] For ease of reference, certain terms used in this application and their meanings as used herein are set forth. To the extent a term is not defined herein, it should be given the broadest definition persons in the pertinent art have given that term as reflected in at least one printed publication or issued patent. Further, the present techniques are not limited by the usage of the terms shown herein, as all equivalents, synonyms, new developments, and terms or techniques that serve the same or a similar purpose are considered to be within the scope of the present claims.

[0037] **Fig. 1(A)** is a simplified block diagram of a system **100** for producing base oil stocks and other high quality hydrocarbons from a light hydrocarbon feed, in accordance with examples. The process begins with the introduction of a hydrocarbon feed stream, such as a hydrocarbon stream **102**, to a steam cracker **104**. As used herein, a hydrocarbon stream **102** may include a composition prior to any treatment, such treatment including cleaning, dehydration or scrubbing, as well as any composition having been partly, substantially or wholly treated for the reduction or removal of one or more compounds or substances, including, but not limited to, sulphur, sulphur compounds, carbon dioxide, water, mercury.

Steam Cracking

[0038] In the steam cracker **104**, the hydrocarbon stream **102** is diluted with steam, and then briefly heated to high temperatures in a steam cracker, such as above 800 °C, before the reaction is quenched. The reaction time may be milliseconds in length. Oxygen is excluded to prevent degradation and decrease the formation of carbon oxides. The mixture of products in the raw product stream **106** from the steam cracker **104** may be controlled by the feedstock, with the lighter feedstocks of the hydrocarbon stream **102**, such as ethane, propane, or butane, or combinations thereof, among others, favoring the formation of lighter products, such as ethylene, propylene, or butadiene, among others. The product distribution in the raw product stream **106**

- 9 -


may also be controlled by the steam/hydrocarbon ratio, the reaction temperature, and the reaction time, among other factors.

[0039] A purification system **108** may be used to remove impurities from the raw product stream **106** to form an ethylene stream **110**. The purification system **108** may include a number of different units to remove impurities, including dryers, coldboxes, a carbon monoxide oxidizer, pressure swing adsorption (PSA) units and the like. The purification system is discussed further with respect to **Fig 1(B)**.

Oligomerization

[0040] The ethylene stream **110** is provided to an oligomerization reactor **112**, where it may be contacted with a homogeneous catalyst **114**, for example, an organometallic catalyst. In examples described herein, the homogeneous catalyst **114** is generally an impurity tolerant organometallic catalyst, such as an Iron (II) pyridine-bis-imide (Fe-PBI), capable of the oligomerization of the ethylene stream **110** to C10+ products, C25+, or C50+ products, to produce diesel, lube, and hydrocarbon fluid molecules, such as the base stocks.

[0041] An example of a homogenous catalyst that may be includes an iron (II) pyridine-bis-imine (Fe-PBI) compound having a structure of formula 1:

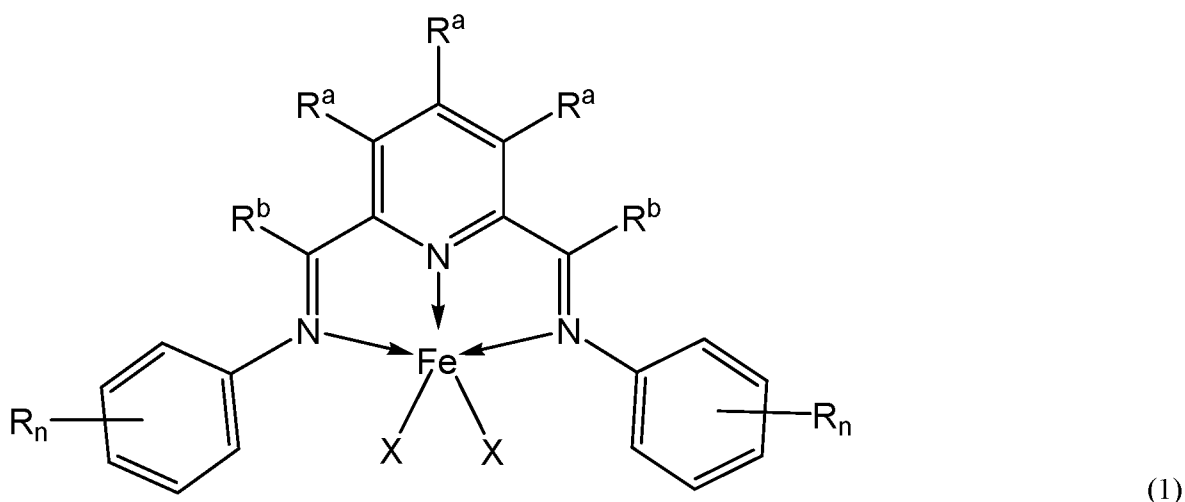


In formula 1, X is a halogen or hydrocarbyl radical, such as Cl. Each R substituent is independently a halogen or hydrocarbyl radical, and each n is an integer from 1-5 representing the number of R groups present. Each n is 1, 2 or 3. In some examples, n is 2 or 3. Each R is a C1-C10 alkyl, or a halogen. In some examples, R is methyl, ethyl or n-propyl. In some examples, at least one R is methyl. In some examples, at least one R is fluorine. In some examples, R_n comprises one, two, or three substituents, wherein each of the substituents is methyl, or fluorine. Each R^a, and R^b are independently a hydrogen, halogen or hydrocarbyl radical. In some

- 10 -

examples, each R^a is a hydrocarbyl or hydrogen, or a hydrogen. Each R^b is a hydrocarbyl, such as a C1-C10 alkyl, or methyl.

[0042] The homogenous catalyst may include an iron (II) pyridine-bis-imine (Fe-PBI) compound having a structure of formula 2:

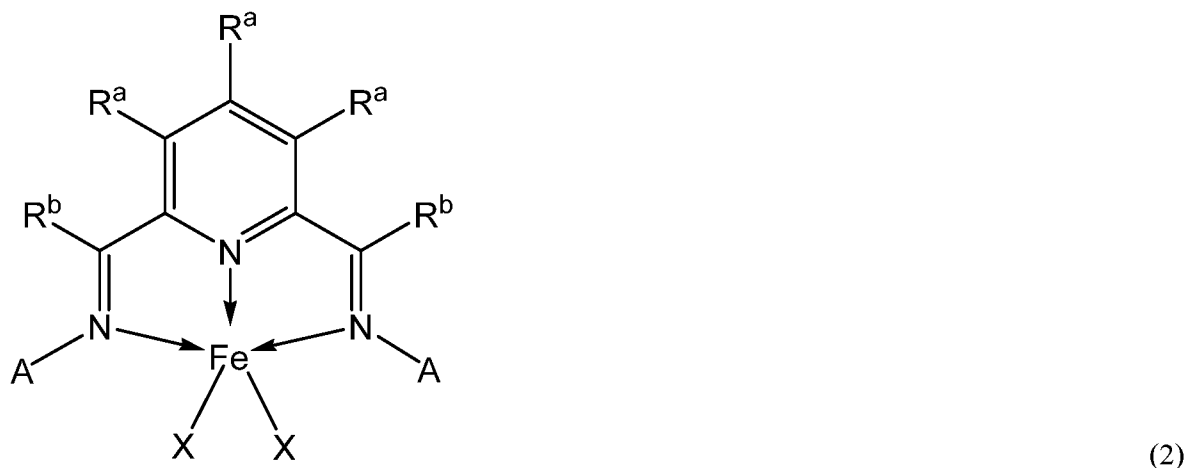

In formula 2, each R^a , R^b and X are as defined above, and each A is independently a substituted aryl group including one, two or three R substituents as defined above.

[0043] In some examples, each A is defined by a structure shown in formula 3:



In formula 3, the one position of the phenyl ring is bonded to the nitrogen of the iron (II) pyridine-bis-imine complex, and each R^2 , R^3 , R^4 , R^5 , and R^6 are independently C1 to C10 alkyl, halogen or hydrogen radical. In some examples, each R^2 , R^3 , R^4 , R^5 , and R^6 are independently methyl, ethyl, n-propyl, fluoro, and hydrogen. In some examples, each R^2 , R^3 , R^4 , R^5 , and R^6 are independently methyl, fluoro and hydrogen. In some examples, each R^2 is methyl and each R^6 is fluoro. In some examples, each R^2 is fluoro and each R^4 is methyl. In some examples, each R^2 and R^6 are methyl, and each R^4 is fluoro. In some examples, each R^2 is methyl and each R^4 is fluoro. In some examples, each R^2 is methyl. Examples of homogenous catalysts that may be used for the oligomerization are discussed further with respect to **Fig. 4**. In some examples, the organometallic catalysts may be supported to form heterogeneous catalysts.

- 11 -

[0044] Generally, the homogeneous catalysts are activated. After the complexes have been synthesized, catalyst systems may be formed by combining them with activators in any manner known from the literature, including by supporting them for use in slurry or gas phase polymerization reactions. The catalyst systems may also be added to or generated in solution polymerization or bulk polymerization (in the monomer). The catalyst system typically includes a complex as described above and an activator such as alumoxane or a non-coordinating anion. Activation may be performed using alumoxane solution including methyl alumoxane, referred to as MAO, as well as modified MAO, referred to herein as MMAO, containing some higher alkyl groups to improve the solubility. Particularly useful MAO can be purchased from Albemarle, typically in a 10 wt. % solution in toluene. In some examples, the catalyst system uses an activator selected from alumoxanes, such as methyl alumoxane, modified methyl alumoxane, ethyl alumoxane, iso-butyl alumoxane, and the like.

[0045] When an alumoxane or modified alumoxane is used, the complex-to-activator molar ratio is from about 1:3000 to 10:1; or from 1:2000 to 10:1; or from 1:1000 to 10:1; or from 1:500 to 1:1; or from 1:300 to 1:1; or from 1:200 to 1:1; or from 1:100 to 1:1; or from 1:50 to 1:1; or from 1:10 to 1:1. When the activator is an alumoxane (modified or unmodified), some examples select the maximum amount of activator at a 5000-fold molar excess over the catalyst precursor (per metal catalytic site). The preferred minimum activator-to-complex ratio is 1:1 molar ratio.

[0046] Activation may also be performed using non-coordinating anions, (NCAs), of the type described in European Patent Application Nos. 277 003 A1 and 277 004 A1. An NCA may be added in the form of an ion pair using, for example, [DMAH]⁺ [NCA]⁻ in which the N,N-dimethylanilinium (DMAH) cation reacts with a basic leaving group on the transition metal complex to form a transition metal complex cation and [NCA]⁻. The cation in the precursor may, alternatively, be trityl. Alternatively, the transition metal complex may be reacted with a neutral NCA precursor, such as B(C₆F₅)₃, which abstracts an anionic group from the complex to form an activated species. Useful activators include N,N-dimethylanilinium tetrakis (pentafluorophenyl)borate (i.e., [PhNMe₂H]B(C₆F₅)₄) and N,N-dimethylanilinium tetrakis (heptafluoronaphthyl)borate, where Ph is phenyl, and Me is methyl.

[0047] Additionally, activators useful herein include those described in U.S. Patent No. 7,247,687 at column 169, line 50 to column 174, line 43, particularly column 172, line 24 to column 173, line 53. These are incorporated by reference herein.

[0048] Non-coordinating anion (NCA) is defined to mean an anion either that does not coordinate to the catalyst metal cation or that does coordinate to the metal cation, but only


- 12 -

weakly. The term NCA is also defined to include multicomponent NCA-containing activators, such as

N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate, that contain an acidic cationic group and the non-coordinating anion.

[0049] The term NCA also includes neutral Lewis acids, such as tris(pentafluorophenyl)boron, that can react with a catalyst to form an activated species by abstraction of an anionic group. An NCA coordinates weakly enough that a neutral Lewis base, such as an olefinically or acetylenically unsaturated monomer can displace it from the catalyst center. Any metal or metalloid that can form a compatible, weakly coordinating complex may be used or contained in the noncoordinating anion. Suitable metals include, but are not limited to, aluminum, gold, and platinum. Suitable metalloids include, but are not limited to, boron, aluminum, phosphorus, and silicon. A stoichiometric activator can be either neutral or ionic. The terms ionic activator, and stoichiometric ionic activator can be used interchangeably. Likewise, the terms neutral stoichiometric activator, and Lewis acid activator can be used interchangeably. The term non-coordinating anion includes neutral stoichiometric activators, ionic stoichiometric activators, ionic activators, and Lewis acid activators.

[0050] In an example described herein, the non-coordinating anion activator is represented by the following formula (1):



wherein Z is (L-H) or a reducible Lewis acid; L is a neutral Lewis base; H is hydrogen and (L-H)⁺ is a Bronsted acid; A^{d-} is a non-coordinating anion having the charge d-; and d is an integer from 1 to 3.

[0051] When Z is (L-H) such that the cation component is (L-H)^{d+}, the cation component may include Bronsted acids such as protonated Lewis bases capable of protonating a moiety, such as an alkyl or aryl, from the catalyst precursor, resulting in a cationic transition metal species, or the activating cation (L-H)^{d+} is a Bronsted acid, capable of donating a proton to the catalyst precursor resulting in a transition metal cation, including ammoniums, oxoniums, phosphoniums, silyliums, and mixtures thereof, or ammoniums of methylamine, aniline, dimethylamine, diethylamine,

N-methylaniline, diphenylamine, trimethylamine, triethylamine, N,N-dimethylaniline, methyldiphenylamine, pyridine, p-bromo N,N-dimethylaniline, p-nitro-N,N-dimethylaniline, phosphoniums from triethylphosphine, triphenylphosphine, and diphenylphosphine, oxoniums

- 13 -

from ethers, such as dimethyl ether diethyl ether, tetrahydrofuran, and dioxane, sulfoniums from thioethers, such as diethyl thioethers and tetrahydrothiophene, and mixtures thereof.

[0052] When Z is a reducible Lewis acid, it may be represented by the formula: (Ar_3C^+) , where Ar is aryl or aryl substituted with a heteroatom, or a C₁ to C₄₀ hydrocarbyl, the reducible Lewis acid may be represented by the formula: (Ph_3C^+) , where Ph is phenyl or phenyl substituted with a heteroatom, and/or a C₁ to C₄₀ hydrocarbyl. In an example, the reducible Lewis acid is triphenyl carbenium.

[0053] Examples of the anion component Ad⁻ include those having the formula $[M_k+Q_n]d^-$ wherein k is 1, 2, or 3; n is 1, 2, 3, 4, 5 or 6, or 3, 4, 5 or 6; n - k = d; M is an element selected from Group 13 of the Periodic Table of the Elements, or boron or aluminum, and Q is independently a hydride, bridged or unbridged dialkylamido, halide, alkoxide, aryloxide, hydrocarbyl radicals, said Q having up to 20 carbon atoms with the proviso that in not more than one occurrence is Q a halide, and two Q groups may form a ring structure. Each Q may be a fluorinated hydrocarbyl radical having 1 to 20 carbon atoms, or each Q is a fluorinated aryl radical, or each Q is a pentafluoryl aryl radical. Examples of suitable Ad⁻ components also include diboron compounds as disclosed in US 5,447,895, which is fully incorporated herein by reference.

[0054] In an example in any of the NCAs represented by Formula 1 described above, the anion component Ad⁻ is represented by the formula $[M^{*k}+Q^{*n}]d^{*-}$ wherein k* is 1, 2, or 3; n* is 1, 2, 3, 4, 5, or 6 (or 1, 2, 3, or 4); n* - k* = d*; M* is boron; and Q* is independently selected from hydride, bridged or unbridged dialkylamido, halogen, alkoxide, aryloxide, hydrocarbyl radicals, said Q* having up to 20 carbon atoms with the proviso that in not more than 1 occurrence is Q* a halogen.

[0055] The techniques describe herein also relate method to dimerize olefins including contacting olefins (such as ethylene, butene, hexane, and others) with a catalyst complex as described above and an NCA activator represented by the Formula (2):



where R is a monoanionic ligand; M^{**} is a Group 13 metal or metalloid; ArNHal is a halogenated, nitrogen-containing aromatic ring, polycyclic aromatic ring, or aromatic ring assembly in which two or more rings (or fused ring systems) are joined directly to one another or together; and n is 0, 1, 2, or 3. Typically the NCA including an anion of Formula 2 also includes a suitable cation that is essentially non-interfering with the ionic catalyst complexes formed with the transition metal compounds, or the cation is Z_d⁺ as described above.

- 14 -


[0056] In an example, in any of the NCAs including an anion represented by Formula 2 described above, R is selected from the group consisting of C₁ to C₃₀ hydrocarbyl radicals. In an example, C₁ to C₃₀ hydrocarbyl radicals may be substituted with one or more C₁ to C₂₀ hydrocarbyl radicals, halide, hydrocarbyl substituted organometalloid, dialkylamido, alkoxy, aryloxy, alkylsulfido, arylsulfido, alkylphosphido, arylphosphide, or other anionic substituent; fluoride; bulky alkoxides, where bulky means C₄ to C₂₀ hydrocarbyl radicals; --SR^a, --NR^a₂, and --PR^a₂, where each R^a is independently a monovalent C₄ to C₂₀ hydrocarbyl radical including a molecular volume greater than or equal to the molecular volume of an isopropyl substitution or a C₄ to C₂₀ hydrocarbyl substituted organometalloid having a molecular volume greater than or equal to the molecular volume of an isopropyl substitution.

[0057] In an example, in any of the NCAs including an anion represented by Formula 2 described above, the NCA also includes cation including a reducible Lewis acid represented by the formula: (Ar₃C⁺), where Ar is aryl or aryl substituted with a heteroatom, and/or a C₁ to C₄₀ hydrocarbyl, or the reducible Lewis acid represented by the formula: (Ph₃C⁺), where Ph is phenyl or phenyl substituted with one or more heteroatoms, and/or C₁ to C₄₀ hydrocarbyls.

[0058] In an example in any of the NCAs including an anion represented by Formula 2 described above, the NCA may also include a cation represented by the formula, (L-H)^{d+}, wherein L is a neutral Lewis base; H is hydrogen; (L-H) is a Bronsted acid; and d is 1, 2, or 3, or (L-H)^{d+} is a Bronsted acid selected from ammoniums, oxoniums, phosphoniums, silyliums, and mixtures thereof.

[0059] Further examples of useful activators include those disclosed in U.S. Patent Nos. 7,297,653 and 7,799,879, which are fully incorporated by reference herein.

[0060] In an example, an activator useful herein includes a salt of a cationic oxidizing agent and a non-coordinating, compatible anion represented by the Formula (3):



wherein OX^{e+} is a cationic oxidizing agent having a charge of e⁺; e is 1, 2 or 3; d is 1, 2 or 3; and A^{d-} is a non-coordinating anion having the charge of d⁻ (as further described above).

Examples of cationic oxidizing agents include: ferrocenium, hydrocarbyl-substituted ferrocenium, Ag⁺, or Pb⁺². Suitable examples of A^{d-} include tetrakis(pentafluorophenyl)borate.

[0061] Activators useful in catalyst systems herein include: trimethylammonium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluoronaphthyl) borate, N,N-diethylanilinium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium

- 15 -

tetrakis(perfluoronaphthyl)borate, trimethylammonium tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, and the types disclosed in U.S. Patent No. 7,297,653, which is fully incorporated by reference herein.

[0062] Suitable activators also include: N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluorophenyl)borate, $[\text{Ph}_3\text{C}^+][\text{B}(\text{C}_6\text{F}_5)_4^-]$, $[\text{Me}_3\text{NH}^+][\text{B}(\text{C}_6\text{F}_5)_4^-]$; 1-(4-(tris(pentafluorophenyl)borate)-2,3,5,6-tetrafluorophenyl)pyrrolidinium; and tetrakis(pentafluorophenyl)borate, 4-(tris(pentafluorophenyl)borate)-2,3,5,6-tetrafluoropyridine.

[0063] In an example, the activator includes a triaryl carbonium (such as triphenylcarbenium tetraphenylborate, triphenylcarbenium tetrakis(pentafluorophenyl) borate, triphenylcarbenium tetrakis-(2,3,4,6-tetrafluorophenyl)borate, triphenyl carbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl) phenyl)borate).

[0064] In an example, two NCA activators may be used in the polymerization and the molar ratio of the first NCA activator to the second NCA activator can be any ratio. In an example, the molar ratio of the first NCA activator to the second NCA activator is 0.01:1 to 10,000:1, or 0.1:1 to 1000:1, or 1:1 to 100:1.

[0065] In an example, the NCA activator-to-catalyst ratio is a 1:1 molar ratio, or 0.1:1 to 100:1, or 0.5:1 to 200:1, or 1:1 to 500:1 or 1:1 to 1000:1. In an example, the NCA activator-to-catalyst ratio is 0.5:1 to 10:1, or 1:1 to 5:1.

[0066] In an example, the catalyst compounds can be combined with combinations of alumoxanes and NCAs (see for example, U.S. Patent No. 5,153,157; U.S. Patent No. 5,453,410; European Patent Application No. EP 0 573 120 B1; WIPO Patent Publication No. WO 94/07928; and WIPO Patent Publication No. WO 95/14044 which discuss the use of an alumoxane in combination with an ionizing activator, all of which are incorporated by reference herein).

[0067] In an example, when an NCA (such as an ionic or neutral stoichiometric activator) is used, the complex-to-activator molar ratio is typically from 1:10 to 1:1; 1:10 to 10:1; 1:10 to 2:1; 1:10 to 3:1; 1:10 to 5:1; 1:2 to 1.2:1; 1:2 to 10:1; 1:2 to 2:1; 1:2 to 3:1; 1:2 to 5:1; 1:3 to 1.2:1;

- 16 -

1:3 to 10:1; 1:3 to 2:1; 1:3 to 3:1; 1:3 to 5:1; 1:5 to 1:1; 1:5 to 10:1; 1:5 to 2:1; 1:5 to 3:1; 1:5 to 5:1; 1:1 to 1:1.2.

[0068] Alternately, a co-activator or chain transfer agent, such as a group 1, 2, or 13 organometallic species (e.g., an alkyl aluminum compound such as tri-n-octyl aluminum), may also be used in the catalyst system herein. The complex-to-co-activator molar ratio is from 1:100 to 100:1; 1:75 to 75:1; 1:50 to 50:1; 1:25 to 25:1; 1:15 to 15:1; 1:10 to 10:1; 1:5 to 5:1; 1:2 to 2:1; 1:100 to 1:1; 1:75 to 1:1; 1:50 to 1:1; 1:25 to 1:1; 1:15 to 1:1; 1:10 to 1:1; 1:5 to 1:1; 1:2 to 1:1; 1:10 to 2:1.

[0069] When the catalyst compounds are ligated metal dihalide compounds, a co-activator is always used when an NCA activator is used.

[0070] Other catalysts, including heterogeneous catalyst such as zeolites, may be used for the oligomerization. However, the oligomerization process may not be as clean, e.g., producing more isomers and fewer linear alpha olefins. Zeolites that may be suitable for this conversion include, but are not limited to 10-ring zeolites such as ZSM-5 (MFI), ZSM-11 (MEL), ZSM-48 (MRE), and the like, with Si/Al₂ ratios from 5 to 500. The zeolites are used in their proton form and may or may not be promoted with metals by ion exchange or impregnation. In addition, the binder used during formulation can influence the yield and product slate.

[0071] The oligomerization process can be performed as a single step process or a two-step process. In a single step process, all of the oligomerization is performed in a single stage or in a single reactor in the oligomerization reactor 112. The ethylene stream 110 is introduced into the single stage generally as a gas phase feed. The ethylene stream 110 is contacted with the homogeneous catalyst 114 under effective oligomerization conditions. A solvent, such as hexane, cyclohexane, or toluene, may be used for the oligomerization process, and recycled. The ethylene feed may be contacted with the homogenous catalyst 114 at a temperature of 20 °C to 300 °C. In some examples, the reaction temperature is at least 25 °C, or at least 50 °C, or at least 100 °C, and is 250 °C or less, or 225 °C or less. The total pressure can be from 1 atm (100 kPa) to 200 atm (20.2 MPa). In some examples, the total pressure is 100 atm (10.1 MPa) or less. In some examples, the oligomerization feed is contacted with the catalyst at a hydrogen partial pressure that is at least 1 % of the total pressure, such as at least 5 % of the total pressure or at least 10 % of the total pressure or up to about 50 % on a volumetric basis. The reaction forms a raw oligomer stream 116 that can then be fractionated in a distillation column 118. An optional step of to quench the catalyst may be used, which consists of using a base, either aqueous or organic, before the fractionation.

- 17 -

[0072] In the distillation column **118**, three streams may be separated from the raw oligomer stream **116**. These may include a light olefinic stream **120**, an intermediate olefinic stream **122** and a heavy olefinic stream **124**. It may be noted that the olefinic streams **120**, **122**, and **124** may not be composed of 100 % olefinic compounds, but may include a number of other compounds, such as paraffins, that are removed in the same boiling point ranges as the olefinic compounds.

[0073] The light olefinic stream **120** may include, for example, linear alpha-olefins having from about four carbon atoms to about 10 carbon atoms and unreacted ethylene. Further, as higher molecular weight compounds are formed, the amounts of paraffinic compounds may increase as well. In this example, the light olefinic stream **120** is combined with the ethylene stream **110** and provided to the oligomerization reactor **112** as combined stream **126**.

[0074] The intermediate olefinic stream **122** may be provided to a dimerization reactor **128**. As an example, the intermediate olefinic stream **122** may include compounds having about 12 carbon atoms to compounds having about 22 carbon atoms, although this may be adjusted based on the takeoff point in the distillation column **118**. In the dimerization reactor **128**, the intermediate olefinic stream **122** may be contacted with a homogeneous or heterogeneous catalyst to be dimerized to form carbon compounds having about 24 carbon atoms to about 44 carbon atoms. The reaction may be run at a temperature of about 50 °C to about 400 °C, and a pressure of about 50 psig to about 2000 psig. The dimerized stream **130** may be returned to the distillation column **118**, in which lower carbon number compounds, such as unreacted compounds having about 12 carbon atoms to about 22 carbon atoms, may be further sent to the dimerization reactor **128** for processing.

[0075] The heavy olefinic stream **124**, may have at least about 24 carbon atoms. To lower the amounts of contaminants, as well as to upgrade the final products, the heavy olefinic stream **124** may be provided to a hydro-processing reactor **132** to remove contaminants and improve product properties, such as cold flow properties. For example, hydrotreatment or mild hydrocracking can be used for removal of contaminants, and optionally to provide some viscosity index uplift, while hydrocracking and hydroisomerization, termed catalytic HDC/HDI, may be used to improve cold flow properties.

Hydro-processing

[0076] As used herein, "hydro-processing" includes any hydrocarbon processing that is performed in the presence of hydrogen. The hydrogen may be added to the hydro-processing reactor **132** as a hydrogen treat stream **134**. The hydrogen treat stream **134** is fed or injected into a vessel or reaction zone or hydro-processing zone in which the hydro-processing

- 18 -

catalyst is located. The hydrogen treat stream **134** may be pure hydrogen or a hydrogen-containing gas, which is a gas stream containing hydrogen in an amount that is sufficient for the intended reactions. The hydrogen treat stream **134** may include one or more other gasses, such as nitrogen and light hydrocarbons, that do not interfere with or affect either the reactions or the products. Impurities, such as H₂S and NH₃ are undesirable and would typically be removed from the hydrogen treat stream **134** before it is conducted to the reactor. The hydrogen treat stream **134** introduced into a reaction stage may include at least 50 vol. % hydrogen or at least 75 vol.% hydrogen. The products of the hydro-processing reactor **132**, termed a hydro-processed stream **136**, may have lower contaminants, including metals and heteroatom compounds, as well as improved viscosities, viscosity indices, saturates content, low temperature properties, volatilities and depolarization, and the like.

[0077] Various types of hydro-processing can be used in the production of fuels and base oil stocks, such as hydroconversion, hydrocracking, hydrogenation, hydrotreating, hydrodesulfurization, hydrodenitrogenation, hydrodemetallation, and hydroisomerization, among others. Typical processes include a demetallation process to remove metallic remnants of the catalyst. Further, a catalytic dewaxing, or hydrocracking/hydroisomerization (HDC/HDI) process, may be included to modify viscosity properties or cold flow properties, such as pour point and cloud point. The hydrocracked or dewaxed feed can then be hydrofinished, for example, to saturate olefins and aromatics from the heavy olefinic stream **124**. In addition to the above, a hydrotreatment stage can also be used for contaminant removal. The hydrotreatment of the oligomer feed to remove contaminants may be performed prior to or after the hydrocracking or the HDC/HDI.

[0078] In the discussion below, a stage in a hydro-processing reactor **132** can correspond to a single reactor or a plurality of reactors. In some examples, multiple reactors can be used to perform one or more of the processes, or multiple parallel reactors can be used for all processes in a stage. Each stage or reactor may include one or more catalyst beds containing hydro-processing catalyst. Note that a catalyst bed in the discussion below may refer to a partial physical catalyst bed. For example, a catalyst bed within a reactor could be filled partially with a hydrocracking catalyst and partially with an HDC/HDI catalyst. For convenience in description, even though the two catalysts may be stacked together in a single catalyst bed, the hydrocracking catalyst and the HDC/HDI catalyst can each be referred to conceptually as separate catalyst beds. As an example, the hydro-processing reactor **132** shown in **Fig. 1** includes a demetallation reactor **132A** and a

- 19 -

hydrocracking/hydroisomerization (HDC/HDI) reactor **132B**, shown as separate reactors or units.

Hydrodemetallation

[0079] The demetallation reactor **132A** includes a demetallation catalyst and operates at about 200 – 500 °C and 50 – 1200 psi. The demetallation reactor removes metals in the homogeneous catalyst, such as Fe and Al, from the organic components, which are deposited on the solid catalysts. The demetallation reactor is typically used for the removal of metals in petroleum oil. The metals in petroleum oil exists as metal complexes, much like the metals in the homogeneous catalysts.

Hydroisomerization/Hydrocracking (HDC/HDI)

[0080] In the HDC/HDI reactor **132B**, suitable HDC/HDI (dewaxing) catalysts may include molecular sieves such as crystalline aluminosilicates, or zeolites. In various examples, the molecular sieve includes ZSM-5, ZSM-22, ZSM-23, ZSM-35, ZSM-48, SAPO-11, zeolite Beta, or zeolite Y, or includes combinations thereof, such as ZSM-23 and ZSM-48, or ZSM-48 and zeolite Beta. Molecular sieves that are selective for dewaxing by isomerization, as opposed to cracking, may be used, such as ZSM-48, ZSM-23, SAPO-11 or any combinations thereof. The molecular sieves may include a 10-member ring 1-D molecular sieve. Examples include EU-1, ZSM-35 (or ferrierite), ZSM-11, ZSM-57, NU-87, SAPO-11, ZSM-48, ZSM-23, and ZSM-22. Some of these materials may be more efficient, such as EU-2, EU-11, ZBM-30, ZSM-48, or ZSM-23. Note that a zeolite having the ZSM-23 structure with a silica to alumina ratio of from 20:1 to 40:1 may be referred to as SSZ-32. Other molecular sieves that are isostructural with the above materials include Theta-I, NU-10, EU-13, KZ-1, and NU-23. The HDC/HDI catalyst may include a binder for the molecular sieve, such as alumina, titania, silica, silica-alumina, zirconia, or a combination thereof, for example alumina and titania or silica and zirconia, titania, or both.

[0081] In various examples, the catalysts according to the disclosure further include a hydrogenation catalyst to saturate olefins and aromatics, which may be termed hydrofinishing herein. The hydrogenation catalyst typically includes a metal hydrogenation component that is a Group VI and/or a Group VIII metal. In some examples, the metal hydrogenation component is a Group VIII noble metal. For example, the metal hydrogenation component may be Pt, Pd, or a mixture thereof. Further, the metal hydrogenation component may be a combination of a non-noble Group VIII metal with a

- 20 -

Group VI metal. Suitable combinations can include Ni, Co, or Fe with Mo or W, or, in some examples, Ni with Mo or W.

[0082] The metal hydrogenation component may be added to the catalyst in any convenient manner. For example, the metal hydrogenation component may be combined with the catalyst using an incipient wetness. In this technique, after combining a zeolite and a binder, the combined zeolite and binder can be extruded into catalyst particles. These catalyst particles may then be exposed to a solution containing a suitable metal precursor. In some examples, metal can be added to the catalyst by ion exchange, where a metal precursor is added to a mixture of zeolite (or zeolite and binder) prior to extrusion.

[0083] The amount of metal in the catalyst may be at least about 0.1 wt. % based on catalyst, or at least about 0.15 wt. %, or at least about 0.2 wt. %, or at least about 0.25 wt. %, or at least about 0.3 wt. %, or at least about 0.5 wt. % based on catalyst. The amount of metal in the catalyst may be about 20 wt. % or less based on catalyst, or about 10 wt. % or less, or about 5 wt. % or less, or about 2.5 wt. % or less, or about 1 wt. % or less. For examples where the metal is Pt, Pd, another Group VIII noble metal, or a combination thereof, the amount of metal may be from about 0.1 to about 5 wt. %, about 0.1 to about 2 wt. %, or about 0.25 to about 1.8 wt. %, or about 0.4 to about 1.5 wt. %. For examples where the metal is a combination of a non-noble Group VIII metal with a Group VI metal, the combined amount of metal may be from about 0.5 wt. % to about 20 wt. %, or about 1 wt. % to about 15 wt. %, or about 2.5 wt. % to about 10 wt. %.

[0084] The HDC/HDI catalysts may also include a binder. In some examples, the HDC/HDI catalysts may use a low surface area binder. A low surface area binder represents a binder with a surface area of about 100 m²/g or less, or 80 m²/g or less, or about 70 m²/g or less. The amount of zeolite in a catalyst formulated using a binder can be from about 30 wt. % zeolite to about 90 wt. % zeolite relative to the combined weight of binder and zeolite. In some examples, the amount of zeolite may be at least about 50 wt. % of the combined weight of zeolite and binder, such as at least about 60 wt. % or from about 65 wt. % to about 80 wt. %.

[0085] A zeolite can be combined with binder in any convenient manner. For example, a bound catalyst can be produced by starting with powders of both the zeolite and binder, combining and mulling the powders with added water to form a mixture, and then extruding the mixture to produce a bound catalyst of a desired size. Extrusion aids can also be used to modify the extrusion flow properties of the zeolite and binder mixture.

- 21 -

[0086] Process conditions in a catalytic HDC/HDI zone in a may include a temperature of from about 200 to about 450 °C, or from about 270 to about 400 °C, a hydrogen partial pressure of from about 1.8 MPag to about 34.6 MPag (about 250 psig to about 5000 psig), or from about 4.8 MPag to about 20.8 MPag, and a hydrogen circulation rate of from about 35.6 m³/m³ (200 SCF/B) to about 1781 m³/m³ (10,000 SCF/B), or from about 178 m³/m³ (1000 SCF/B) to about 890.6 m³/m³ (5000 SCF/B). In other examples, the conditions can include temperatures in the range of about 343 °C (600 °F) to about 435 °C (815 °F), hydrogen partial pressures of from about 3.5 MPag-20.9 MPag (about 500 psig to 3000 psig), and hydrogen treat gas rates of from about 213 m³/m³ to about 1068 m³/m³ (1200 SCF/B to 6000 SCF/B). These latter conditions may be suitable, for example, if the HDC/HDI stage is operating under sour conditions, e.g., in the presence of high concentrations of sulfur compounds.

[0087] The liquid hourly space velocity (LHSV) can vary depending on the ratio of hydrocracking catalyst used to hydroisomerization catalyst in the HDC/HDI catalyst. Relative to the combined amount of hydrocracking and hydroisomerization catalyst, the LHSV may be from about 0.2 h⁻¹ to about 10 h⁻¹, such as from about 0.5 h⁻¹ to about 5 h⁻¹ and/or from about 1 h⁻¹ to about 4 h⁻¹. Depending on the ratio of hydrocracking catalyst to hydroisomerization catalyst used, the LHSV relative to only the HDC/HDI catalyst can be from about 0.25 h⁻¹ to about 50 h⁻¹, such as from about 0.5 h⁻¹ to about 20 h⁻¹, or from about 1.0 h⁻¹ to about 4.0 h⁻¹.

Hydrotreatment Conditions

[0088] Hydrotreatment may be used to reduce the sulfur, nitrogen, and aromatic content of the heavy olefinic stream **124**, for example, removing nitrogen compounds from the oligomerization catalyst. The catalysts used for hydrotreatment may include hydro-processing catalysts that include at least one Group VIII non-noble metal (Columns 8-10 of IUPAC periodic table), such as Fe, Co, or Ni, or Co or Ni, and at least one Group VI metal (Column 6 of IUPAC periodic table), such as Mo or W. Such hydro-processing catalysts may include transition metal sulfides that are impregnated or dispersed on a refractory support or carrier such as alumina or silica. The support or carrier itself typically has no significant or measurable catalytic activity. Substantially carrier- or support-free catalysts, commonly referred to as bulk catalysts, generally have higher volumetric activities than their bound counterparts.

[0089] In addition to alumina or silica, other suitable support or carrier materials can include, but are not limited to, zeolites, titania, silica-titania, and titania-alumina. Suitable

- 22 -

aluminas include porous aluminas, such as gamma or eta forms, having average pore sizes from about 50 to about 200 Angstrom ($\text{\AA}$), or about 75 to about 150 $\text{\AA}$; a surface area from about 100 to about 300 m^2/g , or about 150 to about 250 m^2/g ; and a pore volume of from about 0.25 to about

1.0 cm^3/g , or about 0.35 to about 0.8 cm^3/g . Generally, any convenient size, shape, or pore size distribution for a catalyst suitable for hydrotreatment of a distillate (including lubricant base oil) boiling range feed in a conventional manner may be used. Further, more than one type of hydro-processing catalyst can be used in one or multiple reaction vessels. A Group VIII non-noble metal, in oxide form, may be present in an amount ranging from about 2 wt. % to about

40 wt. %, or from about 4 wt. % to about 15 wt. %. A Group VI metal, in oxide form, can typically be present in an amount ranging from about 2 wt. % to about 70 wt. %, or, for bound catalysts, from about 6 wt. % to about 40 wt. % or from about 10 wt. % to about 30 wt. %. These weight percentages are based on the total weight of the catalyst. Suitable metal catalysts include cobalt/molybdenum (for example, including about 1-10 % Co as oxide and about 10-40 % Mo as oxide), nickel/molybdenum (including about 1-10 % Ni as oxide and about 10-40 % Co as oxide), or nickel/tungsten (including about 1-10 % Ni as oxide and about 10-40 % W as oxide) on alumina, silica, silica-alumina, or titania, among others.

[0090] The hydrotreatment is carried out in the presence of hydrogen, for example, from the hydrogen treat stream 134. Hydrotreating conditions can include temperatures of about 200 °C to about 450 °C, or about 315 °C to about 425 °C; pressures of about 250 psig (1.8 MPag) to about 5000 psig (34.6 MPag) or about 300 psig (2.1 MPag) to about 3000 psig (20.8 MPag); liquid hourly space velocities (LHSV) of about 0.1 hr^{-1} to about 10 hr^{-1} ; and hydrogen treat rates of about 200 SCF/Btu (35.6 m^3/m^3) to 10,000 SCF/Btu (1781 m^3/m^3) or about 500 (89 m^3/m^3) to about 10,000 SCF/B (1781 m^3/m^3) or about 3000 psig (3.5 MPag-20.9 MPag), and hydrogen treat gas rates of from about 213 m^3/m^3 to about 1068 m^3/m^3 (1200 SCF/Btu 6000 SCF/Btu).

Hydrofinishing and Aromatic Saturation Process

[0091] In some examples, a hydrofinishing stage, an aromatic saturation stage, or both may be used. These stages are termed finishing processes herein. Finishing processes may improve color and stability in a final product by lowering the amounts of unsaturated or oxygenated compounds in the final product streams. The finishing may be performed in the hydro-processing reactor 132 after the last hydrocracking or hydroisomerization stage. Further, the finishing may

occur after fractionation of a hydro-processed stream **136** in a product distillation column **138**. If finishing occurs after fractionation, the finishing may be performed on one or more portions of the fractionated product. In some examples, the entire effluent from the last hydrocracking or HDC/HDI process can be finished prior to fractionation into individual product streams.

[0092] In some examples, the finishing processes, including hydrofinishing and aromatic saturation, refer to a single process performed using the same catalyst. Alternatively, one type of catalyst or catalyst system can be provided to perform aromatic saturation, while a second catalyst or catalyst system can be used for hydrofinishing. Typically the finishing processes will be performed in a separate reactor from the HDC/HDI or hydrocracking processes to facilitate the use of a lower temperature for the finishing processes. However, an additional hydrofinishing reactor following a hydrocracking or HDC/HDI process, but prior to fractionation, may still be considered part of a second stage of a reaction system conceptually.

[0093] Finishing catalysts can include catalysts containing Group VI metals, Group VIII metals, and mixtures thereof. In an example, the metals may include a metal sulfide compound having a strong hydrogenation function. The finishing catalysts may include a Group VIII noble metal, such as Pt, Pd, or a combination thereof. The mixture of metals may also be present as bulk metal catalysts wherein the amount of metal is 30 wt. % or greater based on the catalyst. The metals and metal compounds may be bound, for example, on a metal oxide. Suitable metal oxide supports include low acidic oxides such as silica, alumina, silica-aluminas or titania, or, in some examples, alumina.

[0094] The catalysts for aromatic saturation may include at least one metal having relatively strong hydrogenation function on a porous support. Typical binding materials include amorphous or crystalline oxide materials such as alumina, silica, and silica-alumina. The binding materials may also be modified, such as by halogenation or fluorination. The metal content of the catalyst may be as high as 20 wt. % for non-noble metals. In an example, a hydrofinishing catalyst may include a crystalline material belonging to the M41S class or family of catalysts. The M41S family of catalysts are mesoporous materials having high silica content. Examples include MCM-41, MCM-48 and MCM-50. Examples include MCM-41, MCM-48, MCM-49, and MCM-50. Other catalysts that may be used include Beta, Y, and other large pore zeolites (12-member ring MR and up). If separate catalysts are used for aromatic saturation and hydrofinishing, an aromatic saturation catalyst can be selected based on activity or selectivity for aromatic saturation, while a hydrofinishing catalyst can be selected based on activity for improving product specifications, such as product color and polynuclear aromatic reduction.

- 24 -

[0095] Hydrofinishing conditions can include temperatures from about 125 °C to about 425 °C, or about 180 °C to about 280 °C, a hydrogen partial pressure from about 500 psig (3.4 MPa) to about 3000 psig (20.7 MPa), or about 1500 psig (10.3 MPa) to about 2500 psig (17.2 MPa), and an LHSV from about 0.1 hr⁻¹ to about 5 hr⁻¹ LHSV, or, in some examples, 0.5 hr⁻¹ to 1.5 hr⁻¹. Additionally, a hydrogen treat gas rate of from about 35.6 m³/m³ to about 1781 m³/m³ (200 SCF/B to 10,000 SCF/B) can be used.

Fractionation and Products

[0096] After hydro-processing, the hydro-processed oligomers in the hydro-processed stream **136** can be fractionated in the product distillation column **138**. Any number of fractions may be isolated, including, for example, a distillate stream **140** that may include hydrocarbon fluids, such as gasoline, naphtha, diesel, or a distillate fuel fraction, among others. Fractions that form base oil stocks for lubricants and other hydrocarbon products, may be isolated, including, for example, a light neutral stream **142**, a medium neutral stream **144**, and a heavy neutral stream **146**.

[0097] A bottoms stream **148** may also be isolated. In some examples, the bottoms stream **148** is returned to the hydro-processing reactor **132** for further processing.

[0098] **Fig. 1(B)** is a simplified block diagram of a purification system **108** for purifying a raw product stream formed from the cracking of hydrocarbons, in accordance with examples. Like numbered items are as described with respect to **Fig. 1**. The purification system **108** has a fractionator **150**, or quench tower, to remove byproducts that may be formed during cracking, including heavy hydrocarbons, such as tar **152** and steam cracker gas oil **154**. The fractionator **150** may also separate water **156** and C5 to C9 hydrocarbons **158** from the product stream.

[0099] The product stream may be sent to a compression system **160** to boost the pressure for further separations. The compression system **160** may include a single compressor or multiple compression stages. From the compression system **160** the pressurized product stream may be sent to an acid gas removal system **162**. The acid gas removal system **162** may include a caustic tower that removes H₂S and CO₂ using a countercurrent flow of an amine or other solvent.

[0100] A dryer **164** may be used to remove entrained water vapor from product stream from the acid gas removal system **162**. The dryer **164** may include a column containing a molecular sieve or zeolite. A C3 removal system **166** may be used to remove C3's, C4's, and C5's, which may be processed for isolation and other systems.

[0101] From the C3 removal system **166** the product stream may be recompressed and provided to a demethanizer **168**. A coldbox is used to chill the product stream prior to the introduction to the demethanizer **168** to allow a cryogenic separation in the demethanizer **168**.

- 25 -

The product stream from the demethanizer **168** may be provided to a deethanizer **170** to remove ethane, generating the ethylene stream **110**.

[0102] The purification system **108** is not limited to the unit shown in **Fig. 1(B)**. Not all of the units shown in the purification system **108** may be used in all examples. In some examples, the depropanizer, the demethanizer and deethanizer are not present. In these examples, methane and ethane, as well as other hydrocarbons such as propane and butane, are allowed to pass into the oligomerization process. These compounds may be separated at a later point, and either sent for further processing or returned to the steam cracker **104**.

[0103] **Fig. 2** is a simplified block diagram of another system **200** for producing base oil stocks from a hydrocarbon feedstock, in accordance with examples. Like numbered items are as described with respect to **Figs. 1(A) and 1(B)**. The intermediate olefinic stream **122** is not limited to being upgraded by dimerization, but may be upgraded by other processes, such as alkylation.

[0104] As used herein, “alkylation” refers to a process in which a feed stream containing olefins, such the intermediate olefinic stream **122**, is reacted with another stream containing hydrocarbons, such as a mixed xylene stream **172**, among others, in an alkylation reactor **174**. The process converts at least a portion of the olefinic compounds to higher molecular compounds. The alkylation reactor **174** may react the feed streams **122** and **172** in the presence of an acidic catalyst, such as sulfuric acid or hydrofluoric acid, or a solid acid, such as a zeolite, for example zeolite Y, zeolite beta, and zeolite of the MWW family, among others. The alkylation may be run at a temperature of about 50 °C to about 250 °C, and a pressure of about 300 psig to about 1000 psig. The process provides an alkylated stream **176** that may be processed in subsidiary units of the alkylation reactor **174** to remove acid and other contaminants before being provided to a separation or distillation column **178**.

[0105] In the distillation column **178**, light or unreacted compounds may be separated into an unreacted stream **180** and blended with the intermediate olefinic stream **122** to be fed back into the alkylation reactor **174**. A heavy product stream **182** may be separated out and provided to an HDC/HDI reactor **132B**.

[0106] **Fig. 3** is a process flow diagram of a method **300** for producing base oil stocks from a steam cracking process, in accordance with examples. The method **300** begins at block **302**, with the cracking of a hydrocarbon stream to form a raw product stream. As the hydrocarbon stream may be an oil stream, any number of impurities may be present, including metals, heteroatom compounds, water, carbon monoxide, and the like.

- 26 -

[0107] At block **304**, an ethylene stream may be recovered from the raw product stream. In this example, steam cracker gas oil (SCGO) and tar, among others, are separated from the raw product stream, for example, in a purification system. For example, hydrogen sulfide, carbon dioxide, or both, may be separated from the raw product stream in the purification system, for example, using a caustic tower or an amine separator. Depending on the processes, it may not be necessary to remove all impurities. For example, light hydrocarbons may not affect the oligomerization, and, in some examples, are left in the feed stream for later separation.

[0108] At block **306**, the ethylene stream may be oligomerized to form a raw oligomer stream. As described herein, this may be performed by contacting the ethylene stream with a homogeneous catalyst to form the raw oligomer stream, wherein the raw oligomer stream may have a substantial concentration of linear alpha olefins.

[0109] At block **308**, a light olefinic stream may be distilled from the raw oligomer stream. The light olefinic stream may include compounds having between about four and about 12 carbons. At block **310** the light olefinic stream is blended with the ethylene stream prior to oligomerization. As noted herein, an olefinic stream may not include 100 % olefinic compounds, but may include other compounds, such as paraffinic compounds, that have a similar boiling point to the olefinic compounds.

[0110] At block **312**, a heavy olefinic stream is distilled from the intermediate stream. At block **314**, the heavy olefinic stream is hydro-processed to form a hydro-processed stream. In the hydro-processing, the heavy olefinic stream may be hydrodemetallated to remove any traces of catalyst remaining from the oligomerization. The heavy olefinic stream may then be hydrocracked to form lower molecular weight compounds, for example, having a broader distribution. The heavy olefinic stream may be hydroisomerized to form a distribution of different isomers. Further, the heavy olefinic stream may be finished to decrease unsaturated and aromatic compounds in the hydro-processed stream.

[0111] At block **316**, the hydro-processed stream is distilled to form the base stock. Distilling the hydro-processed stream may include separating a distillate stream, a naphtha stream, or both from the hydro-processed stream. Further, distilling the hydro-processed stream may include forming a heavy neutral oil stock stream, a medium neutral oil stock stream, or a light neutral oil stock stream, or any combinations thereof.

[0112] The method may include more or fewer steps than described with respect to **Fig. 3**. For example, an intermediate olefinic stream, including compounds having between about 12 and about 22 carbon atoms, may be distilled from the raw oligomer stream and upgraded in molecular

weight. As described with respect to **Figs. 1 and 2**, this may be performed by dimerization or alkylation.

Examples

[0113] Example 1: Linear alpha olefins of different Schulz-Flory molecular distribution may be produced from ethylene using a homogeneous catalyst.

[0114] The molecular distribution may be controlled by the catalyst, for example, through the ligands. **Fig. 4** is a drawing **400** of related homogeneous catalysts, having different ligands, that may be used for the oligomerization or dimerization processes, in accordance with examples. The catalysts are labeled A – D, and are described further with respect to the oligomerization reactions. Catalyst E may be used in the dimerization process.

[0115] The tests of the catalysts in the oligomerization process were performed in a 500 milliliter (mL) autoclave. A 100 mL toluene solution containing 20 micromoles (μmol) catalyst and 4000 μmol MAO activator was charged to the autoclave. Then a predetermined amount of N_2 , or a mixture of H_2 and N_2 in some examples, as described with respect to Tables 1 – 3, was charged into the autoclave to bring the autoclave to a preset pressure. The autoclave was then heated to 50 °C before ethylene was introduced. The reaction was exothermic and ethylene addition was controlled to keep the temperature below about 120 °C and a final total pressure of about 400 psi. The oligomerization reaction was allowed to proceed for approximately 30 minutes.

[0116] The autoclave was then cooled to room temperature and overhead gas pressure was released via opening of a valve. The reaction product, in the form of a solution or suspension was then recovered, quenched with an aqueous HCl solution, and the aqueous phase containing Fe and Al was discarded. The reaction product was analyzed via gas chromatography (GC) and nuclear magnetic resonance (NMR) techniques.

[0117] The gas chromatography analysis for ethylene oligomers was performed using a method that enabled coverage up to C30. The column was 30 m long, with an inner diameter of 0.32 millimeters and a packing of 0.25 μm , available as a HP-5 column from Agilent. The carrier gas was nitrogen. The injector was held at a temperature of 150 °C and 10 psi. A 50 to 1 split ratio was used with a 121 mL per minute (mL/min) total flow rate and an injection size of 1 - 5 μL . The column oven was set to a 50 °C initial temp with a 10 °C/min ramp rate to a 320 °C final temperature. It was held at the 320 °C temperature for 8 minutes giving a total run time of 35 minutes. The detector was a flame ionization detector held at 300 °C, using a 30 mL/min flow of hydrogen, a 250 mL/min flow of air, and a 25 mL/min makeup stream of nitrogen.

- 28 -

[0118] Another gas chromatography analysis was performed using a high temperature method to enable coverage up to C100. The column was 6 m long, with an inner diameter of 0.53 millimeters and a packing of 0.15 μm , available as a MXT-1 SimDist column from Restek company of State College, PA. The carrier gas was nitrogen. The injector was held at a temperature of 300 °C and 0.9 psi. A 15 to 1 split ratio was used with a 27.4 mL per minute (mL/min). Total flow rate and an injection size of 1 μL . The column oven was set to an 80 °C initial temp with a 15 °C/min ramp rate to a 400 °C final temperature. It was held at the 400 °C temperature for 15 minutes giving a total run time of 36.3 minutes. The detector was a flame ionization detector held at 300 °C, using a 40 mL/min flow of hydrogen, a 200 mL/min flow of air, and a 45 mL/min makeup stream of nitrogen.

[0119] The C-13 NMR analysis was performed using a Bruker 400 MHz Advance III spectrophotometer. The samples were dissolved in chloroform-D (CDCl_3) or toluene-D8 in a 5 mm NMR tube at concentrations of between 10 to 15 wt. % prior to being inserted into the spectrophotometer. The C-13 NMR data was collected at room temperature (20 °C). A 135 degree pulse was employed with an acquisition time adjusted to give a digital resolution of between 0.1 and 0.12 Hz, and at least a 10 second pulse acquisition delay time. Further, continuous broadband proton decoupling using swept square wave modulation without gating was employed during the entire acquisition period. The spectra were acquired with time averaging to provide a signal to noise level adequate to measure the signals of interest. Prior to data analysis, spectra were referenced by setting the chemical shift of the CDCl_3 solvent signal to 77.0 ppm.

[0120] H-1 NMR data was collected at room temperature. The data was recorded using a maximum pulse width of 45 degree, 8 seconds between pulses and signal averaging of 120 transients.

[0121] The analyses confirmed that the products were mostly linear alpha-olefins (LAOs) having Schulz-Flory (S-F) distributions. The S-F distribution constant, α , was determined by an average of the molar ratios of C16/C14; C14/C12; and C12/C10 in the product, as determined by gas chromatography.

[0122] The information in Table 1 shows the basic comparison between oligomerizations performed using catalysts A – D. For these runs, the reaction conditions included about 200 psi or ethylene, about 200 psi of hydrogen, a reaction temperature of about 80 °C to 100 °C, 100 mL of toluene (as a catalyst solvent), 20 μmol of catalyst, and a ratio of 200 mol/mol of activator (co-catalyst) to catalyst, such as the MAO activators described herein.

Table 1: Comparison of oligomerization by catalyst A - D

Example	Catalyst	Alpha Value	% Linear Alpha Olefin*	% Branched Olefins*	% Linear Paraffin*
X1	A	0.339	66.6	22.1	1.6
X2	B	0.667	92.9	5.2	1.2
X3	C	0.828	96.0	1.1	2.4
X4	D	0.947	34.5	0.2	64.7

* Presented in C12 fraction as determined by gas chromatography and mass spectrometry

[0123] Catalyst B was chosen to determine the effects of changing the ratio of hydrogen to nitrogen on the reaction. The results are shown in Table 2. For these runs, the reaction conditions included about 200 psi or ethylene, about 200 psi of hydrogen or a mixture of hydrogen and nitrogen, a reaction temperature of about 80 °C to 100 °C, 100 mL of toluene, 20 μmol of catalyst, and a ratio of 200 mol/mol of activator (co-catalyst) to catalyst. As can be seen by the results in Table 2, changing the hydrogen to nitrogen ratio has relatively small effects on the operation of the catalyst.

Table 2: Effects of changing the ratio of hydrogen to nitrogen using catalyst B

Example	Catalyst	H ₂ /N ₂ , psi	Alpha Value	% Linear Alpha Olefin*	% Branched Olefins*	% Linear Paraffin*
X2	B	200/0	0.667	92.9	5.2	1.2
X5	B	20/180	0.666	92.2	6.3	0.8
X6	B	2/198	0.698	89.2	8.6	1.1

* Presented in C12 fraction as determined by gas chromatography and mass spectrometry

[0124] Catalyst C was chosen to determine the effects of changing the solvent for the reaction. The results are shown in Table 3. For these runs, the reaction conditions included about 200 psi or ethylene, about 200 psi of hydrogen or a mixture of hydrogen and nitrogen, a reaction temperature of about 80 to 100 °C, 100 mL of a solvent as identified in Table 3, 20-40 μmol of catalyst, and a ratio of 100-200 mol/mol of activator (co-catalyst) to catalyst.

Table 3: comparison of oligomerization using different solvents and catalyst C

Example	Catalyst	Solvent	Alpha Value	% Linear Alpha Olefin*	% Branched Olefins*	% Linear Paraffin*
X3	C	Toluene	0.828	96.0	1.1	2.4
X7	C	Isohexane	0.825	92.2	1.28	3.7
X8	C	Cyclohexane	0.826	91.4	1.87	3.9

* Presented in C12 fraction as determined by gas chromatography and mass spectrometry

- 30 -

[0125] The results of the runs in Tables 1-3 indicate that controlling the ligands of the catalyst may be used to control both the paraffin/olefin ratio and the S-F distribution product composition. It may also be noted that the oligomerization using catalysts A-D is tolerant of a large amount of H₂ and a variety of solvents.

[0126] **Fig. 5** is a plot **500** of the Schultz-Flory distribution of a product that includes different carbon numbers, in accordance with examples. The weight fraction of the Schulz-Flory product distribution with experimentally obtained α values may be plotted against the carbon number in the product. The same data can be recast to show lumped fraction distribution as a function of α value.

[0127] **Fig. 6** is a plot **600** of the effect of the change in carbon number composition on a weight fraction of a product as the Schultz-Flory distribution changes, in accordance with examples. The plot **600** shows C24-, C24-C50, and C52+ fractions as a function of a value, indicating that the lube molecule range C24-C50 has a maximum value of about 40 wt. % at an α value around 0.88. This further illustrates that the lube/LAO split may be effectively controlled by using different catalysts that offer different α values.

[0128] Example 2: Dimerizing an intermediate olefinic stream (C14 - C24) into lube range molecules.

[0129] The dimerization may be performed by either heterogeneous catalysts, such as solid acid catalysts, or homogeneous organometallic catalysts. For example, solid acids include proton form zeolite, acid treated clay, amorphous silica-alumina, acid form ion-exchange resins, and various WO₃/ZrO₂ mixed metal oxides.

[0130] To test the dimerization, a 19-g mixture of C14-C24 linear alpha olefins was treated with 200 mg of Catalyst E and 1 mL of MAO (30 % Al) at room temperature overnight. The resulting mixture was diluted with hexane and then hydrolyzed with aqueous HCl.

[0131] **Figs. 7(A) and 7(B)** are plots of gas chromatograms illustrating the changes caused by dimerization **702** of the alpha olefin mixture, in accordance with examples. The plots **700** are of the starting material **704** and the product **706**. The plot of the starting material **704** shows a first set of peaks **708** from the C14 – C24 linear alpha-olefins (LAOs) generated by a homogeneous catalyst, such as catalyst E.

[0132] After dimerization, a second set of peaks **710** show a significant decrease in the amount of C14-C24 LAOs, as well as some broadening, indicating reaction of the LAOs. A new set of peaks **712** is present after the reaction, corresponding to C26 to C52 (and higher) olefins.

- 31 -

This illustrates the effectiveness of dimerization in increasing the molecular weight of the LAOs. Other techniques, such as alkylation, may be used to increase the molecular weight of the LAOs.

[0133] Example 3: Hydroisomerizing lube range olefin molecules to lube oil.

[0134] The hydroisomerization of olefins may broaden the molecular weight distributions of the olefins, improving characteristics such as pour point, VI, and others. This may be performed by a number of acid catalysts, such as the ZSM-48 catalyst described in the synthesis procedure below.

[0135] Preparation of Formulated ZSM-48 catalyst

[0136] To form a bound ZSM-48 catalyst, 65 parts ZSM-48 zeolite crystals are combined with 35 parts pseudoboehmite alumina dry powder, on a calcined dry weight basis. The ZSM-48 and the pseudoboehmite alumina dry powder are placed in a muller or a mixer and mixed for about 10 to 30 minutes. Sufficient water is added to the ZSM-48 and alumina during the mixing process to produce an extrudable paste.

[0137] The extrudable paste is formed into a 1/16 inch quadralobe extrudate using an extruder. After extrusion, the 1/16th inch quadralobe extrudate is dried at a temperature ranging from about 250 °F (about 120 °C) to about 325 °F (about 163 °C). After drying, the dried extrudate is heated to about 1000 °F (about 538 °C) under flowing nitrogen. The extrudate is then cooled to ambient temperature and humidified with saturated air or steam. After the humidification, the extrudate is ion exchanged with about 0.5 to about 1 N ammonium nitrate solution. The ammonium nitrate solution ion exchange is repeated. The ammonium nitrate exchanged extrudate is then washed with deionized water to remove residual nitrate prior to calcination in air. After washing the wet extrudate, it is dried. The exchanged and dried extrudate is then calcined in a nitrogen/air mixture to about 1000 °F (about 538 °C). Following calcination, the extrudate was exposed to steam at about 700 °F (about 371 °C) for about three hours.

[0138] The formulated ZSM-48 catalyst was added to the dimerized product described with respect to **Fig. 7(A)** in Example 2. The mixture was heated in an closed autoclave at hydroisomerization condition of about 200-250 °C and about 500-1000 psi H₂ for 1 to 5 days.

[0139] **Figs. 8(A) and 8(B)** are plots of gas chromatograms illustrating the changes caused by hydroisomerization **802** of an olefin mixture **804**, in accordance with examples. As shown in **Fig. 8(A)**, and described with respect to **Fig. 7(A)**, the olefin mixture **804** includes C14-C24 olefins **806** and C28-C52 olefins **808**. The gas chromatogram of the reaction products **810**, including isomerized C14-C24 **812** and isomerized C28-C52 **814**, is shown in **Fig. 8(B)**. GC

- 32 -

traces of the before and after hydroisomerization materials are shown below, which clearly indicate isomerization of the molecules (broadening of peaks).

[0140] **Fig. 9** is a plot **900** of the DEPT-135 C-13 NMR spectra illustrating the changes caused by hydroisomerization **902** of an alpha olefin mixture, in accordance with examples. As used herein, DEPT is an acronym for distortionless enhancement by polarization transfer. The technique is used to determine the multiplicity of carbon atoms substitution with hydrogen. The DEPT-135 C-13 NMR spectra of the products of hydroisomerization of dimerized C14-C24 LAOs show the presence of isolated methyl (CH₃, ~20 ppm) branching **904**, and the associated methine (CH, ~32 ppm) carbon **906** and methylene carbons **908** (CH₂, ~27 and ~37 ppm) adjacent to the methine (CH) carbon.

Table 4: Comparisons of dimerized and hydroisomerized products.

Example	X9	X10	X11	X12
Description	Dimerized C14-C24 LAO	Hydroisomerized X9	Dimerized C14+ LAO	Hydroisomerized X11
Mn by GPC	412	374	464	405
Mw by GPC	466	437	658	463
PD by GPC	1.13	1.17	1.42	1.14
Tm by DSC, °C	25.4	6.4	47.0	30.2
Tg by DSC, °C	-16.5	-66.5	-5.4	-25.2

[0141] In Table 4, Mn is the number averaged molecular weight, Mw is the weight averaged molecular weight, and PD is the polydispersity, calculated as Mw/Mn. The GPC or gel permeation chromatography is calibrated with polyethylene standards. DSC is differential scanning calorimetry. Tm is the melting point or crystallization temperature of the material and Tg is the glass transition temperature of the material.

[0142] Example 4: LAO recycle and reactions with ethylene in the oligomerization reaction zone.

[0143] It is also anticipated that the non-lube range LAO can be incorporated into the ethylene oligomers during the oligomerization process. The results of the tests are shown in Table 5. For these runs, the reaction conditions included about 100 or 200 psi or ethylene, about 200 psi of hydrogen, a reaction temperature of about 80 to 100 °C, 100 mL of toluene, 20 μmol of catalyst C or E, and a ratio of 100-200 mol/mol of activator (co-catalyst) to catalyst.

[0144] This is demonstrated by addition of 1-pentene after introduction of ethylene to the system. The incorporation of 1-pentene is evident in the results shown in Table 5 by the increasing amount of odd number olefins such as tridecenes (C13 olefins) as well as branched

isomers within the odd number olefins, which indicates the incorporation of an already formed LAO into a growing LAO chain, causing branching. For Table 5, the S-F distribution constant, α , was determined by averaging the molar ratios: C16/C14; C14/C12; and C12/C10 in the product, as determined by gas chromatography, as described herein.

Table 5: Incorporation of 1-pentene into oligomers.

Exempl e	Catalyst	1-Pentene added	C2H4		C12 Fraction			C13 Fraction		
			/	Alpha Value	% in C10- C20*	% Linear Alpha Olefin*	% Branched Olefins*	% in C10- C20*	% Linear Alpha Olefin*	% Branched Olefins*
					*	Olefin*	Olefins*	*	Olefin*	Olefins*
X3	C	No	200/200	0.828	17.5	96.0	1.1	0.5	78.9	13.8
X13	C	Yes	200/200	0.845	16.4	92.3	1.2	1.6	64.3	26.4
X14	C	Yes	100/200	0.869	14.2	87.0	1.8	3.4	49.0	39.4
X15	E	No	200/200	0.678	21.7	92.9	4.2	0.5	70.8	20.7
X16	E	Yes	200/200	0.741	17.9	87.1	8.5	2.9	51.2	39.3

* Presented in C12 or C13 fractions as determined by gas chromatography and mass spectrometry

** Normalized to C10-C20

Embodiments

[0145] The embodiments of the present techniques include any combinations of the examples in the following numbered paragraphs.

[0146] 1. A system for manufacturing a base stock from a hydrocarbon stream, including a steam cracker configured to form a raw product stream from the hydrocarbon stream, a purification system configured to separate an ethylene stream from the raw product stream, and an oligomerization reactor configured to oligomerize the ethylene stream to form a raw oligomer stream. A distillation column is configured to separate the raw oligomer stream into a light olefinic stream, an intermediate olefinic stream, and a heavy olefinic stream, wherein the distillation column is configured to blend the light olefinic stream with the ethylene stream provided to the oligomerization reactor. A hydro-processing reactor is configured to hydro-process the heavy olefinic stream to form a hydro-processed stream. A product distillation column is configured to separate the hydro-processed stream to form the base stock.

[0147] 2. The system of embodiment 1, including a dimerization reactor configured to dimerize the intermediate olefinic stream and return a dimerized stream to the distillation column.

- 34 -


[0148] 3. The system of either of embodiments 1 or 2, including an alkylation reactor configured to alkylate the intermediate olefinic stream and provide an alkylated stream to an alkylation distillation column.

[0149] 4. The system of embodiment 3, wherein the alkylation distillation column is configured to separate an unreacted olefin stream from the alkylated stream and return the unreacted olefin stream to the alkylation reactor.

[0150] 5. The system of any of embodiments 1 to 4, wherein the purification system includes a fractionator configured to remove tar and steam cracker gas oil from the raw product stream, a caustic tower configured to remove hydrogen sulfide and carbon dioxide from the raw product stream, and a dryer configured to remove water from the raw product stream.

[0151] 6. The system of any of embodiments 1 to 5, wherein the oligomerization reactor is configured to use a homogenous catalyst.

[0152] 7. The system of embodiment 6, wherein the homogenous catalyst includes an iron (II) pyridine-bis-imine (Fe-PBI) catalyst including a structure of

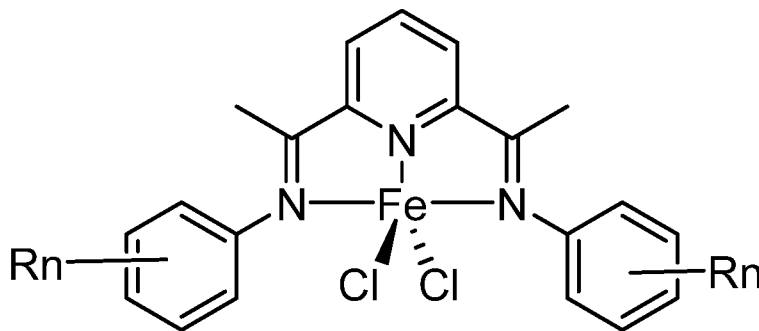

wherein Rn includes one, two, or three substituents, and wherein the substituents include CH₃, F, or both.

[0153] 8. The system of any of embodiments 1 to 7, wherein the hydro-processing reactor includes a demetallation unit.

[0154] 9. The system of any of embodiments 1 to 8, wherein the hydro-processing reactor includes a hydrocracking unit.

[0155] 10. The system of any of embodiments 1 to 9, wherein the hydro-processing reactor includes a hydroisomerization unit.

[0156] 11. The system of any of embodiments 1 to 10, wherein the distillation column is configured to separate the hydro-processed stream into a distillate stream including naphtha, a heavy neutral stream, a medium neutral stream, and a light neutral stream.

- 35 -

[0157] 12. A method for manufacturing a base stock from a hydrocarbon stream, including cracking the hydrocarbon stream to form a raw product stream, separating an ethylene stream from the raw product stream, and oligomerizing the ethylene stream to form a raw oligomer stream. A light olefinic stream is distilled from the raw oligomer stream and oligomerized with the ethylene stream. A heavy olefinic stream is distilled from the raw oligomer stream, and hydro-processed to form a hydro-processed stream. The hydro-processed stream is distilled to form the base stock.


[0158] 13. The method of embodiment 12, including distilling an intermediate olefinic stream from the raw oligomer stream.

[0159] 14. The method of embodiment 13, including dimerizing the intermediate olefinic stream to form a dimerized stream, and distilling the dimerized stream with the raw oligomer stream.

[0160] 15. The method of embodiment 13, including alkylating the intermediate olefinic stream to form an alkylated stream, distilling the alkylated stream to form a lights stream and a heavies stream, combining the lights stream with the intermediate olefinic stream to form a combined stream, and alkylating the combined stream.

[0161] 16. The method of embodiment 15, including hydro-processing the heavies stream.

[0162] 17. The method of any of embodiments 12 to 16, wherein oligomerizing the ethylene stream includes contacting the ethylene stream with a homogenous catalyst including an iron (II) pyridine-bis-imine including a structure of

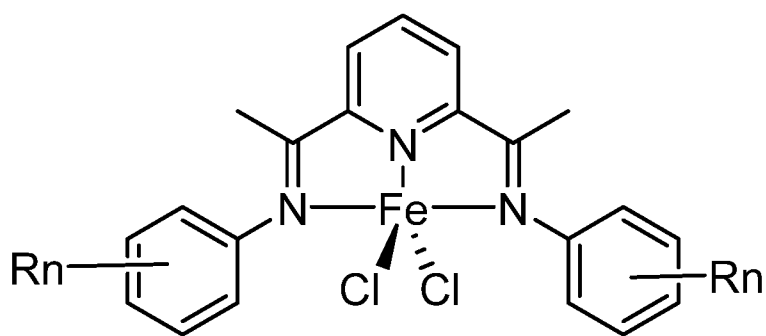

, wherein Rn includes one, two,

or three substituents, and wherein the substituents include CH₃, F, or both.

[0163] 18. The method of any of embodiments 12 to 17, including separating an unreacted ethylene stream from the raw oligomer stream, and oligomerizing the unreacted ethylene stream with the ethylene stream.

[0164] 19. The method of any of embodiments 12 to 18, wherein hydro-processing the heavy olefinic stream includes hydrocracking the heavy olefinic stream.

- 36 -

[0165] 20. The method of any of embodiments 12 to 19, wherein hydro-processing the heavy olefinic stream includes hydroisomerizing the heavy olefinic stream.

[0166] 21. The method of any of embodiments 12 to 20, wherein distilling the hydro-processed stream includes separating a distillate stream, a naphtha stream, or both from the hydro-processed stream.

[0167] 22. The method of any of embodiments 12 to 21, wherein distilling the hydro-processed stream includes forming a heavy neutral oil stock stream, a medium neutral oil stock stream, or a light neutral oil stock stream, or any combinations thereof.

[0168] 23. A system for manufacturing a base oil stock from a hydrocarbon stream, including a steam cracker to form a raw product stream from the hydrocarbon stream, a purification system configured to separate an ethylene stream from the raw product stream, and an oligomerization reactor configured to convert the ethylene stream to a raw oligomer stream by contacting the ethylene stream with a homogenous catalyst. A distillation column is configured to recover a light olefinic stream from the raw oligomer stream, combine the light olefinic stream with the ethylene stream to form a blended stream, and feed the blended stream to the oligomerization reactor. The distillation column is configured to separate an intermediate olefinic stream from the raw oligomer stream and send the intermediate olefinic stream to a dimerization reactor or an alkylation reactor. The distillation column is configured to separate a heavy olefinic stream from the raw oligomer stream. A hydro-processing reactor is configured to demetallate the heavy olefinic stream, to crack the heavy olefinic stream, to form isomers in the heavy olefinic stream, or to hydrogenate olefinic bonds in the heavy olefinic stream, or any combinations thereof. A product distillation column is configured to separate the heavy olefinic stream to form a number of base stock streams.


[0169] 24. The system of embodiment 23, wherein the dimerization reactor is configured to dimerize the intermediate olefinic stream to form a dimerized stream and return the dimerized stream to the distillation column.

[0170] 25. The system of either embodiments 23 or 24, wherein the alkylation reactor is configured to alkylate the intermediate olefinic stream to form an alkylated stream.

[0171] 26. The system of embodiment 25, including an alkylation distillation column configured to separate the alkylated stream into a reacted stream and an unreacted stream, and return the unreacted stream to the alkylation reactor.

- 37 -

[0172] 27. The system of any of embodiments 23 to 26, wherein the homogenous catalyst includes an iron (II) pyridine-bis-imine (Fe-PBI) compound including a structure of

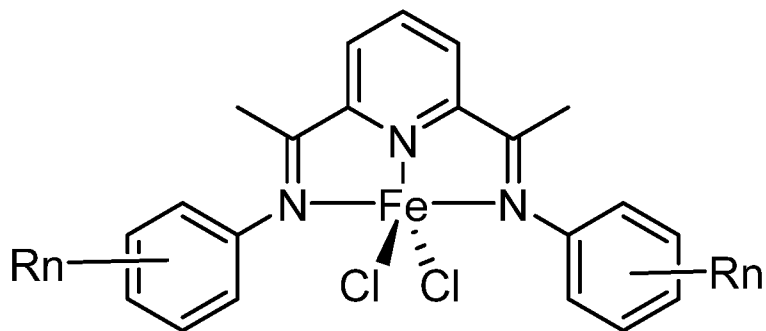

wherein R_n includes one, two, or three substituents, and wherein the substituents include CH₃, F, or both.


[0173] While the present techniques may be susceptible to various modifications and alternative forms, the embodiments discussed above have been shown only by way of example. However, it should again be understood that the techniques is not intended to be limited to the particular embodiments disclosed herein. Indeed, the present techniques include all alternatives, modifications, and equivalents falling within the true spirit and scope of the appended claims.

CLAIMS:

1. A system for manufacturing a base stock from a hydrocarbon stream, including a steam cracker configured to form a raw product stream from the hydrocarbon stream, a purification system configured to separate an ethylene stream from the raw product stream, and an oligomerization reactor configured to oligomerize the ethylene stream to form a raw oligomer stream, a distillation column is configured to separate the raw oligomer stream into a light olefinic stream, an intermediate olefinic stream, and a heavy olefinic stream, wherein the distillation column is configured to blend the light olefinic stream with the ethylene stream provided to the oligomerization reactor, and a hydro-processing reactor configured to hydro-process the heavy olefinic stream to form a hydro-processed stream, and a product distillation column configured to separate the hydro-processed stream to form the base stock.
2. The system of claim 1, including a dimerization reactor configured to dimerize the intermediate olefinic stream and return a dimerized stream to the distillation column.
3. The system of either of claims 1 or 2, including an alkylation reactor configured to alkylate the intermediate olefinic stream and provide an alkylated stream to an alkylation distillation column.
4. The system of claim 3, wherein the alkylation distillation column is configured to separate an unreacted olefin stream from the alkylated stream and return the unreacted olefin stream to the alkylation reactor.
5. The system of any of claims 1 to 4, wherein the purification system includes a fractionator configured to remove tar and steam cracker gas oil from the raw product stream, a caustic tower configured to remove hydrogen sulfide and carbon dioxide from the raw product stream, and a dryer configured to remove water from the raw product stream.
6. The system of any of claims 1 to 5, wherein the oligomerization reactor is configured to use a homogenous catalyst.

- 39 -

7. The system of claim 6, wherein the homogenous catalyst includes an iron (II) pyridine-bis-imine (Fe-PBI) catalyst including a structure of

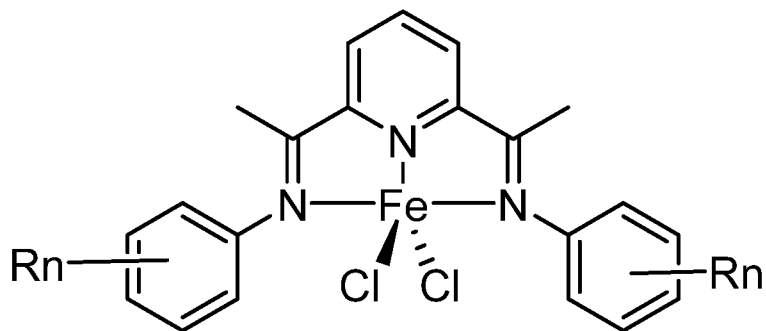

wherein Rn includes one, two, or three substituents, and wherein the substituents include CH₃, F, or both.

8. The system of any of claims 1 to 7, wherein the hydro-processing reactor includes a demetallation unit.

9. The system of any of claims 1 to 8, wherein the hydro-processing reactor includes a hydrocracking unit.

10. The system of any of claims 1 to 9, wherein the hydro-processing reactor includes a hydroisomerization unit.

11. The system of any of claims 1 to 10, wherein the distillation column is configured to separate the hydro-processed stream into a distillate stream including naphtha, a heavy neutral stream, a medium neutral stream, and a light neutral stream.

12. A method for manufacturing a base stock from a hydrocarbon stream, including cracking the hydrocarbon stream to form a raw product stream, separating an ethylene stream from the raw product stream, and oligomerizing the ethylene stream to form a raw oligomer stream, wherein a light olefinic stream is distilled from the raw oligomer stream and oligomerized with the ethylene stream, a heavy olefinic stream is distilled from the raw oligomer stream, and hydro-processed to form a hydro-processed stream, and a hydro-processed stream is distilled to form the base stock.

13. The method of claim 12, including distilling an intermediate olefinic stream from the raw oligomer stream.

14. The method of claim 13, including dimerizing the intermediate olefinic stream to form a dimerized stream, and distilling the dimerized stream with the raw oligomer stream.


15. The method of claim 13, including alkylating the intermediate olefinic stream to form an alkylated stream, distilling the alkylated stream to form a lights stream and a heavies stream,

- 40 -

combining the lights stream with the intermediate olefinic stream to form a combined stream, and alkylating the combined stream.

16. The method of claim 15, including hydro-processing the heavies stream.

17. The method of any of claims 12 to 16, wherein oligomerizing the ethylene stream includes contacting the ethylene stream with a homogenous catalyst including an iron (II) pyridine-bis-imine including a structure of

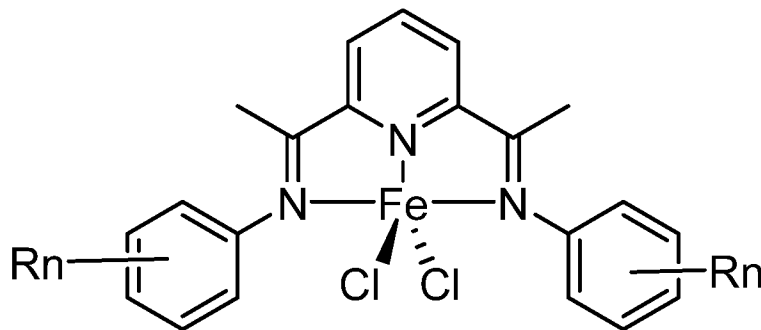

, wherein Rn includes one, two, or three substituents, and wherein the substituents include CH₃, F, or both.

18. The method of any of claims 12 to 17, including separating an unreacted ethylene stream from the raw oligomer stream, and oligomerizing the unreacted ethylene stream with the ethylene stream.

19. The method of any of claims 12 to 18, wherein hydro-processing the heavy olefinic stream includes hydrocracking the heavy olefinic stream.

20. The method of any of claims 12 to 19, wherein hydro-processing the heavy olefinic stream includes hydroisomerizing the heavy olefinic stream.

21. The method of any of claims 12 to 20, wherein distilling the hydro-processed stream includes separating a distillate stream, a naphtha stream, or both from the hydro-processed stream.

22. The method of any of claims 12 to 21, wherein distilling the hydro-processed stream includes forming a heavy neutral oil stock stream, a medium neutral oil stock stream, or a light neutral oil stock stream, or any combinations thereof.

23. A system for manufacturing a base oil stock from a hydrocarbon stream, including a steam cracker to form a raw product stream from the hydrocarbon stream, a purification system configured to separate an ethylene stream from the raw product stream, and an oligomerization reactor configured to convert the ethylene stream to a raw oligomer stream by contacting the ethylene stream with a homogenous catalyst, a distillation column is configured to recover a light olefinic stream from the raw oligomer stream, combine the light olefinic stream with the ethylene

- 41 -


stream to form a blended stream, and feed the blended stream to the oligomerization reactor. The distillation column is configured to separate an intermediate olefinic stream from the raw oligomer stream and send the intermediate olefinic stream to a dimerization reactor or an alkylation reactor, a distillation column configured to separate a heavy olefinic stream from the raw oligomer stream, a hydro-processing reactor configured to demetallate the heavy olefinic stream, to crack the heavy olefinic stream, to form isomers in the heavy olefinic stream, or to hydrogenate olefinic bonds in the heavy olefinic stream, or any combinations thereof, and a product distillation column configured to separate the heavy olefinic stream to form a number of base stock streams.

24. The system of claim 23, wherein the dimerization reactor is configured to dimerize the intermediate olefinic stream to form a dimerized stream and return the dimerized stream to the distillation column.


25. The system of either claims 23 or 24, wherein the alkylation reactor is configured to alkylate the intermediate olefinic stream to form an alkylated stream.

26. The system of claim 25, including an alkylation distillation column configured to separate the alkylated stream into a reacted stream and an unreacted stream, and return the unreacted stream to the alkylation reactor.

27. The system of any of claims 23 to 26, wherein the homogenous catalyst includes an iron (II) pyridine-bis-imine (Fe-PBI) compound including a structure of

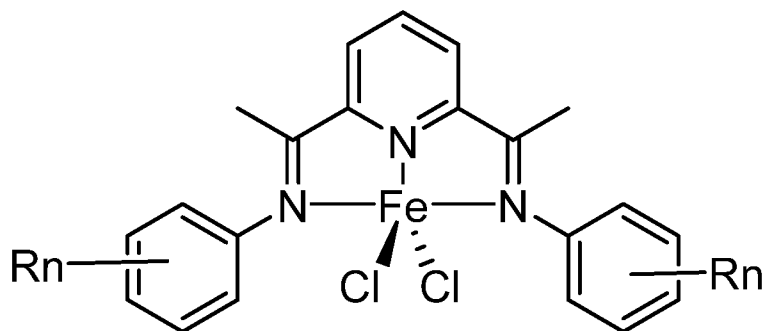

wherein Rn includes one, two, or three substituents, and wherein the substituents include CH₃, F, or both.

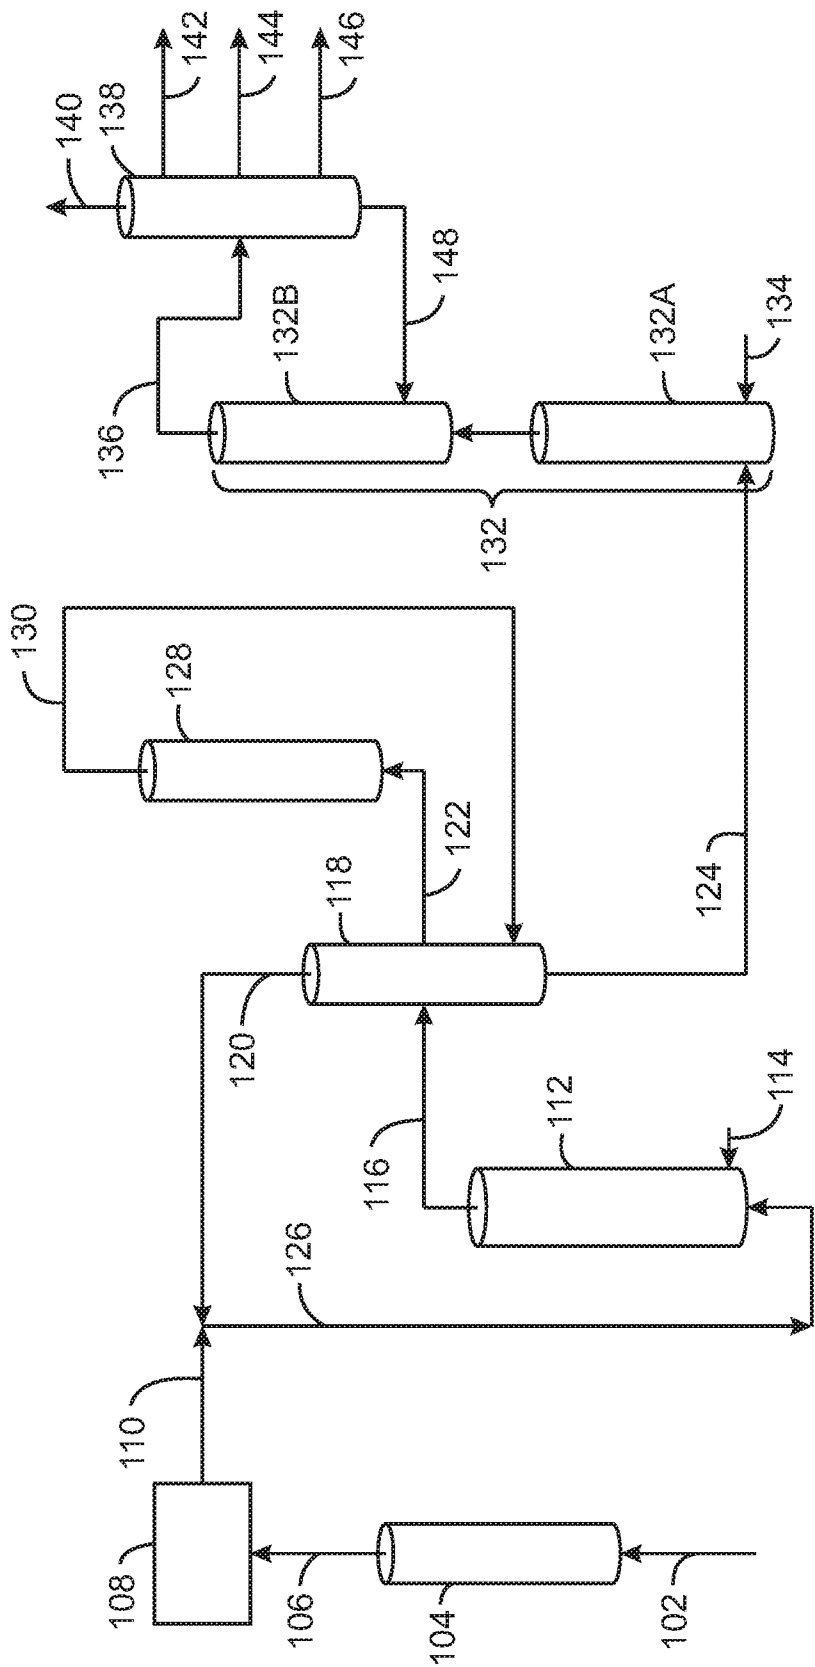

100
FIG. 1(A)


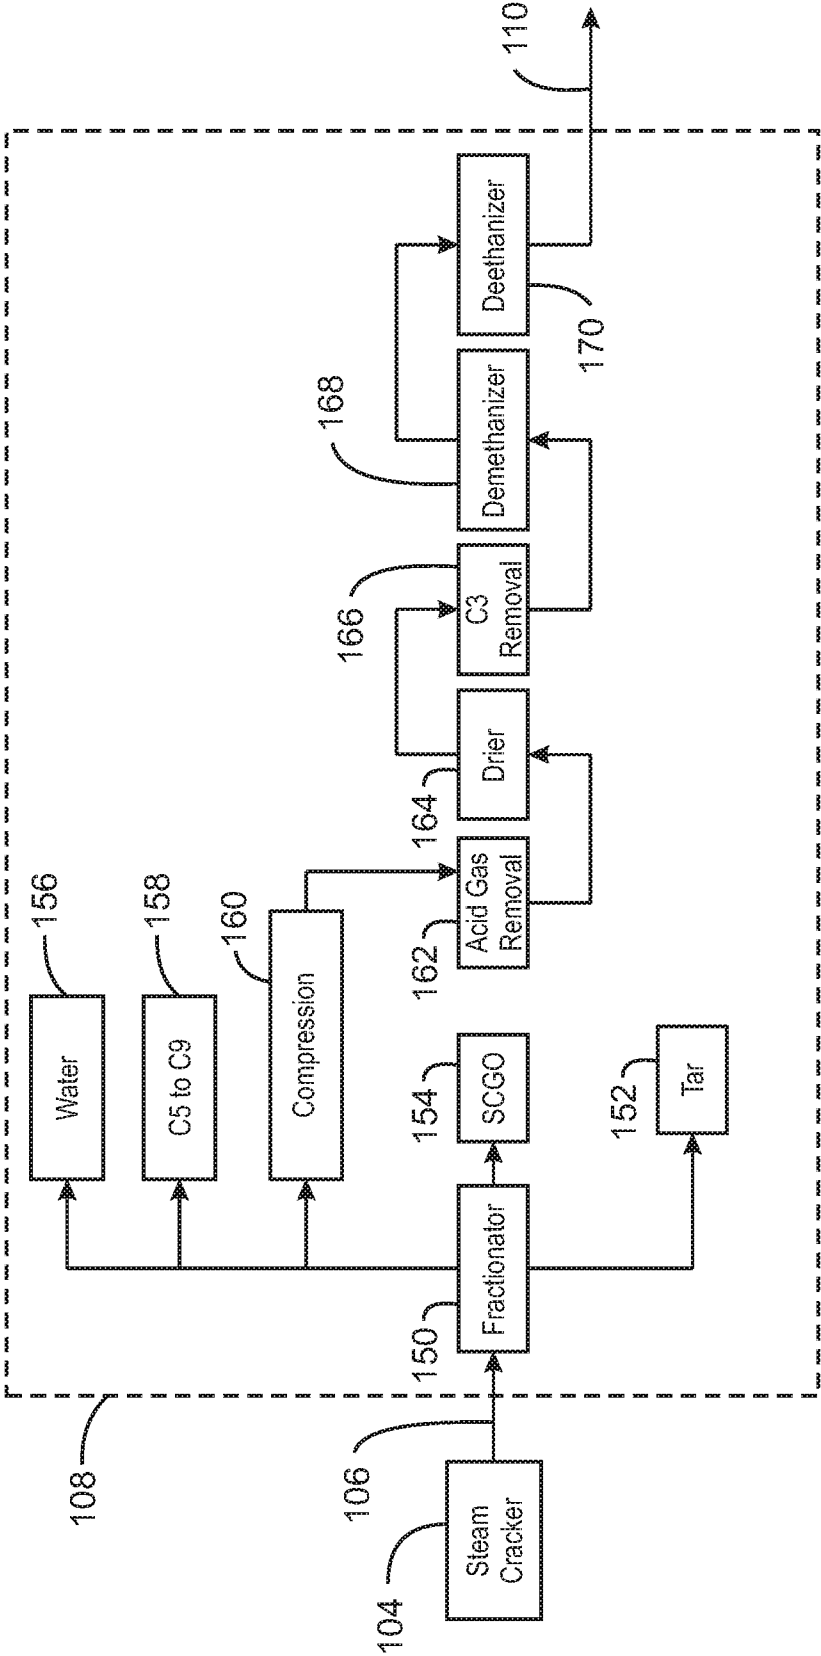



FIG. 1(B)

3/10

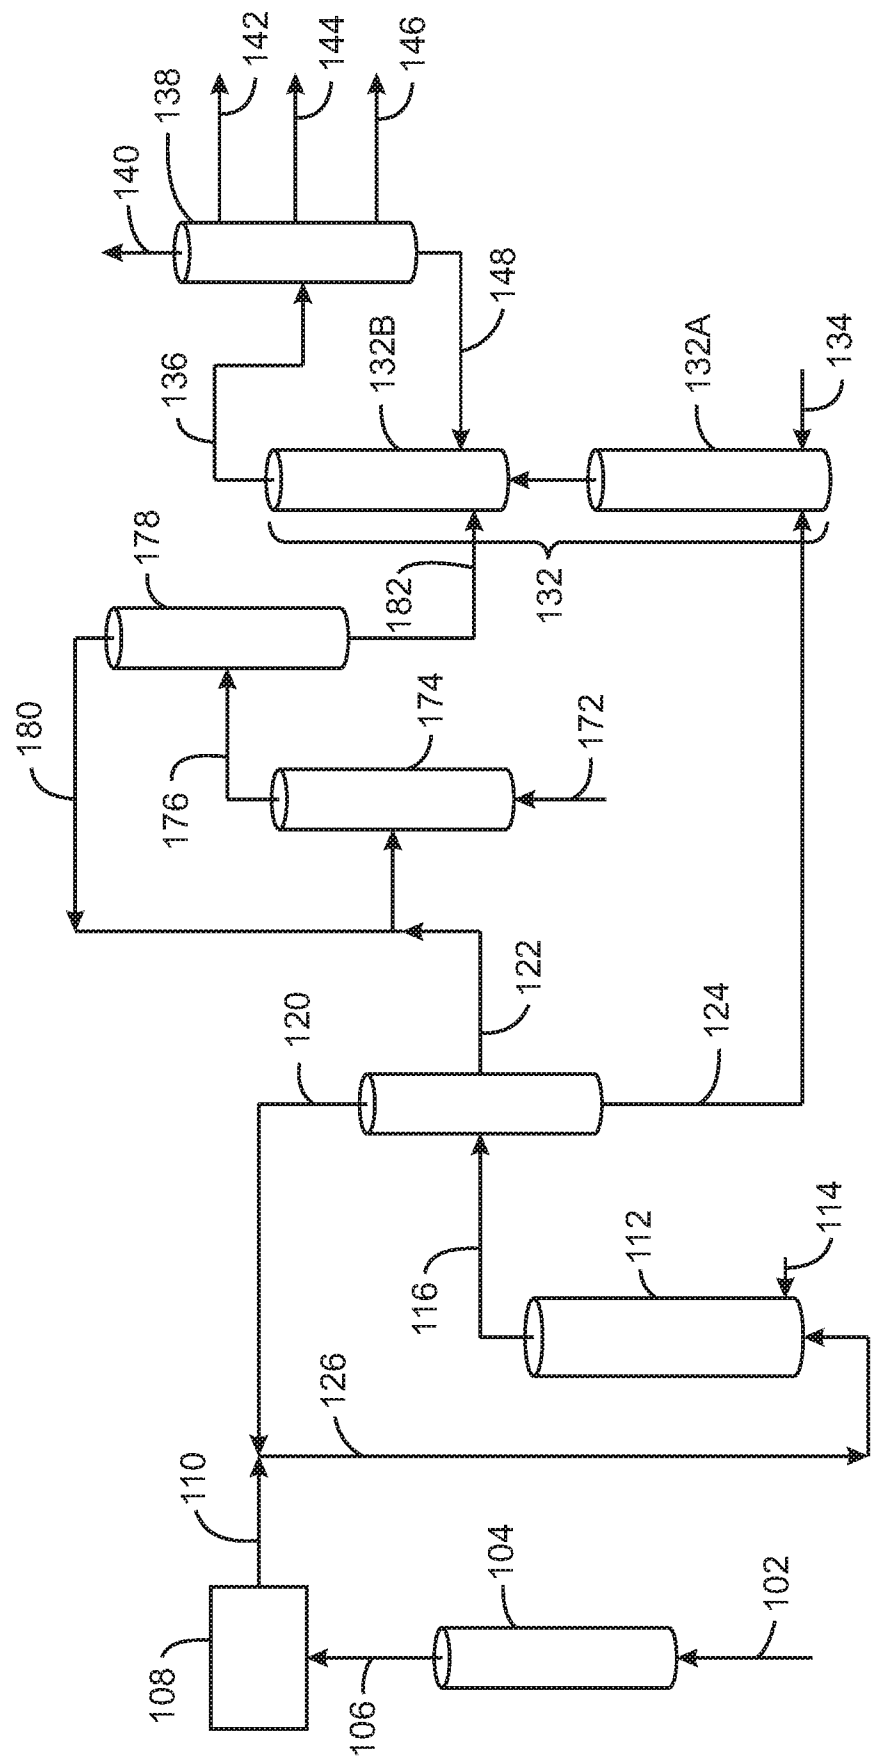


200
FIG. 2

4/10

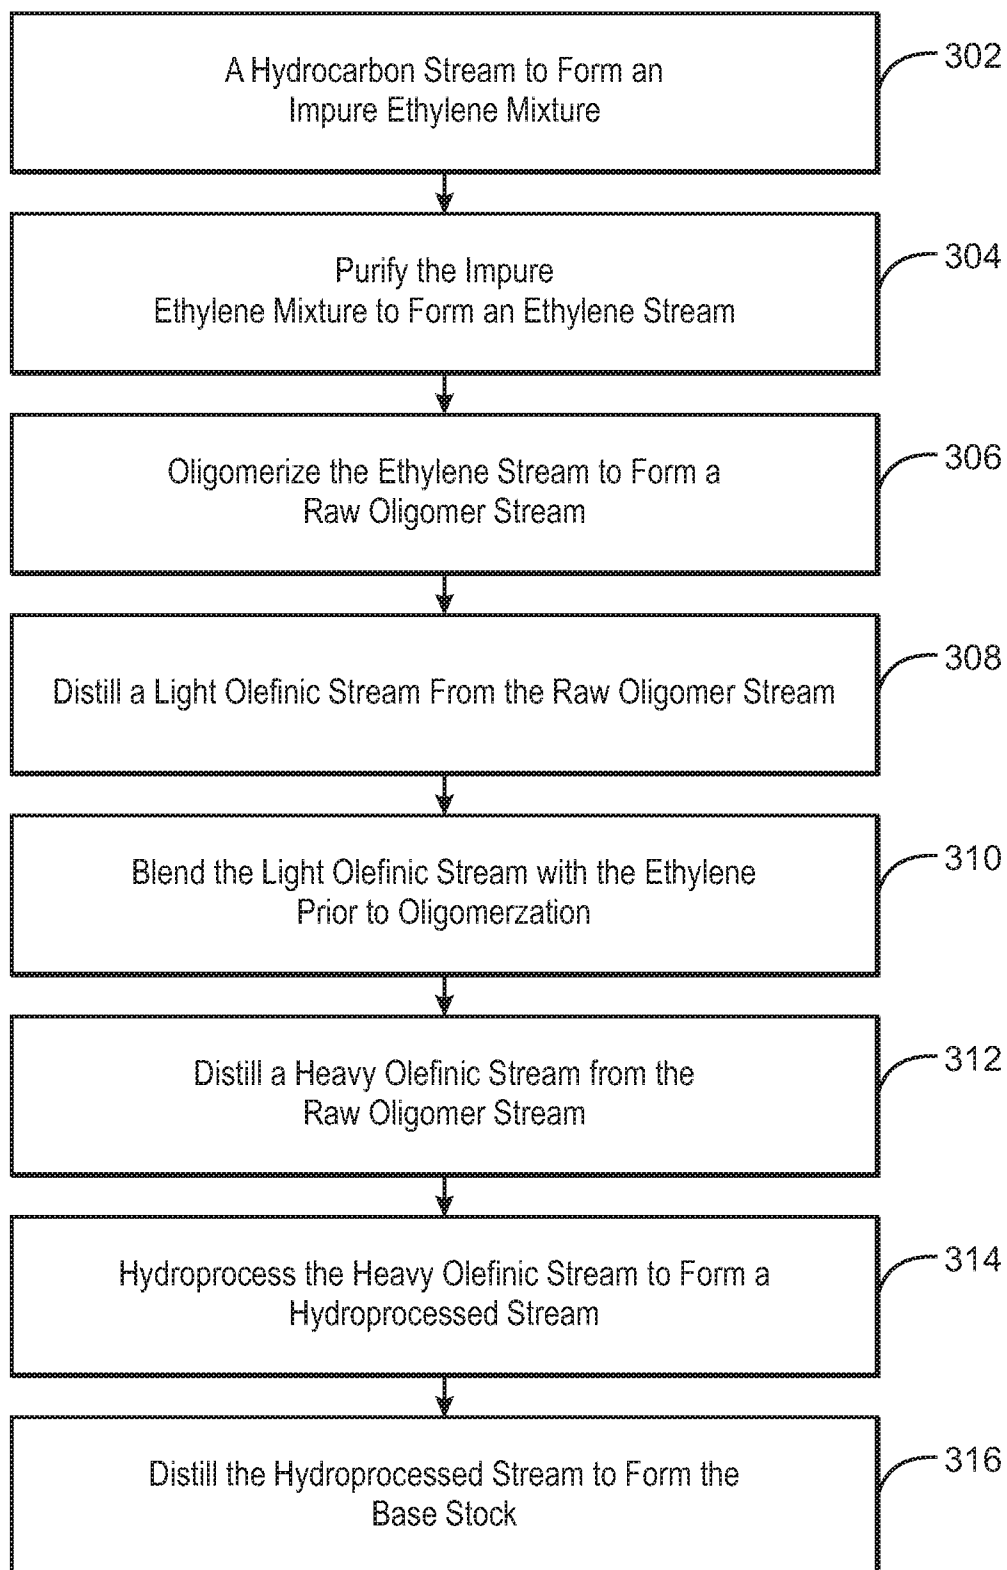


300
FIG. 3

5/10

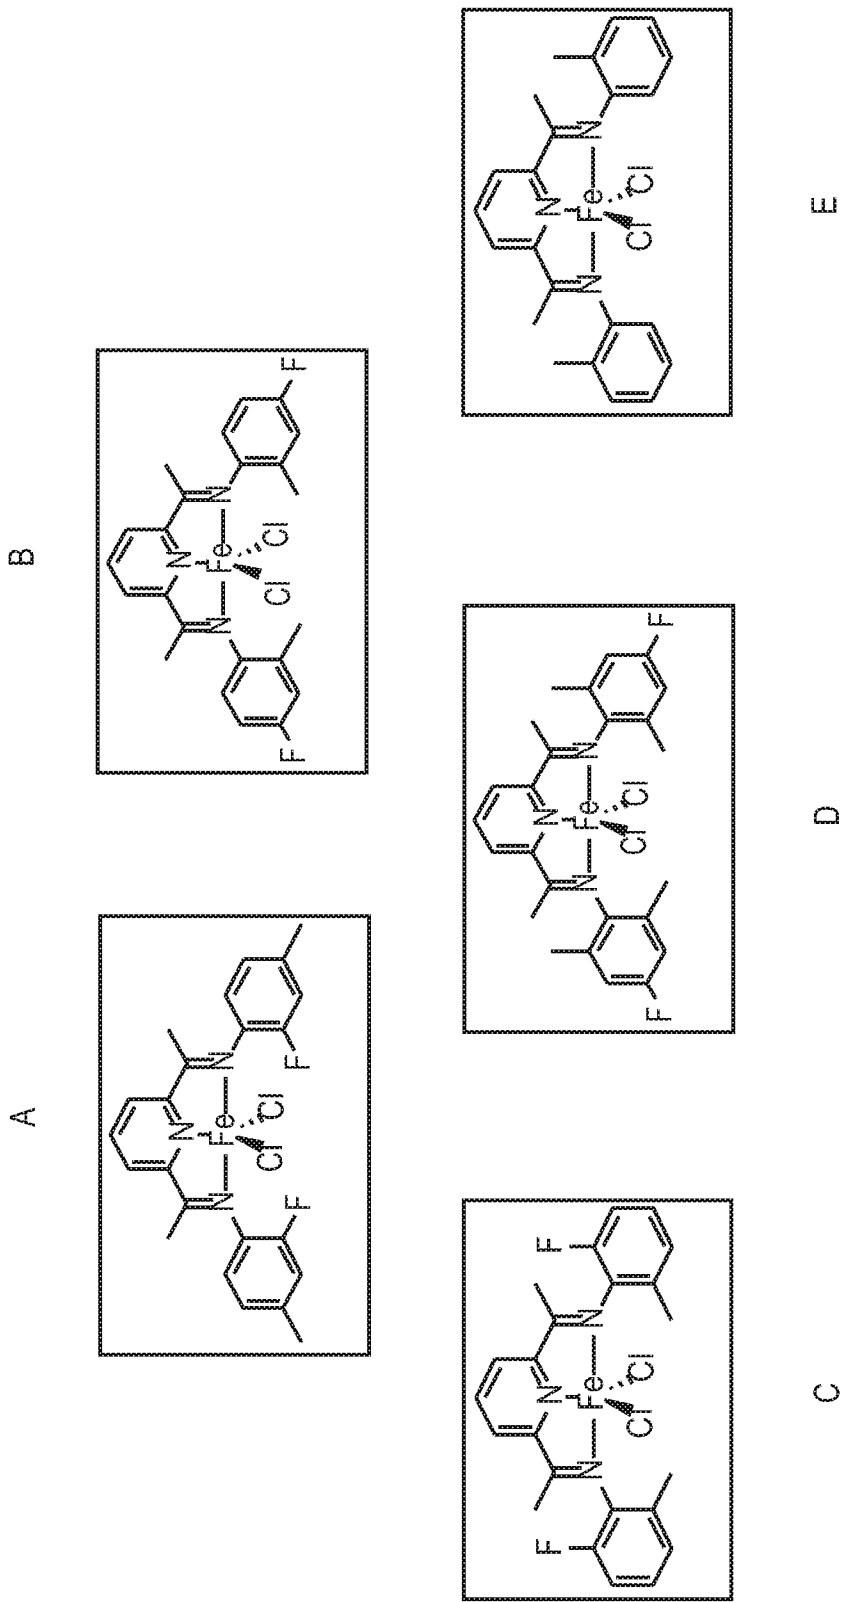


⁴⁰⁰
FIG. 4


6/10

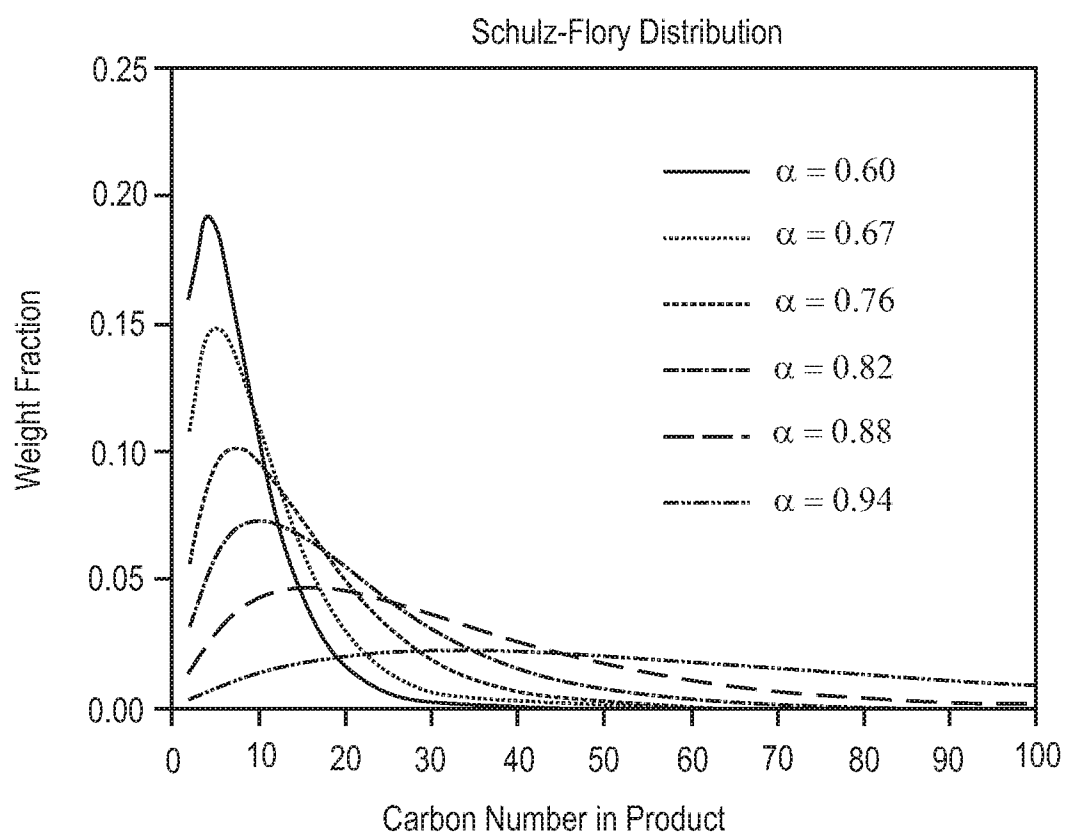


7/10

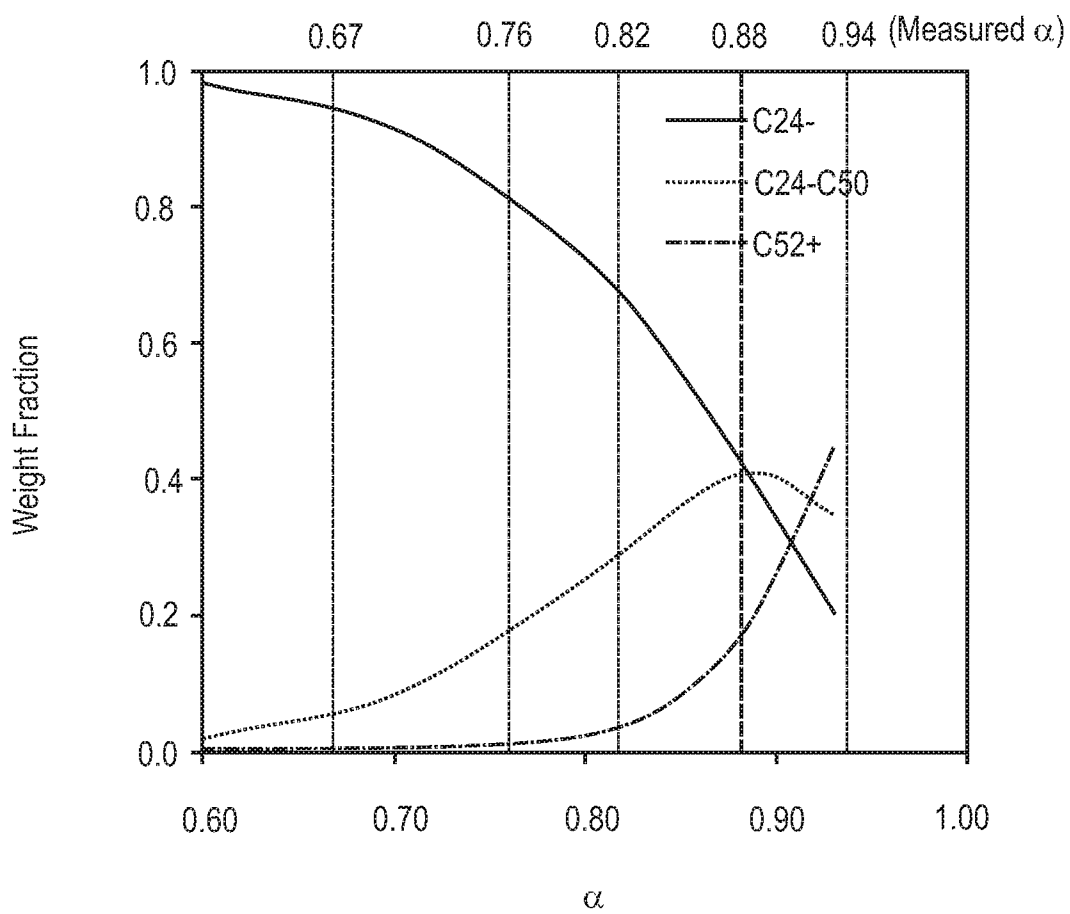


600
FIG. 6

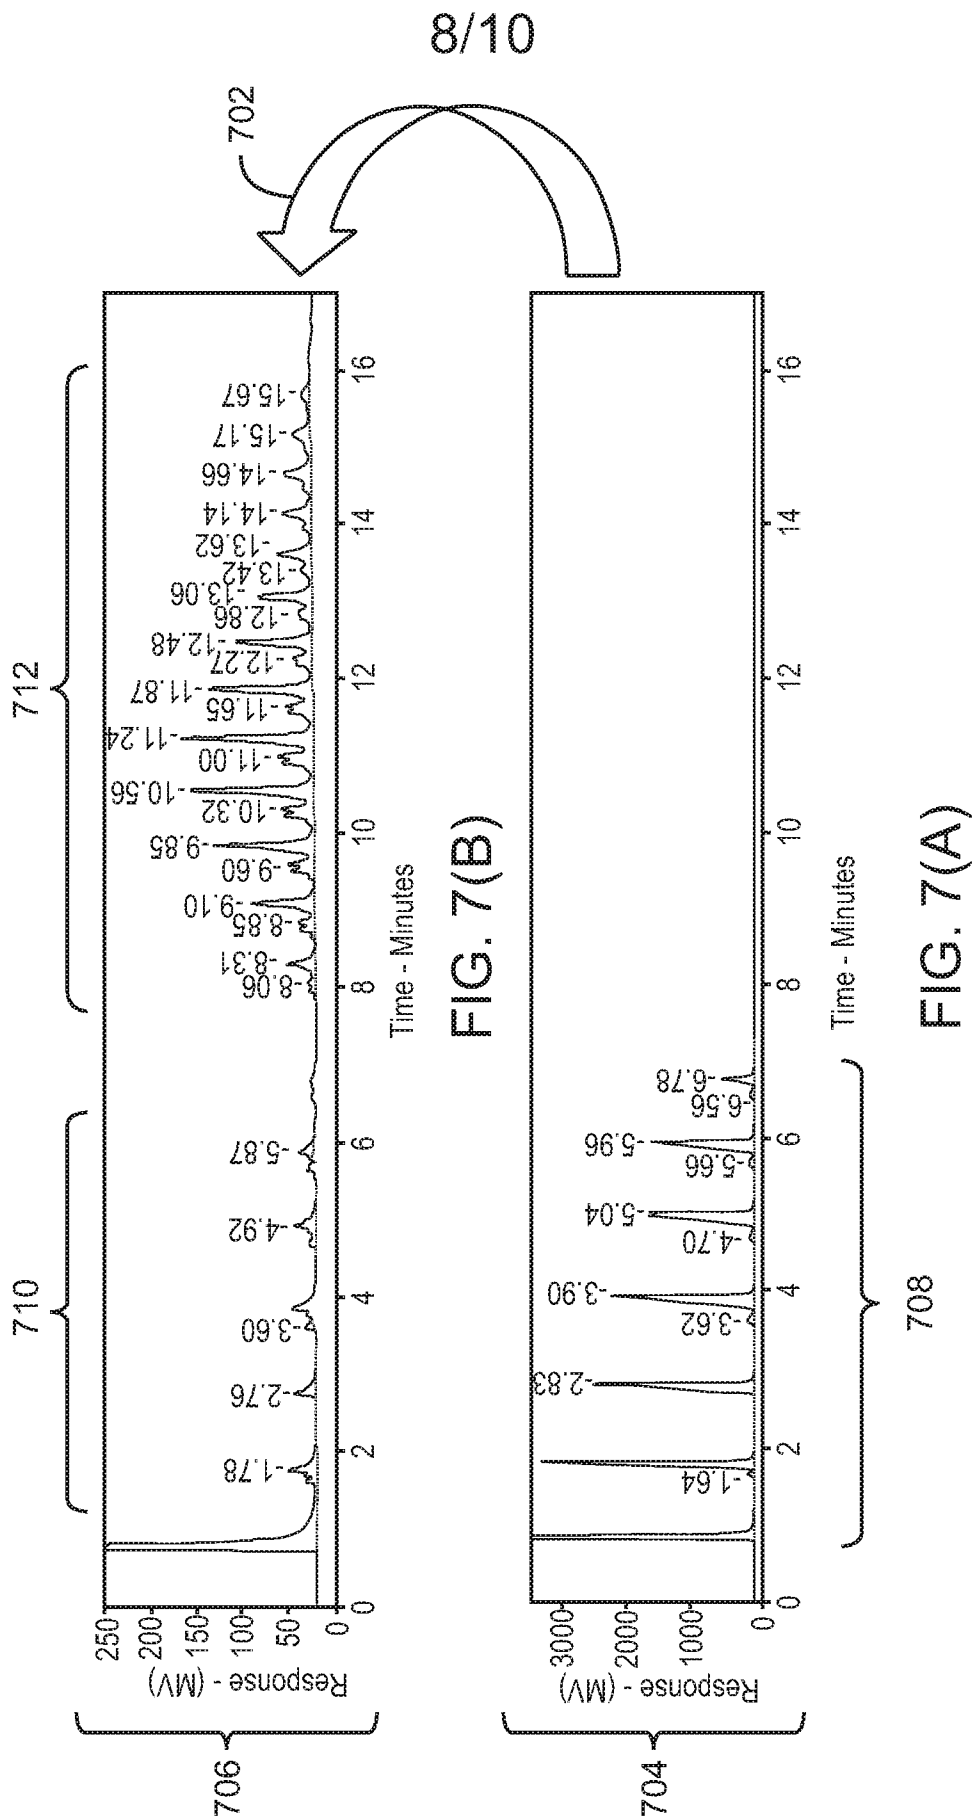

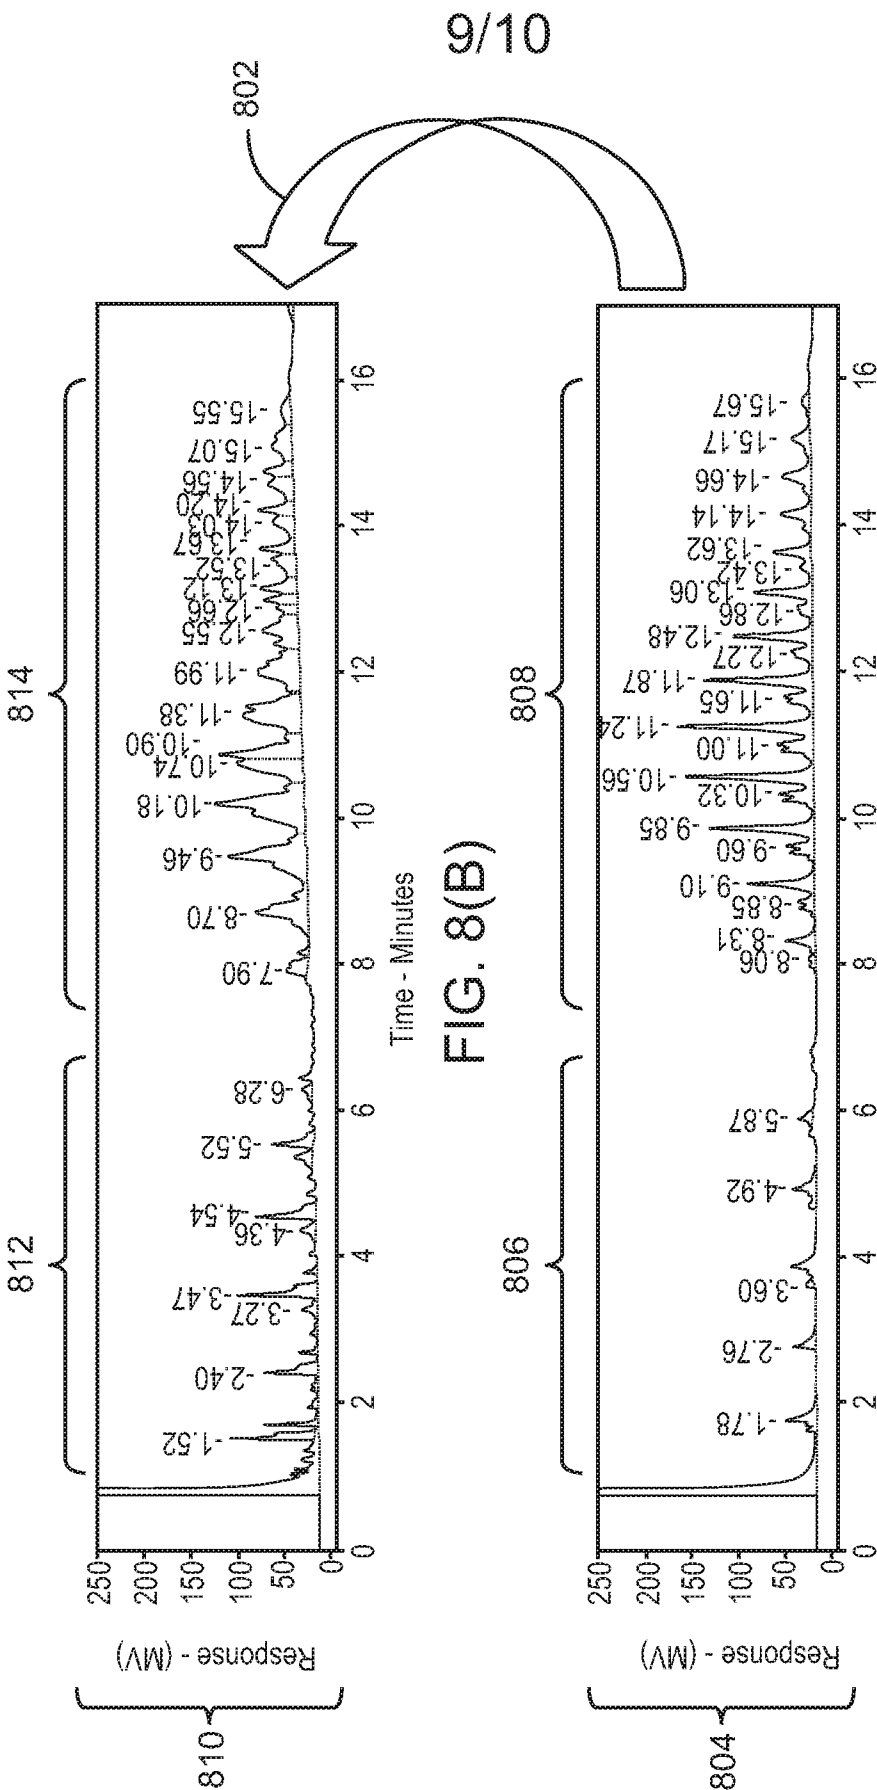

10/10

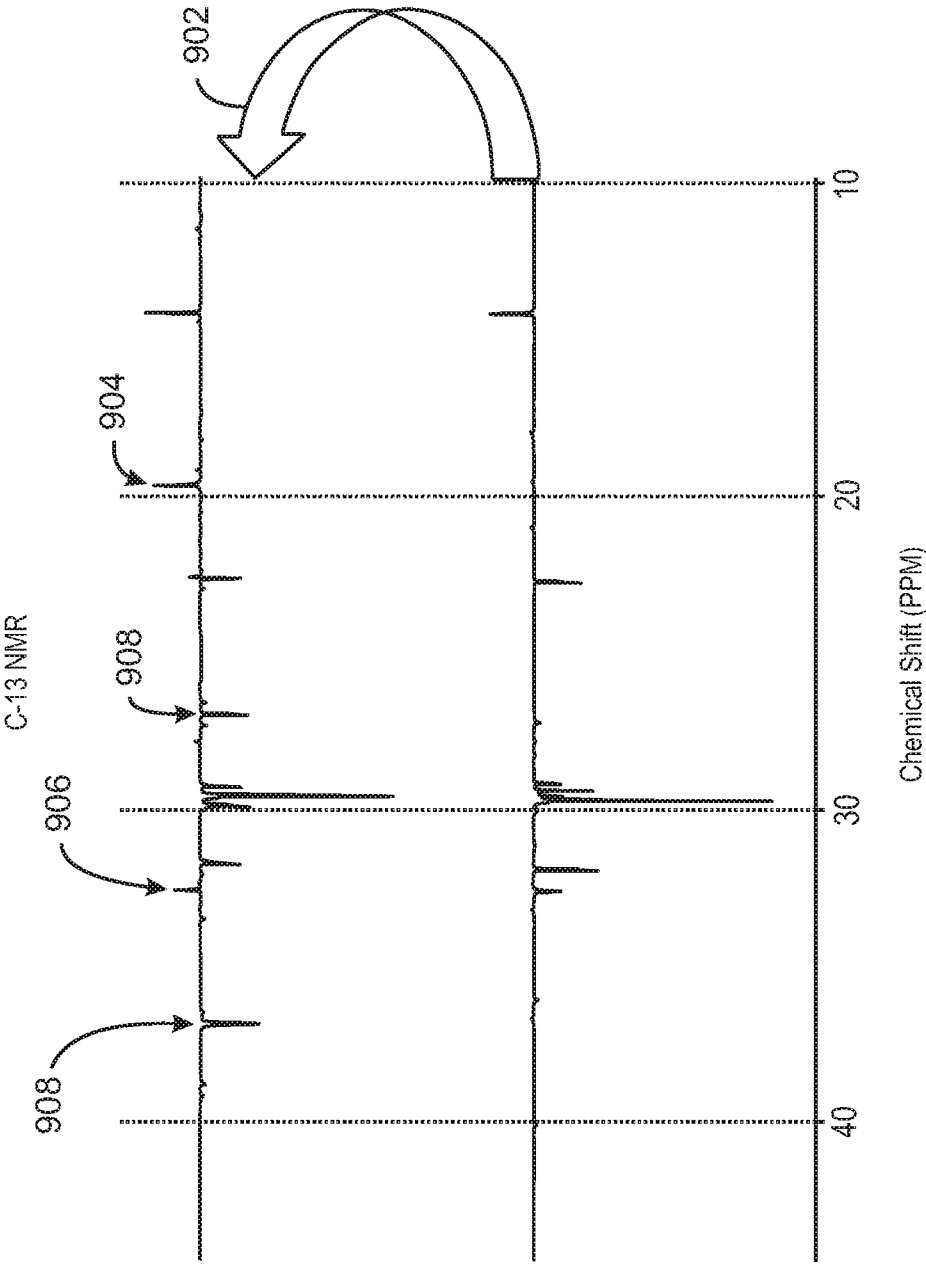

900
FIG. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/046696

A. CLASSIFICATION OF SUBJECT MATTER INV. C10G50/02 B01J31/18 C10G69/06 C10G69/12 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C10G C07C B01J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 970 043 A1 (EXXONMOBIL RES & ENG CO [US]) 20 January 2016 (2016-01-20)	1,8-13, 18-22
Y	paragraphs [0018], [0019], [0036] - [0057], [0079] - [0095] figure 1	2-7, 14-17, 23-27
Y	----- SMALL ET AL: "Iron-Based Catalysts with Exceptionally High Activities and Selectivities for Oligomerization of Ethylene to Linear.alpha.-Olefins", JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, AMERICAN CHEMICAL SOCIETY, US, vol. 120, no. 28, 22 July 1998 (1998-07-22), XP002086898, ISSN: 0002-7863, DOI: 10.1021/JA981317Q Scheme 1 table 1 ----- -/--	6,7,17, 23,27
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 18 November 2019		Date of mailing of the international search report 22/11/2019
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Baumlin, Sébastien

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2019/046696

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2011/138520 A2 (IFP ENERGIES NOUVELLES [FR]; GUILLON EMMANUELLE [FR] ET AL.) 10 November 2011 (2011-11-10) page 19, line 10 - page 20, line 19 figure 1 page 9, lines 22-32 -----	2,5,14, 23,24
Y	US 2017/369804 A1 (LILGA MICHAEL A [US] ET AL) 28 December 2017 (2017-12-28) paragraphs [0024], [0075] - [0078] -----	3,4,15, 16,23, 25,26
Y	US 2016/168491 A1 (YAO JIANHUA [US] ET AL) 16 June 2016 (2016-06-16) paragraph [0021] -----	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2019/046696

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2970043	A1	20-01-2016	CA 2897970 A1 25-09-2014
			EP 2970043 A1 20-01-2016
			SG 10201707447Q A 30-10-2017
			SG 11201505682X A 28-08-2015
			US 2014275669 A1 18-09-2014
			WO 2014149731 A1 25-09-2014
WO 2011138520	A2	10-11-2011	FR 2959750 A1 11-11-2011
			WO 2011138520 A2 10-11-2011
US 2017369804	A1	28-12-2017	AU 2015340297 A1 27-04-2017
			CA 2963869 A1 06-05-2016
			CN 107075385 A 18-08-2017
			EP 3212736 A1 06-09-2017
			US 2016194572 A1 07-07-2016
			US 2017369804 A1 28-12-2017
			WO 2016067032 A1 06-05-2016
US 2016168491	A1	16-06-2016	NONE