

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 200032089 B2**
(10) Patent No. **769902**

(54) Title
Antitachycardial pacing

(51) 6 International Patent Classification(s)
A61N 001/37 A61N 001/39

(21) Application No: 200032089 (22) Application Date: 2000.01.14

(87) WIPO No: W000/41766

(30) Priority Data

(31) Number	(32) Date	(33) Country
09/231570	1999.01.14	US

(43) Publication Date : 2000.08.01
(43) Publication Journal Date : 2000.10.05
(44) Accepted Journal Date : 2004.02.05

(71) Applicant(s)
The Mower Family CHF Treatment Irrevocable Trust

(72) Inventor(s)
M. D. Morton M. Mower

(74) Agent/Attorney
Davies Collison Cave,GPO Box 3876,SYDNEY NSW 2001

(56) Related Art
US 5718726
US 5105810
EP 0870516

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : A61N 1/37, 1/39		(11) International Publication Number: WO 00/41766
A1		(43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/00928		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 14 January 2000 (14.01.00)		
(30) Priority Data: 09/231,570 14 January 1999 (14.01.99) US		
(71) Applicant (for all designated States except US): THE MOWER FAMILY CHF TREATMENT IRREVOCABLE TRUST [US/US]; Suite 501, Two East Fayette Street, Baltimore, MD 21202 (US).		
(72) Inventor; and (75) Inventor/Applicant (for US only): MOWER, M., D., Morton, M. [US/US]; 3908 North Charles Street #1001, Baltimore, MD 21218 (US).		
(74) Agents: ROBERTS, Jon, L. et al.; Roberts Abokhair & Mardula, LLC, Suite 1000, 11800 Sunrise Valley Drive, Reston, VA 20191-5302 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: ANTITACHYCARDIAL PACING

(57) Abstract

Protocols for antitachycardial pacing including biphasic stimulation administered at, or just above, the diastolic depolarization threshold potential; biphasic or conventional stimulation initiated at, or just above, the diastolic depolarization threshold potential, reduced, upon capture, to below threshold; and biphasic or conventional stimulation administered at a level set just below the diastolic depolarization threshold potential. These protocols result in reliable cardiac capture with a lower stimulation level, thereby causing less damage to the heart, extending battery life, causing less pain to the patient and having greater therapeutic effectiveness. In those protocols using biphasic cardiac pacing, a first and second stimulation phase is administered. The first stimulation phase has a predefined polarity, amplitude and duration. The second stimulation phase also has a predefined polarity, amplitude and duration. The two phases are applied sequentially. Contrary to current thought, anodal stimulation is first applied and followed by cathodal stimulation. In this fashion, pulse conduction through the cardiac muscle is improved together with the increase in contractility.

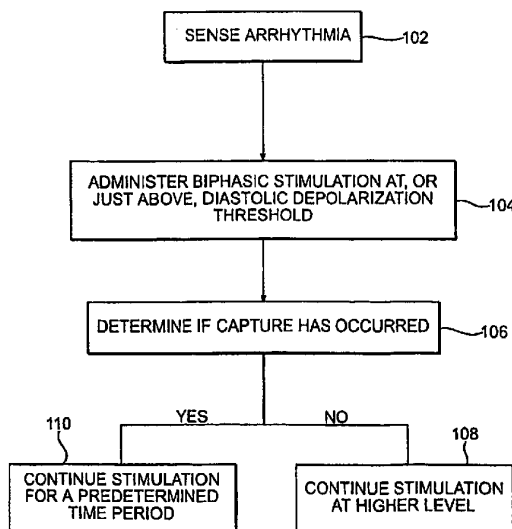

1 **Title:** **ANTITACHYCARDIAL PACING**

2 **Inventor:** Morton M. Mower, M.D.

3 **Field of the Invention**

4 The present invention relates generally to implantable cardioverter/defibrillator with
5 antitachycardial pacing capabilities and/or a method of such pacing.

6 **Background of the Invention**

7 The typical implantable cardioverter/defibrillator (ICD) delivers an initial electrical
8 countershock within ten to twenty seconds of arrhythmia onset, thereby saving countless
9 lives. Improved devices have antitachycardia pacing capabilities in addition to
10 cardioverting/defibrillating functions. These ICDs are capable of different initial responses to
11 one or more tachycardia as well as a programmable sequence of responses to a particular
12 arrhythmia.

13 The output energy level is generally set by a physician in accordance with a patient's
14 capture threshold, determined at the time of heart implantation. This threshold represents the
15 minimum pacing energy required to reliably stimulate a patient's heart. However, due to
16 trauma associated with the stimulation, scar tissue grows at the interface between the
17 implanted cardiac pacer leads and the myocardium. This scar tissue boosts the patient's
18 capture threshold. To insure reliable cardiac capture, the output energy level is thus generally
19 set at a level which is a minimum of two times greater than the initially measured capture
20 threshold. A drawback to such an approach is that the higher stimulation level causes more
21 trauma to the cardiac tissue than would a lower level of stimulation, and hence promotes the
22 formation of scar tissue, thereby boosting the capture threshold.

23 The higher stimulation level also shortens battery life. This is not desirable, as a

- 2 -

shorter battery life necessitates more frequent surgery to implant fresh batteries.

Another drawback is the potential for patient discomfort associated with this higher stimulation level. This is because the higher stimulation level can stimulate the phrenic or diaphragmatic plexus or cause intercostal muscle pacing.

5 Lastly, the higher stimulation is less effective, due to entry block.

A need therefore exists for an ICD that can achieve reliable cardiac capture with a lower stimulation level, thereby causing less damage to the heart, extending battery life, causing less pain to the patient and having greater therapeutic effectiveness than current ICDs. A need also exists for an ICD that can better entrain the heart and can entrain

10 portions of the heart from a greater distance.

Summary of the Invention

The present invention seeks to provide an ICD with antitachycardial pacing capabilities, wherein the stimulation is administered with a voltage either at, just above, or
15 just below the diastolic depolarization threshold potential.

The present invention seeks to sense whether cardiac capture has occurred, and if not, to administer additional stimulation.

The present invention seeks to provide the additional stimulation at a slightly higher voltage level than that level of stimulation which resulted in no capture.

20 The present invention seeks to repeat the stimulation-sensing cycle until cardiac capture has occurred.

The present invention seeks to provide stimulation using a biphasic waveform.

The present invention accomplishes the above objectives by providing an implantable cardioverter-defibrillator with a unique constellation of features and
25 capabilities. Protocols disclosed include:

- 1/ biphasic stimulation administered at, or just above, the diastolic depolarization threshold potential;
- 2/ biphasic or conventional stimulation initiated at, or just above, the diastolic depolarization threshold potential, reduced, upon capture, to below threshold; and
- 30 3/ biphasic or conventional stimulation administered at a level set just below the diastolic depolarization threshold potential.

F:\W\OCC\G\U\p\21762620.doc.09/12/03

- 3 -

In one broad form the present invention provides a method of operating an implantable cardiac stimulator to perform cardioverting, the cardiac stimulator having output means for delivering electrical stimulation of a predetermined polarity, amplitude, shape and duration, the method comprising:

- 5 sensing the onset of tachycardia;
 applying pulses of biphasic pacing stimulation at a first intensity level selected from the group consisting of at the diastolic depolarization threshold, below the diastolic depolarization threshold or above the diastolic depolarization threshold, wherein each pulse of biphasic pacing stimulation comprises:
 - 10 a first stimulation phase with a first phase polarity, a first phase amplitude, a first phase shape and a first phase duration; and
 a second stimulation phase with a second phase polarity, a second phase amplitude, a second phase shape and a second phase duration; and
 determining whether pacing capture has occurred;
 - 15 wherein the first phase amplitude is at a maximum subthreshold amplitude.
- In another broad form the present invention provides a cardiac stimulator to perform cardioverting, the cardiac stimulator comprising:
 - sensing means for sensing the onset of tachycardia;
 - output means for delivering, in response to the sensing means, electrical stimulation
 - 20 of a predetermined polarity, amplitude, shape and duration to cause application of pulses of biphasic pacing stimulation at a first intensity level selected from the group consisting of: at the diastolic depolarization threshold, below the diastolic depolarization threshold, and above the diastolic depolarization threshold; and
 means for determining whether capture has occurred;
 - 25 wherein each pulse of biphasic pacing stimulation comprises:
 - a first stimulation phase with a first phase polarity, a first phase amplitude, a first phase shape and a first phase duration; and
 a second stimulation phase with a second phase polarity, a second phase amplitude, a second phase shape and a second phase duration; and
 - 30

F:\WP00CS\CLP\paper\7\2\620.doc 9/11/2003

- 3A -

wherein the first phase amplitude is at a maximum subthreshold amplitude.

As mentioned, the antitachycardial pacing protocols of the present invention can be used in conjunction with biphasic pacing. The method and apparatus relating to biphasic pacing comprises a first and second stimulation phase, with each stimulation phase having a polarity, amplitude, shape, and duration. In a preferred embodiment, the first and second phases have differing polarities. In one alternative embodiment, the two phases are of differing amplitude. In a second alternative embodiment, the two phases are of differing duration. In a third alternative embodiment, the first phase is in a chopped wave form. In a fourth alternative embodiment, the amplitude of the first phase is ramped. In a fifth alternative embodiment the first phase is administered over 200 milliseconds after completion of a cardiac beating/pumping cycle. In a preferred alternative embodiment, the first phase of stimulation is an anodal pulse at maximum subthreshold amplitude for a long duration, and the second phase of stimulation is a cathodal pulse of short duration and high amplitude. It is noted that the aforementioned alternative embodiments can be combined in differing fashions. It is also noted that these alternative embodiments are intended to be presented by way of example only, and are not limiting.

Enhanced myocardial function is obtained through the biphasic pacing of the present invention. The combination of cathodal with anodal pulses of either a stimulating or

1 conditioning nature, preserves the improved conduction and contractility of anodal pacing
2 while eliminating the drawback of increased stimulation threshold. The result is a
3 depolarization wave of increased propagation speed. This increased propagation speed
4 results in superior cardiac contraction leading to an improvement in blood flow and in
5 increased access to reentrant circuits. Improved stimulation at a lower voltage level also
6 results in reduction in scar tissue buildup thereby reducing the tendency of the capture
7 threshold to rise; reduction in power consumption leading to increased life for pacemaker
8 batteries; and decreased pain to the patient.

9 Brief Description of the Drawings

10 Figs. 1A-1C illustrate examples of methodologies for treating arrhythmias.

11 Fig. 2 illustrates a schematic representation of leading anodal biphasic stimulation.

12 Fig. 3 illustrates a schematic representation of leading cathodal biphasic stimulation.

13 Fig. 4 illustrates a schematic representation of leading anodal stimulation of low level
14 and long duration, followed by conventional cathodal stimulation.

15 Fig. 5 illustrates a schematic representation of leading anodal stimulation of ramped
16 low level and long duration, followed by conventional cathodal stimulation.

17 Fig. 6 illustrates a schematic representation of leading anodal stimulation of low level
18 and short duration, administered in series followed by conventional cathodal stimulation.

19 Fig. 7 illustrates an implantable cardioverter/defibrillator useable for implementing
20 embodiments of the present invention.

21 Description of the Preferred Embodiments

22 The present invention relates to the use of antitachycardial pacing to break up
23 arrhythmia in the atrium. Figs. 1A through 1C illustrate examples of methodologies for
24 treating arrhythmias.

1 Fig. 1A illustrates a first methodology. Here, a sensor senses the onset of arrhythmia

2 102. In a preferred embodiment, this sensor comprises an antitachycardial pacing algorithm.
3 Biphasic stimulation is then administered 104. In varying embodiments, this stimulation is
4 either at, or just above the diastolic depolarization threshold. The ICD determines whether
5 capture has occurred 106. If capture has not occurred, then stimulation continues at a slightly
6 higher level 108. This stimulation - capture check - boost stimulation cycle continues until
7 capture occurs. If capture has occurred, then stimulation is continued for a predetermined
8 period of time 110. In a preferred embodiment, stimulation is administered as long as the
9 arrhythmia persists.

10 In a preferred embodiment, stimulation pulses are administered at 80 to 100 percent of
11 the intrinsic rate with an approximately one to two second pause between each set of
12 stimulation pulses. Then either the number of pulses increases, or the timing between pulses
13 is adjusted. For example, in a preferred embodiment, the first pulse sequence can be at 80
14 percent of the intrinsic heart rate, the second pulse sequence at 82 percent, the third pulse
15 sequence at 84 percent, and so on. In a preferred embodiment a plurality of feedback loops
16 provide data such that the voltage can be adjusted to constantly skirt the capture threshold.
17 Stimulation is continued until the rhythm reverts.

18 Fig. 1B illustrates a second methodology. Here, a sensor senses the onset of
19 arrhythmia 112. In varying embodiments of the second method, biphasic stimulation is then
20 administered 114. This stimulation level is set at or just above the diastolic depolarization
21 threshold potential. The ICD determines whether capture has occurred 116. If capture has
22 not occurred, then stimulation continues at a slightly higher level 118. This stimulation -
23 capture check - boost stimulation cycle continues until capture occurs. If capture has
24 occurred, then stimulation is gradually and continuously reduced to

1 below threshold, and continued 120. Then, if capture is lost, the stimulation is raised to a
2 slightly higher level and is again gradually and continuously reduced. This entire sequence is
3 repeated, such that the stimulation level hovers as close as possible to the lowest stimulation
4 level which provides capture. Stimulation continues until the rhythm reverts, for example,
5 when the antitachycardial pacing algorithm determines that pacing is no longer necessary.

6 **Fig. 1C** illustrates a third methodology. Here, a sensor senses the onset of arrhythmia
7 **122**. In varying embodiments of the third method, either biphasic or conventional stimulation
8 is then administered **124**. This stimulation level is set just below the diastolic depolarization
9 threshold potential. The ICD determines whether capture has occurred **126**. If capture has
10 not occurred, then stimulation continues at a slightly higher level **128**. This stimulation -
11 capture check - boost stimulation cycle continues until capture occurs. If capture has
12 occurred, then stimulation is continued at below threshold level **130**. If capture is lost then
13 the stimulation is raised to a slightly higher level and is gradually and continuously reduced.
14 This entire sequence is repeated, such that the stimulation level hovers as close as possible to
15 the lowest stimulation level which provides capture. Stimulation continues until the rhythm
16 reverts, for example, when the antitachycardial pacing algorithm determines that pacing is no
17 longer necessary.

18 Sensing

19 Sensing can be direct or indirect. For example, direct sensing can be based on data
20 from sensing electrodes. The ICD of the present invention includes sensing
21 circuits/electronics to sense an arrhythmia through one or more sensing and/or stimulating
22 electrodes. The sensing electronics sense the cardiac activity as depicted by electrical signals.
23 For example, as is known in the art, R-waves occur upon the depolarization of ventricular
24 tissue and P-waves occur upon the depolarization of atrial tissue. By monitoring these

1 electrical signals the control/timing circuit of the ICD can determine the rate and regularity of
2 the patient's heart beat, and thereby determine whether the heart is undergoing arrhythmia.
3 This determination can be made by determining the rate of the sensed R-waves and/or P-
4 waves and comparing this determined rate against various reference rates.

5 Direct sensing can be based upon varying criteria; such as, but not limited to, primary
6 rate, sudden onset, and stability. The sole criteria of a primary rate sensor is the heart rate.
7 When applying the primary rate criteria, if the heart rate should exceed a predefined level,
8 then treatment is begun. Sensing electronics set to sudden onset criteria ignore those changes
9 which occur slowly, and initiate treatment when there is a sudden change such as immediate
10 paroxysmal arrhythmia. This type of criteria would thus discriminate against sinus
11 tachycardia. Stability of rate can also be an important criteria. For example, treatment with a
12 ventricular device would not be warranted for a fast rate that varies, here treatment with an
13 atrial device would be indicated.

14 In alternative embodiments, sensing can be indirect. Indirect sensing can be based on
15 any of various functional parameters such as arterial blood pressure, rate of the
16 electrocardiogram deflections or the probability density function (pdf) of the
17 electrocardiogram. For example, whether or not to administer treatment can also be affected
18 by pdf monitoring of the time the signal spends around the baseline.

19 Sensing can also be augmented by stimulating the atria and observing and measuring
20 the consequent effects on atrial and ventricular function.

21 Thus, in a preferred embodiment, sensing electronics are based upon multiple criteria.
22 In addition, the present invention envisions devices working in more than one chamber such
23 that appropriate treatment can be administered to either the atrium or the ventricle in response
24 to sensing electronics based upon a variety of criteria, including those described above as well

1 as other criteria known to those skilled in the art.

2 Stimulation

3 Electrical stimulation is delivered via lead(s) or electrode(s). These leads can be
4 epicardial (external surface of the heart) or endocardial (internal surface of the heart) or any
5 combination of epicardial and endocardial. Leads are well known to those skilled in the art;
6 see, for example, United States Patent Nos. 4662377 to Heilman et al., 4481953 to Gold et
7 al., and 4010758 to Rockland et al., each of which is herein incorporated by reference in its
8 entirety.

9 Lead systems can be unipolar or bipolar. A unipolar lead has one electrode on the
10 lead itself, the cathode. Current flows from the cathode, stimulates the heart, and returns to
11 the anode on the casing of the pulse generator to complete the circuit. A bipolar lead has two
12 poles on the lead a short distance from each other at the distal end, and both electrodes lie
13 within the heart.

14 With the reference to Fig. 7, an exemplary system by which the present invention may
15 be embodied is illustrated. An automatic implantable cardioverter/defibrillator 2 is implanted
16 within the body of the patient and has a pair of output terminals, an anode 4 and a cathode 6.
17 The ICD 2 is coupled to a flexible catheter electrode arrangement 8 having a distal electrode
18 10 and a proximal electrode 12, each associated with the patient's heart. Other electrode
19 configurations may be employed, such as ring-type electrodes. As for external electrodes, an
20 anodal electrode 24 may be employed. The automatic ICD 2 includes sensing and detecting
21 circuitry, as well as pulse generating circuitry, the output of the latter being coupled to the
22 implantable electrodes 10, 12. The ICD 2 senses an arrhythmic condition of the heart and, in
23 response thereto, issues or emits cardioverting or defibrillating pulses to the heart, through the
24 implantable electrodes 10, 12.

1 The catheter electrode 8 is inserted intravenously to a position such that the distal
2 electrode 10 is positioned in the right ventricular apex 14 of the heart and the proximal
3 electrode 12 is positioned in the superior vena cava region 16 of the heart. It should be
4 appreciated that, as the term is used herein, the superior vena cava 16 may also include
5 portions of the right atrium 18.

6 Conventional stimulation is well known to those skilled in the art and comprises
7 monophasic waveforms (cathodal or anodal) as well as multiphasic waveforms wherein the
8 nonstimulating pulses are of a minimal magnitude and are used, for example, to dissipate a
9 residual charge on an electrode.

10 Figs. 2 through 6 depict a range of biphasic stimulation protocols. These protocols
11 have been disclosed in United States Patent No. 5,871,506 to Mower, which is herein
12 incorporated by reference in its entirety.

13 Fig. 2 depicts biphasic electrical stimulation wherein a first stimulation phase
14 comprising anodal stimulus 102 is administered having amplitude 104 and duration 106.
15 This first stimulation phase is immediately followed by a second stimulation phase
16 comprising cathodal stimulation 108 of equal intensity and duration.

17 Fig. 3 depicts biphasic electrical stimulation wherein a first stimulation phase
18 comprising cathodal stimulation 202 having amplitude 204 and duration 206 is administered.
19 This first stimulation phase is immediately followed by a second stimulation phase
20 comprising anodal stimulation 208 of equal intensity and duration.

21 Fig. 4 depicts a preferred embodiment of biphasic stimulation wherein a first
22 stimulation phase, comprising low level, long duration anodal stimulation 302 having
23 amplitude 304 and duration 306, is administered. This first stimulation phase is immediately

1 followed by a second stimulation phase comprising cathodal stimulation 308 of conventional
2 intensity and duration. In differing alternative embodiments, anodal stimulation 302 is: 1) at
3 maximum subthreshold amplitude; 2) less than three volts; 3) of a duration of
4 approximately two to eight milliseconds; and/or 4) administered over 200 milliseconds post
5 heart beat. Maximum subthreshold amplitude is understood to mean the maximum
6 stimulation amplitude that can be administered without eliciting a contraction. In a preferred
7 embodiment, anodal stimulation is approximately two volts for approximately three
8 milliseconds duration. In differing alternative embodiments, cathodal stimulation 308 is: 1)
9 of a short duration; 2) approximately 0.3 to 1.5 milliseconds; 3) of a high amplitude; 4) in
10 the approximate range of three to twenty volts; and/or 5) of a duration less than 0.3
11 millisecond and at a voltage greater than twenty volts. In a preferred embodiment, cathodal
12 stimulation is approximately six volts administered for approximately 0.4 millisecond. In the
13 manner disclosed by these embodiments, as well as those alterations and modifications which
14 can become obvious upon the reading of this specification, a maximum membrane potential
15 without activation is achieved in the first phase of stimulation.

16 **Fig. 5** depicts an alternative preferred embodiment of biphasic stimulation wherein a
17 first stimulation phase, comprising anodal stimulation 402, is administered over period 404
18 with rising intensity level 406. The ramp of rising intensity level 406 can be linear or non-
19 linear, and the slope can vary. This anodal stimulation is immediately followed by a second
20 stimulation phase comprising cathodal stimulation 408 of conventional intensity and duration.
21 In alternative embodiments, anodal stimulation 402: (1) rises to a maximum subthreshold
22 amplitude less than three volts; (2) is of a duration of approximately two to eight
23 milliseconds; and/or (3) is administered over 200 milliseconds post heart beat. In yet other
24 alternative embodiments, cathodal stimulation 408 is: (1) of a short duration; (2)

1 approximately 0.3 to 1.5 milliseconds; (3) of a high amplitude; (4) in the approximate range
2 of three to twenty volts; and/or (5) of a duration less than 0.3 milliseconds and at a voltage
3 greater than twenty volts. In the manner disclosed by these embodiments, as well as those
4 alterations and modifications which can become obvious upon the reading of this
5 specification, a maximum membrane potential without activation is achieved in the first
6 phase of stimulation.

7 Fig. 6 depicts biphasic electrical stimulation wherein a first stimulation phase,
8 comprising series 502 of anodal pulses, is administered at amplitude 504. In one
9 embodiment, rest period 506 is of equal duration to stimulation period 508, and is
10 administered at baseline amplitude. In an alternative embodiment, rest period 506 is of a
11 differing duration than stimulation period 508, and is administered at baseline amplitude.
12 Rest period 506 occurs after each stimulation period 508, with the exception that a second
13 stimulation phase, comprising cathodal stimulation 510 of conventional intensity and
14 duration, immediately follows the completion of series 502. In alternative embodiments: (1)
15 the total charge transferred through series 502 of anodal stimulation is at the maximum
16 subthreshold level; and/or (2) the first stimulation pulse of series 502 is administered over
17 200 milliseconds post heart beat. In yet other alternative embodiments, cathodal stimulation
18 510 is: (1) of a short duration; (2) approximately 0.3 to 1.5 milliseconds; (3) of a high
19 amplitude; (4) in the approximate range of three to twenty volts, and/or (5) of a duration less
20 than 0.3 milliseconds and at a voltage greater than twenty volts.

21 Determining Cardiac Capture

22 Capture can be determined by multiple means. First, capture or the loss thereof, can
23 be determined by monitoring cardiac rhythm. Loss of capture can result in a change in timing
24 of the heart beat.

- 12 -

Second, capture can be monitored through the development of a template. The template can be based on parameters such as electrocardiogram data, mechanical motion and/or probability density function data. Where the template is established pre-stimulation, a change in the baseline signifies capture. Where the template is established after capture has occurred, a change in the template characteristics signifies loss of capture. The templates can be established and/or updated at any time.

Once capture occurs the stimulation protocol of the entrained sites is adjusted as illustrated by Figs. 1 A through 1 C.

Having thus described the basic concept of the invention, it will be readily apparent to those skilled in the art that the foregoing detailed disclosure is intended to be presented by way of example only, and is not limiting. Various alterations, improvements and modifications will occur and are intended to those skilled in the art, but are not expressly stated herein. These modifications, alterations and improvements are intended to be suggested hereby, and within the scope of the invention. Further, the pacing pulses described in this specification are well within the capabilities of existing pacemaker electronics with appropriate programming. Accordingly, the invention is limited only by the following claims and equivalents thereto.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

sensing the onset of tachycardia:

10 pulse of biphasic pacing stimulation comprises:

a second stimulation phase with a second phase polarity, a second phase amplitude, a second phase shape and a second phase duration; and

wherein the first phase amplitude is at a maximum subthreshold amplitude.

20

25 4. The method of operating an implantable cardiac stimulator as in claim 3,
wherein the first stimulation phase comprises an anodal stimulus.

!+61 2 9262 1080 # 10/39

- 14 -

continuing stimulation selected from the group consisting of biphasic stimulation and conventional stimulation at a second intensity level below the diastolic depolarization threshold.

- 5 6. The method of operating an implantable cardiac stimulator as in claim 1, wherein in the event it is determined that capture has occurred, the method further comprising:
 continuing biphasic stimulation for a predetermined period of time.

- 10 7. The method of operating an implantable cardiac stimulator as in claim 1, wherein in the event it is determined that capture has not occurred, further comprising:
 increasing the stimulation intensity level by predefined increments until capture occurs.

- 15 8. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first phase polarity is positive.

9. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first phase duration is at least as long as the second phase duration.

- 20 10. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first stimulation phase comprises an anodal stimulus.

11. The method of operating an implantable cardiac stimulator as in claim 1,
25 wherein the first phase amplitude is less than the second phase amplitude.

12. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first phase amplitude is ramped from a baseline value to a second value.

- 30 13. The method of operating an implantable cardiac stimulator as in claim 12, wherein the second value is equal to the second phase amplitude.

- 15 -

14. The method of operating an implantable cardiac stimulator as in claim 12, wherein the second value is at the maximum subthreshold amplitude.

5 15. The method of operating an implantable cardiac stimulator as in claim 14, wherein the maximum subthreshold amplitude is about 0.5 to 3.5 volts.

10 16. The method of operating an implantable cardiac stimulator as in claim 12, wherein the first phase duration is at least as long as the second phase duration.

17. The method of operating an implantable cardiac stimulator as in claim 12, wherein the first phase duration is about one to nine milliseconds.

15 18. The method of operating an implantable cardiac stimulator as in claim 12, wherein the second phase amplitude is about two volts to twenty volts.

19. The method of operating an implantable cardiac stimulator as in claim 12, wherein the second phase duration is about 0.2 to 0.9 milliseconds.

20 20. The method of operating an implantable cardiac stimulator as in claim 12, wherein the second phase duration is less than 0.3 milliseconds and the second phase amplitude is greater than 20 volts.

25 21. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first phase duration is about one to nine milliseconds.

22. The method of operating an implantable cardiac stimulator as in claim 1, wherein the second phase duration is about 0.2 to 0.9 milliseconds.

30 23. The method of operating an implantable cardiac stimulator as in claim 1, wherein the second phase amplitude is about two volts to twenty volts.

#11700256217625610,page=11/1207

- 16 -

24. The method of operating an implantable cardiac stimulator as in claim 1, wherein the second phase duration is less than 0.3 milliseconds and the second phase amplitude is greater than 20 volts.

5

25. The method of operating an implantable cardiac stimulator as in claim 1, wherein the first stimulation phase further comprises a series of stimulating pulses of a predetermined amplitude, polarity and duration.

10

26. The method of operating an implantable cardiac stimulator as in claim 25, wherein the first stimulation phase further comprises a series of rest periods.

15

27. The method of operating an implantable cardiac stimulator as in claim 26, wherein applying the first stimulation phase further comprises applying a rest period of a baseline amplitude after at least one stimulating pulse.

20

28. The method of operating an implantable cardiac stimulator as in claim 27, wherein the rest period is of equal duration to the duration of the stimulating pulse.

25

29. A cardiac stimulator to perform cardioverting, the cardiac stimulator comprising:

sensing means for sensing the onset of tachycardia;

output means for delivering, in response to the sensing means, electrical stimulation of a predetermined polarity, amplitude, shape and duration to cause application of pulses of biphasic pacing stimulation at a first intensity level selected from the group consisting of: at the diastolic depolarization threshold, below the diastolic depolarization threshold, and above the diastolic depolarization threshold; and

means for determining whether capture has occurred;

wherein each pulse of biphasic pacing stimulation comprises:

30

a first stimulation phase with a first phase polarity, a first phase amplitude, a first phase shape and a first phase duration; and

a second stimulation phase with a second phase polarity, a second phase amplitude, a second phase shape and a second phase duration; and wherein the first phase amplitude is at a maximum subthreshold amplitude.

5 30. The cardiac stimulator as in claim 29, wherein the maximum subthreshold amplitude is about 0.5 to 3.5 volts.

10 31. The cardiac stimulator to perform cardioverting of claim 29, wherein the first phase duration is about one to nine milliseconds.

32. The cardiac stimulator to perform cardioverting of claim 29, wherein the second phase duration is about 0.2 to 0.9 milliseconds.

15 33. The cardiac stimulator to perform cardioverting of claim 29, wherein the second phase amplitude is about two volts to twenty volts.

20 34. The cardiac stimulator to perform cardioverting of claim 29, wherein the second phase duration is less than 0.3 milliseconds and the second phase amplitude is greater than 20 volts.

35. The cardiac stimulator to perform cardioverting of claim 29, wherein the first stimulation phase is initiated greater than 200 milliseconds after completion of a cardiac beating cycle.

25 36. The cardiac stimulator to perform cardioverting of claim 29, wherein in the event that the means for determining determines that capture has occurred, the output means continues biphasic stimulation for a predetermined period of time.

30 37. The cardiac stimulator as in claim 29, wherein in the event that the means for determining determines that capture has not occurred, the output means increases the stimulation intensity level by predefined increments until capture occurs.

F:\W7DOCTGLF\Paper\01765642\paper.doc-09/12/03

- 18 -

38. The cardiac stimulator as in claim 29, wherein the first stimulation phase comprises an anodal stimulus.

5 39. The cardiac stimulator as in claim 29, wherein the first phase duration is at least as long as the second phase duration.

10 40. The cardiac stimulator to perform cardioverting of claim 29, wherein the first phase amplitude is less than the second phase amplitude.

41. The cardiac stimulator to perform cardioverting of claim 29, wherein the first phase amplitude is ramped from a baseline value to a second value.

15 42. The cardiac stimulator as in claim 41, wherein the second value is equal to the second phase amplitude.

43. The cardiac stimulator as in claim 41, wherein the second value is at the maximum subthreshold amplitude.

20 44. The cardiac stimulator as in claim 43, wherein the maximum subthreshold amplitude is about 0.5 to 3.5 volts.

45. The cardiac stimulator as in claim 41, wherein the first phase duration is at least as long as the second phase duration.

25 46. The cardiac stimulator as in claim 41, wherein the first phase duration is about one to nine milliseconds.

30 47. The cardiac stimulator as in claim 41, wherein the second phase duration is about 0.2 to 0.9 milliseconds.

F:\WFOCS\GLF\pct3\7616610pac.doc:191/193

- 19 -

48. The cardiac stimulator as in claim 41, wherein the second phase amplitude is about two volts to twenty volts.

49. The cardiac stimulator as in claim 41, wherein the second phase duration is less than 0.3 milliseconds and the second phase amplitude is greater than 20 volts.

50. The cardiac stimulator to perform cardioverting of claim 29, wherein the first stimulation phase further comprises a series of stimulating pulses of a predetermined amplitude, polarity and duration.

51. The cardiac stimulator as in claim 50, wherein the first stimulation phase further comprises a series of rest periods.

52. The cardiac stimulator as in claim 51, wherein applying the first stimulation phase further comprises applying a rest period of a baseline amplitude after at least one stimulating pulse.

53. The cardiac stimulator as in claim 52, wherein the rest period is of equal duration to the duration of the stimulating pulse.

54. The implantable cardiac stimulator device comprising:
plural electrodes;
sensing circuitry connected to the plural electrodes and adapted to sense the onset of tachycardia;
detecting circuitry connected to the sensing circuitry and adapted to detect whether pacing capture has occurred; and
pulse generating circuitry connected to the plural electrodes and adapted to generate, in response to the sensing circuitry, electrical pulses of a predetermined polarity, amplitude, shape and duration to cause application of pulses of biphasic pacing stimulation at a first intensity level selected from the group consisting of: at the diastolic

P:\W\DOCS\GULF\gulf\3266\layec.doc-017(1)03

- 20 -

depolarization threshold, below the diastolic depolarization threshold, and above the diastolic depolarization threshold; and

wherein each pulse of biphasic pacing stimulation comprises:

- 5 a first stimulation phase with a first phase polarity, a first phase amplitude, a first phase shape and a first phase duration; and
a second stimulation phase with a second phase polarity, a second phase amplitude, a second phase shape and a second phase duration;

10 wherein, in the event that the detecting circuitry determines that capture has occurred, the pulse generating circuitry continues biphasic stimulation for a predetermined period of time; and

wherein the first phase amplitude is at a maximum subthreshold amplitude.

15 55. The implantable cardiac stimulator device as in claim 54, wherein, in the event that the detecting circuitry determines that capture has not occurred, the pulse generating circuitry increases the stimulation intensity level by predefined increments until capture occurs.


20 Dated this 8th Day of December, 2003

THE MOWER FAMILY CHF TREATMENT IRREVOCABLE TRUST

By Their Patent Attorneys


DAVIES COLLISON CAVE

1/5

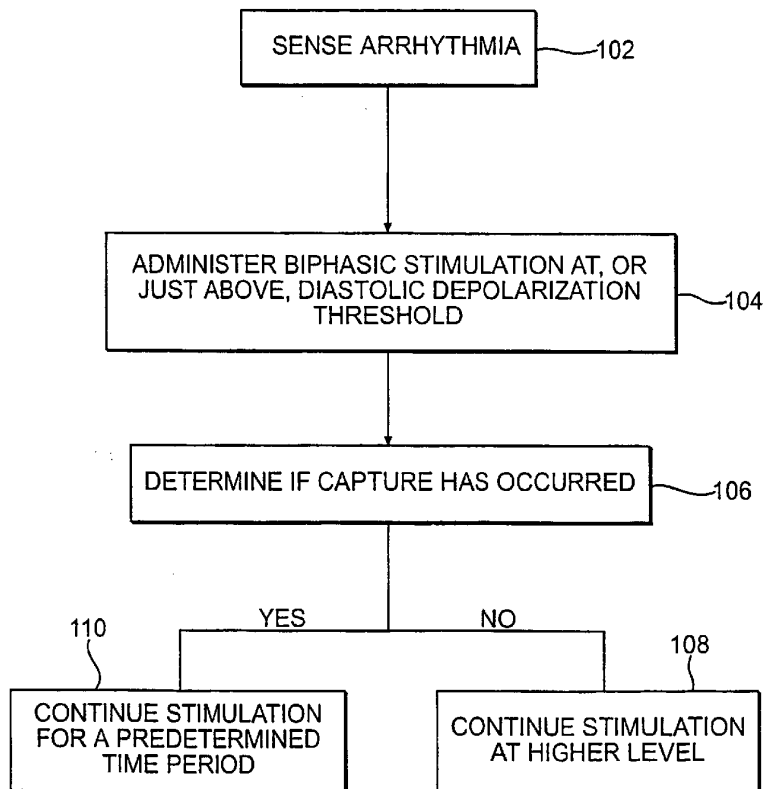**FIG. 1A**


SUBSTITUTE SHEET (RULE 26)

2/5

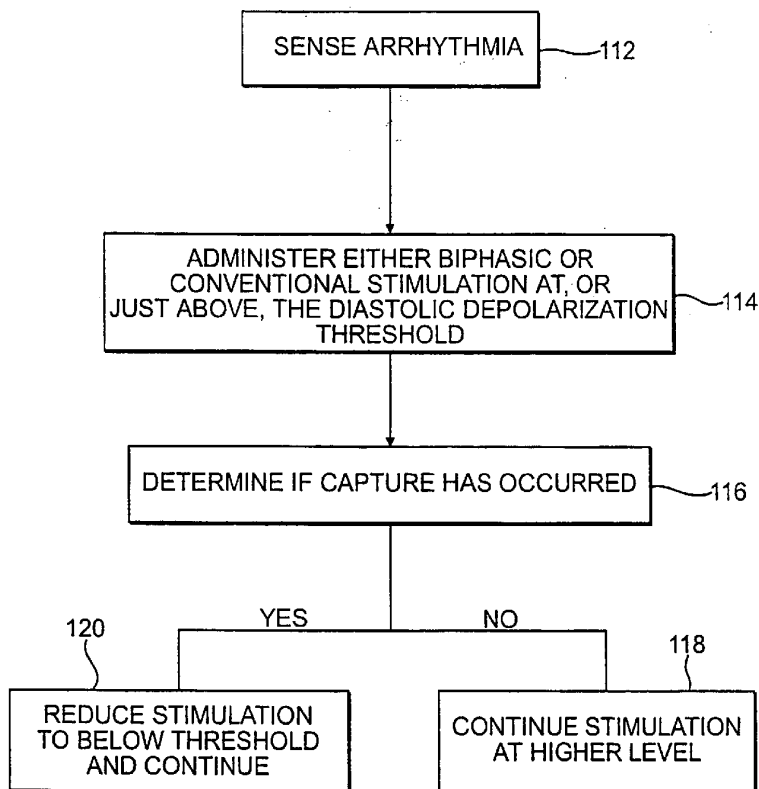**FIG. 1B**





SUBSTITUTE SHEET (RULE 26)

3/5

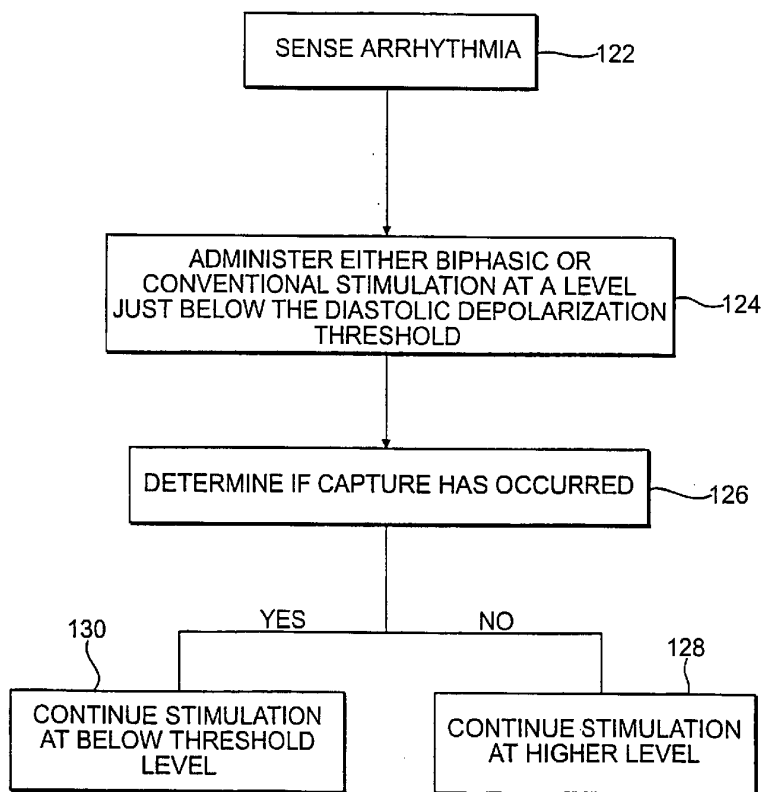**FIG. 1C**



SUBSTITUTE SHEET (RULE 26)

4/5

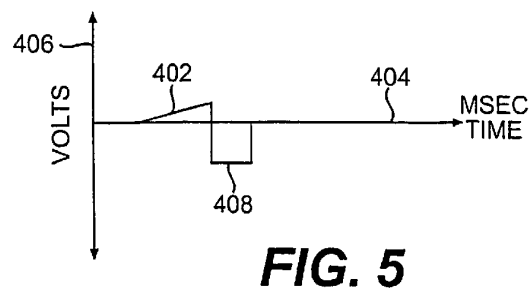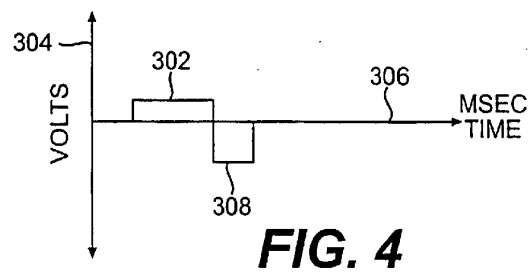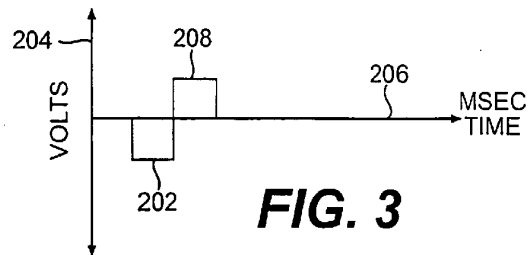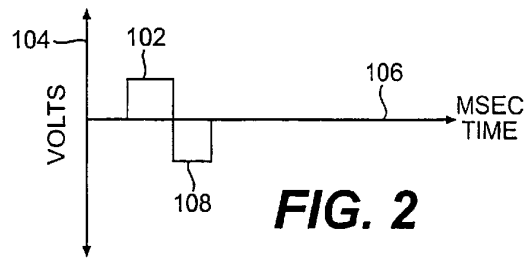

SUBSTITUTE SHEET (RULE 26)

5/5

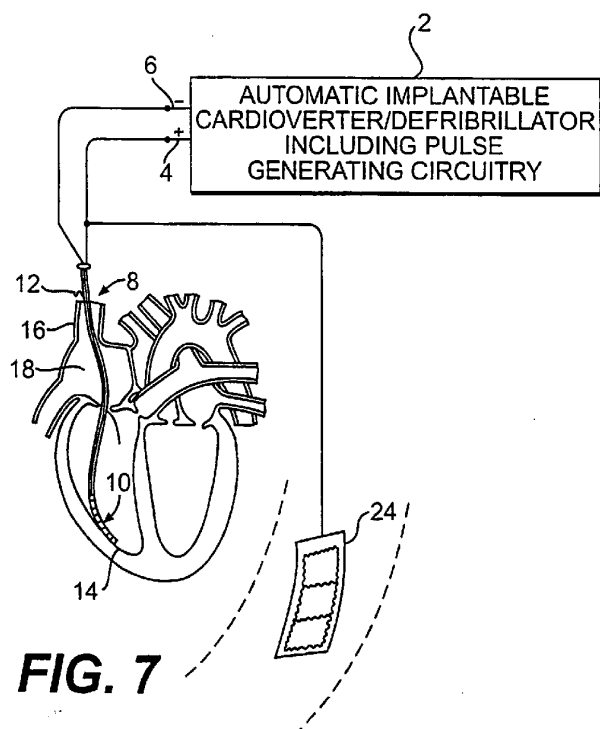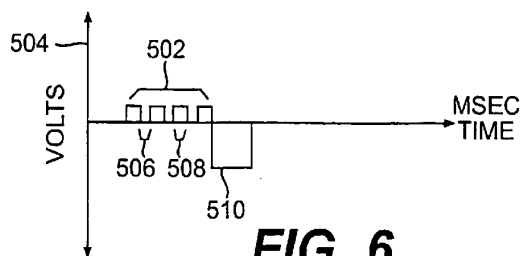

SUBSTITUTE SHEET (RULE 26)