



(51) International Patent Classification:
F04C 29/12 (2006.01)

(21) International Application Number:
PCT/IB2018/051661

(22) International Filing Date:
13 March 2018 (13.03.2018)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
62/501,245 04 May 2017 (04.05.2017) US
2018/5038 24 January 2018 (24.01.2018) BE

(71) Applicant: ATLAS COPCO AIRPOWER, NAAM-
LOZE VENNOOTSCHAP [BE/BE]; Boomsesteenweg
957, 2610 Wilrijk (BE).

(72) Inventors: VAN HOVE, Linus; c/o Atlas Copco Airpow-
er, nv, Boomsesteenweg 957, 2610 Wilrijk (BE). DE MAN,
Steven; c/o Atlas Copco Airpower, nv, Boomsesteenweg
957, 2610 Wilrijk (BE).

(74) Agent: VAN VARENBERG, Patrick et al.; Aren-
bergstraat 13, 2000 Antwerpen (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: TRANSMISSION AND COMPRESSOR OR VACUUM PUMP PROVIDED WITH SUCH A TRANSMISSION

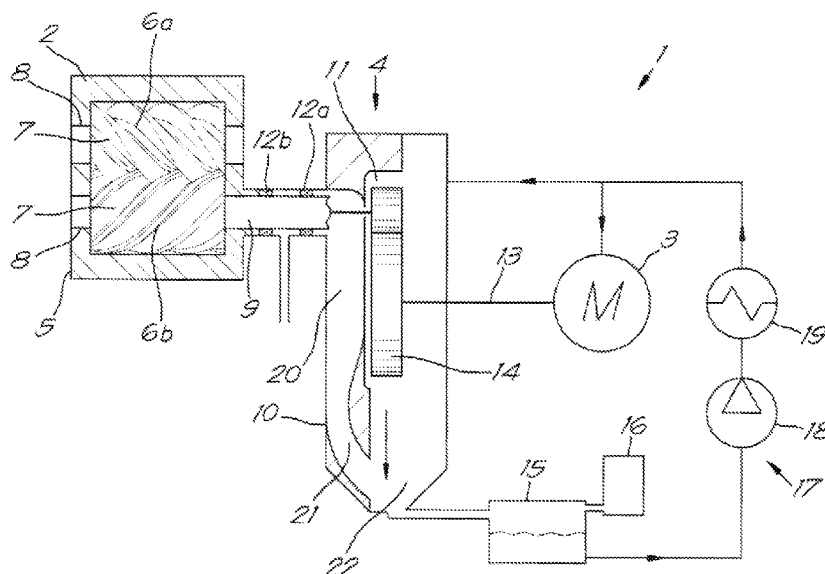


Fig. 1

(57) Abstract: Transmission between drive shaft (13) and a driven shaft (9), which transmission (4) comprises a housing (10) and at least a driven gearwheel (11) that is mounted on the driven shaft (9) and a drive gearwheel (14) that is mounted on a drive shaft (13), characterised in that the housing (10) comprises two separated chambers (20, 22), i.e. a first-chamber (20) that is connected to the driven shaft (9) and a second chamber (22) which is separate from the first chamber (20), whereby the first chamber (20) is connected via a channel (21) with the second chamber (22), whereby around the drive gearwheel (14) or driven gearwheel (11) the second chamber (22) is formed, whereby the form of the second chamber (22) is such that when the gearwheel in question (11, 14) rotates, a gas flow is created around this gearwheel (11, 14) which causes a negative pressure in the channel (21) by the venturi effect.

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

Transmission and compressor or vacuum pump provided with such a transmission

5 The present invention relates to a transmission and a compressor or vacuum pump provided with such transmission.

It is known that a transmission between a drive shaft of a motor and the driven shaft of, for example, a rotor of a
10 compressor element, is provided with a housing in which the gearwheels of the transmission are located.

In order to ensure a proper operation, oil is injected in the housing of the transmission to serve as lubricant.

15

As the driven shaft runs from the compressor element to the transmission, seals are provided between the compressor element and the transmission.

20 However, there will always be some leakage flow, which means some air will end up in the housing of the transmission thus causing a pressure build-up in the transmission.

25 It is important to get rid of such positive pressure as said seals should not be exposed to too big a pressure difference because this can affect their proper operation.

If the pressure difference is too great it is possible that
30 air will leak from the transmission to the compressor element. This air will also contain the injected lubricant.

Such situation needs to be avoided at all times, as this lubricant will unintentionally end up in the compressor element and cause the compressed air generated by the compressor element, to be polluted in this case with the
5 lubricant.

Certainly, in the case of oil-free applications whereby pure compressed air is required, such situation is not tolerable.

10

The positive pressure could be let off into the atmosphere. This means that air with the lubricant ends up in the atmosphere. Such situation is preferably to be avoided for oil-free applications, as this lubricant will end up on or
15 near the machine, and in so doing may accidentally also end up in the machine.

This is why the housing of the transmission is connected with an oil separator, to be able to purify the oil-air
20 mixture in the transmission via the oil separator and to let it off into the atmosphere. The separated oil can be channelled back to an oil reservoir, to subsequently be injected back into the transmission.

25 In the known transmissions, use is made of compressed gas to obtain extraction from the transmission to the oil separator via a venturi channel.

Part of the compressed gas generated by the compressor is
30 used for this which is branched off to said venturi channel. Consequently, the oil-air mixture will be

extracted from the transmission, whereby the compressed gas and the oil-air mixture are blown through a filter.

Naturally this implies a loss of efficiency of the machine.

5

Moreover, the branch can be interrupted or detach, such that the venturi channel loses its effect, such that no extraction to the oil separator takes place.

10 Alternatively, it is also possible to obtain extraction via an external (electrical) source with, for example, a ventilator.

However, this solution also implies an extra consumption of
15 electricity, and also an additional risk if the external source fails, for example, in case of a power failure or break in the cable.

The purpose of the present invention is to provide a
20 solution for at least one of said and other disadvantages.

To this end, the invention relates to a transmission between a drive shaft and a driven shaft, which transmission comprises a housing and at least a driven
25 gearwheel that is mounted on the driven shaft and a drive gearwheel that is mounted on a drive shaft, whereby the housing comprises two separated chambers, i.e. a first chamber that is connected to the driven shaft and a second chamber which is separate from the first chamber, whereby
30 the first chamber is connected via a channel with the second chamber, whereby around the drive gearwheel or driven gearwheel the second chamber is formed, whereby the

form of the second chamber is such that when the gearwheel in question rotates, a gas flow is created around this gearwheel which causes a negative pressure in the channel by the venturi effect.

5

Said gas flow around the gearwheel is also called "gearwind" and is an air flow or vortex that is generated by the rotating teeth of the gearwheel.

10 "The first chamber is connected with the driven shaft", means that this chamber is located on the side of the driven shaft, such that said leak flows end up in this chamber.

15 A first advantage is that, because a negative pressure is created in the channel, an extraction of gas and any lubricant will take place as it were from said first chamber through the channel to the second chamber.

20 This provides the advantage that because of this the pressure in the first chamber can be kept low, at a slight positive or negative pressure, within the limits of the pressure difference over the seals between the compressor element and the transmission.

25

In the second chamber, where the gas and the lubricant of the first chamber end up, there will be a pressure build-up.

30 Another major advantage is that this system does not require any external power source, i.e. compressed air or electricity.

This also means there is no risk of failure or defect by a shut-down of this external power source.

5 Furthermore, it is an automatic self-regulating system: the faster the gearwheels rotate, the more leakage flow there will be from the compressor element to the transmission, and the extraction of the first chamber will be greater the faster the gearwheels rotate.

10

This means that the level of extraction of the first chamber will automatically adapt itself to the situation.

Preferably the gearwheels and the housing form a tight fit,
15 to minimise the leak path between the first chamber and the second chamber as much as possible and to thus create a sufficiently big pressure difference between both chambers.

Preferably, the distance in a radial direction between the
20 wall of the second chamber and the gearwheel in question is also greater in the rotation direction of the gearwheel in question.

This will help to guide the "gearwind" generated by the
25 gearwheel to thus increase the negative pressure in said channel.

In a practical embodiment the second chamber in the housing described above extends from 0° to 225° of the
30 circumference of the gearwheel in question departing from the position of engagement of the gearwheels.

The embodiment described above minimises the vortex losses, such that the power required for the pressure build-up in the second chamber is compensated, and the venturi effect in the channel is maximised to guarantee the negative
5 pressure in the first chamber.

The invention also relates to a compressor or vacuum pump that is provided with a compressor or vacuum pump element and a motor to power the compressor or vacuum pump element
10 and whereby the compressor or the vacuum pump element is also provided with a transmission according to the invention between a drive shaft of the motor and a driven shaft of the compressor or vacuum pump element.

15 With the intention of better showing the characteristics of the invention, a few preferred embodiments of a transmission according to the invention and a compressor or vacuum pump equipped with it are described hereinafter by way of an example, without any limiting nature, with
20 reference to the accompanying drawings, wherein:

figure 1 schematically shows a compressor according to the invention;

figure 2 shows the transmission of figure 1 in detail;

25 figure 3 shows a view according to the arrow F3 in figure 2.

The compressor 1 shown in figure 1 essentially comprises a compressor element 2, a motor 3 and a transmission 4
30 between the compressor element 2 and the motor 3.

The compressor element 2 is in this case a screw compressor element 2, which comprises a compressor element housing 5 and two co-operating screw rotors 6a, 6b, more specifically a male screw rotor 6a and a female screw rotor 6b, the lobes 7 of which turn into each other co-operatively.

Both rotors 6a, 6b are mounted with bearings by means of their shaft 8 in the compressor element housing 5.

10 The shaft 8 of one of the rotors 6b is extended and forms the driven shaft 9.

This driven shaft 9 reaches into the housing 10 of the transmission 4, and the driven gearwheel 11 is mounted at the end of it.

In order to close off the compressor element 2 from the transmission 4, two seals 12a, 12b are mounted on the driven shaft 9: an oil seal 12a and an air seal 12b.

20 The motor 3 has a drive shaft 13 that reaches into the housing 10 of the transmission 4 and on which a drive gearwheel 14 is mounted that engages on said driven gearwheel 11.

25 The transmission 4 comprises the aforementioned housing 10 with said gearwheels 11 and 14 therein.

Of course, it is not excluded that in the housing 10 additional gearwheels are mounted between the driven gearwheel 11 and the drive gearwheel 14.

Nor does this exclude that the motor 3 is located in the housing 10 of the transmission 4.

5 A filter element 16 is connected to the housing 10 of the transmission 4, to be able to filter oil out of the oil-air mixture that is in the housing 10 of the transmission 4.

In this case, but not necessarily, the housing 10 of the transmission 4 is connected to an oil reservoir 15 to
10 collect the injected oil and this oil reservoir 15 is provided with a filter element 16.

Furthermore, the compressor 1 in the shown example is also provided with an oil circuit 17, which can return the oil
15 collected in the oil reservoir 15 with an oil pump 18, i.e. the oil that flows back out of the housing 10 and the oil separated by the filter element 16, back to the transmission 4 and/or the motor 3. Additionally, the oil circuit 17 is also provided with an oil filter 19 to be
20 able to remove impurities from the oil.

According to the invention the housing 10 of the transmission 4 comprises two chambers 20 and 22. A first chamber 20 which is connected to the driven shaft 9 and a
25 second chamber 22 which is separate from the first chamber 20. This is shown in figure 2.

As one can tell from figure 2, the driven shaft 9 extends into the first chamber 20.

The second chamber 22 is provided around the drive gearwheel 14. The first chamber 20 is connected to this second chamber 22 via the channel 21.

5 The form of the second chamber 22 is shown clearly in figure 3.

In this case, the second chamber 22 is integrated in the wall 23 of the housing 10 of the transmission 4.

10

However, it is also possible that the transmission 4 is provided with a shield that is mounted next to, around or against the gearwheel 14 and that is provided with a form similar to the second chamber 22. Such shield can be
15 mounted in the housing 10. This provides the advantage that nothing needs to be changed to a possible existing housing 10.

The second chamber 22 is such that the "gearwind" that is
20 created by rotation of the drive gearwheel 14 is led along the channel 21 such that a negative pressure is caused in the channel 21 because of the venturi effect.

As can be seen in figure 3, the second chamber 22 gets
25 bigger in the rotation direction of the drive gearwheel 14, as was indicated with arrow P. Said channel 21 also connects to the end of the second chamber 22 as seen in the rotation direction P of the drive gearwheel 14, i.e. to its biggest end.

30

Both characteristics will ensure that said effect will be as optimal as possible.

The second chamber 22 extends from 0° to approximately 225° of the circumference of the drive gearwheel 14 in the rotation direction of arrow P, starting from the engagement
5 of the gearwheels.

Preferably, the rest of the circumference of the drive gearwheel 14 forms a tight fit.

10 This will ensure that the vortex losses are reduced to a minimum.

As can be seen in figure 1, the second chamber 22 is connected to the filter element 16 that is connected to the
15 transmission 4. This filter element 16, for example, can be a venting filter or a liquid separator that is provided with a filter.

Because the oil separation in the filter element 16 is
20 always linked with a certain drop in pressure the result will be a positive pressure in the second chamber 22.

This means extra vortex losses in the second chamber 22.

According to the form of the second chamber 22, as shown in
25 figure 3, the reduction of the vortex losses by the tight fit of the drive gearwheel 14 and the extra vortex losses in the second chamber 22 due to pressure build-up over the filter element 16 will cancel each other out which means no extra power of the motor 3 is necessary.

30

The operation of the compressor 1 is very simple and as follows.

During the operation of the compressor 1 the motor 3 will power the drive gearwheel 14, whereby the movement via the driven gearwheel 11 is transferred to the driven shaft 9 of the compressor element 2.

Oil will be injected in the transmission 4 and possibly also the motor 3 for the cooling and/or lubrication of the gearwheels 11, 14, bearings and other parts.

10

The operation of the compressor 1 will result in a certain pressure build-up in the transmission 4, as the air seal 12b on the driven shaft 9 will allow a certain leakage flow in the direction of the compressor element 2 toward the transmission 4.

Consequently, in the housing 10 of the transmission 4 there will be an oil-air mixture at an increased pressure.

20 The rotation of the drive gearwheel 14 will create a so-called "gearwind" in the chamber 22 whereby an air flow or vortex is generated by the rotating teeth of the drive gearwheel 14.

25 By channelling this air flow along the channel 21 the venturi effect will cause a negative pressure in the channel 21.

30 As a result of this negative pressure, the first chamber 20 will be sucked out as it were and the oil-air mixture in this chamber will end up in the second chamber 22 via the channel 21.

This causes a pressure difference between the first chamber 20 and the second chamber 22, whereby the pressure in the first chamber 20 will be lower than the pressure in the second chamber 22.

The lower pressure in the first chamber 20 prevents the seals 12a, 12b on the driven shaft 9 from being exposed to too big a pressure difference, such that it is avoided that the oil-air mixture can end up in the compressor element 2.

The oil-air mixture ends up in the second chamber 22, where a pressure build-up will take place due to the drop in pressure over the filter element 16 after which the purified, oil-free air can be channelled out.

The oil separated in the filter element 16 can then be injected back into the transmission 4 and/or the motor 3 via the oil circuit 17.

Although in the shown example the second chamber 22 is provided around the drive gearwheel 14, it is not excluded that this chamber 22 is provided around the driven gearwheel 11 or another gearwheel, if present.

However, preferably this chamber 22 extends along the gearwheel 11, 14 or another gearwheel, if present, with the greatest diameter and/or the greatest peripheral speed.

As is visible in figure 3, the drive gearwheel 14 in this case is greater than the driven gearwheel 11 and the second

chamber 22 is therefore also provided around the drive gearwheel 14.

5 The bigger gearwheel 14 will, after all, be able to create a greater gas flow, such that the negative pressure in the channel 21 is greater and a better extraction of the first chamber 20 is obtained.

10 According to the invention is it not necessary that it concerns a compressor 1 that is provided with a transmission 4 according to the invention. The machine could also be a vacuum pump.

15 The present invention is by no means limited to the embodiments described as an example and shown in the drawings, but a transmission according to the invention and a compressor or vacuum pump equipped with this can be realised in all kinds of forms and dimensions, without departing from the scope of the invention.

Claims.

.....

1.- Transmission between drive shaft (13) and a driven
5 shaft (9), which transmission (4) comprises a housing (10)
and at least a driven gearwheel (11) that is mounted on the
driven shaft (9) and a drive gearwheel (14) that is mounted
on a drive shaft (13), **characterised in that** the housing
(10) comprises two separated chambers (20, 22), i.e. a
10 first chamber (20) that is connected to the driven shaft
(9) and a second chamber (22) which is separate from the
first chamber (20), whereby the first chamber (20) is
connected via a channel (21) with the second chamber (22),
whereby around the drive gearwheel (14) or driven gearwheel
15 (11) the second chamber (22) is formed, whereby the form of
the second chamber (22) is such that when the gearwheel in
question (11, 14) rotates a gas flow is created around this
gearwheel (11, 14) which causes a negative pressure in the
channel (21) by the venturi effect.

20

2.- Transmission according to claim 1, characterised in
that the second chamber (22) is integrated in the wall (23)
of the housing (10).

25 3.- Transmission according to claim 1 or 2, characterised
in that the transmission (4) is provided with a shield that
is mounted next to or against the gearwheel (11, 14) and is
provided with a cut-away to form said second chamber (22).

30 4.- Transmission according to any one of the previous
claims, characterised in that the second chamber (22)

extends along the gearwheel (11, 14) with the greatest diameter and/or the greatest peripheral speed.

5 5.- Transmission according to any one of the previous claims, characterised in that the second chamber (22) extends from 0° to 225° of the circumference of the gearwheel in question (11, 14) starting from the position of engagement of the gearwheels (11, 14).

10 6.- Transmission according to any one of the previous claims, characterised in that the second chamber (22) extends over 25% to 75%, preferably even over 45% to 55% and even more preferably 50% of the circumference of the gearwheel in question (11, 14).

15

7.- Transmission according to any one of the previous claims, characterised in that the distance in a radial direction between the wall of the second chamber (22) and the gearwheel in question (11, 14) gets bigger in the
20 rotation direction (P) of the gearwheel in question (11, 14).

8.- Transmission according to any one of the previous claims, characterised in that said channel (21) connects to
25 the end of the second chamber (22), as seen in the rotation direction (P) of the gearwheel in question (11, 14).

9.- Transmission according to any one of the previous claims, characterised in that said second chamber (22) is
30 in connection with a filter element (16) or the like connected to the transmission (4).

10.- Compressor provided with a compressor element (2) and a motor (3) to drive the compressor element (2), characterised in that the compressor (1) is provided with a transmission (4) according to any one of the previous
5 claims between a drive shaft (13) of the motor (3) and a driven shaft (9) of the compressor element (2).

11.- Vacuum pump provided with a vacuum pump element and a motor (3) to drive the vacuum pump element, characterised
10 in that the vacuum pump is provided with a transmission (4) according to any one of the previous claims 1 to 9 between a drive shaft (13) of the motor (3) and a driven shaft (9) of the vacuum pump element.

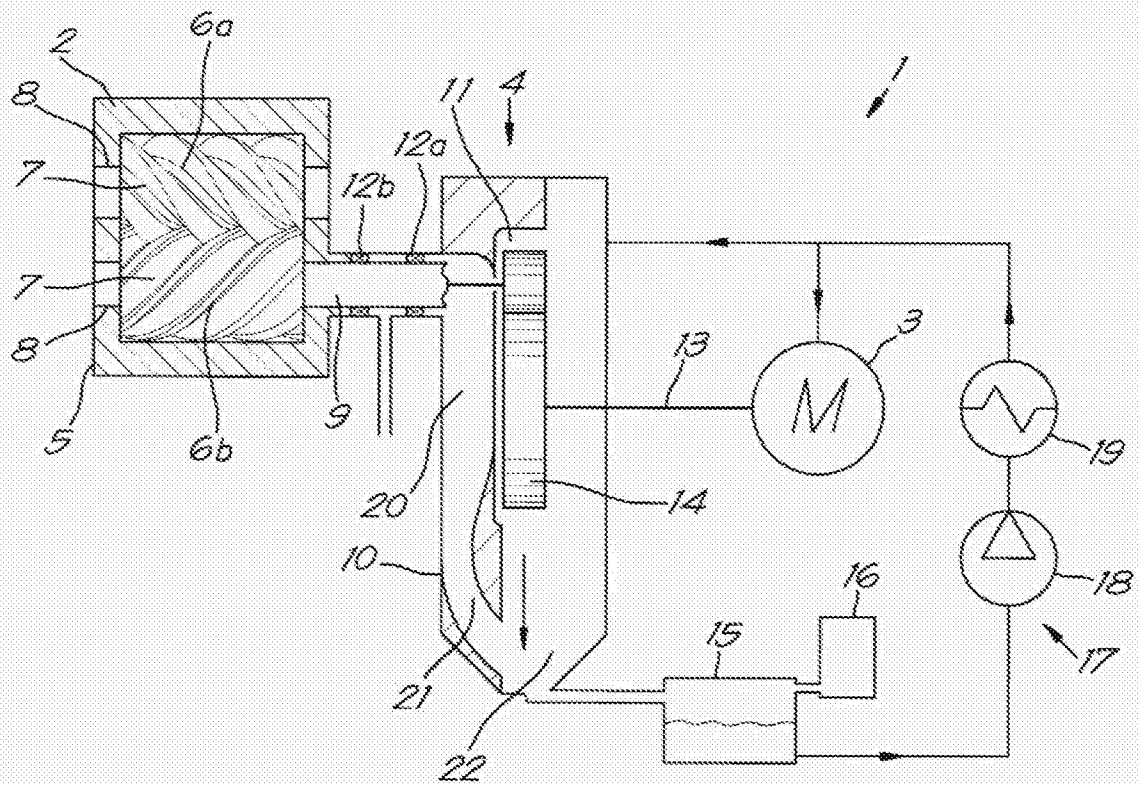


Fig. 1

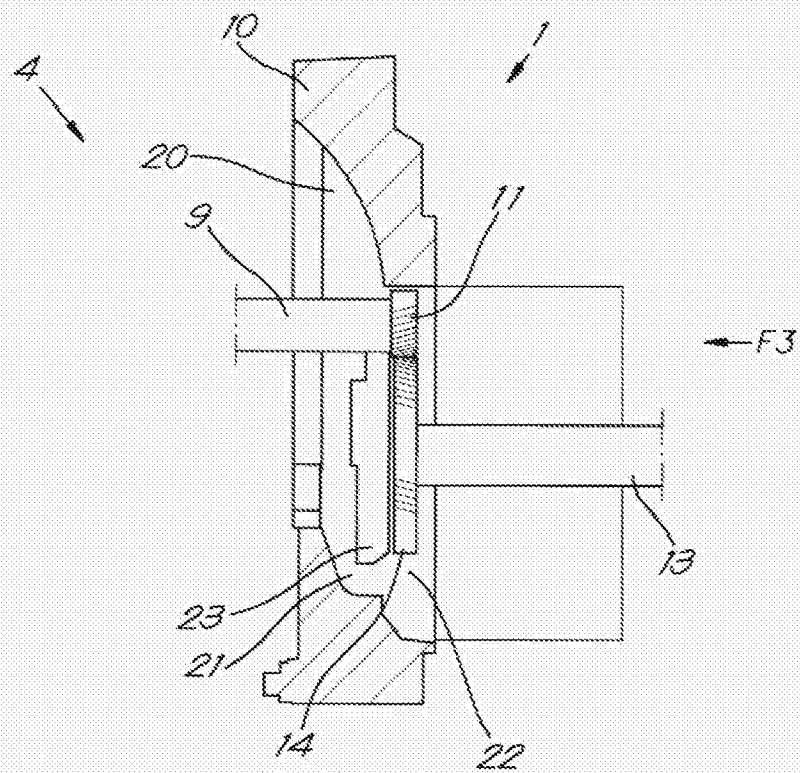


Fig. 2

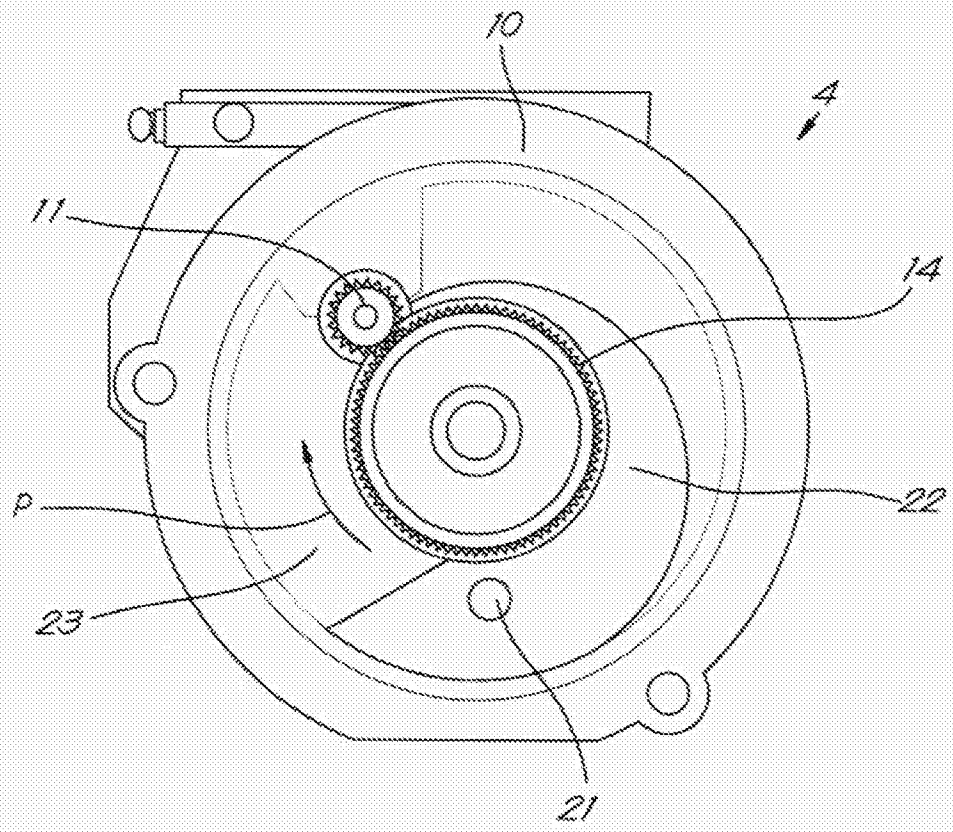


Fig.3

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2018/051661

A. CLASSIFICATION OF SUBJECT MATTER
INV. F04C29/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00/42322 A1 (DU PONT [US]; STAAT DAVID GARRETT [US]; DIVALERIO RINALDO [US]) 20 July 2000 (2000-07-20) page 6, line 37 - page 7, line 10 page 8, line 25 - page 9, line 10 figure 2	1-11
A	----- WO 83/03641 A1 (STAL REFRIGERATION AB [SE]) 27 October 1983 (1983-10-27) claim 1 figure 1	1-11
A	----- EP 0 812 988 A1 (TROESTER MASCHF PAUL [DE]) 17 December 1997 (1997-12-17) the whole document ----- -/--	1-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 June 2018

Date of mailing of the international search report

19/06/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lange, Christian

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2018/051661

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 205 606 795 U (LI YIZHEN) 28 September 2016 (2016-09-28) the whole document	1
A	----- EP 1 892 204 A1 (BEER CHRISTIAN [AT]) 27 February 2008 (2008-02-27) the whole document	1-11
A	----- EP 0 200 152 A2 (BARMAG BARMER MASCHF [DE]) 5 November 1986 (1986-11-05) the whole document	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2018/051661

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0042322	A1	20-07-2000	AT 282772 T 15-12-2004 BR 0008357 A 27-11-2001 CA 2352742 A1 20-07-2000 CN 1336986 A 20-02-2002 DE 60015924 D1 23-12-2004 DE 60015924 T2 10-11-2005 EP 1141552 A1 10-10-2001 JP 2002535539 A 22-10-2002 KR 20010108082 A 07-12-2001 US 6612820 B1 02-09-2003 WO 0042322 A1 20-07-2000
WO 8303641	A1	27-10-1983	DE 3368965 D1 12-02-1987 EP 0105315 A1 18-04-1984 JP H056037 B2 25-01-1993 JP S59500572 A 05-04-1984 SE 450150 B 09-06-1987 WO 8303641 A1 27-10-1983
EP 0812988	A1	17-12-1997	CZ 9701828 A3 17-12-1997 DE 19623514 A1 18-12-1997 EP 0812988 A1 17-12-1997 JP H1052852 A 24-02-1998
CN 205606795	U	28-09-2016	NONE
EP 1892204	A1	27-02-2008	AT 501069 T 15-03-2011 DE 102006040027 B3 26-06-2008 EP 1892204 A1 27-02-2008
EP 0200152	A2	05-11-1986	EP 0200152 A2 05-11-1986 US 4711647 A 08-12-1987