



(51) International Patent Classification:

C03B 33/09 (2006.01) C03B 33/02 (2006.01)

(21) International Application Number:

PCT/US2018/022606

(22) International Filing Date:

15 March 2018 (15.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/474,856 22 March 2017 (22.03.2017) US

(71) Applicant: CORNING INCORPORATED [US/US]; 1
Riverfront Plaza, Corning, New York 14831 (US).(72) Inventors: ABRAMOV, Anatoli, Anatolyevich; 27 Timber
Lane, Painted Post, New York 14870 (US). STE-
WART, Craig, Gene; 6 Katie Lane, Painted Post, New
York 14870 (US).(74) Agent: ABLE, Kevin, M; Corning Incorporated, Intellectual
Property Department, SP-TI-03-01, Corning, New York
14831 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: METHODS OF SEPARATING A GLASS WEB

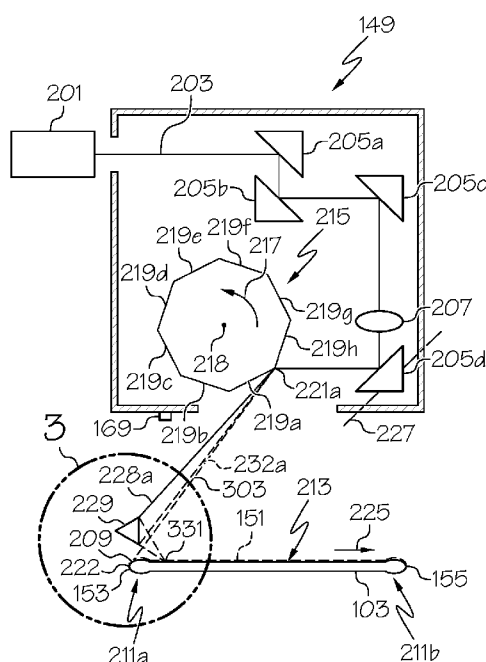


FIG. 2

(57) Abstract: Methods of separating a glass web include exposing a separation path on the glass web to a laser beam that produces thermal stress along the separation path without damaging the glass web. The methods further include redirecting a portion of the laser beam to create a defect on the separation path while the separation path is under thermal stress produced during the exposing the separation path on the glass web to the laser beam, whereupon the glass web separates along the separation path in response to creating the defect. Apparatus are further provided for separating a glass web with at least one laser beam generator that produces a laser beam to heat a separation path and a mirror configured to reflect an end portion of the laser beam to create a defect at a location of the separation path on the glass web.



METHODS OF SEPARATING A GLASS WEB

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority of U.S. Provisional Application Serial No. 62/474,856 filed on March 22, 2017 the contents of which are relied upon and incorporated herein by reference in their entirety as if fully set forth below.

FIELD

[0002] The present disclosure relates generally to methods of separating a glass web and, more particularly, to methods of separating a glass web by creating a defect on a separation path under thermal stress, whereupon the glass web separates along the separation path in response to creating the defect.

BACKGROUND

[0003] It is known to separate a glass ribbon to achieve a glass sheet with the desired dimensions. Conventional separation techniques achieve separation while the glass ribbon is stationary. Further conventional separation techniques achieve separation while the glass ribbon is moving, thereby avoiding uninterrupted traversing of the glass ribbon along a travel direction while separating the glass sheet from the glass ribbon.

SUMMARY

[0004] The following presents a simplified summary of the disclosure to provide a basic understanding of some embodiments described in the detailed description. Some example embodiments of the disclosure are described below with the understanding that any of the embodiments may be used alone or in combination with one another.

[0005] Embodiment 1. A method of separating a glass web may comprise exposing a separation path on the glass web to at least one laser beam to produce thermal stress along the separation path without damaging the glass web. The method may include redirecting a portion of the at least one laser beam to create a defect on the separation path while the separation path is under thermal stress produced during the exposing the separation path on the glass web to the at least one laser beam, whereupon the glass web separates along the separation path in response to creating the defect.

[0006] Embodiment 2. The method of embodiment 1 where the portion of the at least one laser beam is reflected from a reflecting surface during the redirecting to redirect the portion of the laser path to create the defect.

[0007] Embodiment 3. The method of any one of embodiments 1 and 2 where the portion of the at least one laser beam is focused to create the defect.

[0008] Embodiment 4. The method of any one of embodiments 1-3 where the defect is created while exposing the separation path on the glass web to the at least one laser beam.

[0009] Embodiment 5. The method of any one of embodiments 1-4 where the defect is created after a predetermined level of thermal stress is achieved along the separation path during the exposing the separation path on the glass web to the at least one laser beam.

[0010] Embodiment 6. The method of any one of embodiments 1-5 where the glass web includes a first edge and a second edge opposed to the first edge, and where the separation path extends from the first edge to the second edge.

[0011] Embodiment 7. The method of embodiment 6 where the defect is created between the first edge and the second edge.

[0012] Embodiment 8. The method of embodiment 6 where the defect is created a distance from one of the first edge and the second edge of the glass web, where the distance is from 0 mm to about 25 mm.

[0013] Embodiment 9. The method of any one of embodiments 6-8 where the at least one laser beam traverses a beam path that extends off at least one of the first edge and the second edge of the glass web during the exposing the separation path on the glass web to the at least one laser beam.

[0014] Embodiment 10. The method of any one of embodiments 6-9 where the exposing the separation path on the glass web to the at least one laser beam comprises intersecting the at least one laser beam at a corresponding beam spot on a major surface of the glass web, and repeatedly passing the beam spot along the separation path to produce the thermal stress along the separation path.

[0015] Embodiment 11. The method of embodiment 10 where repeatedly passing the beam spot includes repeatedly passing the beam spot in a single direction.

[0016] Embodiment 12. The method of embodiment 11 where the single direction comprises a direction extending from the first edge toward the second edge of the glass web, and where the defect is created closer to the first edge than the second edge.

[0017] Embodiment 13. The method of any one of embodiments 1-12 where the at least one laser beam applies a varying power density along the separation path to produce the thermal stress.

[0018] Embodiment 14. The method of any one of embodiments 1-13 where a plurality of laser beams produce the thermal stress along the separation path with each laser beam producing thermal stress along a corresponding segment of the separation path.

[0019] Embodiment 15. The method of embodiment 14 where each segment of the separation path overlaps at least one adjacent segment of the separation path.

[0020] Embodiment 16. The method of any one of embodiments 1-5 where the glass web comprises a glass sheet, the separation path extends along a length of the glass sheet, and where the separation along the separation path separates an edge portion of the glass sheet from a central portion of the glass sheet.

[0021] Embodiment 17. The method of any one of embodiments 1-15 where the glass web comprises a glass ribbon, the separation path extends along a width of the glass ribbon, and where the separation along the separation path separates a glass sheet from the glass ribbon.

[0022] Embodiment 18. The method of any one of embodiments 1-17 where the glass web comprises a plurality of layers and a coefficient of thermal expansion of one layer of the plurality of layers is different than a coefficient of thermal expansion of another layer of the plurality of layers.

[0023] Embodiment 19. The method of any one of embodiments 1-18 where the glass web is positioned such that the entire separation path is located within a depth of focus of the laser beam.

[0024] Embodiment 20. The method of embodiment 19 where the depth of focus of the laser beam is from about 20 mm to about 400 mm.

[0025] Embodiment 21. A method of separating a glass web can include moving the glass web at a glass web velocity comprising a glass web velocity vector in a conveyance direction of the moving glass web. The method can further include exposing a separation path on the glass web to at least one laser beam spot generated by at least one laser beam to produce thermal stress along the separation path, the separation path extending in a direction transverse to the conveyance direction. The method can further include moving the laser beam spot at a laser beam spot velocity comprising a laser beam spot velocity vector in the conveyance direction that is equal to the glass web velocity vector, where the separation path continues to be exposed to the laser beam spot to continue producing thermal stress along the separation path while the glass web moves at the glass web velocity. The method can further include redirecting a portion of the at least one laser beam to create a defect on the separation path while the separation path is under thermal stress produced during the exposing the separation path and the moving the laser beam spot, whereupon the glass web separates along the separation path in response to creating the defect.

[0026] Embodiment 22. The method of embodiment 21 where the portion of the at least one laser beam is reflected from a reflecting surface during the redirecting to redirect the portion of the at least one laser beam to create the defect.

[0027] Embodiment 23. The method of any one of embodiments 21 and 22 where the portion of the at least one laser beam is focused to create the defect.

[0028] Embodiment 24. The method of any one of embodiments 21-23 where the moving the laser beam spot includes reflecting the at least one laser beam off a rotating reflective surface to cause the laser beam spot to move at the laser beam spot velocity vector.

[0029] Embodiment 25. The method of any one of embodiments 21-24, further comprising repeatedly passing the laser beam spot along the separation path in the direction transverse to the conveyance direction to produce the thermal stress along the separation path during the exposing the separation path and the moving the laser beam spot.

[0030] Embodiment 26. The method of embodiment 25 where the laser beam spot velocity comprises another laser beam spot velocity vector in the direction transverse

to the conveyance direction, wherein the laser beam spot moves in the conveyance direction and the direction transverse to the conveyance direction such that the separation path continues to be exposed to the laser beam spot to continue producing thermal stress along the separation path while the glass web moves at the glass web velocity and while the laser beam spot continues to repeatedly pass along the separation path in the direction transverse to the conveyance direction.

[0031] Embodiment 27. The method of embodiment 26 where the moving the laser beam spot includes reflecting the at least one laser beam off a first reflective surface rotating about a first axis to cause the laser beam spot to repeatedly pass along the separation path in the direction transverse to the conveyance direction, and reflecting the at least one laser beam off a second reflective surface rotating about a second axis to cause the laser beam spot to move at the laser beam velocity vector in the conveyance direction of the glass web.

[0032] Embodiment 28. The method of embodiment 27 where the at least one laser beam reflects off the first reflective surface before the second reflective surface.

[0033] Embodiment 29. The method of embodiment 27 where the at least one laser beam reflects off the second reflective surface before the first reflective surface.

[0034] Embodiment 30. The method of any one of embodiments 27-29 where the first axis is perpendicular to the second axis.

[0035] Embodiment 31. The method of any one of embodiments 25-30 where the step of repeatedly passing the beam spot includes repeatedly passing the beam spot in a single direction transverse to the conveyance direction.

[0036] Embodiment 32. The method of embodiment 31 where the single direction comprises a direction extending from a first edge toward a second edge of the glass web, and wherein the defect is created closer to the first edge than the second edge.

[0037] Embodiment 33. The method of any one of embodiments 21-32 where the defect is created while the laser beam spot is moved at the laser beam spot velocity.

[0038] Embodiment 34. The method of any one of embodiments 21-33 where the defect is created after a predetermined level of thermal stress is achieved along the separation path during the moving the laser beam spot.

[0039] Embodiment 35. The method of any one of embodiments 21-34 where the at least one laser beam spot comprises a plurality of laser beam spots that each produce thermal stress along a corresponding segment of the separation path during the exposing the separation path.

[0040] Embodiment 36. The method of embodiment 35 where each segment of the separation path overlaps a portion of at least one adjacent segment of the separation path.

[0041] Embodiment 37. The method of any one of embodiments 21-36 where the glass web includes a length and a width, and the conveyance direction is a direction of the length of the glass web.

[0042] Embodiment 38. The method of any one of embodiments 21-36 where the glass web comprises a glass ribbon drawn from a forming body, and the conveyance direction is a draw direction of the glass ribbon.

[0043] Embodiment 39. An apparatus for separating a glass web can include at least one laser beam generator to produce a laser beam that traverses along a separation path, where the laser beam heats the entire separation path extending from a first edge of the glass web to an opposed second edge of the glass web. The apparatus can further include a mirror configured to reflect an end portion of the laser path to create a defect at a location of the separation path on the glass web.

[0044] Embodiment 40. The apparatus of embodiment 39, where the mirror comprises a parabolic mirror.

[0045] Embodiment 41. The apparatus of embodiment 39, further comprising a lens configured to focus the end portion of the laser path.

[0046] Embodiment 42. The apparatus of any one of embodiments 39-41, further comprising a first reflector including a first reflective surface rotatable about a first axis. In this embodiment, the laser beam generator can be aligned with the first reflector such that a laser beam produced by the at least one laser beam generator will produce a laser beam spot that repeatedly passes within a laser path along the separation path on the glass web when the first reflector is rotated.

[0047] Embodiment 43. An apparatus for separating a glass web includes at least one laser beam generator and a first reflector comprising a first reflective surface

rotatable about a first axis. The laser beam generator is aligned with the first reflector such that a laser beam produced by the at least one laser beam generator will produce a laser beam spot that repeatedly passes along a separation path on the glass web when the first reflector is rotated. The apparatus further includes a second reflector comprising a second reflective surface rotatable about a second axis. The second reflector is aligned with the first reflector such that the laser beam spot will move in a conveyance direction of the glass web when the second reflector is rotated. The first reflector is positioned upstream from the second reflector such that the laser beam produced by the laser beam generator reflects off the first reflective surface of the first reflector prior to reflecting off the second reflective surface of the second reflector. The apparatus further comprises a mirror configured to reflect an end portion of the laser path to create a defect at a location of the separation path on the glass web.

[0048] Embodiment 44. The apparatus of embodiment 43 where the mirror comprises a parabolic mirror.

[0049] Embodiment 45. The apparatus of embodiment 43, further comprising a lens configured to focus the end portion of the laser path.

[0050] Embodiment 46. An apparatus for separating a glass web comprising at least one laser beam generator, a first reflector and a second reflector. The second reflector includes a second reflective surface rotatable about a second axis. The laser beam generator is aligned with the second reflector such that a laser beam produced by the at least one laser beam generator will produce a laser path with a laser beam spot that will move in a conveyance direction of the glass web when the second reflector is rotated. The first reflector includes a first reflective surface rotatable about a first axis. The first reflector is aligned with the second reflector such that the laser beam spot produced by the at least one laser beam will repeatedly pass along a separation path on the glass web when the first reflector is rotated. The second reflector is positioned upstream from the first reflector such that the laser beam produced by the laser beam generator will reflect off the second reflective surface of the second reflector prior to reflecting off the first reflective surface of the first reflector. The apparatus further includes a mirror configured to reflect an end portion of the laser path to create a defect at a location of the separation path on the glass web.

[0051] Embodiment 47. The apparatus of embodiment 46 where the mirror comprises a parabolic mirror.

[0052] Embodiment 48. The apparatus of embodiment 46, further comprising a lens configured to focus the end portion of the laser path.

BRIEF DESCRIPTION OF THE DRAWINGS

[0053] These and other features, aspects and advantages of the present disclosure are better understood when the following detailed description is read with reference to the accompanying drawings, in which:

[0054] **FIG. 1** is a schematic view of a fusion down-draw apparatus configured to draw a glass ribbon and exemplary glass ribbon separating apparatus;

[0055] **FIG. 2** is a cross sectional schematic view of an exemplary glass separation apparatus along line 2-2 of **FIG. 1**, wherein a laser beam is exposing an upstream end of a separation path on the glass ribbon;

[0056] **FIG. 3** is an enlarged view of a schematic mirror taken a view 3 of **FIG. 2**;

[0057] **FIG. 4** illustrates the laser beam exposing an intermediate location of the separation path on the glass ribbon;

[0058] **FIG. 5** illustrates the laser beam exposing a downstream end of the separation path on the glass ribbon;

[0059] **FIG. 6** illustrates the path on the glass ribbon being positioned within the depth of focus of the laser beam;

[0060] **FIG. 7** is a side view of the glass ribbon of **FIG. 6** illustrating a varying power density along the separation path of the glass ribbon;

[0061] **FIG. 8** illustrates the step of creating a defect in the glass ribbon on the separation path;

[0062] **FIG. 9** illustrates another embodiment wherein the separation path is exposed to a plurality of laser beams that each produces thermal stress along a corresponding segment of the separation path;

[0063] **FIG. 10** is a perspective schematic view of an apparatus exposing a separation path on the glass ribbon at an upstream location;

[0064] **FIG. 11** is the perspective schematic view of the apparatus of **FIG. 10** exposing the separation path at an intermediate location;

[0065] FIG. 12 is the perspective schematic view of the apparatus of FIG. 10 exposing the separation path at a downstream location;

[0066] FIG. 13 is the perspective schematic view of the apparatus of FIG. 12 with the glass ribbon separating the glass sheet from the glass ribbon along the separation path in response to a defect being created on the separation path while the separation path is under thermal stress;

[0067] FIG. 14 is a perspective schematic view of another apparatus exposing a separation path on the glass ribbon at an upstream location;

[0068] FIG. 15 is the perspective schematic view of the apparatus of FIG. 14 exposing the separation path at an intermediate location;

[0069] FIG. 16 is the perspective schematic view of the apparatus of FIG. 14 exposing the separation path at a downstream location; and

[0070] FIG. 17 is the perspective schematic view of the apparatus of FIG. 16 with the glass ribbon separating the glass sheet from the glass ribbon along the separation path in response to a defect being created on the separation path while the separation path is under thermal stress.

DETAILED DESCRIPTION

[0071] Apparatus and methods will now be described more fully hereinafter with reference to the accompanying drawings in which exemplary embodiments of the disclosure are shown. Whenever possible, the same reference numerals are used throughout the drawings to refer to the same or like parts. However, this disclosure may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

[0072] It is to be understood that specific embodiments disclosed herein are intended to be exemplary and therefore non-limiting. As such, the present disclosure relates to methods and apparatus for separating a glass web. In some embodiments, the glass web can include a glass ribbon formed from any glass forming process or glass manufacturing process. The glass ribbon can be provided directly from a glass forming apparatus or glass manufacturing apparatus, can be provided as a spool of glass ribbon that can be rolled or coiled onto a core, or can be provided as a freestanding glass ribbon. In other embodiments, the glass web can include a glass sheet formed by any glass

forming process or glass manufacturing process. The glass sheet can be provided as a glass sheet separated from a glass ribbon, as a glass sheet separated from another glass sheet, as one or more glass sheets provided as a spool of one or more glass sheets rolled or coiled onto a core, as a stack of glass sheets, or as a freestanding glass sheet.

[0073] The glass web can be separated in accordance with the embodiments disclosed herein to form one or more additional glass webs. In some embodiments, the one or more additional glass webs separated from the glass web can include a glass ribbon. The glass ribbon can be separated from a glass ribbon provided directly from a glass forming apparatus or glass manufacturing apparatus, can be separated from a glass ribbon provided as a spool of glass ribbon that can be rolled or coiled onto a core, or can be separated from a glass ribbon provided as a freestanding glass ribbon. In other embodiments, the one or more additional glass webs separated from the glass web can include a glass sheet. The glass sheet can be separated from a glass ribbon provided directly from a glass forming apparatus or glass manufacturing apparatus, can be separated from a glass ribbon provided as a spool of glass ribbon that can be rolled or coiled onto a core, or can be separated from a glass ribbon provided as a freestanding glass ribbon. In still other embodiments, the glass sheet can be separated from a glass sheet provided as a glass sheet separated from a glass ribbon, can be separated from a glass sheet provided as a glass sheet separated from another glass sheet, can be separated from a glass sheet provided as a spool of one or more glass sheets rolled or coiled onto a core, can be separated from a glass sheet provided as a stack of glass sheets, or can be separated from a glass sheet provided as a freestanding glass sheet.

[0074] In further examples the glass web may be separated to remove an edge portion from a remainder of the glass web. For instance, the edge portion may be discarded or further processed in additional applications.

[0075] Glass sheets separated from the glass web can be suitable for further processing into a desired display application. The glass sheets can be used in a wide range of display applications, including liquid crystal displays (LCDs), electrophoretic displays (EPD), organic light emitting diode displays (OLEDs), plasma display panels (PDPs), or the like. Glass sheets may need to be transported from one location to another. The glass sheets may be transported with a conventional support frame designed

to secure a stack of glass sheets in place. Moreover, interleaf material can be placed between each sheet of glass to help prevent contact and therefore preserve the pristine surfaces of the glass sheets.

[0076] Some embodiments will now be described wherein the glass web to be separated comprises a glass ribbon although apparatus and methods of the disclosure are not so limiting. Indeed, apparatus and methods of the disclosure can be used to separate any one of a variety of glass webs, such as the glass webs discussed above.

[0077] In some embodiments, methods of separating a glass web comprising a glass ribbon may be used in conjunction with a glass manufacturing apparatus configured to fabricate the glass ribbon although other glass processing apparatus may be provided in further embodiments. In some embodiments, the glass manufacturing apparatus can comprise a slot draw apparatus, float bath apparatus, down-draw apparatus, up-draw apparatus, press-rolling apparatus or other glass ribbon manufacturing apparatus. By way of example, **FIG. 1** schematically illustrates an apparatus for processing a quantity of glass melt comprising a fusion down-draw apparatus **101** for fusion drawing a glass ribbon **103** for subsequent separation, for example, separation into another glass web such as the illustrated glass sheet **104**. The fusion down-draw apparatus **101** can include a melting vessel **105** that receives batch material **107** from a storage bin **109**. The batch material **107** can be introduced by a batch delivery device **111** powered by a motor **113**. An optional controller **115** can be used to activate the motor **113** to introduce a desired amount of batch material **107** into the melting vessel **105**, as indicated by arrow **117**. A glass melt probe **119** can be used to measure a glass melt **121** level within a standpipe **123** and communicate the measured information to the controller **115** by way of a communication line **125**.

[0078] The fusion down-draw apparatus **101** can also include a first conditioning station such as a fining vessel **127** located downstream from the melting vessel **105** and coupled to the melting vessel **105** by way of a first connecting conduit **129**. In some embodiments, glass melt may be gravity fed from the melting vessel **105** to the fining vessel **127** by way of the first connecting conduit **129**. For instance, gravity may drive the glass melt through an interior pathway of the first connecting conduit **129** from the

melting vessel **105** to the fining vessel **127**. Within the fining vessel **127**, bubbles may be removed from the glass melt by various techniques.

[0079] The fusion draw apparatus can further include a second conditioning station such as a glass melt mixing vessel **131** that may be located downstream from the fining vessel **127**. The glass melt mixing vessel **131** can be used to provide a homogenous glass melt composition, thereby reducing or eliminating cords of inhomogeneity that may otherwise exist within the fined glass melt exiting the fining vessel. As shown, the fining vessel **127** may be coupled to the glass melt mixing vessel **131** by way of a second connecting conduit **135**. In some embodiments, glass melt may be gravity fed from the fining vessel **127** to the glass melt mixing vessel **131** by way of the second connecting conduit **135**. For instance, gravity may drive the glass melt to pass through an interior pathway of the second connecting conduit **135** from the fining vessel **127** to the glass melt mixing vessel **131**.

[0080] The fusion draw apparatus can further include another conditioning station such as a delivery vessel **133** that may be located downstream from the glass melt mixing vessel **131**. The delivery vessel **133** may condition the glass to be fed into a forming device. For instance, the delivery vessel **133** can act as an accumulator and/or flow controller to adjust and provide a consistent flow of glass melt to the forming vessel. As shown, the glass melt mixing vessel **131** may be coupled to the delivery vessel **133** by way of a third connecting conduit **137**. In some embodiments, glass melt may be gravity fed from the glass melt mixing vessel **131** to the delivery vessel **133** by way of the third connecting conduit **137**. For instance, gravity may drive the glass melt through an interior pathway of the third connecting conduit **137** from the glass melt mixing vessel **131** to the delivery vessel **133**.

[0081] As further illustrated, a downcomer **139** can be positioned to deliver glass melt **121** from the delivery vessel **133** to an inlet **141** of a forming vessel **143**. The glass ribbon **103** may then be fusion drawn off the root **145** of a forming wedge **147** and subsequently separated into a glass web, such as another glass ribbon or the illustrated glass sheet **104**, by a glass separation apparatus **149**. **FIG. 1** illustrates a general schematic of the glass separation apparatus **149** wherein **FIGS. 2-5, 7 and 8** schematically illustrate exemplary features of the glass separation apparatus **149**. Indeed,

as illustrated, the glass separation apparatus **149** may divide the glass sheet **104** from the glass ribbon **103** along a separation path **151** that extends in a direction **225** (see **FIG. 2**) that is transverse to the conveyance direction such as the draw direction **1001**. As illustrated in **FIG. 1**, in any of the embodiments of the disclosure, the direction **225** transverse to the conveyance direction **1001** may include the direction **225** being perpendicular to the conveyance direction **1001** or at another angle relative to the conveyance direction. In some embodiments, the direction **225** extends along a width “**W**” of the glass ribbon **103** between a first outer edge **153** and a second outer edge **155** of the glass ribbon **103**. As illustrated in **FIG. 1**, in some embodiments, the conveyance direction **1001** of the glass ribbon **103** can include the draw direction of the glass ribbon. In the illustrated embodiment, the conveyance direction **1001** can be the fusion draw direction of the glass ribbon **103** being fusion down-drawn from the forming vessel **143**. Alternatively, if the glass ribbon is being unwound from a spool of glass ribbon, the conveyance direction can be considered the direction along which the glass ribbon is being drawn from the spool. Still further, if the glass web (e.g., glass ribbon, glass sheet, etc.) is being traversed along a travel path, the conveyance direction can be considered the direction that the glass web travels along the travel path.

[0082] In one embodiment, shown in **FIG. 1**, a length of the glass ribbon **103** can be considered the overall length “**L1**” of the glass ribbon **103** extending from the root **145** of the forming wedge **147** to the outer end **171** (e.g., lower end) of the glass ribbon **103**. In further embodiments, the length of the glass ribbon **103** may be considered a portion of the overall length “**L1**” of the glass ribbon. For example, the length of the glass ribbon **103** can be considered a dimension of the glass ribbon along a direction perpendicular to the width “**W**” of the glass ribbon **103**. In addition or alternatively, the length of the glass ribbon **103** can be considered a dimension of the glass ribbon along the draw direction **1001** of the glass ribbon **103**.

[0083] In another embodiment, the glass separation apparatus **149** may separate an edge portion (e.g., an edge web portion) from the glass web. For example, as shown in **FIG. 1**, the glass separation apparatus **149** can separate an edge portion **159** of the glass sheet **104** from a central portion **161** of the glass sheet **104** along a separation path **163** that extends transverse to a conveyance direction of the glass sheet **104**, wherein the

separation path **163** extends between a first edge **165** and a second edge **167** of the glass sheet **104**. In the illustrated embodiment, the separation path **163** extends along a length “**L2**” of the glass sheet that is perpendicular to the conveyance path of the glass sheet **104**.

[0084] **FIG. 2** illustrates an exemplary glass separation apparatus **149** schematically illustrated in **FIG. 1**. The glass separation apparatus can include a laser beam generator **201** that produces a laser beam **203**. In one embodiment, the laser beam generator produces a CO₂ laser beam that can heat the selected path with relatively long pulses that may approximate a continuous flow of energy can be utilized. As such, the laser beam **203** may be designed to heat the selected path on the glass ribbon (or glass sheet **104**) without damaging the glass ribbon. For purposes of this application, heating the selected path on the glass ribbon without damaging the glass ribbon is intended to mean heating the path without damaging the glass ribbon in a manner that would otherwise result in separation of the glass ribbon without a defect. Examples of heating a selected path without damaging the glass ribbon can include heating without melting the glass ribbon, heating without ablating the glass ribbon, heating without creating a full-body crack in the glass ribbon, and heating without scoring the glass ribbon. Indeed, the laser beam **203** may avoid damaging the glass ribbon to allow generation of a desired level of thermal stress along the separation path **151**, **163** of the glass ribbon (e.g., the glass ribbon **103** or the glass sheet **104**) without separating the glass ribbon prior to application of the defect as discussed below.

[0085] As further shown in **FIG. 2**, the exemplary glass separation apparatus **149** may further include an optional series of reflectors **205a**, **205b**, **205c**, **205d** and one or more optical lenses **207** configured to provide a laser beam spot **209** on an outer edge portion **211a**, **211b** or a first major surface **213** of the glass ribbon **103** or glass sheet **104**. Throughout the application, the laser beam can be moved along a path, and a laser beam spot **209** is considered the area of the surface of the glass web exposed to the laser beam **203** where the laser beam **203** intersects the surface of the glass web. In some embodiments, the laser beam spot may comprise a circular or rectangular laser beam spot or an oblong laser beam spot that has a maximum outer dimension that is significantly less than the overall length of the separation path **151**. In such embodiments, as

discussed below, the laser beam spot can be scanned repeatedly along the separation path prior to application of the defect. In further embodiments of the disclosure, the laser beam spot may comprise an elongated laser beam spot that spans the entire length of the separation path **151**. For instance, the elongated laser beam spot may comprise a stationary laser beam spot that does not scan across, or otherwise move, relative to the glass ribbon **103**. Rather, the elongated laser beam spot may simultaneously irradiate the entire separation path. In some embodiments, the laser beam, without redirecting, can extend even greater than the entire length of the separation path and/or can extend along a path off an edge of the glass web. Indeed, in some embodiments described below, a portion of the laser beam (e.g., that would otherwise project to extend off the edge of the glass web) may be redirected to create a defect on the separation path **151**.

[0086] In some embodiments, where the laser beam spot is significantly less than the overall length of the separation path **151**, the glass separation apparatus **149** can include a first reflector such as the illustrated polygonal reflector **215**. The first reflector can include a first reflective surface. For instance, as shown in **FIG. 2**, the illustrated polygonal reflector **215** can include an octagonal reflector wherein the first reflective surface can comprise eight reflective surface segments **219a-h** that may be integral with one another or provided as separate segments that are mounted in close proximity relative to one another. Furthermore, although an octagonal reflector may be used, other reflectors with more or less reflective surface segments may be used in accordance with aspects of the disclosure. The first reflective surface, or any reflective surface of the first reflector, or the reflective surface of any reflector of the disclosure, can comprise a surface of a mirror that reflects light from the reflective surface of the mirror, a reflective surface of polished metal or other reflective surface. In further embodiments, as shown, the reflective surfaces may be flat, although curved (e.g., concave, convex) surfaces may be provided in further embodiments.

[0087] In one embodiment, the method can include the step of exposing either one or both of the separation paths **151**, **163** along the glass ribbon **103** or glass sheet **104** by rotating the first reflector in a clockwise or counterclockwise rotation. For instance, as shown in **FIGS. 2-6 and 8-9**, the polygonal reflector **215** may rotate in the counterclockwise direction **217** about a first rotation axis **218** to sequentially position

each of the eight reflective surface segments **219a-h** within the selected path of the laser beam **203**. The illustrated rotation shown in the figures depicts the principles of sweeping the laser beam spot **209**. Actual configuration and/or rotation of the polygonal reflector **215** will depend on a wide range of factors such as whether the laser beam spot **209** sweeps between extreme positions from the first outer edge **153** to the second outer edge **155** of the glass ribbon or whether the laser beam spot **209** sweeps off at least one edge of the glass ribbon as shown in **FIGS. 2-3 and 6-16**.

[0088] As discussed below, the laser beam can heat the separation path **151** on the glass ribbon. Throughout the drawings, the separation path **151** is schematically shown as a broken line with the understanding that the actual separation path is coincident with the glass ribbon such as the edge portions and/or major surfaces of the glass ribbon. As shown, the separation path **151** can extend along the outer edge portions **211a**, **211b** and a first major surface **213** of the glass ribbon **103** facing the glass separation apparatus **149** from the first outer edge **153** to the second outer edge **155**, although the separation path can extend along the opposite major surface of the glass ribbon or at an intermediate location between the two major surfaces of the glass ribbon. Indeed, as shown, the separation path **151** can extend coincident with the outer surfaces of the outer edge portions **211a**, **211b** and also extend coincident with the first major surface **213** of the glass ribbon **103**. Furthermore, as shown, the first outer edge portion **211a** can include the first outer edge **153** and the second outer edge portion **211b** can include the second outer edge **155** wherein the separation path **151** can extend across a substantial portion or the entire width “**W**” of the glass ribbon. Likewise, referring to **FIG. 1**, the glass sheet **104** can include the first edge **165** and the second edge **167** wherein the separation path **163** can extend across a substantial portion or the entire length “**L2**” of the glass sheet **104**.

[0089] An exemplary method of heating the separation path **151** with the exemplary polygonal reflector **215** will now be discussed. As shown in **FIG. 2**, for example, as the first reflective surface segment **219a** crosses the path of the laser beam, a first edge portion **221a** of the first reflective surface segment **219a** initially crosses the path of the laser beam **203** to reflect the laser beam, as indicated by laser beam path **228a** off a mirror **229**. As indicated at **228b** (See **FIG. 3**), the laser beam **203** that has reflected

off the mirror **229** is then directed to intersect the separation path **151** at location **331**. In one embodiment, as shown in **FIG. 7**, the laser beam spot **703** at location **331** can have an elongated length that is greater in the direction of the separation path **151** than a direction perpendicular to the separation path. Providing the laser beam spot **703** with an elongated length that extends along the separation path **151** can encourage correct crack formation and propagation along the separation path **151**.

[0090] In one embodiment, as shown schematically, the mirror **229** can comprise a parabolic or other mirror designed to reflect the laser beam **203** to continue exposing the location **331** to the laser beam spot **703** through a rotational angle of the polygonal reflector **215** in the counterclockwise direction **217** about the first rotation axis **218**. Indeed, as shown, in **FIG. 2**, as the polygonal reflector **215** continues to rotate, the laser beam path **228a** scans across the mirror **229** to a new path **232a**. As indicated at **232b**, the laser beam **203** that has reflected off the mirror **229** (e.g., parabolic mirror) is still directed to intersect the separation path **151** at location **331**. In fact, in the illustrated embodiment, the laser beam **203** continues to intersect the separation path **151** at location **331** the entire time the laser beam scans across the mirror from path **228a** to path **232a** as the polygonal reflector **215** rotates through the rotation angle in the counterclockwise direction **217** about the first rotation axis **218**.

[0091] In some embodiments, the footprint of the location **331** matches the footprint of the laser beam spot **703** such that the laser beam spot **703** irradiates the entire location **331** during the rotation angle of the polygonal reflector **215**. In further embodiments, the location **331** may be larger than the footprint of the laser beam spot **703** wherein the laser beam spot moves a distance through the rotational angle of the polygonal reflector **215**. Regardless of the relative size of the laser beam spot **703** and the location **331**, the location **331** is heated above and beyond the other portions of the separation path **151** due to the increased residence time of the laser beam spot **703** within the location **331**. Furthermore, the location **331** is still heated further as the laser beam spot **209** sweeps across the separation path as discussed below.

[0092] Eventually, the polygonal reflector **215** will rotate past the rotational angle such that the laser **203** is not reflected by the parabolic mirror **229**. In some embodiments, although not shown, once the polygonal reflector **215** has just rotated

sufficiently such that the laser **203** is not reflected by the parabolic mirror, the laser can pass by the mirror and expose the separation path **151** on the outer edge portion **211a** of the glass ribbon **103**. In further embodiments, as shown by path **301** in **FIG. 3**, once the polygonal reflector **215** has rotated sufficiently such that the laser **203** is not reflected by the parabolic mirror, the laser can pass between the mirror **229** and the outer edge **153** of the glass ribbon **103** such that the laser does not impact the glass ribbon but travels off the outer edge **153** of the first outer edge portion **211a** of the glass ribbon **103**. Providing the laser beam to travel off the outer edge **153** can maximize exposure of the separation path **151** and thereby maximize the stress along substantially or the entire separation path **151**.

[0093] As further shown in **FIG. 3**, whether or not the laser beam travels off the outer edge **153**, rotation of the polygonal reflector **215** eventually causes the reflected laser beam traveling along path **303** to expose an upstream end **222** of a separation path **151** across the glass ribbon **103** to the laser beam spot **209**. Indeed, as shown, the upstream end **222** of the separation path **151** is exposed to the laser beam spot **209**, thereby heating the separation path **151** at that location. As the polygonal reflector **215** continues to rotate in the counterclockwise direction **217** about the first rotation axis **218**, the angle of the first reflective surface segment **219a** changes, such that the laser beam spot **209** travels along a direction **225** extending from the first outer edge portion **211a** toward a second outer edge portion **211b** of the glass ribbon **103**. As shown in **FIG. 7**, the laser beam spot **209** eventually passes over the location **331** previously heated by the reflected laser beam spot **703**, thereby further heating the location **331**. As shown, in some embodiments, the reflected laser beam spot **703** may have a smaller footprint than the laser beam spot **209** to provide a focused area of enhanced exposure to the laser beam at location **331**.

[0094] **FIG. 4** illustrates the polygonal reflector **215** being rotated such that an intermediate portion **221b** of the first reflective surface segment **219a** subsequently crosses the path of the laser beam **203** to reflect and expose an intermediate location **401** of the separation path **151** to the laser beam spot **209**, thereby heating the path at that location.

[0095] As further shown in **FIG. 5**, the polygonal reflector **215** can be even further rotated in the counterclockwise direction **217** about the first rotation axis **218** such that a second edge portion **221c** of the first reflective surface segment **219a** subsequently crosses the path **507** of the laser beam to reflect and expose a downstream end **501** of the separation path **151** to the laser beam spot **209**, thereby heating the separation path at that location. A further incremental rotation in the counterclockwise direction **217** about the first rotation axis **218** will cause a first edge portion **503** of the second reflective surface segment **219b** to cross the path of the laser beam **203**, wherein the laser beam spot **209** will disappear from the downstream end **501** of the separation path **151** and reappear at the location **331** after traveling along path **228a-228b** as shown in **FIG. 3**. Of course, as the actual laser beam comprises a finite diameter, there is a short moment in time where the laser beam will simultaneously reflect from adjacent portions of adjacent reflective surface segments. At such a moment in time, the laser beam spot **209** may partially appear locations associated with the extremes of the sweep path. For example, during a short period of time, the laser beam **203** will reflect simultaneously from the second edge portion **221c** of the first reflective surface segment **219a** and the first edge portion **503** of the second reflective surface segment **219b**. At such moment in time, the laser beam spot **209** may partially appear at the location shown in **FIG. 5** and partially appear at the location **331** in **FIGS. 2-3**.

[0096] As such, the step of heating can include repeatedly passing the laser beam spot **209** along the separation path **151** to produce thermal stress along the separation path **151**. Moreover, in the illustrated embodiment, the step of repeatedly passing the laser beam spot **209** can optionally include repeatedly passing the laser beam spot **209** in the single direction **225**. Indeed, as each of the reflective surface segments **219a-h** crosses the path of the laser while the polygonal reflector **215** rotates in the illustrated counterclockwise direction **217** about the first rotation axis **218**, the laser beam spot **209** always moves in the single direction **225** from the upstream end **222** to the downstream end **501** of the separation path **151**. The laser beam spot can travel at various speeds along the single direction **225** depending on the rotational speed of the polygonal reflector **215**. For example, the laser beam spot can travel along separation path **151**

from about 0.5 km/s to about 6 km/s, such as from about 1 km/s to about 5 km/s, such as from about 2 km/s to about 4 km/s such as about 3 km/s.

[0097] Further, in addition to repeatedly passing the laser beam spot **209** along the separation path **151** to produce thermal stress along the separation path **151**, the location **331** is also heated above the other portions of the separation path as a portion of the laser sweeping off the first outer edge **153** is redirected to expose the location **331** to the laser beam spot **703**, thereby further heating that area of the separation path **151**.

[0098] Although not shown, in further embodiments, the separation path **151** may be heated in a wide variety of ways. For instance, multiple laser beam generators **201** may be provided and/or the laser beam produced by the laser beam generator may be split into two or more laser beams to simultaneously reflect laser beams from different mirrors and/or different portions of the same mirror of the polygonal reflector. As such, multiple laser beam spots may be provided that travel simultaneously along the separation path **151** in the single direction **225** or along opposite directions depending on the optical configuration of the glass separation apparatus **149**. In another embodiment, the laser beam **203** produced by the laser beam generator **201** may be extended into an elongated laser beam spot that simultaneously heats the entire separation path **151**. In such embodiments, the laser beam spot **209** may remain stationary while simultaneously heating the entire separation path **151** and while a portion of the laser beam directed off the first outer edge **153** is redirected to additionally heat the location **331**. In still further examples, a plurality of stationary laser beam spots may be provided to heat the entire separation path **151**. For instance, the stationary laser beam spots may be positioned end to end wherein the overall length of all of the laser beam spots extends along the entire length of the separation path **151**, or greater than the entire length of the separation path **151** while a portion of the laser beam directed off the outer edge **153** is redirected to additionally heat the location **331**. In further embodiments, the stationary laser beam spots may be positioned to partially overlap one another wherein the overall length of all of the laser beam spots also extends along the entire or greater than the entire length of the separation path **151**.

[0099] In still another embodiment, a plurality of the glass separation apparatus **149** may be provided that each exposes a segment of the overall separation path to the

laser beam spot **209**. For instance, as shown in **FIG. 9**, a plurality of glass separation apparatus **149** may be provided that may optionally be similar or identical to the previously-described glass separation apparatus **149**. It should be noted that while five glass separation apparatus **149** are depicted in **FIG. 9**, this depiction should not limit the scope of the claims appended herewith as any number of glass separation apparatus (e.g., from 1, 2, 3 to greater than 5 glass separation apparatus) can be used in embodiments of the claimed subject matter. Each glass separation apparatus **149** may produce a laser beam **902, 904, 906, 908, 910** that can produce thermal stress along a corresponding heated segment **901, 903, 905, 907, 909** along the overall separation path with a respective laser beam spot **209** provided by each laser beam. In some embodiments, the heated segments may be positioned end-to-end to heat the separation path along the glass ribbon **103**. However, as shown, each heated segment may overlap at least one adjacent heated segment at overlapping regions **911, 913, 915, 917** to provide sufficient heating of the separation path between the segments. In some embodiments, the overlapping regions may include an overlapped length that is from about 5% to about 40% of the length of at least one of the heated segments **901, 903, 905, 907, 909**, such as from about 10% to about 30%, such as about 10% to about 25% of the length of at least one of the heated segments. In one embodiment, each corresponding heated segment **901, 903, 905, 907, 909** can have a length of about 800 millimeters (mm) with each overlapping region **911, 913, 915, 917** having an overlapped length of about 100 mm. Providing the segments and optional overlapping regions can help achieve a sufficient level of thermal stress along the overall separation path extending along the glass ribbon.

[00100] As further shown in **FIG. 9**, a portion of the laser beam can be redirected to create the defect **801** with a mirror such as the parabolic mirror **229** discussed above. Alternatively, as shown, an optical arrangement may be provided where a mirror, such as the illustrated flat mirror **919**, reflects the laser along and between paths **228a, 303** to focus (e.g., with lens **921**) at the location **331** to provide a similar or identical beam spot profile discussed with respect to **FIG. 7** above. As shown, the lens **921** may be provided upstream, prior to the laser being reflected by the mirror **919** such that the laser beam begins focusing prior to being reflected by the mirror **919**. In alternative embodiments, the lens **921** may be located downstream from the mirror **919**.

so that the laser beam begins focusing after being reflected by the mirror **919**. Although the flat mirror **919** and lens **921** are shown as a method of redirecting the portion of the laser beam in **FIG. 9**, such a configuration may be provided in any of the embodiments of the disclosure.

[00101] Some embodiments of the disclosure demonstrate the laser beam spot traveling across a substantial portion of the glass ribbon, such as the entire dimension of the glass ribbon, and in other embodiments, the laser beam spot is also shown to travel off the glass ribbon. As such, the separation path **151**, **163** can likewise extend across a substantial portion of the glass ribbon, such as the entire dimension of the glass ribbon. For instance, as illustrated, the laser beam spot **209** passes along the entire width “**W**” of the glass ribbon **103** from the first outer edge **153** to the second outer edge **155** such that the separation path **151** extends the entire width “**W**” of the glass ribbon **103**. Likewise, as further illustrated in **FIG. 1**, the laser beam spot **209** passes along the entire length “**L2**” of the glass sheet **104** from the first edge **165** to the second edge **167** such that the separation path **163** extends the entire length “**L2**” of the glass sheet **104**. In some embodiments, the separation path **151**, **163** can be from about 50 mm to about 5000 mm, such as from about 50 mm to about 1000 mm, although the laser beam spot **209** may travel along longer or shorter paths in further embodiments.

[00102] The laser beam spot **209** can comprise a circular spot, although elliptical or other spot shapes may be provided in further embodiments. A minimum diameter of the circular laser beam spot at the focused waist can be from about 1 mm to about 2 mm, when determined as $1/e^2$ of the intensity profile of the spot, although other dimensions may be provided in further embodiments. Likewise, the maximum length of an elliptical or other spot shape can be from about 1 mm to about 3 mm, although other dimensions may be provided in further embodiments. For example, when utilizing a stationary laser beam, the laser beam spot shape can be substantially elongated and have a length of tens of centimeters, for example in excess of 1 meter in length. One or a plurality of stationary laser beam spots may be used to expose the separation path **151**.

[00103] As described above, as indicated by path **301** in **FIG. 3**, the laser beam can sweep off at least one end of the separation path such as the upstream end **222** and/or the downstream end **501** of the separation path **151**. Indeed, as indicated by path **301** in

FIG. 3, the laser beam can sweep off the upstream end **222** of the separation path **151**. Furthermore, as indicated by path **601** in **FIG. 6**, the laser beam can sweep off the downstream end **501** of the separation path **151** in further embodiments. Providing a configuration where the laser beam sweeps off both the upstream end **222** and the downstream end **501** can help maximize exposure of the separation path **151** to heating by the laser beam and ensure that all portions of the separation path **151** achieve a sufficient level of thermal stress. Furthermore, allowing the laser beam to sweep off at least one of the upstream end or the downstream end allows the parabolic mirror **229** or other mirror to redirect the energy of the laser beam traveling off the end of the separation path to be redirected to expose the location **331** of the separation path **151** to further heat this portion of the separation path.

[00104] As further illustrated in **FIG. 6**, while exposing the separation path **151** along the glass ribbon, the glass ribbon may be positioned such that the entire separation path **151** is located within the depth of focus “DOF” of the laser beam. The depth of focus “DOF” can be calculated by the formula:

$$\text{DOF} = \left(\frac{8\lambda}{\pi} \right) \left(\frac{F}{D} \right)^2$$

where “F” is the focal length of the lens **207**, “D” is the beam diameter before the lens and “λ” is the wavelength.

[00105] Positioning the entire separation path **151** within the depth of focus of the laser beam **203** can help increase efficiency of energy transfer from the laser beam to the separation path **151**. Since the depth of focus of the laser beam exceeds amplitudes of the glass warp, thickness variation and motion of the glass ribbon during separation, the depth of focus enables separation of non-flat glass with variable thickness, which can also move or to some extent change orientation relative to the laser beam generator **201**. In some embodiments, the depth of focus “DOF” can be from about 20 mm to about 400 mm, such as from about 20 mm to about 200 mm although other depths of focus may be provided in further embodiments.

[00106] Furthermore, in some embodiments, the entire glass ribbon, in addition to the path of the glass ribbon, may be positioned within the depth of focus. The depth of

focus of the laser beam can be large enough to exceed variations of the glass thickness, glass warp or other possible changes in the position of the glass ribbon, and consequently the separation path on the glass ribbon, relative to the laser beam generator during the methods of the present disclosure.

[00107] Furthermore, in some embodiments, a dimension of the laser beam spot **209** on a major surface of the glass ribbon varies while repeatedly passing the laser beam spot along the separation path **151**, especially near the ends of the separation path. For example, the dimension of the laser beam spot **209** on the major surface of the glass ribbon may vary along the separation path **151** when the laser beam **203** is focused along sweep path **603** or sweep path **605**, although other sweep paths may be provided while the glass ribbon is still maintained within the depth of focus.

[00108] As shown in **FIG. 7**, if traveling along sweep path **605**, the laser beam spot **209** may apply a varying power density along the separation path **151**, as represented by the illustrated truncated elliptical power density area **701**, due to the changes in the diameter and shape of the laser beam spot **209** along the separation path **151**. The elliptical power density area **701** of the laser beam spot **209** on the surface of the glass ribbon is truncated since, the laser beam spot intentionally travels off the glass ribbon in the embodiment shown in **FIG. 7** with remaining portions of the power density being redirected with the mirror (e.g., parabolic mirror **229**) to the location **331** where the other end may include an optional non-truncated elliptical power density area where the laser travels off the second outer edge **153** of the glass ribbon.

[00109] When the outer edge portions **211a**, **211b** comprise thickened edge beads, it may be even more beneficial to separate the glass ribbon using two laser beams **203** that produce maximum power densities located near or at the thickened edges (e.g., edge beads), with portions of the respective laser beam spots overlapping in the central area of the glass ribbon. As the maximum power densities are located closer or at the thickened edges, higher thermal stress may be targeted at the thickened edge beads, resulting in increased thermal stress. At the same time, partially overlapping the relatively lower power density provided by the tail of the laser beam spot can provide enhanced thermal stress due to double exposure from the overlapping laser beam spots. Such overlapping can also be provided at overlapping regions **911**, **913**, **915**, **917** shown

in **FIG. 9**, wherein double exposure can account for the lower power density at the outer ends of the heated segments to help achieve a sufficient level of thermal stress along the overall separation path extending along the glass ribbon.

[00110] Localized heating of the separation path **151** creates a temperature differential between different portions of the glass ribbon that creates thermal stress along the separation path **151**. The process of heating the separation path **151**, as discussed above, can be carried out until a predetermined level of stress is achieved. In some embodiments, the preferred predetermined level of stress is the stress corresponding to the temperature along the separation path **151** that is from about 70% to about 100% of the strain temperature point of the glass, such as from about 80% to about 100%, such as from about 90% to about 100%, such as from about 95% to about 100% of the strain point of the glass. This level of heating avoids generation of residual stress in the glass ribbon. In further embodiments, the predetermined level of stress is the stress corresponding to the temperature along the separation path **151** that is from the strain point up to the annealing point of the glass. While lower temperatures may be possible, sometimes it can be desired to reach relatively higher temperatures to maximize the thermal stress along the separation path **151**. Providing a relatively high thermal stress can help reduce the separation time after applying the defect discussed more fully below. In some embodiments, the separation time can be from about 0.1 second to about 3 seconds after creating the defect, although other separation times are possible in further embodiments.

[00111] The time necessary to heat the separation path to the desired level of thermal stress can depend on a wide range of factors such as laser power, type of glass, dimension of the glass, its thickness or other factors. In some embodiments, the separation path **151**, **163** may be sufficiently heated in a range from about 0.1 seconds to about 5 seconds with a CO₂ laser power from about 300 W to about 1.5 kW and a glass thickness from about 0.1 mm to about 3 mm.

[00112] As set forth above, the method of separating the glass ribbon (e.g., glass ribbon, glass sheet, etc.) can include the step of exposing a separation path **151** on the glass ribbon to at least one laser beam spot **209** to produce thermal stress along the separation path without damaging the glass ribbon. The method can also include the step

of creating a defect on the separation path while the separation path is under thermal stress produced during the step of exposing the separation path on the glass ribbon to at least one laser beam spot **209**, whereupon the glass ribbon separates along the separation path in response to creating the defect.

[00113] In one embodiment, the defect is produced after a predetermined level of thermal stress is achieved along the separation path **151** during the step of exposing the separation path to the at least one laser beam spot **209**. Indeed, as the entire separation path is under a predetermined level of thermal stress, the initiation of the defect directly results in the glass ribbon separating along the separation path in response to creating the defect. The separating can begin as the defect is being created or immediately after the defect is created. As such, separation of the glass ribbon can occur as a direct result of the defect that quickly propagates a full body crack along the entire separation path to separate the glass ribbon based on the predetermined level of thermal stress achieved with the laser beam spot **209** and without assistance of other separation forces such as bending, quenching or otherwise stressing the glass sheet. As used herein, the term full body crack refers to a crack that extends through the entire thickness of the glass ribbon. The time to separate the glass web (e.g., glass ribbon) in accordance with aspects of the disclosure can significantly reduce the time necessary to separate the glass web when compared to conventional techniques. As such, aspects of the disclosure can be beneficial in applications where quick separation of the glass web is desirable over conventional techniques. For instance, in applications with increased draw speed, quick separation can be beneficial to allow separation to occur within a given travel length of the glass ribbon. Furthermore, methods of the disclosure can separate the glass ribbon even at elevated temperature conditions. For example, while separation can occur while the glass ribbon is at room temperature, separation can also occur when the glass ribbon is at an elevated temperature typically below the glass strain point, for example, at a temperature up to 400°C although other maximum temperatures may be provided in further embodiments. As such, methods of the disclosure can provide separation before the glass ribbon is cooled during the forming process or during other processing procedures.

[00114] In one embodiment, as shown in **FIG. 8**, in any of the embodiments discussed above, the step of creating the defect can be performed while performing the step of exposing the selected separation path to the at least one laser beam spot **209** to produce thermal stress along the separation path. Creating the defect while exposing the separation path can help maintain a sufficient level of thermal stress along the separation path to provide quick separation that occurs in direct response to creating the defect. In some embodiments, the step of exposing the selected separation path may be completed after beginning the step of creating the defect and may even continue until the separation of the glass ribbon along the separation path is complete. Another advantage of creating the defect while exposing the separation path is reduction of probability of uncontrollable breakage, which may start during exposure (heating), when the defect is created prior to exposure. This can enable reliable separation of strengthened glasses, laminated glass structures and any other glass products having high internal stress. Yet, another advantage of creating the defect while exposing the path is reduction of overall time required for separation.

[00115] In further embodiments, the step of exposing the selected separation path **151** may be completed just prior to creating the defect, at the time the defect is being created, immediately after the defect is created, or shortly after the defect is created. In such embodiments, the defect can still be created when there is sufficient residual thermal stress along the separation path to provide separation along the separation path. In some embodiments, however, the speed of separation can be increased by continuing to expose the separation path **151** to the at least one laser beam spot **209** while creating the defect and even after creating the defect (e.g., during the entire separation of the glass ribbon). Indeed, continuing to expose the separation path while creating the defect can increase the speed of separation by maintaining a predetermined thermal stress, such as a maximum thermal stress along the separation path. However, overexposure of the separation path should be avoided to minimize or avoid generation of residual stress along the separated edges due to overheating.

[00116] The step of creating the defect may be performed in a wide variety of ways. For instance, as shown schematically in **FIG. 1**, in one embodiment, the defect may be created by mechanically engaging the glass ribbon **103**, for example, with a

mechanical tool **168** (e.g., score wheel, indenter, rotary tool (rotating disk), diamond tip, etc.). Indeed, a tip of a scribe can create a defect **801** such as a surface imperfection (e.g., surface crack). In further embodiments, the defect may be provided as a point defect or a score line. Although not shown, a support device such as an air bearing or mechanical contact support member may be provided to help counteract the force applied by the scribe to facilitate creation of the defect **801**.

[00117] In another embodiment, as shown in **FIG. 1**, the defect may be created with a laser beam generator **169** that is different than the laser beam generator **201** used to heat the separation path **151**. As shown in **FIG. 1**, the laser beam generator **169** may be separate from the glass separation apparatus **149**. In further embodiments, the laser beam generator **169** may be mounted to move together with the glass separation apparatus **149**. For instance, as shown in **FIGS. 2, 4-6, 8 and 9**, the laser beam generator **169** may be mounted to a frame, chassis or other structural feature of the glass separation apparatus **149**. In some embodiments, movement of the glass separation apparatus **149** can result in a corresponding movement of the laser beam generator **169**. In such embodiments, mounting the laser beam generator **169** to move together with the glass separation apparatus **149** can simplify alignment of the laser to irradiate the location **331** at the proper moment in time. Indeed, in embodiments where the glass separation apparatus **149** is following a moving glass ribbon to heat the separation path **151**, the laser beam generator **169** can likewise move and always be focused on the location **331** of the separation path **151** without the need for the laser beam generator **169** to adjust its position to track the moving ribbon or time the activation of the laser beam generator **169** at the exact moment in time when the location **331** moving with the ribbon is aligned with the laser beam generator **169**. Furthermore, the laser beam generator **169** can be mounted a sufficient distance away from the ribbon **103** (e.g., 1.5 meters or greater from the ribbon) to reduce radiation of heat from the glass ribbon **103** to the laser beam generator **169**. As such, enhanced expensive cooling of the laser beam generator **169** due to the heat from the glass ribbon **103** can be avoided.

[00118] In one embodiment, the laser beam generator **169** can produce a pulsed laser that can be used to create a defect **801** such as a surface imperfection although sub-surface imperfections may be provided. In some embodiments, the defect **801** produced

by the laser beam generator **169** can comprise a crack, a point defect, a score line, or other defect wherein such defect may optionally be created by an ablation process. In some embodiments, the laser beam generator **169** can comprise a lower power CO₂ laser in pulse burst mode to create the defect **801** due to thermal stress induced by the CO₂ laser pulse burst. In further embodiments, the laser beam generator **169** can comprise a short-pulse diode pumped solid state laser (DPSS laser) that may initiate the defect **801** due to pulsed induced ablation. In any of the embodiments of the disclosure, the defect **801** may comprise an elongated ablation that extends in the direction of the separation path **151** to help properly direct the separation of the glass ribbon along the separation path **151**.

[00119] In another embodiment, the defect **801** may be initiated by the same laser beam generator **201** used to heat the separation path **151** to create the stress profile along the separation path **151**. Indeed, as discussed previously, in some embodiments, a portion of the laser beam produced by the laser beam generator **201** can be redirected to further heat the location **331** to create the defect **801**. Using the same laser beam generator **201** can reduce the complexity of the apparatus while still allowing initiation of the defect **801** once a sufficient level of stress is achieved along the separation path **151**. Indeed, as the separation path **151** to provide the desired stress profile along the separation path, the location is further heated at a higher temperature wherein the defect **801** (e.g., ablation) is designed to occur once the desired stress profile is achieved along the separation path **151**. Thus, once exposure of the location **331** to the laser beam produced by the laser beam generator **201** is sufficient to create the defect **801** in the glass ribbon **103** along the separation path **151**, separation of the glass ribbon occurs since the separation path **151** has already been heated by the same laser beam generator **201** to create the desired stress profile along the separation path **151**.

[00120] In some embodiments, the defect can be located on an outwardly facing side opposite the side of the glass ribbon being exposed to the laser beam spot. In further examples, the defect can be located on the inwardly facing side being exposed to the laser beam spot and may even include defects on both sides of the glass ribbon. Still further, the defect may also be located on the outer edge of the ribbon, on one corner, on both

corners (e.g., two defects), or the defect may be a continuous defect extending from the inwardly facing surface to the outwardly facing surface.

[00121] In some embodiments, providing the defect as a score line may be beneficial to help direct a proper full body crack along the direction of the separation path **151, 163**. For example, the score line can have a length extending along the separation path **151, 163** and a width that is perpendicular to the separation path. The score line can comprise an ablated line in the form of a surface ablation that may form a surface groove or other imperfection in some embodiments. Exemplary score lines can have a wide range of lengths and widths, such as a length within a range from about 0.5 mm to about 5 mm and a width from about 0.1 mm to about 0.3 mm. If provided as a surface defect, the depth of the defect can be from about 5 micrometers to about 500 micrometers, depending on the type of glass. For example, with chemically strengthened glass, a deeper defect may be provided to reach past the chemically strengthened layer of the glass ribbon.

[00122] The defect **801** may be provided at any location along the separation path **151, 163** such as on the separation path. In one embodiment, the defect is located near one of the first and second outer edges **153, 155** of the glass ribbon. In one embodiment, it can be beneficial to locate the defect near the first outer edge **153** where scanning of the laser beam spot **209** starts as described below. For instance, as shown in **FIG. 8**, the defect **801** can be applied between the first outer edge **153** and the second outer edge **155** of the glass ribbon **103**, or the defect may be provided at the first edge and/or the second edge in further embodiments. Applying the defect between the first edge and the second edge can be beneficial to help ensure that the crack begins to propagate at the location of the defect rather than at an edge imperfection that may exist at the edge of the glass ribbon. Moreover, applying the defect between the first edge and the second edge of the glass ribbon **103** can also result in faster separation of the glass ribbon. In some embodiments, the defect can be created on a thickened edge bead commonly found at the outer edge portions **211a, 211b** of the glass ribbon **103**. Alternatively, as shown in **FIGS. 8 and 9**, the defect may optionally be provided inboard of the thickened edge beads. As shown in **FIGS. 8 and 9**, in some embodiments, the defect **801** may be created a distance “**D**” from the first edge (e.g., **153, 165**) where in

some embodiments, “**D**” is 0 mm where the defect **801** is created at the outer edge. In some embodiments the defect **801** may be created a distance “**D**” from 0 mm to about 50 mm, for example from 0 mm to about 35 mm, for example from 0 mm to 25 mm, for example from about 0 mm to about 10 mm. In fact, the defect **801** may be created at any location along the separation path. Furthermore, two or any plurality of defects may be created along the separation path and the separation may occur in a direction from the first edge toward the second edge, from the second edge to the first edge, or separation may occur in both directions toward both the first edge and the second edge. For example, one or a plurality of defects **801** may be provided at a central portion of the separation path, wherein the separation may occur with one or more cracks propagating simultaneously in opposite directions (i.e., toward the first edge and the second edge).

[00123] In some embodiments, the defect may be created at a central portion of the separation path or closer to the first edge or the second edge of the glass ribbon **103**. In one embodiment, as shown in **FIG. 8**, the defect **801** may be created closer to the first outer edge **153** than the second outer edge **155**. Providing the defect **801** closer to the first outer edge **153** of the glass ribbon (e.g., a distance “**D**” from the first outer edge **153**) can be particularly beneficial when the laser beam spot **209** travels in the single direction **225** from the first outer edge **153** toward the second outer edge **155** of the glass ribbon as discussed above. In such an embodiment, the first outer edge **153** of the glass ribbon **103** is upstream along the travel path of the laser beam spot **209** in the single direction **225**. As the full body crack tends to propagate in the single direction **225** of the laser beam spot **209**, locating the defect closer to the first outer edge **153** of the glass ribbon can help propagate the full body crack quickly downstream across the width (or length) of the glass ribbon in the direction **225**. Furthermore, the defect **801** can be located the distance “**D**” that is close enough to also allow the full body crack to propagate upstream to intersect with the first outer edge **153**.

[00124] Furthermore, with reference to **FIG. 9**, the laser beams **902**, **904**, **906**, **908**, **910** can be timed to allow the laser beam spot of each laser beam to travel along the corresponding single direction **225a**, **225b**, **225c**, **225d**, **225e** in a sequential pattern such that adjacent laser beam spots may coexist along the overlapping regions **911**, **913**, **915**, **917**. As such, a laser beam spot may substantially continuously travel along the single

direction across the overall width or length of the glass ribbon to help quickly drive the full body crack along the overall separation path.

[00125] Any of the methods discussed above may be applied to separate a glass web, such as a glass sheet or a glass ribbon. As such, embodiments discussed with respect to the glass ribbon **103** may also apply to the glass sheet **104** or other glass web. For instance, as illustrated with respect to **FIG. 1**, the separation path **151** can extend across the width “**W**” of the glass ribbon **103** between the first outer edge **153** and the second outer edge **155** of the glass ribbon **103**. In such embodiments, creating the defect separates a glass sheet **104** from the glass ribbon **103** as shown in **FIG. 1**. In further embodiments also illustrated in **FIG. 1**, the separation path **163** can extend along the length “**L2**” of the glass sheet **104** between the first edge **165** and the second edge **167** of the glass sheet. In such embodiments, creating the defect can separate the edge portion **159** of the glass sheet **104** from the central portion **161** of the glass sheet **104**.

[00126] Any of the above methods can facilitate separating of a wide range of glass ribbons that may be flat (as shown) or may have a non-flat (e.g., warped) configuration such as bowed into a C-shape, S-shape or other configuration. Furthermore, any of the methods can facilitate separation of glass ribbons with a substantially uniform thickness or a non-uniform variable thickness. For instance, as shown, a glass ribbon with relatively thick edge beads and a relatively thin central portion can be separated.

[00127] In another embodiment, the glass ribbon may be separated when the glass ribbon is relatively stationary or when the glass ribbon is in motion. For example, the glass ribbon may be separated while in motion as it is being drawn from a forming member or if the glass ribbon is slightly swinging and/or twisting relative to the forming member. Still further, any of the methods of the disclosure can be used to separate glass ribbon that is at an elevated temperature not exceeding approximately the strain point of the glass ribbon.

[00128] Furthermore, methods of the disclosure can be used to separate non-strengthened glass or strengthened glass. For instance, methods can be used to separate a strengthened glass ribbon (e.g., chemically strengthened glass ribbon) including at least one outer layer under compression and another layer in tension. In one particular

embodiment, methods of the disclosure can be used to separate strengthened glass ribbon that is strengthened on both sides, wherein the two major surfaces of the glass ribbon are in compression and the central portion of the glass ribbon is in tension.

[00129] In further embodiments, methods of the disclosure may be used to separate glass ribbon comprising laminated glass ribbon layers. In one embodiment, the laminated structure can be provided with a compressive surface layer and a central layer under tension. In another embodiment, the laminated structure can be provided with two compressive surface layers with a central layer under tension sandwiched between the two compressive layers. In still further embodiments, methods of the disclosure may be used to separate laminated glass ribbon layers where at least two of a plurality of layers includes different compositions and/or different coefficients of thermal expansion. In other embodiments the glass ribbon may be a chemically or thermally strengthened glass ribbon, wherein the glass ribbon comprises a surface compressive stress layer produced by ion exchange or thermal processing.

[00130] In further embodiments, the depth of focus of the laser beam may exceed amplitudes of the glass ribbon thickness variations, amplitude of warp, amplitude of glass motion relative to the beam source or other variations in processing conditions.

[00131] **FIGS. 10-17** demonstrate exemplary apparatus and methods that may separate the glass ribbon **103** while the glass ribbon moves along a direction of the length of the glass ribbon. Unless otherwise noted, aspects of the disclosure discussed above and with reference to **FIGS. 1-9** may apply to the exemplary apparatus and methods of **FIGS. 10-17**.

[00132] **FIGS. 10-13** illustrate an exemplary glass separation apparatus **1049** for separating the glass sheet **104** from the glass ribbon **103**. **FIGS. 14-17** illustrate another exemplary glass separation apparatus **1449** for separating the glass sheet **104** from the glass ribbon **103**. The embodiments of **FIGS. 10-13** and **FIGS. 14-17** can be similar, or identical, to the embodiments shown in **FIGS. 1-9** but may be simplified to optionally remove one or more of the reflectors **205a-c**. Each glass separation apparatus **1049**, **1449** includes at least one laser, such as the laser beam generator **201** that produces the laser beam **203** as discussed more fully above. Each glass separation apparatus **1049**, **1449** further includes a first reflector, such as the polygonal reflector **215** discussed above. As

mentioned previously, the polygonal reflector **215** can include the previously-discussed first reflective surface. The first reflective surface is rotatable (e.g., in the counterclockwise direction **217**) about a first rotation axis **218**. As mentioned above, in some embodiments the first reflective surface **219** of the polygonal reflector **215** may comprise a plurality of reflective surface segments similar or identical to the previously-discussed eight reflective surface segments **219a-h**. As further shown in the embodiments of **FIGS. 10-13** and **FIGS. 14-17**, the plurality of reflective surface segments may be rotated (e.g., in the counterclockwise direction **217**) about the first rotation axis **218** to reflect the laser beam **203** from the reflective surface segments to cause the resultant laser beam spot **209** to repeatedly pass along the separation path **151** on the glass ribbon **103** in a direction transverse to the conveyance direction **1001** such as a direction of the width “**W**” of the glass ribbon to produce thermal stress along the separation path **151**.

[00133] As shown in the embodiments depicted in **FIGS. 10-13** and **FIGS. 14-17**, the glass separation apparatus **1049**, **1449** for separating the glass sheet **104** from a glass ribbon **103** further includes a second reflector **205d**, **1401** including a respective second reflective surface **206**, **1402** that may be rotatable about a corresponding second rotation axis **227**, **1403** along direction **1003**, **1405** to reflect the laser beam **203** to cause the laser beam spot **209** to move in the conveyance direction **1001**. In some embodiments, the method includes moving the laser beam spot **209** at a laser beam spot velocity including a laser beam spot velocity vector in the conveyance direction **1001** that is equal to the glass web velocity vector in the conveyance direction **1001**. As such, the laser beam spot **209** remains on the same separation path **151** to continuously heat the separation path **151** and consequently continuously increase thermal stress along the separation path **151** even though the glass ribbon **103** is moving in the conveyance direction **1001** (e.g., draw direction). In a down-draw process, the laser beam spot **209** can include a velocity vector in the draw direction **1001** that is equal or substantially equal to the velocity of the glass ribbon in the draw direction **1001**. As such, the laser beam spot **209** remains on the same separation path **151** of the glass ribbon **103** to continuously heat the separation path and consequently continuously increase the thermal

stress along the separation path **151** even though the glass ribbon is moving in the draw direction of the glass ribbon **103**.

[00134] As shown in **FIGS. 10-13** and **FIGS. 14-17**, the first rotation axis **218** may be perpendicular to the second rotation axis **227**, **1403** although the first axis and second axis may be orientated at another angle relative to one another depending on the optical configuration and/or the desired properties of the laser beam spot **209**.

[00135] In some embodiments, the first reflector may be positioned upstream or downstream relative to the second reflector. For example, the glass separation apparatus **1049** of **FIGS. 10-13** illustrate an embodiment where the second reflector **205d** is positioned upstream of the first reflector **215** such that the laser beam **203** reflects off the second reflective surface **206** of the second reflector **205d** prior to reflecting off the first reflective surface **219** of the first reflector **215**. As demonstrated in **FIGS. 2-7**, the second reflector **205d** that is rotatable about the second rotation axis **227** may be provided in the glass separation apparatus **149** discussed more fully above. In such embodiments, the glass separation apparatus **149** may include the option of rotating the second reflective surface **206** about the second rotation axis **227**. In some embodiments, the separation apparatus may allow selection to avoid rotating of the second reflective surface **206**. Avoiding rotation of the second reflective surface **206** may be desirable in applications where the glass ribbon is not moving along the length of the glass ribbon.

[00136] Alternatively, the glass separation apparatus **1449** of **FIGS. 14-17** illustrate an embodiment where the first reflector **215** is positioned upstream of the second reflector **1401** such that the laser beam **203** reflects off the first reflective surface **219** of the first reflector **215** prior to reflecting off the second reflective surface **1402** of the second reflector **1401**. In such an embodiment, a configuration demonstrated in **FIGS. 2-7** may be used wherein all of the reflectors **205a-d** do not include the ability to rotate. As such, the glass separation apparatus may be used in applications where the glass ribbon is not moving along the length of the glass ribbon. Alternatively, the second reflector **1401** may be provided in addition to allow movement of the laser beam spot in the direction of the length of the glass ribbon.

[00137] In some embodiments, the at least one laser beam generator **201** may produce a plurality of laser beam spots **209** that each produce thermal stress along a

corresponding heated segment of the separation path **151**. For example, as shown in **FIG. 9**, each of the illustrated second reflectors **205d** can include a reflective surface that is rotatable about the second rotation axis **227** to allow each of the heated segments **901**, **903**, **905**, **907**, **909** to travel along the conveyance direction of the glass ribbon to continuously expose the separation path **151** to the respective laser beam spot of each laser beam.

[00138] In some embodiments, the second reflector **205d**, **1401** may be provided without the first reflector **215**. In such embodiments, the at least one laser beam generator may be designed to produce a single laser beam spot extending along the entire width of the glass ribbon or greater than the entire width of the glass ribbon. Alternatively, the at least one laser beam generator may produce a plurality of stationary laser beam spots (e.g., that may optionally partially overlap one another) that together extend along the entire width of the glass ribbon or greater than the entire width of the glass ribbon. In such embodiments, a single laser beam spot traveling along the separation path is not needed since a stationary single elongated laser beam spot or a plurality of stationary laser beam spots span across the entire width of the separation path. In such embodiments, the second reflector **205d**, **1401** may be provided to allow the single laser beam spot or plurality of laser beam spots to move together with the glass ribbon along conveyance direction **1001** (e.g., draw direction) of the glass ribbon to continuously heat the separation path **151** even though the glass ribbon is moving along the conveyance direction **1001**.

[00139] Methods of separating the glass sheet **104** from the glass ribbon **103** will now be described. The method includes the step of moving the glass ribbon **103** in a direction of the length of the glass ribbon. In some embodiments, the glass ribbon **103** may be moved, such as unwound, from a spool of glass ribbon previously produced wherein the unwound portion of the glass ribbon travels along the length of the glass ribbon. In such an embodiment, the spool of glass ribbon may be unwound wherein the glass sheet may be separated from the glass ribbon without interruption of the process of unwinding the glass ribbon from the spool of glass ribbon. Furthermore, the illustrated embodiment of the glass ribbon **103** is shown being moved in a conveyance direction **1001** (e.g., draw direction) such as in a direction of gravity wherein the draw direction is

the same direction as the direction of the length of the glass ribbon and the conveyance direction of the glass ribbon. In alternative embodiments, the glass ribbon may be moved at an angle or even along a direction perpendicular to gravity. Indeed, the glass ribbon **103** may be traveling horizontally along the length of the glass ribbon, for example on air bars, during transport and/or during processing of the glass ribbon. In such embodiments, the glass sheet **104** may be separated from the glass ribbon **103** as the glass ribbon travels in a lateral (e.g., horizontal) conveyance direction.

[00140] The method can further include exposing the separation path **151** on the glass ribbon **103** to at least one laser beam spot **209** to produce thermal stress along the separation path **151** without damaging the glass ribbon **103**. The separation path **151** is considered the path on the first major surface **213** where separation will occur, for example, by a full body crack forming along the separation path and through the entire thickness of the glass ribbon from the first major surface of the glass ribbon to the second major surface of the glass ribbon in response to the creation of the defect discussed more fully below. The separation path **151** can extend in a direction of the width “**W**” of the glass ribbon. For example, the separation path may optionally be perpendicular to the length “**L1**” such that the resultant directional vector of the separation path **151** is identical to the resultant directional vector of the width “**W**” of the glass ribbon. In such an embodiment, separation may result in the glass ribbon including a separated edge extending along the separation path that is perpendicular to the outer edges **153**, **155** of the glass ribbon **103** (i.e., outer edges **153**, **155** that are parallel to one another). Alternatively, the separation path may be at an angle other than perpendicular to length “**L1**” wherein the resultant directional vector of the separation path **151** is not identical to the resulting directional vector of the width “**W**” of the glass ribbon. In such an embodiment, separation may result in the glass ribbon including a separated edge extending along the separation path that is at an acute angle relative to one of the outer edges **153**, **155** (i.e., parallel outer edges **153**, **155**) and an obtuse angle relative to the other of the parallel outer edges **153**, **155**.

[00141] As shown in the drawings and discussed above, the method can include intersecting the at least one laser beam **203** at a corresponding laser beam spot **209** on a major surface, such as the first major surface **213**, of the glass ribbon **103**. The method

can include repeatedly passing the laser beam spot **209** along the separation path **151** in the direction **225** of the width “**W**” of the glass ribbon **103** to produce thermal stress along the separation path **151**. In some embodiments, the laser beam spot **209** may travel in a single direction (e.g., in the direction **225**) in a direction from the first outer edge **153** toward the second outer edge **155** of the glass ribbon **103** without traveling in an opposite direction from the second outer edge **155** to the first outer edge **153** of the glass ribbon **103**.

[00142] Exemplary methods can include reflecting the at least one laser beam **203** off the first reflective surface **219** of a first reflector **215** rotating about the first rotation axis **218** to cause the laser beam spot **209** to repeatedly pass along the separation path **151** in the direction **225** of the width “**W**” of the glass ribbon **103**. As discussed above, the first reflector **215** may comprise a polygonal reflector that rotates to cause the laser beam spot **209** to travel in the single direction **225**.

[00143] Methods of the disclosure can further include the step of moving the laser beam in the conveyance direction **1001** (e.g., draw direction, direction of the length “**L1**” of the glass ribbon **103**, etc.) such that the laser beam travels together with the glass ribbon **103**. As such, the separation path **151** continues to be exposed to the laser beam to continue producing thermal stress along the separation path **151** while the glass ribbon **103** moves in the conveyance direction **1001**.

[00144] Such movement of the laser beam in the conveyance direction **1001** can be carried out in any of the above embodiments, where the glass ribbon **103** is heated along the entire width “**W**” of the glass ribbon **103**. For example, such movement of the laser beam can be provided in embodiments where the laser beam generator provides a single stationary laser beam or a plurality of laser beams (and their respective laser beam spots) that are stationary and overlap one another. In further embodiments, such movement of the laser beam in the conveyance direction **1001** can include embodiments that also include repeatedly passing the laser beam spot **209** or a plurality of laser beam spots (see **FIG. 9**) along the separation path **151**. In such embodiments, the method includes the step of moving the laser beam spot in the conveyance direction **1001** such that the laser beam spot **209** travels together with the glass ribbon **103** while the laser beam spot **209** continues to repeatedly pass along the separation path **151** in the direction

of the width “W” of the glass ribbon **103** to continue producing the thermal stress along the separation path **151**.

[00145] As shown in the embodiments of **FIGS. 10-13** and **FIGS. 14-17**, the methods can include reflecting the at least one laser beam **203** off the rotating reflective surface **206**, **1402** to cause the laser beam to move in the conveyance direction **1001** (e.g., draw direction) such that the laser beam travels together with the glass ribbon. In such a way, each embodiment of **FIGS. 10-13** and **FIGS. 14-17** produces thermal stress along the separation path **151** even while the separation path **151** is moving in the direction **1001**.

[00146] By way of illustration, embodiments of producing thermal stress along the separation path **151** by way of the apparatus illustrated in **FIGS. 10-13** will be discussed. Referring initially to **FIG. 10**, a laser beam **203** produced by the laser beam generator **201** may pass through one or more optical lenses **207** to produce a laser beam spot with a desired shape. The laser beam **203** then reflects off the second reflective surface **206** before the first reflective surface **219** at a first rotational position relative to the second rotation axis **227**. While in the first rotational position shown in **FIG. 10**, the second reflective surface **206** reflects the laser beam **203** to intersect the first reflective surface **219** at a first location **1005a**. The laser beam then reflects off the first reflective surface **219** from the first location **1005a** to intersect the separation path **151** at a lateral location on the separation path dependent upon the rotational position of the first reflector **215** relative to the first rotation axis **218** as discussed above. Indeed, when using the illustrated polygonal reflector as the first reflector **215**, rotation of the polygonal reflector about the first rotation axis **218** in the counterclockwise direction **217** will cause the laser beam spot to travel along the separation path **151** in direction **225** from the first outer edge portion **211a** toward a second outer edge portion **211b** of the glass ribbon **103**. As further discussed above, the step of repeatedly passing the laser beam spot can optionally include repeatedly passing the laser beam spot in a single direction (e.g., the direction **225**). Repeatedly passing the laser beam spot in a single direction may help to quickly separate the glass sheet **104** from the glass ribbon **103** upon creating a defect on the separation path as discussed more fully below.

[00147] The second reflective surface **206** can be rotated (e.g., continuously rotated) at a rotational rate (e.g., a constant rotational rate) about the second rotation axis **227** such that the location of reflection off of the first reflective surface **219** travels in a direction **1007**, such as the illustrated direction, that is parallel to the first rotation axis **218**. Moving the location of reflection in the direction **1007** can help the laser beam spot **209** follow the glass ribbon in the conveyance direction **1001** to allow the laser beam spot to continuously intersect with the separation path **151** while the separation path moves in the conveyance direction **1001** and the direction **225** transverse (e.g., perpendicular) to the conveyance direction **1001**.

[00148] The second reflective surface **206** can be rotated from the first rotational position (shown in **FIG. 10**) about the second rotation axis **227** in direction **1003** to a second rotational position (shown in **FIG. 11**). While in the second rotational position shown in **FIG. 11**, the second reflective surface **206** reflects the laser beam **203** to intersect the first reflective surface **219** at a second location **1005b** downstream from the first location **1005a**. The laser beam then reflects off the first reflective surface **219** from the second location **1005b** to intersect the laser beam spot **209** with the separation path **151** that has moved downstream in direction **1001** compared to the position of the separation path **151** shown in **FIG. 10**.

[00149] The second reflective surface **206** can be still further rotated from the second rotational position (shown in **FIG. 11**) about the second rotation axis **227** in direction **1003** to a third rotational position (shown in **FIG. 12**). While in the third rotational position shown in **FIG. 12**, the second reflective surface **206** reflects the laser beam **203** to intersect the first reflective surface **219** at a third location **1005c** downstream from the second location **1005b**. The laser beam then reflects off the first reflective surface **219** from the third location **1005c** to intersect the laser beam spot **209** with the separation path **151** that has moved downstream in direction **1001** compared to the position of the separation path **151** shown in **FIG. 11**.

[00150] As can be appreciated, although **FIGS. 10-12** show incremental movements of the second reflective surface **206** and incremental positions of the separation path **151**, the movement of the second reflective surface **206** can be rotated continuously about the second rotation axis **227** to cause the laser beam spot **209** to

continuously intersect with the separation path **151** as the separation path moves in the direction of the length of the glass ribbon.

[00151] Embodiments of producing thermal stress along the separation path **151** by way of the apparatus illustrated in **FIGS. 14-17** will now be discussed. Referring initially to **FIG. 14**, the laser beam **203** produced by the laser beam generator **201** may pass through one or more optical lenses **207** to produce a laser beam spot with desired shape. The laser beam **203** may then optionally reflect off of one or more stationary reflectors **1406** to intersect the first reflective surface **219** before intersecting the second reflective surface **1402**. In one embodiment, the laser beam **203** intersects the first reflective surface **219** at location **1409**. The laser beam may then optionally reflect off of one or more additional reflectors **1407** before reflecting off of the second reflective surface **1402** of the second reflector **1401** at a first rotational position relative to the second rotation axis **1403**. While in the first rotational position shown in **FIG. 14**, the second reflective surface **1402** reflects the laser beam **203** to intersect the laser beam spot **209** with the separation path **151** at a lateral location on the separation path dependent upon the rotational position of the first reflector **215** relative to the first rotation axis **218** as discussed above. Indeed, when using the illustrated polygonal reflector as the first reflector **215**, rotation of the polygonal reflector about the first rotation axis **218** in the counterclockwise direction **217** will cause the laser beam spot **209** to travel along the separation path **151** in direction **225** from the first outer edge portion **211a** toward a second outer edge portion **211b** of the glass ribbon **103**. As further discussed above, the step of repeatedly passing the laser beam spot can optionally include repeatedly passing the laser beam spot in a single direction (e.g., the direction **225**).

[00152] The second reflective surface **1402** can be rotated (e.g., continuously rotated) at a rotational rate (e.g., e.g., a constant rotational rate or an adjusted rotational rate) about the second rotation axis **1403** to allow the laser beam spot to continuously intersect with the separation path **151** while the separation path moves in the direction **1001** of the length of the glass ribbon and the direction **225** of the width of the glass ribbon.

[00153] The second reflective surface **1402** can be rotated from the first rotational position (shown in **FIG. 14**) about the second rotation axis **1403** in direction

1405 to a second rotational position (shown in **FIG. 15**). While in the second rotational position shown in **FIG. 15**, the second reflective surface **1402** reflects the laser beam **203** to intersect the separation path **151** that has moved downstream in direction **1001** compared to the position of the separation path **151** shown in **FIG. 14**.

[00154] The second reflective surface **1402** can be still further rotated from the second rotational position (shown in **FIG. 15**) about the second rotation axis **1403** in direction **1405** to a third rotational position (shown in **FIG. 16**). While in the third rotational position shown in **FIG. 16**, the second reflective surface **1402** reflects the laser beam **203** to intersect the laser beam spot **209** with the separation path **151** that has moved downstream in direction **1001** compared to the position of the separation path **151** shown in **FIG. 15**.

[00155] As can be appreciated, although **FIGS. 14-16** show incremental movements of the second reflective surface **1402** and incremental positions of the separation path **151**, the movement of the second reflective surface **1402** can be rotated continuously about the second rotation axis **1403** to cause the laser beam spot to continuously intersect with the separation path **151** as the separation path moves in the direction of the length of the glass ribbon.

[00156] In any of the embodiments of the disclosure, rotation of the second reflective surface **206, 1402** can be coordinated with the velocity of the glass ribbon in the conveyance direction **1001** (e.g. in the draw direction) such that the laser beam spot continuously intersects the separation path **151** as the separation path moves along the conveyance direction. For example, the second reflective surface **206, 1402** may be manually rotated about the second rotational axis. In further embodiments, an actuator (not shown) may be used to rotate the second reflective surface **206, 1402** at a continuous predetermined rotational speed to cause the laser beam spot to continuously intersect the separation path **151** as it moves in the direction of the length and as the laser beam spot moves along the direction **225**. Still further, the actuator may optionally be operated by a controller configured to obtain feedback from a sensor that senses the velocity of the glass ribbon in the direction of the length of the glass ribbon (e.g., down draw direction **1001**) and enters the velocity of the glass ribbon in an algorithm that calculates a target rotational rate of the second reflective surface **206, 1402** about the second rotation axis

227, 1403. The controller can then operate the actuator to rotate the second reflective surface **206, 1402** at the target rotational rate to cause the laser beam spot to continuously contact the separation path **151**. In still further embodiments, sensors (e.g., thermal or optical sensors) may be employed to determine where the laser beam spot is intersecting the corresponding major surface of the glass ribbon. The controller may compare this location to the location of the separation path and operate the actuator to speed up, slow down, or maintain the current rotational rate of the second reflective surface **206, 1402** about the second rotation axis **227, 1403** such that the laser beam spot continuously intersects the corresponding major surface of the glass ribbon.

[00157] Any of the methods of the disclosure discussed above may further include the step of creating a defect **801** on the separation path **151** while the separation path is under thermal stress produced during the processes discussed above, whereupon the glass sheet **104** separates from the glass ribbon **103** along the separation path **151** in response to creating the defect **801**.

[00158] The defect **801** may be created by a mechanical scribe (e.g., the scribe **168** discussed with respect to **FIG. 1**) such as a score wheel, a diamond tip or other defect generating technique. In further embodiments, the defect **801** may be created by a laser beam generator **169** as discussed in any of the embodiments above. If provided, the laser beam generator **169** may travel together with the glass ribbon **103** in the down draw direction **1001** such that the laser beam generator **169** does not need to be adjusted to impact the correct location on the separation path **151** once the defect **801** is desired to be created. In further embodiments, the laser beam generator **169** may remain stationary while the glass ribbon **103** travels in the down draw direction **1001** relative to the stationary laser beam generator **169**. In such examples, the laser beam generator may be moved (e.g., rotated) or a reflective surface may be rotated to track the correct location on the separation path **151**. Still further, in some embodiments, the stationary laser beam generator may be located such that the laser only impacts a single point when activated. Such a single point can be vertically aligned with the correct location on the separation path **151**. As such, the separation path **151** can travel in the down draw direction **1001** until the correct location for creating the defect is coincident with the single point of the stationary laser beam generator. At that moment in time, the stationary laser beam

generator can be activated to create the defect **801** at the correct location on the separation path **151**.

[00159] As shown in **FIGS. 10-17**, the method can alternatively include the step of creating the defect **801** by redirecting a portion of the laser beam to location **331** to create the defect **801** on the separation path **151** while the separation path **151** is under thermal stress produced during the exposing the separation path **151** on the glass ribbon **103** to the laser beam. In some embodiments, a reflector similar or identical to the reflector discussed above with respect to **FIGS. 1-9** may be provided. Indeed, in some embodiments, as shown, the reflector may comprise the illustrated parabolic mirror **229** described with respect to **FIGS. 1-8** above. Although not shown, in further embodiments, the mirror **919** and lens **921** discussed with respect to **FIG. 9** above may be used to redirect the portion of the laser beam to create the defect **801**.

[00160] In some embodiments, as shown in **FIGS. 10-17**, the parabolic mirror **229** or other reflector may travel together with the ribbon in the down draw direction **1001** to continuously redirect the portion of the laser beam back onto the location **331** of the separation path **151** as the separation path travels together with the glass ribbon **103** in down draw direction **1001**. As shown in **FIGS. 13 and 18**, in response to the defect **801**, the glass sheet **104** separates from the glass ribbon **103** along the separation path **151**.

[00161] As mentioned previously, any of the exemplary methods of the disclosure can include repeatedly passing the laser beam spot **209** in the single direction **225** from the first outer edge portion **211a** to the second outer edge portion **211b**. Although not required, passing the laser beam spot in the single direction can be beneficial to quickly separate the glass sheet **104** from the glass ribbon **103**. For example, as shown in **FIGS. 12 and 17**, the defect **801** can be created closer to the first outer edge **153** than the second outer edge **155** whereupon the thermal stress profile generated by the laser beam spot **209** traveling in the single direction **225** can help propagate a full body crack in the single direction **225**.

[00162] In any of the exemplary methods of the disclosure, the defect **801** may be created while the separation path **151** is being exposed to the laser beam **203** to produce the thermal stress along the separation path **151**. While the defect **801** may be

produced shortly after creating the thermal stress, continuing to generate or maintain the thermal stress with the laser beam along the separation path **151** while generating the defect **801** can allow the defect to be created while the separation path **151** is under maximum stress to facilitate separation of the glass sheet **104**.

[00163] Furthermore, the defect **801** may be created after a predetermined level of thermal stress is achieved along the separation path during the step of heating the separation path **151**. For instance, in some embodiments, the apparatus may be designed such that the defect **801** is generated by redirecting the portion of the laser beam only after a predetermined level of thermal stress is achieved along the separation path **151**.

[00164] While the embodiments of **FIGS. 10-13** and **FIGS. 14-17** illustrate a single laser beam, further embodiments can include the use of multiple laser beams to create thermal stress along the separation path. For example, the plurality of laser beams discussed with reference to **FIG. 9** may be used in the embodiments of **FIGS. 10-13** and **FIGS. 14-17** to allow separation of glass ribbons having a relatively larger overall width. In such embodiments, the plurality of laser beam spots can each intersect a corresponding heated segment **901, 903, 905, 907, 909**, each laser beam following the separation path **151** as the separation path travels in the direction of the length of the glass ribbon. Furthermore, in some embodiments, each segment of the separation path can overlap a portion of at least one adjacent segment of the separation path (e.g., see overlapping regions **911, 913, 915, 917**). Such overlapping regions can allow sufficient thermal stress to be generated along the entire separation path **151**.

[00165] It will be apparent to those skilled in the art that various modifications and variations can be made to the present disclosure without departing from the spirit and scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A method of separating a glass web comprising:
exposing a separation path on the glass web to at least one laser beam to produce thermal stress along the separation path without damaging the glass web; and
redirecting a portion of the at least one laser beam to create a defect on the separation path while the separation path is under thermal stress produced during the exposing, whereupon the glass web separates along the separation path in response to creating the defect.
2. The method of claim 1, wherein the portion of the at least one laser beam is reflected from a reflecting surface during the redirecting to create the defect.
3. The method of claim 1, wherein the portion of the at least one laser beam is focused to create the defect.
4. The method of claim 1, wherein the defect is created while exposing the separation path on the glass web to the at least one laser beam.
5. The method of claim 1, wherein the defect is created after a predetermined level of thermal stress is achieved along the separation path during the exposing.
6. The method of claim 1, wherein the glass web includes a first edge and a second edge opposed to the first edge, and wherein the separation path extends from the first edge to the second edge.
7. The method of claim 6, wherein the defect is created between the first edge and the second edge.

8. The method of claim 6, wherein the defect is created a distance from one of the first edge and the second edge of the glass web, wherein the distance is from 0 mm to about 25 mm.
9. The method of claim 6, wherein the at least one laser beam traverses a beam path that extends off at least one of the first edge and the second edge of the glass web during the exposing.
10. The method of claim 6, wherein the exposing comprises intersecting the at least one laser beam at a corresponding beam spot on a major surface of the glass web, and repeatedly passing the beam spot along the separation path to produce the thermal stress along the separation path.
11. The method of claim 10, wherein repeatedly passing the beam spot includes repeatedly passing the beam spot in a single direction.
12. The method of claim 11, wherein the single direction comprises a direction extending from the first edge toward the second edge of the glass web, and wherein the defect is created closer to the first edge than the second edge.
13. The method of claim 1, wherein the at least one laser beam applies a varying power density along the separation path to produce the thermal stress.
14. The method of claim 1, wherein the at least one laser beam comprises a plurality of laser beams to produce the thermal stress along the separation path, each laser beam of the plurality of laser beams producing thermal stress along a corresponding segment of the separation path.
15. The method of claim 14, wherein each segment of the separation path overlaps at least one adjacent segment of the separation path.

16. The method of claim 1, wherein the glass web comprises a glass sheet, the separation path extends along a length of the glass sheet, and the separation along the separation path separates an edge portion of the glass sheet from a central portion of the glass sheet.

17. The method of claim 1, wherein the glass web comprises a glass ribbon, the separation path extends along a width of the glass ribbon, and the separation along the separation path separates a glass sheet from the glass ribbon.

18. The method of claim 1, wherein the glass web comprises a plurality of layers and a coefficient of thermal expansion of one layer of the plurality of layers is different than a coefficient of thermal expansion of another layer of the plurality of layers.

19. The method of claim 1, wherein the glass web is positioned such that the entire separation path is located within a depth of focus of the at least one laser beam.

20. The method of claim 19, wherein the depth of focus of the at least one laser beam is from about 20 mm to about 400 mm.

21. A method of separating a glass web comprising:
moving the glass web at a glass web velocity comprising a glass web velocity vector in a conveyance direction of the moving glass web;
exposing a separation path on the glass web to at least one laser beam spot generated by at least one laser beam to produce thermal stress along the separation path, the separation path extending in a direction transverse to the conveyance direction;
moving the laser beam spot at a laser beam spot velocity comprising a laser beam spot velocity vector in the conveyance direction that is equal to the glass web velocity vector, wherein the separation path continues to be exposed to the laser beam spot to continue producing thermal stress along the separation path while the glass web moves at the glass web velocity; and

redirecting a portion of the at least one laser beam to create a defect on the separation path while the separation path is under thermal stress produced during the exposing the separation path and the moving the laser beam spot, whereupon the glass web separates along the separation path in response to creating the defect.

22. The method of claim 21, wherein the portion of the at least one laser beam is reflected from a reflecting surface during the redirecting to redirect the portion of the laser path to create the defect.

23. The method of claim 21, wherein the portion of the at least one laser beam is focused to create the defect.

24. The method of claim 21, wherein the moving the laser beam spot includes reflecting the at least one laser beam off a rotating reflective surface to cause the laser beam spot to move at the laser beam spot velocity vector.

25. The method of claim 21, further comprising repeatedly passing the laser beam spot along the separation path in the direction transverse to the conveyance direction to produce the thermal stress along the separation path during the exposing the separation path and the moving the laser beam spot.

26. The method of claim 25, wherein the laser beam spot velocity comprises another laser beam spot velocity vector in the direction transverse to the conveyance direction, wherein the laser beam spot moves in the conveyance direction and the direction transverse to the conveyance direction such that the separation path continues to be exposed to the laser beam spot to continue producing thermal stress along the separation path while the glass web moves at the glass web velocity and while the laser beam spot continues to repeatedly pass along the separation path in the direction transverse to the conveyance direction.

27. The method of claim 26, wherein the moving the laser beam spot includes:

reflecting the at least one laser beam off a first reflective surface rotating about a first axis to cause the laser beam spot to repeatedly pass along the separation path in the direction transverse to the conveyance direction, and

reflecting the at least one laser beam off a second reflective surface rotating about a second axis to cause the laser beam spot to move at the laser beam velocity vector in the conveyance direction of the glass web.

28. The method of claim 27, wherein the at least one laser beam reflects off the first reflective surface before the second reflective surface.

29. The method of claim 27, wherein the at least one laser beam reflects off the second reflective surface before the first reflective surface.

30. The method of claim 27, wherein the first axis is perpendicular to the second axis.

31. The method of claim 25, wherein the step of repeatedly passing the beam spot includes repeatedly passing the beam spot in a single direction transverse to the conveyance direction.

32. The method of claim 31, wherein the single direction comprises a direction extending from a first edge toward a second edge of the glass web, and wherein the defect is created closer to the first edge than the second edge.

33. The method of claim 21, wherein the defect is created while the laser beam spot is moved at the laser beam spot velocity.

34. The method of claim 21, wherein the defect is created after a predetermined level of thermal stress is achieved along the separation path during the moving the laser beam spot.

35. The method of claim 21, wherein the at least one laser beam spot comprises a plurality of laser beam spots that each produce thermal stress along a corresponding segment of the separation path during the exposing the separation path.

36. The method of claim 35, wherein each segment of the separation path overlaps a portion of at least one adjacent segment of the separation path.

37. The method of claim 21, wherein the glass web includes a length and a width, and the conveyance direction is a direction of the length of the glass web.

38. The method of claim 21, wherein the glass web comprises a glass ribbon drawn from a forming body, and the conveyance direction is a draw direction of the glass ribbon.

39. An apparatus for separating a glass web comprising:

at least one laser beam generator configured to produce a laser beam that heats the entire separation path extending from a first edge of the glass web to an opposed second edge of the glass web; and

a mirror positioned to reflect an end portion of the laser beam to create a defect at a location of the separation path on the glass web.

40. The apparatus of claim 39, wherein the mirror comprises a parabolic mirror.

41. The apparatus of claim 39, further comprising a lens to focus the end portion of the laser beam.

42. The apparatus of claim 39, further comprising a first reflector including a first reflective surface rotatable about a first axis, the laser beam generator aligned with the first reflector such that the laser beam produced by the at least one laser beam generator will produce a laser beam spot that repeatedly passes along the separation path on the glass web when the first reflector is rotated.

43. An apparatus for separating a glass web comprising:
- at least one laser beam generator;
 - a first reflector comprising a first reflective surface rotatable about a first axis, the laser beam generator aligned with the first reflector such that a laser beam produced by the at least one laser beam generator will produce a laser beam spot that repeatedly passes along a separation path on the glass web when the first reflector is rotated;
 - a second reflector comprising a second reflective surface rotatable about a second axis, the second reflector aligned with the first reflector such that the laser beam spot will move in a conveyance direction of the glass web when the second reflector is rotated,
 - wherein the first reflector is positioned such that the laser beam produced by the laser beam generator reflects off the first reflective surface of the first reflector prior to reflecting off the second reflective surface of the second reflector; and
 - a mirror configured to reflect an end portion of the laser beam to create a defect at a location of the separation path on the glass web.
44. The apparatus of claim 43, wherein the mirror comprises a parabolic mirror.
45. The apparatus of claim 43, further comprising a lens to focus the end portion of the laser beam.
46. An apparatus for separating a glass web comprising:
- at least one laser beam generator;
 - a second reflector comprising a second reflective surface rotatable about a second axis, the laser beam generator aligned with the second reflector such that a laser beam produced by the at least one laser beam generator will produce a laser beam spot that will move in a conveyance direction of the glass web when the second reflector is rotated;
 - a first reflector comprising a first reflective surface rotatable about a first axis, the first reflector aligned with the second reflector such that the laser beam spot produced by the at least one laser beam will repeatedly pass along a separation path on the glass web when the first reflector is rotated,

wherein the second reflector is positioned such that the laser beam produced by the laser beam generator will reflect off the second reflective surface of the second reflector prior to reflecting off the first reflective surface of the first reflector; and

a mirror configured to reflect an end portion of the laser beam to create a defect at a location of the separation path on the glass web.

47. The apparatus of claim 46, wherein the mirror comprises a parabolic mirror.

48. The apparatus of claim 46, further comprising a lens configured to focus the end portion of the laser path.

1 / 14

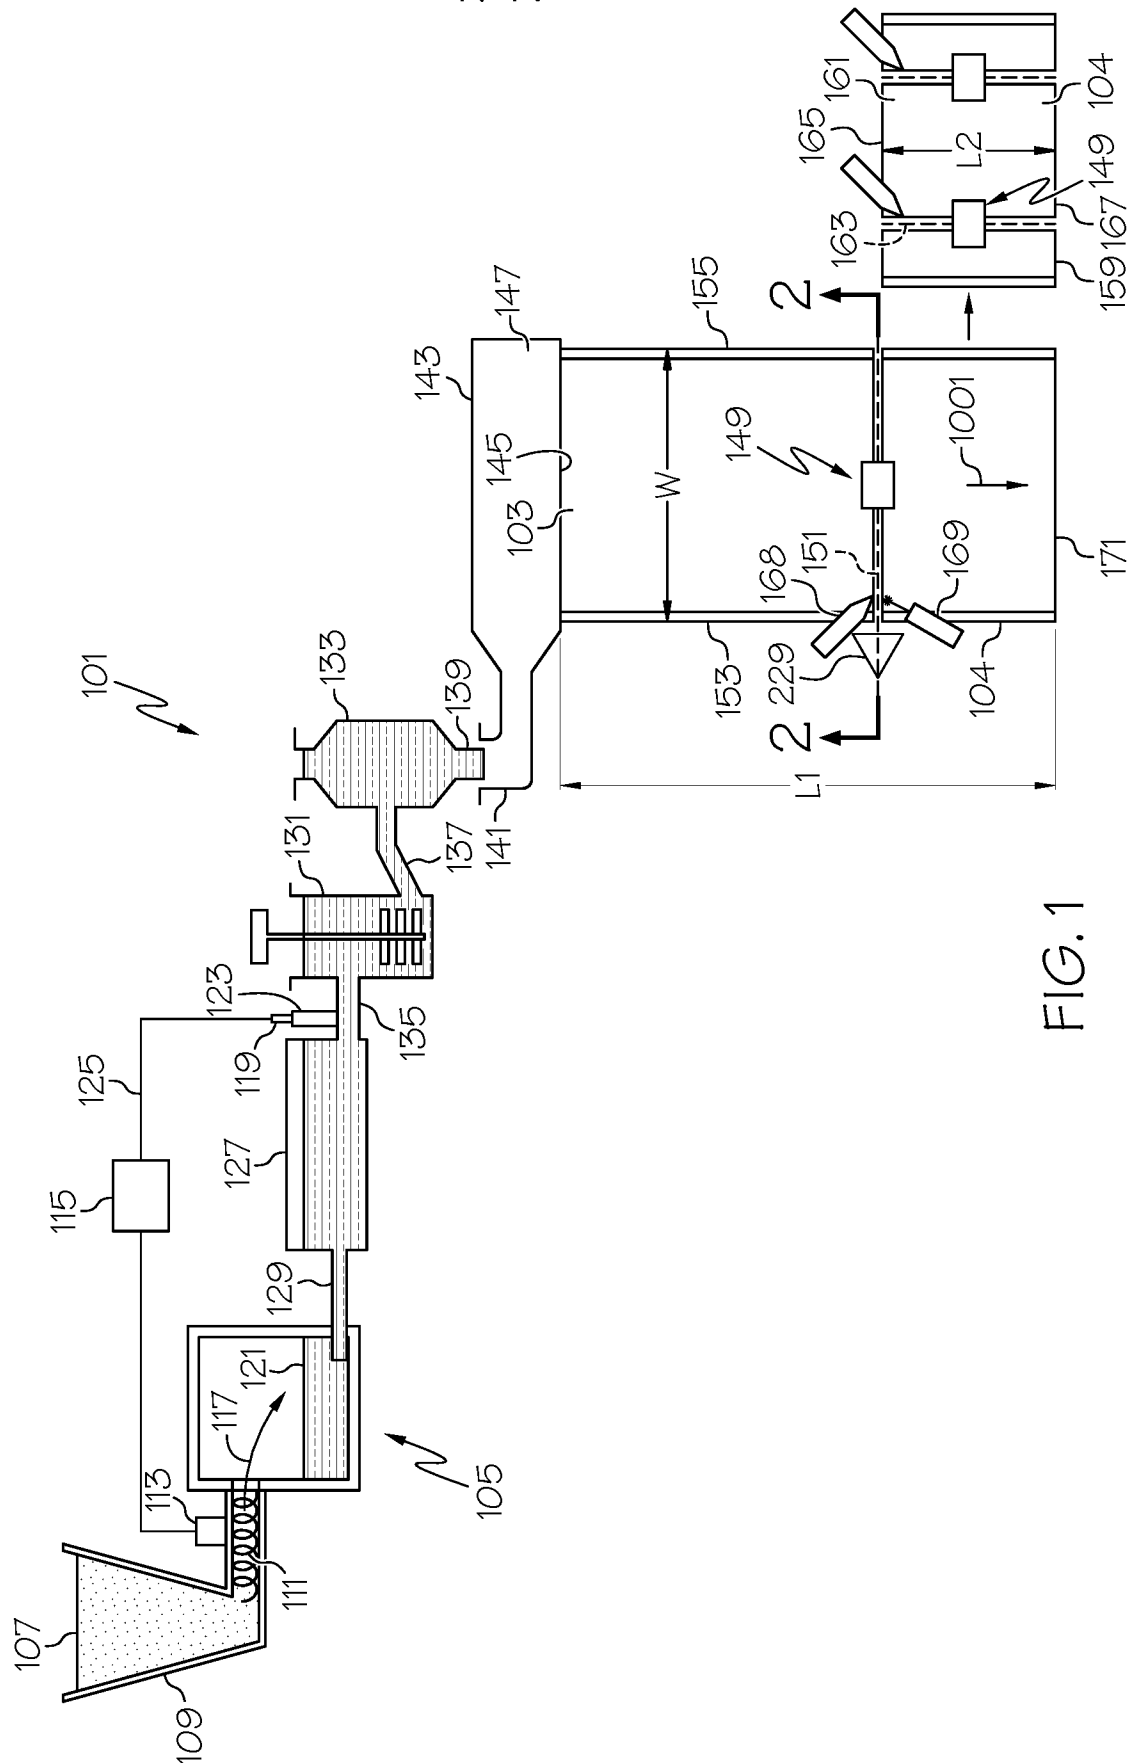
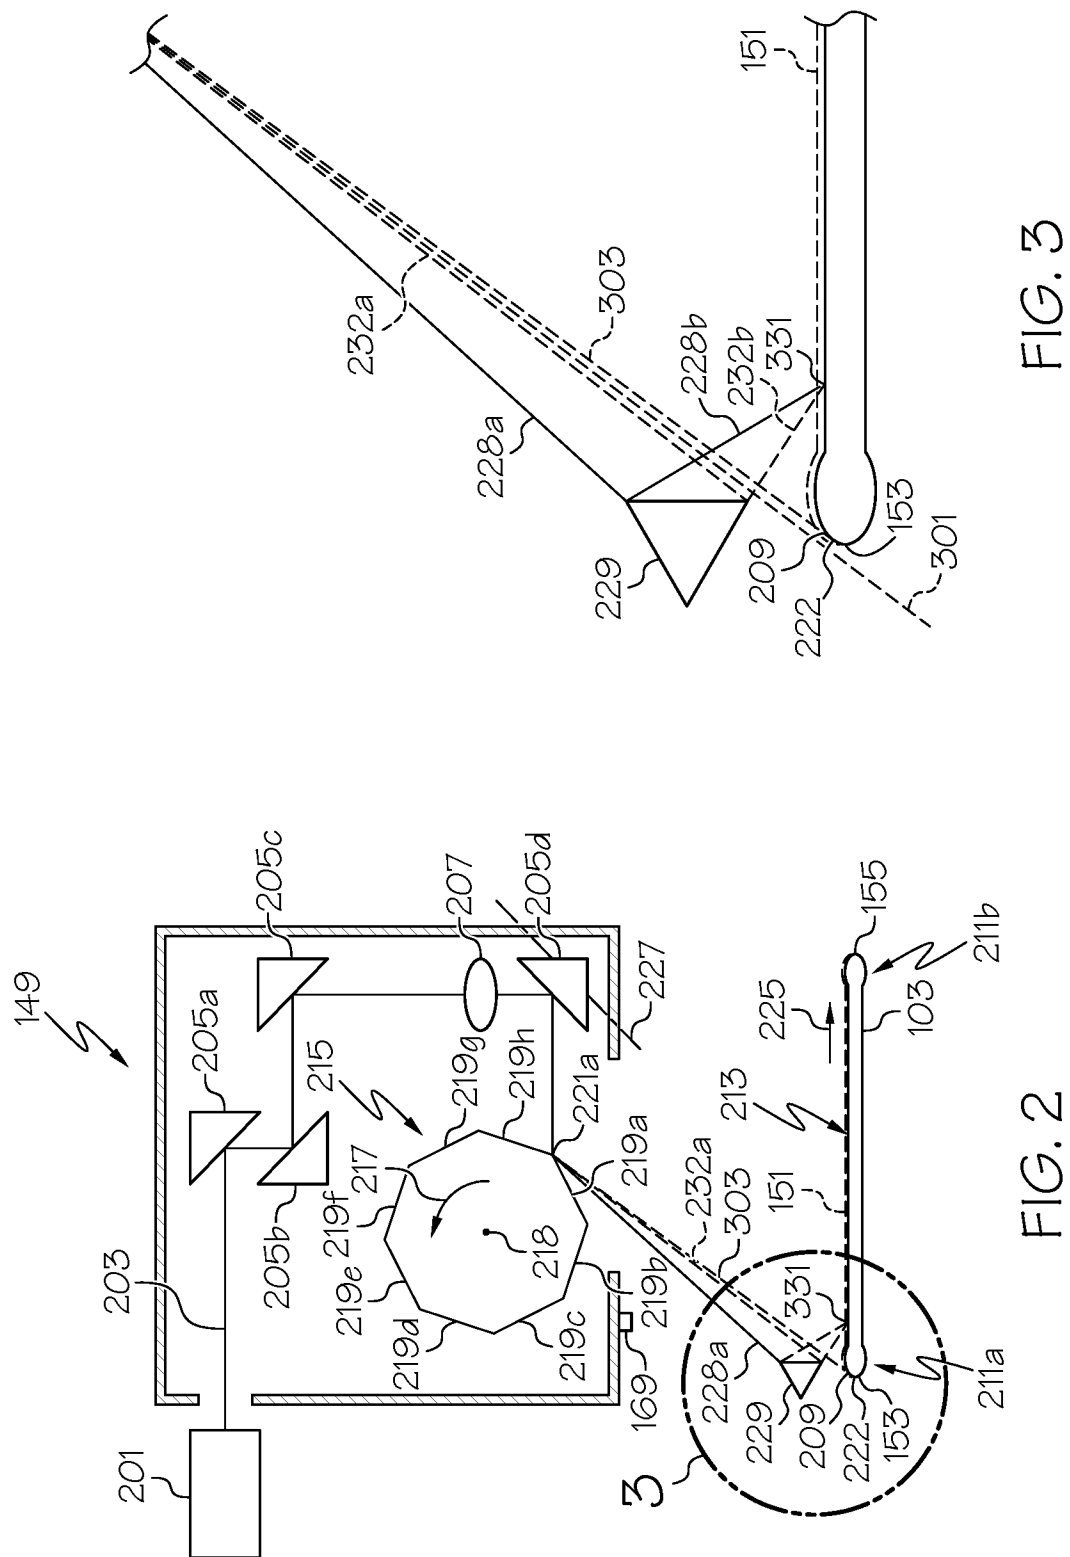
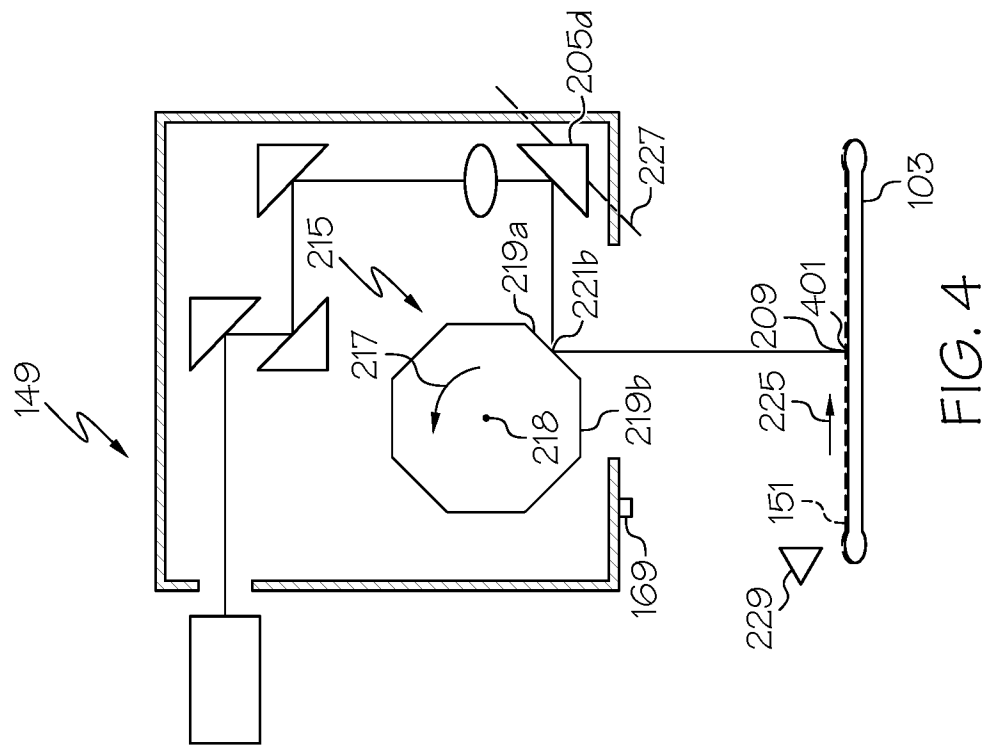


FIG. 1








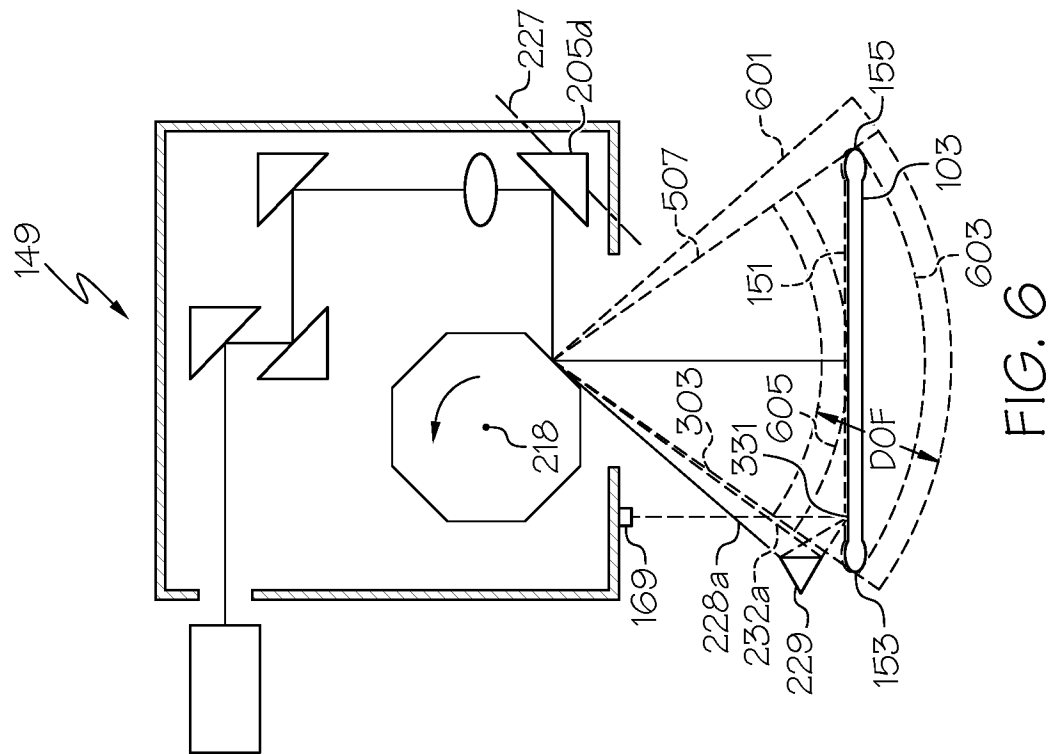


FIG. 6

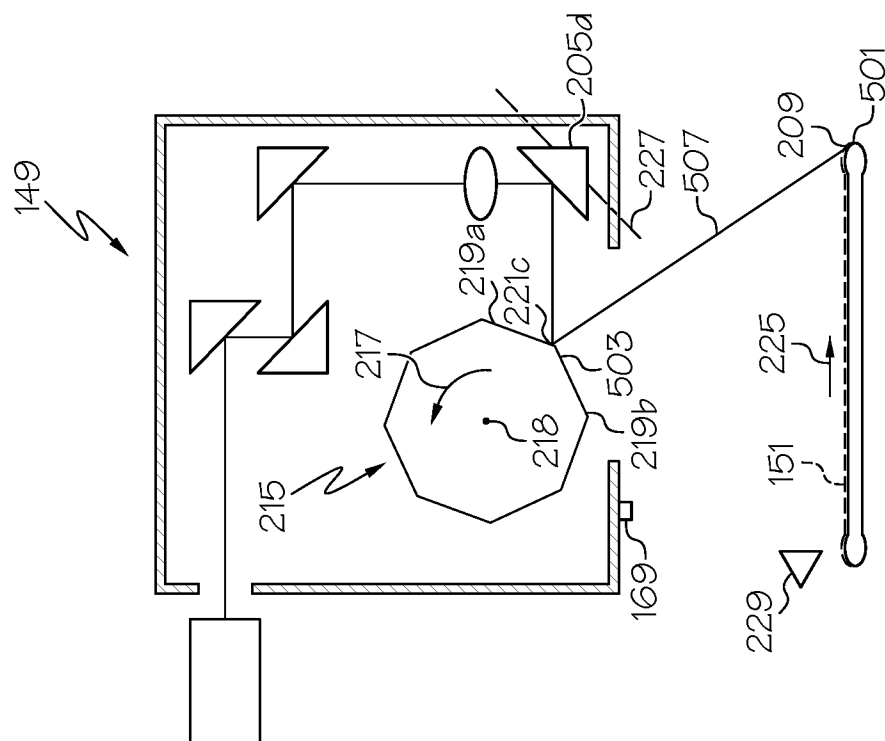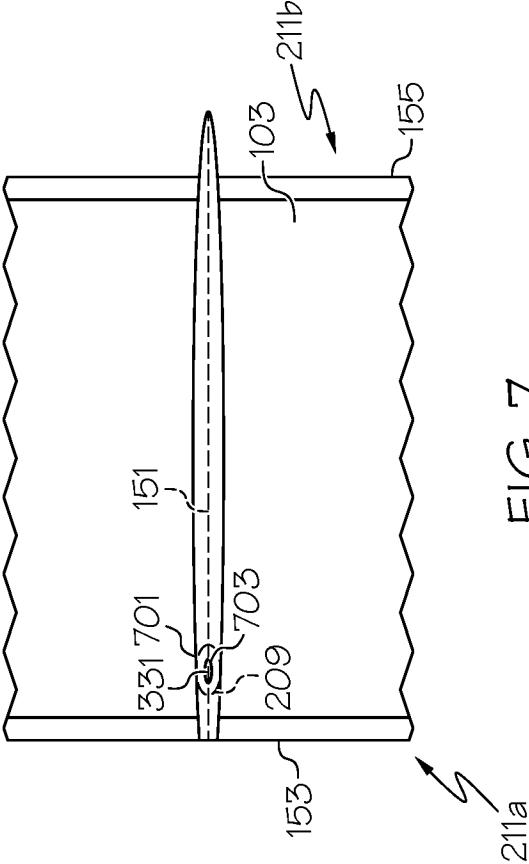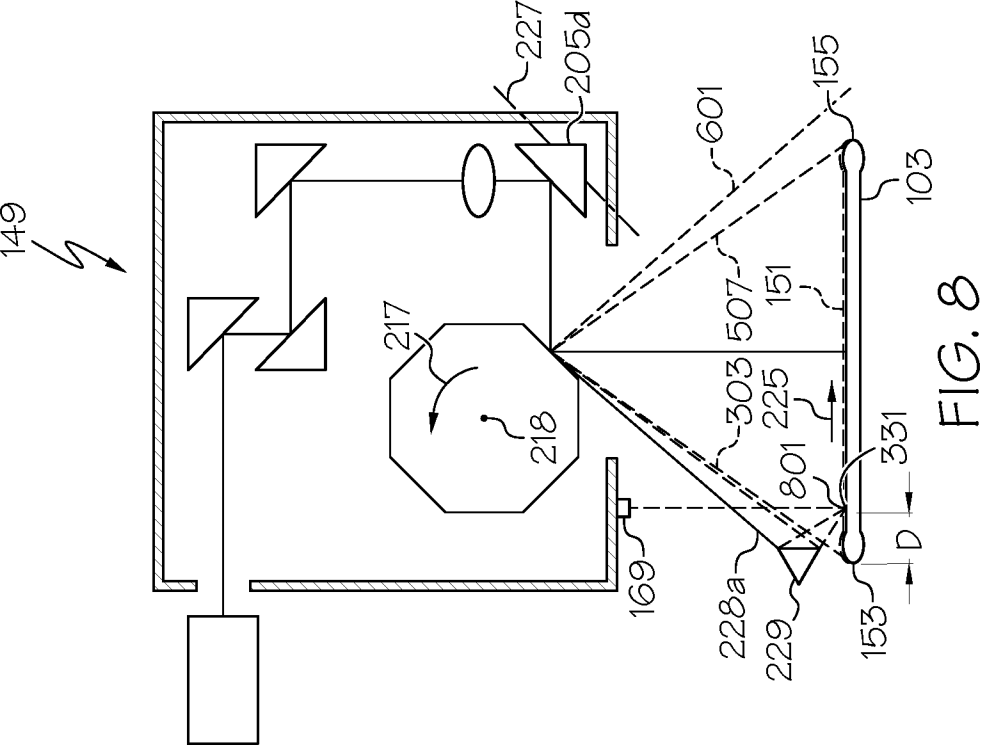

50.



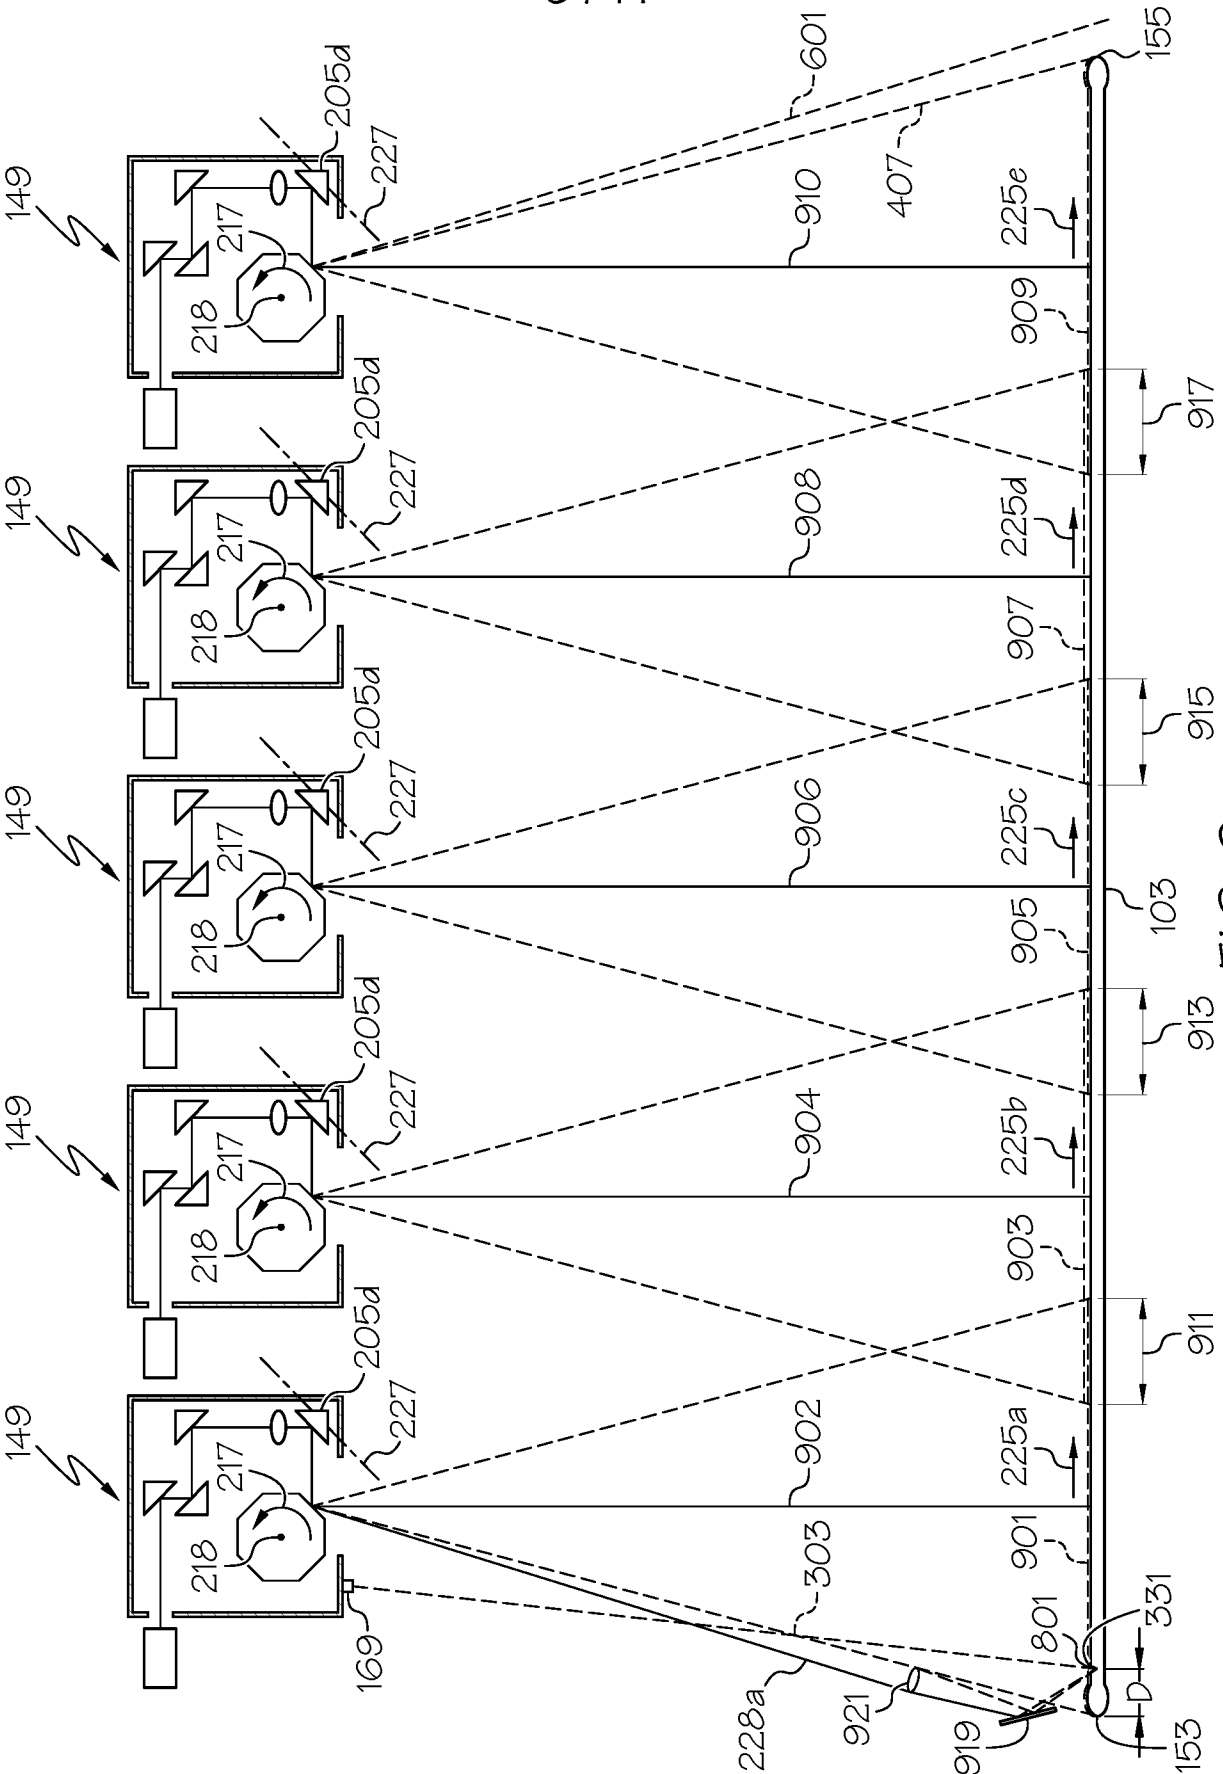


FIG. 9

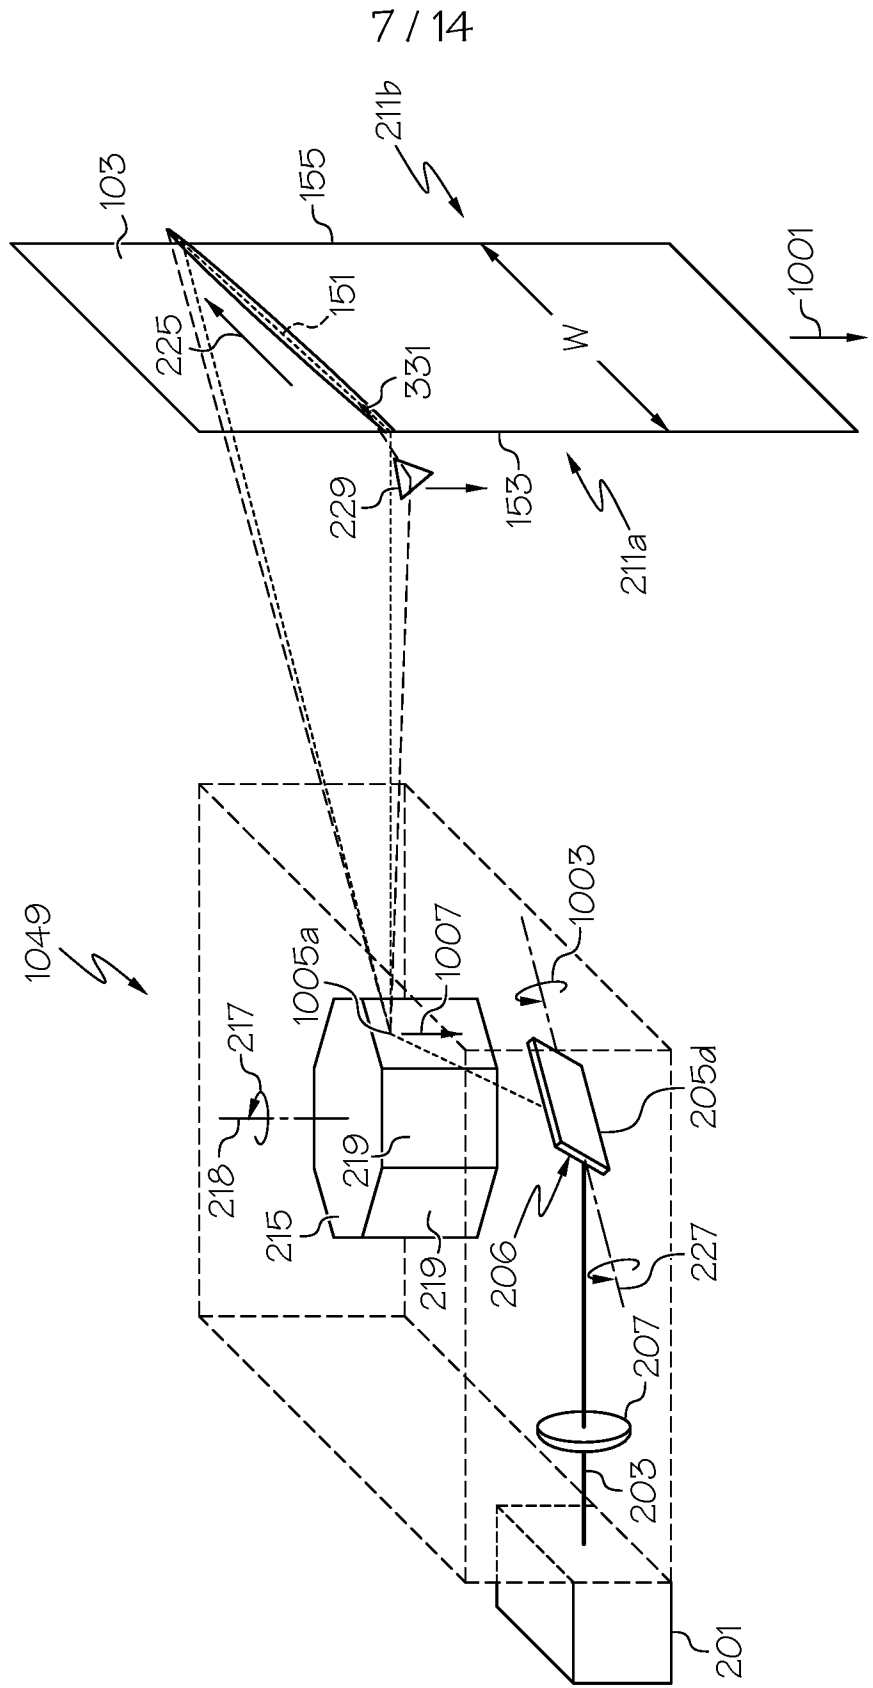
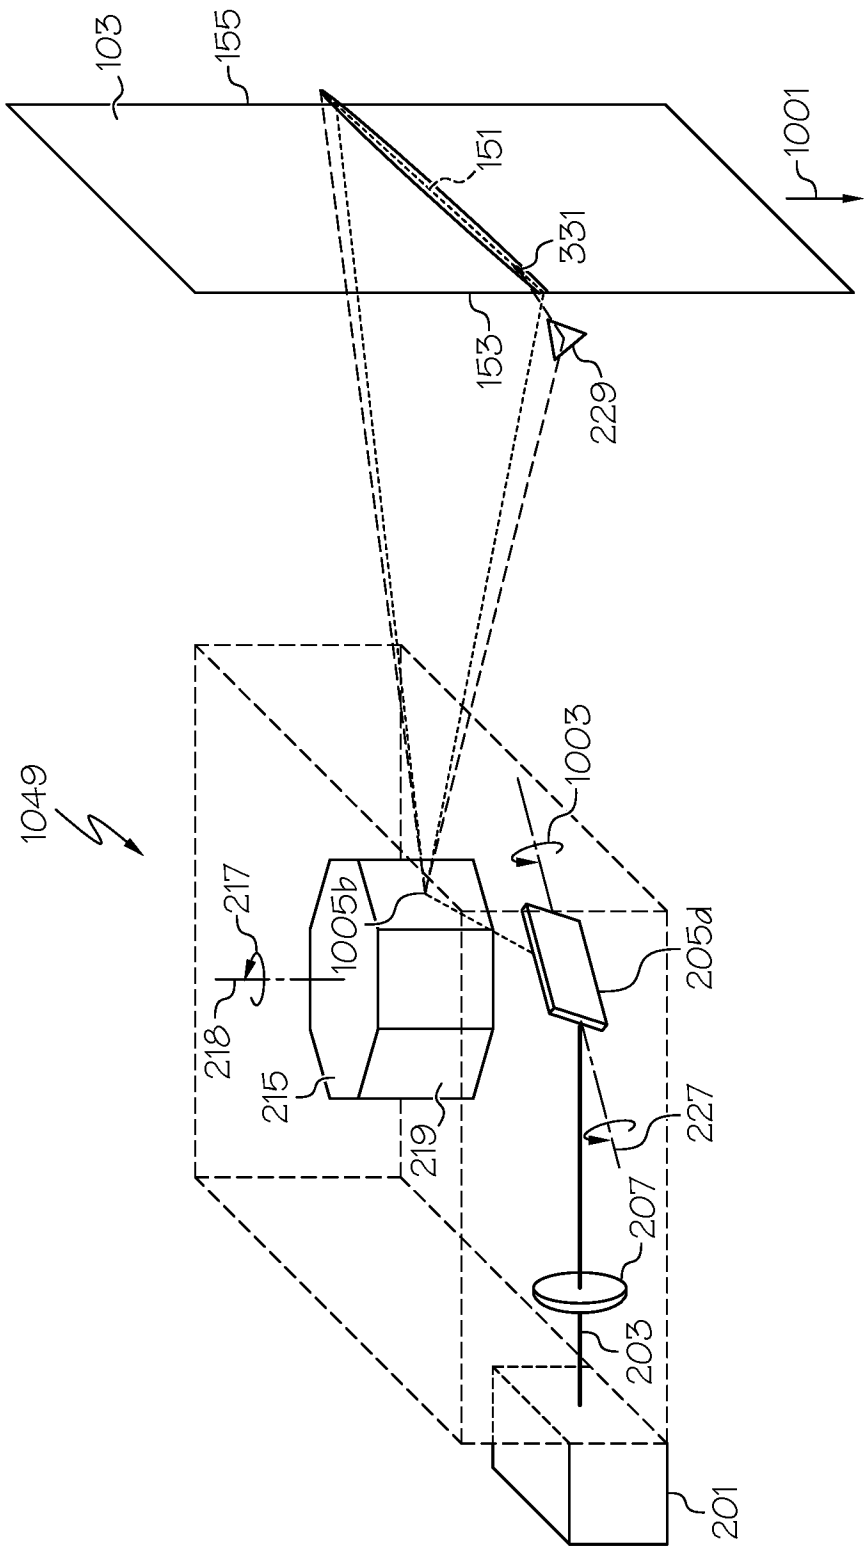


FIG. 10



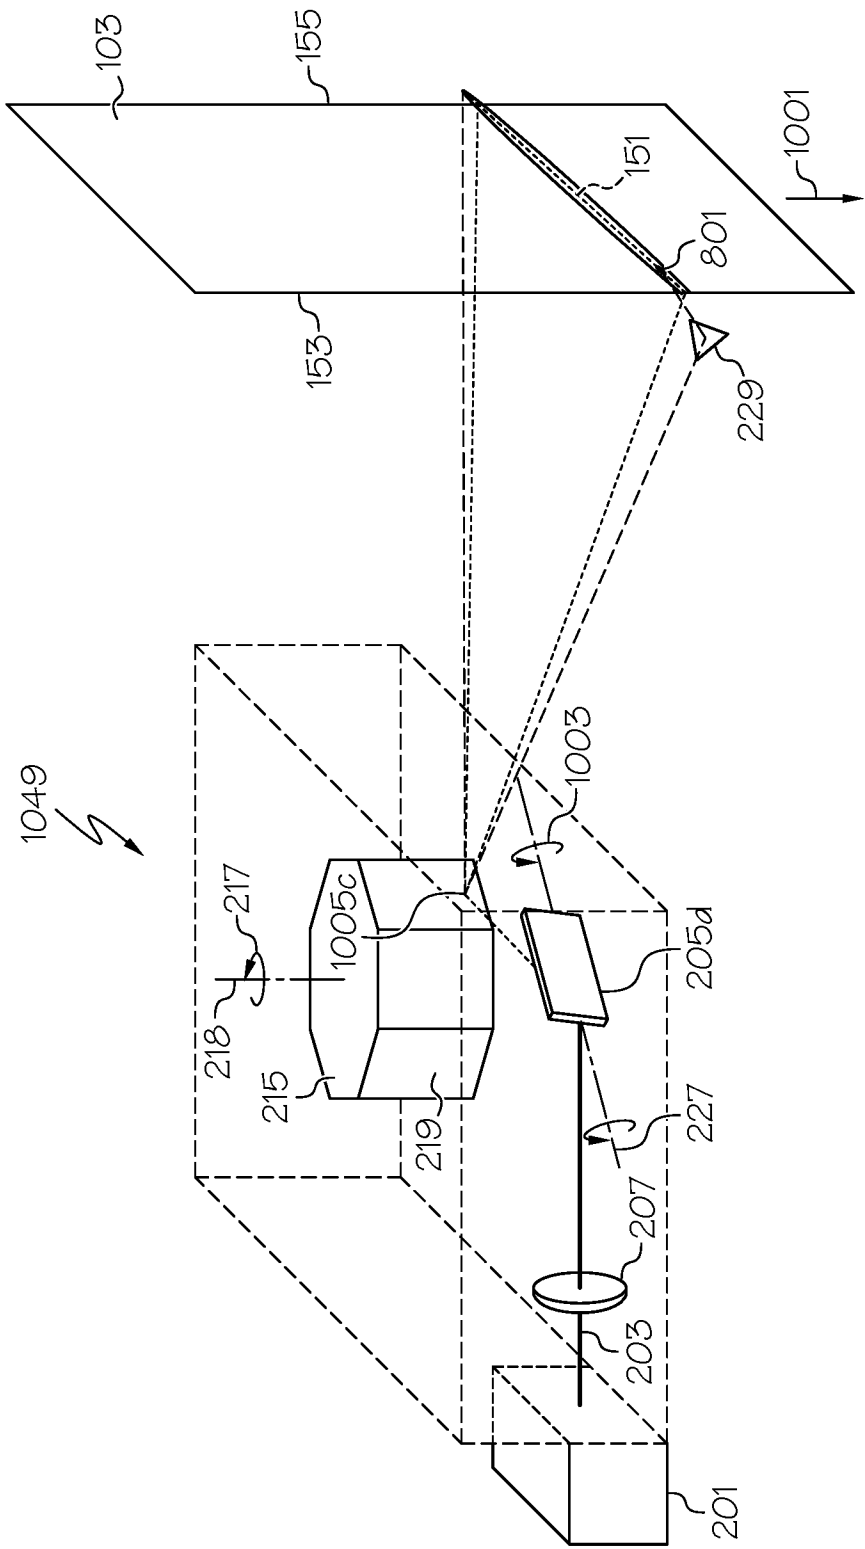


FIG. 12

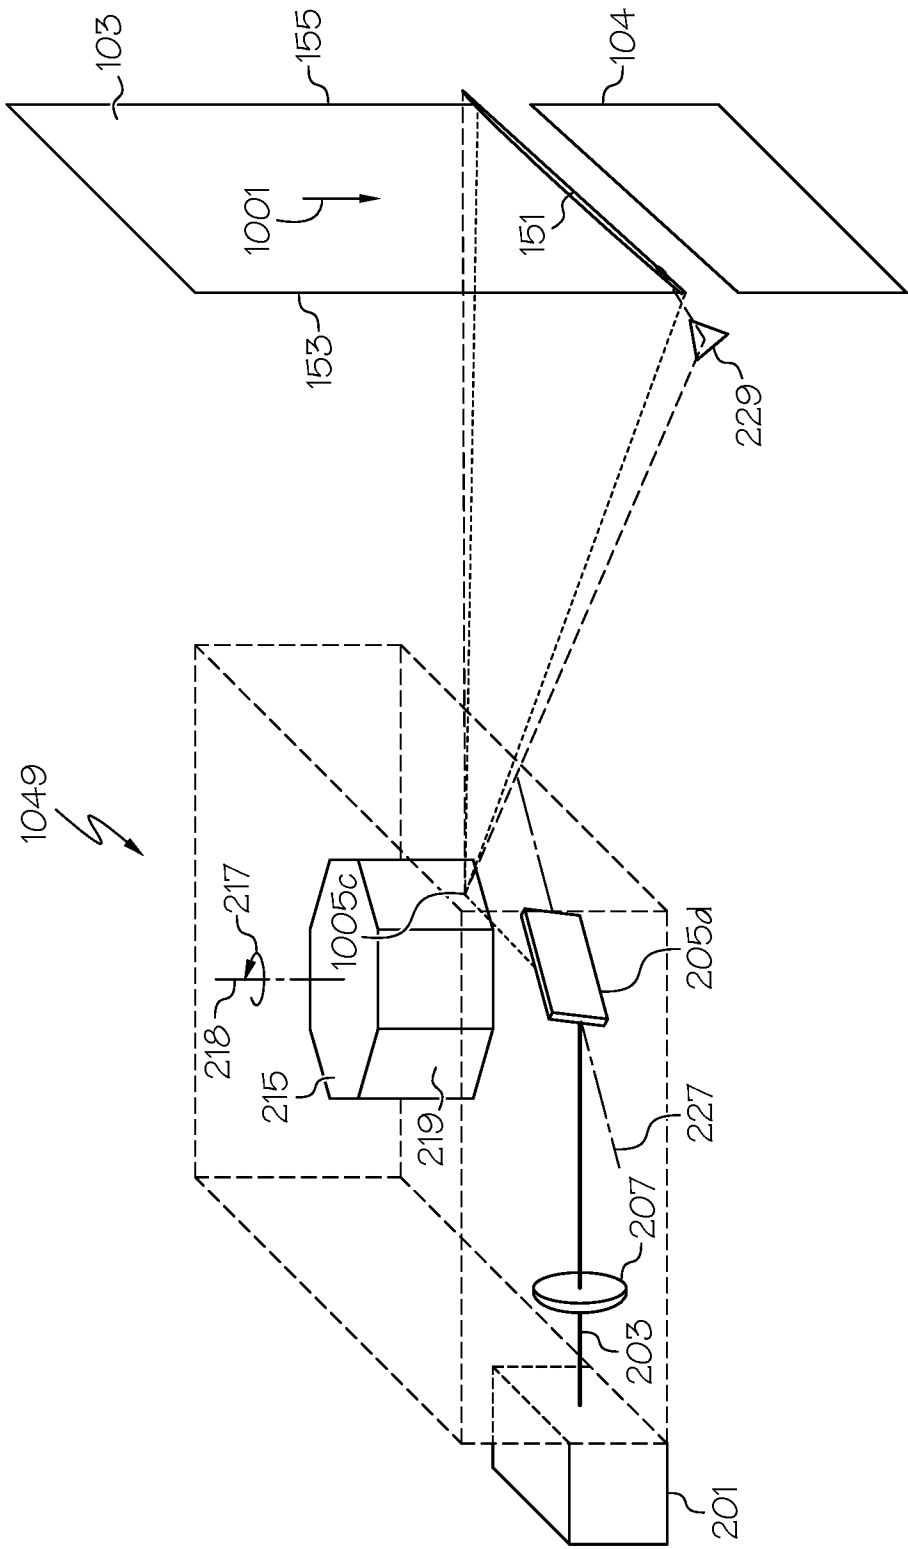
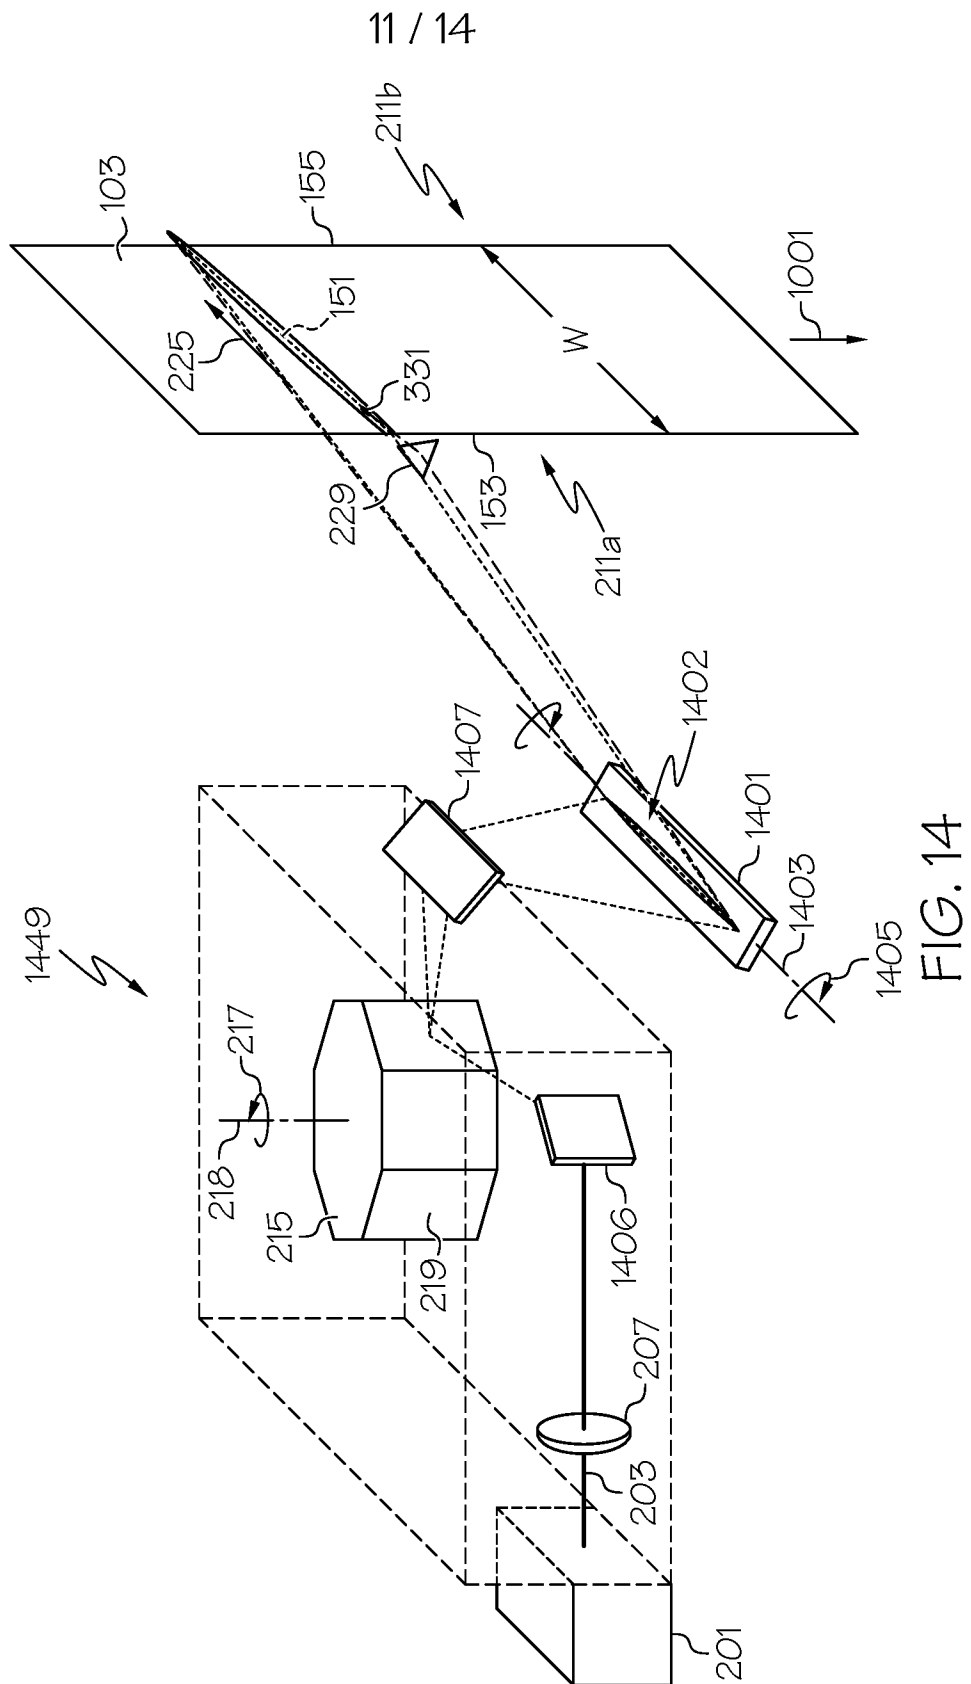
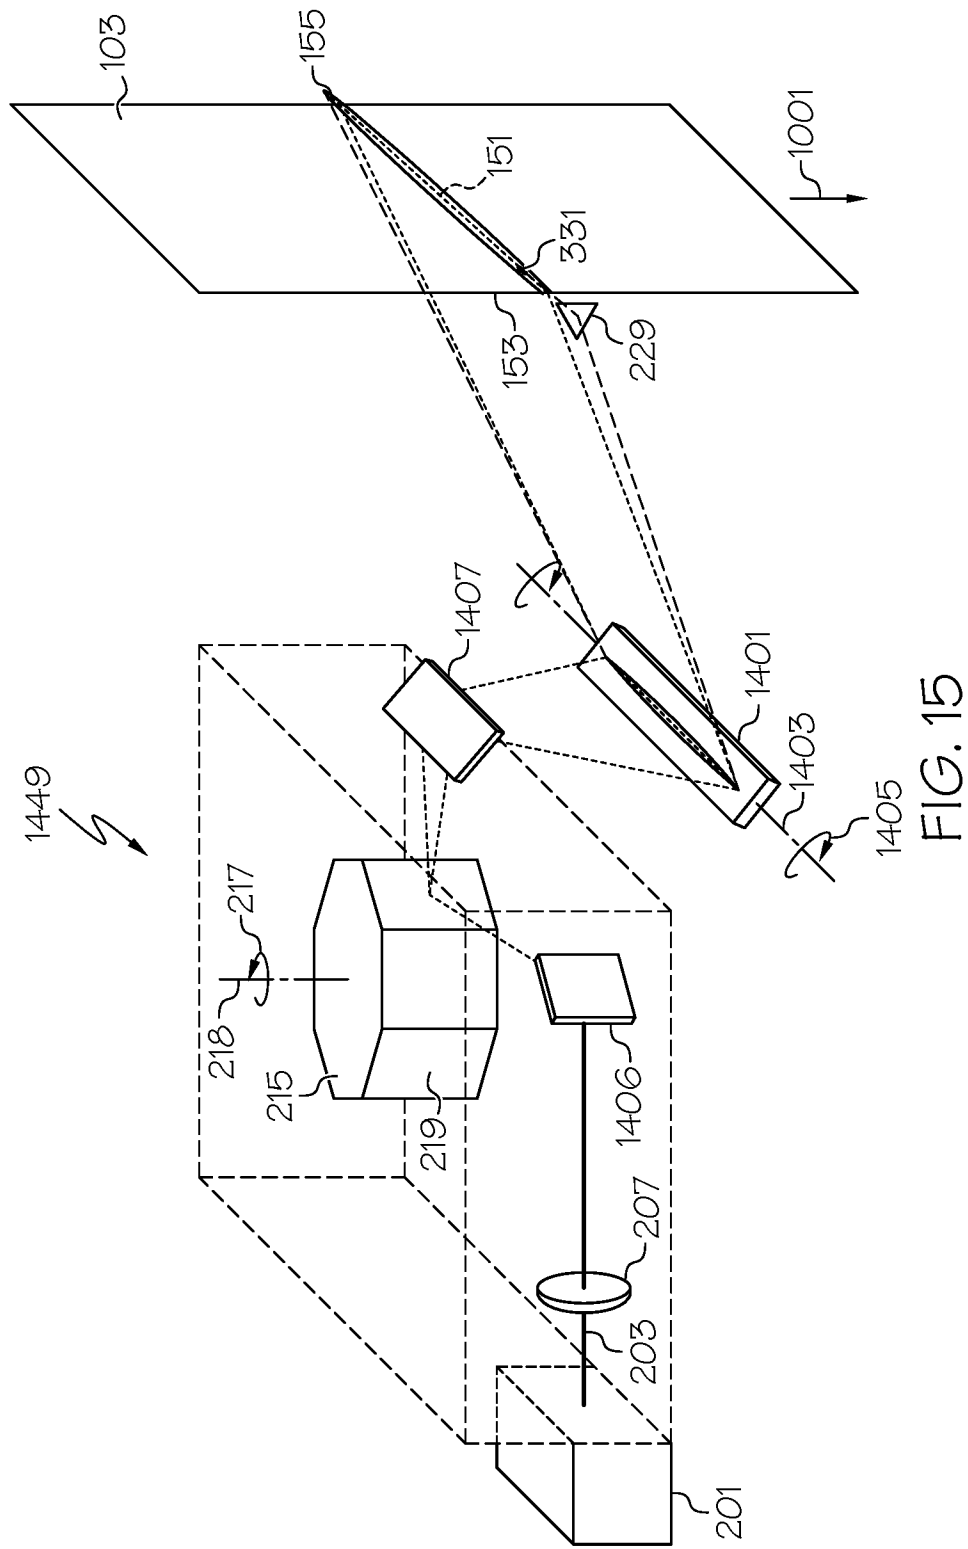
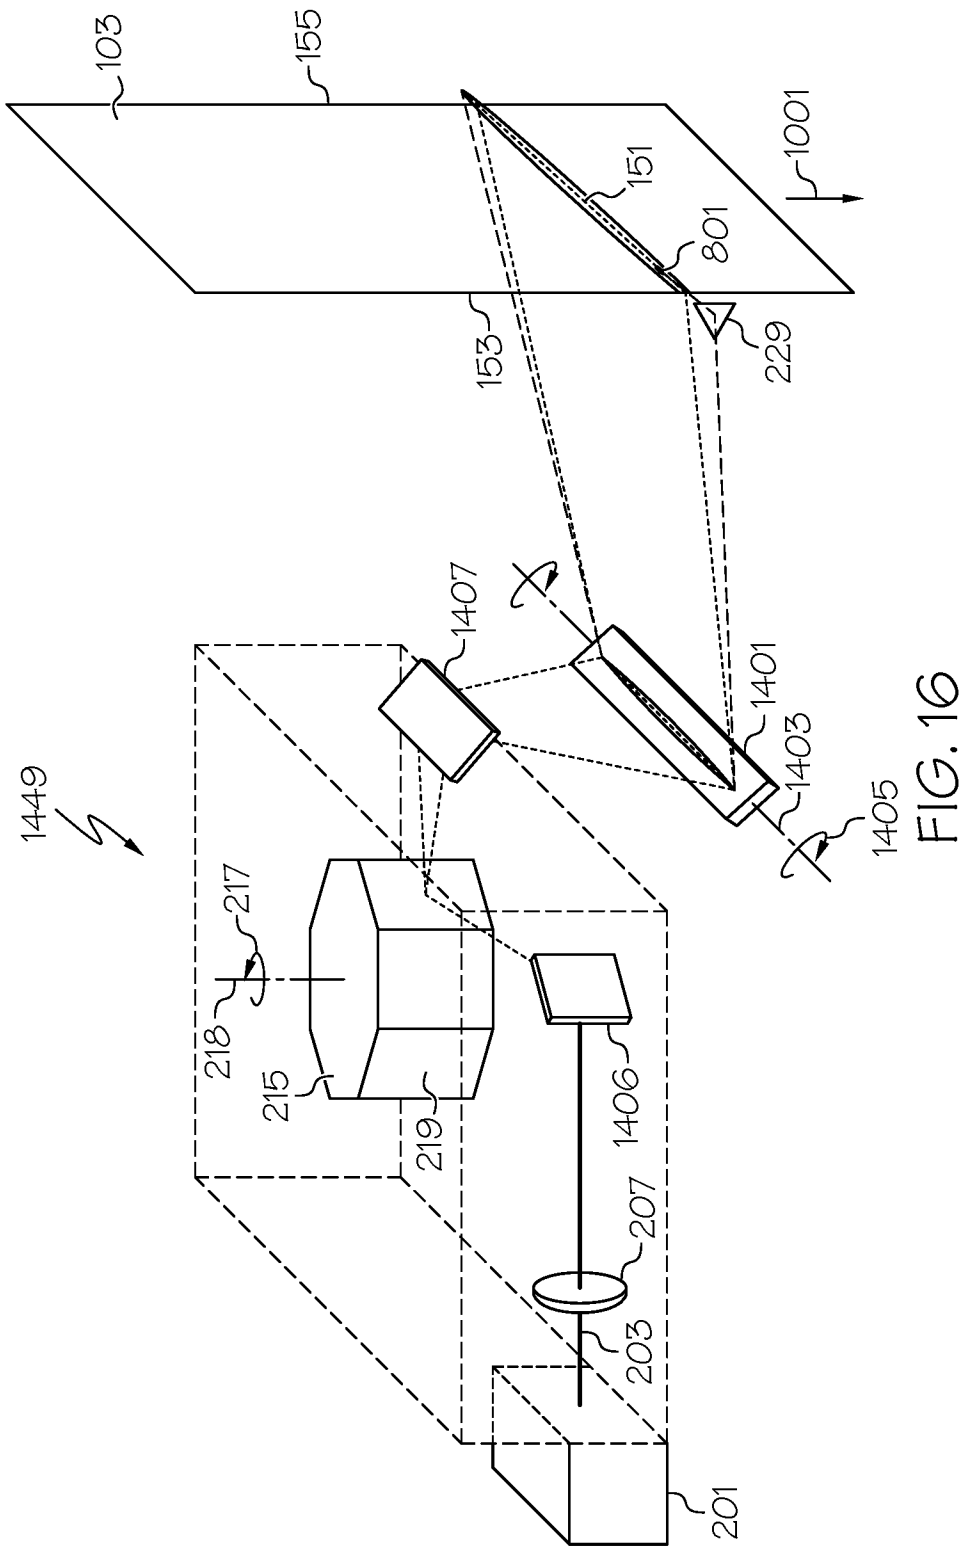


FIG. 13







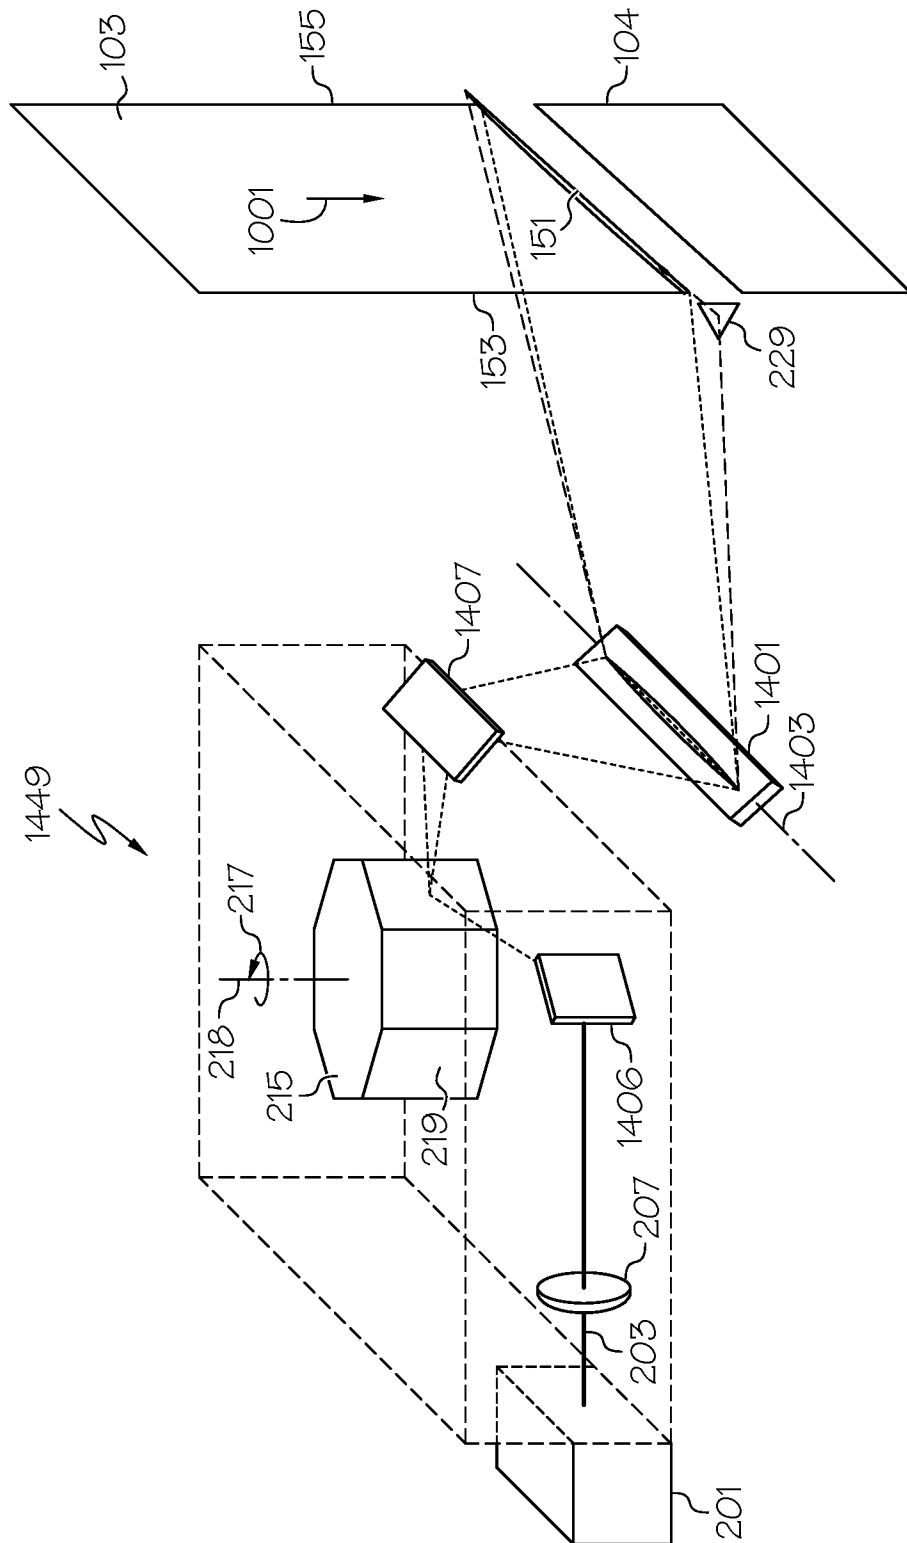


FIG. 17