



(86) Date de dépôt PCT/PCT Filing Date: 1999/06/18
(87) Date publication PCT/PCT Publication Date: 2000/01/06
(45) Date de délivrance/Issue Date: 2005/08/09
(85) Entrée phase nationale/National Entry: 2000/12/04
(86) N° demande PCT/PCT Application No.: JP 1999/003283
(87) N° publication PCT/PCT Publication No.: 2000/001026
(30) Priorités/Priorities: 1998/06/26 (10/196801) JP;
1999/01/08 (11/2640) JP


(51) Cl.Int.⁶/Int.Cl.⁶ H01M 10/40, H01M 4/58, H01M 2/14,
H01M 4/02

(72) Inventeurs/Inventors:
KAMINO, MARUO, JP;
OHSHITA, RYUJI, JP;
NAKAJIMA, HIROSHI, JP;
UESUGI, MAKOTO, JP;
NOHMA, TOSHIYUKI, JP;
NISHIO, KOJI, JP

(73) Propriétaire/Owner:
SANYO ELECTRIC CO., LTD., JP

(74) Agent: MARKS & CLERK

(54) Titre : BATTERIE SECONDAIRE AU LITHIUM A ELECTROLYTE DE GEL DE POLYMER
(54) Title: LITHIUM SECONDARY BATTERY USING GELLED POLYMERIC ELECTROLYTE

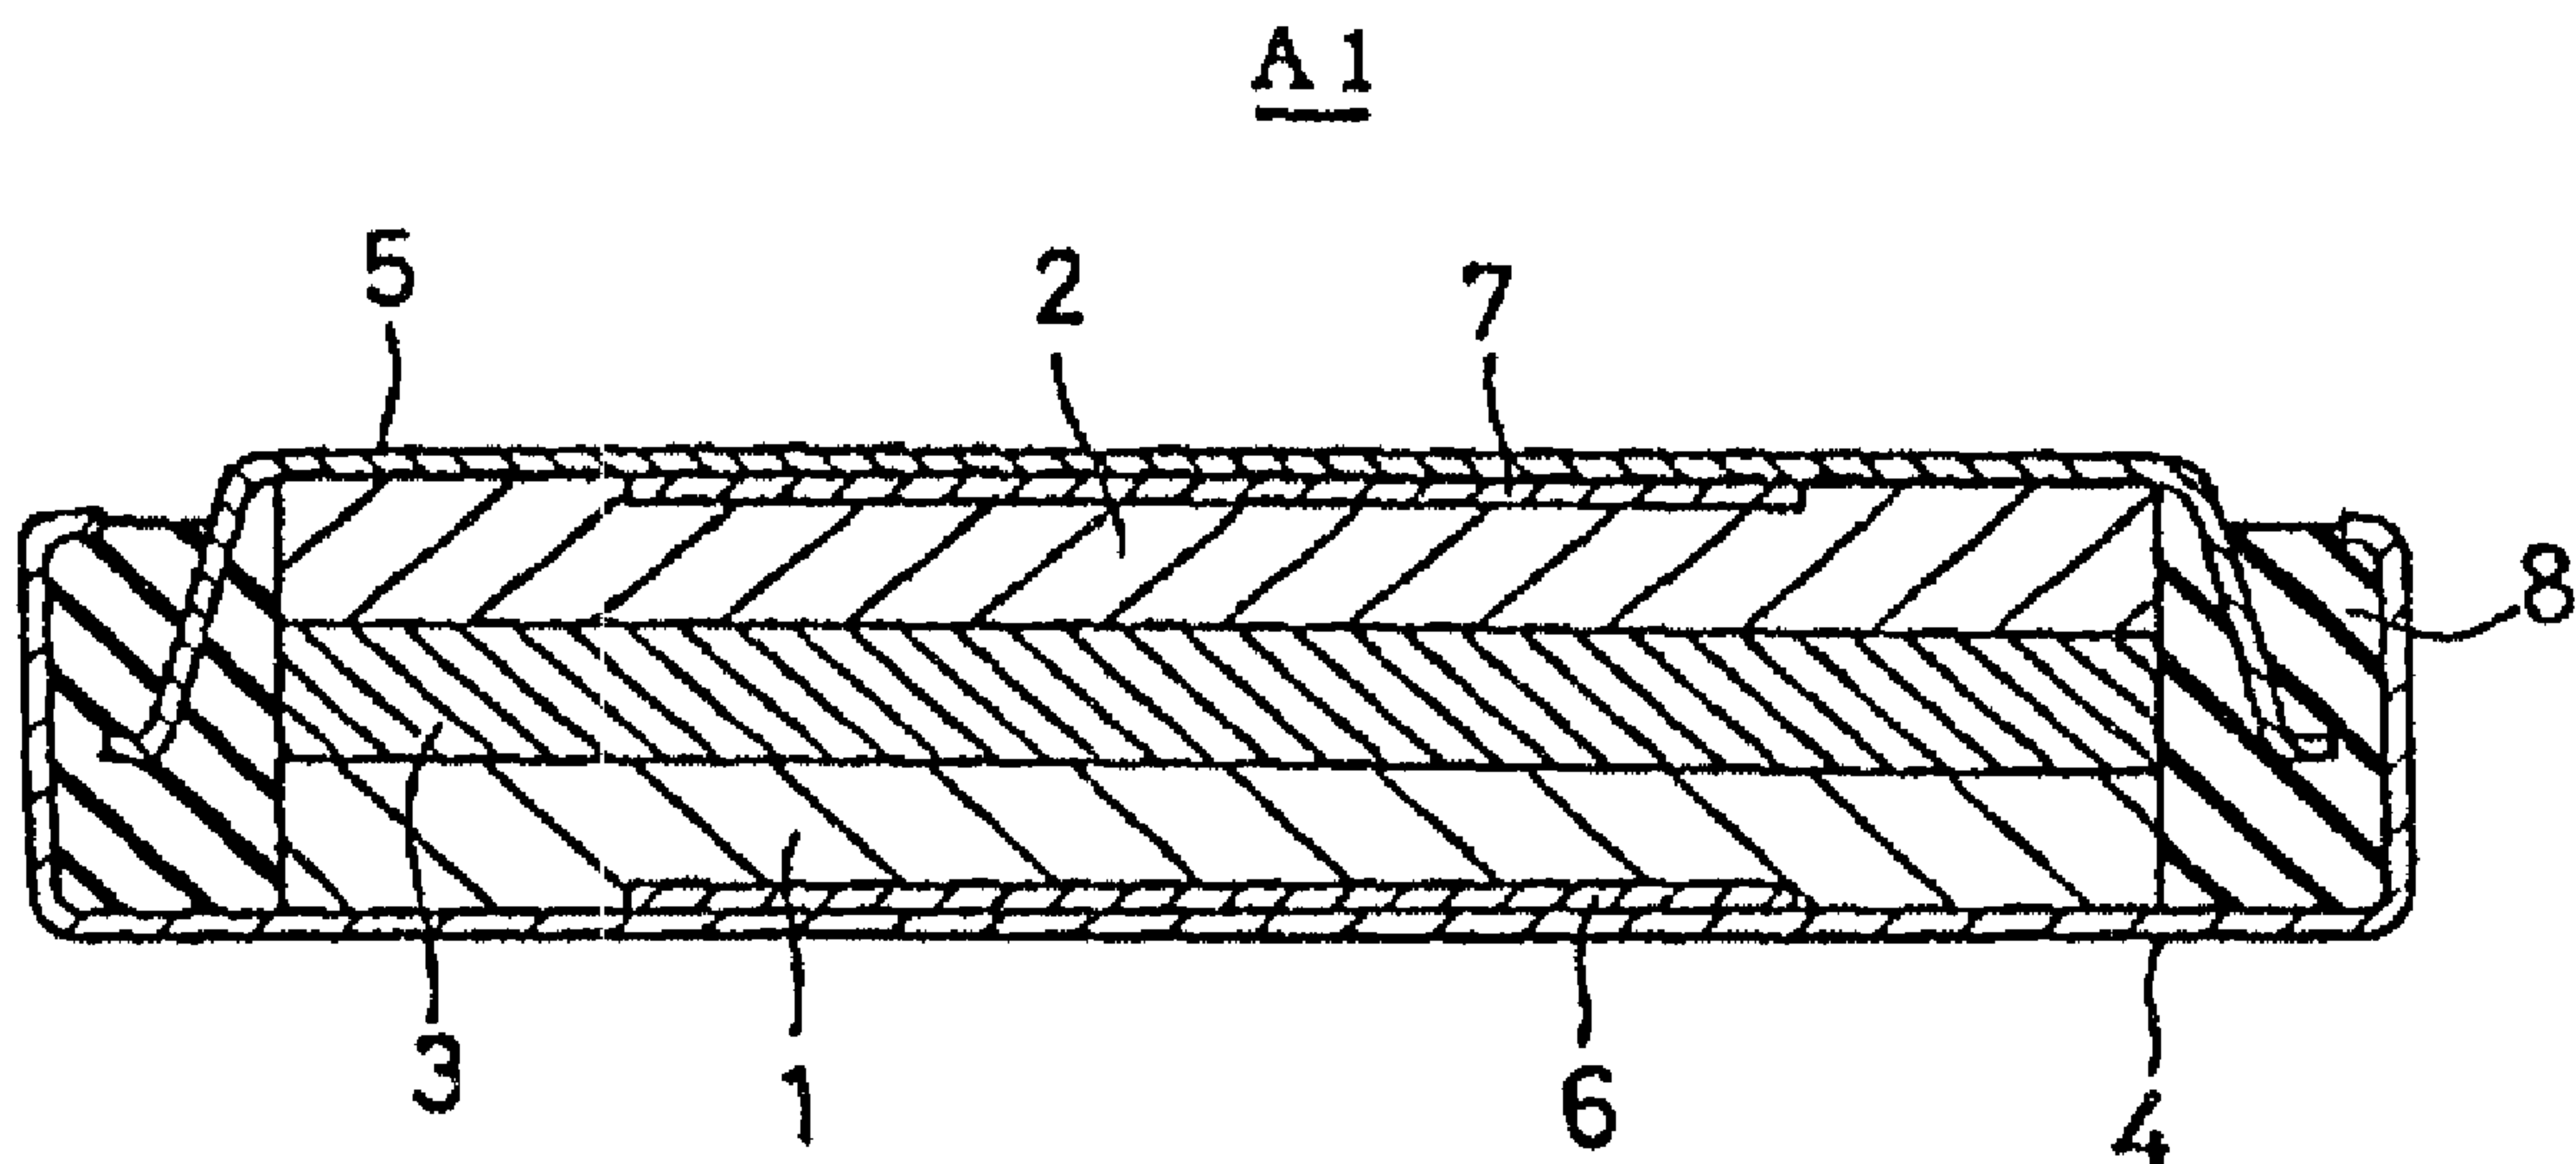

(57) Abrégé/Abstract:

A cell which utilizes spinel type lithium manganate as an active material and comprises a positive electrode containing a gelled polymer electrolyte (A), a negative electrode and a gelled polymer electrolyte (B) in a membrane or film form doubling as a separator, wherein the gelled polymer electrolytes (A and B) both comprises a polyalkylene oxide based polymer impregnated with a liquid electrolyte. The inventive cell has a large contact surface area between an active material of the positive electrode and a gelled polymer electrolyte due to a specific gelled polymer electrolyte (A) contained in the positive electrode, which results in its having a large initial discharge capacity (especially, a high rate discharge capacity). Further, in the inventive cell, the manganese in the spinel type lithium manganate shows a reduced tendency to dissolve out, due to a specific gelled polymer electrolyte (B) used as an electrolyte, which results in the reduction of the decrease in discharge capacity caused by the dissolution of manganese in a charge-discharge cycle, that is, in the excellent charge-discharge cycle characteristics of the cell.



世界知的所有権機関
国際事務局

PCT

特許協力条約に基づいて公開された国際出願



(51) 国際特許分類6 H01M 10/40, 4/02, 4/58, 2/14	A1	(11) 国際公開番号 WO00/01026 (43) 国際公開日 2000年1月6日(06.01.00)
(21) 国際出願番号 PCT/JP99/03283 (22) 国際出願日 1999年6月18日(18.06.99) (30) 優先権データ 特願平10/196801 1998年6月26日(26.06.98) JP 特願平11/2640 1999年1月8日(08.01.99) JP (71) 出願人 (米国を除くすべての指定国について) 三洋電機株式会社(SANYO ELECTRIC CO., LTD.)(JP/JP) 〒570-8677 大阪府守口市京阪本通2丁目5番5号 Osaka, (JP) (72) 発明者 ; および (75) 発明者 / 出願人 (米国についてののみ) 神野丸男(KAMINO, Maruo)(JP/JP) 大下竜司(OHSHITA, Ryuji)(JP/JP) 中島 宏(NAKAJIMA, Hiroshi)(JP/JP) 能間俊之(NOHMA, Toshiyuki)(JP/JP) 西尾晃治(NISHIO, Koji)(JP/JP) 〒570-8677 大阪府守口市京阪本通2丁目5番5号 三洋電機株式会社 Osaka, (JP)		上杉 誠(UESUGI, Makoto)(JP/JP) 〒229-0035 神奈川県相模原市相生4-7-12 イルムーシャ西田301 Kanagawa, (JP) (74) 代理人 松尾智弘(MATSUO, Tomohiro) 〒532-0011 大阪府大阪市淀川区西中島6丁目9番20号 新大阪GHビル Osaka, (JP) (81) 指定国 CA, JP, KR, US, 欧州特許 (DE, FR, GB) 添付公開書類 国際調査報告書
(54)Title: GELLED POLYMER ELECTROLYTE LITHIUM SECONDARY CELL (54)発明の名称 ゲル状高分子電解質リチウム二次電池 <u>A1</u> (57) Abstract A cell which utilizes spinel type lithium manganate as an active material and comprises a positive electrode containing a gelled polymer electrolyte (A), a negative electrode and a gelled polymer electrolyte (B) in a membrane or film form doubling as a separator, wherein the gelled polymer electrolytes (A and B) both comprises a polyalkylene oxide based polymer impregnated with a liquid electrolyte. The inventive cell has a large contact surface area between an active material of the positive electrode and a gelled polymer electrolyte due to a specific gelled polymer electrolyte (A) contained in the positive electrode, which results in its having a large initial discharge capacity (especially, a high rate discharge capacity). Further, in the inventive cell, the manganese in the spinel type lithium manganate shows a reduced tendency to dissolve out, due to a specific gelled polymer electrolyte (B) used as an electrolyte, which results in the reduction of the decrease in discharge capacity caused by the dissolution of manganese in a charge-discharge cycle, that is, in the excellent charge-discharge cycle characteristics of the cell.		

Specification

LITHIUM SECONDARY BATTERY USING GELLED POLYMERIC ELECTROLYTE

5 Technical Field

The present invention relates to a lithium secondary battery including spinel type lithium manganese oxide as a positive electrode active material and gelled polymeric electrolyte as an ion conducting medium, and more particularly, it relates to improvement of a positive electrode for the purpose of providing a
10 lithium secondary battery using a gelled polymeric electrolyte with large initial discharge capacity and good charge-discharge cycle performance.

Background Art

As an ion conducting medium (electrolyte) of a lithium secondary battery,
15 a liquid electrolyte (electrolytic solution) has been conventionally used because of its good ionic conductivity although it has problems of leakage and elution of an electrode material.

When a liquid electrolyte is used as an ion conducting medium in a lithium secondary battery using lithium manganese oxide as a positive electrode
20 active material, however, manganese included in the lithium manganese oxide is gradually eluted into the liquid electrolyte, resulting in causing a problem that the discharge capacity is degraded in a small number of charge-discharge cycles.

When a solid electrolyte (such as a film and a foil) is used instead of a
25 liquid electrolyte, the degradation of the discharge capacity due to the elution of

manganese into the electrolyte can be avoided. The ionic conductivity of the solid electrolyte is, however, generally lower than that of the liquid electrolyte, and a contact area between the electrolyte and the electrode is so small that the electric resistance (interface resistance) on the interface between the electrolyte and the electrode is large. Therefore, the discharge capacity, at high rate discharge in particular, is degraded.

Accordingly, as an ion conducting medium for improving the disadvantages of and making the best use of the advantages of the liquid electrolyte and the solid electrolyte, a gelled electrolyte, particularly a gelled polymeric electrolyte that can be easily formed into a thin film and is inexpensive, has been recently proposed. A gelled polymeric electrolyte is a gelled substance obtained by impregnating a liquid electrolyte including a solute (electrolytic salt) and a solvent into a matrix of a polymer (resin). Since a gelled polymeric electrolyte includes a liquid electrolyte, it has higher ionic conductivity than a solid electrolyte, and since the liquid electrolyte is fixed through gelation within the matrix of the gelled polymeric electrolyte, manganese is minimally eluted into the liquid electrolyte.

When a gelled polymeric electrolyte is used, however, a contact area between the electrode and the electrolyte is smaller than in using a liquid electrolyte. Therefore, the electric resistance (interface resistance) on the interface between the electrode and the electrolyte is large as in using a solid electrolyte. As a result, the discharge capacity, at high rate discharge in particular, is degraded.

Accordingly, an object of the invention is providing a lithium secondary battery using a gelled polymeric electrolyte with large initial discharge capacity

and good charge-discharge cycle performance.

Disclosure of Invention

The lithium secondary battery using a gelled polymeric electrolyte of
5 this invention (present battery) comprises a positive electrode including a gelled
polymeric electrolyte (A) and using spinel type lithium manganese oxide as an
active material; a negative electrode; and a gelled polymeric electrolyte (B) in
the shape of a film or sheet also serving as a separator, and the gelled polymeric
electrolyte (A) and the gelled polymeric electrolyte (B) are made from a polymer
10 of poly(alkylene oxide) series impregnated with a liquid electrolyte.

Both the gelled polymeric electrolyte (A) included in the positive
electrode and the gelled polymeric electrolyte (B) in the shape of a film or sheet
also serving as a separator are the polymers of poly(alkylene oxide) series
impregnated with a liquid electrolyte.

15 Examples of the polymer of poly(alkylene oxide) series are poly(ethylene
oxide), poly(propylene oxide), a block copolymer of poly(ethylene oxide) and
polystyrene, a block copolymer of poly(ethylene oxide) and polypropylene oxide,
polyetherimide, polyethersulfone, polysiloxane and polysulfone. From the
viewpoint of the charge-discharge cycle performance, the block copolymer of
20 poly(ethylene oxide) and polystyrene is particularly preferred. In particular,
the polymer of poly(alkylene oxide) series used for the gelled polymeric
electrolyte (B) preferably has high mechanical strength and a large molecular
weight. When, for example, poly(ethylene oxide) is used, the number average
molecular weight M_n is preferably approximately two million through eight
25 million.

Examples of the electrolyte used for impregnating the polymer of poly(alkylene oxide) series are LiClO_4 , LiCF_3SO_3 , LiPF_6 , LiBF_4 , LiSbF_6 , LiAsF_6 , $\text{LiN}(\text{C}_m\text{F}_{2m+1}\text{SO}_2)(\text{C}_n\text{F}_{2n+1}\text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5), and $\text{LiC}(\text{C}_p\text{F}_{2p+1}\text{SO}_2)(\text{C}_q\text{F}_{2q+1}\text{SO}_2)(\text{C}_r\text{F}_{2r+1}\text{SO}_2)$ (wherein p , q and r independently indicate an integer ranging between 1 and 5). Examples of the solvent are ethylene carbonate, propylene carbonate, butylene carbonate, vinylene carbonate, dimethyl carbonate, diethyl carbonate, methylethyl carbonate, γ -butyrolactone, sulfolane, 1,2-dimethoxyethane, 1,2-diethoxyethane, 1,2-ethoxymethoxyethane, tetrahydrofuran, 2-methyl-1,3-dioxolane, 4-methyl-1,3-dioxolane, dimethyl ether, diethyl ether, ethyl acetate and methyl propionate. The liquid electrolyte preferably includes $\text{LiN}(\text{C}_m\text{F}_{2m+1}\text{SO}_2)(\text{C}_n\text{F}_{2n+1}\text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) and/or $\text{LiC}(\text{C}_p\text{F}_{2p+1}\text{SO}_2)(\text{C}_q\text{F}_{2q+1}\text{SO}_2)(\text{C}_r\text{F}_{2r+1}\text{SO}_2)$ (wherein p , q and r independently indicate an integer ranging between 1 and 5) in a concentration of 0.1 through 2.0 mol/liter because the elution of manganese can be thus effectively suppressed during charge-discharge cycles. When another solute is used together with $\text{LiN}(\text{C}_m\text{F}_{2m+1}\text{SO}_2)(\text{C}_n\text{F}_{2n+1}\text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) and/or $\text{LiC}(\text{C}_p\text{F}_{2p+1}\text{SO}_2)(\text{C}_q\text{F}_{2q+1}\text{SO}_2)(\text{C}_r\text{F}_{2r+1}\text{SO}_2)$ (wherein p , q and r independently indicate an integer ranging between 1 and 5), the concentration of the solutes in the liquid electrolyte is preferably lower than 2.0 mol/liter.

In the case where the gelled polymeric electrolyte (A) and the gelled polymeric electrolyte (B) are made from the same material, a film of a polymer of poly(alkylene oxide) series is formed on a positive electrode by a casting method or the like, and part of the cast polymer of poly(alkylene oxide) series is allowed

to be included in the positive electrode at the same time. Subsequently, the polymer of poly(alkylene oxide) series is impregnated with the same liquid electrolyte. In this manner, the film-like gelled polymeric electrolyte (B) also serving as the separator and the positive electrode including the gelled
5 polymeric electrolyte (A) are preferably integrally fabricated because the fabrication can be thus eased and the contact resistance between the gelled polymeric electrolyte also serving as the separator and the positive electrode can be lowered.

The spinel type lithium manganese oxide used as the active material of
10 the positive electrode is lithium manganese oxide having a spinel structure belonging to the cubic system. A specific example of the spinel type lithium manganese oxide is $\text{LiM}_x\text{Mn}_{2-x}\text{O}_4$ (wherein M is at least one element selected from the group consisting of Ni, Al, Mg, Fe and Co; and $0 \leq x \leq 0.5$).

Examples of the material for the negative electrode are a substance
15 capable of electrochemically occluding and discharging lithium ions and metallic lithium. Examples of the substance capable of electrochemically occluding and discharging lithium ions are a carbon material such as graphite (natural graphite and artificial graphite), coke and an organic baked substance; lithium alloy such as lithium - aluminum alloy, lithium- magnesium alloy, lithium -
20 indium alloy, lithium - tin alloy, lithium - thallium alloy, lithium - lead alloy and lithium - bismuth alloy; and a metal oxide or metal sulfide including one of or two or more of tin, titanium, iron, molybdenum, niobium, vanadium and zinc.

Since the present battery uses a positive electrode including a specific gelled polymeric electrolyte (A), the contact area between the positive electrode
25 active material and the gelled polymeric electrolyte is large. Accordingly, the

present battery can attain large initial discharge capacity (at high rate discharge in particular). Also, since the present battery uses a specific gelled polymeric electrolyte (B) as the electrolyte, manganese included in spinel type lithium manganese oxide is minimally eluted, which can reduce the degradation
5 of the discharge capacity derived from elution of manganese during charge-discharge cycles. Accordingly, the present battery can exhibit good charge-discharge cycle performance.

According to an aspect of the present invention there is provided a lithium
10 secondary battery comprising a positive electrode comprising a lithium manganese oxide spinel as the active material and a gelled polymeric electrolyte (A), a negative electrode, and a gelled polymeric electrolyte (B) in the shape of a film or sheet serving as a separator, the gelled polymeric electrolyte (A) and the gelled polymeric electrolyte (B)
15 each being made from the same material which is a block copolymer of poly(ethylene oxide) and polystyrene impregnated with a liquid electrolyte.

Brief Description of Drawing

Figure 1 is a sectional view of a lithium secondary battery using a gelled polymeric electrolyte fabricated in an embodiment.

20

Preferred Embodiments

The present invention will now be described in detail on the basis of preferred embodiments thereof, and it is noted that the invention is not limited to the following embodiments but can be practiced with appropriate modification
25 without departing from the scope of the invention.

Embodiment 1**Preparation of positive electrode**

Lithium nitrate (LiNO_3), nickel nitrate ($\text{Ni(NO}_3)_2$) and manganese acetate ($\text{Mn(CH}_3\text{COO)}_2$) were mixed in a molar ratio of 1:0.4:1.6, and the mixture was baked at 600°C for 24 hours in the air, thereby obtaining $\text{LiNi}_{0.4}\text{Mn}_{1.6}\text{O}_4$. Then, the $\text{LiNi}_{0.4}\text{Mn}_{1.6}\text{O}_4$ was crushed with a jet mill, so as to prepare a spinel type lithium manganese oxide powder with a median diameter of $10\ \mu\text{m}$. The spinel type lithium manganese oxide powder, a carbon powder

serving as a conductive agent and a poly(vinylidene fluoride) powder serving as a binder were mixed in a weight ratio of 85:10:5, and the mixture was kneaded with NMP (N-methyl-2-pyrrolidone) to give a paste. The paste was applied on a positive electrode collector (stainless steel plate) by a doctor blade method (to
 5 attain a thickness of 80 μ m after drying), and the resultant was heated at 130°C, thereby preparing a positive electrode (porous electrode) in the shape of a disk with a diameter of 10 mm.

Preparation of gelled polymeric electrolyte also serving as separator

Poly(ethylene glycol) ethyl ether acrylate (with a number average
 10 molecular weight M_n of 360; $\text{CH}_2=\text{CH}-\text{COO}-(\text{CH}_2-\text{CH}_2-\text{O})_n-\text{CH}_2-\text{CH}_3$) and a liquid electrolyte obtained by dissolving 1 M (mol/liter) of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3 were mixed in a weight ratio of 1:1. The mixture was applied on the positive electrode into a thickness of 25 μ m, and irradiated with electron
 15 beams with a beam irradiation apparatus with electron curtain system (having output power of 200 kV, exposure of 2 Mrad and a travel speed of an irradiated target of 1 m/min.), thereby polymerizing the poly(ethylene glycol) ethyl ether acrylate. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through
 20 observation with a scanning electron microscope (SEM) that the gelled polymeric electrolyte had entered the inside of the positive electrode.

Preparation of negative electrode

A graphite powder with an average particle size of 10 μ m serving as a lithium ion occluding agent and poly(vinylidene fluoride) serving as a binder
 25 were mixed in a weight ratio of 95:5, and the mixture was kneaded with NMP to

give a paste. The paste was applied on a negative electrode collector (stainless steel plate) by the doctor blade method (to attain a thickness of 70 μ m after drying), and the resultant was heated at 130°C, thereby preparing a negative electrode in the shape of a disk with a diameter of 10 mm.

5 Fabrication of lithium secondary battery using gelled polymeric electrolyte

10 The negative electrode was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can, thereby fabricating a flat lithium secondary battery (present battery) A1 using the gelled polymeric electrolyte. The capacity ratio between the positive electrode and the negative electrode was set to 1:1.1, so as to control the battery capacity by the positive electrode capacity. In every battery described below, the capacity ratio between the positive electrode and the negative electrode was also set to 1:1.1. Figure 1 is a sectional view of the lithium secondary battery A1 using the gelled polymeric electrolyte, and the battery A1 of Figure 1 comprises a positive electrode 1, a negative electrode 2, a gelled polymeric electrolyte film 3 for separating these electrodes, a positive electrode can 4, a negative electrode can 5, a positive electrode collector 6, a negative electrode collector 7, an insulating packing 8 and the like. The positive electrode 1 and the negative electrode 2 opposing each other with the gelled polymeric electrolyte film 3 impregnated with a liquid electrolyte sandwiched therebetween are housed in the battery can formed by the positive electrode can 4 and the negative electrode can 5. The positive electrode 1 is connected to the positive electrode can 4 through the positive electrode collector 6, and the negative electrode 2 is connected to the negative electrode can 5

through the negative electrode collector 7, so that chemical energy generated within the battery can be taken out as electric energy.

Embodiment 2

Lithium nitrate, aluminum hydroxide ($\text{Al}(\text{OH})_3$) and manganese acetate
 5 were mixed in a molar ratio of 1:0.4:1.6, and the mixture was baked at 800°C for
 24 hours in the air, thereby obtaining $\text{LiAl}_{0.4}\text{Mn}_{1.6}\text{O}_4$. The $\text{LiAl}_{0.4}\text{Mn}_{0.6}\text{O}_4$ was
 crushed with a jet mill to give a spinel type lithium manganese oxide powder
 with a median diameter of $10\ \mu\text{m}$. The spinel type lithium manganese oxide
 powder, a carbon powder serving as a conductive agent and a poly(vinylidene
 10 fluoride) powder serving as a binder were mixed in a weight ratio of 85:10:5.
 The mixture was kneaded with NMP to give a paste. The paste was applied on
 a positive electrode collector (stainless steel plate) by the doctor blade method
 (to attain a thickness of $80\ \mu\text{m}$ after drying), and the resultant was heated at
 130°C . Thus, a positive electrode (porous electrode) in the shape of a disk with
 15 a diameter of 10 mm was prepared.

Next, poly(ethylene glycol) ethyl ether acrylate (with a number average
 molecular weight Mn of 360; $\text{CH}_2=\text{CH}-\text{COO}-(\text{CH}_2-\text{CH}_2-\text{O})_n-\text{CH}_2-\text{CH}_3$)
 and a liquid electrolyte obtained by dissolving 1 M (mol/liter) of LiClO_4 in a
 mixed solvent including ethylene carbonate and dimethyl carbonate in a volume
 20 ratio of 2:3 were mixed in a weight ratio of 1:1. The resultant was applied on
 the positive electrode into a thickness of $25\ \mu\text{m}$, and irradiated with electron
 beams with a beam irradiation apparatus with electron curtain system (having
 output power of 200 kV, exposure of 2 Mrad and a travel speed of an irradiated
 target of 1 m/min.), thereby polymerizing the poly(ethylene glycol) ethyl ether
 25 acrylate. Thus, a gelled polymeric electrolyte film also serving as a separator

was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope (SEM) that the gelled polymeric electrolyte had entered the inside of the positive electrode.

Then, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (present battery) A2 using the gelled polymeric electrolyte was fabricated.

Embodiment 3

Lithium nitrate, magnesium acetate ($\text{Mg}(\text{CH}_3\text{COO})_2$) and manganese acetate were mixed in a molar ratio of 1:0.4:1.6, and the mixture was baked at 700°C for 24 hours in the air, thereby obtaining $\text{LiMg}_{0.4}\text{Mn}_{1.6}\text{O}_4$. The $\text{LiMg}_{0.4}\text{Mn}_{0.6}\text{O}_4$ was crushed with a jet mill to give a spinel type lithium manganese oxide powder with a median diameter of $10\ \mu\text{m}$. The spinel type lithium manganese oxide powder, a carbon powder serving as a conductive agent and a poly(vinylidene fluoride) powder serving as a binder were mixed in a weight ratio of 85:10:5. The mixture was kneaded with NMP to give a paste. The paste was applied on a positive electrode collector (stainless steel plate) by the doctor blade method (to attain a thickness of $80\ \mu\text{m}$ after drying), and the resultant was heated at 130°C . Thus, a positive electrode (porous electrode) in the shape of a disk with a diameter of 10 mm was prepared.

Next, poly(ethylene glycol) ethyl ether acrylate (with a number average molecular weight Mn of 360; $\text{CH}_2=\text{CH}-\text{COO}-(\text{CH}_2-\text{CH}_2-\text{O})_n-\text{CH}_2-\text{CH}_3$) and a liquid electrolyte obtained by dissolving 1 M (mol/liter) of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume

ratio of 2:3 were mixed in a weight ratio of 1:1. The resultant was applied on the positive electrode into a thickness of 25 μ m, and irradiated with electron beams with a beam irradiation apparatus with electron curtain system (having output power of 200 kV, exposure of 2 Mrad and a travel speed of an irradiated target of 1 m/min.), thereby polymerizing the poly(ethylene glycol) ethyl ether acrylate. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope (SEM) that the gelled polymeric electrolyte had entered the inside of the positive electrode.

Then, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (present battery) A3 using the gelled polymeric electrolyte was fabricated.

Embodiment 4

Lithium nitrate, ferric nitrate ($\text{Fe}(\text{NO}_3)_3$) and manganese acetate were mixed in a molar ratio of 1:0.4:1.6, and the mixture was baked at 700°C for 24 hours in the air, thereby obtaining $\text{LiFe}_{0.4}\text{Mn}_{1.6}\text{O}_4$. The $\text{LiFe}_{0.4}\text{Mn}_{0.6}\text{O}_4$ was crushed with a jet mill to give a spinel type lithium manganese oxide powder with a median diameter of 10 μ m. The spinel type lithium manganese oxide powder, a carbon powder serving as a conductive agent and a poly(vinylidene fluoride) powder serving as a binder were mixed in a weight ratio of 85:10:5. The mixture was kneaded with NMP to give a paste. The paste was applied on a positive electrode collector (stainless steel plate) by the doctor blade method (to attain a thickness of 80 μ m after drying), and the resultant was heated at

130°C. Thus, a positive electrode (porous electrode) in the shape of a disk with a diameter of 10 mm was prepared. Next, poly(ethylene glycol) ethyl ether acrylate (with a number average molecular weight Mn of 360; $\text{CH}_2=\text{CH}-\text{COO}-(\text{CH}_2-\text{CH}_2-\text{O})_n-\text{CH}_2-\text{CH}_3$) and a liquid electrolyte obtained by dissolving 1 M (mol/liter) of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3 were mixed in a weight ratio of 1:1. The resultant was applied on the positive electrode into a thickness of 25 μm , and irradiated with electron beams with a beam irradiation apparatus with electron curtain system (having output power of 200 kV, exposure of 2 Mrad and a travel speed of an irradiated target of 1 m/min.), thereby polymerizing the poly(ethylene glycol) ethyl ether acrylate. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope (SEM) that the gelled polymeric electrolyte had entered the inside of the positive electrode.

Then, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (present battery) A4 using the gelled polymeric electrolyte was fabricated.

Embodiment 5

Lithium nitrate, cobalt acetate ($\text{Co}(\text{CH}_3\text{COO})_2$) and manganese acetate were mixed in a molar ratio of 1:0.4:1.6, and the mixture was baked at 700°C for 24 hours in the air, thereby obtaining $\text{LiCo}_{0.4}\text{Mn}_{1.6}\text{O}_4$. The $\text{LiCo}_{0.4}\text{Mn}_{0.6}\text{O}_4$ was crushed with a jet mill to give a spinel type lithium manganese oxide powder

with a median diameter of 10 μ m. The spinel type lithium manganese oxide powder, a carbon powder serving as a conductive agent and a poly(vinylidene fluoride) powder serving as a binder were mixed in a weight ratio of 85:10:5. The mixture was kneaded with NMP to give a paste. The paste was applied on
5 a positive electrode collector (stainless steel plate) by the doctor blade method (to attain a thickness of 80 μ m after drying), and the resultant was heated at 130°C. Thus, a positive electrode (porous electrode) in the shape of a disk with a diameter of 10 mm was prepared. Next, poly(ethylene glycol) ethyl ether acrylate (with a number average molecular weight Mn of 360; $\text{CH}_2=\text{CH}-\text{COO}$
10 $-(\text{CH}_2-\text{CH}_2-\text{O})_n-\text{CH}_2-\text{CH}_3$) and a liquid electrolyte obtained by dissolving 1 M (mol/liter) of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3 were mixed in a weight ratio of 1:1. The resultant was applied on the positive electrode into a thickness of 25 μ m, and irradiated with electron beams with a beam irradiation apparatus with
15 electron curtain system (having output power of 200 kV, exposure of 2 Mrad and a travel speed of an irradiated target of 1 m/min.), thereby polymerizing the poly(ethylene glycol) ethyl ether acrylate. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope
20 (SEM) that the gelled polymeric electrolyte had entered the inside of the positive electrode.

Then, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat
25 lithium secondary battery (present battery) A5 using the gelled polymeric

electrolyte was fabricated.

Embodiment 6

A block copolymer of poly(ethylene oxide) and polystyrene (with a copolymerization ratio of 1:1 and a number average molecular weight Mn of approximately 300,000) was dissolved in NMP to give a solution (with a solid content of 20 wt%). The solution was applied on one face of a positive electrode the same as that prepared in Embodiment 1 into a thickness of 25 μ m, thereby forming a block copolymer film of poly(ethylene oxide) and polystyrene. This positive electrode was immersed in a liquid electrolyte obtained by dissolving 1 M of LiClO₄ in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3, so as to impregnate the block copolymer of poly(ethylene oxide) and polystyrene with the liquid electrolyte. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope that the gelled polymeric electrolyte had entered the inside of the positive electrode. Next, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (present battery) A6 using the gelled polymeric electrolyte was fabricated.

Comparative Example 1

A flat lithium secondary battery (comparative battery) B1 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 1 except for the following: Instead of the gelled polymeric electrolyte film also serving as a separator, a liquid electrolyte obtained by dissolving 1 M of LiClO₄

in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3 and a polyethylene microporous film (separator) with a thickness of 25 μ m were used, and the gelled polymeric electrolyte was not included in the positive electrode.

5 Comparative Example 2

Poly(vinylidene fluoride) (with a number average molecular weight M_n of approximately 110,000) was dissolved in acetone to give a solution (with a solid content of 10 wt%). The solution was applied on one face of a positive electrode the same as that prepared in Embodiment 1 into a thickness of 25 μ m, thereby forming a poly(vinylidene fluoride) film. The positive electrode was immersed in a liquid electrolyte obtained by dissolving 1 M of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3, so as to impregnate the poly(vinylidene fluoride) with the liquid electrolyte. Thus, a gelled polymeric electrolyte film also serving as a separator was formed on one face of the positive electrode. It was confirmed through observation with a scanning electron microscope that the gelled polymeric electrolyte had entered the inside of the positive electrode. Next, a negative electrode (the same as that prepared in Embodiment 1) was placed on the gelled polymeric electrolyte film formed on one face of the positive electrode and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (comparative battery) B2 using the gelled polymeric electrolyte was prepared.

Comparative Example 3

A block copolymer of poly(ethylene oxide) and polystyrene (with a copolymerization ratio of 1:1 and a number average molecular weight M_n of approximately 300,000) was dissolved in NMP to give a solution (with a solid

content of 20 wt%). The solution was formed by the casting method into a block copolymer film of poly(ethylene oxide) and polystyrene with a thickness of 25 μ m. Then, the film was immersed in a liquid electrolyte obtained by dissolving 1 M of LiClO_4 in a mixed solvent including ethylene carbonate and dimethyl carbonate in a volume ratio of 2:3, so as to impregnate the block copolymer of poly(ethylene oxide) and polystyrene with the liquid electrolyte by 100 wt%. Thus, a gelled polymeric electrolyte film also serving as a separator was formed. Next, the gelled polymeric electrolyte film was sandwiched between a positive electrode and a negative electrode the same as those prepared in Embodiment 1 (whereas the positive electrode was not impregnated with the gelled polymeric electrolyte), and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (comparative battery) B3 using the gelled polymeric electrolyte was fabricated.

Discharge capacity of each battery at 1st and 100th cycles

With respect to each of the present batteries A1 through A6 and the comparative batteries B1 through B3, 100 charge-discharge cycles were run, in each cycle of which the battery was charged to 4.2 V at a current density of 100 μ A/cm² and discharged to 2.75 V at a current density of 100 μ A/cm² at 25°C, thereby obtaining the discharge capacity (mAh) of the battery at the 1st and 100th cycles. The results are shown in Table 1.

Table 1

	Discharge capacity (mAh)	
	1st cycle	100th cycle
Present battery A1	2.2	1.8
Present battery A2	2.2	2.0
Present battery A3	2.1	1.9
Present battery A4	2.1	1.9
Present battery A5	2.2	2.0
Present battery A6	2.2	2.0
Comparative battery B1	2.2	1.2
Comparative battery B2	2.2	1.2
Comparative battery B3	1.9	1.7

As is shown in Table 1, the discharge capacity at the 100th cycle is larger in the present batteries A1 through A6 than in the comparative batteries B1 and B2. Also, the discharge capacity at the 1st cycle is larger in the present batteries A1 through A6 than in the comparative battery B3. It is understood from the results that the invention provides a lithium secondary battery using a gelled polymeric electrolyte with large initial discharge capacity and good charge-discharge cycle performance. The discharge capacity at the 100th cycle of the comparative battery B1 was small probably because manganese was eluted into the liquid electrolyte, and the discharge capacity at the 100th cycle of the comparative battery B2 was small probably because manganese was eluted into the liquid electrolyte impregnated into the gelled polymeric electrolyte film also serving as the separator. Furthermore, the discharge capacity at the 1st cycle of the comparative battery B3 is small probably because a contact area between the positive electrode and the electrolyte was so small that the contact resistance on the interface was large.

Embodiment 7

Preparation of positive electrode

Lithium nitrate and manganese dioxide were mixed in a molar ratio of 1:2, and the mixture was baked at 600°C for 24 hours in the air, thereby obtaining LiMn_2O_4 . The LiMn_2O_4 was crushed with a jet mill to give a spinel
5 type lithium manganese oxide powder with a median diameter of 10 μm . The spinel type lithium manganese oxide powder, a carbon powder serving as a conductive agent, a poly(vinylidene fluoride) powder serving as a binder and a block copolymer of poly(ethylene oxide) and polystyrene (with a copolymerization ratio of 1:1 and a number average molecular weight Mn of
10 approximately 300,000) were mixed in a weight ratio of 85:10:3:2. The resultant mixture was kneaded with NMP to give a paste, the paste was applied on a positive electrode collector (aluminum plate) by the doctor blade method (to attain a thickness of 80 μm after drying), and the resultant was heated at 130°C. Thus, a positive electrode (porous electrode) in the shape of a disk with
15 a diameter of 10 mm was prepared. The positive electrode was immersed in a liquid electrolyte obtained by dissolving 1 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1, so as to impregnate the block copolymer of poly(ethylene oxide) and polystyrene with the liquid electrolyte.

Preparation of gelled polymeric electrolyte also serving as separator

A block copolymer of poly(ethylene oxide) and polystyrene (with a copolymerization ratio of 1:1 and a number average molecular weight Mn of approximately 300,000) was dissolved in NMP to give a 20 wt% solution. The solution was formed by the casting method into a block copolymer film of
25 poly(ethylene oxide) and polystyrene with a thickness of 25 μm . Next, the

film was immersed in a liquid electrolyte obtained by dissolving 1 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1, so as to impregnate the block copolymer of poly(ethylene oxide) and polystyrene with the liquid electrolyte. Thus, a gelled
5 polymeric electrolyte film also serving as a separator was prepared.

Fabrication of lithium secondary battery using gelled polymeric electrolyte

The gelled polymeric electrolyte film also serving as a separator was sandwiched between the positive electrode and a negative electrode (the same as
10 that prepared in Embodiment 1) and the resultant was housed in a battery can. Thus, a flat lithium secondary battery (present battery) A7 using the gelled polymeric electrolyte was fabricated.

Embodiment 8

A flat lithium secondary battery (present battery) A8 using a gelled
15 polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of $\text{LiN}(\text{CF}_3\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the
20 positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 9

A flat lithium secondary battery (present battery) A9 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7
25 except that a liquid electrolyte obtained by dissolving 1 M of

LiN(CF₃SO₂)(C₄F₉SO₂) in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film
5 also serving as the separator.

Embodiment 10

A flat lithium secondary battery (present battery) A10 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of LiN(C₄F₉SO₂)₂ in a
10 mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 11

A flat lithium secondary battery (present battery) A11 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of LiC(CF₃SO₂)₃ in a
20 mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 12

25 A flat lithium secondary battery (present battery) A12 using a gelled

polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of $\text{LiC}(\text{CF}_3\text{SO}_2)_2(\text{C}_4\text{F}_9\text{SO}_2)$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for
5 impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 13

A flat lithium secondary battery (present battery) A13 using a gelled
10 polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of $\text{LiC}(\text{CF}_3\text{SO}_2)(\text{C}_4\text{F}_9\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for
15 impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 14

A flat lithium secondary battery (present battery) A14 using a gelled
polymeric electrolyte was fabricated in the same manner as in Embodiment 7
20 except that a liquid electrolyte obtained by dissolving 1 M of $\text{LiC}(\text{C}_4\text{F}_9\text{SO}_2)_3$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block
copolymer of poly(ethylene oxide) and polystyrene in the preparation of the
positive electrode and the gelled polymeric electrolyte film also serving as the
25 separator.

Embodiment 15

A flat lithium secondary battery (present battery) A15 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of
5 $\text{LiN}(\text{CF}_3\text{SO}_2)(\text{C}_5\text{F}_{11}\text{SO}_2)$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

10 Embodiment 16

A flat lithium secondary battery (present battery) A16 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 0.1 M of LiPF_6 and 0.9 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl
15 carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 17

20 A flat lithium secondary battery (present battery) A17 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 0.5 M of LiPF_6 and 0.5 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for
25 impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the

preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 18

5 A flat lithium secondary battery (present battery) A18 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 0.9 M of LiPF_6 and 0.1 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the
10 preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 19

A flat lithium secondary battery (present battery) A19 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7
15 except that a liquid electrolyte obtained by dissolving 1 M of LiClO_4 in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 20

A flat lithium secondary battery (present battery) A20 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of LiBF_4 in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of
25 1:1 was used as the liquid electrolyte for impregnating the block copolymer of

poly(ethylene oxide) and polystyrene in the preparation of the positive electrode and the gelled polymeric electrolyte film also serving as the separator.

Embodiment 21

5 A flat lithium secondary battery (present battery) A21 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 1 M of LiPF_6 in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the preparation of the positive electrode
10 and the gelled polymeric electrolyte film also serving as the separator.

Comparative Example 4

A flat lithium secondary battery (comparative battery) B4 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 3 except that a liquid electrolyte obtained by dissolving 1 M of LiClO_4 in a mixed
15 solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 and a polyethylene microporous film (separator) with a thickness of 25 μm were used instead of the gelled polymeric electrolyte film also serving as the separator and that the gelled polymeric electrolyte was not included in the positive electrode.

20 Comparative Example 5

A flat lithium secondary battery (comparative battery) B5 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 3 except that a liquid electrolyte obtained by dissolving 1 M of LiBF_4 in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of
25 1:1 and a polyethylene microporous film (separator) with a thickness of 25 μm

were used instead of the gelled polymeric electrolyte film also serving as the separator and that the gelled polymeric electrolyte was not included in the positive electrode.

Comparative Example 6

5 A flat lithium secondary battery (comparative battery) B6 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 3 except that a liquid electrolyte obtained by dissolving 1 M of LiPF_6 in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 and a polyethylene microporous film (separator) with a thickness of 25 μm
10 were used instead of the gelled polymeric electrolyte film also serving as the separator and that the gelled polymeric electrolyte was not included in the positive electrode.

Comparative Example 7

15 A flat lithium secondary battery (comparative battery) B7 using a gelled polymeric electrolyte was fabricated in the same manner as in Embodiment 3 except that a liquid electrolyte obtained by dissolving 1 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 and a polyethylene microporous film (separator) with a thickness of 25 μm
20 were used instead of the gelled polymeric electrolyte film also serving as the separator and that the gelled polymeric electrolyte was not included in the positive electrode.

Discharge capacity of battery at 1st and 100th cycles

25 With respect to each of the present batteries A7 through A21 and the comparative batteries B4 through B7, 100 charge-discharge cycles were run under the aforementioned conditions, thereby obtaining the discharge capacity

(mAh) at the 1st and 100th cycles. The results are shown in Table 2.

Table 2

	Discharge capacity (mAh)	
	1st cycle	100th cycle
Present battery A7	2.4	2.2
Present battery A8	2.4	2.2
Present battery A9	2.4	2.1
Present battery A10	2.4	2.2
Present battery A11	2.4	2.2
Present battery A12	2.4	2.1
Present battery A13	2.4	2.2
Present battery A14	2.4	2.2
Present battery A15	2.4	2.0
Present battery A16	2.4	2.2
Present battery A17	2.4	2.0
Present battery A18	2.4	1.9
Present battery A19	2.4	1.7
Present battery A20	2.4	1.5
Present battery A21	2.4	1.6
Comparative battery B4	2.4	1.2
Comparative battery B5	2.4	1.1
Comparative battery B6	2.4	1.2
Comparative battery B7	2.4	1.2

As is shown in Table 2, the discharge capacity at the 100th cycle is larger in the present batteries A7 through A21 using the gelled polymeric electrolyte film also serving as the separator because of a smaller amount of manganese eluted during the charge-discharge cycles than in the comparative batteries B4 through B7 using the liquid electrolyte. Among the present batteries A7 through A21, the discharge capacity at the 100th cycle is particularly large in the present batteries A7 through A18. Accordingly, it is understood that the solute of the liquid electrolyte used for the impregnation is preferably

$\text{LiN}(\text{C}_m\text{F}_{2m+1}\text{SO}_2)(\text{C}_n\text{F}_{2n+1}\text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) or $\text{LiC}(\text{C}_p\text{F}_{2p+1}\text{SO}_2)(\text{C}_q\text{F}_{2q+1}\text{SO}_2)(\text{C}_r\text{F}_{2r+1}\text{SO}_2)$ (wherein p , q and r independently indicate an integer ranging between 1 and 5).

Relationship between concentration of liquid electrolyte and charge-discharge

5 cycle performance

Seven kinds of lithium secondary batteries (present batteries) A22 through A28 each using a gelled polymeric electrolyte were fabricated in the same manner as in Embodiment 7 except that a liquid electrolyte obtained by dissolving 0.05 M, 0.1 M, 0.5 M, 1.5 M, 2.0 M, 2.5 M or 3.0 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in
 10 a mixed solvent including ethylene carbonate and diethyl carbonate in a volume ratio of 1:1 was used as the liquid electrolyte for impregnating the block copolymer of poly(ethylene oxide) and polystyrene in the fabrication of the positive electrode and the gelled polymeric electrolyte film also serving as the separator. Subsequently, with respect to each of the batteries, 100 charge-
 15 discharge cycles were run under the aforementioned conditions, thereby obtaining the discharge capacity (mAh) at the 1st and 100th cycles. The results are shown in Table 3. Table 3 also shows the discharge capacity at the 1st and 100th cycles of the present battery A7 listed in Table 2.

Table 3

	Concentration of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$ in liquid electrolyte (M)	Discharge capacity (mAh)	
		1st cycle	100th cycle
Present battery A22	0.05	2.4	1.3
Present battery A23	0.1	2.4	1.6
Present battery A24	0.5	2.4	1.9
Present battery A7	1.0	2.4	2.2
Present battery A25	1.5	2.4	2.0
Present battery A26	2.0	2.4	1.6
Present battery A27	2.5	2.4	1.3
Present battery A28	3.0	2.4	1.3

It is understood from Table 3 that the liquid electrolyte preferably includes 0.1 through 2.0 M of $\text{LiN}(\text{C}_2\text{F}_5\text{SO}_2)_2$. It was also confirmed that a concentration of 0.1 through 2.0 M is preferred in using any of other liquid electrolytes according to this invention represented by

5 $\text{LiN}(\text{C}_m\text{F}_{2m+1}\text{SO}_2)(\text{C}_n\text{F}_{2n+1}\text{SO}_2)$ or $\text{LiC}(\text{C}_p\text{F}_{2p+1}\text{SO}_2)(\text{C}_q\text{F}_{2q+1}\text{SO}_2)(\text{C}_r\text{F}_{2r+1}\text{SO}_2)$.

Industrial Applicability

The invention provides a lithium secondary battery using a gelled polymeric electrolyte with large initial discharge capacity and good charge-

10 discharge cycle performance.


The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A lithium secondary battery comprising a positive electrode comprising a lithium manganese oxide spinel as the active material and a gelled polymeric electrolyte (A);
a negative electrode; and
a gelled polymeric electrolyte (B) in the shape of a film or sheet serving as a separator, the gelled polymeric electrolyte (A) and the gelled polymeric electrolyte (B) each being made from the same material which is a block copolymer of poly(ethylene oxide) and polystyrene impregnated with a liquid electrolyte.
2. The lithium secondary battery using a gelled polymeric electrolyte according to claim 1, wherein the lithium manganese oxide spinel is $\text{LiM}_x\text{Mn}_{2-x}\text{O}_4$, wherein M is at least one element selected from the group consisting of Ni, Al, Mg, Fe and Co, and $0 \leq x \leq 0.5$.
3. The lithium secondary battery using a gelled polymeric electrolyte according to claim 1, wherein the liquid electrolyte includes $\text{LiN}(\text{C}_m \text{F}_{2m+1} \text{SO}_2)(\text{C}_n \text{F}_{2n+1} \text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) and $\text{LiC}(\text{C}_p \text{F}_{2p+1} \text{SO}_2)(\text{C}_q \text{F}_{2q+1} \text{SO}_2)(\text{C}_r \text{F}_{2r+1} \text{SO}_2)$ (wherein p, q and r independently indicate an integer ranging between 1 and 5).
4. The lithium secondary battery using a gelled polymeric electrolyte according to claim 1, wherein the liquid electrolyte includes $\text{LiN}(\text{C}_m \text{F}_{2m+1} \text{SO}_2)(\text{C}_n \text{F}_{2n+1} \text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) and $\text{LiC}(\text{C}_p \text{F}_{2p+1} \text{SO}_2)(\text{C}_q \text{F}_{2q+1} \text{SO}_2)(\text{C}_r \text{F}_{2r+1} \text{SO}_2)$ (wherein p, q and r independently indicate an integer ranging between 1 and 5) in a concentration of 0.1-2.0 mol/liter.
5. The lithium secondary battery using a gelled polymeric electrolyte according to claim 1, wherein the liquid electrolyte includes $\text{LiN}(\text{C}_m \text{F}_{2m+1} \text{SO}_2)(\text{C}_n \text{F}_{2n+1} \text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) or $\text{LiC}(\text{C}_p \text{F}_{2p+1} \text{SO}_2)(\text{C}_q \text{F}_{2q+1} \text{SO}_2)(\text{C}_r \text{F}_{2r+1} \text{SO}_2)$ (wherein p, q and r independently indicate an integer ranging between 1 and 5).

6. The lithium secondary battery using a gelled polymeric electrolyte according to claim 1, wherein the liquid electrolyte includes $\text{LiN}(\text{C}_m \text{F}_{2m+1} \text{SO}_2)(\text{C}_n \text{F}_{2n+1} \text{SO}_2)$ (wherein m and n independently indicate an integer ranging between 1 and 5) or $\text{LiC}(\text{C}_p \text{F}_{2p+1} \text{SO}_2)(\text{C}_q \text{F}_{2q+1} \text{SO}_2)(\text{C}_r \text{F}_{2r+1} \text{SO}_2)$ (wherein p, q and r independently indicate an integer ranging between 1 and 5) in a concentration of 0.1-2.0 mol/liter.

F i g u r e 1

A1

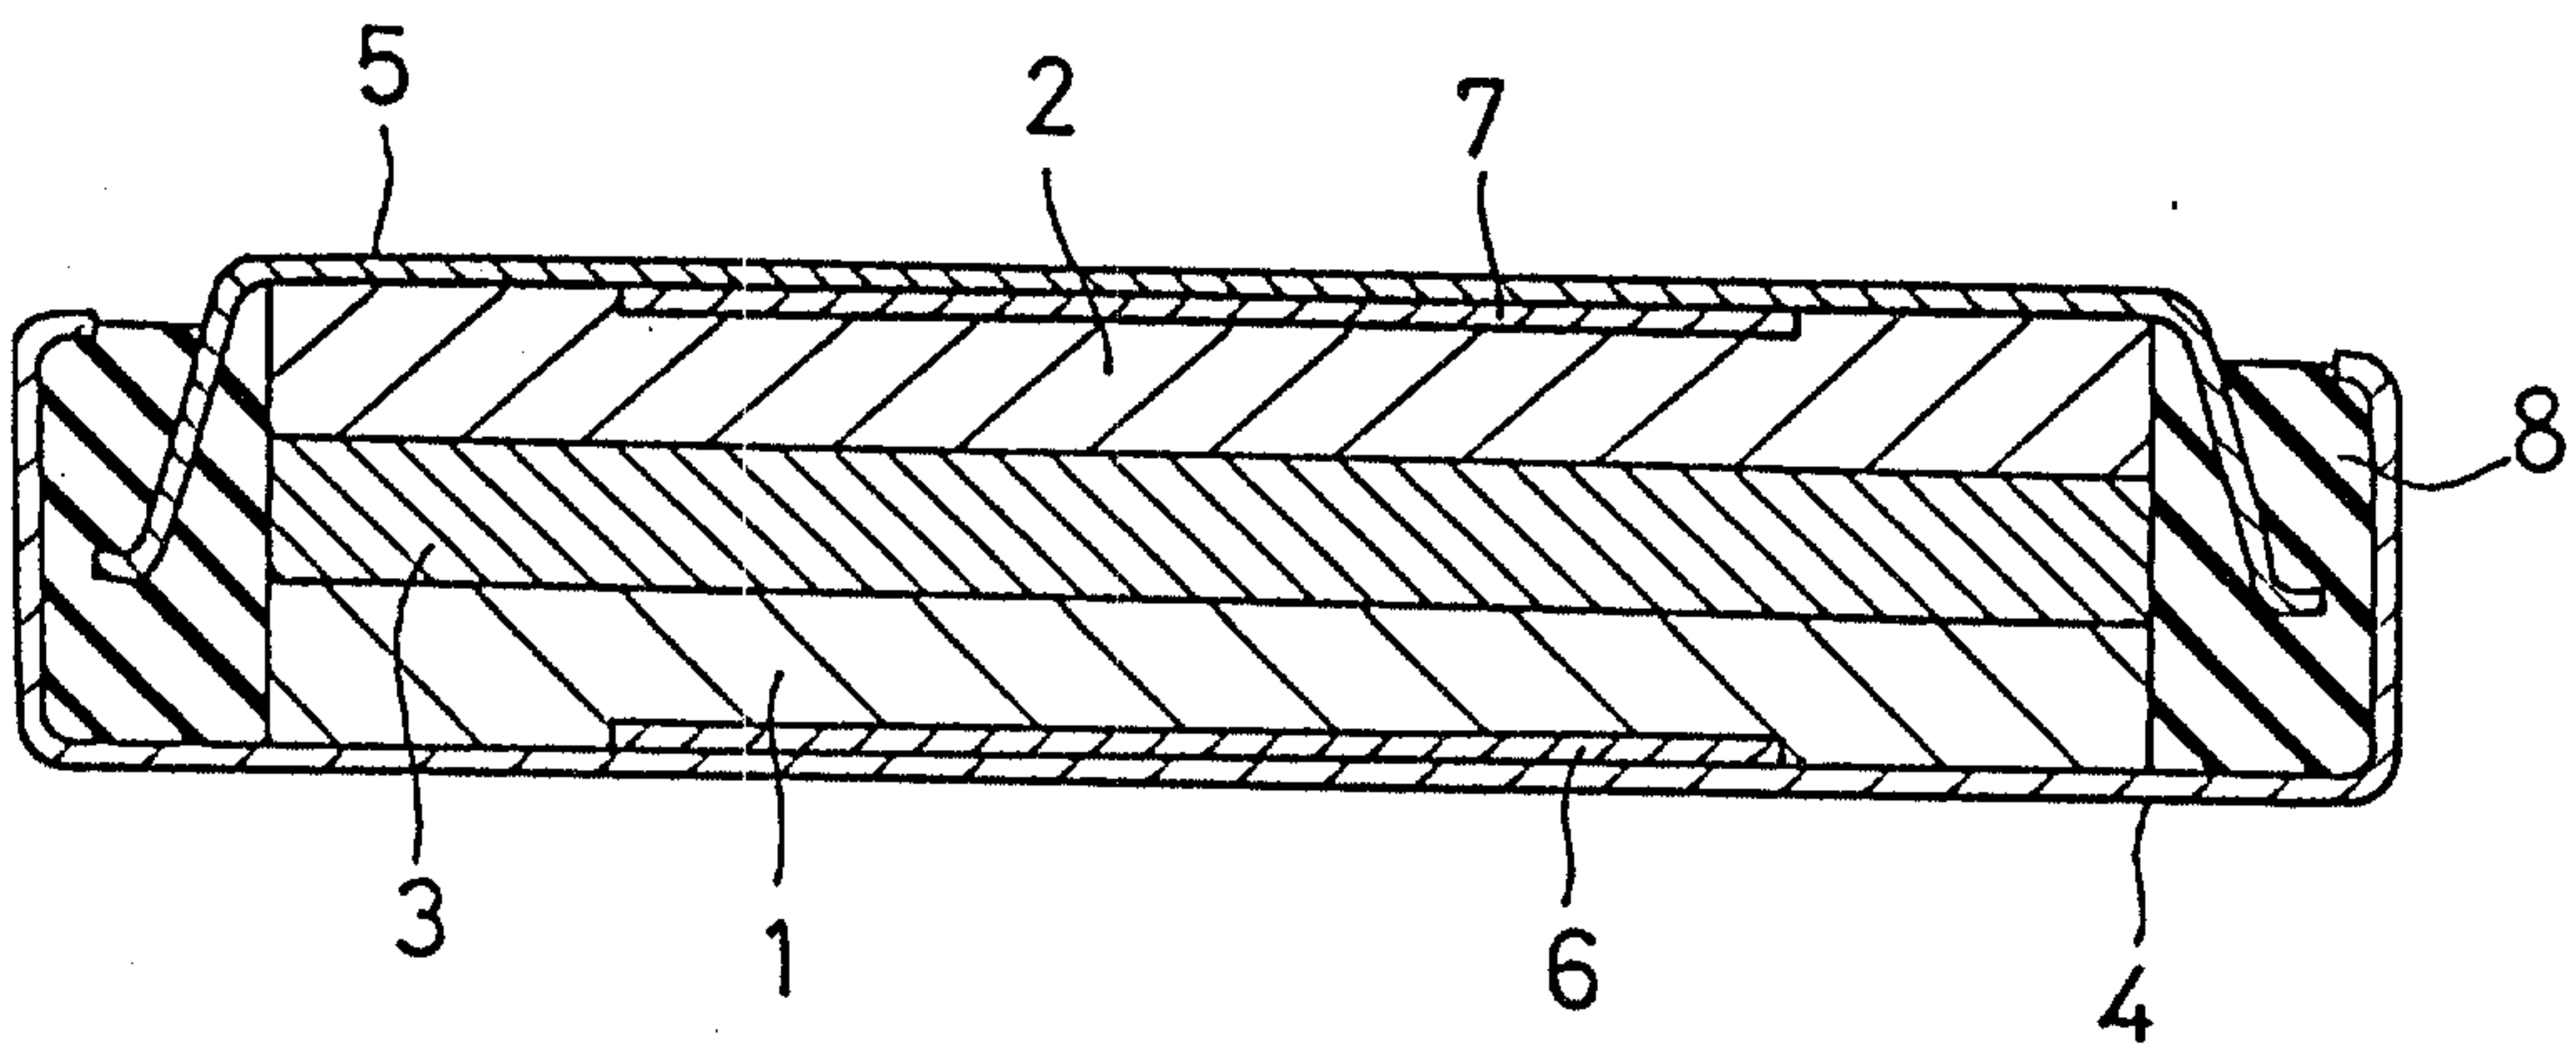

Mark & Clerk

A 1

