



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(22) **Date de dépôt/Filing Date:** 2022/01/17

(41) **Mise à la disp. pub./Open to Public Insp.:** 2022/09/15

(30) **Priorité/Priority:** 2021/03/15 (US63/161,077)

(51) **Cl.Int./Int.Cl.** *H02K 3/00* (2006.01),
H02K 11/04 (2016.01), *H02P 27/04* (2016.01)


(71) **Demandeur/Applicant:**
THE BOEING COMPANY, US

(72) **Inventeurs/Inventors:**
GAO, LIJUN, US;
LIU, SHENGYI, US

(74) **Agent:** SMART & BIGGAR LP

(54) **Titre : METHODE ET SYSTEME POUR EXPLOITER UN MOTEUR A FREQUENCE VARIABLE ET VITESSE INDEPENDANTE DANS UNE PLAGE DE VITESSE ETENDUE**

(54) **Title: METHOD AND SYSTEM FOR OPERATING A VARIABLE FREQUENCY INDEPENDENT SPEED MOTOR IN AN EXTENDED SPEED RANGE**

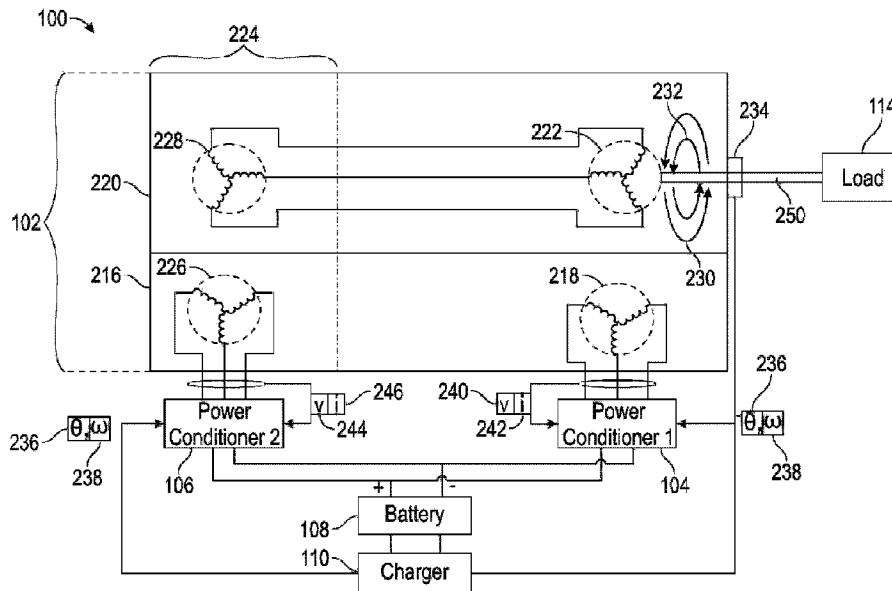

(57) **Abrégé/Abstract:**

A system may include a variable frequency independent speed (VFIS) motor-generator. The system may further include a first power conditioner coupled to a set of stator windings of the VFIS motor-generator and a second power conditioner, distinct from the first power conditioner, coupled to a set of primary windings of a high-frequency transformer, where a set of secondary windings of the high-frequency transformer are coupled to a set of rotor windings of the VFIS motor-generator. A method may include providing a first power signal at the set of stator windings. The method may further include generating a second power signal at the second power conditioner for driving the set of rotor windings, where a shaft speed of the VFIS motor-generator is based on a difference between a first frequency of the first power signal and a second frequency of the second power signal.



ABSTRACT

A system may include a variable frequency independent speed (VFIS) motor-generator. The system may further include a first power conditioner coupled to a set of stator
5 windings of the VFIS motor-generator and a second power conditioner, distinct from the first power conditioner, coupled to a set of primary windings of a high-frequency transformer, where a set of secondary windings of the high-frequency transformer are coupled to a set of rotor windings of the VFIS motor-generator. A method may include providing a first power signal at the set of stator windings. The method may further
10 include generating a second power signal at the second power conditioner for driving the set of rotor windings, where a shaft speed of the VFIS motor-generator is based on a difference between a first frequency of the first power signal and a second frequency of the second power signal.

METHOD AND SYSTEM FOR OPERATING A VARIABLE FREQUENCY INDEPENDENT SPEED MOTOR IN AN EXTENDED SPEED RANGE

BACKGROUND

5 This disclosure is generally related to the field of operating a variable frequency independent speed (VFIS) motor-generator and, in particular, to operating a VFIS motor-generator in an extended speed range for both driving and regenerative modes.

Power conditioners may be coupled with synchronous and nonsynchronous motor-
generators to perform the functions of driving the motor-generator with an alternating
10 current (AC) power signal while in a driving mode and converting regenerative AC power into a direct current (DC) power signal while in a regenerative mode.

Power conditioners may be limited to a finite operational frequency range while
operating in a driving mode. When implemented with a typical synchronous or
asynchronous motor, the rotation of a motor shaft may also be limited to the operational
15 frequency range of the power conditioner. The limited frequency range may be undesirable, particularly in applications where temporary high rotations per minute (RPMs) are likely, such as an aircraft taking off, a race car sprinting, or a ship changing direction.

Power conditioners may also be limited in the frequencies that regenerative power can
20 be harvested while in a regenerative mode. For example, when the RPMs drop below a minimum regenerative frequency, a frequency of a regenerative power signal may be too low to perform an effective power conversion. Hydraulic braking may be used instead of regeneration which may cause the energy produced by a back-driven load to dissipate as heat rather than storing it in a usable form. Other disadvantages may exist.

SUMMARY

Disclosed are systems and methods that may overcome at least one of the shortcomings of typical power conditioner setups. In an example, a system includes a VFIS motor-generator having a stator with a set of stator windings, a rotor with a set of rotor windings, and a high-frequency transformer having a set of primary windings on the stator and a set of secondary windings on the rotor, where the set of secondary windings are coupled to the set of rotor windings. The system further includes a first power conditioner coupled to the set of stator windings. The system also includes a second power conditioner, distinct from the first power conditioner, coupled to the primary winding.

In some examples, a first power signal generated by the first power conditioner induces a first rotating magnetic field at the set of stator windings, a second power signal generated by the second power conditioner induces a second rotating magnetic field at the set of rotor windings, and a shaft speed is based on a difference between a first frequency of the first power signal and a second frequency of the second power signal. In some examples, the shaft speed is the difference between the first frequency and the second frequency divided by a number of pole pairs.

In some examples, the first power conditioner is configured to generate a constant frequency AC power signal while a shaft frequency is less than a minimum regeneration frequency and the second power conditioner is configured to generate a variable frequency AC power signal having a positive 3-phase sequence while the shaft frequency is less than the minimum regeneration threshold frequency. In some examples, the first power conditioner is configured to generate a variable frequency AC power signal while a shaft frequency is greater than a minimum regeneration frequency and less than a maximum operational frequency of the first power conditioner and the second power conditioner is configured to generate a DC power signal while the shaft frequency is greater than the minimum regeneration frequency and less than the maximum operational frequency. In some examples, the first power conditioner is

configured to generate a constant frequency AC power signal between a minimum regenerative frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is greater than the maximum operational frequency and the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while the shaft frequency is greater than the maximum operational frequency.

In some examples, the first power conditioner is configured to generate a constant frequency AC power signal between a minimum regenerative frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is greater than a minimum regeneration frequency and the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while the shaft frequency is greater than the minimum regeneration frequency.

In some examples, the first power conditioner is configured to generate a constant frequency AC power signal between a minimum regenerative frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is less than a maximum operational frequency of the first power conditioner and the second power conditioner is configured to generate a DC power signal while the shaft frequency is less than the maximum operational frequency.

In some examples, the first power conditioner is configured to operate in a regenerative mode, the second power conditioner is configured to generate a variable frequency AC power signal having a positive 3-phase sequence while a shaft frequency is less than the minimum regeneration threshold frequency, and a combination of the variable frequency AC power signal and the shaft frequency is greater than or equal to the minimum regeneration threshold frequency. In some examples, the first power conditioner is configured to operate in a regenerative mode and the system further includes a battery, where the first power conditioner is configured to generate a DC power signal to charge the battery when in the regenerative mode.

In some examples, the system includes a battery coupled to the first power conditioner and the second power conditioner and a charger coupled to the battery, where the charger is configured to charge the battery using a power source. In some examples, the system includes an encoder configured to measure a shaft phase and a shaft
5 frequency and to communicate the shaft phase and the shaft frequency to the first power conditioner and the second power conditioner. In some examples, the first power conditioner and the second power conditioner each include one or more inverters, one or more rectifiers, or a combination thereof. In some examples, the VFIS motor-generator is incorporated into a vehicle having regenerative power harvesting
10 capabilities.

In an example, a system includes a VFIS motor-generator having a stator with a set of stator windings and a rotor with a set of rotor windings. The system further includes a first power conditioner configured to generate a first power signal for driving the set of stator windings when operating in a driving mode and configured to generate a DC
15 power signal for charging a battery when operating in a regenerative mode. The system also includes a second power conditioner configured to generate a second power signal for driving the set of rotor windings.

In some examples, the system includes a battery coupled to the first power conditioner and to the second power conditioner and a charger configured to connect to an electrical
20 power source and to charge the battery using the electrical power source. In some examples, the system includes a high-frequency transformer including a primary winding positioned on the stator and a secondary winding positioned on the rotor, where the second power signal is communicated to the set of rotor windings via the high-frequency transformer.

25 In an example a method includes providing a first power signal at a set of stator windings of a VFIS motor-generator, wherein the set of stator windings is coupled to a first power conditioner. The method further includes generating a second power signal at a second power conditioner for driving a set of rotor windings of the VFIS motor-generator, where

a shaft speed of the VFIS motor-generator is a difference between a first frequency of the first power signal and a second frequency of the second power signal divided by a number of pole pairs of the VFIS motor-generator.

5 In some examples, the first power signal is a driving AC power signal, where a shaft frequency is greater than a maximum operational frequency of the first power conditioner, and where the second power signal is an AC power signal having a negative 3-phase sequence. In some examples, the first power signal is a regenerative AC power signal, where a shaft frequency is less than a minimum regenerative frequency, and where the second power signal is an AC power signal having a positive
10 3-phase sequence.

BRIEF DESCRIPTION OF THE DRAWINGS

- FIG. 1 is a schematic diagram depicting an example of a system for operating a VFIS motor-generator in an extended speed range.
- 15 FIG. 2 is a schematic diagram depicting an example of a system for operating a VFIS motor-generator in an extended speed range.
- FIG. 3 is a functional diagram depicting an example of relations between power signals and a shaft speed.
- FIG. 4 is a graph depicting an example of relations between power signals and a shaft speed.
- 20 FIG. 5 is a graph depicting an example of relations between power signals and a shaft speed.
- FIG. 6 is a graph depicting an example of relations between power signals and a shaft speed.
- FIG. 7 is a schematic diagram depicting an example of a power conditioner.

FIG. 8 is a graph depicting an example of relations between power signals and a shaft speed.

FIG. 9 is a flow chart depicting an example of a method for operating a VFIS motor-generator in an extended speed range.

While the disclosure is susceptible to various modifications and alternative forms, specific examples have been shown by way of example in the drawings and will be described in detail herein. However, it should be understood that the disclosure is not intended to be limited to the particular forms disclosed. Rather, the intention is to cover all modifications, equivalents and alternatives falling within the scope of the disclosure.

DETAILED DESCRIPTION

Referring to FIG. 1, an example of a system **100** for operating a VFIS motor-generator **102** in an extended speed range is depicted. The system **100** may include the VFIS motor-generator **102**, a first power conditioner **104**, a second power conditioner **106**, a battery **108**, and a charger **110**. The charger **110** may be configured to connect to a power source **112**. The VFIS motor-generator **102** may be coupled to a torque load **114**, such as a propulsion system, a surface control actuator, another type of actuation device, or the like. The system **100** may be incorporated into a vehicle **160**, such as an aircraft, automobile, ship, or another type of motorized vehicle.

The VFIS motor-generator **102** may include any type of motor designed to actively drive both a set of rotor windings and a set of stator windings. By changing a frequency and/or direction of a field generated at the rotor windings, the VFIS motor-generator **102** may achieve a rotational frequency that is independent from a frequency of a power signal used to drive its windings. The VFIS motor-generator **102** may also be back-driven and used as a generator for regenerative power applications. The VFIS motor-generator may be a 3-phase motor. An example of a VFIS motor-generate usable with the descriptions provided herein is described further in US Patent No. **10,547,269**, issued

on January **28, 2020**, and entitled “Variable Frequency Independent Speed Motor,” the contents of which are incorporated by reference herein in their entirety.

The first power conditioner **104** and the second power conditioner **106** may include circuitry and devices for converting power signals. For example, when in a driving mode, a DC power signal from the battery **108** may be converted into AC power signals for driving the VFIS motor-generator **102**. When in a regenerative mode, an AC power signal generated by the VFIS motor-generator **102** may be converted into a DC power signal for charging the battery **108**. The first power conditioner **104** and the second power conditioner **106** are further described herein.

The battery **108** may include any device for storing electrical charge. As a non-limiting example, the battery **108** may include a lead-acid battery, a lithium-ion battery, a rechargeable alkaline battery, a capacitor, a super-capacitor, another type of electrical charge storage device, or combinations thereof. Further, the battery **108** may include multiple cells, e.g., a battery pack. During operation, the battery **108** may be charged by regenerative power received from the first power conditioner **104** and/or the second power conditioner **106** or by the charger **110**.

The charger **110** may be configured to connect to the power source **112**. The power source **112** may be external to and/or remote from the vehicle **160**. For example, in cases where the vehicle is an aircraft, the power source **112** may be a ground-based power supply. As another example, in cases where the vehicle is an automobile, the power source **112** may be a car charging station or a consumer electrical outlet. In some cases, the power source **112** may be incorporated within the vehicle **160**. For example, in the case of a ship, the power source **112** could be an on-board power generation system.

Because the VFIS motor-generator **102** may be driven by two power signals (a first power signal to drive a set of rotor windings and a second power signal to drive a set of stator windings) the first power conditioner **104** and the second power conditioner **106** may be able to effectively combine their output power signals to operate the VFIS motor-

generator **102** in a frequency range that extends past the individual capabilities of either the first power conditioner **104** or the second power conditioner **106**, when taken alone. Further, during regeneration, the first power conditioner **104** and the second power conditioner **106** may be able to effectively combine their output power signals to operate
5 in a regenerative power mode outside of the regenerative capability range of either the first power conditioner **104** or the second power conditioner **106**. This extended speed range is further described herein.

Referring to FIG. 2, an example of a system **100** for operating a VFIS motor-generator in an extended speed range is depicted. FIG. 2 may provide more detail showing how
10 the first power conditioner **104** and the second power conditioner **106** are coupled to the VFIS motor-generator **102**.

The VFIS motor-generator **102** may include a stator **216** and a rotor **220**. The stator **216** may have a set of stator windings **218**. The rotor **220** may have a set of rotor windings **222**. The VFIS motor-generator **102** may further include a high-frequency transformer
15 **224** having a set of primary windings **226** on the stator **216** and a set of secondary windings **228** on the rotor **220**. The set of secondary windings **228** may be connected to the set of rotor windings **222**.

While in a driving mode, the first power conditioner **104** may be configured to generate a power signal for driving the set of stator windings **218**. The power signal may induce
20 a first rotating magnetic field **230** at the set of stator windings **218**. The second power conditioner **106** may be configured to generate a power signal for driving the set of rotor windings **222**. The power signal generated by the second power conditioner **106** may be transmitted to the set of rotor windings **222** via the high-frequency transformer **224** and may induce a second rotating magnetic field **232** at the set of rotor windings **222**.
25 The combination of the first rotating magnetic field **230** and the second rotating magnetic field **232** may cause a shaft **250** of the VFIS motor-generator **102** to rotate.

Frequencies of the first rotating magnetic field **230** and the second rotating magnetic field **232** may be additive and/or subtractive when applied to the shaft **250**. In FIG. 2,

they are shown as being additive with both the first rotating magnetic field **230** and the second rotating magnetic field **232** rotating in the same direction. As used herein, a power signal generated by the second power conditioner **106** that causes the second rotating magnetic field **232** to rotate in the same direction as the shaft **250** is referred to as having a positive frequency (or a positive **3**-phase sequence) and a power signal generated by the second power conditioner **106** that causes the second rotating magnetic field **232** to rotate in an opposite direction than the shaft is referred to as having a negative frequency (or a negative **3**-phase sequence). Thus, a speed of the shaft **250** (also referred to herein as a shaft frequency) may be based on a difference between the frequency of the power signal generated by the first power conditioner **104** and the frequency of the power signal generated by the second power conditioner **106**. In some cases, the VFIS motor-generator may include multiple pole pairs. In that case, the shaft frequency may be the difference between the two power signals divided by the number of pole pairs.

By applying a positive **3**-phase sequence AC power signal to the set of rotor windings **222**, a shaft frequency may be lower than a frequency that would be produced by the first rotating magnetic field **230** alone. By applying a DC power signal to the set of rotor windings **222**, the shaft frequency may correspond to a frequency of the first rotating magnetic field **230**. By applying a negative **3**-phase sequence AC power signal to the set of rotor windings **222**, the shaft frequency may be greater than a frequency that would be produced by the first rotating magnetic field **230** alone. This may enable the VFIS motor-generator **102** to be operated at a frequency (having a shaft frequency) that is higher than an operational bandwidth of either the first power conditioner **104** or the second power conditioner **106** when taken alone. In some cases, when the first power conditioner **104** and the second power conditioner **106** have a same operational frequency range, the frequency capacity of the shaft may be doubled as compared to a system that may have a single power conditioner.

While in a regeneration mode, the shaft **250** may be driven (or reverse-driven) by the torque load **114**. Rotation of the shaft **250** may result in rotation of the rotor **220**, which

may generate a regenerative AC power signal at the set of stator windings **218**. The first power conditioner **104** may convert the regenerative AC power signal into a DC power signal that may be used to charge the battery **108**. During regeneration, the second power conditioner **106** may generate a power signal for driving the set of rotor windings **222**. As with the driving mode, when in the regenerative mode, the set of rotor windings **222** may be driven with a positive sequence 3-phase AC signal, a DC signal, or a negative sequence 3-phase AC signal. Because the second rotating magnetic field **232** rotates relative to a speed of the shaft **250**, a frequency the second rotating magnetic field **232** may be greater than a frequency of the rotating shaft **250**. This may enable regeneration to occur even at shaft speeds that are below a minimum regeneration frequency of the first power conditioner **104**.

The first power conditioner **104** and the second power conditioner **106** may control their respective output power signals based on signals measured within the VFIS motor-generator **102** signals. For example, the system **100** may include an encoder **234** that may communicate a shaft phase **236** and a shaft frequency **238** to both the first power conditioner **104** and the second power conditioner **106**. A first voltage **240** and a first current **242** of a power signal present on the set of stator windings **218** may be measured and provided to the first power conditioner. A second voltage **244** and a second current **246** present on the set of primary windings **226** of the high-frequency transformer **224** may be measured and provided to the second power conditioner **106**.

Referring to FIG. 3, an example of a relationship **300** between a first power signal **302**, a second power signal **306**, and a shaft speed **312** is depicted. The first power signal **302** may have a first frequency **304** and the second power signal **306** may have a second frequency **308**. The functional relationship **300** may be a two-directional function. In a first direction, which may be associated with a driving mode, the first power signal **302** in combination with the second power signal **306** may determine the shaft speed **312**. In a second direction, which may be associated with a regenerative mode, the shaft speed **312** in combination with the second power signal **306** may determine the first power signal **302**.

In the first direction, the functional relationship **300** may include a difference **314** between the first frequency **304** and the second frequency **308**. The difference **314** may be divided at a multiplier **316** by a number of pole pairs **310** to resulting in a shaft frequency **311**. In an example, if the shaft speed has the units RPM (revolutions per minute), then the shaft frequency may be multiplied by **60** seconds (i.e., one minute), which would result in the shaft speed equaling the shaft frequency **311** multiplied by **60** and dividing the result by the number of pole pairs **310**. Without the factor **60** seconds, the shaft frequency **311** may be in the unit of revolutions/second.

In the second direction, the first frequency **304** may be the result of an algebraic sum of the shaft frequency **311** and the second frequency **308**. The shaft frequency **311** may be the result of the shaft speed **312** multiplied at the multiplier **316** by the number of pole pairs **310**. In both cases, either driving or regenerative, the relationship may be mathematically the same.

Referring to FIG. **4**, a graph depicting an example of relationships between power signals and a shaft frequency **402** is depicted. In FIG. **4**, and subsequent figures, the shaft frequency **402** is depicted as continuously increasing over time. However, this is for descriptive purposes. In practice, the shaft frequency **402** may vary depending on a stage of usage of the VFIS motor-generator **102** (e.g., a stage of a flight mission profile, such as taxi, takeoff, climb, cruise, descent, etc.).

FIG. **4** shows several different threshold frequencies including a minimum regeneration frequency **404**, a maximum operational frequency **406** of the first power conditioner **104**, a maximum shaft frequency **408** of the VFIS motor-generator **102**, and a maximum negative 3-phase sequence operational frequency of the second power conditioner **106** (depicted as a minimum operational frequency **410** in FIG. **4**). In many applications, the absolute values of the maximum operational frequency **406** and the minimum operational frequency **410** may be equal because the maximum achievable frequency of both the power conditioners **104**, **106** may be limited by the same types of the semiconductor devices. The minimum regeneration frequency **404** represents a

threshold level for regenerative power to be effectively harvested from shaft rotation. At this frequency, typical existing motor-generator regeneration processes may cease power harvesting operations, and the vehicle braking process may rely on other mechanisms, for example, hydraulic braking, which may dissipate the shaft energy as heat. The operational frequencies **404**, **406**, **408**, **410** may represent frequency thresholds that mark the boundaries of the design parameters of their respective components. As seen in FIG. 4, the shaft frequency **402** of the VFIS motor-generator **102** may be operated at frequencies that exceed the maximum operational frequency **406** of the first power conditioner **104**. Different stages of operations may be utilized as the shaft frequency **402** increases.

Operation of the system **100** may be divided into three regions **452**, **454**, **456** based on a shaft frequency **402**, which may run from **0** to the maximum shaft frequency **408** (which may equal twice the maximum operational frequency **406** of the first power conditioner **104**, if both the power conditioners **104**, **106** have the same maximum operational frequency).

In a first region **452**, the shaft frequency **402** may range from **0** to the minimum regeneration frequency **404**. Within the first region **452**, the power conditioners **104**, **106** may operate in a driving mode (with the first power conditioner **104** powering the set of stator windings **218**) or a regeneration mode (with the first power conditioner **104** receiving power from the set of stator windings **218**).

In the first region **452**, the driving mode may be referred to as a pseudo-sub-synchronous mode. In this mode, the shaft frequency **402** may be lower than a constant frequency AC power signal **412** generated by the first power conditioner **104** (which may be held constant at the minimum regeneration frequency **404**), hence the term “sub” is used for this mode. Yet, the shaft frequency **402** may still synchronize with the combined frequency effect of the constant frequency AC power signal **412** of the first power conditioner **104** and a variable frequency AC power signal **418** generated by the second power conditioner **106**. Therefore, it may be referred to as “pseudo-sub”

synchronous mode. The second power conditioner **106** may operate at a positive sequence with a frequency anywhere from **0** to the minimum regeneration frequency **404**.

In a first driving sub-mode shown in FIG. **4**, in the first region **452**, the first power conditioner **104** may generate the constant frequency AC power signal **412**. The constant frequency AC power signal **412** may be equal to the minimum regeneration frequency **404** as shown. In some cases, the constant frequency AC power signal **412** may be slightly higher than the minimum regeneration frequency **404**. The second power conditioner **106** may generate the variable frequency AC power signal **418** having a positive 3-phase sequence. The shaft frequency **402** can smoothly increase from **0** to the minimum regen frequency (e.g., as part of a starting process) with the help of the second power conditioner **106** while the first power conditioner **104** produces the constant frequency AC power signal **412**. Based on the functional relationship described with reference to FIG. **3**, the variable frequency AC power signal **418** may be decreased as the shaft frequency **402** increases in order to maintain the constant frequency AC power signal **412** at or above the minimum regeneration frequency **404**. The assistance provided by the second power conditioner **106** by generating the variable AC power signal **418** represents an advantage over systems that rely on only a single power conditioner.

In a second driving sub-mode, an operational frequency between **0** and the minimum regeneration frequency **404** may be chosen. The variable frequency AC power signal **418** may be selected based on the functional relationship described with respect to FIG. **3** to enable the shaft frequency **402** to equal the chosen frequency. In other words, the shaft frequency **402** need not increase over time, as shown in FIG. **4**, but may be selected to be a constant speed between **0** and the minimum regeneration frequency **404**. The same concept may apply to each of the regions **452**, **454**, **456**. For example, within each of these regions, the shaft frequency **402** may increase over time as depicted in FIG. **4** or may be chosen as a constant frequency within the applicable region.

In the first region **452**, the regeneration mode may be referred to as an extended regeneration mode. In this mode when the shaft frequency **402** changes from the minimum regeneration frequency **404** to **0** (e.g., braking until a complete stop), a frequency of a signal received at the first power conditioner **104** may remain at or slightly higher than the minimum regeneration frequency **404** by changing the variable frequency AC power signal **418** of the second power conditioner **106** from **0** to the minimum regeneration frequency **404**. This concept repeats through FIGS. **5** and **6** and is further described with reference to FIG. **8**.

By maintaining the constant frequency AC power signal **412** at a frequency that equals or exceeds the minimum regeneration frequency **404**, the system **100** may be operated in a way that enables power regeneration at any time, even when the shaft frequency **402**, alone, is too low to enable regenerative power to be harvested.

In a second region **454**, the shaft frequency **402** may be greater than the minimum regeneration frequency **404** and less than the maximum operational frequency **406** of the first power conditioner **104**. During a driving mode in this region, the first power conditioner **104** may generate a variable frequency AC power signal **414**. The term variable frequency, as used herein, means that the frequency may fall anywhere between an upper limit (e.g., the maximum operational frequency **406**) and a lower limit (e.g., the minimum regeneration frequency **404**) and/or may increase or decrease along with the shaft frequency **402**. The second power conditioner **106** may generate a DC power signal **420**. In this state, the set of rotor windings **222** may operate as a constant magnetic field and the VFIS motor-generator **102** may emulate a typical synchronous motor.

During a regeneration mode in the second region **454**, the shaft frequency **402** may change from the maximum operational frequency **406** of the first power conditioner **104** to the minimum regeneration frequency **404** due to a braking. The frequency of the variable frequency AC power signal **414** (which in the case of regeneration may be produced by rotation of the shaft **250** by the load **114**) may correspond to the shaft

frequency **402** and the second power conditioner **106** may continually produce the DC power signal **420**. As described with reference to the first region **452**, in the second region **454**, during either the driving mode or the regeneration mode, sub-modes such as continuously changing speed operation (changing) or fixed speed operation are applicable.

In a third region **456**, the shaft frequency **402** may be greater than the maximum operational frequency **406** of the first power conditioner **104** and less than the maximum shaft frequency **408** (or two times the maximum operational frequency **406**). In this region, a range of the shaft frequency **402** is considered to be extended because it is greater than the maximum operational frequency **406** of the first power conditioner. In a driving mode, the third region **456** may be referred to as a pseudo-super synchronous mode. In this mode, the shaft frequency **402** may be higher than the operational frequencies of either of the power conditioners **104**, **106**. Therefore, it is may be referred to as “super.” Yet, because the shaft frequency may be synchronized with the combined frequency effect a constant frequency AC power signal **416** and a variable frequency AC power signal **422**, the mode may be referred to as “pseudo-super”. In the pseudo-super-synchronous mode, the first power conditioner **104** may generate a constant frequency AC power signal **416**, which may be at its maximum operational frequency **406** as shown in FIG. 4 or may be somewhere between the minimum regeneration frequency **404** and the maximum operational frequency **406**. The second power conditioner **106** may generate a variable frequency AC power signal **422** having a negative 3-phase sequence. Based on the functional relationship described in FIG. 3 the negative 3-phase sequence may be additive with the constant frequency AC power signal **416**, enabling the shaft to be operated at a frequency that is higher than the maximum operational frequency **406** of the first power conditioner **104**. Thus, by having two power conditioners attached to a VFIS motor-generator **102**, the system **100** may have an extended speed range.

For a regeneration mode in the third region **456**, the shaft frequency **402** may change from the maximum shaft frequency **408** to the maximum operational frequency **406** due

to a vehicle braking process. The frequency of the constant frequency AC power signal **416** (which in the case of regeneration may be produced by rotation of the shaft **250** by the load **114**) may correspond to the shaft frequency **402** and the second power conditioner **106** may produce the variable frequency AC power signal **422** having a negative 3-phase sequence in order to extend the range of the shaft speed **402**. As described previously, in the third region **456**, during either the driving mode or the regeneration mode, sub-modes such as continuously changing speed operation (changing) or fixed speed operation are applicable.

Referring to FIG. 5, a graph depicts an example of relationships between power signals and a shaft frequency **402**. Unlike FIG. 4, the example of FIG. 5 may include two regions **552**, **554** instead of three as in FIG. 4. The second region **454** described with reference to FIG. 4, where the VFIS motor-generator **102** is operated as a typical synchronous motor, may be omitted.

In the first region **552**, the shaft frequency **402** may be less than the minimum regeneration frequency **404**. As described with respect to the first region **452**, in the first region **552** during a driving mode, the power conditioners **104**, **106**, may be driven in a pseudo-sub-synchronous mode. In a first driving sub-mode, the first power conditioner **104** may generate a constant frequency AC power signal **412** that is equal to the minimum regeneration frequency **404**, as shown, or in some cases the constant frequency AC power signal **412** may be slightly higher than the minimum regeneration frequency **404**. The second power conditioner **106** may generate a variable frequency AC power signal **418** having a positive 3-phase sequence. The variable frequency AC power signal **418** may be decreased as the shaft frequency **402** increases in order to maintain the constant frequency AC power signal **412** at or above the minimum regeneration frequency **404**. In this way, the example of FIG. 5 is similar to the example of FIG. 4. In a second driving sub-mode, an operational frequency between **0** and the minimum regeneration frequency **404** may be chosen. The variable frequency AC power signal **418** may be selected based on the functional relationship described with

respect to FIG. 3 to enable the shaft frequency **402** to equal the chosen frequency. This regeneration sub-mode is further described with reference to FIG. 8.

In a second region **554**, the shaft frequency **402** may be greater than a minimum regeneration frequency **404** and no greater than the maximum shaft speed **408**. In this region, a range of the shaft frequency **402** is considered to be extended because it is greater than the maximum operational frequency **406** of the first power conditioner. In a driving mode, the third region **456** may be referred to as a pseudo-super synchronous mode. The first power conditioner **104** may generate a constant frequency AC power signal **502** that may fall between the minimum regeneration frequency **404** and the maximum operational frequency **406** of the first power conditioner **104**. The second power conditioner **106** may generate a variable frequency AC power signal **504** having a negative 3-phase sequence while the shaft frequency **402** is greater than the minimum regeneration frequency **404**.

For a regeneration mode in the second region **554**, the shaft frequency **402** may change from the maximum shaft frequency **408** to the maximum operational frequency **406** due to a vehicle braking process. The frequency of the constant frequency AC power signal **416** (which in the case of regeneration may be produced by rotation of the shaft **250** by the load **114**) may correspond to the shaft frequency **402** and the second power conditioner **106** may produce the variable frequency AC power signal **422** having a negative 3-phase sequence in order to extend the range of the shaft speed **402**. As described previously, in the third region **456**, during either the driving mode or the regeneration mode, sub-modes such as continuously changing speed operation (changing) or fixed speed operation are applicable.

The resulting shaft frequency **402** described in FIG. 5 may be the same as in FIG. 4. However, by operating in this way, demand on each of the power conditioners **104**, **106** may be more evenly distributed. Other benefits may exist.

Referring to FIG. 6, a graph depicts an example of relationships between power signals and a shaft frequency **402**. In a first region **652**, the shaft frequency **402** may range from

0 to the maximum operational frequency **406** of the first power conditioner **104**. The VFIS motor-generator **102** may be operated as a synchronous motor until the first power conditioner **104** reaches its maximum operational frequency **406**.

5 In a driving mode, while the shaft frequency **402** is less than the maximum operational frequency **406** of the first power conditioner **104**, the first power conditioner **104** may generate a constant frequency AC power signal **602** between the minimum regeneration frequency **404** and a maximum operational frequency **406** of the first power conditioner **104**. The second power conditioner **106** may generate a DC power signal **604** in order to generate a constant magnetic force and operate the VFIS motor-generator **102** as a
10 synchronous motor.

During a regeneration mode in the first region **652**, the shaft frequency **402** may change from the maximum operational frequency **406** of the first power conditioner **104** to the minimum regeneration frequency **404** due to a braking. The frequency of the variable frequency AC power signal **414** (which in the case of regeneration may be produced by
15 rotation of the shaft **250** by the load **114**) may correspond to the shaft frequency **402** and the second power conditioner **106** may continually produce the DC power signal **420**. As previously described, during either the driving mode or the regeneration mode, sub-modes such as continuously changing speed operation (changing) or fixed speed operation may be applicable.

20 In a second region **654**, the shaft frequency **402** may be greater than the maximum operational frequency **406** of the first power conditioner **104**, and less than the maximum shaft frequency **408** (or two times the maximum operational frequency **406**). In this region, a range of the shaft frequency **402** is considered to be extended because it is greater than the maximum operational frequency **406** of the first power conditioner. In
25 a driving mode, the second region **454** may be referred to as a pseudo-super synchronous mode. In this mode, the shaft frequency **402** may be higher than the operational frequencies of either of the power conditioners **104**, **106**. In the pseudo-super-synchronous mode, the first power conditioner **104** may generate a constant

frequency AC power signal **416** and the second power conditioner **106** may generate a variable frequency AC power signal **422** having a negative 3-phase sequence. Based on the functional relationship described in FIG. **3** the negative 3-phase sequence may be additive with the constant frequency AC power signal **416**, enabling the shaft to be operated at a frequency that is higher than the maximum operational frequency **406** of the first power conditioner **104**.

For a regeneration mode in the second region **654**, the shaft frequency **402** may change from the maximum shaft frequency **408** to the maximum operational frequency **406** due to a vehicle braking process. The frequency of the constant frequency AC power signal **416** (which in the case of regeneration may be produced by rotation of the shaft **250** by the load **114**) may correspond to the shaft frequency **402** and the second power conditioner **106** may produce the variable frequency AC power signal **422** having a negative 3-phase sequence in order to extend the range of the shaft speed **402**. As described previously, in the second region **654**, during either the driving mode or the regeneration mode, sub-modes such as continuously changing speed operation (changing) or fixed speed operation are also applicable.

The example of FIG. **6** may enable the operation of the VFIS motor-generator **102** in an extended shaft frequency mode but may be limited in the ability to produce regenerative power when the shaft frequency **402** is lower than the minimum regeneration frequency **404**. While some examples are provided in FIGS. **4-6**, the application is not intended to be limited only to these operations. Other possible operations of the first power conditioner **104** and the second power conditioner **106** are possible.

Referring to FIG. **7**, an example of a power conditioner **700** is depicted. The power conditioner **700** may describe the first power conditioner **104**, the second power conditioner **106**, or both.

The power conditioner **700** may be configured to operate in a driving mode **702** or in a regenerative mode **704**. While in the driving mode **702**, the power conditioner **700** may include at least one inverter **710** which may generate an AC power signal **706** for driving

a set of windings. The power conditioner **700** may also be configured to operate in a regenerative mode **704**. While in the regenerative mode **704**, the power conditioner **700** may include at least one rectifier **712** for generating a DC power signal **708** for charging a battery (e.g., the battery **108**).

5 FIG. **8** is a graph depicting an example of relations between power signals and a shaft speed. In FIG. **8**, a shaft frequency **802** may be back-driven (e.g., in a regenerative mode) to produce a constant frequency AC power signal **804**. While FIGS. **4** and **5** may be associated with either a driving mode or a regeneration mode, the example of FIG. **8** is described with respect to regeneration at a shaft frequency **802** that is below the
10 minimum regeneration frequency **404**. In this case, the first power conditioner **104** may operate in the regenerative mode **704** and the second power conditioner **106** may generate a variable frequency AC power signal **418** having a positive 3-phase sequence. A combination of the variable frequency AC power signal **418** and the shaft frequency **802** may produce the constant frequency AC power signal **804**, which may
15 be greater than or equal to the minimum regeneration frequency **404**. The constant frequency AC power signal **804** may be present at the set of stator windings **218** and may be used to produce a power signal to charge the battery **108** of FIG. **2**.

Referring to FIG. **9**, a flow chart depicting an example of a method **900** for operating a VFIS motor-generator in an extended speed range is depicted. The method **900** may
20 include providing a first power signal at a set of stator windings of a VFIS motor-generator, where the set of stator windings is coupled to a first power conditioner, at **902**. For example, in a driving mode, the first power signal **302** may be provided by the first power conditioner **104** to the set of stator windings **218**. In a regenerative mode, the first power signal **302** may be generated by turning the shaft **250** and, thereby,
25 causing an interaction between the magnetic fields **230**, **232**.

The method **900** may further include generating a second power signal at a second power conditioner for driving a set of rotor windings of the VFIS motor-generator, where a shaft speed of the VFIS motor-generator is a difference between a first frequency of

the first power signal and a second frequency of the second power signal divided by a number of pole pairs of the VFIS motor-generator, at **904**. For example, the second power conditioner **106** may generate the second power signal **306**.

5 Further illustrative and non-exclusive examples according to the disclosure are described in the following paragraphs:

10 In an example according to the present disclosure a system (**100**) comprises: a variable frequency independent speed (VFIS) motor-generator (**102**) having a stator (**216**) with a set of stator windings (**218**), a rotor (**220**) with a set of rotor windings (**222**), and a high-frequency transformer (**224**) having a set of primary windings (**226**) on the stator (**216**) and a set of secondary windings (**228**) on the rotor (**220**), wherein the set of secondary windings (**228**) are coupled to the set of rotor windings (**222**); a first power conditioner (**104**) coupled to the set of stator windings (**218**); and a second power conditioner (**106**), distinct from the first power conditioner (**104**), coupled to the set of primary windings (**226**).

15 Optionally, in the system (**100**) of the earlier paragraph, a first power signal (**302**) generated by the first power conditioner (**104**) induces a first rotating magnetic field (**230**) at the set of stator windings (**218**) while the first power conditioner (**104**) is in a driving mode (**702**), wherein a second power signal (**306**) generated by the second power conditioner (**104**) induces a second rotating magnetic field (**232**) at the set of
20 rotor windings (**222**), and wherein a shaft speed (**312**) is based on a difference (**314**) between a first frequency (**304**) of the first power signal (**302**) and a second frequency (**308**) of the second power signal (**306**).

25 Optionally, in the system (**100**) of one of the earlier paragraphs, the shaft speed (**312**) is the difference (**314**) between the first frequency (**304**) and the second frequency (**308**) divided by a number of pole pairs (**310**).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner 104 is configured to increase the shaft speed (312) over time or wherein the first power conditioner 104 is configured to keep the shaft speed (312) constant over time.

- 5 Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a driving mode (702), is configured to generate a constant frequency alternating current (AC) power signal (412) while a shaft frequency (402) is within a first region (452) that is less than a minimum regeneration frequency (404), and wherein the second power conditioner (106) is configured to generate a variable
- 10 frequency AC power signal (418) having a positive 3-phase sequence while the shaft frequency (402) is within the first region (454) that is less than the minimum regeneration frequency (404).

- Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a regenerative mode (704), is configured to generate a DC
- 15 power signal (708), wherein the second power conditioner (106) is configured to generate a variable frequency AC power signal (418) having a positive 3-phase sequence while a shaft frequency (402) is within a first region (452) that is less than a minimum regeneration frequency (404), and wherein the variable frequency AC power signal (418) added to the shaft frequency (802) is greater than or equal to the minimum
- 20 regeneration frequency (404).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a driving mode (702), is configured to generate a variable frequency AC power signal (414) while a shaft frequency (402) is within a second region (454) that is greater than a minimum regeneration frequency (404) and less than a maximum operational frequency (406) of the first power conditioner (104), and wherein the second power conditioner (106) is configured to generate a direct current (DC) power signal (420) while the shaft frequency (402) is within the second region (454) that is greater than the minimum regeneration frequency (404) and less than the maximum operational frequency (406).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a regenerative mode (704), is configured to generate a DC power signal (708), and wherein the second power conditioner (106) is configured to generate a DC power signal (420) while a shaft frequency (802) is within a second region (454) that is greater than the minimum regeneration frequency (404) and less than the maximum operational frequency (406).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a driving mode, is configured to generate a constant frequency AC power signal (416) between a minimum regeneration frequency (404) and a maximum operational frequency (406) of the first power conditioner (104) while a shaft frequency (402) is within a third region (456) that is greater than the maximum operational frequency (406), and wherein the second power conditioner (106) is configured to generate a variable frequency AC power signal (422) having a negative 3-phase sequence while the shaft frequency (402) is within the third region (456) that is greater than the maximum operational frequency (406).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a regenerative mode (704), is configured to generate a DC power signal (708), and wherein the second power conditioner (106) is configured to generate a variable frequency AC power signal (422) having a negative 3-phase sequence while a shaft frequency (402) is within a third region (456) that is greater than the maximum operational frequency (406).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a driving mode (702), is configured to generate a variable frequency AC power signal (502) between a minimum regeneration frequency (404) and a maximum operational frequency (406) of the first power conditioner (104) while a shaft frequency (402) is within a second region (554) that is greater than the minimum regeneration frequency (404), and wherein the second power conditioner (106) is configured to generate a variable frequency AC power signal (504) having a negative 3-phase sequence while the shaft frequency (402) is within the second region (554) that is greater than the minimum regeneration frequency (404).

Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a regenerative mode (704), is configured to generate a DC power signal (708), wherein the second power conditioner (106) is configured to generate a variable frequency AC power signal (422) having a negative 3-phase sequence while a shaft frequency (402) is within a second region (554) that is greater than the minimum regeneration frequency (404).

- Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a driving mode (702), is configured to generate a variable frequency AC power signal (602) between a minimum regeneration frequency (404) and a maximum operational frequency (406) of the first power conditioner (104) while a shaft frequency (402) is within a first region (652) that is less than the maximum operational frequency (406) of the first power conditioner (104), and wherein the second power conditioner (106) is configured to generate a DC power signal (604) while the shaft frequency (402) is within the first region (652) that is less than the maximum operational frequency (406).
- 10 Optionally, in the system (100) of one of the earlier paragraphs, the first power conditioner (104), while in a regenerative mode (704), is configured to generate a DC power signal (708), wherein the second power conditioner (106) is configured to generate a DC power signal (604) while a shaft frequency (402) is within a first region (652) that is less than the maximum operational frequency (406).
- 15 Optionally, the system (100) of one of the earlier paragraphs further comprises: an encoder (234) configured to measure a shaft phase (236) and a shaft frequency (238) and to communicate the shaft phase (236) and the shaft frequency (238) to the first power conditioner (104) and the second power conditioner (106).
- 20 In another example according to the present disclosure, a system (100) comprises: a variable frequency independent speed (VFIS) motor-generator (102) having a stator (216) with a set of stator windings (218) and a rotor (220) with a set of rotor windings (222); a first power conditioner (104) configured to generate a first power signal (302) for driving the set of stator windings (218) when operating in a driving mode (702) and configured to generate a direct current (DC) power signal (708) for battery charging
- 25 when operating in a regenerative mode (704); and a second power conditioner (106) configured to generate a second power signal (306) for driving the set of rotor windings (222).

Optionally, the system (100) of the earlier paragraph further comprises: a high-frequency transformer (224) including a set of primary windings (226) positioned on the stator (216) and a set of secondary windings (228) positioned on the rotor (220), wherein the second power signal (306) is communicated to the set of rotor windings (222) via the high-frequency transformer (224).

In another example according to the present disclosure, a method (900) comprises: providing (902) a first power signal (302) at a set of stator windings (218) of a variable frequency independent speed (VFIS) motor-generator (102), wherein the set of stator windings (218) is coupled to a first power conditioner (104); and generating (904) a second power signal (306) at a second power conditioner (106) for driving a set of rotor windings (222) of the VFIS motor-generator (102), wherein a shaft speed (312) of the VFIS motor-generator (102) is a difference (314) between a first frequency (304) of the first power signal (302) and a second frequency (308) of the second power signal (306) divided by a number of pole pairs (310) of the VFIS motor-generator (102).

Optionally, in the method of the earlier paragraph, the first power signal (302) is a driving alternating current (AC) power signal (416), wherein a shaft frequency (402) is greater than a maximum operational frequency (406) of the first power conditioner (104), and wherein the second power signal (306) is an AC power signal (422) having a negative 3-phase sequence.

Optionally, in the method of one of the earlier paragraphs, the first power signal (302) is a regenerative AC power signal (804), wherein a shaft frequency (802) is less than a minimum regeneration frequency (404), and wherein the second power signal (306) is an AC power signal (418) having a positive 3-phase sequence. Although various examples have been shown and described, the present disclosure is not so limited and will be understood to include all such modifications and variations as would be apparent to one skilled in the art.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A system comprising:

5 a variable frequency independent speed (VFIS) motor-generator having a stator with a set of stator windings, a rotor with a set of rotor windings , and a high-frequency transformer having a set of primary windings on the stator and a set of secondary windings on the rotor , wherein the set of secondary windings are coupled to the set of rotor windings;

a first power conditioner coupled to the set of stator windings; and

10 a second power conditioner, distinct from the first power conditioner, coupled to the set of primary windings.

15 **2.** The system of claim **1**, wherein a first power signal generated by the first power conditioner induces a first rotating magnetic field at the set of stator windings while the first power conditioner is in a driving mode, wherein a second power signal generated by the second power conditioner induces a second rotating magnetic field at the set of rotor windings, and wherein a shaft speed is based on a difference between a first frequency of the first power signal and a second frequency of the second power signal.

20 **3.** The system of claim **2**, wherein the shaft speed is the difference between the first frequency and the second frequency divided by a number of pole pairs.

4. The system of claim **2**, wherein the first power conditioner is configured to increase the shaft speed over time or wherein the first power conditioner is configured to keep the shaft speed constant over time.

5. The system of any one of claims 1-4, wherein the first power conditioner, while in a driving mode, is configured to generate a constant frequency alternating current (AC) power signal while a shaft frequency is within a first region that is less than a minimum regeneration frequency, and wherein the second power conditioner is configured to generate a variable frequency AC power signal having a positive 3-phase sequence while the shaft frequency is within the first region that is less than the minimum regeneration frequency.
6. The system of any one of claims 1-5, wherein the first power conditioner, while in a regenerative mode, is configured to generate a DC power signal, wherein the second power conditioner is configured to generate a variable frequency AC power signal having a positive 3-phase sequence while a shaft frequency is within a first region that is less than a minimum regeneration frequency, and wherein the variable frequency AC power signal added to the shaft frequency is greater than or equal to the minimum regeneration frequency.
7. The system of any one of claims 1-6, wherein the first power conditioner, while in a driving mode, is configured to generate a variable frequency AC power signal while a shaft frequency is within a second region that is greater than a minimum regeneration frequency and less than a maximum operational frequency of the first power conditioner, and wherein the second power conditioner is configured to generate a direct current (DC) power signal while the shaft frequency is within the second region that is greater than the minimum regeneration frequency and less than the maximum operational frequency.
8. The system of any one of claims 1-7, wherein the first power conditioner, while in a regenerative mode, is configured to generate a DC power signal, and wherein the second power conditioner is configured to generate a DC power signal while a shaft frequency is within a second region that is greater than the minimum regeneration frequency and less than the maximum operational frequency.

- 5 9. The system of any one of claims 1-8, wherein the first power conditioner, while in a driving mode, is configured to generate a constant frequency AC power signal between a minimum regeneration frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is within a third region that is greater than the maximum operational frequency, and wherein the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while the shaft frequency is within the third region that is greater than the maximum operational frequency.
- 10 10. The system of any one of claim 1-9, wherein the first power conditioner, while in a regenerative mode, is configured to generate a DC power signal , and wherein the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while a shaft frequency is within a third region that is greater than the maximum operational frequency.
- 15 11. The system of any one of claims 1-10, wherein the first power conditioner, while in a driving mode, is configured to generate a variable frequency AC power signal between a minimum regeneration frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is within a second region that is greater than the minimum regeneration frequency, and wherein the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while the shaft frequency is within the second region that is greater than the minimum regeneration frequency.
- 20 12. The system of any one of claims 1-11, wherein the first power conditioner, while in a regenerative mode, is configured to generate a DC power signal, wherein the second power conditioner is configured to generate a variable frequency AC power signal having a negative 3-phase sequence while a shaft frequency is within a second region that is greater than the minimum regeneration frequency.
- 25

13. The system of any one of claims 1-12, wherein the first power conditioner, while in a driving mode, is configured to generate a variable frequency AC power signal between a minimum regeneration frequency and a maximum operational frequency of the first power conditioner while a shaft frequency is within a first region that is less than the maximum operational frequency of the first power conditioner, and wherein the second power conditioner is configured to generate a DC power signal while the shaft frequency is within the first region that is less than the maximum operational frequency.

14. The system of any one of claims 1-13, wherein the first power conditioner, while in a regenerative mode, is configured to generate a DC power signal, wherein the second power conditioner is configured to generate a DC power signal while a shaft frequency is within a first region that is less than the maximum operational frequency .

15. The system of any one of claims 1-14, further comprising:

an encoder configured to measure a shaft phase and a shaft frequency and to communicate the shaft phase and the shaft frequency to the first power conditioner and the second power conditioner.

16. A system comprising:

a variable frequency independent speed (VFIS) motor-generator having a stator with a set of stator windings and a rotor with a set of rotor windings;

a first power conditioner configured to generate a first power signal for driving the set of stator windings when operating in a driving mode and configured to generate a direct current (DC) power signal for battery charging when operating in a regenerative mode ; and

a second power conditioner configured to generate a second power signal for driving the set of rotor windings.

17. The system of claim **16**, further comprising:

a high-frequency transformer including a set of primary windings positioned on the stator and a set of secondary windings positioned on the rotor, wherein the second power signal (**306**) is communicated to the set of rotor windings via the high-frequency transformer.

18. A method comprising:

providing a first power signal at a set of stator windings of a variable frequency independent speed (VFIS) motor-generator, wherein the set of stator windings is coupled to a first power conditioner; and

generating a second power signal at a second power conditioner for driving a set of rotor windings of the VFIS motor-generator, wherein a shaft speed of the VFIS motor-generator is a difference between a first frequency of the first power signal and a second frequency of the second power signal divided by a number of pole pairs of the VFIS motor-generator.

19. The method of claim **18**, wherein the first power signal is a driving alternating current (AC) power signal, wherein a shaft frequency is greater than a maximum operational frequency of the first power conditioner, and wherein the second power signal is an AC power signal having a negative **3**-phase sequence.

20. The method of claim **18** or **19**, wherein the first power signal is a regenerative AC power signal, wherein a shaft frequency is less than a minimum regeneration frequency, and wherein the second power signal is an AC power signal having a positive **3**-phase sequence.

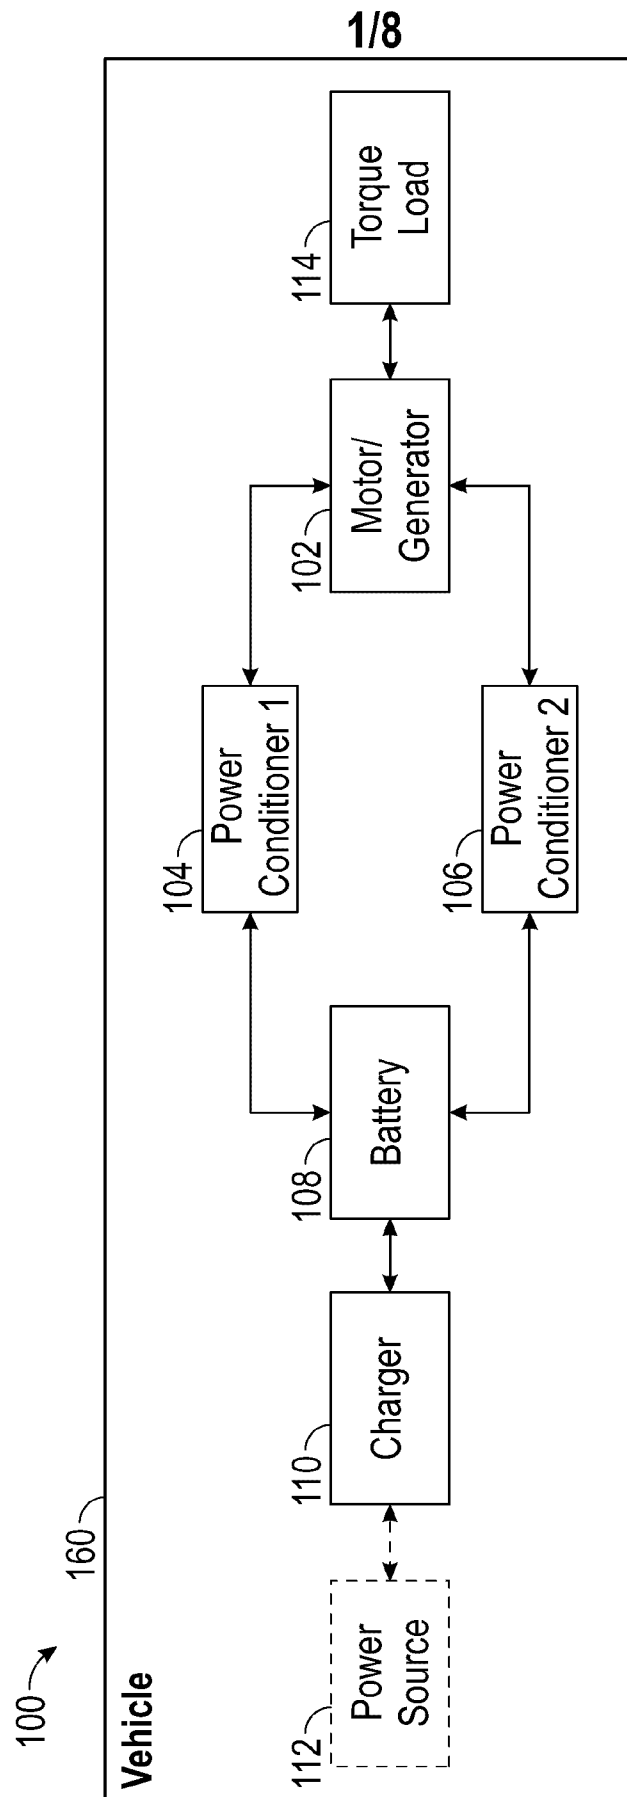


FIG. 1

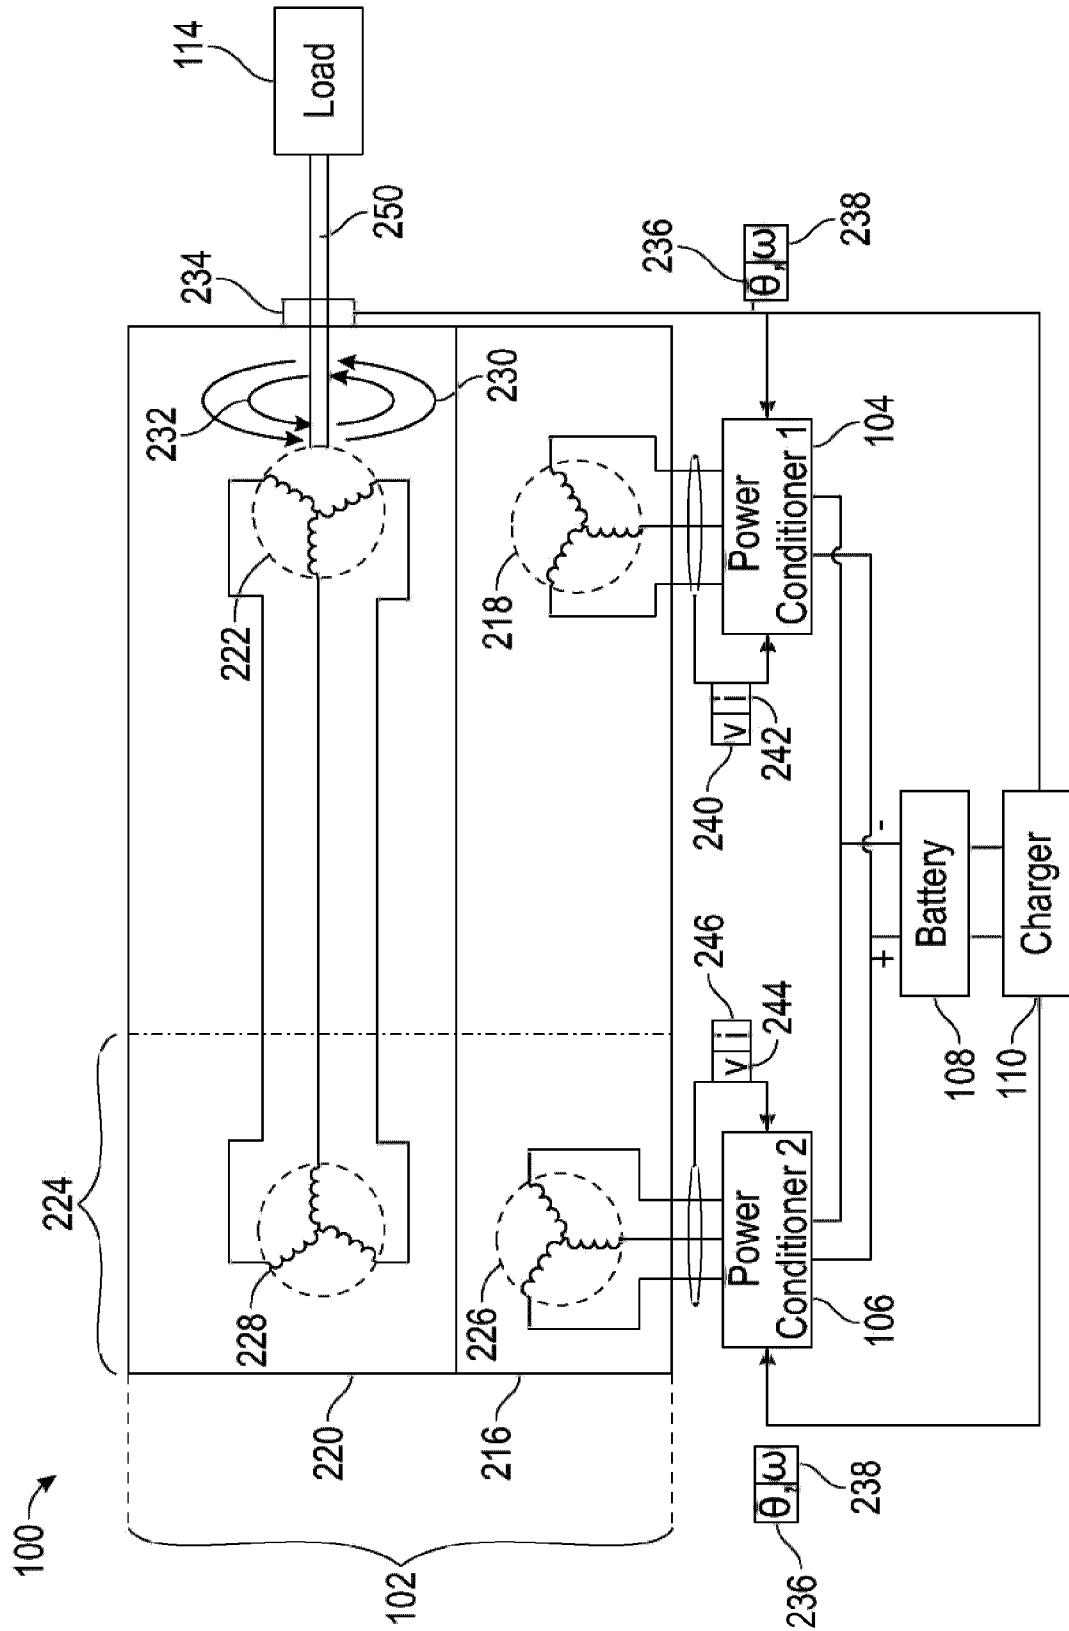


FIG. 2

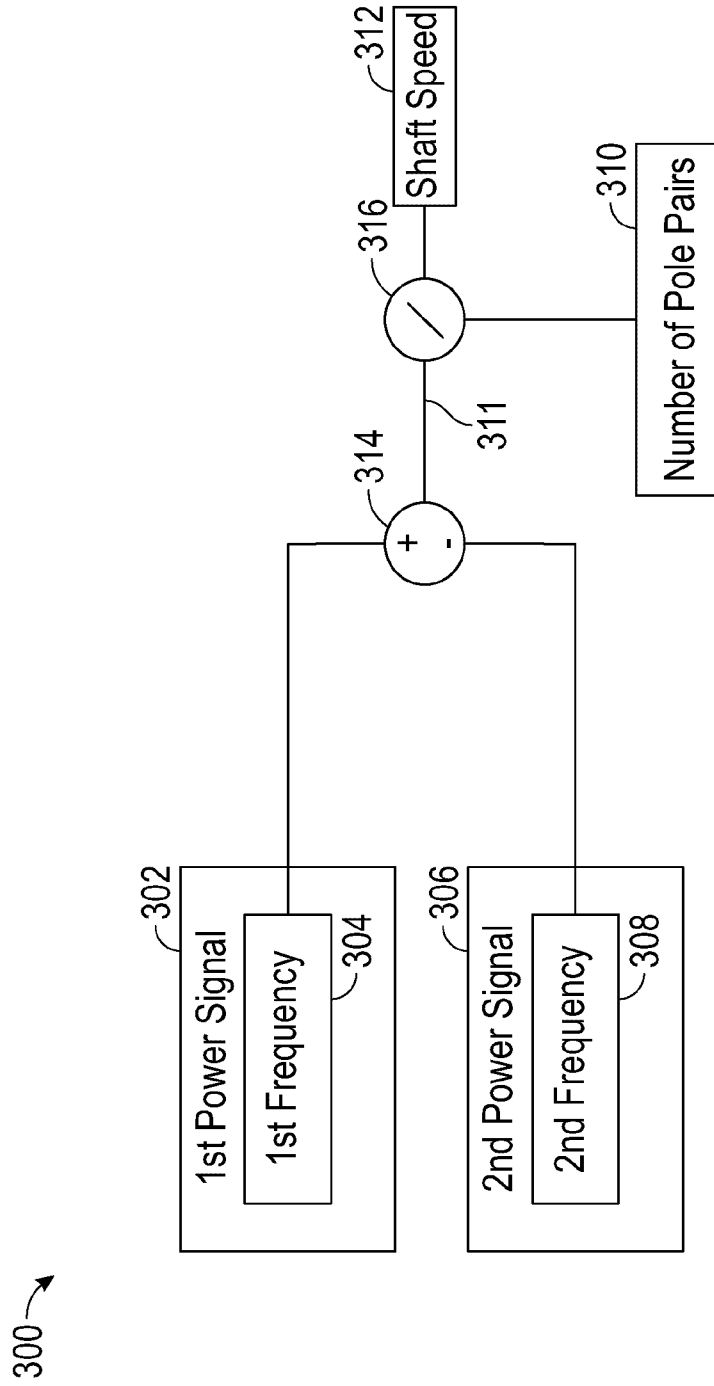


FIG. 3

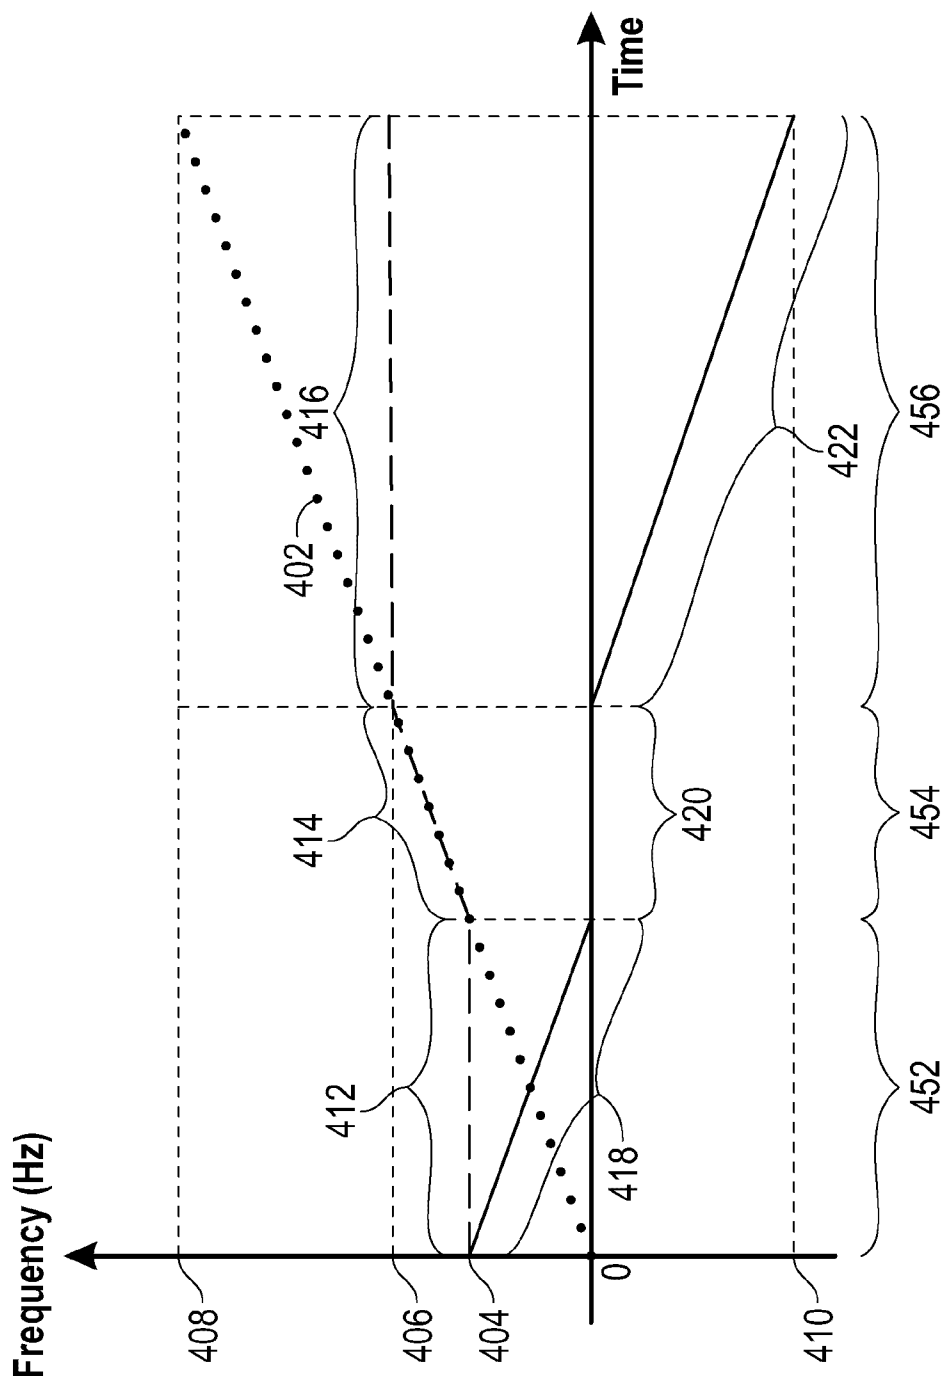


FIG. 4

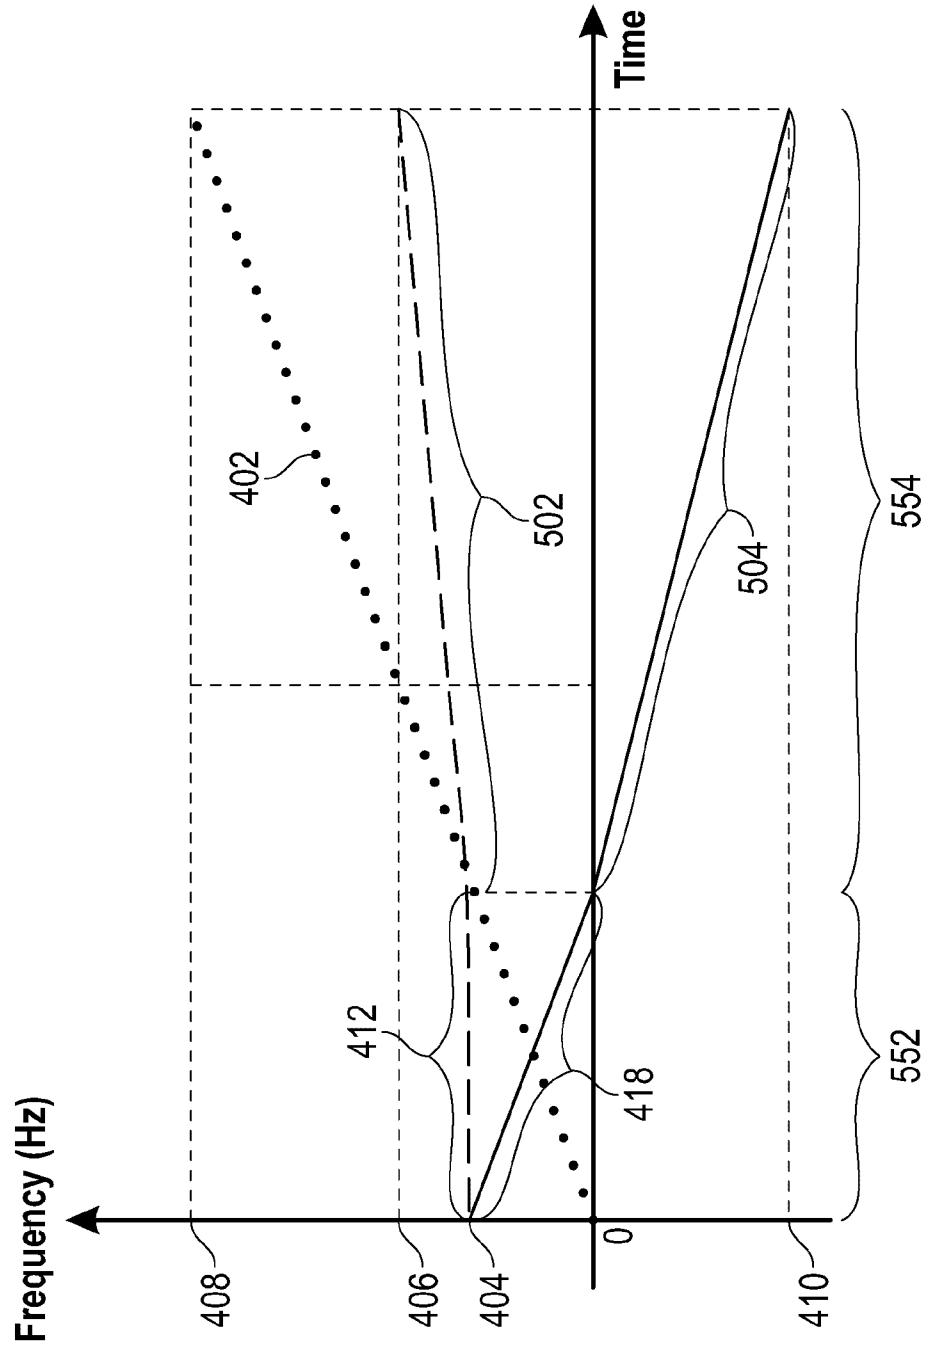


FIG. 5



FIG. 6

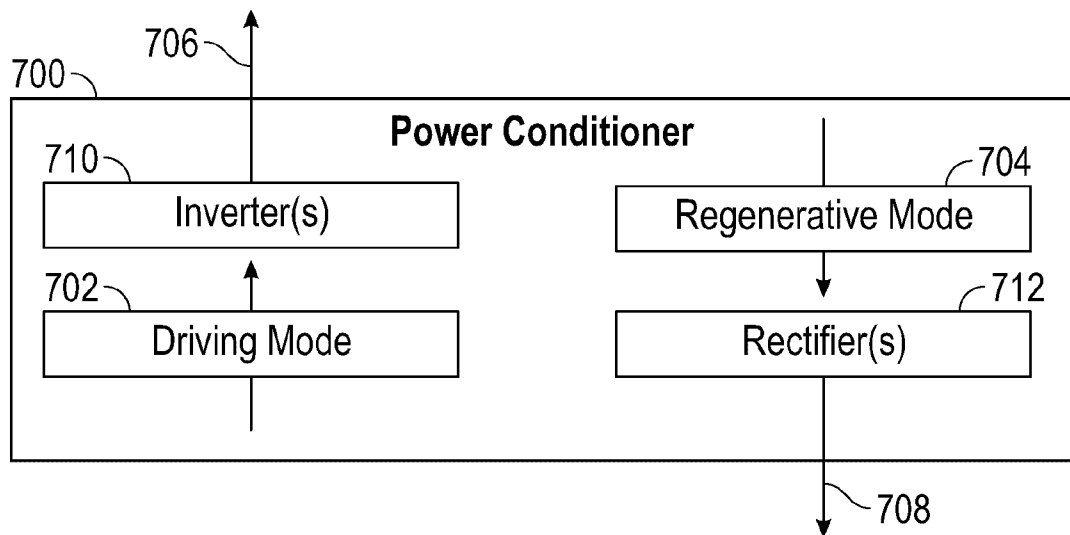


FIG. 7

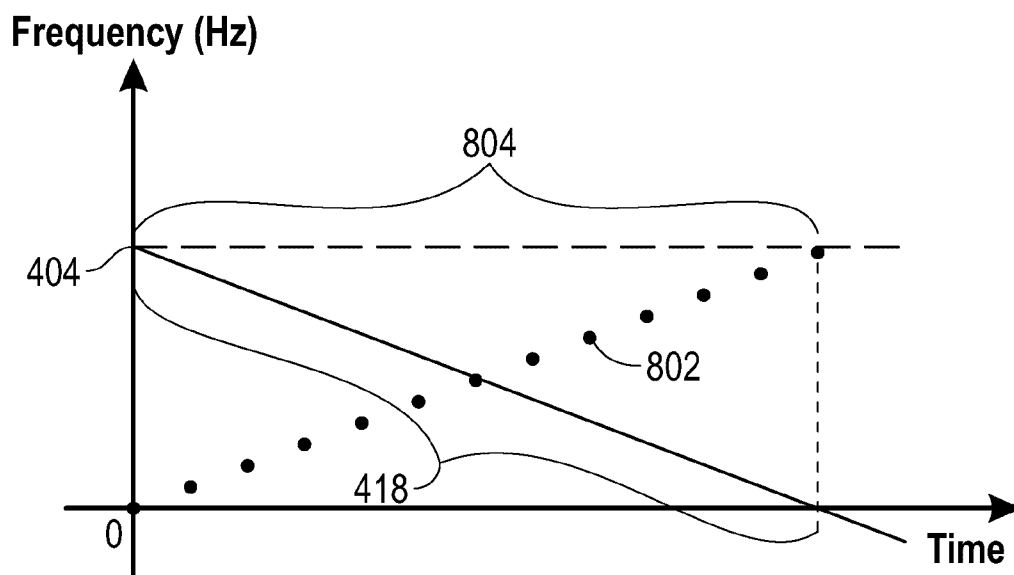
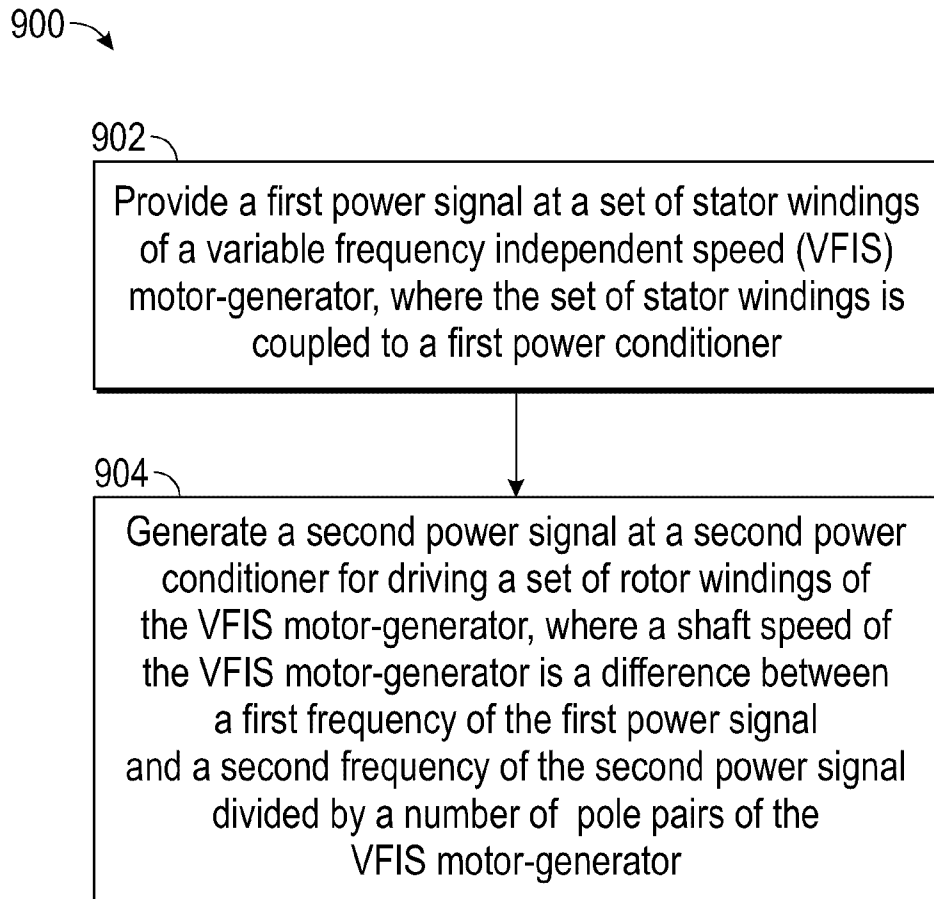


FIG. 8

**FIG. 9**