




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B60T 8/88, 13/66, 13/74, 17/18	A1	(11) International Publication Number: WO 00/68053 (43) International Publication Date: 16 November 2000 (16.11.00)
(21) International Application Number: PCT/GB00/01126 (22) International Filing Date: 24 March 2000 (24.03.00) (30) Priority Data: 9910194.1 5 May 1999 (05.05.99) GB (71) Applicant (for all designated States except US): LUCAS INDUSTRIES PLC [GB/GB]; 46 Park Street, London W1Y 4DJ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): HARRIS, Alan, Leslie [GB/GB]; 24 Malvern Road, Balsall Common, Coventry CV7 7DU (GB). (74) Agent: W.P. THOMPSON & CO.; Coopers Building, Church Street, Liverpool L1 3AB (GB).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: IMPROVED BACK-UP BRAKING IN VEHICLE BRAKING SYSTEMS

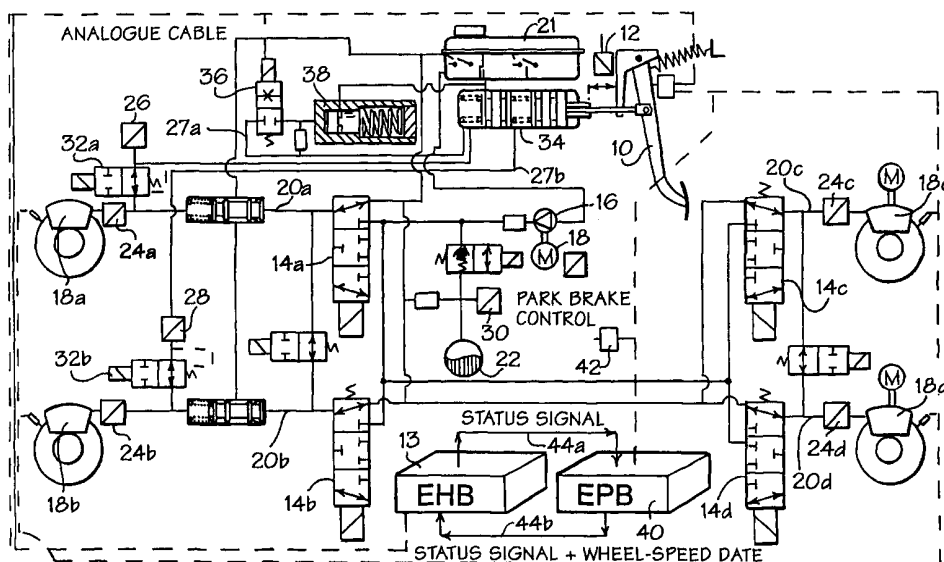

(57) Abstract

A vehicle braking system comprising an electro-hydraulic braking means of the type which operates normally in a brake-by-wire mode wherein hydraulic pressure is applied to braking devices at the vehicle wheels (18a-d) in proportion to the driver's braking demand as sensed electronically at a brake pedal (10), and which, if the brake-by-wire mode should fail, operates in a push-through mode wherein hydraulic pressure is applied to the braking devices at the vehicle wheels (18) by way of a master cylinder (34) coupled mechanically to the brake pedal (10), and an electric parking braking means for enabling the braking devices to be actuated for parking braking purposes. For supplementing the push-through braking provided by the electro-hydraulic braking means in the event that the brake-by-wire mode has failed, it is arranged that the operation of the foot pedal (10) by the driver also causes operation of the electric parking braking.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DESCRIPTION

IMPROVED BACK-UP BRAKING IN

VEHICLE BRAKING SYSTEMS

The present invention is concerned with improving braking performance in vehicle braking systems, in particular within the context of vehicle braking systems having electro-hydraulic (EHB) braking.

A typical EHB system for a vehicle comprises a brake pedal, respective braking devices which are connected to the vehicle wheels and which are capable of being brought into communication with electronically controlled proportional control valves in order to apply hydraulic fluid under pressure to the braking devices, a hydraulic pump driven by an electric motor, and a high pressure hydraulic pressure accumulator fed by said pump for the provision of hydraulic fluid under pressure which can be passed to the braking device via the proportional control valve in order to apply hydraulic fluid under pressure to the braking devices in so called "brake-by-wire" mode in proportion to the driver's demand as sensed at the brake pedal. The EHB system is controlled by an electronic controller (ECU).

In order to enable the vehicle to be braked in conditions where for some reason, the EHB system has become inoperative, for example because of a major component failure, it is usual in vehicles fitted with EHB to include a mechanical back-up system comprising a master cylinder which is linked to the brake pedal and which can be arranged to be coupled

hydraulically to respective brake actuators at the front wheels to provide at least some braking in the event of total EHB failure. This is known as the "push-through" mode of braking. In order to make the EHB system "feel" like a conventional braking system in the "push-through" mode of braking, a travel simulator is also usually provided which is connected hydraulically to the master cylinder coupled to the brake pedal and which allows, by increasing the volume under pressure, the brake pedal to be depressed to an extent comparable with that of conventional systems.

The performance of an electro-hydraulic braking system (EHB) in its back-up (push-through) operating mode is, however, not as good as when the EHB is working normally in that there is no braking at all at the rear axle and no booster function for the action of the hydraulic cylinder.

Some prior art systems provide 4-wheel push-through, but do not isolate the power-circuit fluid from that in the hydrostatic push-through circuit. This makes the push-through function vulnerable to fluid aeration.

One could in principle provide 4-wheel push-through braking, but only by using two more isolating pistons, two more isolation solenoid valves and a larger master cylinder. However, this would be unacceptable due to the cost, packaging and consideration of additional heat dissipation and electrical energy consumption.

Some vehicles are now fitted with electrically operated parking brake systems (EPB) wherein for parking purposes, the normal braking devices, in addition to being actuable hydraulically, can be brought into a

braking condition electrically. For example, the brake actuator can include a piston which is drivable by a reversible electric motor to apply and retract the brake shoes from a brake disc for respectively applying and releasing parking braking.

In accordance with the present invention, there is provided a vehicle braking system comprising an electro-hydraulic braking means of the type which operates normally in a brake-by-wire mode wherein hydraulic pressure is applied to braking devices at the vehicle wheels in proportion to the driver's braking demand as sensed electronically at a brake pedal, and which, if the brake-by-wire mode should fail, operates in a push-through mode wherein hydraulic pressure is applied to the braking devices at the vehicle wheels by way of a master cylinder coupled mechanically to the brake pedal, and an electric parking braking means for enabling the braking devices to be actuated for parking braking purposes, wherein for supplementing the push-through braking provided by the electro-hydraulic braking means in the event that the brake-by-wire mode had failed, it is arranged that the operation of the foot pedal by the driver also causes operation of the electric parking braking.

To achieve this, an ECU within the EPB system should preferably receive a signal indicating the operational status of the EHB system. With such an arrangement, whenever the EHB is working correctly, then the EPB would receive the EHB status signal and respond only to the normal parking-brake control. On the other hand, if the EHB status signal is not received by the ECU of the EPB, indicating that the EHB is not operational

then the parking braking will be allowed to respond, not only to the parking brake control but also to the operation of the brake pedal. Braking will then be obtained from both the push-through operation and EPB.

In some embodiments of such a system, there could be the problem that failure of the status signal link between the ECUs in the EHB and the EPB, for example by way of an open-circuit connector fault, could allow the EPB to operate in response to brake pedal signals at times when the EHB was actually still operational. The additional brake torque resulting from both systems operating together could cause severe overbraking at the rear axle, with a consequential risk of vehicle instability.

To overcome this problem, it is preferred that electro-hydraulic braking at the rear axle of the vehicle is allowed only when a control unit of the electro-hydraulic braking means has confirmation that the electric parking means is in a satisfactory operational state.

The system can include electronic control units for controlling electro-hydraulic braking and electric parking braking, respectively, which are interconnected such that electro-hydraulic braking at the rear axle of the vehicle is allowed only when the control unit for electro-hydraulic braking has confirmation from the control unit for electric parking braking that the electric parking means is in said satisfactory operational state.

Advantageously, the control unit for electro-hydraulic braking is arranged to provide a first status signal to the control unit for electric parking braking whereby whenever a status signal indicative of the electro-hydraulic

braking means being in a satisfactory operational state is received by the control unit for electric parking braking, the electric braking means responds only to parking braking control.

Also advantageously, the control unit for electric parking braking is arranged to direct a second status signal to the control unit for electro-hydraulic braking for providing said confirmation that the electric parking braking means is in said satisfactory operational state.

Preferably, said first and second status signals are transferred between the control units via a common link whereby if the link itself fails, neither status signal is transferred between the two control units.

The invention is described further hereinafter, by way of example only, with reference to the accompanying drawings, in which:-

FIG. 1 is a schematic illustration of one embodiment of an electro-hydraulic braking system to which the present invention is applicable; and

FIGS. 2a and 2b are sequence flow diagrams illustrating one possible routine for the operation of an embodiment in accordance with the present invention.

Referring first to Fig. 1, the illustrated EHB system comprises a brake pedal 10 with an associated sensor 12 for the acquisition of the driver's braking demand. The driver's demand is transferred to an electronic control unit (ECU) 13, evaluated there, and used as the source for the generation of electrical control signals for proportional solenoid control valves 14a, 14b,

14c, 14d, a hydraulic pump 16, wheel brakes 18a, 18b of one axle supplied with hydraulic fluid by electrically actuated brake channels 20a, 20b and wheel brakes 18c, 18d of the other axle supplied by electrically actuated channels 20c, 20d. Hydraulic fluid for the system is stored in a reservoir 21.

Under normal braking conditions, brake pressure modulation in the electrically actuated brake channels 20a, 20b, 20c, 20d is effected in a known manner by means of the proportional solenoid control valves 14a, 14b, 14c and 14d, the brake pressure being provided by a pressure accumulator/reservoir 22 whose pressure is maintained by the pump 16 operated by an electric motor 18.

Pressure sensors 24a and 24b monitor the hydraulic pressure at the wheel brakes 18a, 18b of the front axle and pressure sensors 24c and 24d monitor the hydraulic pressure at the wheel brakes 18c, 18d of the rear axle. Further pressure sensors 26, 28 monitor the pressure within push-through circuits 27a, 27b for the right and left front wheel brakes and a pressure sensor 30 monitors the supply pressure in the accumulator/reservoir 22. Respective solenoids 29 and 31 enable the brake channels 20a, 20b and 20c, 20d to be coupled together.

The push-through circuits 27a, 27b include respective solenoid controlled valves 32a, 32b to enable these circuits to be closed (open-circuited) during normal brake-by-wire operation.

The push-through arrangement includes a master-cylinder 34 coupled to the brake pedal 10 and to the circuits 27a, 27b, the master cylinder

enabling the front brakes to be actually manually in the event of failure of the brake-by-wire system. Coupled to the circuit 27b via a solenoid operated valve 36 is a travel simulator 38 which is activated hydraulically by master-cylinder pressure to give "feel" to the driver during push-through operation of the brakes. The connection between the master cylinder 34 and the travel simulator 38 is controllable by the electrically operated valve 36, so that unnecessary pedal travel can be avoided during manual actuation by closure of this valve.

Also shown diagrammatically in Fig. 1 is an electronic parking brake (EPB) control arrangement comprising an EPB, ECU 40 and a park brake actuator/control 42 by which at least some of the brake actuators 18 can be operated electrically, for example by way of respective electric motors, to apply the foundation brakes for vehicle parking purposes.

The system described thus far is already known.

In the illustrated embodiment of the present invention, there is provided a first link between the EHB and the EPB which is arranged to carry a status signal from the EHB to the EPB which shows the status of the EHB and in particular indicates to the EPB when the EHB is not functioning correctly. Whenever the EHB is functioning correctly, then the EPB is advised accordingly via the link 44a and is arranged to respond only to the parking brake control. However, if the EHB status signal is not received by the EPB ECU via the link 44a, then the parking brake is allowed to respond to brake-pedal operation, as well as to parking brake control.

In addition to the link 44a, the illustrated embodiment includes a second link 44b carrying a second status signal, this time from the EPB to the EHB. In practice, the links 44a,44b would be carried by the same wire/bus in different time slots in accordance with conventional techniques. The EHB is programmed such that EHB braking of the rear axle is allowed only when the EPB status signal indicates that the park-brake system is correct.

Thus, if the link 44a/44b carrying the status signals is intact and if the status signal is received by the EPB showing that the EHB is working correctly, then the EPB will work only in response to the parking-brake (EPB) control and it is not possible for overbraking to occur by the EHB and EPB being actuated together. Furthermore, the EHB will work normally, with braking taking place at the brake actuators of both the front and rear axles.

However, if the link 44a/44b fails for any reason, for example because of an open circuit fault then as well as the EPB receiving no status signal from the EHB the EHB receives no status signal from the EPB and is therefore constrained to work only on the front brakes (braking of the rear wheels being disabled as described above).

Thus, if the reason why the EPB receives no status signal from the EHB is that the link 44a is faulty rather than because the EHB itself is not functional, then although the EHB remains functional it only operates on the front brakes and it is unlikely that severe overbraking would result.

However, because EPB is not designed for the application of precisely-known braking torque, there is still some risk that the EPB may

cause instability by locking the rear wheels. This problem can be addressed by arranging the system layout such that wheelspeed data is available to the EPB ECU, even at times when the EHB is not working (see Fig. 1). It is then possible to use the technique of EBA (Electronic Brake Apportioning) so that, if the wheels tend to lock, the brake is released and then re-applied to a lower torque level. Alternatively, the EPB can be controlled in a manner similar to ABS - i.e. to cyclically apply and release the parking brakes in response to wheel-speed data.

Simplified self explanatory flow diagrams illustrating the foregoing operation of the EHB and EPB systems are shown in Figs. 2a and 2b. The flow steps indicated in them diagrams are as follows:

50 - Start

52 - Is EPB status OK ?

54 - Normal EHB function

56 - Inhibit rear EHB braking

58 - Finish

60 - Start

62 - Is EHB status OK ?

64 - Normal EPB function (no response to pedal movement)

66 - EPB permitted to respond to pedal movement

68 - Finish

CLAIMS

1. A vehicle braking system comprising an electro-hydraulic braking means of the type which operates normally in a brake-by-wire mode wherein hydraulic pressure is applied to braking devices at the vehicle wheels in proportion to the driver's braking demand as sensed electronically at a brake pedal, and which, if the brake-by-wire mode should fail, operates in a push-through mode wherein hydraulic pressure is applied to the braking devices at the vehicle wheels by way of a master cylinder coupled mechanically to the brake pedal, and an electric parking braking means for enabling the braking devices to be actuated for parking braking purposes, wherein for supplementing the push-through braking provided by the electro-hydraulic braking means in the event that the brake-by-wire mode has failed, it is arranged that the operation of the foot pedal by the driver also causes operation of the electric parking braking.

2. A vehicle braking system as claimed in claim 1, wherein it is arranged that electro-hydraulic brake at the rear axle of the vehicle is allowed only when a control unit of the electro-hydraulic braking means has confirmation that the electric parking means is in a satisfactory operational state.

3. A vehicle braking system as claimed in claim 2, which includes electronic control units for controlling electro-hydraulic braking and electric parking braking respectively, which are interconnected such that electro-hydraulic braking at the rear axle of the vehicle is allowed only when


the control unit for electro-hydraulic braking has confirmation from the control unit for electric parking braking that the electric parking means is in said satisfactory operational state.

4. A vehicle braking system as claimed in claim 3, wherein the control unit for electro-hydraulic braking is arranged to provide a first status signal to the control unit for electric parking braking whereby whenever a status signal indicative of the electro-hydraulic braking means being in a satisfactory operational state is received by the control unit for electric parking braking, the electric braking means responds only to parking braking control.



5. A vehicle braking system as claimed in claim 4, wherein the control unit for electric parking braking is arranged to direct a second status signal to the control unit for electro-hydraulic braking for providing said confirmation that the electric parking braking means is in said satisfactory operational state.

6. A vehicle braking system as claimed in claim 5 wherein said first and second status signals are transferred between the control units via a common link whereby if the link itself fails, neither status signal is transferred between the two control units.

7. A vehicle braking system substantially as hereinbefore described, with reference to and as illustrated in the accompanying drawings.

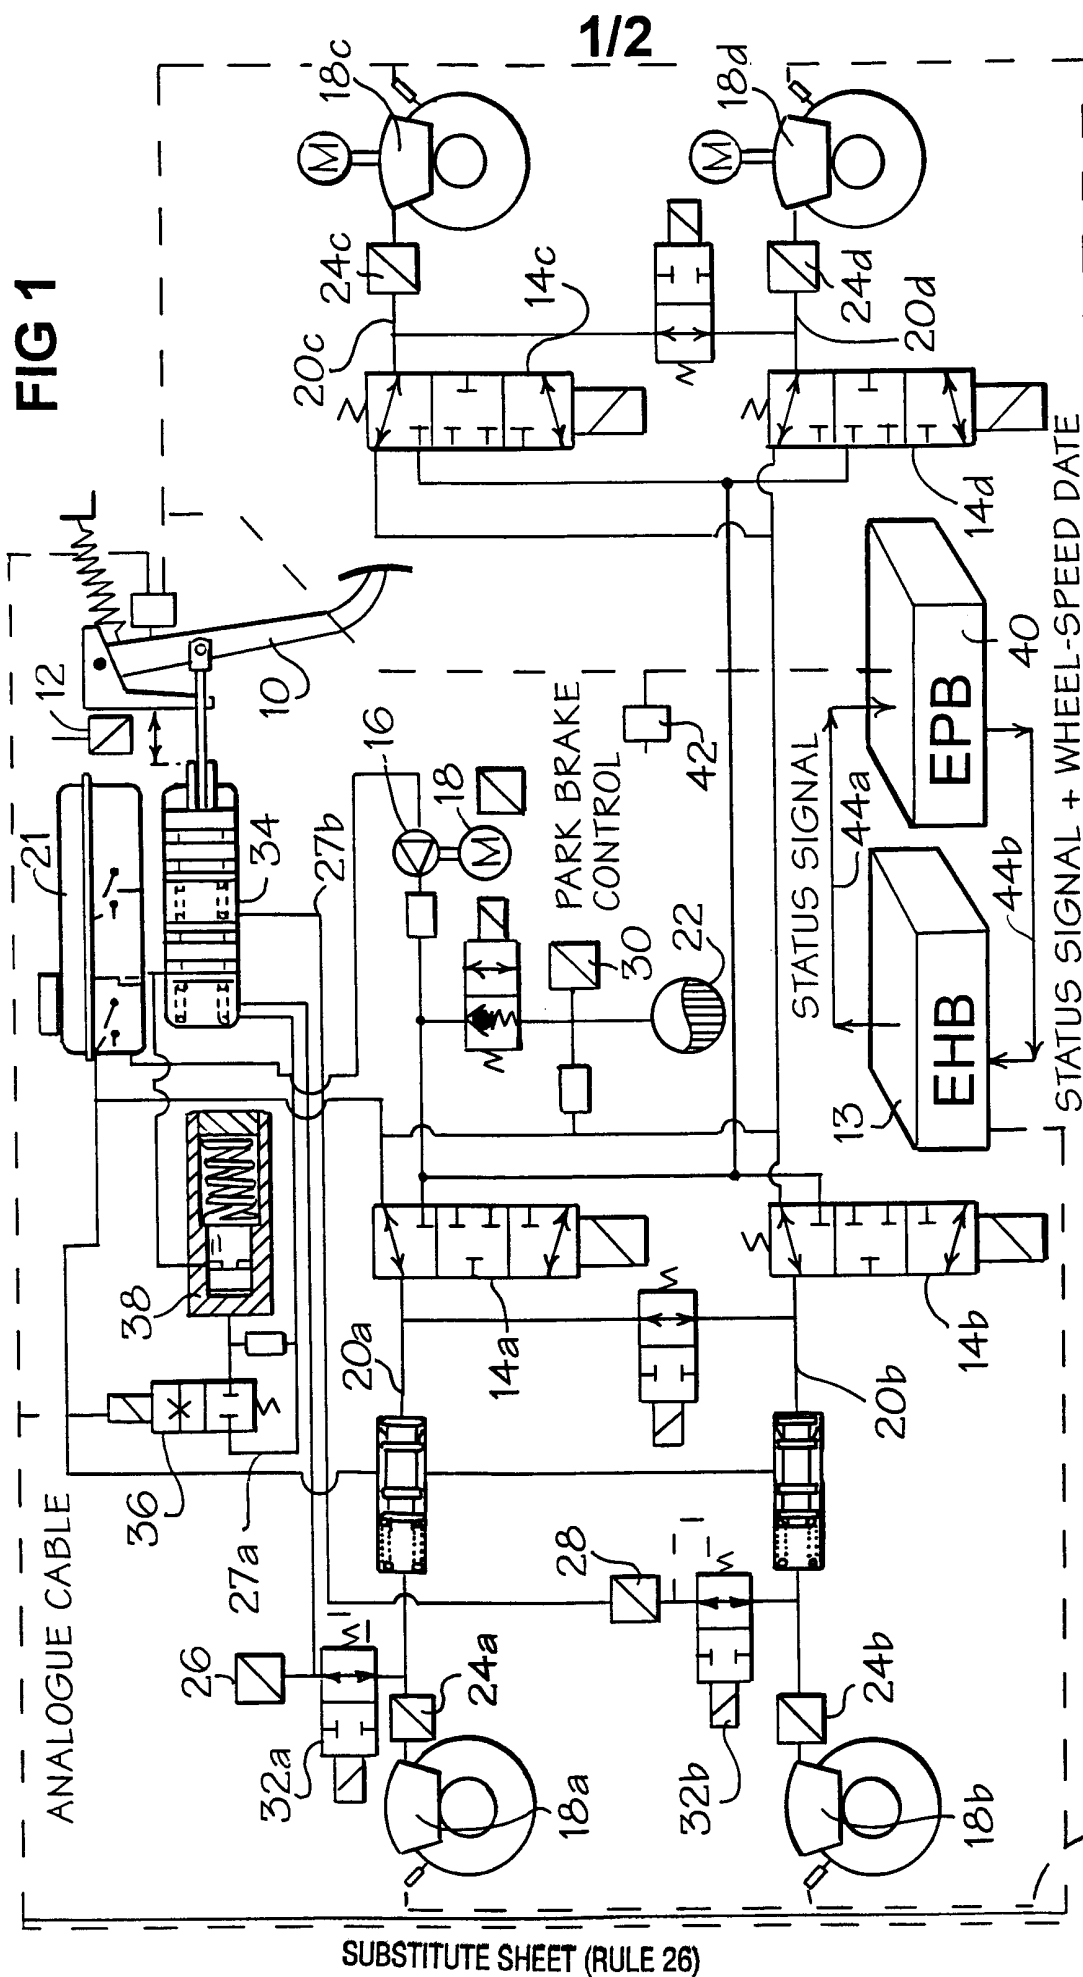

2/2
EHB LOGIC

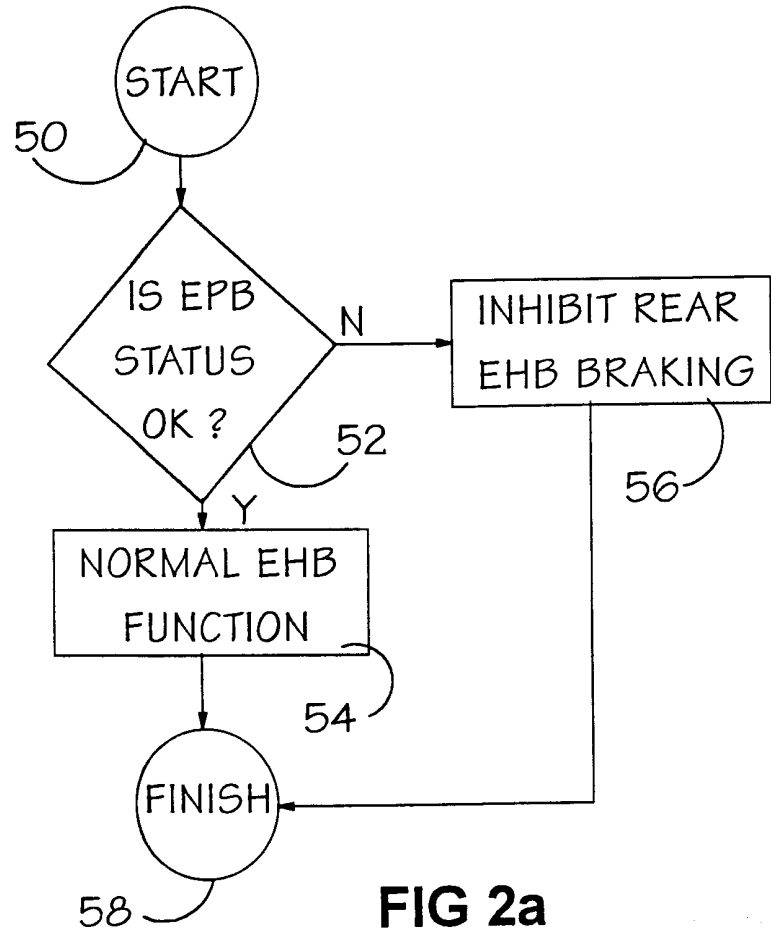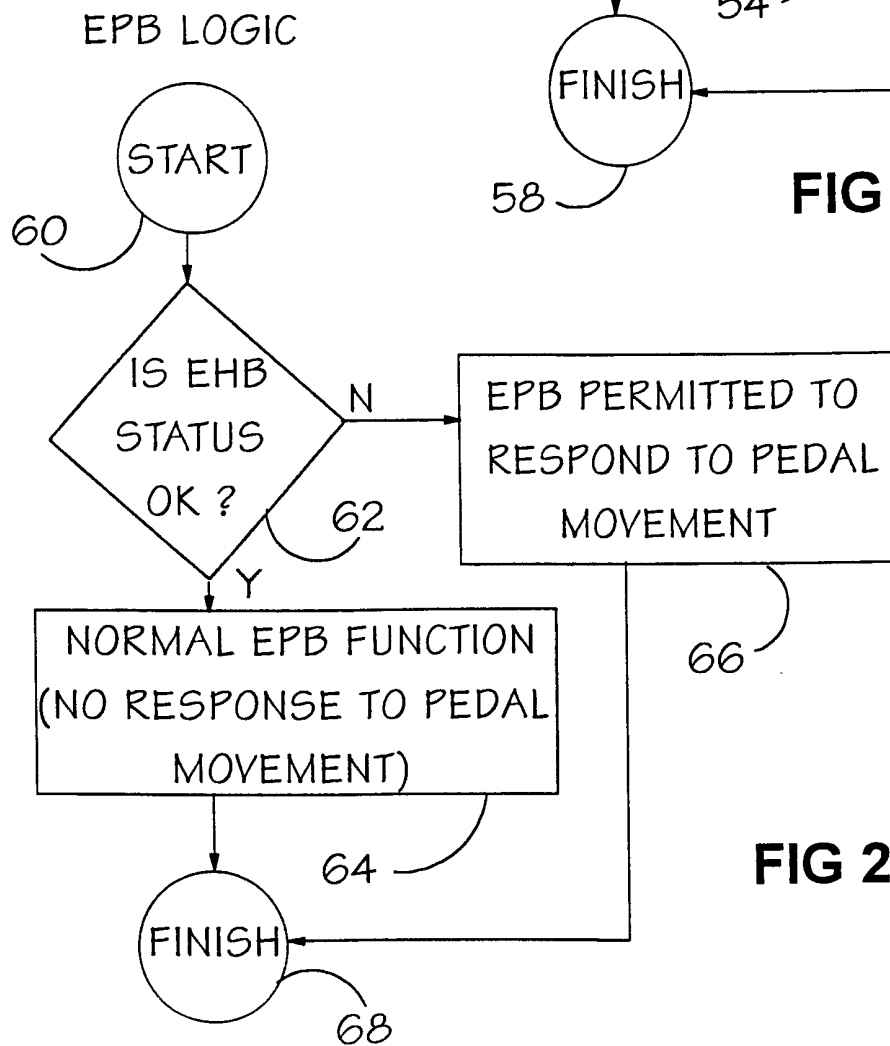**FIG 2a****FIG 2b**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/01126

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60T8/88 B60T13/66 B60T13/74 B60T17/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 196 53 541 A (AUDI NSU AUTO UNION AG) 25 June 1998 (1998-06-25) column 2, line 32 - line 57 ----	1,7
A	US 5 139 315 A (VILLEC GEORGE N ET AL) 18 August 1992 (1992-08-18) column 7, line 47 -column 8, line 4 ----	1,7
A	US 4 804 073 A (TAIG ALISTAIR G ET AL) 14 February 1989 (1989-02-14) column 5, line 17 - line 42; figures 12,13 ----	1,7
P,A	DE 197 58 289 A (ITT MFG ENTERPRISES INC) 1 July 1999 (1999-07-01) column 3, line 39 -column 4, line 32 -----	1,7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 July 2000

Date of mailing of the international search report

14/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Blurton, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/01126

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19653541 A	25-06-1998	NONE	
US 5139315 A	18-08-1992	NONE	
US 4804073 A	14-02-1989	AU 617965 B AU 3427989 A BR 8907354 A CA 1319894 A DE 68901721 D DE 68901721 T EP 0419492 A ES 2014606 A JP 6068303 B JP 3500918 T KR 9302425 B WO 8910496 A	05-12-1991 24-11-1989 26-03-1991 06-07-1993 09-07-1992 11-02-1993 03-04-1991 16-07-1990 31-08-1994 28-02-1991 30-03-1993 02-11-1989
DE 19758289 A	01-07-1999	NONE	