

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(10) International Publication Number

WO 2020/128495 A1

(43) International Publication Date  
25 June 2020 (25.06.2020)

(51) International Patent Classification:  
*H01M 4/04* (2006.01)      *H01M 4/36* (2006.01)  
*H01M 4/133* (2010.01)      *H01M 4/38* (2006.01)  
*H01M 4/134* (2010.01)

(71) Applicant: NEXEON LIMITED [GB/GB]; 136 Eastern Avenue, Milton Park, Abingdon Oxfordshire OX14 4SB (GB).

(21) International Application Number:  
PCT/GB2019/053640

(72) Inventors: MASON, Charles A.; 136 Eastern Avenue, Milton Park, Abingdon, Oxford Oxfordshire OX144SB (GB). TAYLOR, Richard Gregory; 140 South Road, Sully, Penarth South Wales CF64 5SP (GB). FRIEND, Christopher Michael; Long View, High Street, Long Wittenham Oxfordshire OX14 4QD (GB).

(22) International Filing Date:  
19 December 2019 (19.12.2019)

(74) Agent: GILL JENNINGS & EVERY LLP et al.; The Broadgate Tower, 20 Primrose Street, London Greater London EC2A 2ES (GB).

(25) Filing Language:  
English


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(26) Publication Language:  
English

(30) Priority Data:  
1820695.3      19 December 2018 (19.12.2018) GB  
16/274,187      12 February 2019 (12.02.2019) US  
1912991.5      09 September 2019 (09.09.2019) GB

(54) Title: ELECTROACTIVE MATERIALS FOR METAL-ION BATTERIES

FIGURE 1

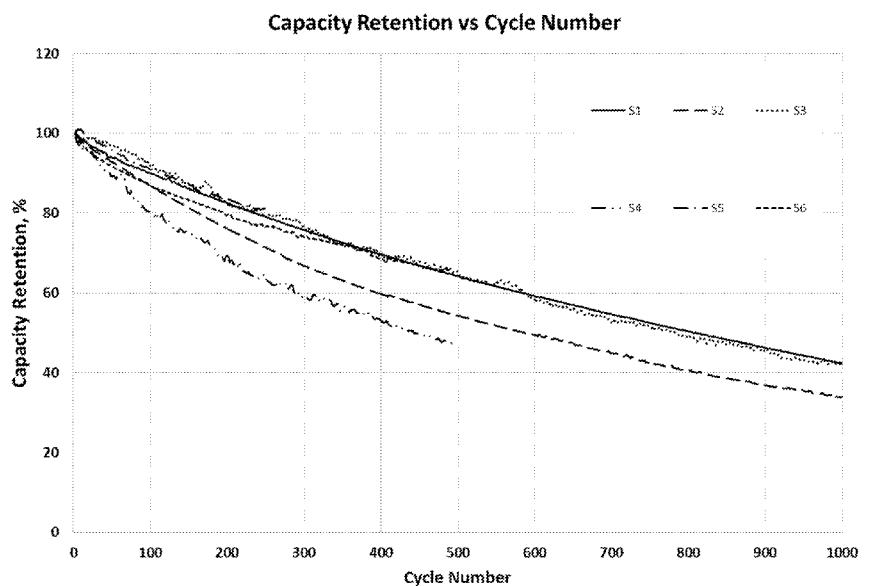

(57) **Abstract:** The invention relates to a particulate material comprising a plurality of composite particles, wherein the composite particles comprise: (a) a porous carbon framework comprising micropores and mesopores having a total pore volume of at least 0.6 cm<sup>3</sup>/g, where the volume fraction of micropores is in the range from 0.1 to 0.9 and the volume fraction of pores having a pore diameter no more than 20 nm is at least 0.75, and the porous carbon framework has a D<sub>50</sub> particle size of less than 20 µm; (b) silicon located within the micropores and/or mesopores of the porous carbon framework in a defined amount relative to the volume of the micropores and/or mesopores.

WO 2020/128495 A1

[Continued on next page]



KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## Electroactive Materials for Metal-Ion Batteries

This invention relates in general to electroactive materials that are suitable for use in electrodes for rechargeable metal-ion batteries, and more specifically to particulate materials having high electrochemical capacities that are suitable for use as anode active materials in rechargeable metal-ion batteries. The particulate electroactive materials of the invention have particular utility in hybrid anodes comprising two or more different electroactive materials.

Rechargeable metal-ion batteries are widely used in portable electronic devices such as mobile telephones and laptops and are finding increasing application in electric or hybrid vehicles. Rechargeable metal-ion batteries generally comprise an anode layer, a cathode layer, an electrolyte to transport metal ions between the anode and cathode layers, and an electrically insulating porous separator disposed between the anode and the cathode. The cathode typically comprises a metal current collector provided with a layer of metal ion containing metal oxide based composite, and the anode typically comprises a metal current collector provided with a layer of an electroactive material, defined herein as a material which is capable of inserting and releasing metal ions during the charging and discharging of a battery. For the avoidance of doubt, the terms "cathode" and "anode" are used herein in the sense that the battery is placed across a load, such that the cathode is the positive electrode and the anode is the negative electrode. When a metal-ion battery is charged, metal ions are transported from the metal-ion-containing cathode layer via the electrolyte to the anode and are inserted into the anode material. The term "battery" is used herein to refer both to a device containing a single anode and a single cathode and to devices containing a plurality of anodes and/or a plurality of cathodes.

There is interest in improving the gravimetric and/or volumetric capacities of rechargeable metal-ion batteries. The use of lithium-ion batteries has already provided a substantial improvement when compared to other battery technologies, but there remains scope for further development. To date, commercial lithium-ion batteries have largely been limited to the use of graphite as an anode active material. When a graphite anode is charged, lithium intercalates between the graphite layers to form a material with the empirical formula  $\text{Li}_x\text{C}_6$  (wherein x is greater than 0 and less than or equal to 1). Consequently, graphite has a maximum theoretical capacity of 372 mAh/g in a lithium-ion battery, with a practical capacity that is somewhat lower (ca. 340 to 360 mAh/g). Other materials, such as silicon, tin and germanium, are capable of intercalating lithium with a significantly higher capacity than graphite but have yet to find widespread commercial use due to difficulties in maintaining sufficient capacity over numerous charge/discharge cycles.

Silicon in particular has been identified as a promising alternative to graphite for the manufacture of rechargeable metal-ion batteries having high gravimetric and volumetric capacities because of its

very high capacity for lithium (see, for example, Insertion Electrode Materials for Rechargeable Lithium Batteries, Winter, M. *et al.* in *Adv. Mater.* 1998, 10, No. 10). At room temperature, silicon has a theoretical maximum specific capacity in a lithium-ion battery of about 3,600 mAh/g (based on  $\text{Li}_{15}\text{Si}_4$ ). However, the use of silicon as an anode material is complicated by large volumetric 5 changes on charging and discharging.

Intercalation of lithium into bulk silicon leads to a large increase in the volume of the silicon material, up to 400% of its original volume when silicon is lithiated to its maximum capacity, and repeated charge-discharge cycles cause significant mechanical stress in the silicon material, resulting in fracturing and delamination of the silicon anode material. Volume contraction of silicon 10 particles upon delithiation can result in a loss of electrical contact between the anode material and the current collector. A further difficulty is that the solid electrolyte interphase (SEI) layer that forms on the silicon surface does not have sufficient mechanical tolerance to accommodate the expansion and contraction of the silicon. As a result, newly exposed silicon surfaces lead to further electrolyte decomposition and increased thickness of the SEI layer and irreversible consumption of 15 lithium. These failure mechanisms collectively result in an unacceptable loss of electrochemical capacity over successive charging and discharging cycles.

A number of approaches have been proposed to overcome the problems associated with the volume change observed when charging silicon-containing anodes. The most widespread approach to address the irreversible capacity loss of silicon-containing anodes is to use some form 20 of finely structured silicon as the electroactive material. It has been reported that fine silicon structures below around 150 nm in cross-section, such as silicon films and silicon nanoparticles are more tolerant of volume changes on charging and discharging when compared to silicon particles in the micron size range. However, neither of these is particularly suitable for commercial scale applications in their unmodified form; nanoscale particles are difficult to prepare and handle 25 and silicon films do not provide sufficient bulk capacity. For example, nanoscale particles tend to form agglomerates, making it difficult to obtain a useful dispersion of the particles within an anode material matrix. In addition, the formation of agglomerates of nanoscale particles results in an unacceptable capacity loss on repeated charge-discharge cycling.

Ohara *et al.* (*Journal of Power Sources* 136 (2004) 303-306) have described the evaporation of 30 silicon onto a nickel foil current collector as a thin film and the use of this structure as the anode of a lithium-ion battery. Although this approach gives good capacity retention, the thin film structures do not give useful amounts of capacity per unit area, and any improvement is eliminated when the film thickness is increased.

WO 2007/083155 discloses that improved capacity retention may be obtained through the use of silicon particles having high aspect ratio, i.e. the ratio of the largest dimension to the smallest dimension of the particle.

It is also known in general terms that electroactive materials such as silicon may be deposited 5 within the pores of a porous carrier material, such as an activated carbon material. These composite materials provide some of the beneficial charge-discharge properties of nanoscale silicon particles while avoiding the handling difficulties of nanoparticles. For instance, Guo *et al.* (Journal of Materials Chemistry A, 2013, pp.14075-14079) discloses a silicon-carbon composite material in which a porous carbon substrate provides an electrically conductive framework with 10 silicon nanoparticles deposited within the pore structure of the substrate with uniform distribution. SEI formation over the initial charging cycles is confined to the remaining pore volume such that the remaining silicon is not exposed to the electrolyte in subsequent charging cycles. It is shown that the composite material has improved capacity retention over multiple charging cycles, however the initial capacity of the composite material in mAh/g is significantly lower than for silicon 15 nanoparticles.

JP2003100284 discloses an active material comprising a carbon-based scaffold with small pores branching off from a few larger pores. An electroactive material (e.g. silicon) is indiscriminately located on the walls of both large and small pores and on the external surface of the carbon-based scaffold.

20 Despite the efforts to date, there is a continued need for improvements in the electrochemical storage capacity of lithium-ion batteries. Although one long-term objective is to develop electrodes containing a high proportion of silicon as the electroactive material, another objective of battery manufacturers is to identify ways of using small amounts of silicon to supplement the capacity of graphite anodes. A current focus is therefore on obtaining incremental improvements to existing 25 metal-ion battery technology through the use of "hybrid" electrodes comprising a combination of graphite and Si-based electroactive materials rather than a wholesale transition from graphite anodes to silicon anodes.

The use of hybrid electrodes presents challenges of its own. Any additional electroactive material 30 must be provided in a form which is compatible with the graphite particulate forms conventionally used in metal-ion batteries. For example, it must be possible to disperse the additional electroactive material throughout a matrix of graphite particles and the particles of the additional electroactive material must have sufficient structural integrity to withstand compounding with graphite particles and subsequent formation of an electrode layer, for example via steps such as compressing, drying and calendering.

Furthermore, differences in the metallation properties of graphite and other electroactive materials must be taken into account when developing hybrid anodes. For example, in the lithiation of a silicon-graphite hybrid anode in which graphite constitutes at least 50 wt% of the electroactive material, the silicon needs to be lithiated to its maximum capacity to gain the capacity benefit from 5 all the electroactive material. Whereas in a non-hybrid silicon electrode, the silicon material would generally be limited to ca. 25 to 60% of its maximum gravimetric capacity during charge and discharge so as to avoid placing excessive mechanical stresses on the silicon material and a resultant reduction in the overall volumetric capacity of the cell, this option is not available in hybrid electrodes. Consequently, the silicon material must be able to withstand very high levels of 10 mechanical stress through repeated charge and discharge cycles.

There is therefore a need in the art for silicon-containing electroactive materials that combine high lithiation capacity with sufficient capacity retention and structural stability over multiple charge-discharge cycles. In particular, materials that are used to supplement conventional electroactive materials, such as graphite, would need to maintain capacity and structural stability when 15 repeatedly lithiated to their maximum capacity. The present invention addresses this issue by providing a particulate material comprising a porous carbon framework and a plurality of nanoscale domains of elemental silicon located within the pores of the porous carbon framework. The pore structure of the porous carbon framework and the ratio of silicon to the available pore volume of the porous carbon framework are each carefully controlled to obtain optimum performance, particularly 20 under the demanding criteria required for hybrid electrodes.

In a first aspect, the invention provides a particulate material comprising a plurality of composite particles, wherein the composite particles comprise:

- (a) a porous carbon framework comprising micropores and mesopores, wherein
  - (i) the micropores and mesopores have a total pore volume as measured by 25 gas adsorption of  $P_1 \text{ cm}^3/\text{g}$ , wherein  $P_1$  has a value of at least 0.6,
  - (ii) the volume fraction of micropores ( $\Phi_a$ ) is in the range from 0.1 to 0.9, based on the total volume of micropores and mesopores;
  - (iii) the volume fraction of pores having a pore diameter of no more than 20 nm ( $\Phi_{20}$ ) is at least 0.75, based on the total volume of micropores and mesopores, and
  - (iv) the porous carbon framework has a  $D_{50}$  particle size of less than 20  $\mu\text{m}$ ;
- (b) a plurality of nanoscale domains of elemental silicon located within the micropores and/or mesopores of the porous carbon framework;

wherein the weight ratio of silicon to the porous carbon framework in the composite particles is in the range from  $[1 \times P_1 \text{ to } 2.2 \times P_1] : 1$ .

The invention therefore relates to a particulate material in which the porous carbon framework comprises both micropores and mesopores with a minimum total volume of at least 0.6 cm<sup>3</sup>/g. The total volume of micropores and mesopores is represented herein as P<sub>1</sub> cm<sup>3</sup>/g. P<sub>1</sub> itself is a dimensionless quantity having a value of at least 0.6 which is also used to correlate the available pore volume to the weight ratio of silicon in the particulate material.

5

In accordance with conventional IUPAC terminology, the term "micropore" is used herein to refer to pores of less than 2 nm in diameter, the term "mesopore" is used herein to refer to pores of 2-50 nm in diameter, and the term "macropore" is used to refer to pores of greater than 50 nm diameter.

The pore volume is distributed between micropores and mesopores such that the volume fraction 10 of micropores is in the range of 0.1 to 0.9, based on the total volume of micropores and mesopores. The volume fraction of micropores (based on the total volume of micropores and mesopores) is represented herein by the symbol  $\Phi_a$  and the volume fraction of mesopores (based on the total volume of micropores and mesopores) is represented by the symbol  $\Phi_b$ , and therefore it will be understood that  $\Phi_a + \Phi_b = 1$ .

15 The porous carbon framework is also defined by a pore volume that is substantially skewed towards smaller pores, such that a minimum of 75% of the total micropore and mesopore volume is in the form of pores having a diameter of no more than 20 nm. The volume fraction of pores having a diameter of no more than 20 nm (based on the total volume of micropores and mesopores) is represented herein by the symbol  $\Phi_{20}$ , with the symbols  $\Phi_{10}$  and  $\Phi_5$  being used to 20 define the corresponding volume fractions of pores having diameters of no more than 10 nm and no more than 5 nm, respectively.

The porous carbon framework is furthermore defined by a D<sub>50</sub> particle size of less than 20 µm. For the avoidance of doubt, P<sub>1</sub> as used herein relates to the pore volume of the porous carbon framework when measured in isolation, i.e. in the absence of silicon or any other material 25 occupying the pores of the porous carbon framework. Similarly, the references herein to the volume of micropores, mesopores and macropores in the porous carbon framework, and any references to the distribution of pore volume within the porous carbon framework, refer to the internal pore volume of the porous carbon framework in isolation (i.e. in the absence of any silicon or other materials occupying the pore volume).

30 The weight ratio of silicon to the porous carbon framework in the composite particles is in the range from [1×P<sub>1</sub> to 2.2×P<sub>1</sub>] : 1. The weight ratio of silicon to the porous carbon framework is therefore proportional to the available pore volume in the porous carbon framework, such that a weight ratio

of  $[1 \times P_1] : 1$  corresponds to around 43% v/v occupancy of the pores of the porous carbon framework by silicon, taking into account silicon density of around  $2.3 \text{ g/cm}^3$ . The upper limit of the ratio at  $[2.2 \times P_1] : 1$  corresponds to around 95% v/v occupancy of the pores of the porous carbon framework by silicon. Typically these ratios are calculated on the basis of pure carbon and pure silicon.

5

Elemental silicon is located in the micropores and/or mesopores in the form of a plurality of nanoscale silicon domains. As used herein, the term "nanoscale silicon domain" refers to a nanoscale body of silicon that is located within the pores of the porous carbon framework. The maximum dimensions of the nanoscale silicon domains are defined by the pore diameters of the pores in which the silicon is located.

10

The invention therefore relates in general terms to a particulate material in which nanoscale domains of silicon occupy a substantial fraction of the pore volume of a porous carbon framework in which the pore volume is distributed between both small mesopores (of no more than 20 nm diameter) and micropores. It has been found that this particle architecture provides an electroactive material with very high gravimetric and volumetric capacity on lithiation and high reversible capacity retention over multiple charge-discharge cycles.

15

Without being bound by theory, it is believed that locating nanoscale silicon domains within small mesopores and/or micropores firstly provides fine silicon structures which are able to lithiate and delithiate without excessive structural stress. It is believed that these very fine silicon domains have a lower resistance to elastic deformation and higher fracture resistance than larger silicon structures. By ensuring that a relatively high proportion of the pore volume is occupied by silicon, the particulate material of the invention has a high capacity. Furthermore, by locating nanoscale silicon domains within small mesopores and/or micropores as described above, only a small area of silicon surface is accessible to electrolyte and SEI formation is therefore limited.

20

It has been found by the present inventors that the twin objectives of obtaining high capacity and high reversible capacity retention depend on careful control of the distribution of pore sizes. Although very fine silicon structures within micropores might be expected to lithiate reversibly most effectively, it has been found that porous carbon frameworks with an excessive micropore fraction can accommodate sub-optimal amounts of silicon, such that the volumetric capacity of the material is low. Without being bound by theory, it is believed that deposition of silicon into very highly microporous carbon frameworks results in the formation of silicon structures (such as caps or walls) which block access to unoccupied pore volume, thus limiting the silicon loading that is achievable.

25

30

However, if silicon is deposited into carbon frameworks having a very high degree of mesoporosity, then the silicon nanostructures are undesirably large and the carbon wall thickness is increased. As a result, although higher volumetric capacity can be achieved, both the silicon nanostructures and the porous carbon framework are subjected to excessive structural strain during lithiation – 5 particularly when lithiated to maximum capacity, as is the case in hybrid anodes that also comprise graphite as an electroactive material. This excessive structural strain can result in fracturing of the silicon nanostructures and the porous carbon framework. Additional exposure of silicon from the fracture surfaces to the electrolyte in subsequent charge-discharge cycles then means that SEI formation can become a significant failure mechanism leading to capacity loss. By controlling the 10 relative volume fractions of micropores and mesopores and by ensuring that the mesopore volume is largely confined to pores below 20 nm, the particulate material of the invention avoids these failure mechanisms and maintains high reversible capacity over multiple charge-discharge cycles while also accommodating a large relative proportion of silicon within the pore volume of the porous carbon framework. This stands in clear contrast to the excessive and unconstrained SEI 15 formation that characterises the material disclosed by Guo, for example (see above).

Although lithiation of the silicon may result in a degree of external expansion of the entire composite material, the careful control of the micropore and mesopore volume fractions and the size distribution of the mesopore volume fraction towards smaller pore diameters ensures that the particulate material is able to deform reversibly without fracturing over multiple charge-discharge 20 cycles. Stress on the carbon framework and the silicon material is therefore controlled at a level that is tolerated over large numbers of charge-discharge cycles without substantial loss of capacity.

As a result of the unique particle architecture of the inventive composite material, the silicon in the particulate material of the invention has electrochemical performance that is comparable to that of fine silicon nanoparticles but without the disadvantages of excessive SEI formation and poor 25 dispersibility that make discrete silicon nanoparticles non-viable as an electrode material for commercial use. The relatively high volumetric content of silicon of the particulate material makes it particularly suitable for use as a component of hybrid anodes.

The porous carbon framework suitably comprises a three-dimensionally interconnected open pore network comprising a combination of micropores and/or mesopores and optionally a minor volume 30 of macropores. The porous carbon framework is characterised by a high pore volume in the form of micropores and/or mesopores. The total volume of micropores and mesopores (i.e. the total pore volume in the range of 0 to 50 nm) is referred to herein as  $P_1$  cm<sup>3</sup>/g, wherein  $P_1$  represents a dimensionless natural number having a value of at least 0.6. As set out above, the value of  $P_1$  is also used to correlate the available pore volume in the porous carbon framework to the weight ratio 35 of silicon to the porous carbon framework as set out above.

Preferably, the value of  $P_1$  is at least 0.65, or at least 0.7, or at least 0.75, or at least 0.8, or at least 0.85, or at least 0.9, or at least 0.95, or at least 1. More preferably, the value of  $P_1$  is at least 0.7, or at least 0.75, or at least 0.8, or at least 0.85. Optionally, the total volume of micropores and mesopores may be greater than 1 cm<sup>3</sup>/g, for instance,  $P_1$  may be at least 1.05, or at least 1.1, or at least 1.15, or at least 1.2.

The use of a high porosity carbon framework is advantageous since it allows a larger amount of silicon to be accommodated within the pore structure, and it has been found that high porosity carbon frameworks in which the pore volume is predominantly in the form of micropores and smaller mesopores have sufficient strength to accommodate the volumetric expansion of the silicon without fracturing or otherwise degrading the porous carbon framework.

The internal pore volume of the porous carbon framework is capped at a value at which increasing fragility of the porous carbon framework outweighs the advantage of increased pore volume accommodating a larger amount of silicon. In general, the value of  $P_1$  may be no more than 2.2. However, preferably, the value of  $P_1$  may be no more than 2, or no more than 1.8, or no more than 1.6, or no more than 1.5, or no more than 1.4, or no more than 1.3, or no more than 1.2, or no more than 1.1, or no more than 1.0, or no more than 0.9. More preferably, the value of  $P_1$  is no more than 1.2, or no more than 1.1, or no more than 1.0, or no more than 0.9.

In accordance with the invention, the value of  $P_1$  may be, for instance, in the range from 0.6 to 2 (i.e. a total volume of micropores and mesopores of 0.6 to 2 cm<sup>3</sup>/g). For instance,  $P_1$  may be in the range from 0.6 to 1.8, or in the range from 0.65 to 1.8, or in the range from 0.7 to 1.8, or in the range from 0.75 to 1.8, or in the range from 0.8 to 1.8, or in the range from 0.85 to 1.8, or in the range from 0.9 to 1.8, or in the range from 0.65 to 1.7, or in the range from 0.7 to 1.7, or in the range from 0.75 to 1.7, or in the range from 0.8 to 1.7, or in the range from 0.85 to 1.7, or in the range from 0.9 to 1.7, or in the range from 0.95 to 1.7, or in the range from 0.7 to 1.6, or in the range from 0.75 to 1.6, or in the range from 0.8 to 1.6, or in the range from 0.85 to 1.6, or in the range from 0.9 to 1.6, or in the range from 0.95 to 1.6, or in the range from 1 to 1.6, or in the range from 0.75 to 1.5, or in the range from 0.8 to 1.5, or in the range from 0.85 to 1.5, or in the range from 0.9 to 1.5, or in the range from 0.95 to 1.5, or in the range from 1 to 1.5, or in the range from 0.8 to 1.4, or in the range from 0.85 to 1.4, or in the range from 0.9 to 1.4, or in the range from 0.95 to 1.4, or in the range from 1 to 1.4.

Preferably, the value of  $P_1$  may be, for instance, in the range from 0.6 to 1.4, or in the range from 0.65 to 1.4, or in the range from 0.7 to 1.4, or in the range from 0.75 to 1.4 or in the range from 0.6 to 1.3, or in the range from 0.65 to 1.3, or in the range from 0.7 to 1.3, or in the range from 0.75 to 1.3 or in the range from 0.6 to 1.2, or in the range from 0.65 to 1.2, or in the range from 0.7 to 1.2,

or in the range from 0.75 to 1.2, or in the range from 0.6 to 1, or in the range from 0.65 to 1, or in the range from 0.7 to 1, or in the range from 0.75 to 1, or in the range from 0.6 to 0.9, or in the range from 0.65 to 0.9, or in the range from 0.7 to 0.9, or in the range from 0.75 to 0.9.

5 The volume fraction of micropores ( $\Phi_a$ ) is preferably in the range from 0.15 to 0.85, more preferably in the range from 0.2 to 0.8.

Preferably,  $\Phi_a$  is in the range from 0.45 to 0.85, more preferably in the range from 0.5 to 0.8, more preferably in the range from 0.5 to 0.75, more preferably in the range from 0.5 to 0.7, to take particular advantage of the high capacity retention of very fine silicon nanostructures located within micropores. For example,  $\Phi_a$  may be in the range from 0.55 to 0.8, or in the range from 0.6 to 0.8, or in the range from 0.6 to 0.75.

10 Alternatively,  $\Phi_a$  may be in the range from 0.2 to 0.5, more preferably in the range from 0.3 to 0.5, to take particular advantage of the opportunity for high silicon loadings.

As discussed above, the pore volume that is substantially skewed towards smaller pores, such that a minimum of 75% of the total micropore and mesopore volume of the porous carbon framework is in the form of pores having a diameter of no more than 20 nm. More preferably,  $\Phi_{20}$  is at least 0.8, more preferably at least 0.85, more preferably at least 0.9.

15 Preferably,  $\Phi_{10}$  is at least 0.70, or at least 0.75, or at least 0.8, or at least 0.85, based on the total volume of micropores and mesopores. More preferably,  $\Phi_5$  is at least 0.75, or at least 0.8, or at least 0.85, based on the total volume of micropores and mesopores. Thus, in preferred 20 embodiments, at least 75% of the total micropore and mesopore volume of the porous carbon framework is in the form of pores having a diameter of no more than 10 nm, and more preferably no more than 5 nm.

25 A fraction of pores having diameters in the larger mesopore range may be advantageous to facilitate electrolyte access to the silicon domains. Therefore, pores having a diameter in the range of 10 to 50 nm (i.e. larger mesopores) may optionally constitute no more than 1%, or no more than 2%, or no more than 5%, or no more than 10% of the total micropore and mesopore volume of the porous carbon framework.

30 The volumetric ratio of micropores to mesopores in the porous carbon framework may range in principle from 100:0 to 0:100. Preferably, the volumetric ratio of micropores to mesopores is from 90:10 to 55:45, or from 90:10 to 60:40, or from 85:15 to 65:35.

The pore size distribution of the porous carbon framework may be monomodal, bimodal or multimodal. As used herein, the term “pore size distribution” relates to the distribution of pore size relative to the cumulative total internal pore volume of the porous carbon framework. A bimodal or multimodal pore size distribution may be preferred since close proximity between the smallest pores and pores of larger diameter provides the advantage of efficient ionic transport through the porous network to the silicon. Accordingly, the particulate material has high ionic diffusivity and therefore improved rate performance.

Suitably, a bimodal or multimodal pore size distribution includes a peak pore size in the micropore range and a peak pore size in the mesopore size range which differ from one another by a factor of 10 from 5 to 20, more preferably by a factor of about 10. For instance, the porous carbon framework may have a bimodal pore size distribution including a peak at a pore size of 1.5 nm and a peak at a pore size of 15 nm.

The total volume of micropores and mesopores and the pore size distribution of micropores and mesopores are determined using nitrogen gas adsorption at 77 K down to a relative pressure  $p/p_0$  of 15  $10^{-6}$  using quenched solid density functional theory (QSDFT) in accordance with standard methodology as set out in ISO 15901-2 and ISO 15901-3. Nitrogen gas adsorption is a technique that characterizes the porosity and pore diameter distributions of a material by allowing a gas to condense in the pores of a solid. As pressure increases, the gas condenses first in the pores of smallest diameter and the pressure is increased until a saturation point is reached at which all of 20 the pores are filled with liquid. The nitrogen gas pressure is then reduced incrementally, to allow the liquid to evaporate from the system. Analysis of the adsorption and desorption isotherms, and the hysteresis between them, allows the pore volume and pore size distribution to be determined. Suitable instruments for the measurement of pore volume and pore size distributions by nitrogen 25 gas adsorption include the TriStar II and TriStar II Plus porosity analyzers, which are available from Micromeritics Instrument Corporation, USA, and the Autosorb IQ porosity analyzers, which are available from Quantachrome Instruments.

Nitrogen gas adsorption is effective for the measurement of pore volume and pore size distributions for pores having a diameter up to 50 nm, but is less reliable for pores of much larger 30 diameter. For the purposes of the present invention, nitrogen adsorption is therefore used to determine pore volumes and pore size distributions only for pores having a diameter up to and including 50 nm. As set out above, the value of  $P_1$  is determined by taking into account only pores of diameter up to and including 50 nm (i.e. only micropores and mesopores), and the values of  $\Phi_a$ ,  $\Phi_b$ ,  $\Phi_{20}$ ,  $\Phi_{10}$ , and  $\Phi_5$  are likewise determined relative to the total volume of micropores and mesopores only.

In view of the limitations of available analytical techniques it is not possible to measure pore volumes and pore size distributions across the entire range of micropores, mesopores and macropores using a single technique. In the case that the porous carbon framework comprises macropores, the volume of pores in the range of greater than 50 nm and up to 100 nm is identified 5 herein with the value of  $P_2$   $\text{cm}^3/\text{g}$  and is measured by mercury porosimetry. As set out above, the value of  $P_2$  relates to the pore volume of the porous carbon framework when measured in isolation, i.e. in the absence of silicon or any other material occupying the pores of the porous carbon framework.

For the avoidance of doubt, the value of  $P_2$  takes into account only pores having a diameter of from 10 greater than 50 nm up to and including 100 nm, i.e. it includes only the volume of macropores up to 100 nm in diameter. Any pore volume measured by mercury porosimetry at pore sizes of 50 nm or below is disregarded for the purposes of determining the value of  $P_2$  (as set out above, nitrogen adsorption is used to characterize the mesopores and micropores). Pore volume measured by mercury porosimetry above 100 nm is assumed for the purposes of the invention to be inter-15 particle porosity and is also not take into account when determining the value of  $P_2$ .

Mercury porosimetry is a technique that characterizes the porosity and pore diameter distributions of a material by applying varying levels of pressure to a sample of the material immersed in mercury. The pressure required to intrude mercury into the pores of the sample is inversely proportional to the size of the pores. Values obtained by mercury porosimetry as reported herein 20 are obtained in accordance with ASTM UOP578-11, with the surface tension  $\gamma$  taken to be 480 mN/m and the contact angle  $\phi$  taken to be 140° for mercury at room temperature. The density of mercury is taken to be 13.5462 g/cm<sup>3</sup> at room temperature. A number of high precision mercury porosimetry instruments are commercially available, such as the AutoPore IV series of automated mercury porosimeters available from Micromeritics Instrument Corporation, USA. For a complete 25 review of mercury porosimetry reference may be made to P.A. Webb and C. Orr in "Analytical Methods in Fine Particle Technology, 1997, Micromeritics Instrument Corporation, ISBN 0-9656783-0.

The volume of macropores (and therefore the value of  $P_2$ ) is preferably small as compared to the 30 volume of micropores and mesopores (and therefore the value of  $P_1$ ). While a small fraction of macropores may be useful to facilitate electrolyte access into the pore network, the advantages of the invention are obtained substantially by accommodating silicon in micropores and smaller mesopores.

Thus, in accordance with the invention the total volume of macropores in the porous carbon framework is  $P_2$   $\text{cm}^3/\text{g}$  as measured by mercury porosimetry, wherein  $P_2$  preferably has a value of

no more than  $0.2 \times P_1$ , or no more than  $0.1 \times P_1$ , or no more than  $0.05 \times P_1$ , or no more than  $0.02 \times P_1$ , or no more than  $0.01 \times P_1$ , or no more than  $0.005 \times P_1$ .

In preferred embodiments,  $P_2$  has a value of no more than 0.3, or no more than 0.25, or no more than 0.20, or no more than 0.15, or no more than 0.1, or no more than 0.05. As discussed above in relation to larger mesopores, a small pore volume fraction in the macropore range may be advantageous to facilitate electrolyte access to the silicon.

The open pore network optionally includes a hierarchical pore structure, i.e. a pore structure in which there is a degree of ordering of pore sizes, with smaller pores branching from larger pores.

It will be appreciated that intrusion techniques such as gas adsorption and mercury porosimetry are effective only to determine the pore volume of pores that are accessible to nitrogen or to mercury from the exterior of the porous carbon framework. Porosity values ( $P_1$  and  $P_2$ ) as specified herein shall be understood as referring to the volume of open pores, i.e. pores that are accessible to a fluid from the exterior of the porous carbon framework. Fully enclosed pores which cannot be identified by nitrogen adsorption or mercury porosimetry shall not be taken into account herein when specifying porosity values. Likewise, any pore volume located in pores that are so small as to be below the limit of detection by nitrogen adsorption is not taken into account for determining the value of  $P_1$ .

The porous carbon framework may comprise crystalline carbon or amorphous carbon, or a mixture of amorphous and crystalline carbon. The porous carbon framework may be either a hard carbon or soft carbon framework and may suitably be obtained by known procedures involving the pyrolysis of polymers or organic matter.

The porous carbon framework preferably has a BET surface area of at least 750 m<sup>2</sup>/g, or at least 1,000 m<sup>2</sup>/g, or at least 1,250 m<sup>2</sup>/g, or at least 1,500 m<sup>2</sup>/g. The term "BET surface area" as used herein should be taken to refer to the surface area per unit mass calculated from a measurement of the physical adsorption of gas molecules on a solid surface, using the Brunauer–Emmett–Teller theory, in accordance with ISO 9277. Preferably, the BET surface area of the conductive porous particle framework is no more than 4,000 m<sup>2</sup>/g, or no more than 3,500 m<sup>2</sup>/g, or no more than 3,250 m<sup>2</sup>/g, or no more than 3,000 m<sup>2</sup>/g.

As used herein, the term "hard carbon" refers to a disordered carbon matrix in which carbon atoms are found predominantly in the sp<sup>2</sup> hybridised state (trigonal bonds) in nanoscale polycyclic aromatic domains. The polycyclic aromatic domains are cross-linked with a chemical bond, e.g. a C–O–C bond. Due to the chemical cross-linking between the polycyclic aromatic domains, hard carbons cannot be converted to graphite at high temperatures. Hard carbons have graphite-like character as

evidenced by the large G-band ( $\sim 1600\text{ cm}^{-1}$ ) in the Raman spectrum. However, the carbon is not fully graphitic as evidenced by the significant D-band ( $\sim 1350\text{ cm}^{-1}$ ) in the Raman spectrum.

As used herein, the term “soft carbon” also refers to a disordered carbon matrix in which carbon atoms are found predominantly in the  $\text{sp}^2$  hybridised state (trigonal bonds) in polyaromatic domains 5 having dimensions in the range of 5 to 200 nm. In contrast to hard carbons, the polyaromatic domains in soft carbons are associated by intermolecular forces but are not cross-linked with a chemical bond. This means that they will graphitise at high temperature. The porous carbon framework preferably comprises at least 50%  $\text{sp}^2$  hybridised carbon as measured by XPS. For example, the porous carbon framework may suitably comprise from 50% to 98%  $\text{sp}^2$  hybridised 10 carbon, from 55% to 95%  $\text{sp}^2$  hybridised carbon, from 60% to 90%  $\text{sp}^2$  hybridised carbon, or from 70% to 85%  $\text{sp}^2$  hybridised carbon.

A variety of different materials may be used to prepare suitable porous carbon frameworks. Examples of organic materials that may be used include plant biomass including lignocellulosic materials (such as coconut shells, rice husks, wood etc.) and fossil carbon sources such as coal. 15 Examples of polymeric materials which form porous carbon frameworks on pyrolysis include phenolic resins, novolac resins, pitch, melamines, polyacrylates, polystyrenes, polyvinylalcohol (PVA), polyvinylpyrrolidone (PVP), and various copolymers comprising monomer units of acrylates, styrenes,  $\alpha$ -olefins, vinyl pyrrolidone and other ethylenically unsaturated monomers. A variety of different hard carbon materials are available in the art depending on the starting material and the 20 conditions of the pyrolysis process.

The porous carbon framework may undergo a chemical or gaseous activation process to increase the volume of mesopores and micropores. A suitable activation process comprises contacting pyrolysed carbon with one or more of oxygen, steam,  $\text{CO}$ ,  $\text{CO}_2$  and  $\text{KOH}$  at a temperature in the range from 600 to 1000°C.

25 Mesopores can also be obtained by known templating processes, using extractable pore formers such as  $\text{MgO}$  and other colloidal or polymer templates which can be removed by thermal or chemical means post pyrolysis or activation.

The porous carbon framework may have a  $D_{50}$  particle diameter in the range from 0.5 to 20  $\mu\text{m}$ . Preferably, the  $D_{50}$  particle diameter is at least 1  $\mu\text{m}$ , more preferably at least 2  $\mu\text{m}$ , for example at 30 least 3  $\mu\text{m}$ , or at least 4  $\mu\text{m}$ , or at least 5  $\mu\text{m}$ . Preferably, the  $D_{50}$  particle diameter of the particulate material is no more than 18  $\mu\text{m}$ , more preferably no more than 16  $\mu\text{m}$ , more preferably no more than 14  $\mu\text{m}$ , more preferably no more than 12  $\mu\text{m}$ , more preferably no more than 10  $\mu\text{m}$ , for example no more than 9  $\mu\text{m}$ , or no more than 8  $\mu\text{m}$ . More preferably, the  $D_{50}$  particle diameter

is no more than 10  $\mu\text{m}$ , or no more than 9  $\mu\text{m}$ , or no more than 8  $\mu\text{m}$ , or no more than 7  $\mu\text{m}$ , or no more than 6  $\mu\text{m}$ , or no more than 5  $\mu\text{m}$ .

For instance, the porous carbon framework may have a  $D_{50}$  particle diameter in the range from 1 to 12  $\mu\text{m}$ , or from 1 to 10  $\mu\text{m}$ , or from 2 to 10  $\mu\text{m}$ , or from 2 to 8  $\mu\text{m}$ , or from 2 to 6  $\mu\text{m}$ , or from 3 to 10  $\mu\text{m}$ , or from 3 to 8  $\mu\text{m}$ , or from 3 to 7  $\mu\text{m}$ , or from 3 to 6  $\mu\text{m}$ , or from 3 to 5  $\mu\text{m}$ .

The amount of silicon in the porous carbon framework is correlated to the available pore volume by the requirement that the weight ratio of silicon to the porous carbon framework in the composite particles is in the range from  $[1 \times P_1 \text{ to } 2.2 \times P_1] : 1$ . This relationship takes into account the density of silicon and the pore volume of the porous carbon framework to define a weight ratio of silicon at 10 which the internal pore volume of the porous carbon framework ( $P_1 \text{ cm}^3/\text{g}$ ) is around 43% to 95% v/v occupied by silicon (in the uncharged state).

Preferably, the weight ratio of silicon to the porous carbon framework is at least  $1.1 \times P_1$ , more preferably at least  $1.15 \times P_1$ , more preferably at least  $1.2 \times P_1$ , more preferably at least  $1.25 \times P_1$ , more preferably at least  $1.3 \times P_1$ , more preferably at least  $1.35 \times P_1$ , more preferably at least  $1.4 \times P_1$ .

15 Where the porous carbon framework comprises a relatively higher ratio of mesopores to micropores, (for instance where  $\Phi_a$  is in the range from 0.2 to 0.5, or in the range from 0.3 to 0.5), the weight ratio of silicon to the porous carbon framework may be higher still, for example at least  $1.45 \times P_1$ , more preferably at least  $1.5 \times P_1$ , more preferably at least  $1.55 \times P_1$ , more preferably at least  $1.6 \times P_1$ , more preferably at least  $1.65 \times P_1$ , more preferably at least  $1.7 \times P_1$ .

20 The minimum weight ratio of silicon to the porous carbon framework is correlated to both the mesopore fraction ( $\Phi_b$ ) and the total pore volume by the requirement that the weight ratio of silicon to the porous carbon framework in the composite particles is at least  $1 \times P_1$ . More preferably, the weight ratio of silicon to the porous carbon framework has at least the value given by  $[\Phi_b + 0.75] \times P_1$ , more preferably at least the value given by  $[\Phi_b + 0.8] \times P_1$ , more preferably at least the value given by

25  $[\Phi_b + 0.9] \times P_1$ , more preferably at least the value given by  $[\Phi_b + 1] \times P_1$ , more preferably at least the value given by  $[\Phi_b + 1.1] \times P_1$  (with the proviso that said value is at least  $1 \times P_1$ ). Thus, in the case that the mesopore fraction ( $\Phi_b$ ) has a higher value, the minimum amount of silicon in the composite particles is also higher. This correlation between mesopore fraction and the minimum weight ratio of silicon to the porous carbon framework ensures that porous carbon frameworks having higher mesopore fractions are occupied by silicon to a higher extent, thus optimising the volumetric capacity of the particulate material. Ensuring that porous carbon frameworks having higher mesopore fractions have a higher minimum silicon loading also reduces the possibility that larger

30 mesopore fractions have a higher minimum silicon loading also reduces the possibility that larger

micropores will be partially occupied by silicon, thus reducing the silicon surface area that is exposed to the electrolyte and thereby limiting undesirable SEI formation.

The maximum weight ratio of silicon to the porous carbon framework is also correlated to both the mesopore fraction ( $\Phi_b$ ) and the total pore volume by the requirement that the weight ratio of silicon to the porous carbon framework in the composite particles is no more than the value given by  $1.9 \times P_1$ . More preferably, the weight ratio of silicon to the porous carbon framework is no more than the value given by  $[\Phi_b + 1.6] \times P_1$ , more preferably no more than the value given by  $[\Phi_b + 1.5] \times P_1$  (with the proviso that said value is no more than  $1.9 \times P_1$ ). The correlation between mesopore fraction and the maximum weight ratio of porous carbon framework ensures that that porous carbon frameworks having higher micropore fractions are not excessively filled by silicon. As set out above, it may be more difficult to achieve very high ratios of silicon in the event that the porous carbon framework is more highly microporous due to the potential for walls or caps to form which enclose occupied pore volume. In addition, in the case that the porous carbon framework is more highly microporous, diffusion of lithium through very fine silicon structures becomes rate limited, reducing the rate capacity of the particulate material. Accordingly, controlling the upper limit of the silicon ratio ensures a degree of electrolyte access to the internal pore volume of the porous carbon framework, facilitating transport of lithium ions to the silicon domains.

Preferably the silicon mass in the composite particles is located substantially or entirely within the pores of the porous carbon framework in the form of the nanoscale silicon domains that are described above. For example, it is preferred that at least 90 wt%, more preferably at least 95 wt%, more preferably at least 98 wt%, more preferably at least 99 wt% of the silicon mass in the composite particles is located within the internal pore volume of the porous carbon framework such that there is no or very little silicon located on the external surface of the composite particles.

The particulate materials of the invention can be further characterised by their performance under thermogravimetric analysis (TGA) in air. Preferably the particulate material contains no more than 10% unoxidised silicon at 800 °C as determined by TGA in air with a temperature ramp rate of 10 °C/min. More preferably the particulate material contains no more than 5% or no more than 2% unoxidised silicon at 800 °C as determined by TGA in air with a temperature ramp rate of 10 °C/min.

The determination of the amount of unoxidised silicon is derived from the characteristic TGA trace for these materials. A mass increase at ca. 300-500 °C corresponds to initial oxidation of silicon to  $\text{SiO}_2$ , and is followed by mass loss at ca. 500-600 °C as carbon is oxidised to  $\text{CO}_2$  gas. Above ca. 600 °C, there is a further mass increase corresponding to the continued conversion of silicon to

$\text{SiO}_2$  which increases toward an asymptotic value above 1000 °C as silicon oxidation goes to completion.

For the purposes of this analysis, it is assumed that any mass increase above 800 °C corresponds to the oxidation of silicon to  $\text{SiO}_2$  and that the total mass at completion of oxidation is  $\text{SiO}_2$ . This allows the percentage of unoxidised silicon at 800 °C as a proportion of the total amount of silicon to be determined according to the following formula:

$$Z = 1.875 \times [(M_f - M_{800}) / M_f] \times 100\%$$

Wherein Z is the percentage of unoxidized silicon at 800 °C,  $M_f$  is the mass of the sample at completion of oxidation and  $M_{800}$  is the mass of the sample at 800 °C.

10 Without being bound by theory, it is understood that the temperature at which silicon is oxidised under TGA corresponds broadly to the length scale of the oxide coating on the silicon due to diffusion of oxygen atoms through the oxide layer being thermally activated. The size of the silicon nanostructure and its location limit the length scale of the oxide coating thickness. Therefore it is understood that silicon deposited in micropores and mesopores will oxidise at a lower temperature  
15 than deposits of silicon on a particle surface due to the necessarily thinner oxide coating existing on these structures. Accordingly, preferred materials according to the invention exhibit substantially complete oxidation of silicon at low temperatures consistent with the small length scale of silicon nanostructures that are located in micropores and smaller mesopores. For the purposes of the invention, silicon oxidation at 800 °C is assumed to be silicon on the external  
20 surfaces of the porous carbon framework. This is also referred to herein as "coarse silicon".

The silicon is preferably amorphous silicon. It is believed that amorphous silicon has better performance as an electroactive material. The morphology of the silicon can be determined by known procedures using X-Ray Diffraction (XRD).

25 Preferably, the volume of micropores and mesopores in the composite particles (i.e. in the presence of the silicon), as measured by nitrogen gas adsorption, is no more than  $0.15 \times P_1$ , or no more than  $0.10 \times P_1$ , or no more than  $0.05 \times P_1$ , or no more than  $0.02 \times P_1$ .

30 The weight ratio of silicon to the porous carbon framework can be determined by elemental analysis. Elemental analysis is used to determine the weight percentages of both silicon and carbon in the composite particles. Optionally, the amounts of hydrogen, nitrogen and oxygen may also be determined by elemental analysis. Preferably, elemental analysis is also used to determine the weight percentage of carbon (and optionally hydrogen, nitrogen and oxygen) in the porous carbon framework alone. Determining the weight percentage of carbon in the in the porous carbon

framework alone takes account of the possibility that the porous carbon framework contains a minor amount of heteroatoms within its molecular framework. Both measurements taken together allow the weight percentage of silicon relative to the entire porous carbon framework to be determined reliably.

5 The silicon content is preferably determined by ICP-OES (Inductively coupled plasma-optical emission spectrometry). A number of ICP-OES instruments are commercially available, such as the iCAP® 7000 series of ICP-OES analyzers available from ThermoFisher Scientific. The carbon content of the composite particles and of the porous carbon framework alone (as well as the hydrogen, nitrogen and oxygen content if required) are preferably determined by IR absorption. A  
10 suitable instrument for determining carbon, hydrogen, nitrogen and oxygen content is the TruSpec® Micro elemental analyser available from Leco Corporation.

15 The composite particles preferably have a low total oxygen content. Oxygen may be present in the composite particles for instance as part of the porous carbon framework or as an oxide layer on any exposed silicon surfaces. Preferably, the total oxygen content of the composite particles is less than 15 wt%, more preferably less than 10 wt%, more preferably less than 5 wt%, for example less than 2 wt%, or less than 1 wt%, or less than 0.5 wt%.

20 The silicon may optionally comprise a minor amount of one or more dopants. Suitable dopants include boron and phosphorus, other n-type or p-type dopants, nitrogen, or germanium. Preferably, the dopants are present in a total amount of no more than 2 wt% based on the total amount of silicon and the dopant(s).

25 For the avoidance of doubt, the term “particle diameter” as used herein refers to the equivalent spherical diameter (esd), i.e. the diameter of a sphere having the same volume as a given particle, wherein the particle volume is understood to include the volume of any intra-particle pores. The terms “D<sub>50</sub>” and “D<sub>50</sub> particle diameter” as used herein refer to the volume-based median particle diameter, i.e. the diameter below which 50% by volume of the particle population is found. The terms “D<sub>10</sub>” and “D<sub>10</sub> particle diameter” as used herein refer to the 10th percentile volume-based median particle diameter, i.e. the diameter below which 10% by volume of the particle population is found. The terms “D<sub>90</sub>” and “D<sub>90</sub> particle diameter” as used herein refer to the 90th percentile volume-based median particle diameter, i.e. the diameter below which 90% by volume of the particle population is found.

30 Particle diameters and particle size distributions can be determined by routine laser diffraction techniques in accordance with ISO 13320:2009. Laser diffraction relies on the principle that a particle will scatter light at an angle that varies depending on the size the particle and a collection

of particles will produce a pattern of scattered light defined by intensity and angle that can be correlated to a particle size distribution. A number of laser diffraction instruments are commercially available for the rapid and reliable determination of particle size distributions. Unless stated otherwise, particle size distribution measurements as specified or reported herein are as measured

5 by the conventional Malvern Mastersizer<sup>TM</sup> 3000 particle size analyzer from Malvern Instruments. The Malvern Mastersizer<sup>TM</sup> 3000 particle size analyzer operates by projecting a helium-neon gas laser beam through a transparent cell containing the particles of interest suspended in an aqueous solution. Light rays which strike the particles are scattered through angles which are inversely proportional to the particle size and a photodetector array measures the intensity of light at several

10 predetermined angles and the measured intensities at different angles are processed by a computer using standard theoretical principles to determine the particle size distribution. Laser diffraction values as reported herein are obtained using a wet dispersion of the particles in distilled water. The particle refractive index is taken to be 3.50 and the dispersant index is taken to be 1.330. Particle size distributions are calculated using the Mie scattering model.

15 The composite particles may have a D<sub>50</sub> particle diameter in the range from 0.5 to 20 µm. Preferably, the D<sub>50</sub> particle diameter is at least 1 µm, more preferably at least 2 µm, for example at least 3 µm, or at least 4 µm, or at least 5 µm. Preferably, the D<sub>50</sub> particle diameter of the particulate material is no more than 18 µm, more preferably no more than 16 µm, more preferably no more than 14 µm, more preferably no more than 12 µm, more preferably no more than 10 µm,

20 for example no more than 9 µm, or no more than 8 µm.

For instance, the composite particles may have a D<sub>50</sub> particle diameter in the range from 1 to 12 µm, or from 1 to 10 µm, or from 2 to 10 µm, or from 3 to 10 µm, or from 3 to 8 µm. Particles within these size ranges and having porosity and a pore diameter distribution as set out herein are ideally suited for use in hybrid anodes for metal-ion batteries, due to their dispersibility in slurries, their structural robustness, their capacity retention over repeated charge-discharge cycles, and their ability to occupy the interparticle void spaces between conventional graphite particles used in the electrode of metal-ion batteries.

The D<sub>10</sub> particle diameter of the composite particles is preferably at least 0.2 µm, or at least 0.5 µm, or at least 0.8 µm, or at least 1 µm, or at least 1.5 µm, or at least 2 µm. By maintaining the D<sub>10</sub> particle diameter at 0.2 µm or more, the potential for undesirable agglomeration of sub-micron sized particles is reduced, resulting in improved dispersibility of the particulate material and improved capacity retention.

The D<sub>90</sub> particle diameter of the composite particles is preferably no more than 40 µm, or no more than 30 µm, or no more than 20 µm, or no more than 15 µm, or no more than 12 µm, or no more

than 10  $\mu\text{m}$ . The presence of very large particles results in non-uniform forming packing of the particles in electrode active layers, thus disrupting the formation of dense electrode layers, particularly electrode layers having a thickness in the conventional range from 20 to 50  $\mu\text{m}$ . Therefore, it is preferred that the  $D_{90}$  particle diameter is no more than 20  $\mu\text{m}$ , and more preferably lower still.

The composite particles preferably have a narrow size distribution span. For instance, the particle size distribution span (defined as  $(D_{90}-D_{10})/D_{50}$ ) is preferably 5 or less, more preferably 4 or less, more preferably 3 or less, more preferably 2 or less, and most preferably 1.5 or less. By maintaining a narrow size distribution span, efficient packing of the particles into dense electrode layers is more readily achievable.

The composite particles may be spheroidal in shape. Spheroidal particles as defined herein may include both spherical and ellipsoidal particles and the shape of the composite particles of the invention may suitably be defined by reference to the sphericity and the aspect ratio of the particles of the invention. Spheroidal particles are found to be particularly well-suited to dispersion in slurries without the formation of agglomerates. In addition, the use of porous spheroidal particles is surprisingly found to provide a further improvement in strength when compared to porous particles and porous particle fragments of irregular morphology.

The sphericity of an object is conventionally defined as the ratio of the surface area of a sphere to the surface area of the object, wherein the object and the sphere have identical volume. However, in practice it is difficult to measure the surface area and volume of individual particles at the micron scale. However, it is possible to obtain highly accurate two-dimensional projections of micron scale particles by scanning electron microscopy (SEM) and by dynamic image analysis, in which a digital camera is used to record the shadow projected by a particle. The term "sphericity" as used herein shall be understood as the ratio of the area of the particle projection to the area of a circle, wherein the particle projection and circle have identical circumference. Thus, for an individual particle, the sphericity  $S$  may be defined as:

$$S = \frac{4 \cdot \pi \cdot A_m}{(C_m)^2}$$

wherein  $A_m$  is the measured area of the particle projection and  $C_m$  is the measured circumference of the particle projection. The average sphericity  $S_{av}$  of a population of particles as used herein is defined as:

$$S_{av} = \frac{1}{n} \sum_{i=1}^n \left[ \frac{4 \cdot \pi \cdot A_m}{(C_m)^2} \right]$$

wherein n represents the number of particles in the population.

As used herein, the term “spheroidal” as applied to the composite particles of the invention shall be understood to refer to a material having an average sphericity of at least 0.70. Preferably, the porous spheroidal particles of the invention have an average sphericity of at least 0.85, more preferably at least 0.90, more preferably at least 0.92, more preferably at least 0.93, more preferably at least 0.94, more preferably at least 0.95. Optionally, the porous spheroidal particles may have an average sphericity of at least 0.96, or at least 0.97, or at least 0.98, or at least 0.99.

It will be understood that the circumference and area of a two-dimensional particle projection will depend on the orientation of the particle in the case of any particle which is not perfectly spheroidal. However, the effect of particle orientation may be offset by reporting sphericity and aspect ratios as average values obtained from a plurality of particles having random orientation. A number of SEM and dynamic image analysis instruments are commercially available, allowing the sphericity and aspect ratio of a particulate material to be determined rapidly and reliably. Unless stated otherwise, sphericity values as specified or reported herein are as measured by a CamSizer XT particle analyzer from Retsch Technology GmbH. The CamSizer XT is a dynamic image analysis instrument which is capable of obtaining highly accurate distributions of the size and shape for particulate materials in sample volumes of from 100 mg to 100 g, allowing properties such as average sphericity and aspect ratios to be calculated directly by the instrument.

The composite particles preferably have a BET surface area of no more than 150 m<sup>2</sup>/g, or no more than 100 m<sup>2</sup>/g, or no more than 80 m<sup>2</sup>/g, or no more than 60 m<sup>2</sup>/g, or no more than 40 m<sup>2</sup>/g, or no more than 30 m<sup>2</sup>/g, or no more than 25 m<sup>2</sup>/g, or no more than 20 m<sup>2</sup>/g, or no more than 15 m<sup>2</sup>/g, or no more than 10 m<sup>2</sup>/g. In general, a low BET surface area is preferred in order to minimise the formation of solid electrolyte interphase (SEI) layers at the surface of the composite particles during the first charge-discharge cycle of an anode comprising the particulate material of the invention. However, a BET surface area which is excessively low results in unacceptably low charging rate and capacity due to the inaccessibility of the bulk of the electroactive material to metal ions in the surrounding electrolyte. For instance, the BET surface area is preferably at least 0.1 m<sup>2</sup>/g, or at least 1 m<sup>2</sup>/g, or at least 2 m<sup>2</sup>/g, or at least 5 m<sup>2</sup>/g. For instance, the BET surface area may be in the range from 1 m<sup>2</sup>/g to 25 m<sup>2</sup>/g, more preferably in the range from 2 to 15 m<sup>2</sup>/g.

The particulate material of the invention typically has a specific charge capacity on first lithiation of 1200 to 2340 mAh/g. Preferably the particulate material of the invention has a specific charge capacity on first lithiation of at least 1400 mAh/g.

The composite particles of the invention are suitably prepared via the chemical vapor infiltration (CVI) of a silicon-containing precursor into the pore structure of the porous carbon framework. As used herein, CVI refers to processes in which a gaseous silicon-containing precursor is thermally decomposed on a surface to form elemental silicon at the surface and gaseous by-product.

5 Suitable gaseous silicon-containing precursors include silane ( $\text{SiH}_4$ ), silane derivatives (e.g. disilane, trisilane and tetrasilane), and trichlorosilane ( $\text{SiHCl}_3$ ). The silicon-containing precursors may be used either in pure form or more usually as a diluted mixture with an inert carrier gas, such as nitrogen or argon. For instance, the silicon-containing precursor may be used in an amount in the range from 0.5-20 vol%, or 1-10 vol%, or 1-5 vol% based on the total volume of the silicon-  
10 containing precursor and the inert carrier gas. The CVI process is suitably carried out at low partial pressure of silicon precursor with total pressure of 101.3 kPa (i.e. 1 atm), the remaining partial pressure made up to atmospheric pressure using an inert padding gas such as hydrogen, nitrogen or argon. Deposition temperatures ranging from 400-700 °C are used, for example from 400-550 °C, or 400-500 °C, or 400-450 °C, or 450-500 °C. The CVI process may suitably be performed in a  
15 fixed bed reactor, fluidized bed reactor (including spouted bed reactor), or rotary kiln.

A particular advantage of this invention is that the porous carbon frameworks have a very high ratio internal surface area to external surface area, due to the very low pore size. As a result, deposition of silicon onto the internal surfaces of the porous carbon framework is kinetically favoured. Accordingly, a very high proportion of silicon in the composite particles of the invention  
20 is in the form of nanoscale elemental silicon domains located within the micropores and/or mesopores of the porous carbon framework (e.g. at least 90 wt%, more preferably at least 95 wt%, more preferably at least 98 wt%, more preferably at least 99 wt% of the silicon mass in the composite particles as set out above).

By contrast, the formation of silicon deposits on the external surfaces of the porous carbon framework occurs at a significantly lower rate, such that the composite particles typically contain very low amounts of external silicon on the external surfaces of the porous carbon framework. Without being bound by theory, it is believed that the larger dimensions of silicon on external surfaces of the porous carbon frameworks means that external silicon (referred to herein as “coarse silicon”) is less able to cycle reversibly and leads to a proportionally higher amount of  
25 oxidised silicon and SEI formation, such that composite particles with a high amount of external silicon will have worse capacity retention over multiple charging and discharging cycles.

The particulate material of the invention may optionally include a conductive carbon coating. Suitably a conductive carbon coating may be obtained by a chemical vapour deposition (CVD) method. CVD is a well-known methodology in the art and comprises the thermal decomposition of

5 a volatile carbon-containing gas (e.g. ethylene) onto the surface of the particulate material. Alternatively, the carbon coating may be formed by depositing a solution of a carbon-containing compound onto the surface of the particulate material followed by pyrolysis. The conductive carbon coating is sufficiently permeable to allow lithium access to the interior of the composite particles without excessive resistance, so as not to reduce the rate performance of the composite particles. For instance, the thickness of the carbon coating may suitably be in the range from 2 to 30 nm. Optionally, the carbon coating may be porous and/or may only cover partially the surface of the composite particles.

10 A carbon coating has the advantages that it further reduces the BET surface area of the particulate material by smoothing any surface defects and by filling any remaining surface microporosity, thereby further reducing first cycle loss. In addition, a carbon coating improves the conductivity of the surface of the composite particles, reducing the need for conductive additives in the electrode composition, and also creates an optimum surface for the formation of a stable SEI layer, resulting in improved capacity retention on cycling.

15 In accordance with the first aspect of the invention, there is further provided particulate materials according to the following aspects 1-1 to 1-41.

Aspect 1-1: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-1.4;
- (ii)  $\Phi_a$  is in the range from 0.5 to 0.8;
- 20 (iii)  $\Phi_{20}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ .

Aspect 1-2: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-1.4;
- (ii)  $\Phi_a$  is in the range from 0.5 to 0.8;
- 25 (iii)  $\Phi_{10}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ .

Aspect 1-3: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-1.4;
- (ii)  $\Phi_a$  is in the range from 0.5 to 0.8;
- 30 (iii)  $\Phi_{10}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

Aspect 1-4: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-1.4;
- (ii)  $\Phi_a$  is in the range from 0.5 to 0.8;
- (iii)  $\Phi_5$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

5 Aspect 1-5: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-1.4;
- (ii)  $\Phi_a$  is in the range from 0.5 to 0.8;
- (iii)  $\Phi_5$  is at least 0.75;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

10 Aspect 1-6: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_{20}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ .

15 Aspect 1-7: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_{10}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ .

20 Aspect 1-8: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_{10}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

25 Aspect 1-9: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_5$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

30 Aspect 1-10: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_5$  is at least 0.75;

(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ .

Aspect 1-11: A particulate material according to the first aspect of the invention, wherein:

5 (i)  $P_1$  is in the range from 0.7-0.9;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ .

Aspect 1-12: A particulate material according to the first aspect of the invention, wherein:

10 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{20}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

Aspect 1-13: A particulate material according to the first aspect of the invention, wherein:

15 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

20 Aspect 1-14: A particulate material according to the first aspect of the invention, wherein:

25 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

Aspect 1-15: A particulate material according to the first aspect of the invention, wherein:

30 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_5$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

Aspect 1-16: A particulate material according to the first aspect of the invention, wherein:

5 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

Aspect 1-17: A particulate material according to the first aspect of the invention, wherein:

10 (i)  $P_1$  is in the range from 0.7-0.9;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.8]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

15 Aspect 1-18: A particulate material according to the first aspect of the invention, wherein:

20 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{20}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-19: A particulate material according to the first aspect of the invention, wherein:

25 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-20: A particulate material according to the first aspect of the invention, wherein:

30 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-21: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_5$  is at least 0.8;
- 5 (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;
- (v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-22: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_5$  is at least 0.75;
- 10 (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;
- (v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

15 Aspect 1-23: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.7-0.9;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_5$  is at least 0.75;
- 20 (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ ;
- (v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+0.9]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-24: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- 25 (iii)  $\Phi_{20}$  is at least 0.8;
- (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ ;
- (v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-25: A particulate material according to the first aspect of the invention, wherein:

- (i)  $P_1$  is in the range from 0.8-1.2;
- (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;
- (iii)  $\Phi_{10}$  is at least 0.8;
- 30 (iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ ;
- (v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1]\times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

Aspect 1-26: A particulate material according to the first aspect of the invention, wherein:

5 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1] \times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5] \times P_1$ .

Aspect 1-27: A particulate material according to the first aspect of the invention, wherein:

10 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1] \times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5] \times P_1$ .

15 Aspect 1-28: A particulate material according to the first aspect of the invention, wherein:

20 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1] \times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5] \times P_1$ .

Aspect 1-29: A particulate material according to the first aspect of the invention, wherein:

25 (i)  $P_1$  is in the range from 0.7-0.9;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is at least the value given by  $[\Phi_b+1] \times P_1$ , and preferably no more than the value given by  $[\Phi_b+1.5] \times P_1$ .

Aspect 1-30: A particulate material according to the first aspect of the invention, wherein:

30 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{20}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2  $\times P_1$  to 1.8  $\times P_1$ ] : 1.

35

Aspect 1-31: A particulate material according to the first aspect of the invention, wherein:

5 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.8× $P_1$ ] : 1.

Aspect 1-32: A particulate material according to the first aspect of the invention, wherein:

10 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$   
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.8× $P_1$ ] : 1.

15 Aspect 1-33: A particulate material according to the first aspect of the invention, wherein:

20 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_5$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.8× $P_1$ ] : 1.

Aspect 1-34: A particulate material according to the first aspect of the invention, wherein:

25 (i)  $P_1$  is in the range from 0.7-1.4;  
(ii)  $\Phi_a$  is in the range from 0.5 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.8× $P_1$ ] : 1.

Aspect 1-35: A particulate material according to the first aspect of the invention, wherein:

30 (i)  $P_1$  is in the range from 0.7-0.9;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.8× $P_1$ ] : 1.

Aspect 1-36: A particulate material according to the first aspect of the invention, wherein:

5 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{20}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 18  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.6× $P_1$ ] : 1.

Aspect 1-37: A particulate material according to the first aspect of the invention, wherein:

10 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 1 to 12  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.6× $P_1$ ] : 1.

Aspect 1-38: A particulate material according to the first aspect of the invention, wherein:

15 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_{10}$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.6× $P_1$ ] : 1.

Aspect 1-39: A particulate material according to the first aspect of the invention, wherein:

20 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.8;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.6× $P_1$ ] : 1.

Aspect 1-40: A particulate material according to the first aspect of the invention, wherein:

25 (i)  $P_1$  is in the range from 0.8-1.2;  
(ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\Phi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 2 to 8  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2× $P_1$  to 1.6× $P_1$ ] : 1.

30 35 Aspect 1-41: A particulate material according to the first aspect of the invention, wherein:

(i)  $P_1$  is in the range from 0.7-0.9;

5 (ii)  $\Phi_a$  is in the range from 0.6 to 0.8;  
(iii)  $\varphi_5$  is at least 0.75;  
(iv) the  $D_{50}$  particle size of the porous carbon framework is in the range from 3 to 6  $\mu\text{m}$ ;  
(v) the weight ratio of silicon to the porous carbon framework is in the range from [1.2 $\times P_1$  to 1.6 $\times P_1$ ] : 1.

10 In accordance with the present invention, it is to be understood that the preferred/optional features disclosed herein in relation to the first aspect of the invention that fall within the scope of the above-described aspects 1-1 to 1-41 are also to be taken as preferred/optional features of the aspects 1-1 to 1-41. Likewise, any features of the dependent claims that fall within the scope of the above-described aspects 1-1 to 1-41 are also to be interpreted as though those claims also depended from aspects 1-1 to 1-41.

15 In a second aspect of the invention, there is provided a composition comprising a particulate material according to the first aspect of the invention and at least one other component. Preferably, the compositions according to the second aspect of the invention may be used to form active layers of electrodes. Such compositions may be referred to herein as "electrode compositions". The particulate material used to prepare the composition of the second aspect of the invention may have any of the features described as preferred or optional with regard to the first aspect of the invention, and may be a particulate material according to any of aspects 1-1 to 1-41.

20 Thus, there is provided a composition comprising a particulate material according to the first aspect of the invention and at least one other component selected from: (i) a binder; (ii) a conductive additive; and (iii) an additional particulate electroactive material.

25 The composition is preferably a hybrid electrode composition which comprises a particulate material according to the first aspect of the invention and at least one additional particulate electroactive material.

30 The at least one additional particulate electroactive material preferably has a specific capacity on lithiation in the range from 100 to 600 mAh/g, or from 200 to 500 mAh/g. Examples of additional particulate electroactive materials include graphite, hard carbon, silicon, tin, germanium, gallium, aluminium and lead. The at least one additional particulate electroactive material is preferably selected from graphite and hard carbon, and most preferably the at least one additional particulate electroactive material is graphite.

The at least one additional particulate electroactive material preferably has a  $D_{50}$  particle diameter in the range from 10 to 50  $\mu\text{m}$ , preferably from 10 to 40  $\mu\text{m}$ , more preferably from 10 to 30  $\mu\text{m}$  and most preferably from 10 to 25  $\mu\text{m}$ , for example from 15 to 25  $\mu\text{m}$ .

The  $D_{10}$  particle diameter of the at least one additional particulate electroactive material is preferably at least 5  $\mu\text{m}$ , more preferably at least 6  $\mu\text{m}$ , more preferably at least 7  $\mu\text{m}$ , more preferably at least 8  $\mu\text{m}$ , more preferably at least 9  $\mu\text{m}$ , and still more preferably at least 10  $\mu\text{m}$ .

The  $D_{90}$  particle diameter of the at least one additional particulate electroactive material is 5 preferably no more than 100  $\mu\text{m}$ , more preferably no more than 80  $\mu\text{m}$ , more preferably no more than 60  $\mu\text{m}$ , more preferably no more than 50  $\mu\text{m}$ , and most preferably no more than 40  $\mu\text{m}$ .

In preferred embodiments, the at least one additional particulate electroactive material is selected 10 from graphite and hard carbon particles having a  $D_{50}$  particle diameter in the range from 10 to 50  $\mu\text{m}$ . Still more preferably, the at least one additional particulate electroactive material is selected from graphite particles, wherein the graphite particles have a  $D_{50}$  particle diameter in the range 15 from 10 to 50  $\mu\text{m}$ .

The at least one additional particulate electroactive material is preferably in the form of spheroidal 15 particles having an average sphericity of at least 0.70, preferably at least 0.85, more preferably at least 0.90, more preferably at least 0.92, more preferably at least 0.93, more preferably at least 0.94, and most preferably at least 0.95.

The at least one additional particulate electroactive material preferably has an average aspect ratio of less than 3:1, preferably no more than 2.5:1, more preferably no more than 2:1, more preferably no more than 1.8:1, more preferably no more than 1.6:1, more preferably no more than 1.4:1 and most preferably no more than 1.2:1.

20 The particulate material of the invention may constitute from 0.5 to 80 wt% of the total dry weight of the electroactive materials in the composition. For instance, the particulate material of the invention may constitute from 2 to 70 wt%, or from 4 to 60 wt%, or from 5 to 50 wt% of the total dry weight of the electroactive materials in the composition.

25 In the case that the composition is a hybrid electrode composition comprising at least one additional particulate electroactive material as described above, the electrode composition preferably comprises from 1 to 20 wt%, or from 2 to 15 wt%, or from 2 to 10 wt%, or from 2 to 5 wt% of the particulate material of the invention, based on the total dry weight of the composition.

30 Furthermore, in the case that the composition is a hybrid electrode composition, the electrode composition preferably comprises from 10 to 98 wt%, or from 15 to 97 wt%, or from 20 to 97 wt%, or from 25 to 97 wt% of the at least one additional particulate electroactive material, based on the total dry weight of the composition.

The ratio of the at least one additional particulate electroactive material to the particulate material of the invention is suitably in the range from 50:50 to 99:1 by weight, more preferably from 60:40 to 98:2 by weight, more preferably 70:30 to 97:3 by weight, more preferably 80:20 to 96:4 by weight, and most preferably 85:15 to 95:5 by weight.

5 The at least one additional particulate electroactive material and the particulate material of the invention together preferably constitute at least 50 wt%, more preferably at least 60% by weight of, more preferably at least 70 wt%, and most preferably at least 80 wt%, for example at least 85 wt%, at least 90 wt%, or at least 95 wt% of the total weight of the composition.

10 The composition may optionally comprise a binder. A binder functions to adhere the composition to a current collector and to maintain the integrity of the composition. Examples of binders which may be used in accordance with the present invention include polyvinylidene fluoride (PVDF), polyacrylic acid (PAA) and alkali metal salts thereof, modified polyacrylic acid (mPAA) and alkali metal salts thereof, carboxymethylcellulose (CMC), modified carboxymethylcellulose (mCMC), sodium carboxymethylcellulose (Na-CMC), polyvinylalcohol (PVA), alginates and alkali metal salts thereof, styrene-butadiene rubber (SBR) and polyimide. The composition may comprise a mixture 15 of binders. Preferably, the binder comprises polymers selected from polyacrylic acid (PAA) and alkali metal salts thereof, and modified polyacrylic acid (mPAA) and alkali metal salts thereof, SBR and CMC.

20 The binder may suitably be present in an amount of from 0.5 to 20 wt%, preferably 1 to 15 wt% and most preferably 2 to 10 wt%, based on the total dry weight of the composition.

The binder may optionally be present in combination with one or more additives that modify the properties of the binder, such as cross-linking accelerators, coupling agents and/or adhesive accelerators.

25 The composition may optionally comprise one or more conductive additives. Preferred conductive additives are non-electroactive materials which are included so as to improve electrical conductivity between the electroactive components of the electrode composition and between the electroactive components of the electrode composition and a current collector. The conductive additives may suitably be selected from carbon black, carbon fibers, carbon nanotubes, graphene, acetylene black, ketjen black, metal fibers, metal powders and conductive metal oxides. Preferred 30 conductive additives include carbon black and carbon nanotubes.

The one or more conductive additives may suitably be present in a total amount of from 0.5 to 20 wt%, preferably 1 to 15 wt% and most preferably 2 to 10 wt%, based on the total dry weight of the electrode composition.

In a third aspect, the invention provides an electrode comprising a particulate material as defined with reference to the first aspect of the invention in electrical contact with a current collector. The particulate material used to prepare the electrode of the third aspect of the invention may have any of the features described as preferred or optional with regard to the first aspect of the invention, 5 and may be a particulate material according to any of aspects 1-1 to 1-41.

As used herein, the term current collector refers to any conductive substrate which is capable of carrying a current to and from the electroactive particles in the electrode composition. Examples of materials that can be used as the current collector include copper, aluminium, stainless steel, nickel, titanium and sintered carbon. Copper is a preferred material. The current collector is 10 typically in the form of a foil or mesh having a thickness of between 3 to 500 µm. The particulate materials of the invention may be applied to one or both surfaces of the current collector to a thickness which is preferably in the range from 10 µm to 1 mm, for example from 20 to 500 µm, or from 50 to 200 µm.

Preferably, the electrode comprises an electrode composition as defined with reference to the 15 second aspect of the invention in electrical contact with a current collector. The electrode composition may have any of the features described as preferred or optional with regard to the second aspect of the invention.

The electrode of the third aspect of the invention may suitably be fabricated by combining the particulate material of the invention (optionally in the form of the electrode composition of the 20 invention) with a solvent and optionally one or more viscosity modifying additives to form a slurry. The slurry is then cast onto the surface of a current collector and the solvent is removed, thereby forming an electrode layer on the surface of the current collector. Further steps, such as heat treatment to cure any binders and/or calendaring of the electrode layer may be carried out as appropriate. The electrode layer suitably has a thickness in the range from 20 µm to 2 mm, 25 preferably 20 µm to 1 mm, preferably 20 µm to 500 µm, preferably 20 µm to 200 µm, preferably 20 µm to 100 µm, preferably 20 µm to 50 µm.

Alternatively, the slurry may be formed into a freestanding film or mat comprising the particulate material of the invention, for instance by casting the slurry onto a suitable casting template, removing the solvent and then removing the casting template. The resulting film or mat is in the 30 form of a cohesive, freestanding mass which may then be bonded to a current collector by known methods.

The electrode of the third aspect of the invention may be used as the anode of a metal-ion battery. Thus, in a fourth aspect, the present invention provides a rechargeable metal-ion battery

comprising an anode, the anode comprising an electrode as described above, a cathode comprising a cathode active material capable of releasing and reabsorbing metal ions; and an electrolyte between the anode and the cathode. The particulate material used to prepare the battery of the fourth aspect of the invention may have any of the features described as preferred or optional with regard to the first aspect of the invention, and may be a particulate material according to any of aspects 1-1 to 1-41.

The metal ions are preferably lithium ions. More preferably the rechargeable metal-ion battery of the invention is a lithium-ion battery, and the cathode active material is capable of releasing and lithium ions.

10 The cathode active material is preferably a metal oxide-based composite. Examples of suitable cathode active materials include  $\text{LiCoO}_2$ ,  $\text{LiCo}_{0.99}\text{Al}_{0.01}\text{O}_2$ ,  $\text{LiNiO}_2$ ,  $\text{LiMnO}_2$ ,  $\text{LiCo}_{0.5}\text{Ni}_{0.5}\text{O}_2$ ,  $\text{LiCo}_{0.7}\text{Ni}_{0.3}\text{O}_2$ ,  $\text{LiCo}_{0.8}\text{Ni}_{0.2}\text{O}_2$ ,  $\text{LiCo}_{0.82}\text{Ni}_{0.18}\text{O}_2$ ,  $\text{LiCo}_{0.8}\text{Ni}_{0.15}\text{Al}_{0.05}\text{O}_2$ ,  $\text{LiNi}_{0.4}\text{Co}_{0.3}\text{Mn}_{0.3}\text{O}_2$  and  $\text{LiNi}_{0.33}\text{Co}_{0.33}\text{Mn}_{0.34}\text{O}_2$ . The cathode current collector is generally of a thickness of between 3 to 500  $\mu\text{m}$ . Examples of materials that can be used as the cathode current collector include 15 aluminium, stainless steel, nickel, titanium and sintered carbon.

The electrolyte is suitably a non-aqueous electrolyte containing a metal salt, e.g. a lithium salt, and may include, without limitation, non-aqueous electrolytic solutions, solid electrolytes and inorganic solid electrolytes. Examples of non-aqueous electrolyte solutions that can be used include non-protic organic solvents such as propylene carbonate, ethylene carbonate, butylene carbonates, 20 dimethyl carbonate, diethyl carbonate, gamma butyrolactone, 1,2-dimethoxyethane, 2-methyltetrahydrofuran, dimethylsulfoxide, 1,3-dioxolane, formamide, dimethylformamide, acetonitrile, nitromethane, methylformate, methyl acetate, phosphoric acid triesters, trimethoxymethane, sulfolane, methyl sulfolane and 1,3-dimethyl-2-imidazolidinone.

Examples of organic solid electrolytes include polyethylene derivatives polyethyleneoxide derivatives, polypropylene oxide derivatives, phosphoric acid ester polymers, polyester sulfide, polyvinylalcohols, polyvinylidene fluoride and polymers containing ionic dissociation groups. 25

Examples of inorganic solid electrolytes include nitrides, halides and sulfides of lithium salts such as  $\text{Li}_5\text{Ni}_2$ ,  $\text{Li}_3\text{N}$ ,  $\text{LiI}$ ,  $\text{LiSiO}_4$ ,  $\text{Li}_2\text{SiS}_3$ ,  $\text{Li}_4\text{SiO}_4$ ,  $\text{LiOH}$  and  $\text{Li}_3\text{PO}_4$ .

The lithium salt is suitably soluble in the chosen solvent or mixture of solvents. Examples of 30 suitable lithium salts include  $\text{LiCl}$ ,  $\text{LiBr}$ ,  $\text{LiI}$ ,  $\text{LiClO}_4$ ,  $\text{LiBF}_4$ ,  $\text{LiBC}_4\text{O}_8$ ,  $\text{LiPF}_6$ ,  $\text{LiCF}_3\text{SO}_3$ ,  $\text{LiAsF}_6$ ,  $\text{LiSbF}_6$ ,  $\text{LiAlCl}_4$ ,  $\text{CH}_3\text{SO}_3\text{Li}$  and  $\text{CF}_3\text{SO}_3\text{Li}$ .

Where the electrolyte is a non-aqueous organic solution, the metal-ion battery is preferably provided with a separator interposed between the anode and the cathode. The separator is typically formed of an insulating material having high ion permeability and high mechanical strength. The separator typically has a pore diameter of between 0.01 and 100  $\mu\text{m}$  and a thickness of between 5 and 300  $\mu\text{m}$ . Examples of suitable electrode separators include a micro-porous polyethylene film.

The separator may be replaced by a polymer electrolyte material and in such cases the polymer electrolyte material is present within both the composite anode layer and the composite cathode layer. The polymer electrolyte material can be a solid polymer electrolyte or a gel-type polymer electrolyte.

In a fifth aspect, the invention provides the use of a particulate material as defined with reference to the first aspect of the invention as an anode active material. Preferably, the particulate material is in the form of an electrode composition as defined with reference to the second aspect of the invention, and most preferably the electrode composition comprises one or more additional particulate electroactive materials as defined above. The particulate material used according to the fifth aspect of the invention may have any of the features described as preferred or optional with regard to the first aspect of the invention, and may be a particulate material according to any of aspects 1-1 to 1-41.

### Examples

Porous carbon frameworks C1 to C3 used in the following examples have the characteristics set out in Table 1.

**Table 1**

					Volumetric Pore size distribution based on $P_1$				
Carbon	BET, $\text{m}^2/\text{g}$	$P_1$	$\varphi_a$	$D_{50}$ ( $\mu\text{m}$ )	$\text{PD}_{10}$ (nm)	$\text{PD}_{30}$ (nm)	$\text{PD}_{50}$ (nm)	$\text{PD}_{75}$ (nm)	$\text{PD}_{90}$ (nm)
C1	1568	0.69	0.69	5.1	0.59	0.77	0.99	2.17	6.09
C2	1860	0.88	0.54	3.1	0.6	0.87	1.41	2.79	5.12
C3	2493	1.3	0.50	4.8	0.8	1.12	1.86	3.28	4.77

**Example 1 – Preparation of composite particles in a fixed bed reactor**

Silicon-carbon composite particles were prepared by placing 1.8 g of a particulate porous framework with the properties listed in Table 1 on a stainless-steel plate at a constant thickness of 1 mm along its length. The plate was then placed inside a stainless-steel tube of outer diameter 60 mm with gas inlet and outlet lines located in the hot zone of a retort furnace. The furnace tube was purged with nitrogen gas for 30 minutes at room temperature, then the sample temperature was increased to 450-500 °C. The nitrogen gas flow-rate is adjusted to ensure a gas residence time of at least 90 seconds in the furnace tube and maintained at that rate for 30 minutes. Then, the gas supply is switched from nitrogen to a mixture of monosilane in nitrogen at 1.25 vol. % concentration. Dosing of monosilane is performed over a 5-hour period with a reactor pressure maintained at 101.3 kPa (1 atm). After dosing has finished the gas flow rate is kept constant whilst the silane is purged from the furnace using nitrogen. The furnace is purged for 30 minutes under nitrogen before being cooled down to room temperature over several hours. The atmosphere is then switched over to air gradually over a period of two hours by switching the gas flow from nitrogen to air from a compressed air supply.

The composites prepared according to Example 1 have the characteristics set out in Table 2 below.

**Example 2 – Preparation of composite particles in a fluidised bed reactor**

Silicon-carbon composite particles were prepared in a vertical bubble-fluidised bed reactor comprising an 83 mm internal diameter stainless steel cylindrical vessel. A 250 g quantity of a powder of carbon framework particles with the properties listed in Table 1 is placed in the reactor. An inert gas (nitrogen) at a low flow rate is injected into the reactor to remove any oxygen. The reactor is then heated to a reaction temperature between 400 and 500°C and 4% v/v monosilane gas diluted in nitrogen is supplied to the bottom of the reactor at a flow rate sufficient to fluidize the carbon framework particles, for a length of time sufficient to deposit the target mass of silicon. The reactor is purged for 30 minutes under nitrogen before being cooled down to room temperature over several hours. The atmosphere is then switched over to air gradually over a period of two hours by switching the gas flow from nitrogen to air from a compressed air supply.

The composites prepared according to Example 2 have the characteristics set out in Table 2 below.

**Example 3 – Preparation of composite particles in a rotary tube furnace reactor**

Silicon-carbon composite particles were prepared by placing 5 g of a particulate porous framework with the properties listed in Table 1 into a quartz tube with a bulb section (11.4 cm long). The quartz tube is then placed inside a rotary reactor tube furnace with heating zone of approximately 5 15 x 20 cm (L x D) with gas inlet and outlet lines located approx. 29 cm away from the hot zone of the furnace. The quartz tube within the furnace rotates ca. 315° clockwise and then anti-clockwise, thereby continuously moving/rotating the porous carbon. The furnace tube was purged with nitrogen gas for 30 minutes at room temperature, then the sample temperature was increased to 10 450-500 °C. The nitrogen gas flow-rate is adjusted to ensure a gas residence time of at least 90 seconds in the furnace tube and maintained at that rate for 30 minutes. Then, the gas supply is switched from nitrogen to a mixture of monosilane in nitrogen at 1.25 vol. % concentration. Dosing of monosilane is performed over a 5-hour period with a reactor pressure maintained at 101.3 kPa (1 atm). After dosing has finished the gas flow rate is kept constant whilst the silane is purged from 15 the furnace using nitrogen. The furnace is purged for 30 minutes under nitrogen before being cooled down to room temperature over several hours. The atmosphere is then switched over to air gradually over a period of two hours by switching the gas flow from nitrogen to air from a compressed air supply.

The composites prepared according to Example 3 have the characteristics set out in Table 2 below.

**Table 2**

Sample No.	Reactor*	Framework	BET m <sup>2</sup> /g	Si wt%	C wt%	O wt%	Si:C	Si:C / P <sub>1</sub>	Particle size distribution, um				Coarse Si**
									D <sub>10</sub>	D <sub>50</sub>	D <sub>90</sub>	D <sub>98</sub>	
S1	F	C2	27	54.0	37.1	7.6	1.5	1.7	1.2	3.2	7.2	10.7	5.2
S2	F	C2	13	56.6	40.0	3.1	1.4	1.6	1.8	4.1	9.1	14.8	9.4
S3	F	C1	46	51.3	40.8	7.0	1.3	1.8	3.0	6.6	12.4	16.8	4.8
S4	R	C1	78	51.6	40.3	7.9	1.3	1.9	3.7	8.4	18.3	29.3	10.1
S5	FBR	C2	245	51.0	45.9	4.7	1.1	1.3	0.1	3.2	7.1	10.7	3.6
S6	FBR	C2	196	49.1	46.0	3.9	1.1	1.2	1.4	3.4	7.2	10.4	5.5
S7	F	C3	178	58.0	32.5	9.2	1.8	1.4	1.6	4.8	8.7	11.0	7.5
S8	F	C3	93	61.0	30.6	7.4	2.0	1.5	1.7	4.8	8.6	11.1	7.8

\* F = Fixed Bed, R = Rotary tube furnace, FBR = Fluidised Bed; \*\* Coarse Si = Wt% oxidised silicon at 800 °C by TGA method described above

#### Example 4 - Preparation of Electrodes

Negative electrode coatings (anodes) were prepared from the materials of sample and comparative sample given in Table 1 using the following method.

Test coin cells were made with negative electrodes comprising the silicon-based composite material prepared as described above. A dispersion of carbon black SuperP® (conductive carbon) in CMC binder was mixed in a Thinky™ mixer. The Si-C composite material was added to the mixture and mixed for 30 min in the Thinky™ mixer. SBR binder was then added to give a CMC: SBR ratio of 1:1, yielding a slurry with a weight ratio of Si-C composite material: CMC/SBR: carbon black of 70%:16%:14%. The slurry was further mixed for 30 min in the Thinky™ mixer, then was coated onto a 10 µm thick copper substrate (current collector) and dried at 50 °C for 10 minutes, followed by further drying at 110 °C for 12 hours to thereby form a negative electrode.

#### Example 5 - Full Cell Manufacture

Full coin cells were made using circular negative electrodes of 0.8 cm radius cut from the electrodes of example 4 with a porous polyethylene separator and a nickel manganese cobalt (NMC532) positive electrode. The positive and negative electrodes were designed to form a balanced pair, such that the capacity ratio of the positive to negative electrodes were 0.9. An electrolyte comprising 1 M LiPF6 in a 7:3 solution of EMC/FEC (ethylene methyl carbonate/fluoroethylene carbonate) containing 3 wt% vinylene carbonate was then added to the cell before sealing.

The full coin cells were cycled as follows: A constant current was applied at a rate of C/25, to lithiate the anode, with a cut off voltage of 4.3 V. When the cut off was reached, a constant voltage of 4.3 V is applied until a cut off current of C/100 is reached. The cell was then rested for 10 minutes in the lithiated state. The anode is then delithiated at a constant current of C/25 with a cut off voltage of 2.75 V. The cell was then rested for 10 minutes. After this initial cycle, a constant current of C/2 was applied to lithiate the anode with a 4.3 V cut off voltage, followed by a 4.3 V constant voltage with a cut off current of C/40 with rest time of 5 minutes. The anode was then delithiated at a constant current of C/2 with a 2.75V cut off. This was then repeated for the desired number of cycles. The charge and discharge capacity was followed for up to 1000 cycles and the capacity retention at 100 and 300 cycles (CR100 and CR300) was determined for each sample. In the case of S1, S2 and S3, CR500 and CR1000 were also determined. This data is provided in Table 3 along with the 1st lithiation capacity, the 1st delithiation capacity and the first cycle loss (FCL) for each of the samples. The capacity retention over multiple cycles is also represented graphically in Figure 1.

The charge (lithiation) and discharge (delithiation) capacities for each cycle are calculated per unit mass of the silicon-carbon composite material and the capacity retention value is calculated for each discharge capacity as a percentage of the discharge capacity on the second cycle. The first cycle loss (FCL) is  $(1 - (1^{\text{st}} \text{ delithiation capacity}/1^{\text{st}} \text{ lithiation capacity})) \times 100\%$ . The values in Table 5 3 are averaged over 3 coin cells for each sample.

**Table 3**

Sample No.	1st lith. mAh/g	1st de-lith. mAh/g	FCL%	CR100 %	CR300 %	CR500 %	CR1000 %
S1	2149	1773	17.5	90	76	64	46
S2	2276	1851	18.7	87	67	54	33
S3	2052	1582	22.9	89	76	59	42
S4	2079	1631	21.5	78	59	42	-
S5	2009	1398	30.4	91	-	-	-
S6	2127	1618	23.9	87	74	-	-
S7	2344	1718	26.7	77	-	-	-
S8	2412	1779	26.3	80	-	-	-

**CLAIMS**

1. A particulate material comprising a plurality of composite particles, wherein the composite particles comprise:

- (a) a porous carbon framework comprising micropores and mesopores, wherein
  - (i) the micropores and mesopores have a total pore volume as measured by gas adsorption of  $P_1 \text{ cm}^3/\text{g}$ , wherein  $P_1$  represents a natural number having a value of at least 0.6,
  - (ii) the volume fraction of micropores ( $\Phi_a$ ) is in the range from 0.1 to 0.9, based on the total volume of micropores and mesopores;
  - (iii) the volume fraction of pores having a pore diameter of no more than 20 nm ( $\Phi_{20}$ ) is at least 0.75, based on the total volume of micropores and mesopores, and
  - (iv) the porous carbon framework has a  $D_{50}$  particle size of less than 20  $\mu\text{m}$ ;
- (b) a plurality of nanoscale elemental silicon domains located within the micropores and/or mesopores of the porous carbon framework;

15 wherein the weight ratio of silicon to the porous carbon framework in the composite particles is in the range from  $[1 \times P_1 \text{ to } 2.2 \times P_1] : 1$ .

2. A particulate material according to claim 1, wherein  $P_1$  has a value of at least 0.65, or at least 0.7, or at least 0.75, or at least 0.8, or at least 0.85, or at least 0.9, or at least 0.95, or at least 1.

20 3. A particulate material according to claim 1 or claim 2, wherein  $P_1$  has a value of no more than 2, or no more than 1.8, or no more than 1.6, or no more than 1.5, or no more than 1.4, or no more than 1.3, or no more than 1.2, or no more than 1.1, or no more than 1.0, or no more than 0.9.

25 4. A particulate material according to any preceding claim, wherein the volume fraction of micropores is in the range from 0.15 to 0.85, or in the range from 0.2 to 0.8, or in the range from 0.45 to 0.85, or in the range from 0.5 to 0.8, or in the range from 0.55 to 0.8, or in the range from 0.6 to 0.8, or in the range from 0.6 to 0.75, based on the total volume of micropores and mesopores.

30 5. A particulate material according to claim 4, wherein the volume fraction of micropores ( $\Phi_a$ ) is in the range from 0.45 to 0.85, or in the range from 0.5 to 0.8, or in the range from 0.5 to 0.75, or in the range from 0.5 to 0.7, based on the total volume of micropores and mesopores.

6. A particulate material according to claim 4, wherein the volume fraction of micropores ( $\Phi_a$ ) is in the range from 0.2 to 0.5, or in the range from 0.3 to 0.5, based on the total volume of micropores and mesopores.

5 7. A particulate material according to any preceding claim, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is at least the value given by  $[\Phi_b+0.75]\times P_1$ , wherein  $\Phi_b$  represents the volume fraction of mesopores, based on the total volume of micropores and mesopores.

8. A particulate material according to claim 7, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is at least the value given by  $[\Phi_b+1]\times P_1$ .

10 9. A particulate material according to claim 8, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is at least the value given by  $[\Phi_b+1.1]\times P_1$ .

10. A particulate material according to any preceding claim, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is no more than the value given by  $[\Phi_b+1.6]\times P_1$ .

15 11. A particulate material according to any preceding claim, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is no more than the value given by  $[\Phi_b+1.5]\times P_1$ .

12. A particulate material according to any of claims 4 to 6, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is at least  $1.1\times P_1$ , or at least  $1.15\times P_1$ , or at 20 least  $1.2\times P_1$ , or at least  $1.25\times P_1$ , or at least  $1.3\times P_1$ , or at least  $1.35\times P_1$ , or at least  $1.4\times P_1$ .

13. A particulate material according to claim 6, wherein the weight ratio of silicon to the porous carbon framework in the composite particles is at least  $1.45\times P_1$ , or at least  $1.5\times P_1$ , or at least  $1.55\times P_1$ , or at least  $1.6\times P_1$ , or at least  $1.65\times P_1$ , or at least  $1.7\times P_1$ .

14. A particulate material according to any preceding claim, wherein the volume fraction of 25 pores having a pore diameter of no more than 20 nm ( $\Phi_{20}$ ) is at least 0.8, or at least 0.85, or at least 0.9, based on the total volume of micropores and mesopores.

15. A particulate material according to any preceding claim, wherein the volume fraction of pores having a pore diameter of no more than 10 nm ( $\Phi_{10}$ ) is at least 0.70, or at least 0.75, or at least 0.8, or at least 0.85, based on the total volume of micropores and mesopores.

16. A particulate material according to any preceding claim, wherein the volume fraction of pores having a pore diameter of no more than 5 nm ( $\phi_5$ ) is at least 0.7, or at least 0.75, or at least 0.8, or at least 0.85, based on the total volume of micropores and mesopores.

5 17. A particulate material according to any preceding claim, wherein the porous carbon framework has a monomodal pore size distribution.

18. A particulate material according to any of claims 1 to 16, wherein the porous carbon framework has a bimodal or multimodal pore size distribution.

10 19. A particulate material according to any preceding claim, wherein the porous carbon framework comprises macropores having a diameter in the range from greater than 50 nm to 100 nm having a total volume  $P_2$  cm<sup>3</sup>/g as measured by mercury porosimetry, wherein  $P_2$  is no more than 0.2× $P_1$ , or no more than 0.1× $P_1$ , or no more than 0.05× $P_1$ , or no more than 0.02× $P_1$ , or no more than 0.01× $P_1$ , or no more than 0.005× $P_1$ .

15 20. A particulate material according to any preceding claim, wherein the composite particles have a  $D_{50}$  particle diameter of at least 0.5 µm, at least 1 µm, or at least 2 µm, or at least 3 µm, or at least 4 µm, or at least 5 µm.

21. A particulate material according to any preceding claim, wherein the composite particles have a  $D_{50}$  particle diameter of no more than 18 µm, or no more than 16 µm, or no more than 14 µm, or no more than 12 µm, or no more than 10 µm, or no more than 9 µm, or no more than 8 µm, or no more than 7 µm, or no more than 6 µm, or no more than 5 µm.

20 22. A particulate material according to any preceding claim, wherein the composite particles have a  $D_{10}$  particle diameter of at least 0.2 µm, or at least 0.5 µm, or at least 0.8 µm, or at least 1 µm, or at least 1.5 µm, or at least 2 µm.

23. A particulate material according to any preceding claim, wherein the composite particles have a  $D_{90}$  particle diameter of no more than 40 µm, or no more than 30 µm, or no more than 20 µm, or no more than 15 µm, or no more than 12 µm, or no more than 10 µm.

25 24. A particulate material according to any preceding claim, wherein the composite particles have a particle size distribution span of 5 or less, or 4 or less, or 3 or less, or 2 or less, or 1.5 or less.

25. A particulate material according to any preceding claim, wherein the composite particles have a BET surface area of no more than 150 m<sup>2</sup>/g, or no more than 100 m<sup>2</sup>/g, or no more than 80

$\text{m}^2/\text{g}$ , or no more than  $60 \text{ m}^2/\text{g}$ , or no more than  $40 \text{ m}^2/\text{g}$ , or no more than  $30 \text{ m}^2/\text{g}$ , or no more than  $25 \text{ m}^2/\text{g}$ , or no more than  $20 \text{ m}^2/\text{g}$ , or no more than  $15 \text{ m}^2/\text{g}$ .

26. A particulate material according to any preceding claim, wherein the composite particles have a BET surface area of at least  $0.1 \text{ m}^2/\text{g}$ , or at least  $1 \text{ m}^2/\text{g}$ , or at least  $2 \text{ m}^2/\text{g}$ , or at least  $5 \text{ m}^2/\text{g}$ .

27. A particulate material according to any preceding claim, having specific capacity on lithiation of 1200 to 2340  $\text{mAh/g}$ .

28. A particulate material according to any preceding claim, wherein at least 90 wt%, preferably at least 95 wt%, preferably at least 98 wt%, more preferably at least 99 wt% of the silicon mass in the composite particles is located within the internal pore volume of the porous carbon framework.

29. A particulate material according to any preceding claim, wherein no more than 10%, preferably no more than 5%, more preferably no more than 2% of the silicon content of the particulate material is unoxidised at  $800 \text{ }^\circ\text{C}$  when the particulate material is analysed by TGA in air with a temperature ramp rate of  $10 \text{ }^\circ\text{C/min}$ .

15 30. A composition comprising a particulate material as defined in any of claims 1 to 29 and at least one other component.

31. A composition according to claim 30, comprising a particulate material as defined in any of claims 1 to 29, and at least one other component selected from: (i) a binder; (ii) a conductive additive; and (iii) an additional particulate electroactive material.

20 32. A composition according to claim 31, comprising at least one additional particulate electroactive material.

33. A composition according to claim 32, comprising from 1 to 20 wt%, or from 2 to 15 wt%, or from 2 to 10 wt%, or from 2 to 5 wt% of the particulate material as defined in any of claims 1-29, based on the total dry weight of the composition.

25 34. A composition according to claim 32 or claim 33, comprising from 10 to 98 wt%, or from 15 to 97 wt%, or from 20 to 97 wt%, or from 25 to 97 wt% of the at least one additional particulate electroactive material, based on the total dry weight of the composition.

35. A composition according to any one of claims 32 to 34, wherein the at least one additional particulate electroactive material has a specific capacity on lithiation in the range from 100 to 600  $\text{mAh/g}$ , or from 200 to 500  $\text{mAh/g}$ .

36. A composition according to claim 35, wherein the at least one additional particulate electroactive material is selected from graphite and hard carbon.

37. A composition according to any of claims 31 to 36, comprising a binder, optionally in an amount of from 0.5 to 20 wt%, or 1 to 15 wt%, or 2 to 10 wt%, based on the total dry weight of the  
5 composition.

38. A composition according to any of claims 31 to 37, comprising one or more conductive additives, optionally in a total amount of from 0.5 to 20 wt%, or 1 to 15 wt%, or 2 to 10 wt%, based on the total dry weight of the composition.

39. An electrode comprising a particulate material as defined in any of claims 1 to 29 in  
10 electrical contact with a current collector.

40. An electrode according to claim 39, wherein the particulate material is in the form of a composition as defined in any of claims 30 to 38.


41. A rechargeable metal-ion battery comprising:

15 (i) an anode, wherein the anode comprises an electrode as described in claim 39 or  
claim 40;  
(ii) a cathode comprising a cathode active material capable of releasing and  
reabsorbing metal ions; and  
(iii) an electrolyte between the anode and the cathode.

42. Use of a particulate material as defined in any of claims 1 to 29 as an anode active  
20 material.

43. Use according to claim 42, wherein the particulate material is in the form of a composition as defined in any of claims 30 to 38.

FIGURE 1

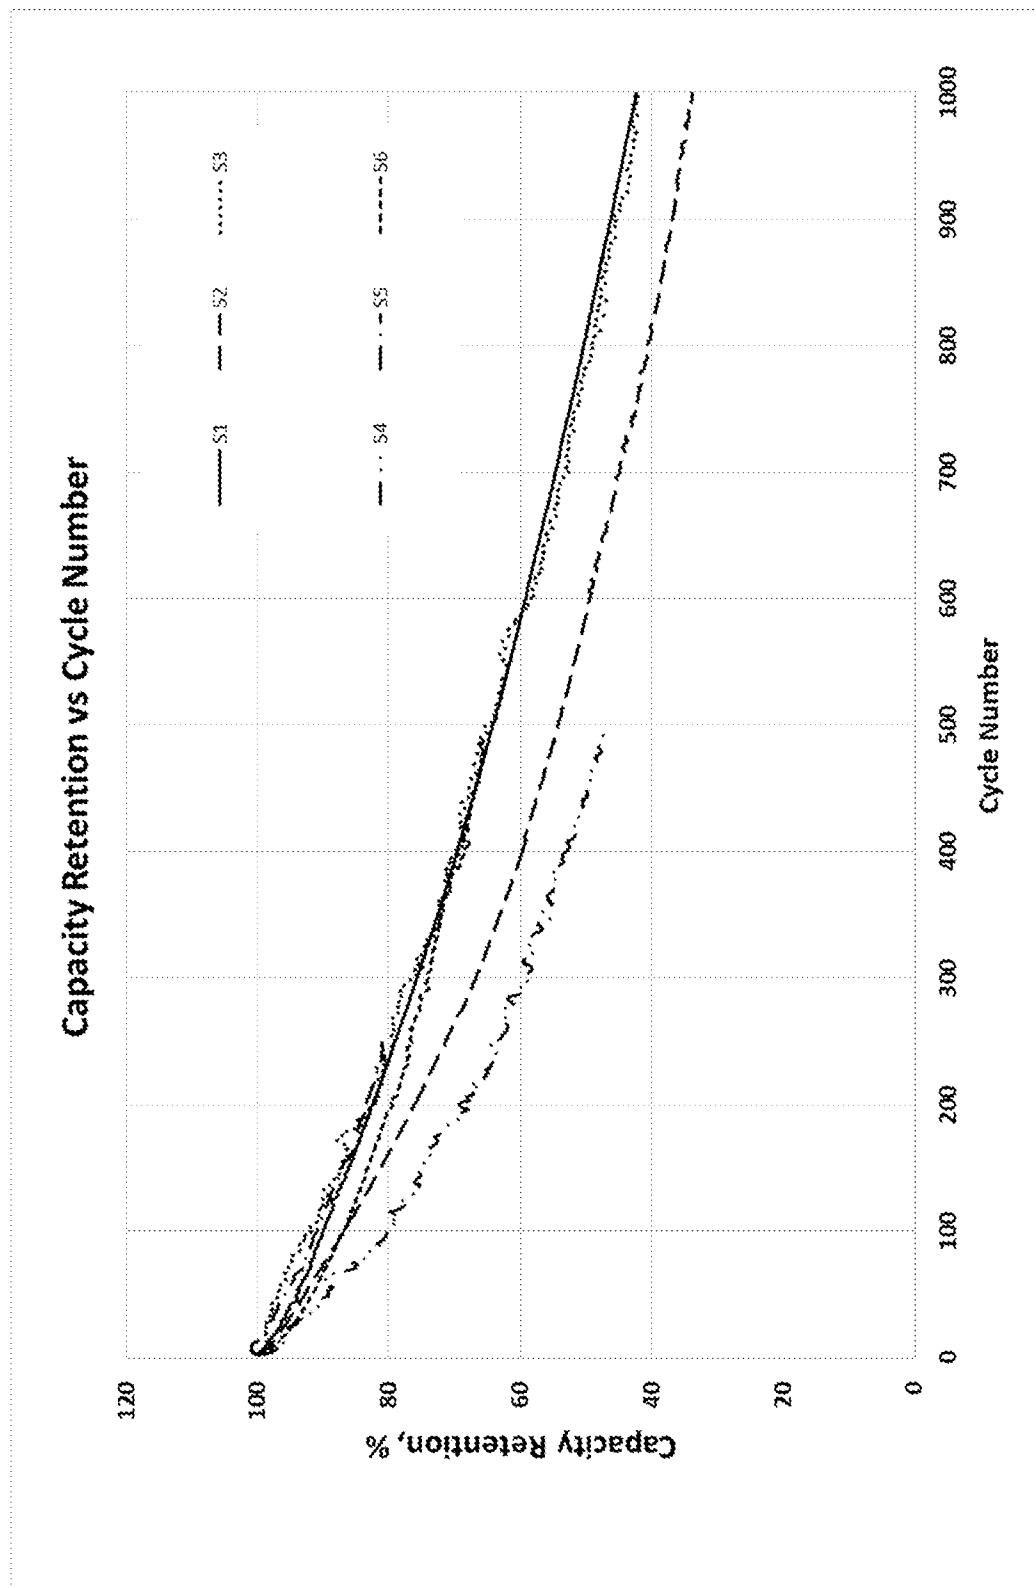

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/GB2019/053640

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. H01M4/04 H01M4/133 H01M4/134 H01M4/36 H01M4/38  
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2018/165610 A1 (GROUP 14 TECH INC [US]) 13 September 2018 (2018-09-13) the whole document ----- X US 2017/170477 A1 (SAKSHAUG AVERY [US] ET AL) 15 June 2017 (2017-06-15) the whole document ----- -/-	1-43 1-43

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier application or patent but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
20 February 2020	04/03/2020
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Swiatek, Ryszard

## INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2019/053640

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>RENYUAN ZHANG ET AL: "Highly Reversible and Large Lithium Storage in Mesoporous Si/C Nanocomposite Anodes with Silicon Nanoparticles Embedded in a Carbon Framework",  ADVANCED MATERIALS,  vol. 26, no. 39,  1 October 2014 (2014-10-01), pages  6749-6755, XP055667354,  DE  ISSN: 0935-9648, DOI:  10.1002/adma.201402813  the whole document</p> <p>-----</p>	1-43
A	<p>WO 2012/131628 A1 (BASF SE [DE]; BASF CHINA CO LTD [CN] ET AL.)  4 October 2012 (2012-10-04)  the whole document</p> <p>-----</p>	1-43

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2019/053640

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2018165610	A1 13-09-2018	CN 110582823 A	EP 3593369 A1	KR 20190122805 A	17-12-2019 15-01-2020 30-10-2019
		US 2020020935 A1	WO 2018165610 A1		16-01-2020 13-09-2018
US 2017170477	A1 15-06-2017	CN 108475779 A	EP 3341990 A1	JP 2018534720 A	31-08-2018 04-07-2018 22-11-2018
		KR 20180113187 A	US 2017170477 A1	US 2019280298 A1	15-10-2018 15-06-2017 12-09-2019
		WO 2017040299 A1			09-03-2017
WO 2012131628	A1 04-10-2012	CN 103459312 A	EP 2691338 A1	JP 2014522355 A	18-12-2013 05-02-2014 04-09-2014
		KR 20140018907 A	WO 2012131628 A1		13-02-2014 04-10-2012