



(51) International Patent Classification: Not classified

[US/US]; 3301 Northstarr Road #216, Richardson, TX 75082 (US).

(21) International Application Number:

PCT/US2010/060087

(74) Agents: **FRANZ, Warren, L.** et al.; Texas Instruments Incorporated, Deputy General Patent Counsel, P. O. Box 655474, Mail Station 3999, Dallas, TX 75265-5474 (US).

(22) International Filing Date:

13 December 2010 (13.12.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/687,173 14 January 2010 (14.01.2010) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:

US 12/687,173 (CON)
Filed on 14 January 2010 (14.01.2010)(71) Applicant (for all designated States except US): **TEXAS INSTRUMENTS INCORPORATED** [US/US]; P. O. Box 655474, Mail Station 3999, Dallas, TX 75265-5474 (US).(71) Applicant (for JP only): **TEXAS INSTRUMENTS JAPAN LIMITED** [JP/JP]; 24-1, Nishi-shinjuku 6-chome, Shinjuku-ku, Tokyo, 160-8366 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **COOPER, J., Randall** [US/US]; 1505 Barton Creek Court, Lucas, TX 75002 (US). **ZHANG, Weibiao** [CN/US]; 2209 Senna Hills Lane, Plano, TX 75025 (US). **SCOTT, Kyl, W.**

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

[Continued on next page]

(54) Title: BATTERY CELL TAB MONITOR AND METHOD

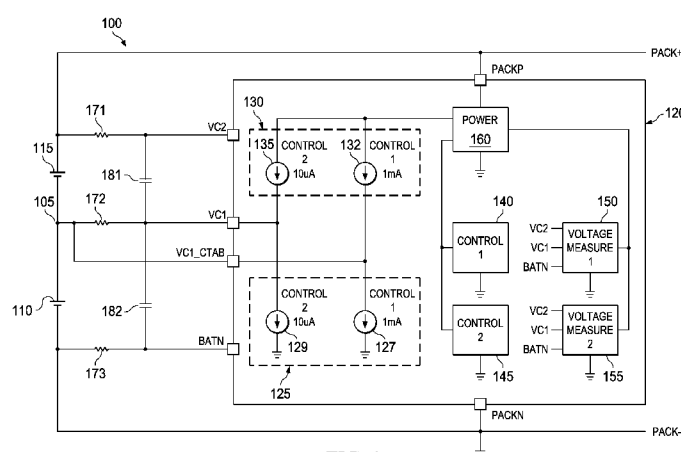


FIG. 1

(57) **Abstract:** A battery cell tab monitoring apparatus (100) includes a conductive element (105) electrically connected between two battery cells (110, 115). The conductive element (105) is connected to a sensing circuit (120) including a pull-down current source (125) connected to pull current from the conductive element and/or a pull-up current source (130) connected to drive current into the conductive element. A voltage measuring circuit (150) is connected to sense voltages during operation of the pull-down current source (125) and the pull-up current source (130) to be used to determine the status of the conductive element. For instance, voltages beyond certain fixed or variable thresholds indicate that the conductive element (105) is flexing or cracking, which can be a precursor to its breaking. Voltages beyond other fixed or variable thresholds indicate that the conductive element is fully disconnected. The current sources used to push and pull the sensing currents may be used to bring the battery cells (110, 115) into balance when an imbalance is detected.



-
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- Published:**
- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

BATTERY CELL TAB MONITOR AND METHOD

[0001] This invention relates generally to voltage measuring devices and methods, and more specifically to devices and methods monitoring battery cells in a battery stack.

BACKGROUND

[0002] It is common to power electronic devices with battery packs containing two or more battery cells. For instance, two or more battery cells may be stacked in series to produce a higher voltage to power various electronic devices. The batteries are monitored to provide a user of the powered device with information regarding the amount of energy remaining in the battery. In some applications, each cell of a battery stack is monitored because the voltage for each cell may drift too high or too low for a particular application or a particular cell may stop working, affecting the overall performance of the battery stack.

[0003] Circuits that monitor the battery cells in the battery pack monitor the voltage across each cell and the voltage for the entire series. Typically, a mechanical tab electrically connects each battery cell to the monitoring circuit. The mechanical tab over time may become disconnected due to physical conditions such as dropping the battery pack. When the tab becomes disconnected from the battery cells, the circuit loses the ability to monitor individual cells.

SUMMARY

[0004] Generally speaking, pursuant to these various embodiments, a battery cell tab monitoring apparatus includes a conductive element electrically connected between two battery cells. The conductive element is connected to a sensing circuit. The sensing circuit includes a pull-down current source connected to pull current from the conductive element and/or a pull-up current source connected to drive current into the conductive element. A voltage measuring circuit is connected to sense voltages during operation of the pull-down current source and the pull-up current source. The measured voltage may be used to determine the status of the conductive element. For instance, absolute voltages or voltage variations beyond certain thresholds can indicate that the conductive element such as a battery cell tab is flexing or cracking, which can be a precursor to the breaking of the battery cell tab. Absolute voltages or voltage variations beyond other thresholds can indicate that the conductive element is fully disconnected from the battery cells.

[0005] One approach to sensing the different absolute voltages and voltage variations is to push and pull different currents to and from the conductive element. Alternating the pushing and pulling reduces battery cell imbalance caused by the voltage checks and provides an opportunity to make additional voltage readings. The current sources used to push and pull the sensing currents may also be used to bring the battery cells into balance when an imbalance is detected.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a circuit diagram of an example battery cell tab monitor configured in accordance with various embodiments of the invention;

[0007] FIG. 2 is a circuit diagram of an example battery cell tab monitor configured in accordance with various embodiments of the invention;

[0008] FIG. 3 is a flow diagram of the operation of an example battery cell tab monitor detecting a fixed voltage threshold as configured in accordance with various embodiments of the invention.

[0009] FIGS. 4-6 are sample waveforms that may be observed in the system when configured in accordance with various embodiments of the invention.

[0010] FIG. 7 is a flow diagram of the operation of an example battery cell tab monitor detecting a voltage shift as configured in accordance with various embodiments of the invention.

[0011] FIGS. 8-10 are sample waveforms that may be observed in the system when configured in accordance with various embodiments of the invention.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

[0012] FIG. 1 illustrates an example embodiment circuit 100. The circuit 100 includes a conductive element 105 electrically connected to a first battery cell 110 and a second battery cell 115. The conductive element 105 is electrically connected to a sensing circuit 120. The sensing circuit 120 includes a pull-down current source 125 connected to pull current from the conductive element 105. The sensing circuit 120 also includes a pull-up current source 130 connected to drive current into the conductive element 105.

[0013] Although the pull-down current source 125 and the pull-up current source 130 can each operate with just one current source, in a different approach each may include multiple, independently controllable current sources. In the example of FIG. 1, the pull-down current

source 125 includes a first pull-down current source 127 and a second pull-down current source 129. In this example, the pull-up current source 130 includes a first pull-up current source 132 and a second pull-up current source 135. In this example, the sensing circuit 120 contains a first control circuit 140 and a second control circuit 145. In one approach, the first pull-down current source 127 provides about 1 milliamp of current and is controlled by the first control circuit 140. The second pull-down current source 129 provides about 10 microamps of current and is controlled by the second control circuit 145. Similarly, the first pull-up current source 132 provides about 1 milliamp of current and is controlled by the first control circuit 140 and the second pull-up current source 135 provides about 10 microamps of current and is controlled by the second control circuit 145.

[0014] The control circuits 140 and 145 may be hardware based controllers or firmware based controllers. In one approach, the first control circuit 140 comprises a hardware based controller that can turn on and off the first pull-up current source 132 and the first pull-down current source 127. The second control circuit 145 comprises a firmware based controller that can turn on and off the second pull-up current source 135 and the second pull-down current source 129.

[0015] An example approach to the control circuits 140 and 145 is illustrated with reference to FIG. 2. A hardware based controller 240 includes comparators 220 and 222 connected to compare voltages from the conductive element 105 to different threshold voltages V_{th1} and V_{th2} as described in more detail below. The signals from the comparators 220 and 222 are provided to a hardware logic element 224, such as those known to the skilled in the art, that in turn provides a push current control 228 signal to control the first pull-up current source 132 and a pull current control 226 signal to control the first pull-down current source 127.

[0016] A firmware based controller 245 as shown in FIG. 2 includes a microcontroller 252 connected to an analog-to-digital converter 254. In this approach, the analog-to-digital converter 254 is connected to receive voltages from the conductive element 105 and convert those voltage signals to a digital signal for processing by the microcontroller 252. The microcontroller 252 is connected to control the operation of the analog-to-digital converter 254. The microcontroller 252 is also programmed and configured to create and send a push current control 258 signal to control the second pull-up current source 135 and a pull current control 256

signal to control the second pull-down current source 129 based upon the voltage digital signals provided by the analog-to-digital converter 254. Switches 262, 264, 266, and 268 control the sensing of voltages and the provision of current for the hardware based controller 240, and switches 272, 274, 276, and 278 control the sensing of voltages and the provision of current for the firmware based controller 245.

[0017] With reference again to FIG. 1, the sensing circuit 100 includes a voltage measuring circuit 150 connected to sense voltages during operation of the pull-down current source 127 and the pull-up current source 132. The sensing circuit 100 contains a second voltage measuring circuit 155 connected to sense voltages during operation of the pull-down current source 129 and the pull-up current source 135.

[0018] In the example of FIG. 1, the control circuit 140 and the voltage measuring circuit 150 are connected to determine the status of the conductive element 105. For example, voltage measuring circuit 150 can compare voltage measured during operation of the pull-down current source 127 to a first voltage threshold and the voltage measuring circuit 150 can compare the voltage measured during operation of the pull-up current source 132 to a second voltage threshold. Based on the comparisons of the measured voltages to either fixed thresholds or on the measured voltage variations, the control circuit 140 can determine the status of the conductive element 105.

[0019] Likewise, voltage measuring circuit 155 can compare voltage measured during operation of the pull-down current source 129 to a third voltage threshold and the voltage measuring circuit 155 can compare the voltage measured during operation of the pull-up current source 135 to a fourth voltage threshold. Based on the comparisons of the measured voltages to either fixed thresholds or on the measured voltage variations, the control circuit 145 can determine the status of the conductive element 105.

[0020] In this example, the control circuit 140 controls the pull-up current source 132 and the pull-down current source 127 to alternate in operation to balance the load on the first battery cell 110 and the second battery cell 115. In addition to balancing the load on the battery cells 110 and 115, alternating between the pull-down current source 127 and the pull-up current source 132 allows the voltage measuring circuit 150 to compare voltage variations in both the positive and negative directions to confirm the accuracy of the measurements. For example, a

measurement made during operation of the pull-down current source 127 can be compared to a measurement made during operation of the pull-up current source 132 to determine whether a given measurement lies within an expected range such that spurious measurements can be disregarded.

[0021] In other approaches, the circuit 100 need not include both a pull-up current source 130 and a pull-down current source 125. For example, if the circuit 100 includes other known load balancing mechanisms, the need to use the pull-up current source 130 and pull-down current source 125 to reduce load imbalance is reduced, and one of the pull-up current source 130 or the pull-down current source 125 can be implemented to perform the voltage checks as described herein. In such an approach, the elements of the unused current source can be removed or left out of the circuit 100.

[0022] In another approach using multiple current sources, the control circuit 140 operates the first pull-down current source 127 and/or the first pull-up current source 132 periodically to determine whether the conductive element 105 electrical connection is intact. The control circuit 145 may operate the second pull-down current source 129 and/or the second pull-up current source 135 periodically to monitor quality of the conductive element 105 electrical connection.

[0023] In one such example, the first pull-down current source 127 is controlled to pull about 1 milliamp out of the conductive element 105 for about two milliseconds. Then, the first pull-up current source 132 is controlled to push about 1 milliamp into the conductive element 105 for about two milliseconds. In this example, this check is performed once every eight seconds. If the electrically conductive element 105 is disconnected from the first battery cell 110 and the second battery cell 115, the resulting voltage at the disconnect will be sensed by the voltage measuring circuit 150 both at a low threshold as occurs when the pull-down current source 127 operates and at a high threshold when the pull-up current source 132 operates. Upon meeting both these low and high thresholds on consecutive checks, the sensing circuit 120 will signal this to be a disconnected conductive element or tab such that the device enters a fault condition.

[0024] So configured, the sensing circuit 120 applies or pulls a larger current such as about 1 milliamp to sense whether a voltage variation reaches a certain threshold from which it

may be determined that the conductive element 105 has broken and is no longer in electrical contact with the first battery cell 110 and the second battery cell 115A. A smaller current, such as about 10 microamps may be pulled from or pushed into the conductive element 105 to sense voltage variations that indicate wear of the conductive element 105.

[0025] In another application of the circuit 100, the control circuit 145 can receive information regarding relative charge of the first battery cell 110 and the second battery cell 115. In this approach, the control circuit 145 operates the pull-up current source 135 and the pull-down current source 129 to balance the relative charge of the first battery cell 110 and the second battery cell 115. In this approach, sensing circuitry as known in the art can determine an imbalance of charge between the first battery cell 110 and the second battery cell 115. The sensing circuitry in various approaches may comprise a controller circuit separate from those shown in FIG. 1 or may be in communication with control circuit 140 and/or control circuit 145. Such imbalances between cells in a battery pack can lead to poor performance including perhaps failure of the battery pack. Thus, upon determining an imbalance of charge between the first battery cell 110 and the second battery cell 115, the sensing circuit 120 can correct the imbalance of charge between the first battery cell 110 and the second battery cell 115 by pushing current or pulling current via the conductive element 105 using any of the current sources. Selective pushing and pulling of current into and out of particular battery cells can work to rebalance the relative cell charges of the battery pack. Moreover, depending on the amount of imbalance, a larger current may be applied by the first pull-down current source 127 or a smaller current may be applied by the second pull-down current source 129, depending on the amount of imbalance in the cells to be corrected.

[0026] The remainder of the example circuit 100 shown in FIG. 1 includes well known elements used for the operation of a sensing circuit 120 used in conjunction with battery cells. For instance, resistors 171, 172, and 173 work with capacitors 181 and 182 to filter voltage transients on the first battery cell 110, the second battery cell 115, and the combination of the battery cells 110 and 115. In some implementations, for example, it may be possible to omit resistors 171, 172, and 173 as well as capacitors 181 and 182. It is also possible to eliminate the circuit node VC1_CTAB and only use circuit node VC1 for both pull-down current sources and both pull-up current sources, with consideration given to the effects of resistor 172 if the

VC1_CTAB circuit node is eliminated. Additional elements could be added in other approaches.

[0027] An example method of monitoring battery cell tab conditions is described with reference to FIG. 3 and the example circuit 100 of FIG. 1. This method uses fixed voltage thresholds for determining the condition of the conductive element 105 and can be executed by either a hardware based control circuit or a firmware based control circuit. The method 300 includes at step 305 pulling current out of a conductive element 105 disposed between a first battery cell 110 and a second battery cell 115. At step 310 the method includes sensing a first voltage across the first battery cell 110 while pulling current out of the conductive element 105. At step 315 the method includes pushing current into the conductive element 105 disposed between the first battery cell 110 and the second battery cell 115 and at step 320 sensing a second voltage across the first battery cell 110 while pushing current into the conductive element 105. As shown in FIG. 3, the steps of pulling current 305 and pushing current 315 may be performed in either order. In other words, the step of pushing current 215 from the conductive element 105 may be performed before pulling current 305 through the conductive element 105. In another approach, either steps 305 and 310 or steps 315 and 320 are skipped, such that current is either pulled into or pushed from the conductive element 105; such an approach may be accompanied by application of other known load balancing methods. At step 330 the method includes determining a connection status of the conductive element 105 based at least in part the first voltage and the second voltage.

[0028] The steps of pulling current 305 out of the conductive element 105 and pushing current 315 into the conductive element 105 can be alternated periodically. In one example, either the step of pulling current 305 out of the conductive element and/or pushing the current 315 into the conductive element may include pushing or pulling a first current at a first interval and pushing or pulling a second current and a second interval. For instance, the step of pulling the first current at the first interval may include pulling a current of about 1 milliamp to determine whether the conductive element 105 is connected to a sensing circuit 120. The step of pulling the second current at the second interval may include pulling a current of about 10 microamps to determine a degradation of the connection between the conductive element 105 and the sensing circuit 120.

[0029] By one approach, the step 330 of determining the connection status of the

conductive element 105 is based at least in part on the voltage measured at step 310, comparing the first voltage to a first voltage threshold at step 340 and at step 350 comparing the second voltage measured at step 320 to a second voltage threshold at step 350. At step 360 an indication of the connection status of the connective element 105 is provided according to a function of the first voltage as compared to the first voltage threshold and the second voltage as compared to the second threshold. The specific voltage thresholds may vary according to a specific application.

[0030] By way of example, FIG. 4 shows the current and voltage waveforms expected when a 1 milliamp current is applied when the conductive element 105 is connected and has a low resistance. The indicators VC1 and VC1_CTAB indicate the nodes on the example circuit of FIG. 1 where the represented currents and voltages are applied and measured. When a 1 milliamp current is pulled out of the VC1_CTAB node, the voltage at the VC1 node does not change appreciably and does not cross the fixed low threshold T_1 . Similarly, when a 1 milliamp current is pushed into the VC1_CTAB node, the voltage at the VC1 node does not change appreciably and does not cross the fixed high threshold T_2 . Accordingly, the conductive element 105 is declared to be connected.

[0031] FIG. 5 shows the current and voltage waveforms expected when the conductive element 105 is disconnected or has a very high resistance. When the 1 milliamp current is pulled from or pushed into the VC1_CTAB node, the voltage measured at VC1 crosses the fixed low threshold T_1 when the pull-down current source 127 is active and crosses the fixed high threshold T_2 when the pull-up current source 132 is active. This condition indicates the conductive element 105 is disconnected and open.

[0032] FIG. 6 shows the current and voltage waveforms expected when the conductive element 105 is connected and has a moderate resistance. When the 1 milliamp current is pulled from or pushed into the VC1_CTAB node, the voltage measured at VC1 varies but does not cross the fixed low threshold when the pull-down current source 127 is active or the fixed high threshold when the pull-up current source 132 is active. Because the fixed thresholds were not exceeded, the system declares the conductive element 105 to be connected.

[0033] Another example method of monitoring battery cell tab conditions will be described with reference to FIG. 7 and the example circuit 100 of FIG. 1. This method uses variable voltage thresholds for determining the condition of the conductive element 105 and

would be used by either a hardware based control circuit or a firmware based control circuit. The method 700 includes at step 702 a measurement of the initial voltage across the first battery cell 110. Subsequent voltage measurements are compared to this initial voltage to determine the state of the conductive element 105. At step 705 the method includes pulling current out of a conductive element 105 disposed between a first battery cell 110 and a second battery cell 115. At step 710 the method includes sensing a voltage drop across the first battery cell 110 caused by pulling current out of the conductive element 105. At step 715 the method includes pushing current into the conductive element 105 disposed between the first battery cell 110 and the second battery cell 115 and at step 720 sensing a voltage rise across the first battery cell 110 caused by pushing current into the conductive element 105.

[0034] As shown in FIG. 7, the steps of pulling current 705 and pushing current 715 may be performed in either order. In other words, the step of pushing current 715 into the conductive element 105 may be performed before pulling current 705 through the conductive element 105. In another approach, either steps 705 and 710 or steps 715 and 720 are skipped, such that current is either pulled into or pushed from the conductive element 105; such an approach may be accompanied by application of other known load balancing methods. At step 730 the method includes determining a connection status of the conductive element 105 based at least in part on the voltage drop and the voltage rise sensed at steps 710 and 720.

[0035] By one approach, determining the connection status includes comparing a difference between the first voltage and an initial voltage to a first threshold to make a first comparison at step 740 and comparing a difference between the second voltage and the initial voltage to a second voltage threshold to make a second comparison at step 750. By one approach, the first threshold and the second threshold are determined based on the last measured voltage such that the thresholds are measuring the total voltage change during a particular operation of one of the current sources. At step 760 the method includes providing an indication of the connection status of the conductive element according to the first comparison and the second comparison.

[0036] In one such example, a firmware based control circuit 145 can command a 10 microampere current to be pulled out of the center tab or conductive element 105 for about 8 milliseconds. The control circuit 145 then turns off the pull-down current source 129 for 10

milliseconds, followed by the control circuit 145 controlling the second pull-up current source 135 to provide 10 microamperes of current to the conductive element 105 for about 8 milliseconds. If the conductive element 105 is partially disconnected, the control circuit 145 is able to detect voltage at the conductive element 105 moving due to the 10 microampere current being pulled from or pushed into the conductive element 105. This moving voltage is an indication of wear on the conductive element 105 or center tab disposed between the first battery cell 110 and the second battery cell 115.

[0037] By way of example, FIG. 8 shows the current and voltage waveforms expected when a ten microampere current is applied when the conductive element 105 is connected and has a low resistance. The indicators VC1 and VC1_CTAB indicate the nodes on the example circuit of FIG. 1 where the represented currents and voltages are applied and measured. When a ten microampere current is pulled out of the VC1_CTAB node, the voltage at the VC1 node does not change appreciably from the initial voltage and does not cross the variable low threshold T_3 . Similarly, when a ten microampere current is pushed into the VC1_CTAB node, the voltage at the VC1 node does not change appreciably and does not cross the variable high threshold T_4 . Accordingly, the conductive element 105 is declared to be connected.

[0038] FIG. 9 shows one possible set of current and voltage waveforms expected when the conductive element 105 is disconnected or has a very high resistance. When the ten microampere current is pulled from or pushed into the VC1_CTAB node, the voltage measured at VC1 crosses the variable low threshold T_3 when the pull-down current source 129 is active and crosses the variable high threshold T_4 when the pull-up current source 132 is active. This condition indicates the conductive element 105 is disconnected and open. One can see from this example that the low threshold T_3 and the high threshold T_4 measure a voltage delta or change during the application of current from the current sources. Thus the high threshold T_4 is measured from the voltage at the start of the application of current from the pull-down current source 132.

[0039] FIG. 10 shows one possible set of current and voltage waveforms expected when the conductive element 105 is connected and has a moderate resistance. In this example, unlike the example of FIG. 5, the voltage measured at the VC1 node crosses the low threshold T_3 when the pull-down current source 129 is active and the high threshold T_4 when the pull-up current

source 135 is active. This reflects the smaller delta threshold applied in this example. Moreover, the threshold may be variable to test various conditions. Accordingly, when a particular threshold is crossed, it is possible to determine the magnitude of the resistance, and thus the amount of wear, of the conductive element 105.

[0040] Referring again to FIG. 1, a particular example circuit for performing this method would include a conductive element 105 electrically connected to a first battery cell 110 and a second battery cell 115 and electrically connected to a sensing circuit 120. The sensing circuit 120 includes a first pull-down current source 127 connected to periodically pull a first current from the conductive element 105 for a first amount of time and a first pull-up current source 132 connected to periodically push current approximately equal to the first current into the conductive element 105 for approximately the first amount of time. A second pull-down current source 129 is connected to periodically pull a second current from the conductive element 105 for a second amount of time, and a second pull-up current source 135 is connected to periodically drive current approximately equal to the second current into the conductive element 105 for approximately the second amount of time. In this example, the first current is about 1 milliamp and the second current is about 10 microamps.

[0041] A first control circuit 140 is connected to control operation of the first pull-down current source 127, the first pull-up current source 132, and a second control circuit 145 is connected to control operation of the second pull-down current source 129, and the second pull-up current source 135. A first voltage measuring circuit 150 is connected to sense voltages during operation of the first pull-down current source 127, the first pull-up current source 132, and a second voltage measuring circuit 155 is connected to sense voltages during operation of the second pull-down current source 129, and the second pull-up current source 135.

[0042] The control circuits 140 and 145 are connected to determine a status of the conductive element 105 based at least in part on the measured voltages such that the control circuits 140 and 145 compare voltages during operation of at least one of the first pull-down current source 127 and the first pull-up current source 132 to a first voltage threshold, and the control circuits 140 and 145 compare voltages during operation of at least one of the second pull-down current source 129 and the second pull-up current source 135 to a second voltage threshold. In this example, the first pull-down current source 127 and the first pull-up current

source 132 are controlled by at least one hardware based control circuit 140, and the second pull-down current source 129 and the second pull-up current source 135 are controlled by at least one firmware based control circuit 145. The control circuit 145 can also be configured to receive information regarding relative charge of the first battery cell 110 and the second battery cell 115 and wherein the controller circuit 145 operates the second pull-up current source 135 and the second pull-down current source 129 to balance the relative charge of the first battery cell 110 and the second battery cell 115.

[0043] So configured, a battery cell tab monitoring circuit as described herein can determine when the connection tab between two battery cells is disconnected and when the battery cell tab is exhibiting signs of wear that can be a precursor to breaking of the battery cell tab. Versions of the circuit also enable selective pushing and pulling of current into and out of the battery cell tab to balance the charge of battery cells in a battery stack when the battery cell charges become imbalanced.

[0044] Embodiments having different combinations of one or more of the features or steps described in the context of example embodiments having all or just some of such features or steps are intended to be covered hereby. Those skilled in the art will appreciate that many other embodiments and variations are also possible within the scope of the claimed invention.

CLAIMS

What is claimed is:

1. A battery cell tab monitoring circuit electrically connected to a conductive element that is electrically connected to a first battery cell and a second battery cell, the circuit comprising:

a current source connected to pull current from the conductive element or drive current into the conductive element;

a controller circuit connected to control operation of the current source; and

a voltage measuring circuit connected to sense voltages during operation of the current source;

wherein the controller circuit is connected to determine a status of the conductive element based at least in part on the voltage measurements.

2. The circuit of claim 1, wherein the current source comprises a pull-down current source connected to pull current from the conductive element, and a pull-up current source connected to drive current into the conductive element.

3. The circuit of claim 2, wherein the pull-down current source comprises a first pull-down current source and a second pull-down current source; and wherein the pull-up current source comprises a first pull-up current source and a second pull-up current source.

4. The circuit of claim 3, wherein the controller circuit operates the first pull-down current source and the first pull-up current source periodically to determine whether the conductive element electrical connection is intact.

5. The circuit of claim 3, wherein the controller circuit operates the second pull-down current source and the second pull-up current source periodically to monitor quality of the conductive element electrical connection.

6. The circuit of claim 2, wherein the controller circuit controls the pull-up current source and the pull-down current source to alternate in operation to balance load on the first battery cell and the second battery cell.

7. The circuit of claim 2, wherein the controller circuit compares voltages during operation of the pull-down current source to a first voltage fixed or variable threshold; and wherein the controller circuit compares voltages during operation of the pull-up current source to a second fixed or variable voltage threshold.

8. The circuit of claim 2, wherein the controller circuit receives information regarding relative charge of the first battery cell and the second battery cell; and the controller circuit operates the pull-up current source and the pull-down current source to balance the relative charge of the first battery cell and the second battery cell.

9. The circuit of claim 1,
wherein the current source comprises:
a first pull-down current source connected to periodically pull a first current from the conductive element for a first amount of time;
a first pull-up current source connected to periodically push current approximately equal to the first current into the conductive element for approximately the first amount of time;
a second pull-down current source connected to periodically pull a second current from the conductive element for a second amount of time; and
a second pull-up current source connected to periodically drive current approximately equal to the second current into the conductive element for approximately the second amount of time;
wherein the controller circuit is connected to control operation of the first pull-down current source, the first pull-up current source, the second pull-down current source, and the second pull-up current source;

wherein the voltage measuring circuit is connected to sense voltages during operation of the first pull-down current source, the first pull-up current source, the second pull-down current source, and the second pull-up current source; and

wherein the controller circuit is connected to determine the status of the conductive element based at least in part on the measured voltages, such that the controller circuit compares voltages during operation of at least one of the first pull-down current source and the first pull-up current source to a first fixed or variable voltage threshold and the controller circuit compares voltages during operation of at least one of the second pull-down current source and the second pull-up current source to a second fixed or variable voltage threshold.

10. The circuit of claim 9, wherein the controller circuit receives information regarding relative charge of the first battery cell and the second battery cell and the controller circuit operates the second pull-up current source and the second pull-down current source to balance the relative charge of the first battery cell and the second battery cell.

11. The circuit of claim 10, wherein the first current is about 1 milliamp and the second current is about 10 microamps.

12. A method of monitoring battery cell conditions, comprising:
pulling current out of a conductive element disposed between a first battery cell and a second battery cell;
sensing a first voltage across the first battery cell while pulling current out of the conductive element;
pushing current into the conductive element disposed between the first battery cell and the second battery cell;
sensing a second voltage across the first battery cell while pushing current into the conductive element; and
determining a connection status of the conductive element based at least in part on the first voltage and the second voltage.

13. The method of claim 12, wherein the steps of pushing current into the conductive element and pulling current out of the conductive element are periodically alternated .

14. The method of claim 12, wherein the step of determining the connection status of the conductive element based at least in part on the first voltage and the second voltage comprises:

comparing the first voltage to a first voltage threshold;

comparing the second voltage to a second voltage threshold; and

providing an indication of the connection status of the conductive element according to a function of the first voltage as compared to the first voltage threshold and the second voltage as compared to the second threshold.

15. The method of claim 12, wherein the step of determining the connection status of the conductive element based at least in part on the first voltage and the second voltage comprises:

comparing a difference between the first voltage and an initial voltage to a first threshold to make a first comparison;

comparing a difference between the second voltage and the initial voltage to a second voltage threshold to make a second comparison; and

providing an indication of the connection status of the conductive element according to the first comparison and the second comparison.

16. The method of claim 12, wherein the step of pushing current into the conductive element comprises pushing a first current at a first interval, and pushing a second current at a second interval.

17. The method of claim 16, wherein the step of pushing the first current at the first interval comprises pushing a current of about 1 milliamp to determine whether the conductive element is connected to a sensing circuit; and wherein the step of pushing the second current at

the second interval comprises pushing a current of about 10 microamps to determine a degradation of the connection between the conductive element and the sensing circuit.

18. The method of claim 12, further comprising determining an imbalance of charge between the first battery cell and the second battery cell; and correcting the imbalance of charge between the first battery cell and the second battery cell by pushing current or pulling current via the conductive element.

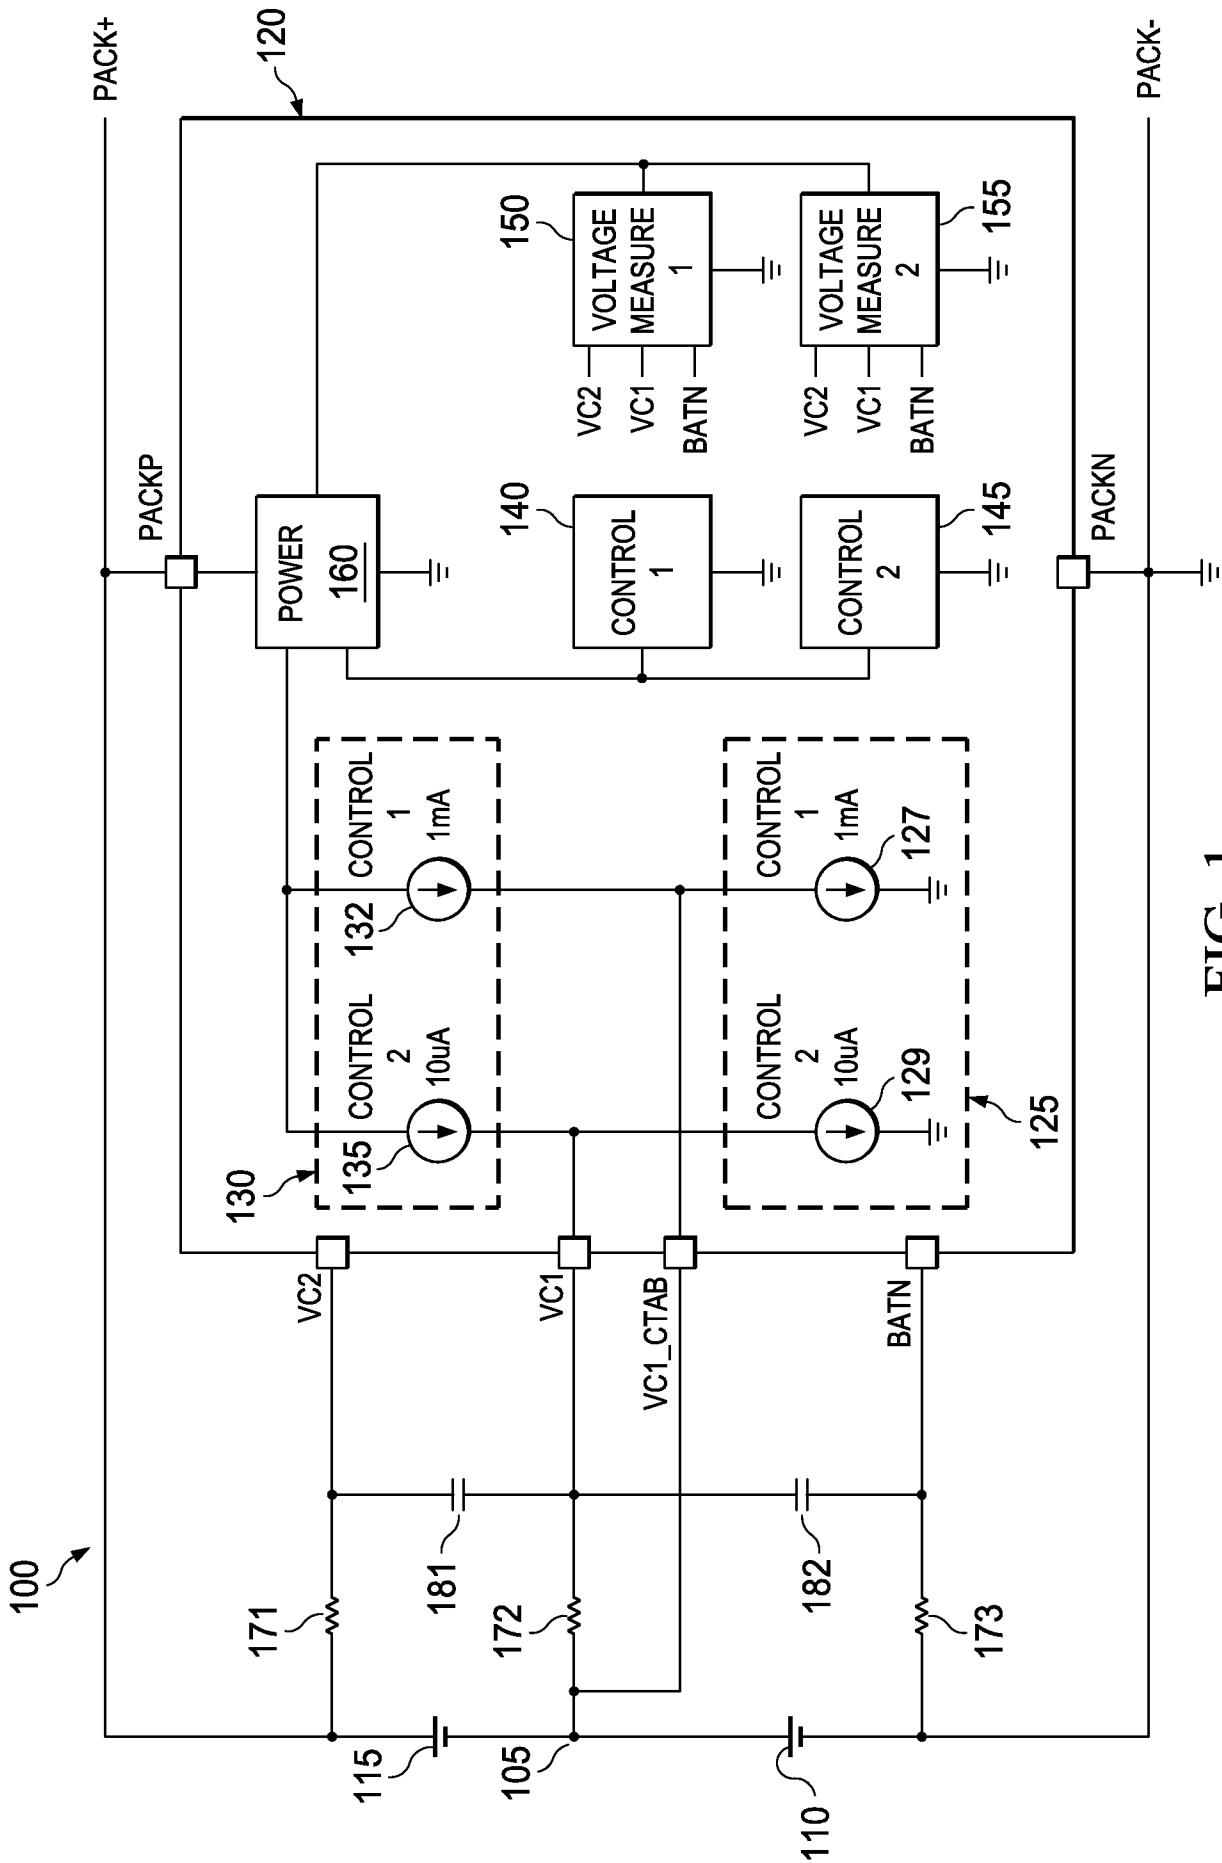


FIG. 1

2/10

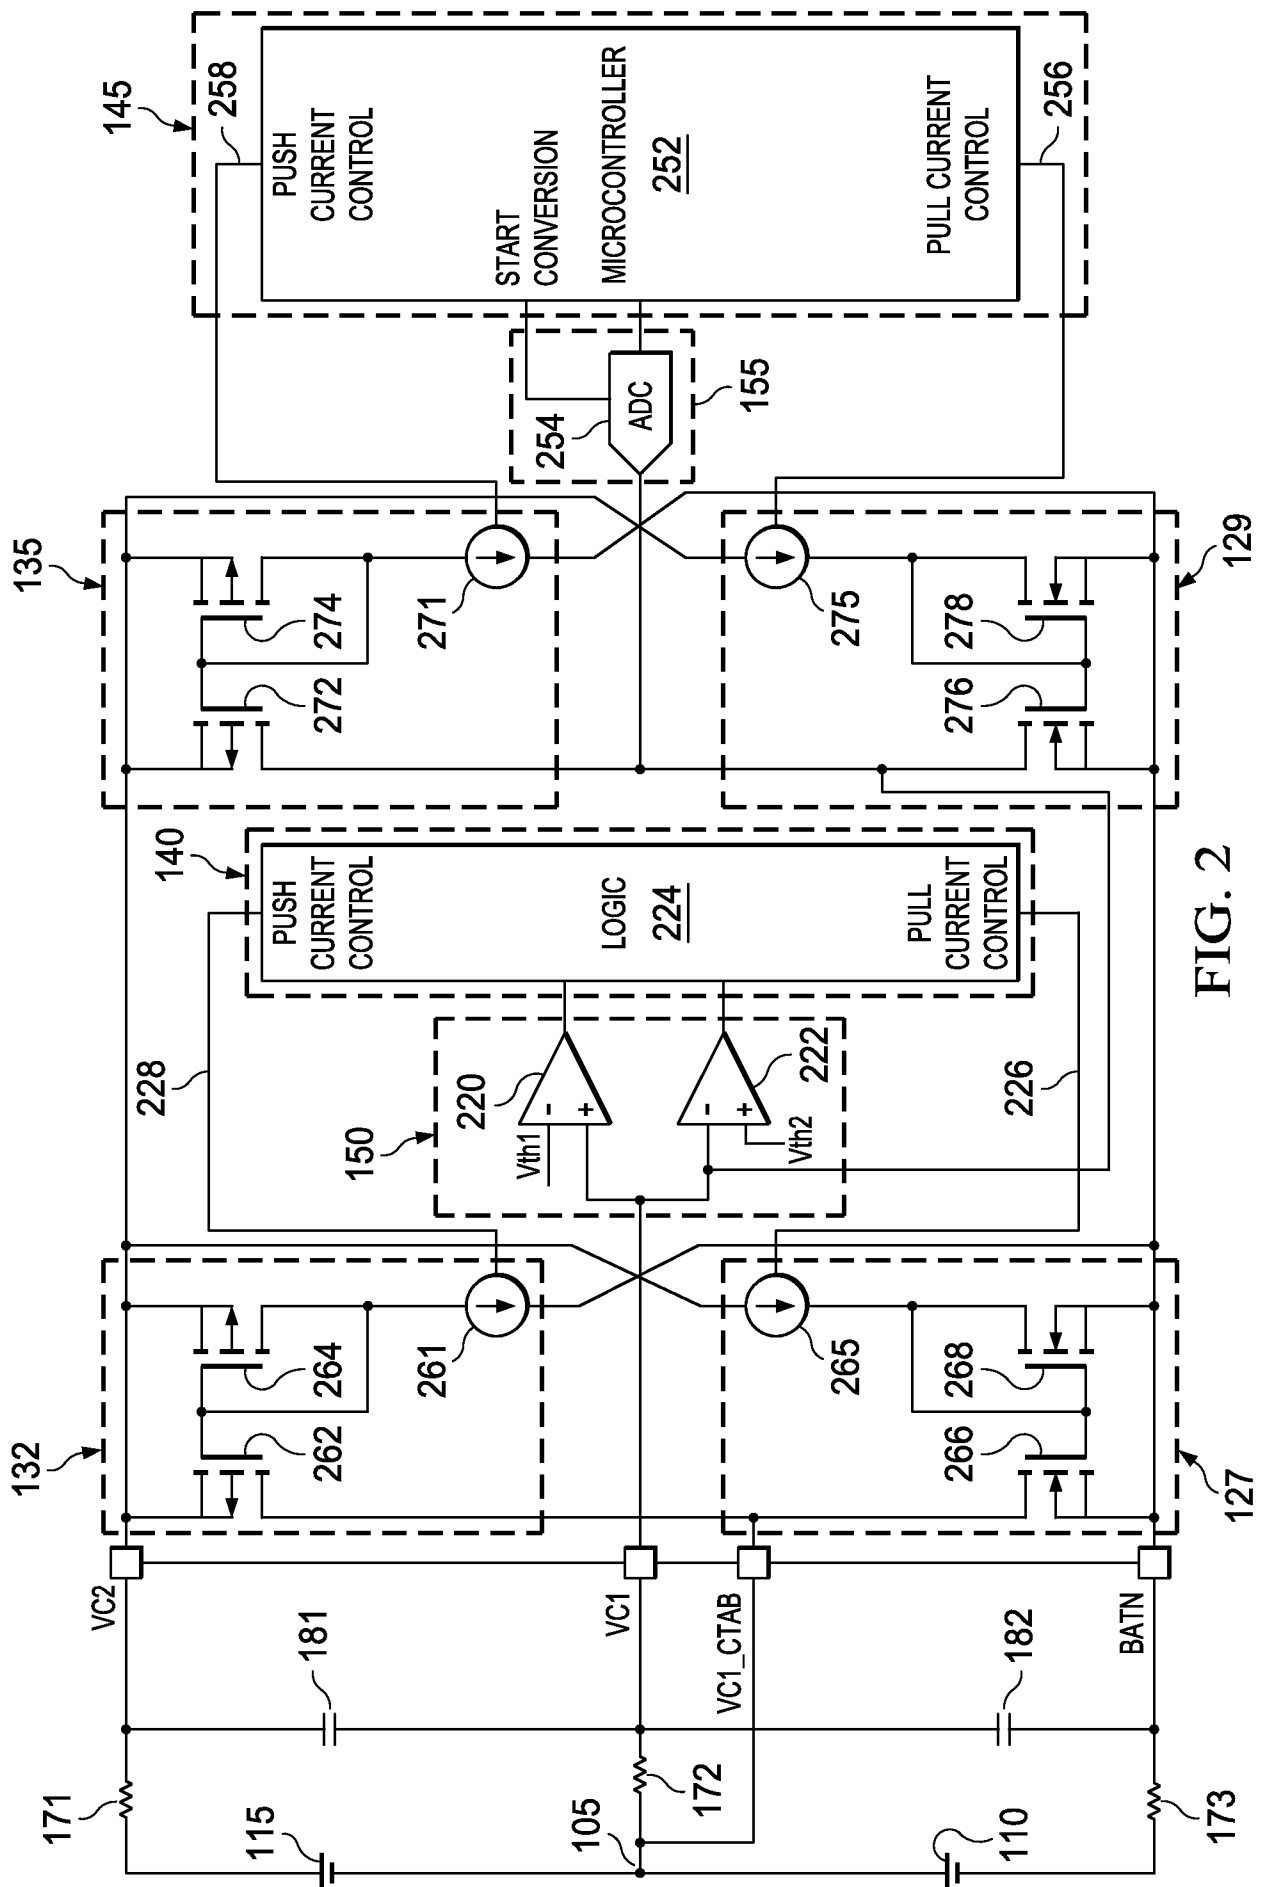


FIG. 2

3/10


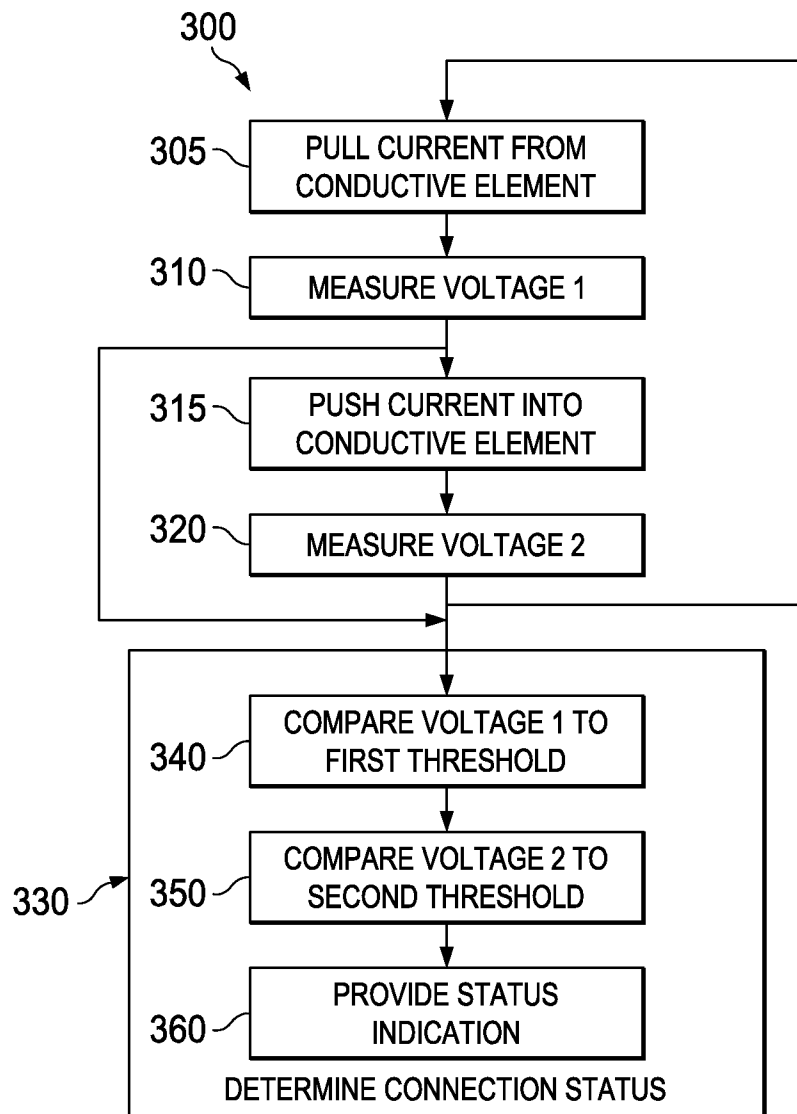


FIG. 3


4/10

FIG. 4

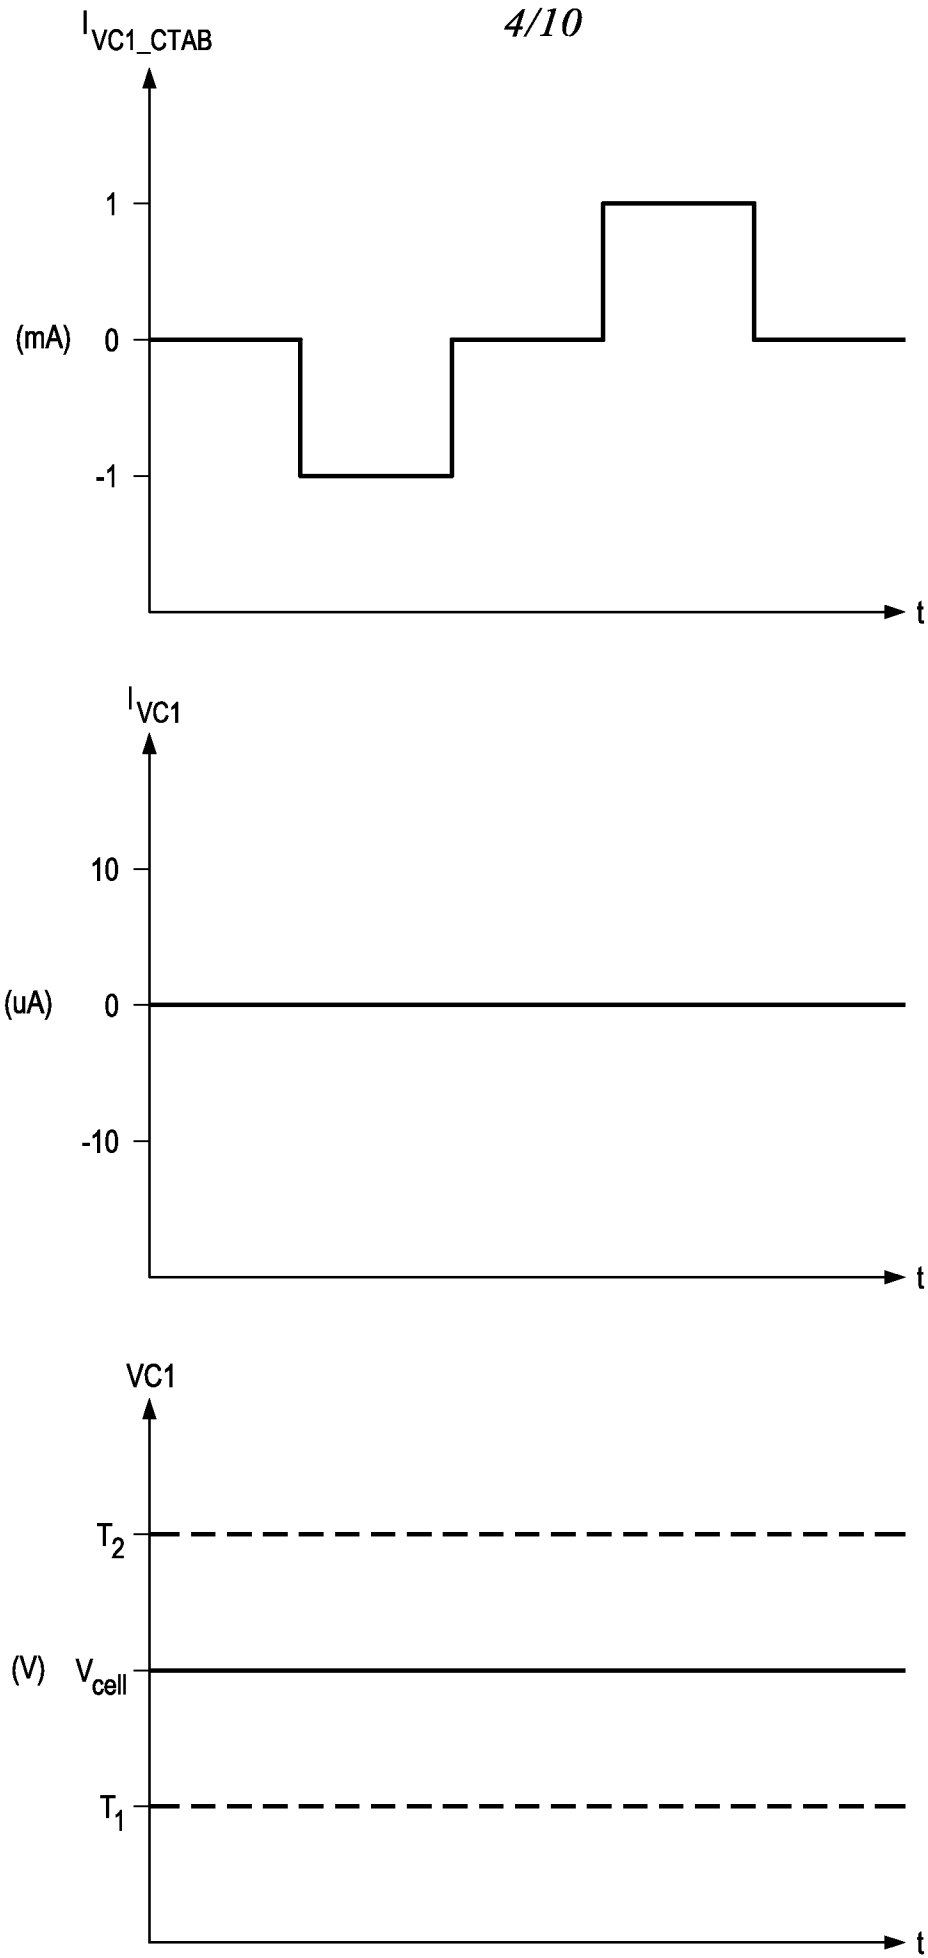


5/10

FIG. 5

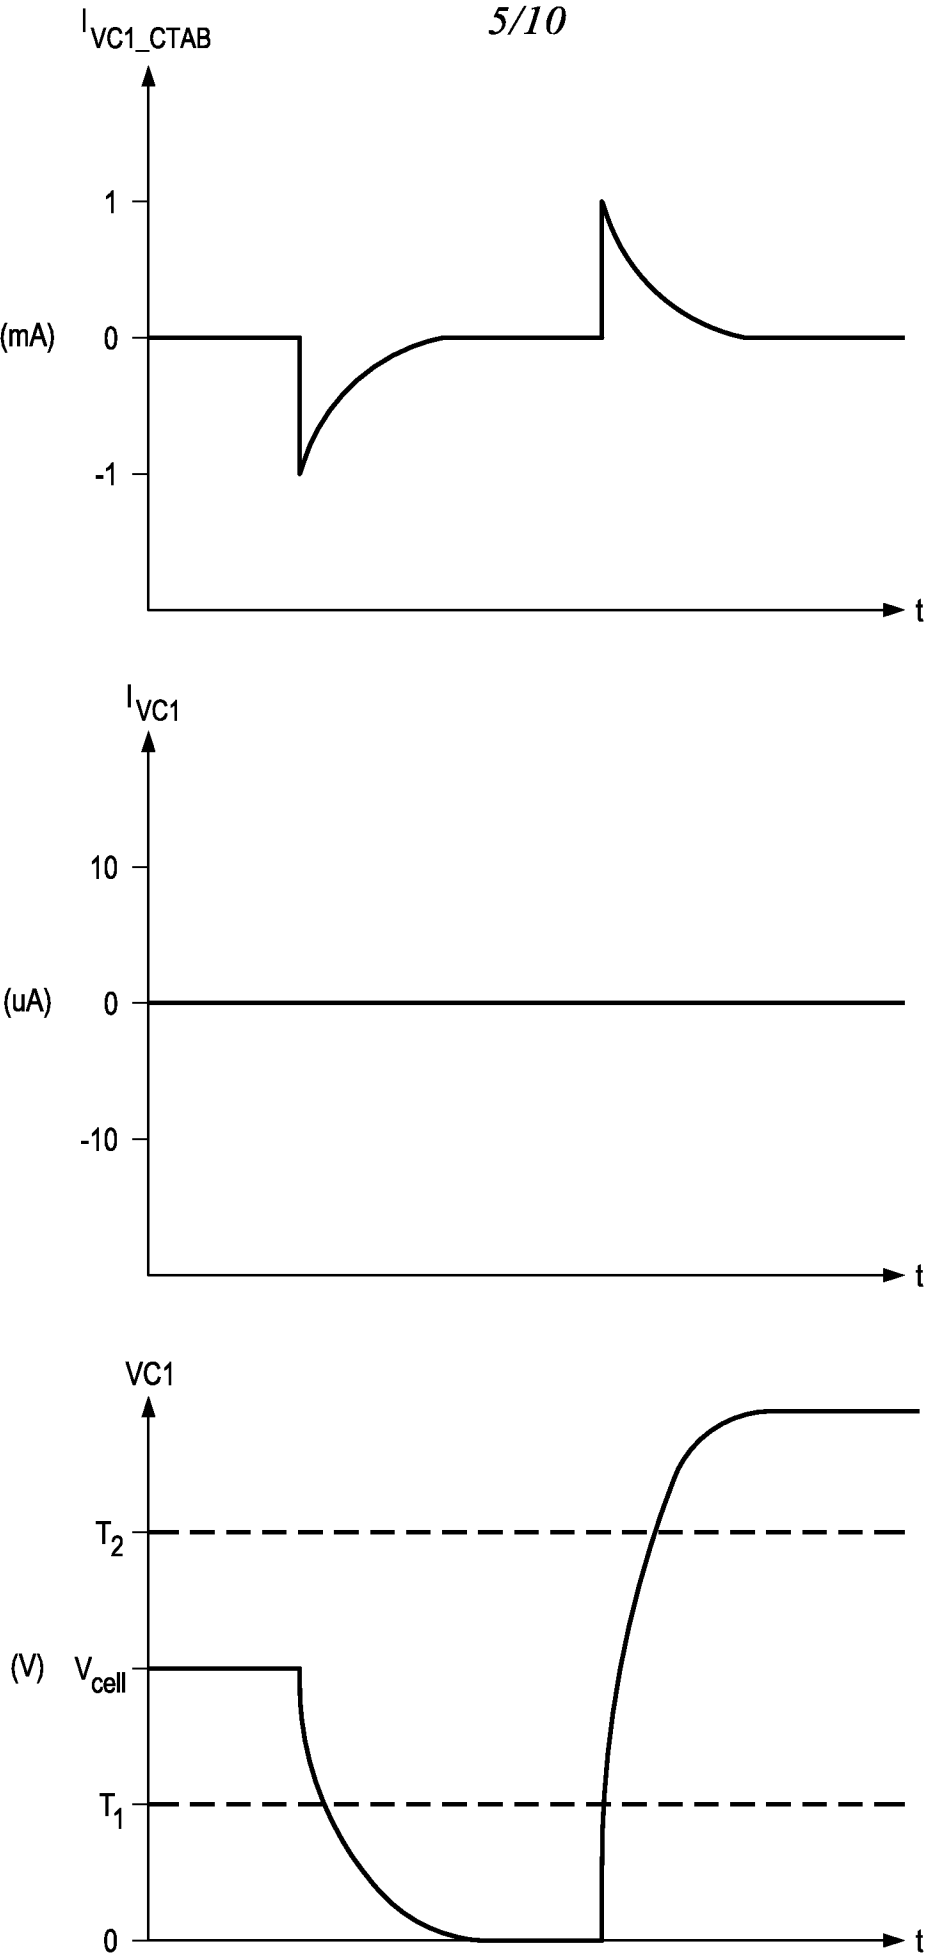

6/10

FIG. 6

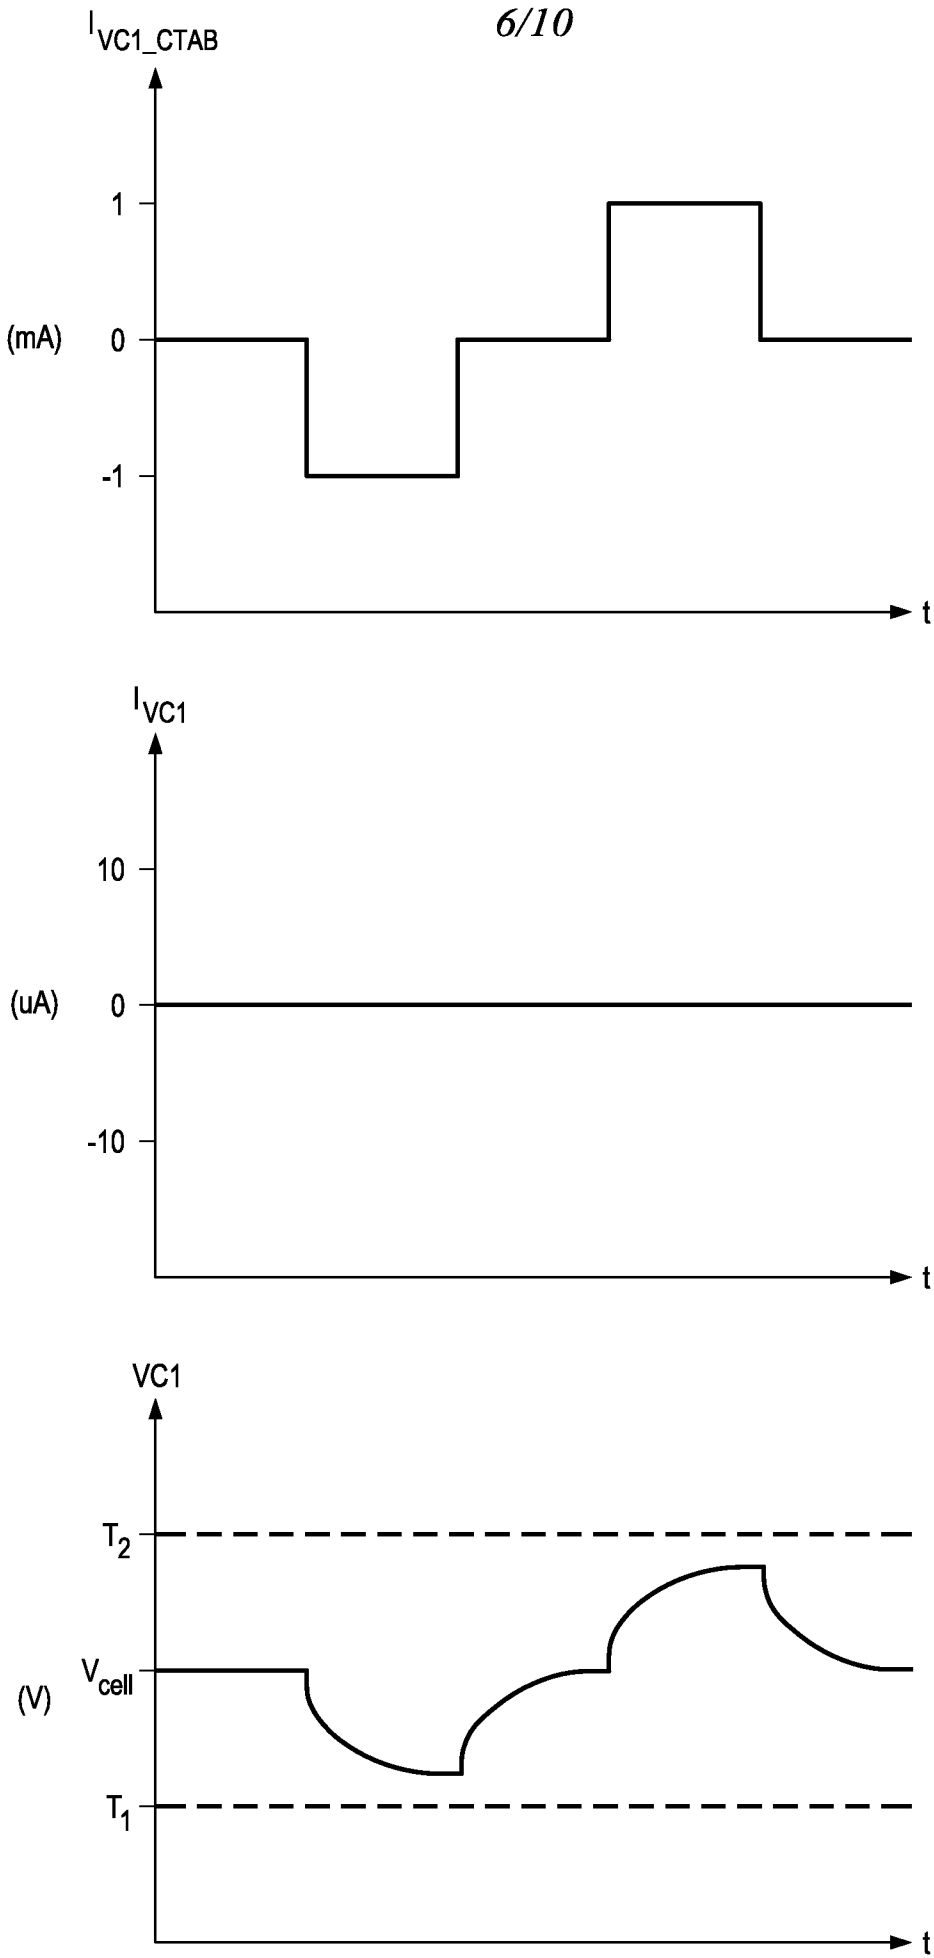

7/10

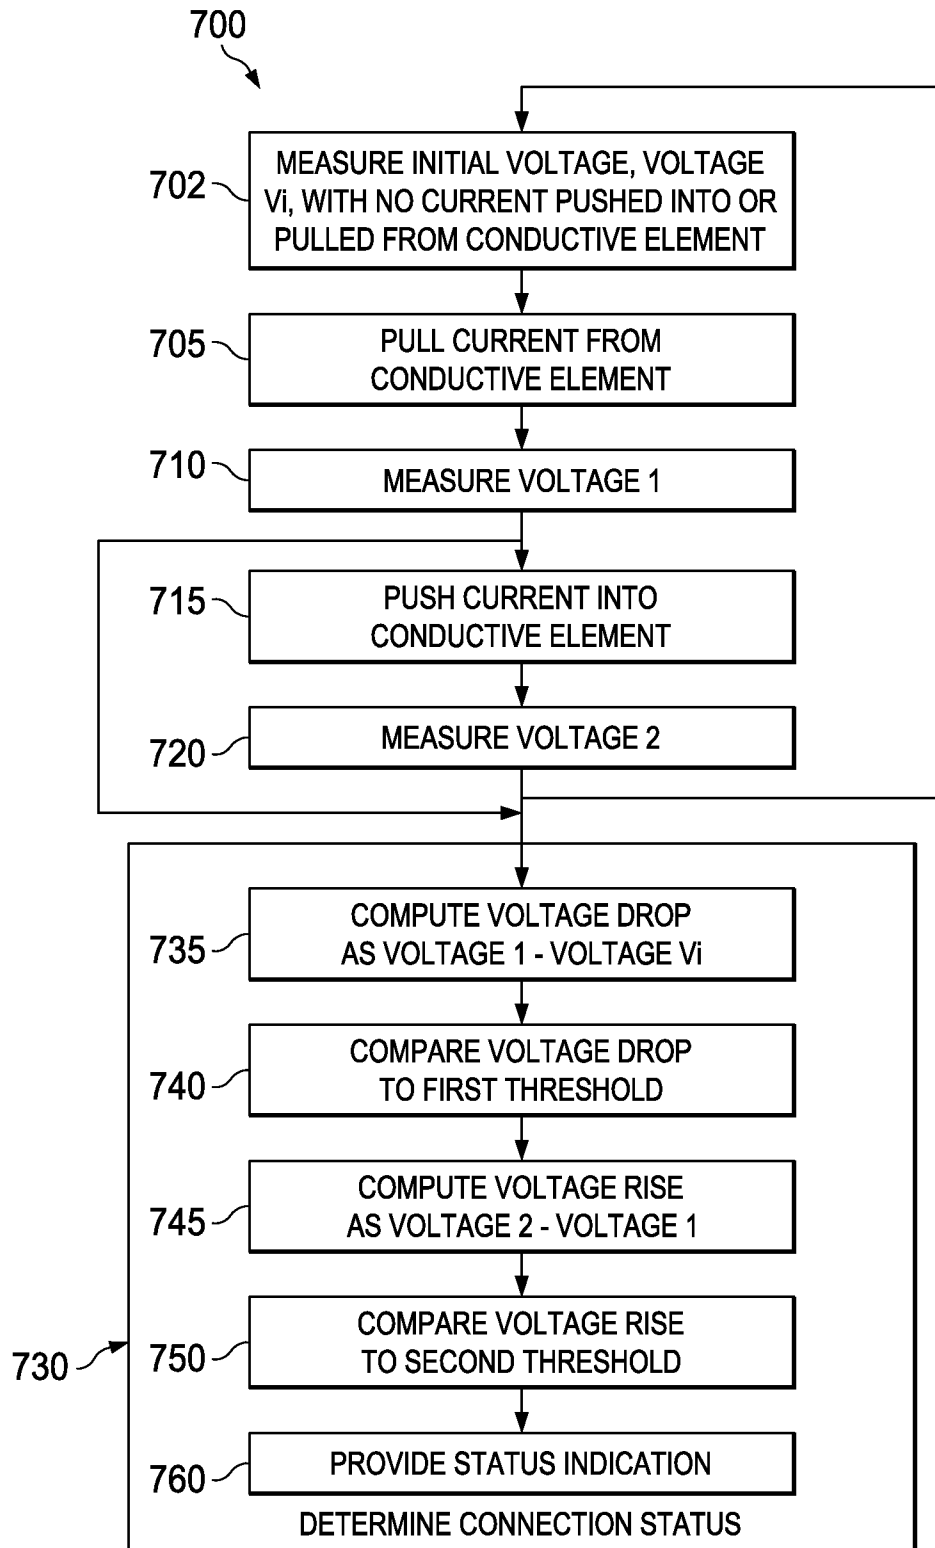


FIG. 7

8/10


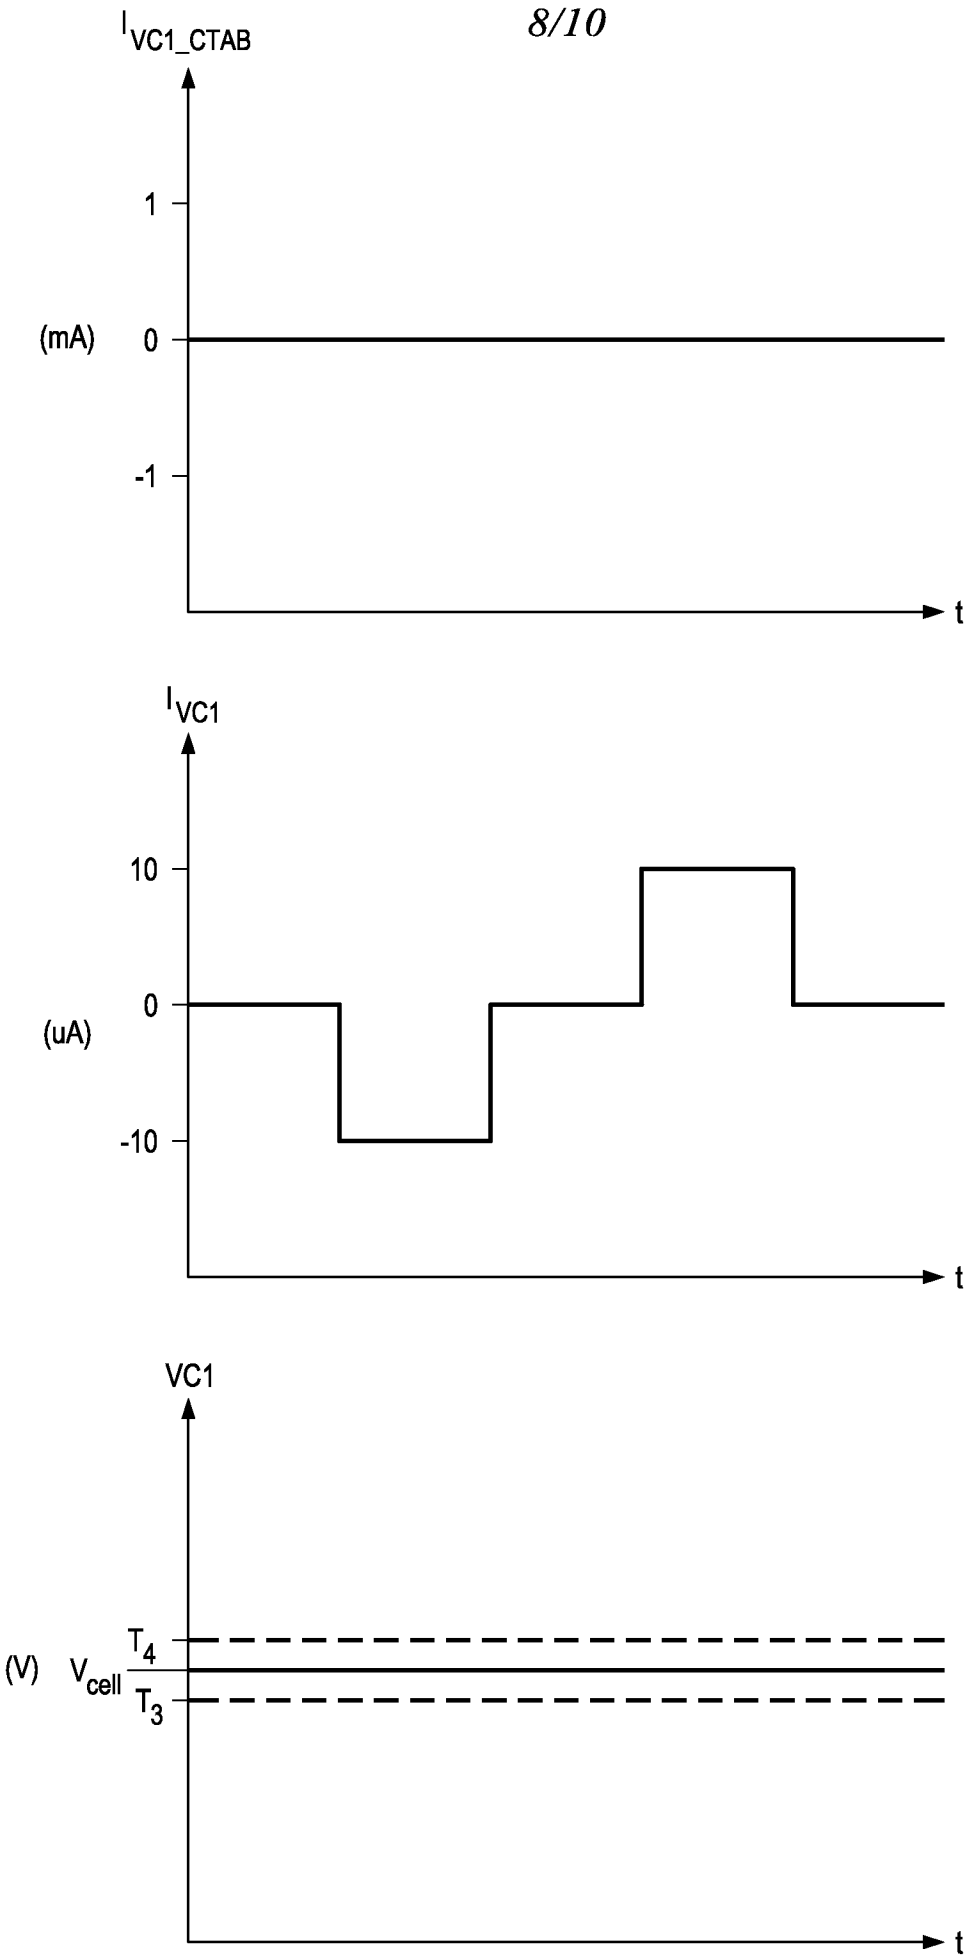


FIG. 9



10/10

FIG. 10

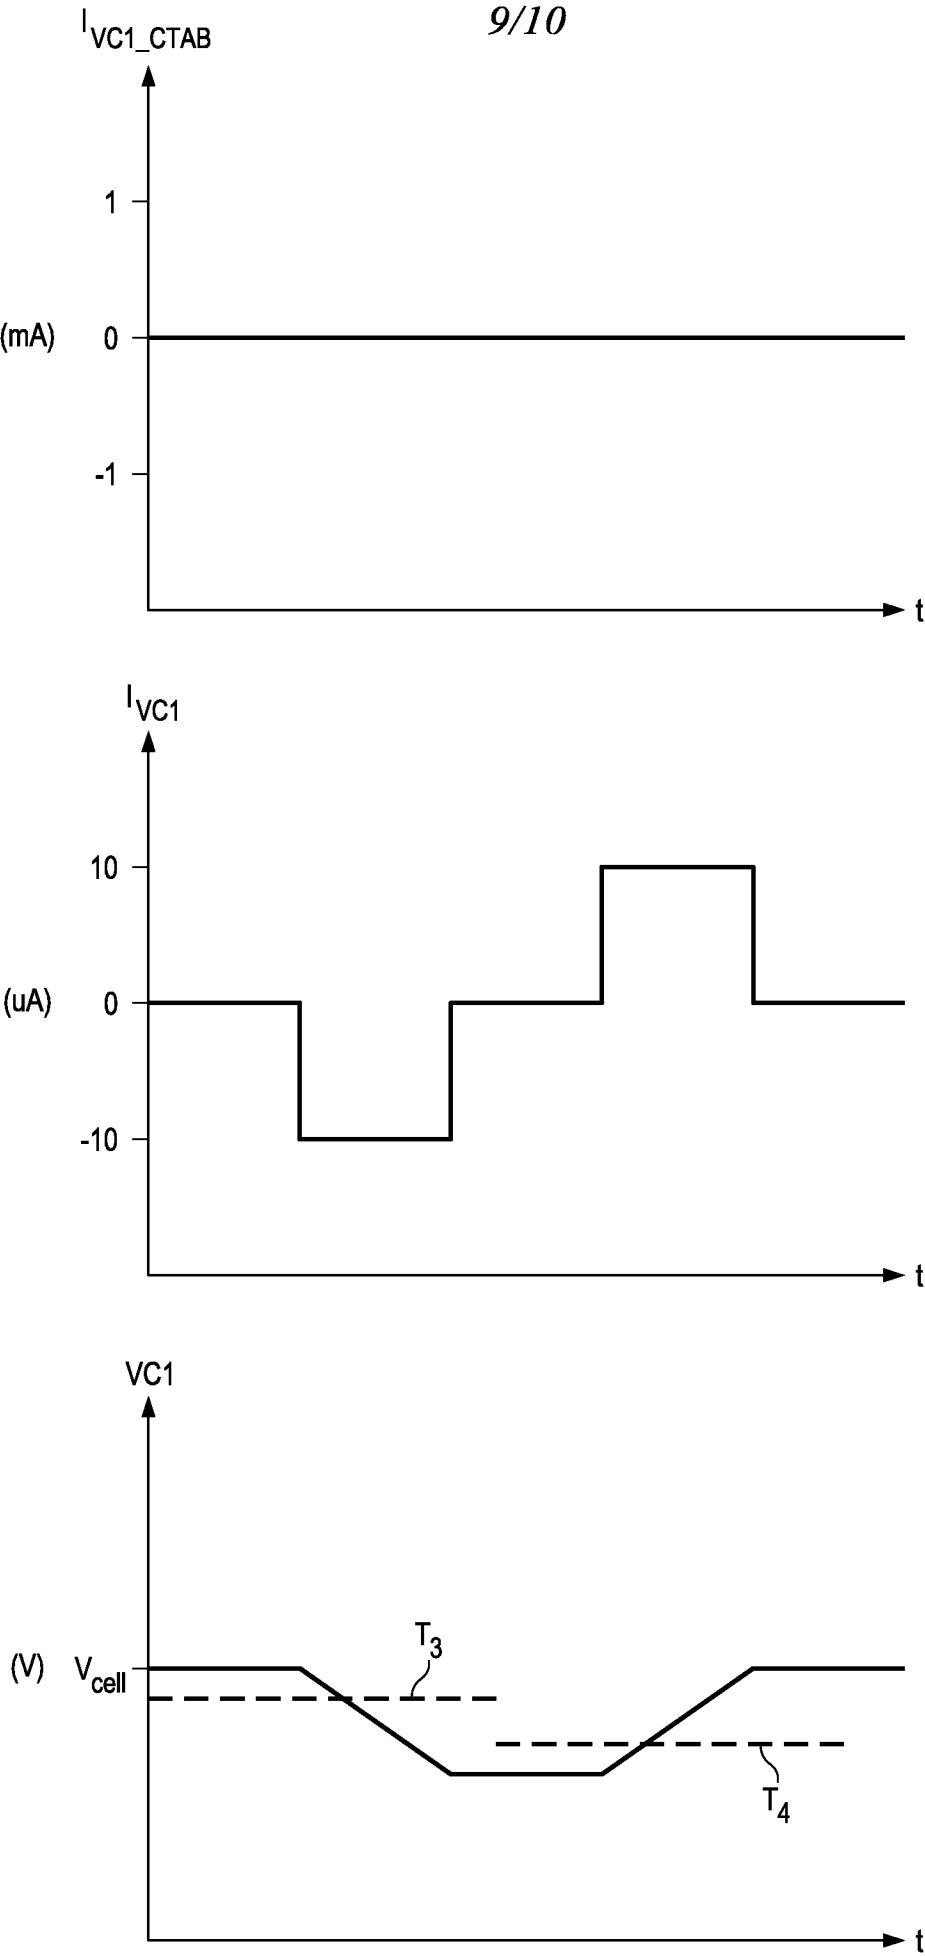