

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 October 2007 (18.10.2007)

PCT

(10) International Publication Number  
**WO 2007/116225 A1**

(51) International Patent Classification:  
*C01B 3/34* (2006.01) *H05H 1/46* (2006.01)  
*B01J 19/08* (2006.01)

(74) Agent: TALBOT-PONSONBY, CLARE JOSEPHINE;  
Fugro House, Hithercroft Road, Wallingford, Oxfordshire  
OX10 9RB (GB).

(21) International Application Number:  
PCT/GB2007/050132

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 19 March 2007 (19.03.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0606943.9 7 April 2006 (07.04.2006) GB  
0623159.1 21 November 2006 (21.11.2006) GB

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): ACCENTUS PLC [GB/GB]; 3rd Floor, 11 Strand, London WC2N 5HR (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BEECH, Philip, Michael [GB/GB]; 3 Darent Place, Ladygrove, Didcot, Oxfordshire OX11 74Q (GB). JONES, Stuart, Leigh [GB/GB]; 16 Kimberley Walk, Minworth, Sutton Coldfield, Birmingham B76 9RB (GB). SHAWCROSS, James, Timothy [GB/GB]; 27 Ticknell Piece Road, Charlbury, Oxford, Oxfordshire OX7 3TN (GB).

**Declaration under Rule 4.17:**


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

— with international search report

[Continued on next page]

(54) Title: HYDROGEN PRODUCTION

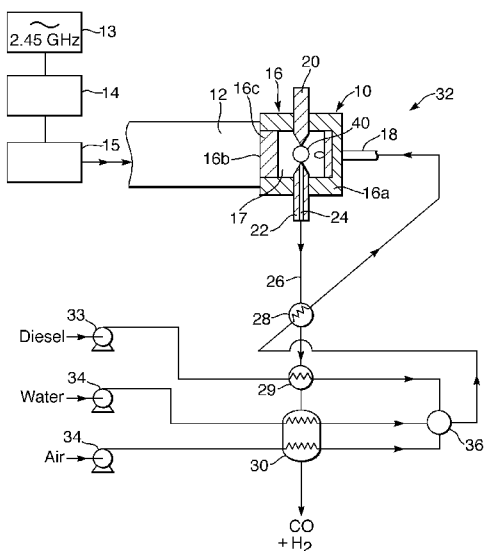

(57) Abstract: A process and apparatus are provided for producing hydrogen from a hydrocarbon fuel by combining the fuel with a gas comprising both oxygen and steam, and passing the resulting mixture through a plasma generated by a microwave plasma generator between opposed electrodes. At least one of the electrodes defines a duct for outflow of gaseous material from the vicinity of the plasma, and the gas mixture emerging from the outflow duct contains hydrogen. The fuel undergoes partial oxidation and steam reforming, the reactions being initiated by the plasma rather than by a catalyst.

WO 2007/116225 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

Hydrogen Production

The present invention relates to a process and an apparatus for producing hydrogen from hydrocarbons, particularly but not exclusively long chain hydrocarbons such as diesel fuel.

Fuel cells consuming hydrogen and oxygen (from the air) offer the promise of providing a clean and efficient electrical power source. However this leads to a requirement for an efficient and correspondingly clean process for the production of hydrogen. It would be convenient if this could be produced from hydrocarbons that are currently widely available, for example through the existing distribution network for diesel fuel for internal combustion engines.

The present invention accordingly provides a process for producing hydrogen from a hydrocarbon fuel, the process comprising:

- combining the fuel with a gas comprising oxygen and/or steam;
- and passing the fuel and gas mixture through a plasma generated by a microwave plasma generator between opposed electrodes in a reactor, at least one of the electrodes defining a duct for outflow of material from the vicinity of the plasma;
- so that the gas mixture emerging from the outflow duct contains hydrogen,

wherein the fuel and the gas comprising oxygen and/or steam enter the reactor so as to form a swirl of fuel and gas mixture around the electrodes.

Preferably the fuel is combined with a gas comprising both oxygen and steam.

- 2 -

There are typically one or more gas/fuel inlets into the reactor. The gas and fuel enter the reactor so as to form a swirl of fuel and gas mixture around the electrodes. The swirling fuel and gas mixture causes the fuel and gas mixture to form a vortex at the centre of the cell between the two electrodes leading to good mixing of the fuel with the gas comprising oxygen and/or steam. In one embodiment of the present invention the fuel/gas inlets are tangential to the direction of motion of the fuel and gas mixture as it swirls around the electrodes. Thus, the fuel/gas inlets have a tangential component with respect to a circle centred on the longitudinal axis of the electrodes i.e. the inlet is in a direction which has a component at a non-zero angle to a line joining the inlet to the longitudinal axis of the electrode. Providing an outflow duct for the gas mixture through one of the electrodes aids the formation of a vortex in the reactor. In addition, removing the gas mixture through one of the electrodes lowers the gas pressure where the electrodes are at their closest approach. The lower gas pressure enables the plasma still to strike (initiate the discharge) and be sustained when the reactor is operated at atmospheric pressure or higher pressures, preferably the latter, for example a pressure of up to 7 atmospheres. A pressure of up to 2.3 atmospheres is particularly desirable when feeding the emerging gas mixture to a solid oxide fuel cell. Removing the gas mixture through one of the electrodes also increases the likelihood that the gases pass through the plasma as the entrance to the outflow duct is located in the plasma. This is an advantage of the present invention.

As the gas mixture passes into the outflow duct hydrogen reforming is typically still taking place such that there is typically a plasma tail in the outflow

duct. The reactions continue in this tail which increases the yield of hydrogen. This yield can be further increased by placing a suitable reforming catalyst in the tailpipe if required.

5

It will be appreciated that the gas mixture emerging from the outflow duct will also contain other gases such as carbon monoxide, and possibly also carbon dioxide, and that it may be necessary to subject this emerging gas mixture to subsequent process steps. This clearly depends on the use to which the hydrogen is to be put. If the gas mixture is to be supplied to a polymer electrolyte membrane (PEM) fuel cell, then a mixture substantially free of carbon monoxide is required, whereas a solid oxide fuel cell (SOFC) could use a mixture of hydrogen and carbon monoxide directly. The emerging gas mixture consists primarily of hydrogen and carbon monoxide, which may be subjected to a "water gas shift reaction", i.e. reacting the carbon monoxide with steam, to generate additional hydrogen (and carbon dioxide). If necessary, any remaining carbon monoxide may be reacted with oxygen by a selective oxidation process. An alternative approach is to separate hydrogen from the carbon monoxide using a membrane such as a palladium alloy membrane.

The microwave reactor typically comprises an outer metal block acting as a containment vessel together with an inner replaceable insert of a material that is largely transparent to microwaves, easily moulded, machined or shaped and can be used at reforming temperatures, typically above 600°C. A suitable microwave transparent material is chosen depending on the temperature at which the reactor is operated. For example, PTFE (polytetrafluoroethene) is suitable at lower reforming temperatures and mica, alumina and quartz at higher

- 4 -

temperatures. The inner part of the insert is machined to present a cylindrical chamber into which the fuel and gas mixture enters through one or more tangential gas inlets such that a swirl is induced within the fuel and gas mixture leading to a vortex as the gas exits through one of the paired electrodes located towards the centre of the insert. The microwave reactor may also be operated without the microwave transparent insert as the chamber, in which the insert usually fits, induces a swirl and can be profiled to enhance this effect.

The microwave plasma generator may provide microwave power continuously or in pulses. Using a pulsed microwave power supply has the advantage of reducing the total energy used by the process.

The effect of the plasma is to create free radicals, and to heat the gas, and hence to cause chemical reactions to occur more rapidly. There are two main reactions which occur: steam reforming, and partial oxidation. Steam reforming is an endothermic reaction, typically requiring temperatures above about 650°C; the extent to which it is endothermic increases as the number of carbon atoms in the hydrocarbon increases, and moreover steam reforming tends to form carbon where polynuclear or olefinic components are present, as is usually the case when diesel fuel is used (unless the steam/carbon ratio is significantly greater than 2, which would reduce efficiency). Partial oxidation, in contrast, is an exothermic reaction. The products of partial oxidation depend on the ratio of fuel to oxygen: partial oxidation forms hydrogen and carbon monoxide if the proportion of oxygen is low, and forms water, carbon monoxide and carbon dioxide if the proportion of oxygen is higher. The use of a plasma for performing these reactions avoids the need to provide a catalyst, and

- 5 -

enables the reactor to have a more rapid response time because there is significantly less thermal inertia.

For partial oxidation conditions, preferably the  
5 molar ratio of oxygen to carbon in the fuel and gas mixture is in the range 0.5 to 0.7, and the molar ratio of steam to carbon is between 1.5 and 2.0.

The fuel may be a liquid fuel such as kerosene,  
10 petrol (gasoline) or diesel fuel; and may comprise oxygenated compounds such as ethanol. For this purpose it may be appropriate to assume that diesel fuel is about C15. In practice diesel fuel is a complex mixture which may contain hundreds of different components. For  
15 example one type of diesel fuel has been found to have as its primary constituents about 14% 2-methyl tridecane, 14% n-hexadecane, 10% n-tridecane, and between 6% and 7% of each of tetramethylpentadecane, trimethyldodecane, butyl naphthalene, and propyl naphthalene and n-octyl  
20 benzene (these being molar proportions). The diesel fuel is preferably supplied to the microwave plasma generator in a vapour form.

A microwave plasma generator operates at very high  
25 frequencies, typically above 1 GHz, for example 2.45 GHz, and at such a high frequency the oscillations of the applied electric field are so rapid that only electrons can readily respond. The plasma that is formed is consequently far from local thermodynamic equilibrium,  
30 and so can operate at a wide range of pressures. In particular it can operate at around atmospheric pressure, or even at higher pressures (for example 3 or 7 atmospheres).

35 The present invention also provides a system comprising a microwave plasma reactor and a fuel cell

- 6 -

wherein the microwave plasma reactor comprises a reaction chamber coupled to a microwave plasma generator, at least one pair of opposed electrodes in the reaction chamber and perpendicular to the direction of propagation of  
5 microwave radiation through the reaction chamber, one or more inlets for fuel and a gas comprising oxygen and/or steam in the chamber positioned so as to cause gas passing through the electrodes to form a swirl around the electrodes and at least one of the electrodes defining a  
10 duct for outflow of material from the vicinity of the plasma. In a preferred embodiment the gas inlets are in a direction tangential with respect to the electrodes or in a direction tangential to the direction of motion of the fuel and gas mixture in the reactor.

15

The process and the plant or apparatus of the invention will now be further and more particularly described, by way of example only, and with reference to the accompanying drawing in which:

20

Figure 1 shows a diagrammatic flow diagram of a hydrogen generating apparatus of the invention, incorporating a microwave plasma reactor shown in section.

25

Referring to figure 1 a microwave plasma reactor 10 comprises a microwave waveguide 12 at one end of which is a microwave generator 13 (shown diagrammatically) coupled to the waveguide 12 through a circulator 14 and a tuner  
30 15, and at the other end of which is a chamber 16 for the chemical reactions. Alternatively the microwave can be coupled using a coaxial cable connection rather than waveguide. The chamber 16, in this example, consists of a rectangular steel box 16a of substantially the same  
35 cross-sectional shape as the waveguide 12, and with a microwave-transparent aperture 16b communicating with the

- 7 -

waveguide 12; the opposite end of the box 16a is closed, so that the chamber 16 forms the end of the transmission path for the microwaves. This opposite end of the box 16a (closed end) can be in the form of a plate or sliding short to aid tuning of the plasma. Within the box 16a is an insert 16c of a material which is transparent to microwaves (such as PTFE or silica) defining a cylindrical cavity 17 provided with a tangential gas inlet duct 18. The general shape and arrangement of the reaction chamber is similar to that described in GB 2 273 027. The top and bottom walls of the box 16a support a pair of electrodes 20 and 22 with conically tapered ends facing each other, on the longitudinal axis of the cylindrical cavity 17. One of the electrodes 22 defines an exit duct 24 along its longitudinal axis. This electrode 22 (and so the outflow duct 24) extends to outside of the reaction chamber 16, and communicates with an outlet duct 26 for the hydrogen-containing gases that are formed. The electrodes 20 and 22 act to focus the electric component of the microwave field such that microwave energy is maximized between the electrodes at the centre of the cavity 17. The electrodes are designed so that a good contact is made with the block 16. The outlet duct 26 passes through heat exchangers 28, 29 and 30 in succession (which in practice may be integrated into a single unit).

The microwave plasma reactor 10 forms part of a hydrogen-generating apparatus 32. Diesel fuel is supplied by a pump 33 through the heat exchanger 29 to reach a temperature of about 400°C so that it evaporates, and the vapour is supplied to a mixing unit 36. Water and air are supplied to the mixer unit 36 by respective pumps 34 through respective channels through the heat exchanger 30 so that each is at a temperature of about 400°C, so that the water is in the form of steam. The resulting

- 8 -

gas/vapour mixture is then further heated by passing through the heat exchanger 28, and is then fed (for example at 400°C) into the inlet duct 18 of the reaction chamber 16. Alternatively, the diesel fuel may be heated to about 550°C. Where PTFE is used as the insert or aperture material, the fuel and gas mixture entering the reactor must not exceed 200°C. It is appreciated that at elevated input temperatures the diesel, air and or steam may be mixed in alternative combinations to avoid auto ignition or uncontrolled combustion.

In operation, the hot gas mixture flowing through the outlet duct 26 consists primarily of hydrogen, carbon monoxide and excess steam (as discussed below), and nitrogen from the air. It can be fed to a water gas shift unit (not shown) where the excess steam reacts with the carbon monoxide to provide more hydrogen.

In use of the microwave plasma reactor 10, with the generator 13 generating microwaves at 2.45 GHz, the electrodes 20 and 22 are initially brought close enough together that the voltage induced between the electrodes by the microwaves is sufficient to strike a discharge and to form a plasma. The electrodes 20 and 22 are then moved a short distance apart, so as to minimise thermal erosion, while maintaining a ball of plasma between the ends of the electrodes 20 and 22. The gas mixture introduced through the duct 18 swirls around the inside of the cavity 17 and then passes through the plasma ball 40, to emerge through the outlet duct 26. Typically the microwave generator 13 might generate at least 300 W of microwave power, and the tuner 15 is used to maximise the microwave power between the electrodes 20 and 22, while minimising the reflected power in the waveguide 12.

35

The pressure within the cavity 17 is typically

- 9 -

between 1 atmosphere and 3 or 4 atmospheres (absolute values), and a plasma at such a pressure has a comparatively high electron temperature and a moderately high particle temperature. The bulk temperature within the plasma 40 can be expected to be in the range between 1000 K and 4000 K. The effect of the microwaves is both to act as a heating device and also to generate electrons, ions and free radicals. The effect of the plasma ball 40 will in practice depend on the microwave power that is supplied, on the proportions of the reactants air, diesel fuel and water, and on their temperature and flow rate.

Experiments have been carried out on a hydrogen-generating apparatus 32 as shown in figure 1, differing only in that the gas/vapour mixture is not heated after the mixer unit 36, but is instead supplied at about 200°C to the microwave plasma reactor 10. In the absence of any air supply (i.e. pure steam reforming) the outflowing gas, following condensation of excess steam, was found to comprise 67% (by vol) hydrogen and about 25 vol% carbon monoxide: the temperature of the outflowing gas and the proportion of the diesel fuel which is reformed both increase with the microwave power that is provided. At a steam/carbon ratio of 3, diesel fuel was 89% converted using a microwave power of 2000 W while if the microwave power was reduced to 700 W, the diesel fuel conversion decreased to between 40 and 50%. The incomplete conversion of diesel fuel suggests the desirability of also providing a source of oxygen to provide additional heat through the partial oxidation reaction. When using air as the source of oxygen it is also necessary to increase the flow rate of gases through the plasma reactor 10 because of the dilution by nitrogen, which is inert.

- 10 -

Further experiments have been carried out on gas mixtures including both air and steam. These experiments focused on two values of the oxygen to carbon ratio ( $O_2:C$ ): 0.5, at which hydrogen productivity is enhanced, 5 and 0.7, to minimise the microwave power requirement and also to minimise the production of ethylene, other olefins, and acetylene. Further work has demonstrated that an  $O_2:C$  of 0.55 is particularly preferred. The absolute values of pressure were generally slightly above 10 2 atmospheres. Steam was generally added to provide a steam/carbon ratio of 2, to inhibit formation of carbon. The overall flow rate was 80 litres per minute in each case. For values of the oxygen/carbon ratio of above 0.5 it was found that all the fuel was converted.

15

It was found that ethylene was also a minor component of the outflowing gases (< 1%), and as predicted this was more the case for the lower oxygen to carbon ratio of 0.5. This could be eliminated by 20 providing a small volume of conventional reforming catalyst or specific ethylene removal catalyst at the outer end of the exit duct 24. The presence of a conventional reforming catalyst was found to be highly effective at removing ethylene, and also for increasing 25 the hydrogen productivity, even though its volume was such that the space velocity of the gases through the catalyst was about 95,000 /hr. The need for such a catalyst is less significant at the higher oxygen/carbon ratio of 0.7, when the hydrogen productivity is already 30 higher because of the higher thermal energy associated with the more oxidising gas mixture, and the ethylene levels are lower. At the tail end of any such reforming catalyst, a water gas shift catalyst (e.g. chromium/iron oxides) may be provided to utilise the unreacted steam 35 from the reformat stream, or alternatively a water gas shift reaction may be carried out using a separate

catalyst unit (not shown).

The results, indicating the composition of the outflowing gases, and the experimental conditions, of such experimental runs are shown in the following table.

Table

		Run 1	Run 2	Run 3
10	oxygen/carbon ratio	0.50	0.70	0.70
	steam/carbon ratio	2.0	2.0	2.0
	exit duct 24 contents	catalyst	-	catalyst
	pressure / mbarg	1100	1650	1100
15	Carbon monoxide /%	14.8	16.7	10.5
	carbon dioxide /%	9.0	12.6	11.2
	hydrogen /%	29.5	17.7	22.1
	oxygen /%	0.5	0.2	0.5
	nitrogen /%	46.2	52.8	55.7
20	methane /%	0.709	0.549	0.290
	ethylene /%	0.133	0.045	0.002
	acetylene /%	0.000	0.009	0.019
	ethane /%	0.047	0.000	0.000
	carbon	no	no	no
25	Fuel conversion /%	99.4	100	100

The residence time of the reactants within the plasma ball 40 is very short, being typically about 0.1 ms with this 80 slpm flow rate. Extending from the plasma ball 40 down the exit duct 24 is a plasma tail which is a high temperature luminous zone in which it can be expected that chemical reactions are occurring. The experiments carried out without a source of oxygen (with steam and diesel fuel only), as described above, were found to give short plasma tails only about 25 mm long,

- 12 -

whereas the experiments in which oxygen was also present gave tails up to 230 mm long. The higher the steam loading, the shorter the tail; the higher the oxygen loading, the longer the tail. In the experimental  
5 conditions summarised in the table the residence time in the high temperature tail is about 4 to 5 ms.

The present invention has the advantage that complete fuel conversion can be achieved by a single pass  
10 of the fuel and gas mixture through the apparatus.

The observed results show that the hydrogen-generating apparatus 32 when operated as described above is very effective at generating hydrogen from diesel  
15 fuel; high conversions are obtained despite the short residence times, and this suggests that higher throughputs may be possible. If still larger throughput is required, it will be appreciated that this could be achieved by using a plurality of such microwave plasma  
20 reactors 10 through which the gas flows are in parallel. Alternatively, larger individual reactors with higher throughputs could be used with appropriate modification of the waveguide and wavelength of the microwave radiation entering the reactor.

25

As indicated above the optimum process ratios have been identified as: oxygen/carbon in the range 0.4 to 0.8, more preferably 0.5 to 0.7; steam/carbon in the range 1 to 4, more preferably 1.5 to 2.0. It will be  
30 appreciated that the experimental measurements described above were carried out without the optimum preheating of the reactants, as the heat exchanger 28 was not used. It is more thermally efficient to provide more preheating, although this should not exceed about 550°C, at which the  
35 diesel fuel would be expected to undergo thermal cracking, and must not exceed a temperature at which the

- 13 -

materials defining the cavity 17 are damaged by the heat. Providing more thermal energy to the reactants by preheating ensures that the microwave energy is primarily used to create radicals and so to initiate chemical  
5 reactions, rather than being required to heat up the reactants. With preheating to 400°C or 550°C it would be expected that the microwave power requirement would be less, for the same overall conversion.

10 It will also be appreciated that the process, plant and apparatus described above may be modified in various ways while remaining within the scope of the present invention. For example the apparatus may also include burners or electrical heaters (not shown) to heat the  
15 water, air and diesel fuel to suitable temperatures; such heaters may for example be used during start-up. And further preheating of the reactants might be achieved by partial combustion (possibly using a catalytic reactor) of some of the diesel fuel before it is fed to the  
20 microwave reactor 10. In an alternative, at start-up, just air might be fed into the reactor 10 to initiate the plasma ball 40 and to provide a hot gas supply; once the heat exchangers 28, 29 and 30 had been heated up, water and diesel fuel could then be also supplied as described  
25 above. It will also be appreciated that the microwave reactor 10 may be modified in various ways. In particular, there might be other inlet ports provided in the insert 16c through which the reactant gases may be supplied, or there might be an inlet ports through the  
30 electrode 20, or again there might be means to inject reactants into the plasma tail within the outlet duct 24 or the downstream outlet pipe 26.

- 14 -

Figure 2 shows a microwave plasma generator consisting of a chamber 40 consisting of a block 41 made of glass-reinforced polytetrafluoroethylene, and two end-pieces 43 and 44. The block 41 has a cylindrical inner surface 42 and a passage 53 which communicates with the gas inlet at one end and is tangential to the inner surface 42 of the block 41 at the other. Thus gas emerging into the chamber 40 formed by the block 41 and the end-pieces 43 and 44 does so tangentially and spirals around the electrodes 60 and 62 before entering the gap 61 between the electrodes 60 and 62. This spiral flow pattern increases the stability of the electric discharge between the electrodes 60 and 62, so enabling electrode tips of larger diameter to be used, with a consequent increase in the throughput of activated gas. For example, a diameter of 8 mm for the tip and orifice 56 of the passageway 54 in the electrode 60 and a gap 61 of 0.2 mm enables 100 shpm of gas to be activated. The discharge stability is increased further by means of a central projection 55 on the tip of electrode 62, and the flow of gas into the orifice 56 of the passageway 54 in the electrode 60 is enhanced by making the inner surface 58 of the orifice 56 trumpet-shaped. The electrode 60 is provided with a replaceable tip 57. Alternatively the electrode 60 may be a single piece (not shown).

Figure 3 shows a microwave plasma generator comprising of a chamber 74 consisting of a block 71 made of glass-reinforced polytetrafluoroethylene, and an end-piece at the top 75 and a second end-piece at the bottom (not shown). A gas inlet passes through the top end-piece 75 at an angle so as to produce a swirl of gas in the chamber 74 around the electrodes 72 and 73. The gas inlet may be straight or curved.

- 15 -

In a further embodiment (not shown) the microwave plasma generator of Figure 3 can be assembled without the block 71. A swirl of gas still forms around the electrodes due to the angle and profile of the gas inlet.

5 In another embodiment (not shown), the upper electrode 20, 62 or 72 could contain a further outflow duct for the gas mixture.

Claims

1. A process for producing hydrogen from a hydrocarbon fuel, the process comprising:  
5 combining the fuel with a gas comprising oxygen and/or steam;  
and passing the fuel and gas mixture through a plasma generated by a microwave plasma generator between opposed electrodes in a reactor, at least one of the electrodes  
10 defining a duct for outflow of material from the vicinity of the plasma;  
so that the gas mixture emerging from the outflow duct contains hydrogen,  
wherein the fuel and the gas comprising oxygen and/or  
15 steam enter the reactor so as to form a swirl of fuel and gas mixture around the electrodes.
  
2. A process as claimed in claim 1 wherein the fuel and the gas comprising oxygen and/or steam enter the reactor  
20 tangentially with respect to the electrodes.
  
3. A process as claimed in claim 1 wherein the fuel/gas inlets are tangential to the direction of motion of the fuel and gas mixture.  
25
  
4. A process as claimed in any one of the preceding claims wherein the fuel is combined with a gas comprising both oxygen and steam.
  
- 30 5. A process as claimed in any one of the preceding claims wherein the hydrocarbon fuel is a diesel fuel.
  
6. A process as claimed in any one of the preceding claims wherein the proportions of fuel, oxygen and steam  
35 are such that the molar ratio of oxygen to carbon is in the range 0.5 to 0.7, while the molar ratio of steam to

- 17 -

carbon is between 1.5 and 2.0.

7. A process as claimed in any one of the preceding claims wherein the fuel is supplied to the microwave  
5 plasma generator in a vapour form.

8. A process as claimed in claim 7 wherein heat to produce the steam and/or the vaporised fuel is obtained by heat exchange with the gas mixture emerging from the  
10 outflow duct.

9. A process as claimed in any one of the preceding claims wherein pulsed microwave power is supplied to the reactor.  
15

10. A apparatus for producing hydrogen from a hydrocarbon fuel by a process as claimed in any one of the preceding claims.

20 11. A system comprising a microwave plasma reactor and a fuel cell wherein the microwave plasma reactor comprises a reaction chamber coupled to a microwave plasma generator, at least one pair of opposed electrodes in the reaction chamber and perpendicular to the direction of  
25 propagation of microwave radiation through the reaction chamber, one or more inlets for fuel and a gas comprising oxygen and/or steam in the chamber positioned so as to cause gas passing through the electrodes to form a swirl around the electrodes and at least one of the electrodes  
30 defining a duct for outflow of material from the vicinity of the plasma.

12. A system as claimed in claim 11 wherein the gas inlets are in a direction tangential with respect to the  
35 electrodes.

- 18 -

13. A system as claimed in claim 11 wherein the fuel/gas inlets are tangential to the direction of motion of the fuel and gas mixture.

5

Fig.1.

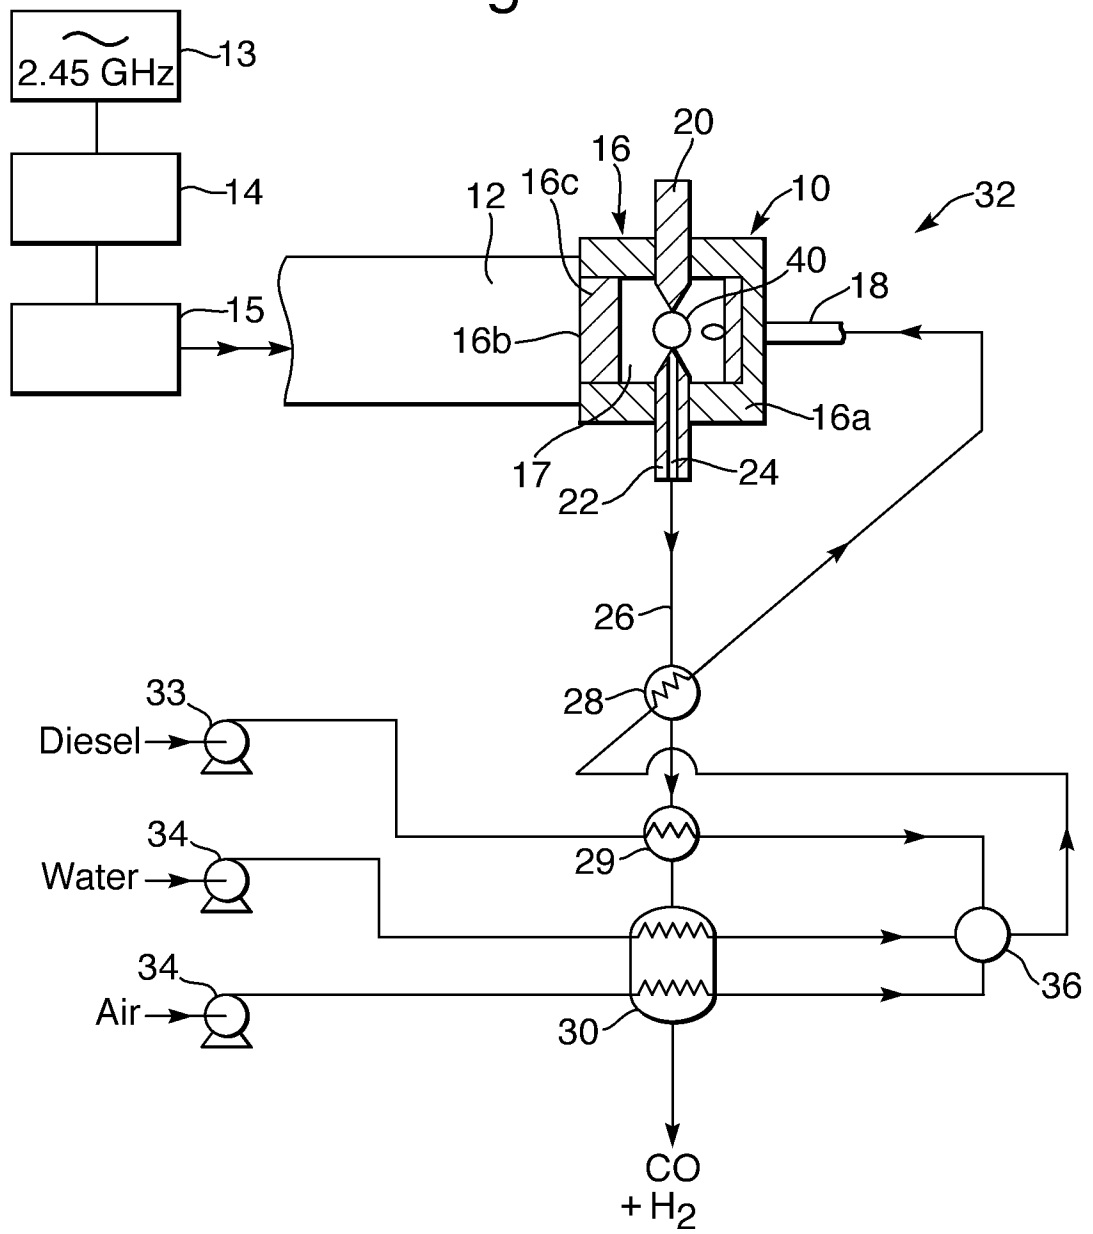


Fig.2.


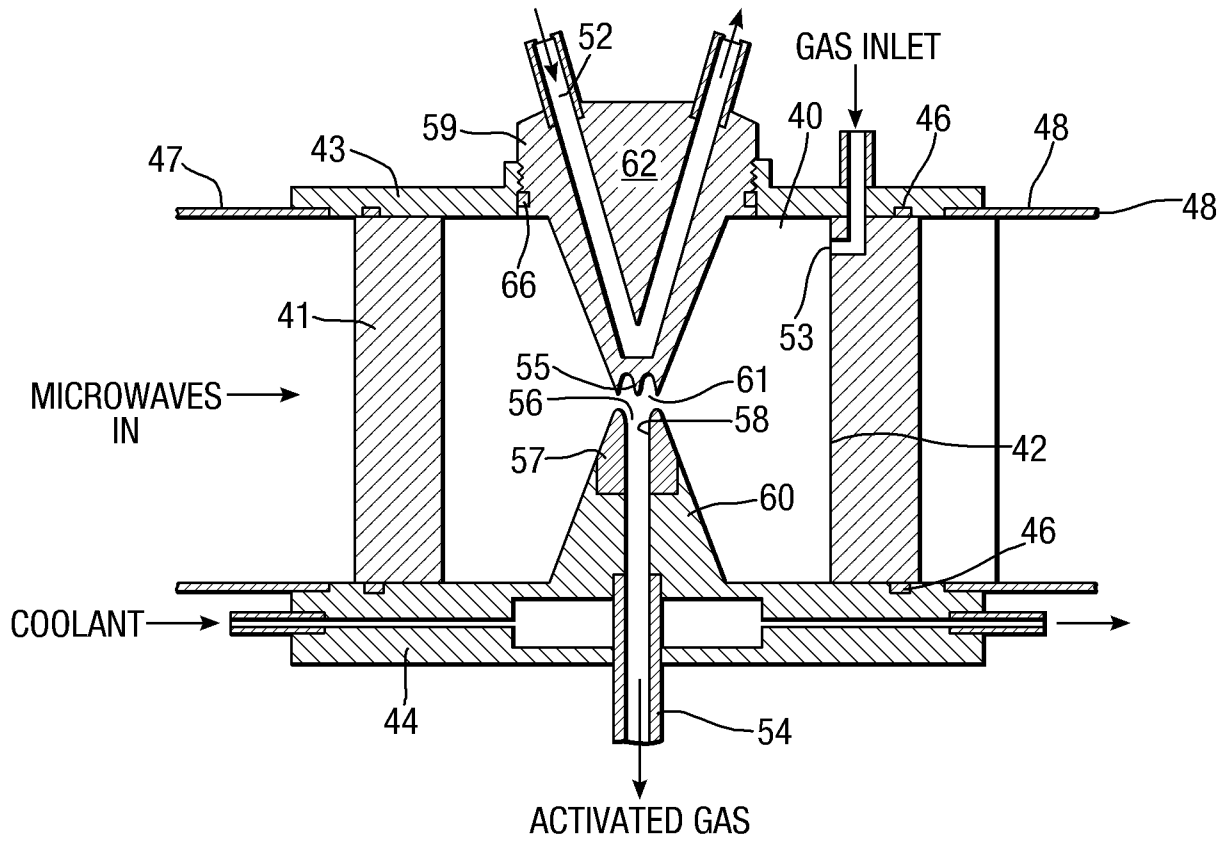


Fig.3.

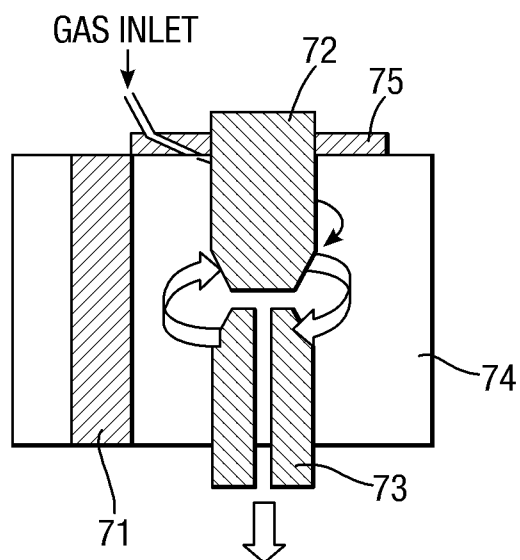

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/GB2007/050132

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
INV. C01B3/34	B01J19/08	H05H1/46
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) B01J C01B H05H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, INSPEC, CHEM ABS Data		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 845 287 A1 (AEA TECHNOLOGY PLC [GB] ACCENTUS PLC [GB]) 3 June 1998 (1998-06-03)	10
Y	column 1, lines 26-40; figure 1  column 2, lines 11-20 column 2, line 49 - column 4, line 7 column 5, lines 41-45 -----	1-9, 11-13
Y	US 2005/210877 A1 (RABINOVICH ALEXANDER [US] ET AL) 29 September 2005 (2005-09-29)	1-9, 11-13
A	paragraphs [0007], [0020], [0021], [0025], [0036]; claims 1,26; figure 3 -----	10
A	WO 2004/033368 A (HRL LAB LLC [US]; WILLIAMSON WELDON S [US]; VAJO JOHN J [US]) 22 April 2004 (2004-04-22) page 18, line 16 - page 20, line 7; claims 7,12,13,16-21,24,28,29 -----	1-13
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <span style="margin-left: 200px;"><input checked="" type="checkbox"/> See patent family annex.</span>		
* Special categories of cited documents :		
<p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>*&amp;* document member of the same patent family</p>	
Date of the actual completion of the international search		Date of mailing of the international search report
29 May 2007		08/06/2007
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer  Werner, Håkan

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2007/050132

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0845287	A1	03-06-1998	DE 69726830 D1	29-01-2004
			DE 69726830 T2	07-10-2004
			GB 2319941 A	03-06-1998
			JP 10156176 A	16-06-1998
			US 6126779 A	03-10-2000
<hr/>				
US 2005210877	A1	29-09-2005	WO 2005094335 A2	13-10-2005
<hr/>				
WO 2004033368	A	22-04-2004	AU 2003277326 A1	04-05-2004
<hr/>				