(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 July 2009 (16.07.2009)

PCT

(10) International Publication Number
WO 2009/086637 A1

(51) International Patent Classification:
E21B 47/12 (2006.01) *F16L 15/08* (2006.01)
E21B 17/00 (2006.01) *F16L 25/02* (2006.01)

(21) International Application Number:
PCT/CA2009/000025

(22) International Filing Date: 9 January 2009 (09.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/006,400 11 January 2008 (11.01.2008) US

(71) Applicant *(for all designated States except US)*: **Schlumberger Technology Corporation** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas, 77478 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **DOFP, Anthony R.** [CA/CA]; 166 Riverview Circle S. E., Calgary , Alberta T2C 4J9 (CA). **LOGAN, Derek W.** [CA/CA]; 19 Fisherman's Bend, Calgary , Alberta T3Z 1B2 (CA). **HOLMEN, Garry** [CA/—]; 194 Chapalina Terrace S.E., Calgary, Alberta T2X 3Y5 (CA).

(74) Agent: **LEE Brian Y.**; Gowling Lafleur Henderson LLP, P.O. Box 30, Suite 2300, 550 Burrard Street, Vancouver, British Columbia Canada V6C 2B5 (CA).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: ELECTROMAGNETIC TELEMETRY ASSEMBLY WITH PROTECTED ANTENNA

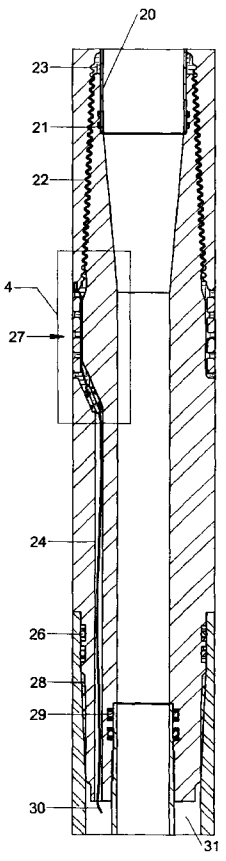


Figure 3

(57) Abstract: Oilfield drilling utilizes downhole data transmitted to surface for formation evaluation and steering of directional wellbores. A leading technology in providing subsurface to surface communication is Electro-Magnetic (EM) Telemetry. This technology is typically employed with a downhole antenna concentric with the bore of an electrically insulating "gap sub" portion of the system. The antenna blocks the bore from further use to conduct other sensors or equipment through. One aspect of the invention is to integrate the antenna into the structure of the gap sub, thereby clearing the bore for conducting other tools through, and also protecting the antenna from the harsh drilling environment, including abrasion, erosion, shock, and vibration. Another aspect of this invention enables the antenna to serve a secondary function as an anti- rotation feature between the two halves of the gap sub.

WO 2009/086637 A1

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to the identity of the inventor (Rule 4.17(i))*

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report*

ELECTROMAGNETIC TELEMETRY ASSEMBLY WITH PROTECTED ANTENNA

FIELD OF THE INVENTION

The field of the invention relates generally to measurement while drilling, and in particular to an electromagnetic telemetry assembly with a protected antenna.

BACKGROUND OF THE INVENTION

It is known in the oilfield drilling industry to take measurements near a drill bit to assist in evaluating and locating a well, based on geological, geometrical, and environmental parameters. This information may be stored in memory for later retrieval and / or telemetered to surface in near real-time in a technique known as Measurement While Drilling ("MWD").

A common method of MWD transmission to surface uses a low frequency Electro-Magnetic ("EM") signal created by applying an alternating voltage across an insulating joint in the drill string, thereby inducing a current to flow through the earth formation and back to surface where it is detected by sensitive receivers. The insulating joint or "gap joint" is often formed as part of a component of the drill string known as the "gap sub", wherein the "gap" refers to a length of non-conductive material interposed between two conductive metal tubular components and the term "sub" refers to a short length of drill collar.

In some prior art examples of gap sub designs, there are disclosed a rigid insulated antenna connection which traverses the length of the gap sub along the axis of the bore. This antenna and any additional fixturing to hold it partially obstructs the bore, precluding further use of the bore to conduct logging tools or other equipment there-through.

In other prior art gap sub designs, the presence of an antenna is not specifically disclosed, and instead, it is known to use a probe containing an insulated signal conductor along with other electronics required to produce the transmission signal; the conductor traverses the length of the gap sub along the axis of the bore thereby making electrical contact on both sides of the gap joint to effect signal transmission. While it is often economical and convenient to contain the electronics, batteries, and sensors in a probe centered along the gap sub axis (and thus has become the industry standard), the use of a probe obstructs the bore, and prevents the bore for being used to conduct additional equipment there-through.

Sub-surface signal transmitting apparatus are known in other applications, such as post-well drilling formation evaluation. However, such apparatus not being used in drilling applications do not have the necessary structural properties for use in a drill string. For example, such apparatus typically have cabling and batteries located in exposed locations on the outside of the apparatus which thus would be exposed to damage when used in a drilling application.

It is therefore desirable to provide to an EM telemetry assembly for use in a drill string that provides a solution to at least some of the deficiencies in the prior art.

BRIEF SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided an EM telemetry gap sub which comprises: (a) an electrically conductive housing having a body with a bore there-through and a threaded end; (b) an electrically conductive end coupling having a body with a bore there-through, an electronics cavity end, and an opposite threaded end threaded into the threaded end of the housing, (c) an insulated gap joint comprising a dielectric material in an annular gap between the threaded ends of the housing and end coupling; (d) a passage extending longitudinally through the end coupling body from the electronics cavity end to the threaded end; and (e) a conductor having an insulated covering and extending from the electronics cavity end, through the passage, through the gap joint and electrically connected to the housing. The conductor is electrically connectable to the EM telemetry electronics package to serve as an antenna there-for.

According to another aspect of the invention, there is provided an EM telemetry assembly comprising the aforementioned gap sub, a mandrel connected at one end to the end coupling and having a body with a bore there-through, an electronics housing in the mandrel bore spaced from the mandrel body and connected at one end to the end coupling, wherein the space between the mandrel body and electronics housing defines an electronics cavity; an EM telemetry electronics package in the electronics cavity and electrically coupled to the conductor.

A first portion of the conductor can be an electrically conductive core of a transmission wire extending through the passage from the electronics cavity end to the threaded end. The EM telemetry gap sub can further comprise a feed-through seated in the threaded end of the passage and which comprises an

electrically insulating body and wherein a second portion of the conductor is a feed-through conductor segment which extends through the insulating body and is electrically connected to one end of the transmission wire. A third portion of the conductor can be an antenna wire extending through the gap joint and having one end electrically connected to the feed-through conductor segment and an opposite end electrically connected to the housing.

The passage can further extend through the gap joint and into the housing body, and the conductor can be a conductive rod and the insulating covering can be a jacket surrounding the rod. The rod and jacket extend through the passage such that the rod extends through the end coupling and into the housing thereby serving to impede rotation between the housing and end coupling.

The jacket can be composed of a material having properties which acts as an electrical barrier at the expected downhole operating temperatures of the gap sub. In particular, the jacket can be composed of a material selected from the group consisting of: fiberglass reinforced epoxy, heat shrink tubing, curable silicone elastomer, powder coaded paint, polyetheretheketone, and polyamide-imide.

The EM telemetry gap sub can further comprise an electrically conductive compression spring located in the end of the passage extending into the housing body and in electrical contact with the body and the rod.

The gap sub provides a clear bore and also protects the antenna from damage in the harsh drilling environment. The gap sub accomplishes this by embedding the antenna within the structure of the gap joint, either before or after the gap dielectric material is applied.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an end view of an EM telemetry assembly having a clear bore and a protected antenna according to a first embodiment of the invention.

Figure 2 is a side section view of the EM telemetry assembly.

Figure 3 is a detail side section view of a gap sub portion of the EM telemetry assembly, including integrated antenna wiring, and a partial view of an electronics cavity.

Figure 4 is a detail side section view of the integrated antenna wiring.

Figure 5 is an end view of a second embodiment of the EM telemetry assembly.

Figure 6 is a side section view of the second embodiment of the EM telemetry assembly.

Figure 7 is a detail side section view of the gap sub portion of the second embodiment, showing a dual-purpose conductor / anti-rotation rod.

Figure 8 is a detail side section view of the conductor rod.

Figure 9 is a detail view of a compression spring at the end of the conductor rod.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

In this description, directional terms such as "up", "down", "upper" and "lower" are used merely to help the reader understand the disclosed embodiments and should not be construed to limit the orientation or operation of the embodiments in any way. These directional terms are used in relation to the illustrative embodiments as they are depicted in the Figures, the upward direction being toward the top of the corresponding Figure and the downward direction being toward the bottom of the corresponding Figure.

According to one embodiment of the invention and referring to Figures 1 through 4, an EM telemetry assembly **16** includes a gap sub portion (shown in detail in Figures 3 and 4) comprising generally of an internally threaded housing **10** and an externally threaded end coupling **17** and dielectric material **42** electrically separating the internally threaded housing **10** from the end coupling **17.** The facing and threaded ends of the housing **10** and end coupling **17** when screwed together define a loose fitting annular thread gap **22** there-between, which is filled with the dielectric material **42.** The dielectric material **42** also fills an external annular recess **27** on the outside surface of the end coupling **17** below and adjacent to the thread gap **22** and an internal annular recess **23** on the inside surface of the housing **10** above and adjacent the thread gap **22.** Consequently, a non-conductive gap joint provided by the dielectric material **42** extends from the external annular recess **27**, through the annular thread gap **22** and to the internal annular recess **23**.

The internally threaded housing **10** also contains at an upper end a standard female drill string threaded connection **15** allowing it to be connected to drill-string components above it (not shown). A lower coupling **13** contains at a lower

end a standard male drill-string threaded connection **14**, which allows it to be connected to drill-string components below it (not shown).

The EM telemetry assembly **16** also contains a mandrel **11**, which has a clear bore through its center, allowing the passage of fluids and other equipment there-through, such as a wire-line logging tool (not shown). The mandrel **11** is sealed against fluid ingress at its ends by seals **29**. Surrounding the mandrel **11** is a tubular electronics housing **12** connected at its lower end to the lower coupling **13** and at its upper end to the end coupling **17**. The electronics housing **12** in conjunction with the mandrel **11**, lower coupling **13** and the end coupling **17** form a sealed annular electronics cavity **31** with o-ring seals **26**.

An elongated wire passage **24** is a drilled hole which extends through the annular body of the end coupling **17**, from the bottom end of the end coupling **17** to the external annular recess **27** near the top end of the end coupling **17.** The wire passage **24** runs substantially parallel to the bore but is located in the annular portion of this end coupling **17.** A transmission wire **46** extends through the wire passage **24** and may be potted to support it against vibration damage. One end of the transmission wire **46** is electrically connected, through the use of solder, crimp, or similar technique, to a lower end of a feed-through conductor **45** of a feed-through **48.** The feed-through **48** is seated in the mouth of the wire passage **24** that opens into the annular recess of the end coupling **17.** A feed-through **48** is a well known and commercially available part from a supplier such as Greene Tweed, Inc. and consists of an insulating body **43**, seals **44** surrounding the body **43** and providing a seal between the body **43** and the antenna passage **24**, and the conductor **45** seated within a bore in the body **43**. The purpose of the feed-through **48** is to provide a means of passing an electrical conductor through a sealed insulator.

Antenna wiring **41** is electrically coupled at one end to an upper end of the feed-through conductor **45** in a similar manner to the transmission wiring **46**. The other end of the antenna wiring **41** is anchored and makes electrical contact solely with the housing **10** through the use of a securing bolt **47** threaded into the end of the housing **10**.

The lower end of the transmission wiring **46** extends out of the lower end of the wire passage **24** and into the annular electronics cavity **31**. The electronics cavity **31** contains batteries, sensors, and electronics sufficient to measure downhole parameters (collectively, "electronics package"). The electronics package produces a transmission signal consisting of an alternating voltage applied to a conductor end **30** of the insulated transmission wire **46** referenced to a ground return on the end coupling **17**.

During assembly of the gap sub, a suitable dielectric material **42** such as a polymer resin is injected into the space between loose fitting and spaced apart threads **22** creating the electrically insulating joint required for the functioning of the EM telemetry assembly **16**. The feed-through **48** prevents the polymer resin from flowing into the electronics cavity **31** during injection, and further provides an additional level of protection against fluid ingress once the EM telemetry assembly **16** is in service, and exposed to high pressure drilling fluid downhole.

Protective rings **40** surround the external annular recess **27** of the end coupling **17** and are spaced apart and electrically isolated from each other and from the two halves of the gap joint in the recess by the dielectric material **42**. The protective rings **40** serve to protect the softer dielectric material from wear caused by rubbing contact with the borehole and rock cuttings. The protective rings **40** also protect the antenna wiring **41** which runs underneath them. Embedding the antenna directly within the structure of the gap joint has the

positive benefit of protecting the wiring **41** from damage due to either internal flow erosion through the bore or external abrasion with the rocks and cuttings of the borehole. An injectable dielectric material **42**, such as polymer resin, has the further benefit of rigidly restraining the wiring **41** such that the wiring is not affected by the large shocks and vibrations encountered in the drilling environment.

An internal non-conductive sleeve **20** is mounted in the bore of the gap sub and contacts the dielectric material **42** in the internal annular recess **23**. The sleeve **20** increases the length of non-conductive area on the bore of the gap sub. This increases the effective resistance of the internal conductive path through the mud, reducing the amount of wasted current flowing through this non-productive path, and thereby increasing the efficiency of the transmission system as a whole. Furthermore, seals **21** provide an additional level of protection against fluid leakage into the gap joint, should the dielectric material **42** alone not create a sufficient seal.

Referring mow to Figures 5 through 9 and according to an alternative embodiment of the invention, there is provided an EM telemetry assembly having many similar features as the embodiment shown in Figures 1 to 4, but with the following notable differences. Rather than the antenna connection being made prior to the dielectric material **88** being injected, an alternative is to form the antenna connection after injection. In keeping with the concept of having the antenna embedded within the gap joint, and thus completely protected from internal and external attack, a hole is drilled through the assembled gap sub consisting generally of the end coupling **72**, housing **73**, and dielectric material **88** to form an elongated passage **71** having a lower end opening into an electronics cavity **74** below the end coupling **72** and a upper end **84** terminating in the body of the housing **73**. That is, the passage extends through the entire

length of the end coupling **72**, through the dielectric material **88** and partway through the housing **73.**

A metallic conductor rod **70** with an insulating jacket **81** surrounding the rod **70** is installed in the elongated passage **71,** and extends from the electronics cavity **74** to the passage upper end **84**. Electrical connection may be achieved between the conductor rod top end **80** and housing **73** by a number of means, listed as illustrative, but not intended to be inclusive of all possible techniques which would be available to one skilled in the art. The conductor rod top end **80** may be press fit within the elongated passage **71**. This could be achieved with a drilled hole having a internal diameter tolerance of 0.2500" +0.0003" / -0.0000", and the conductor rod end **80** having an external diameter tolerance of 0.2504" +0.0002" / -0.0000" for example, resulting in an interference of 0.0001" to 0.0006". Alternatively and as shown in Figure 9, a compression spring **89** may be placed in the end of the elongated passage **84**, making electrical contact with both conductor rod end **80** and housing **73**. Another alternative would be to use a conductive epoxy (not shown) to make electrical contact between conductor rod top end **80** and housing **73**

The EM transmission signal from the electronics package (not shown) in the electronics cavity **74** is now applied as an alternating voltage on the conductor rod **70** at the end adjacent to the electronics cavity **74** by means of a soldered electrical connection to the electronic package.

The insulating jacket **81** is necessary as the conductor rod **70** may otherwise short the housing **73** and end coupling **74** together as it passes between external thread **85** and internal thread **82**. The insulating jacket **81** may be formed by a wide variety of insulating materials, such as, but not limited to: fiberglass reinforced epoxy, heat shrink tubing, two part curable silicone elastomer, powder

coated paint, engineering plastics such as PEEK (Polyetheretherketone), PAI (Polyamide-imide), or any similarly non-conductive material that may act as an electrical barrier at the expected temperatures experienced downhole (up to 150°C/300°F or hotter as required). These materials may be applied as a preformed tube, a liquid or powder which solidifies, or as a film which is wrapped around the conductor rod.

An additional benefit to having the insulated conductor rod **70** pass through the insulating gap **83**, female thread **82** and male thread **85**, is that once in place, it has the function of preventing any relative rotation between housing **73** and end coupling **74** due to drilling loads subsequently applied. Additionally, whereas only a single insulated conductor rod is displayed in the drawings, a plurality of insulated conductor rods (not shown) can be provided around the circumference of the gap sub body, increasing the torque resistance as a roughly linear function with the number of insulated conductor rods employed.

While particular embodiments of the present invention has been described in the foregoing, it is to be understood that other embodiments are possible within the scope of the invention and are intended to be included herein. It will be clear to any person skilled in the art that modifications of and adjustments to this invention, not shown, are possible without departing from the spirit of the invention as demonstrated through the exemplary embodiment. The invention is therefore to be considered limited solely by the scope of the claims.

What is claimed is:

1. An electromagnetic telemetry gap sub comprising:

(a) an electrically conductive housing having a body with a bore there-through and a threaded end;

(b) an electrically conductive end coupling having a body with a bore there-through, an electronics cavity end, and an opposite threaded end threaded into the threaded end of the housing,

(c) an insulated gap joint comprising a dielectric material in an annular gap between the threaded ends of the housing and end coupling such that the threaded ends are electrically insulated from each other;

(d) a passage extending longitudinally through the end coupling body from the electronics cavity end to the threaded end; and

(e) a conductor having an insulated covering and extending from the electronics cavity end, through the passage, through the gap joint and electrically connected to the housing, the conductor electrically connectable to an electromagnetic telemetry electronics package to serve as an antenna there-for.

2. An electromagnetic telemetry gap sub as claimed in claim 1 wherein a first portion of the conductor is an electrically conductive core of a transmission wire extending through the passage from the electronics cavity end to the threaded end.

3. An electromagnetic telemetry gap sub as claimed in claim 2 further comprising a feed-through seated in the threaded end of the passage and comprising an electrically insulating body and wherein a second portion of the conductor is a feed-through conductor segment which extends through the insulating body and is electrically connected to one end of the transmission wire.

4. An electromagnetic telemetry gap sub as claimed in claim 3 wherein a third portion of the conductor is an antenna wire extending through the gap joint and having one end electrically connected to the feed-through conductor segment and an opposite end electrically connected to the housing.

5. An electromagnetic telemetry gap sub as claimed in claim 1 wherein the passage further extends through the gap joint and into the housing body, and the conductor is a conductive rod and the insulating covering is a jacket surrounding the rod, the rod and jacket extending through the passage such that the rod extends through the end coupling and into the housing thereby serving to impede rotation between the housing and end coupling.

6. An electromagnetic telemetry gap sub as claimed in claim 5 wherein the jacket is composed of a material having properties which acts as an electrical barrier at the expected downhole operating temperatures of the gap sub.

7. An electromagnetic telemetry gap sub as claimed in claim 6 wherein the jacket is composed of a material selected from the group consisting of: fiberglass reinforced epoxy, heat shrink tubing, curable silicone elastomer, powder coaded paint, polyetheretheketone, and polyamide-imide.

8. An electromagnetic telemetry gap sub as claimed in claim 5 further comprising an electrically conductive compression spring located in the end of the passage extending into the housing body and in electrical contact with the body and the rod.

9. An electromagnetic telemetry assembly comprising:

(a) the gap sub as claimed in claim 1;

(b) a mandrel connected at one end to the end coupling and having a body with a bore therethrough;

(c) an electronics housing in the mandrel bore spaced from the mandrel body and connected at one end to the end coupling, the space between mandrel body and electronics housing defining an electronics cavity; and

(d) an electromagnetic telemetry electronics package in the electronics cavity and electrically coupled to the conductor.

10. An electromagnetic telemetry gap sub or an electromagnetic telemetry assembly as claimed in any of claims 1 to 9 further comprising an external annular recess on an outside surface of the end coupling and adjacent to and in communication with the annular gap between the threads, and wherein the gap joint further comprises dielectric material which fills the external annular recess and is in contact with the dielectric material in the annular gap between the threads.


11. An electromagnetic telemetry gap sub or an electromagnetic telemetry assembly as claimed in claim 10 further comprising a protective ring surrounding the external annular recess and embedded in the dielectric material which fills the external annular recess.

12. An electromagnetic telemetry gap sub or an electromagnetic telemetry assembly as claimed in any one of claims 1 to 11 further comprising an internal annular recess on an inside surface of the housing adjacent to and in communication with the annular gap between the threads and wherein the gap joint further comprises dielectric material which fills the internal annular recess and is in contact with the dielectric material in the annular gap between the threads.

13. An electromagnetic telemetry gap sub or an electromagnetic telemetry assembly as claimed in claim 12 further comprising an internal non-conductive sleeve mounted in the bore of the housing and is in contact with the dielectric material which fills the internal annular recess.

14. An electromagnetic telemetry assembly as claimed in any of claims 1 to 13 wherein the dielectric material is a polymer resin.

Figure 1



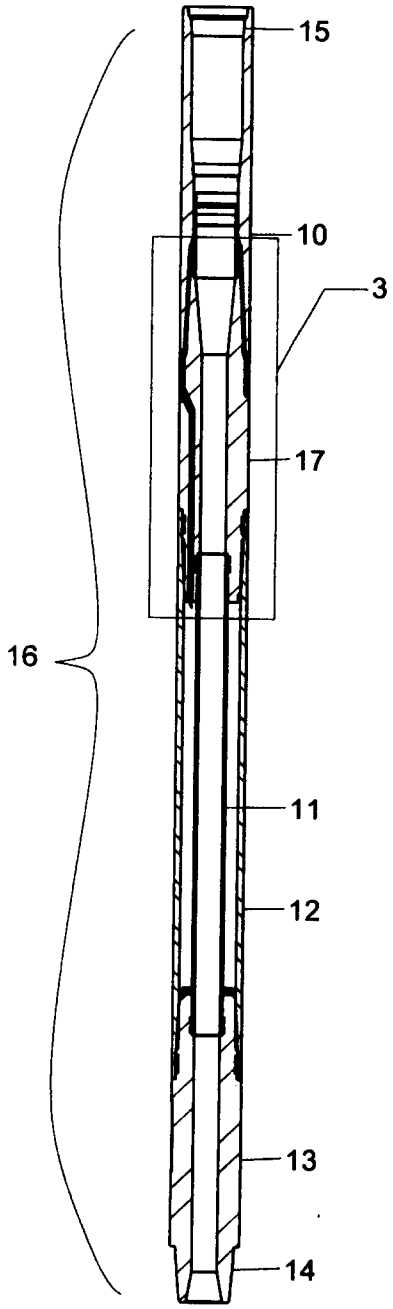


Figure 2

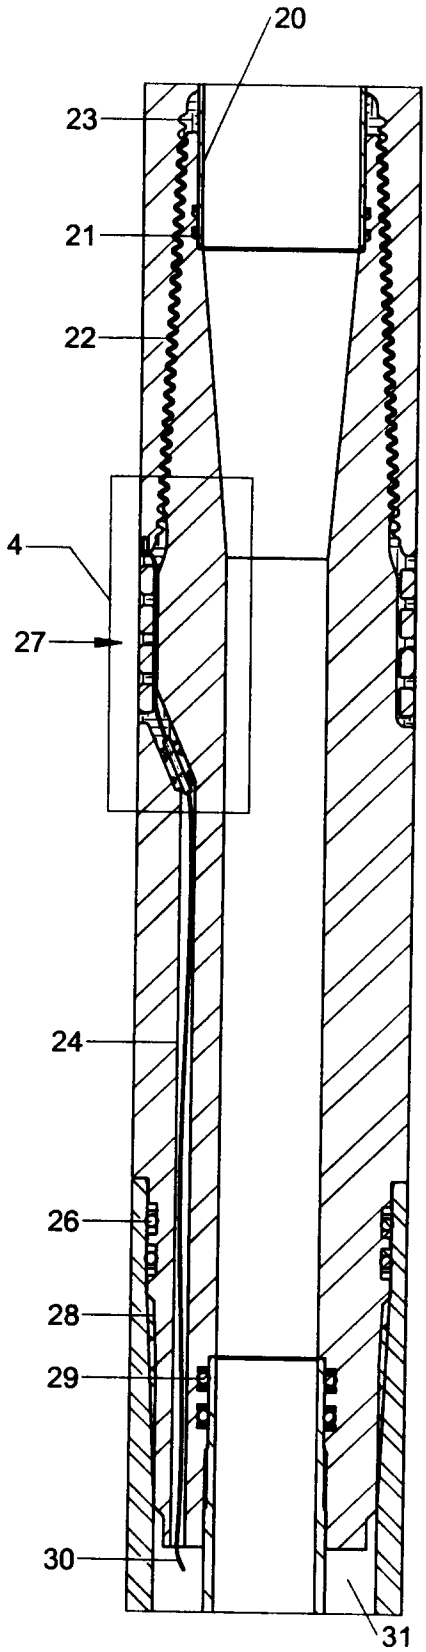


Figure 3

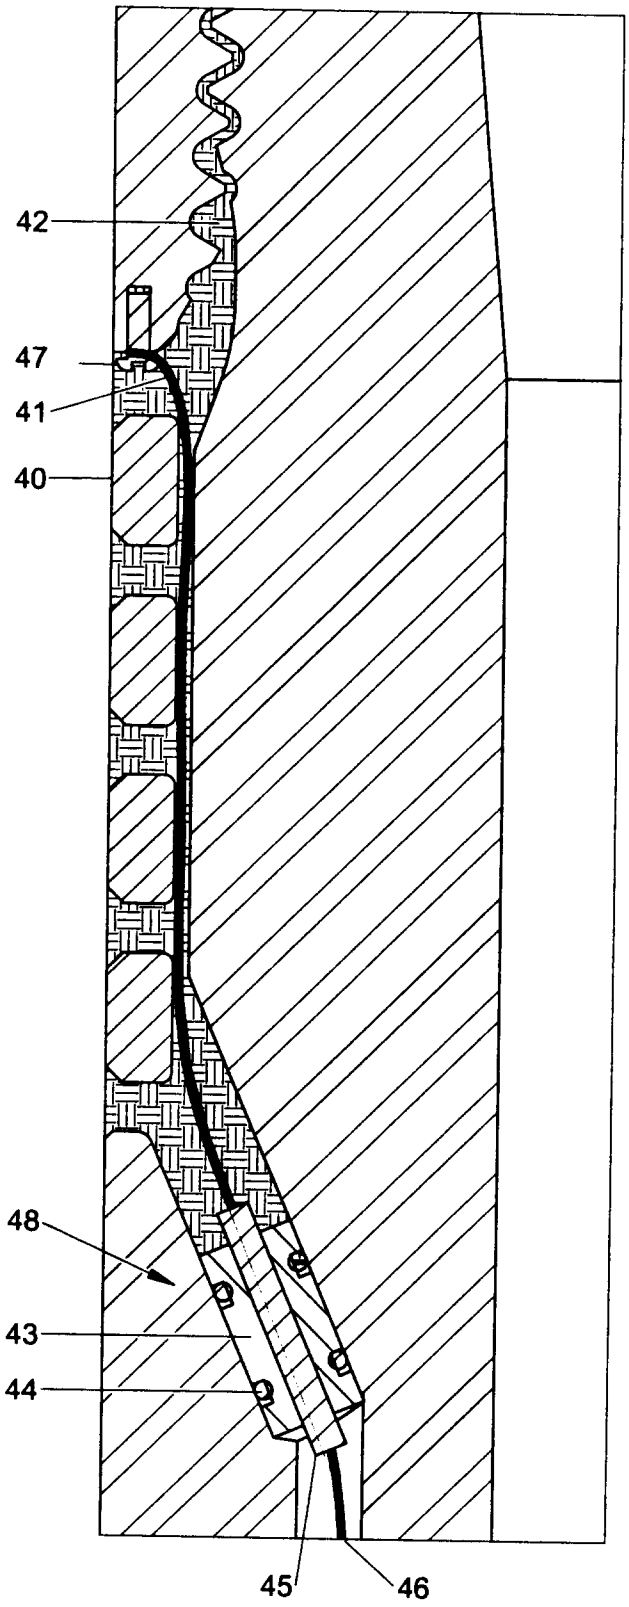



Figure 4

Figure 5



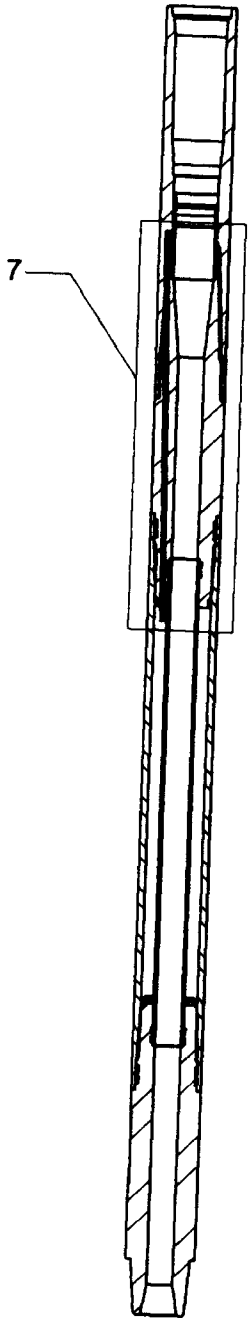


Figure 6

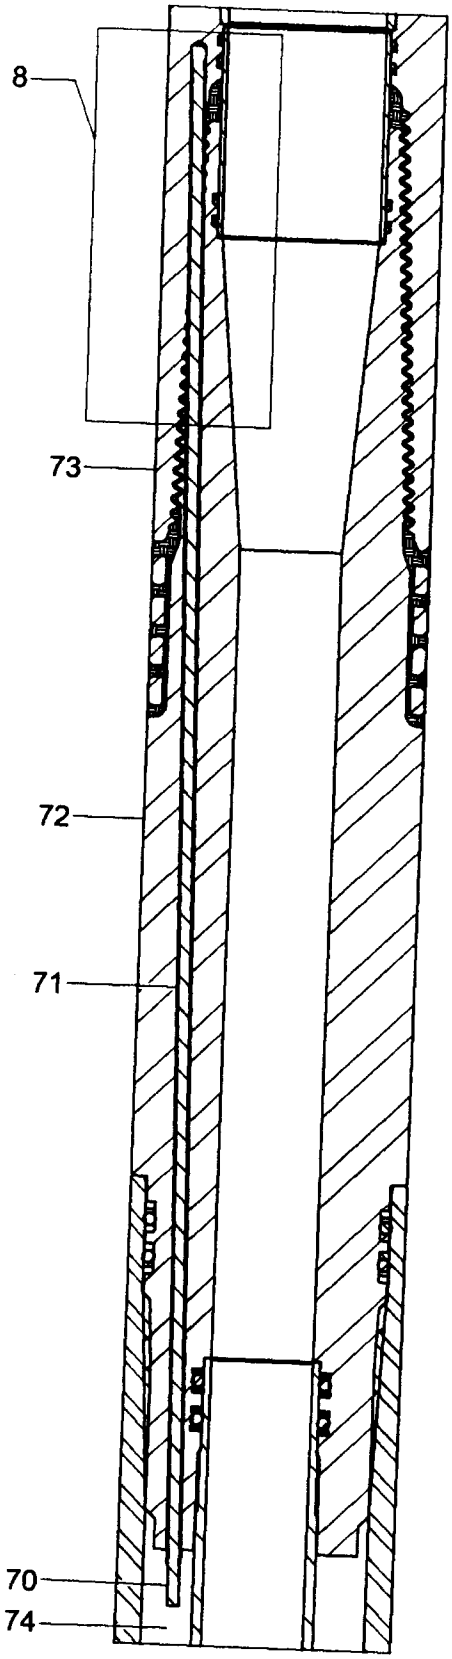


Figure 7

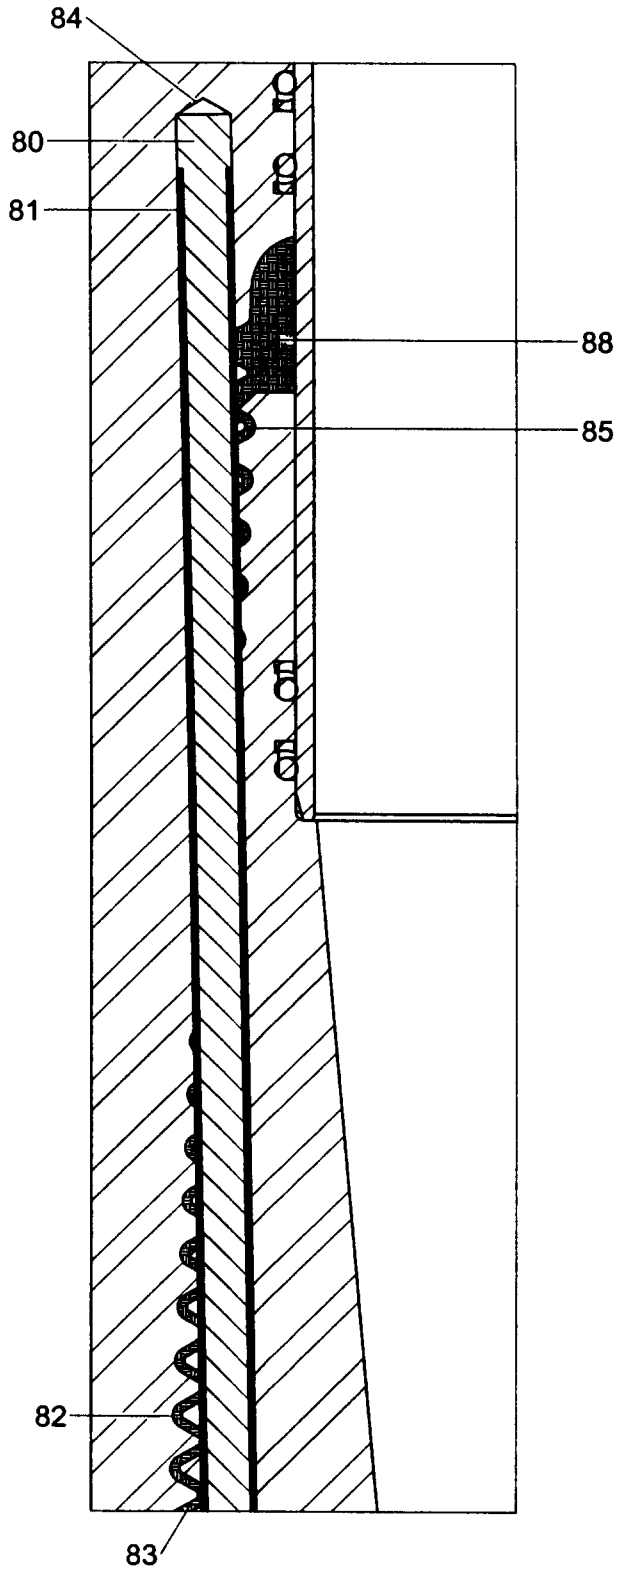


Figure 8

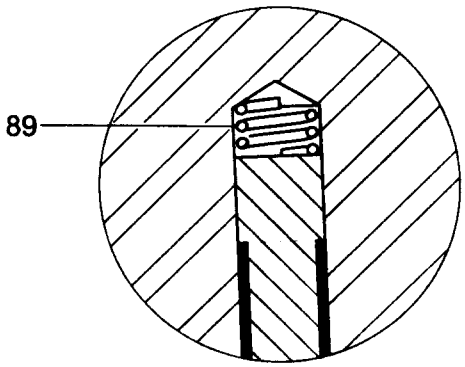


Figure 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2009/000025

A. CLASSIFICATION OF SUBJECT MATTER

IPC: ***E21B 47/12*** (2006.01) , ***E21B 17/00*** (2006.01) , ***F16L 15/08*** (2006.01) , ***F16L 25/02*** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: ***E21B 47/12*** (2006.01) , ***E21B 17/00*** (2006.01) , ***F16L 15/08*** (2006.01) , ***F16L 25/02*** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

Canadian Patents Database, Delphion, QWeb (FAMPAT)

Keywords : sub, gap, telemetry, antenna, EM (electomagnetic), dielectric

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US4,845,493A (HOWARD, M.A.) 04 July 1989 (04-07-1989) * Abstract; Fig. 1; Col. 7, lines 39-44; Col. 8, lines 7-14 *	1-4, 9-14
A	US7,255,183A (CRAMER, D.) 14 August 2007 (14-08-2007) * Abstract; Fig. 2-3; Col. 2, line 47 - Col. 3, line 21 *	1-4, 9-14
A	US4,510,797A (GUIDRY S.L. et al.) 16 April 1985 (16-04-1985) * Abstract; Fig. 2C-3; Col. 3, line 63 - Col. 4, line 15 *	1-4, 9-14
A	CA2 584 691A1 (LASATER J.B. et al.) 28 October 2007 (28-10-2007) * Abstract; Fig. 2; Page 4, line 26-24 *	1-4, 9-14
A	US2005/0068703A1 (DOPF T. et al.) 31 March 2005 (31-03-2005) * Abstract, Fig. 3B; Para [0044] *	5-8

[ ] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
6 April 2009 (06-04-2009)	9 April 2009 (09-04-2009)

Name and mailing address of the ISA/CA	Authorized officer
Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	William Tse 819- 934-6355

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2009/000025

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US 4845493A	04-07-1989	BR 8800035A	02-08-1988
		BR 8905977A	19-06-1990
		CA 1255358A1	06-06-1989
		CA 2002484A1	28-05-1990
		DE 3861322D1	07-02-1991
		EP 0274457A2	13-07-1988
		EP 0274457A3	01-03-1989
		EP 0274457B1	02-01-1991
		EP 0371906A2	06-06-1990
		EP 0371906A3	10-04-1991
		JP 2197694A	06-08-1990
		JP 63176589A	20-07-1988
		NO 880031A	11-07-1988
		NO 880031D0	06-01-1988
		NO 894435A	29-05-1990
		NO 894435D0	08-11-1989
		US 4788544A	29-11-1988
		US 4884071A	28-11-1989
US 7255183B2	14-08-2007	US 2006201717A1	14-09-2006
US 4510797A	16-04-1985	AU 574334B2	07-07-1988
		AU 1934483A	29-03-1984
		BR 8305153A	02-05-1984
		CA 1201708A1	11-03-1986
		DE 3380067D1	20-07-1989
		EP 0104993A2	04-04-1984
		EP 0104993A3	26-03-1986
		EP 0104993B1	14-06-1989
		ES 525837D0	01-10-1984
		ES 8500379A1	01-01-1985
		IN 161671A1	16-01-1988
		MX 157029A	19-10-1988
		NO 163708B	26-03-1990
		NO 163708C	04-07-1990
		NO 833210A	26-03-1984
		PH 20429A	05-01-1987
		PT 77375A	01-10-1983
		PT 77375B	22-04-1986
CA 2584691A1	28-10-2007	AR 060707A1	10-07-2008
		AU 2007201655A1	15-11-2007
		BR PI0702013A	18-12-2007
		DE102007020662A1	06-12-2007
		FR 2900436A1	02-11-2007
		NO 20072196A	29-10-2007
		US 7336199B2	26-02-2008
		US 2007257812A1	08-11-2007
US 2005068703A1	31-03-2005	AT 204360T	15-09-2001
		AU 705493B2	27-05-1999
		AU 6118596A	09-01-1997
		BR 9608803A	07-12-1999
		CA 2151525A1	13-12-1996
		CA 2151525C	31-12-2002
		CA 2476370A1	31-01-2005
		DE 69614536D1	20-09-2001
		DE 69614536T2	18-04-2002
		EP 0832345A2	01-04-1998
		EP 0832345B1	16-08-2001
		GB 0417072D0	01-09-2004
		GB 2404401A	02-02-2005
		GB 2404401B	06-12-2006

continued...