


Jan. 2, 1923.

1,440,506.

G. STULTZ.
CLOSING DEVICE FOR ENVELOPES.
FILED JUNE 22, 1921.

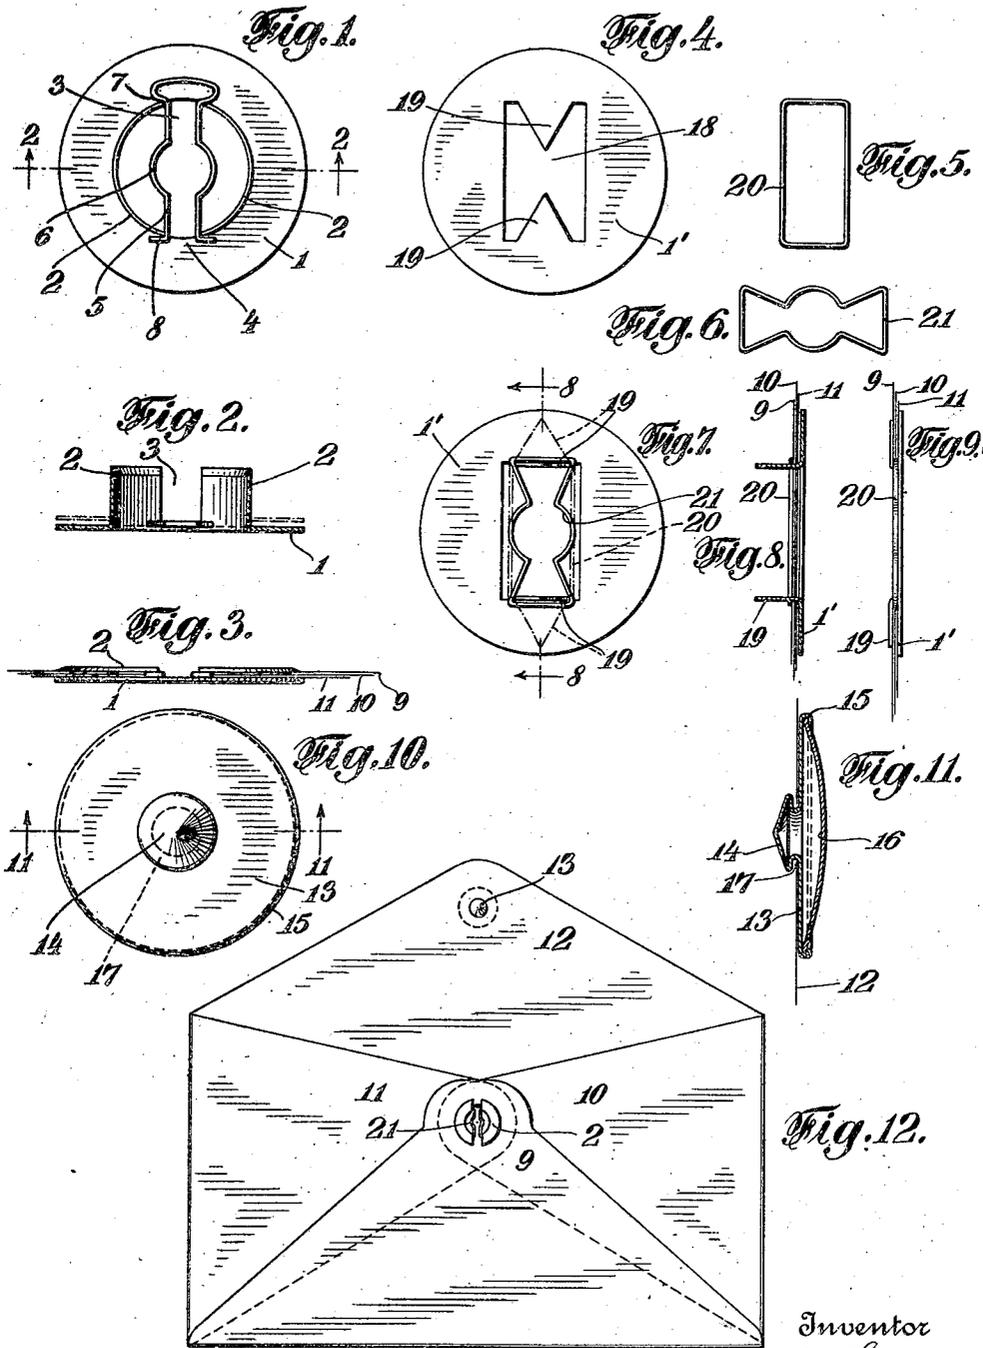

Inventor
George Stultz
By his Attorney
Carl Klein

UNITED STATES PATENT OFFICE.

GEORGE STULTZ, OF BLOOMFIELD, NEW JERSEY.

CLOSING DEVICE FOR ENVELOPES.

Application filed June 22, 1921. Serial No. 479,520.

To all whom it may concern:

Be it known that I, GEORGE STULTZ, a citizen of the United States, and resident of 256 Spruce St., Bloomfield, in the county of Essex and State of New Jersey, have invented certain new and useful Improvements in Closing Devices for Envelopes, of which the following is a specification.

This invention relates to sealing or closing devices for envelopes and comprises certain novel features as to design and association of parts with the envelope material.

One of the objects of my invention is to provide a simple, inexpensive and readily applicable device which may be easily associated with an envelope without requiring complicated machinery for doing so.

Another object of my invention is to provide in connection with the sealing device means for facilitating ornamentations to be applied thereon.

Another important object of my invention is to provide such means for securely and permanently closing an envelope which will in no way be bulky or will not interfere with the general use of the envelope.

The foregoing and further objects will be more fully apparent from the following description and the accompanying drawing, forming part of this specification, and in which:

Fig. 1 shows a top view of a preferred form of my device prior to being associated with an envelope.

Fig. 2 is a cross sectional view thereof taken on line 2—2 of Fig. 1.

Fig. 3 is a side elevation of my device when associated with the envelope material.

Fig. 4 is a top view of the blank of a modified form of my device.

Figs. 5 and 6 illustrate various spring members which may be employed to a modified form of my device.

Fig. 7 is a top view of a modified form of my device, prior to engaging the envelope material.

Fig. 8 is a cross sectional view there-through taken on line 8—8 of Fig. 7.

Fig. 9 is a side elevation of my device, showing its attachment to the envelope material.

Fig. 10 is a plan view of the engaging or closing member of my device.

Fig. 11 is a cross sectional view taken on line 11—11 of Fig. 10.

Fig. 12 illustrates an envelope equipped with my sealing device.

Referring to Figs. 1, 2, and 3, numeral 1 indicates a flanged base member from which extends upwards a piercing portion 2, which is preferably slotted at 3 and 4. The spring member 5, preferably made of a resilient wire and bent in such a manner as to engage the slotted portions 3 and 4 of the piercing part of the base member, is placed into the recesses or slots provided therein. At its center portion, the spring member is outwardly bent as indicated at 6, while the ends 7 and 8 are so arranged as to unmovably engage the piercing part 2.

The base member when being attached to the envelope is placed within the envelope below the ends of the free overlapping flaps thereof. Then the piercing member 2 is pressed through the envelope material, whereafter the spring member 5 is inserted into the slots.

After the spring member has been placed in this manner the piercing portion 2 is pressed outward and over the protruding ends 7 and 8 of the spring member, while the envelope material at the same time is caught between the flange of the base member and the now spread out piercing portion.

As shown in Fig. 3, the uppermost of central flap is indicated at 9, one side flap at 10, and the other flap at 11. Attached in the corner of the free closing flap 12 of the envelope, and so arranged as to register with the inner rounded portion 6 of the spring, is a button 13 as shown in detail in Figs. 10 and 11.

This button is preferably made of one piece pressed or drawn and possesses a tapered head 14 which passes through the flap material 12 while its enlarged portion is

provided with an annular recess indicated at 15 adapted to receive an ornamentation of celluloid, paper, or other material as indicated at 16.

5 When the button or closing member 13 is pressed down upon the spring 5, head 14 temporarily spreads the rounded portion 6 of the spring, and is finally engaged thereby at the recess 17, provided between the head
10 and the base of the button.

A similar device to that shown in Figs. 1, 2, and 3, is illustrated in Figs. 4, 7, 8, and 9, in which a base member 1' is shown, the center 18 of which is cut out in such a manner as to provide two prongs 19 which are
15 subsequently bent upwards as seen in Fig. 8.

The spring device 20 or 21, as shown in Figs. 5 and 6 is slipped with its short ends over prongs 18 and 19, the latter having
20 first passed through the overlapping envelope flaps, in the same manner as described before, and as illustrated in Fig. 8. The spring member 20 or 21 may be shaped in any desired form, but preferably so that
25 when button 14 is pressed against the spring, the latter will yield and permanently engage the recess 17 between the head and the base.

From the foregoing it will be evident
30 that my device is very simply attached to envelopes, not requiring any particular arrangement for doing so. It is not necessary to especially pierce the envelope in order to attach my device at the desired place,
35 as is the case in devices used heretofore.

The device designed for piercing the envelope material partially in place are the piercing portions 2 or the prongs 19, which are pressed through the envelope flaps from
40 within the envelope to the outer surface.

The advantage of placing the spring member on top of the envelope material is obvious for two reasons. Firstly, because of the fact that the spring itself acts as securing means for the base member, and
45 secondly, when closing or sealing my envelope the paper underneath the spring has to be pierced by the head of button 13. This fact is of vital importance, as a misuse of the envelope may be readily detected
50 since the paper becomes damaged, when someone tries to close the envelope unauthorized.

My device is primarily designed to permanently close an envelope. When forcibly
55 opened in order to deceive, the impression of the head into the paper will give evidence of former use of the envelope.

On the other hand, the paper itself after
60 having been pierced by the head also serves as a locking or tightening means between the spring and the head when the former snaps into recess 17.

While I have shown only preferred
65 forms of my device, be it understood that

changes and improvements may be made without departure from the main feature of my invention, that is, of locking the overlapping flaps of the envelope between the spring means and the base member.

The application of monograms or other ornaments upon the top of the buttoning or closing member of the envelope is another important feature of my device.

Having thus described my invention, I
75 claim:

1. In combination with an envelope, a closing device comprising a paper piercing member adapted to engage the envelope from within, a spring member engaging the
80 envelope from without and held by said piercing member, and means associated with the open flap of the envelope engaging said spring member, thus permanently closing
85 said envelope.

2. In combination with an envelope, a closing device comprising one member adapted to pass in part through the envelope material from within the envelope, a spring member adapted to be associated
90 from without with the envelope material, and to be engaged by the part of said first mentioned member which passes through the envelope material, and means associated with the closing flap of the envelope
95 for engaging said spring member, thus permanently closing said envelope.

3. In combination with an envelope having the corners of each flap overlapping, a locking device composed of one member engaging the corners of three flaps from
100 within the envelope and passing in part therethrough, a spring member engaging the said three flap corners from without, said part of the first mentioned member
105 passing through the flaps adapted to permanently combine said spring member and said flaps when bent over said spring member, and a button associated with the corner of the fourth flap adapted to engage
110 the spring member, thus permanently closing said envelope.

4. In combination with an envelope having three permanently associated and overlapping flaps and a closing flap, a sealing
115 device comprising two members, one engaging said three overlapping flaps, the other the closing flap, the former member composed of a flanged piercing part and a spring, the piercing portion of the first
120 part adapted to pass through said overlapping flaps from within the envelope and to permanently engage said spring from without the envelope, said closing member engaging the closing flap of the envelope
125 adapted to engage the spring, and means provided in said closing member for facilitating the reception of ornamentations at its exposed end.

5. An envelope sealing device, compris- 130

ing in combination a base member and a closing member, the former composed of a flanged part having upturned piercing portions adapted to pass through the envelope material from within, a spring adapted to engage the envelope material from without and to be held by the piercing portions, said closing member adapted to be associated with the free flap of the envelope and provided with a head for receiving ornamentations. 10

Signed at New York in the county of New York and State of New York this 11 day of June A. D. 1921.

GEORGE STULTZ.