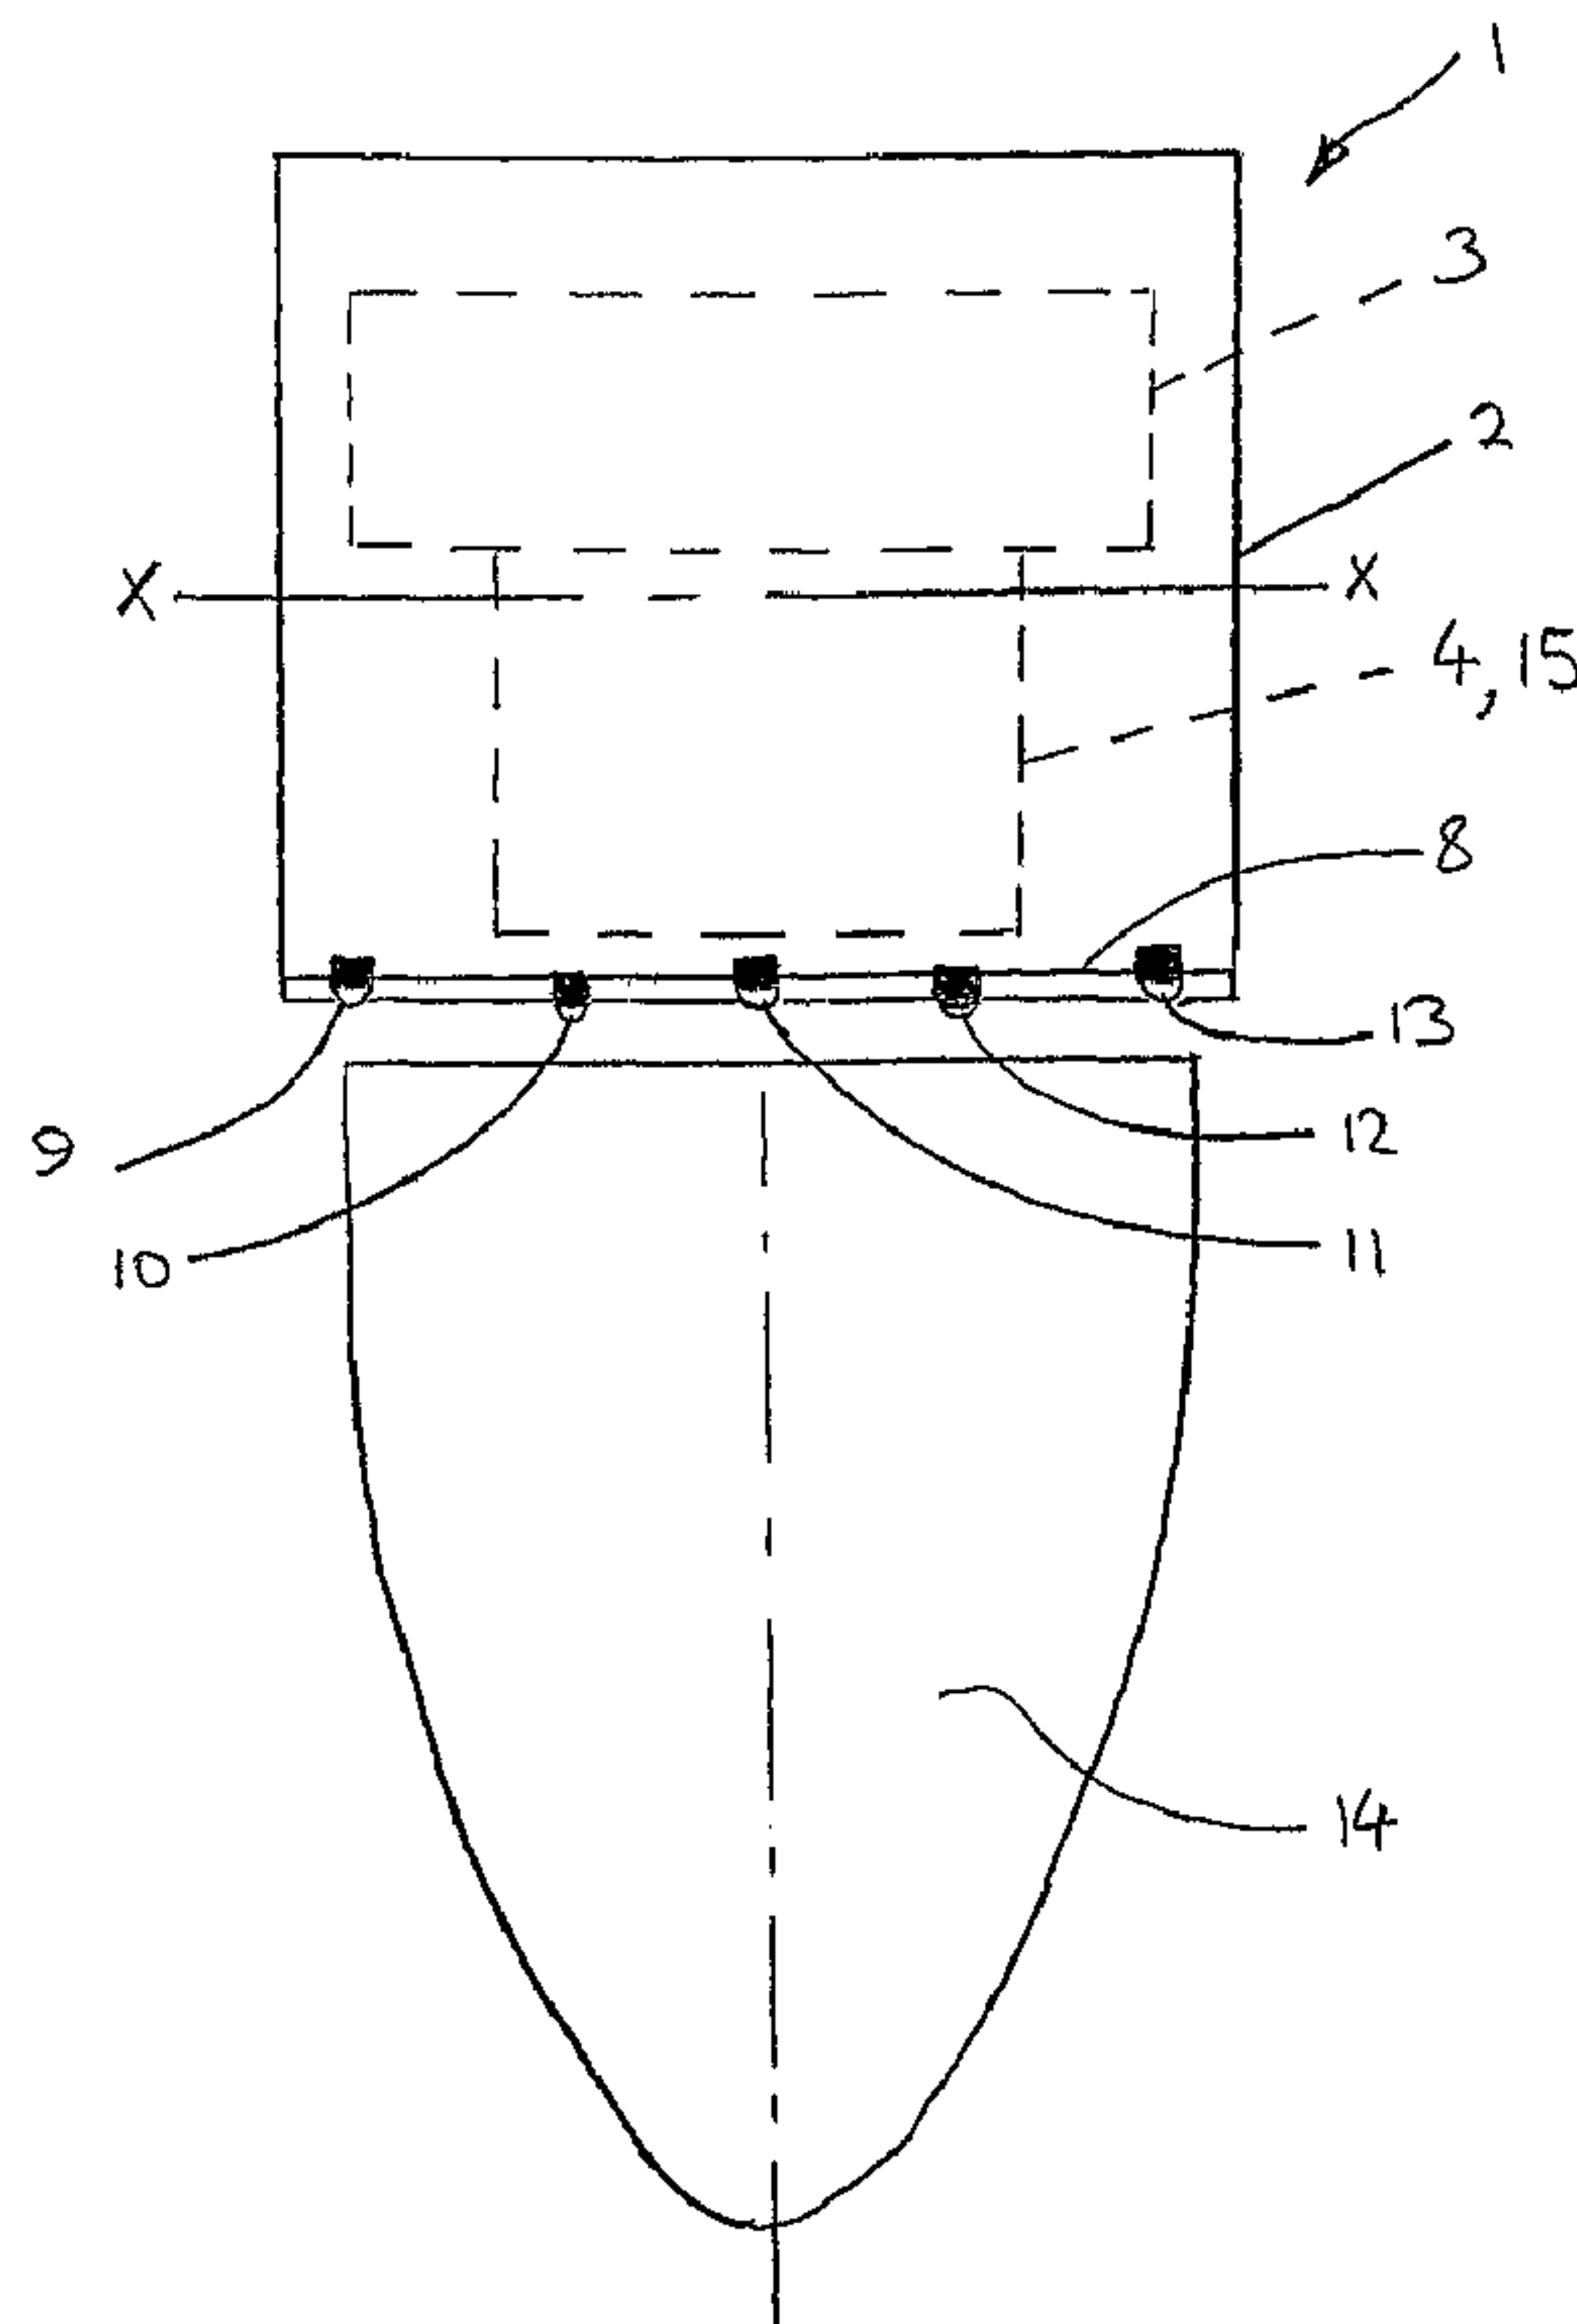




(86) **Date de dépôt PCT/PCT Filing Date:** 2005/07/13
(87) **Date publication PCT/PCT Publication Date:** 2007/01/18
(45) **Date de délivrance/Issue Date:** 2015/11/24
(85) **Entrée phase nationale/National Entry:** 2008/01/09
(86) **N° demande PCT/PCT Application No.:** EP 2005/007615
(87) **N° publication PCT/PCT Publication No.:** 2007/006329

(51) **Cl.Int./Int.Cl. H03K 17/94** (2006.01),
A47K 10/34 (2006.01)
(72) **Inventeurs/Inventors:**
MOK, KIN LUN, CN;
MOK, KING LUN, CN;
NG, HONG, CN
(73) **Propriétaire/Owner:**
SCA HYGIENE PRODUCTS AB, SE
(74) **Agent:** FETHERSTONHAUGH & CO.

(54) **Titre : DISPOSITION DE CAPTEURS DE DISTRIBUTEUR AUTOMATIQUE**
(54) **Title: AUTOMATED DISPENSER SENSOR ARRANGEMENT**



(57) **Abrégé/Abstract:**

An automatic dispenser for dispensing a product stored in the dispenser, which includes an active IR sensor system for detecting a user. The IR system includes emitters and receivers which are mounted so that each IR emitter's active emitting portion protrudes



(57) Abrégé(suite)/Abstract(continued):

outwardly from an outer surface of the housing and each IR receiver's active receiving portion is recessed behind that outer surface, such that the outward protrusion of the active receiving portion from the outer surface of the housing is less than the outward protrusion of the active emitting portion. The outer surface of the housing in question which is preferably at the bottom of the housing next to the discharge outlet. This arrangement allows a reliable and accurate IR reception field to be obtained with a shape more suited to expected user positioning.



(10) International Publication Number
WO 2007/006329 A1

[Continued on next page]

The diagram illustrates a garment assembly, possibly a bra, with the following components labeled:

- 1**: The upper rectangular portion of the garment.
- 2**: A dashed rectangle within the upper portion.
- 3**: A horizontal dashed line labeled 'X' passing through the upper portion.
- 4, 15**: A vertical dashed line passing through the center of the lower portion.
- 8**: A horizontal band connecting the upper and lower portions.
- 9, 10, 11, 13, 14**: Five circular elements (possibly buttons or fasteners) located on the horizontal band.
- 12**: The lower triangular portion of the garment.

(57) Abstract: An automatic dispenser for dispensing a product stored in the dispenser, which includes an active IR sensor system for detecting a user. The IR system includes emitters and receivers which are mounted so that each IR emitter's active emitting portion protrudes outwardly from an outer surface of the housing and each IR receiver's active receiving portion is recessed behind that outer surface, such that the outward protrusion of the active receiving portion from the outer surface of the housing is less than the outward protrusion of the active emitting portion. The outer surface of the housing in question which is preferably at the bottom of the housing next to the discharge outlet. This arrangement allows a reliable and accurate IR reception field to be obtained with a shape more suited to expected user positioning.

WO 2007/006329 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

26516-125

1

Automated dispenser sensor arrangement

Field of the invention:

The present invention relates generally to a dispenser
5 having an active infra-red (IR) sensor system, in
particular for dispensers of the type including a motor-
driven dispensing system combined with control circuitry
for sensing the presence of a possible user by means of
said IR sensor system and controlling operation of said
10 motor to effect dispensing of material, without physical
contact of the user with the dispenser being necessary
for initiating the dispensing sequence. Such dispensers
are often referred to as hands-free dispensers or
touchless dispensers.

15

The invention furthermore relates particularly to an
automatic towel dispenser (preferably paper towels stored
inside the dispenser housing) of the electrically powered
type (particularly battery powered type but also AC-
20 powered or combinations of AC and DC powered types) in
which the IR sensor system is used to control dispensing
of paper sheets such as paper hand-towels when the
presence of said possible user is detected to be within a
specified zone, without physical contact of the user with
25 the dispenser being required for initiating the
dispensing sequence.

Background to the invention:

Dispensers of the aforementioned type are known for
30 example from US-B1-6695246 and US-A-6069354.

In for example the dispenser according to US-B1-6695246,
the sensor control circuitry uses active IR (i.e. both IR
emission and detection) to control sensing of the

presence of a possible user. The IR is emitted in pulses. In the active IR mode, the presence of an object (i.e. a possible user) can be detected within a detection zone of about 12 to 24 cm from the dispenser and upon said
5 detection operates a motor to dispense a hand towel to a user. One IR receiver and one IR emitter are located behind a front cover of the dispenser and each is mounted in a respective tube, the tubes being placed adjacent one another. By this arrangement the detection distance is
10 kept short (between about 12 to 24 cm) so that objects which are outside the detection zone do not lead to undesired and unintentional dispensing. Likewise the object must be in the correct position and at a correct angle otherwise the tubes will prevent IR from being
15 reflected back and collected by the receiver. Thus, while the possibility of undesirable reflections from other surfaces or the like is reduced, the sensor system requires fairly accurate positioning of the hand to effect operation. When an object is detected, the
20 microprocessor activates the motor to dispense a towel if two scans with sufficient reflected IR are received the IR sensing control system.

US-A-6069354 discloses a dispenser using active IR which
25 generates a square wave at about 1.2kHz so as to emit a modulated IR signal which is detected by reflection against a possible user to an IR detector (receiver). This document proposes using a sensor system set to sense a user between about 1.25 cm and about 30 cm distant from
30 the dispenser. The IR emitter and the IR detector are both arranged very close together approximately midway up the front panel of the device while the discharge outlet is located at a lower part of the device. To operate the dispenser, the user thus raises a hand upwards above the

26516-125

3

discharge opening to where the IR sensor and emitter are placed.

5 In both of the above dispensers, a user's hand which is not correctly positioned with respect to the small area of detection of the sensors on the dispenser, i.e. in the small range of area detected and thus which does not immediately activate hand towel dispensing, will often be tempted to touch the dispenser to try and cause
10 dispensing in the belief that touching of the casing close to the sensors is required, despite any written notices which the dispenser may contain in this regard. This is particularly the case because the user's hand is already at the height of the dispenser. This can result
15 in lack of hygiene when several users consecutively touch the dispenser.

Some embodiments of the present invention have as one of their objects, to provide an advantageous positioning of IR emitters and
20 detectors (receivers) so as to provide good detection ability over a large area and to still avoid unintentional dispensing due to incorrect IR sensing.

A further object of some embodiments of the invention is to improve
25 the positioning of the sensors in relation to the dispenser discharge outlet so that user detection occurs in an area of the dispenser where it is expected that a user's hands will normally be present for grasping a product issued by the dispenser, in particular by causing dispensing to
30 occur without the user needing to raise his/her hands to the mounted height of the dispenser.

A further object is to improve the possibility of better hygiene.

26516-125

4

Further objects of the invention will be apparent upon reading this specification.

5 Summary of the invention:

The main object of some embodiments of the invention is achieved by a dispenser having the features described herein.

10

Further features of the invention will be apparent to the reader of this specification.

15

The sensors in the inventive dispenser are positioned such that the IR emitters create a wide and useful IR detection zone and the IR detectors (i.e. IR receivers) are arranged to prevent IR from the emitters directly entering the receivers and to reduce IR reflections from other directions.

20

The IR emitters and IR receiver each have an active portion. In this regard, this is the portion of the IR photodiode which actively emits IR outwards or respectively receives IR inwards. The active portion of the IR emitters and receivers can be considered as being the translucent protective cover which surrounds and encloses the photovoltaic material of the photodiode, since it is the photovoltaic material which is the portion of the emitter which either emits or receives IR. These covers are typically translucent red or green in practice and may be shaped with flat or rounded outer ends for example. The active portion does not include any portion of the wire connectors which lie on the side of the photovoltaic material which is the

25
30

opposite side to that on which the translucent cover is primarily located.

Any locations on the dispenser are defined with respect to the dispenser in its normal position of use and not mounted upside down or the like. Thus, the lower part of the dispenser is intended to be at the bottom. In the embodiments shown herein, the lower part of the dispenser is the part in which the dispensing outlet is located. Likewise the lateral direction of the dispenser is a generally horizontal direction.

Where a vertical direction or plane is referred to, this is normally intended to refer to the generally vertical direction. When the dispenser is mounted on a true vertical wall (as will be described later with reference to Fig. 2 for example), the vertical direction is thus a true vertical direction. If however, the wall is slightly inclined by a few degrees, a vertical direction referred to in the claim with respect to the dispenser will also be inclined by the same amount and in the same direction as the wall inclination.

Partly due to the good coverage of the sensor system which can detect potential (possible) users at a sufficient distance from a large range of the normal positions of approach of the user's hands to the dispenser, this allows the system to react to a user's presence early and thus enables the dispenser to be designed to consume low power. This reduced power consumption is possible since in periods when a possible user (i.e. an object assumed to be a user requiring dispensing of a product such as a length of hand towel or toilet paper) is not located near the dispenser, the

scanning rate can be lowered, without any appreciable risk that the scanning rate will be too low to react quickly enough when a product should be dispensed by a user being detected. When the user is detected, the
5 scanning rate is changed to a faster rate.

Low power consumption is particularly important in dispensers which are entirely or partially battery powered by a battery or batteries, which are generally
10 expected to operate for a long time (e.g. enough time to dispense 60 or more rolls of paper without requiring battery replacement) and the improved arrangement of sensors and the sensing control system allows less power to be used at times when no users are present requiring a
15 product to be dispensed.

The scanning rate, i.e. the number of scans performed per second, is made to vary upon the location of a user with respect to the dispenser, such that the dispenser
20 operates at a first scanning rate (i.e. performs a scanning sequence by activating IR receiver and emitter circuits, and then emitting scanning pulses at a first number of single scans per second) when no possible/potential user is detected. The system then
25 increases the scanning rate when a user is considered to be close to the dispenser (i.e. has entered a "first" detection zone). This variable scanning rate allows very low power to be used when no users are adequately close to the dispenser, and only to use a higher power level
30 when required, so that a quick reaction time to dispense a product is experienced by the user.

The dispenser sensing system may be further improved to reduce power consumption, by providing an additional

remote sensor linked by either a wire connection to the dispenser or by a wireless link (e.g. IR or radio) to the dispenser. This additional sensor can be used to detect e.g. a user entering a washroom in which the dispenser is placed at a different location to the entrance and thus can cause the first scanning rate to change to the second scanning rate. Such a "remote" sensor could also be mounted on the front-facing portion of the dispenser and could be arranged to operate at a very slow scanning rate due to the distance of the entry to a washroom from the location of the dispenser, such that by the time the possible user wishes to use a dispenser and has thus moved closer to the dispenser, the dispenser is already operating at a higher second scanning rate allowing rapid detection by the active IR sensor system of the dispenser defined in the claims.

Alternatively the same set of active IR sensors as defined in the claims which are used to cause the dispenser to dispense a product can also be used to detect a user entering a first detection zone. In this way, a user approaching the dispenser (e.g. 40 to 50 cm or perhaps further away from the dispenser) will activate the sensor system to change the scanning rate to a higher scanning rate, and as the user continues to move his/her hands and/or body closer to the discharge outlet of the dispenser, the user will be detected as being in a "dispensing zone" and will thus cause the dispenser to dispense a product (e.g. a paper hand towel or paper toilet toil).

If desired, more than two scanning rates can be used. For example a first slow scanning rate can be used (such as 1 or 2 times per second) followed by a higher second

scanning rate (at e.g. 3 to 6 times per second), followed by a further higher rate (at e.g. 7 to 12 times per second) whereby the scanning rate is increased from one rate to the next as the user is detected to be moving closer to the dispenser. This can be performed by a series of different sensors for example, each detecting at different distances, with the final sensor system being as defined in the appended claims, or for example by arranging the sensor system to detect an increased IR signal reflection from the user as the user comes closer.

When a user moves away from the dispenser, the scanning rate can be decreased again to a lower rate, thereby consuming less sensor operation power.

As will be apparent, even at relatively short distances for the first detection zone (e.g. up to about 50 cm from the dispenser for example at an angle of about 10° to about 45°, or about 30 to about 60°, to the vertical plane slanted in a forwards direction away from the rear of the dispenser and downwards), the system has significant power saving advantages while still allowing a good reaction time to dispense a towel.

This is because the user expects to move his/her hands relatively close to, but not in contact with the dispenser, in order for dispensing to occur and this takes of the order of between a quarter and half a second at normal hand movement speeds (0.2 m/s to 0.5 m/s), by which time the dispenser can be made to be already scanning at the second higher rate (or even at a still higher rate) and thus be able to dispense very close to the time when the hands are in an expected position for dispensing (i.e. a position at which the user would

26516-125

expect a towel to be dispensed, typically some 15 to 25 cm from the dispenser outlet).

5 Likewise, it is preferred that when using an IR sensor system, the sensor system should preferably be able to cope with singular anomalies of short term high IR reflections as sometimes occurs, without dispensing a towel, so that it is appropriate to sense two or more consecutive scans, or e.g. a predetermined number of
10 scans in a number of consecutive scans (e.g. two out of three consecutive scans), at a predetermined level of IR above background level, before dispensing a product.

Advantageous use can be made of the varied scanning rate
15 by making the first scanning rate between e.g. 0.15 and 0.25 seconds between scans (i.e. the scanning rate when a possible user is outside the first detection zone), or even longer (such as between 0.25 seconds and 0.5 seconds), and the second scanning rate of the order of
20 about 0.08 to 0.12 seconds between scans and requiring only two consecutive scans (or e.g. two out of three consecutive scans) providing a reflected IR above background IR level to activate dispensing. Such dispensing will be perceived by the user as almost
25 immediate, yet a significant amount of power used by the sensor system can be saved due to the initial low scanning rate which consumes less power.

26516-125

9a

According to one aspect of the present invention, there is provided a paper towel dispenser arranged for both store a supply of paper and automatically dispensing at least a portion of said supply of paper, said dispenser comprising a housing with an outer surface, and an active IR sensor system for detecting presence of a possible user, said IR sensor system including at least one IR emitter having an active emitting portion and at least one IR receiver having an active receiving portion, wherein said outer surface is positioned on the lower side of said dispenser housing facing generally downwards, and wherein said outer surface at the lower side of said dispenser housing, in which said at least one emitter and said at least one receiver are positioned, is directly adjacent a lateral discharge opening of said dispenser on the lower side of said dispenser and said sensor system generating a detection zone being inclined downwardly and forwardly of the discharge opening, wherein each IR emitter is positioned such that at least part of its active emitting portion protrudes outwardly from said outer surface of said housing, and each IR receiver is positioned such that at least part of its active receiving portion is recessed behind said outer surface of the housing, such that any outward protrusion of the active receiving portion from said outer surface of said housing is less than the outward protrusion of said active emitting portion from said outer surface of said housing, and wherein said sensor system comprises at least two IR emitters and at least three IR receivers, wherein one receiver is located on each lateral side of an emitter such that the emitters and receivers are in the order receiver-emitter-receiver-emitter-receiver in a lateral direction across the dispenser and the spacing between each

26516-125

9b

emitter and each laterally adjacent receiver is substantially equal.

Brief description of the drawings:

The invention will now be explained in more detail with
5 reference to certain non-limiting embodiments thereof and with
the aid of the accompanying drawings, in which:

- Fig. 1 shows a schematic front view of a paper towel dispenser with a paper roll and paper transport mechanism in hidden view, depicting a schematic view of a first detection zone,
- 5
- Fig. 2 shows a side view of the arrangement in Fig. 1 whereby a side panel of the dispenser has been removed to show schematically the paper roll and simplified details of the paper transport mechanism,
- 10
- Fig. 3A is a sectional enlarged view showing further detail and taken through the lower part of the casing shown in Fig. 1, also from the front and at the location of the IR sensors,
- 15
- Fig. 3B is a schematic diagram of a frontal view of the arrangement shown in Fig. 3A, depicting the approximate frontal view of the first detection zone achieved by the active IR sensor arrangement,
- 20
- Fig. 4 shows an exemplary plot of emittance amplitude of the scanning pulses against time,
- 25
- Fig. 5 shows a plot of received signal level against time, for a series of received IR reflections occurring due to the emitted IR pulses in Fig. 4,
- 30
- Fig. 6 shows a block diagram of the basic system elements of an embodiment of a dispenser according to the invention,

Fig. 7 shows an RC circuit used for effecting wake-up of the microprocessor in the MCU so as to perform a scan, and

5 Fig. 8 shows an alternative version of the RC circuit depicted in Fig. 7.

Fig. 9 shows a further embodiment of the invention with a further sensor, additional to the main active IR sensor system, able to detect a user at a further distance from the dispenser,

10

Detailed description of preferred embodiments:

Fig. 1 and Fig. 2 show a dispenser 1 in front and side views respectively, whereby Fig. 2 shows the dispenser 1 attached at its rear side to a wall W (the means of attachment are not shown but may be of any suitable type such as screws, adhesive, adhesive tape, or other attachment means), whereby the rear surface of the dispenser lies against said wall W which is normally vertical.

15

20

The dispenser 1 comprises a housing 2, within which is located a product supply, in this case a supply of paper in a roll 3. The roll 3 is suitably a roll of continuous non-perforated paper, but may also comprise perforated paper in some cases. Also located in the housing 2 is a paper transport mechanism 4 preferably in the form of a modular drive cassette with its own casing 15, which can preferably be removed as a single unit from the housing 2 when the housing is opened.

25

30

Figure 1 shows the paper roll 3 and the transport mechanism 4 which feeds paper from the roll towards a

discharge outlet (see further description below), as simple blocks for the sake of simplicity. Likewise Fig. 2 shows the paper roll 3 and the transport mechanism 4 in a vastly simplified form, whereby the transport mechanism includes a drive roller 5 engaged with a counter roller 6, whereby a portion of the paper sheet 7 is shown located between said rollers 5, 6, with the leading edge of said paper sheet 7 ready to be dispensed at a discharge outlet 8 formed in the housing 2 at the lower side thereof.

The drive roller 5 is shown schematically connected to an electrical drive motor M powered by batteries B. A gearing, typically in a gearbox, may be included between the motor drive shaft and the drive roller 5. Suitable batteries may supply a total of 6V when new and typically four 1.5V batteries are suitable for this purpose. Exemplary of suitable types are Duracell's MN1300 batteries whereby each battery has a capacity of 13Ah and which can operate from full to total discharge between the range of 1.5V to 0.8V. Operation of the motor M causes drive roller 5 to rotate and to thereby pull paper sheet 7 from the paper roll 3 by pinching the paper between the nip of the rollers 5 and 6. Upon actuation, the motor rotates thereby withdrawing paper sheet from the roll 3, which also rotates so as to allow paper to be moved towards the discharge opening 8. Other forms of drive mechanisms for withdrawing paper from a roll may also be used. The details of the paper transport mechanism or other product transport mechanism are however not important for an understanding of the invention. Such devices are also well known per se in the art.

It will also be understood from the foregoing that drive roller 5 and counter roller 6 may have their functions swapped such that the counter roller 6 could be the drive roller which is operably connected to the drive motor (and thus the drive roller 5 depicted in Fig. 2 only acts as a counter roller in contact with roller 6, normally with paper or towel in the nip therebetween).

Although the principle of operation is explained using paper in the form of a continuous paper sheet in a roll, it is to be understood that the dispenser may be used to dispense other products from a product supply, such as a continuous piece of paper in concertina format for example. Alternative products may be dispensed by the device with appropriate redesign thereof. It is also possible that other dispensing devices are tagged on to the dispenser. For example the dispenser may further include an air freshener which is activated for example once every 5 or 10 minutes (or other suitable time) or once upon a certain number of towels dispensed. This extra tagged-on dispenser can be controlled by the dispenser control circuitry (to be described below) or by separate control circuitry (not described herein).

The motor M is at rest and without power applied to it when no paper is to be dispensed, and the motor M is rotated when paper is to be dispensed through (i.e. fed through) the discharge opening 8. The operation of the motor M is controlled by a master control unit MCU (see e.g. Fig. 6) connected to a sensing system comprising sensors 9-13, of which sensors 10 and 12 are IR emitters and sensors 9, 11, and 13 are IR receivers. Such IR emitters and receivers are well known in the art and typically comprise diode structures in the form of

photodiodes. Suitable IR emitters and receivers are for example made by Lite-ON Electronics Inc., under Type number LTE-3279K for the IR emitters and under Type number LTR-323DB for the receivers. Other types of IR emitters and receivers may also be used. In the shown embodiment, the IR emitters 10, 12 and IR receivers 9, 11, 13, are shown approximately equally spaced consecutively in the lateral direction X-X of the housing, parallel to the product supply roll 3. The spacing can suitably be between 3 to 7cm, preferably between 4 and 5 cm, and most preferably about 5 cm spacing between a consecutive emitter and receiver, such that the distance between sensors 9 and 10, 10 and 11, 11 and 12, 12 and 13 are all approximately equal.

Also, the emitters and receivers are shown (see Fig. 2) placed on the rearmost side of the discharge outlet 8. Other arrangements of sensors are also possible such as all sensors placed on the front-facing side of the outlet in a straight row. The arrangement of sensors consecutively as receiver/emitter/receiver/emitter/receiver with a correct spacing allows an advantageous shape of detection zone 14, which is somewhat tongue-like in shape (see Fig. 1, 2 and 3B). The underlying tongue shape can be altered somewhat depending on power applied to the emitters and also their extent of protrusion from their housing surface and also the extent of recessing of the IR receivers as well as by their spacing.

With the understanding from this description that a tongue-shaped detection zone is produced due to the spacing between sensors, to a small extent by the power supplied, and due to the recessing/protruding

relationships of the IR emitters and receivers, the skilled person will be able to readily vary the tongue shape to meet more precise needs of the dispenser in any special situation or dispenser size, merely by routine experimentation.

The dispenser 1, upon detection of a possible user (the detection process being described further below) without any contact of the user with the dispenser or the sensors, for a sufficient time in the first detection zone, thus causes the dispenser to determine that a user is present in a dispensing zone and thus to dispense a product. Dispensing in this case is performed in this case by the front portion of the paper 7 being discharged automatically through discharge opening 8 (a laterally extending opening in the lower part of the housing). This allows the user to grasp the paper 7 and to draw it against a cutting edge such as cutting edge 16 shown in Fig. 2, proximate the discharge opening 8, so as to remove the torn/cut-off piece of paper.

The first detection zone 14 as shown in Figs. 1, 2 and 3B is shown as tongue-like and is inclined downwardly and forwardly of the discharge opening at an angle x° of preferably between 20° to 30° to the vertical axis Y, for example 27.5° . This is achieved by mounting the IR emitters and receivers at between 20 and 30° to the vertical plane which extends laterally across the dispenser. The angle at which each of the emitters and receivers is inclined may vary up to a few degrees, but is generally equal for all emitters and receivers so as to produce a better detection zone. The sensor system is thus able to detect for a vast majority of its full extent between 10 over an angle of some 10° to 45° to the

vertical plane (i.e. a detection in a zone somewhat corresponding to the zone 14 shown in Fig. 2).

5 Details of one preferred arrangement of emitters and receivers with respect to the casing will now be explained with respect to Fig. 3A. The emitters and receivers in this case may suitably be the Lite-ON emitters and receivers described above.

10 The lower portion of the dispenser comprises a first cover 50 attached to which is the main PCB for the sensors 9-13 which are emitters and receivers as described above. To this PCB are attached a series of holders 52a and 52b holding each of the sensors. The
15 receiver holders 52a are shorter than the emitter holders 52b in order to provide a means of recessing the receivers 9, 11, 13 with respect to a flat planar outer cover 53, which in the case shown is provided with varying length recesses. Outer cover 53 can be attached
20 to the emitters and receivers by a frictional fit for example in the case it is decided to fit these as a single unit, although outer cover 53 may also be attached to the PCB or the first cover 50 where desired.

25 As can be seen in Fig. 3A each of the recesses in which the emitters and receivers are placed are substantially circular. If conical shaped recesses are provided for example, the extent of protrusion of the active part of the emitters, and the extent of protrusion of the active
30 part of the receivers (i.e. for the case that the receivers do indeed protrude beyond lower surface 54, as is the case shown in Fig. 3A, rather than being totally recessed) may require small adaptations to achieve the desired detection field shape. The relative protrusion of

the emitters and receivers can be seen by comparing the position of the short lateral chain line on each sensor which line is either below or above the (lower) outer surface 54 of outer cover 53. In the case of the emitters 5 20, 12 which are arranged to have the active emitting portion protruding outwardly from the outer surface 54 by a larger extent than the receivers 9, 11 and 13, the line is shown below the outer surface 54 (i.e. outside the outer surface 54), whereas in the case of the active 10 receiving portion of receivers 9, 11, 13, the lines are above the outer surface 54 because the active receiving portion is at least partially recessed behind the outer surface 54 (it may also be fully recessed such that it has no portion thereof protruding outward beyond the 15 surface 54).

In the case shown, the distance "A" of the tip of the emitters 10, 12 from the surface 54 is approximately 3 mm and the distance "B" of the tips of each of the receivers 20 9, 11, 13 from the surface 54 is about 1 mm. The distances between respective sensors 9 - 13 is such that x_1 approximately equals each of the distances x_2 , x_3 and x_4 . With the recessed and protruding dimensions of 1 mm and 3 mm respectively, a distance of about 50 mm for each 25 distance x_1 , x_2 , x_3 and x_4 has been found very suitable.

The amount of recessing and protrusion, once the principles of this invention are understood, can be determined by routine experiment. However, a recessing 30 such that the IR receivers project by distance B of between -2mm (i.e. totally recessed by 2 mm) and +1.5 mm may be used, although a small positive distance B between 0.2 mm and 1.5 mm is most suitable. Likewise for the IR

emitters, a protrusion of distance A by 2 to 4 mm may be used.

5 The foregoing configuration of about 3 mm and 1 mm protrusion beyond surface 54, for the emitters and receivers respectively, produces a very favourable tongue shape of the detection zone. The general tongue shape of the detection zone 14 produced is shown in Fig. 3B (which corresponds to the configuration in Fig. 3A) by the dash-dot chain perimeter line 55 indicating the periphery of
10 the area 14. There will be some variation of the shape and also the total length of tongue-shaped zone 14 from the discharge opening 8 in the direction Z (see direction Z in Fig. 2) such that it can vary between about 25 cm and about 50 cm, based on applying varying power to the
15 emitters between 0.001mAs and 0.1mAs in steady conditions. The depth of the detection zone 14 shown by dimension C in Fig. 2 will however vary little, even when the length of zone 14 changes in direction Z when power
20 is changed. It remains relatively constant for the arrangement of sensors in the example shown at about 8 cm.

25 In Fig. 3B, the ellipses 56, 57, 58, shown below each of the receivers 9, 11, 13 are smaller than the ellipses 59, 60 shown below each of the emitters 10, 12. This difference in size is due to the recessed and protruding nature of these sensors respectively. The ellipses are however only a way of diagrammatically representing the
30 principal of main field of detection and reception, since practical testing of the exact shape of the detection zone shows that it in fact corresponds to an area 14 bounded by perimeter line 55. A part of a user entering

any part of zone 14 bounded by perimeter 55 can thus be detected by the system.

Fig. 3B also shows that a detection blind gap is formed which extends a distance of about 5 cm (with some variation of about 0.5 cm, thus varying between 4.5 cm and 5.5 cm distance), below the lower surface 54 which surface 54 may be substantially at the same vertical level as the discharge outlet 8. The surface 54 may however be arranged such that it lies 1 to 4 cm above the discharge outlet, thereby however still providing an outward surface of the dispenser, such that the intended detection field is not blocked in some way by other parts of the dispenser housing.

The blind gap may however be made to have a distance of preferably between 4 and 6 cm from the lower surface 54 depending on the relative protrusion of the emitters and receivers and their lateral spacing

The relatively large size of the blind gap is caused largely by the recessing of almost all of the active portion of the receivers behind surface 54 (i.e. vertically above surface 54 in the position of use).

The blind gap is also shown in Figs. 1 and 2.

The recessing of the receivers 9, 11, 13 (i.e. their lesser protrusion outwardly beyond surface 54 compared to the emitters, or their complete recessing entirely above surface 54) is of particular advantage since it substantially prevents IR signals emitted from shining directly onto all parts of the receivers which can otherwise degrade system reception sensitivity.

Furthermore it reduces IR reflection interference from other directions than the detection zone 14.

5 As will be explained below in more detail, when a part of a possible user's body enters this first detection zone 14, the sensing system detects the user's presence and causes the sensor system to change from a first scanning rate to a second scanning rate which is higher than said first scanning rate. The sensing system also causes the
10 motor M to turn upon regarding a user (due to the signals received) as being present in a dispensing zone.

This arrangement allows a reliable and accurate IR reception field to be obtained with a shape which is very
15 well suited to the expected hand positioning of a user when the user's hands approach the dispenser.

While a preferred form of the emitter/receiver arrangement as shown in the Figures has certain
20 advantages, the use of only one emitter and two receivers or more than two emitters and three receivers could also be used. Preferably however, to form a desired detection area, there should be one more receiver than emitter when these are arranged consecutively as
25 receiver/emitter/receiver etc. Two receivers (one at each lateral end) should preferably be placed proximate the outer lateral ends of the sensor arrangement (and also thereby the dispenser) to allow for reception of IR over the broadest width of the sensor arrangement in the
30 dispenser and thus make the dispenser more user-friendly by creating a desirable detection zone.

In an alternative embodiment shown in Fig. 9, a further sensor 19, remote from the dispenser housing 2 and

operatively connected by wireless or wire connection 20 to the sensor system (shown schematically at 22) and its control system in the dispenser housing, may be used to form a first detection zone 18 which is further from the dispenser than the detection zone 17 (detection zone 17 in this case is similar in shape to the first detection zone 14 in Figs. 1 and 2). Alternatively or additionally, a further sensor may be placed on the front part, e.g. a front surface, of the dispenser housing and facing forwards away from any wall or the like on which the dispenser is mounted, to allow a longer range of detection forwards of the dispenser, such as the sensor 21 shown schematically which is likewise connected to the sensor system 22. The sensor 19 and/or 21 may for example be arranged to detect the presence of possible users up to a distance of more than the first detection zone, e.g. a distance of more than 50 cm, preferably more than 100 cm, more preferably more than 200 cm and still more preferably more than 300 cm or even further from the dispenser housing 2.

The emitters 10, 12 of the sensor system are arranged via suitable control circuitry, which may control circuitry as known per se in the art, to emit pulsed IR at a narrow frequency band of for example about 15kHz $\pm 0.5\%$. Another IR frequency could however be chosen. The receivers 9, 11, 13, are arranged to detect the emitted IR which is reflected against objects (stationary or moving) back towards the receivers. In order to detect the IR which initiates primarily and almost entirely from the emitted IR (even up to very strong light conditions of 10 000 lux or more), rather than all sources and frequencies of IR radiation due to background influences, the IR receivers need to be tuned to the frequency of the emitters. Thus

the IR receivers are provided with a detection circuit which suppresses IR outside the expected frequency range of the reflected waves and amplifies the IR at the 15 kHz range level. In this regard, while a frequency detection range both above and below the emitted frequency band range of between 2 to 10 kHz can operate in most situations, it has been found more suitable to use a frequency range (frequency band) which lies about 3kHz above and also below the central frequency of the emitted IR. Thus, the receivers are tuned (or in other words "synchronised") with the emitted IR at a central frequency of 15kHz by allowing IR in the range of 12 to 18 kHz to be detected (e.g. by use of a band pass filter set at 12 to 18 kHz). Frequencies outside that band are thus heavily suppressed, while the frequencies within the 12 to 18 kHz band are amplified, with maximum amplification being at the central frequency of about 15kHz up to for example about 53dB.

By operating with a modulated frequency in the emitters and receivers, the effects of e.g. bright sunlight which might otherwise cause saturation of the IR received signal compared to any reflected signal are substantially obviated allowing the device to work in light conditions of up to about 10 000 lux background illumination.

Fig. 4 shows a series of individual scans (i.e. a pulsed IR emission) at a first scanning rate having a time between individual scans of t_1 , a second scanning rate having a time between individual scans of t_2 which is shorter than t_1 (i.e. a higher scanning rate than t_1) and a third scanning rate having a time between individual scan of t_3 where t_3 is greater than t_1 and t_2 . The time between individual scans is measured as the time from the

start of one single scan to the time of starting the next individual scan. Each of the individual scans is here shown as having the same pulse intensity (i.e. no adjustment is made between individual scans to take account of previous received reflected scans which may result in a different emittance power being supplied to the IR emitters. A further time t_4 is shown which is a predetermined time or a predetermined number of pulses separated by time t_1 (the first scanning rate) which needs to elapse before the system alters the scanning rate to the third, slowest scanning rate with time interval t_3 . The pulse width of each individual pulse is normally constant.

The time t_1 is set at a constant level to lie between 0.15 to 1.0 second, preferably 0.15 to 0.4 of a second, i.e. such that each individual scan pulse is separated by an equal time t_1 . The time t_1 can however be varied and a very suitable rate to optimise the device for battery power saving and reaction time to dispensing has been found to be about $t_1=0.17$ seconds. The second scanning rate is always faster than the first scanning rate and t_2 is set to lie preferably between 0.05 to 0.2 seconds, preferably between 0.08 and 0.12 seconds between scans. The time t_2 can however be varied to be another suitable value, but preferably lies between 30% to 70% of t_1 . Time t_3 may be set at for example between 0.3 and 0.6 seconds, although a longer time t_3 is also possible, such as 1 second or even longer. However for emittance circuit time triggering (in particular by using an RC triggering circuit using the RC time constant to cause a discharge of current to the microprocessor for initiating timing operation) it is most suitable if t_3 is set to double the length of t_1 . Thus t_3 may be set at 0.34 seconds when t_1

is 0.17 seconds. The initial time t_1 can be made variable, for example via a variable resistor operated from outside the device, although typically this will be factory set so as to avoid unintentional alteration of time t_1 which is unsuitable in certain situations.

Time t_4 may typically be chosen to be of the order of between 30 seconds to 10 minutes and may also be variably set up in the device dependent on the type of use and surroundings which are normally encountered where the device is to be located. A suitable value for optimised operation has however been found to be about 300 seconds, although may also be more, where it is desired to save further power.

Although not shown it will be apparent that additional time periods may also be set in the device with intermediate time periods (i.e. intermediate between the values of T_1 and T_2 values, or intermediate between t_2 and t_3 etc) or even greater time periods, dependent on operating conditions, although the use of three different scanning rates has been shown to take account of most situations with good performance in terms of reaction time and power saving. For example, a further time period longer than t_4 , e.g. 30 minutes, occurring during issuing of scans at interval t_3 could be used so as to alter the time period between scans to be longer than t_3 (e.g. 10 seconds between individual scans). Such a situation may be useful when the dispenser might not hardly be used for night-time periods. The reason for this will become clearer upon reading the following description of operation.

As can be seen in Fig. 4, after four scans S1 - S4 at a time interval of t_1 , the scanning rate changes to the second faster scanning rate with interval t_2 and continues at the second scanning rate for two further scans S5 and S6. The reason for this change will be explained below with reference to Fig. 5.

Fig. 5 shows a sample of the possible received signal level (received signal strength) of the received signals R1-R7 caused in response to emitting the scan pulses S1-S7.

The approximate background IR level is indicated as a signal received level of Q0. This level Q0 may of course vary and as shown further below this can however be taken into account. For simplicity of explanation however, it is assumed in the following example that Q0 remains substantially constant.

When S1 is emitted and there is no object which is not accounted for in the last background value of received signal, the background level received at R1 will be approximately at level Q0. Likewise at the next scan S2 the level of IR received is also close to Q0 and thus causes no alteration of the first scanning rate. At scan S3, the received signal level R3 is however above background level, but only marginally (e.g. less than a predetermined value, for example less than 10%, above background IR level) and thus the first scanning rate is maintained. Such small changes (below the predetermined level) above and below Q0 can occur due to temporary changes in moisture levels or persons moving at a longer distance from the dispenser, or stray IR due to changes

in sunlight conditions or temperature conditions around the dispenser.

At scan S4, the received signal level has reached or
5 surpassed the predetermined value of e.g. 10% above
background IR and the sensor system and its control thus
assumes that a possible user (e.g. the user's hands or
whole body) is moving closer towards the dispenser in
order to retrieve a product such as a paper towel. In
10 order to be able to react faster when the user is assumed
to wish that a towel to be dispensed (i.e. when the
received signal level has reached or surpassed the
predetermined value of e.g. 10% above background IR), the
scanning rate thus increases to the second scanning rate
15 and thus issues the next scanning pulse at a shorter time
t2 after the previous pulse.

If the signal level R5 received on the next scan S5 also
fulfils the criteria of being at, or more than, a
20 predetermined level above background IR (e.g. at or
greater than 10% above background IR in accordance with
the criteria used for the previous scans) the sensor
system records via a counter (e.g. in a memory or another
form of register) a single detection above the
25 predetermined level and then issues a further scan S6 at
interval t2 to check whether the received IR is still at
or above the level of 10% greater than background IR Q0.
As shown in Fig. 5, this is the case for scan S6, and the
sensor system control (comprising both software and a
30 microprocessor in a preferred form) then immediately
issues an output to the motor M to start the motor
turning in order to dispense a product (e.g. a portion of
paper 7 from roll 3). In this case, i.e. when two
consecutive scans are above the predetermined level, the

system has thus determined that a possible user is in a zone requiring a product to be dispensed and thus determines that the user is in a "dispensing" zone.

5 In the case where only one set of sensors is used to detect the presence of a user in the first detection zone (e.g. the embodiment of Figs. 1 and 2), the detection zone and the dispensing zone will be the same physical zone, but it is merely the sensor control system which
10 logically determines that a user has entered the dispensing zone.

In the embodiment of Fig. 3 however, where an additional sensor 19 and/or 21 is used, the signal level R4 will
15 have been sensed in zone 18 and thus will already have caused the first scanning rate to change to the second scanning rate before the user has entered zone 17 which, in the case of Fig. 3, would be the dispensing zone which is distinct the first detection zone 18. The zones 17 and
20 18 could of course overlap to a lesser or greater degree, but zone 18 in such a case should always have at least a portion thereof which is arranged to extend further from the dispenser than zone 17. In such a case it is however appropriate for the second scanning rate to be maintained
25 for a time suitable for a user to physically enter the zone 17 (e.g. a time for moving towards a wash basin, washing hands and then using a towel). Such a suitable time may be set for example between 1 and 10 minutes, during which time the second scanning rate is maintained,
30 in the expectation of receiving IR reflected signals R which fulfil the criteria that a product is to be dispensed.

In a further situation, not shown, where the level at R5 is below the predetermined level (e.g. 10% above background IR), the system may be programmed to issue a further scan and to check again whether the received signal level is at or above the predetermined level so as to indicate that a user is present and wishes to receive a towel. Thus, rather than always requiring two consecutive scans to produce two received signals having a received signal strength above the predetermined level, it has been found preferable to allow any two of three consecutive scans to be above the predetermined level. Further possibilities also exist of course whereby the number of scans to allow dispensing of a towel could be any two out of four consecutive scans, or any three out of four consecutive scans, or further combinations. However, with t1 set at 0.17 seconds and t2 at 0.1 seconds, it has been found suitable to allow any two out of three consecutive scans to trigger dispensing of a product as this produces very reliable results.

In the case shown in Fig. 4, after a towel or other product has been dispensed (discharged), the system alters the scanning rate back to the first scanning rate so as to save power and thus scan S7 is emitted at time t1 after scan S6. Clearly this saves power as early as possible. However, the second scanning rate can be maintained for longer if desired (situation not depicted in Fig. 4) so that when a user again wishes to take a second or further product (e.g. a further towel) by moving their hands again towards the dispenser outlet, the dispensing occurs quickly again.

In the case shown in Fig. 5 a case is shown corresponding to Fig. 4, where the user has for example torn off a

piece of paper which has been dispensed from the dispenser and thus the level of IR radiation received at R7 is below the predetermined level (e.g. a level of 10% or more above Q0).

5

The predetermined level above background level at which the sensor system control causes discharge of a product to occur has been described above as being 10% above background for two out of three consecutive scans.

10

However practical tests have shown that a more suitable level is at or above 12% greater than background IR and even more preferably at or above 15% greater than background IR. This is for example to take account of varying light conditions which may occur when a user is close to the dispenser, but not actually wishing to use it.

15

However, it has also been found in testing that the increase in reflected IR which is received allows entirely different thresholds to be used where desired. Thus for example the sensor circuits can be tuned such that the predetermined level above background level is up to 90% or more, even up to 95% or more, above background IR, before dispensing occurs. This allows for example a far greater distinction of the reflection from a user's hands compared to any non-desired received IR in the pulsed bandwidth of 12 to 18 kHz (e.g. in the case of very strong light conditions). At the same time, the proximity at which such a high level occurs is generally less than when a lower predetermined level is used, unless the current to the emitters is slightly increased.

20

25

30

In some rare cases users may move their hands very quickly towards the dispenser and may be aggravated by

having to wait for a time more than absolutely necessary for the first scanning rate to alter to the second scanning rate and wait a further 0.2 seconds (when using $t_2=0.1$, even though this a negligible time). A further
5 overriding control may thus be included in which any single received scan signal at or above e.g. 30% (or a higher amount such as above 95% in the case described in the preceding paragraph) compared to background level can be used to cause immediate dispensing of a product,
10 without requiring consecutive scans at or above a predetermined level, even when in the first scanning rate mode. This can also be made to apply in the second scanning rate mode.

15 After a period of inactivity for an extended time period t_4 during which the sensing system has been scanning at the first rate, the system can be allowed to assume that there are no possible users in the vicinity of the dispenser. In such a case, even the time t_1 may be
20 considered too short to allow optimal power saving and thus the system can alter the scanning rate to the third scanning rate (lower than the first scanning rate), during which a scanning pulse is issued only once after elapse of time t_3 . However in such a case, when an IR
25 signal is received which is at or above the predetermined level (e.g. 15% or more above background level), then the system should alter the scanning rate directly to the second higher scanning rate, rather than first adopting the original first scanning rate. However in such a case
30 it is appropriate to require at least two scans but preferably more scans to cause product dispensing. For example, when a washroom where the dispenser is placed is put into darkness and then at some time later the lights are turned on, the IR received levels may be considered

to determine that a user is present. To avoid a product being dispensed in such a case it may be appropriate to let the system have time to take account of the background IR levels before being allowed to dispense.

5

In terms of the background level of IR, as mentioned above, this will vary over time. Likewise, the presence of fixed objects (e.g. soap dishes, other containers, or other fixed objects) within the range of the dispenser need to be taken account of as background IR. In order to do this, it has been found suitable to take a moving average of the most recently recorded IR received signals R so as to alter the level Q0 on a continuous basis.

10

For example, the four (or more or less than four) most recently received IR signal values can be used to form the average value of background signal level by dividing e.g. the sum of the four most recent received signal levels by four. As each new value of IR is received, the oldest value of the four values is moved out of the calculation (e.g. by removing it from a register or store of most recent values in the control circuitry) and calculating a new average based on the most recent values. Calculation of a moving average and the means required to do this in both hardware and/or software for the most recently recorded set of values is very well known in the art of electronics and thus is deemed to require no further explanation here.

20

25

By using such a moving average of background IR level, the further advantage is obtained that when a user who has just withdrawn a towel or other product keeps his/her hands at the dispensing outlet, the received IR level will remain high. However, to prevent a user in this way

30

causing discharge of a large amount of product, e.g. paper towel material, the user's hands will be regarded as being background IR when they are relatively stationary and thus dispensing will not occur. To
5 dispense a further product (e.g. paper), the user must therefore move his/her hands away from the dispenser sensors to allow a reading of "true" background IR (i.e. background IR without the user's hands being present too close to the device). Only upon renewed movement of the
10 user's hands towards the dispenser sensors can product dispensing be caused to occur again.

A still further means by which misuse of a dispenser by repeated withdrawing of towels unnecessarily can be
15 prevented is by arranging, in addition or even as an alternative to the above moving average, an adjustable minimum elapse time between towel dispensing (e.g. a time of between 2 and 10 seconds). However this feature is not generally required since in most cases, the inherent
20 elapse time for the system to determine a user as being present in the dispensing zone and to turn the motor to dispense a towel, will be sufficient to prevent such misuse.

25 It will also be appreciated that as the batteries of the dispenser discharge over time, the power supplied to the sensors may also be affected, which may cause less efficient operation. To prevent this occurring and thus to ensure a stable voltage is available for supply to the
30 sensors (until a time close to total battery depletion), a constant current sink may be employed. Such constant current sinks to provide voltage stability are well known per se in the art of electronics and thus are deemed to require no further description here, although it will be

understood that their use in the sensing circuitry for such a dispenser as described herein is particularly advantageous. The amount of extra energy required to operate the constant current sink is negligible and thus use of such a device is barely noticeable on battery useable lifetime.

The power supplied to the emitters may additionally be arranged to be varied by an automatic control, suitably between an amount of 0.001mAs to 0.1mAs (using a 6V battery installation), in order to take account of reflected signal strength from previous scans and to adjust the level of emitted IR to a more suitable level. This can be achieved by varying the current to the emitters between e.g. 1mA and 100 mA (i.e. a 100-times variation possibility). This can be done by using the PWM module 106 (to be described later) whereby a square PWM signal is converted to a DC voltage having an output proportional to the PWM duty cycle, and whereby the MCU changes the PWM duty cycle to adjust the DC voltage to the emitter circuits and thus the power of the IR signal emitted, based on signal strength inputs received by the sensors and sent to the MCU. For example, if the reflected signal strength is very low on the last few scans (e.g. five scans) when dispensing occurred, this may be because the typical brightness of the user's hands is low and background light levels are relatively high. This may cause received signal levels to be only just above the predetermined level compared to background IR unless the user's hands are placed very close to the sensors, which can lead to difficulty in detection in some circumstances. In such a case it may be suitable to increase the power supplied to the IR emitters so as to receive a more easily perceptible signal change. Likewise

if the typical brightness of the user's hands is high and background IR levels are low, it may be suitable to decrease the power supplied to the IR emitters as an easily perceivable signal level change (i.e. reflected IR level during dispensing compared to background IR level) is received. In this way, the power supplied to the emitters is still further optimised to take account of such conditions while providing reliable and fast sensing and dispensing. Thus apart from in very high light conditions, only very low power to the sensors can be used. In this way it will also be understood that the dispenser can be optimised such that the first detection zone in which the presence of a possible user causes changing from the first to the second scanning rate is selected to lie at between about 20 and 60 cm, preferably between 25 cm and 50 cm from the discharge outlet. It will be apparent that further increases in power to the emitters will increase the range of detection, but the power consumption will increase at a much greater rate and false detections may also occur more easily. Thus the range of up to 50 cm from the dispenser for allowing detection of a user is a preferred maximum.

An alternative, possibly simpler, method which can be used to vary the IR emitter current, rather than by comparing (as above) the values of reflection to background levels, is to set a so-called "standard value" or "threshold value" in the control circuitry, which is a value of the expected detected signal strength received in normal operating conditions. The current supplied might be e.g. 5mA. If this standard value is called A1, then during operation the control circuitry (MCU thereof) can be made to calculate the IR level, A2, from a predetermined number of the most recently received IR

values (i.e. the moving average of the most recent values). If $A2 > A1$ (i.e. the detected reflection moving average signal level $A2$ is above the stored standard signal level $A1$) the current supplied to the emitter can
5 be reduced, preferably in increments. Likewise, in the case where $A2 > A1$, then the current supplied to the emitters can be increased, preferably incrementally.

In a further preferred embodiment, the dispenser can be
10 arranged to have two modes of operation, one being the sensing mode described previously whereby active IR sensing is operating, the other being a hanging towel mode whereby each time for example a paper towel is dispensed and also removed (e.g. torn off), a new paper
15 towel is discharged from the dispenser. For this purpose, the cutting edge 16 as shown in Fig. 2 for example could be mounted such that the application of pressure against the cutting edge (often referred to as a cutter bar) causes a switch to be actuated to start the motor M to
20 issue a new piece of towel ready to be torn off. The device may also include a manual switch so that this hanging towel mode can be set manually by a user, or automatically set by a timing circuit, for example at known time periods when the dispenser will normally be in
25 constant use and the use of the active IR sensor system is temporarily superfluous.

A hanging towel mode can also for example be suitable in
extremely high background IR conditions when the sensing
30 system is totally saturated and thus cannot detect the difference in the increased level of IR radiation from a user compared to background levels, or at times close to battery depletion when the power consumption of the active IR sensing system is unsuitably high for the

remaining power. An automatic switching to this mode and turning off the active IR sensing in times of very high background IR (e.g. at or above 10 000 lux) and battery depletion may thus also have advantages.

5

Fig. 6 shows a block diagram of the basic system of one embodiment of a dispenser according to the invention, in which the portion shown in dotted lines includes the basic components for IR signal modulation, IR emission and IR reception used to submit a sensing signal to the A/D modulation of the master control unit (MCU) which unit contains a microprocessor.

10

Box 101 and 102 denote IR emitter(s) and receiver(s) respectively, corresponding generally to the previously described emitters 10, 12 and receivers 9, 11, 13. These IR emitters and receivers are preferably photodiodes. The user's hand shown outside the dotted lines indicates that IR radiation emitted by the emitter(s) 101 is being reflected by the hand back to receiver(s) 102. Unit 103 is a photo-electric converter for converting the received IR signal before it is passed to filtering and amplification unit 104 where the band pass filter and amplification circuits operate to amplify the received signal around the central frequency in a limited bandwidth and to thereby suppress other IR frequencies relatively. The signal is then passed to a signal rectification unit 105, since the IR signal is an AC signal. From the unit 105, the signal passes into the A/D module of the MCU.

15

20

25

30

The output of the PWM module 106 is controlled by the MCU such that a square wave signal from the PWM can have its duty cycle varied by the MCU to adjust the DC voltage to

the emitter circuits and thus the power of the IR signal emitted. The PWM 106 is connected to a D/A converter 107 and into an IR emitter driving circuitry unit 109 which includes the constant current sink mentioned previously.

5 Into the same IR emitter driving circuitry is also fed a signal from a phase frequency detection module 108 which issues a 15kHz ($\pm 0.5\%$) impulse modulated signal (or another frequency of modulated signal as considered appropriate) so as to drive the emitters 101 via the
10 emitter driving circuitry 109 to emit modulated IR signals for short intervals (e.g. each signal is emitted for about 1 ms). In this regard it should be noted that before the modulated signal is emitted, the MCU should first have already put the filter and amplification
15 circuit unit 104 for the received signal into operation for a short period, e.g. 2.5 ms, before emitting a modulated pulse, so as to allow the receiver circuit to stabilise so as to reliably detect reflected IR from the emitted IR signal. Since the unit 104 is already in
20 operation when the IR scanning pulse is emitted, and since the filters and amplification unit are centered around the central frequency of the emitted pulse, there is no need to synchronise the timing of the emitted pulse and the received pulse to any further extent.

25 The signal from unit 109 feeds into the IR emitter on/off control unit 110. The input/output module 118 of the MCU also feeds into the unit 110 to be turned on and off as required to thereby perform an IR scan via the emitter
30 101.

In order to activate the microprocessor (i.e. wake it up to perform a scan at a certain rate), RC wake-up circuitry 115 feeds into the MCU into a wake-up detection

unit 114. Unit 117 is an external interrupt detection unit.

From the input output module 118 is a feed to unit 119 which can be regarded as the motor driving circuitry which drives the motor M when the sensor system (which preferably includes the MCU and software) has detected that a product should be dispensed due to the determination of the presence of a user in the dispensing zone.

Further peripheral units 111, 112 are respectively a paper sensing circuit unit and a low power detection circuit (i.e. for detecting batteries close to depletion). Unit 116 indicates battery power which is used to drive the MCU and also all other peripherals and the motor. Unit 120 may be motor overload circuitry which cuts off power to the motor for example when paper becomes jammed in the dispenser or when there is no paper in the dispenser. Unit 121 is a paper length control unit, which operates such that a constant length of paper (which is itself variably adjustable by manual operation e.g. of a variable resistor or the like) each time the motor is made to operate to dispense a length of paper sheet 7 through the discharge opening 8. This unit 121 may also include a low power compensation module by which the motor under lower power is made to turn for a longer period of time in order to dispense the same length of paper sheet, although the unit may simply be a pulse position control system whereby the rotation of the motor is counted in a series of pulses and the rotation is stopped only when the exact number of pulses has been achieved. Such a pulse position control system could include for example a fixedly located photointerruptor

which can detect slots in a corresponding slotted unit fixed to the motor drive shaft (or alternatively on the drive roller 5 operably connected to the drive motor). Unit 122 may be low paper detection circuitry and unit 123 may be a unit used to indicate whether the casing is open or closed. This can for example be used to provide automatic feeding of a first portion of paper from the paper roll through the discharge opening when the case is closed, e.g. after refilling with a new roll of paper, so that the person refilling the dispenser is assured that the device is dispensing properly after having been closed.

Although not shown here, a series of warning or status indication lights may be associated for example with various units such as units 111, 112, 120 to 123 to indicate particular conditions to a potential user or dispenser attendant or repairman (e.g. if the dispenser motor is jammed or the dispenser needs refilling with paper or the like).

Fig. 7 shows one embodiment of an RC control circuitry which can be used to give a timed wake-up of the microprocessor in the MCU. The principle of such a circuit is well known and in the present case a suitable value for the resistor R_e is 820 kOhm and for the capacitor 0.33 microfarads. Although not shown specifically in Fig. 6, the RC wake-up circuitry uses the input/output unit 118 of the MCU to provide the timed wake-up function of the microprocessor so that a scan occurs at the prescribed time interval (t_1 , t_2 or t_3 for example). When there is a high to low voltage drop at the input/output, as a result of the RC circuitry, the MCU will "wake-up" and perform a scan. This wake-up leading

to the performing of a scan also requires supporting software. Likewise the length of the time t_1 and/or t_2 and/or t_3 can suitably be made as a multiple of the RC circuitry time constant, whereby the input from the RC circuit can be used in the software to determine whether a scan is required or not at each interval. In this regard it will be noted that an RC circuit is subject to voltage changes at the input (via VDD which is the MCU supply voltage source acquired after passing through a diode from the battery voltage supply). As the voltage of the battery (or batteries) drops, there will then be an increase in the RC time constant in the circuit of Fig. 7 and thus the times t_1 , t_2 and t_3 set initially will vary as the batteries become more depleted. For example, with the time t_1 set at the preferred level of 0.17 seconds for a battery level of 6V, a drop to depletion level of 4.2V will increase time t_1 to 0.22s. Thus, the values of t_1 , t_2 , t_3 etc., as used herein, are to be understood as being the values with a fully charged battery source.

Fig. 8 shows a modified RC circuit which has the advantage of using less current than the circuit shown in Fig. 7. In Fig. 8, three bipolar transistors are used to minimise the current used when the MCU is asleep.

Under normal conditions, the digital circuitry inside the MCU operates in a logic High voltage state and a logic Low voltage state at which the current drain is very low. However when the RS-wake-up circuitry is connected as in Fig. 7 (whereby the indication "to MCU" implies a connection to the input/output port of the MCU) this creates a voltage change at the input/output port of the MCU which is a progressive voltage change, due to the charging and discharging process in the RC circuit. This

creates a relatively long working period for the digital circuitry in the MCU, in turn resulting in an internally higher current consumption in the IC internal circuitry than is present during normal operation conditions. This results in somewhat higher power consumption to the MCU during its "off" cycle (i.e. the "sleep" cycle of the MCU).

By the circuitry in Fig. 8, the modification includes the use of two input/output ports PA7 (right hand side in the Figure) and PB7 (left hand side in the Figure) to the MCU. The important aspect of this circuit is that two transistors Q2 and Q3 have been added in cascade which together modify the RC charge-up characteristics. The MCU PA7 pin then gives a much sharper charge-up curve. The delay time constant for waking up the MCU is determined by R4 and C1, which have been given values of 820kOhm and 0.68μF respectively in the example shown. Other values for other time constants can of course be chosen.

The fast voltage change at port PA7 is achieved after conversion in Q2 and Q3, which minimizes the time required for transition from a logic High voltage to a logic Low voltage level. Such a circuit as in Fig. 8 can achieve about 40% power reduction during the sleep cycle compared to the Fig. 7 circuitry for approximately the same RC time constants. Thus the RC timing circuitry of Fig. 8 is particularly advantageous where maximum power is to be saved.

26516-125

42

CLAIMS:

1. A paper towel dispenser arranged for both store a supply of paper and automatically dispensing at least a portion of said supply of paper, said dispenser comprising a housing
5 with an outer surface, and an active IR sensor system for detecting presence of a possible user, said IR sensor system including at least one IR emitter having an active emitting portion and at least one IR receiver having an active receiving portion, wherein said outer surface is positioned on the lower
10 side of said dispenser housing facing generally downwards, and wherein said outer surface at the lower side of said dispenser housing, in which said at least one emitter and said at least one receiver are positioned, is directly adjacent a lateral discharge opening of said dispenser on the lower side of said
15 dispenser and said sensor system generating a detection zone being inclined downwardly and forwardly of the discharge opening, wherein each IR emitter is positioned such that at least part of its active emitting portion protrudes outwardly from said outer surface of said housing, and each IR receiver
20 is positioned such that at least part of its active receiving portion is recessed behind said outer surface of the housing, such that any outward protrusion of the active receiving portion from said outer surface of said housing is less than the outward protrusion of said active emitting portion from
25 said outer surface of said housing, and wherein said sensor system comprises at least two IR emitters and at least three IR receivers, wherein one receiver is located on each lateral side of an emitter such that the emitters and receivers are in the order receiver-emitter-receiver-emitter-receiver in a lateral
30 direction across the dispenser and the spacing between each

26516-125

43

emitter and each laterally adjacent receiver is substantially equal.

2. The dispenser according to claim 1, wherein said sensor system comprises two IR emitters and three IR receivers,
5 wherein each IR emitter is positioned such that its active emitting portion protrudes from said outer surface of said housing and each IR receiver is positioned such that its active receiving portion is partially recessed behind said outer surface of the housing, such that any outward protrusion of the
10 active receiving portion of each receiver from said outer surface of said housing is less than the outward protrusion of said active emitting portion of each emitter from said outer surface of said housing.

3. The dispenser according to claim 2, wherein said
15 spacing between each emitter and laterally adjacent receiver is between 3 and 7 cm.

4. The dispenser according to claim 3, wherein said spacing between each emitter and laterally adjacent receiver is between 4 and 5 cm.

20 5. The dispenser according to claim 3 or 4, wherein said spacing between each emitter and laterally adjacent receiver is 5 cm.

6. The dispenser according to any one of claims 1 or 2, wherein each emitter and each receiver is inclined at an angle
25 of between 20° and 30° with respect to a vertical plane extending laterally across the dispenser, said angle at which each of said emitters and receivers is inclined being generally equal for all emitters and receivers.

26516-125

44

7. The dispenser according to claim 6, wherein said angle at which said emitters and receivers are inclined is arranged to be such that said sensor system can detect in an angular range of between 10° to 45° to the vertical.

5 8. The dispenser according to any one of claims 1-7, wherein said sensor system is arranged to scan for the presence of a possible user at a first scanning rate and also at a second scanning rate, and wherein said second scanning rate is higher than said first scanning rate, and wherein the sensor
10 system is arranged to change said scanning rate from said first scanning rate to said second scanning rate upon detecting presence of an object with a reflected IR level which is the same or greater than a predetermined value above background IR level.

15 9. The dispenser according to any one of claims 1-8, wherein said dispenser comprises a discharge outlet proximate or on a lower face thereof, and wherein each of said emitters and receivers is arranged such that a detection blind gap is formed outwardly of and below said discharge outlet along the
20 entire length of said discharge outlet.

10. The dispenser according to claim 9, wherein said detection blind gap extends a distance of between 2 and 6 cm vertically below said discharge outlet.

11. The dispenser according to claim 10, wherein said
25 detection blind gap extends a distance of between 4.5 cm and 5.5 cm vertically below said discharge outlet.

12. The dispenser according to claim 1, further including a sensor control system and a product feed system to feed, in a

26516-125

45

feed cycle, at least a portion of a supply of paper through a discharge outlet, said feed system being activated to feed paper when said sensor control system determines that dispensing is required based upon signal strength of received
5 infrared emissions, such that a product is dispensed by said feed system when said sensor system detects a change in received signal strength which is at or greater than a predetermined amount above another signal strength level, said change in said received signal strength level preferably being
10 a predetermined amount above a background signal strength level, for a predetermined number of single scans.

13. The dispenser according to claim 12, wherein said predetermined signal strength level is at or above 10% higher than background level.

15 14. The dispenser according to claim 13, wherein said predetermined signal strength level is at or above 12% higher than background level.

15. The dispenser according to claim 13 or 14, wherein said predetermined signal strength level is at or above 15%
20 higher than background level.

16. The dispenser according to any one of claims 12 to 15, wherein said portion of paper which is fed through said discharge outlet is arranged to be fed to at least sufficient length such that at the end of said feed cycle said portion of
25 paper will at least extend vertically below each emitter and each receiver.

17. A dispenser according to any one of claims 1 and 12 to 16, wherein said dispenser comprises a discharge outlet with

26516-125

46

a cutting edge located proximate said discharge outlet and against which cutting edge paper discharged through said discharge outlet may be moved relatively, so as to cut said paper for removal of a cut-away portion.

5 18. The dispenser according to any one of claims 1-17, wherein said IR emitters are controlled by a sensor control system to provide IR radiation to a level such that the detection field provided by said emitters is able to detect the presence of a possible user at a distance of up to 25 cm from
10 said discharge outlet.

19. The dispenser according to claim 18, wherein the detection field is able to detect the presence of a possible user at a distance of up to 50 cm from said discharge outlet.

20. The dispenser according to any one of claims 1 to 19,
15 wherein said sensor system is arranged to emit infrared radiation only with a first emitting frequency and wherein said sensor system is arranged to detect radiation in a limited frequency detection range, wherein said first emitting frequency is about 15 kHz $\pm$ 0.5% and said frequency detection
20 range is between about 12 kHz and about 18 kHz.

21. The dispenser according to any one of claims 1 to 20, wherein the power supplied to one or more emitters of said sensor system is variable, so as to be able to vary the emitted IR signal strength, whereby the power supplied is increased
25 when the average signal level of a predetermined number of the most recently received previous scans is less than at least a first predetermined signal level, and wherein said power supplied is decreased when the average energy level of a

26516-125

47

predetermined number of the most recently received previous scans is more than said first predetermined signal level.

22. A dispenser according to any one of claims 1 to 21, wherein said sensor system includes means for detecting

5 background infrared radiation, said means includes a storage of a predetermined number of most recently received infrared detections obtained during scanning, and wherein an average of said predetermined number of most recently received infrared detections is taken as the background infrared radiation level.

10 23. A dispenser according to any one of claims 1 to 22, wherein the dispenser and sensor system are battery powered, by a battery located in the dispenser housing.

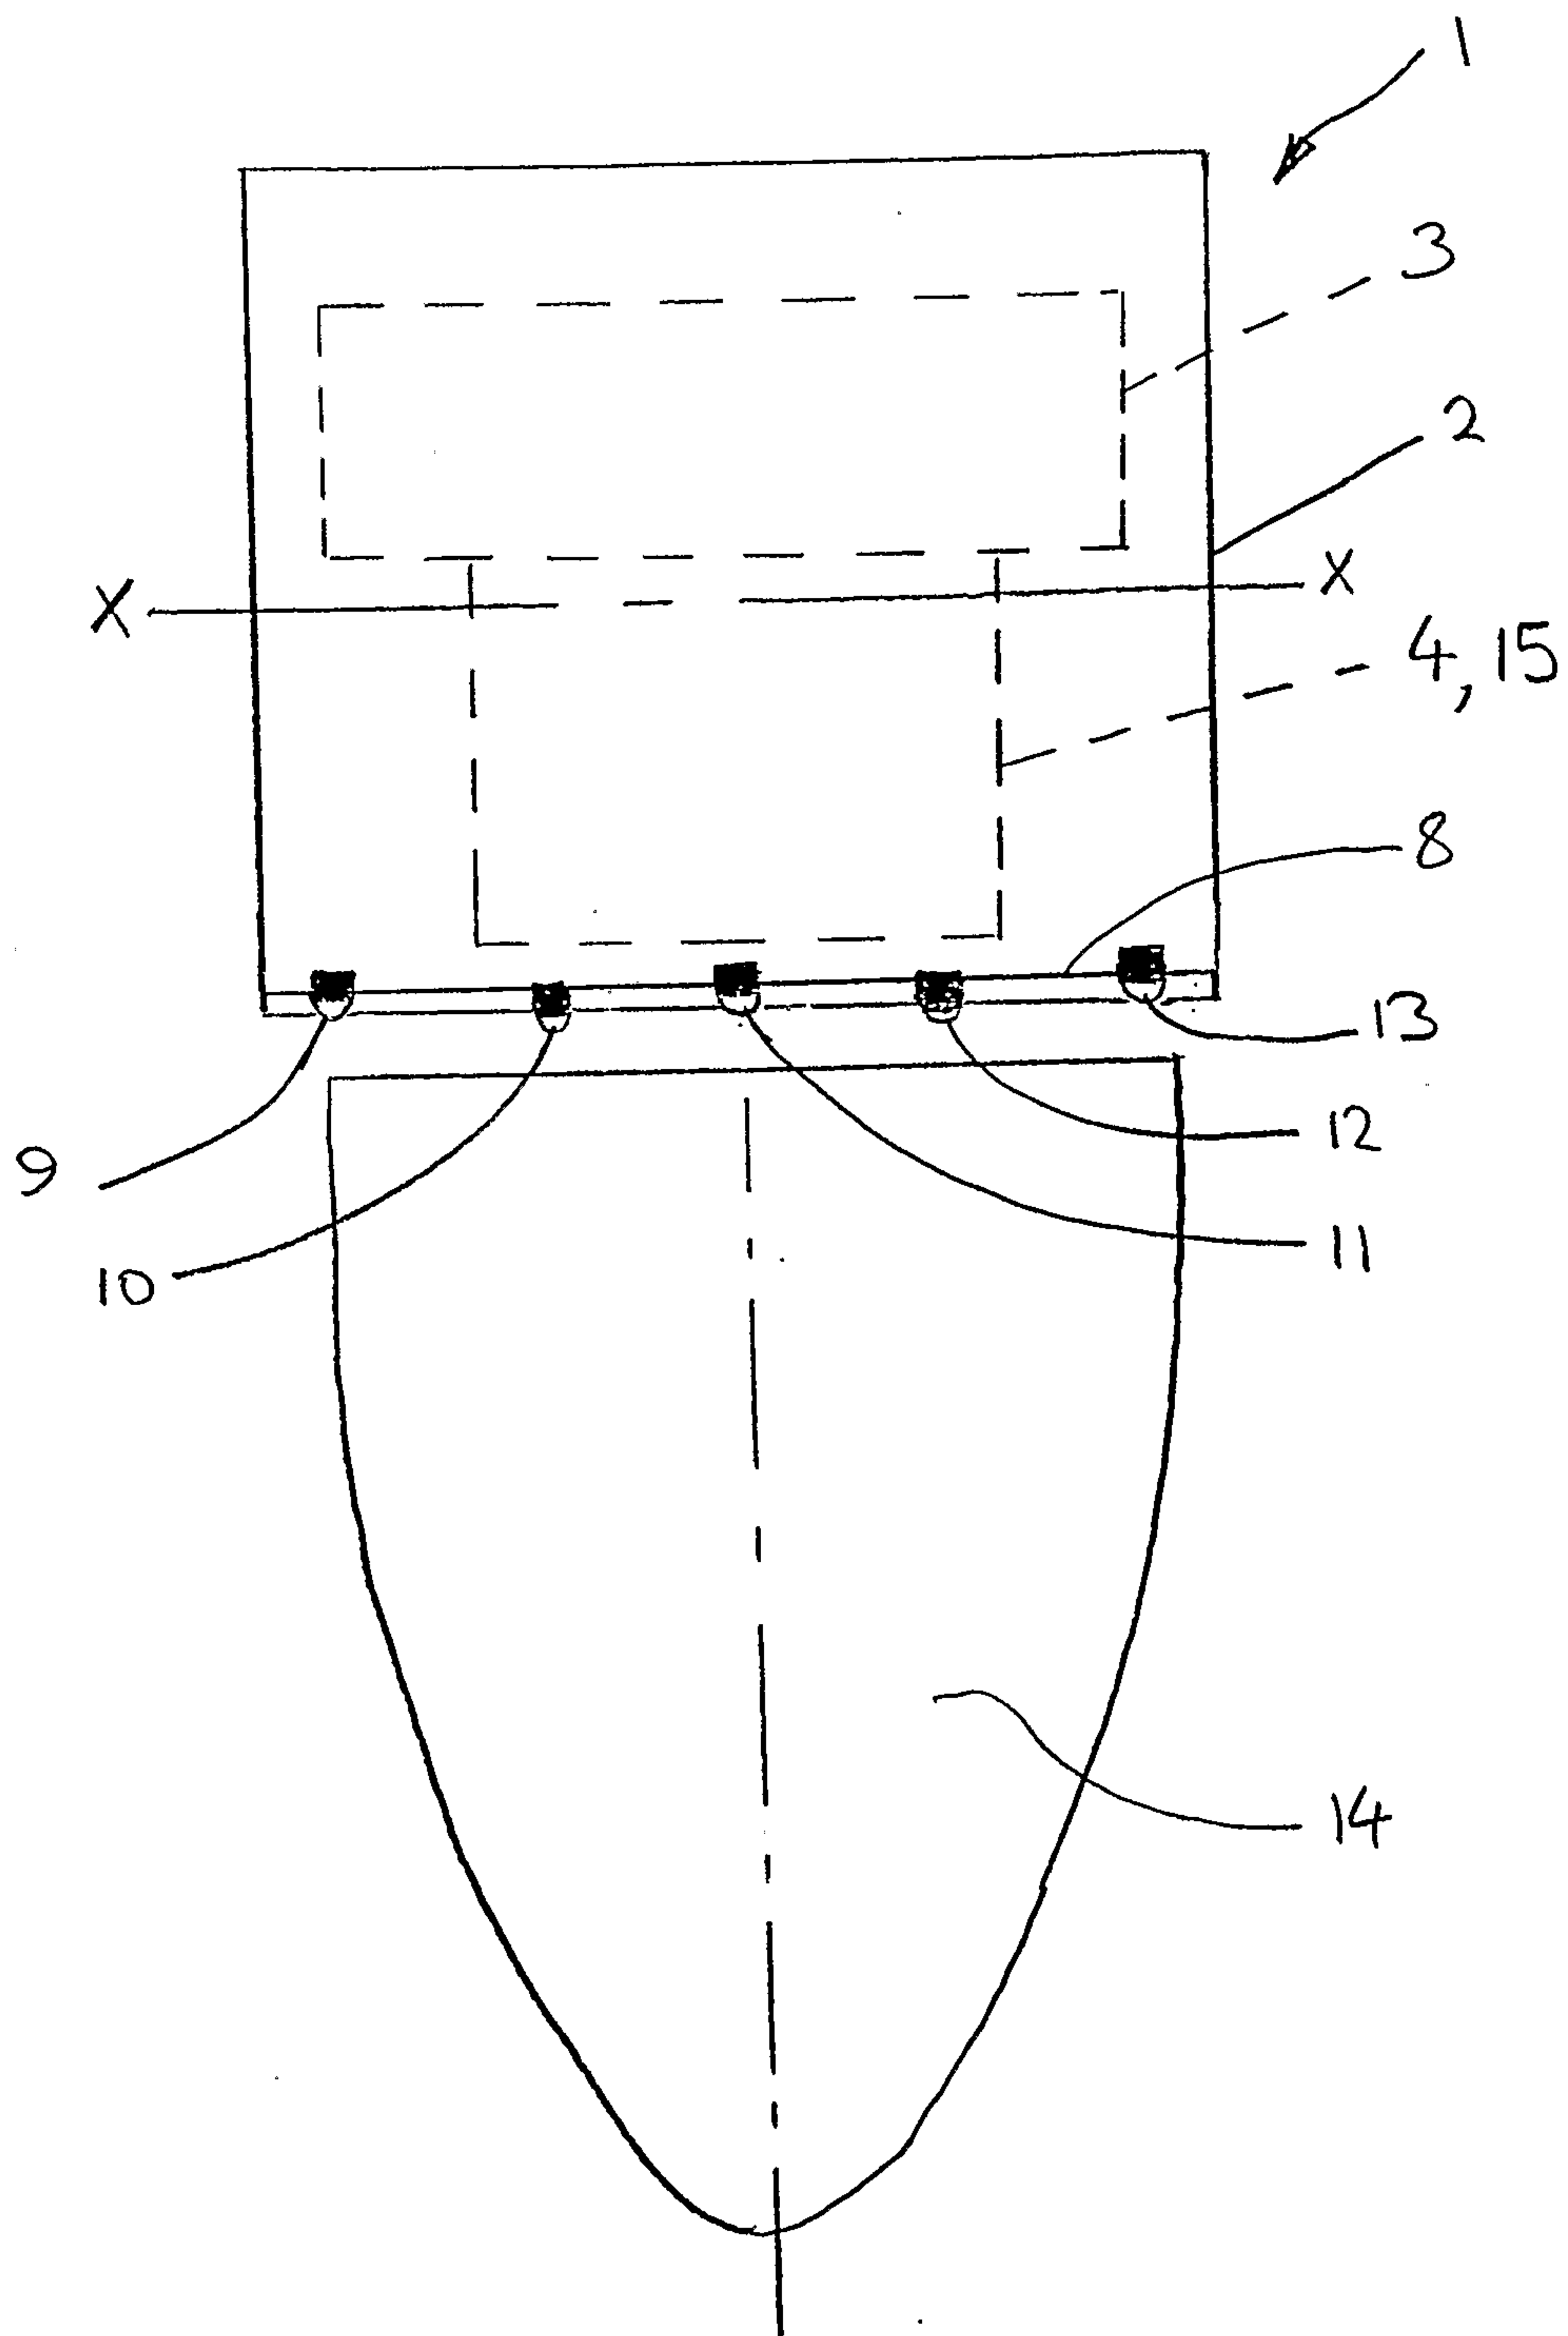
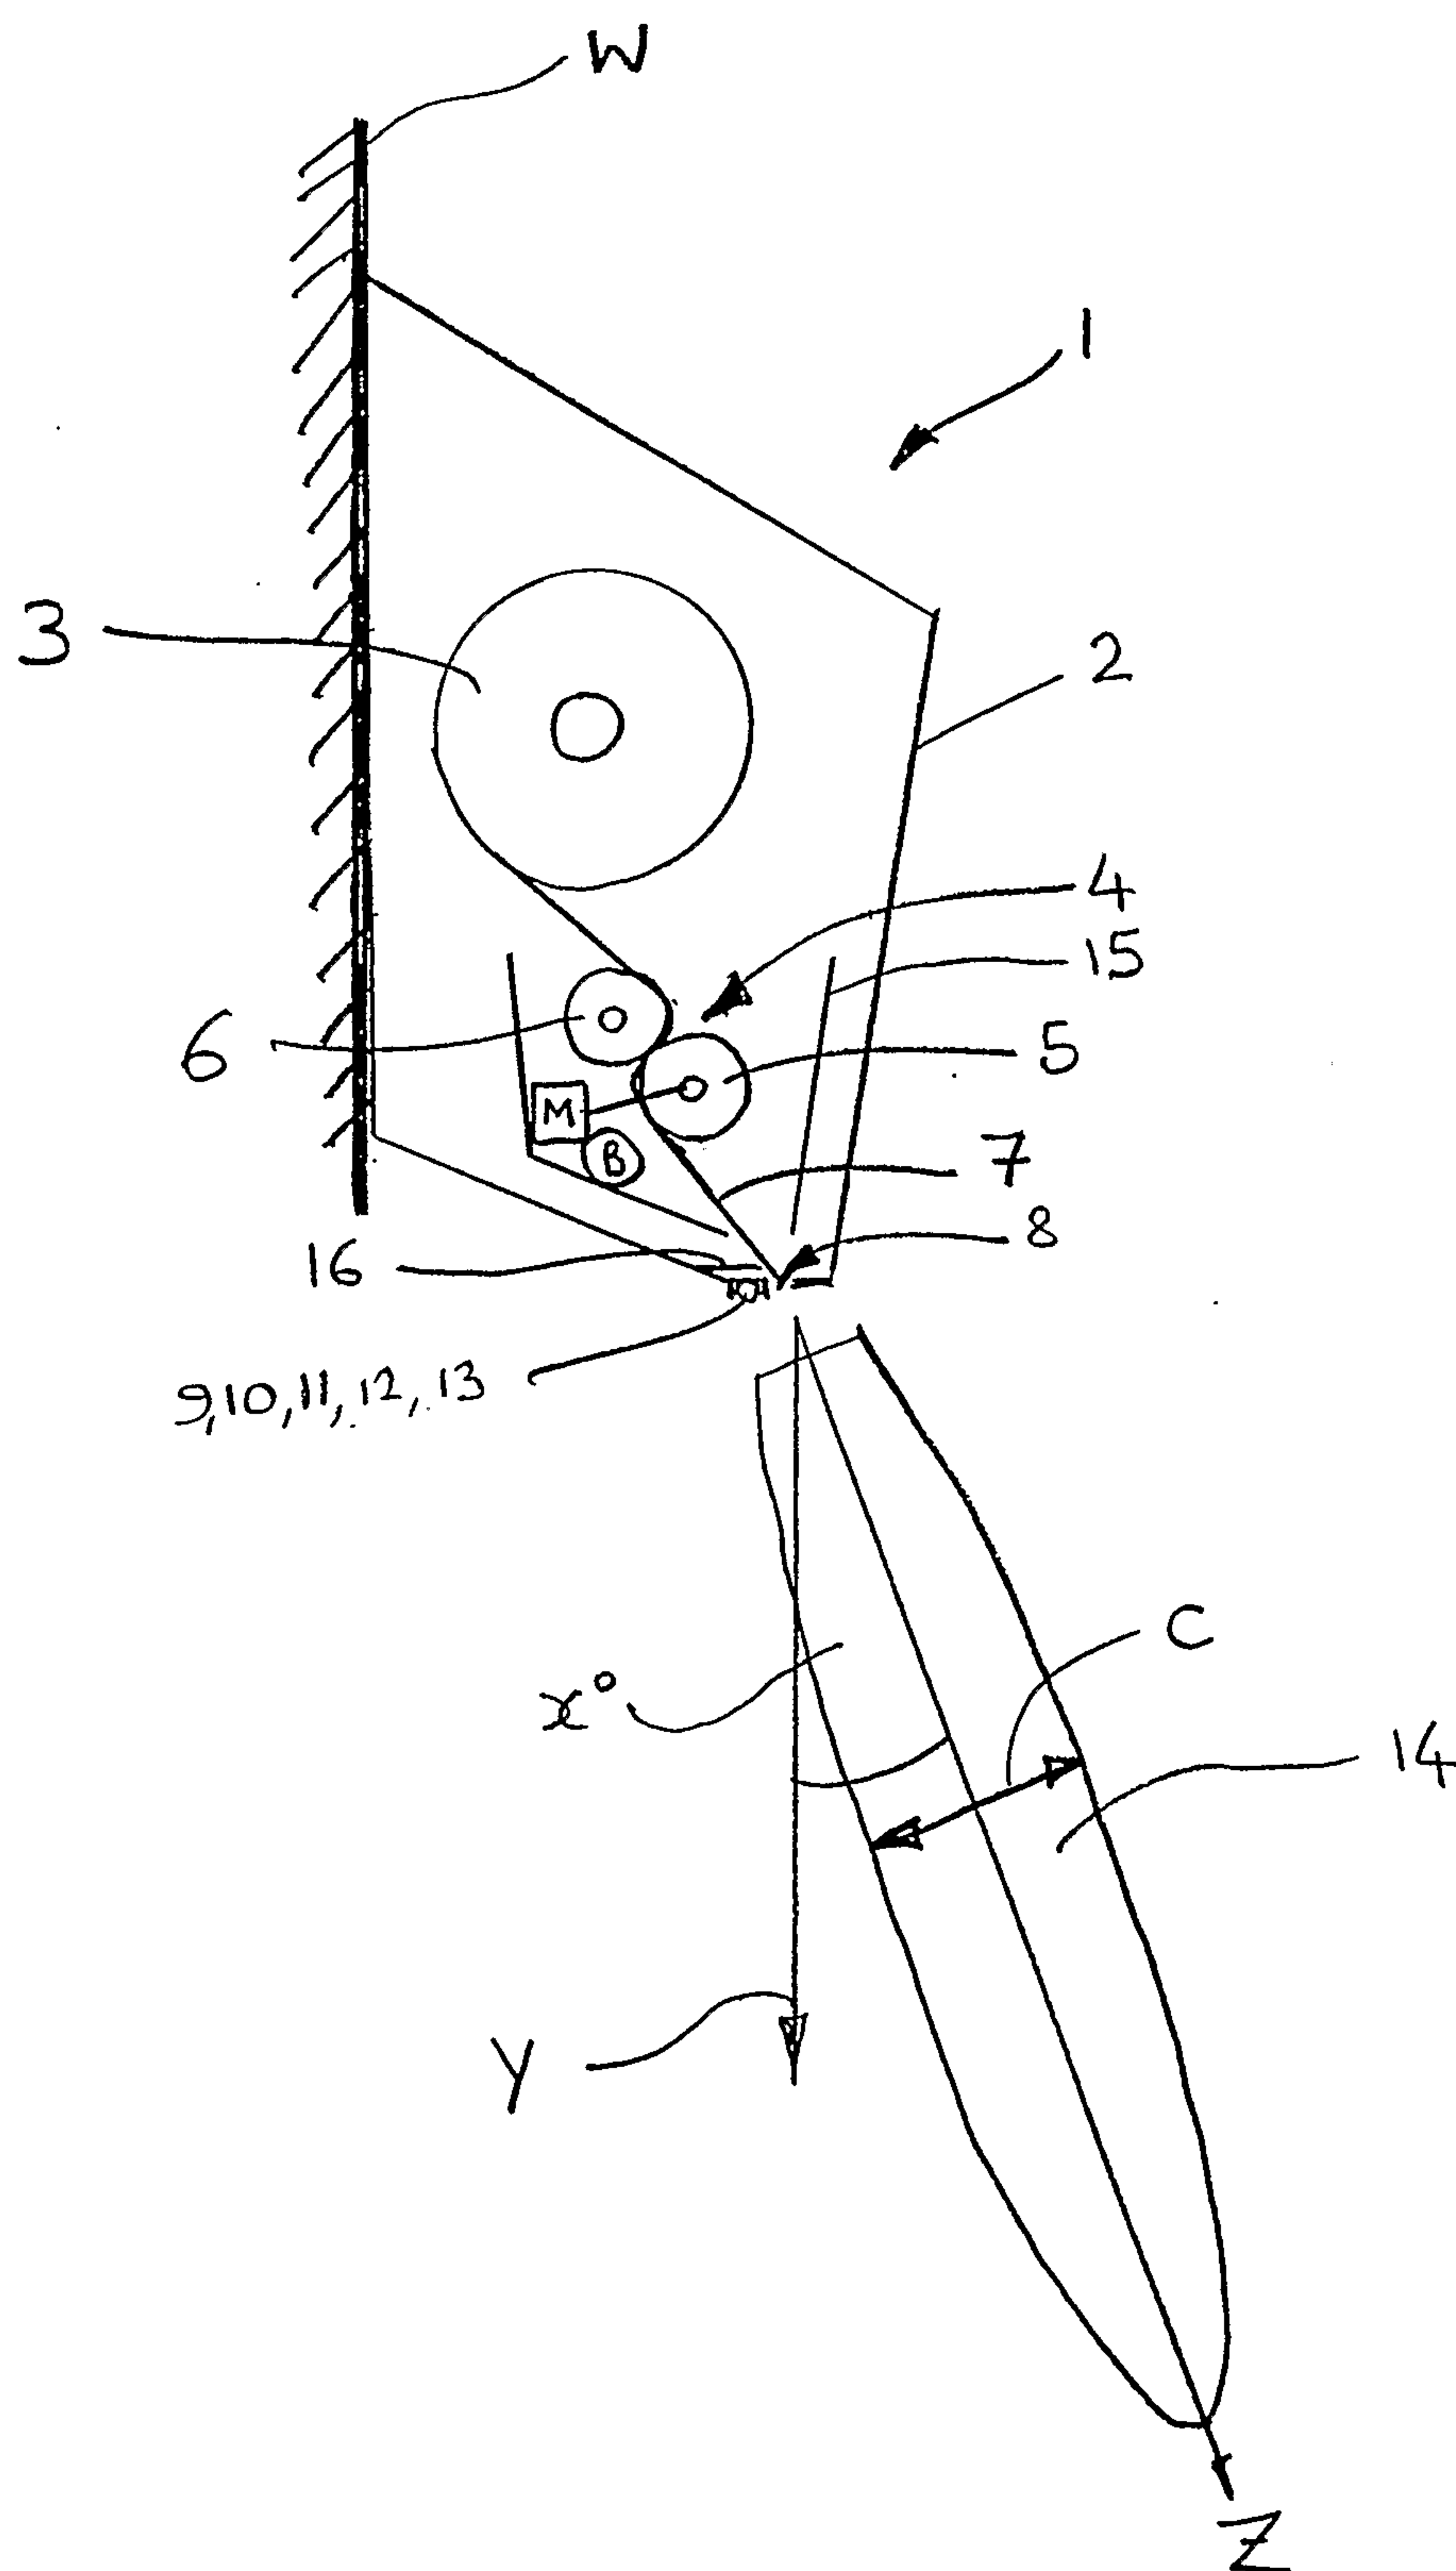
FIG. 1

FIG. 2



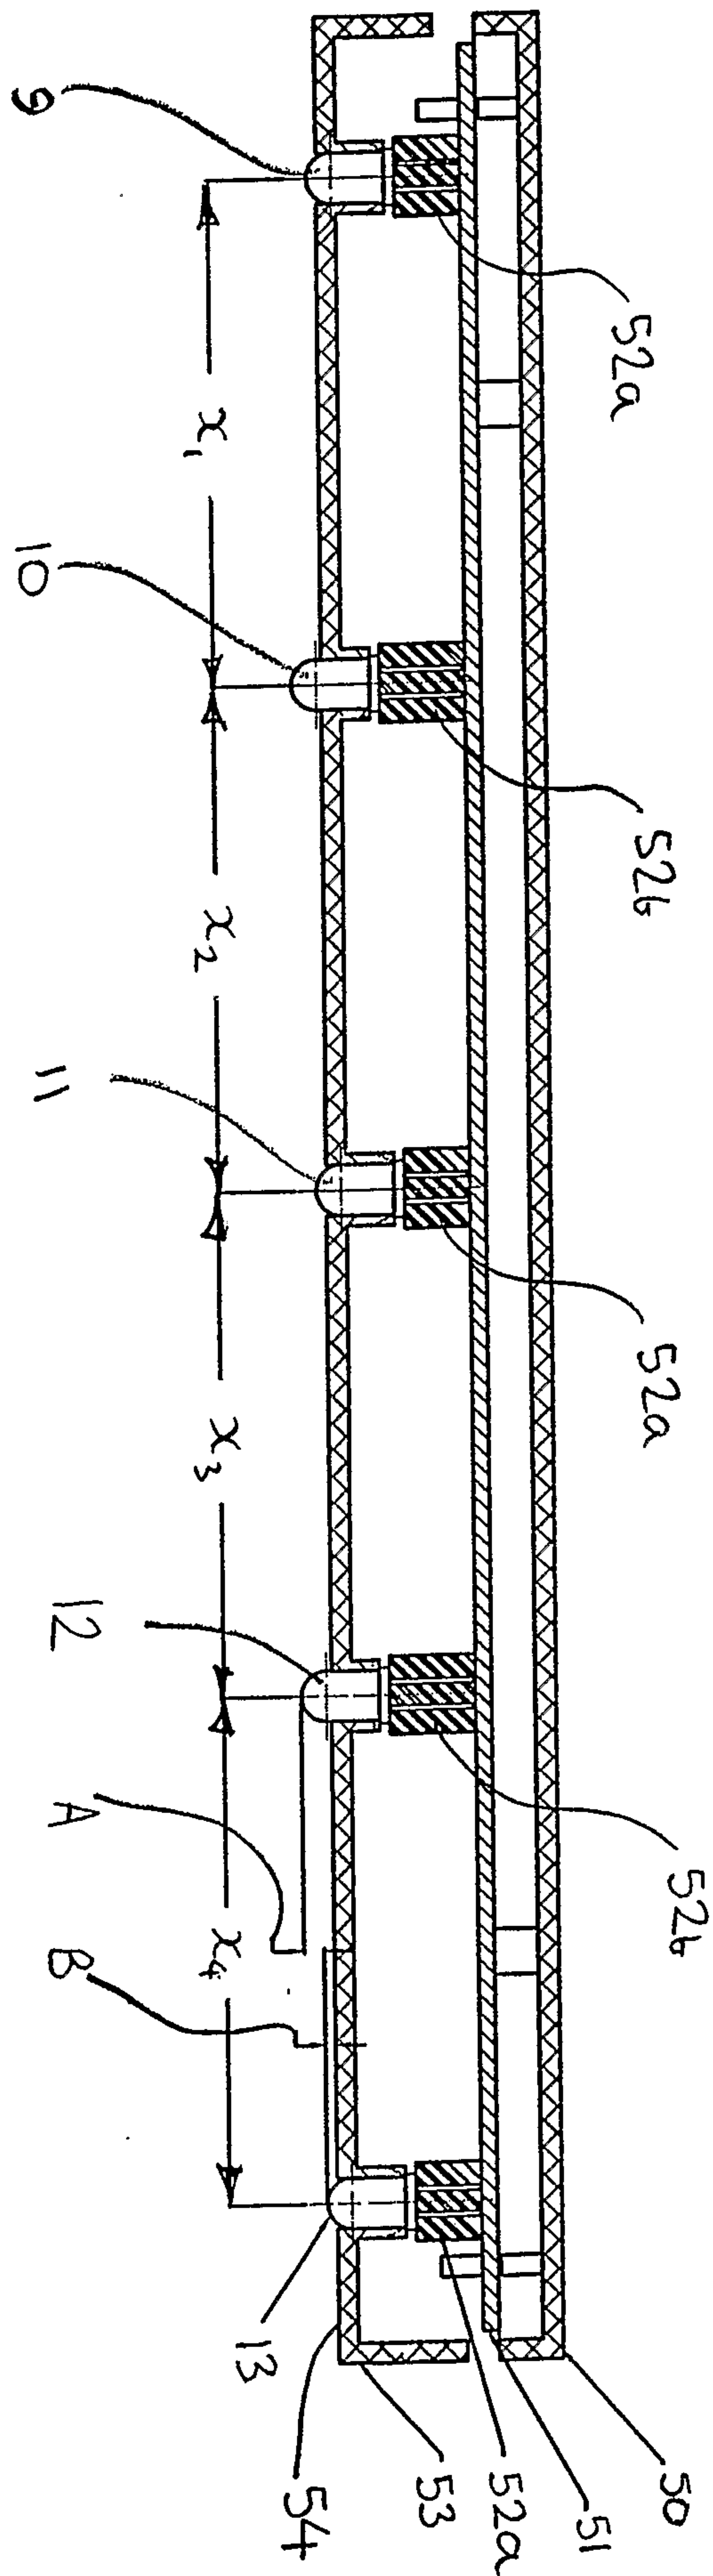


Fig. 3A

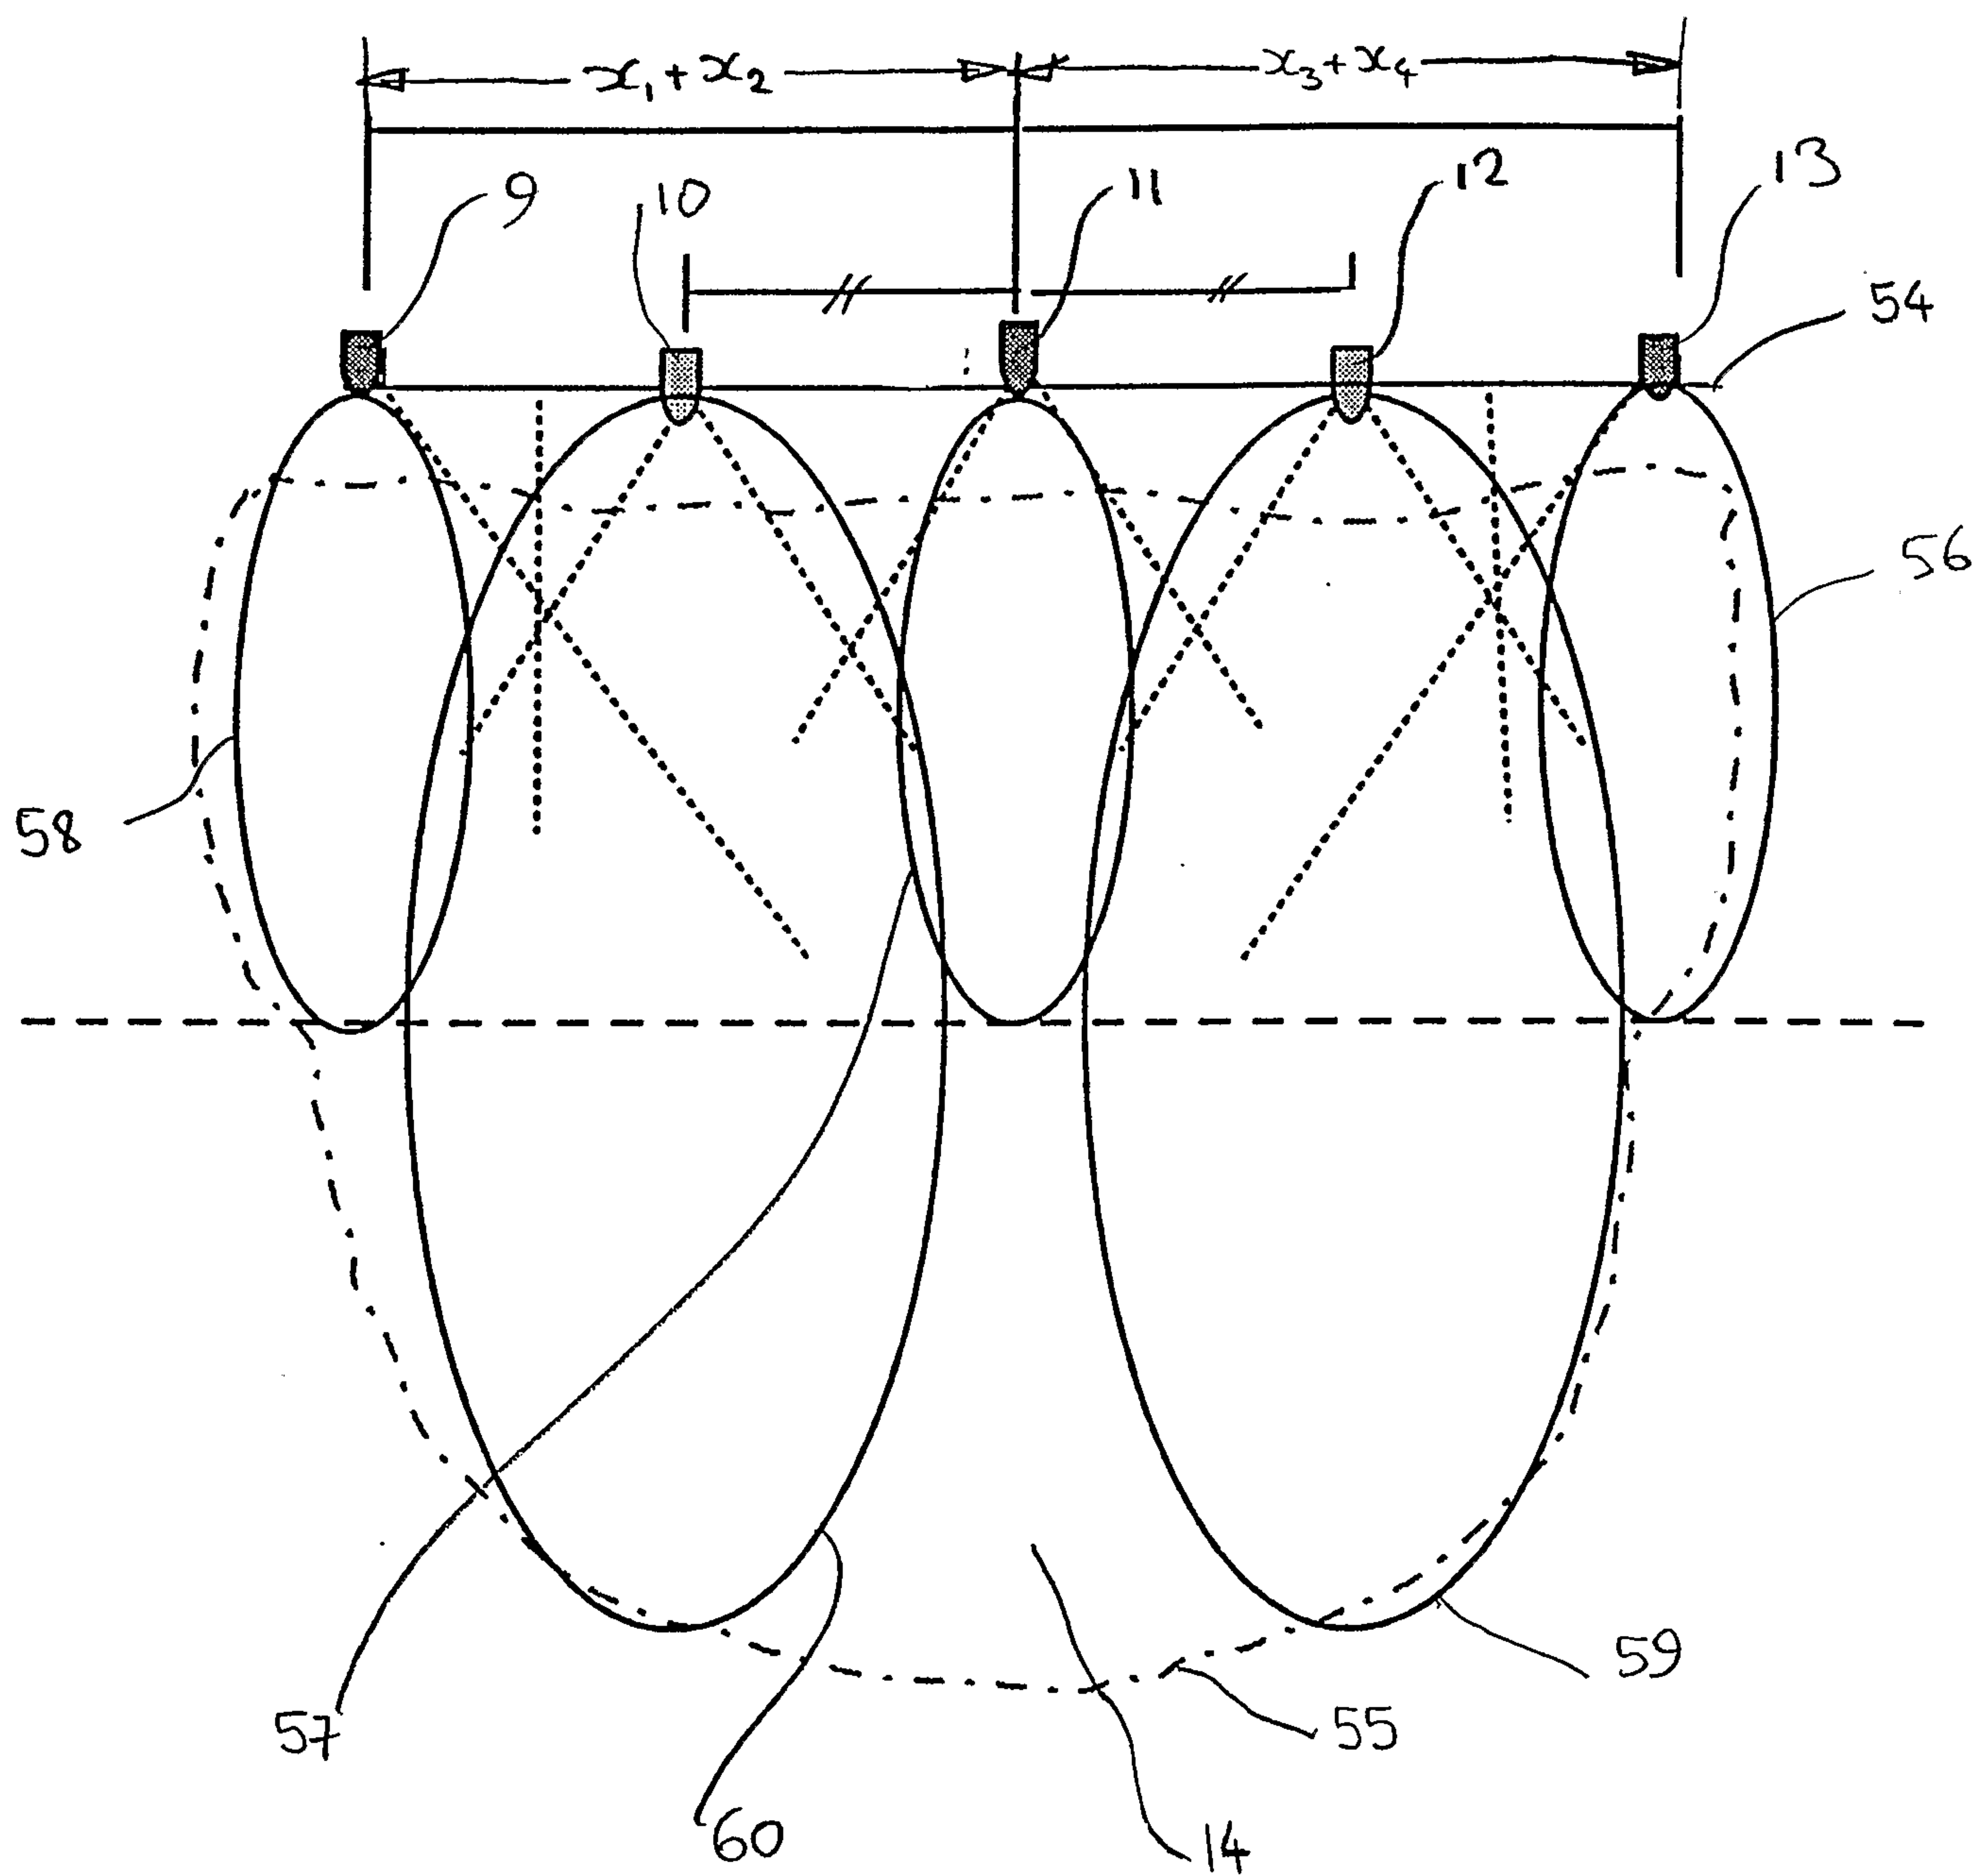
FIG. 3B

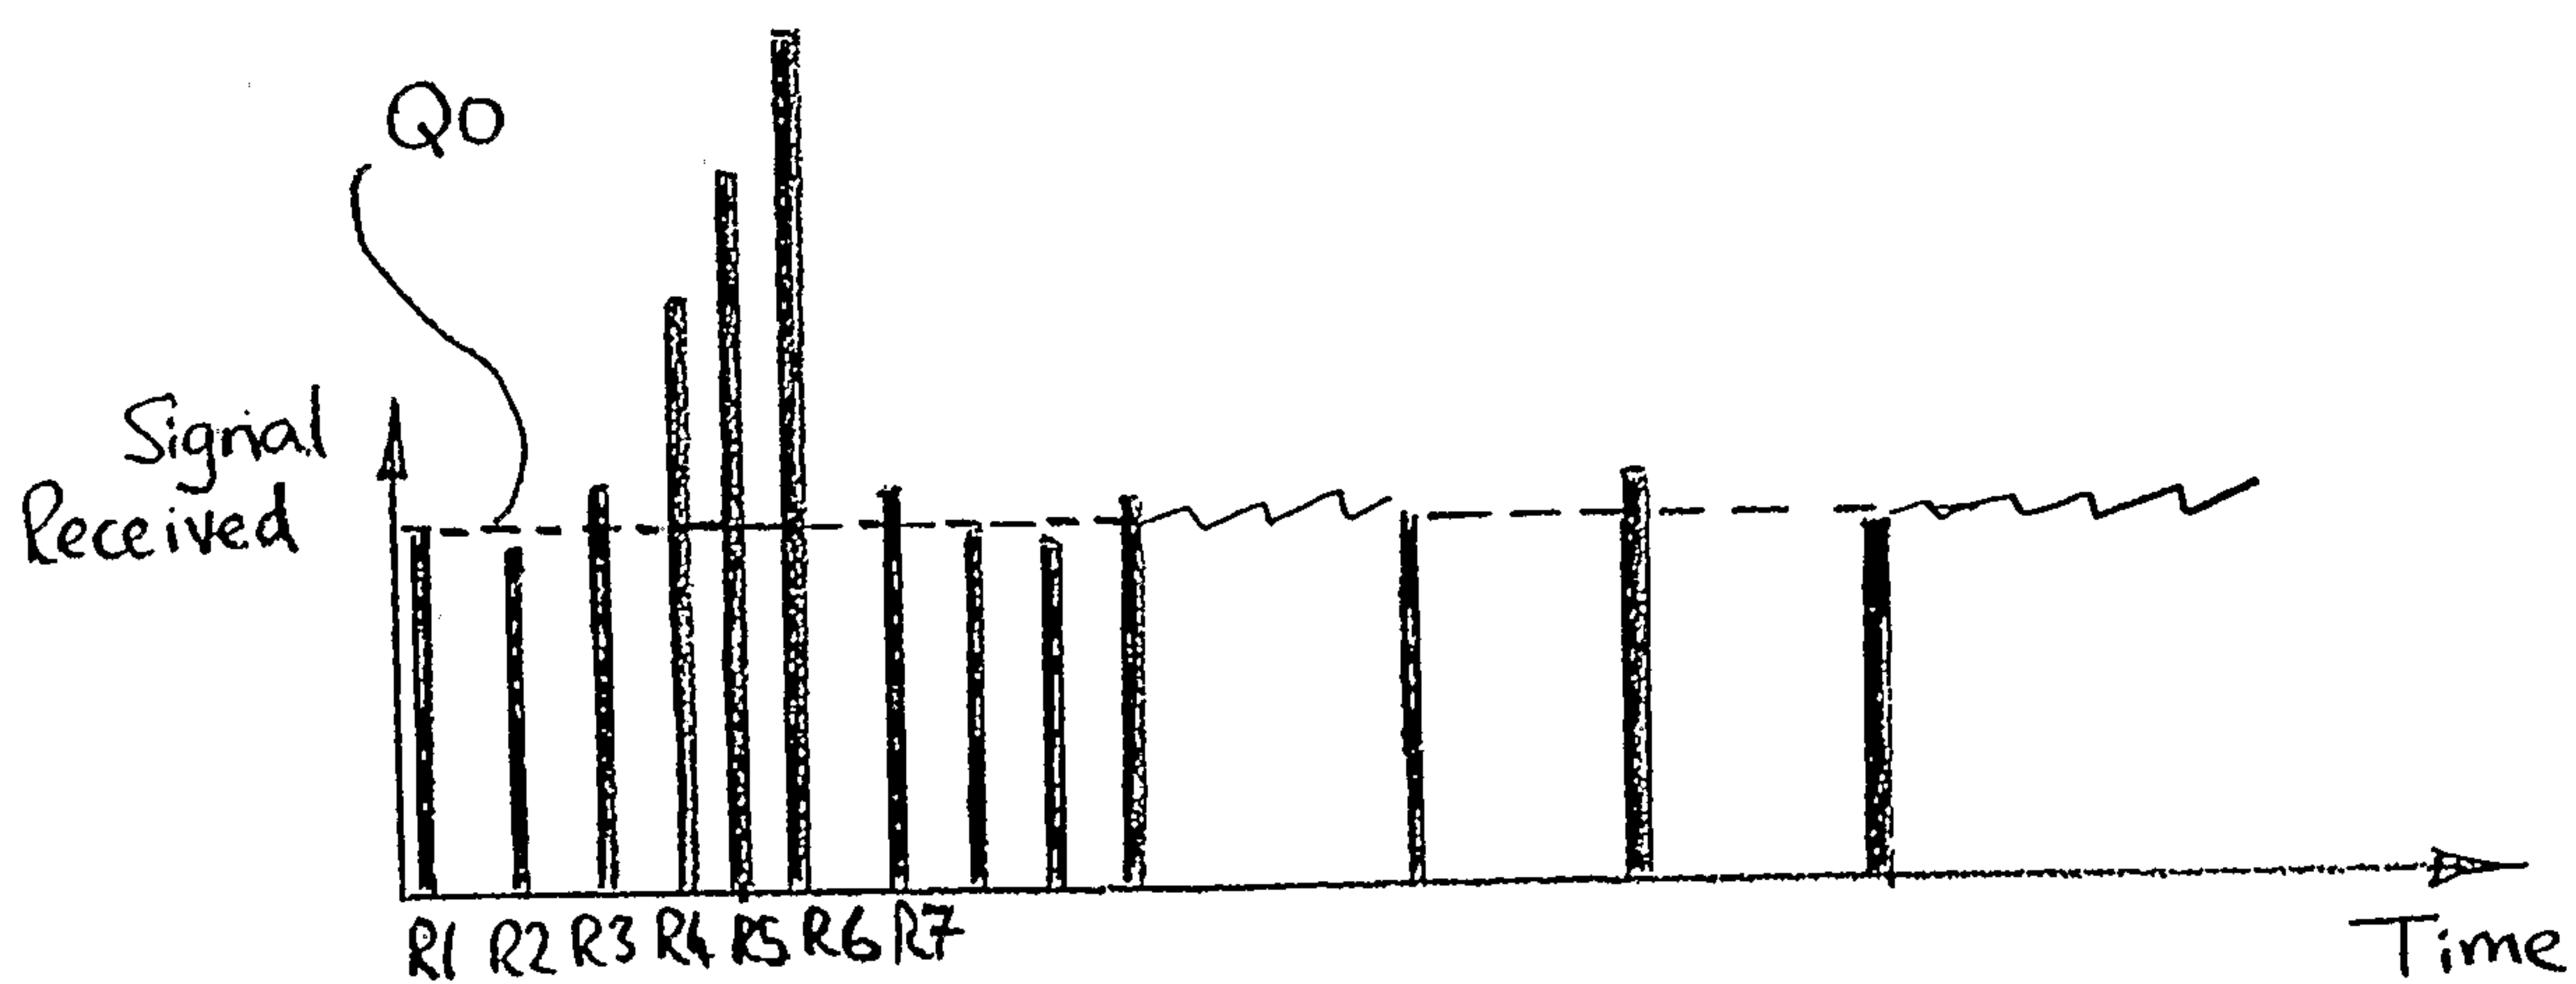
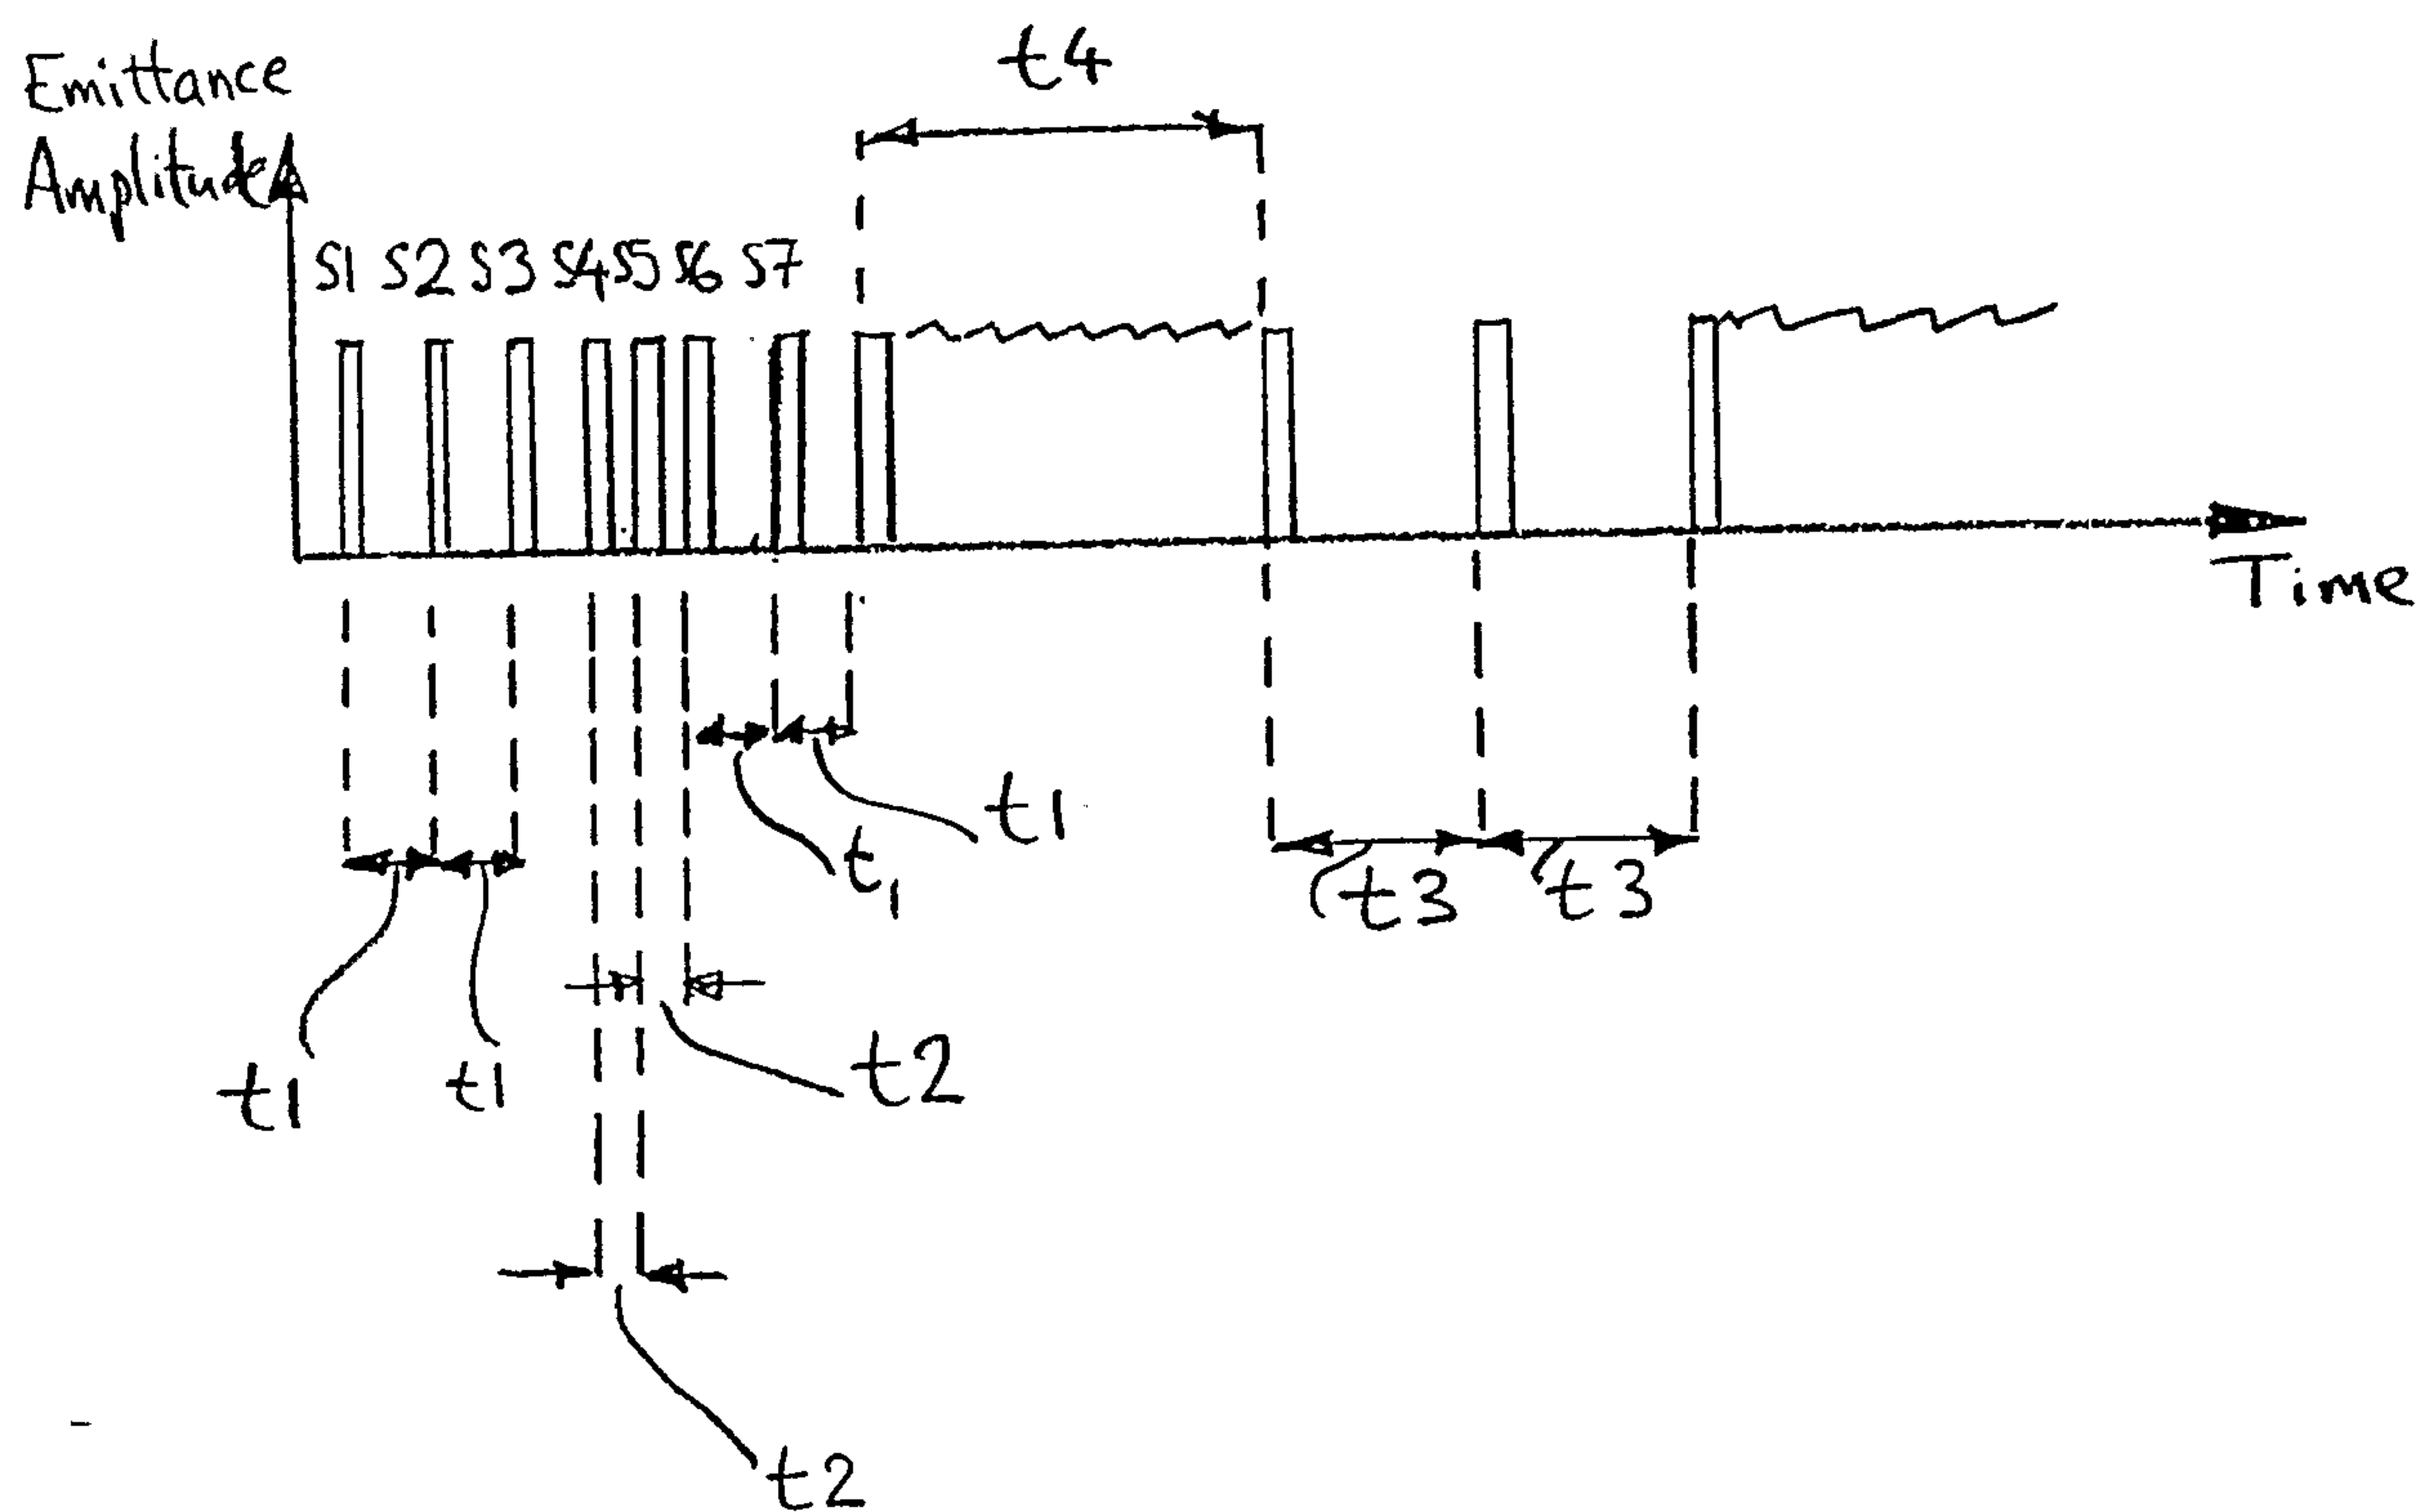
FIG. 4FIG 5

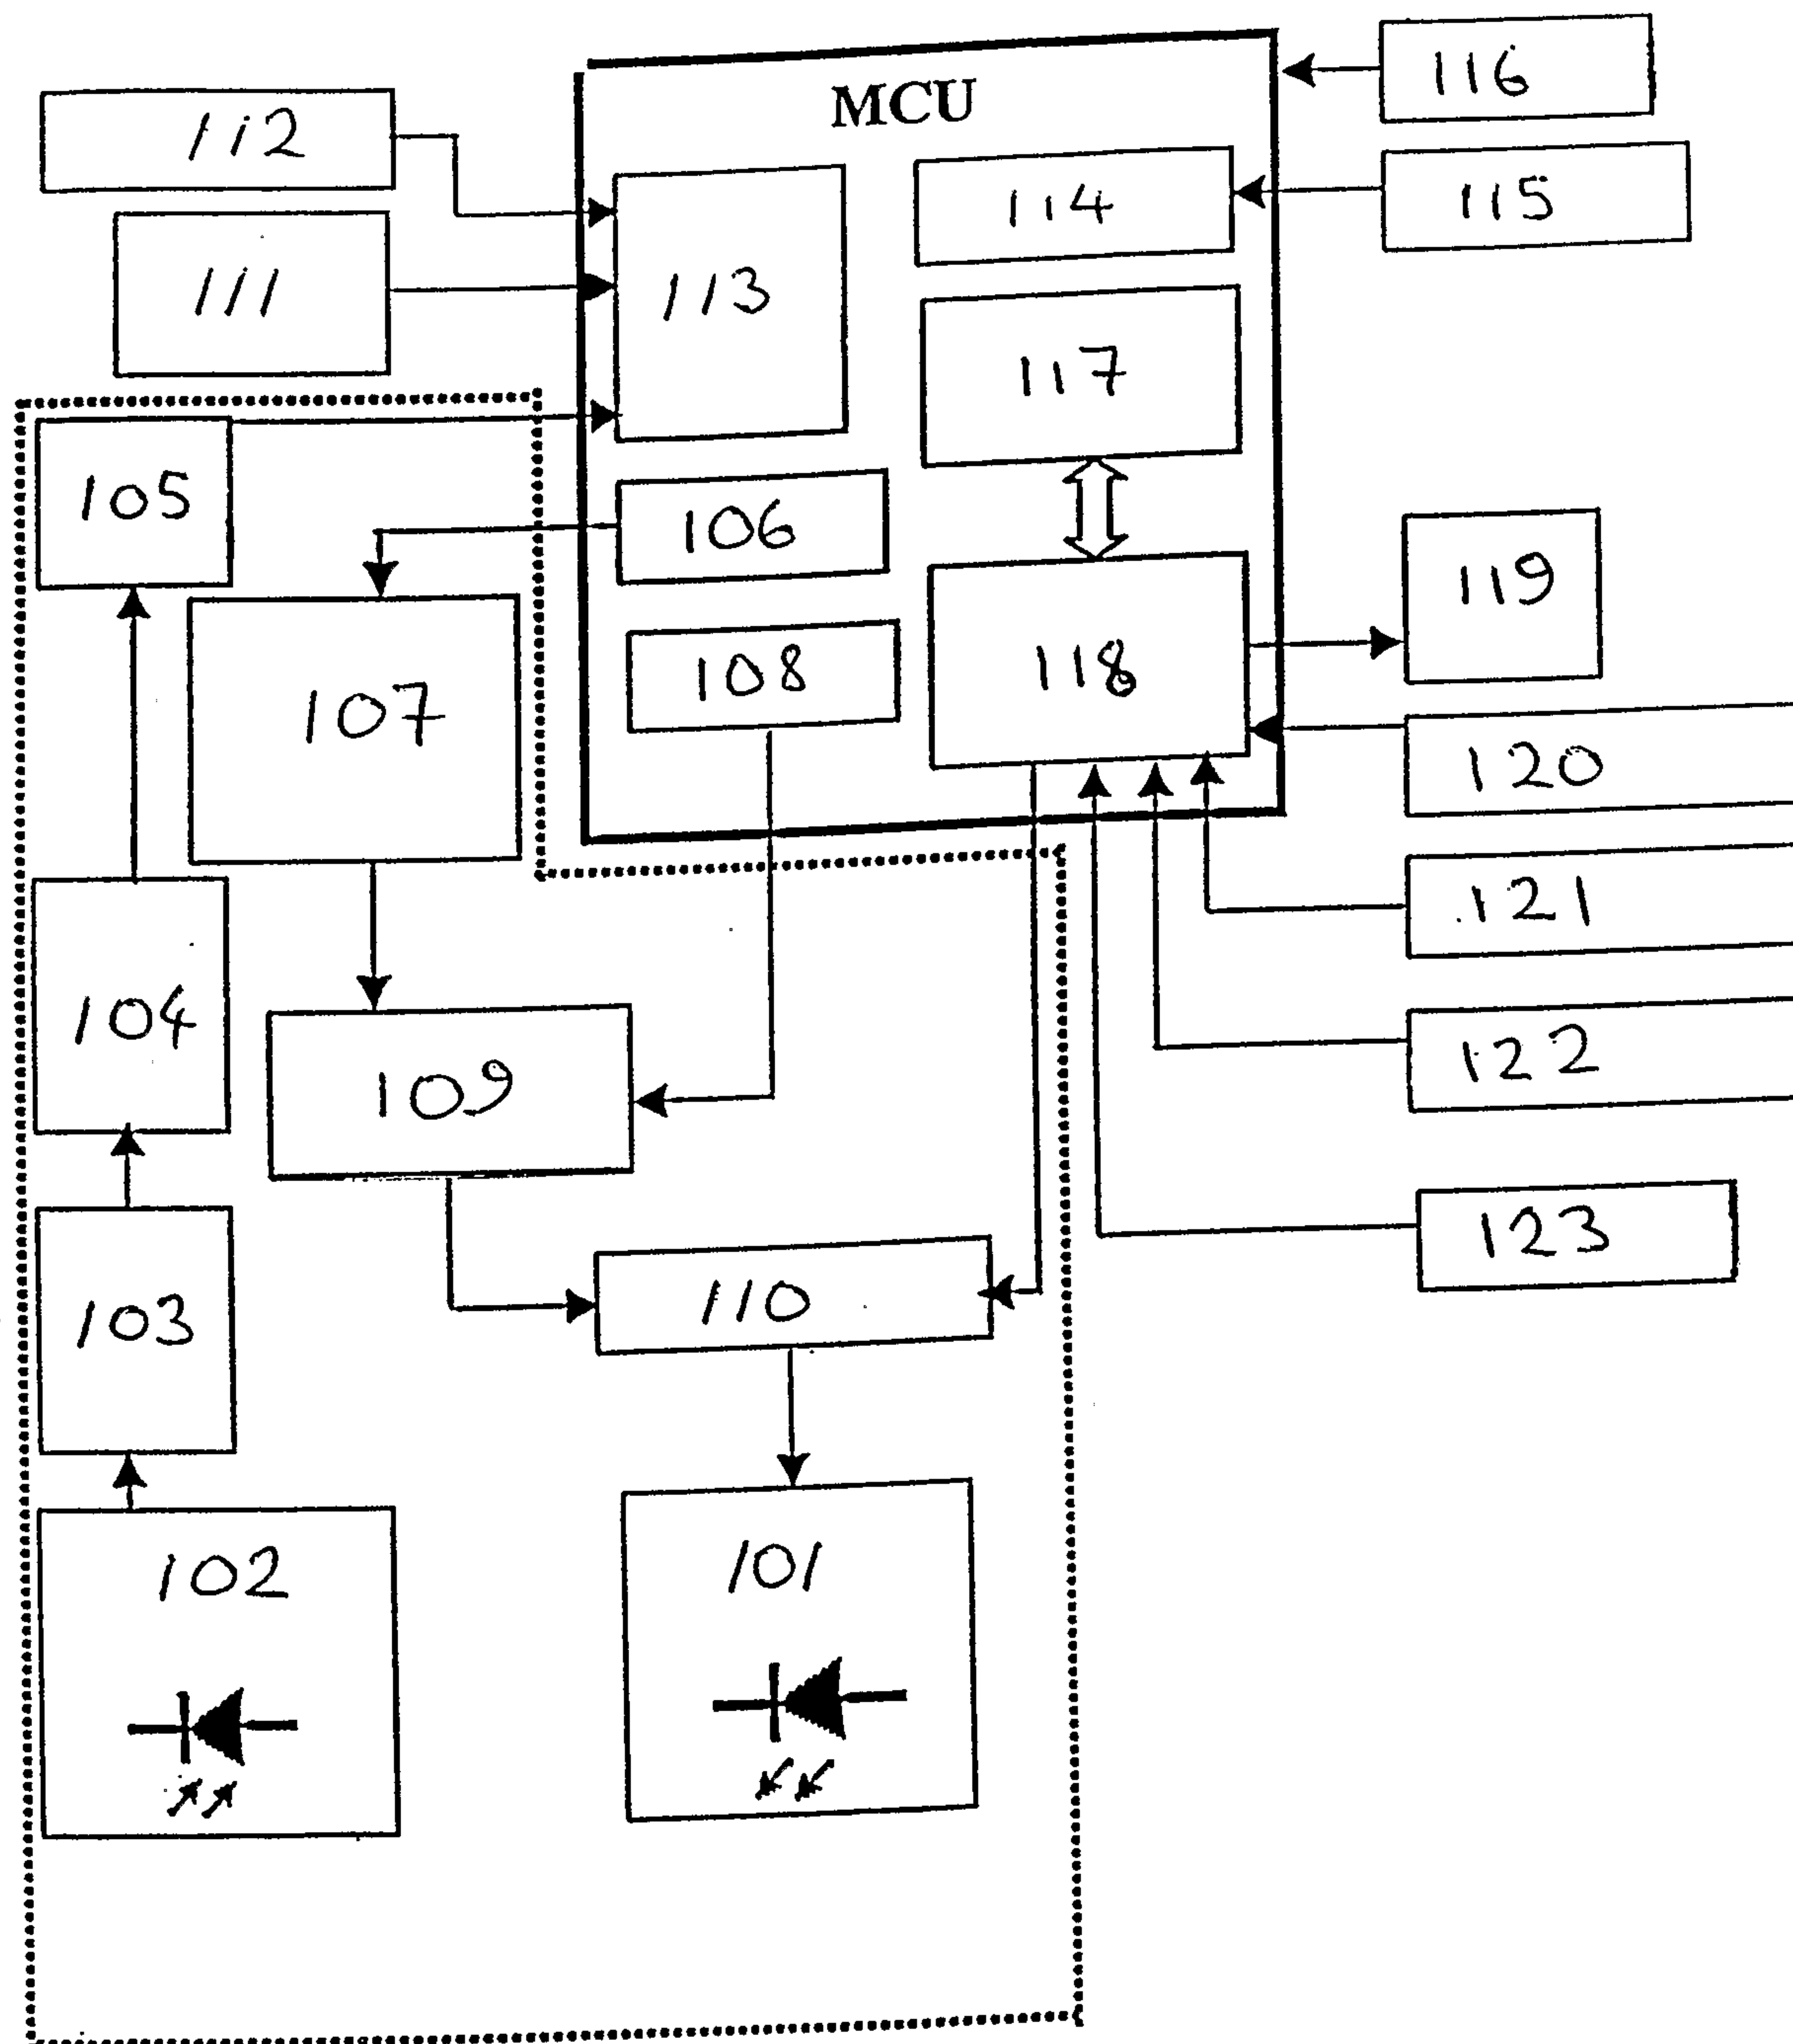
Fig. 6

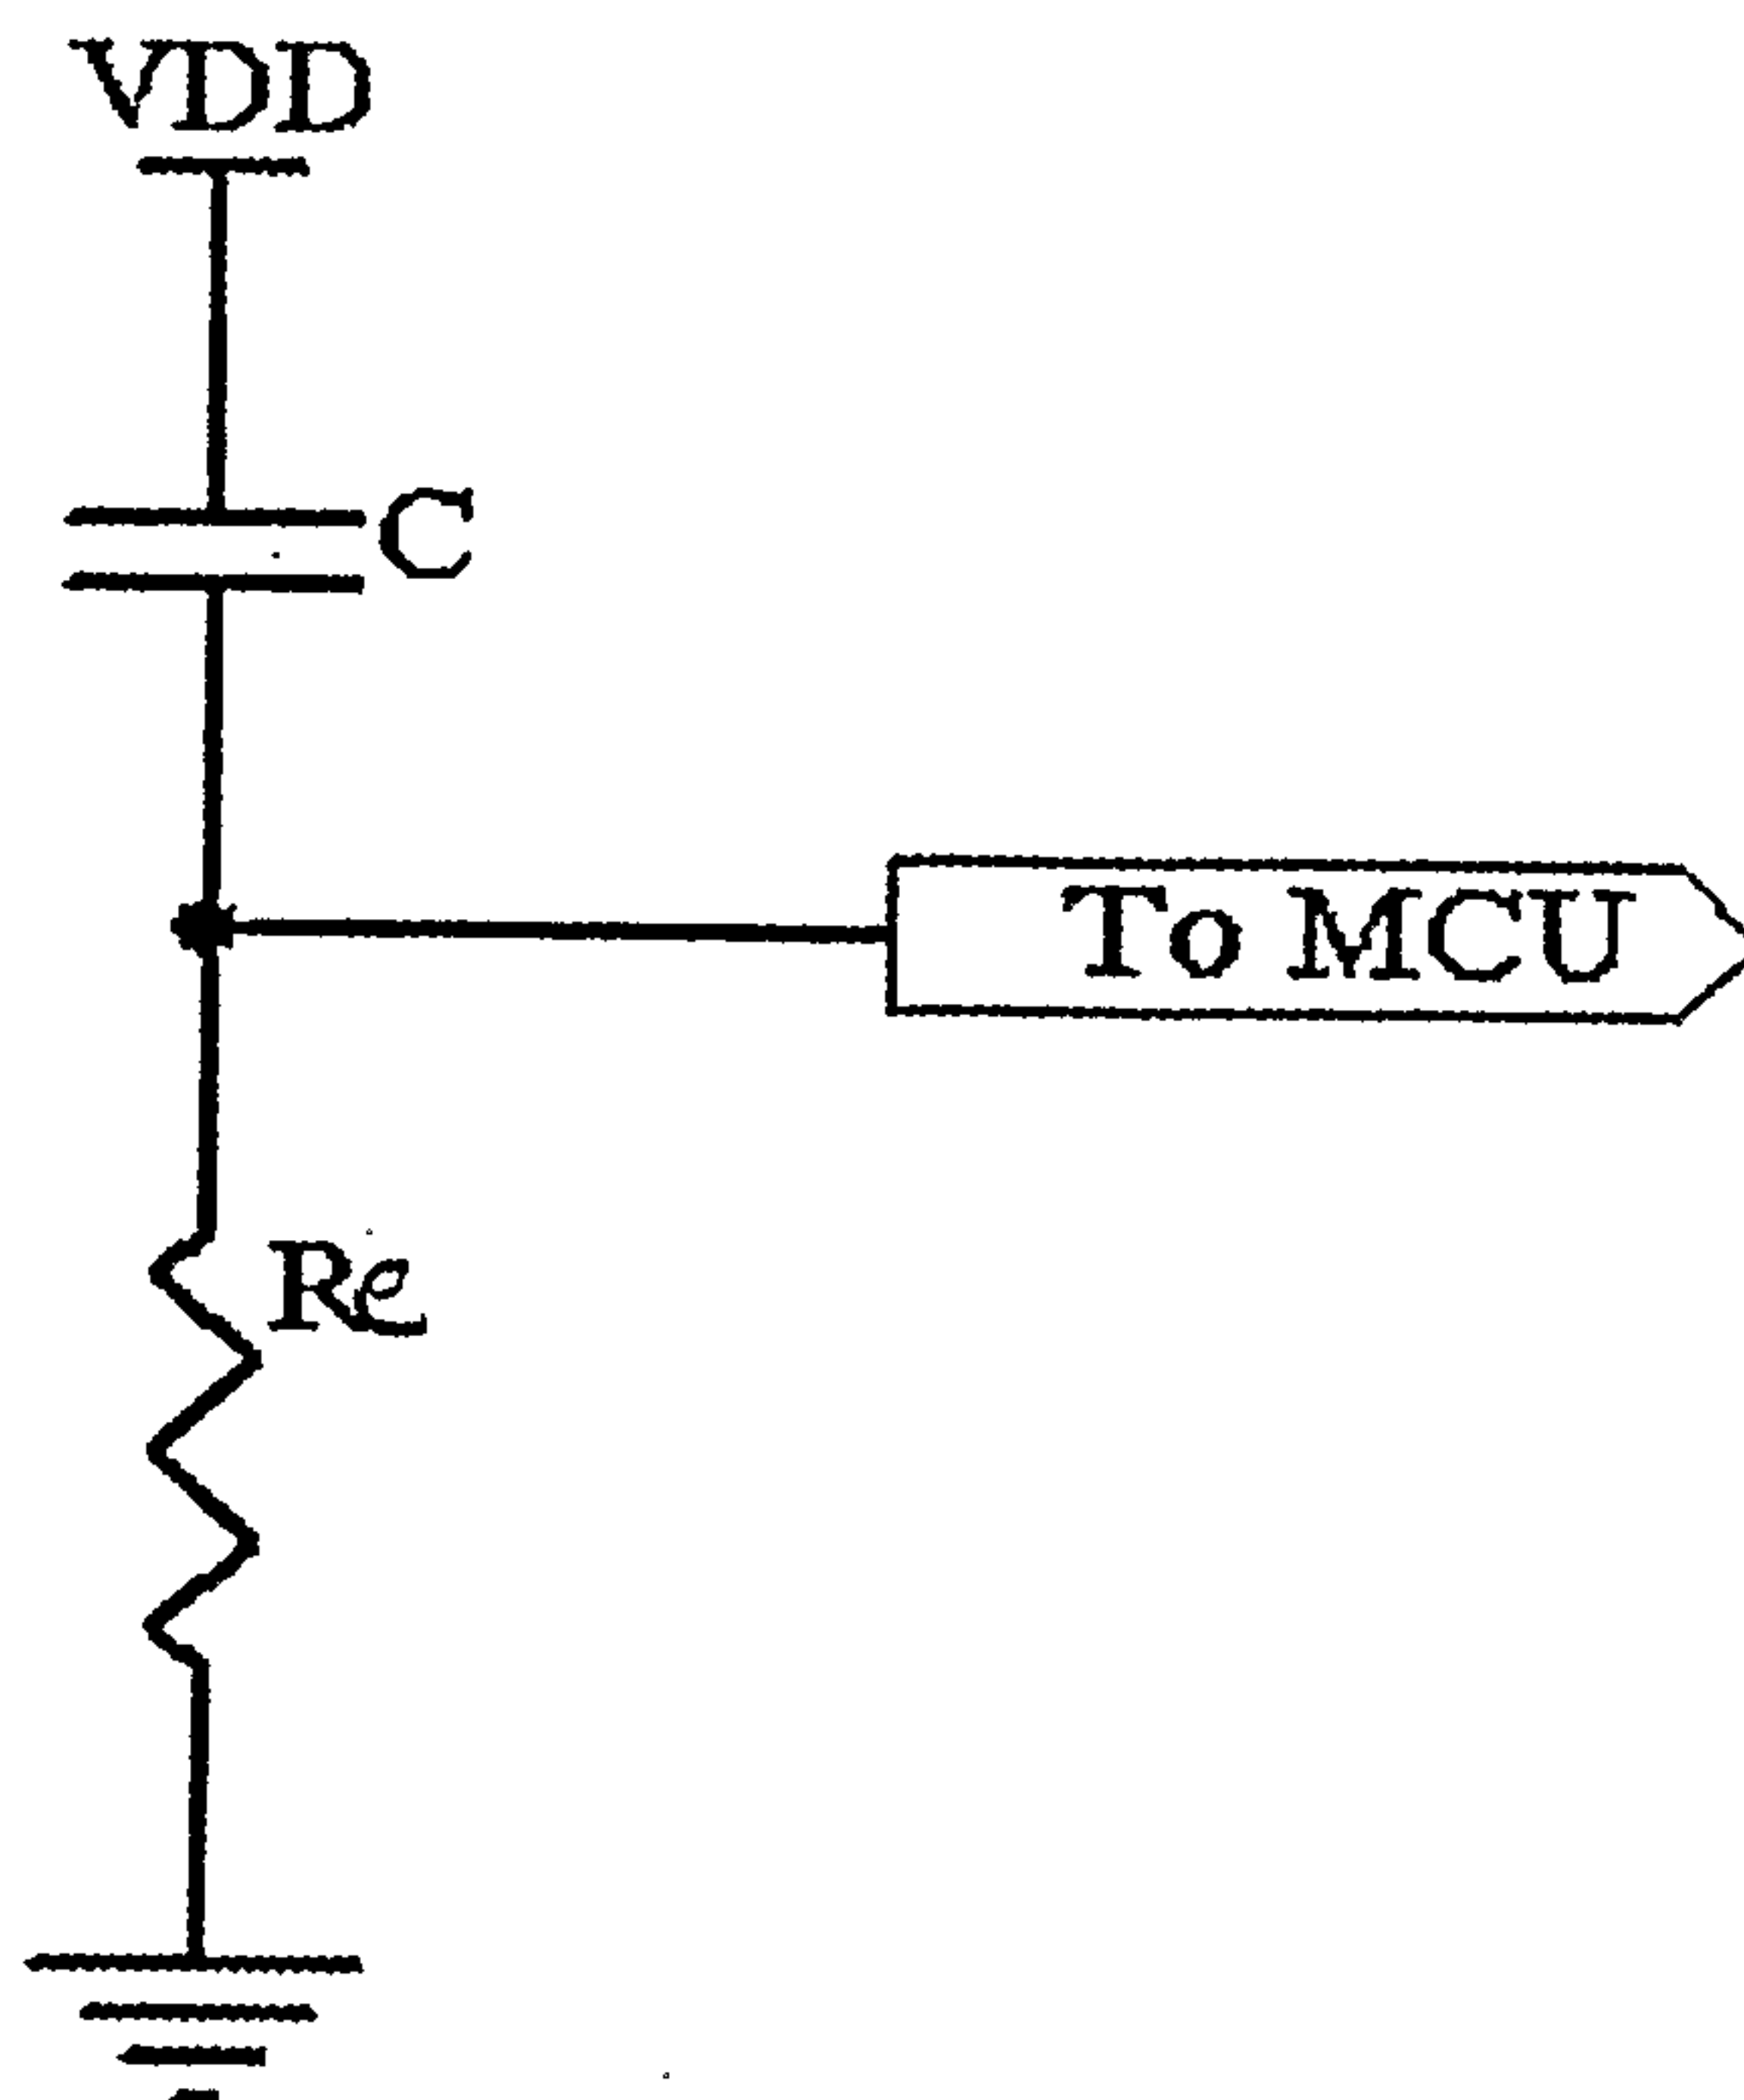
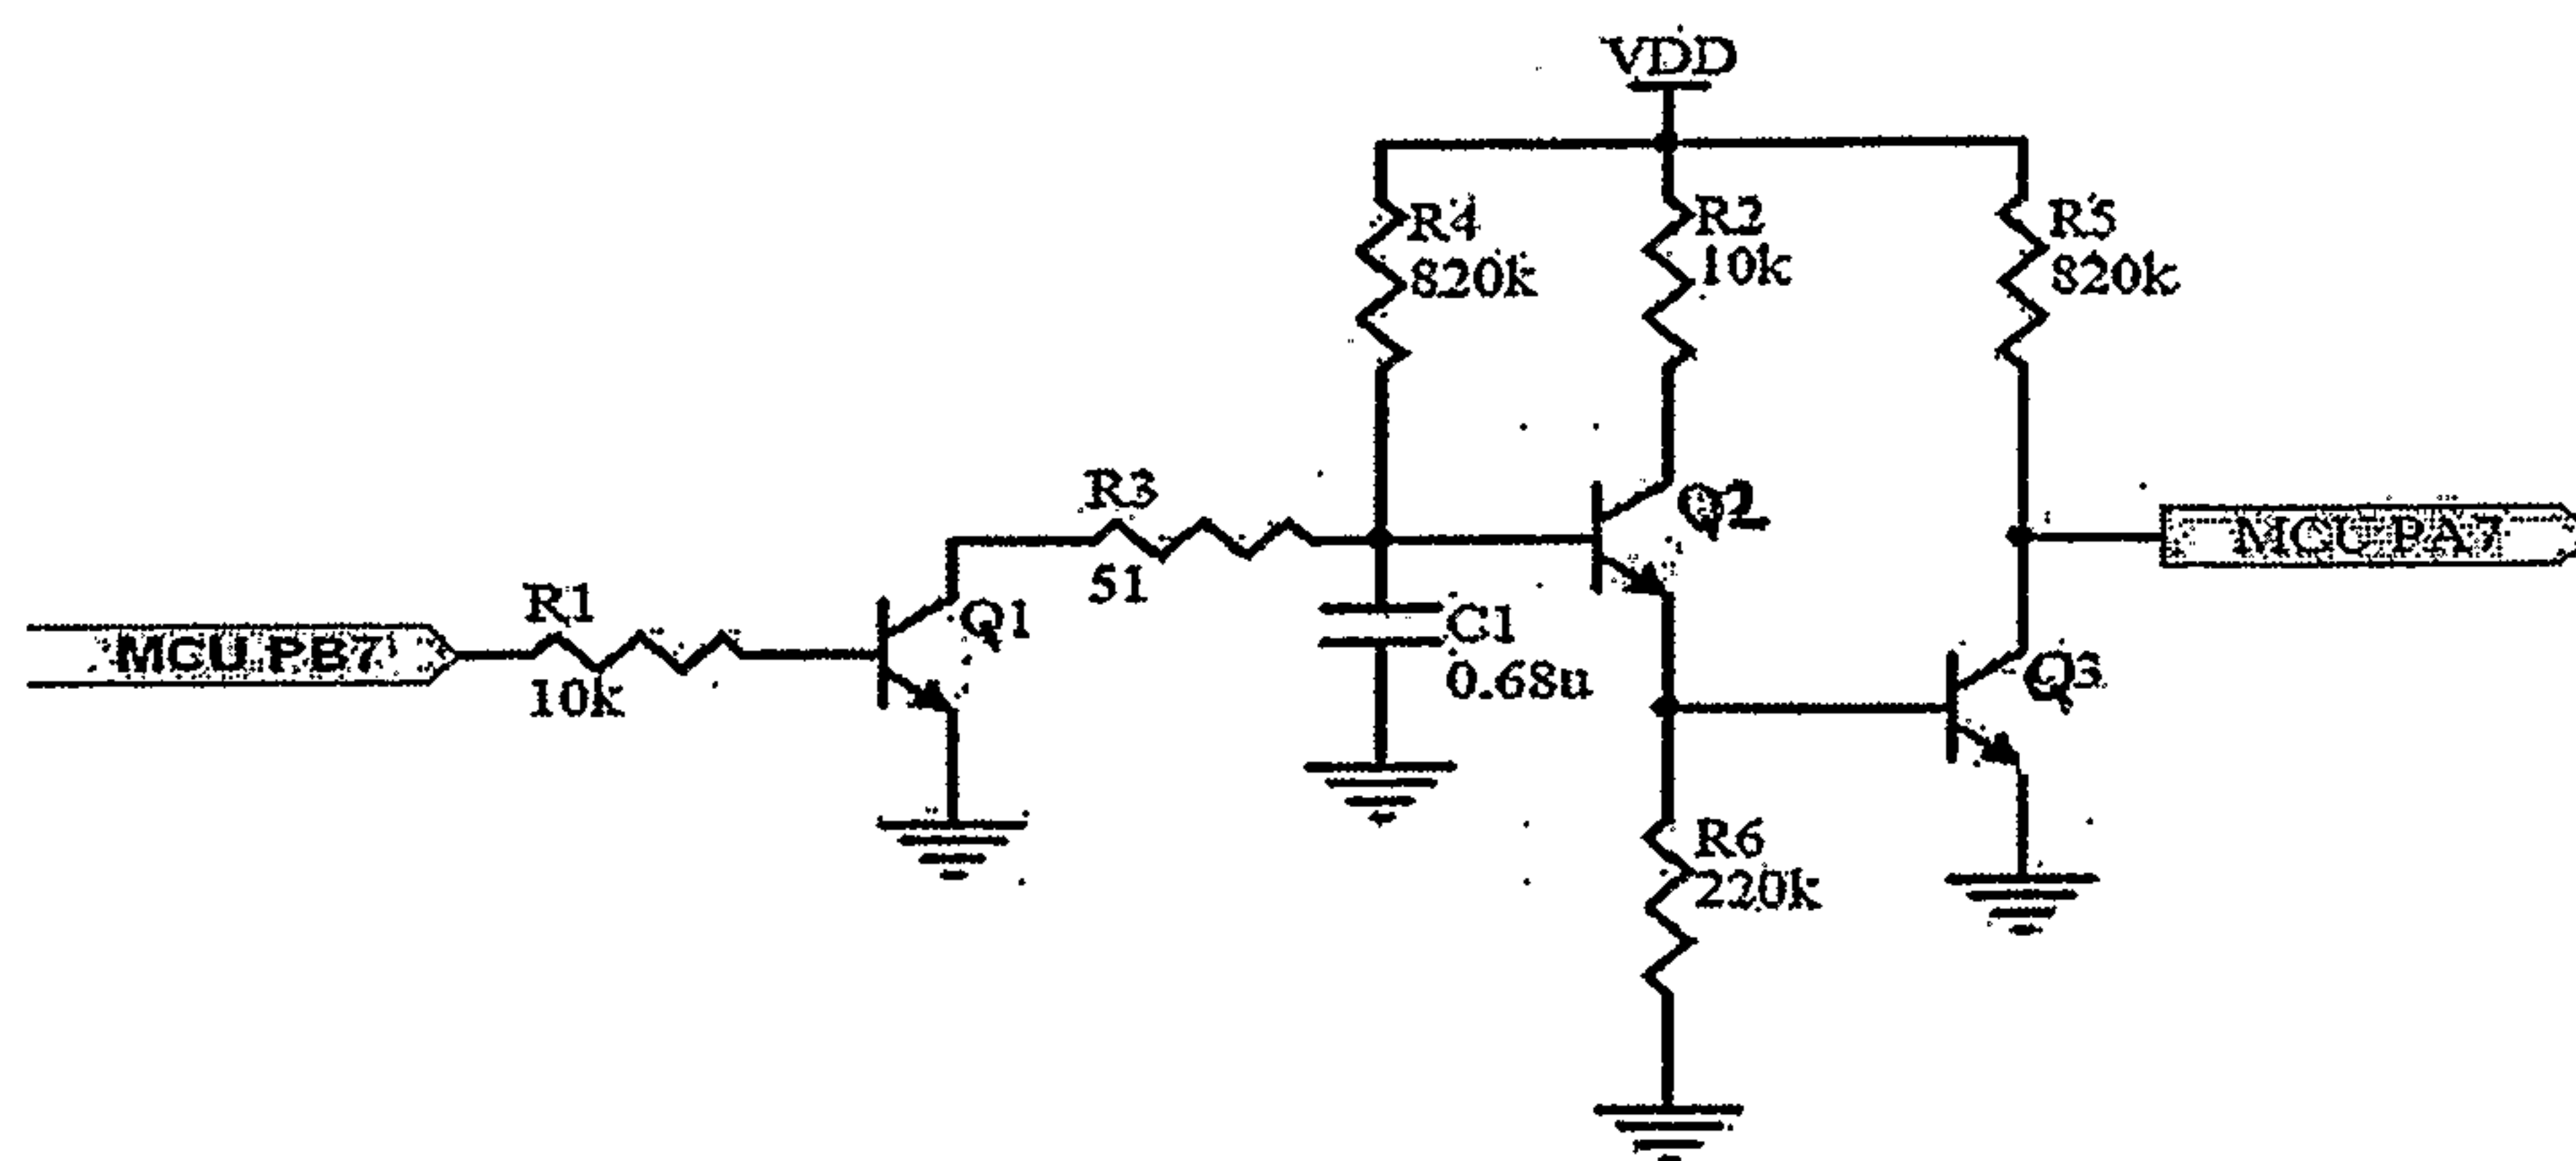
FIG. 7FIG. 8

FIG. 9