

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 March 2006 (23.03.2006)

PCT

(10) International Publication Number
WO 2006/029991 A1

(51) International Patent Classification⁷: **B65B 61/18**,
7/28, B65D 17/50, B31B 1/90

(74) Agent: **RATLIFF, I.**; Downsvie Road, Wantage, Oxfordshire OX12 9BP (GB).

(21) International Application Number:
PCT/EP2005/054484

(22) International Filing Date:
9 September 2005 (09.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04255525.0 13 September 2004 (13.09.2004) EP

(71) Applicant (for all designated States except LS, US):
CROWN PACKAGING TECHNOLOGY, INC
[US/US]; 11535 S. Central Avenue, Alsip, Illinois
60803-2599 (US).

(71) Applicant (for LS only): **CROWN PACKAGING UK PLC** [GB/GB]; Downsvie Road, Wantage, Oxfordshire OX12 9BP (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HALL, Jason, John** [GB/GB]; Flat 3, Church Road, Sandford-on-Thames, Oxfordshire OX4 4XZ (GB). **LONGWORTH, Paul** [GB/GB]; 2 Laurel Crescent, Grove, Oxfordshire OX12 7HZ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TAB FOLDING AND SEALING APPARATUS AND METHOD

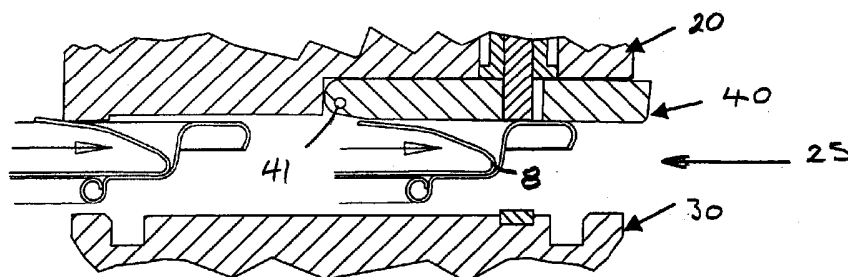

(57) Abstract: A method and apparatus for folding a tab over a peelable panel on an end structure comprising a ring/panel. The ring and panel are formed from the same flexible material which has no inherent deadfold characteristic. In one embodiment an upper tab fold tool includes a pivotable plate for holding the folded edge of the tab in position prior to heat sealing to the peelable panel.



WO 2006/029991 A1

Description

TAB FOLDING AND SEALING APPARATUS AND METHOD

Technical Field

- [001] This invention relates to tab folding. In particular it relates to an apparatus for folding a tab over a peelable lid structure on a container.

Background Art

- [002] Tabs are in general use for the removal of peelable panels and typically are formed from a projection of the panel. By grasping the tab, the panel can be peeled off a container. The material of the peelable panel and integral tab typically comprises a laminate structure, which may include a heat sealable layer and a barrier layer such as aluminium and/or varnish. In closures on containers for food products which require processing by retorting, for example, the tab may be folded over the main part of the panel in order to avoid handling problems. Often the peelable panel is fixed to a metal ring which is then seamed to the edge of a can body. In order to avoid damage to the tab, particularly during processing, it is usual to fold the tab radially inwardly away from the ring prior to the seaming operation.
- [003] Folding the tab of a peelable panel which includes a thick layer of aluminium can be carried out in a relatively straightforward manner by using the material's inherent deadfold properties. A typical folding process for such a tab/panel is carried out in three steps as shown in figure 1. Firstly the peelable panel 1 is fixed to a metal ring 2 by heat sealing (figure 1(a)). The ring 2 includes a flat annulus 3, an upright wall 4 and a seaming panel 5. During heat sealing, the tab 6 is forced by the heat sealing tool 10 around the wall 4 at the side of the ring so as to lie in a position approximately perpendicular to the centre part of the peelable panel. In a second operation, a folding tool 11 passes laterally over the seaming panel (Figure 1(b)) until it contacts the tab and folds the tab 6 over the annulus 3 of the ring 2 and main part of panel 1 (Figure 1(c)). When the tool 11 is removed, deadfold in the tab/panel material maintains the tab 6 in its folded position (Figure 1(d)). Finally, a press tool 12 crushes the tab flat against the rest of the peelable panel 1 (Figure 1(e)).
- [004] This prior art folding method is only suitable for material which has inherent deadfold properties, typically including an aluminium layer of around 70µm (microns) in thickness. In all types and thicknesses of lidding material, the tab has to stay on, or very close to the lid panel to avoid being damaged during handling and/or seaming. With flexible material structures, the lidding may be a three or four layer structure using less than 30 µm (microns) or at most 40 microns of aluminium, typically 0 to 10 µm. Not only would the tab crush operation of Figure 1(e) fail to maintain the tab of

such flexible lidding structures in the desired folded position, but flexible tab material adjacent the upright wall and seaming panel of the ring 2 is free to move and tends to wrinkle or to develop a fold in a non-ideal position during the folding and "crushing" operations (figures 1(d) and (e)), thus risking damage to the tab.

[005] This invention seeks to provide a method and apparatus for use with ends in which the tab and lid structure are formed from the same flexible material, which has no inherent deadfold characteristic.

Disclosure of Invention

[006] According to the present invention, there is provided an apparatus for folding a tab of flexible material over a peelable panel, in which the tab and peelable panel are formed from a single piece of the same flexible material which has no inherent deadfold characteristic and which, in use, is fixed to a ring or container body such that the tab extends away from the panel, the apparatus comprising: an upper tab fold tool having two independent and distinct regions comprising: a first region for folding the tab; and a second region including a biasing device for flattening the folded tab against the peelable panel ; a lower tab fold tool; and a heat seal stake; and in which either or both of the fold tools are moveable axially relative to each other for folding the tab against the peelable panel and the heat seal stake is provided in the upper tab fold tool for bonding the folded tab in its folded position.

[007] By combining the tab fold and heat seal stake in a single tool, lidding material with no inherent deadfold can be handled and subjected to subsequent thermal processing without risk of damaging the tab.

[008] The peelable panel is fixed to a flat annulus of the ring or a container body to form the peelable end structure. An upright wall of the ring or container body extends away from the annulus to a seaming panel. Ideally, the biasing device flattens the folded edge of the tab against the peelable panel prior to folding the remainder of the tab flat against the peelable panel. This prevents the tab from moving and avoids bonding of the folded tab in a position in which the folded edge extends beyond the flat annulus and around the upright wall.

[009] The biasing device may include a pivotable plate which is held against the tab fold upper tool by the seaming panel such that lateral movement of the lidding material relative to the apparatus releases the pivotable plate for flattening the folded edge of the tab against the peelable panel.

[010] Typically the apparatus further comprises a heat seal tool for fixing the peelable panel to a ring although this tool may alternatively be completely separate from that for tab folding and heat sealing of the tab.

[011] According to another aspect of the present invention, there is provided a method of

folding a tab of flexible material over a peelable panel, the method comprising: providing an upper tab fold tool, a lower tab fold tool and a heat seal stake; moving either or both of the tab fold tools axially relative to each other and folding the tab against the peelable panel by a first step of folding the tab; and a second step of flattening the folded edge of the tab against the panel prior to folding and flattening the remainder of the tab flat against the panel; and moving the heat seal stake into contact with the folded tab and bonding the folded tab in its folded position.

[012] Prior to folding and flattening the tab to the panel the method may further comprise fixing the panel to a ring with the unbonded tab extending away from the remainder of the panel and adjacent a seaming panel of the ring. The method may, in an alternative embodiment, comprise fixing the panel directly to a container with the unbonded tab extending away from the remainder of the panel and adjacent a seaming panel of the container body.

[013] In a preferred embodiment, the method further comprises providing a biasing plate in the upper tab fold tool; moving the ring/panel structure and upper tab fold tool relative to each other, a seaming panel of the ring holding the biasing plate against the upper tab fold tool; moving the ring/panel structure and apparatus relative to each other, and releasing the biasing plate, flattening the tab edge against the panel and bonding the tab onto the peelable panel. Typically, the biasing plate is pivotable and/or spring loaded.

Brief Description of the Drawings

[014] Preferred embodiments of the invention will now be described with reference to the drawings, in which:

[015] Figure 1 is the prior art tab folding apparatus described above;

[016] Figure 2 which is a schematic side view of a first embodiment of apparatus for tab folding; and

[017] Figure 3 is a schematic side view of a second embodiment of tab folding apparatus.

Mode for the Invention

[018] In all the embodiments of figures 1 to 3, the peelable panel 1 is fixed to a metal ring 2 by heat sealing. The ring 2 includes a flat annulus 3, an upright wall 4 and a seaming panel 5. During heat sealing, the tab 6 is forced by the heat sealing tool 10 around the wall 4 at the side of the ring so as to lie in a position approximately perpendicular to the centre part of the peelable panel. The end structure of figures 2 and 3 has a peelable panel which is formed from flexible material having a laminated structure with 0 to 40 μm (microns) of aluminium and includes a heat sealable material on its outer surface for bonding the tab in its folded position.

- [019] In a second operation, upper tab fold tool 20 passes laterally over the seaming panel until it contacts the tab 6 and folds the tab over the annulus 3 of the ring 2 and main part of panel 1. However, in contrast with the prior art of figure 1, upper tab fold tool 20 of the present invention combines tab fold, crush and heat seal in a single tool 20 for use with flexible lidding materials.
- [020] In the embodiment of figure 2, upper tab fold tool 20 comprises a first portion 21 for folding the tab 6 over the peelable panel 1 (figure 2(2)). During relative axial movement of ring/panel and tool 20, a "letterbox" 25 is formed between upper tab fold tool 20 and lower tab fold tool 30. As the ring/panel pass laterally through the letterbox 25, portion 21 of the upper tab fold tool passes with minimum clearance over the seaming panel and folds the tab 6 over the peelable panel 1. Minimising clearance avoids wrinkling of the flexible lidding material or folding the tab in a non-ideal position such that the fold is too close to the countersink wall, resulting in the folded edge extending to the upright wall.
- [021] Central region 22 of the upper tab fold tool 20 maintains the tab in its folded position as the ring passes through the letterbox 25. Figure 2(3) shows two ring/panel structures in folding and crushing positions for clarity only. In reality these operations are carried out with a single ring/panel in the apparatus at any one time.
- [022] When the ring/panel structure reached the position at the right hand side of figure 2(3) and 2(4), the upper tab fold tool crushes the tab 6 and heat seal stake 24 bonds the tab down onto peelable panel 1. This operation may be achieved either by downward movement of the upper tab fold tool, upward movement of the lower tab fold tool (lifting the ring/panel structure) as indicated by the arrow in figure 2(4), or a combination of these relative movements. Curled edge 7 of the ring 2 fits into a recess 31 in lower tab fold tool 30 for crushing and heat sealing.
- [023] The upper tab fold tool 20 of the embodiment of figure 3 includes a plate 40 which is pivotable about point 41 as shown on figure 3(3). As the ring/panel structure advances through letterbox 25, pivotable plate 40 is lifting against the upper tab fold tool 20 by seaming panel 5, against the action of spring 42. Further forward movement releases the pivot plate so that it drops and folds the "edge" 8 of tab 6. This edge 8 is thus prevented from movement around the ring 2 and/or up the wall 4 of the ring and improves consistency of the folded position of the tab.
- [024] In figure 3(5), the end is lifted up and the whole tab is folded flat. Heat seal stake 24 bonds the tab in position. Residual heat in the material from the initial sealing of the flexible lidding panel to the ring may "tack" the tab in place prior to the final heat seal stake. The tab fold plate 20 also acts as a stripper for removal of the heat seal stake.
- [025] The invention has been described above by way of example only and changes may be made to the method/apparatus within the scope of the invention. For example, the

upper tab fold tool (including such features as heat seal stake or pivot plate) may be configured so as to fix tabs having a variety of profiles. Biasing devices other than spring 40 may be used.

[026] Although the use of an intermediate ring structure to which the peelable panel is bonded prior to seaming of the ring to a can body is shown in the drawings, the invention is applicable to any container which is closed by a peelable panel with integral tab. For example, the peelable panel could be on an end or directly attached to the container body.


Claims

- [001] An apparatus for folding a tab of flexible material over a peelable panel, in which the tab and peelable panel are formed from a single piece of the same flexible material which has no inherent deadfold characteristic and which, in use, is fixed to a ring such that the tab extends away from the panel, the apparatus comprising:
an upper tab fold tool having two independent and distinct regions comprising:
a first region for folding the tab; and
a second region including a biasing device for flattening the folded tab against the peelable panel ;
a lower tab fold tool; and
a heat seal stake;
and in which either or both of the fold tools are moveable axially relative to each other for folding the tab against the peelable panel and the heat seal stake is provided in the upper tab fold tool for bonding the folded tab in its folded position.
- [002] An apparatus according to claim 1, in which the biasing device flattens the folded edge of the tab against the peelable panel prior to folding the remainder of the tab flat against the peelable panel.
- [003] An apparatus according to claim 1 or claim 2, in which the biasing device includes a pivotable plate which is held against the tab fold upper tool by a seaming panel of the ring such that lateral movement of the lidding material relative to the apparatus releases the pivotable plate for flattening the folded edge of the tab against the peelable panel.
- [004] An apparatus according to any one of claims 1 to 3, further comprising a heat seal tool for fixing the peelable panel to a ring.
- [005] A method of folding a tab of flexible material over a peelable panel, the method comprising:
providing an upper tab fold tool, a lower tab fold tool and a heat seal stake;
moving either or both of the tab fold tools axially relative to each other and folding the tab against the peelable panel by:
a first step of folding the tab; and
a second step of flattening the folded edge of the tab against the panel prior to folding and flattening the remainder of the tab flat against the panel; and
moving the heat seal stake into contact with the folded tab and bonding the folded tab in its folded position.
- [006] A method according to claim 5, further comprising fixing the panel to a ring or a





container body with the unbonded tab extending away from the remainder of the panel and adjacent a seaming panel of the ring or container body, prior to folding and flattening the tab to the panel.

- [007] A method according to claim 6, further comprising:
providing a biasing plate in the upper tab fold tool;
moving the ring/panel structure and upper tab fold tool relative to each other, a seaming panel of the ring holding the biasing plate against the upper tab fold tool;
moving the ring/panel structure and apparatus relative to each other;
releasing the biasing plate;
flattening the tab edge against the panel; and
bonding the tab onto the peelable panel.
- [008] A method according to claim 7 in which the biasing plate is pivotable and/or spring loaded.


[Fig. 001]

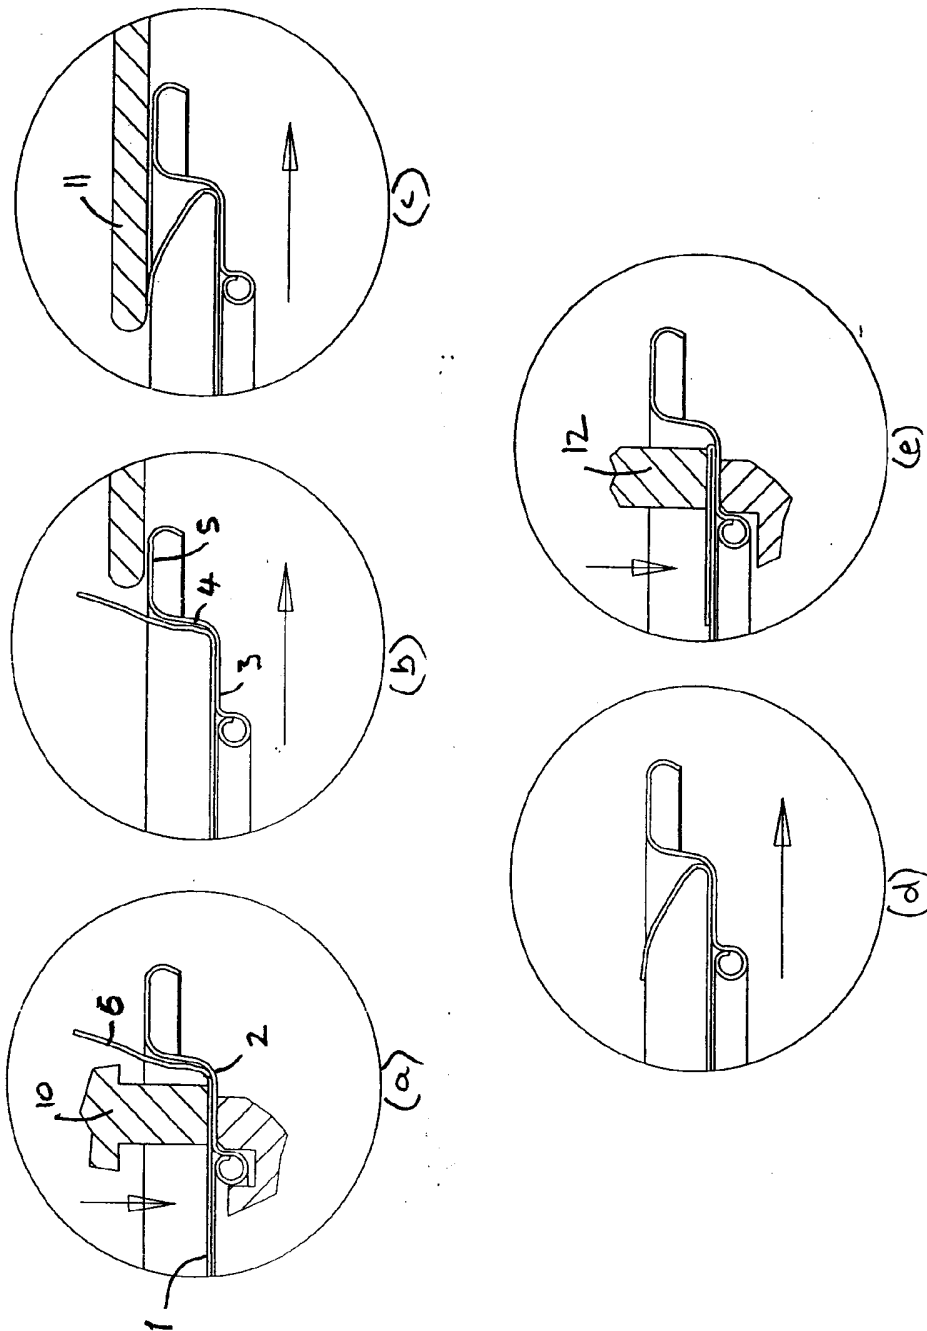

[Fig. 002]

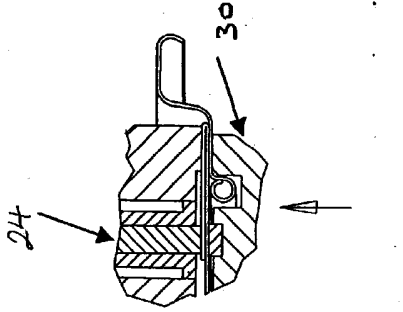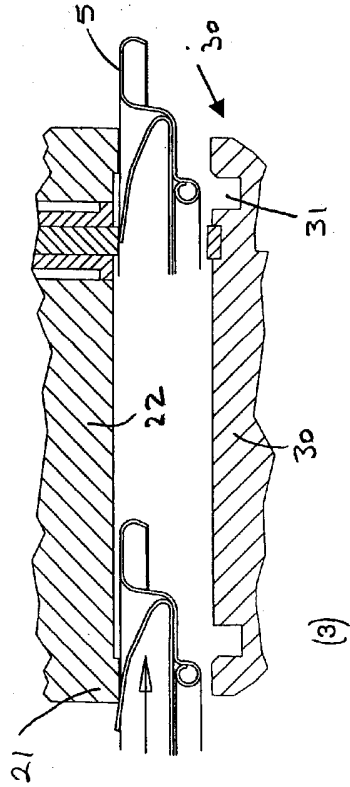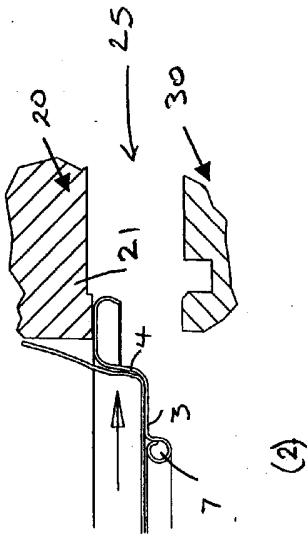

[Fig. 003]

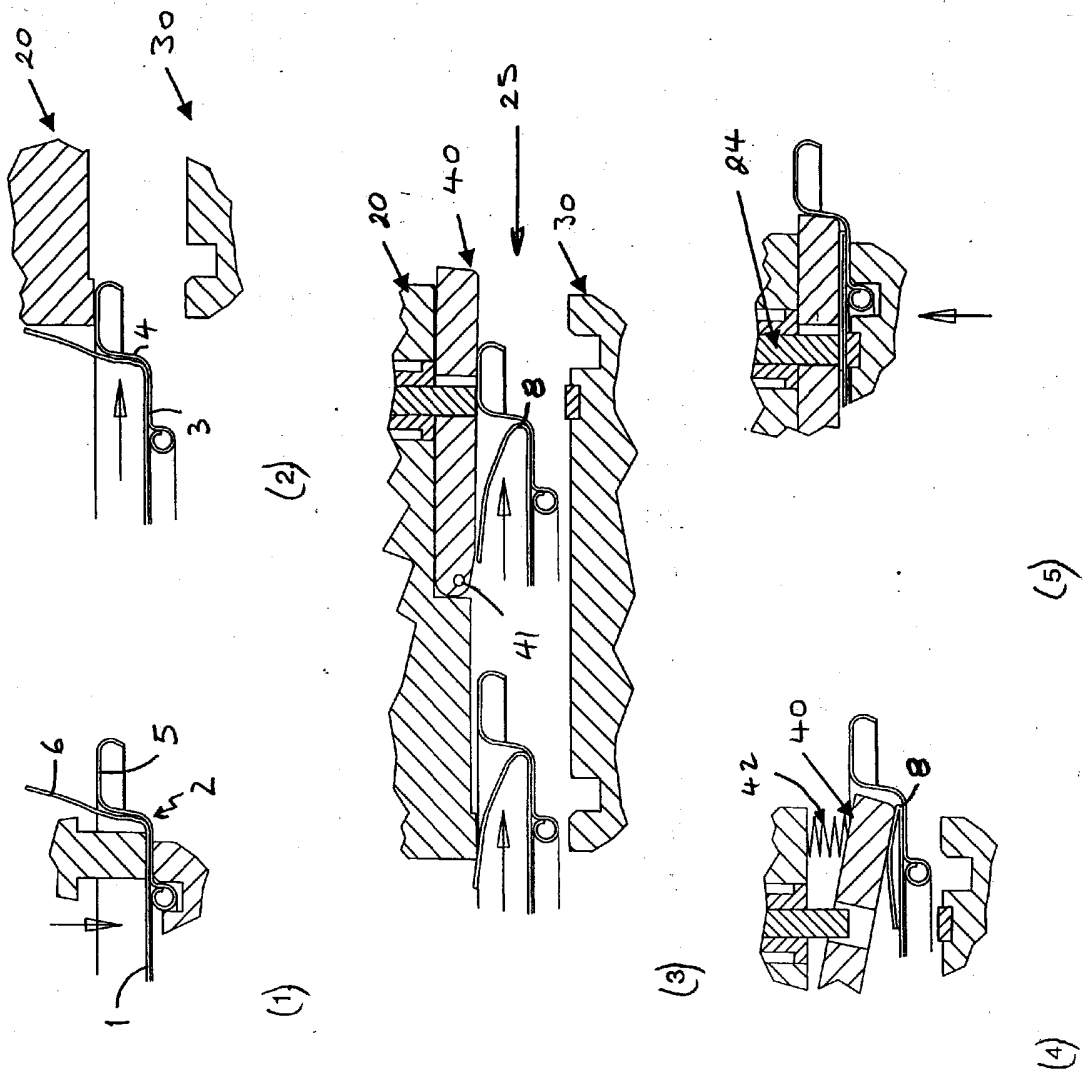

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/054484

A. CLASSIFICATION OF SUBJECT MATTER

B65B61/18 B65B7/28 B65D17/50 B31B1/90

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B65B B65D B31B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 915 254 A (ZUMSTEG ET AL) 10 April 1990 (1990-04-10) column 5, line 18 - line 40; claim 1; figure 1	1,4,5
Y	US 6 161 367 A (WALTER ET AL) 19 December 2000 (2000-12-19) column 5, line 19 - line 24; claim 1; figures 4,8	1
X	EP 1 386 852 A1 (CROWN CORK & SEAL TECHNOLOGIES CORPORATION) 4 February 2004 (2004-02-04)	5
Y	claims 6-9; figures 1-3	1
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 November 2005

Date of mailing of the international search report

25/11/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Vigilante, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/054484

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 090 957 A2 (SANDHERR PACKUNGEN AG) 12 October 1983 (1983-10-12) page 4, line 15 - page 6, line 28; figures 1-3	1,4,5
Y	WO 99/35045 A1 (DISPENSING CONTAINERS CORPORATION; DIAMOND, GEORGE, B) 15 July 1999 (1999-07-15) page 7, line 19 - page 9, line 28 page 10, line 22 - page 11, line 19; figures 1-3b,9a	1,4,5
A	US 5 141 594 A (WALTER ET AL) 25 August 1992 (1992-08-25) column 2, line 30 - line 41; figure 6	1-8
A	US 4 544 080 A (WRIGHT ET AL) 1 October 1985 (1985-10-01) column 3, line 18 - line 39; figures 1-9	1-8
A	US 2 801 040 A (MEYER-JAGENBERG GUNTHER ET AL) 30 July 1957 (1957-07-30) column 5, line 49 - line 70 column 6, line 59 - column 7, line 5; figures 1-10	1,5
A	US 5 277 722 A (BLOCK ET AL) 11 January 1994 (1994-01-11) column 5, line 7 - column 6, line 19 column 7, line 35 - line 41; claims 1,5; figures 1-10	1,5
A	WO 01/07330 A1 (ALCAN RORSCHACH AG; VETTER, DANIEL; FREY, JUERG) 1 February 2001 (2001-02-01) figures 1-3	1-8
A	US 6 129 268 A (STAHLECKER ET AL) 10 October 2000 (2000-10-10) the whole document	1-8
A	EP 1 065 145 A1 (TETRA LAVAL HOLDINGS & FINANCE SA) 3 January 2001 (2001-01-03) the whole document	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/054484

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4915254	A	10-04-1990	CH 674829 A5 DE 3868254 D1 EP 0321394 A1 ES 2030898 T3 GR 3004329 T3 US 5020955 A	31-07-1990 12-03-1992 21-06-1989 16-11-1992 31-03-1993 04-06-1991
US 6161367	A	19-12-2000	DE 19817737 A1 EP 0952080 A1	04-11-1999 27-10-1999
EP 1386852	A1	04-02-2004	AU 2003246000 A1 BR 0312641 A CA 2491780 A1 WO 2004014758 A1 TR 200500106 T2 US 2005247712 A1	25-02-2004 19-04-2005 19-02-2004 19-02-2004 23-05-2005 10-11-2005
EP 0090957	A2	12-10-1983	CH 654542 A5	28-02-1986
WO 9935045	A1	15-07-1999	AU 2452399 A BR 9906792 A CA 2317597 A1 CN 1297413 A CZ 20002501 A3 EP 1045797 A1 IL 137152 A JP 2002500137 T NO 20003470 A NZ 505559 A PL 342744 A1 RU 2223208 C2 TR 200001919 T2	26-07-1999 02-10-2001 15-07-1999 30-05-2001 12-12-2001 25-10-2000 06-07-2003 08-01-2002 06-09-2000 28-08-2002 02-07-2001 10-02-2004 21-12-2000
US 5141594	A	25-08-1992	CA 2030611 A1 CH 680422 A5	30-05-1991 31-08-1992
US 4544080	A	01-10-1985	CA 1289515 C GB 2166409 A JP 61104947 A	24-09-1991 08-05-1986 23-05-1986
US 2801040	A	30-07-1957	NONE	
US 5277722	A	11-01-1994	NONE	
WO 0107330	A1	01-02-2001	AU 6565600 A	13-02-2001
US 6129268	A	10-10-2000	NONE	
EP 1065145	A1	03-01-2001	AT 281359 T DE 69921630 D1 DE 69921630 T2 ES 2232101 T3 JP 2001018304 A PT 1065145 T US 6413350 B1	15-11-2004 09-12-2004 20-10-2005 16-05-2005 23-01-2001 31-03-2005 02-07-2002