US 20030146907A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0146907 A1**

Boals et al. (43) **Pub. Date: Aug. 7, 2003**

(54) **WIRELESS FILE TRANSMISSION**

(75) Inventors: **Daniel A. Boals**, Costa Mesa, CA (US); **James Y. Wilson**, Crystal Lake, IL (US)

Correspondence Address:
Patent Administrator
Suite 1600
525 West Monroe Street
Chicago, IL 60661-3693 (US)

(73) Assignee: **NEC Corporation**

(21) Appl. No.: **10/199,475**

(22) Filed: **Jul. 19, 2002**

Related U.S. Application Data

(63) Continuation of application No. 08/784,688, filed on Jan. 15, 1997, which is a continuation-in-part of application No. 08/543,786, filed on Oct. 16, 1995, now abandoned.

Publication Classification

(51) **Int. Cl.**[7] **G09G 5/00**

(52) **U.S. Cl.** **345/179**

(57) **ABSTRACT**

A computer system which includes one or more wireless interface devices that are adapted to communicate with a remote host over a radio link. Each of the wireless interface devices is a pen-based device which includes an ink field in which pen events are translated into pen data packets and transmitted to the remote host over the radio link. Local inking is provided at the wireless interface device in order to maintain the pen paradigm in essentially real time.

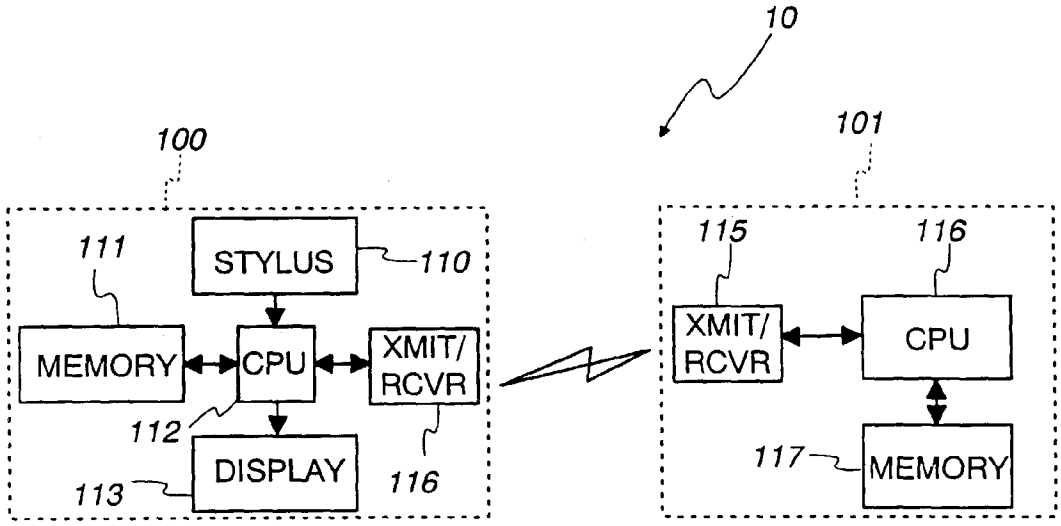


Fig. 1

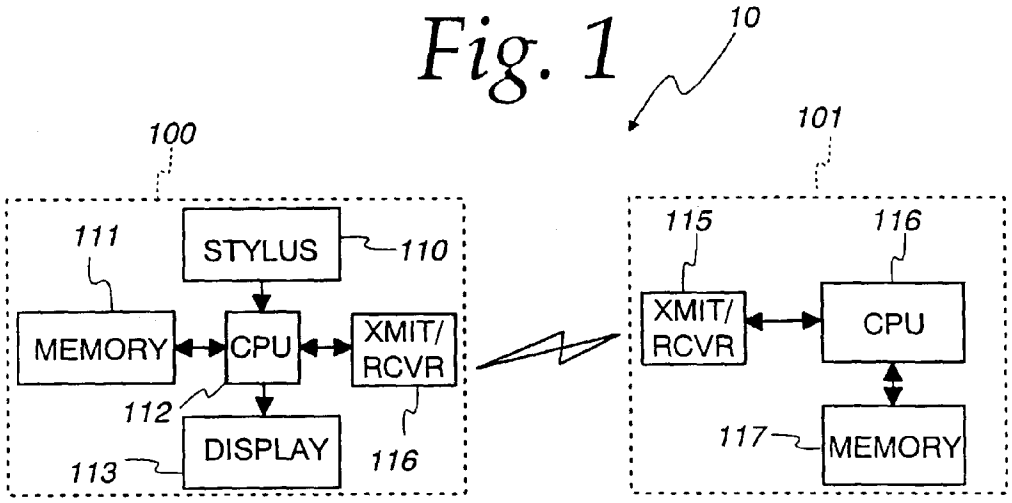


Fig. 2

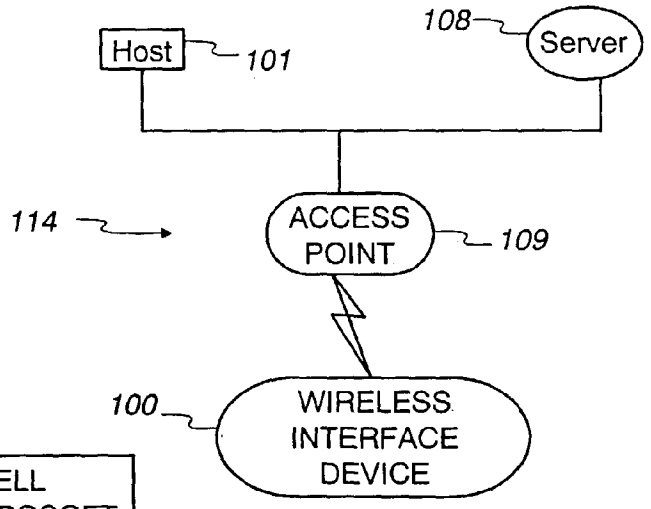
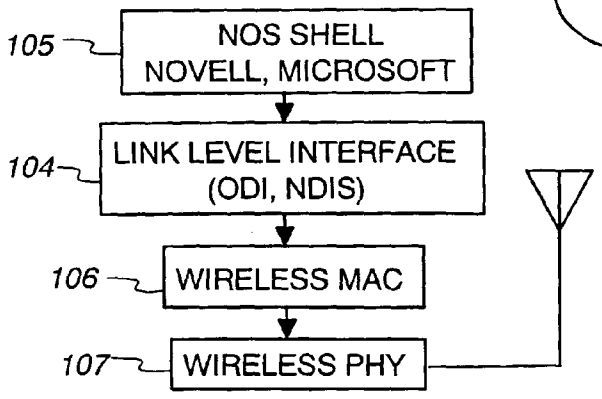


Fig. 3



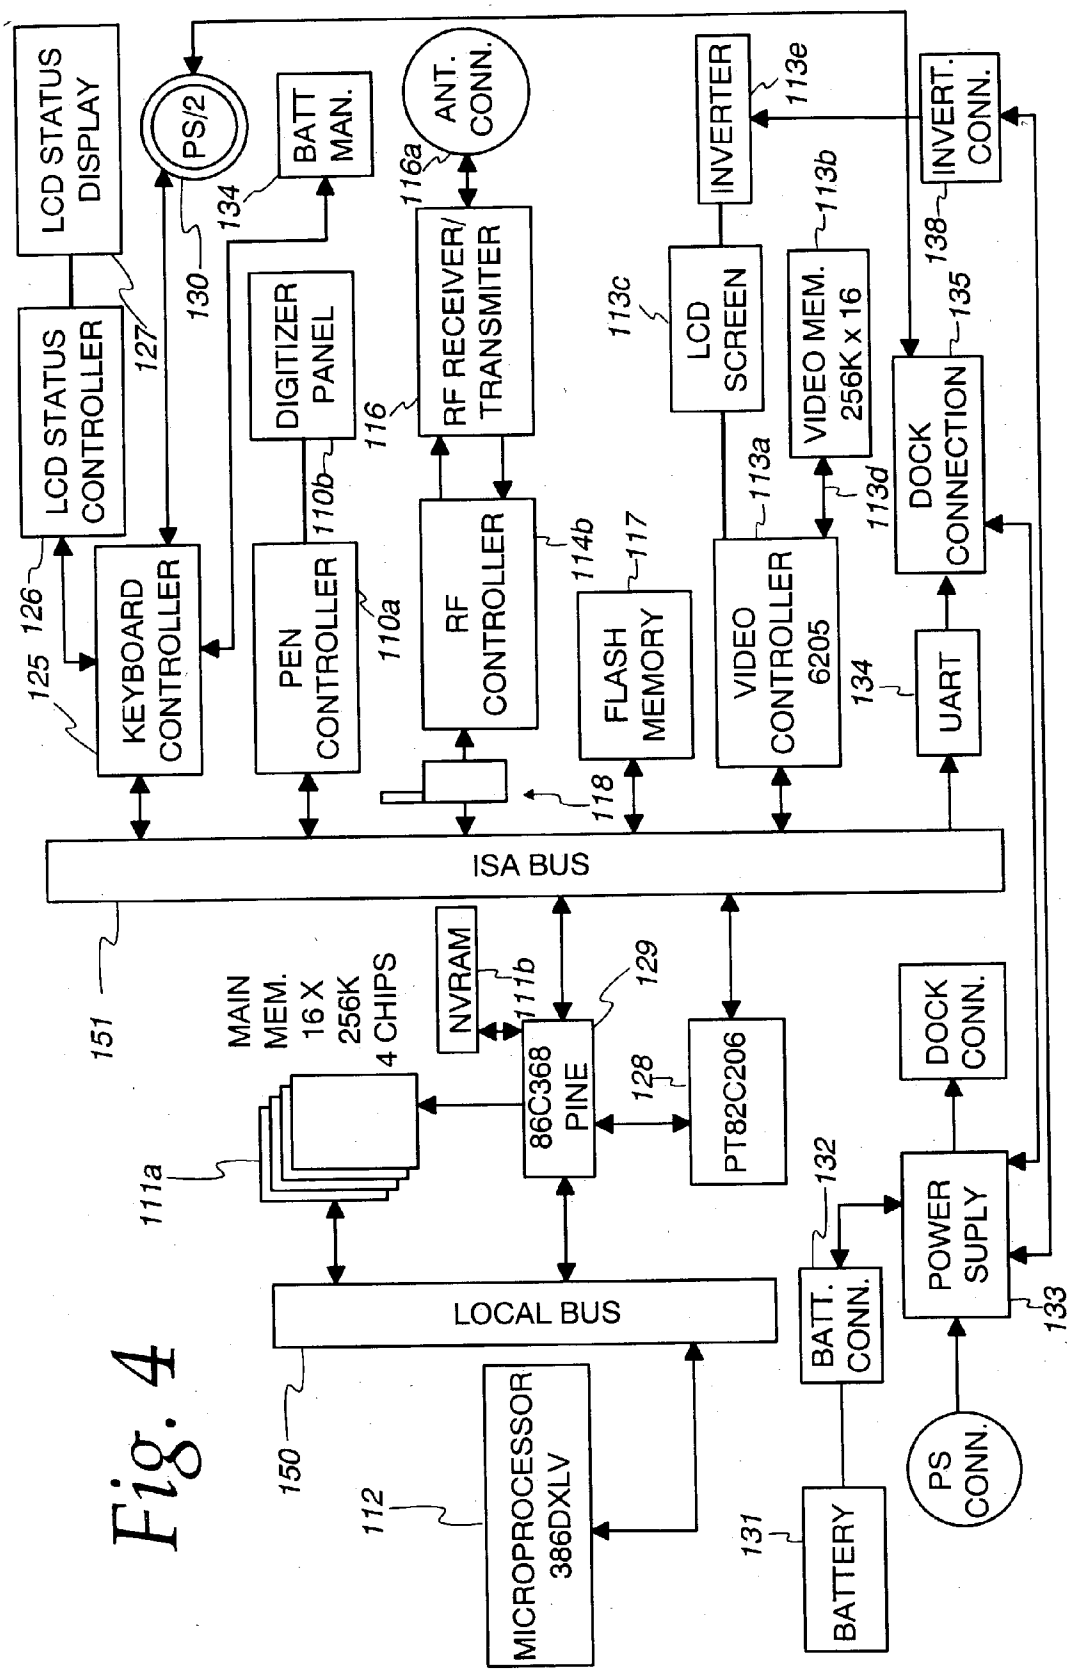

LCD STATUS DISPLAY
LCD STATUS CONTROLLER
KEYBOARD CONTROLLER
PS/2
BATT MAN.
ANT. CONN.
DIGITIZER PANEL
PEN CONTROLLER
RF RECEIVER/ TRANSMITER
RF CONTROLLER
FLASH MEMORY
INVERTER
LCD SCREEN
VIDEO MEM. 256K x 16
VIDEO CONTROLLER 6205
INVERT. CONN.
DOCK CONNECTION
UART
ISA BUS
NVRAM
MAIN MEM. 16 X 256K 4 CHIPS
86C368 PINE
PT82C206
DOCK CONN.
POWER SUPLY
LOCAL BUS
BATT. CONN.
PS CONN.
MICROPROCESSOR 386DXLV
BATTERY
125
126
127
130
134
116a
116
110b
110a
114b
117
118
113c
113a
113b
113d
113e
138
135
134
151
111b
129
128
132
111a
150
112
131
133

Fig. 4

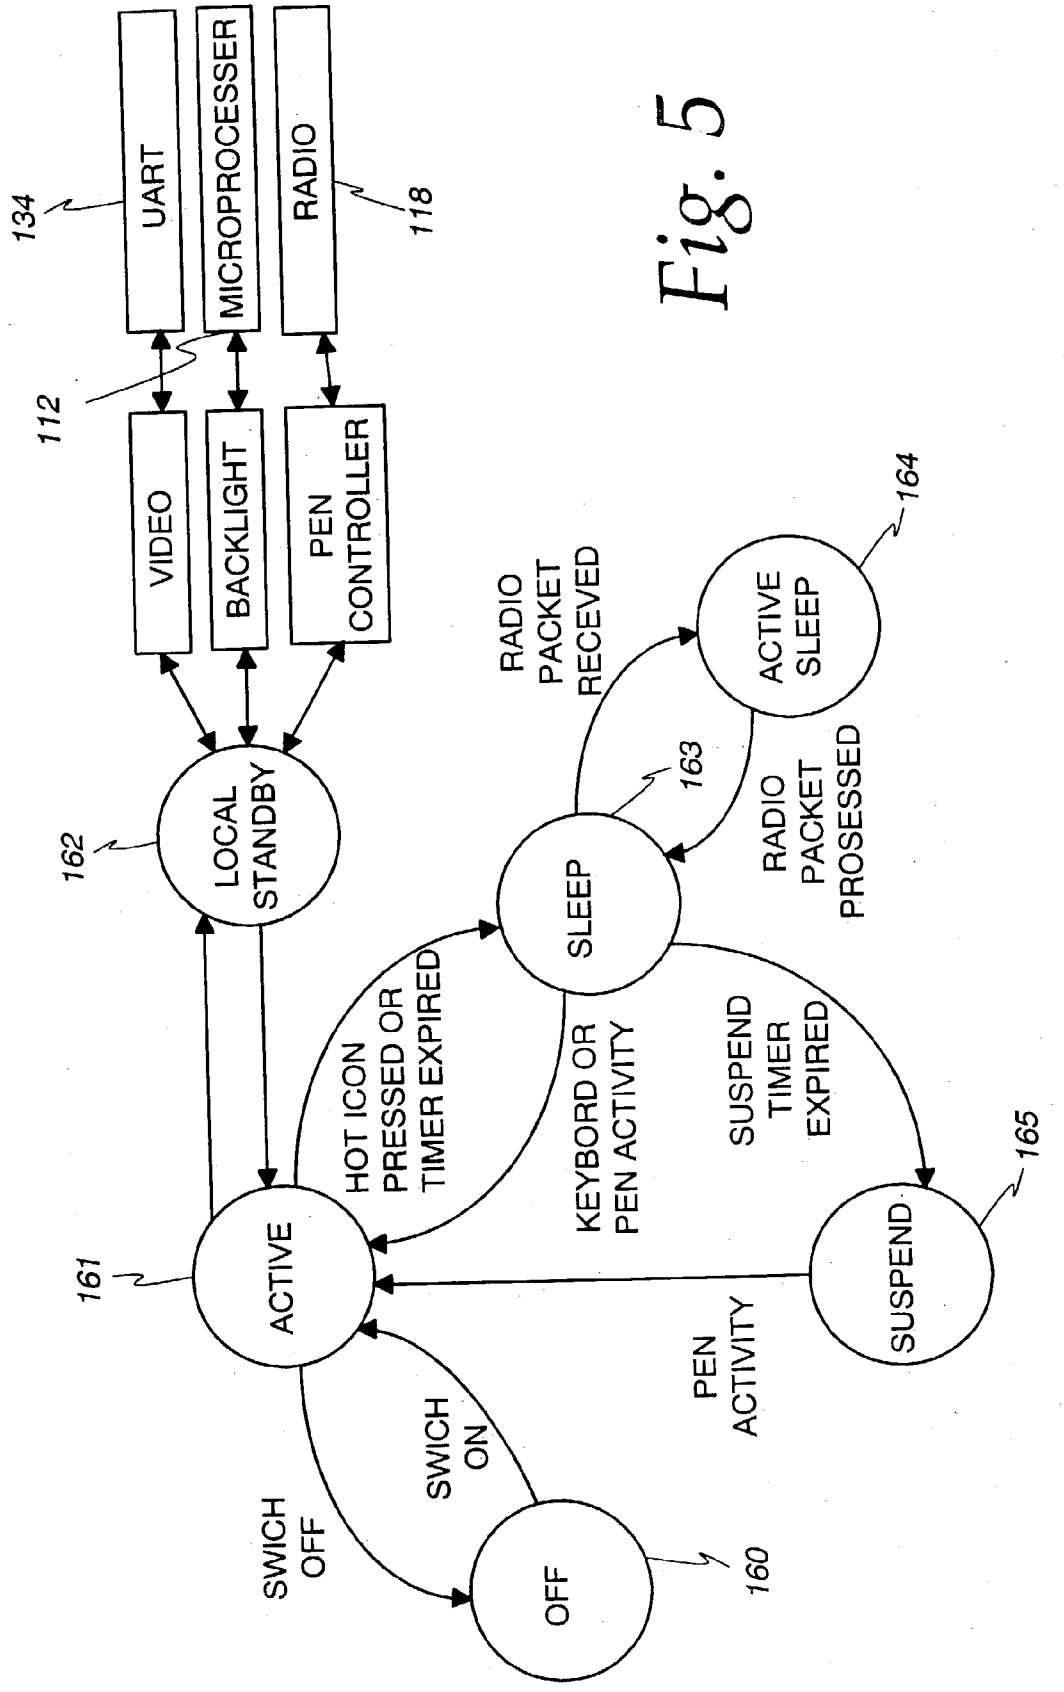

UART
MICROPROCESSER
RADIO
134
118
112
VIDEO
BACKLIGHT
PEN CONTROLLER
LOCAL STANDBY
162
ACTIVE
161
SLEEP
163
ACTIVE SLEEP
164
SUSPEND
165
OFF
160
HOT ICON PRESSED OR TIMER EXPIRED
KEYBORD OR PEN ACTIVITY
SUSPEND TIMER EXPIRED
RADIO PACKET RECEVED
RADIO PACKET PROSESSED
SWICH ON
SWICH OFF
PEN ACTIVITY

Fig. 5

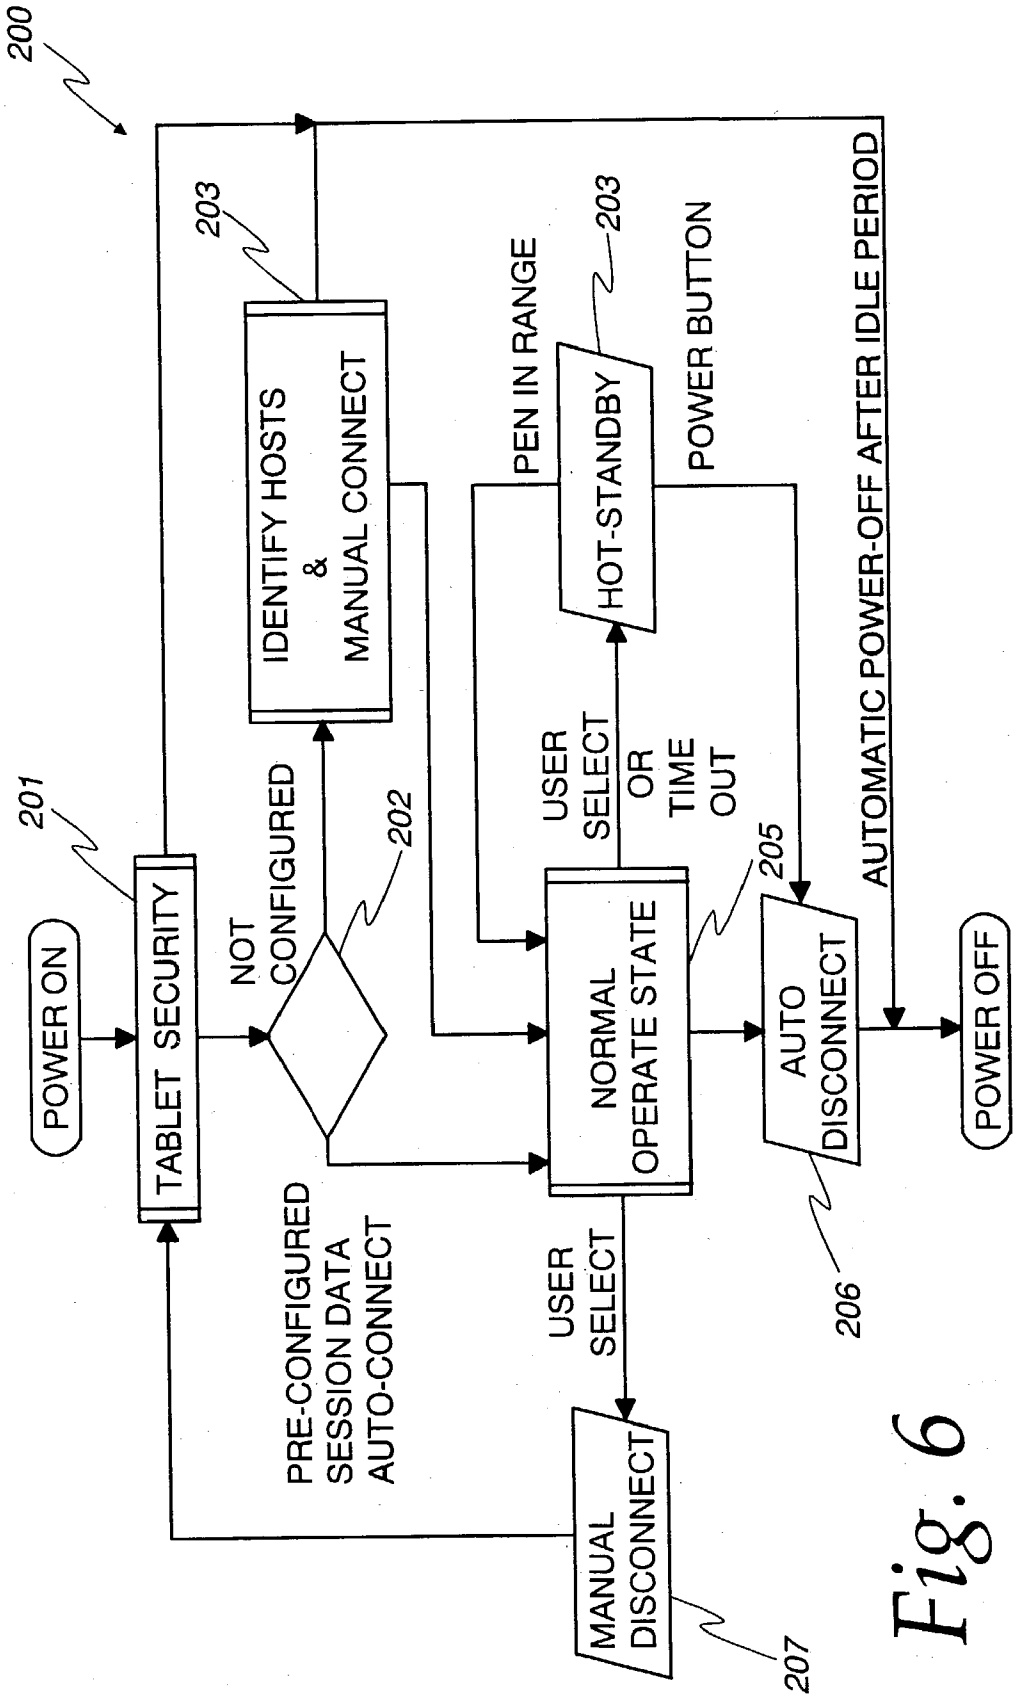

200
POWER ON
201
TABLET SECURITY
NOT CONFIGURED
202
IDENTIFY HOSTS & MANUAL CONNECT
203
PRE-CONFIGURED SESSION DATA AUTO-CONNECT
PEN IN RANGE
HOT-STANDBY
203
POWER BUTTON
USER SELECT OR TIME OUT
NORMAL OPERATE STATE
205
AUTO DISCONNECT
206
AUTOMATIC POWER-OFF AFTER IDLE PERIOD
POWER OFF
USER SELECT
MANUAL DISCONNECT
207

Fig. 6

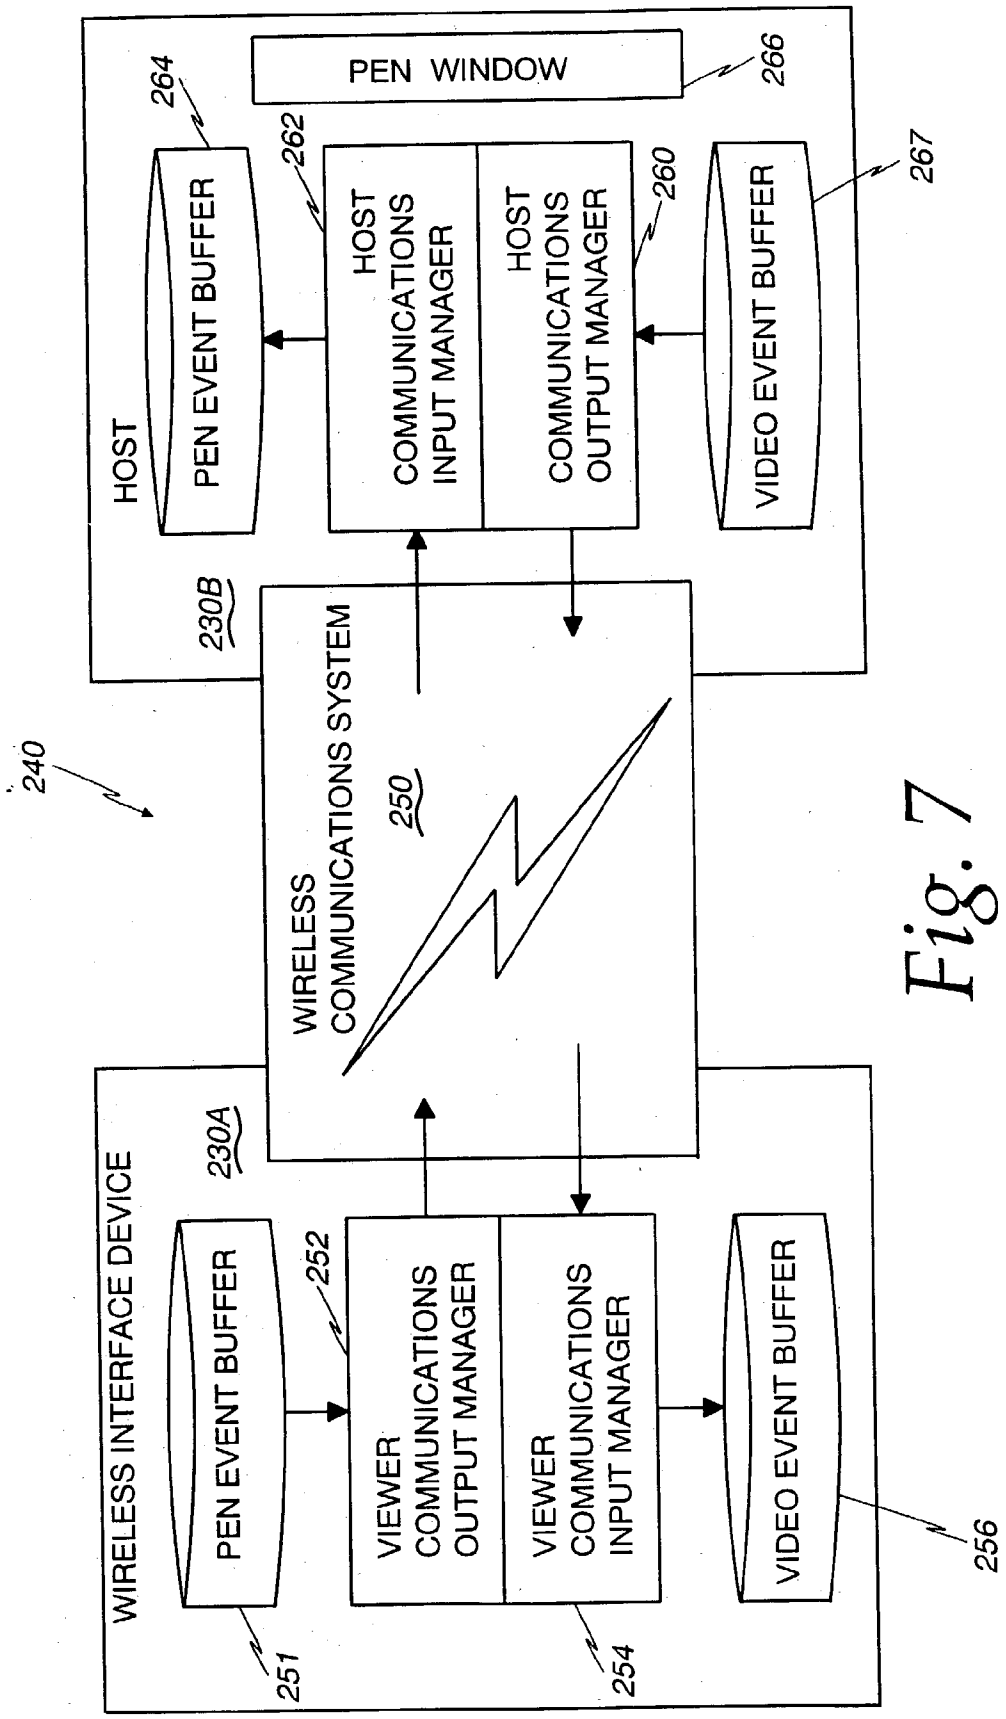

240
HOST
PEN EVENT BUFFER
264
PEN WINDOW
266
262
HOST COMMUNICATIONS INPUT MANAGER
HOST COMMUNICATIONS OUTPUT MANAGER
260
VIDEO EVENT BUFFER
267
230B
WIRELESS COMMUNICATIONS SYSTEM
250
WIRELESS INTERFACE DEVICE
230A
PEN EVENT BUFFER
252
VIEWER COMMUNICATIONS OUTPUT MANAGER
VIEWER COMMUNICATIONS INPUT MANAGER
VIDEO EVENT BUFFER
251
254
256

Fig. 7

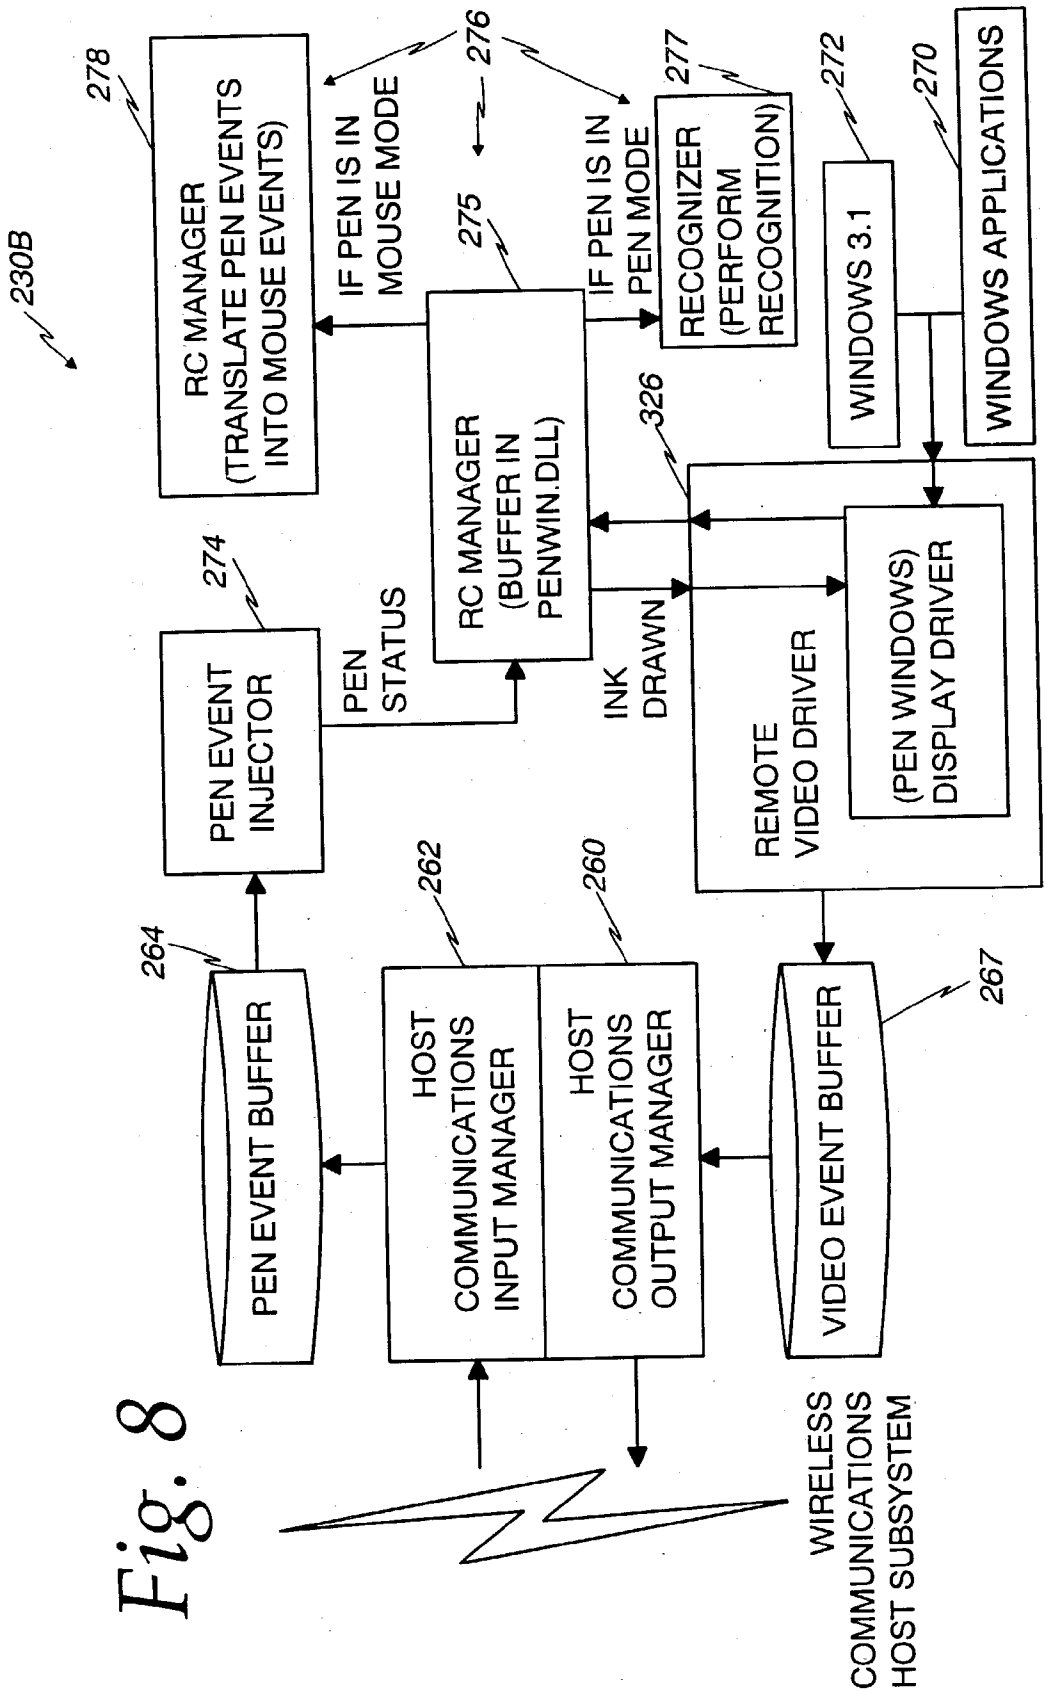

230B
278
RC MANAGER
(TRANSLATE PEN EVENTS
INTO MOUSE EVENTS)
IF PEN IS IN
MOUSE MODE
276
IF PEN IS IN
PEN MODE
277
RECOGNIZER
(PERFORM
RECOGNITION)
272
WINDOWS 3.1
270
WINDOWS APPLICATIONS
275
RC MANAGER
(BUFFER IN
PENWIN.DLL)
326
274
PEN EVENT
INJECTOR
PEN
STATUS
INK
DRAWN
REMOTE
VIDEO DRIVER
(PEN WINDOWS)
DISPLAY DRIVER
262
260
264
HOST
COMMUNICATIONS
INPUT MANAGER
HOST
COMMUNICATIONS
OUTPUT MANAGER
PEN EVENT BUFFER
VIDEO EVENT BUFFER
267
WIRELESS
COMMUNICATIONS
HOST SUBSYSTEM

Fig. 8

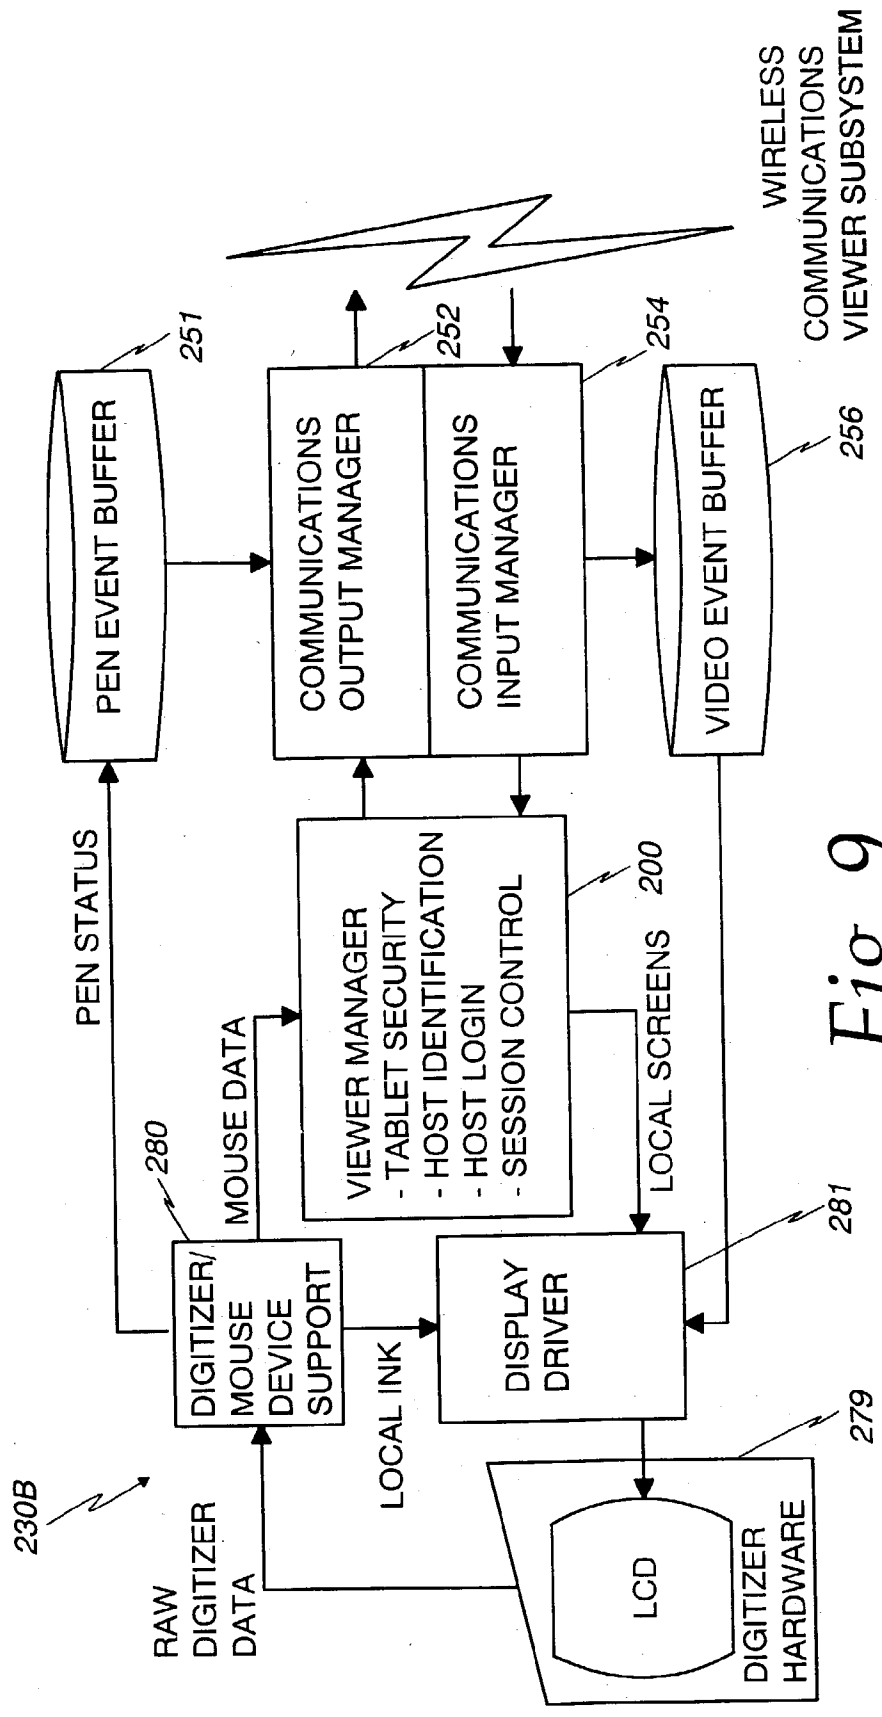

WIRELESS COMMUNICATIONS VIEWER SUBSYSTEM
251
PEN EVENT BUFFER
252
COMMUNICATIONS OUTPUT MANAGER
254
COMMUNICATIONS INPUT MANAGER
256
VIDEO EVENT BUFFER
PEN STATUS
MOUSE DATA
280
VIEWER MANAGER
- TABLET SECURITY
- HOST IDENTIFICATION
- HOST LOGIN
- SESSION CONTROL
200
LOCAL SCREENS
DIGITIZER/ MOUSE DEVICE SUPPORT
LOCAL INK
DISPLAY DRIVER
281
230B
RAW DIGITIZER DATA
LCD
DIGITIZER HARDWARE
279

Fig. 9

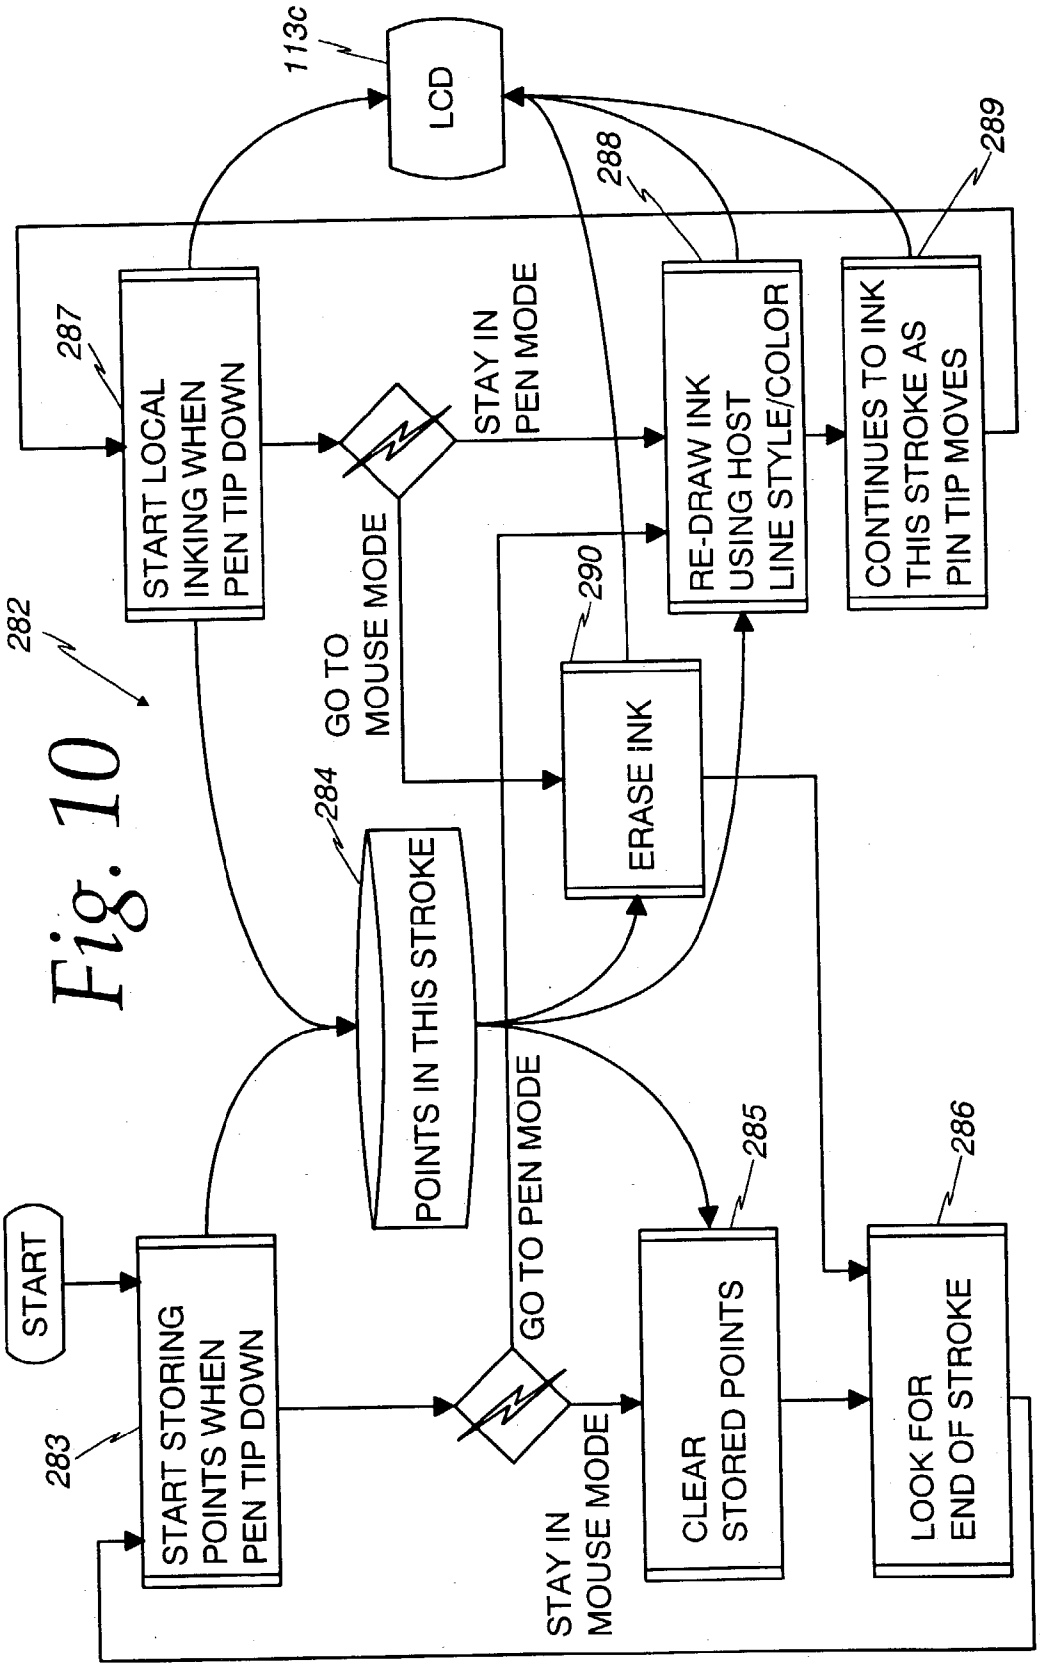

113c
LCD
288
289
287
START LOCAL INKING WHEN PEN TIP DOWN
STAY IN PEN MODE
RE-DRAW INK USING HOST LINE STYLE/COLOR
CONTINUES TO INK THIS STROKE AS PIN TIP MOVES
282
GO TO MOUSE MODE
290
ERASE INK
284
POINTS IN THIS STROKE
START
283
START STORING POINTS WHEN PEN TIP DOWN
GO TO PEN MODE
285
CLEAR STORED POINTS
286
LOOK FOR END OF STROKE
STAY IN MOUSE MODE

Fig. 10

Fig. 11a

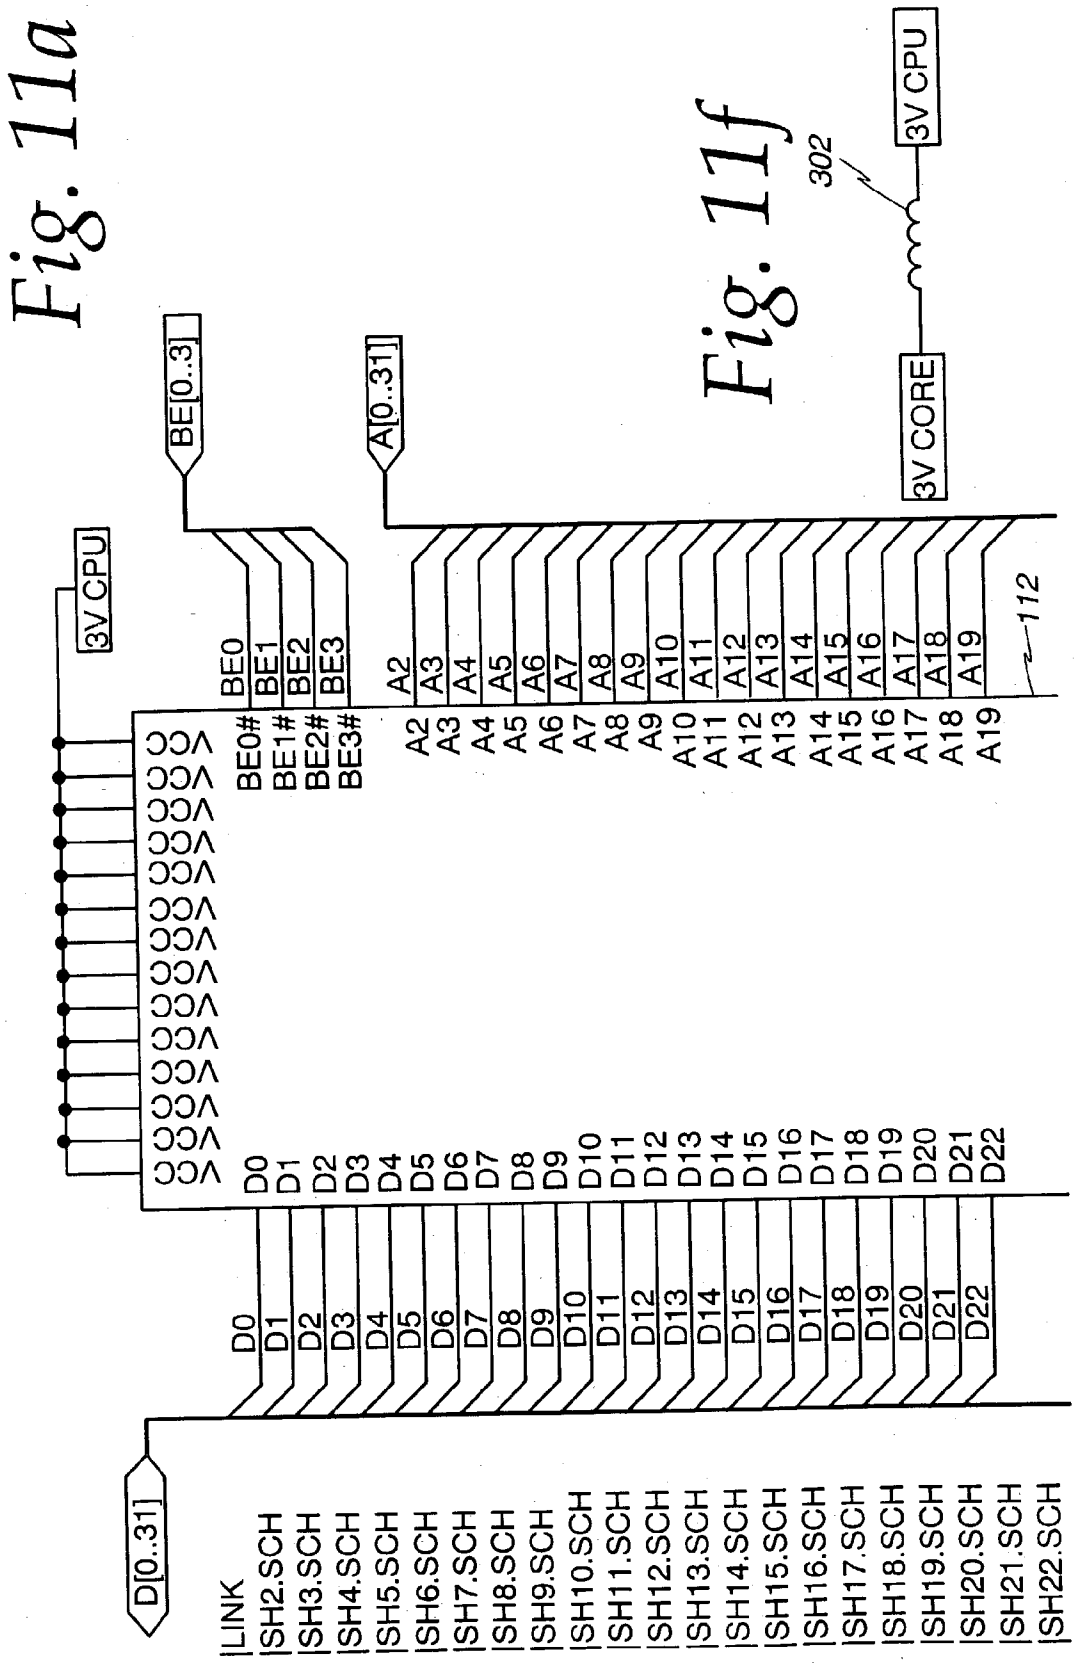


Fig. 11f

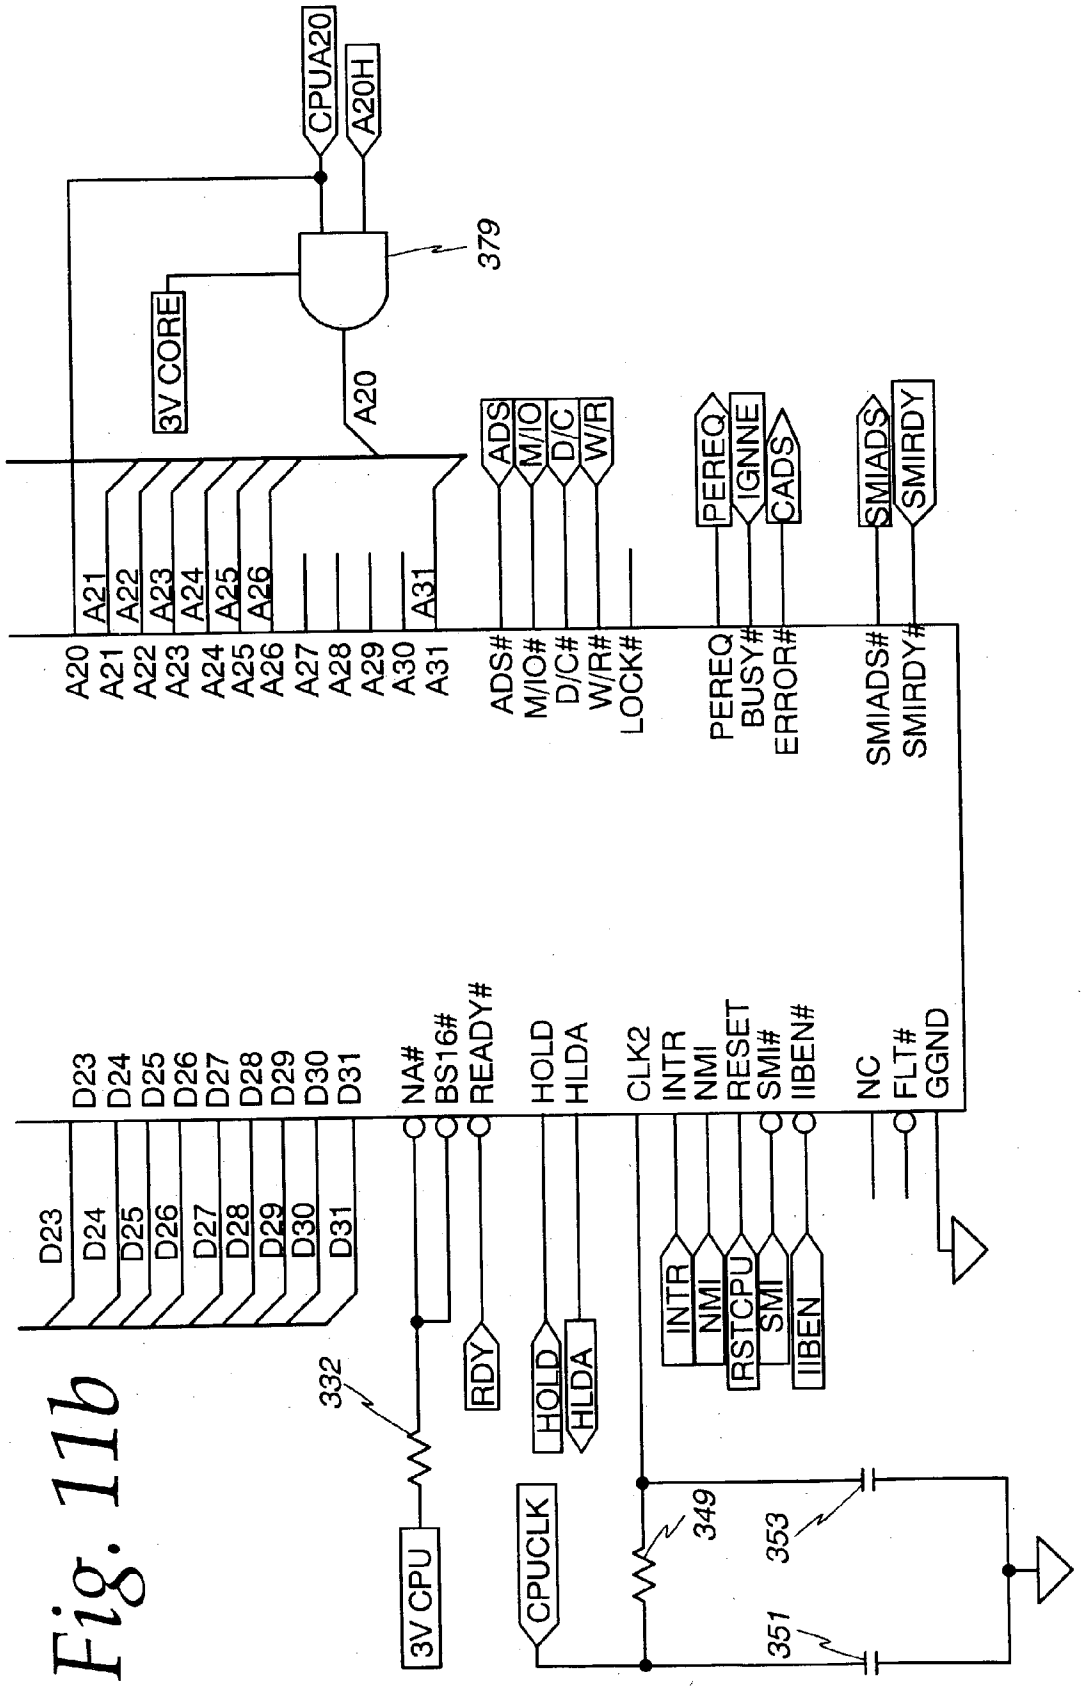

CPUA20
A20H
379
3V CORE
A20
A21
A22
A23
A24
A25
A26
A31
ADS
M/IO
D/C
W/R
PEREQ
IGNNE
CADS
SMIADS
SMIRDY
A20
A21
A22
A23
A24
A25
A26
A27
A28
A29
A30
A31
ADS#
M/IO#
D/C#
W/R#
LOCK#
PEREQ
BUSY#
ERROR#
SMIADS#
SMIRDY#
D23
D24
D25
D26
D27
D28
D29
D30
D31
NA#
BS16#
READY#
HOLD
HLDA
CLK2
INTR
NMI
RESET
SMI#
IIBEN#
NC
FLT#
GGND
D23
D24
D25
D26
D27
D28
D29
D30
D31
332
RDY
HOLD
HLDA
INTR
NMI
RSTCPU
SMI
IIBEN
3V CPU
CPUCLK
349
353
351

Fig. 11b

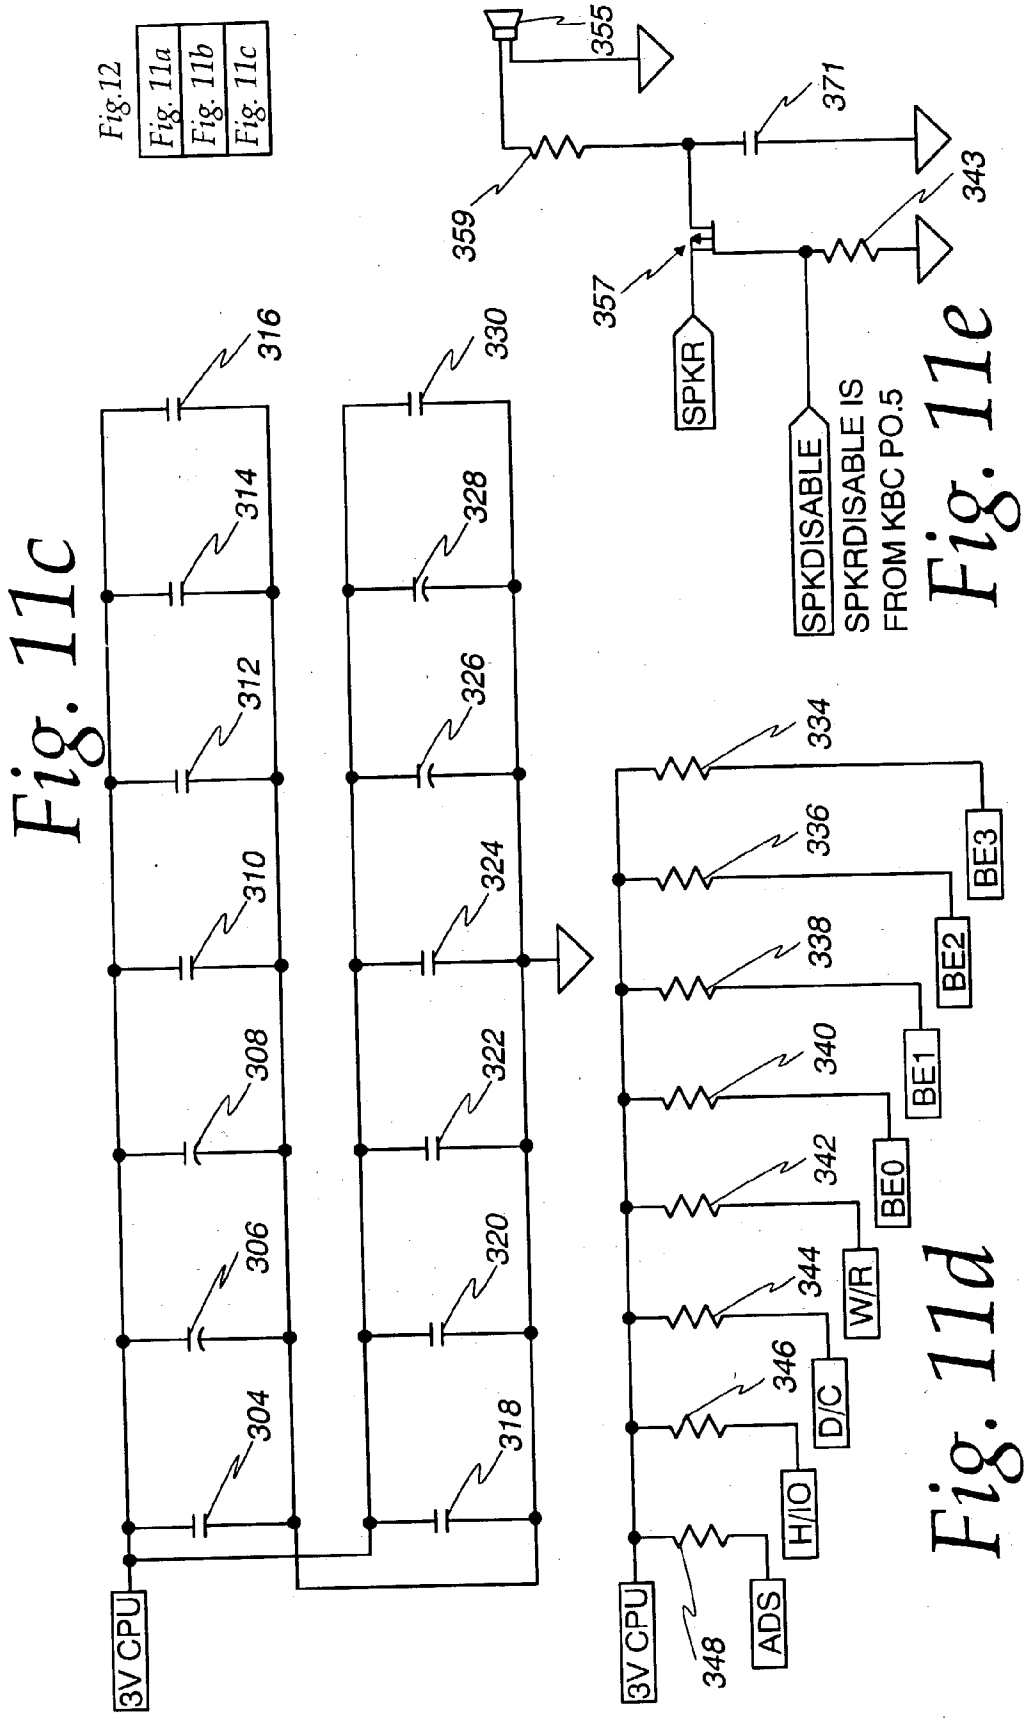

Fig.12
Fig. 11a
Fig. 11b
Fig. 11c
Fig. 11c
316
314
312
310
308
306
304
330
328
326
324
322
320
318
3V CPU
Fig. 11e
355
371
359
343
357
SPKR
SPKDISABLE
SPKRDISABLE IS FROM KBC PO.5
Fig. 11d
334
336
338
340
342
344
346
348
BE3
BE2
BE1
BE0
W/R
D/C
H/IO
ADS
3V CPU

Fig. 12a

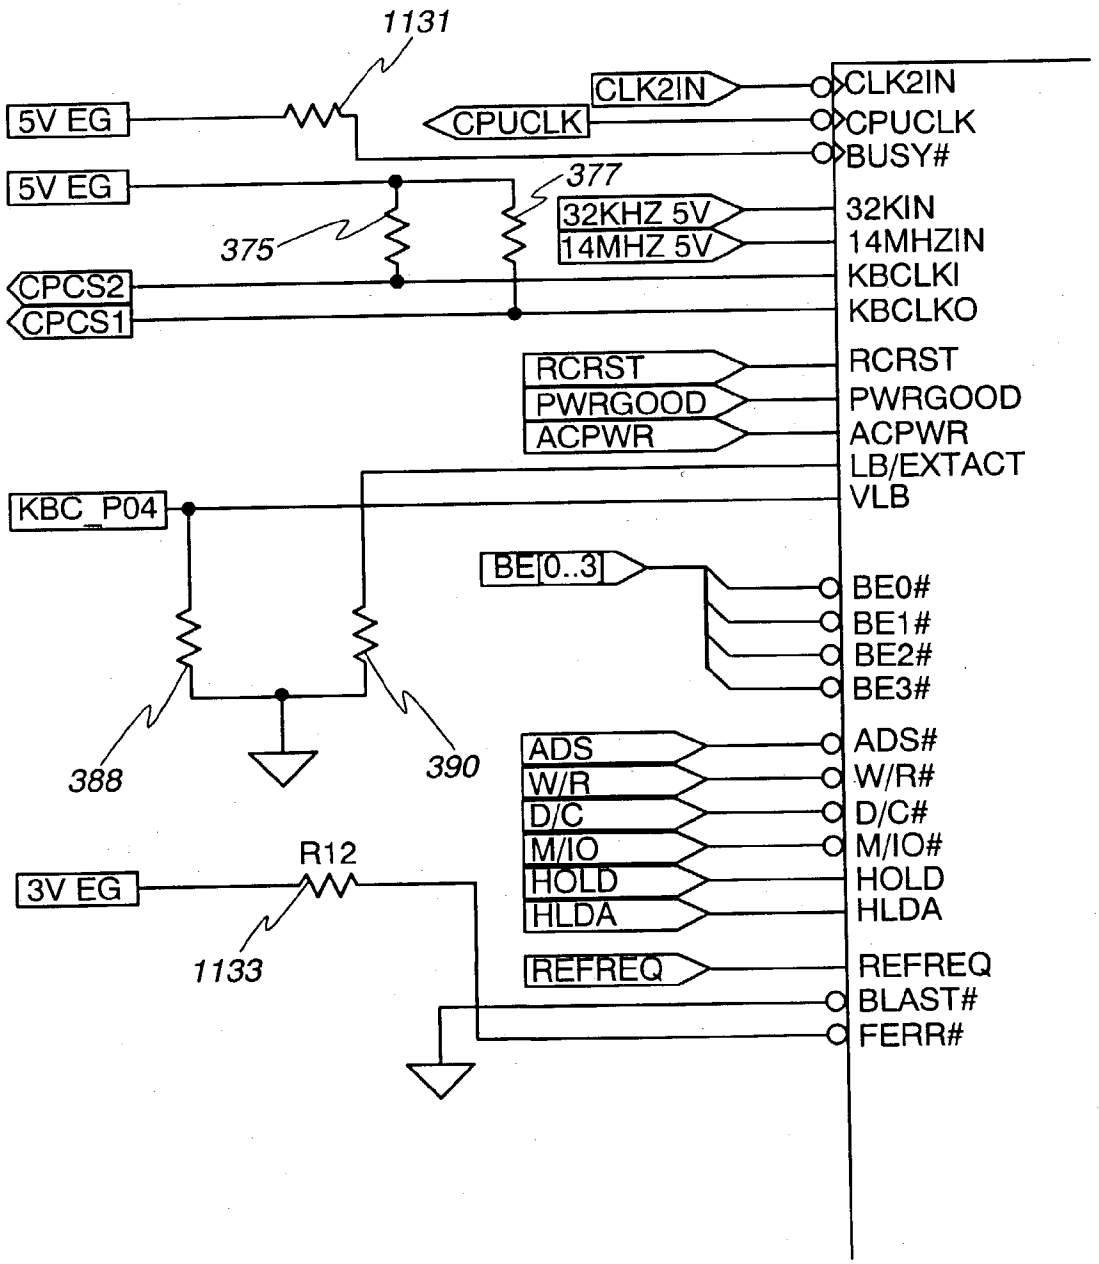

1131
5V EG
CLK2IN
CPUCLK
BUSY#
5V EG
377
375
32KHZ 5V
14MHZ 5V
32KIN
14MHZIN
CPCS2
CPCS1
KBCLKI
KBCLKO
RCRST
PWRGOOD
ACPWR
LB/EXTACT
VLB
KBC_P04
BE[0..3]
BE0#
BE1#
BE2#
BE3#
388
390
ADS
W/R
D/C
M/IO
HOLD
HLDA
ADS#
W/R#
D/C#
M/IO#
HOLD
HLDA
R12
3V EG
1133
REFREQ
BLAST#
FERR#

Fig. 12b

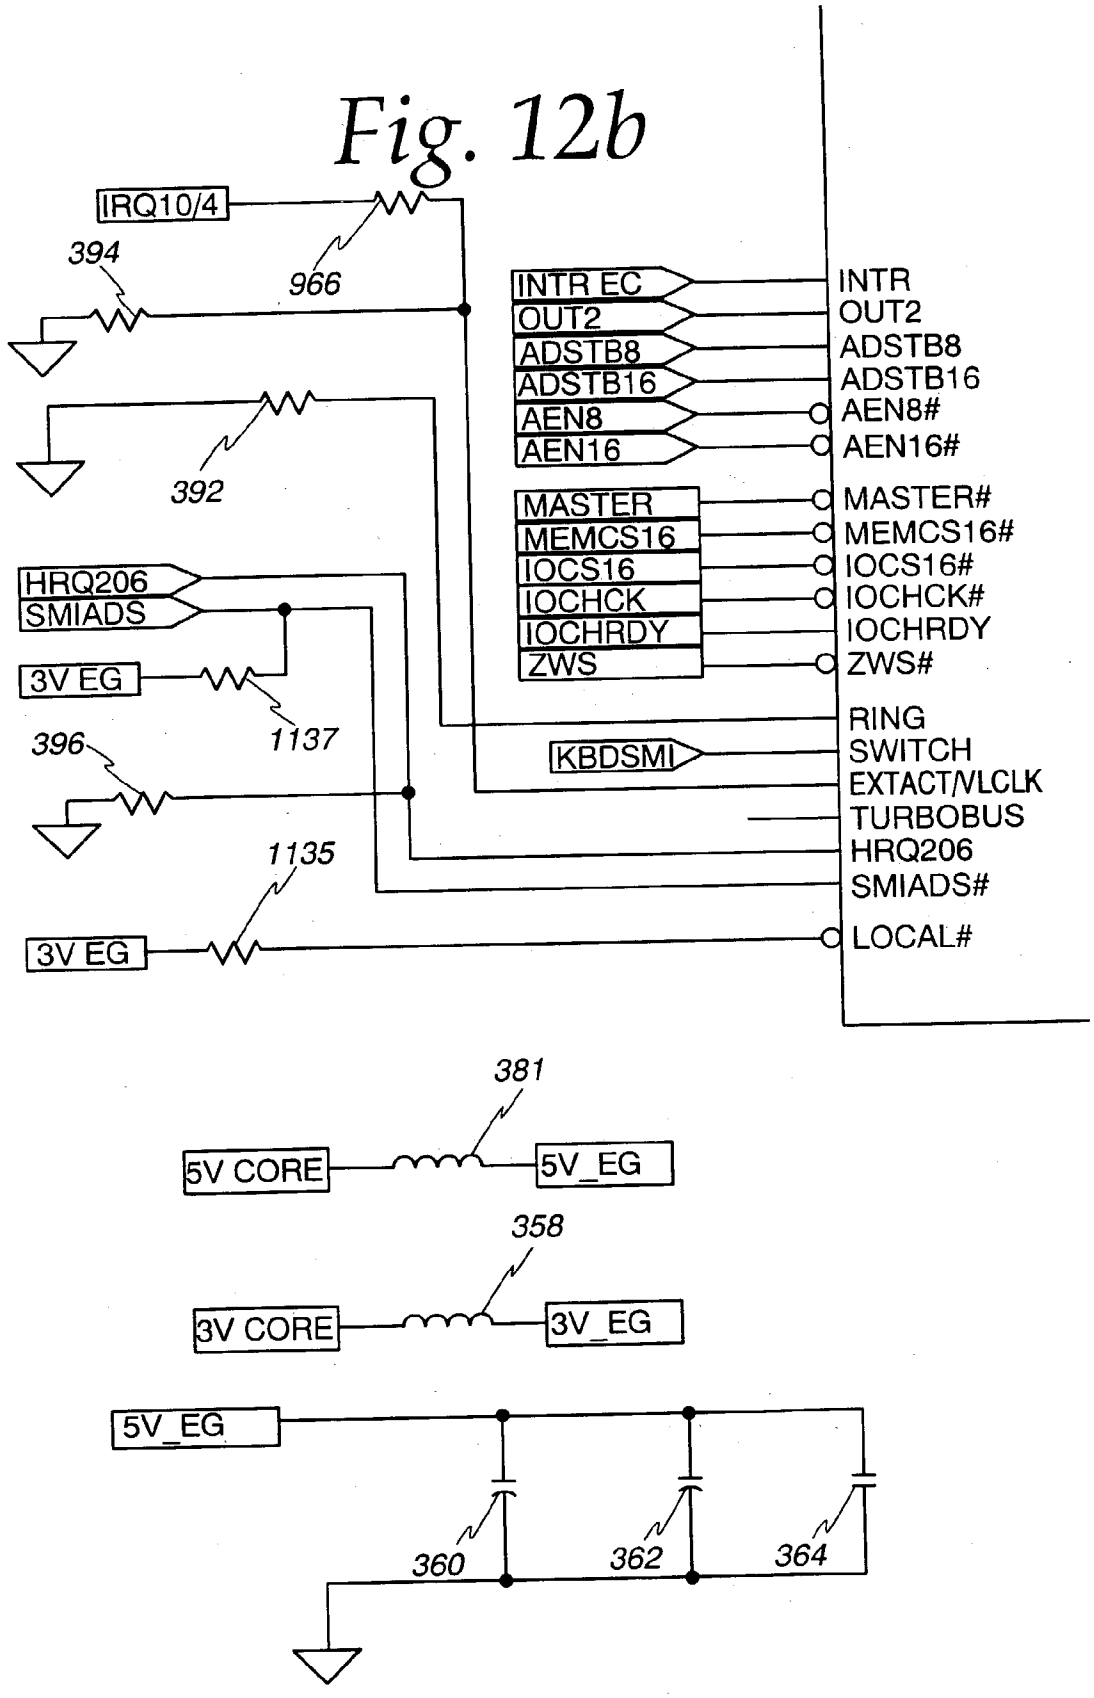

IRQ10/4
394
966
392
HRQ206
SMIADS
3V EG
1137
396
1135
3V EG
INTR EC
OUT2
ADSTB8
ADSTB16
AEN8
AEN16
MASTER
MEMCS16
IOCS16
IOCHCK
IOCHRDY
ZWS
KBDSMI
INTR
OUT2
ADSTB8
ADSTB16
AEN8#
AEN16#
MASTER#
MEMCS16#
IOCS16#
IOCHCK#
IOCHRDY
ZWS#
RING
SWITCH
EXTACT/VLCLK
TURBOBUS
HRQ206
SMIADS#
LOCAL#
381
5V CORE
5V_EG
358
3V CORE
3V_EG
5V_EG
360
362
364

Fig. 12c

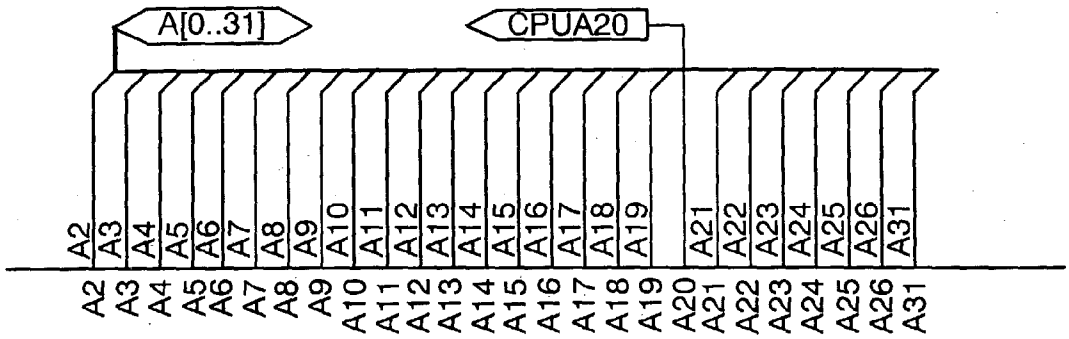

A[0..31]
CPUA20
A2 A3 A4 A5 A6 A7 A8 A9 A10 A11 A12 A13 A14 A15 A16 A17 A18 A19 A21 A22 A23 A24 A25 A26 A31
A2 A3 A4 A5 A6 A7 A8 A9 A10 A11 A12 A13 A14 A15 A16 A17 A18 A19 A20 A21 A22 A23 A24 A25 A26 A31

Fig. 12d

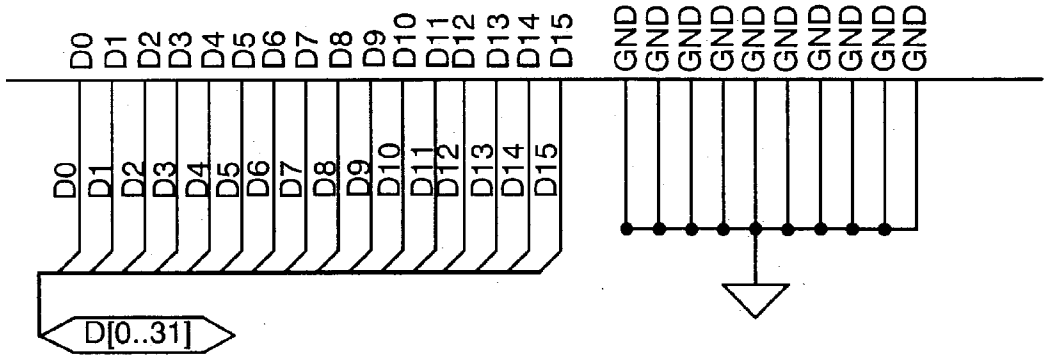


Fig. 12

Fig. 12a	*Fig. 12c*	*Fig. 12e*	*Fig. 12g*
Fig. 12b	*Fig. 12d*	*Fig. 12f*	*Fig. 12h*

Fig. 12e

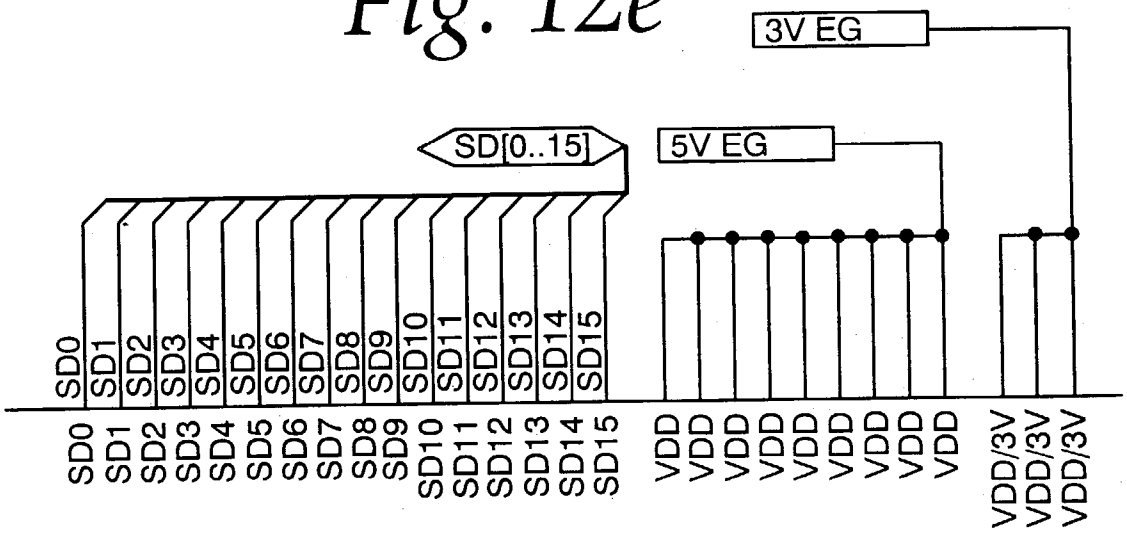

3V EG
SD[0..15]
5V EG
SD0
SD1
SD2
SD3
SD4
SD5
SD6
SD7
SD8
SD9
SD10
SD11
SD12
SD13
SD14
SD15
VDD
VDD
VDD
VDD
VDD
VDD
VDD
VDD
VDD/3V
VDD/3V
VDD/3V

Fig. 12f

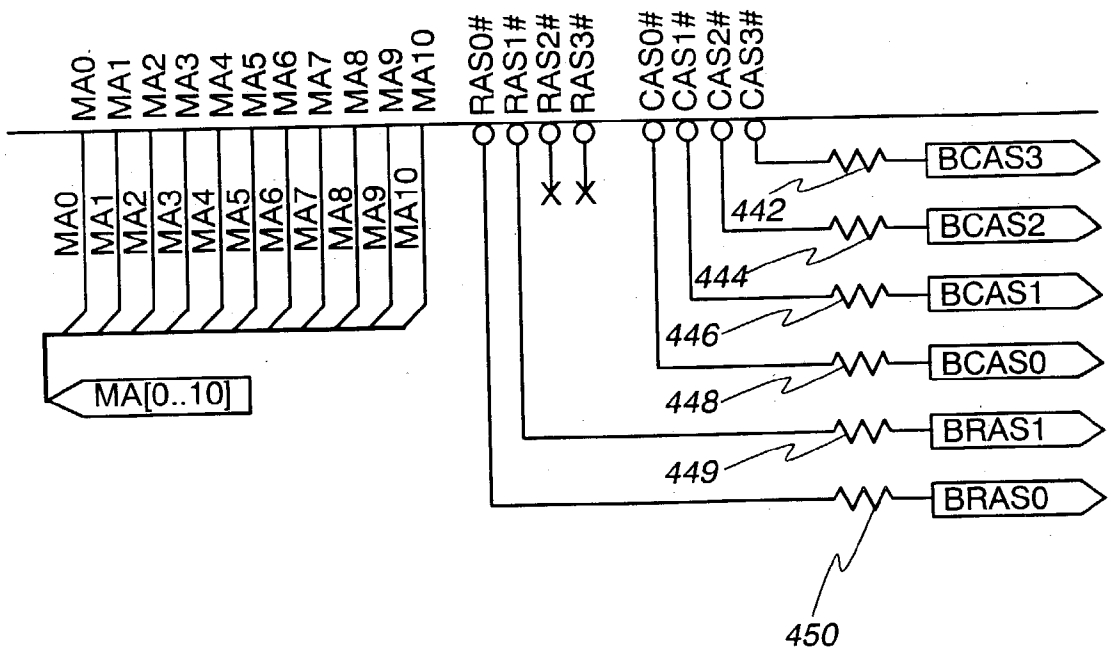
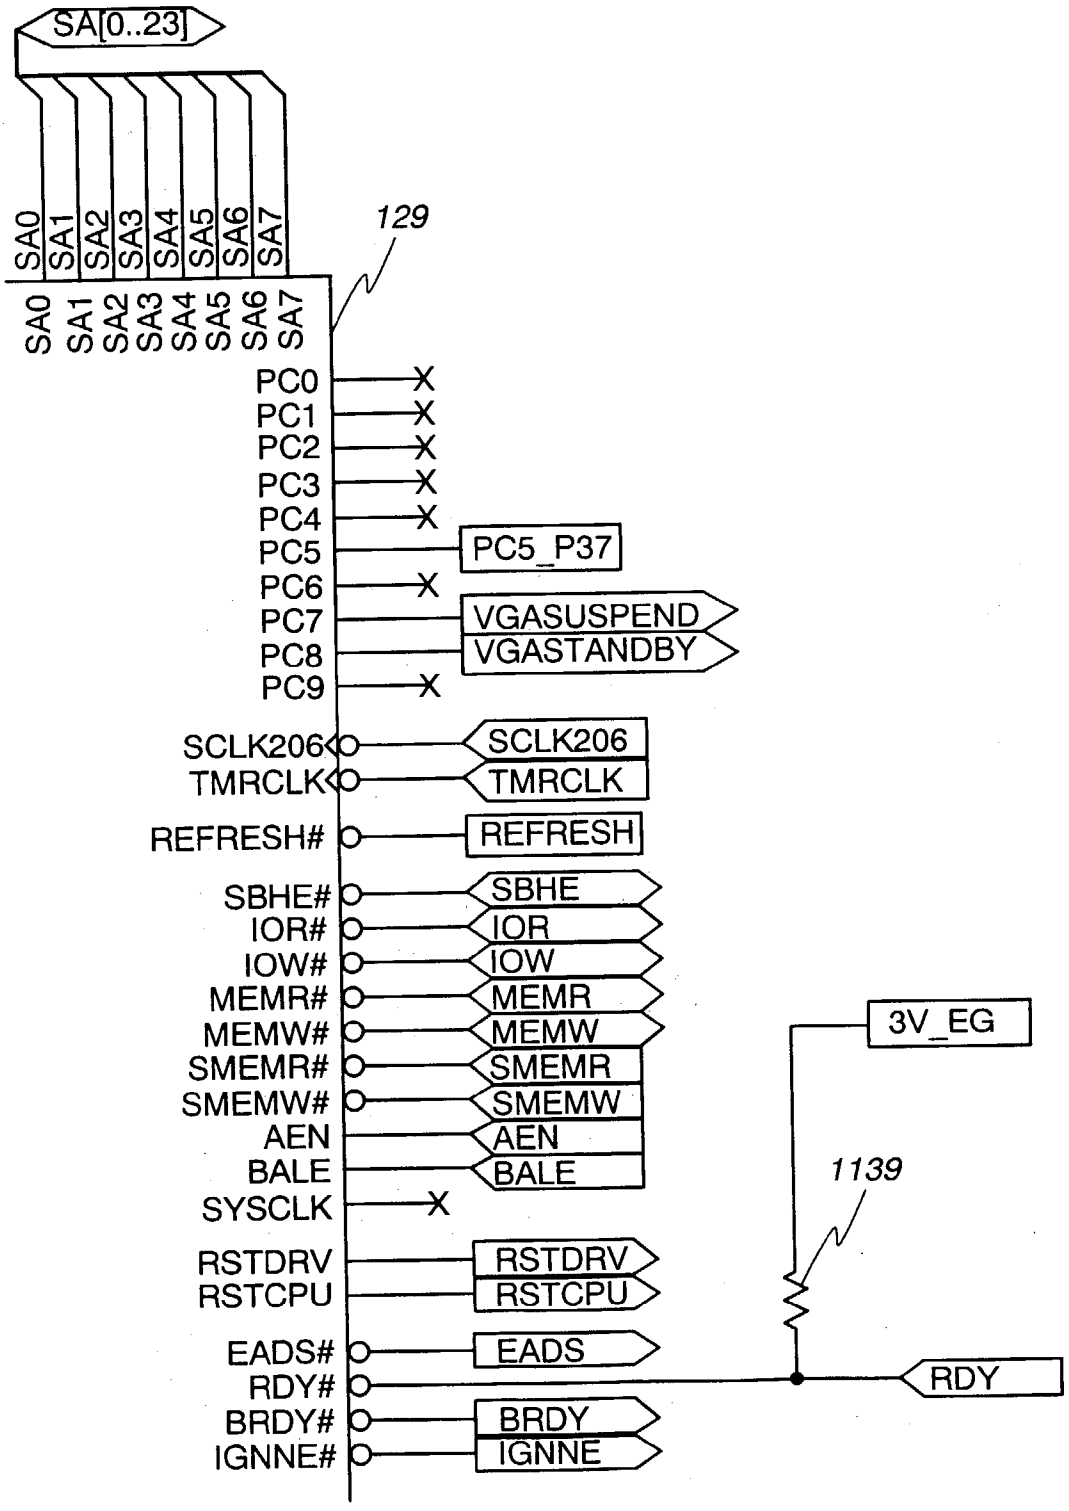

MA0
MA1
MA2
MA3
MA4
MA5
MA6
MA7
MA8
MA9
MA10
RAS0#
RAS1#
RAS2#
RAS3#
CAS0#
CAS1#
CAS2#
CAS3#
MA[0..10]
BCAS3
BCAS2
BCAS1
BCAS0
BRAS1
BRAS0
442
444
446
448
449
450

Fig. 12g


SA[0..23]
SA0
SA1
SA2
SA3
SA4
SA5
SA6
SA7
129
PC0
PC1
PC2
PC3
PC4
PC5
PC6
PC7
PC8
PC9
PC5_P37
VGASUSPEND
VGASTANDBY
SCLK206
TMRCLK
REFRESH#
SBHE#
IOR#
IOW#
MEMR#
MEMW#
SMEMR#
SMEMW#
AEN
BALE
SYSCLK
RSTDRV
RSTCPU
EADS#
RDY#
BRDY#
IGNNE#
SCLK206
TMRCLK
REFRESH
SBHE
IOR
IOW
MEMR
MEMW
SMEMR
SMEMW
AEN
BALE
RSTDRV
RSTCPU
EADS
BRDY
IGNNE
3V_EG
1139
RDY

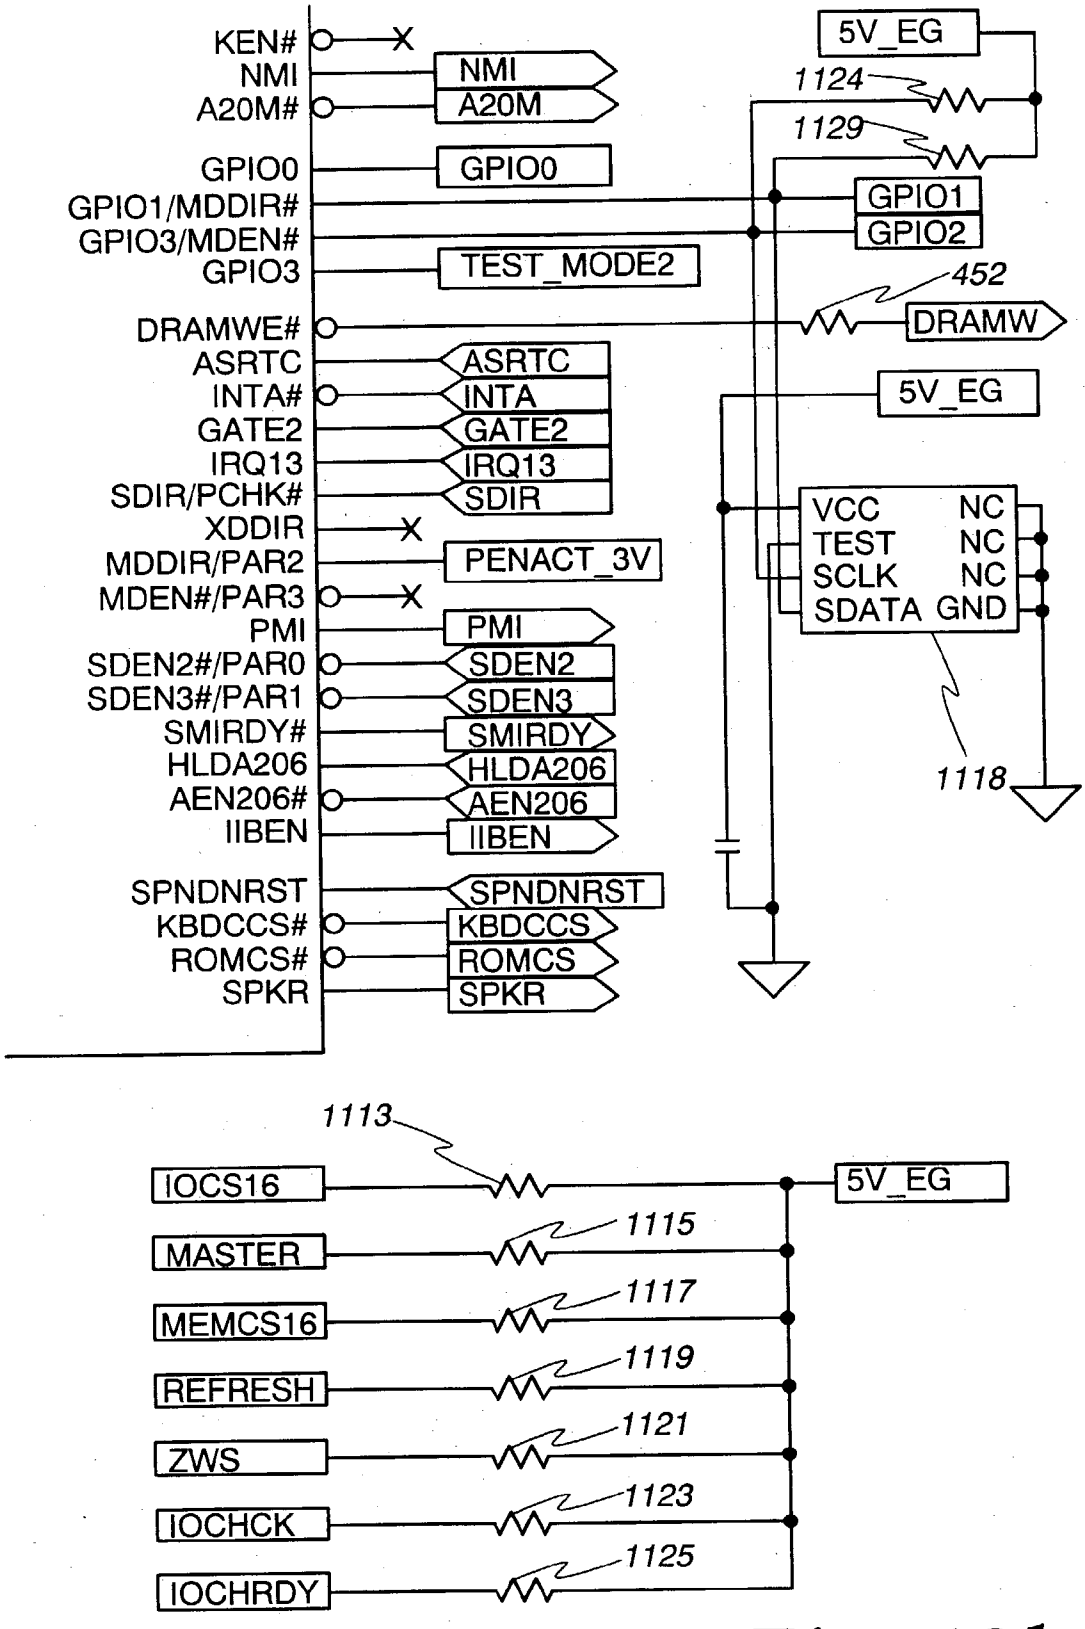

KEN#
NMI
A20M#
GPIO0
GPIO1/MDDIR#
GPIO3/MDEN#
GPIO3
DRAMWE#
ASRTC
INTA#
GATE2
IRQ13
SDIR/PCHK#
XDDIR
MDDIR/PAR2
MDEN#/PAR3
PMI
SDEN2#/PAR0
SDEN3#/PAR1
SMIRDY#
HLDA206
AEN206#
IIBEN
SPNDNRST
KBDCCS#
ROMCS#
SPKR
NMI
A20M
GPIO0
TEST_MODE2
ASRTC
INTA
GATE2
IRQ13
SDIR
PENACT_3V
PMI
SDEN2
SDEN3
SMIRDY
HLDA206
AEN206
IIBEN
SPNDNRST
KBDCCS
ROMCS
SPKR
5V_EG
1124
1129
GPIO1
GPIO2
452
DRAMW
5V_EG
VCC
TEST
SCLK
SDATA
NC
NC
NC
GND
1118
1113
IOCS16
MASTER
MEMCS16
REFRESH
ZWS
IOCHCK
IOCHRDY
5V_EG
1115
1117
1119
1121
1123
1125

Fig. 12h

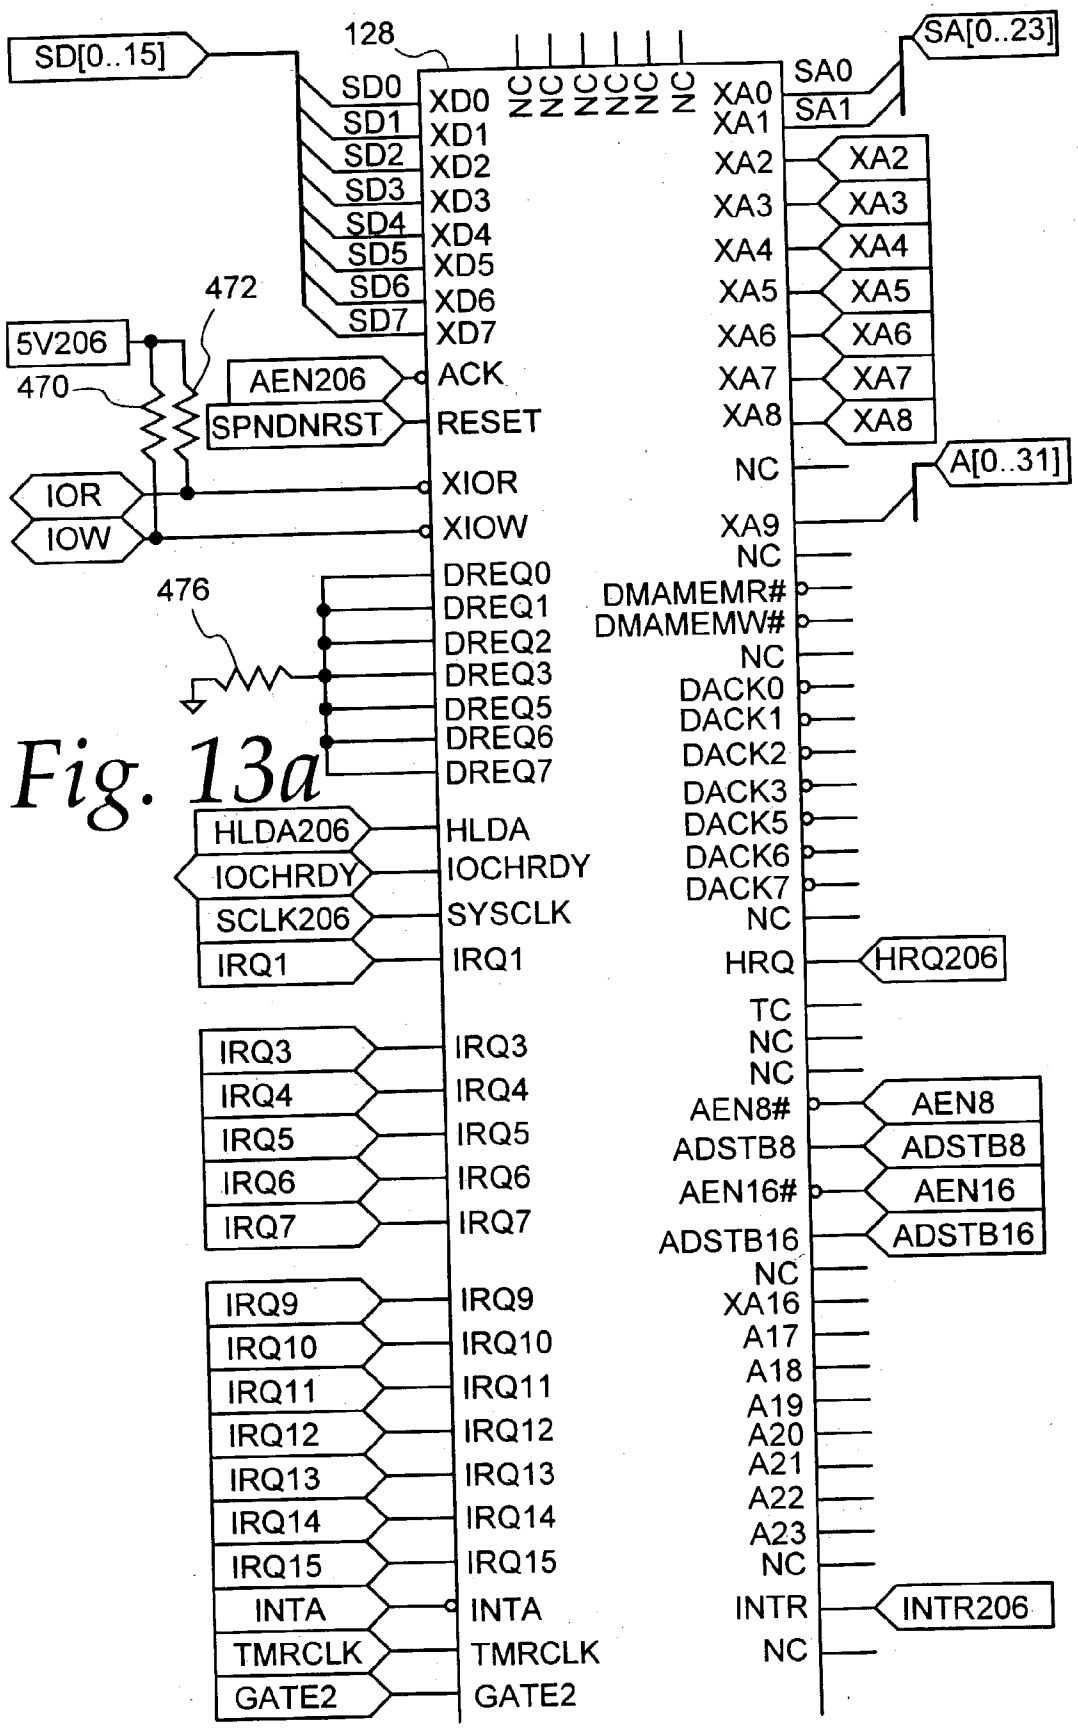

SD[0..15]
128
SD0
SD1
SD2
SD3
SD4
SD5
SD6
SD7
XD0
XD1
XD2
XD3
XD4
XD5
XD6
XD7
472
5V206
470
AEN206
SPNDNRST
ACK
RESET
IOR
IOW
XIOR
XIOW
476
DREQ0
DREQ1
DREQ2
DREQ3
DREQ5
DREQ6
DREQ7
HLDA206
IOCHRDY
SCLK206
IRQ1
HLDA
IOCHRDY
SYSCLK
IRQ1
IRQ3
IRQ4
IRQ5
IRQ6
IRQ7
IRQ3
IRQ4
IRQ5
IRQ6
IRQ7
IRQ9
IRQ10
IRQ11
IRQ12
IRQ13
IRQ14
IRQ15
INTA
TMRCLK
GATE2
IRQ9
IRQ10
IRQ11
IRQ12
IRQ13
IRQ14
IRQ15
INTA
TMRCLK
GATE2
SA[0..23]
SA0
SA1
XA0
XA1
XA2
XA3
XA4
XA5
XA6
XA7
XA8
XA2
XA3
XA4
XA5
XA6
XA7
XA8
A[0..31]
NC
XA9
NC
DMAMEMR#
DMAMEMW#
NC
DACK0
DACK1
DACK2
DACK3
DACK5
DACK6
DACK7
NC
HRQ
HRQ206
TC
NC
NC
AEN8#
ADSTB8
AEN16#
ADSTB16
AEN8
ADSTB8
AEN16
ADSTB16
NC
XA16
A17
A18
A19
A20
A21
A22
A23
NC
INTR
INTR206
NC

Fig. 13a

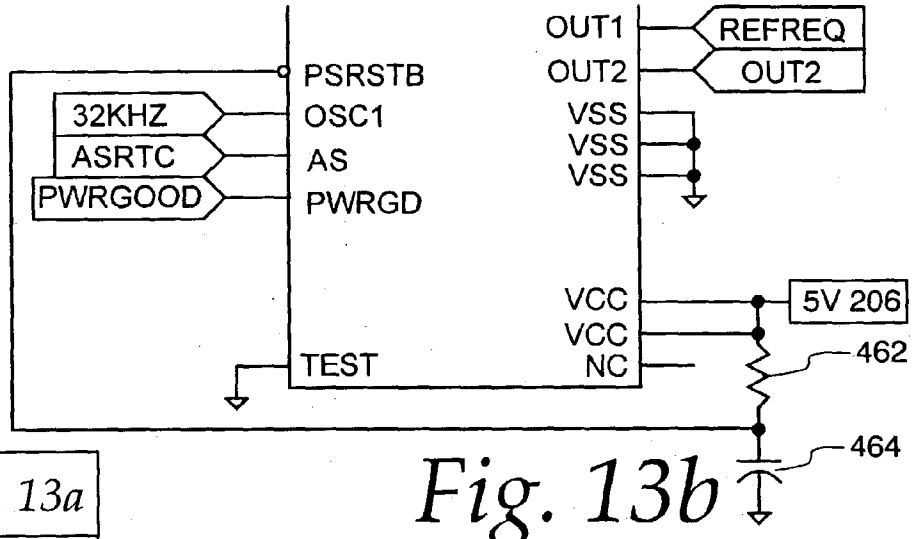
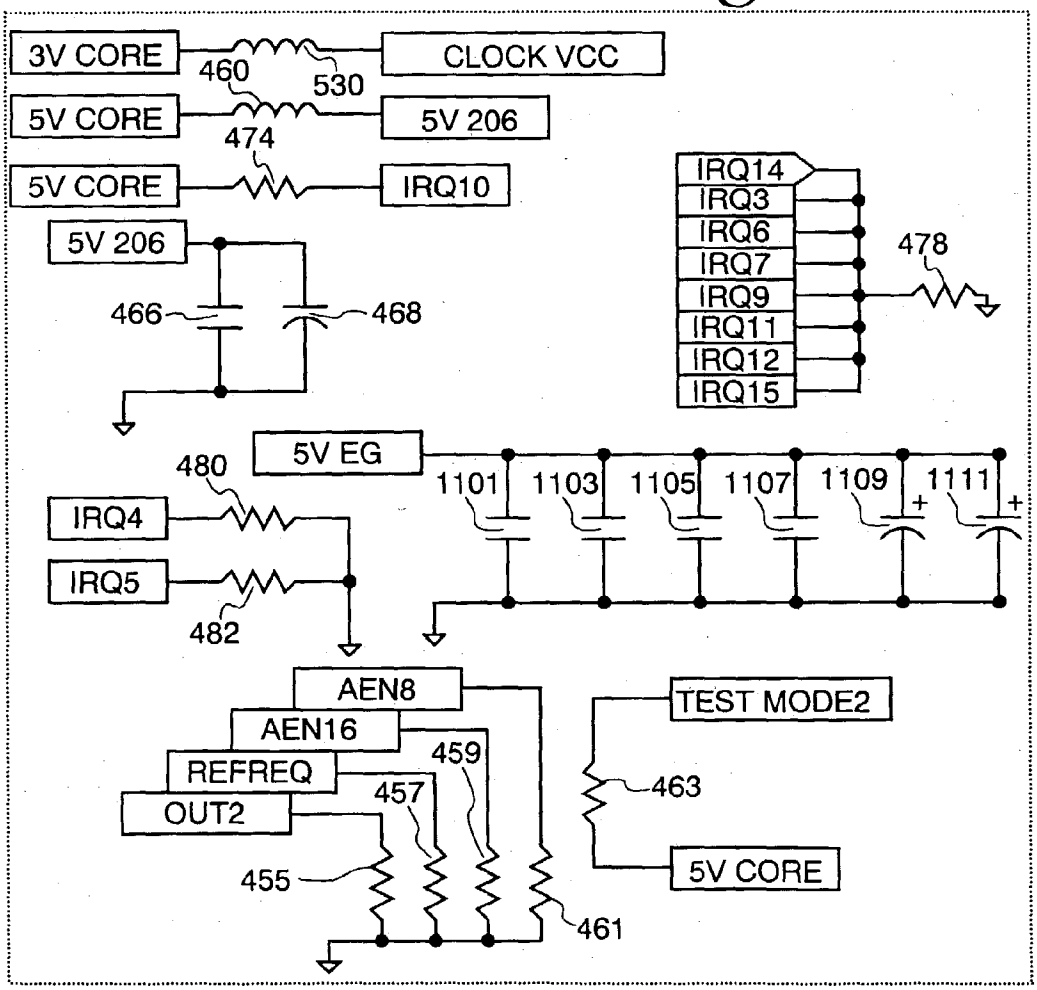


Fig. 13a

Fig. 13b

Fig. 13b

Fig. 13c



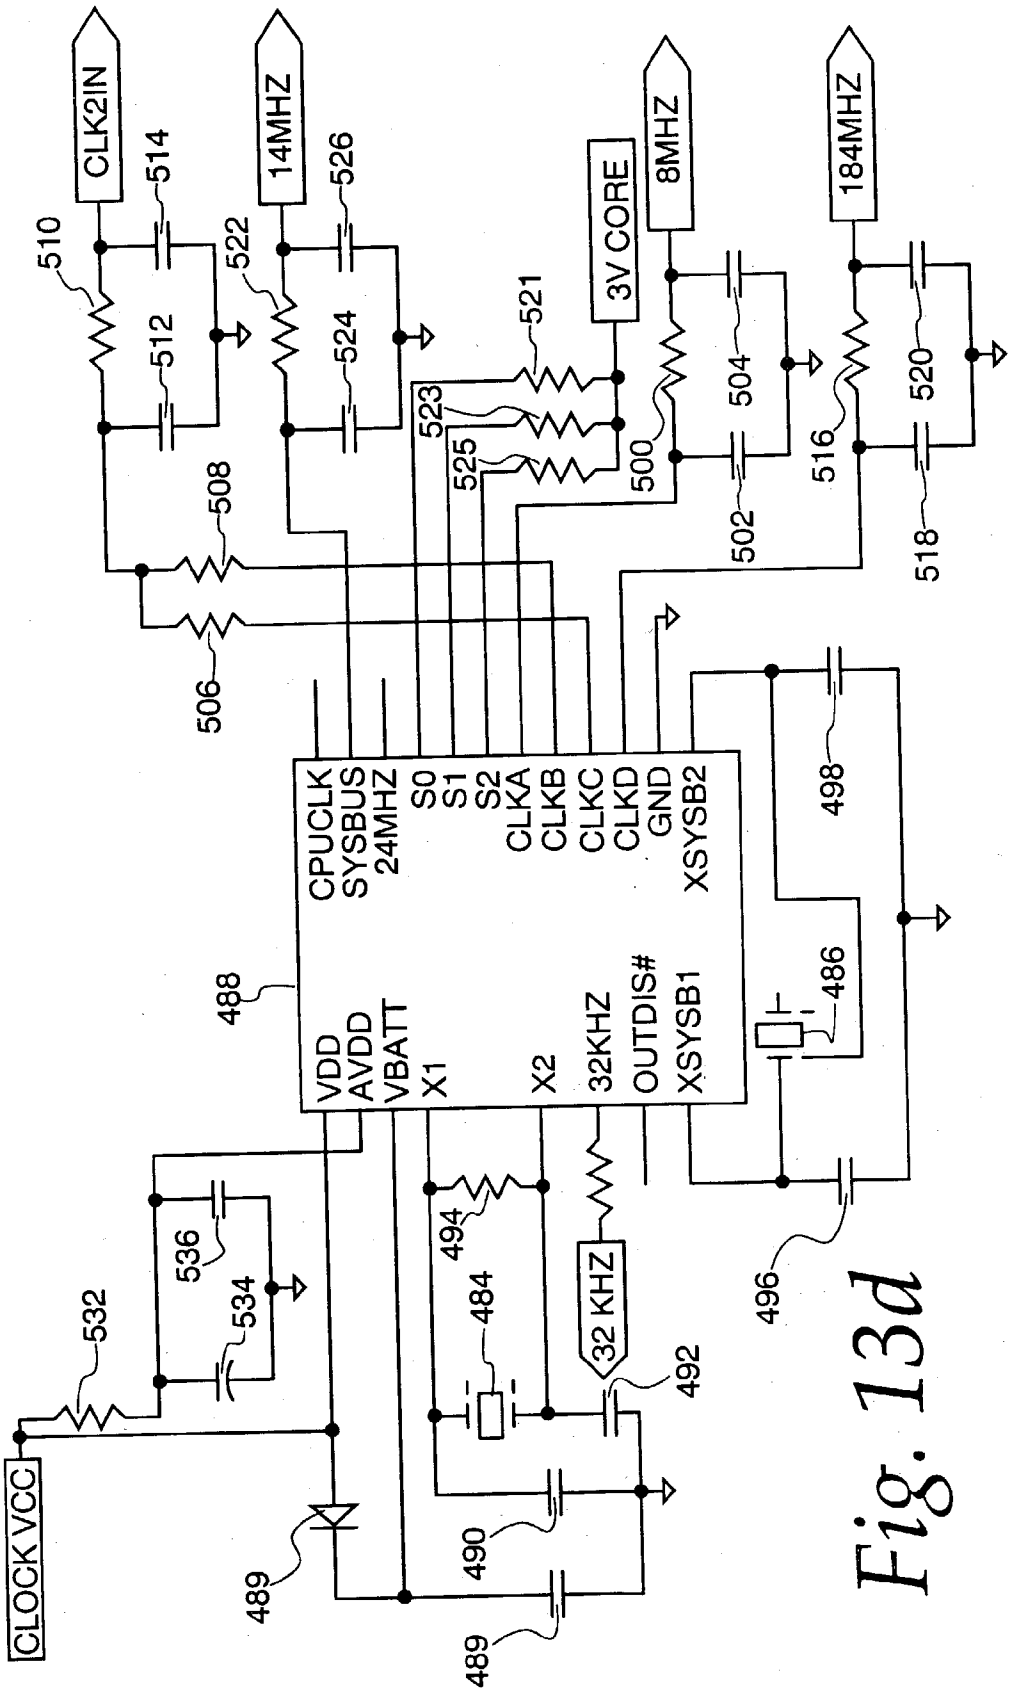

CLK2IN
14MHZ
3V CORE
8MHZ
184MHZ
CPUCLK
SYSBUS
24MHZ
S0
S1
S2
CLKA
CLKB
CLKC
CLKD
GND
XSYSB2
VDD
AVDD
VBATT
X1
X2
32KHZ
OUTDIS#
XSYSB1
32 KHZ
CLOCK VCC
488
489
490
492
494
496
498
500
502
504
506
508
510
512
514
516
518
520
521
522
523
524
525
526
532
534
536
484
486

Fig. 13d

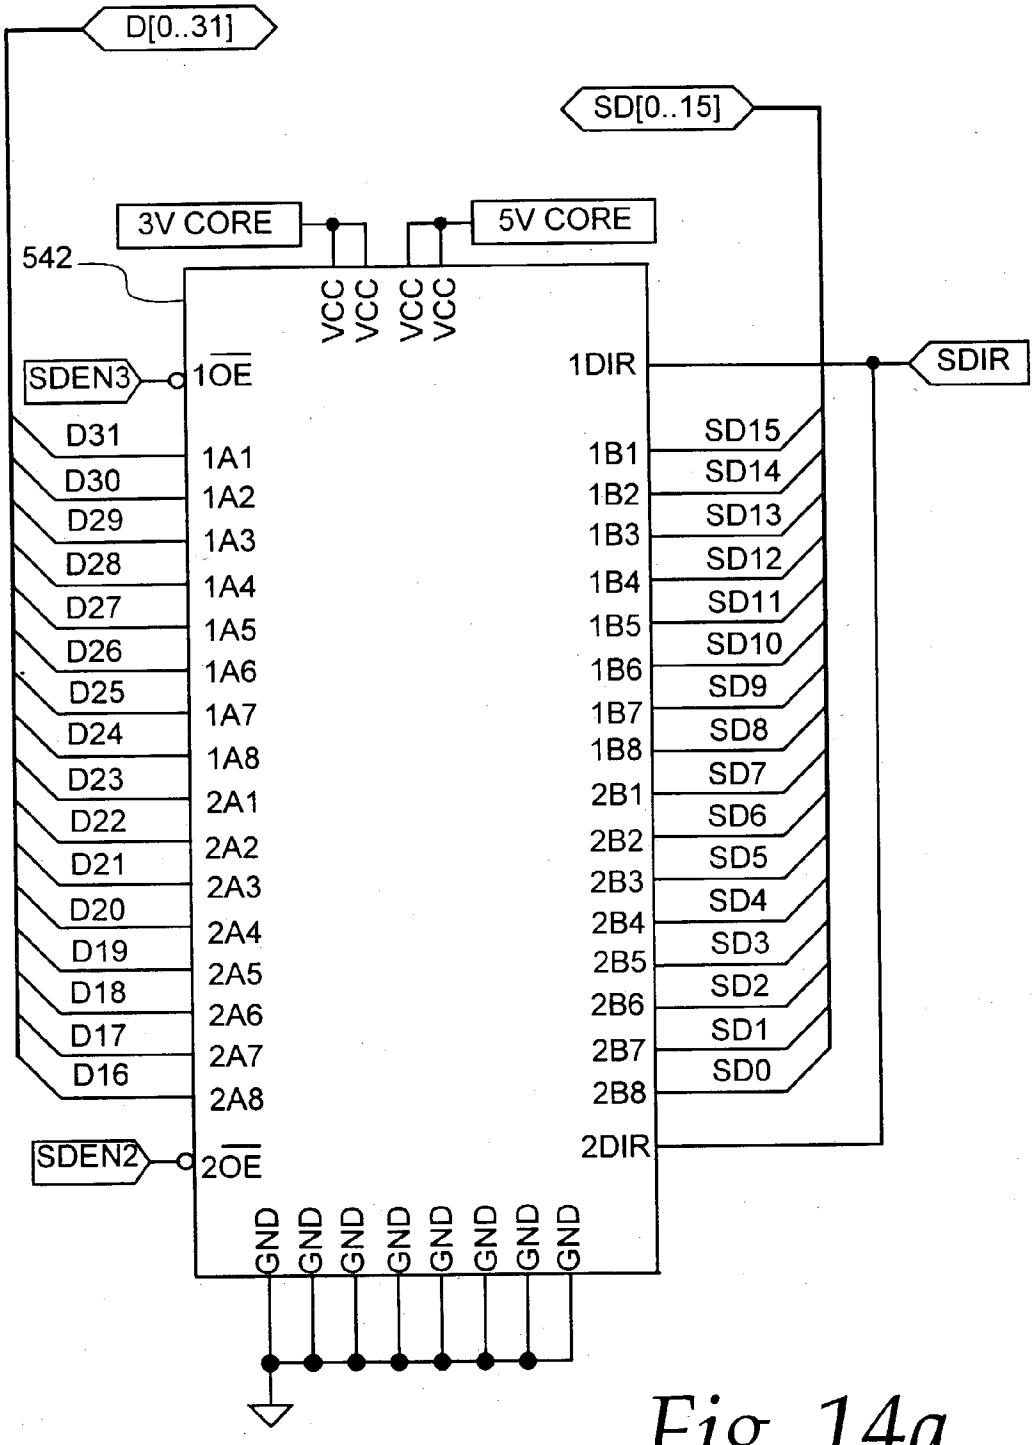

D[0..31]
SD[0..15]
3V CORE
5V CORE
542
VCC
VCC
VCC
VCC
SDEN3
1OE
1DIR
SDIR
D31
D30
D29
D28
D27
D26
D25
D24
D23
D22
D21
D20
D19
D18
D17
D16
1A1
1A2
1A3
1A4
1A5
1A6
1A7
1A8
2A1
2A2
2A3
2A4
2A5
2A6
2A7
2A8
1B1
1B2
1B3
1B4
1B5
1B6
1B7
1B8
2B1
2B2
2B3
2B4
2B5
2B6
2B7
2B8
SD15
SD14
SD13
SD12
SD11
SD10
SD9
SD8
SD7
SD6
SD5
SD4
SD3
SD2
SD1
SD0
SDEN2
2OE
2DIR
GND
GND
GND
GND
GND
GND
GND
GND

Fig. 14a

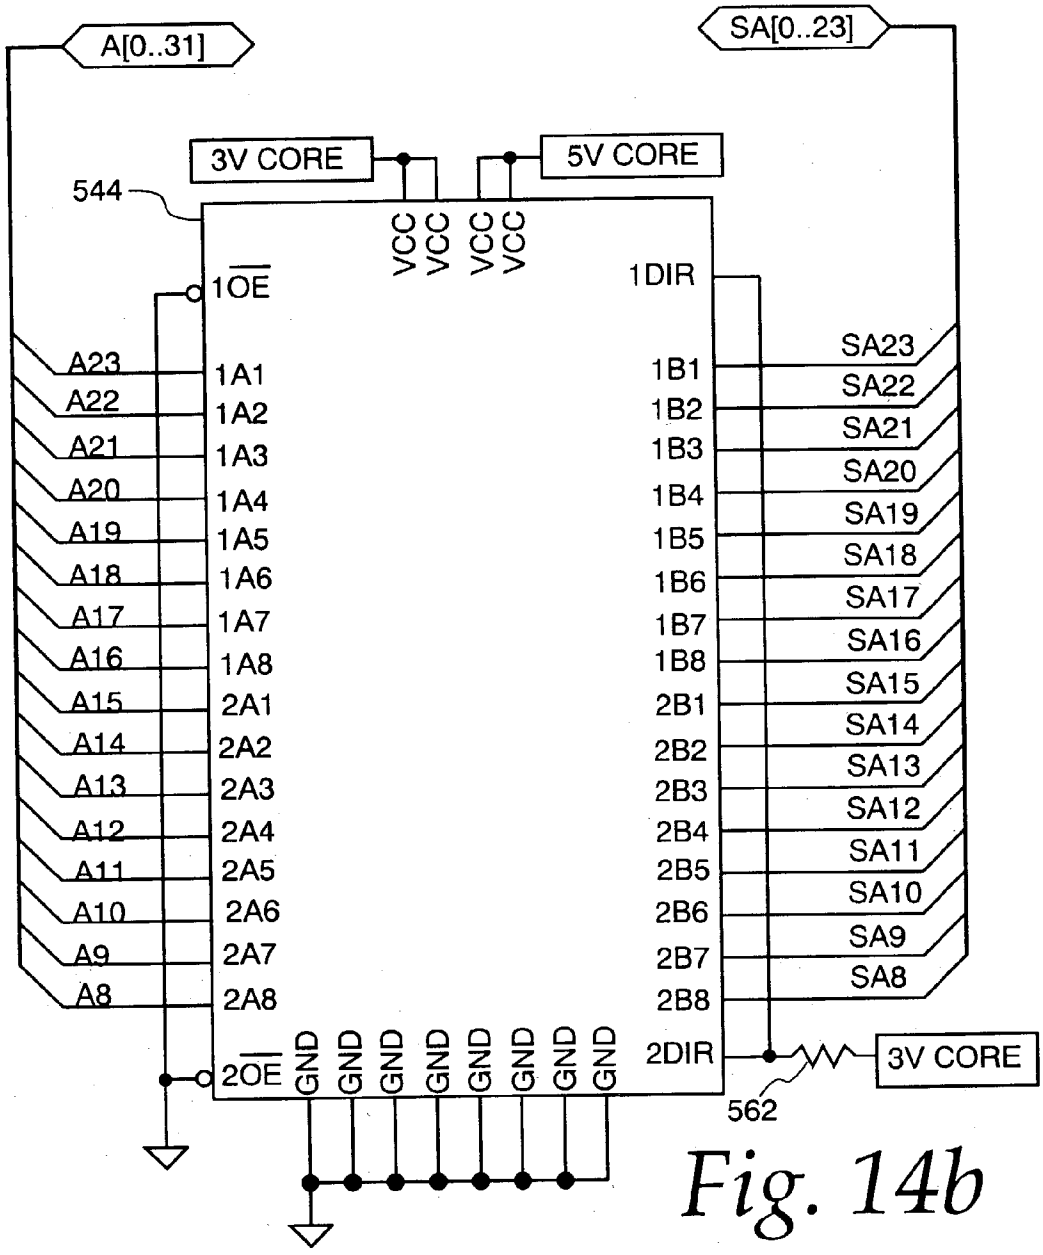


Fig. 14b




Fig. 14c




Fig. 14d

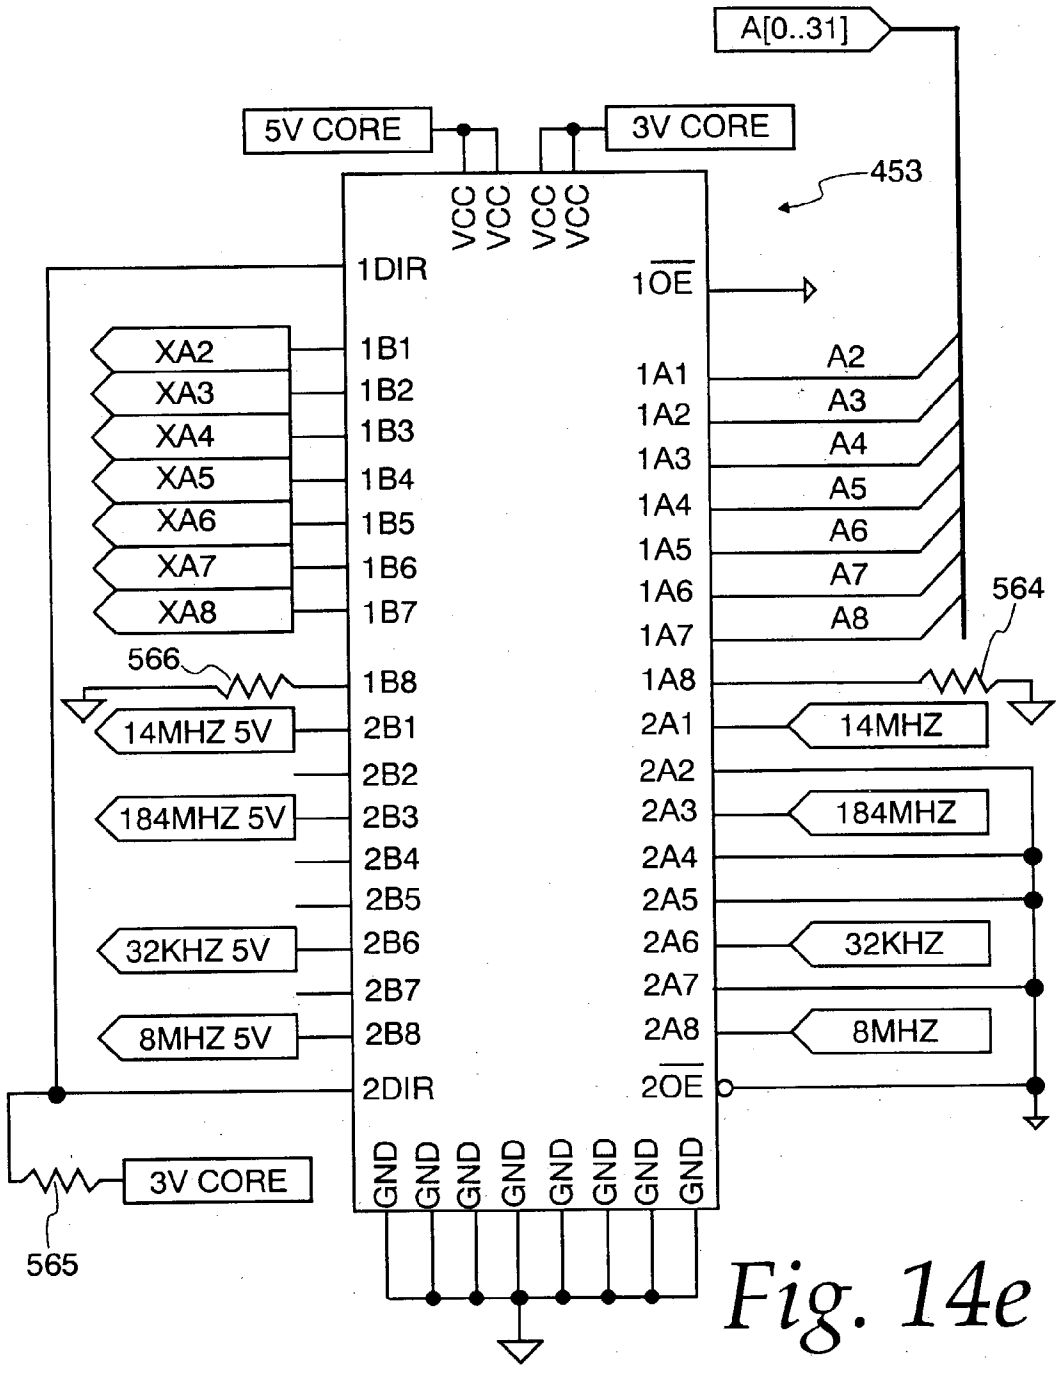


Fig. 14e

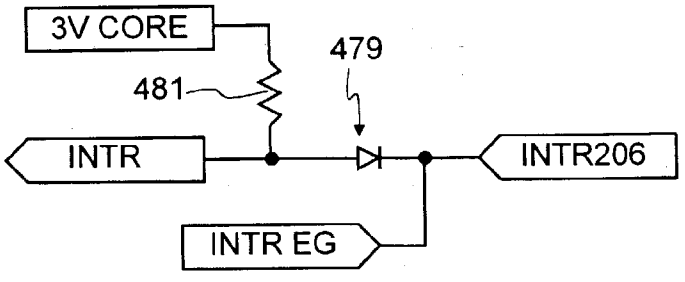


Fig. 14f

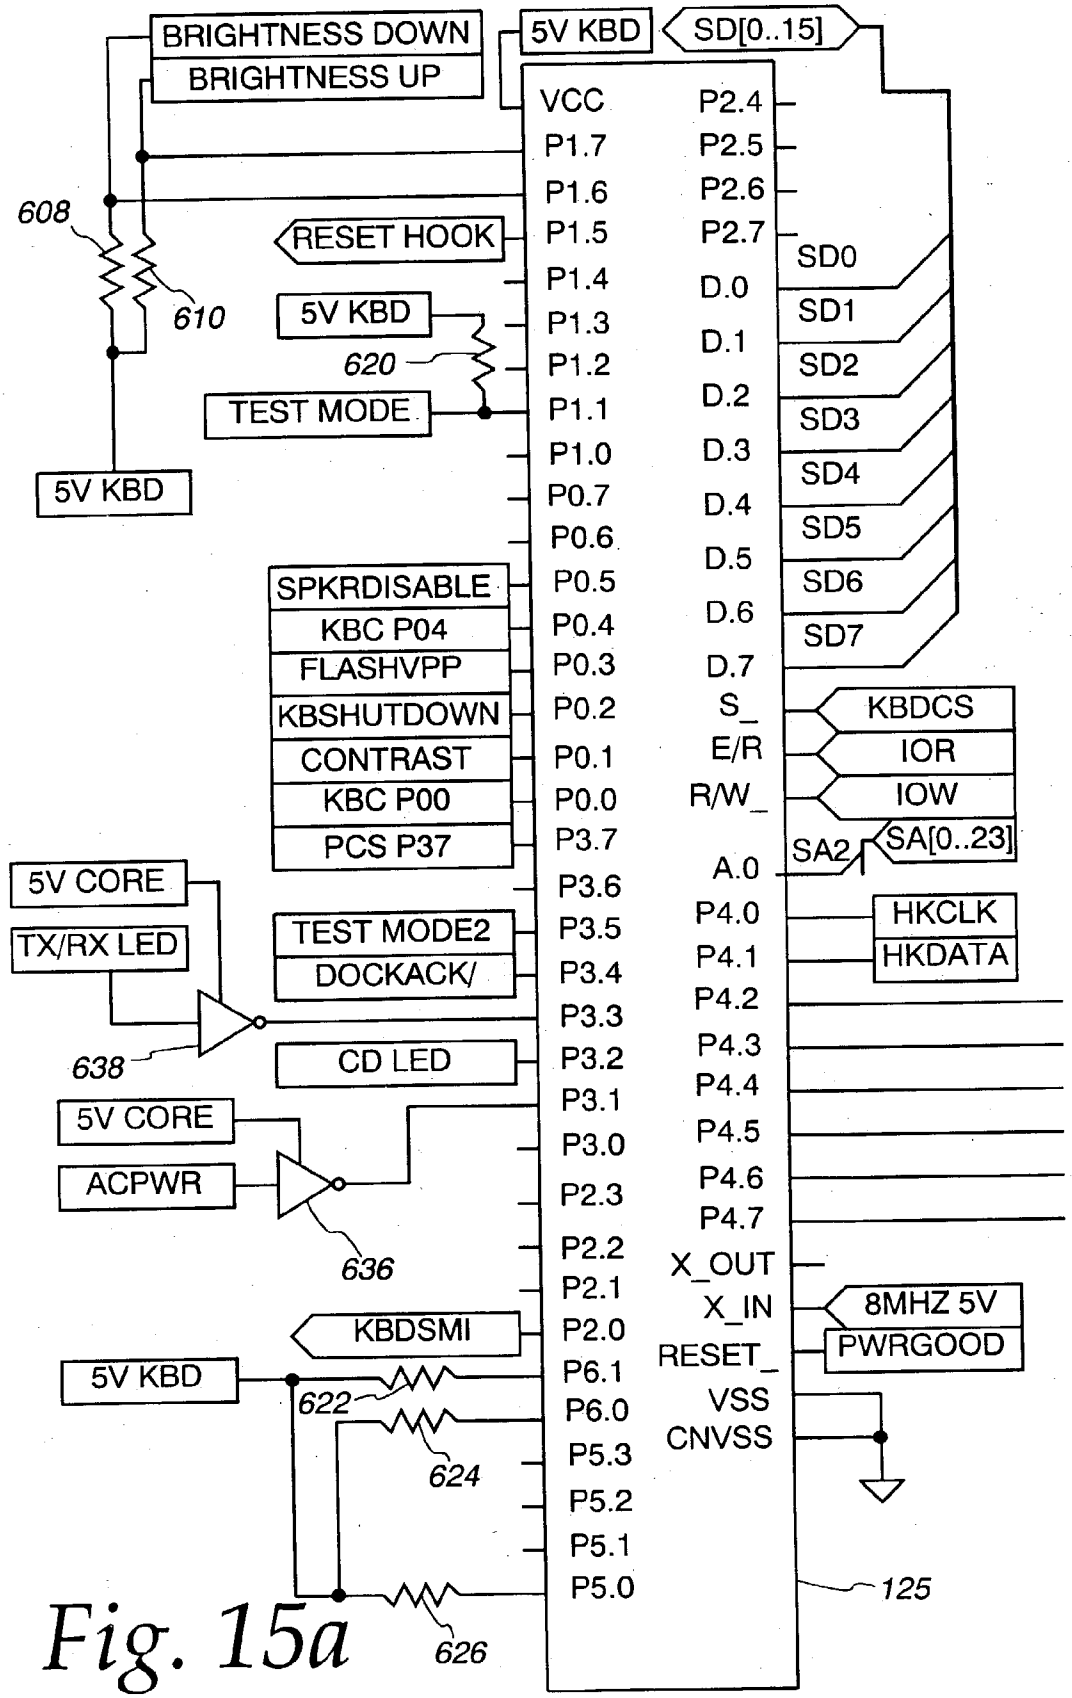

BRIGHTNESS DOWN
BRIGHTNESS UP
608
610
5V KBD
RESET HOOK
5V KBD
620
TEST MODE
5V KBD
SPKRDISABLE
KBC P04
FLASHVPP
KBSHUTDOWN
CONTRAST
KBC P00
PCS P37
5V CORE
TX/RX LED
638
TEST MODE2
DOCKACK/
CD LED
5V CORE
ACPWR
636
KBDSMI
5V KBD
622
624
626
5V KBD
SD[0..15]
VCC
P1.7
P1.6
P1.5
P1.4
P1.3
P1.2
P1.1
P1.0
P0.7
P0.6
P0.5
P0.4
P0.3
P0.2
P0.1
P0.0
P3.7
P3.6
P3.5
P3.4
P3.3
P3.2
P3.1
P3.0
P2.3
P2.2
P2.1
P2.0
P6.1
P6.0
P5.3
P5.2
P5.1
P5.0
P2.4
P2.5
P2.6
P2.7
D.0
D.1
D.2
D.3
D.4
D.5
D.6
D.7
SD0
SD1
SD2
SD3
SD4
SD5
SD6
SD7
S_
E/R
R/W_
SA2
A.0
P4.0
P4.1
P4.2
P4.3
P4.4
P4.5
P4.6
P4.7
X_OUT
X_IN
RESET_
VSS
CNVSS
KBDCS
IOR
IOW
SA[0..23]
HKCLK
HKDATA
8MHZ 5V
PWRGOOD
125

Fig. 15a

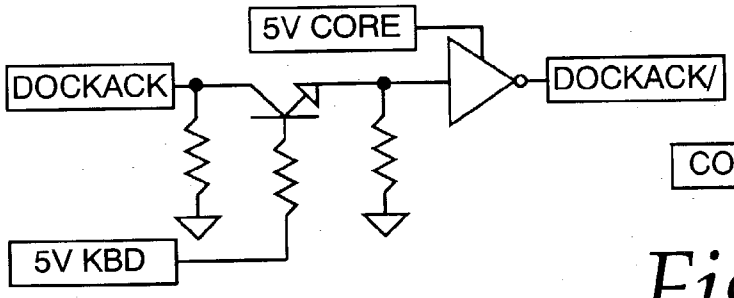


Fig. 15d




Fig 15e




Fig. 15f

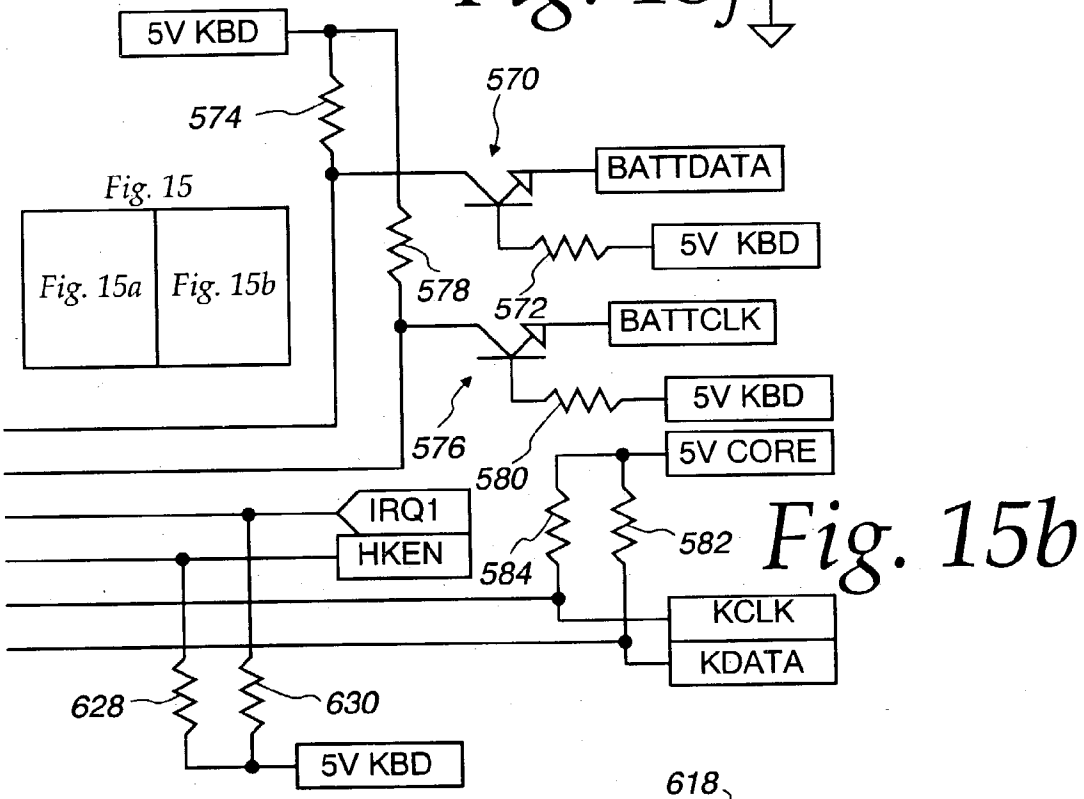


Fig. 15

Fig. 15a	Fig. 15b

Fig. 15b




Fig. 15g

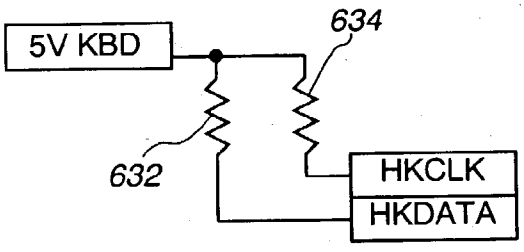


Fig. 15c

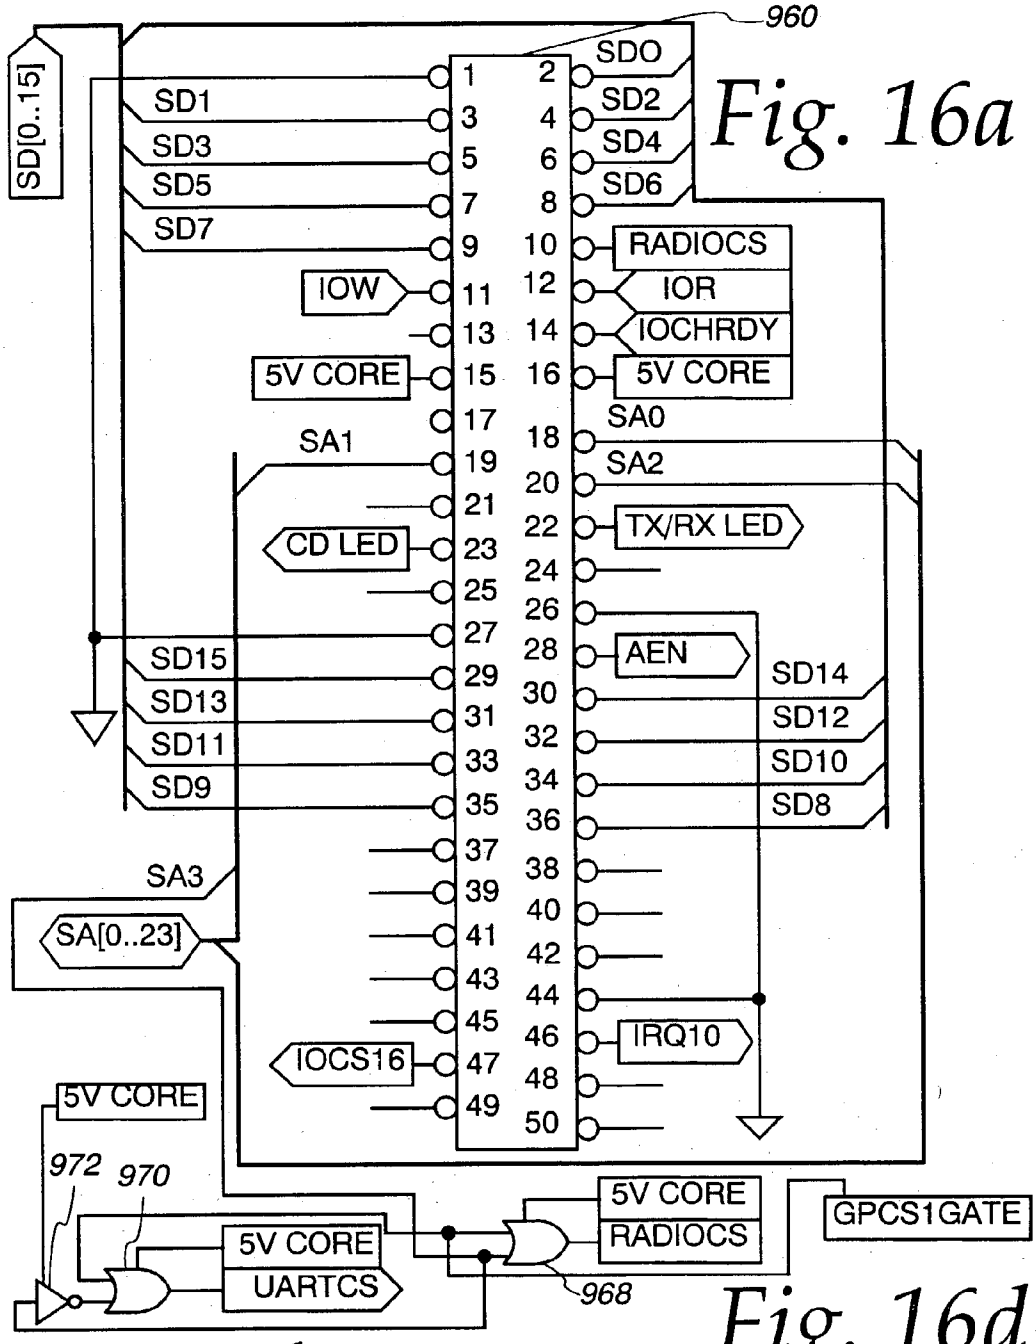


Fig. 16a

Fig. 16d

Fig. 16b



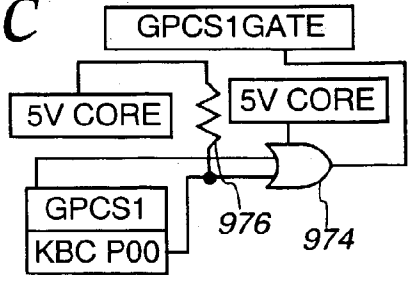


Fig. 16c





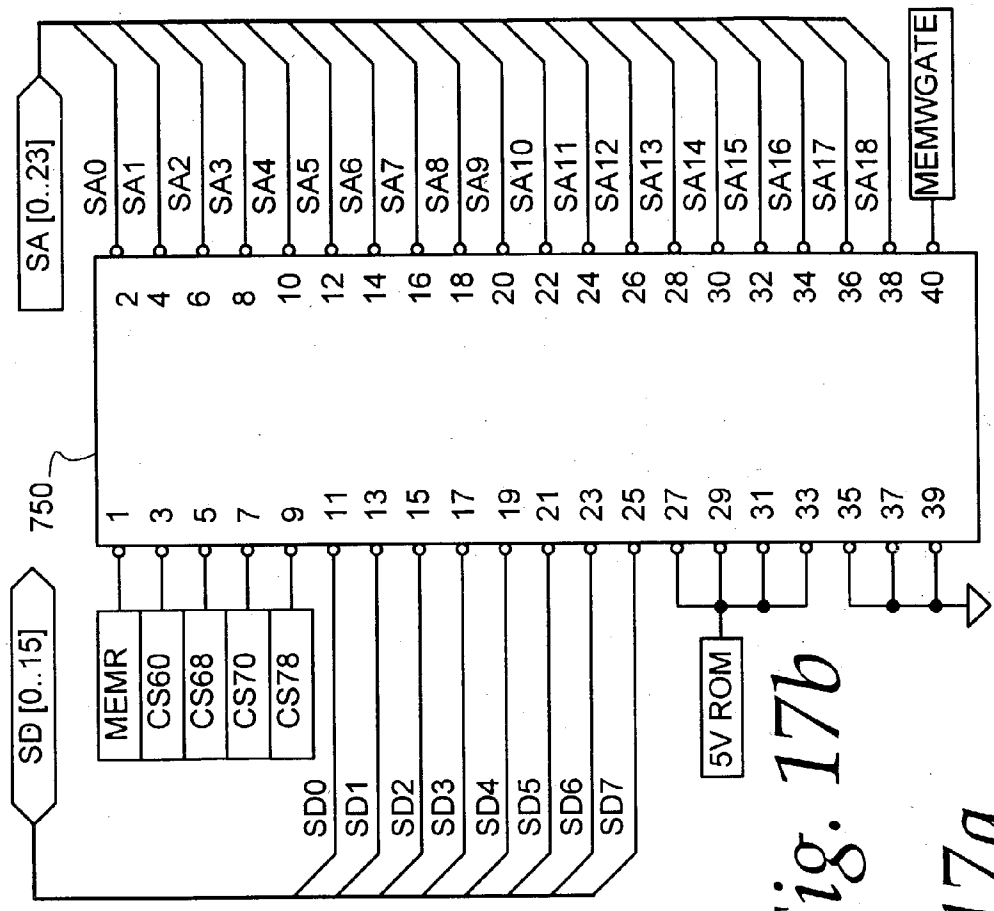


Fig. 17b

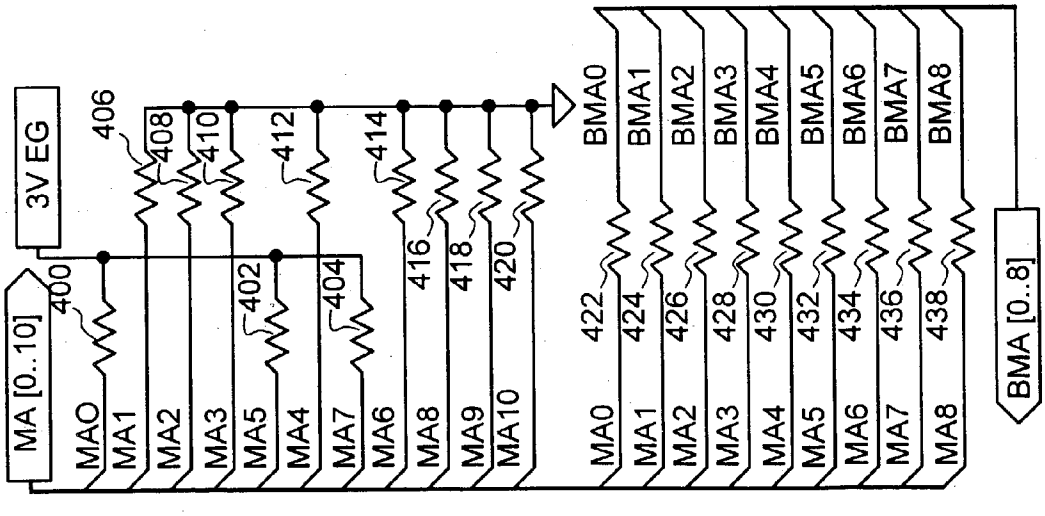


Fig. 17a

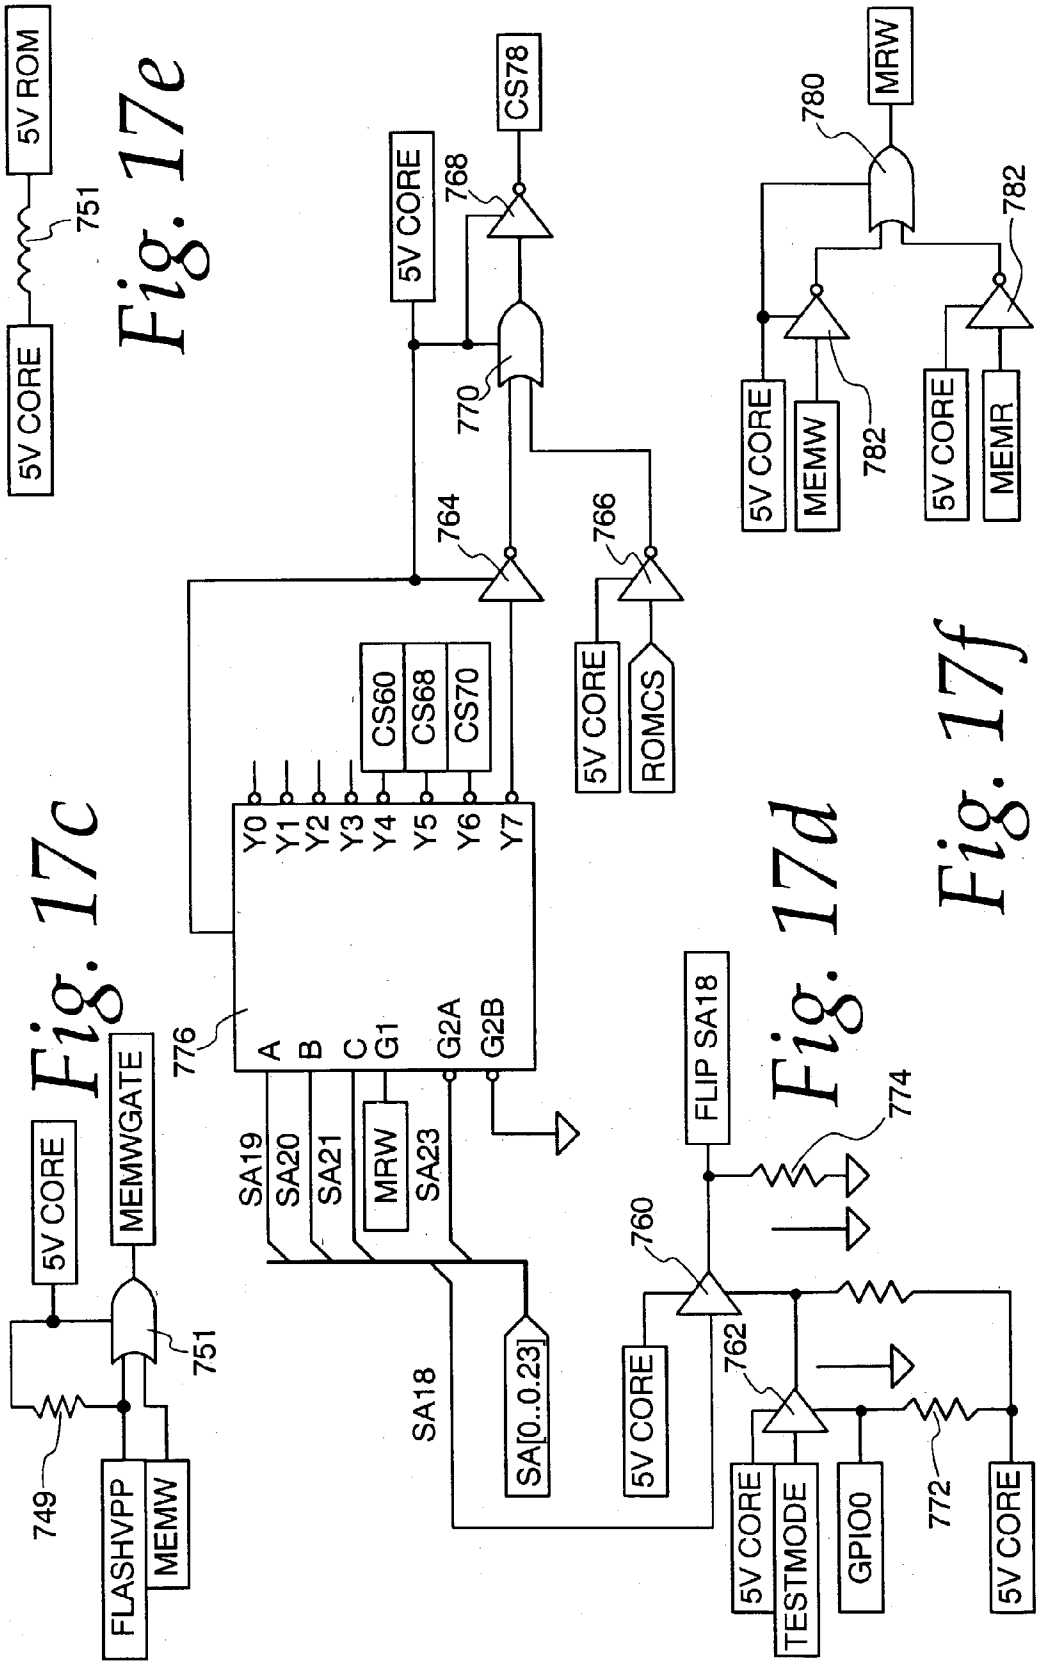


Fig. 17e

Fig. 17c

Fig. 17d

Fig. 17f

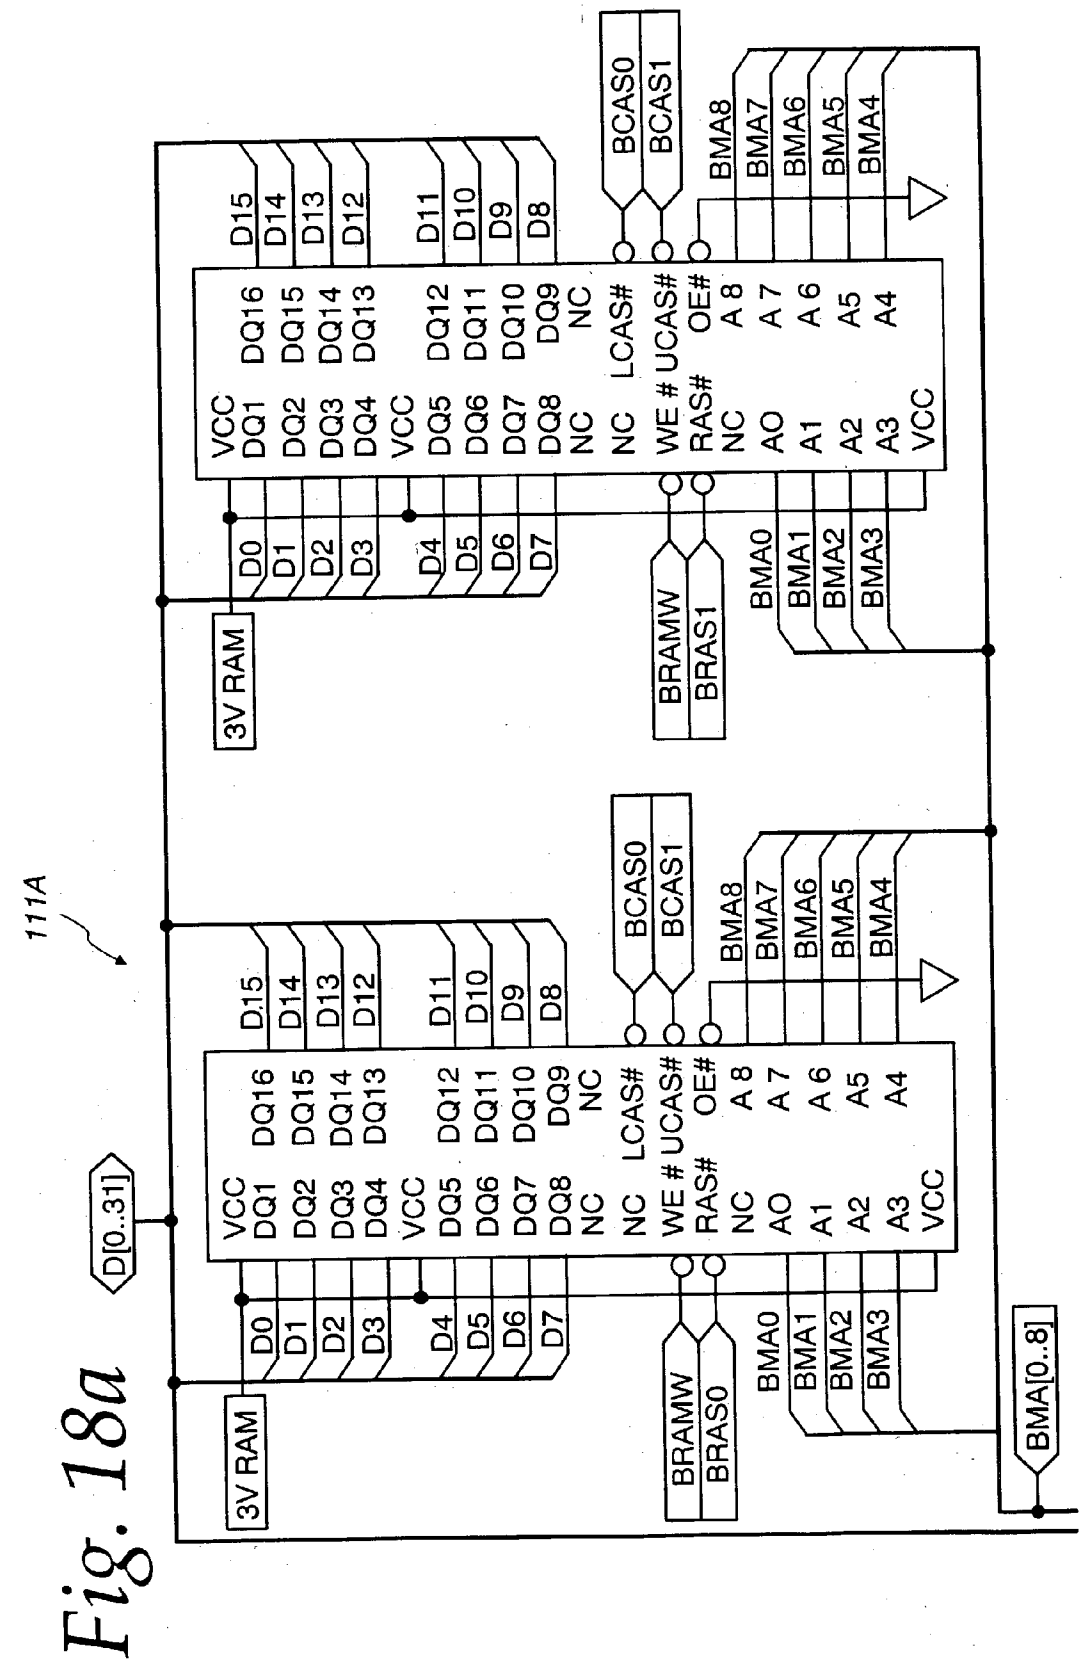

111A
D[0..31]
3V RAM
3V RAM
BRAMW
BRAS0
BRAMW
BRAS1
BCAS0
BCAS1
BCAS0
BCAS1
BMA[0..8]
BMA0
BMA1
BMA2
BMA3
BMA4
BMA5
BMA6
BMA7
BMA8
D0
D1
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
D14
D15
VCC
DQ1
DQ2
DQ3
DQ4
VCC
DQ5
DQ6
DQ7
DQ8
NC
NC
WE #
RAS#
NC
AO
A1
A2
A3
VCC
DQ16
DQ15
DQ14
DQ13
DQ12
DQ11
DQ10
DQ9
NC
LCAS#
UCAS#
OE#
A 8
A 7
A 6
A5
A4

Fig. 18a

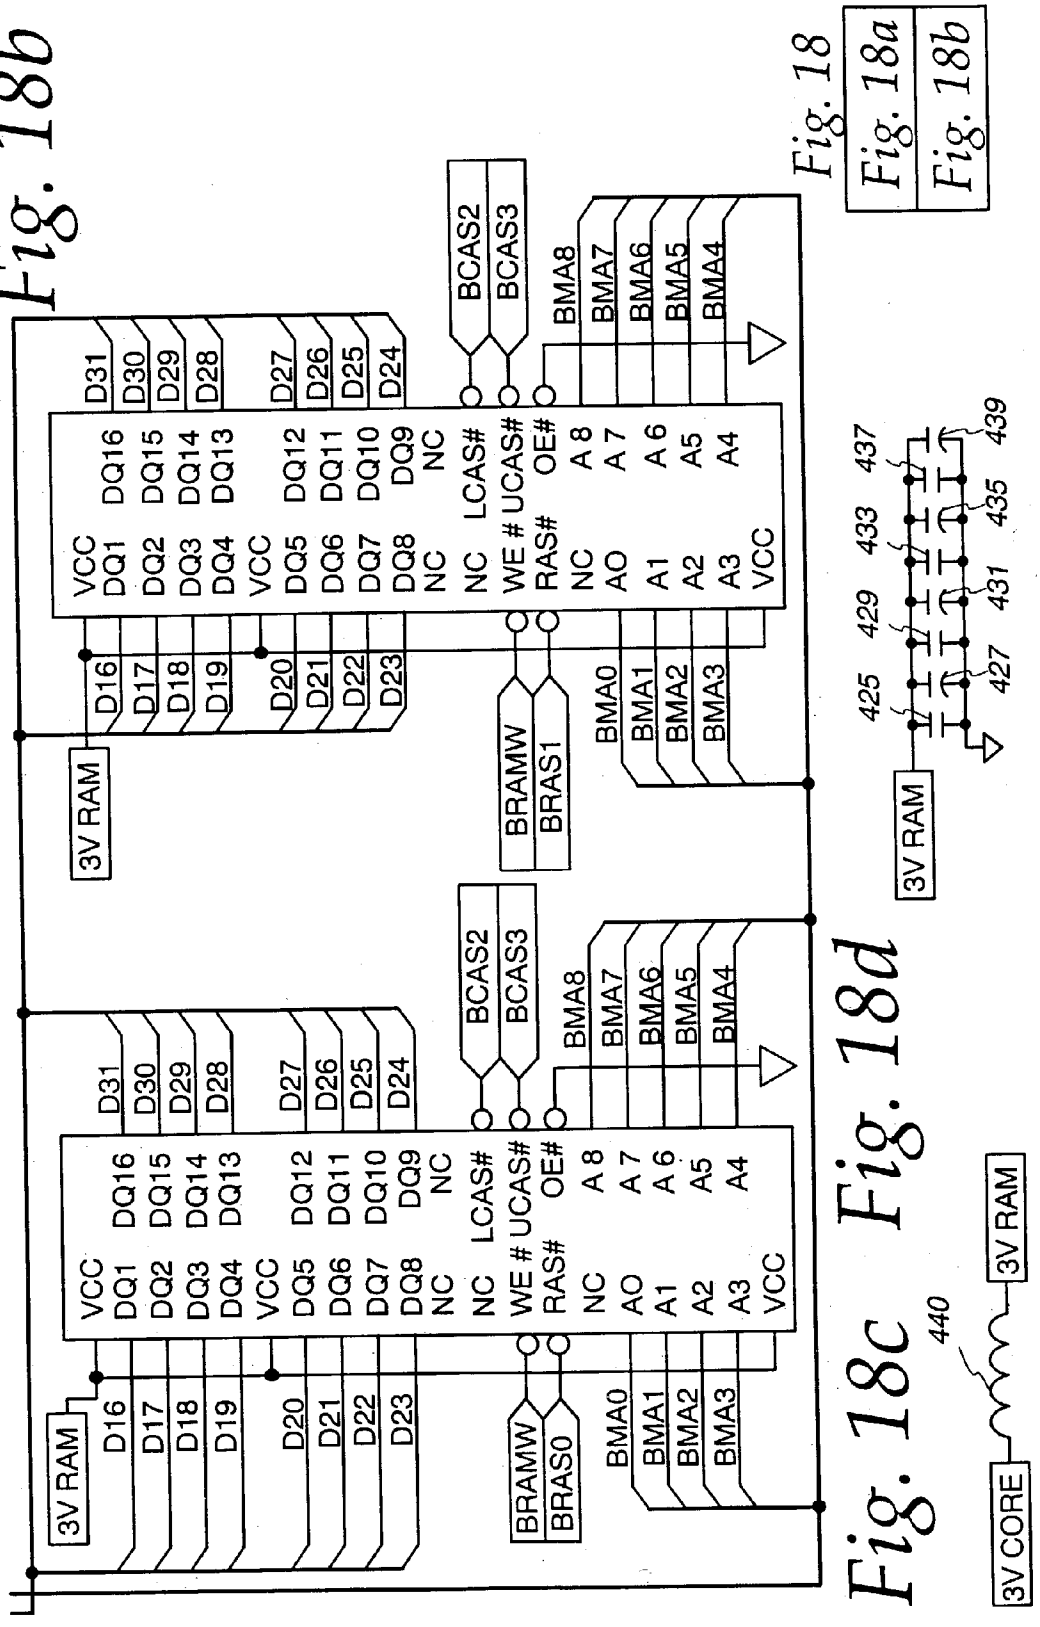


Fig. 18b

Fig. 18

Fig. 18a
Fig. 18b

Fig. 18c Fig. 18d

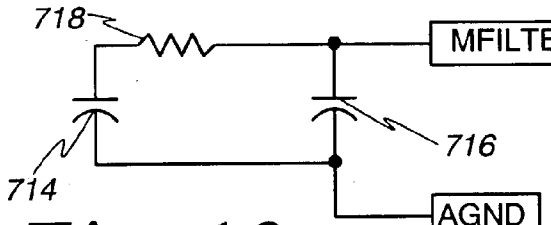


Fig. 19q

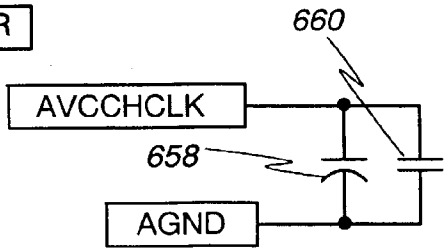


Fig. 19p




Fig. 19r

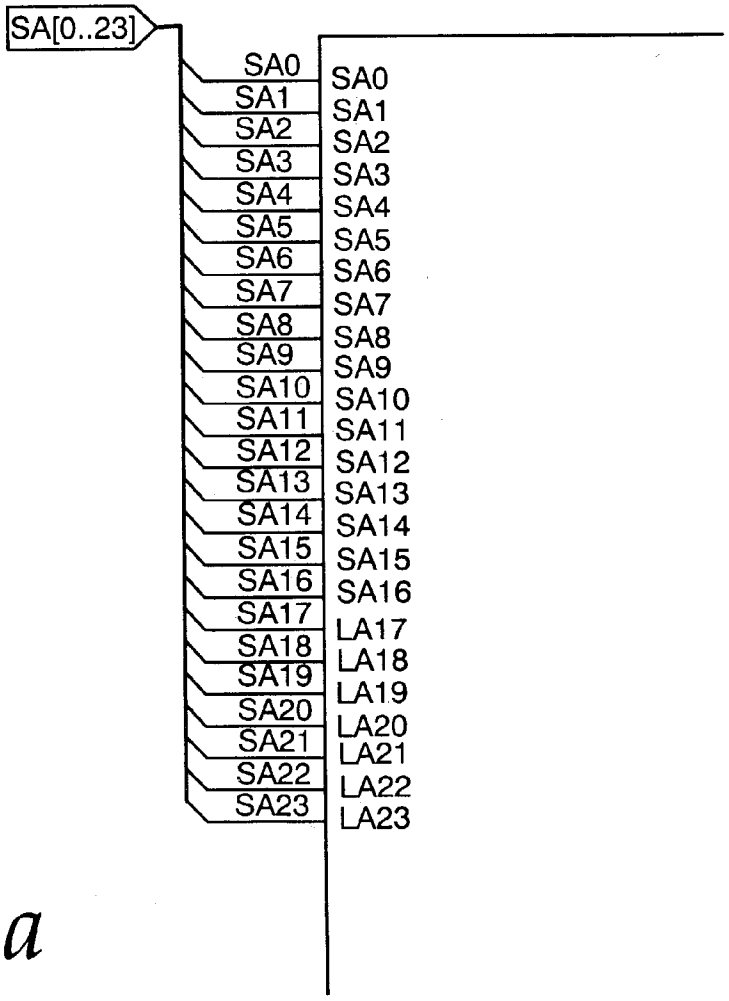
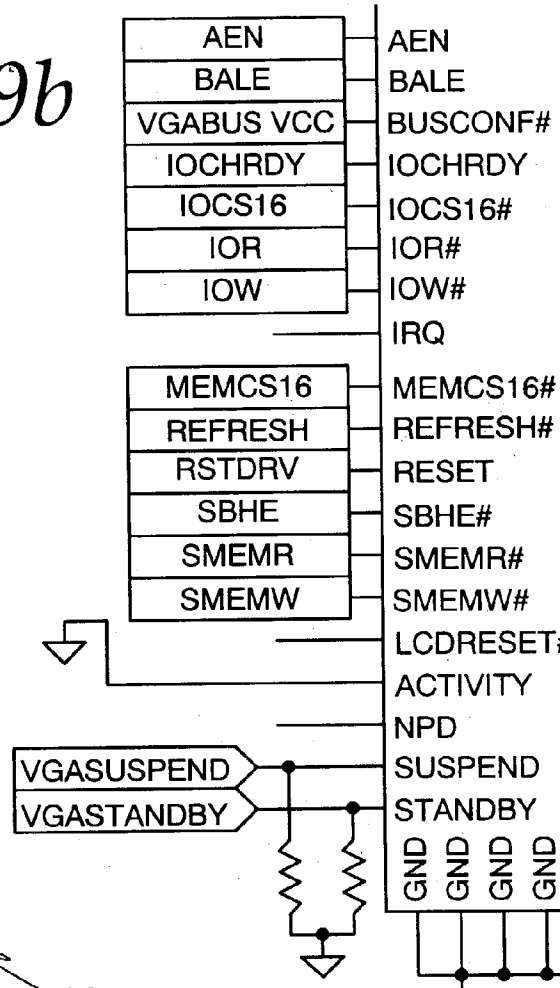


Fig. 19a

Fig. 19b



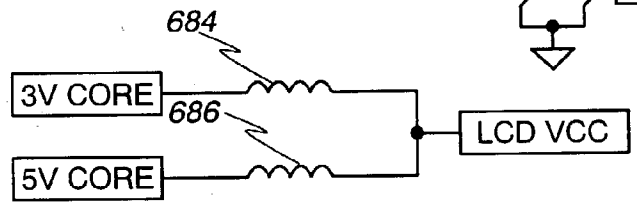


Fig. 19g




Fig. 19h

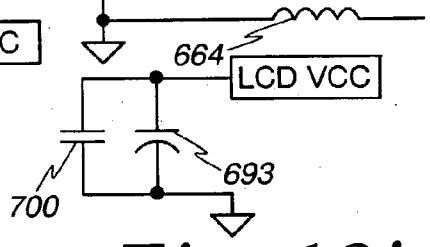


Fig. 19i

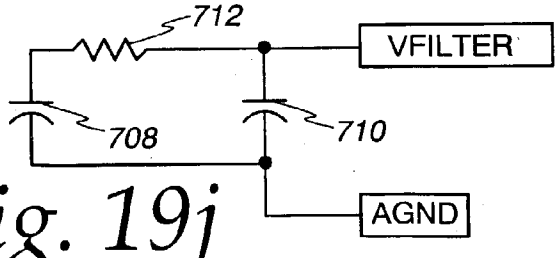
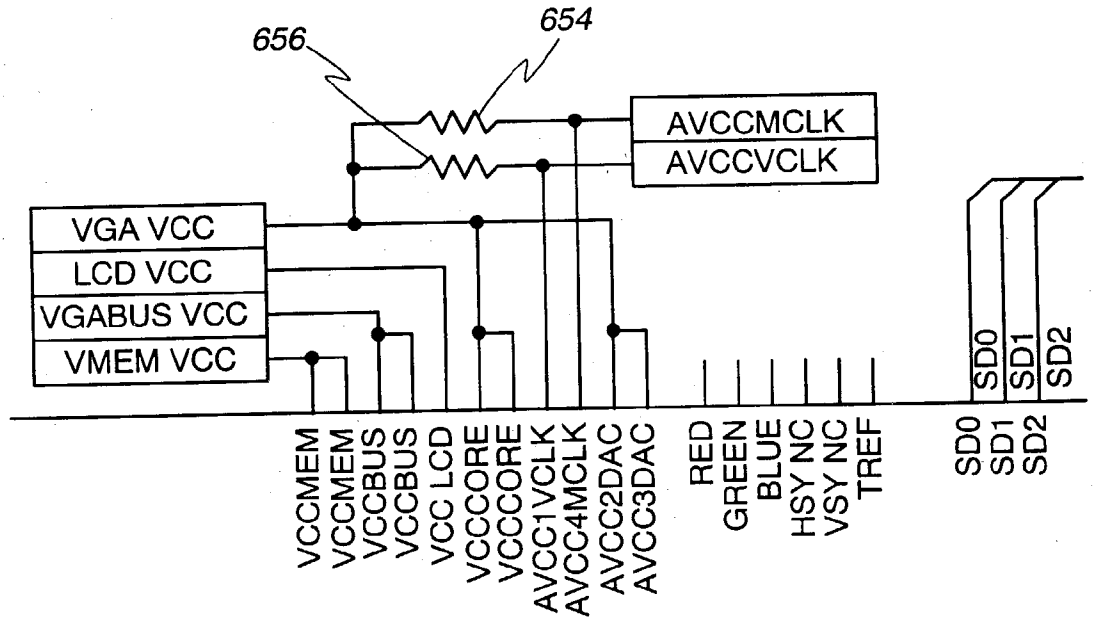


Fig. 19j

Fig. 19c


656
654
AVCCMCLK
AVCCVCLK
VGA VCC
LCD VCC
VGABUS VCC
VMEM VCC
SD0
SD1
SD2
VCCMEM
VCCMEM
VCCBUS
VCCBUS
VCC LCD
VCCCORE
VCCCORE
AVCC1VCLK
AVCC4MCLK
AVCC2DAC
AVCC3DAC
RED
GREEN
BLUE
HSY NC
VSY NC
TREF
SD0
SD1
SD2

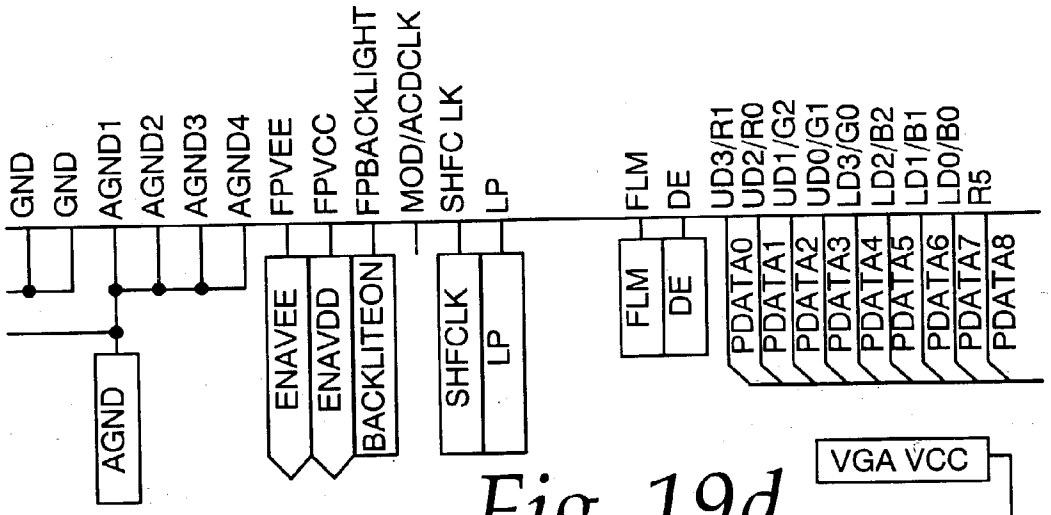


Fig. 19d

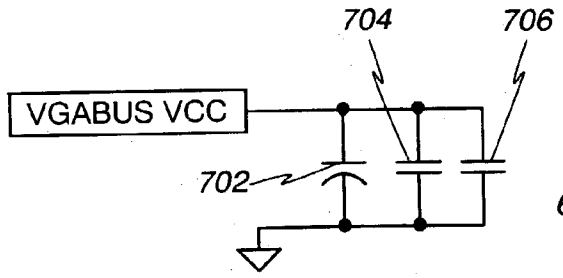


Fig. 19k

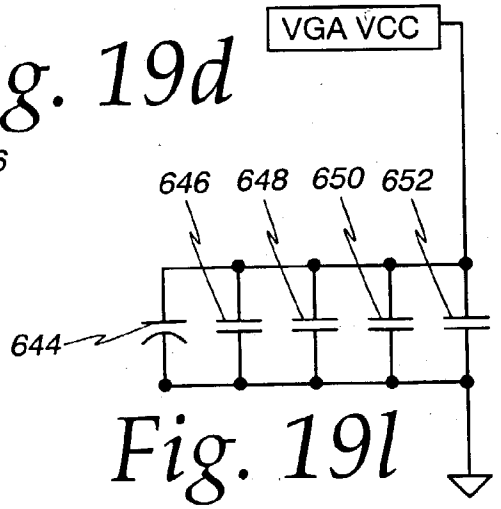


Fig. 19l




Fig. 19o



Fig. 19n

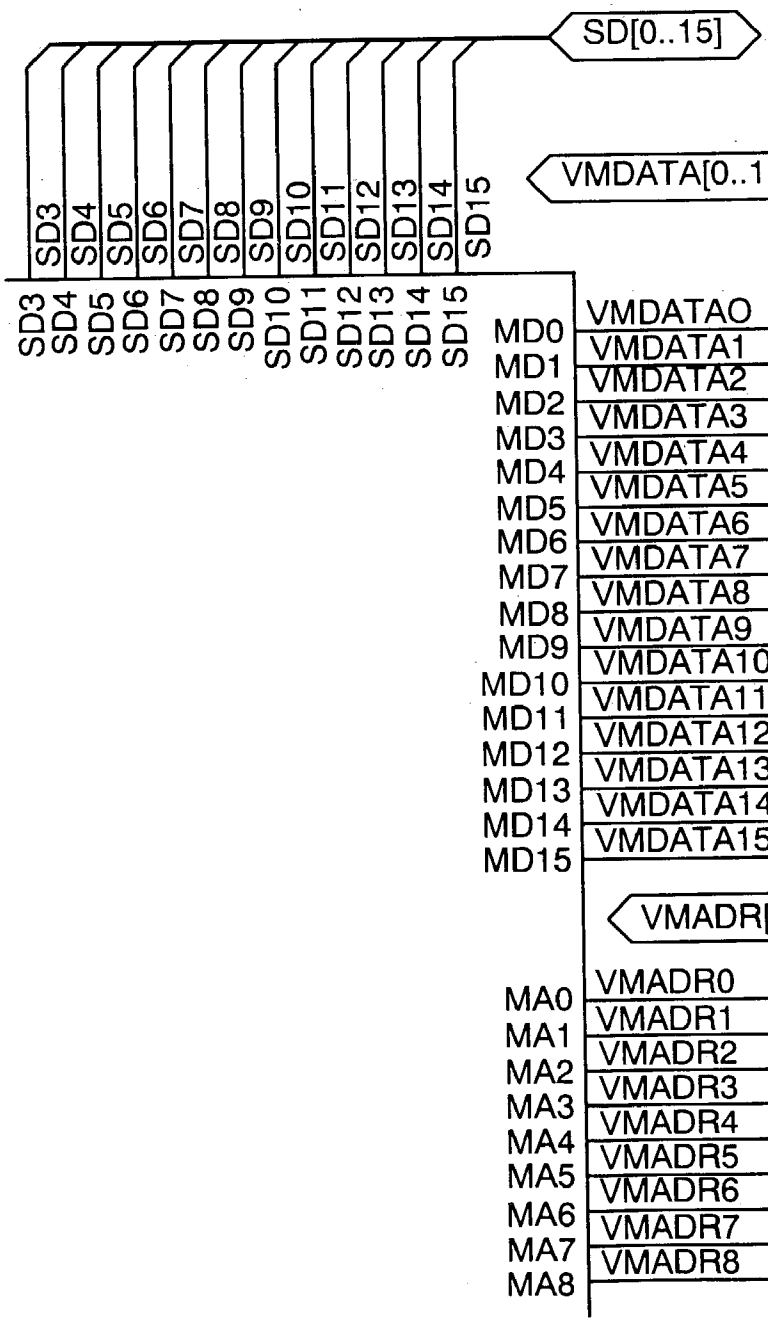


Fig. 19e

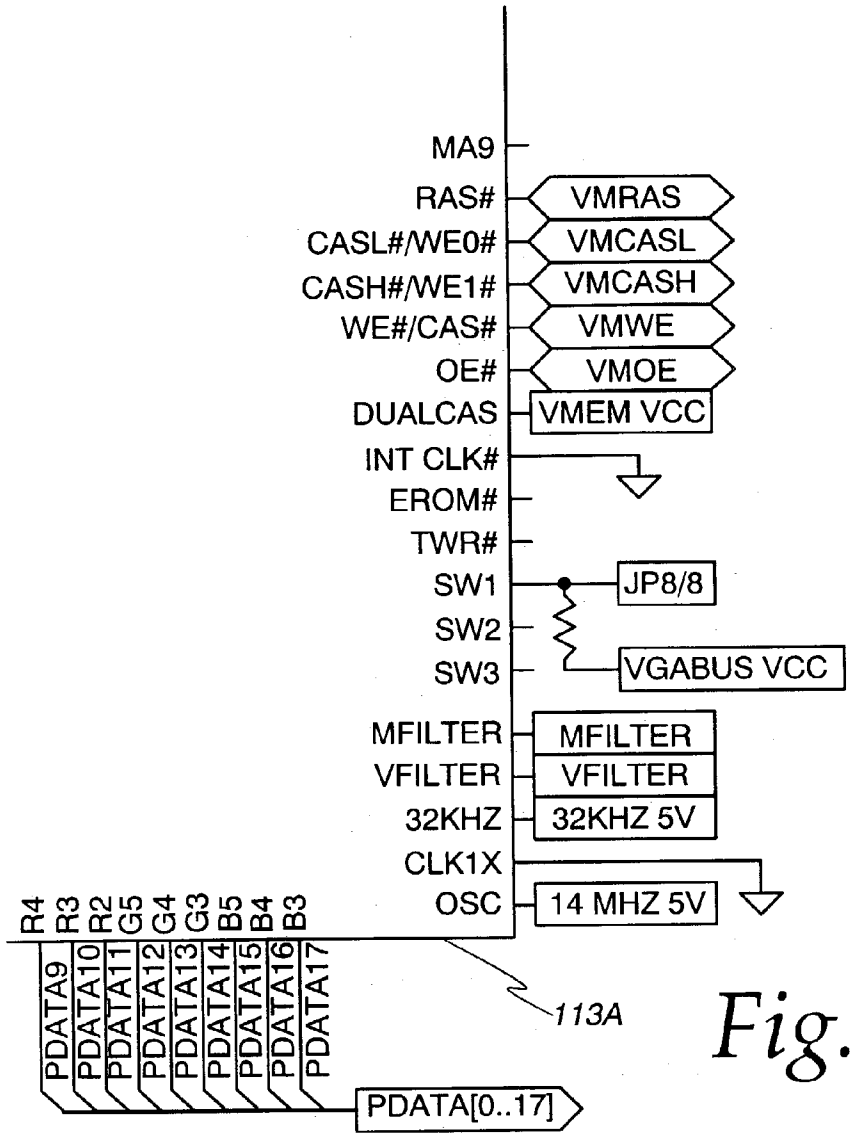


Fig. 19f

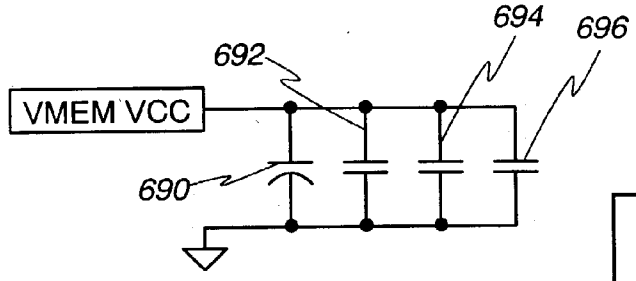


Fig. 19m

Fig. 19

Fig. 19a	Fig. 19c	Fig. 19e
Fig. 19b	Fig. 19d	Fig. 19f

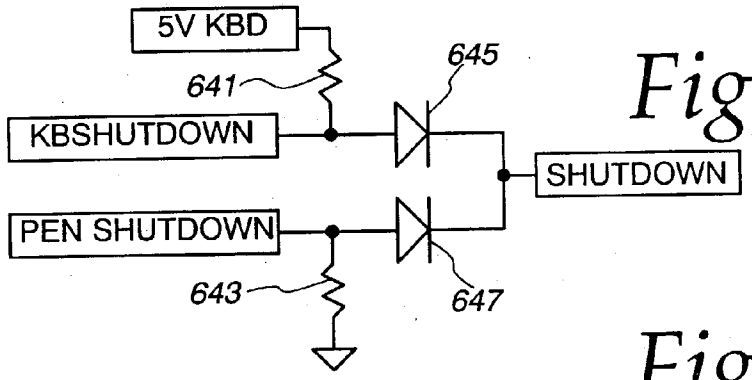


Fig. 20a

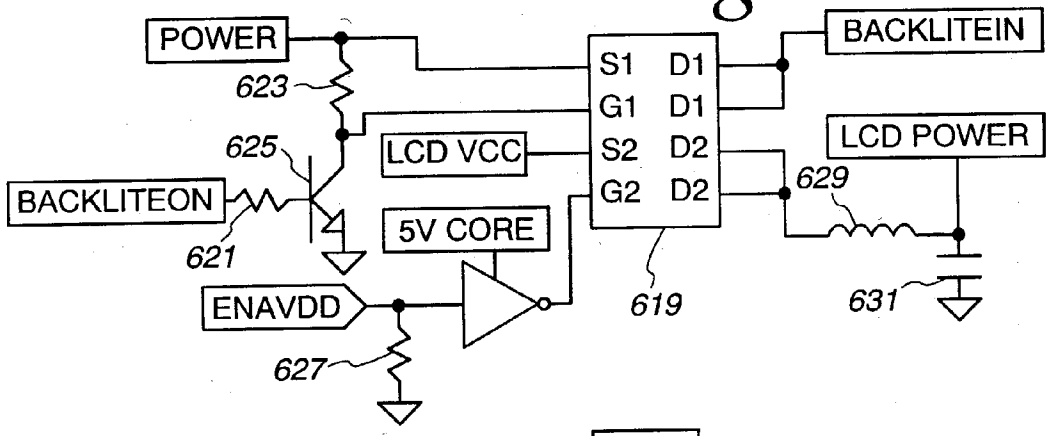


Fig. 20b

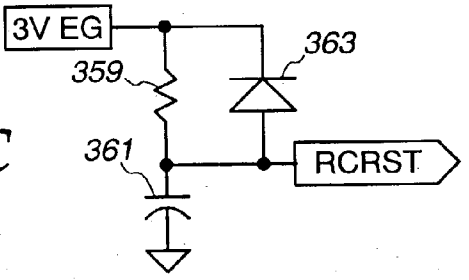


Fig. 20c

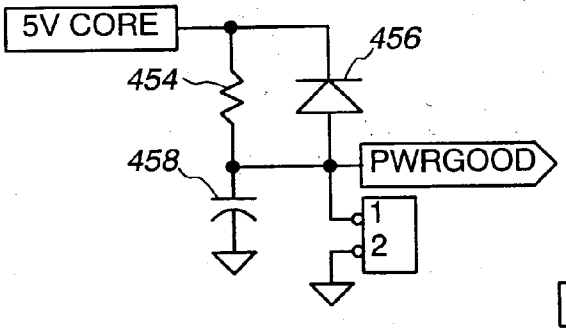


Fig. 20d

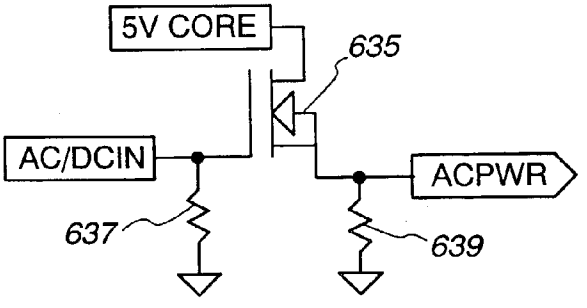
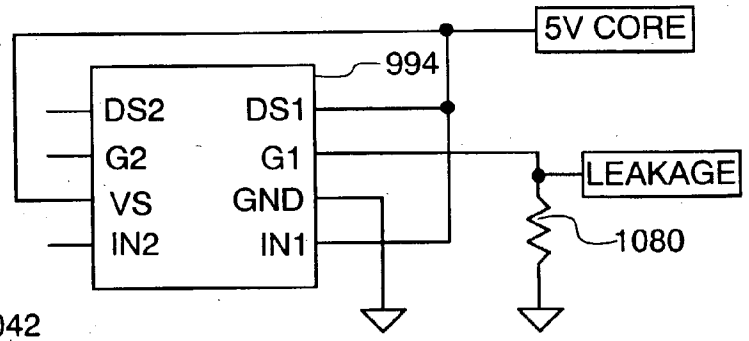


Fig. 20e

Fig. 21a



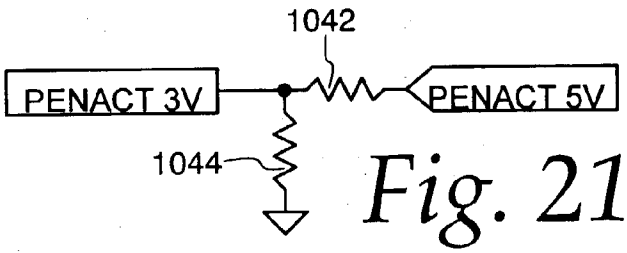
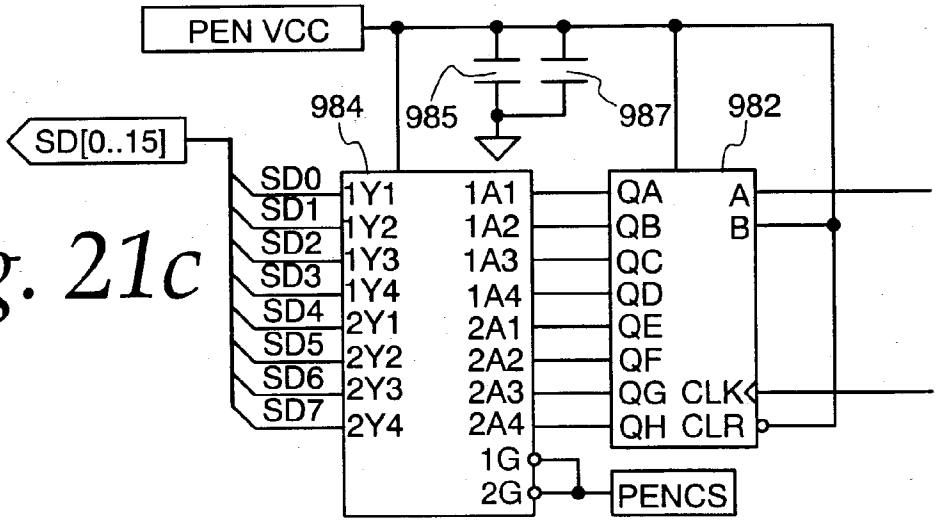


Fig. 21b

Fig. 21c



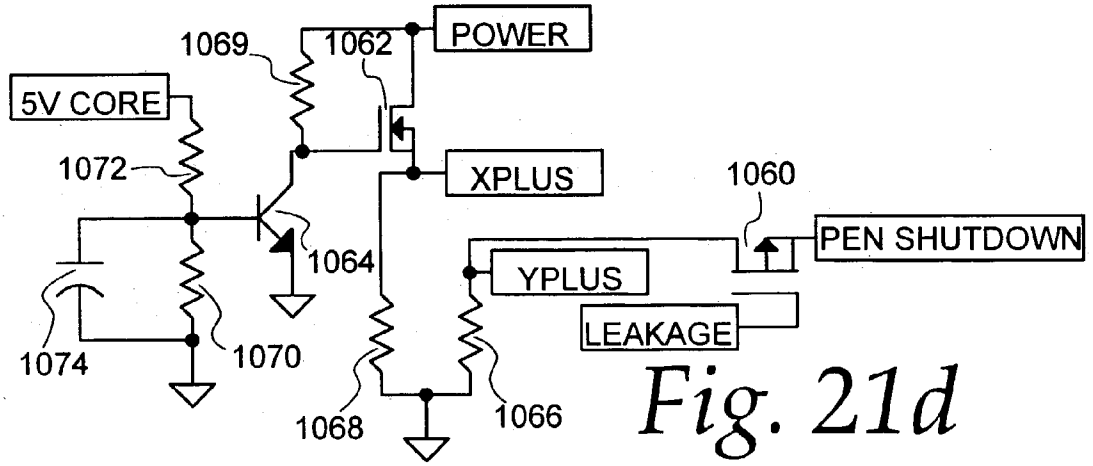


Fig. 21d

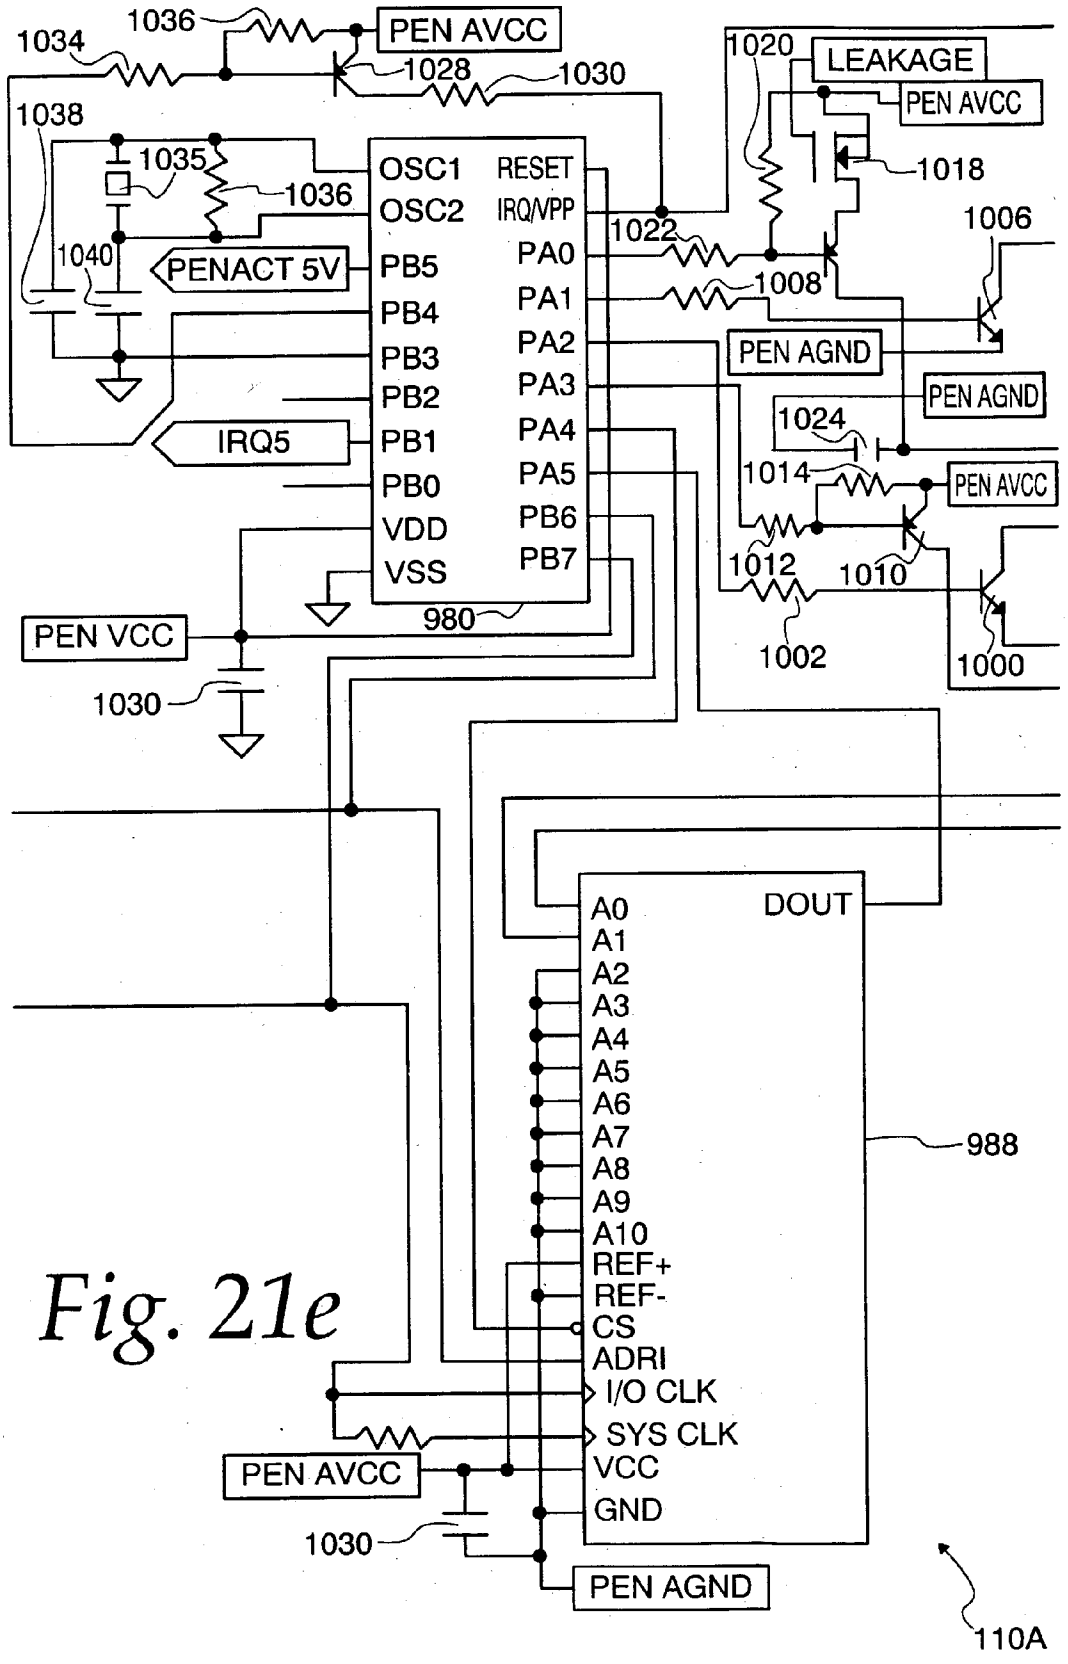

1034
1036
PEN AVCC
1028
1030
1038
1035
1036
1040
PENACT 5V
IRQ5
OSC1
OSC2
RESET
IRQ/VPP
PB5
PB4
PB3
PB2
PB1
PB0
VDD
VSS
PA0
PA1
PA2
PA3
PA4
PA5
PB6
PB7
980
PEN VCC
1030
1020
LEAKAGE
PEN AVCC
1018
1006
1022
1008
PEN AGND
PEN AGND
1024
1014
PEN AVCC
1012
1010
1002
1000
A0
A1
A2
A3
A4
A5
A6
A7
A8
A9
A10
REF+
REF-
CS
ADRI
I/O CLK
SYS CLK
VCC
GND
DOUT
988
PEN AVCC
1030
PEN AGND
110A

Fig. 21e

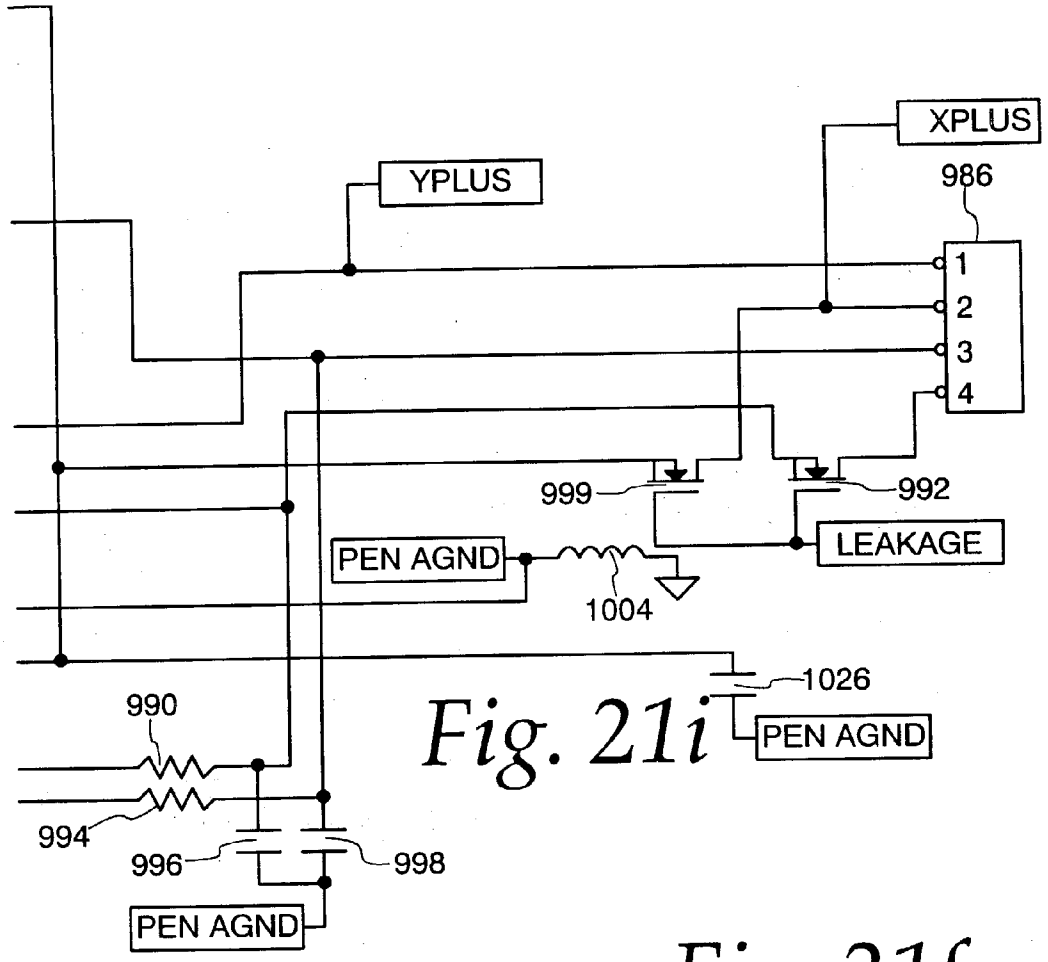


Fig. 21i

Fig. 21f




Fig. 21h




Fig. 21g




Fig. 21c	Fig. 21e	Fig. 21i

Fig. 22a

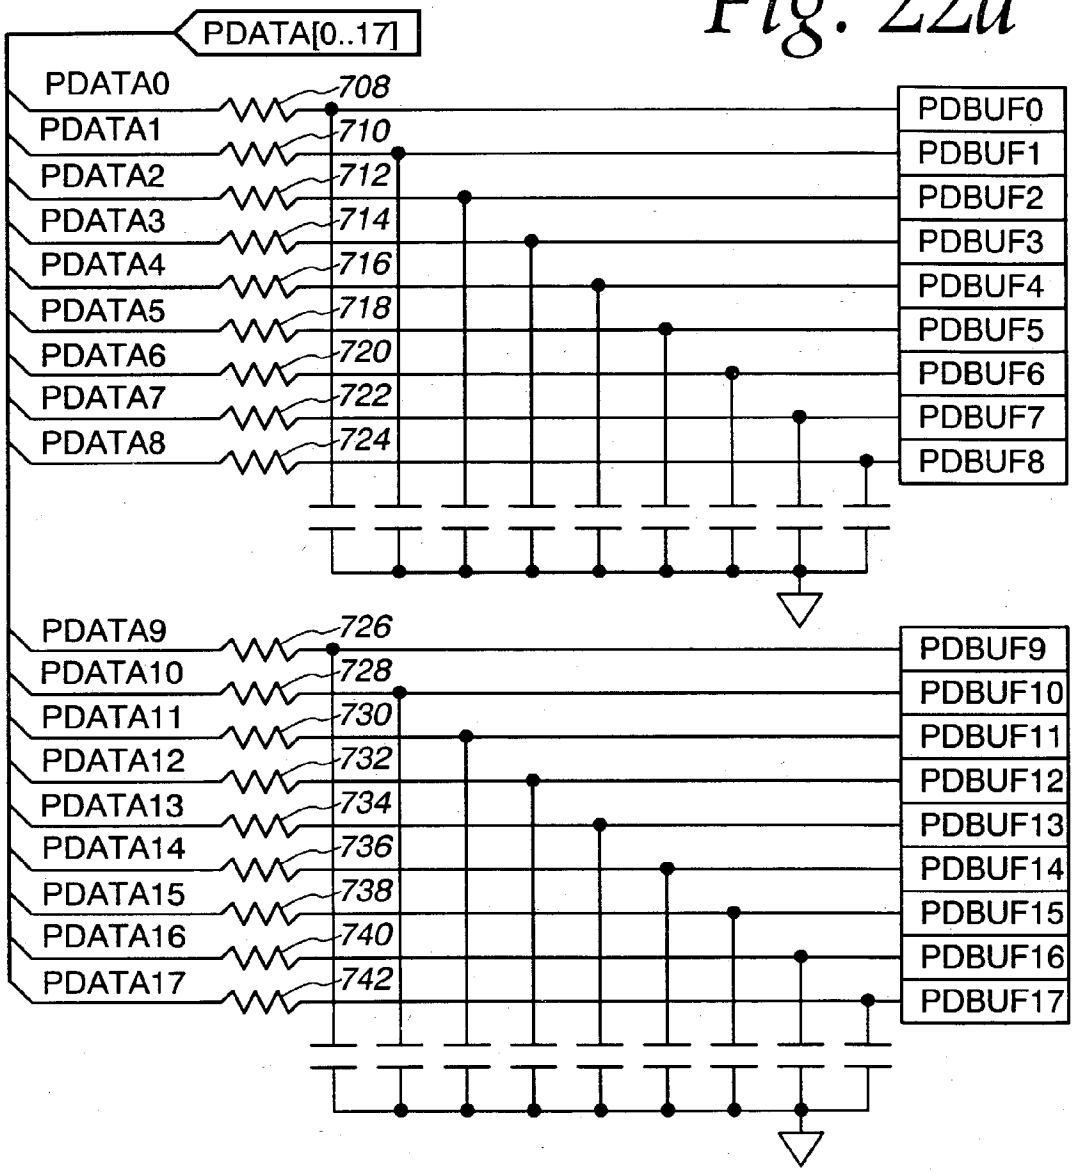


Fig. 22b

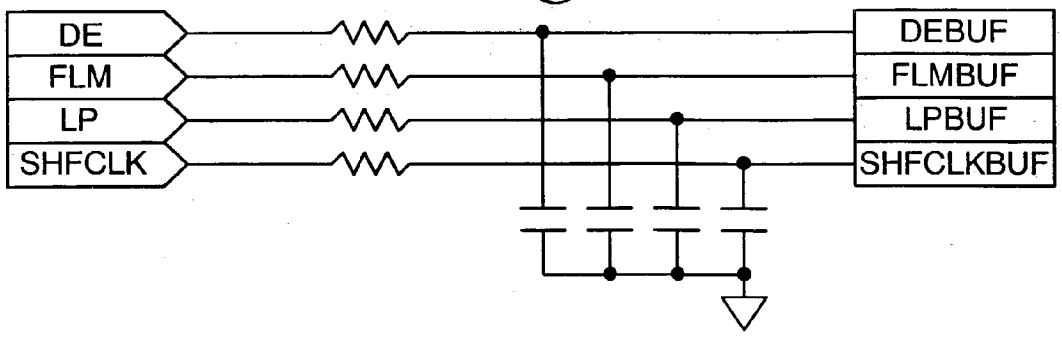


Fig. 22c

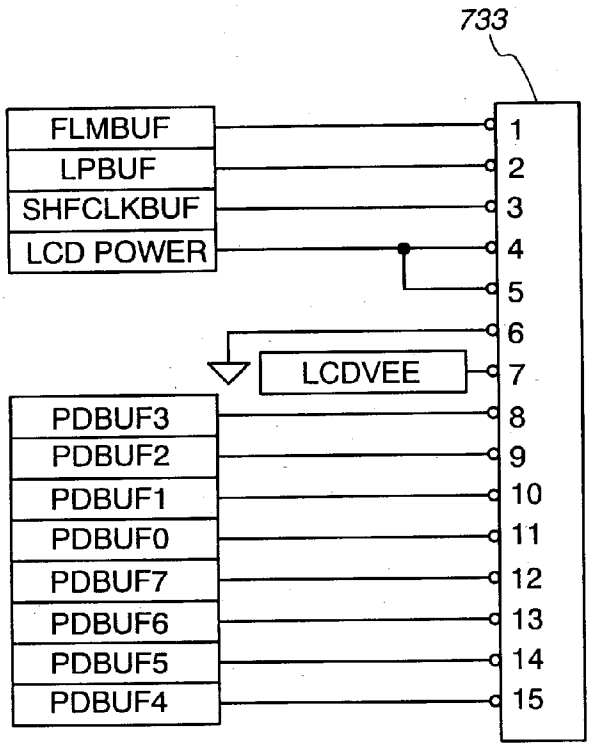


Fig. 22d

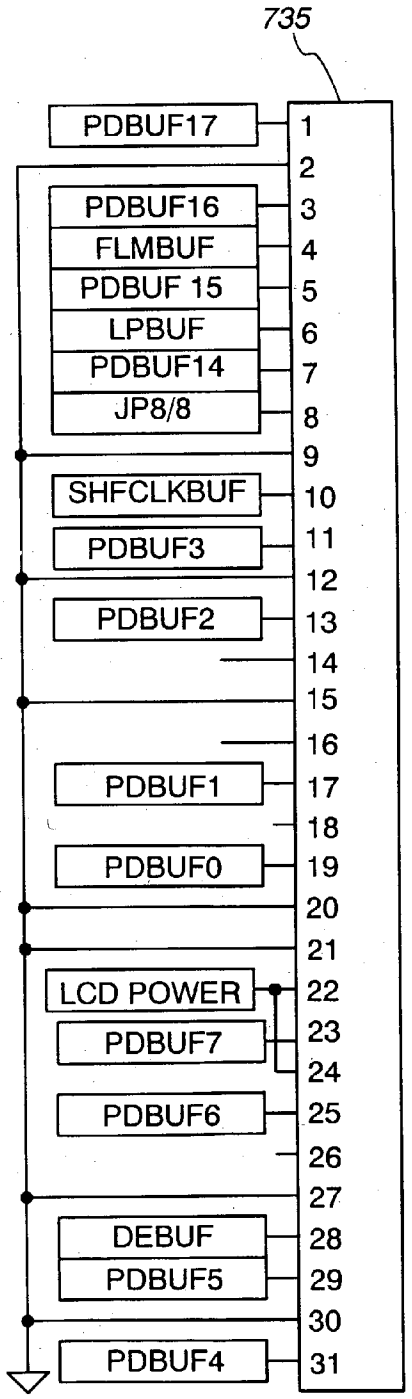
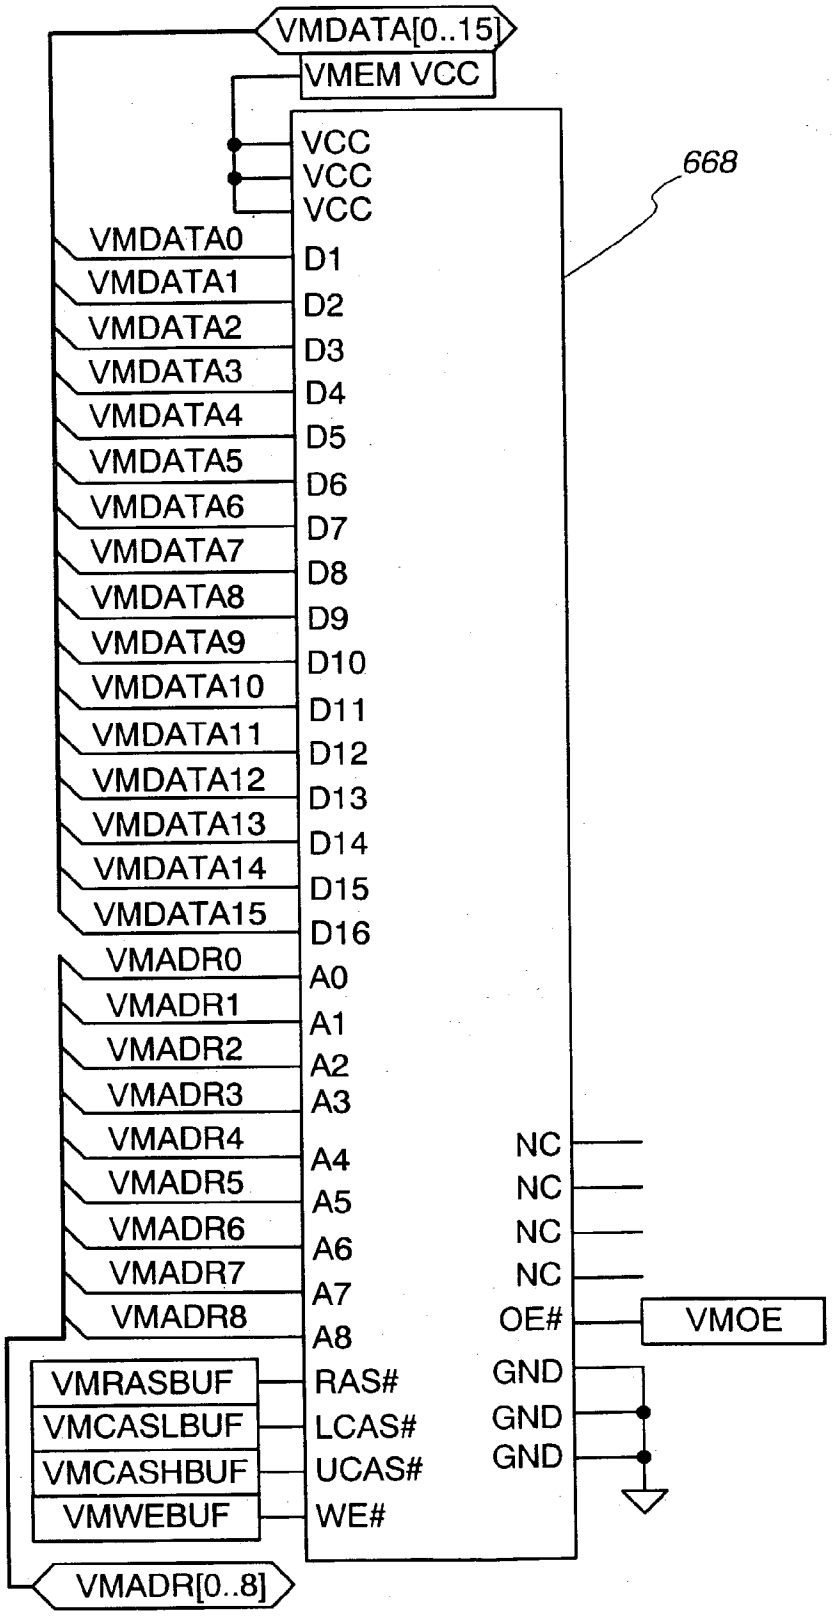


Fig. 23a


VMDATA[0..15]
VMEM VCC
668
VCC
VCC
VCC
VMDATA0
VMDATA1
VMDATA2
VMDATA3
VMDATA4
VMDATA5
VMDATA6
VMDATA7
VMDATA8
VMDATA9
VMDATA10
VMDATA11
VMDATA12
VMDATA13
VMDATA14
VMDATA15
D1
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
D14
D15
D16
VMADR0
VMADR1
VMADR2
VMADR3
VMADR4
VMADR5
VMADR6
VMADR7
VMADR8
A0
A1
A2
A3
A4
A5
A6
A7
A8
NC
NC
NC
NC
OE#
VMOE
VMRASBUF
VMCASLBUF
VMCASHBUF
VMWEBUF
RAS#
LCAS#
UCAS#
WE#
GND
GND
GND
VMADR[0..8]

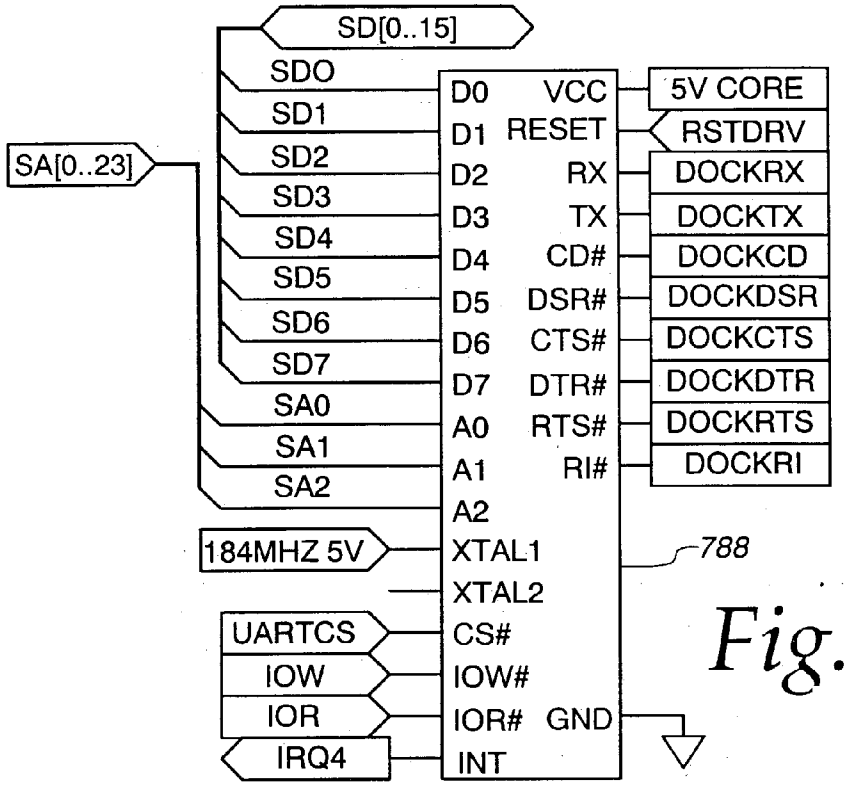
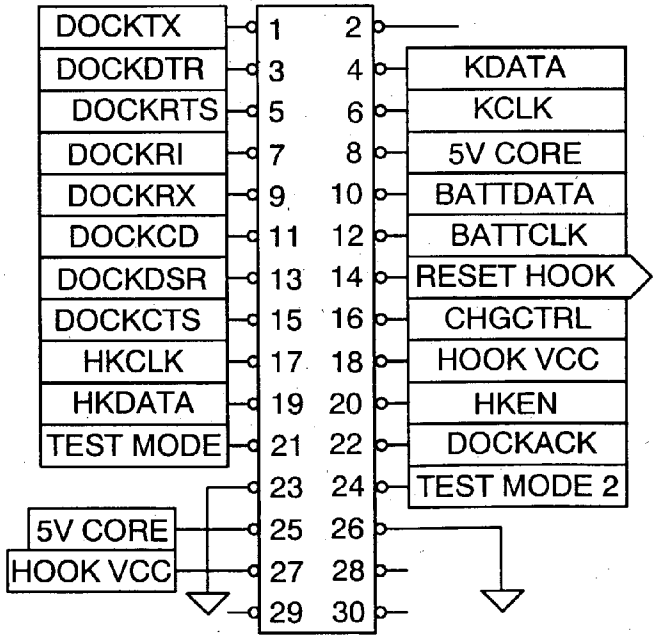


Fig. 23b

Fig. 23c



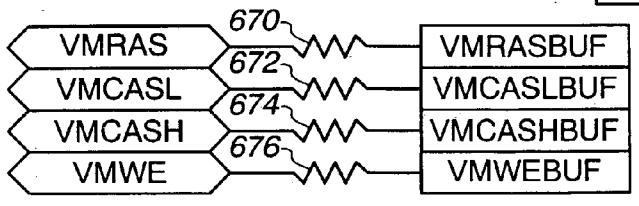
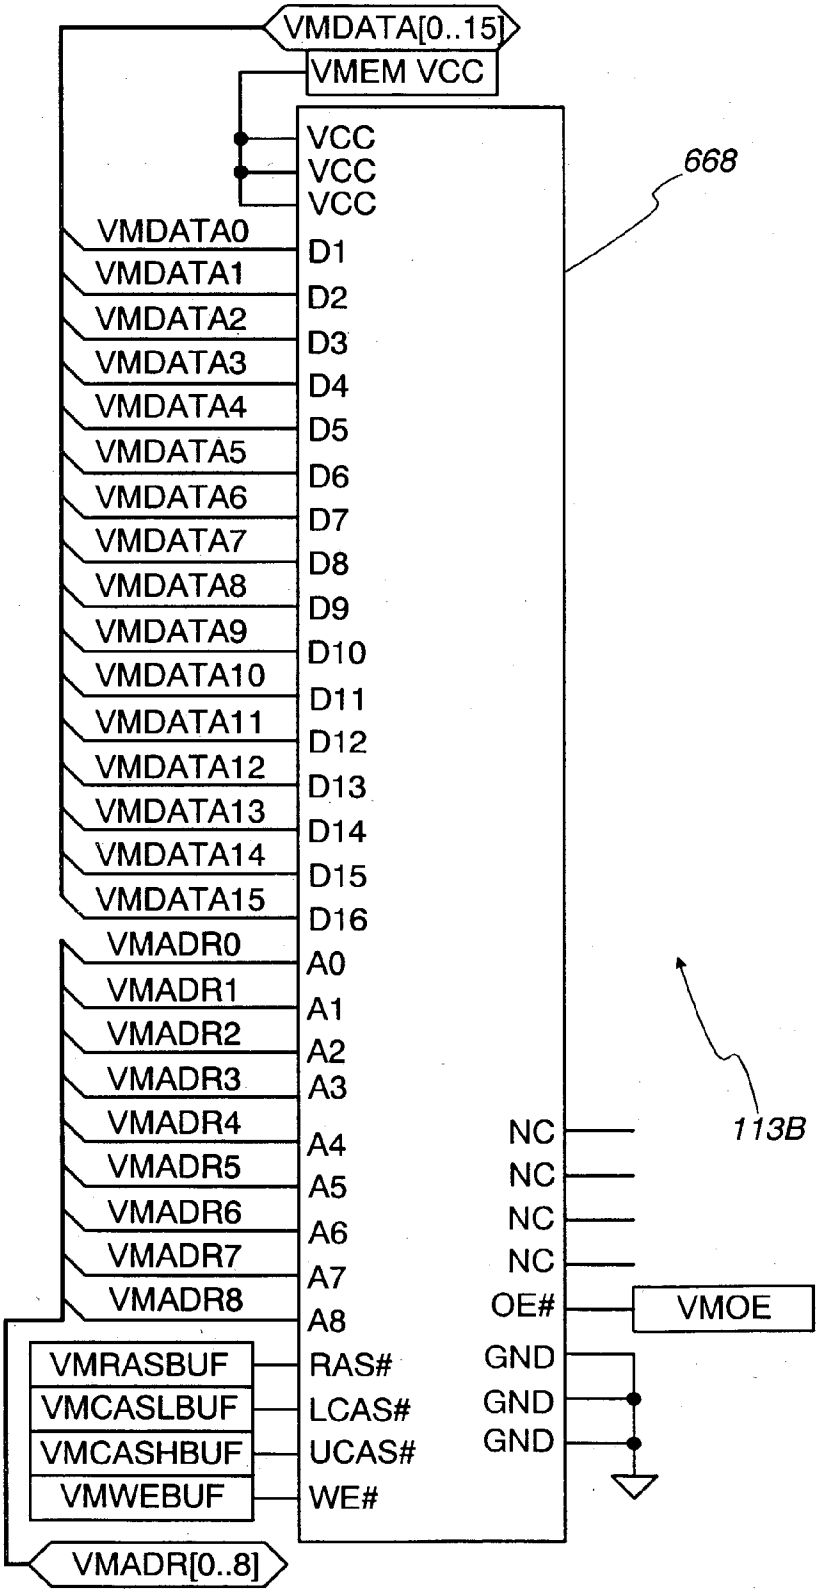


Fig. 23d

Fig. 23e


VMDATA[0..15]
VMEM VCC
VCC
VCC
VCC
668
VMDATA0
VMDATA1
VMDATA2
VMDATA3
VMDATA4
VMDATA5
VMDATA6
VMDATA7
VMDATA8
VMDATA9
VMDATA10
VMDATA11
VMDATA12
VMDATA13
VMDATA14
VMDATA15
D1
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
D14
D15
D16
VMADR0
VMADR1
VMADR2
VMADR3
VMADR4
VMADR5
VMADR6
VMADR7
VMADR8
A0
A1
A2
A3
A4
A5
A6
A7
A8
113B
NC
NC
NC
NC
OE#
VMOE
GND
GND
GND
VMRASBUF
VMCASLBUF
VMCASHBUF
VMWEBUF
RAS#
LCAS#
UCAS#
WE#
VMADR[0..8]

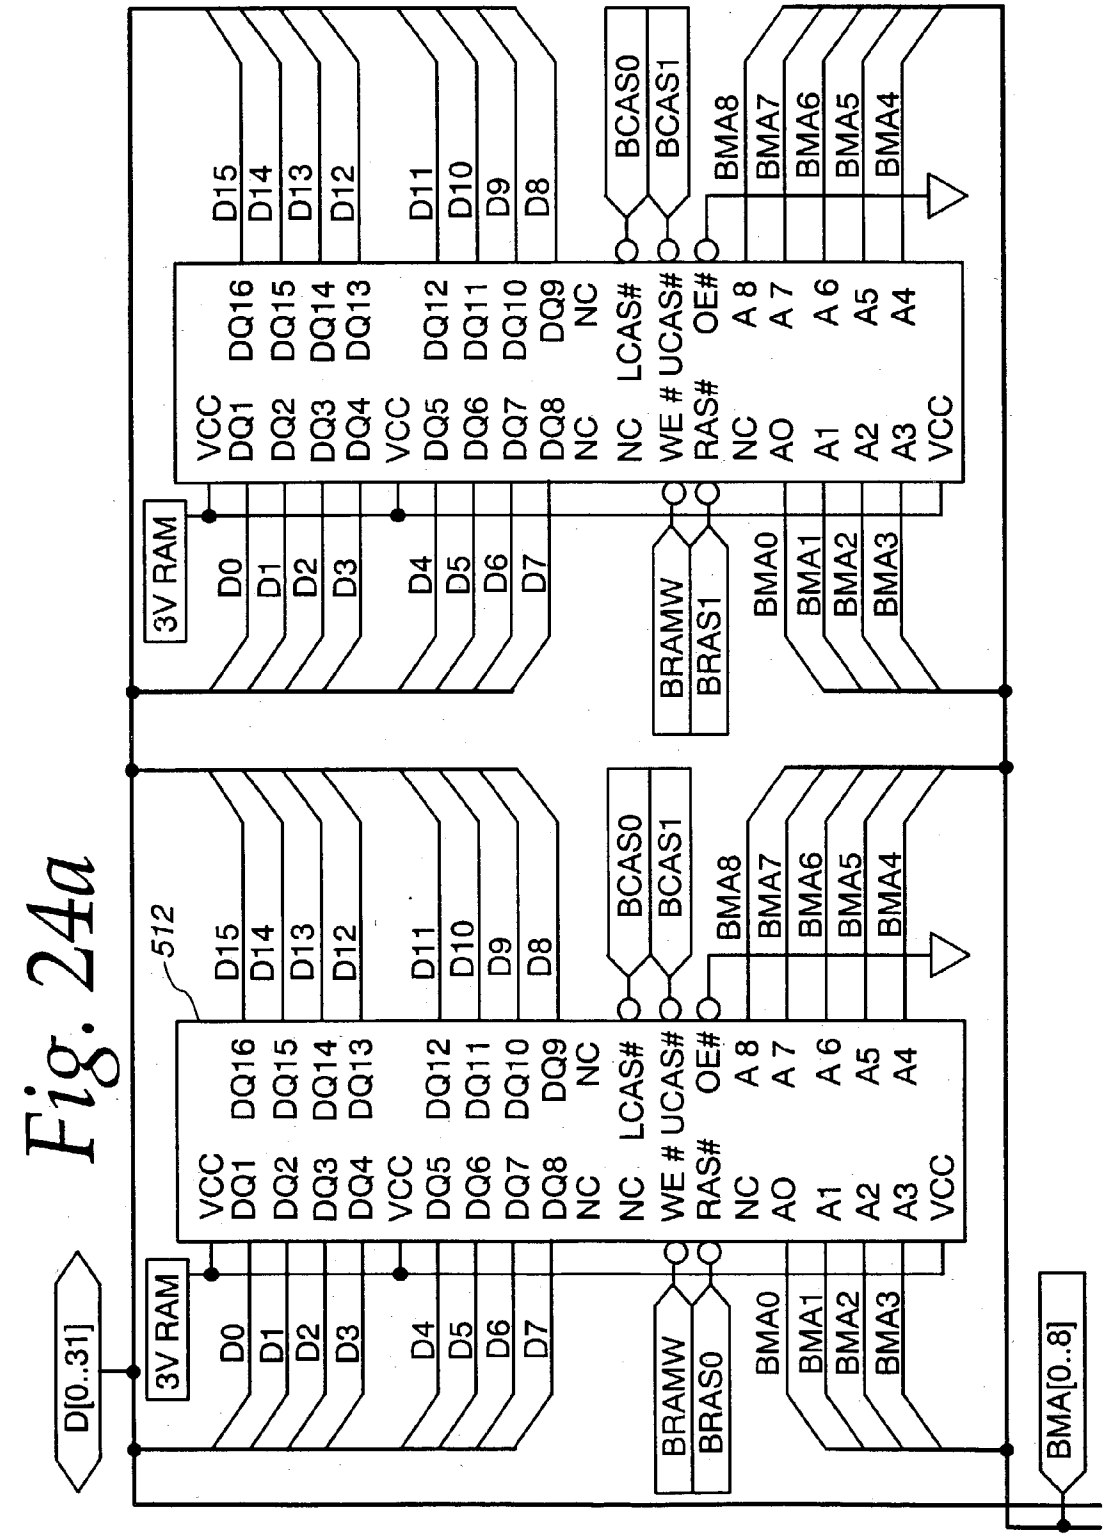

D[0..31]
3V RAM
512
D0
D1
D2
D3
D4
D5
D6
D7
D8
D9
D10
D11
D12
D13
D14
D15
VCC
DQ1
DQ2
DQ3
DQ4
VCC
DQ5
DQ6
DQ7
DQ8
NC
NC
WE #
RAS#
NC
AO
A1
A2
A3
VCC
DQ16
DQ15
DQ14
DQ13
DQ12
DQ11
DQ10
DQ9
NC
LCAS#
UCAS#
OE#
A 8
A 7
A 6
A5
A4
BCAS0
BCAS1
BRAMW
BRAS0
BMA0
BMA1
BMA2
BMA3
BMA4
BMA5
BMA6
BMA7
BMA8
BMA[0..8]

Fig. 24a

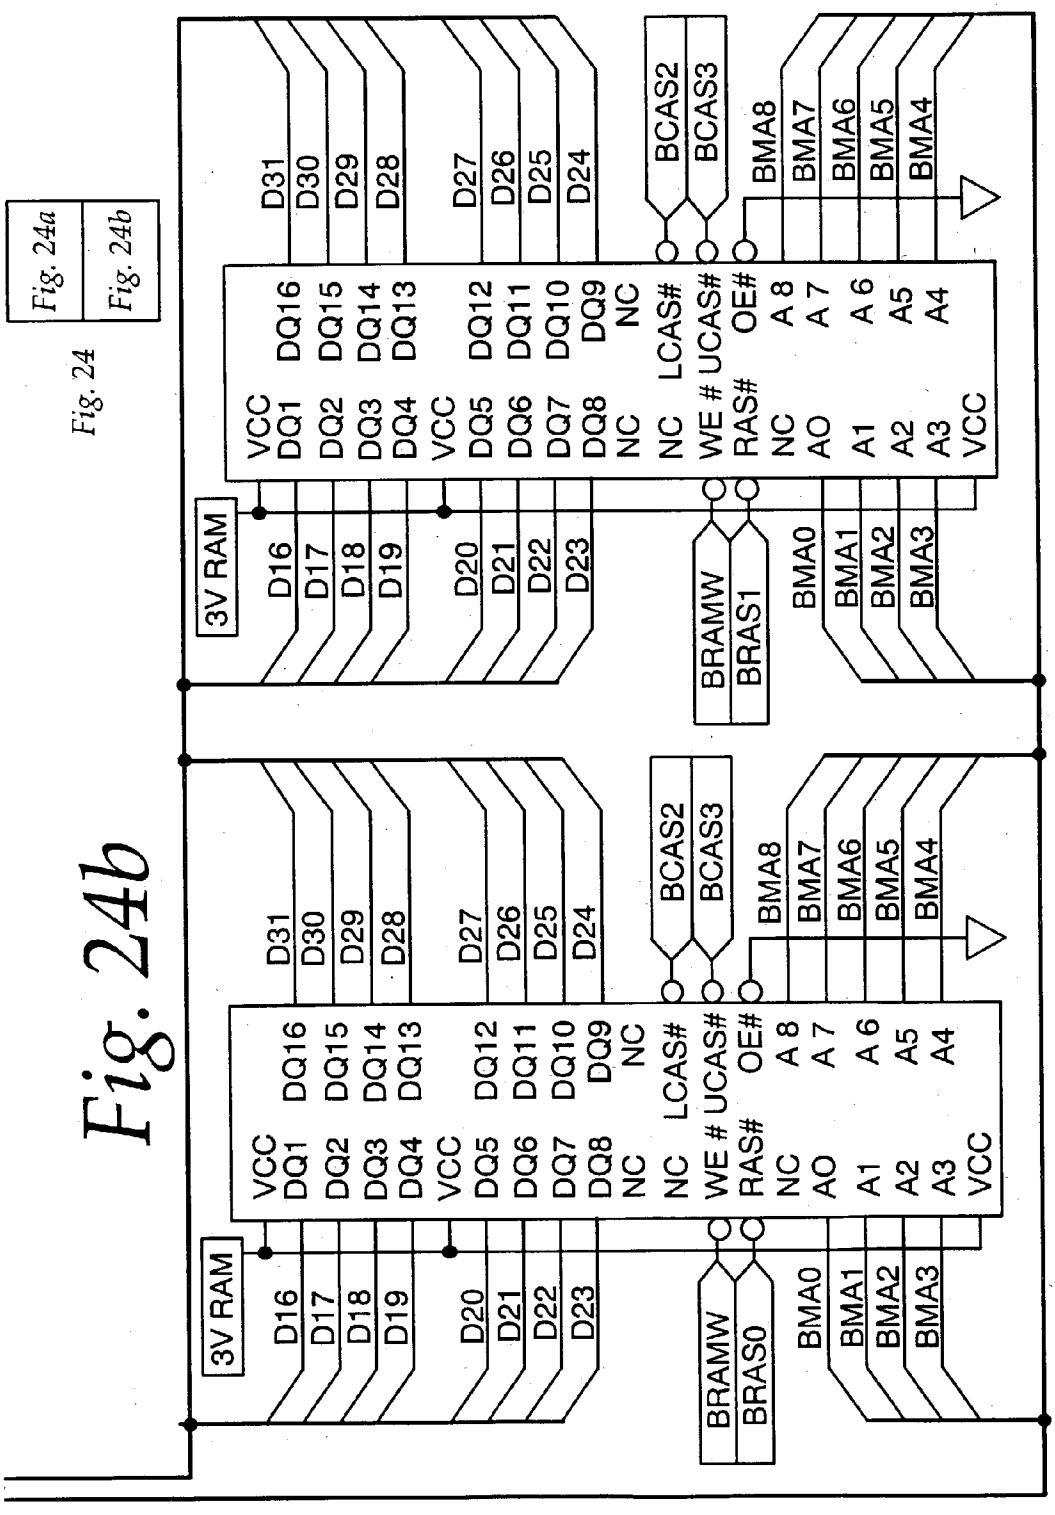
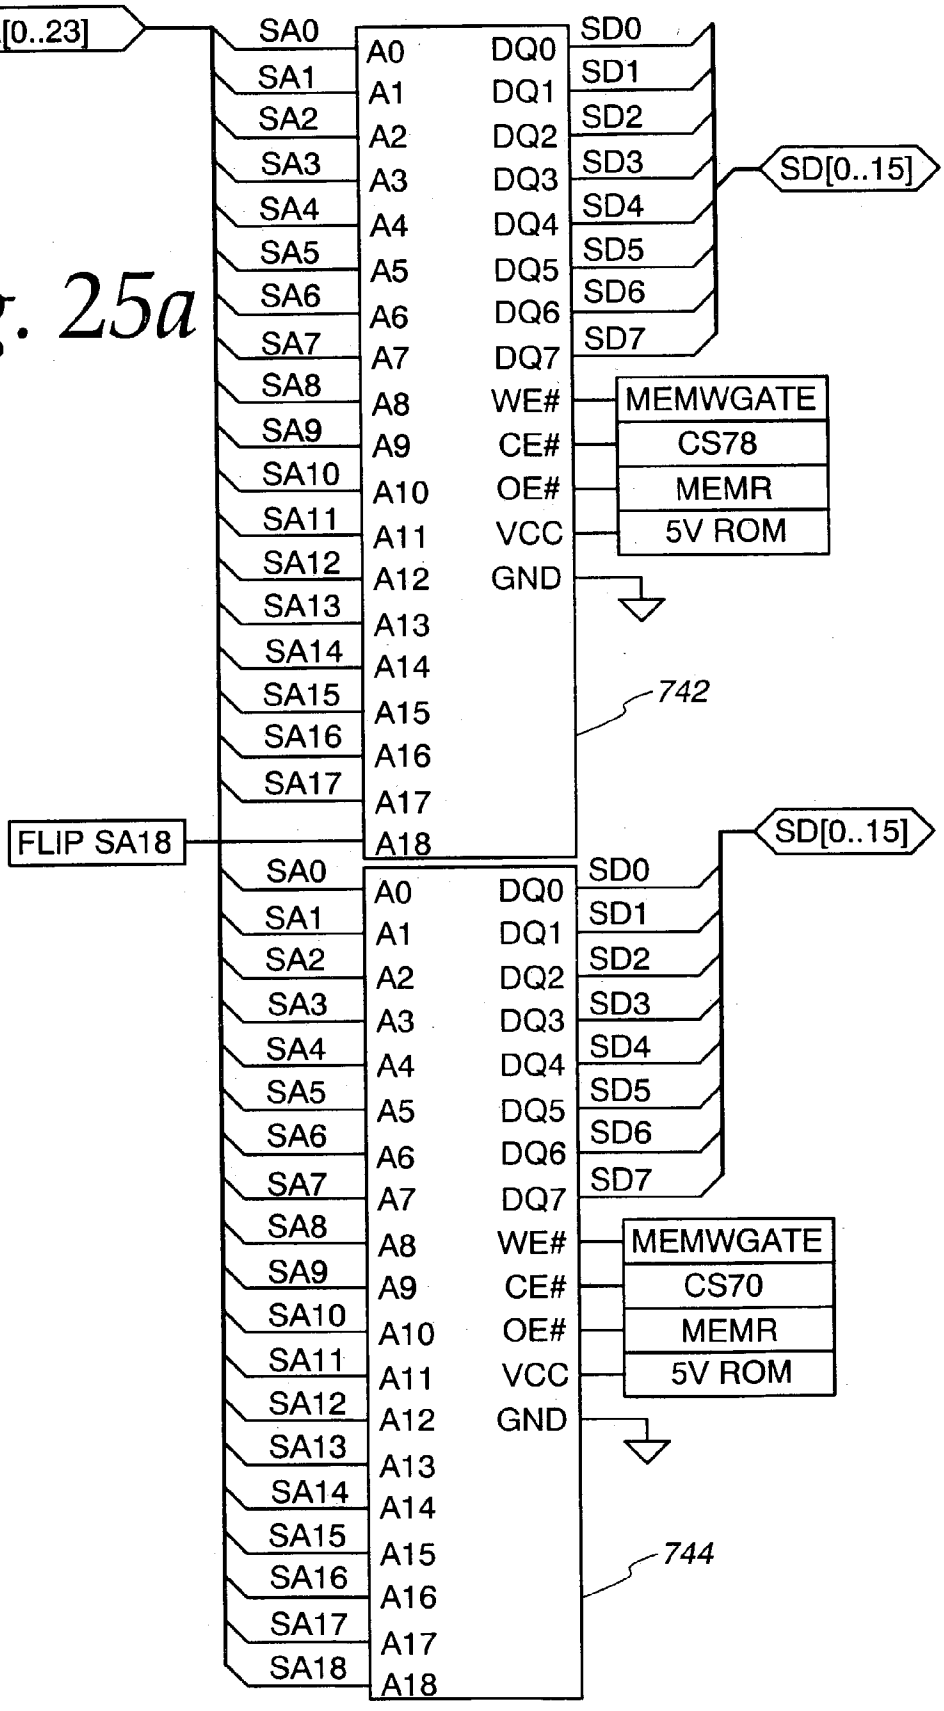

Fig. 24a
Fig. 24b
Fig. 24
Fig. 24b
3V RAM
D16
D17
D18
D19
D20
D21
D22
D23
D24
D25
D26
D27
D28
D29
D30
D31
VCC
DQ1
DQ2
DQ3
DQ4
VCC
DQ5
DQ6
DQ7
DQ8
NC
DQ9
DQ10
DQ11
DQ12
DQ13
DQ14
DQ15
DQ16
NC
LCAS#
UCAS#
OE#
A 8
A 7
A 6
A5
A4
NC
WE #
RAS#
AO
A1
A2
A3
VCC
BRAMW
BRAS1
BRAS0
BCAS2
BCAS3
BMA0
BMA1
BMA2
BMA3
BMA4
BMA5
BMA6
BMA7
BMA8

Fig. 25a


SA[0..23]
SA0
SA1
SA2
SA3
SA4
SA5
SA6
SA7
SA8
SA9
SA10
SA11
SA12
SA13
SA14
SA15
SA16
SA17
FLIP SA18
A0
A1
A2
A3
A4
A5
A6
A7
A8
A9
A10
A11
A12
A13
A14
A15
A16
A17
A18
DQ0
DQ1
DQ2
DQ3
DQ4
DQ5
DQ6
DQ7
WE#
CE#
OE#
VCC
GND
SD0
SD1
SD2
SD3
SD4
SD5
SD6
SD7
SD[0..15]
MEMWGATE
CS78
MEMR
5V ROM
742
SD[0..15]
MEMWGATE
CS70
MEMR
5V ROM
744

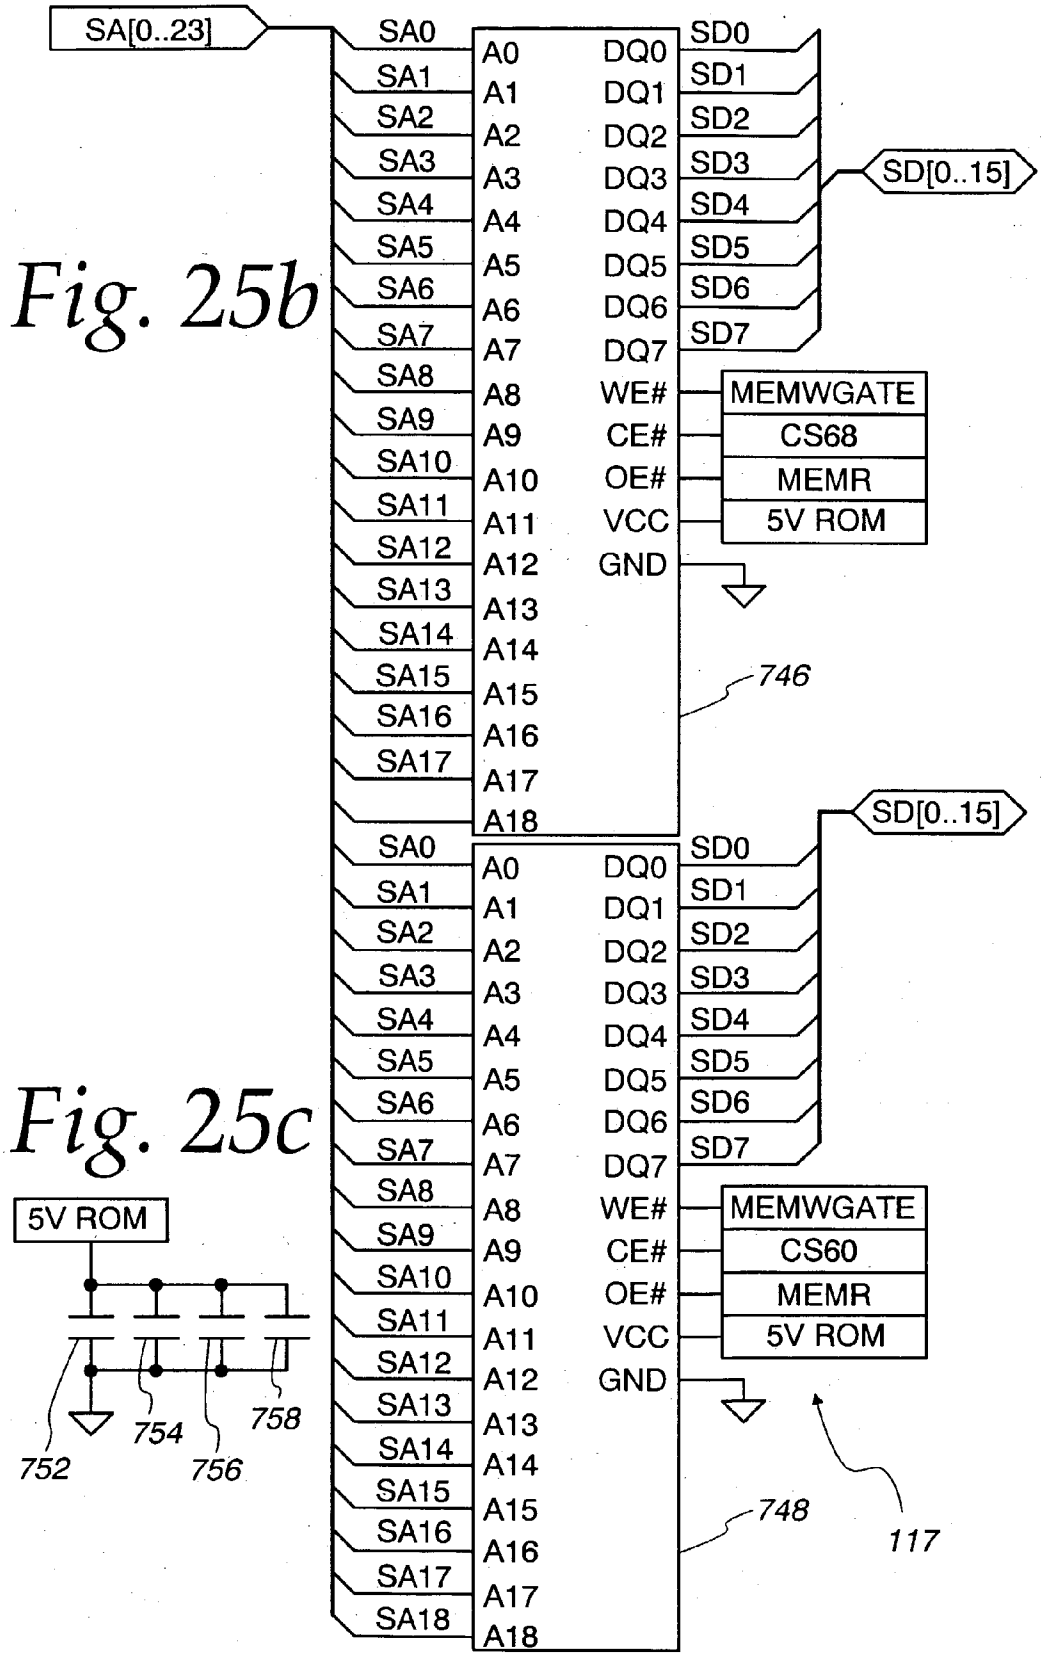


Fig. 25b

Fig. 25c

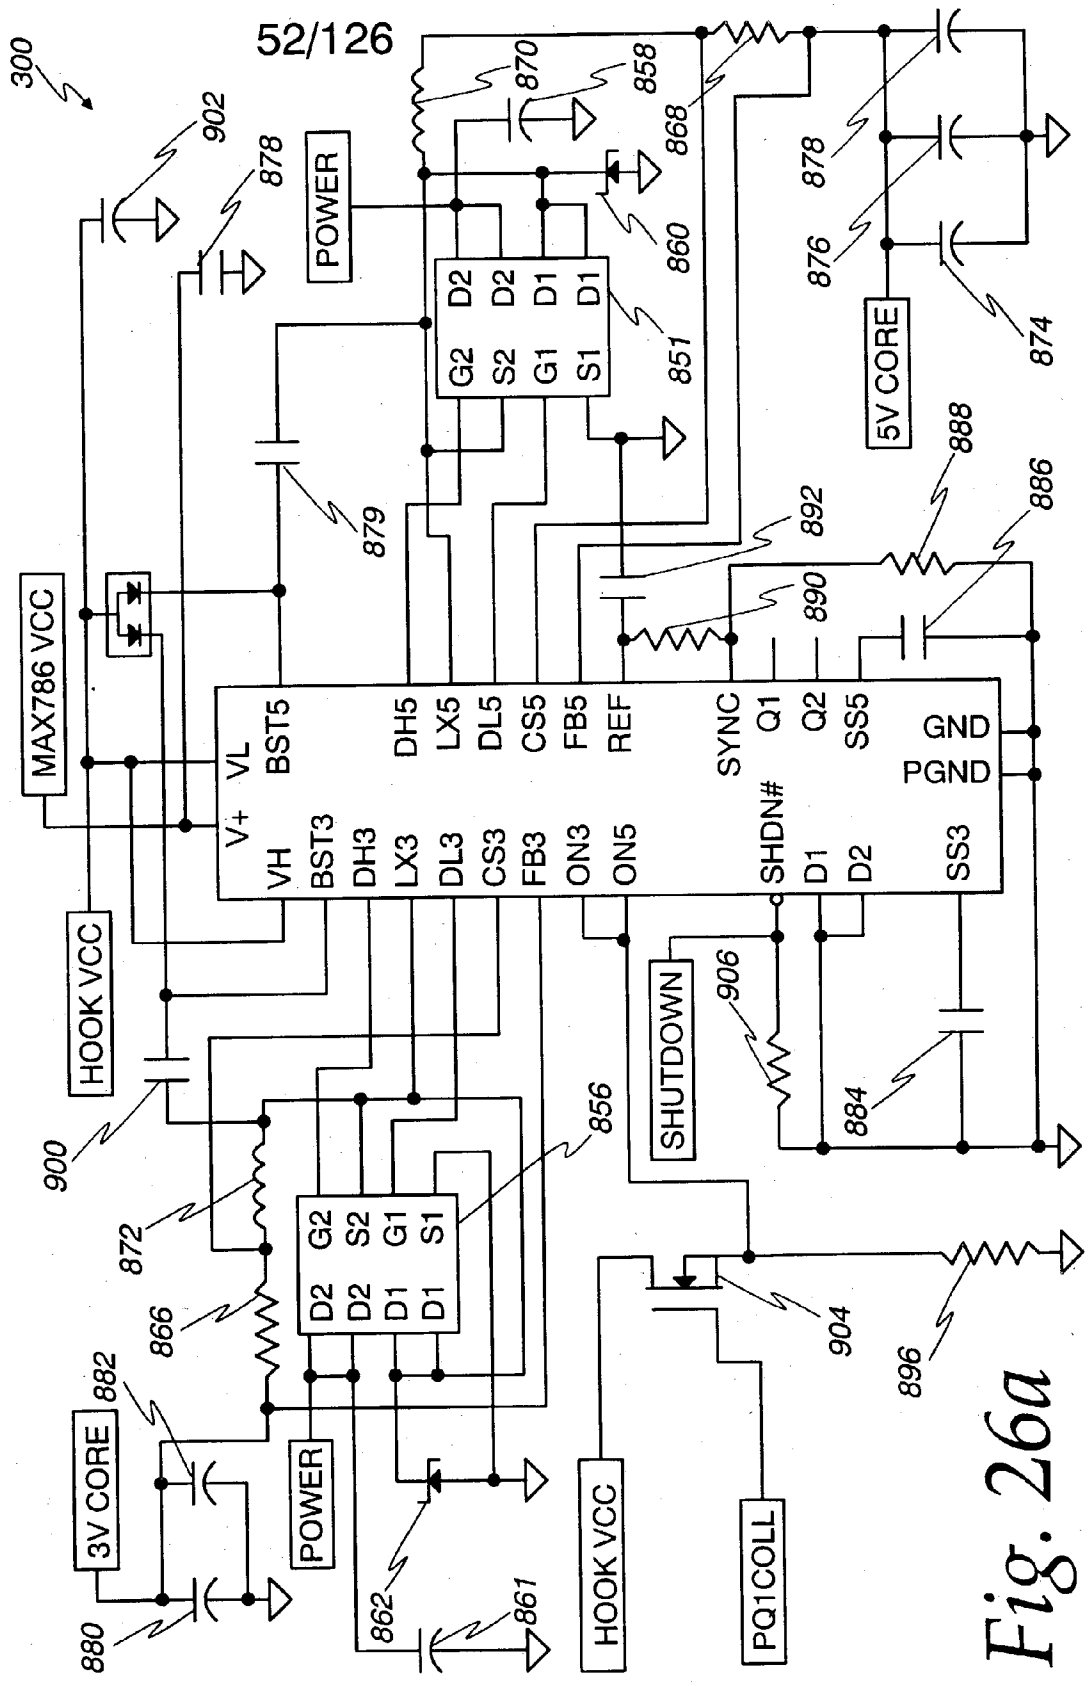

52/126
300
902
878
POWER
870
858
868
860
851
D2 D2 D1 D1
G2 S2 G1 S1
878
876
874
5V CORE
879
888
886
892
890
MAX786 VCC
VL BST5 DH5 LX5 DL5 CS5 FB5 REF SYNC Q1 Q2 SS5 GND
V+ VH BST3 DH3 LX3 DL3 CS3 FB3 ON3 ON5 SHDN# D1 D2 SS3 PGND
HOOK VCC
900
906
SHUTDOWN
884
856
872
866
882
3V CORE
880
862
861
HOOK VCC
PQ1COLL
904
896

Fig. 26a

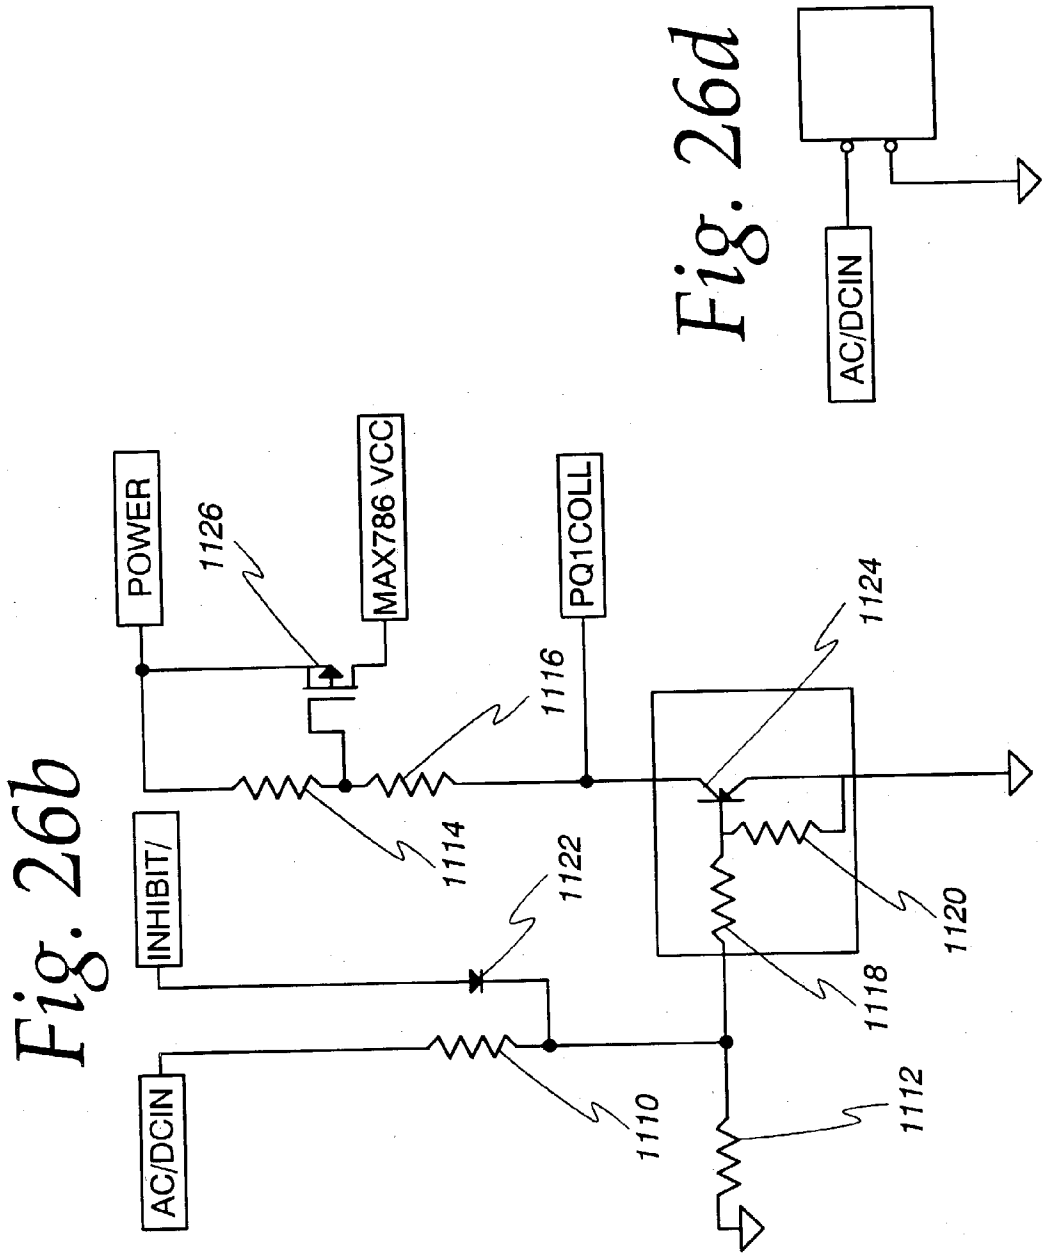


Fig. 26b

Fig. 26d

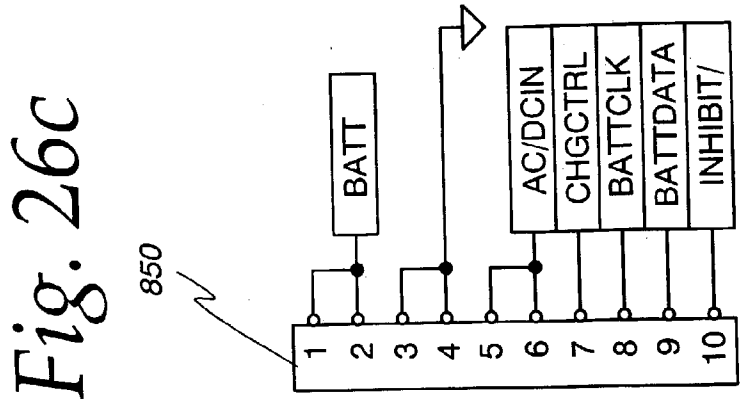


Fig. 26c

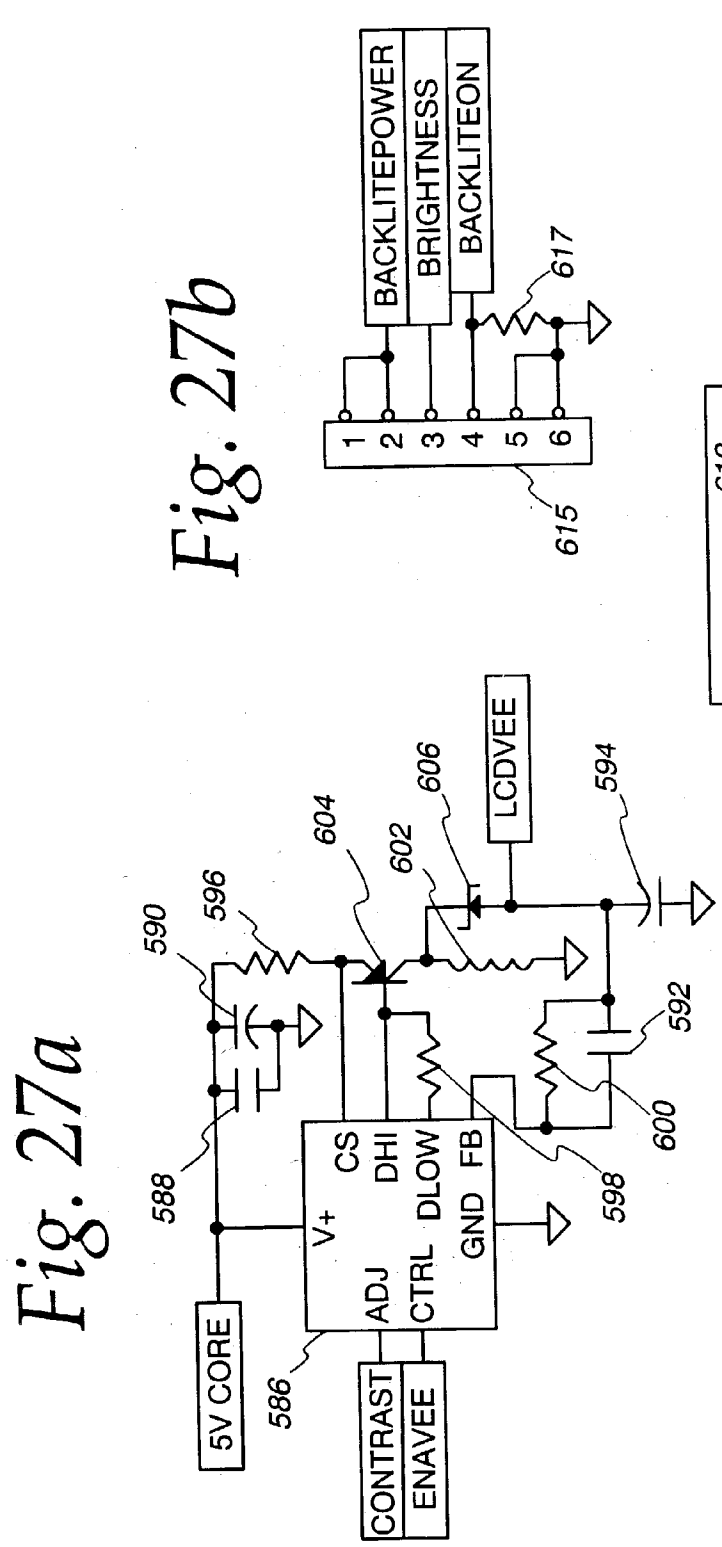


Fig. 27a

Fig. 27b

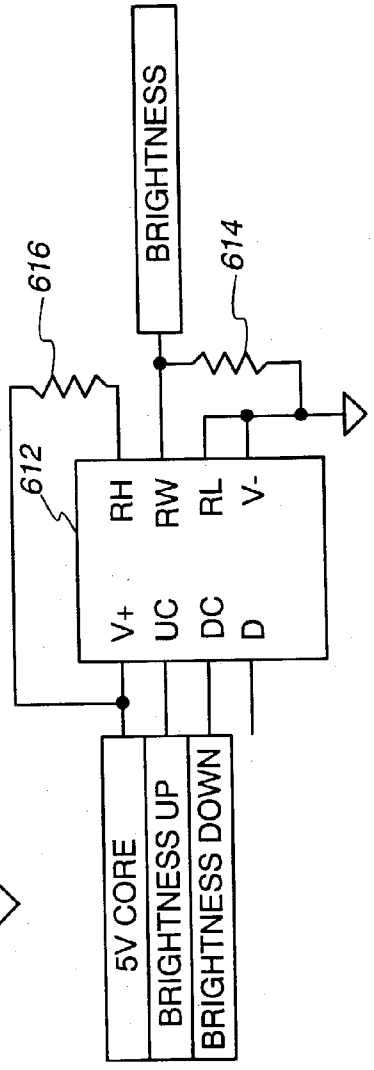


Fig. 27c

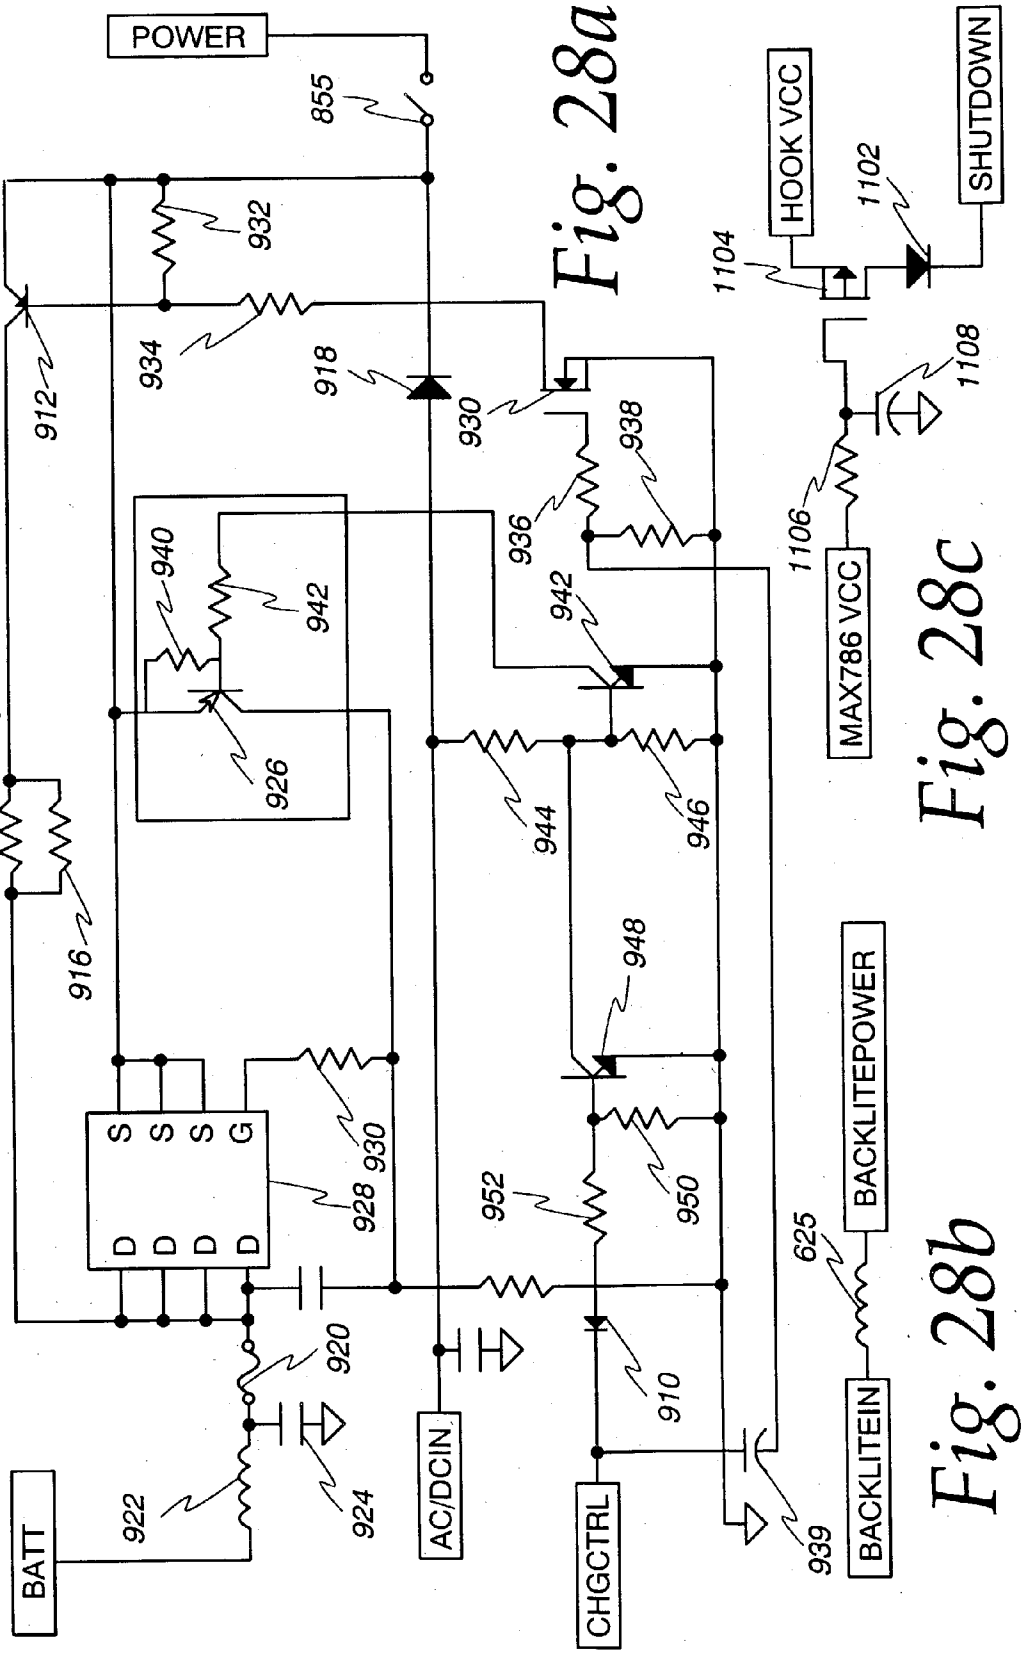


Fig. 28a

Fig. 28c

Fig. 28b

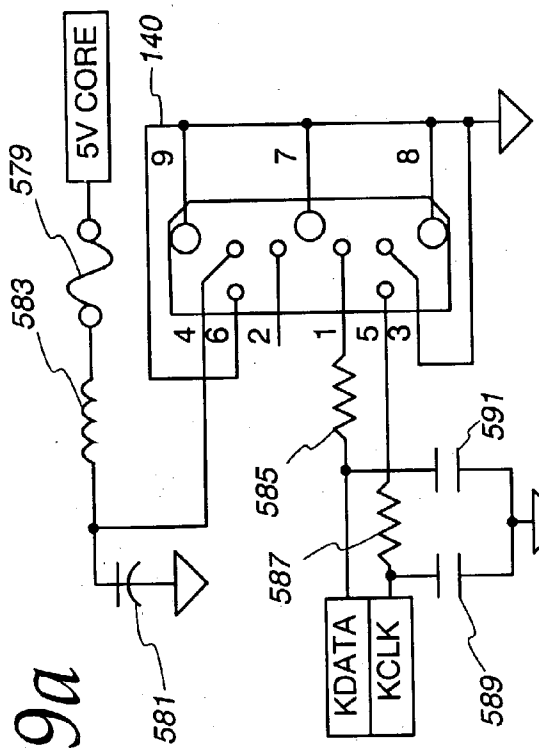


Fig. 29a

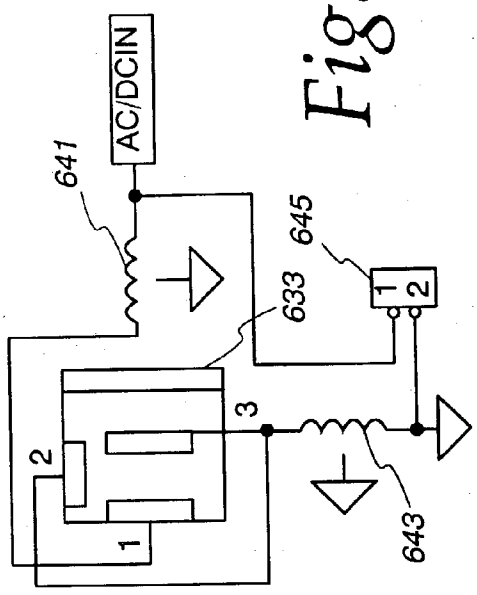


Fig. 29b

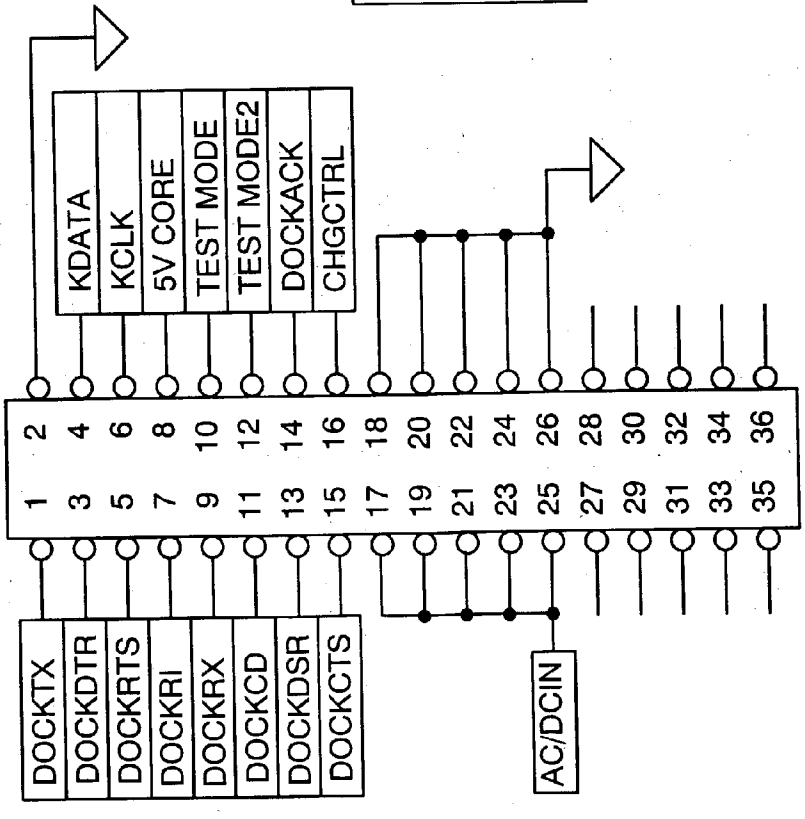


Fig. 29c




Fig. 29d




Fig. 29e

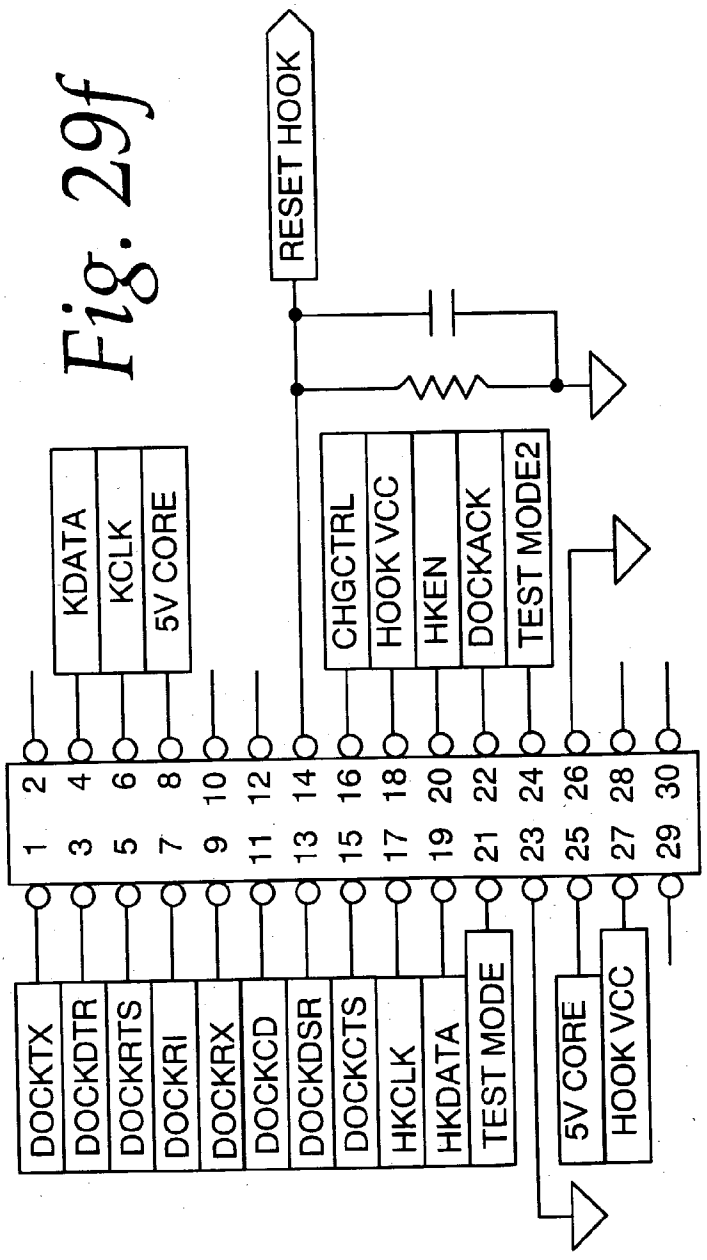
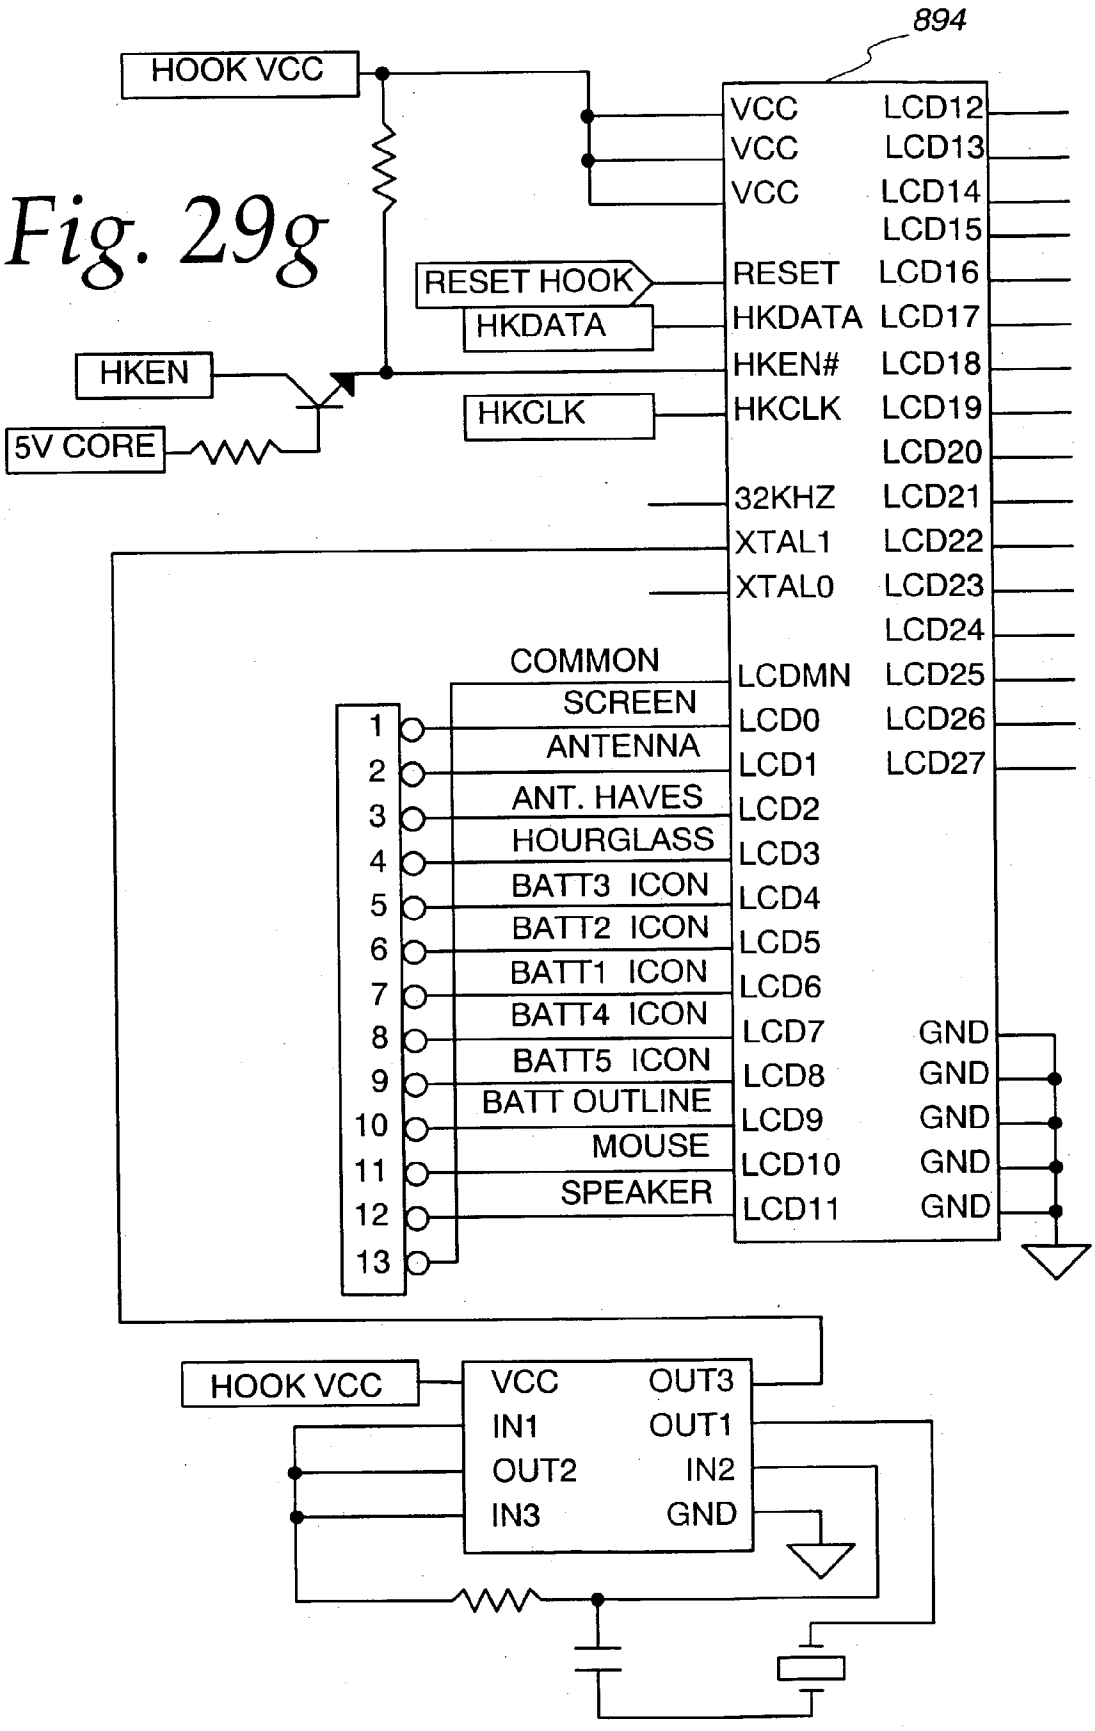


Fig. 29f

Fig. 29g


894
HOOK VCC
VCC
VCC
VCC
LCD12
LCD13
LCD14
LCD15
RESET HOOK
RESET
LCD16
HKDATA
HKDATA
LCD17
HKEN
HKEN#
LCD18
HKCLK
HKCLK
LCD19
LCD20
5V CORE
32KHZ
LCD21
XTAL1
LCD22
XTAL0
LCD23
LCD24
COMMON
LCDMN
LCD25
SCREEN
LCD0
LCD26
ANTENNA
LCD1
LCD27
ANT. HAVES
LCD2
HOURGLASS
LCD3
BATT3 ICON
LCD4
BATT2 ICON
LCD5
BATT1 ICON
LCD6
BATT4 ICON
LCD7
GND
BATT5 ICON
LCD8
GND
BATT OUTLINE
LCD9
GND
MOUSE
LCD10
GND
SPEAKER
LCD11
GND
1
2
3
4
5
6
7
8
9
10
11
12
13
HOOK VCC
VCC
OUT3
IN1
OUT1
OUT2
IN2
IN3
GND

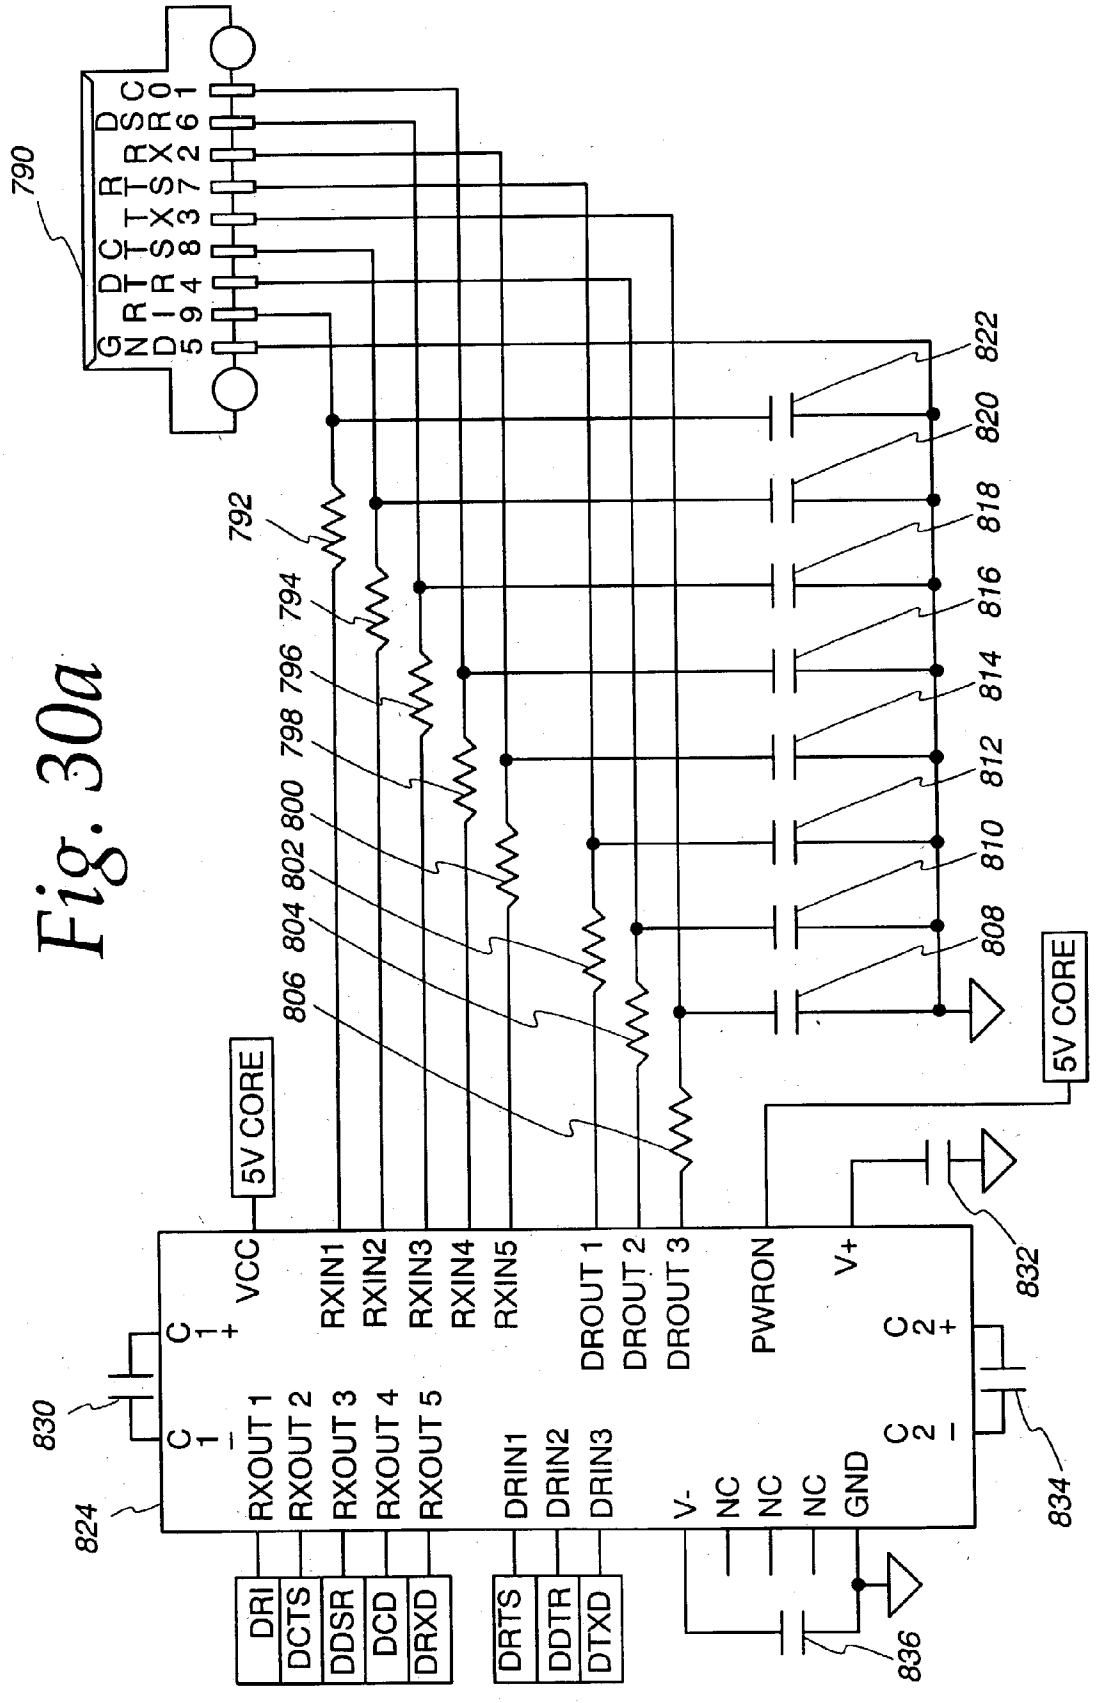

790
GND
DTR
DSR
RTS
CTS
RXD
RI
5 9 4 8 3 7 2 6 1
792
794
796
798
800
802
804
806
808
810
812
814
816
818
820
822
5V CORE
VCC
C1+
C1-
RXIN1
RXIN2
RXIN3
RXIN4
RXIN5
DROUT 1
DROUT 2
DROUT 3
PWRON
V+
C2+
C2-
RXOUT 1
RXOUT 2
RXOUT 3
RXOUT 4
RXOUT 5
DRIN1
DRIN2
DRIN3
V-
NC
NC
NC
GND
DRI
DCTS
DDSR
DCD
DRXD
DRTS
DDTR
DTXD
824
830
832
834
836

Fig. 30a




Fig. 30c




Fig. 30d

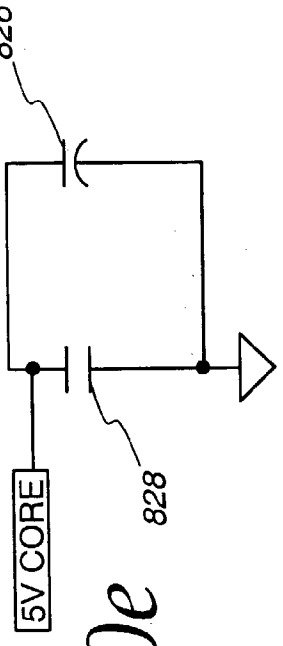


Fig. 30e

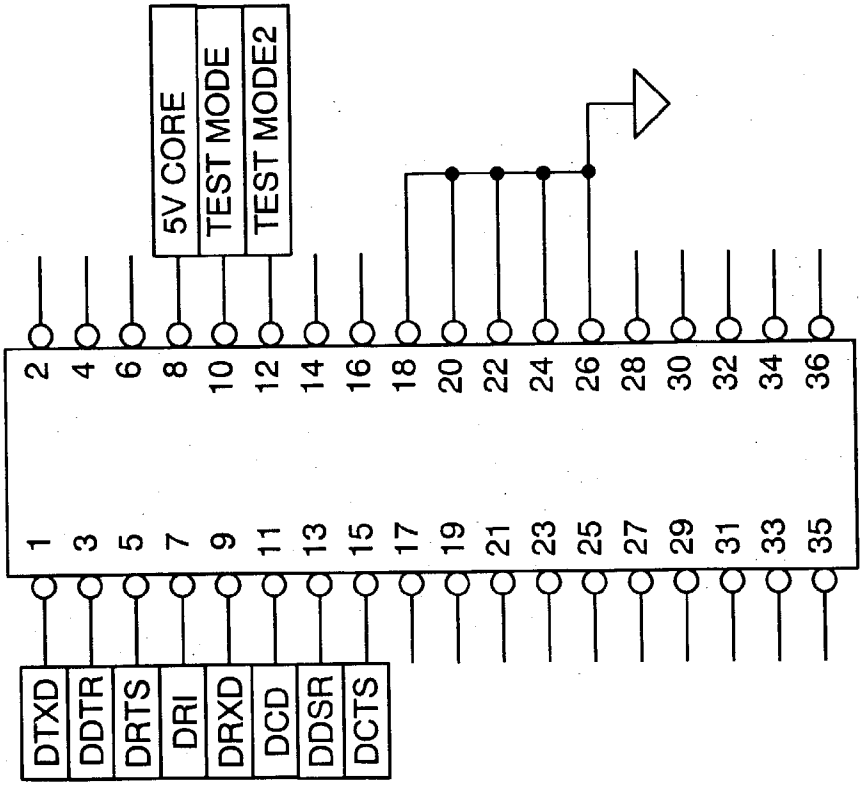


Fig. 30b

Fig. 31

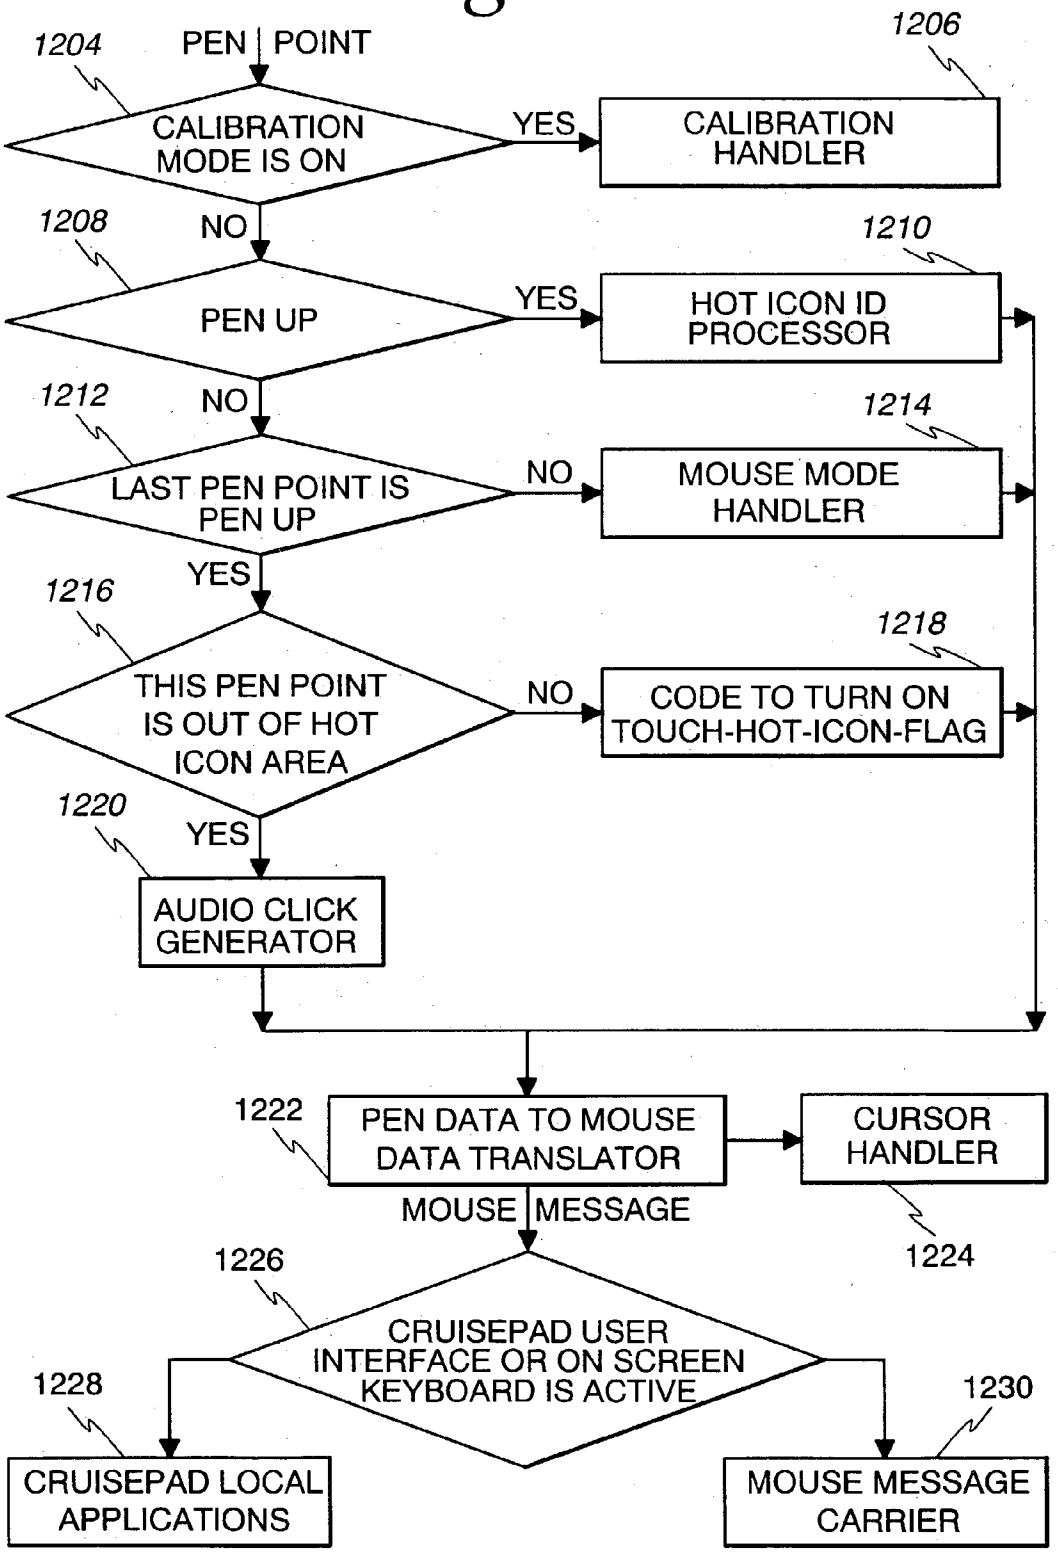

1204
PEN | POINT
CALIBRATION MODE IS ON
YES
1206
CALIBRATION HANDLER
NO
1208
PEN UP
YES
1210
HOT ICON ID PROCESSOR
NO
1212
LAST PEN POINT IS PEN UP
NO
1214
MOUSE MODE HANDLER
YES
1216
THIS PEN POINT IS OUT OF HOT ICON AREA
NO
1218
CODE TO TURN ON TOUCH-HOT-ICON-FLAG
YES
1220
AUDIO CLICK GENERATOR
1222
PEN DATA TO MOUSE DATA TRANSLATOR
CURSOR HANDLER
1224
MOUSE | MESSAGE
1226
CRUISEPAD USER INTERFACE OR ON SCREEN KEYBOARD IS ACTIVE
1228
CRUISEPAD LOCAL APPLICATIONS
1230
MOUSE MESSAGE CARRIER

Fig. 32

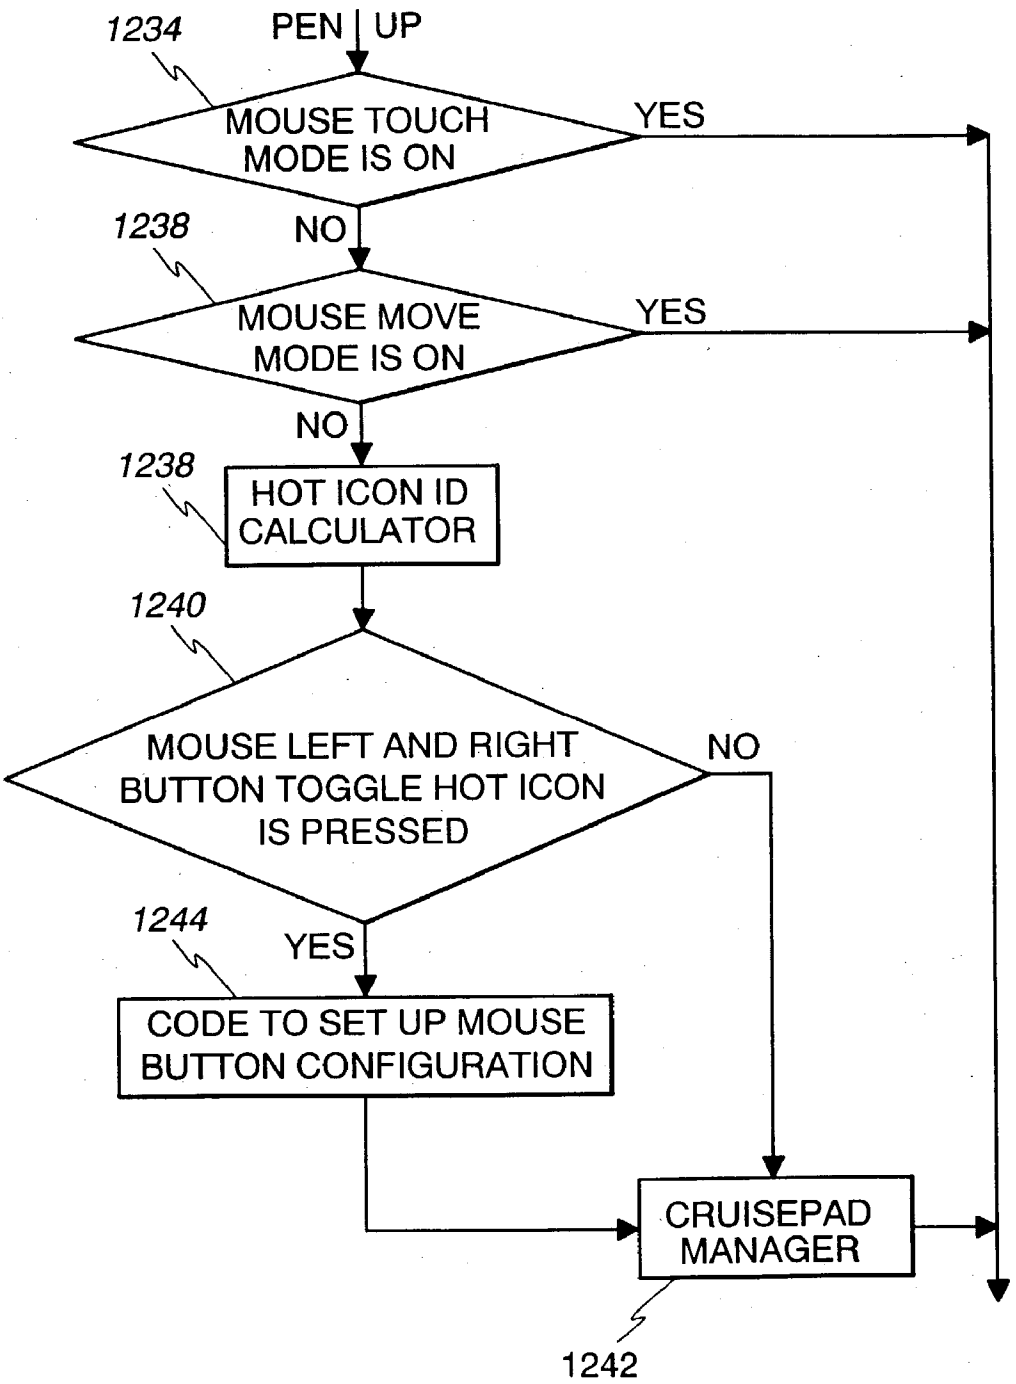

1234
PEN UP
MOUSE TOUCH MODE IS ON
YES
1238
NO
MOUSE MOVE MODE IS ON
YES
NO
1238
HOT ICON ID CALCULATOR
1240
MOUSE LEFT AND RIGHT BUTTON TOGGLE HOT ICON IS PRESSED
NO
1244
YES
CODE TO SET UP MOUSE BUTTON CONFIGURATION
CRUISEPAD MANAGER
1242

Fig. 33

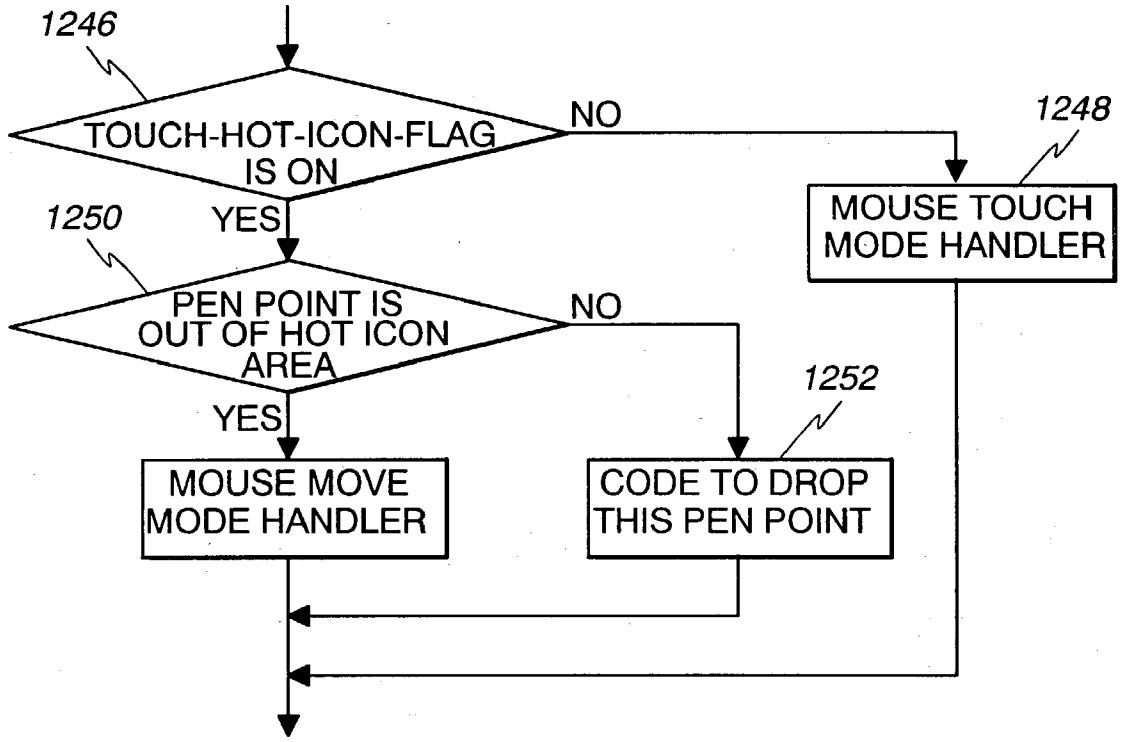

1246
TOUCH-HOT-ICON-FLAG IS ON
NO
1248
MOUSE TOUCH MODE HANDLER
1250
YES
PEN POINT IS OUT OF HOT ICON AREA
NO
1252
YES
MOUSE MOVE MODE HANDLER
CODE TO DROP THIS PEN POINT

Fig. 34

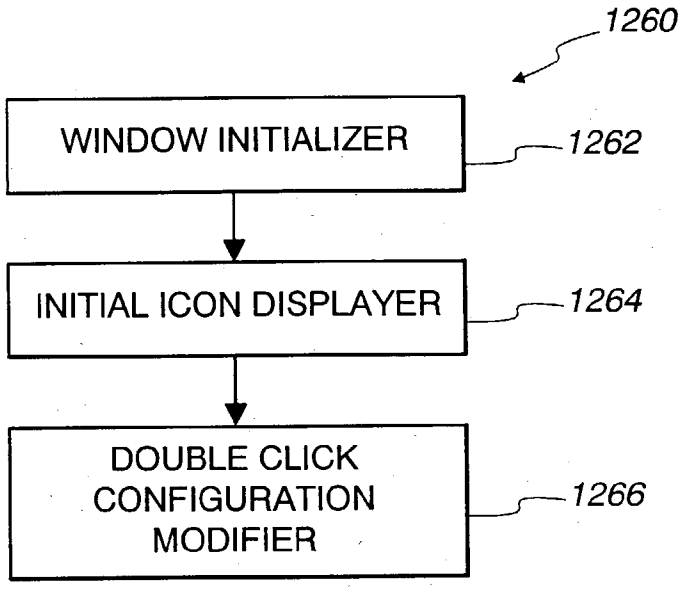

1260
WINDOW INITIALIZER
1262
INITIAL ICON DISPLAYER
1264
DOUBLE CLICK CONFIGURATION MODIFIER
1266

Fig. 35

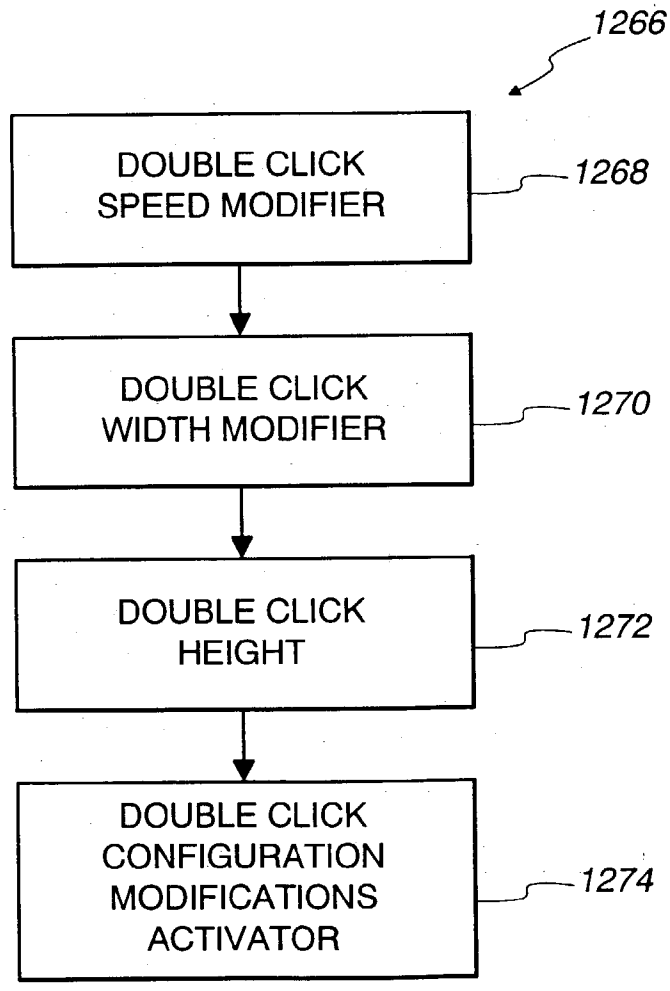

1266
DOUBLE CLICK SPEED MODIFIER
1268
DOUBLE CLICK WIDTH MODIFIER
1270
DOUBLE CLICK HEIGHT
1272
DOUBLE CLICK CONFIGURATION MODIFICATIONS ACTIVATOR
1274

Fig. 36

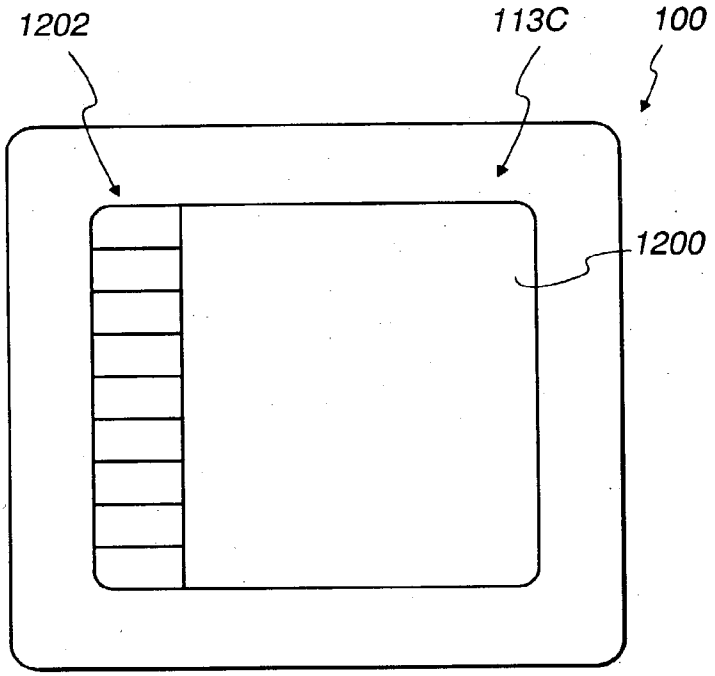


Fig. 37

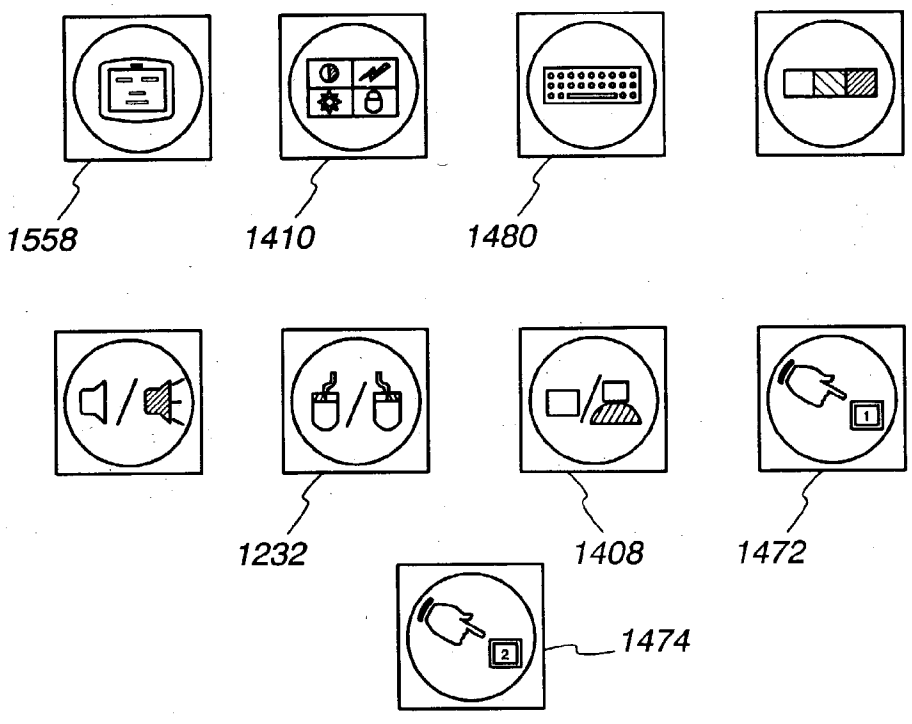


Fig. 38

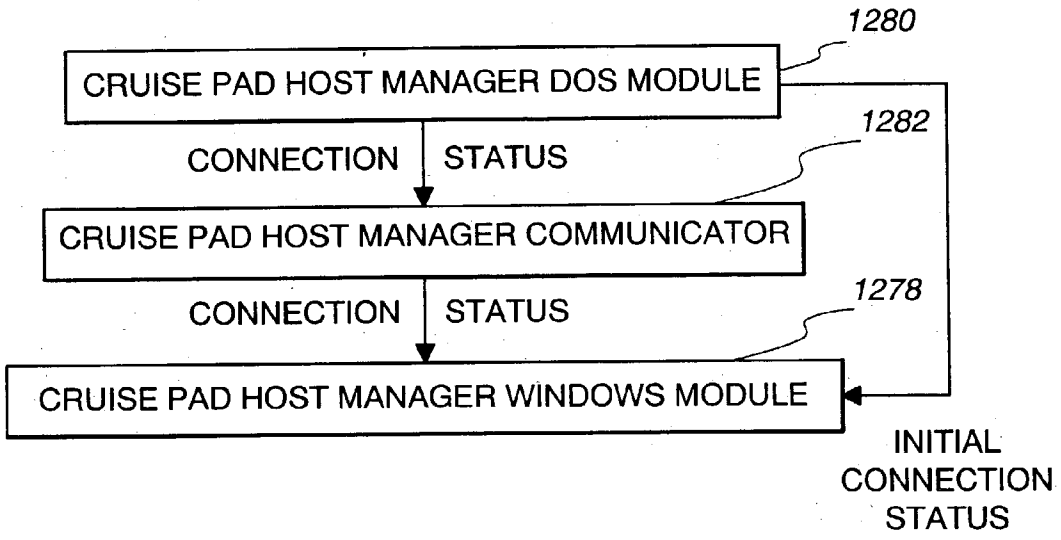


Fig. 39

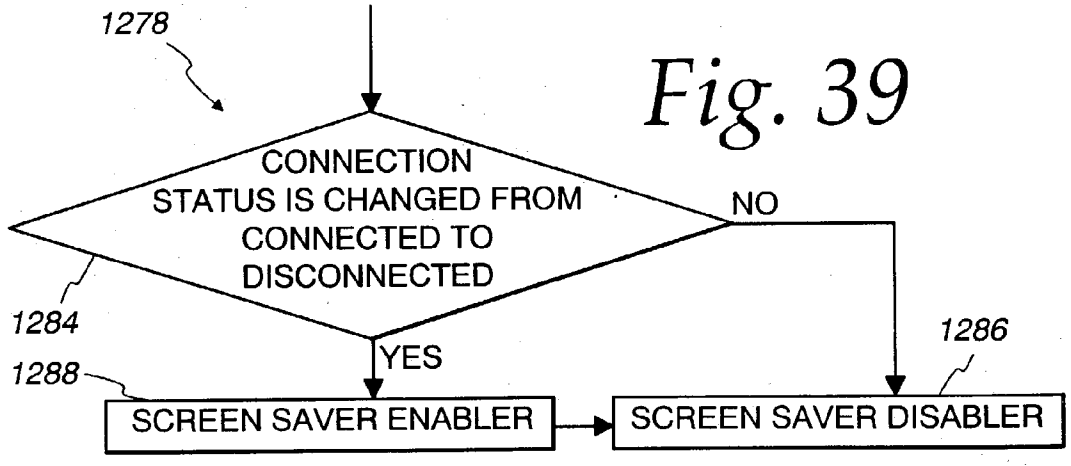


Fig. 40

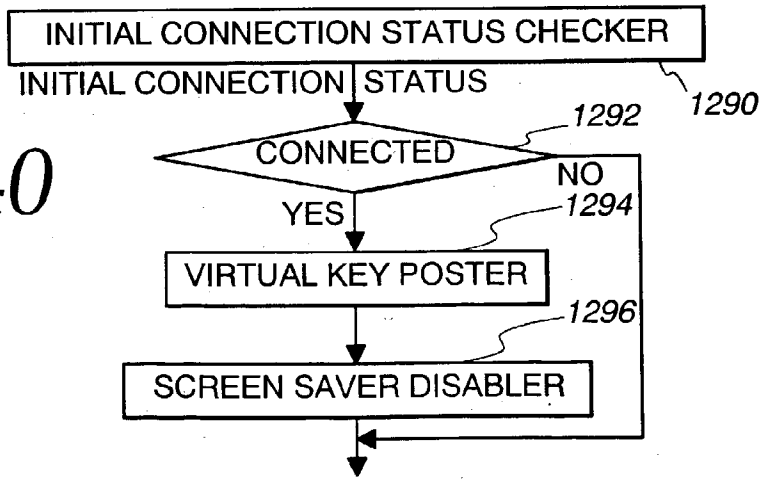


Fig. 40a

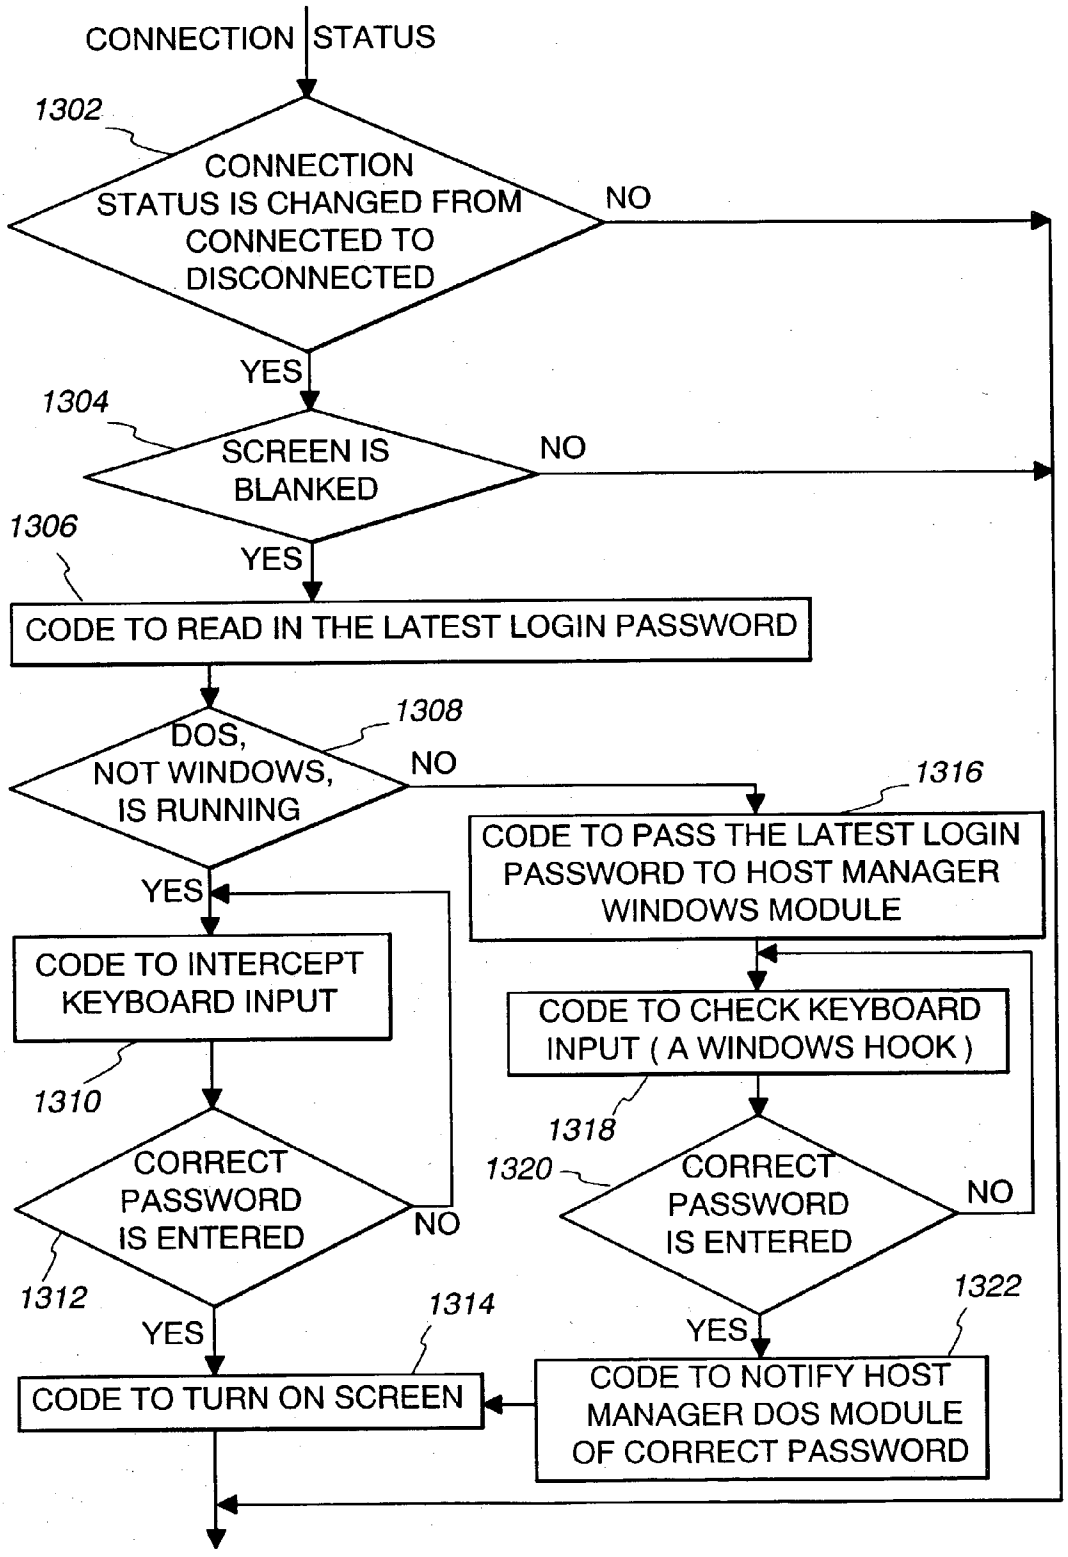

CONNECTION STATUS
1302
CONNECTION STATUS IS CHANGED FROM CONNECTED TO DISCONNECTED
NO
YES
1304
SCREEN IS BLANKED
NO
YES
1306
CODE TO READ IN THE LATEST LOGIN PASSWORD
1308
DOS, NOT WINDOWS, IS RUNNING
NO
YES
1316
CODE TO PASS THE LATEST LOGIN PASSWORD TO HOST MANAGER WINDOWS MODULE
CODE TO INTERCEPT KEYBOARD INPUT
CODE TO CHECK KEYBOARD INPUT (A WINDOWS HOOK)
1310
1318
CORRECT PASSWORD IS ENTERED
1320
CORRECT PASSWORD IS ENTERED
NO
NO
1312
YES
1314
YES
1322
CODE TO TURN ON SCREEN
CODE TO NOTIFY HOST MANAGER DOS MODULE OF CORRECT PASSWORD

Fig. 41

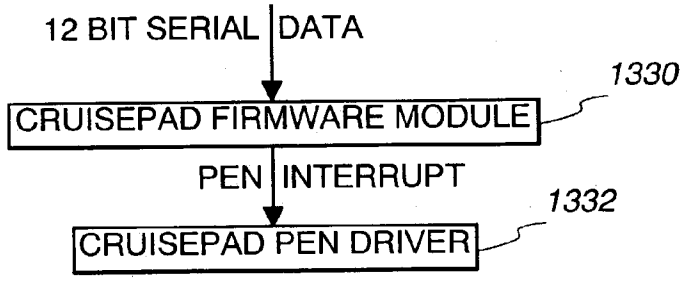
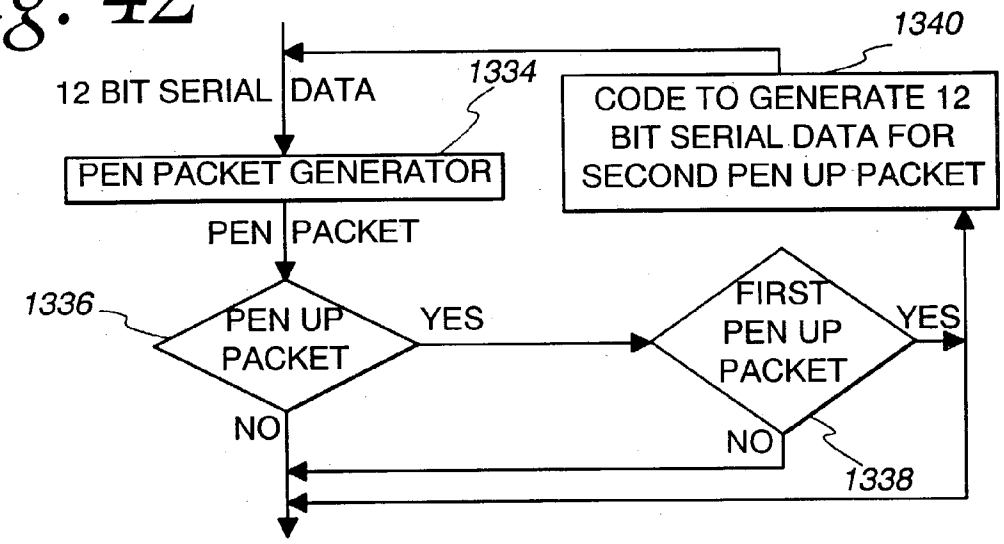


Fig. 42



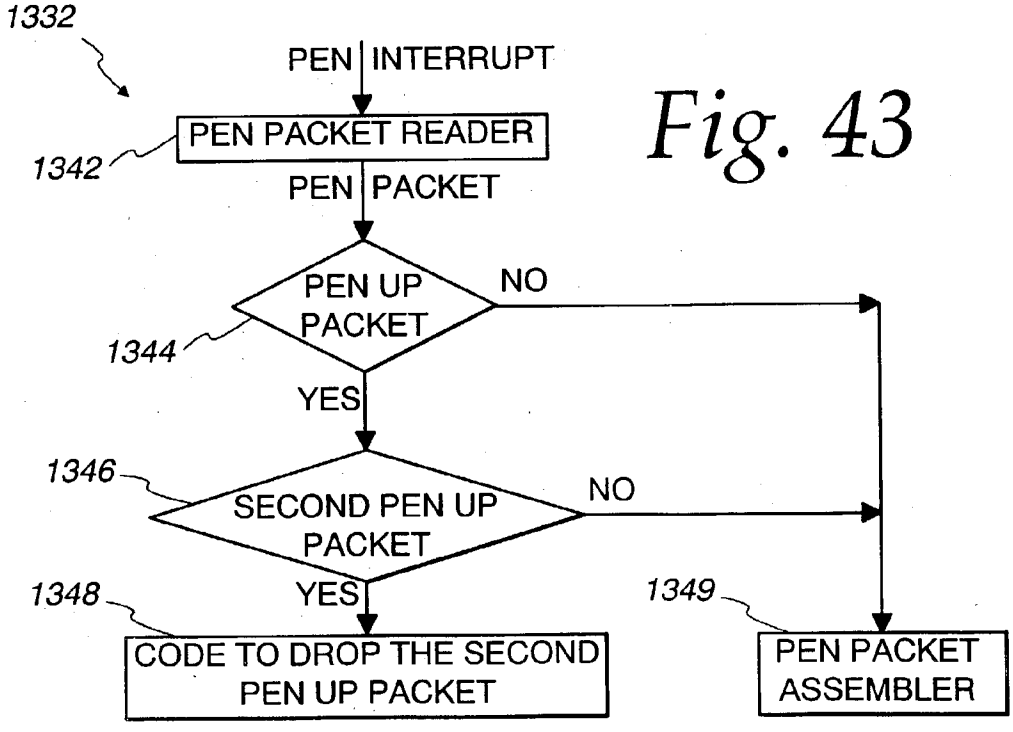


Fig. 43

Fig. 44

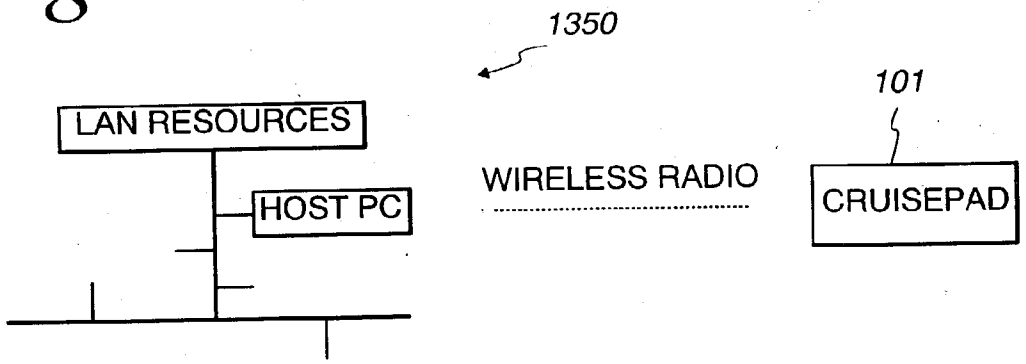


Fig. 45 Prior Art

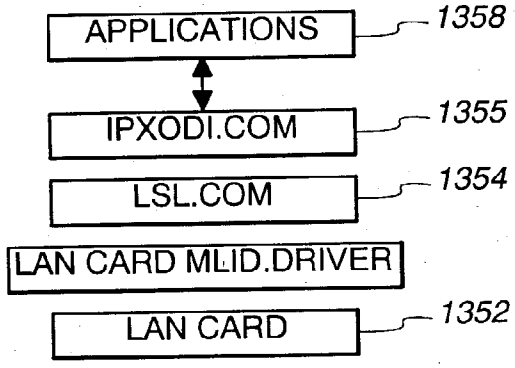


Fig. 46

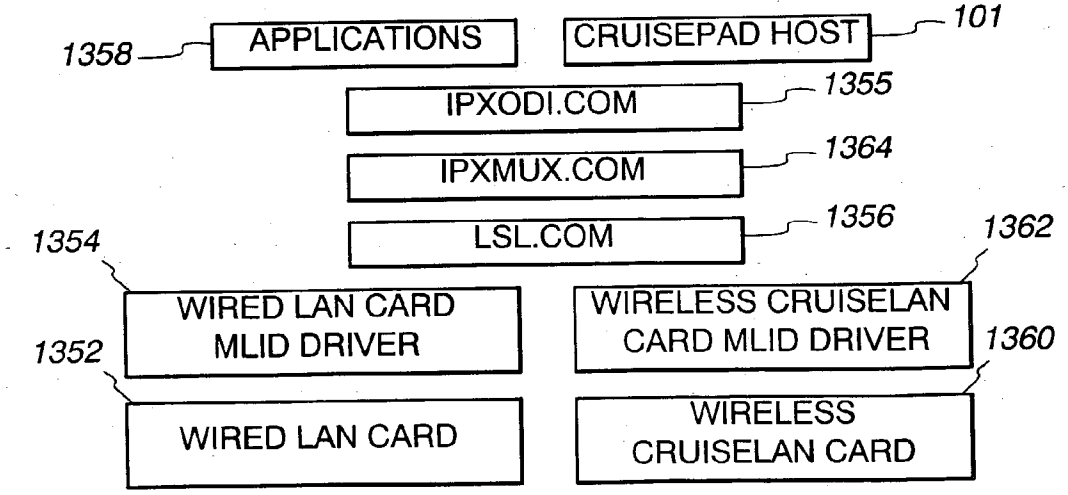


Fig. 47

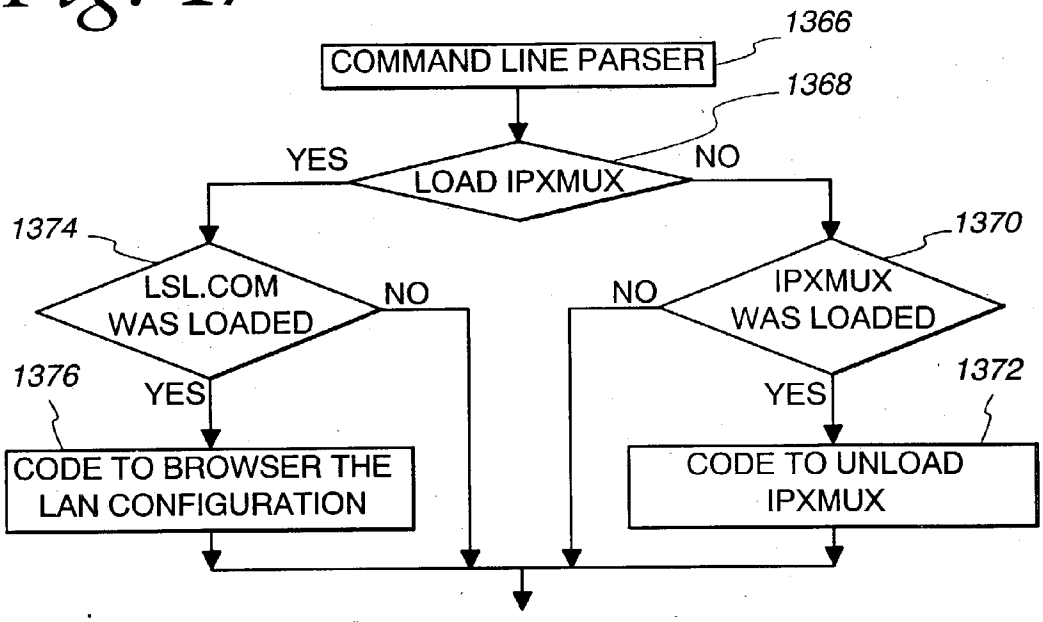


Fig. 48

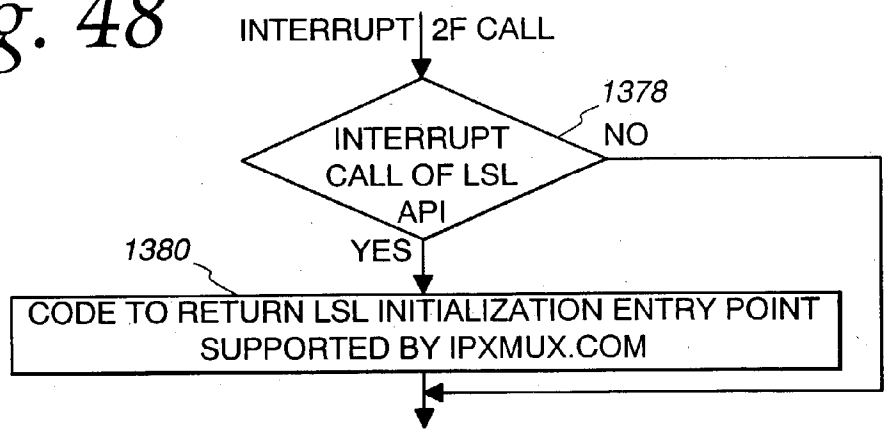


Fig. 49

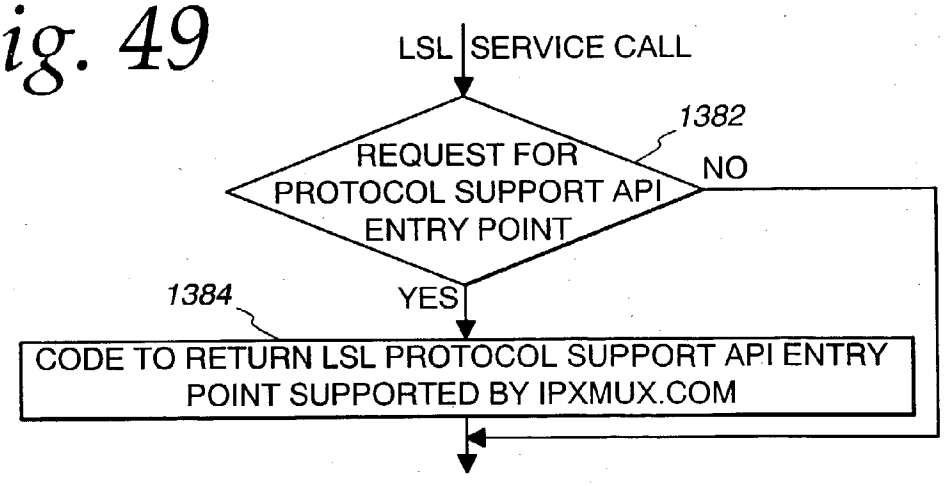


Fig. 50

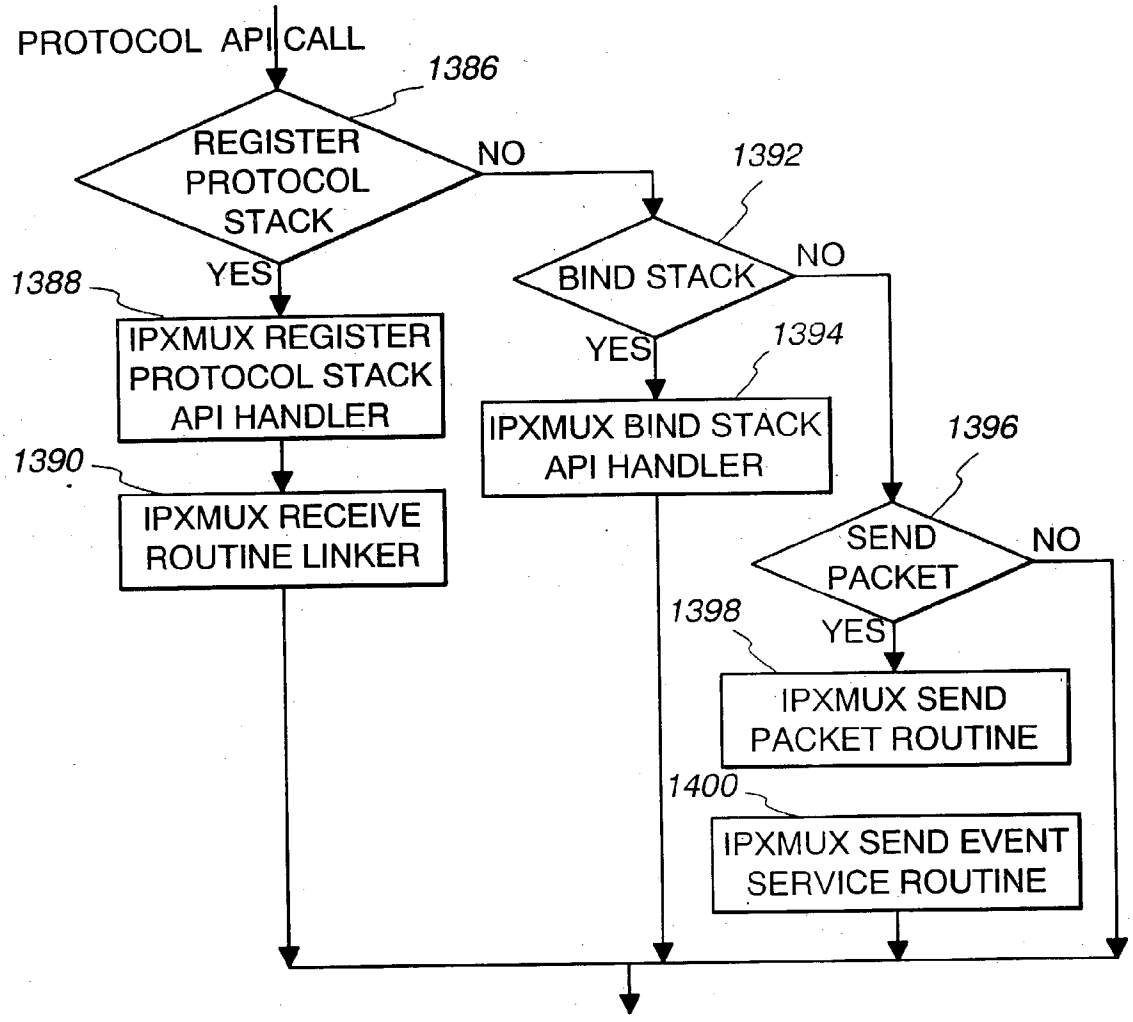

PROTOCOL API CALL
1386
REGISTER PROTOCOL STACK
NO
YES
1388
IPXMUX REGISTER PROTOCOL STACK API HANDLER
1390
IPXMUX RECEIVE ROUTINE LINKER
1392
BIND STACK
NO
YES
1394
IPXMUX BIND STACK API HANDLER
1396
SEND PACKET
NO
YES
1398
IPXMUX SEND PACKET ROUTINE
1400
IPXMUX SEND EVENT SERVICE ROUTINE

Fig. 51

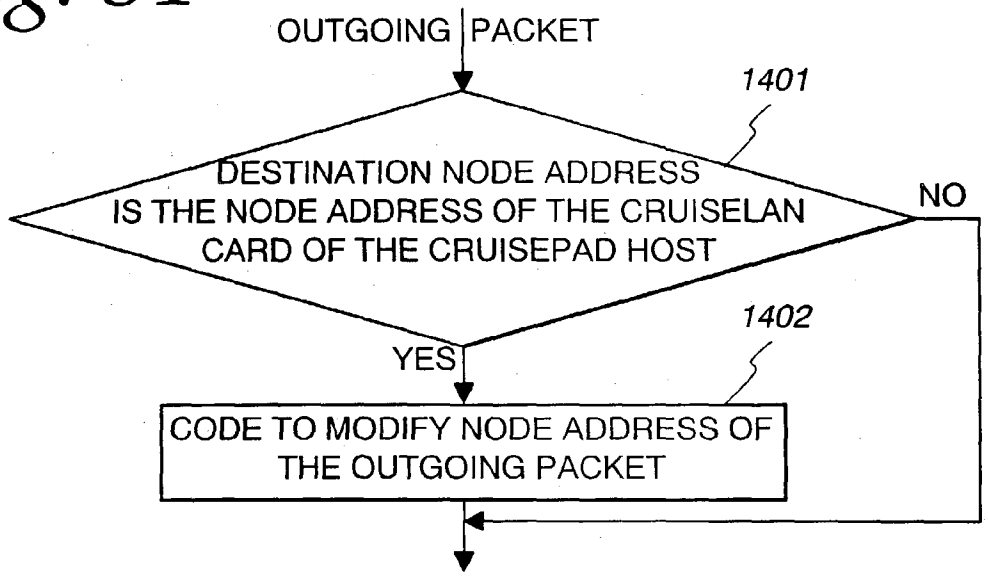
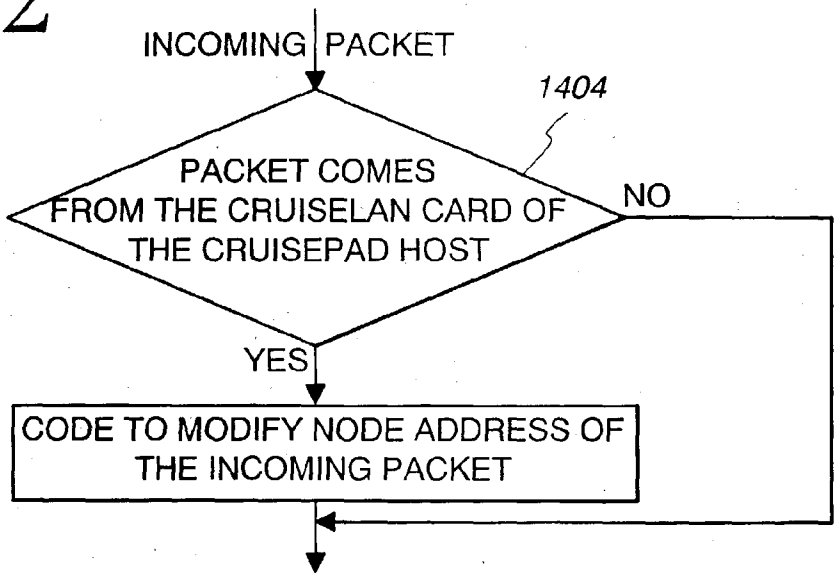

OUTGOING PACKET
1401
DESTINATION NODE ADDRESS IS THE NODE ADDRESS OF THE CRUISELAN CARD OF THE CRUISEPAD HOST
NO
YES
1402
CODE TO MODIFY NODE ADDRESS OF THE OUTGOING PACKET

Fig. 52


INCOMING PACKET
1404
PACKET COMES FROM THE CRUISELAN CARD OF THE CRUISEPAD HOST
NO
YES
CODE TO MODIFY NODE ADDRESS OF THE INCOMING PACKET

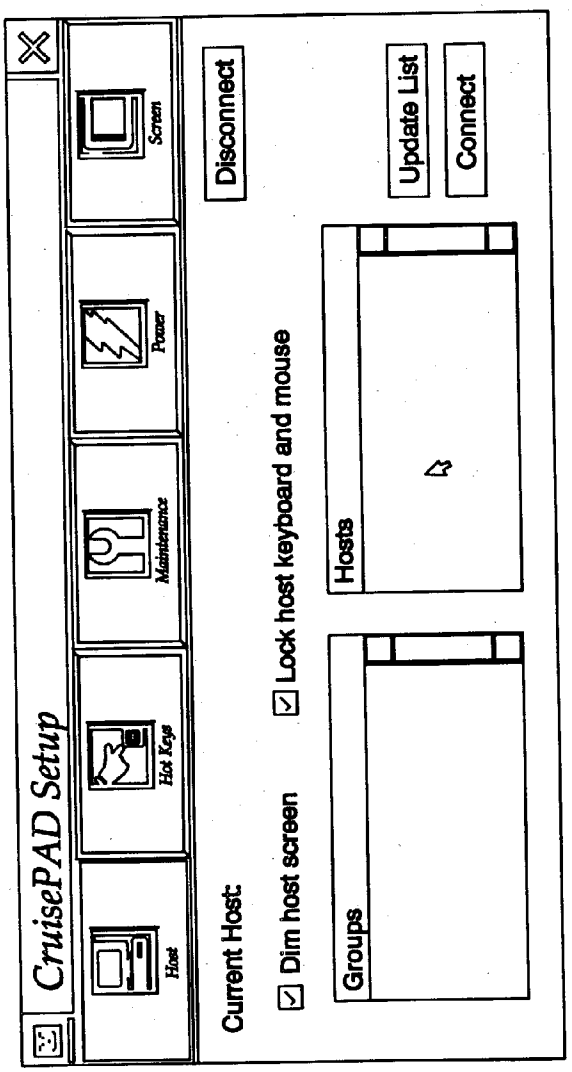

CruisePAD Setup
Host
Hot Keys
Maintenance
Power
Screen
Disconnect
Current Host:
Dim host screen
Lock host keyboard and mouse
Groups
Hosts
Update List
Connect

Fig. 53

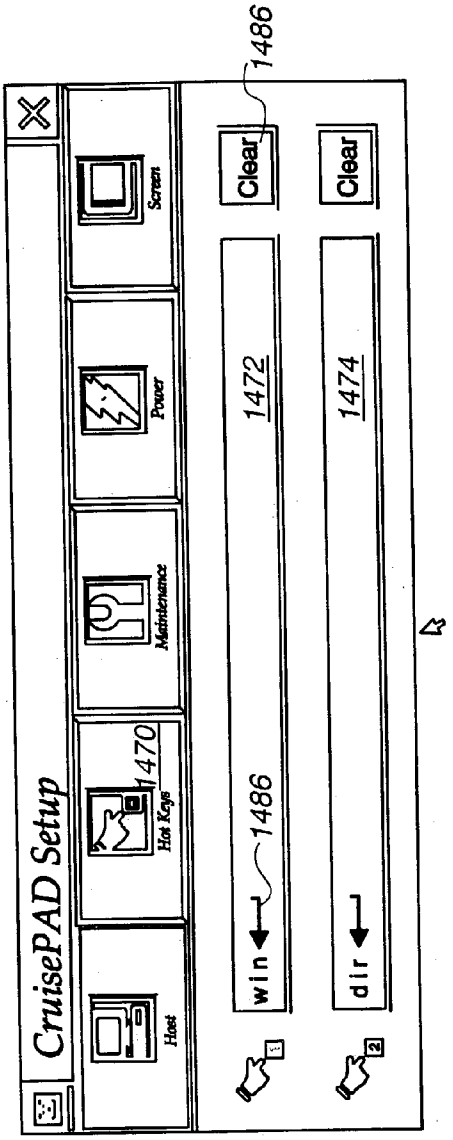

CruisePAD Setup
Host
Hot Keys
1470
Maintenance
Power
Screen
1486
Clear
1472
win
1486
Clear
1474
dir

Fig. 54

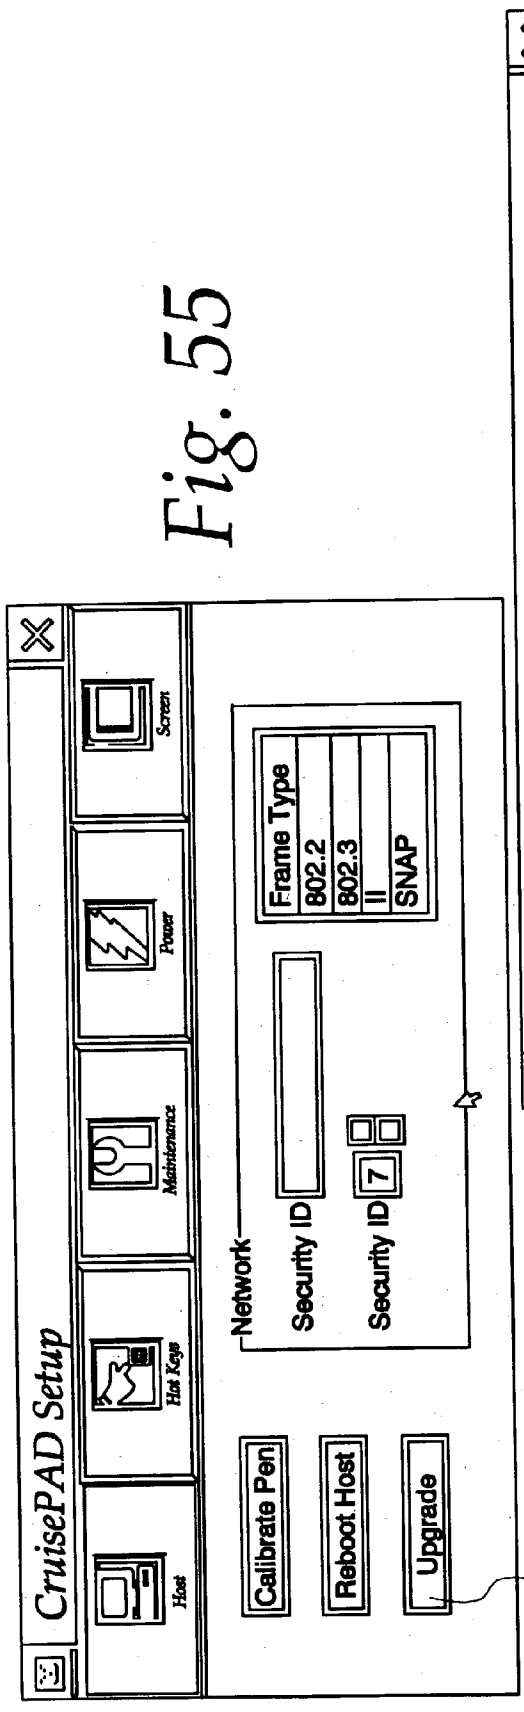

CruisePAD Setup
Host
Hot Keys
Maintenance
Power
Screen
Network
Security ID
Security ID
7
Frame Type
802.2
802.3
II
SNAP
Calibrate Pen
Reboot Host
Upgrade
1502

Fig. 55

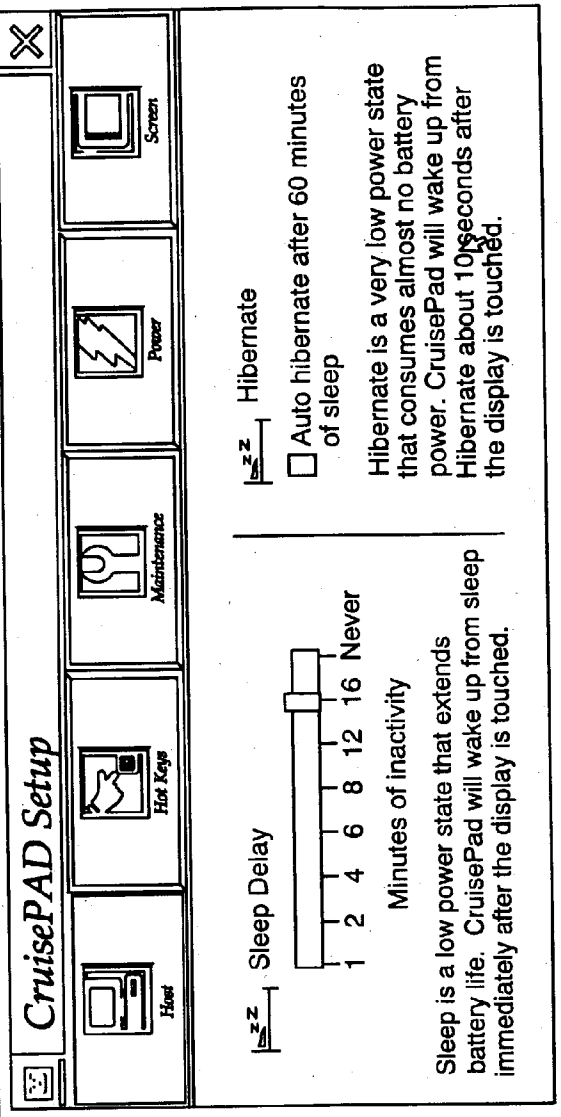

CruisePAD Setup
Host
Hot Keys
Maintenance
Power
Screen
Sleep Delay
1 2 4 6 8 12 16 Never
Minutes of inactivity
Sleep is a low power state that extends battery life. CruisePad will wake up from sleep immediately after the display is touched.
Hibernate
Auto hibernate after 60 minutes of sleep
Hibernate is a very low power state that consumes almost no battery power. CruisePad will wake up from Hibernate about 10 seconds after the display is touched.

Fig. 56

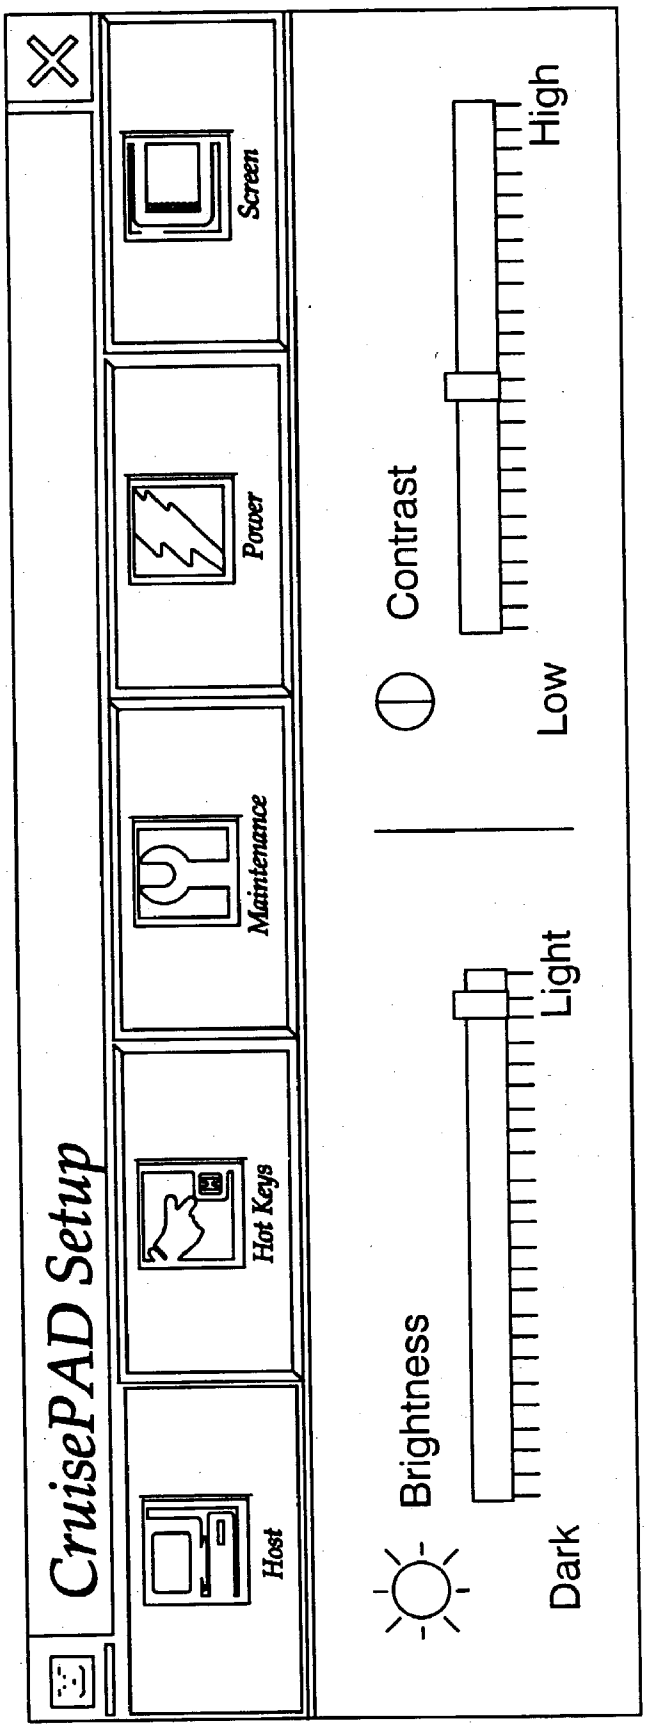
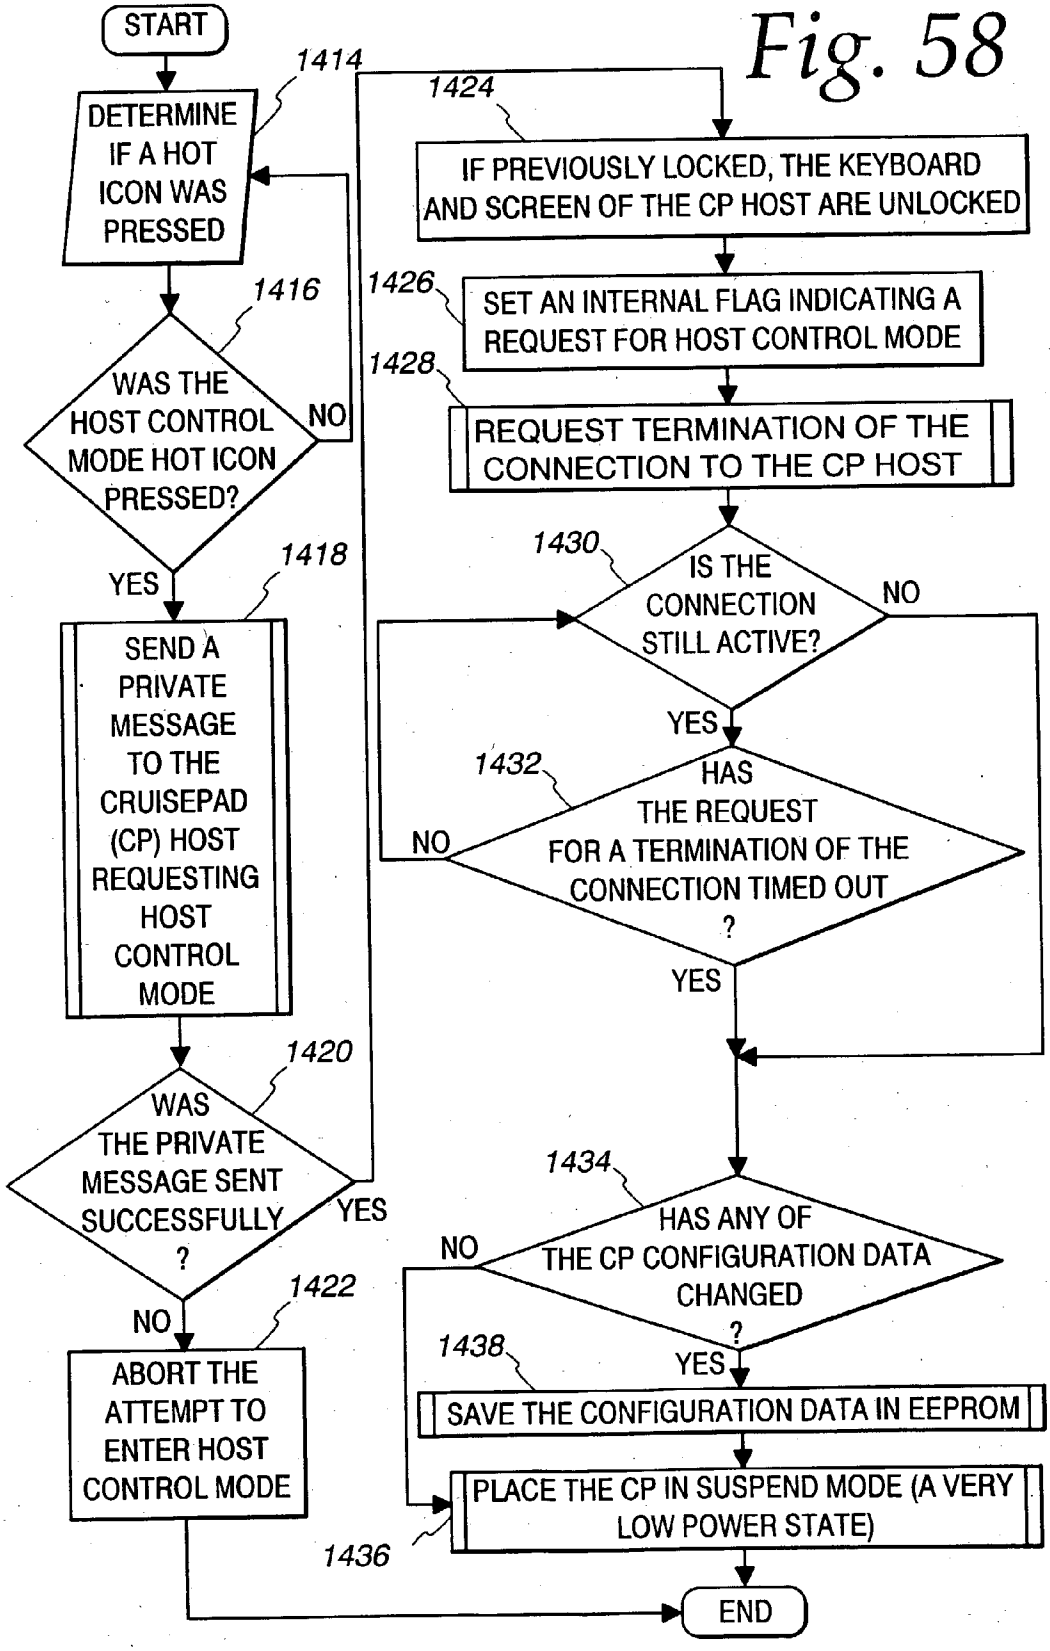

CruisePAD Setup
Host
Hot Keys
Maintenance
Power
Screen
Brightness
Dark
Light
Contrast
Low
High

Fig. 57

Fig. 58


START
1414
DETERMINE IF A HOT ICON WAS PRESSED
1416
WAS THE HOST CONTROL MODE HOT ICON PRESSED?
NO
YES
1418
SEND A PRIVATE MESSAGE TO THE CRUISEPAD (CP) HOST REQUESTING HOST CONTROL MODE
1420
WAS THE PRIVATE MESSAGE SENT SUCCESSFULLY ?
YES
NO
1422
ABORT THE ATTEMPT TO ENTER HOST CONTROL MODE
1424
IF PREVIOUSLY LOCKED, THE KEYBOARD AND SCREEN OF THE CP HOST ARE UNLOCKED
1426
SET AN INTERNAL FLAG INDICATING A REQUEST FOR HOST CONTROL MODE
1428
REQUEST TERMINATION OF THE CONNECTION TO THE CP HOST
1430
IS THE CONNECTION STILL ACTIVE?
NO
YES
1432
HAS THE REQUEST FOR A TERMINATION OF THE CONNECTION TIMED OUT ?
NO
YES
1434
HAS ANY OF THE CP CONFIGURATION DATA CHANGED ?
NO
YES
1438
SAVE THE CONFIGURATION DATA IN EEPROM
PLACE THE CP IN SUSPEND MODE (A VERY LOW POWER STATE)
1436
END

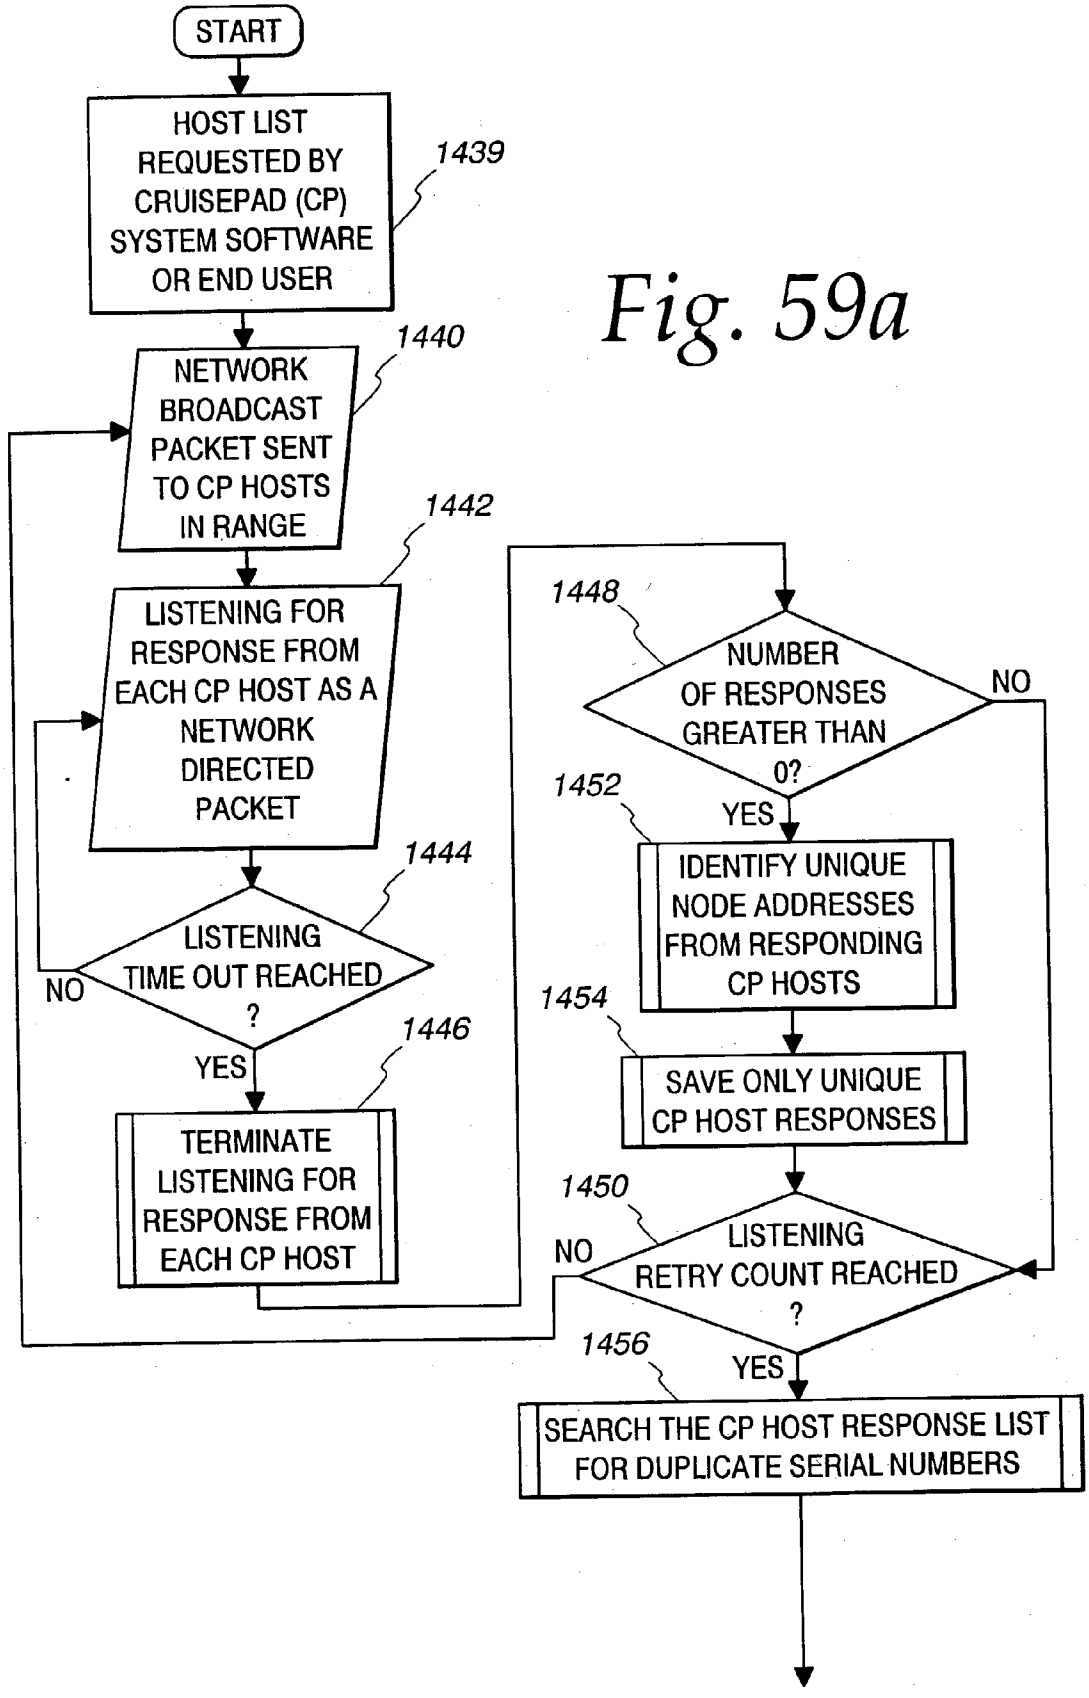

START
HOST LIST REQUESTED BY CRUISEPAD (CP) SYSTEM SOFTWARE OR END USER
1439
NETWORK BROADCAST PACKET SENT TO CP HOSTS IN RANGE
1440
LISTENING FOR RESPONSE FROM EACH CP HOST AS A NETWORK DIRECTED PACKET
1442
LISTENING TIME OUT REACHED ?
1444
NO
YES
TERMINATE LISTENING FOR RESPONSE FROM EACH CP HOST
1446
NUMBER OF RESPONSES GREATER THAN 0?
1448
NO
YES
IDENTIFY UNIQUE NODE ADDRESSES FROM RESPONDING CP HOSTS
1452
SAVE ONLY UNIQUE CP HOST RESPONSES
1454
LISTENING RETRY COUNT REACHED ?
1450
NO
YES
SEARCH THE CP HOST RESPONSE LIST FOR DUPLICATE SERIAL NUMBERS
1456

Fig. 59a

Fig. 59b

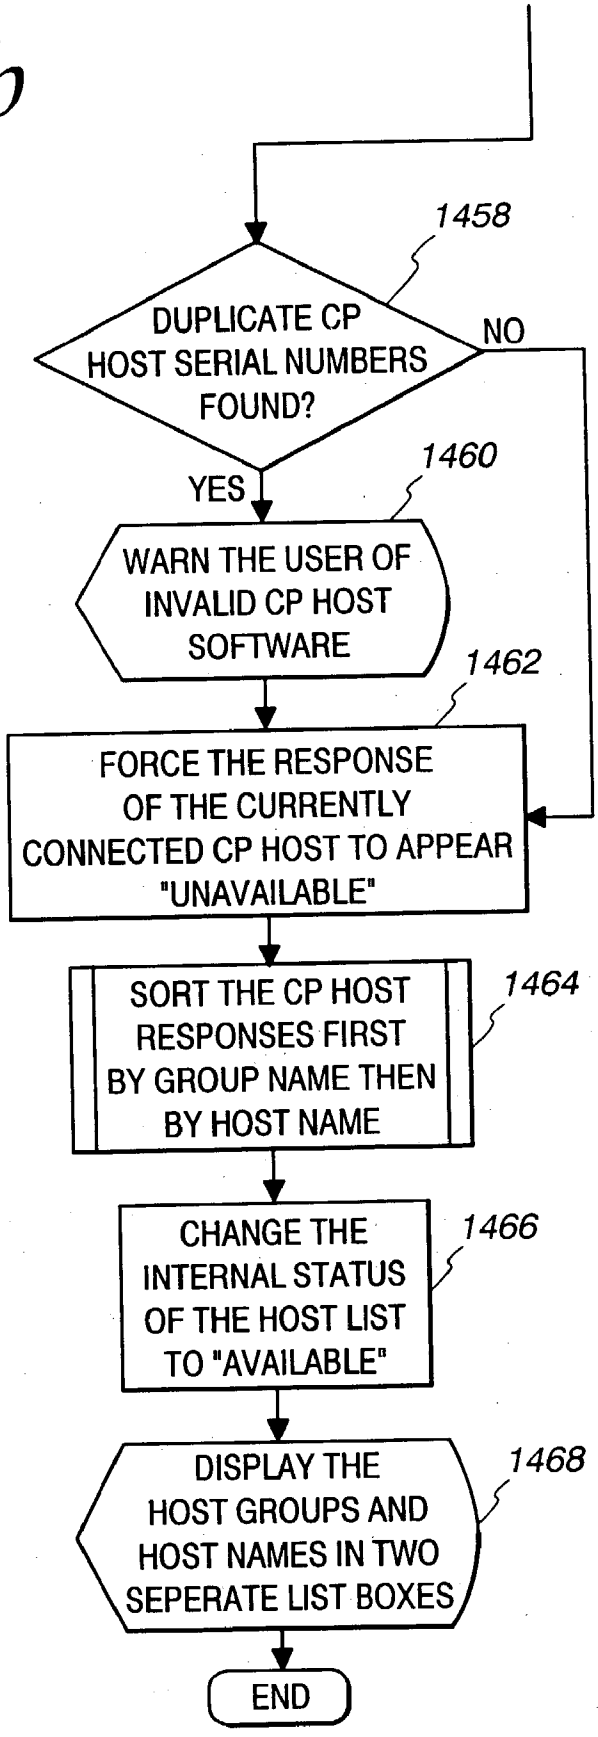

1458
DUPLICATE CP HOST SERIAL NUMBERS FOUND?
NO
YES
1460
WARN THE USER OF INVALID CP HOST SOFTWARE
1462
FORCE THE RESPONSE OF THE CURRENTLY CONNECTED CP HOST TO APPEAR "UNAVAILABLE"
SORT THE CP HOST RESPONSES FIRST BY GROUP NAME THEN BY HOST NAME
1464
CHANGE THE INTERNAL STATUS OF THE HOST LIST TO "AVAILABLE"
1466
DISPLAY THE HOST GROUPS AND HOST NAMES IN TWO SEPERATE LIST BOXES
1468
END

Fig. 60

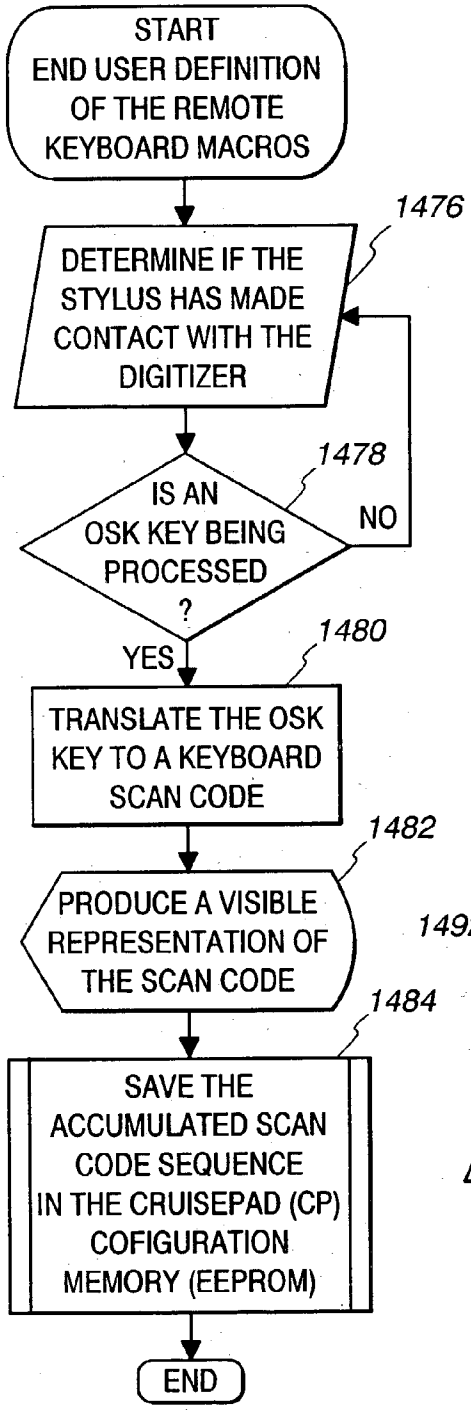

START
END USER DEFINITION OF THE REMOTE KEYBOARD MACROS
1476
DETERMINE IF THE STYLUS HAS MADE CONTACT WITH THE DIGITIZER
1478
IS AN OSK KEY BEING PROCESSED ?
NO
YES
1480
TRANSLATE THE OSK KEY TO A KEYBOARD SCAN CODE
1482
PRODUCE A VISIBLE REPRESENTATION OF THE SCAN CODE
1484
SAVE THE ACCUMULATED SCAN CODE SEQUENCE IN THE CRUISEPAD (CP) COFIGURATION MEMORY (EEPROM)
END

Fig. 61

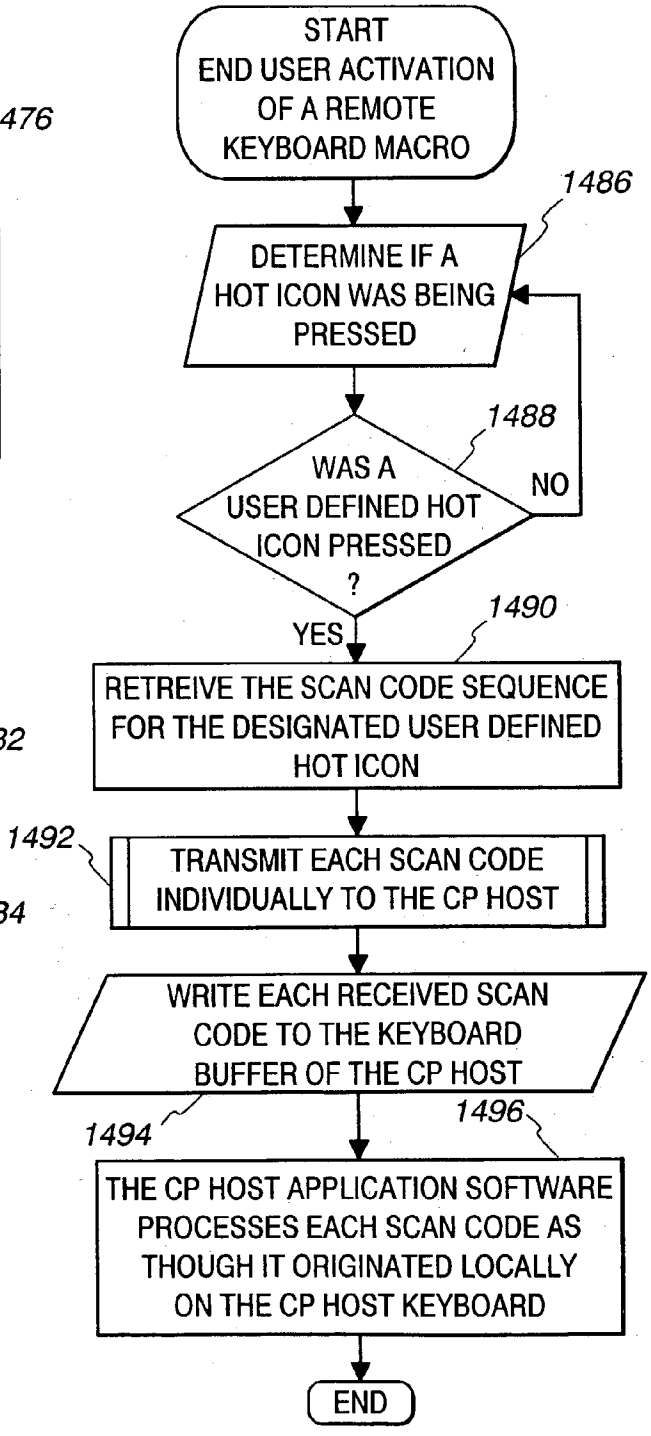

START
END USER ACTIVATION OF A REMOTE KEYBOARD MACRO
1486
DETERMINE IF A HOT ICON WAS BEING PRESSED
1488
WAS A USER DEFINED HOT ICON PRESSED ?
NO
YES
1490
RETREIVE THE SCAN CODE SEQUENCE FOR THE DESIGNATED USER DEFINED HOT ICON
1492
TRANSMIT EACH SCAN CODE INDIVIDUALLY TO THE CP HOST
WRITE EACH RECEIVED SCAN CODE TO THE KEYBOARD BUFFER OF THE CP HOST
1494
1496
THE CP HOST APPLICATION SOFTWARE PROCESSES EACH SCAN CODE AS THOUGH IT ORIGINATED LOCALLY ON THE CP HOST KEYBOARD
END

Fig. 62a

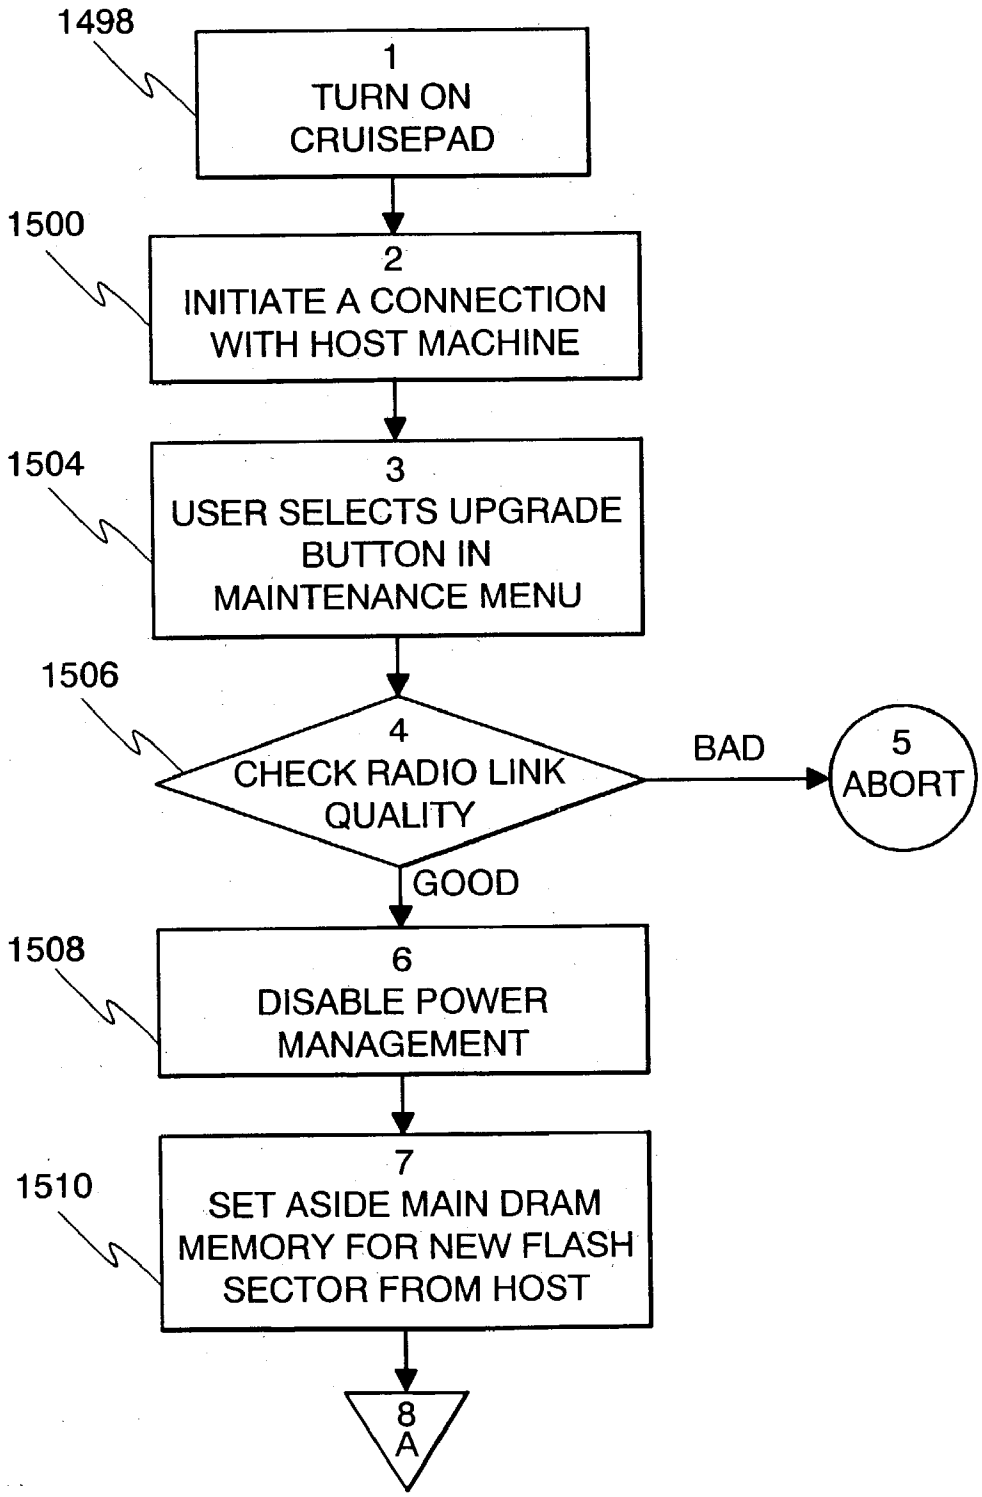

1498
1
TURN ON CRUISEPAD
1500
2
INITIATE A CONNECTION WITH HOST MACHINE
1504
3
USER SELECTS UPGRADE BUTTON IN MAINTENANCE MENU
1506
4
CHECK RADIO LINK QUALITY
BAD
5
ABORT
GOOD
1508
6
DISABLE POWER MANAGEMENT
1510
7
SET ASIDE MAIN DRAM MEMORY FOR NEW FLASH SECTOR FROM HOST
8
A

Fig. 62b

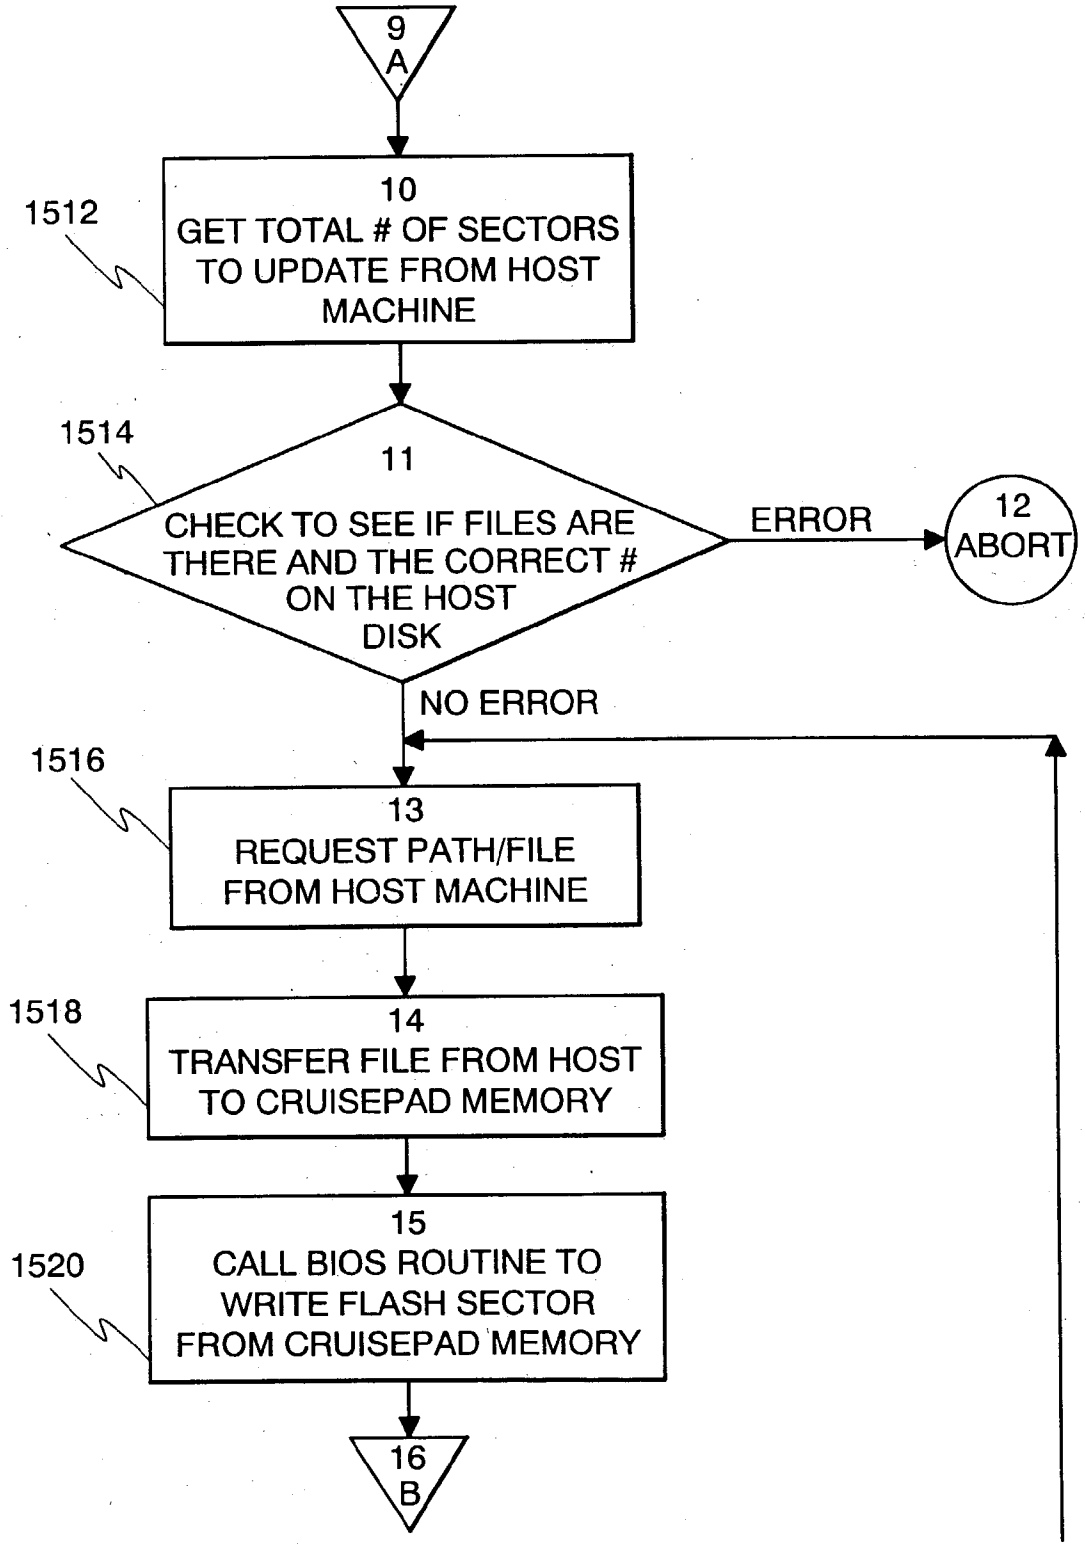

9
A
10
GET TOTAL # OF SECTORS TO UPDATE FROM HOST MACHINE
1512
1514
11
CHECK TO SEE IF FILES ARE THERE AND THE CORRECT # ON THE HOST DISK
ERROR
12
ABORT
NO ERROR
1516
13
REQUEST PATH/FILE FROM HOST MACHINE
1518
14
TRANSFER FILE FROM HOST TO CRUISEPAD MEMORY
15
CALL BIOS ROUTINE TO WRITE FLASH SECTOR FROM CRUISEPAD MEMORY
1520
16
B

Fig. 62c

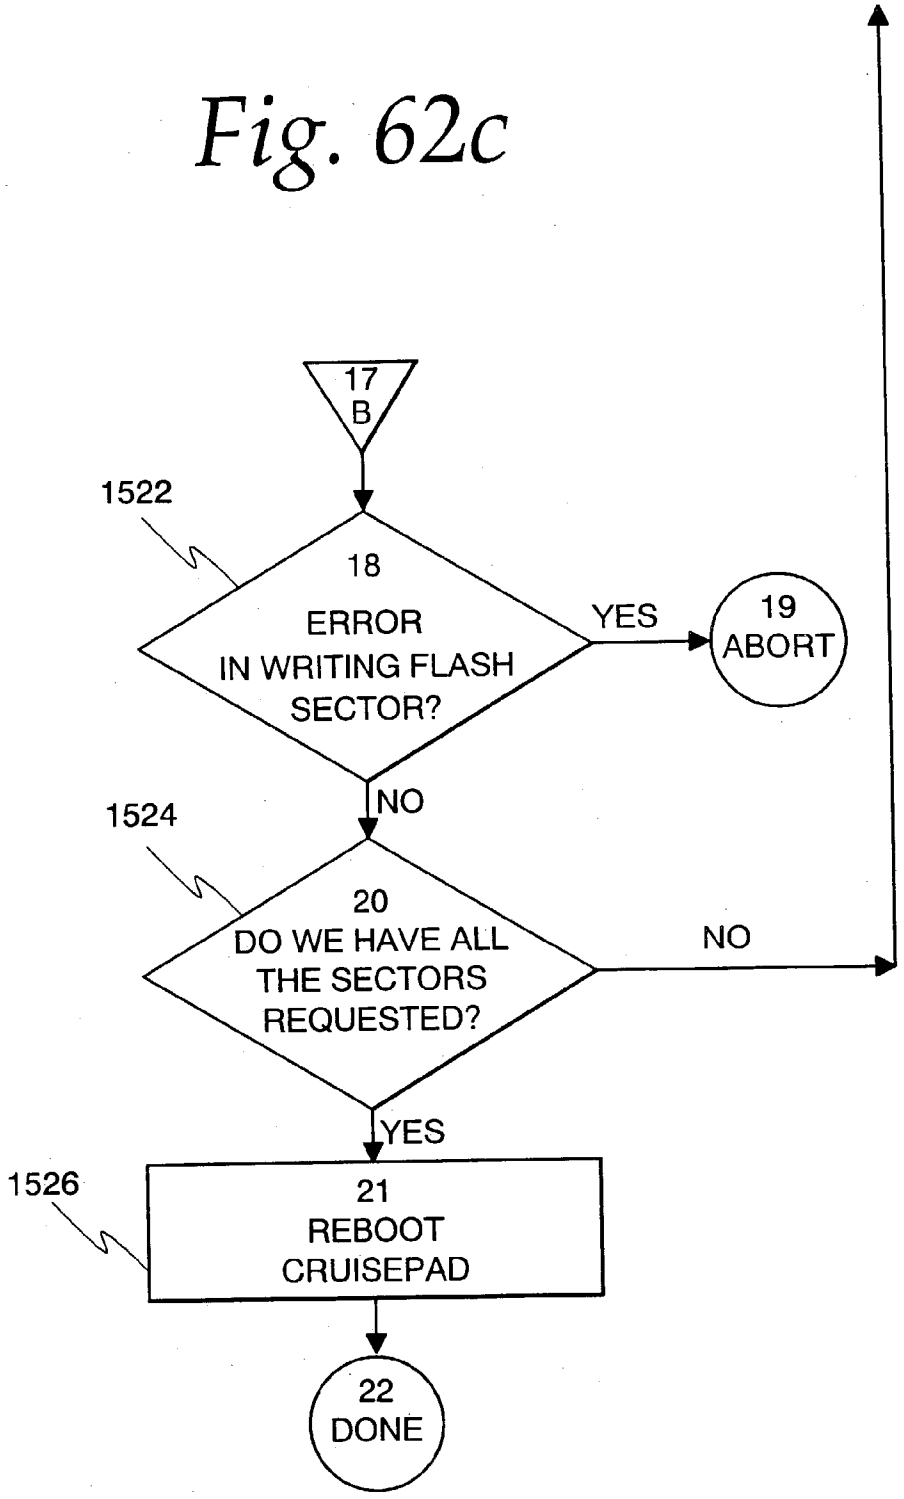
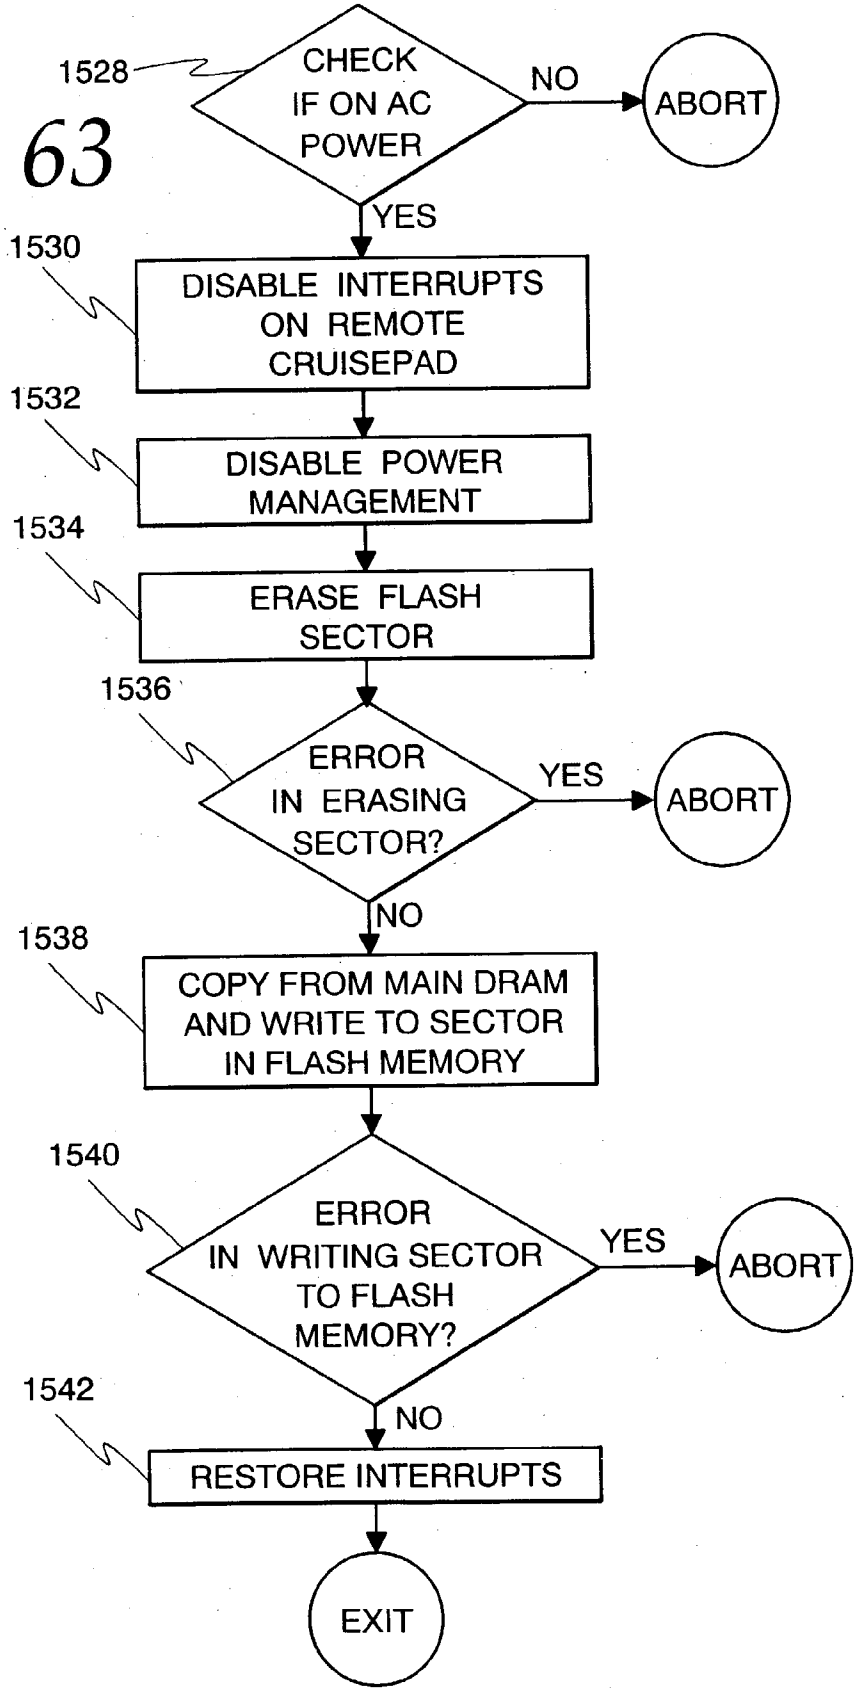


Fig. 62

Fig. 62a
Fig. 62b
Fig. 62c

Fig. 63


1528
CHECK IF ON AC POWER
NO
ABORT
YES
1530
DISABLE INTERRUPTS ON REMOTE CRUISEPAD
1532
DISABLE POWER MANAGEMENT
1534
ERASE FLASH SECTOR
1536
ERROR IN ERASING SECTOR?
YES
ABORT
NO
1538
COPY FROM MAIN DRAM AND WRITE TO SECTOR IN FLASH MEMORY
1540
ERROR IN WRITING SECTOR TO FLASH MEMORY?
YES
ABORT
1542
NO
RESTORE INTERRUPTS
EXIT

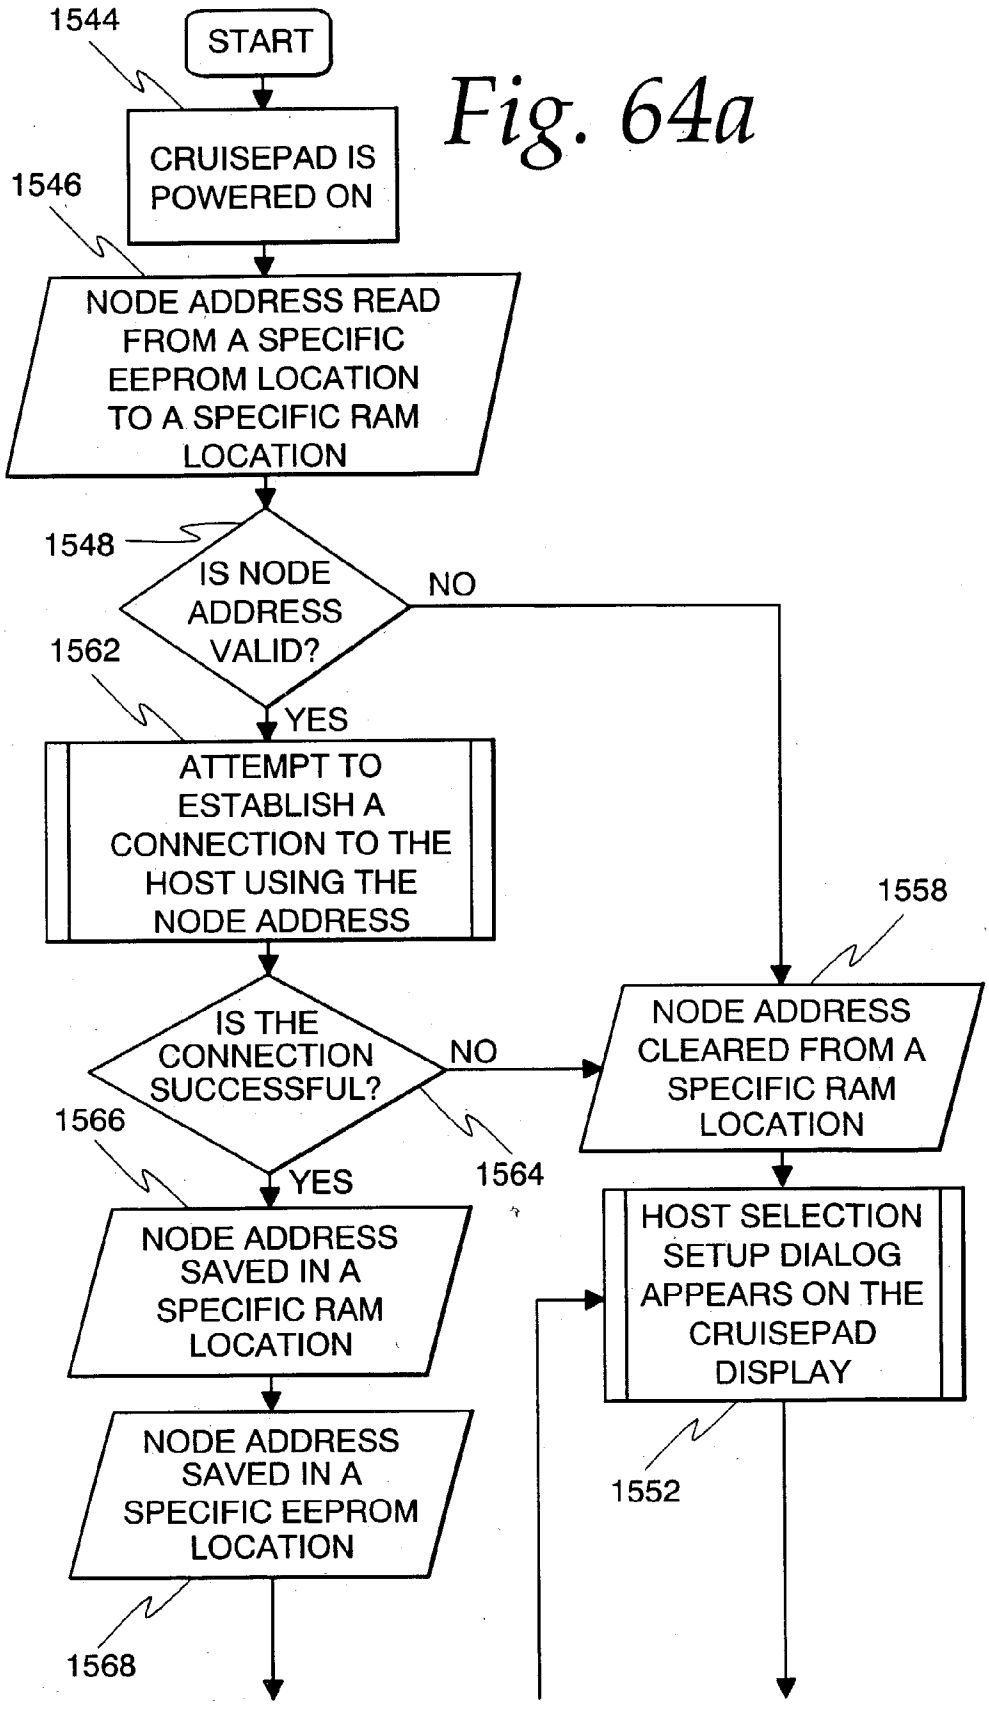

1544
START
CRUISEPAD IS POWERED ON
1546
NODE ADDRESS READ FROM A SPECIFIC EEPROM LOCATION TO A SPECIFIC RAM LOCATION
1548
IS NODE ADDRESS VALID?
NO
YES
1562
ATTEMPT TO ESTABLISH A CONNECTION TO THE HOST USING THE NODE ADDRESS
IS THE CONNECTION SUCCESSFUL?
NO
YES
1564
1566
NODE ADDRESS SAVED IN A SPECIFIC RAM LOCATION
NODE ADDRESS SAVED IN A SPECIFIC EEPROM LOCATION
1568
1558
NODE ADDRESS CLEARED FROM A SPECIFIC RAM LOCATION
HOST SELECTION SETUP DIALOG APPEARS ON THE CRUISEPAD DISPLAY
1552

Fig. 64a

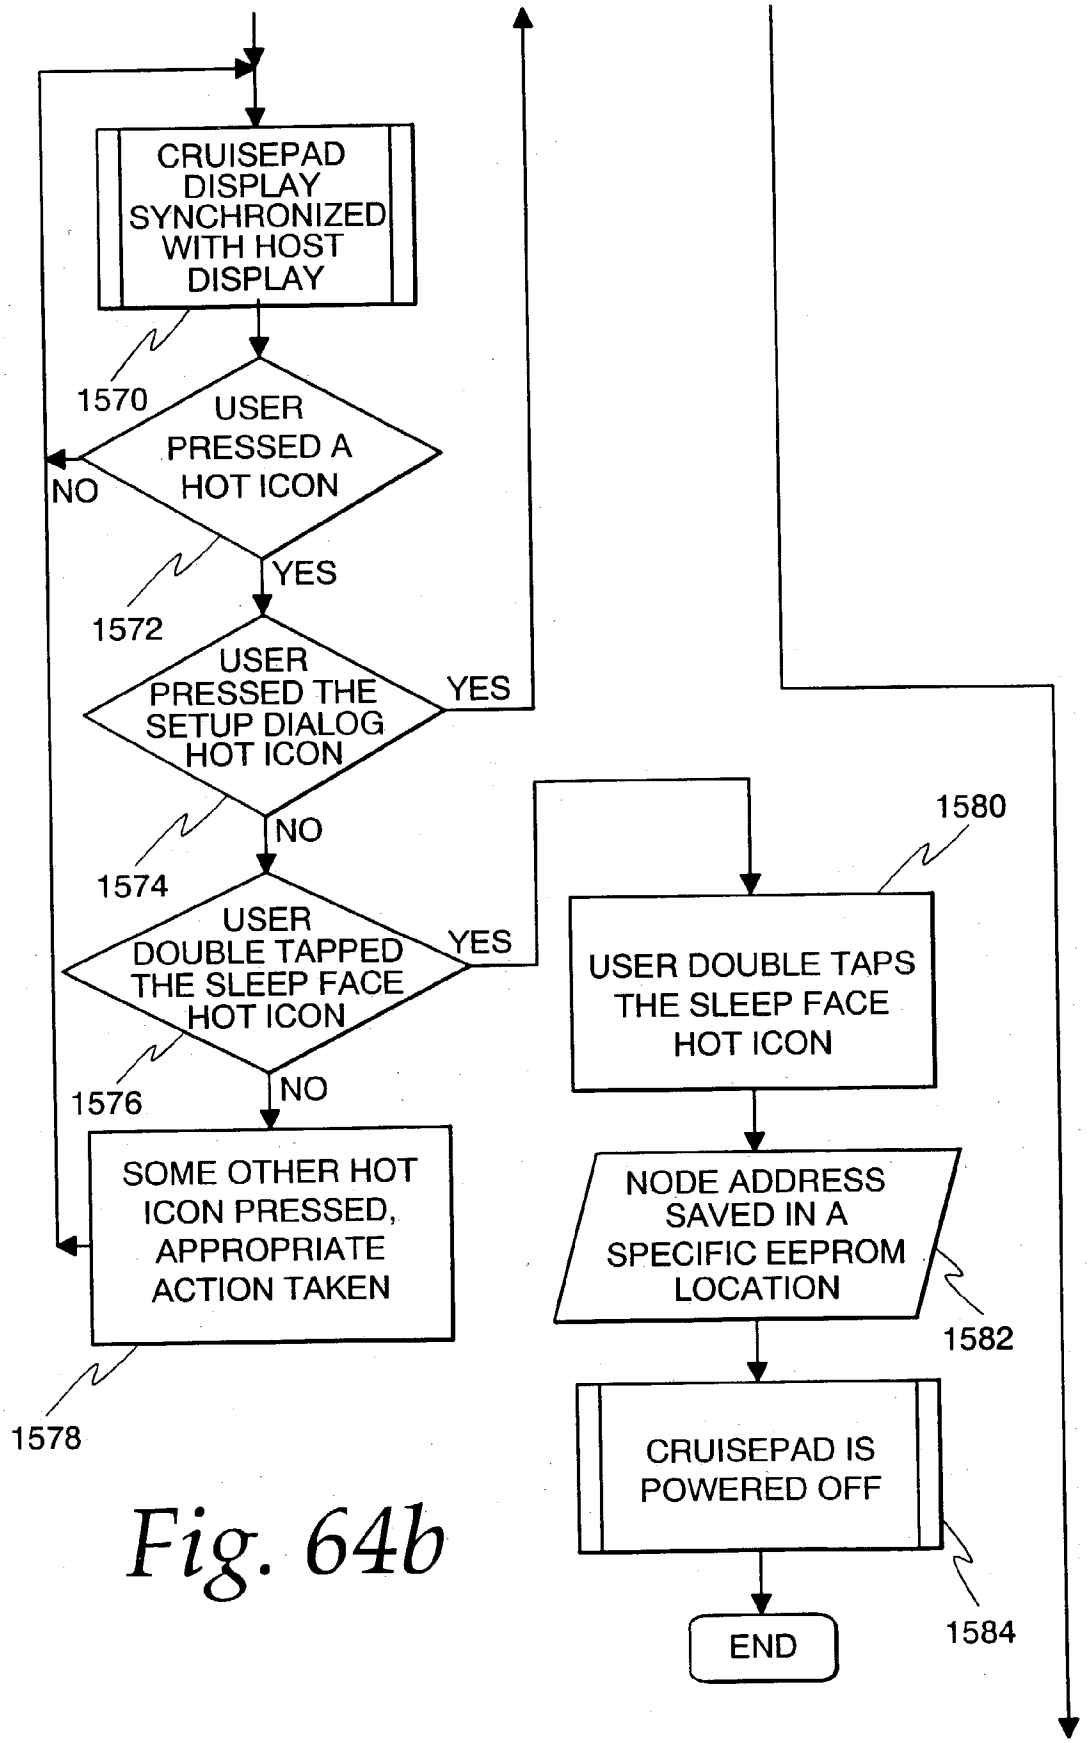

CRUISEPAD DISPLAY SYNCHRONIZED WITH HOST DISPLAY
1570
USER PRESSED A HOT ICON
NO
YES
1572
USER PRESSED THE SETUP DIALOG HOT ICON
YES
NO
1574
USER DOUBLE TAPPED THE SLEEP FACE HOT ICON
YES
NO
1576
SOME OTHER HOT ICON PRESSED, APPROPRIATE ACTION TAKEN
1578
1580
USER DOUBLE TAPS THE SLEEP FACE HOT ICON
NODE ADDRESS SAVED IN A SPECIFIC EEPROM LOCATION
1582
CRUISEPAD IS POWERED OFF
1584
END

Fig. 64b

Fig. 64c

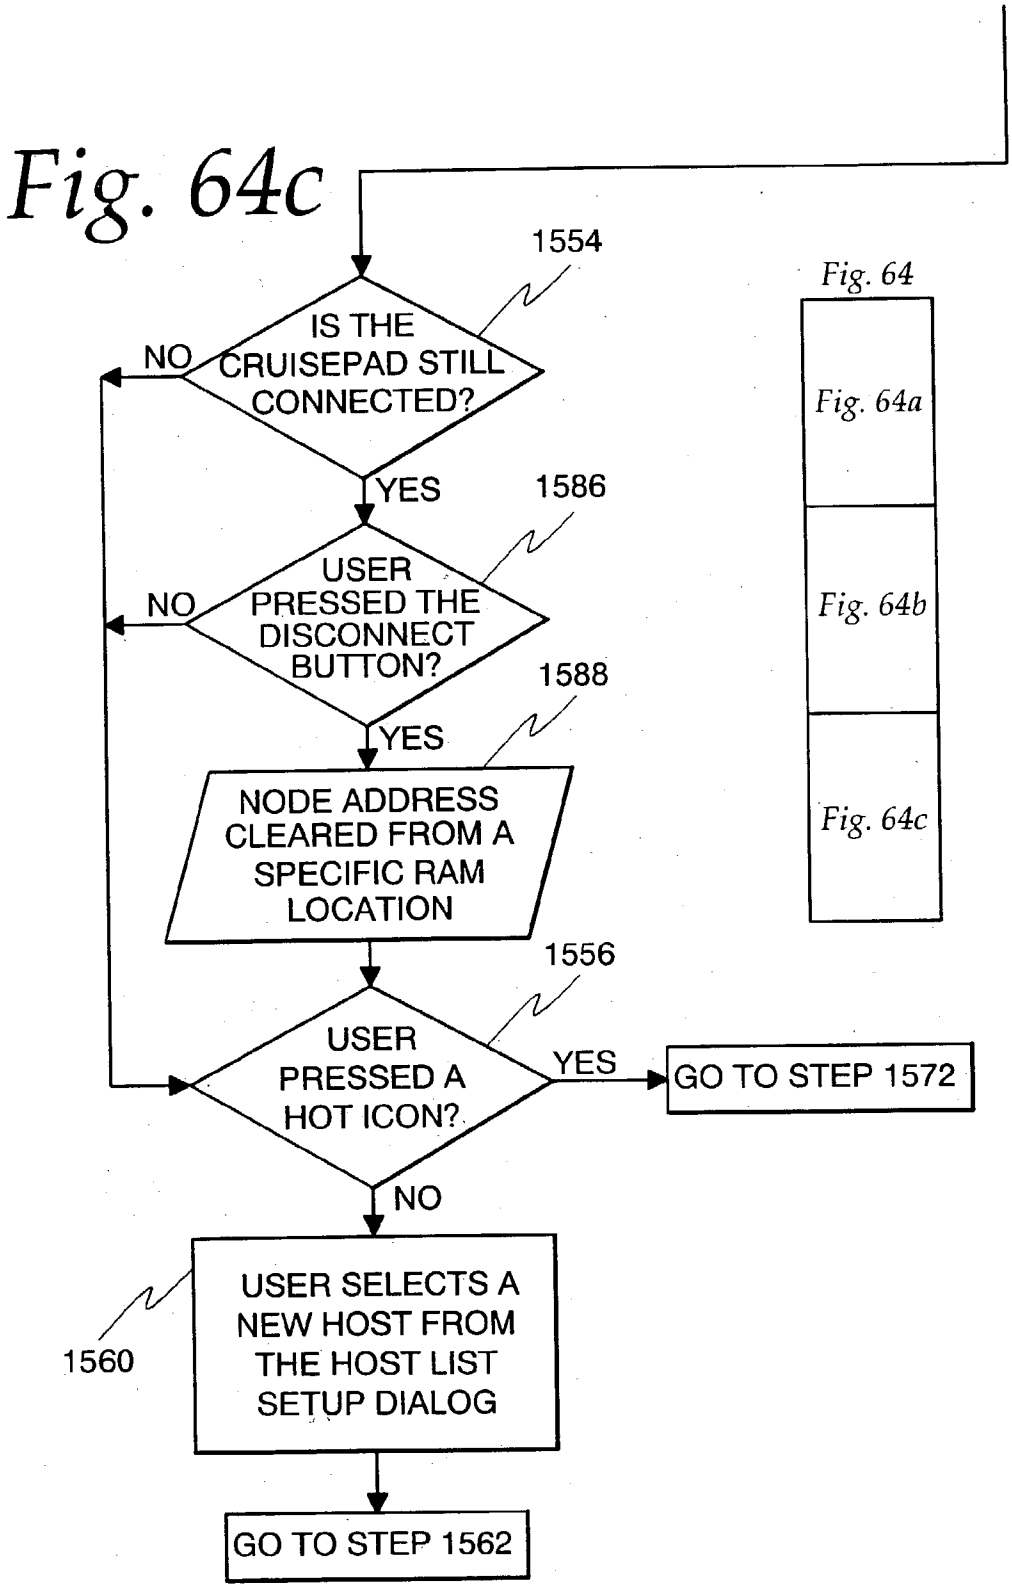
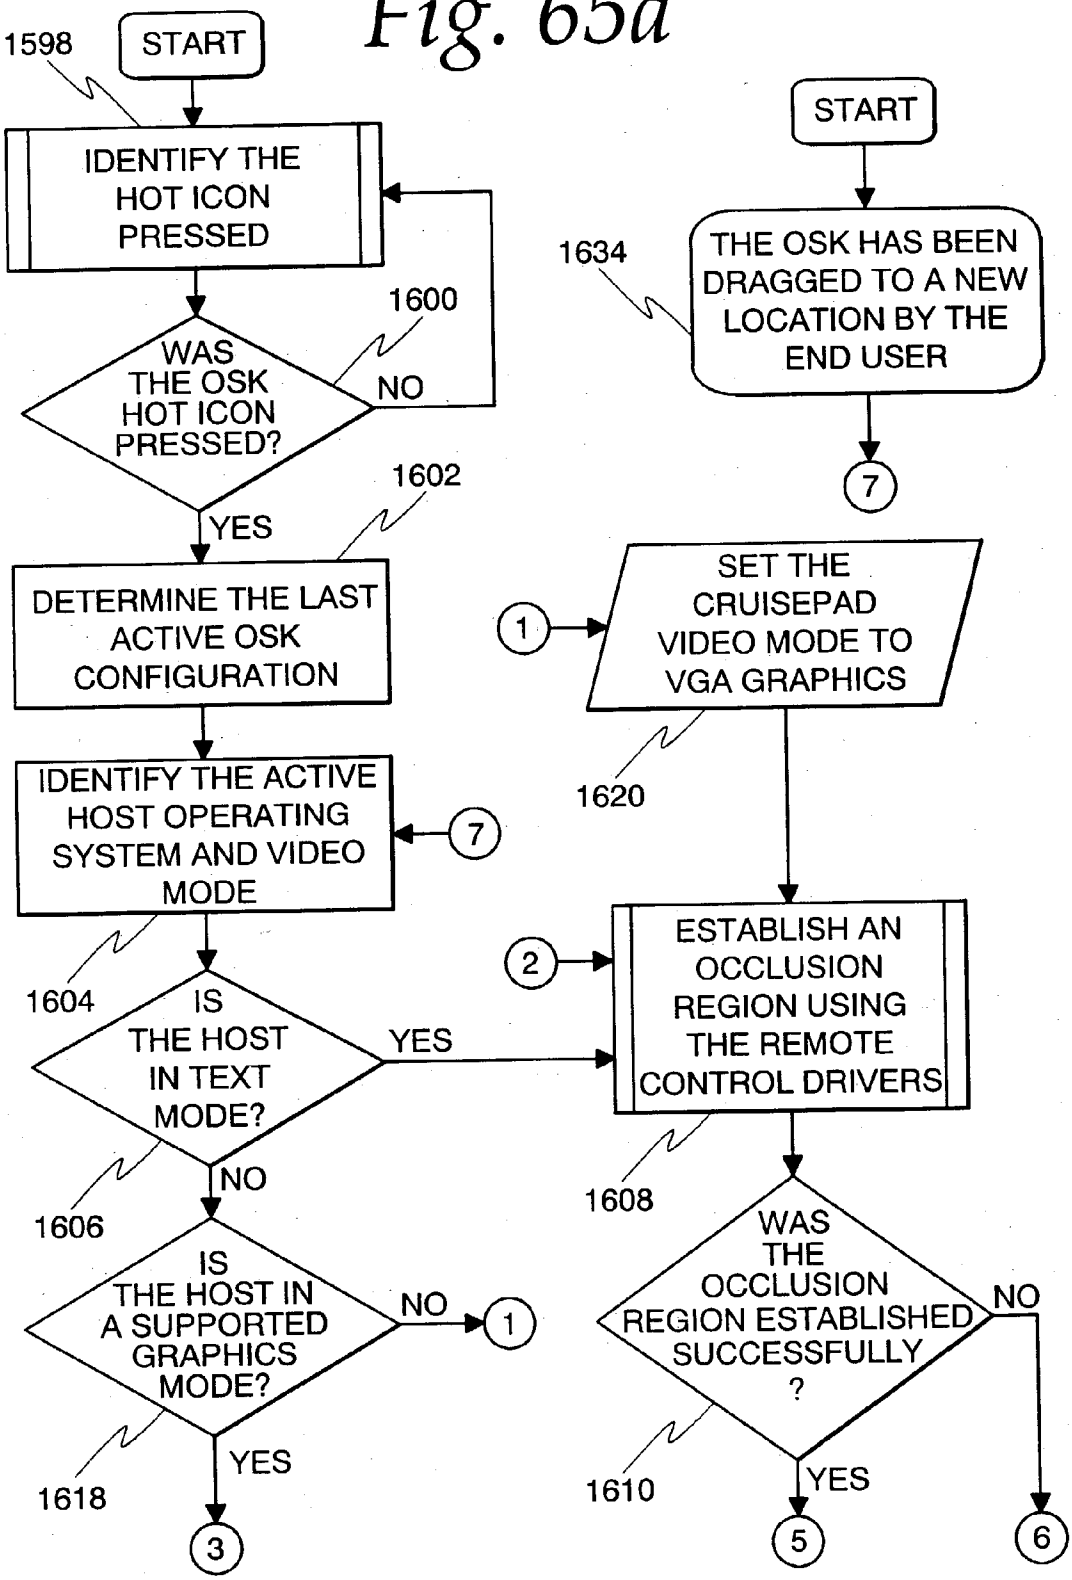

1554
IS THE CRUISEPAD STILL CONNECTED?
NO
YES
1586
USER PRESSED THE DISCONNECT BUTTON?
NO
YES
1588
NODE ADDRESS CLEARED FROM A SPECIFIC RAM LOCATION
1556
USER PRESSED A HOT ICON?
YES
GO TO STEP 1572
NO
1560
USER SELECTS A NEW HOST FROM THE HOST LIST SETUP DIALOG
GO TO STEP 1562
Fig. 64
Fig. 64a
Fig. 64b
Fig. 64c

Fig. 65a


1598
START
IDENTIFY THE HOT ICON PRESSED
1600
WAS THE OSK HOT ICON PRESSED?
NO
YES
1602
DETERMINE THE LAST ACTIVE OSK CONFIGURATION
IDENTIFY THE ACTIVE HOST OPERATING SYSTEM AND VIDEO MODE
7
1604
IS THE HOST IN TEXT MODE?
YES
NO
1606
IS THE HOST IN A SUPPORTED GRAPHICS MODE?
NO
1
YES
1618
3
START
1634
THE OSK HAS BEEN DRAGGED TO A NEW LOCATION BY THE END USER
7
1
SET THE CRUISEPAD VIDEO MODE TO VGA GRAPHICS
1620
2
ESTABLISH AN OCCLUSION REGION USING THE REMOTE CONTROL DRIVERS
1608
WAS THE OCCLUSION REGION ESTABLISHED SUCCESSFULLY ?
NO
YES
1610
5
6

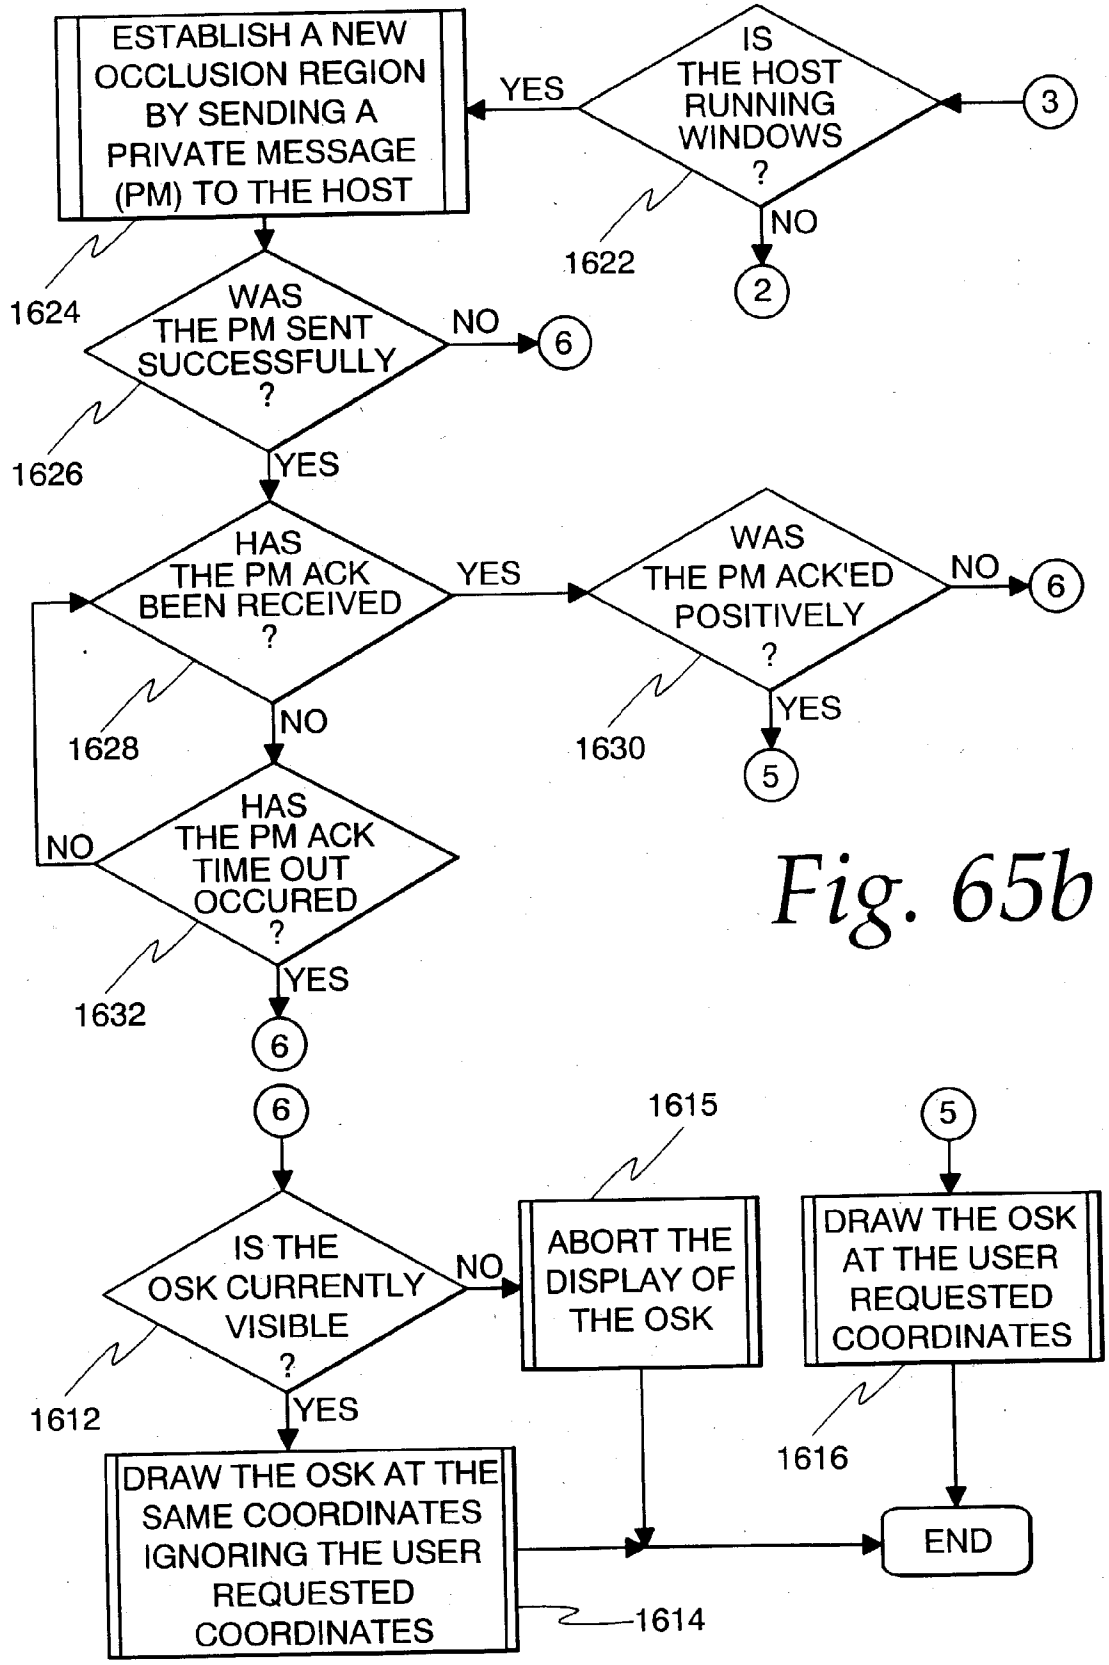

ESTABLISH A NEW OCCLUSION REGION BY SENDING A PRIVATE MESSAGE (PM) TO THE HOST
IS THE HOST RUNNING WINDOWS ?
YES
NO
3
2
1622
1624
WAS THE PM SENT SUCCESSFULLY ?
NO
6
1626
YES
HAS THE PM ACK BEEN RECEIVED ?
YES
WAS THE PM ACK'ED POSITIVELY ?
NO
6
1628
NO
1630
YES
5
HAS THE PM ACK TIME OUT OCCURED ?
NO
1632
YES
6
6
1615
5
IS THE OSK CURRENTLY VISIBLE ?
NO
ABORT THE DISPLAY OF THE OSK
DRAW THE OSK AT THE USER REQUESTED COORDINATES
1612
YES
1616
DRAW THE OSK AT THE SAME COORDINATES IGNORING THE USER REQUESTED COORDINATES
1614
END

Fig. 65b

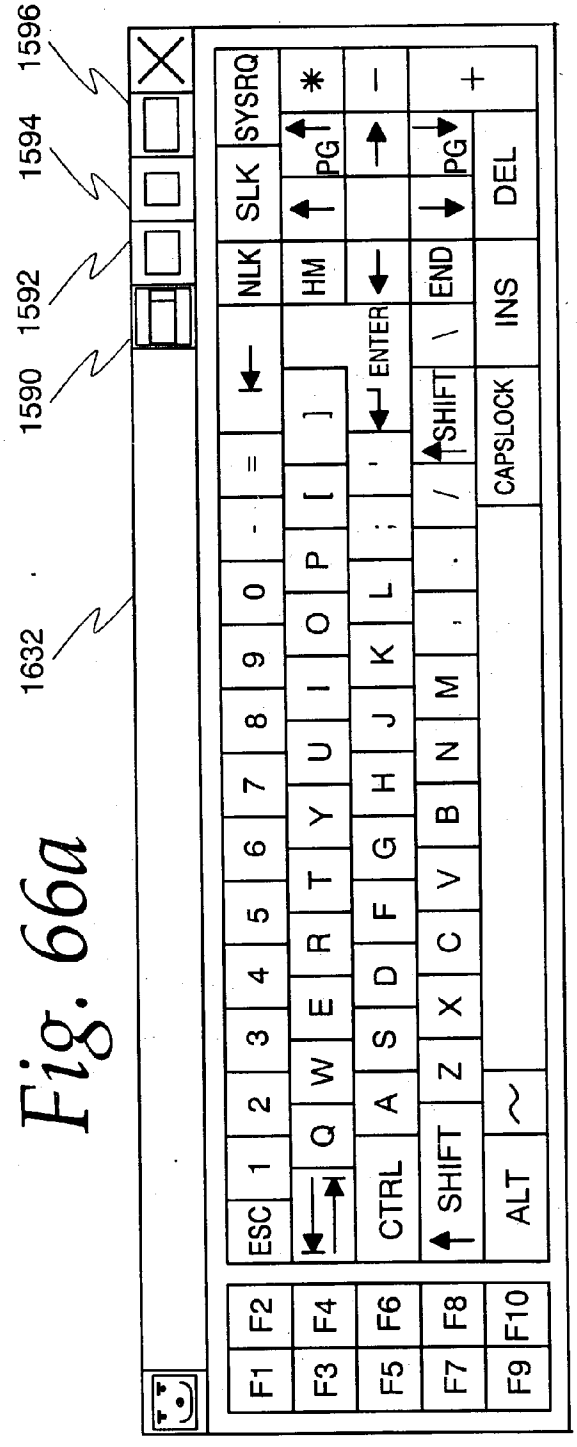


Fig. 66a

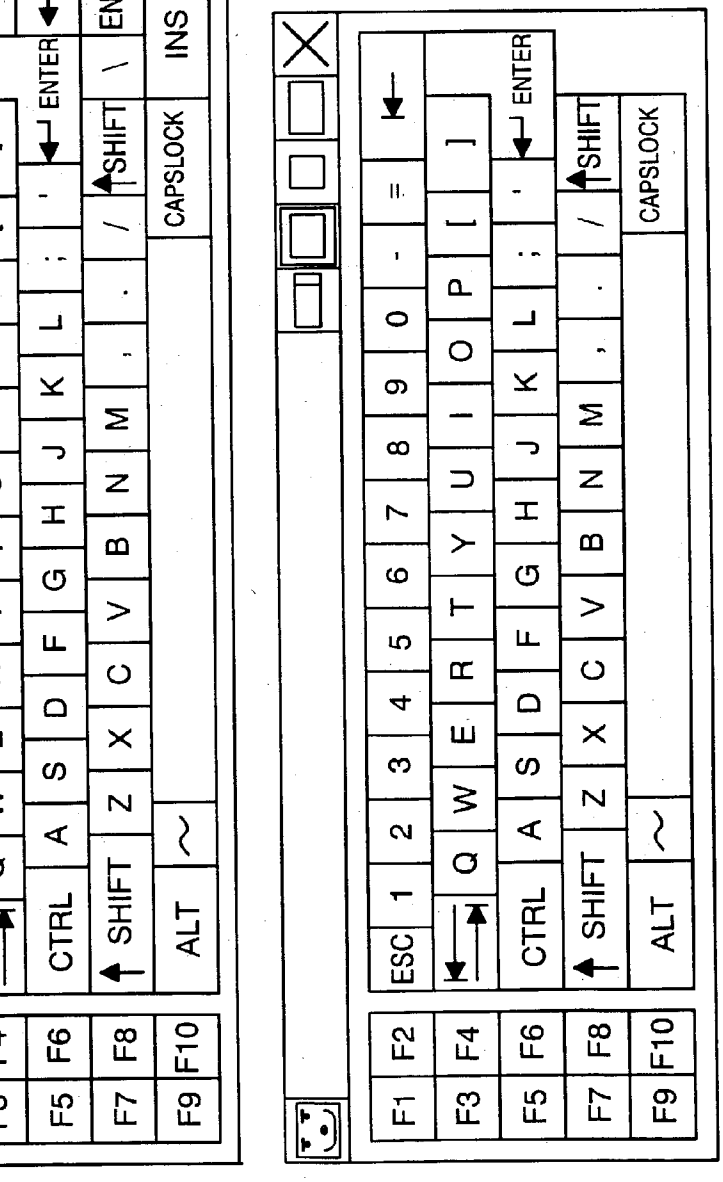


Fig. 66b

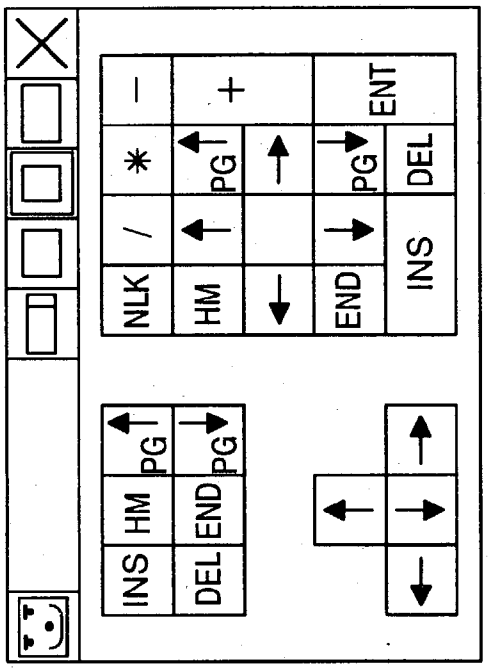


Fig. 66c

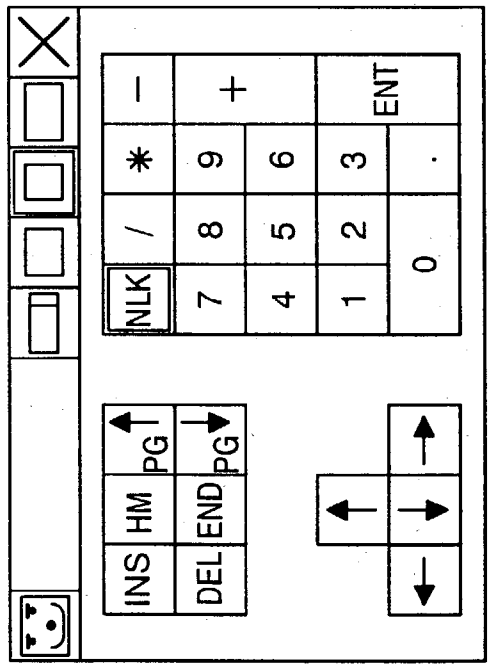


Fig. 66d

Fig. 67

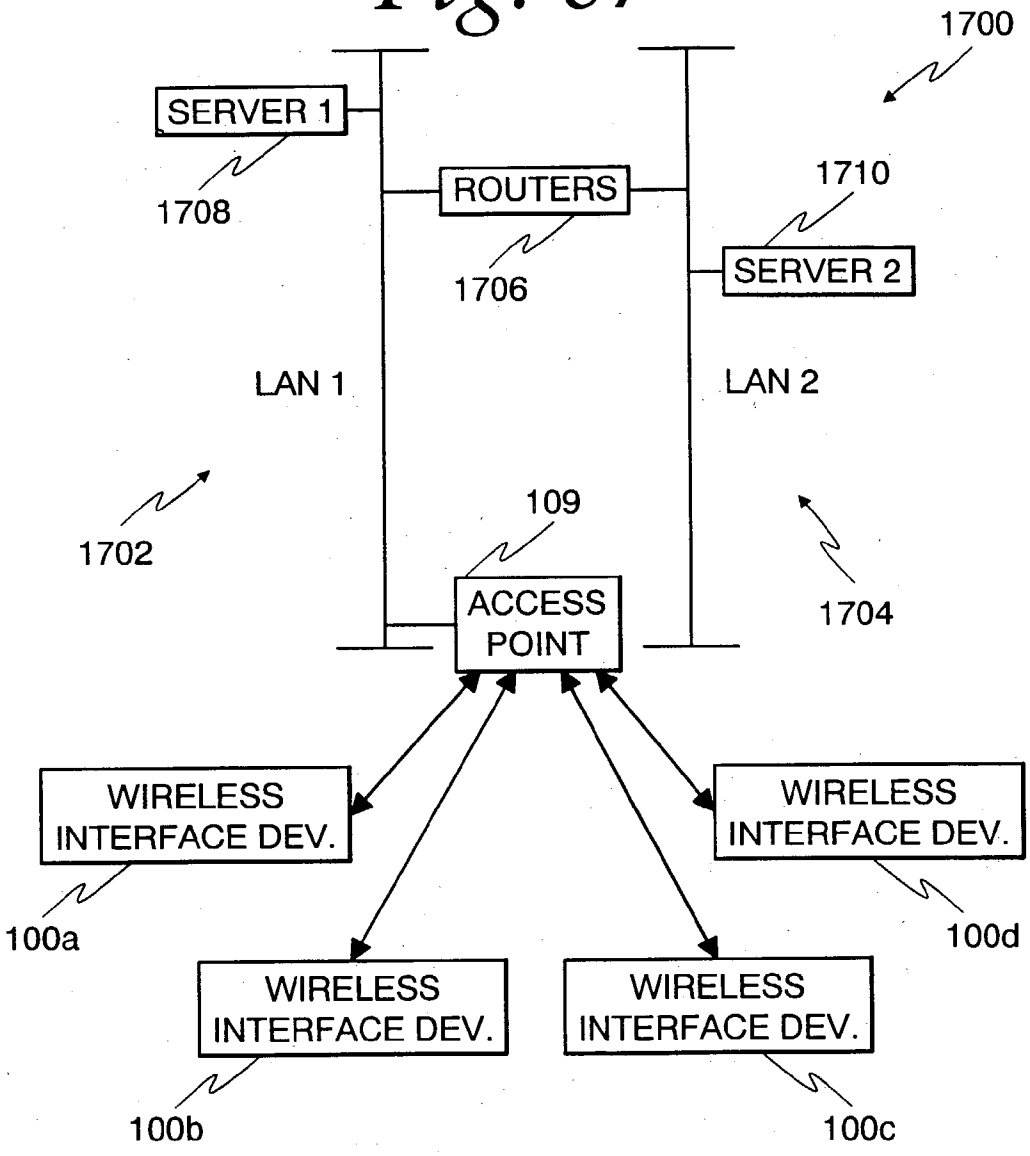

1700
SERVER 1
1708
ROUTERS
1706
1710
SERVER 2
LAN 1
LAN 2
1702
109
1704
ACCESS POINT
WIRELESS INTERFACE DEV.
100a
WIRELESS INTERFACE DEV.
100d
WIRELESS INTERFACE DEV.
100b
WIRELESS INTERFACE DEV.
100c

Fig. 68

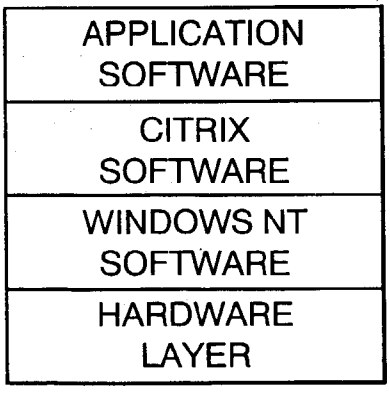
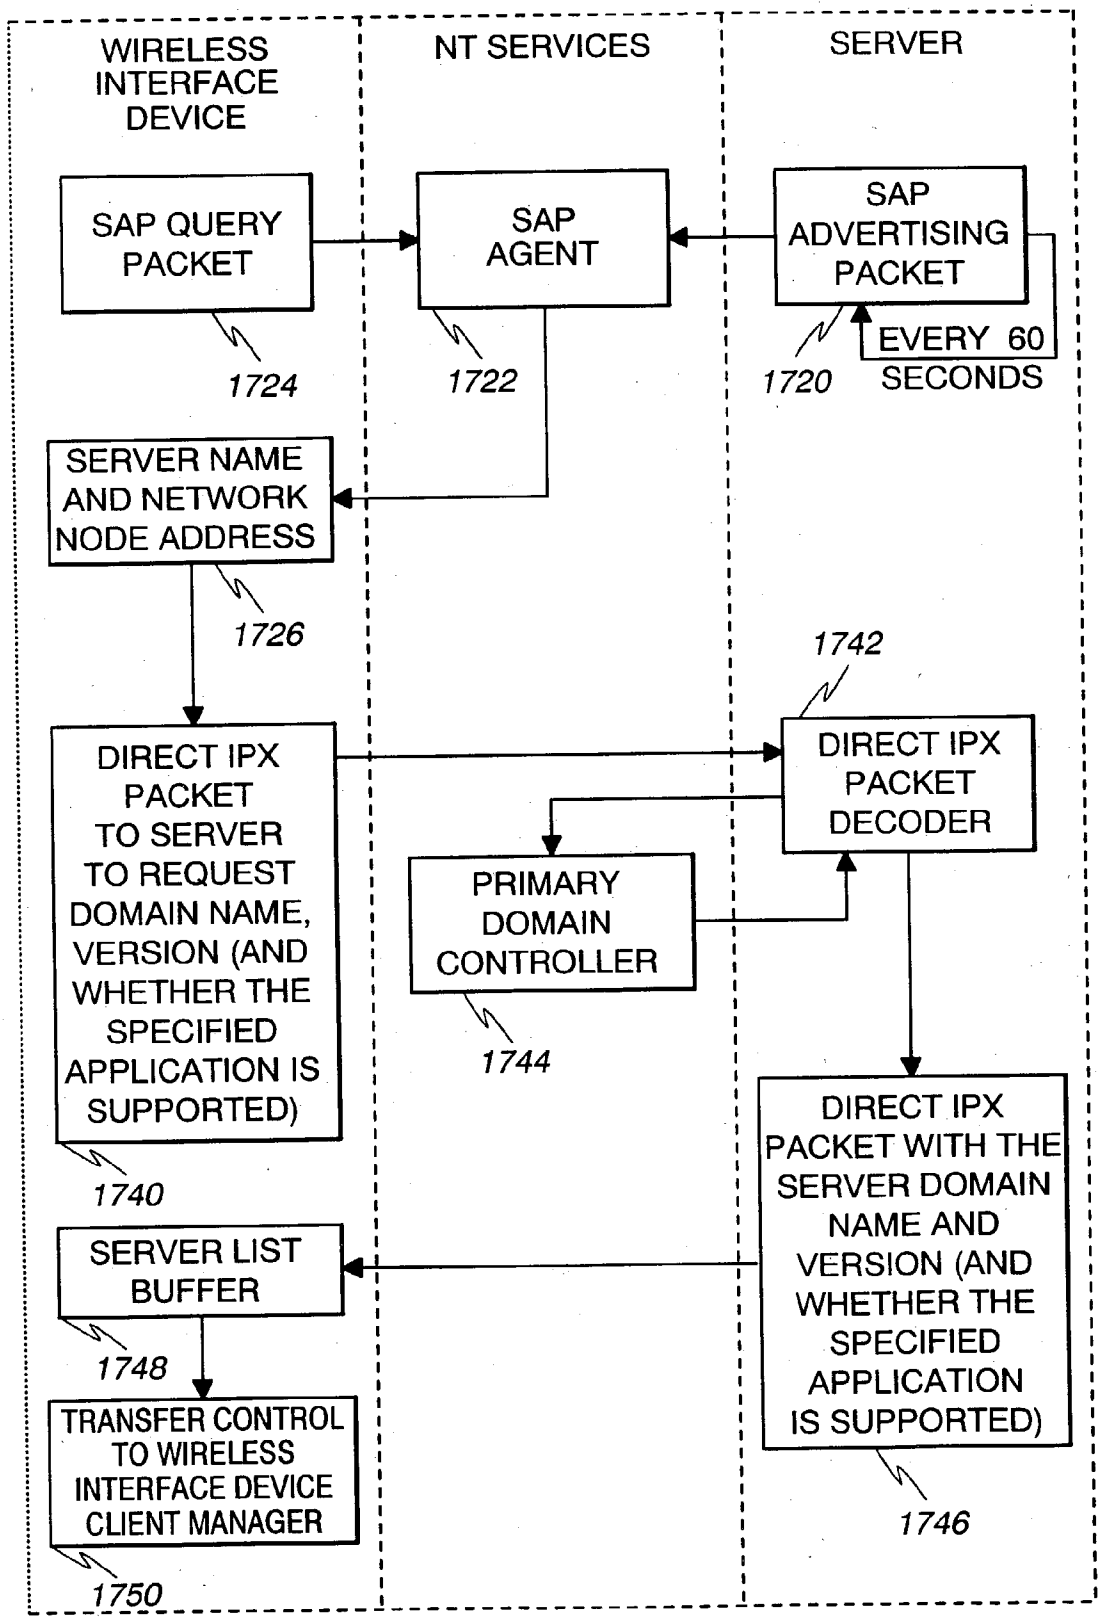

APPLICATION SOFTWARE
CITRIX SOFTWARE
WINDOWS NT SOFTWARE
HARDWARE LAYER

Fig. 69


WIRELESS INTERFACE DEVICE
NT SERVICES
SERVER
SAP QUERY PACKET
SAP AGENT
SAP ADVERTISING PACKET
EVERY 60 SECONDS
1724
1722
1720
SERVER NAME AND NETWORK NODE ADDRESS
1726
1742
DIRECT IPX PACKET TO SERVER TO REQUEST DOMAIN NAME, VERSION (AND WHETHER THE SPECIFIED APPLICATION IS SUPPORTED)
DIRECT IPX PACKET DECODER
PRIMARY DOMAIN CONTROLLER
1744
1740
DIRECT IPX PACKET WITH THE SERVER DOMAIN NAME AND VERSION (AND WHETHER THE SPECIFIED APPLICATION IS SUPPORTED)
SERVER LIST BUFFER
1748
1746
TRANSFER CONTROL TO WIRELESS INTERFACE DEVICE CLIENT MANAGER
1750

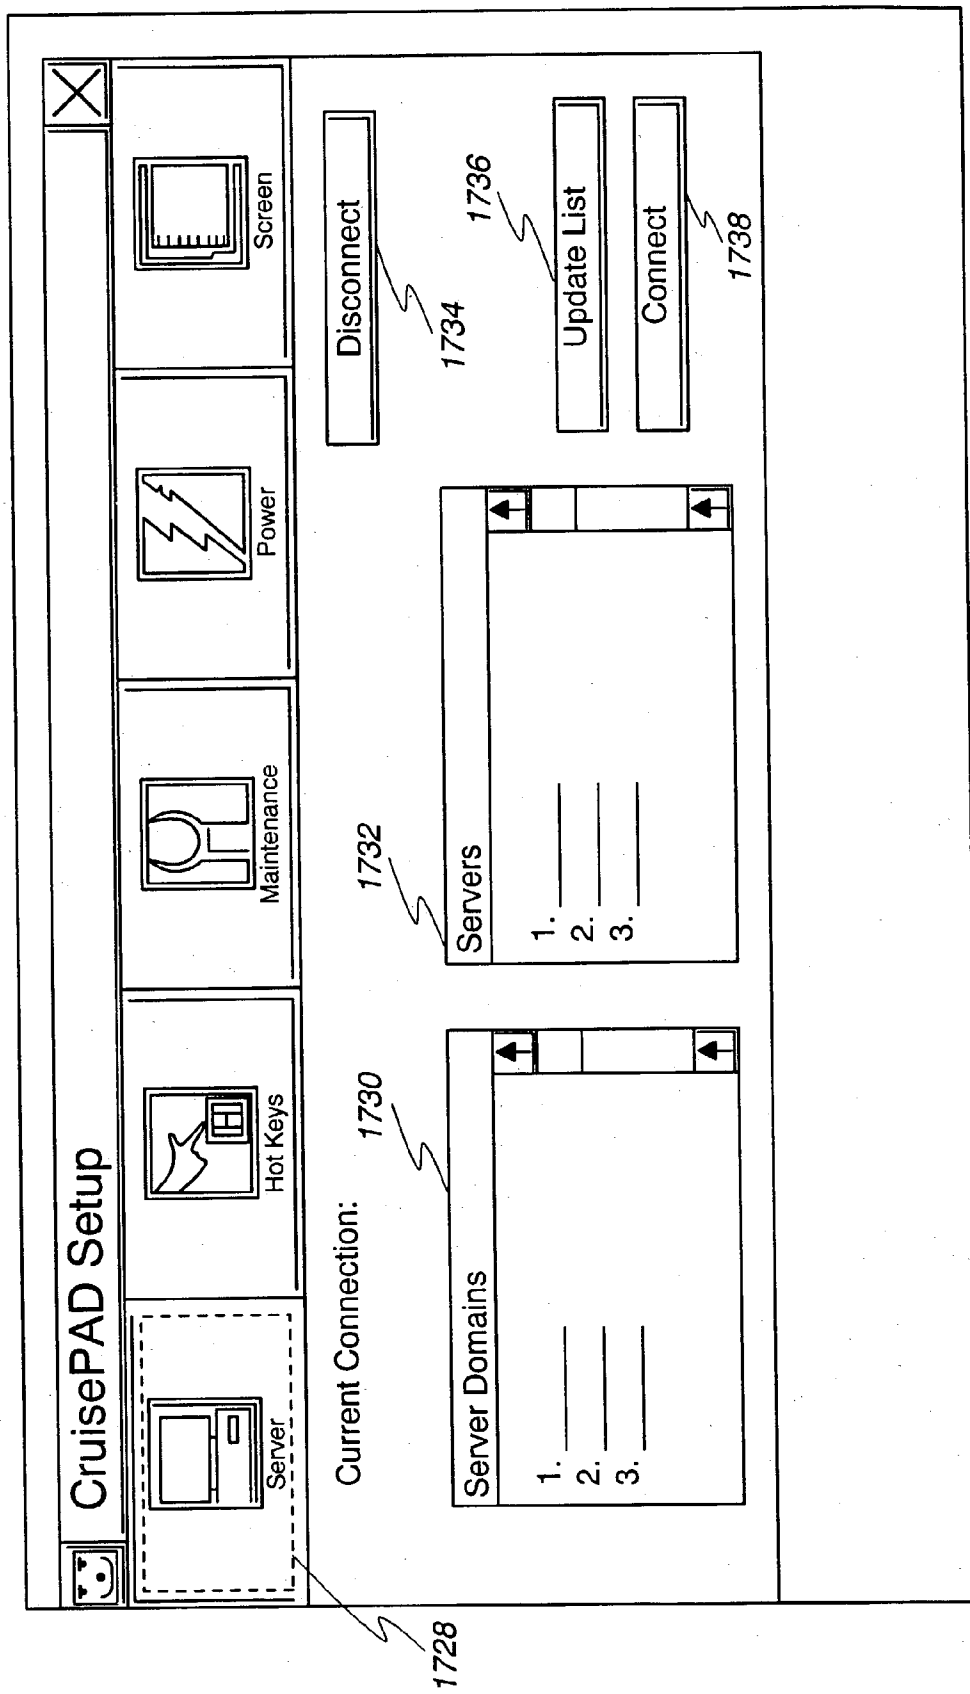

CruisePAD Setup
Server
Hot Keys
Maintenance
Power
Screen
Current Connection:
Server Domains
1.
2.
3.
Servers
1.
2.
3.
Disconnect
Update List
Connect
1728
1730
1732
1734
1736
1738

Fig. 70

Fig. 71a

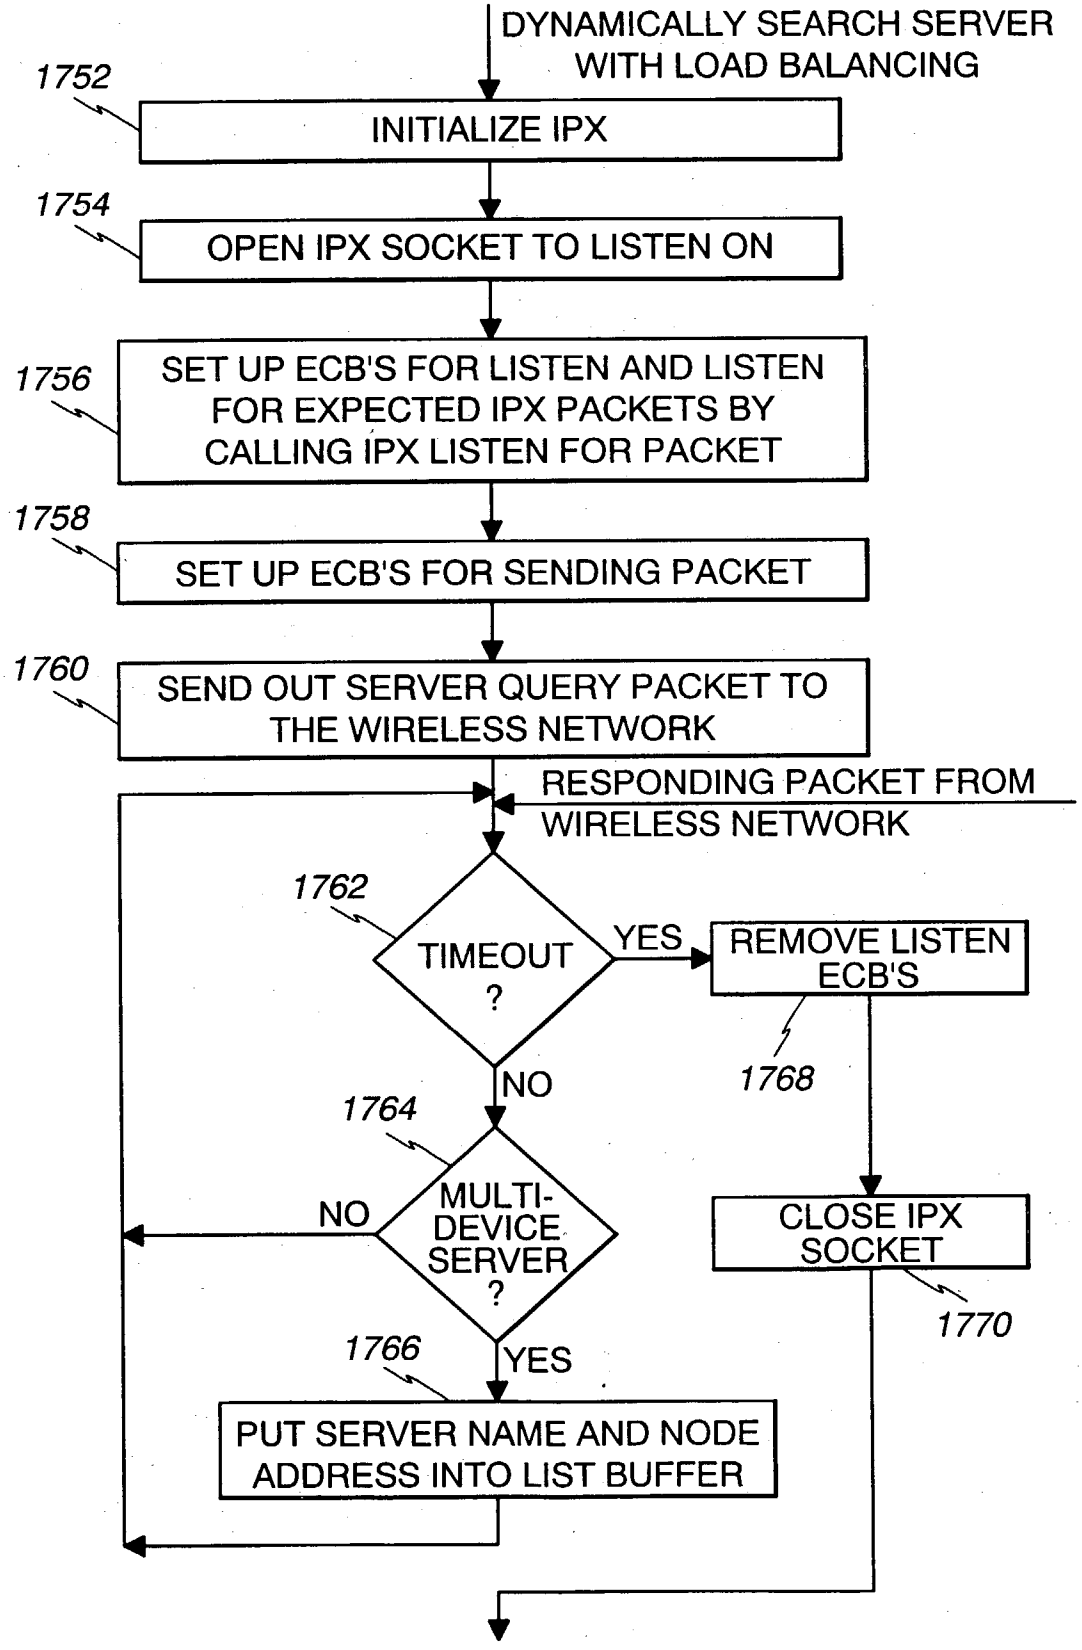

DYNAMICALLY SEARCH SERVER WITH LOAD BALANCING
1752
INITIALIZE IPX
1754
OPEN IPX SOCKET TO LISTEN ON
1756
SET UP ECB'S FOR LISTEN AND LISTEN FOR EXPECTED IPX PACKETS BY CALLING IPX LISTEN FOR PACKET
1758
SET UP ECB'S FOR SENDING PACKET
1760
SEND OUT SERVER QUERY PACKET TO THE WIRELESS NETWORK
RESPONDING PACKET FROM WIRELESS NETWORK
1762
TIMEOUT ?
YES
REMOVE LISTEN ECB'S
1768
NO
1764
MULTI-DEVICE SERVER ?
NO
CLOSE IPX SOCKET
1770
1766
YES
PUT SERVER NAME AND NODE ADDRESS INTO LIST BUFFER

Fig. 71b

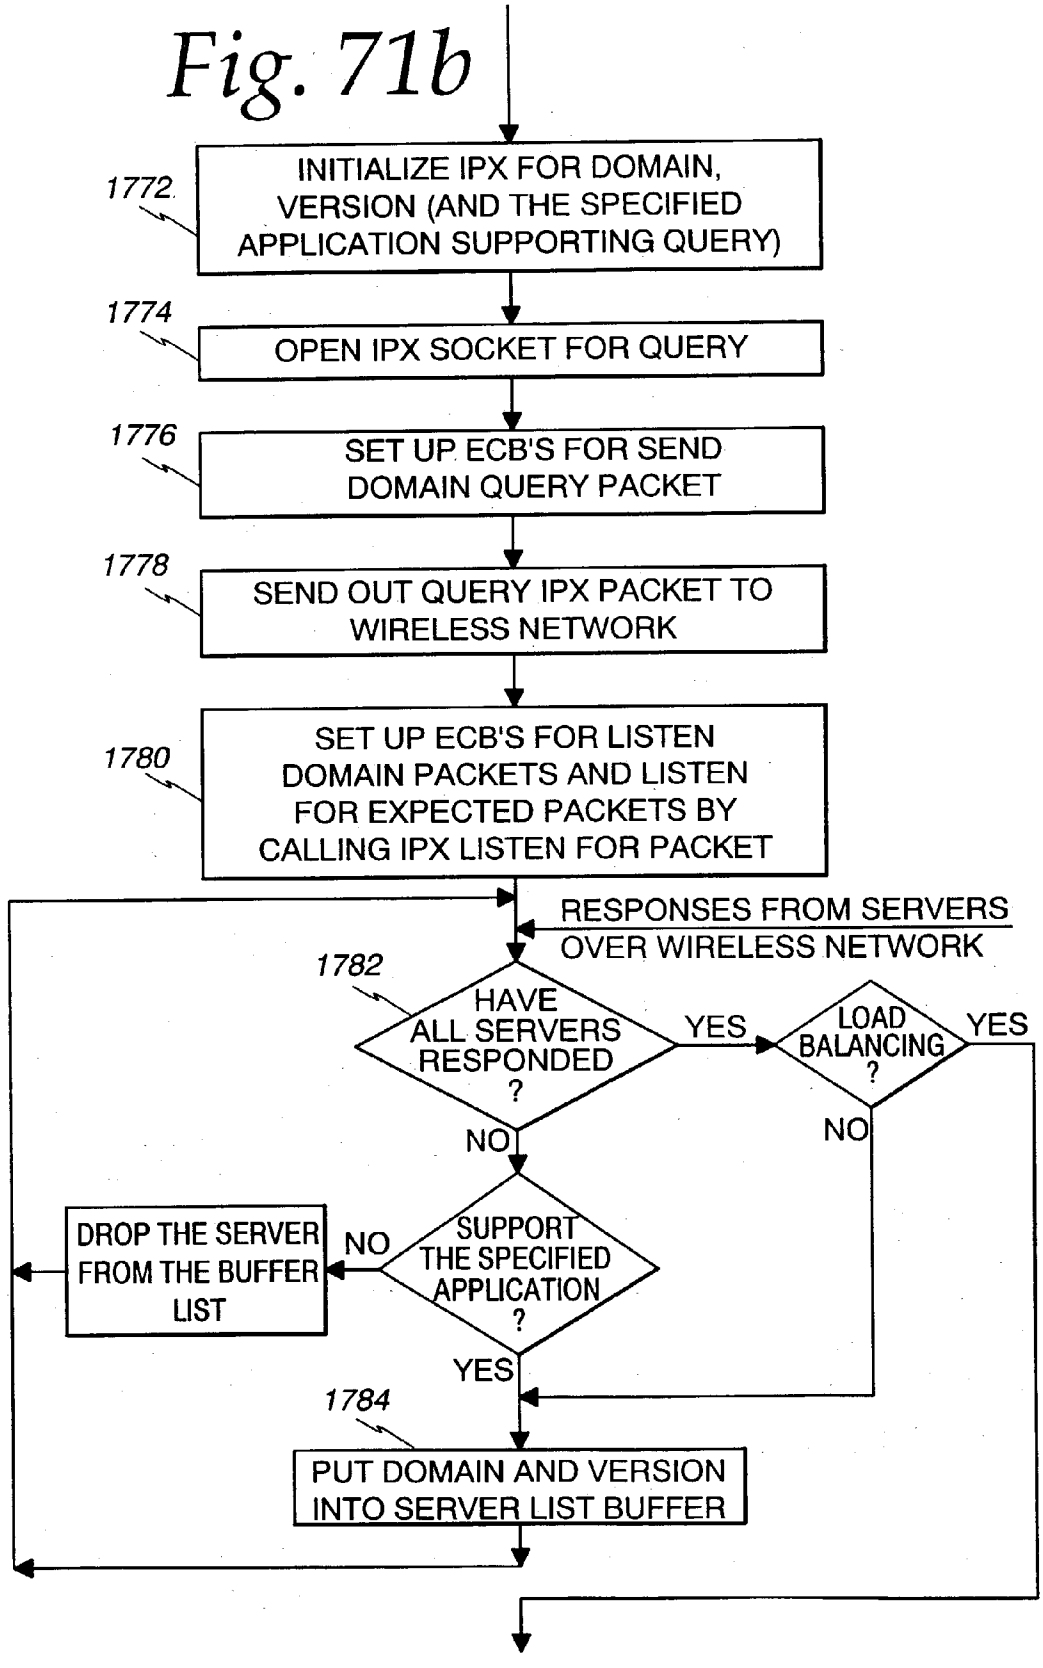

1772
INITIALIZE IPX FOR DOMAIN, VERSION (AND THE SPECIFIED APPLICATION SUPPORTING QUERY)
1774
OPEN IPX SOCKET FOR QUERY
1776
SET UP ECB'S FOR SEND DOMAIN QUERY PACKET
1778
SEND OUT QUERY IPX PACKET TO WIRELESS NETWORK
1780
SET UP ECB'S FOR LISTEN DOMAIN PACKETS AND LISTEN FOR EXPECTED PACKETS BY CALLING IPX LISTEN FOR PACKET
RESPONSES FROM SERVERS OVER WIRELESS NETWORK
1782
HAVE ALL SERVERS RESPONDED ?
YES
LOAD BALANCING ?
YES
NO
NO
SUPPORT THE SPECIFIED APPLICATION ?
NO
DROP THE SERVER FROM THE BUFFER LIST
YES
1784
PUT DOMAIN AND VERSION INTO SERVER LIST BUFFER

Fig. 71c

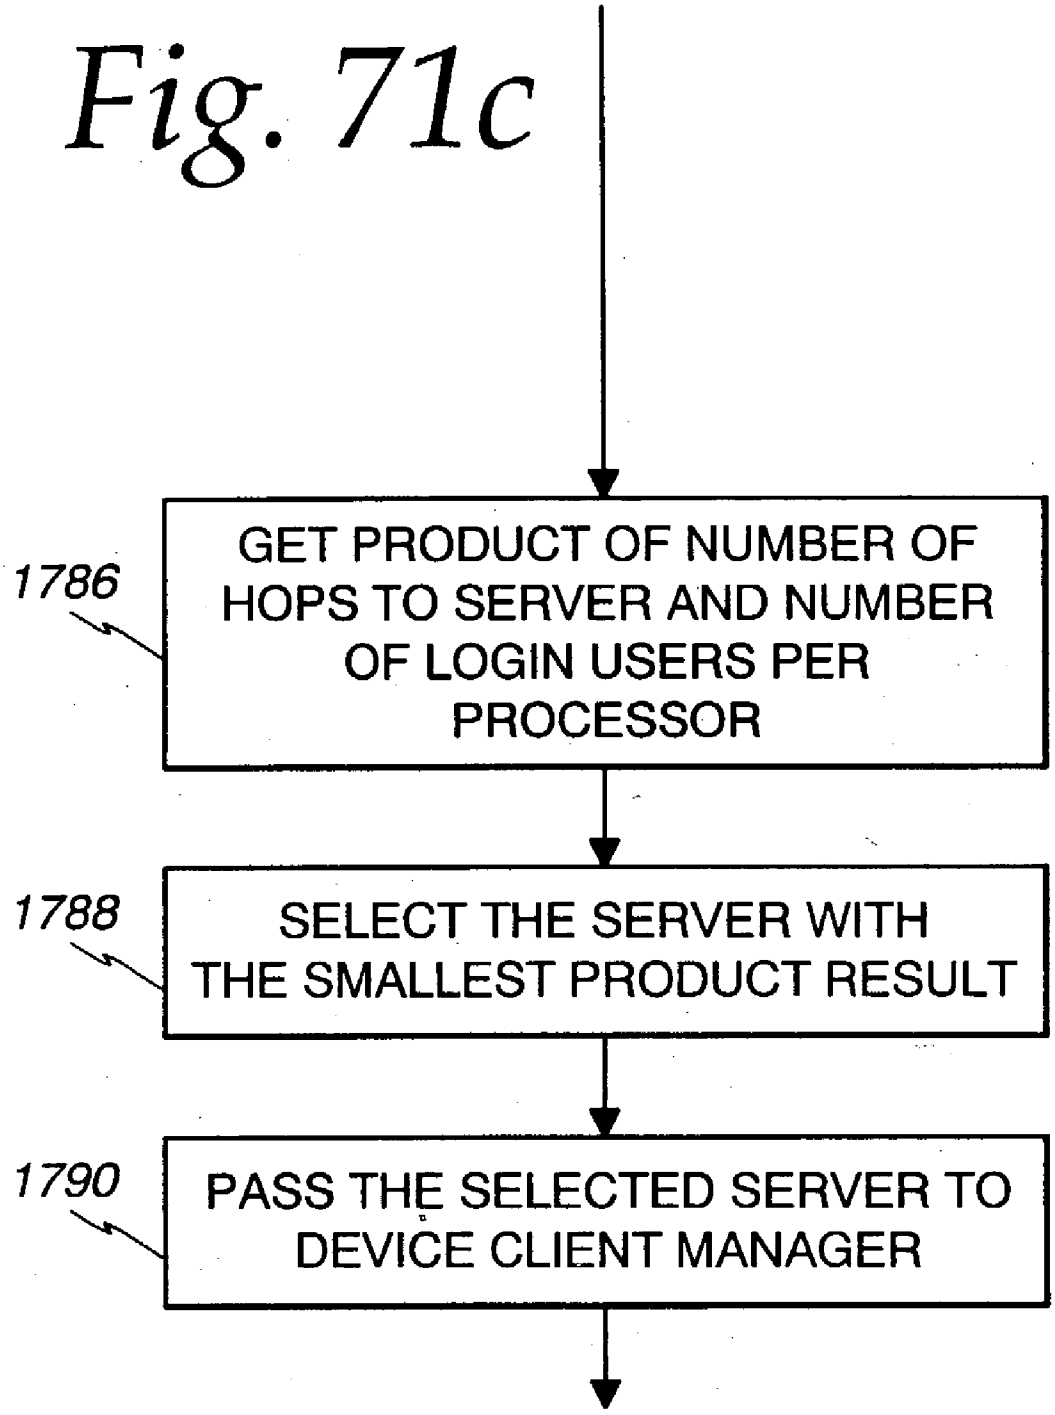

1786
GET PRODUCT OF NUMBER OF HOPS TO SERVER AND NUMBER OF LOGIN USERS PER PROCESSOR
1788
SELECT THE SERVER WITH THE SMALLEST PRODUCT RESULT
1790
PASS THE SELECTED SERVER TO DEVICE CLIENT MANAGER

Fig. 72

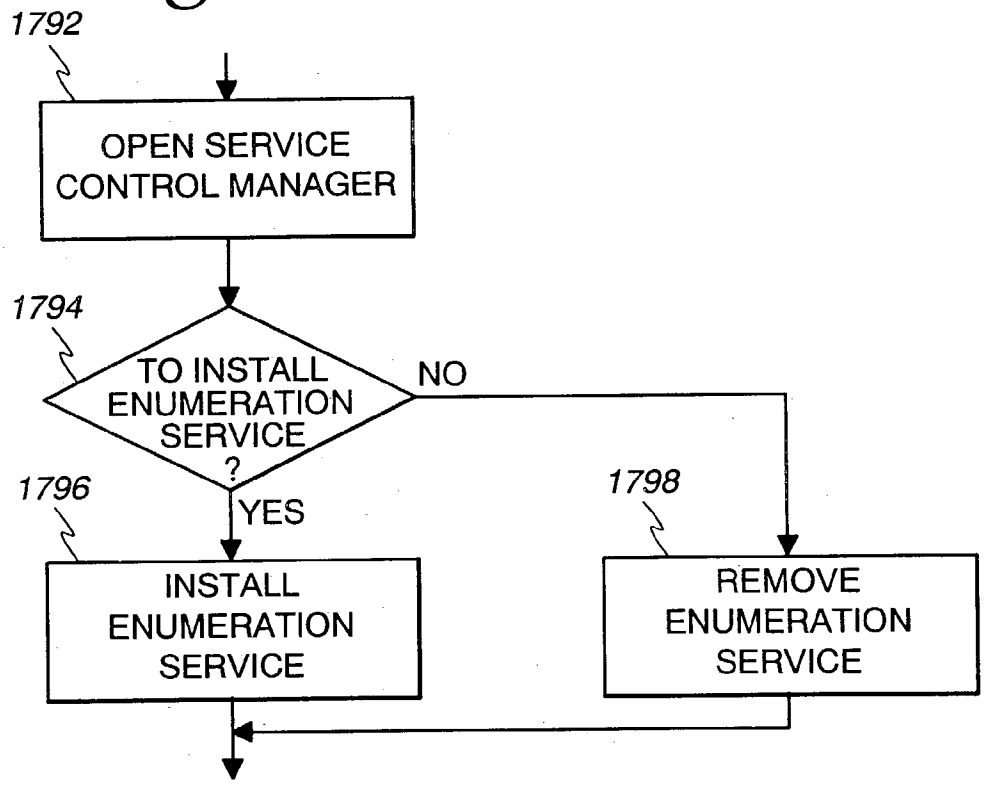

1792
OPEN SERVICE CONTROL MANAGER
1794
TO INSTALL ENUMERATION SERVICE ?
NO
YES
1796
INSTALL ENUMERATION SERVICE
1798
REMOVE ENUMERATION SERVICE

Fig. 73

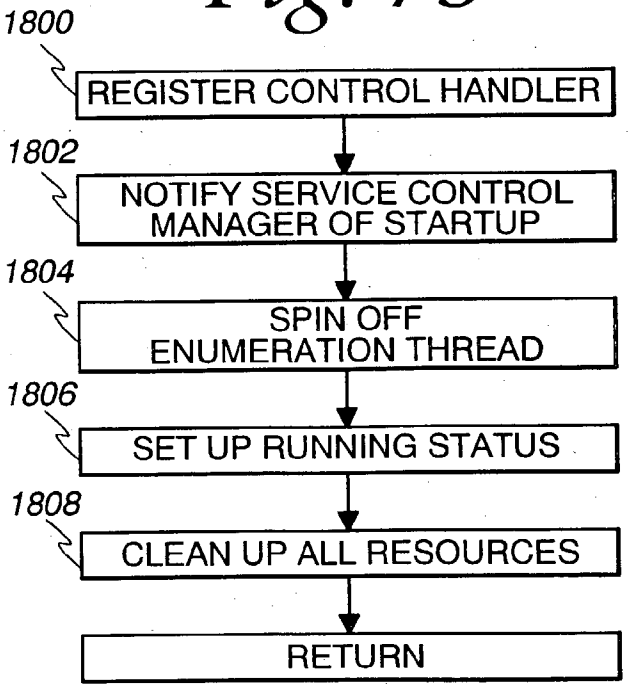

1800
REGISTER CONTROL HANDLER
1802
NOTIFY SERVICE CONTROL MANAGER OF STARTUP
1804
SPIN OFF ENUMERATION THREAD
1806
SET UP RUNNING STATUS
1808
CLEAN UP ALL RESOURCES
RETURN

Fig. 74

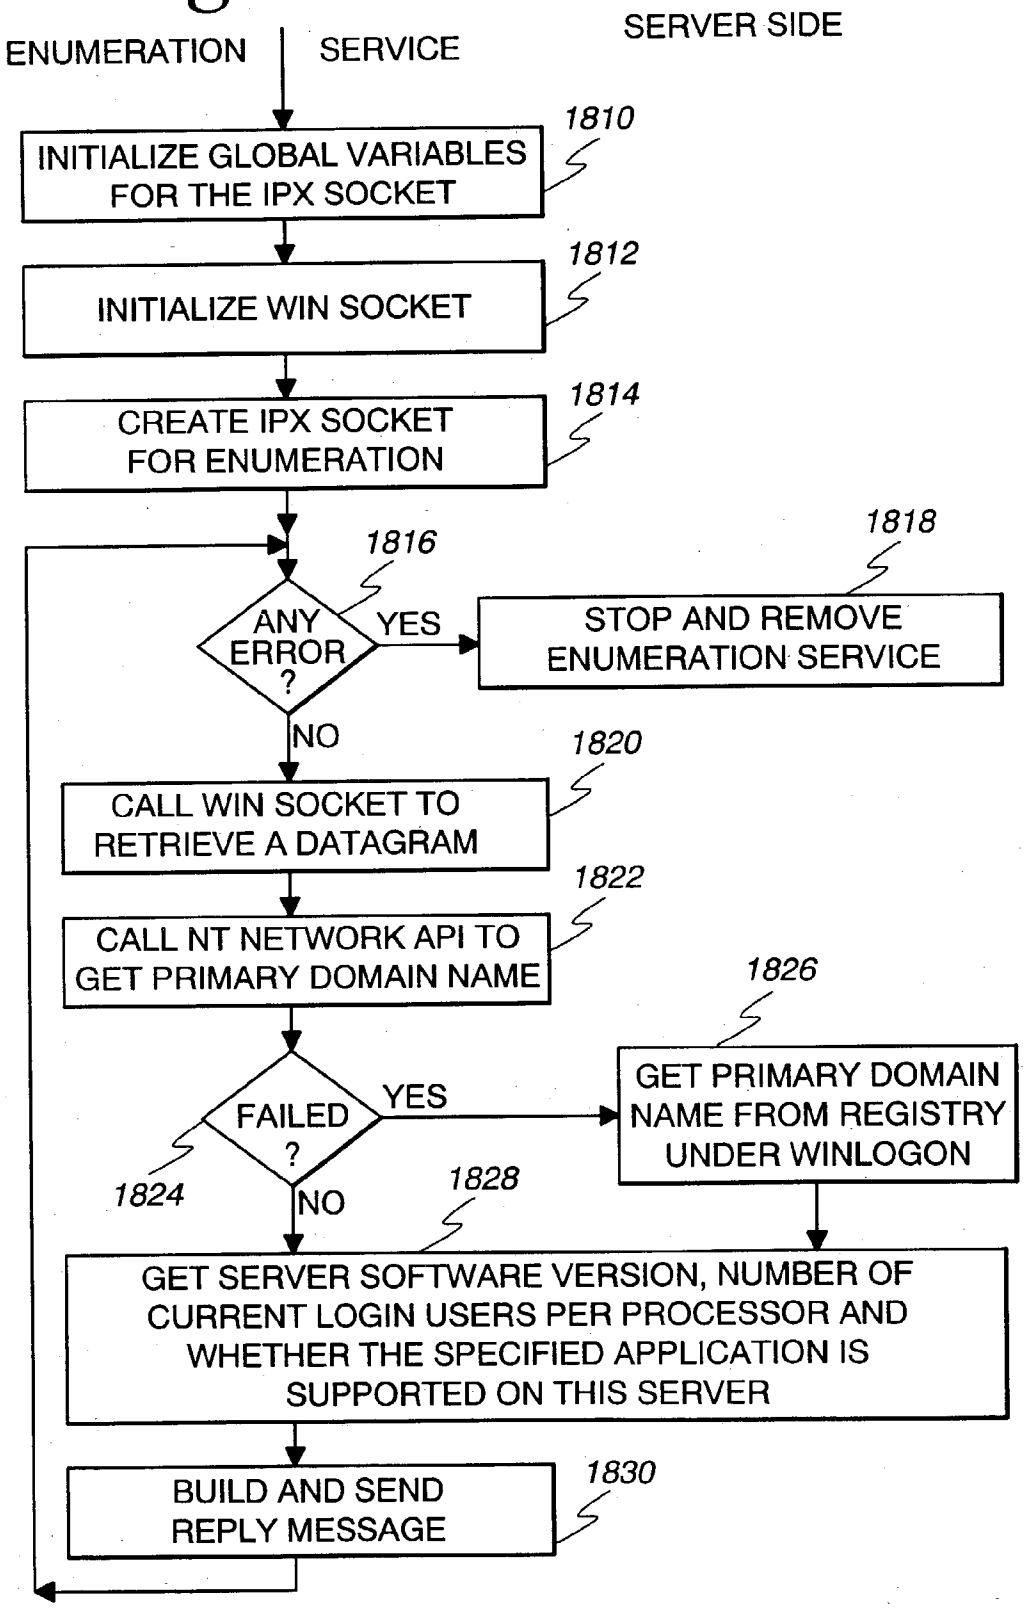

ENUMERATION SERVICE
SERVER SIDE
INITIALIZE GLOBAL VARIABLES FOR THE IPX SOCKET
1810
INITIALIZE WIN SOCKET
1812
CREATE IPX SOCKET FOR ENUMERATION
1814
1816
ANY ERROR ?
YES
1818
STOP AND REMOVE ENUMERATION SERVICE
NO
CALL WIN SOCKET TO RETRIEVE A DATAGRAM
1820
CALL NT NETWORK API TO GET PRIMARY DOMAIN NAME
1822
1826
FAILED ?
YES
GET PRIMARY DOMAIN NAME FROM REGISTRY UNDER WINLOGON
1824
NO
1828
GET SERVER SOFTWARE VERSION, NUMBER OF CURRENT LOGIN USERS PER PROCESSOR AND WHETHER THE SPECIFIED APPLICATION IS SUPPORTED ON THIS SERVER
BUILD AND SEND REPLY MESSAGE
1830

Fig. 75

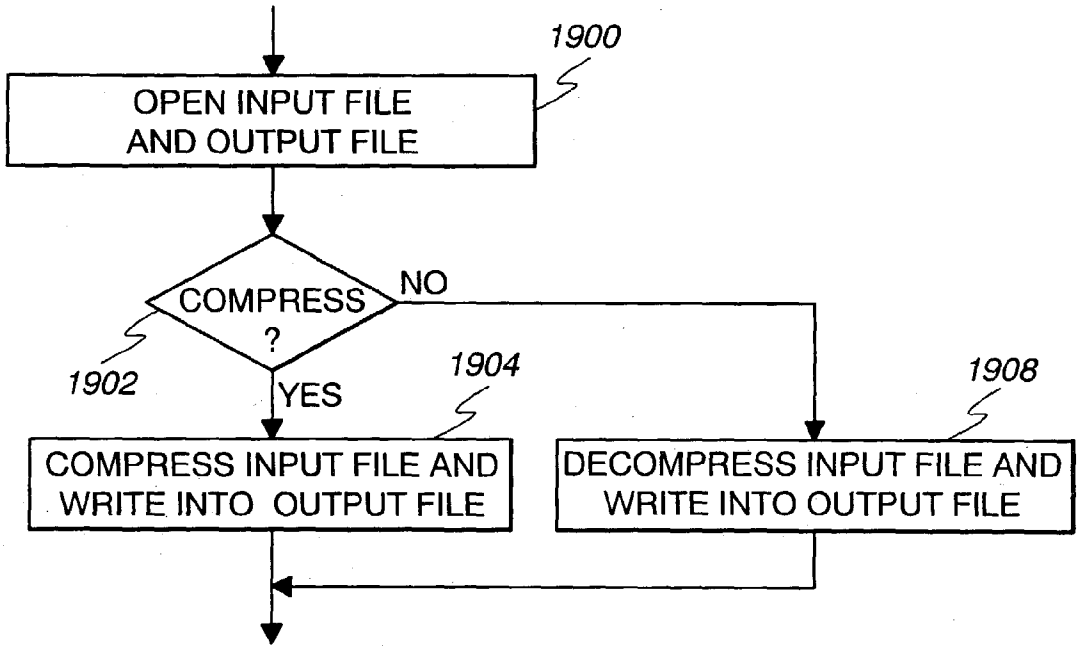

1900
OPEN INPUT FILE AND OUTPUT FILE
COMPRESS ?
NO
YES
1902
1904
1908
COMPRESS INPUT FILE AND WRITE INTO OUTPUT FILE
DECOMPRESS INPUT FILE AND WRITE INTO OUTPUT FILE

Fig. 76a

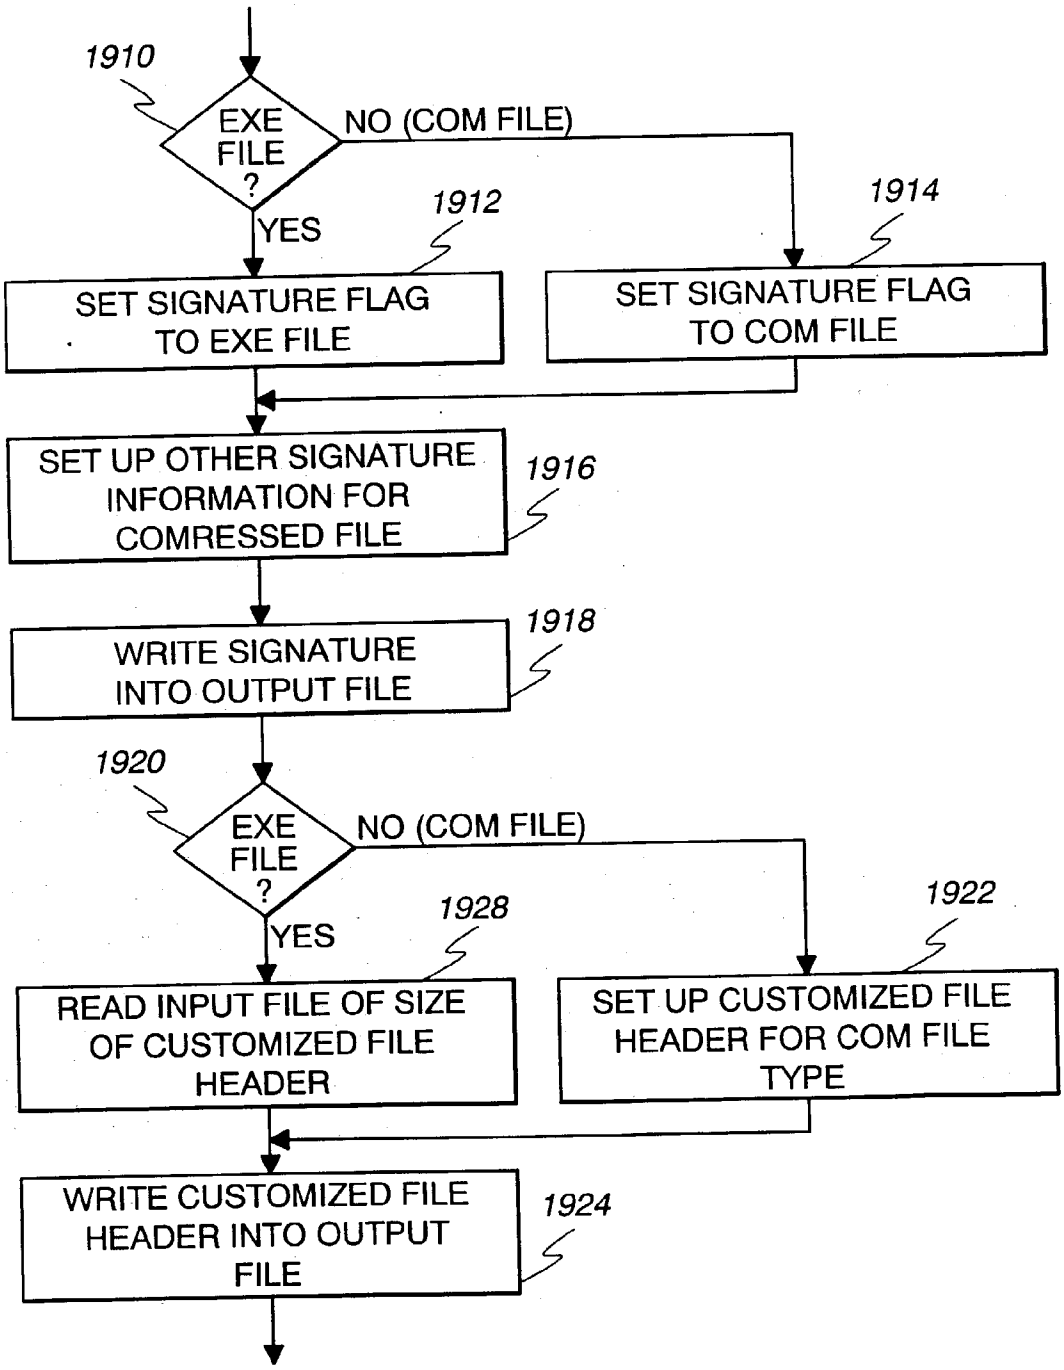

1910
EXE FILE ?
NO (COM FILE)
YES
1912
1914
SET SIGNATURE FLAG TO EXE FILE
SET SIGNATURE FLAG TO COM FILE
SET UP OTHER SIGNATURE INFORMATION FOR COMRESSED FILE
1916
WRITE SIGNATURE INTO OUTPUT FILE
1918
1920
EXE FILE ?
NO (COM FILE)
YES
1928
1922
READ INPUT FILE OF SIZE OF CUSTOMIZED FILE HEADER
SET UP CUSTOMIZED FILE HEADER FOR COM FILE TYPE
WRITE CUSTOMIZED FILE HEADER INTO OUTPUT FILE
1924

Fig. 76b

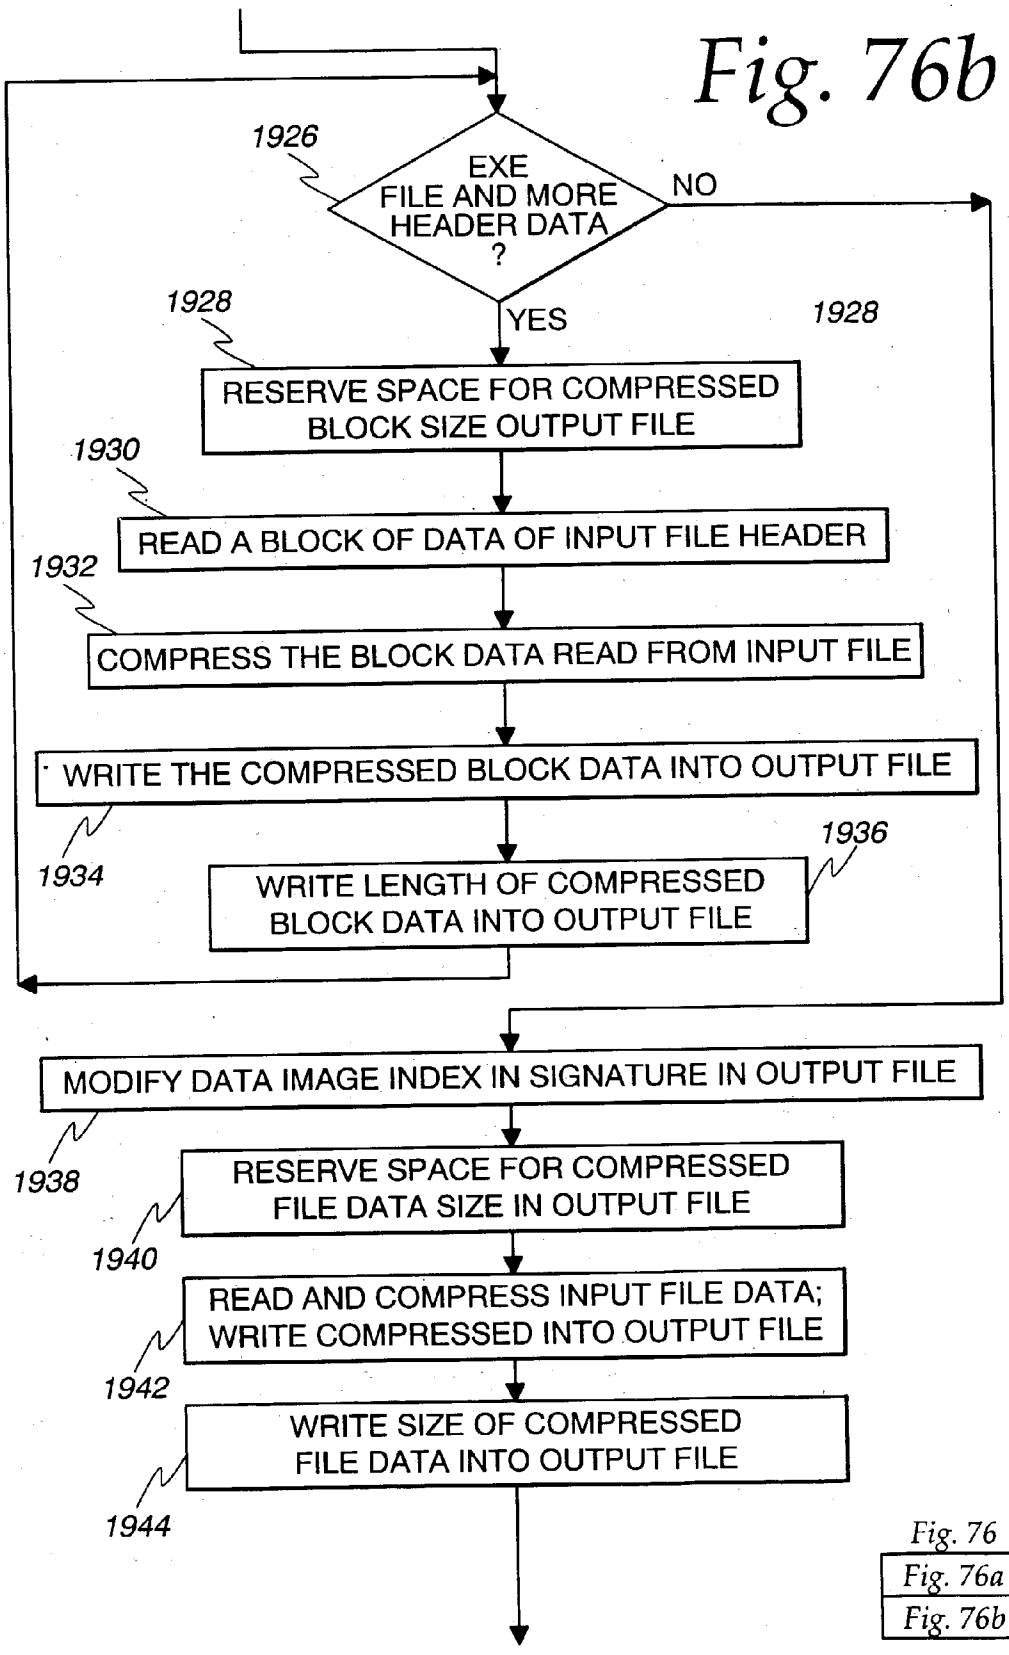


Fig. 76

Fig. 76a
Fig. 76b

Fig. 77

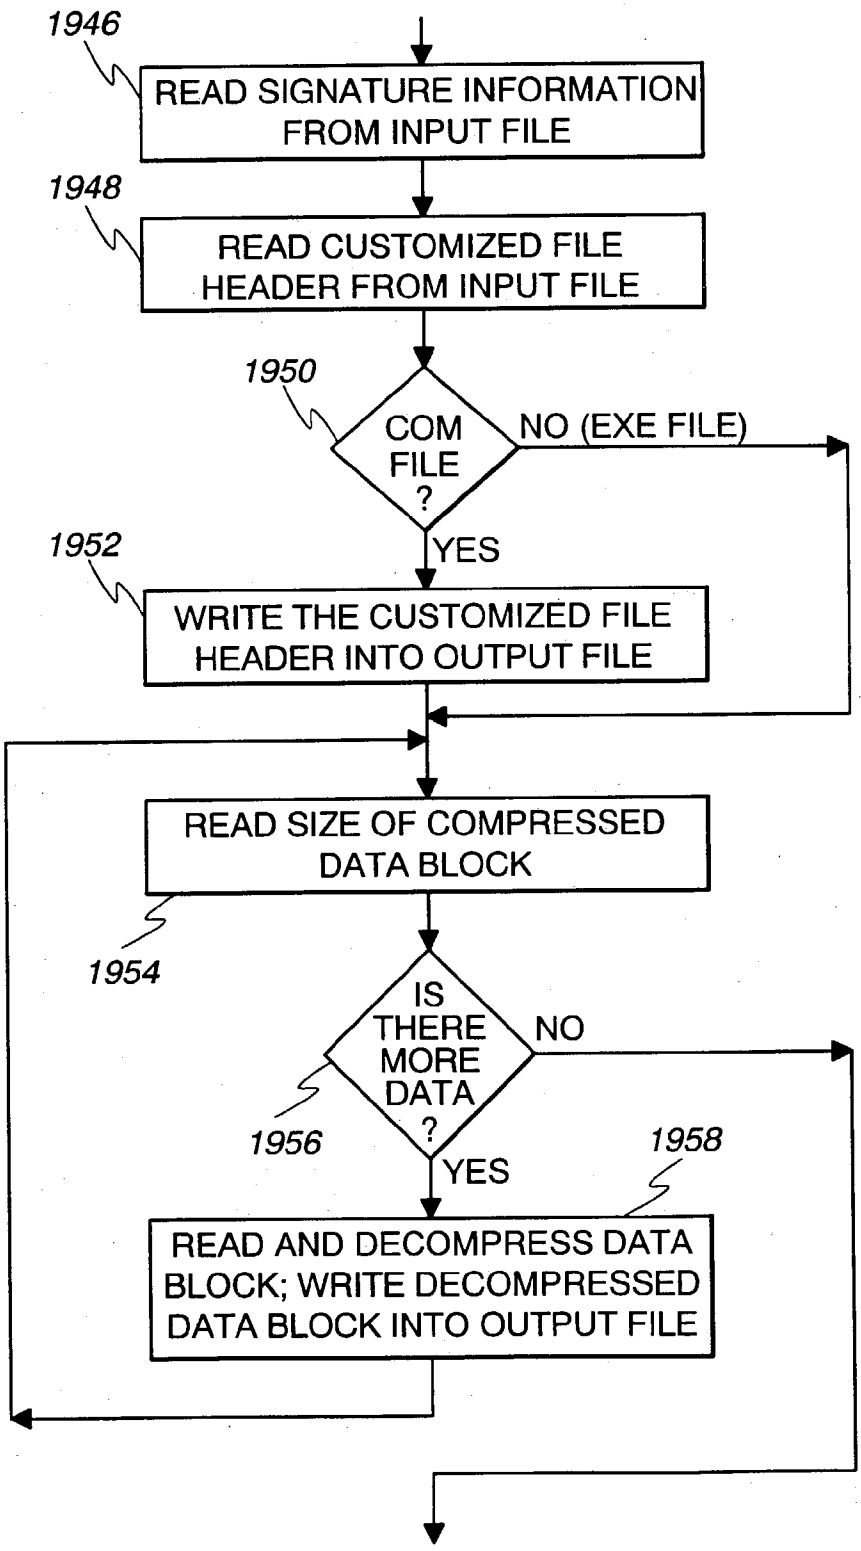

1946
READ SIGNATURE INFORMATION FROM INPUT FILE
1948
READ CUSTOMIZED FILE HEADER FROM INPUT FILE
1950
COM FILE ?
NO (EXE FILE)
YES
1952
WRITE THE CUSTOMIZED FILE HEADER INTO OUTPUT FILE
READ SIZE OF COMPRESSED DATA BLOCK
1954
IS THERE MORE DATA ?
NO
1956
1958
YES
READ AND DECOMPRESS DATA BLOCK; WRITE DECOMPRESSED DATA BLOCK INTO OUTPUT FILE

Fig. 78

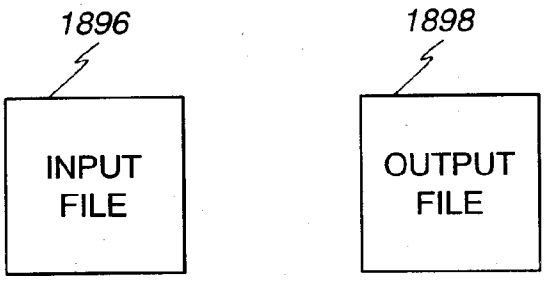

1896
1898
INPUT FILE
OUTPUT FILE

Fig. 79

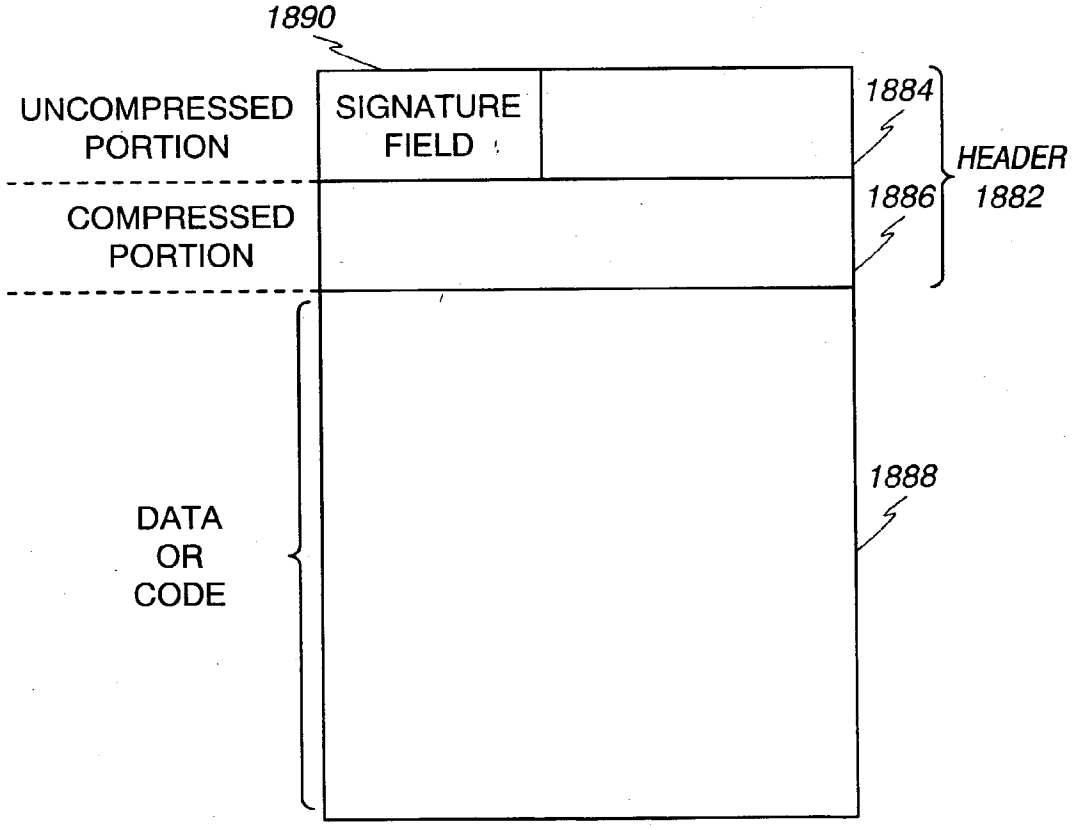
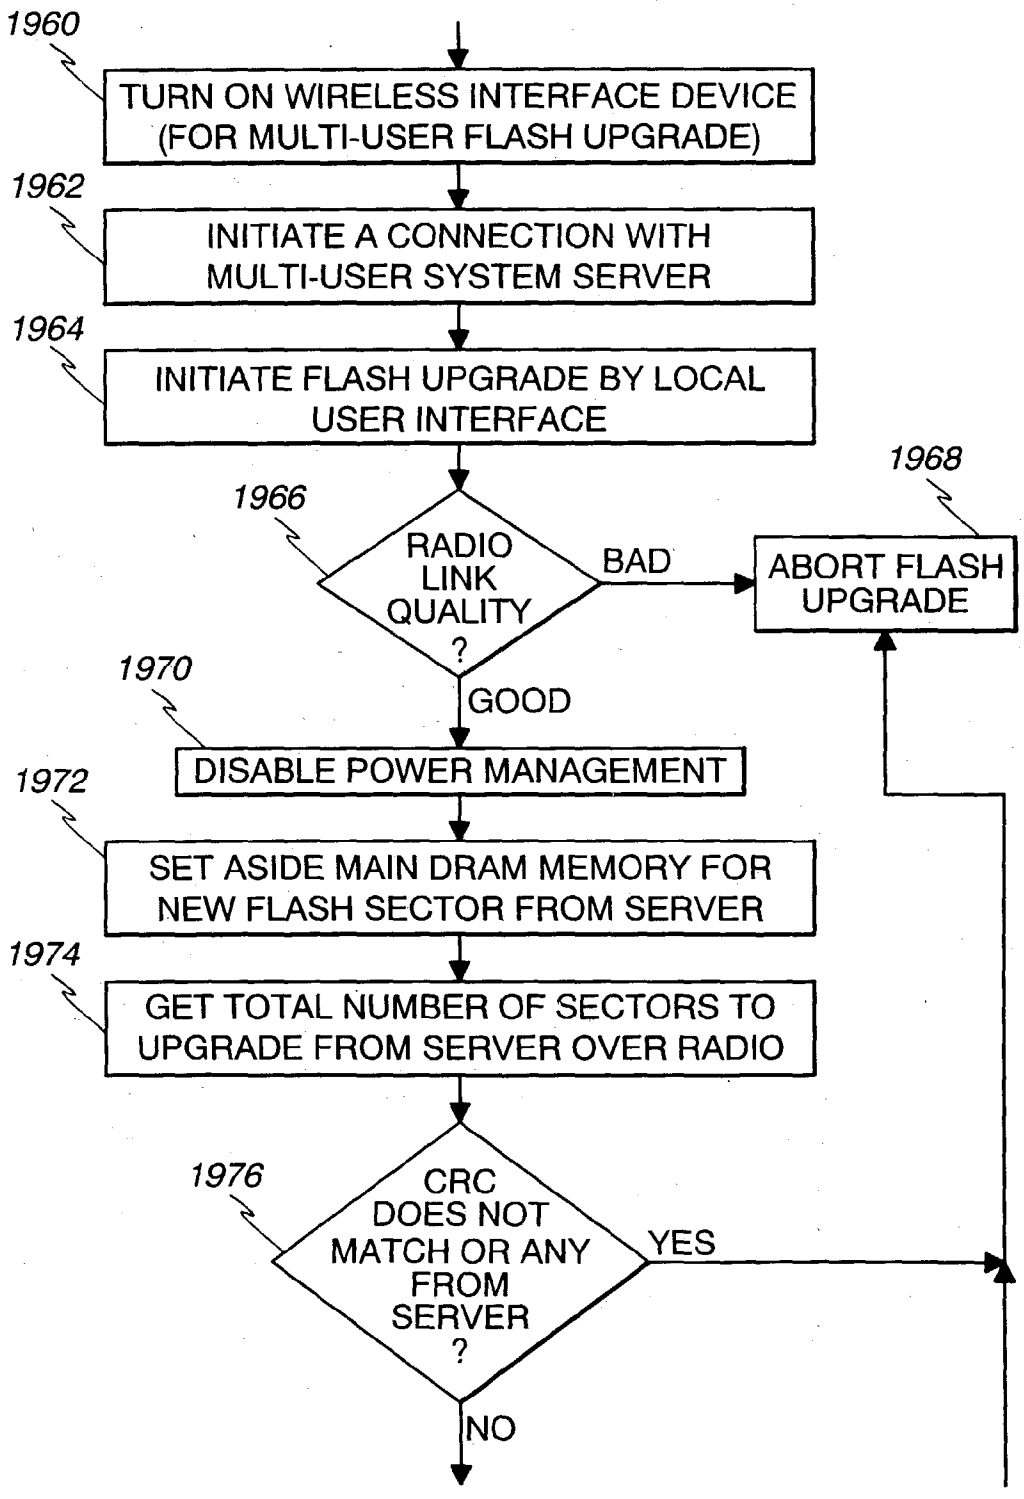

1890
UNCOMPRESSED PORTION
SIGNATURE FIELD
1884
HEADER 1882
1886
COMPRESSED PORTION
1888
DATA OR CODE

Fig. 80a


1960
TURN ON WIRELESS INTERFACE DEVICE (FOR MULTI-USER FLASH UPGRADE)
1962
INITIATE A CONNECTION WITH MULTI-USER SYSTEM SERVER
1964
INITIATE FLASH UPGRADE BY LOCAL USER INTERFACE
1966
RADIO LINK QUALITY ?
BAD
1968
ABORT FLASH UPGRADE
GOOD
1970
DISABLE POWER MANAGEMENT
1972
SET ASIDE MAIN DRAM MEMORY FOR NEW FLASH SECTOR FROM SERVER
1974
GET TOTAL NUMBER OF SECTORS TO UPGRADE FROM SERVER OVER RADIO
1976
CRC DOES NOT MATCH OR ANY FROM SERVER ?
YES
NO

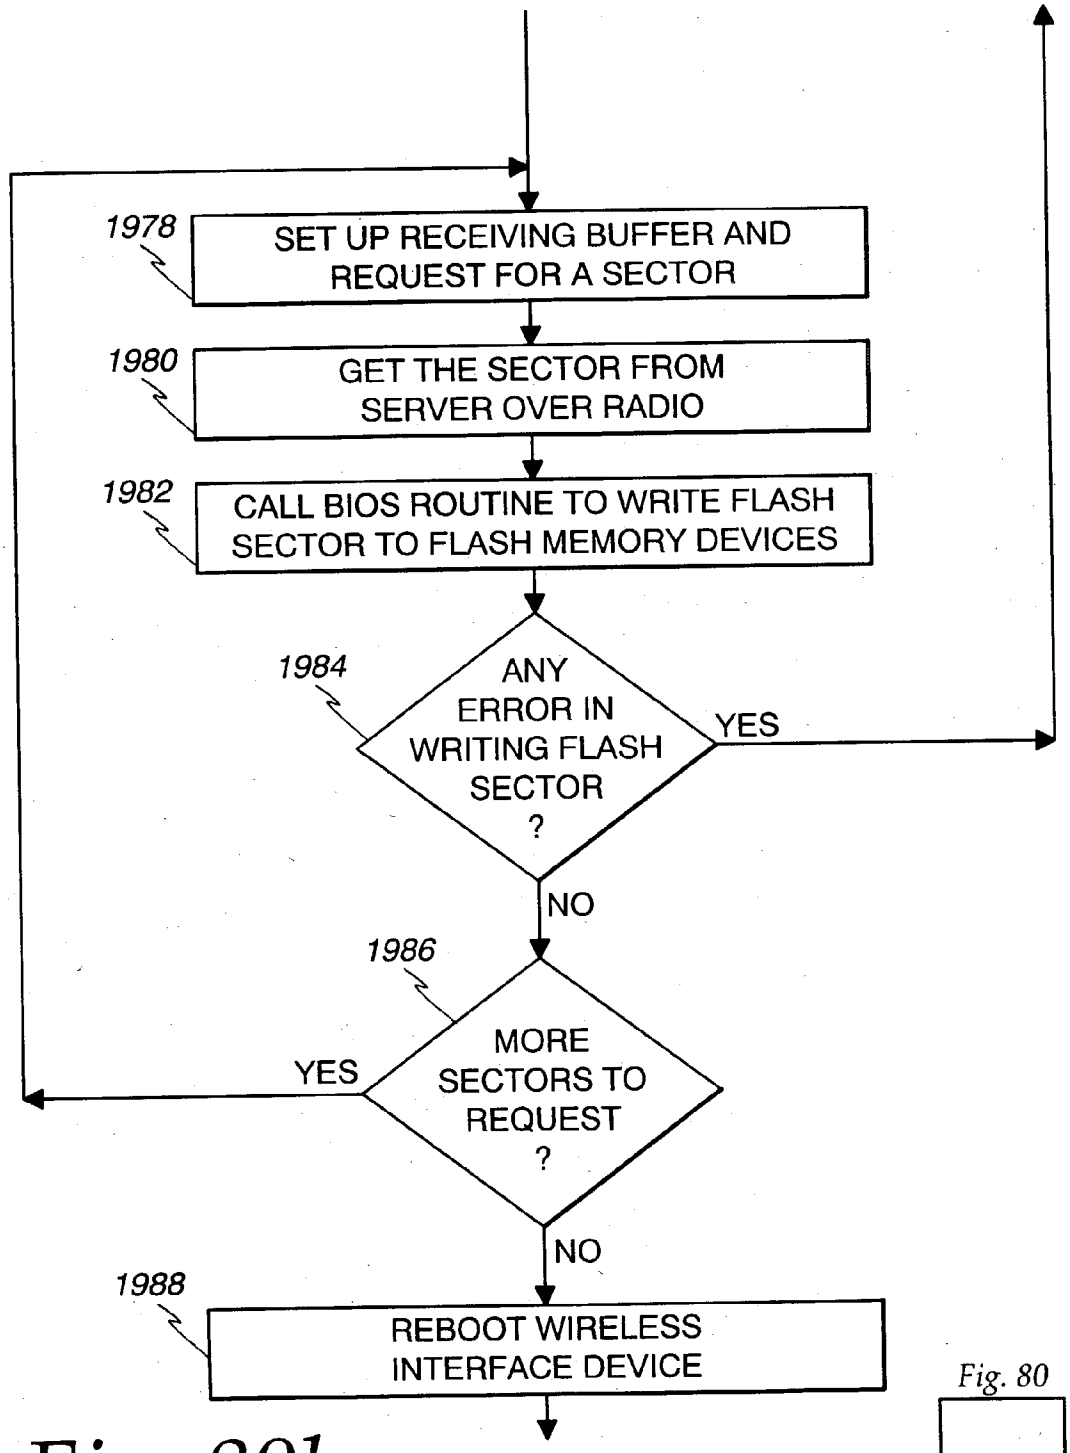


Fig. 80b

Fig. 80

Fig. 80a

Fig. 80b

Fig. 81

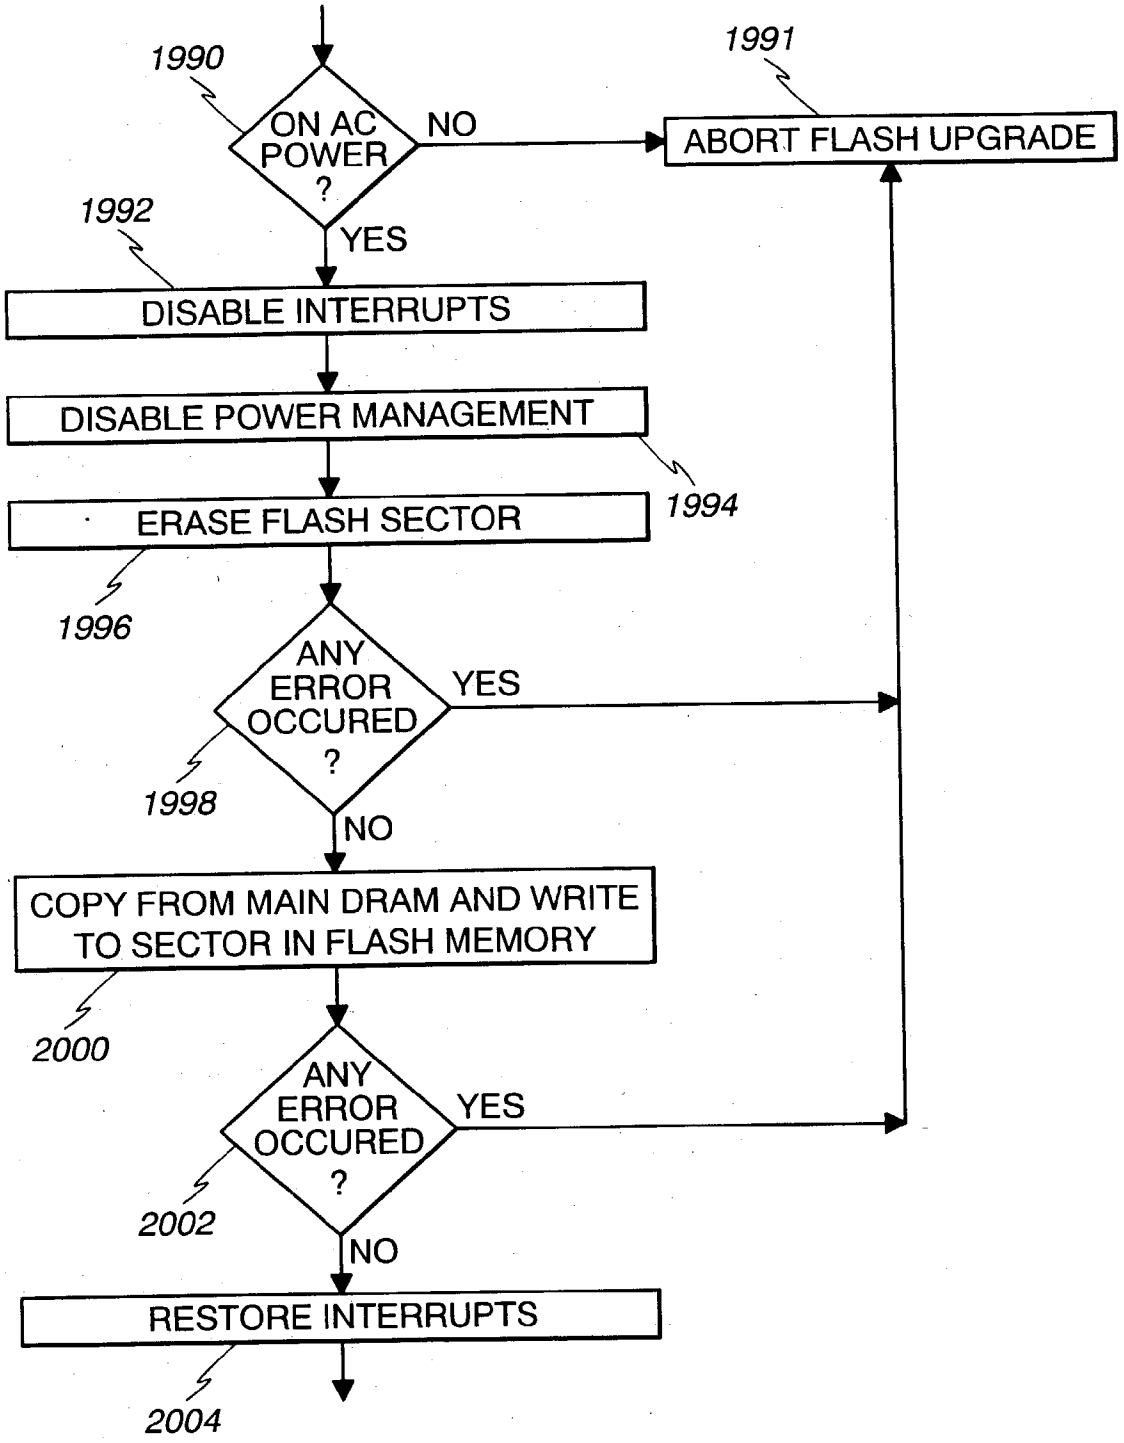

1990
ON AC POWER ?
NO
1991
ABORT FLASH UPGRADE
YES
1992
DISABLE INTERRUPTS
DISABLE POWER MANAGEMENT
1994
ERASE FLASH SECTOR
1996
ANY ERROR OCCURED ?
YES
1998
NO
COPY FROM MAIN DRAM AND WRITE TO SECTOR IN FLASH MEMORY
2000
ANY ERROR OCCURED ?
YES
2002
NO
RESTORE INTERRUPTS
2004

Fig. 82

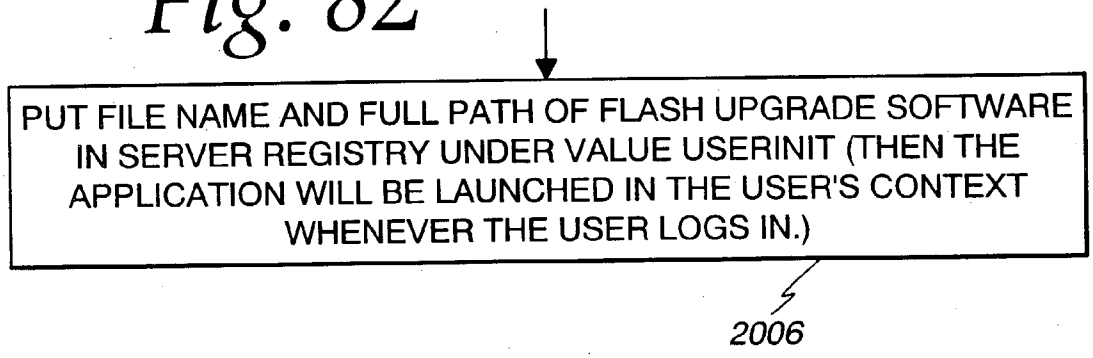


Fig. 83

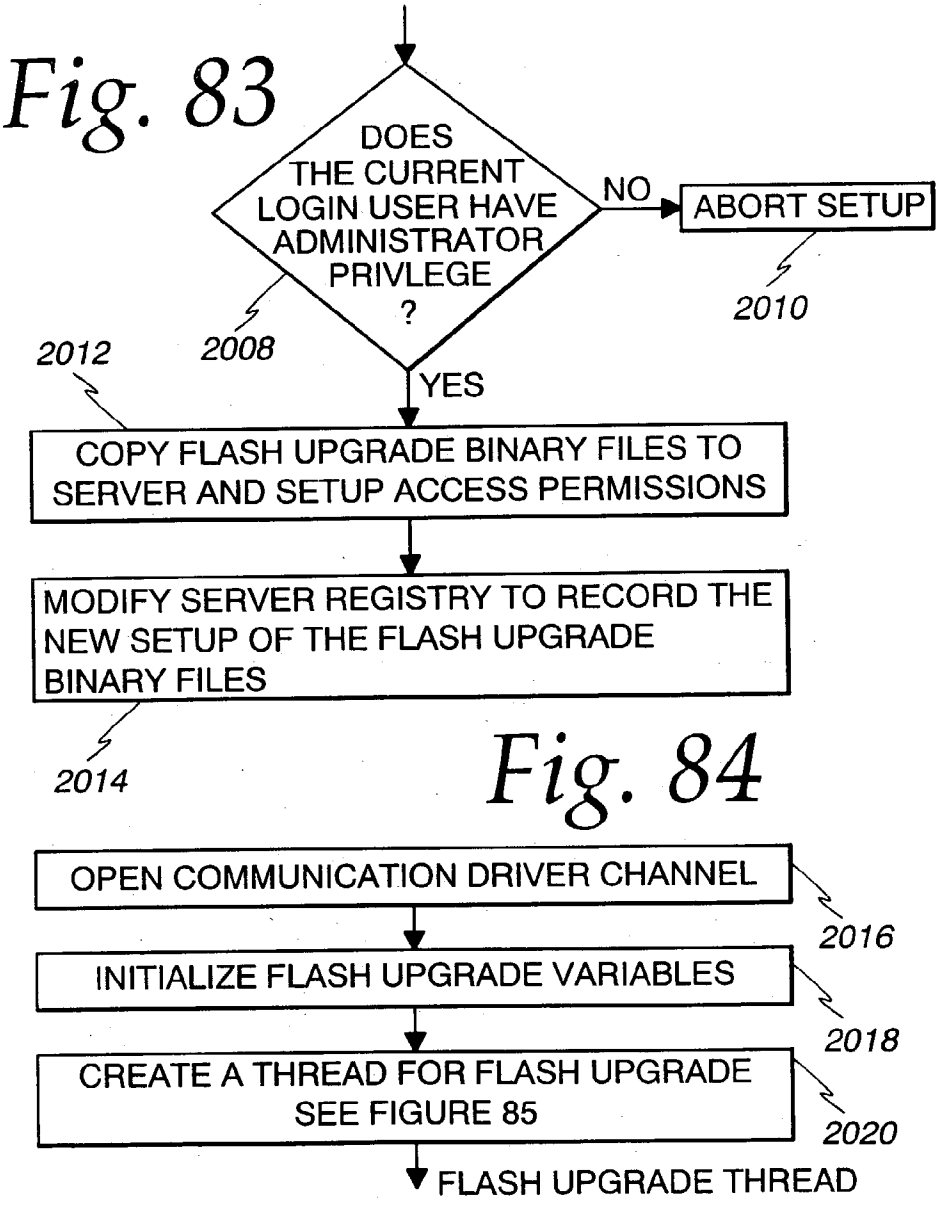
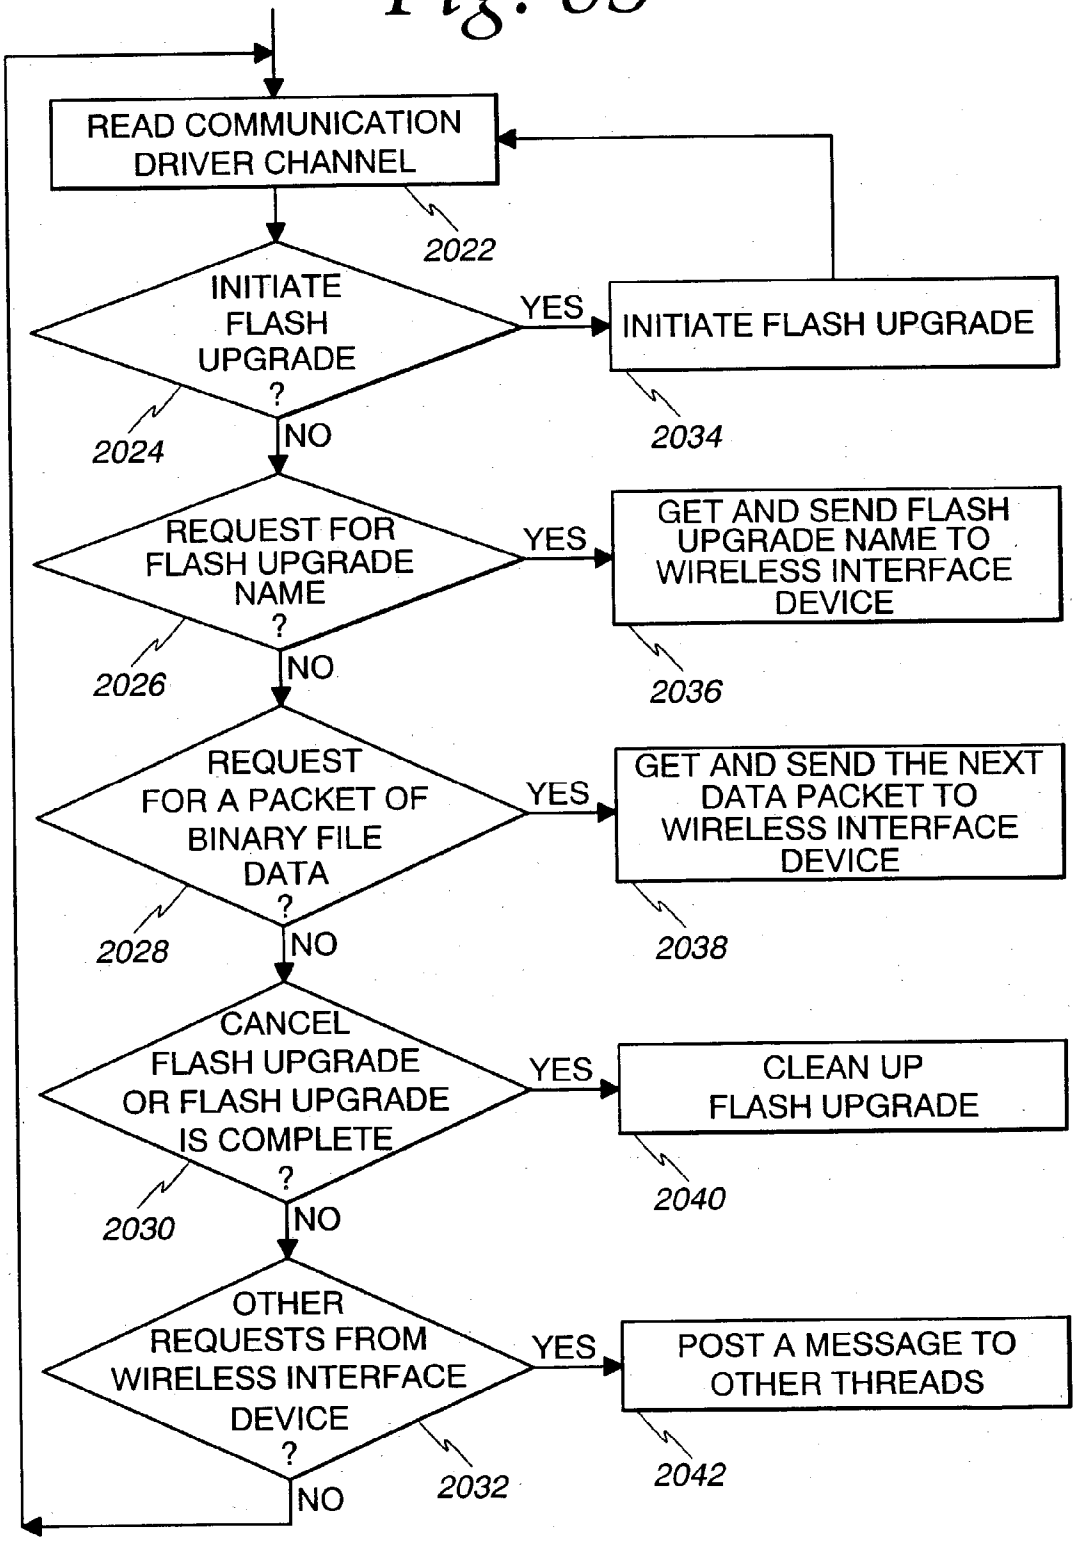


Fig. 84

Fig. 85


READ COMMUNICATION DRIVER CHANNEL
2022
INITIATE FLASH UPGRADE ?
YES
INITIATE FLASH UPGRADE
2024
NO
2034
REQUEST FOR FLASH UPGRADE NAME ?
YES
GET AND SEND FLASH UPGRADE NAME TO WIRELESS INTERFACE DEVICE
2026
NO
2036
REQUEST FOR A PACKET OF BINARY FILE DATA ?
YES
GET AND SEND THE NEXT DATA PACKET TO WIRELESS INTERFACE DEVICE
2028
NO
2038
CANCEL FLASH UPGRADE OR FLASH UPGRADE IS COMPLETE ?
YES
CLEAN UP FLASH UPGRADE
2030
NO
2040
OTHER REQUESTS FROM WIRELESS INTERFACE DEVICE ?
YES
POST A MESSAGE TO OTHER THREADS
2032
NO
2042

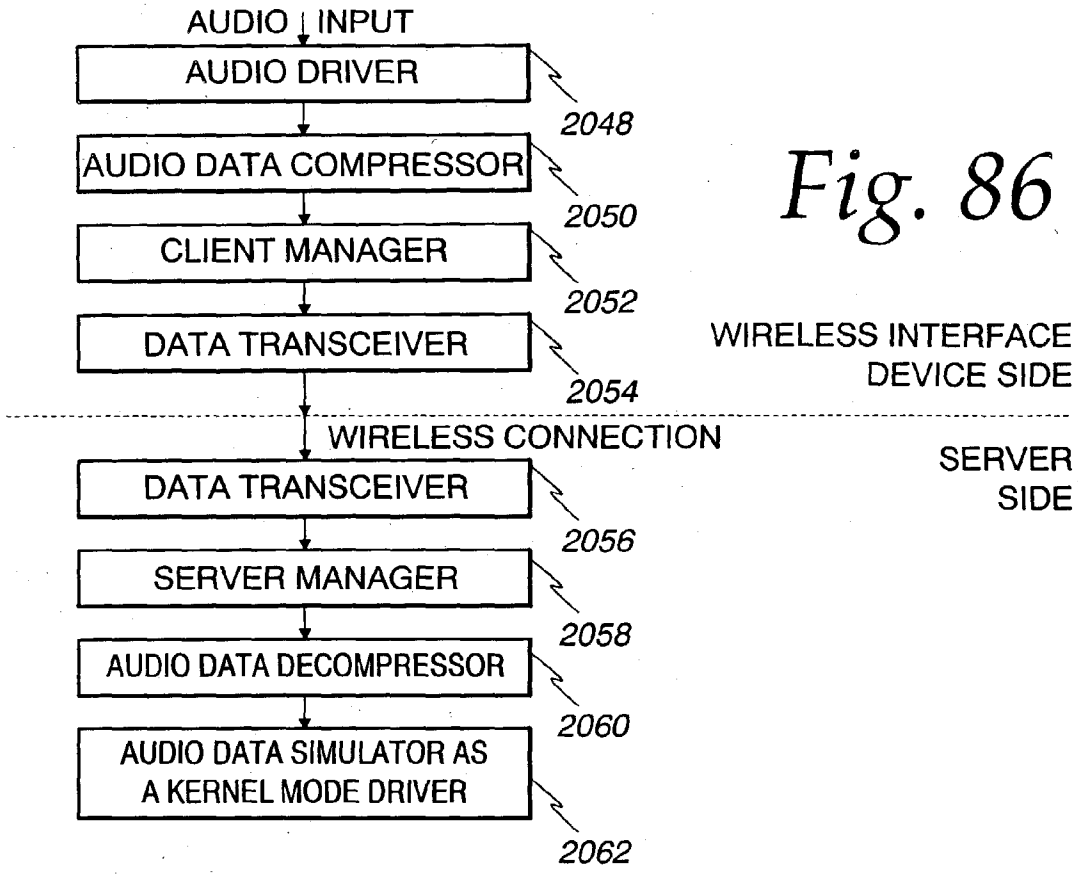

AUDIO INPUT
AUDIO DRIVER
2048
AUDIO DATA COMPRESSOR
2050
CLIENT MANAGER
2052
DATA TRANSCEIVER
2054
WIRELESS INTERFACE DEVICE SIDE
WIRELESS CONNECTION
SERVER SIDE
DATA TRANSCEIVER
2056
SERVER MANAGER
2058
AUDIO DATA DECOMPRESSOR
2060
AUDIO DATA SIMULATOR AS A KERNEL MODE DRIVER
2062

Fig. 86

Fig. 87

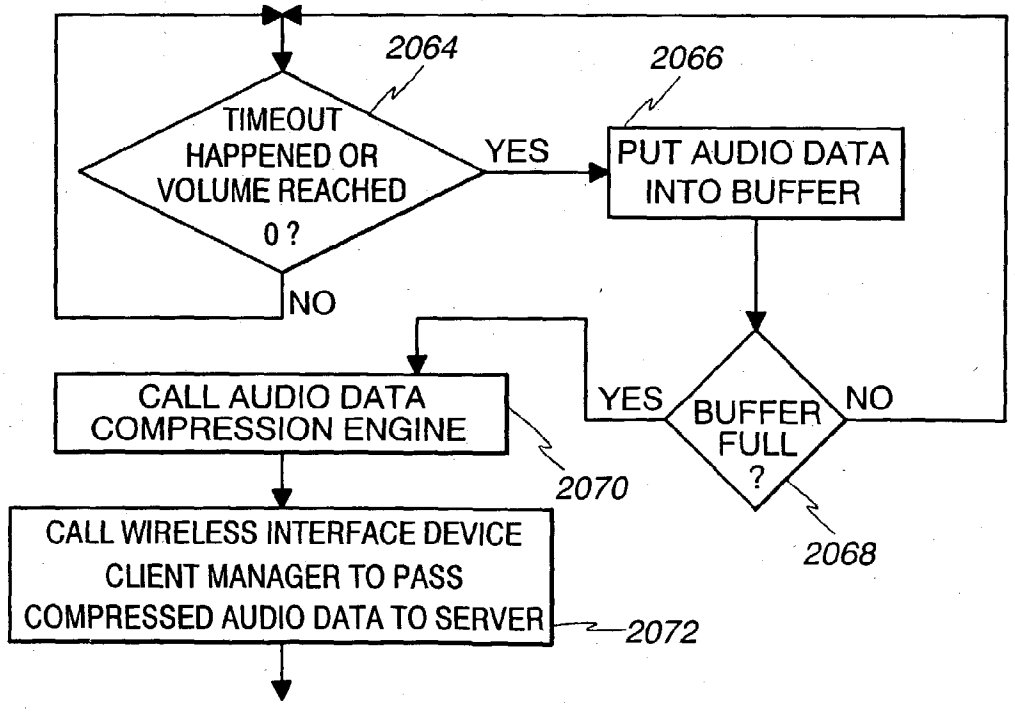
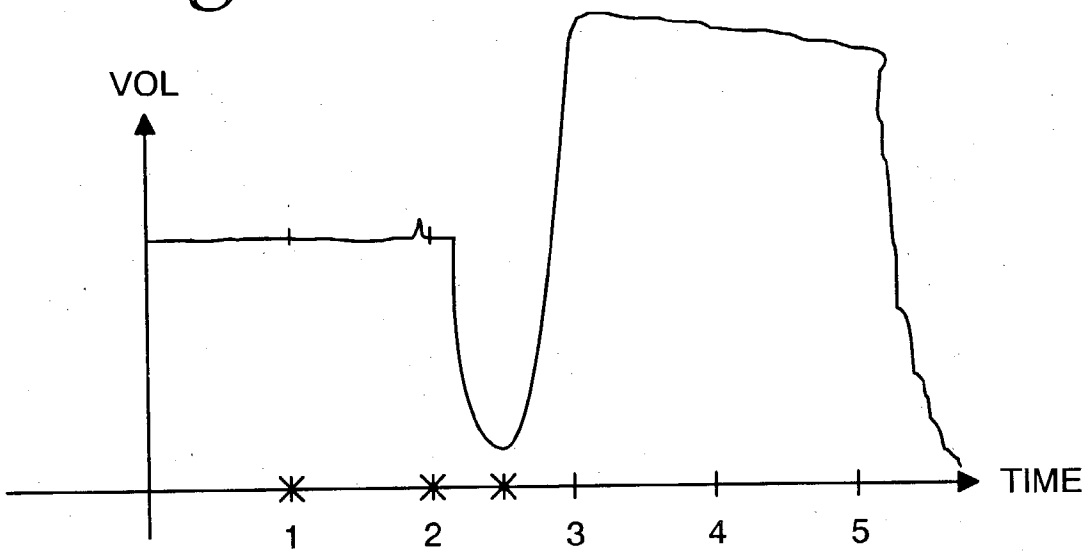

2064
TIMEOUT HAPPENED OR VOLUME REACHED 0 ?
YES
NO
2066
PUT AUDIO DATA INTO BUFFER
BUFFER FULL ?
YES
NO
2068
CALL AUDIO DATA COMPRESSION ENGINE
2070
CALL WIRELESS INTERFACE DEVICE CLIENT MANAGER TO PASS COMPRESSED AUDIO DATA TO SERVER
2072

Fig. 88


VOL
TIME
1
2
3
4
5

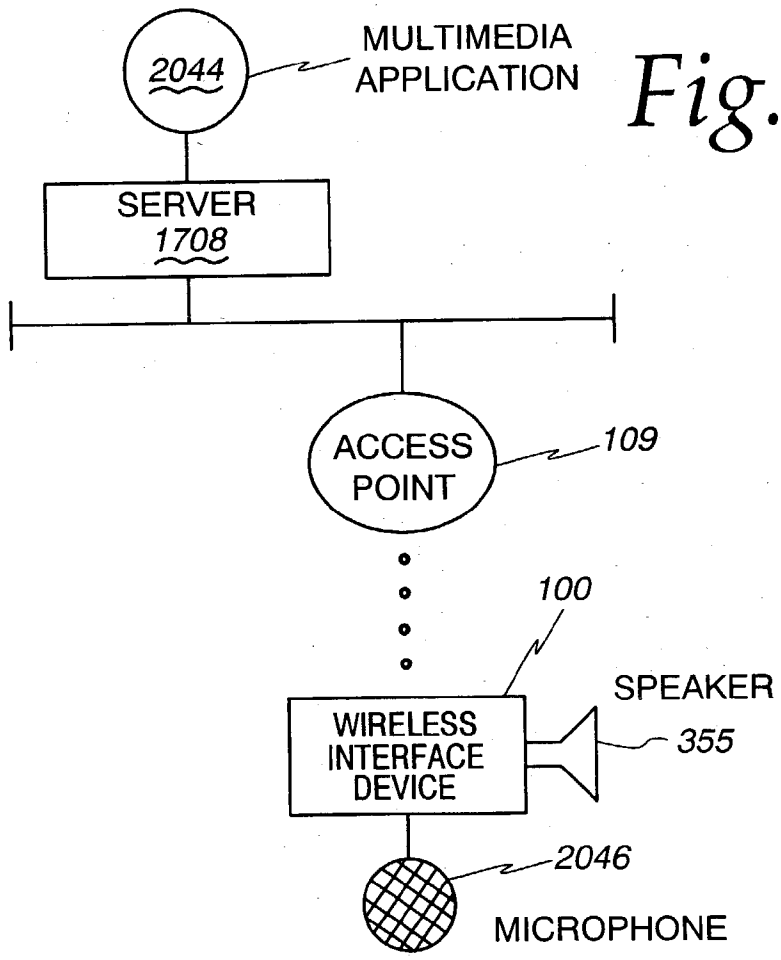

2044
MULTIMEDIA APPLICATION
SERVER 1708
ACCESS POINT
109
100
SPEAKER
355
WIRELESS INTERFACE DEVICE
2046
MICROPHONE

Fig. 89

Fig. 90

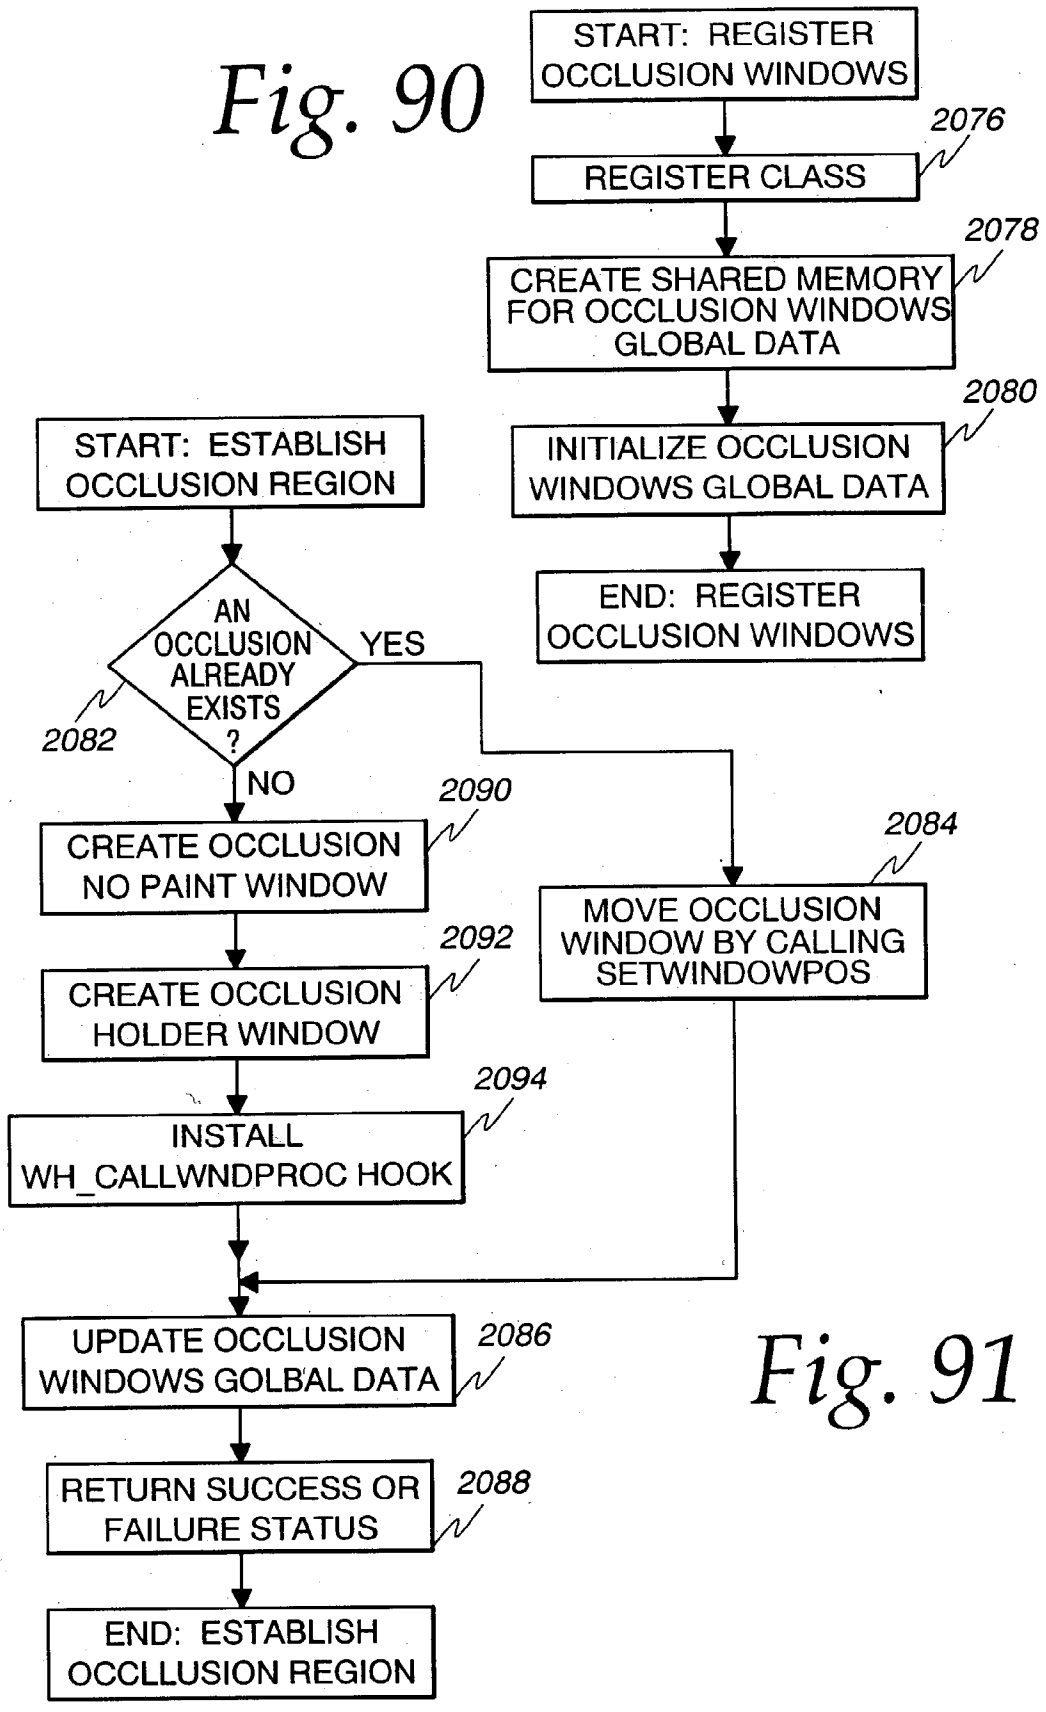

START: REGISTER OCCLUSION WINDOWS
2076
REGISTER CLASS
2078
CREATE SHARED MEMORY FOR OCCLUSION WINDOWS GLOBAL DATA
2080
INITIALIZE OCCLUSION WINDOWS GLOBAL DATA
END: REGISTER OCCLUSION WINDOWS
START: ESTABLISH OCCLUSION REGION
AN OCCLUSION ALREADY EXISTS ?
2082
YES
NO
2090
CREATE OCCLUSION NO PAINT WINDOW
2084
MOVE OCCLUSION WINDOW BY CALLING SETWINDOWPOS
2092
CREATE OCCLUSION HOLDER WINDOW
2094
INSTALL WH_CALLWNDPROC HOOK
2086
UPDATE OCCLUSION WINDOWS GOLBAL DATA
2088
RETURN SUCCESS OR FAILURE STATUS
END: ESTABLISH OCCLLUSION REGION

Fig. 91

Fig. 92

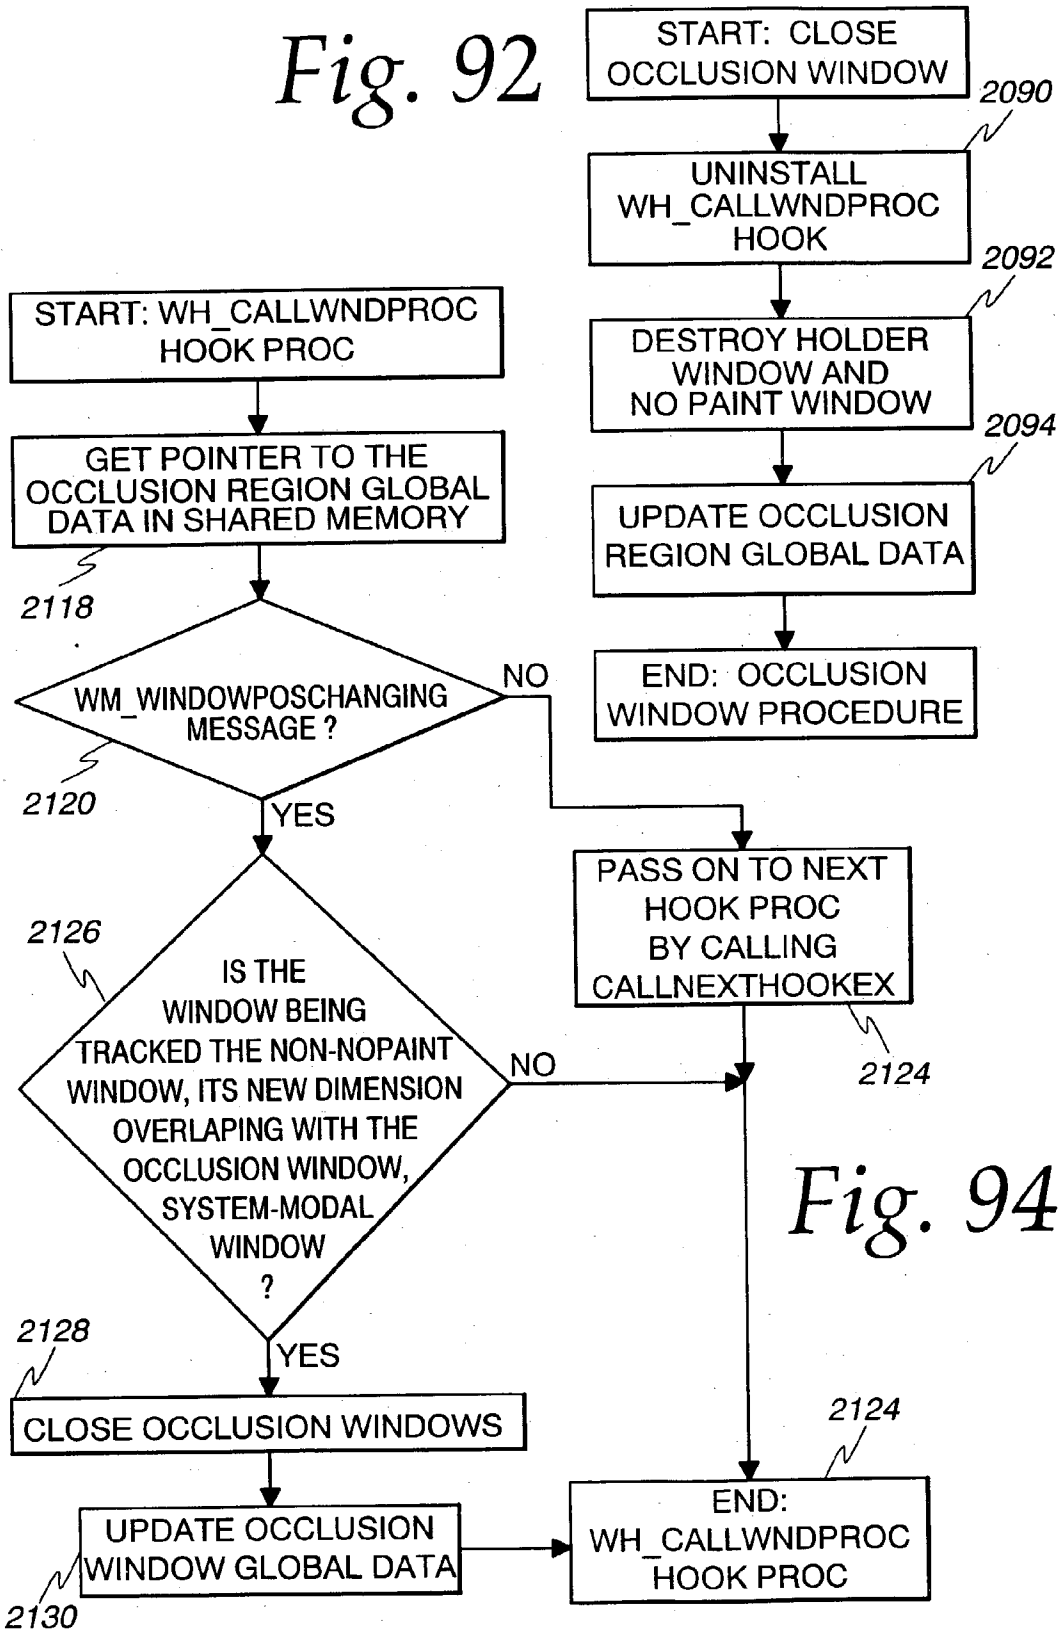

START: CLOSE OCCLUSION WINDOW
2090
UNINSTALL WH_CALLWNDPROC HOOK
2092
DESTROY HOLDER WINDOW AND NO PAINT WINDOW
2094
UPDATE OCCLUSION REGION GLOBAL DATA
END: OCCLUSION WINDOW PROCEDURE
START: WH_CALLWNDPROC HOOK PROC
GET POINTER TO THE OCCLUSION REGION GLOBAL DATA IN SHARED MEMORY
2118
WM_WINDOWPOSCHANGING MESSAGE ?
NO
2120
YES
PASS ON TO NEXT HOOK PROC BY CALLING CALLNEXTHOOKEX
2124
2126
IS THE WINDOW BEING TRACKED THE NON-NOPAINT WINDOW, ITS NEW DIMENSION OVERLAPING WITH THE OCCLUSION WINDOW, SYSTEM-MODAL WINDOW ?
NO
2128
YES
CLOSE OCCLUSION WINDOWS
2124
UPDATE OCCLUSION WINDOW GLOBAL DATA
2130
END: WH_CALLWNDPROC HOOK PROC

Fig. 94

Fig. 93

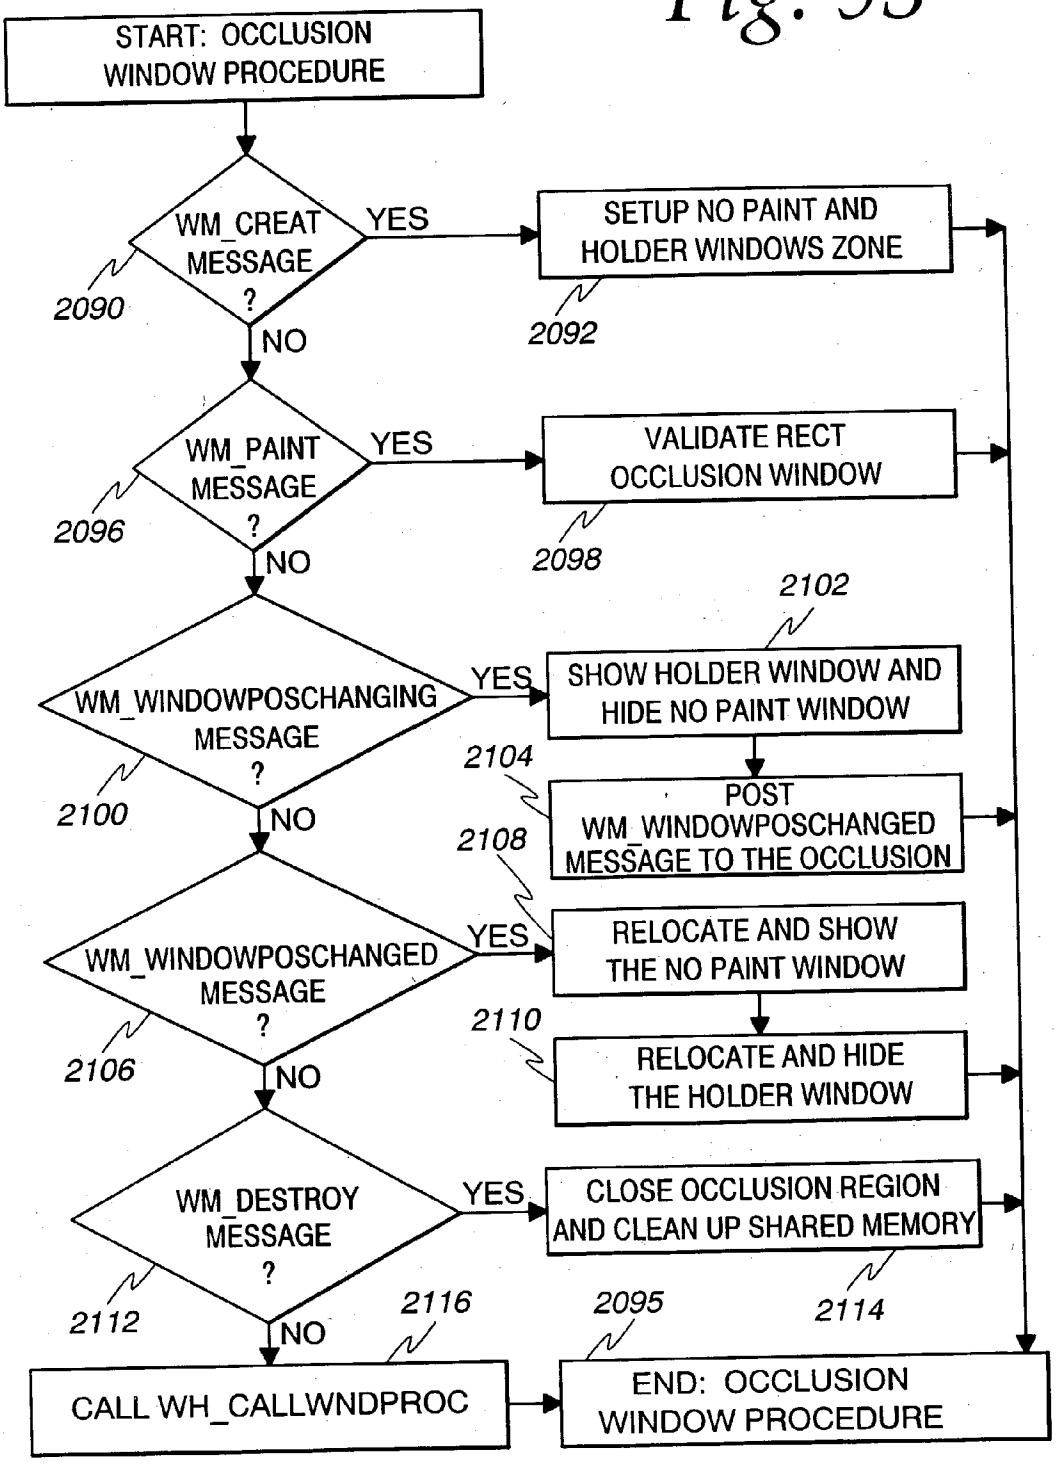
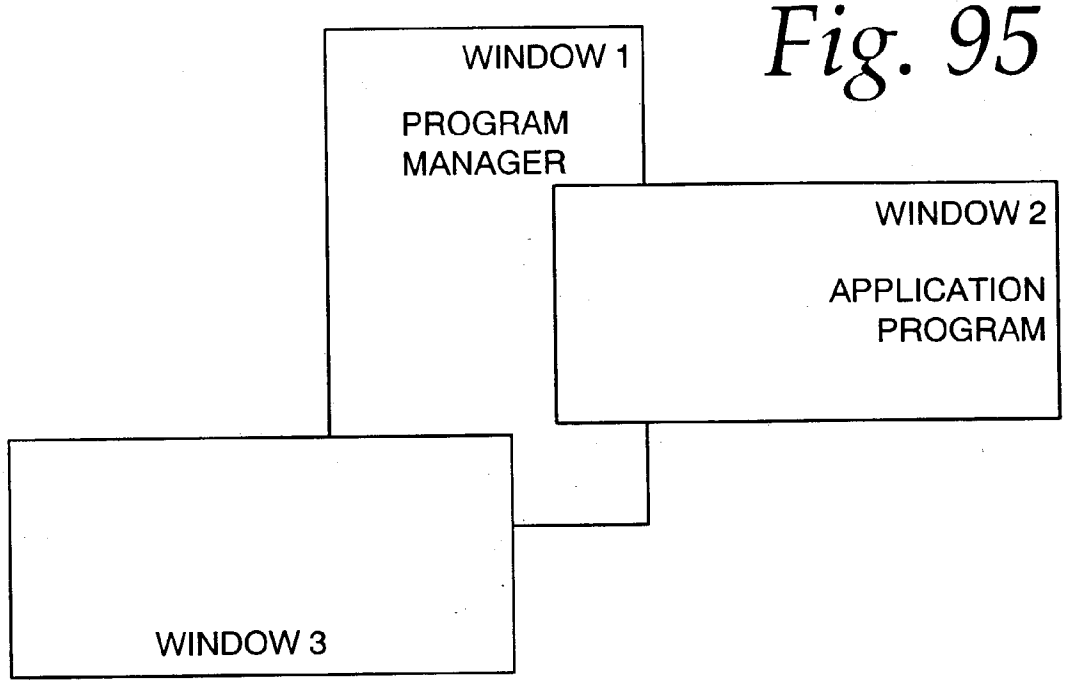

START: OCCLUSION WINDOW PROCEDURE
WM_CREAT MESSAGE ?
YES
NO
2090
SETUP NO PAINT AND HOLDER WINDOWS ZONE
2092
WM_PAINT MESSAGE ?
YES
NO
2096
VALIDATE RECT OCCLUSION WINDOW
2098
2102
WM_WINDOWPOSCHANGING MESSAGE ?
YES
NO
2100
SHOW HOLDER WINDOW AND HIDE NO PAINT WINDOW
2104
POST WM_WINDOWPOSCHANGED MESSAGE TO THE OCCLUSION
2108
WM_WINDOWPOSCHANGED MESSAGE ?
YES
NO
2106
RELOCATE AND SHOW THE NO PAINT WINDOW
2110
RELOCATE AND HIDE THE HOLDER WINDOW
WM_DESTROY MESSAGE ?
YES
NO
2112
CLOSE OCCLUSION REGION AND CLEAN UP SHARED MEMORY
2114
2116
CALL WH_CALLWNDPROC
2095
END: OCCLUSION WINDOW PROCEDURE

Fig. 95


WINDOW 1
PROGRAM MANAGER
WINDOW 2
APPLICATION PROGRAM
WINDOW 3

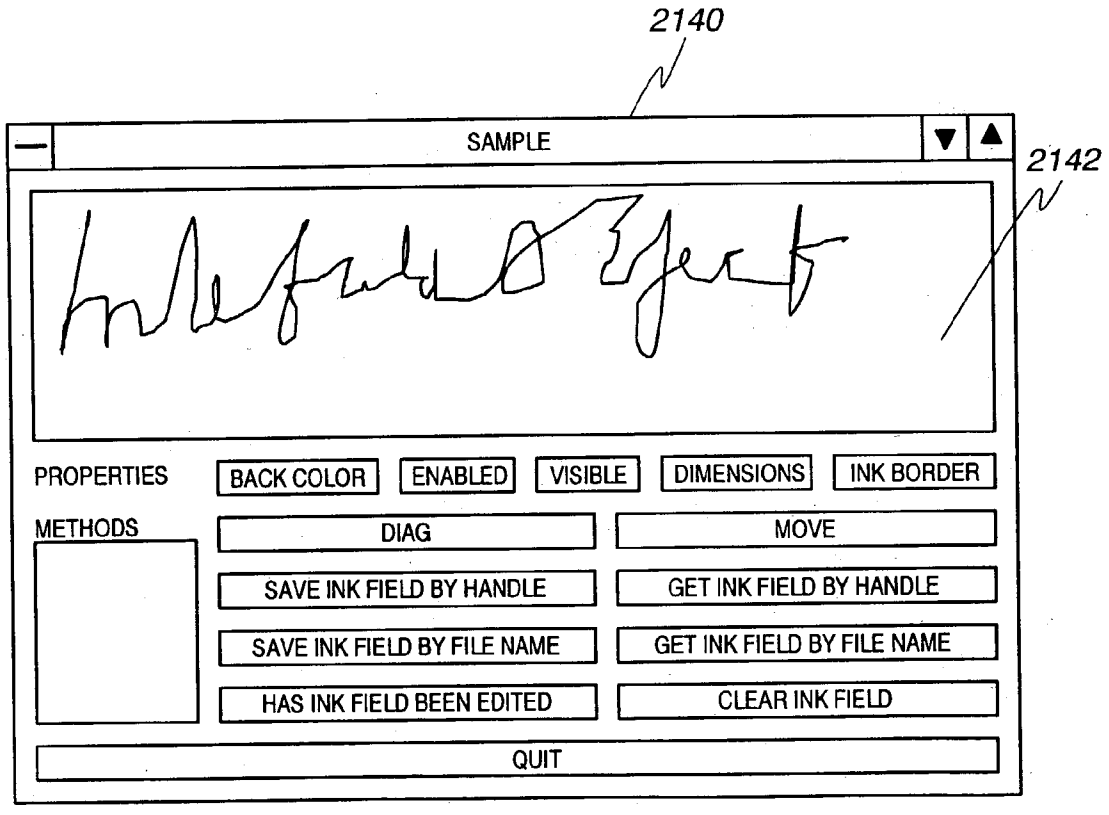

2140
SAMPLE
2142
PROPERTIES
BACK COLOR
ENABLED
VISIBLE
DIMENSIONS
INK BORDER
METHODS
DIAG
MOVE
SAVE INK FIELD BY HANDLE
GET INK FIELD BY HANDLE
SAVE INK FIELD BY FILE NAME
GET INK FIELD BY FILE NAME
HAS INK FIELD BEEN EDITED
CLEAR INK FIELD
QUIT

Fig. 96

Fig. 97

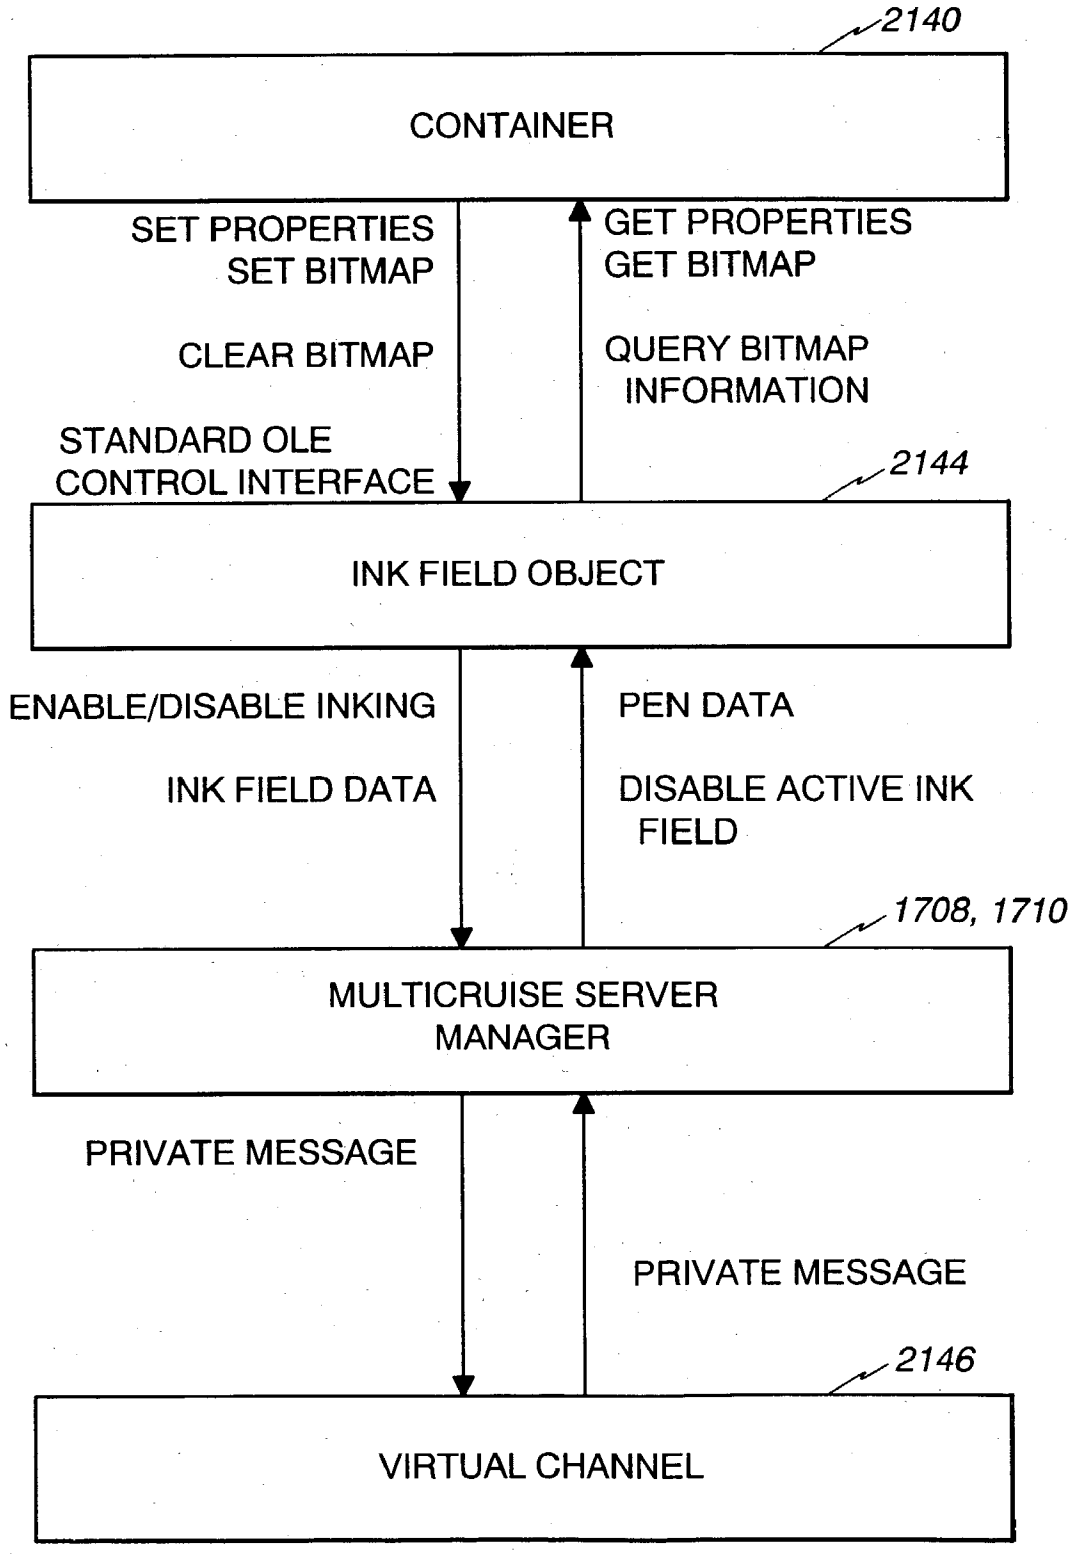

2140
CONTAINER
SET PROPERTIES
SET BITMAP
CLEAR BITMAP
STANDARD OLE
CONTROL INTERFACE
GET PROPERTIES
GET BITMAP
QUERY BITMAP
INFORMATION
2144
INK FIELD OBJECT
ENABLE/DISABLE INKING
INK FIELD DATA
PEN DATA
DISABLE ACTIVE INK
FIELD
1708, 1710
MULTICRUISE SERVER
MANAGER
PRIVATE MESSAGE
PRIVATE MESSAGE
2146
VIRTUAL CHANNEL

Fig. 98

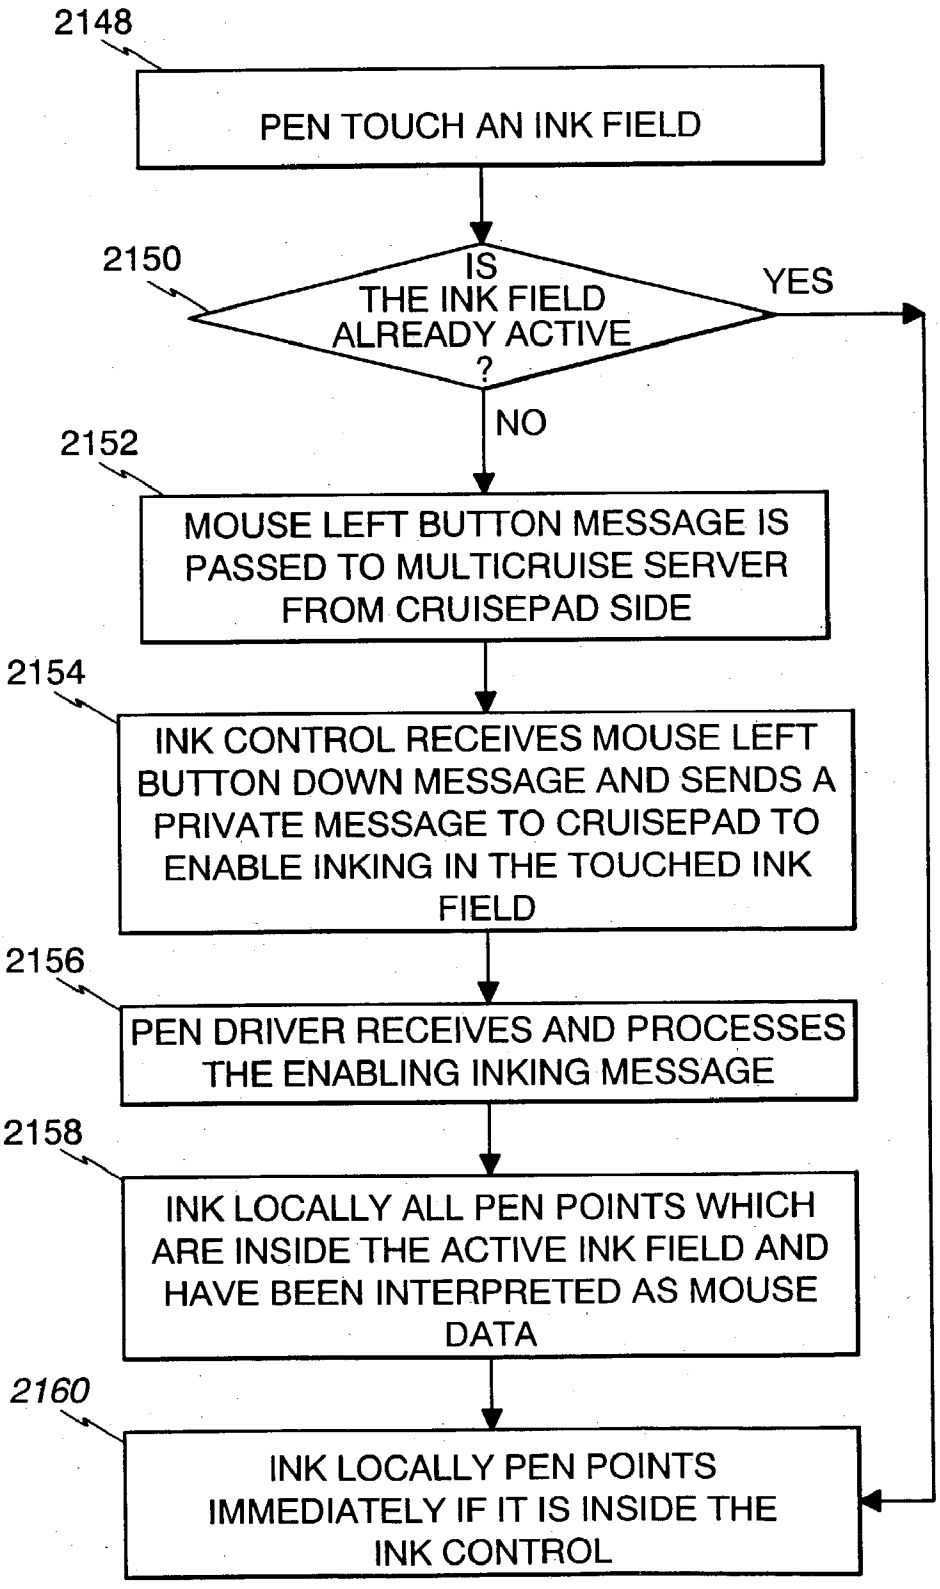
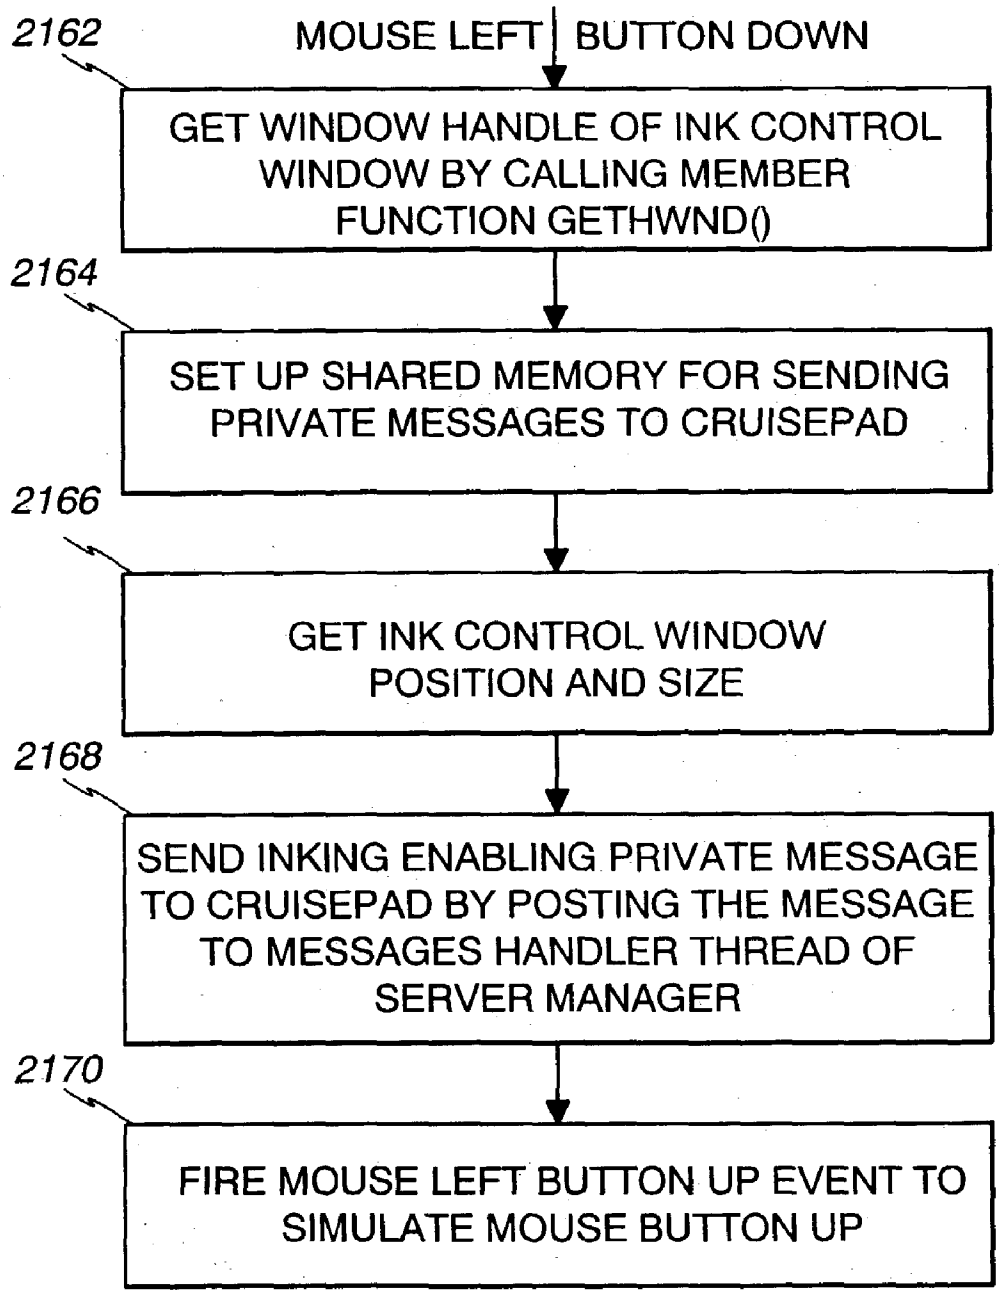

2148
PEN TOUCH AN INK FIELD
2150
IS THE INK FIELD ALREADY ACTIVE ?
YES
NO
2152
MOUSE LEFT BUTTON MESSAGE IS PASSED TO MULTICRUISE SERVER FROM CRUISEPAD SIDE
2154
INK CONTROL RECEIVES MOUSE LEFT BUTTON DOWN MESSAGE AND SENDS A PRIVATE MESSAGE TO CRUISEPAD TO ENABLE INKING IN THE TOUCHED INK FIELD
2156
PEN DRIVER RECEIVES AND PROCESSES THE ENABLING INKING MESSAGE
2158
INK LOCALLY ALL PEN POINTS WHICH ARE INSIDE THE ACTIVE INK FIELD AND HAVE BEEN INTERPRETED AS MOUSE DATA
2160
INK LOCALLY PEN POINTS IMMEDIATELY IF IT IS INSIDE THE INK CONTROL

Fig. 99


2162
MOUSE LEFT BUTTON DOWN
GET WINDOW HANDLE OF INK CONTROL WINDOW BY CALLING MEMBER FUNCTION GETHWND()
2164
SET UP SHARED MEMORY FOR SENDING PRIVATE MESSAGES TO CRUISEPAD
2166
GET INK CONTROL WINDOW POSITION AND SIZE
2168
SEND INKING ENABLING PRIVATE MESSAGE TO CRUISEPAD BY POSTING THE MESSAGE TO MESSAGES HANDLER THREAD OF SERVER MANAGER
2170
FIRE MOUSE LEFT BUTTON UP EVENT TO SIMULATE MOUSE BUTTON UP

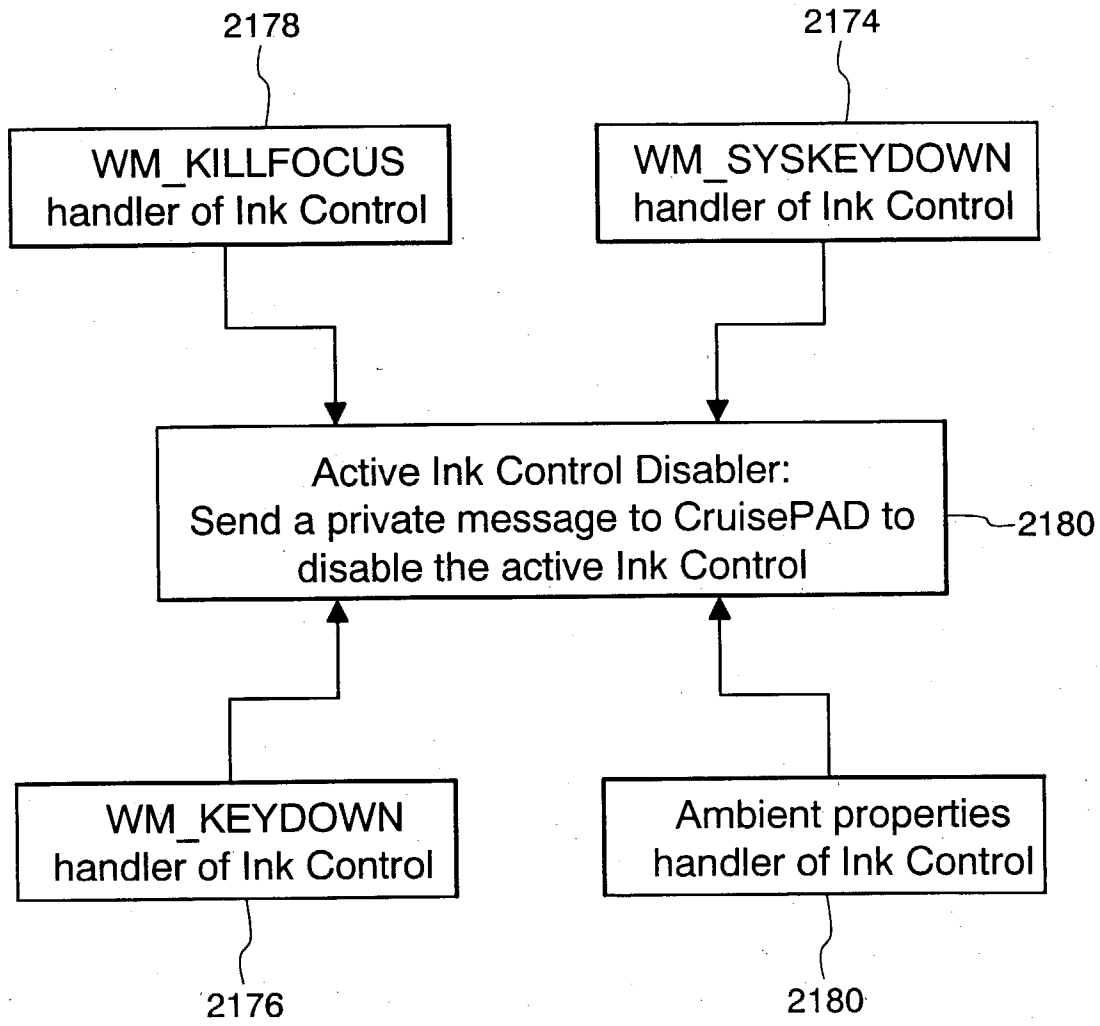

2178
2174
WM_KILLFOCUS handler of Ink Control
WM_SYSKEYDOWN handler of Ink Control
Active Ink Control Disabler: Send a private message to CruisePAD to disable the active Ink Control
2180
WM_KEYDOWN handler of Ink Control
Ambient properties handler of Ink Control
2176
2180

Fig. 100

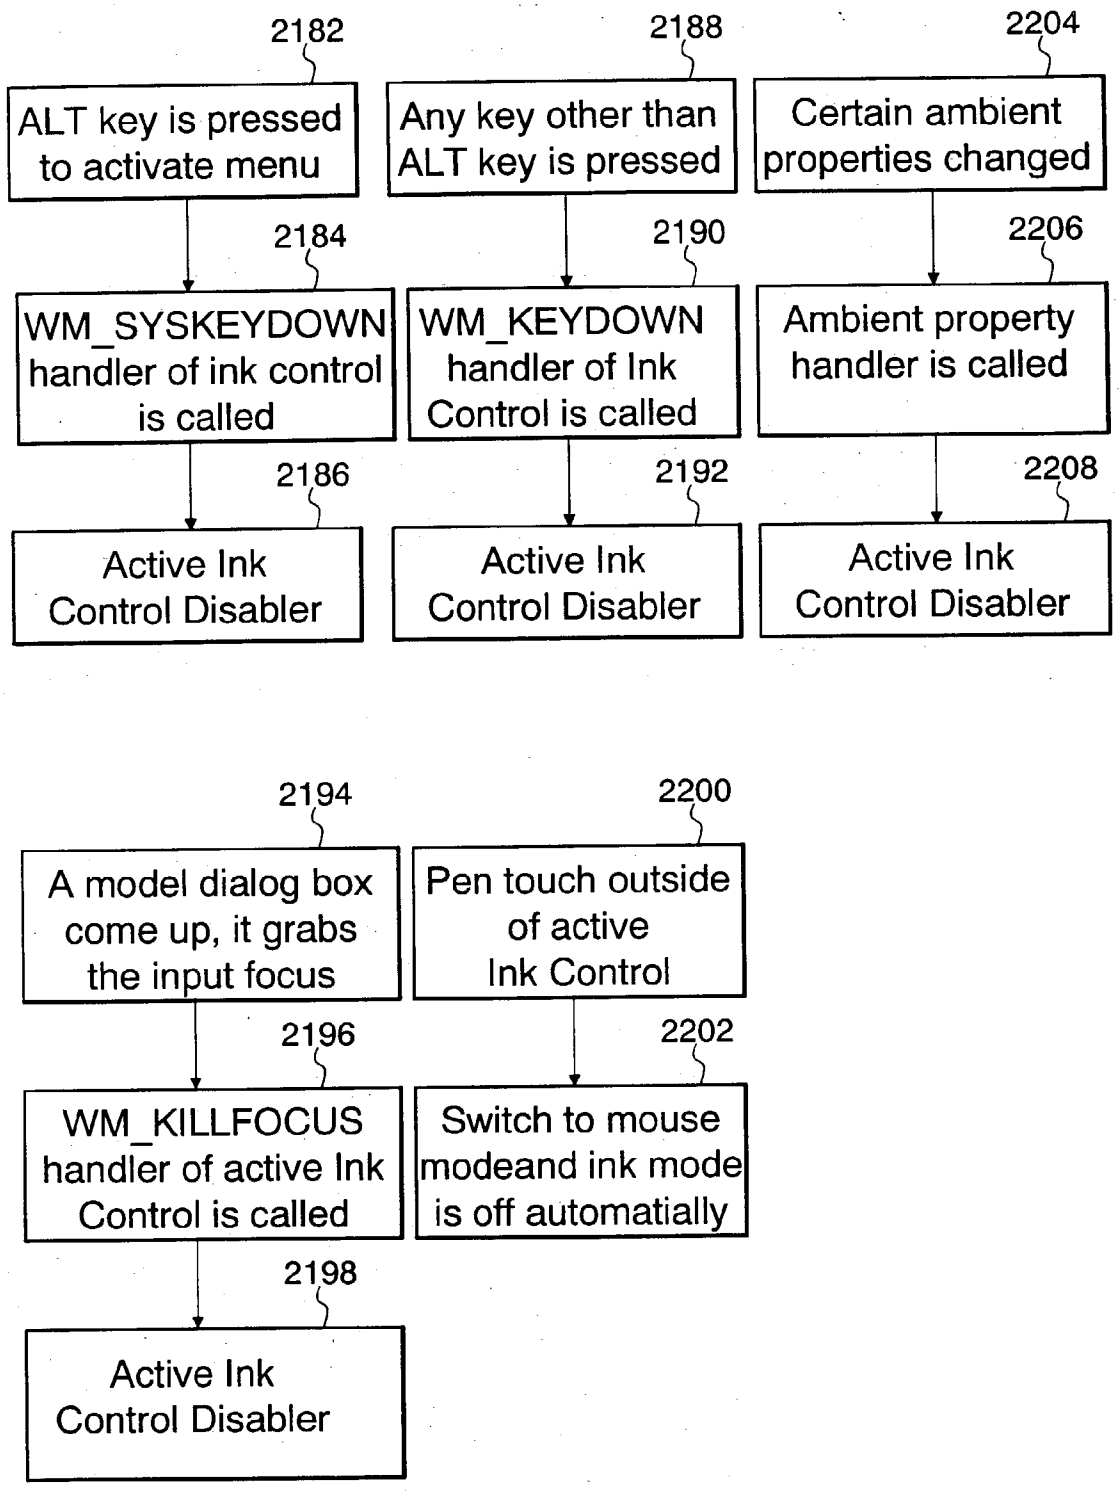

2182
ALT key is pressed to activate menu
2184
WM_SYSKEYDOWN handler of ink control is called
2186
Active Ink Control Disabler
2188
Any key other than ALT key is pressed
2190
WM_KEYDOWN handler of Ink Control is called
2192
Active Ink Control Disabler
2204
Certain ambient properties changed
2206
Ambient property handler is called
2208
Active Ink Control Disabler
2194
A model dialog box come up, it grabs the input focus
2196
WM_KILLFOCUS handler of active Ink Control is called
2198
Active Ink Control Disabler
2200
Pen touch outside of active Ink Control
2202
Switch to mouse modeand ink mode is off automatially

Fig. 101

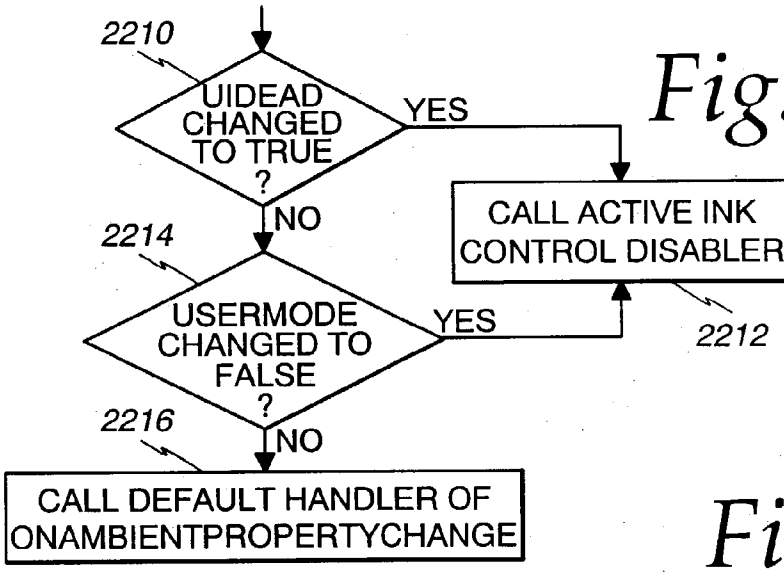
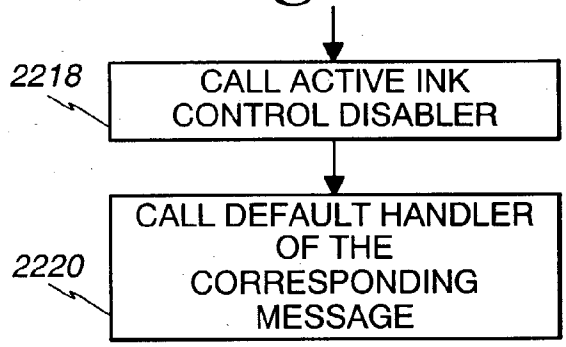


Fig. 102

Fig. 103



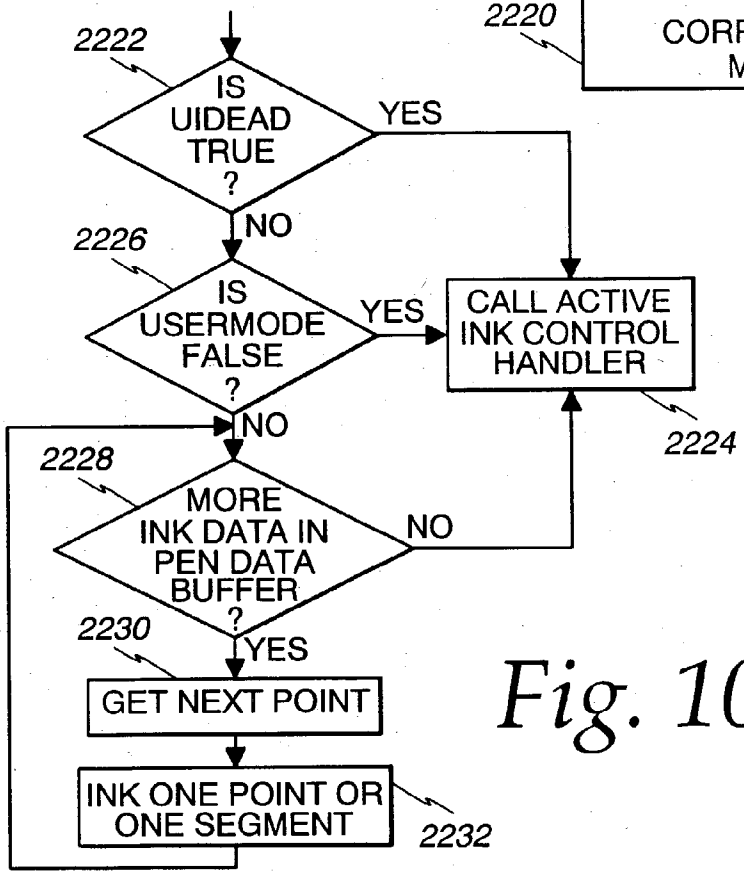


Fig. 104

Fig. 105

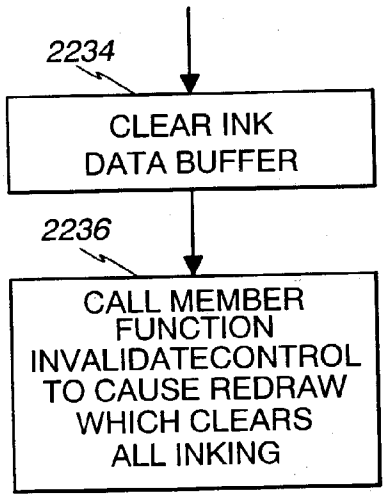


Fig. 106

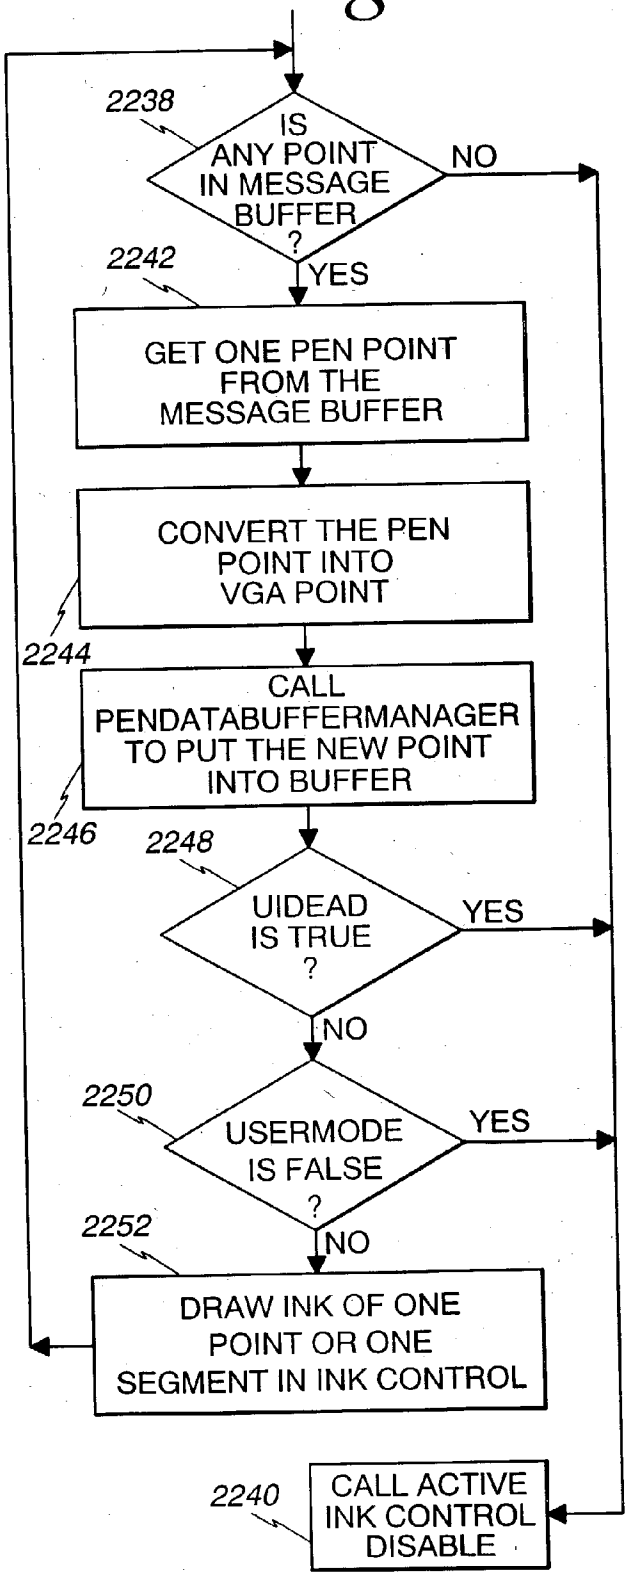


Fig. 107

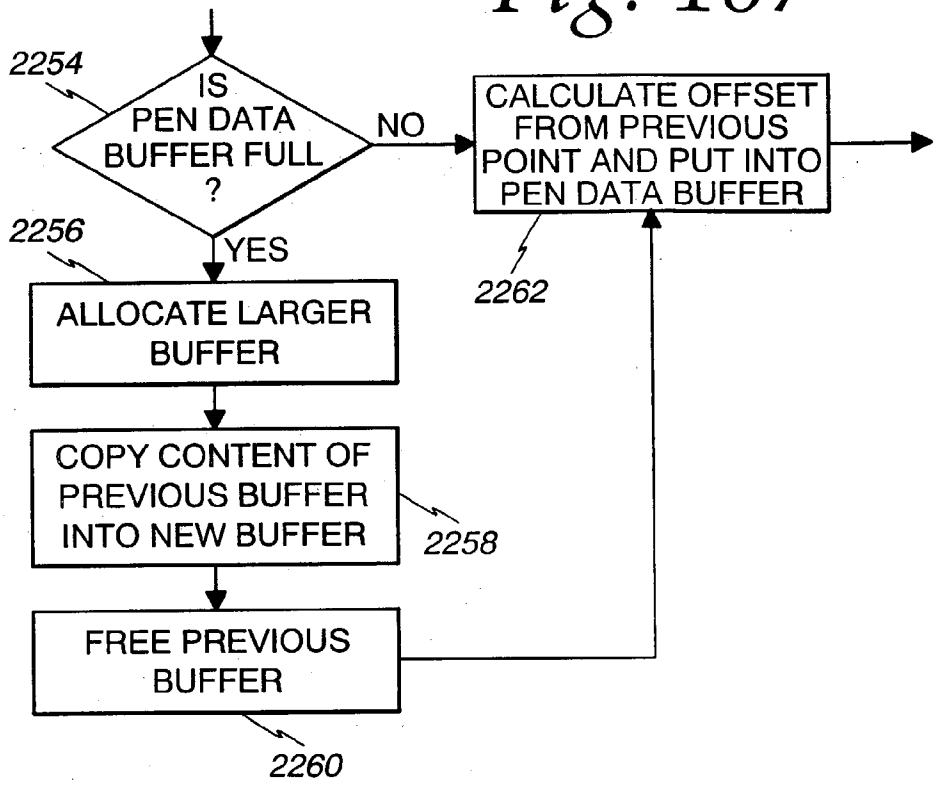


Fig. 108

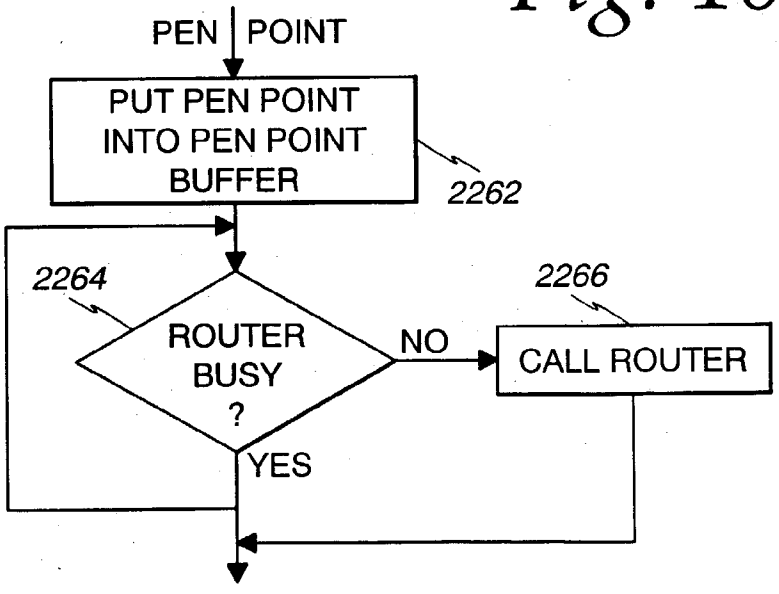
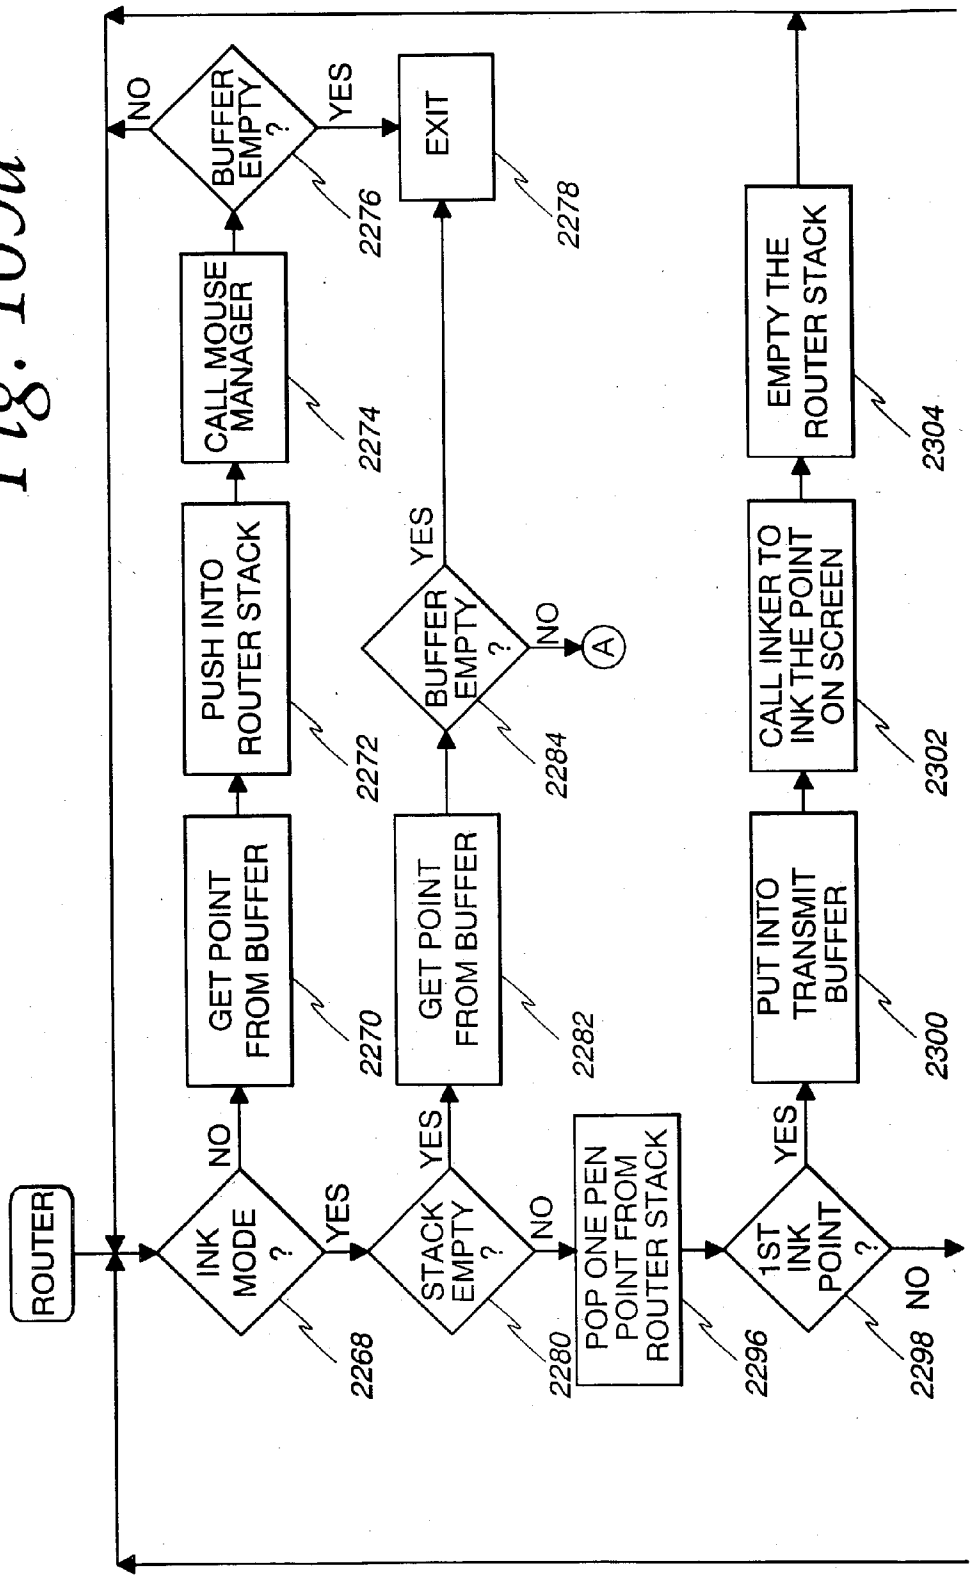


Fig. 109a


ROUTER
INK MODE ?
NO
YES
2268
GET POINT FROM BUFFER
2270
PUSH INTO ROUTER STACK
2272
CALL MOUSE MANAGER
2274
BUFFER EMPTY ?
NO
YES
2276
EXIT
2278
STACK EMPTY ?
YES
NO
2280
GET POINT FROM BUFFER
2282
BUFFER EMPTY ?
YES
NO
2284
A
POP ONE PEN POINT FROM ROUTER STACK
2296
1ST INK POINT ?
YES
NO
2298
PUT INTO TRANSMIT BUFFER
2300
CALL INKER TO INK THE POINT ON SCREEN
2302
EMPTY THE ROUTER STACK
2304

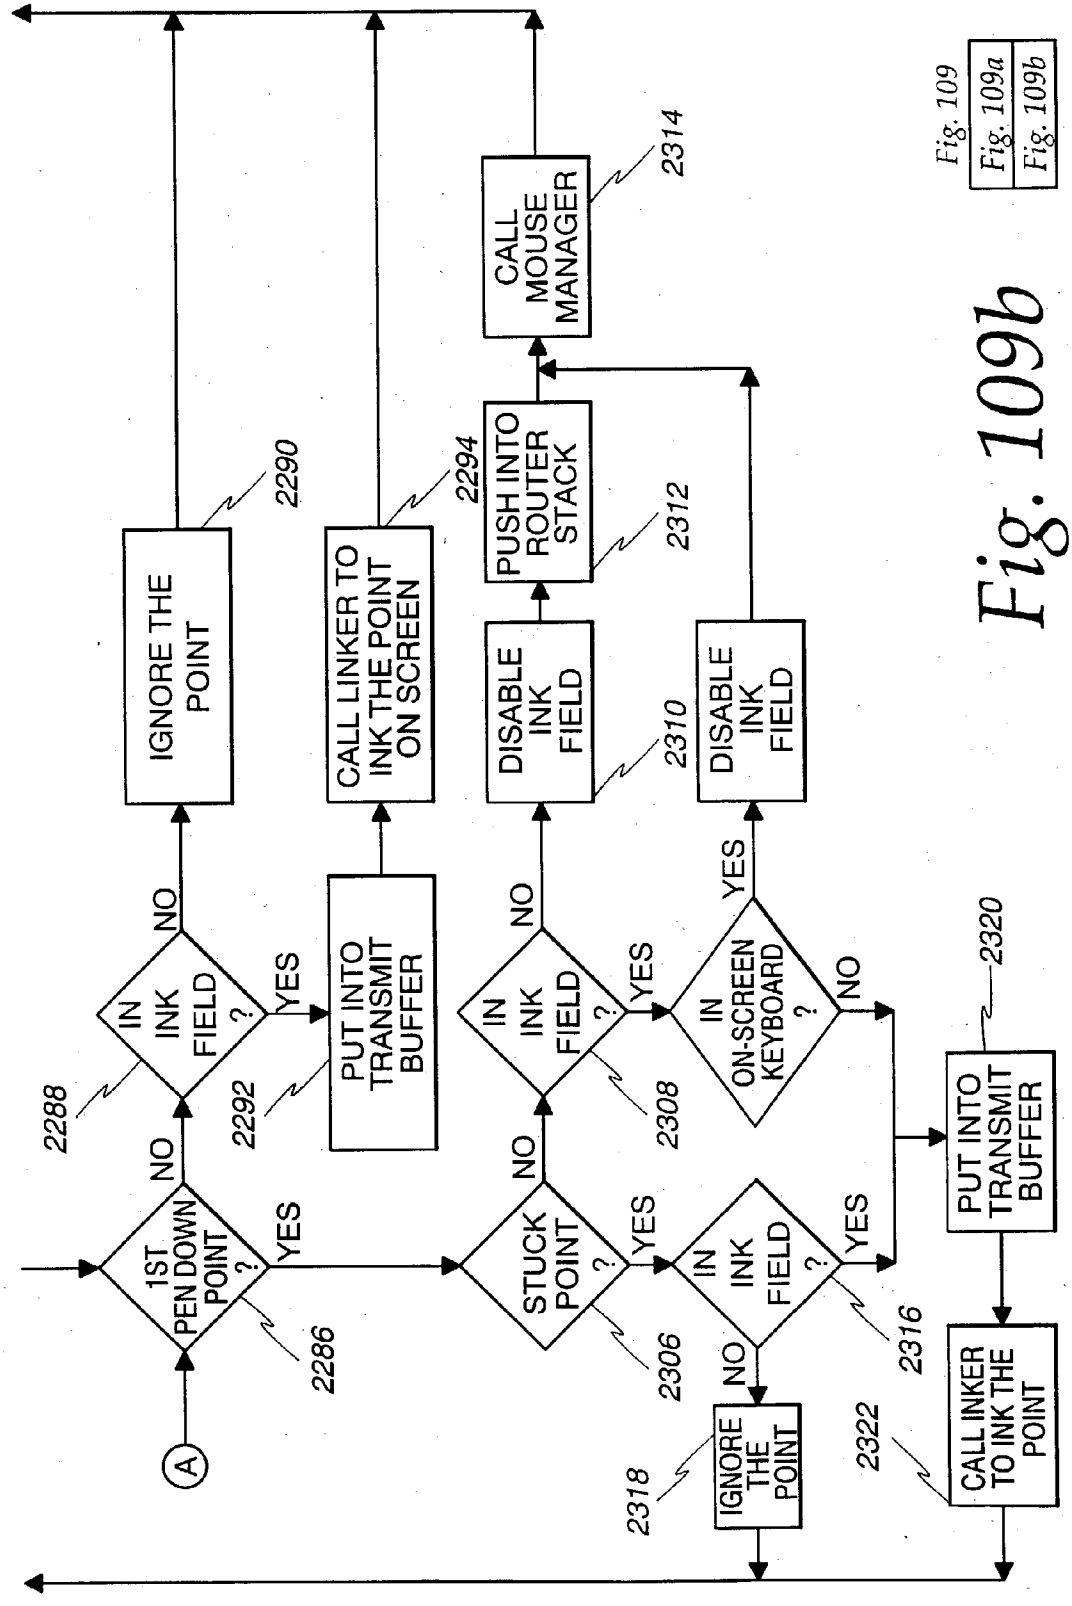


Fig. 109b

Fig. 109
Fig. 109a
Fig. 109b

Fig. 110

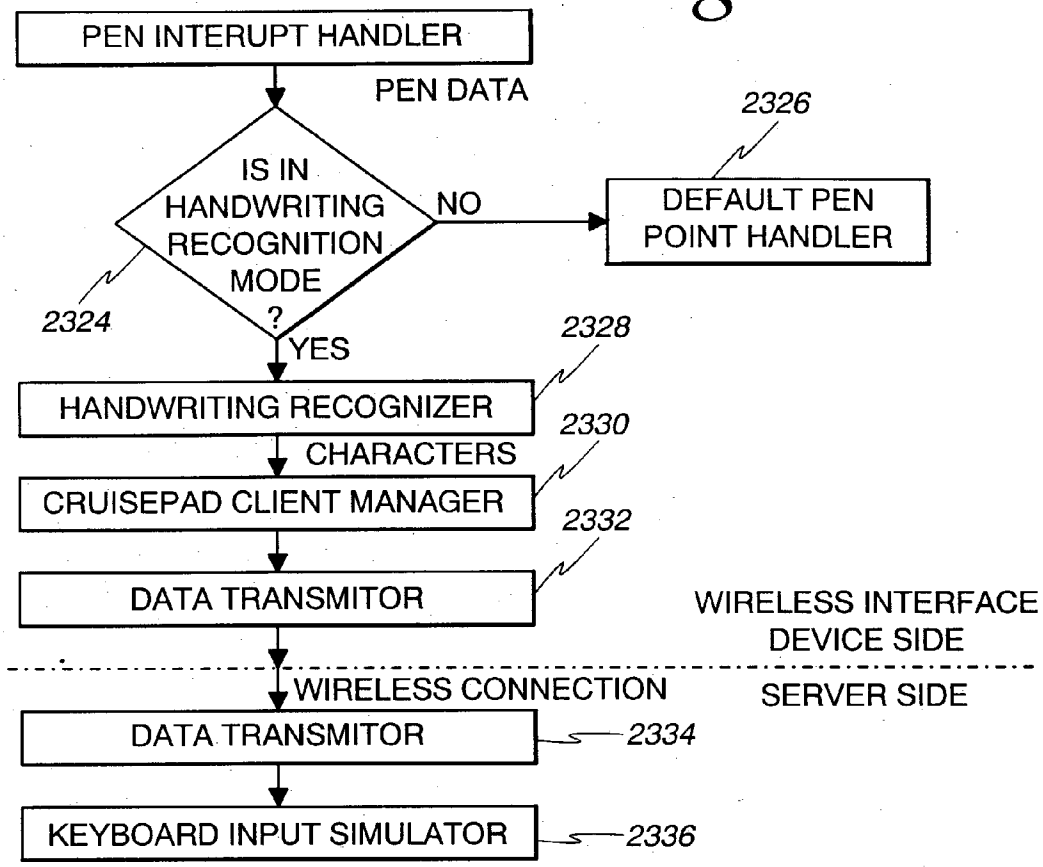


Fig. 111

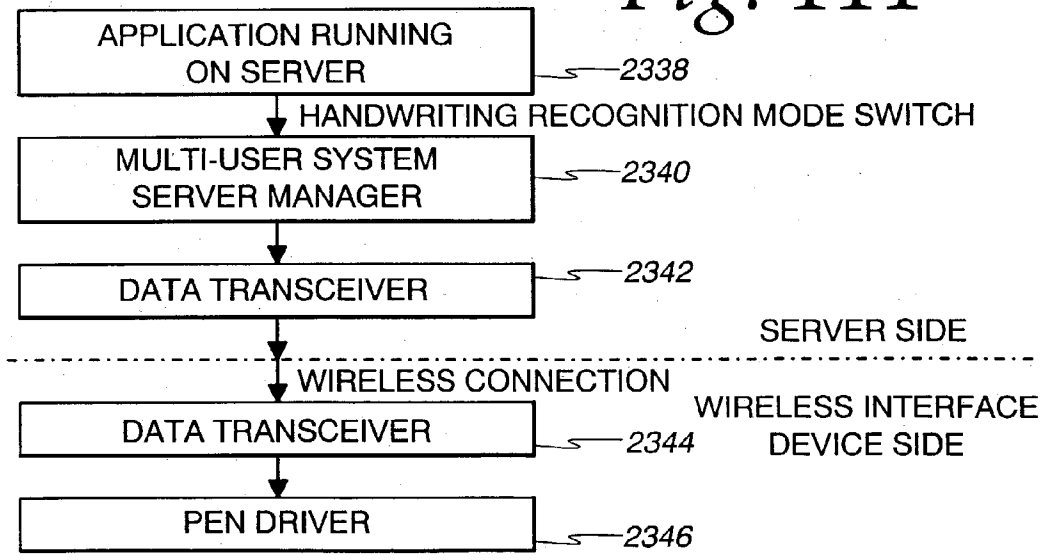
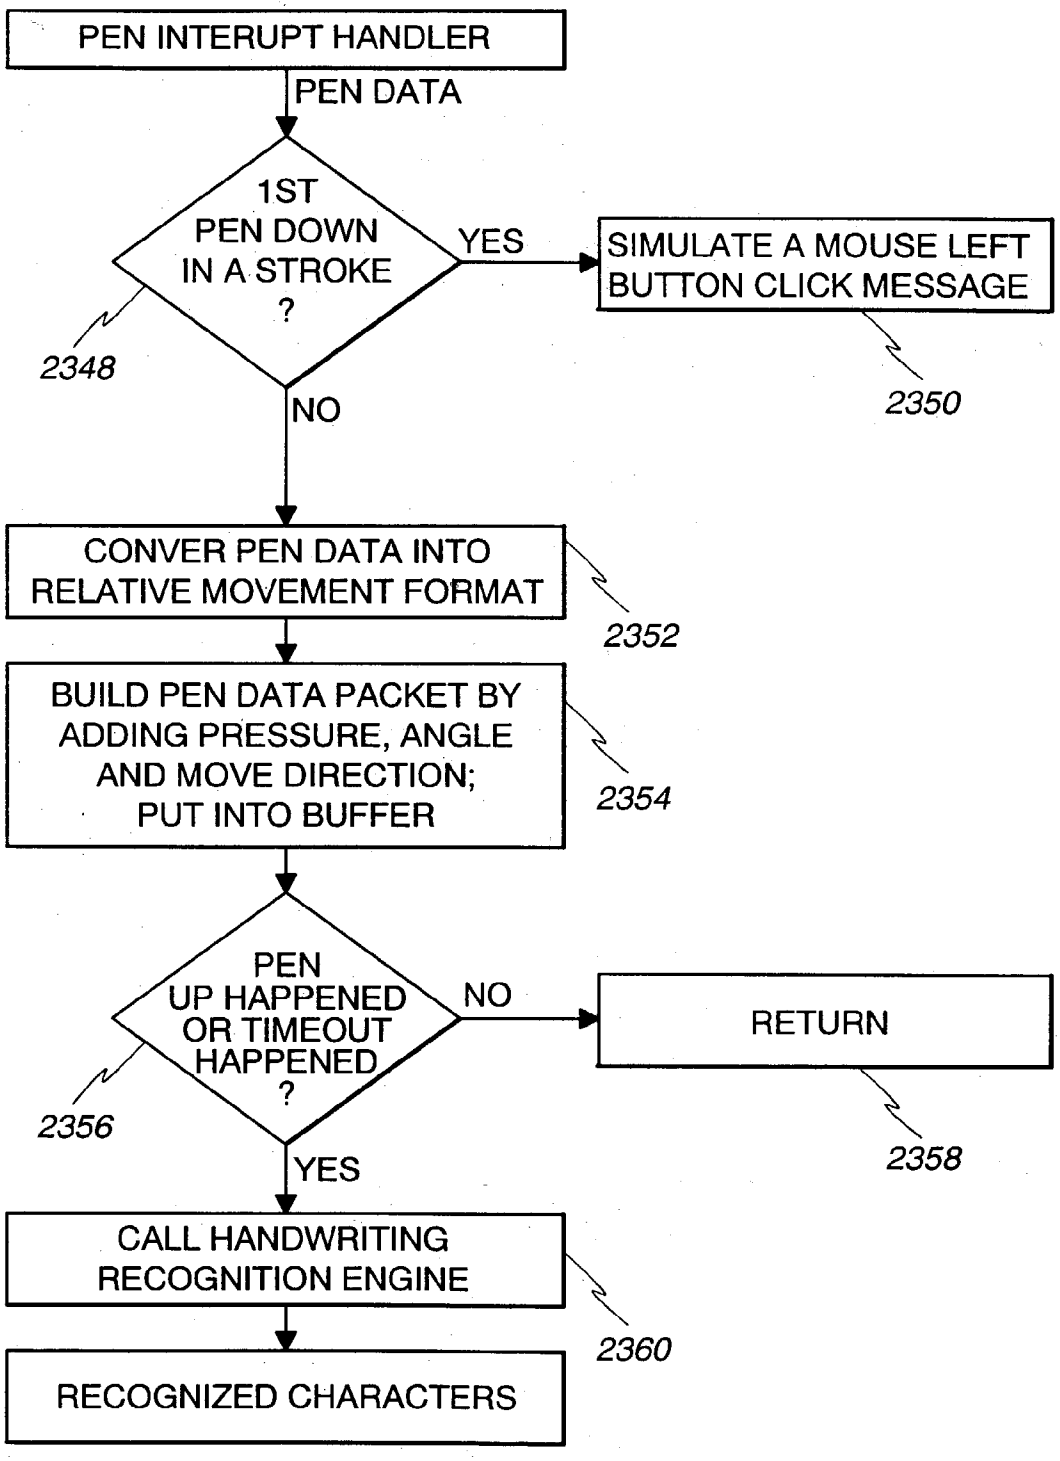


Fig. 112


PEN INTERUPT HANDLER
PEN DATA
1ST PEN DOWN IN A STROKE ?
YES
SIMULATE A MOUSE LEFT BUTTON CLICK MESSAGE
2348
2350
NO
CONVER PEN DATA INTO RELATIVE MOVEMENT FORMAT
2352
BUILD PEN DATA PACKET BY ADDING PRESSURE, ANGLE AND MOVE DIRECTION; PUT INTO BUFFER
2354
PEN UP HAPPENED OR TIMEOUT HAPPENED ?
NO
RETURN
2356
2358
YES
CALL HANDWRITING RECOGNITION ENGINE
2360
RECOGNIZED CHARACTERS

WIRELESS FILE TRANSMISSION

CROSS-REFERENCE TO RELATED CASES

[0001] This case is a continuation-in-part of the following copending application: Ser. No. 08/543,786, filed on Oct. 16, 1995.

[0002] This case is also related to the following copending applications, all filed on Oct. 16, 1995: REMOTE CONTROL INTERFACE, by B. R. Banerjee, S. C. Gladwin, A. Maskatia and A. Soucy, Ser. No. 08/543,700; RADIO FLASH UPDATE, by D. Bi, H. Hsiung and J. Wilson, Ser. No. 08/543,463; MOUSE EMULATION WITH PASSIVE PEN, by D. Bi, G. Cohen, M. Cortopassi, J. George, S. C. Gladwin, H. Hsiung, P. Lim, J. Parham, A. Soucy, D. Voegeli and J. Wilson, Ser. No. 08/543,786; RESUME ON PEN CONTACT, by M. Cortopassi, S. C. Gladwin and D. Voegeli, Ser. No. 08/543,510; SCREEN SAVER DISABLER, by D. Bi, S. C. Gladwin and J. Wilson, Ser. No. 08/543,698; IPX DRIVER FOR MULTIPLE LAN ADAPTERS, by D. Bi, Ser. No. 08/553,808; DISASTER RECOVERY JUMPER, by M. Cortopassi, J. George, J. Parham and D. Voegeli, Ser. No. 08/543,423; RC TIME CONSTANT, by M. Cortopassi, Ser. No. 08/543,697; DOUBLE PEN UP EVENT, by D. Bi and J. George, Ser. No. 08/543,787; REMOTE OCCLUSION REGION, by J. Wilson, Ser. No. 08/543,701; BROADCAST SEARCH FOR AVAILABLE HOST, by D. Bi, S. C. Gladwin and J. Wilson, Ser. No. 08/543,599; HOST/REMOTE CONTROL MODE, by M. Cortopassi, J. George, S. C. Gladwin, H. Hsiung, P. Lim, J. Parham, D. Voegeli and J. Wilson, Ser. No. 08/551,936; PASSWORD SWITCH TO OVERRIDE REMOTE CONTROL, by D. Bi, S. C. Gladwin and J. Wilson, Ser. No. 08/543,785; AUTOMATIC RECONNECT ON REQUIRED SIGNAL, by S. C. Gladwin and J. Wilson, Ser. No. 08/543,425; and PORTABLE TABLET, by G. Cohen, S. C. Gladwin, P. Lim, J. Smith, A. Soucy, K. Swen, G. Wong, K. Wood and G. Wu, Ser. No. 29/045,319; REMOTE KEYBOARD MACROS ACTIVATED BY HOT ICONS, by S. C. Gladwin, _____, J. Wilson, Ser. No. 08/543,788.

[0003] This case is also related to the following cases, all filed on even date: MULTIPLE WIRELESS INTERFACES TO A SINGLE SERVER, by S. C. Gladwin, A. Soucy and J. Wilson, Ser. No. _____; WIRELESS ENUMERATION OF AVAILABLE SERVERS, by S. C. Gladwin, D. Bi, A. Gopalan, and J. Wilson, Ser. No. _____; DYNAMIC SERVER ALLOCATION FOR LOAD BALANCING WIRELESS INTERFACE PROCESSING, by D. Bi, Serial No. _____; DATA COMPRESSION LOADER, by D. Boals and J. Wilson, Ser. No. _____; MULTI-USER RADIO FLASH ROM UPDATE, by D. Bi and J. Wilson, Ser. No. _____; AUDIO COMPRESSION IN A WIRELESS INTERFACE DEVICE, by S. C. Gladwin, D. Bi and D. Voegeli, Ser. No. _____; MULTI-USER ON-SCREEN KEYBOARD, by D. Bi, Ser. No. _____; LOCAL HANDWRITING RECOGNITION IN A WIRELESS INTERFACE TABLET, by S. C. Gladwin, D. Bi, D. Boals and J. Wilson, Ser. No. _____; INK TRAILS ON A WIRELESS REMOTE INTERFACE TABLET, by S. C. Gladwin, D. Bi, D. Boals, J. George, S. Merkle and J. Wilson, Ser. No. _____, and MODE SWITCHING FOR PEN-BASED COMPUTER SYSTEMS, by D. Bi, Ser. No. _____.

BACKGROUND OF THE INVENTION

[0004] 1. Field of the Invention

[0005] The present invention relates to a computer system, and more particularly, to a computer system which includes a wireless interface device that is adapted to communicate with a remote host by way of a radio link. The remote host processes pen data transmitted by the wireless interface device. Local inking of the pen events is provided at the wireless interface device in order to maintain the pen paradigm in essentially real time.

[0006] 2. Description of the Prior At

[0007] Pen-based portable personal computer systems are generally known in the art. Such systems typically include a digitizer panel and utilize a stylus as an input device. Both active and passive stylus devices are known. In such pen-based personal computer systems, the path of the stylus is tracked relative to the digitizer panel to maintain the pen paradigm and to provide visual feedback to the user. Such pen-based portable personal computer systems are known to use Microsoft Windows for Pen Computing Systems ("Pen Windows"). With such a system utilizing the Pen Windows operating system, the pen driver can typically deliver stylus tip locations every five to ten milliseconds to achieve a resolution of about 200 dots per inch and to connect the dots in a timely manner. As such, the Pen Windows operating system can provide a real time response to maintain the pen paradigm.

[0008] The object of the pen-based portable personal computer system is to provide the user with a tool as familiar as pencil and paper. Unfortunately, the popularity of such pen-based computer systems is a lot less than expected by the industry. As such, application programs for such pen-based systems are limited.

SUMMARY OF THE INVENTION

[0009] It is an object of the present invention to solve various problems in the prior art.

[0010] It is yet another object of the present invention to provide a computer system which includes a remote wireless interface device which can operate in a pen-based mode.

[0011] The present invention relates to a computer system, and more particularly, to a computer system which includes a wireless interface device that is adapted to communicate with a remote host by way of a radio link. The remote host processes pen data transmitted by the wireless interface device and provides for inking of the pen events on the wireless interface device.

[0012] Briefly, the present invention relates to a computer system which includes one or more wireless interface devices that are adapted to communicate with a remote host over a radio link. Each of the wireless interface devices is a pen-based device which includes an ink field in which pen events are translated into pen data packets and transmitted to the remote host over the radio link. Local inking is provided at the wireless interface device in order to maintain the pen paradigm in essentially real time.

BRIEF DESCRIPTION OF THE DRAWING

[0013] These and other objects of the present invention will be readily understood with reference to the following specification and attached drawing, wherein:

[0014] **FIG. 1** is a block diagram of the hardware configuration of a wireless interface device in accordance with the present invention and a host computer;

[0015] **FIG. 2** is a block diagram illustrating the access of the wireless interface device in accordance with the present invention and a wired local area network;

[0016] **FIG. 3** is a diagram illustrating the software structure for the wireless interface device in accordance with the present invention;

[0017] **FIG. 4** is a block diagram showing one implementation of the wireless interface device of **FIG. 1**;

[0018] **FIG. 5** is a state diagram illustrating the six internal power management states of the wireless interface device;

[0019] **FIG. 6** is a block diagram illustrating the operational states of the wireless interface device under the control of dedicated Viewer Manager software in accordance with the present invention;

[0020] **FIG. 7** is a block diagram of the software environment under which the wireless interface device and the host computer operate to provide remote control of the host computer;

[0021] **FIG. 8** is a block diagram which shows in further detail the software environment in the host computer, running an application program under a Windows environment;

[0022] **FIG. 9** is a block diagram which shows in further detail the software environment in the wireless interface device, running in a normal operation state;

[0023] **FIG. 10** is a block diagram illustrating the method used in the wireless interface device to anticipate a pen/mouse mode decision;

[0024] FIGS. **11-30** are schematic diagrams of the wireless interface device in accordance with the present invention;

[0025] FIGS. **31-35** are flow charts relating to mouse emulation with a passive pen;

[0026] **FIG. 36** is a plan view of the wireless interface device illustrating the hot icon area and viewing area of the display;

[0027] **FIG. 37** illustrates the hot icons in the hot icon area of the display;

[0028] **FIGS. 38, 39** and **40** are flow charts relating to a system for disabling the screen saver to reduce LAN traffic;

[0029] **FIG. 40A** is a flow chart relating to a host access protection password system;

[0030] FIGS. **41-43** are flow charts relating to a system for handling pen-up events;

[0031] **FIG. 44** is a configuration diagram illustrating the wireless interface device interfacing with a wired LAN system;

[0032] **FIG. 45** is a diagram of the software structure of a known network system;

[0033] **FIG. 46** is a diagram of the software structure of network system which enables the wireless interface device to interface with the wired LAN system, illustrated in **FIG. 44**;

[0034] FIGS. **47-52** are flow charts relating to the seamless integration of wired and wireless LANS;

[0035] FIGS. **53-57** are illustrations of various set-up dialog boxes available on the wireless interface device;

[0036] **FIG. 58** is a flow chart relating to the host control mode;

[0037] **FIG. 59** is a flow chart relating to a system for broadcasting for available hosts;

[0038] **FIGS. 60 and 61** are flow charts relating to a system for providing remote keyboard macros on the wireless interface device;

[0039] FIGS. **62**A-**62**C, **63**A and **63**B are flow charts relating to a wireless flash memory device programmer;

[0040] **FIGS. 64A and 64B** are flow charts relating to a system for providing automatic reconnection of the host;

[0041] **FIGS. 65A and 65B** are flow charts relating to providing a remote occlusion region on the wireless interface device; and

[0042] FIGS. **66**A-**66**D illustrate the various configurations of an on-screen keyboard available on the wireless interface device.

[0043] **FIG. 67** is a block diagram of the hardware configuration for a system for interfacing multiple wireless interface devices to a single server in accordance with the present invention.

[0044] **FIG. 68** is a block diagram illustrating the software architecture of the server illustrated in **FIG. 67**.

[0045] **FIG. 69** is an overall diagram of the software for wireless enumeration of the server.

[0046] **FIG. 70** is a view of a dialog box on the wireless interface device in a set-up mode.

[0047] FIGS. **71**A-**71**C are flow charts of the software for the wireless interface device for wireless enumeration of servers in accordance with the present invention.

[0048] **FIG. 72** is a flow chart of the software at the server side for the installation of the server side software for wireless enumeration of the servers available for connection to the wireless interface devices in accordance with the present invention.

[0049] **FIG. 73** is a flow chart for the software on the server side for providing wireless enumeration in accordance with the present invention.

[0050] **FIG. 74** is a flow chart for the software on the server side for providing wireless enumeration in accordance with the present invention.

[0051] **FIG. 75** is an overall flow chart for compressing and decompressing files in accordance with the present invention.

[0052] **FIGS. 76***a*-**76***b* are flow charts for compressing .EXE and .COM files in accordance with the present invention.

[0053] **FIG. 77** is a flow chart for decompressing .EXE and .COM files in accordance with the present invention.

[0054] **FIG. 78** is a block diagram of an exemplary customized file in accordance with the present invention.

[0055] **FIG. 79** is a block diagram illustrating an input file and an output file.

[0056] FIGS. **80-85** are flow charts for enabling the FLASH memory device on multiple wireless interface devices to be updated wirelessly.

[0057] **FIGS. 86 and 87** are flow charts for an audio compression system in accordance with the present invention.

[0058] **FIG. 88** is a graphical representation of an exemplary audio signal.

[0059] **FIG. 89A** is a simplified block diagram of the system illustrated in **FIG. 67**, illustrating the speaker and microphone on wireless interface device for running multimedia applications.

[0060] **FIG. 89B** is a block diagram of an audio subsystem in accordance with the present invention.

[0061] FIGS. **90-94** are flow charts for a multi-user on-screen keyboard in accordance with the present invention.

[0062] **FIG. 95** is a simplified diagram illustrating a plurality of overlapping windows and the on-screen keyboard on a display.

[0063] **FIG. 96** illustrates a container supported by various application programs, such as VISUAL BASIC with an ink field.

[0064] **FIG. 97** illustrates a data flow diagram for a system for providing ink trails on a wireless interface device in accordance with the present invention.

[0065] FIGS. **98-109** represent flow charts for the invention illustrated in **FIG. 97**.

[0066] FIGS. **110-112** represent flow charts for a local handwriting recognition system in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0067] 1. General

[0068] The present invention relates to a system which allows wireless access and control of a remote host computer, which may be either a desktop, tower or portable computer to enable remote access of the various files and programs on the host computer. The system not only allows access to remote host computers that are configured as stand-alone units but also provides access to both wired and wireless local area networks (LAN).

[0069] The system includes a wireless interface device which includes a graphical user interface (GUI) which allows various types of input. In particular, input to the wireless interface device is primarily by way of a passive stylus, which can be used in a pen mode or a mouse mode. In a pen mode, a trail of ink tracking the path of the stylus (pen paradigm) provides visual feedback to the user by way of a pen digitizer. In a mouse mode, however, a cursor may be generated which follows the "tip" of the pen, but the path of cursor motion is not inked.

[0070] A virtual keyboard is also provided as part of the GUI. Activation of the keys on the virtual keyboard is by way of the stylus or by finger input. In addition, the system also supports a full-size external keyboard.

[0071] **FIG. 1** illustrates a block diagram of the system **10** in accordance with the present invention. In particular, a wireless interface device **100**, in accordance with the present invention, enables wireless access of a remote host computer **101**, configured as either a stand-alone unit or as a part of a wired or wireless local area network (LAN). When the remote host computer **101** is in a stand-alone configuration, as illustrated in **FIG. 1**, communication between the remote host computer **101** and the wireless interface device **100** is by way of a wireless communication link, provided by a communication subsystem **118** in which the remote host computer **101** is provided with a transceiver **115** for radio communication with a transceiver **116** in the wireless interface device **100**. For example, the desktop or remote host computer **101** can be provided with a PCMCIA interface which can be used with a wireless transceiver card to communicate with the transceiver **116** in the wireless interface device **100**. Alternatively, an Industry Standard Architecture (ISA) card transceiver can be installed in the host computer **101** in a spare ISA expansion slot. In particular, the transceivers **115** and **116** may be implemented as 2.4 GHz radio frequency (RF) transceiver modules with a Wireless Media Access Control function, available from Proxim Inc., Mountain View, Calif., configured with either an ISA or PCMCIA interface.

[0072] As mentioned above, the wireless interface device **100** can also be used with a wireless LAN in a peer-to-peer network or a wired LAN. **FIG. 2** illustrates the communication between the wireless interface device **100** and a wired LAN **114**, which includes a server **108** in a, for example, Novell Netware or Microsoft LAN Manager environment. In this mode, the transceiver **116** in the wireless interface device **100** communicates with an access point **109** by way of a transceiver (not shown), which interfaces the wireless interface device **100** with a wired LAN **114** which includes a server **108**. Alternatively, the wireless interface device **100** can be used in a wireless network in a Windows for Workgroups or Personal Netware environment, for example.

[0073] The configuration of the radio communication subsystem between the wireless interface device **100** and the remote host computer **101** or access point **109** conforms to the Open System Interconnection (OSI) reference model for data communications and implements the lower two layers of the seven-layer OSI model. In particular, with reference to **FIG. 3**, the physical layer **107** (WIRELESS PHY) may be a 2.4 GHz spread spectrum frequency hopping radio which replaces the LAN cable normally connected between workstations. The radio operates within the 2.4000-2.4835 GHz band, the unlicensed Industrial Scientific and Medial (ISM) band, and is divided into eighty-two 1 MHz channels. In a spread-spectrum, frequency-hopping radio, data is broadcast on one particular channel for a predetermined time (i.e. 400 msec); and then the system hops to another channel in a predetermined pattern to avoid interference.

[0074] The wireless media access control (WIRELESS MAC) **106** is used to interface to higher level software **105** (i.e. NOS SHELL, NOVELL, MICROSOFT) through network drivers **104** (i.e. LINK LEVEL INTERFACE (ODI,

NDIS)). The MAC conforms to the industry standard protocol is in accordance with IEEE 802.11.

[0075] As shown in **FIG. 1**, the wireless interface device **100** includes a central processing unit (CPU) **112**, a local memory system **111**, a pen-based input subsystem (STYLUS) **110**, a display subsystem **113** and a transceiver **116**. As will be discussed in more detail below, the wireless interface device **100** includes a Viewer Manager software **200** (**FIG. 6**) which performs three (3) basic functions: (i) collecting and transmitting input positional information from a stylus input subsystem **110** to the host computer **101**, (ii) receiving from the host computer **101** a video image to be displayed on the display subsystem **113**, and (iii) managing the communications link between the wireless interface device **100** and the host computer **101**.

[0076] The wireless interface device **100** is thus able to control and access various programs such as Windows and Windows application programs and files residing at the host computer **101** and display the results in its display **113**.

[0077] 2. Description of the Block Diagram

[0078] **FIG. 4** is a block diagram of the wireless interface device **100**. As shown in **FIG. 4**, the wireless interface device **100** has both a processor or "local bus"**150** and an ISA bus **151**. The local bus **150** operates at the clock rate of the CPU **112**, while the ISA bus **151** operates at the industry standard 8 MHz clock rate. The CPU **112** may be implemented by a microprocessor, which allows suspension and resumption of operation by halting and restarting the system clock to reduce battery consumption. Because power management in a portable device is important, the CPU **112** should preferably support power management functions, such as System Management Mode (SMM) and System Management Interrupt (SMI) techniques known in the industry. One example of a suitable microprocessor is the AMD386DXLV, available from Advanced Micro Devices, Inc., Sunnyvale, Calif., which operates at up to 25 MHz at a 3.0V supply voltage.

[0079] The CPU **112** interfaces over local bus **150** with a system controller **129**. The system controller **129** manages (i) system operation, including the local and ISA buses **150** and **151**, (ii) memory, and (iii) power to the system. The system controller **129** may be, for example, a Model No. 86C368 integrated circuit, available from PicoPower Technology, Inc., San Jose, Calif.

[0080] The present implementation takes advantage of the several levels of power management supported by the system controller **129**. Power management in the present implementation is described in further detail below.

[0081] The system controller **129** provides a dynamic random access memory (DRAM) controller and a non-volatile random access memory (NVRAM) controller to control the DRAM **111**A and a non-volatile RAM, NVRAM **111**B, which form a portion of the memory subsystem **111** (**FIG. 1**) in the wireless interface device **100**. As shown in **FIG. 4**, the DRAM **111**A in the wireless interface device **100** may be provided by four 16-bit by 256K DRAM memory chips, to provide a total of 2 megabytes of memory, while the NVRAM **111**B, used to store configuration data and passwords, for example, may be implemented using E^2PROM technology to provide permanent storage.

[0082] All devices on the ISA bus **151** are managed by an integrated peripheral controller (IPC) **128**. The IPC **128** provides various functions including direct memory access (DMA) control, interrupt control, a timer, a real time clock (RTC) controller, and a memory mapper for mapping peripheral devices to the system memory space as illustrated in Table 4 below. The IPC **128** may be implemented by a Model No. PT82C206 integrated circuit, also available from the aforementioned PicoPower Technology, Inc.

[0083] The stylus input subsystem **110** is implemented by a stylus, a pen controller **110**A and a digitizer panel **110**B. The pen controller **110**A controls the digitizer panel **110**B and provides positional information of pen or stylus contact. The pen controller **110**A can be implemented, for example by a Model No. MC68HC705J2 microcontroller, available from Motorola, Inc. In this implementation, the digitizer panel **110**B can be, for example, an analog-resistive touch screen, so that the stylus is sensed by mechanical pressure. Using a digitizer panel which senses mechanical pressure allows a "dumb" stylus, or even the human finger, to be used as an input device. When using a dumb stylus, switching between mouse and pen modes is accomplished by selecting an icon as discussed below. Alternately, other styli, such as a "light pen" or an electronic stylus with various operating modes, can also be used. In some electronic stylus', switching between pen and mouse modes can be achieved by pushing a "barrel button" (i.e. a switch located on the barrel of the stylus).

[0084] As mentioned above, the wireless interface device **100** includes a display subsystem **113** which, in turn, includes a liquid crystal display (LCD) **113**C. The LCD **113**C is controlled by a video controller **113**A, and supported by video memory **113**B. The video controller **113**A can be implemented by a Model No. CL-GD6205 video controller, available from Cirrus Logic Corporation, Milpitas, Calif. The LCD **113**C can be, for example, a monochrome display, such as the Epson EG9015D-NZ (from Epson Corporation), or an active matrix color display. The video memory **113**B may be implemented as DRAMs, organized as 256K by 16 bits.

[0085] The video controller **113**A communicates with video memory **113**B over a separate 16-bit video bus **113**D. In this implementation, the video controller **113**A provides "backlighting" support through a backlight control pin BACKLITEON that is de-asserted to conserve power under certain power management conditions as discussed below.

[0086] As discussed above, the communication subsystem **118** allows communication with a remote host computer **101** in either a stand-alone configuration or connected to either a wired or wireless LAN. The communication system **118** includes the transceiver **116**, an antenna **116**A, and an RF controller **114**A for interfacing with the local ISA bus **151**.

[0087] The wireless interface device **100** also includes a keyboard controller **125** which performs, in addition to controlling an optional keyboard by way of a connector, various other functions including battery monitoring and LCD status control. The keyboard controller **125** can be implemented by a Model No. M38802M2 integrated circuit from Mitsubishi Corporation, Tokyo, Japan. Battery power to the wireless interface device **100** may be provided by an intelligent battery pack (IBP) **131**, for example, as described in U.S. patent application Ser. No. 07/975,879, filed on Nov.

13, 1992, hereby incorporated by reference, connected to a system power supply module **133** by way of a battery connector **132**. The IBP **131** maintains and provides information about the remaining useful battery life of IBP **131**, monitored by keyboard controller **125**. Upon the occurrence of a significant event relative to the IBP **130**, e.g. battery remaining life falling below a preset value, the keyboard controller **125** generates an interrupt signal.

[**0088**] A serial port is provided and implemented by way of a universal asynchronous receiver transmitter (UART) **134**, which can be accessed externally via a serial port connector **135**. As will be discussed in more detail below, the serial port connector **135** allows for disaster recovery for the flash memory **117**, which may be used to store the basic input/output (BIOS) for the CPU **112**.

[**0089**] 3. Power Management

[**0090**] In order to conserve battery power, the wireless interface device **100** incorporates power management. While a user of the wireless interface device **100** would normally only be aware of four power management states: "off"; "active"; "suspend"; and "sleep" modes, internally six power management states are implemented as shown in **FIG. 5**. More particularly, with reference to **FIG. 5**, before the wireless interface device **100** is powered up, the wireless interface device **100** is in an "off" state, indicated by the reference numeral **160**. In an "off" state **160**, no power is supplied to the system. A state **161** (the "active" state) is entered when the power switch (**FIG. 28**) to the wireless interface device **100** is turned to the "on" position. In the active state **161**, all components of wireless interface device **100** are active. From active state **161**, the wireless interface device **100** enters a "local standby" state **162**. The local standby state **162** is transparent to the user of the wireless interface device **100**. From the user's point of view, in the local standby state **162**, the wireless interface device **100** is in active mode. In this state **162**, specific inactive devices are each put into a static state after a predetermined time-out period of inactivity for that device. In a static state, each device consumes minimal power. In the local standby state **162**, devices that can be put into static states include the CPU **112**, the video controller **113**A, the pen controller **110**A, the UART **134**, and the transceiver **116**. Backlighting of the LCD video display is also disabled in local standby state **162**. If not, input activities are detected by the keyboard controller **125** or pen controller **110**A. After the later of their respective present time-out periods, these devices are placed in a static state. These devices emerge from the static state once an activity relevant to its operation is detected, e.g. a pen event is detected.

[**0091**] The user of the wireless interface device **100** can place the wireless interface device **100** in a "sleep" mode **163** by selecting an icon (**FIG. 37**) labelled "sleep" from the GUI as will be discussed below. Alternatively, the "sleep" mode may be entered from the active state **161** after a preset period of inactivity. In a "sleep" mode, corresponding to either "sleep" state **163** or "active sleep" state **164**, the display subsystem **113** is switched off; and most devices are placed in static states. When a keyboard or pen event is detected, the sleep state **163** and active sleep state **164** are exited, and the wireless interface device **100** enters the active state **161**. From the sleep state **163**, an active sleep state **164** is entered when a communication packet is received from the host computer **101**. Although the display subsystem **113** is turned off, the received communication packet can result in an update to an image stored in the video memory **113**B. The CPU **112** handles the communication packet from the host computer **101** and activates the video controller **113**A to update such an image. The active sleep state **164** is transparent to the user of the wireless interface device **100**, since the updated image is not displayed on the LCD screen **113**C. When the communication packet is handled, the wireless interface **100** returns to a sleep state **163**. The device activities in wireless interface device **100** in "sleep" mode **163** are illustrated in Table 1 below.

TABLE 1

DEVICE	STATE	CLOCKS DISABLED	COMMENTS	WAKEUP SOURCE
Microprocessor	Static Suspend	Clock Stop Control by the system controller	Static Mode entered when clock stopped	Clock Restarted and Controlled by the system controller
System Controller	Static Suspend	Clock Stopped/32 KHz Left on		Activity on EXACT, SWITCH, or RING pins
Peripheral Controller	Static	32 KHz Source		Any Interrupts
Main Memory	Slow Refresh	System controller 38 KHz	Memory Refreshed at 128 mS	
Video	Static	14 MHz disconnected	Controlled through use of system controller power management pins	When system is resumed
Video Memory	Slow	32 KHz	Memory Refreshed at 128 mS	Video Controller
	Refresh			automatically adjusts refresh rate depending on mode
LCD Module	OFF	NA	Power to Module will never be applied in Sleep	Controlled by Video controller power up sequencing
LCD Backlight	OFF	NA	Backlight will never be on in Sleep	Controlled by Video controller power up sequencing
UART	Static	1.84 MHz	Part has no direct power management	
UART Trans.	Off	NA	Part turned off, until access to UART. Inactivity timer will start, and look for a time-out of two minutes before turning off transceiver	Access to serial port
ROM	Static	NA	After ROM is shadowed, the CS and OE line will	

TABLE 1-continued

DEVICE	STATE	CLOCKS DISABLED	COMMENTS	WAKEUP SOURCE
			be driven high to keep these parts in a static mode	
NVRAM	Static	NA	After NVRAM is read, the CS line will be high which forces part into a static mode	
Pen Controller	Sleep	Own 4.0 MHz	Sleeps after each point is processed as long as the pen is not pressing the screen	Pen Down wakes up Pen controller. Pen controller asserts the PEN_ ACTIVITY signal which will wake up the entire system.
Hook	Active	Own 32 KHz	Keeps the last display as told by the keyboard controller	NA
Clock Generator	Active	All Clocks Running	Clocks needed in order to wake system back up	
Radio	Sleep	Internal	Radio Handles its own power management	Wakes up on periodic basis in order to keep SYNC. When a packet is ready, the Radio will assert the activity pin to the EXPACT input of the system controller which will wake up the system

[0092] Upon expiration of a timer, the wireless interface device **100** enters into an internal state "suspend" mode **165**. In a suspend mode, the wireless interface device **100** is essentially turned off and communication packets from the host computer **101** are not handled. The wireless interface device **100** emerges from suspend state **165** into active state **161** when a pen event is detected.

[0093] As mentioned above, the video controller **113**A supports various power management modes internal to the display subsystem **113**. Power is conserved in display subsystem **113** by entering "standby" and "suspend" modes. In the video controller **113**A's "standby" mode, which can be entered by (i) expiration of a timer internal to the video controller **113**A, (ii) firmware in the video controller **113**A, or (iii) a signal received from system controller **129** on the video controller **113**A's "STANDBY" pin. In the video controller **113**A's standby mode, the LCD **113**C is powered down and the video clock is suspended. The video controller **113**A exits the standby mode either under firmware control, or upon system controller 129's de-asserting video controller **113**A's STANDBY pin. Upon exiting standby mode, the LCD **113**C is powered and the video clock becomes active. In this implementation, the LCD **113**C includes multiple power planes ("panels"). For reliability reasons, in a powering up or powering down operation, these panels in the LCD display are preferably powered in a predetermined sequence specified by the manufacturer.

[0094] Maximum power is conserved in the display subsystem **113** when video controller **113**A enters the "suspend" mode. The suspend mode can be entered either by asserting a signal from the system controller **129** on the SUSPEND pin of video controller **113**A, or under firmware control. In this implementation, if the suspend mode is entered from the SUSPEND pin, the CPU **112** is prevented from accessing the video RAM **113**B and video bus **113**D. In that state, the contents of configuration registers in the video controller **113**A are saved, to be restored when suspend mode is exited. In the suspend mode, the video RAM **113**B is refreshed using the lowest possible refresh clock rate.

[0095] 4. General Description of Operation

[0096] **FIG. 6** is a block diagram illustrating the operational states of wireless interface device **100** under the control of the Viewer Manager software **200**. As shown in **FIG. 6**, on power up, the wireless interface device **100** enters into a "TABLET SECURITY" state **201**, in which an optional security step is performed. In the state **201**, either the device **100** automatically shuts off after an idle period or the user performs a "log on" procedure which, as a security measure, identifies and validates the user. Then, at decision point **202**, the Viewer Manager software **200** then determines if a procedure to set up a communication link is preconfigured. If so, a communication link is established automatically with the host computer **101** and the Viewer Manager software **200** goes into the normal operation state **205**, which is described in further detail below. If a communication link is not preconfigured, a manual procedure is performed in state **203**, in which the desired host computer **101** is identified and connected. From state **203**, either the device **100** automatically shuts off after an idle period or the user continues on and enters normal operation state **205**.

[0097] In normal operation state **205**, the wireless interface device **100** controls the program running in the host computer **101**, in accordance with the input data received from stylus input subsystem **110**. The positions of the stylus in stylus input subsystem **110** are delivered to the host computer **101**, which generates display commands to the wireless interface device **100**. The CPU **112** executes the display commands received, which may result in an update of the LCD **113**C. In this embodiment, either a direct user command or inactivity over a predetermined time period causes the wireless interface device **100** to enter a "HOT-STANDBY" minimum power state ("sleep" mode), represented in **FIG. 6** by block **204**. In the minimum power state **204**, to preserve battery power, the various operations of the wireless interface device **100**'s functional units are placed on standby status. If the status is put in contact with the digitizer panel, the wireless interface device **100** is reactivated, and control of the host computer **101** is resumed by re-entering state **205**. Thereupon, wireless interface device **100** enters into a state **206**, in which an auto-disconnect

procedure is executed, which releases control of the host computer **101** and powers down the wireless interface device **100**.

[**0098**] The user may also relinquish control of the host computer **101** from state **205** by selecting a manual disconnect function. When the manual disconnect function is selected, the wireless interface device **100** enters manual disconnect state **207**, in which the connection to the host computer **101** is terminated. The wireless interface device **100** is then returned to state **201** to accept the next user validation.

[**0099**] **FIG. 7** is a block diagram of the software environment **240** in which the wireless interface device **100** and the host computer **101** operate to provide the wireless interface device **100** remote control of the host computer **101**. As shown in **FIG. 7, a** wireless communication system **250** is provided for communication between the host computer **101** and the wireless interface device **100**. On the side of the wireless interface device **100**, i.e. software environment **230**A, a communication output manager software routine **252** controls transmissions of pen events over the wireless communication link **250** to a host communication input manager **262** in the host computer **101** (i.e. software environment **230**B). The pen events include the position information of the stylus and tip-up and tip-down information. A pen event buffer **251** queues the pen events for transmission through a communications manager **252**. In the software environment **230**A, the communications input manager **254** receives from the wireless communication system **250** video events transmitted by host communication output manager **260** in the software environment **230**B. These video events include graphical commands for controlling the LCD **113**C. In the software environment **230**A, the received video commands are queued in the video event buffer **256** to be processed by the CPU **112** as graphical instructions to the LCD **113**C.

[**0100**] In the software environment **230**B, i.e. in host computer **101**, pen events are queued in pen event buffer **264**, which may then be provided to the Pen Windows module **266**. The Pen Windows module **266** processes the pen events and creates video events in a video event buffer **267**, which is then transmitted to the wireless interface device **100** over wireless communication system **250**.

[**0101**] **FIG. 8** is a block diagram which shows in further detail the software environment **230**B (**FIG. 7**) in the host computer **101**; running an application program **270** under a Windows operating system **272**. As shown in **FIG. 8**, the pen events queued in the pen event buffer **264** are provided to a pen event injector **274**, which provides the pen events from the pen event buffer **264**, one pen event at a time, to a buffer ("RC buffer") **275** of the Recognition Context Manager module (the "RC manager") **276** in Pen Windows. The RC buffer **275** holds a maximum of four pen events. The RC Manager **276** assumes that pen events are received at RC buffer **275** as they occur. Thus, if the Pen Windows system is presented with pen events faster than they are retrieved from RC buffer **275** without pen event injector **274**, the pen events that arrive at RC buffer **275** when it is full are lost. The pen event injector **274** prevents such data loss. To provide this capability, the pen event injector **274** includes both Windows virtual device (V×D) and device driver (DRV) codes (not shown). The DRV portion removes a single pen event from pen event buffer **264** and delivers it to the RC buffer **275** using the normal Pen Windows add and process pen event mechanisms. Then the V×D portion reactivates the DRV code after a minimum time delay using a virtual machine manager service to retrieve the next pen event from pen event buffer **264**. Those of ordinary skill in the art would appreciate that, under the terminology used in Windows, DRV code refers to a dynamically linked library in Windows which interacts with a hardware device (in this case, pen device buffer **264**), and V×D code refers to a dynamically lined library which manages a sharable resource (in this case, the DRV code).

[**0102**] The RC Manager **276** examines each pen event in the RC buffer **275**, and according to the context of the pen event in its possession, the RC Manager **276** determines whether the stylus is in the pen mode or in the mouse mode. In this embodiment, as will be discussed in more detail below, an icon allows the user to use the stylus as a "mouse" device. The icon, called "mouse button toggle", allows the user to switch between a "left" button and a "right" button as used in an industry standard mouse device. The selected button is deemed depressed when the stylus makes contact with the pressure-sensitive digitizer panel. A rapid succession of two contacts with the display is read by the RC Manager **276** as a "double click", and dragging the stylus along the surface of the display is read by the RC Manager **276** as the familiar operation of dragging the mouse device with the selected button depressed.

[**0103**] If the stylus is in the pen mode, the RC Manager **276** provides the pen event to a recognizer **277** to interpret the "gesture". Alternatively, if the pen event is a mouse event, the RC Manager **276** provides the pen event as a mouse event for further processing in a module **278**. The interpreted gestures or mouse events are further processed as input data to the Windows operating system **272** or the application program **270**.

[**0104**] The output data from an application program, such as Windows **272** or application program **270**, is provided to the video event buffer **267**. These video events are transmitted to the host communications output manager **260** for transmission to the wireless interface device **100**.

[**0105**] **FIG. 9** is a block diagram which shows in further detail the software environment **230**A in the wireless interface device **100** in the normal operation state **205** of the Viewer Manager **200**. In **FIG. 9**, the stylus in the stylus input subsystem **110** and LCD video display **113**C in the video display subsystem **113** are shown collectively as a digitizer-display device **279**. In a normal operation state **205**, the Viewer Manager **200** interacts with the application program **270** in the wireless interface device **100** by way of the Communications Output Manager **252** and the Communications Input Manager software **254**. In addition, the Viewer Manager software **200** also receives digitized data from a digitizer **280**, which, in turn, receives digitized data from stylus input subsystem **110**. The Viewer Manager software **200** uses the digitized data to provide visual feedback to the user, which is discussed in further detail below. The Viewer Manager software **200** generates local video commands to a display driver **281**. The display driver **281** also receives from video event buffer **256** video display commands from the host computer system **101**.

[**0106**] At the core of the wireless interface device **100**'s user interface is the stylus's behavior under Pen Windows.

Of significance in wireless interface device **100**'s design is the emulation of the natural "pen-and-shaper" interaction with the user. That is, in a pen mode, the stylus must leave ink as it moves across the surface of the screen in the same way that a pen leaves ink on paper. However, using Pen Windows software, the RC Manager **276**, residing in the host computer **101**, determines for each pen event whether the mouse or the pen mode is used.

[**0107**] If the wireless interface device **100** simplistically accesses the host computer **101** as a local device access, the wireless link between the host computer **101** and the wireless interface device **100** would be required to carry a minimum of 200 inking messages per second (100 stylus tip locations plus 100 line drawing commands). To maintain the pen-and-paper emulation, the wireless interface device **100** is further required to have a total processing delay (hence response time), including the overhead of the communication protocols, which is near or below the human perception level. In addition, noise in the transmission medium often leads to momentarily interruption of data transmission, or results in data corruption that requires re-transmission, thereby further reducing the throughput of the wireless link. To provide an acceptable level of performance, i.e., a high message-per-second communication rate and an acceptable propagation delay, a technique referred to as "local inking" is developed and applied to the wireless interface device **100**'s design, in accordance with the present invention. Without local inking, a high bandwidth communication link is required to meet the propagation delay requirement. Such a high bandwidth communication link is impractical, both in terms of cost and its impact on the portability of the resulting wireless access device.

[**0108**] With local inking, the Viewer Manager software **200** provides inking on the LCD **113**C locally before the corresponding inking video events are received from the host computer **101**. In this manner, visual feedback is provided virtually immediately without requiring either highly complex networking equipment, or very high performance and costly components in both the wireless interface device **100** and the host computer **101**. Local inking provides both a real time response and an orderly handling of the stylus's data stream. Since local inking reduces the need for processing at the peak pen event rate of the stylus's data stream, the host computer **101** can thus apply normal buffering techniques, thereby reducing the bandwidth requirement on the communication network.

[**0109**] In one proposed industry standard for a stylus or pen-based system, namely the Microsoft Windows for Pen Computing system ("Pen Windows"), the pen mode requires (i) a pen driver that can deliver stylus tip locations every five to ten milliseconds (100 to 200 times per second), so as to achieve a resolution of two hundred dots per inch (200 dpi), and (ii) a display driver than can connect these dots in a timely manner. By these requirements, Pen Windows attempts to provide a real time response to maintain the pen paradigm. The Windows for Pen Computing system is promoted by Microsoft Corporation, Redmond, Washington. Details of the Pen Windows system are also provided in Windows version 3.1 Software Developer Kit obtainable from Microsoft Corporation. Under one implementation of the Pen Windows, a maximum of four stylus locations can be stored in a buffer of a module called "PENWIN.DLL" (for "Pen Window Dynamically Linked Library")). Consequently, in that implementation, the maximum latency allowed is twenty to forty milliseconds before any queue tip location is written. Each time the system fails to process a pen event within twenty to forty milliseconds of queuing, a stylus tip location is lost and there is a corresponding impact on the accuracy of the line being traced.

[**0110**] As mentioned above, the stylus is used in both pen mode and mouse mode. Since the RC Manager **276**, running on the host computer **101**, rather than a software module on the wireless interface device **100**, determines whether a given pen event is a mouse mode event or a pen mode event, the Viewer Manager software **200** must anticipate which of these modes is applicable for that pen event. Further, should the anticipated mode prove to be incorrect, the Viewer Manager software **200** is required to correct the incorrectly inked image in video display subsystem **113**.

[**0111**] **FIG. 10** illustrates the method used in the wireless interface device **100** to anticipate the RC Manager **276**'s mode decision and to correct the image in the video display subsystem **113** when a local inking error occurs. As shown in **FIG. 10**, when the normal operational state **205** is entered, a pen control program (represented by the state diagram **282**) in the Viewer Manager software **200** is initially in the mouse mode in state **283**. However, even in the mouse mode, the trajectory of the stylus in contact with the pen digitizer is stored in the pen event buffer **284** until a mode message is received from the host computer **101**. The pen event buffer **284** is separate from pen event buffer **251**, which is used to transmit the pen events to the host computer **101**. If the RC Manager **276** confirms that the stylus **110** is in a mouse mode, the accumulated pen events are discarded and the pen control program **282** waits for the last point on which the pen tip is in contact with the pen digitizer. Then the pen control program **282** returns to a state **283**, in which the trajectory of the pen is again accumulated in the pen event buffer **284** until receipt of a mode message from the host computer **101**. In state **283**, the control program **282** assumes that the stylus will continue to be in the mouse mode.

[**0112**] Alternatively, while in state **283**, if a mode message is received indicating the stylus is in the pen mode, the control program **282** enters state **288**, in which the accumulated pen events are drawn locally onto the LCD screen of the video display subsystem **113** in accordance with the line style and color specified in the mode message. After all accumulated pen events in the pen event buffer **284** are drawn, the control program **282** enters a state **289**, in which control program **282** continues to ink the trajectory of the tip of the stylus for as long as contact with the pen digitizer is maintained. Once the tip of the stylus breaks contact with the pen digitizer, the control program **282** enters state **287**.

[**0113**] In state **287** the control program **282** assumes that the stylus will continue to be in the pen mode. Thus, local ink will follow the trajectory of the stylus while the top of the stylus remains in contact with the pen digitizer, or until a mode message is received from the host computer **101**, whichever arrives earlier. Since the initial policy decision is a guess, the local inking is drawn using a single pixel-wide style and an XOR ("exclusive OR") operation, in which the pixels along the trajectory of the stylus are inverted. While in state **287**, the pen events associated with the trajectory of the stylus are accumulated in the pen event buffer **284**.

[0114] If the mode message received in state **287** indicates that the stylus is in mouse mode, i.e. the policy decision was wrong, the control program **282** then enters a state **290**, in which the accumulated pen events in pen event buffer **284** are used to erase the stylus stroke. Since the initial draw is accomplished by a bit XOR ("exclusive OR") operation at the appropriate positions of the frame buffer, erasure is simply provided by the same XOR operation at the same positions of the frame buffer. The control program **282** then enters state **286**. However, if the mode message received in state **287** confirms that the stylus is in pen mode, the accumulated pen events of pen event buffer **284** are used to redraw on the LCD **113**C, using the line style and color specified on the mode message.

[0115] Under a convention of the Pen Windows software, starting a stroke of the stylus with the barrel button depressed (for active stylus systems) indicates an erase ink operation in pen mode. The control program **282** recognizes this convention and refrains from inking during this stroke without waiting for confirmation from the host computer **101**. In addition, the control program **282** does not change modes across an erasing stroke: i.e., if the stylus is in the pen mode prior to the erase stroke, the stylus remains in the pen mode after the erase stroke; conversely, if the stylus is in the mouse mode prior to the erase stroke, the stylus remains in the mouse mode after the erase stroke.

[0116] Since all the pen events used in local inking on the wireless interface device **100** are also processed in the host computer **101**, the trajectory of local inking must coincide identically with the line drawn at the host computer **101**. Because of local inking, processing by the host computer **101** within the human perceptual response time is rendered unnecessary. Thus, in the host computer **101**, the pen events can be queued at pen event buffer **264**, to be retrieved one at a time by pen event injector **274**. Hence, when pen event buffer **264** is suitably sized, data loss due to overflow by RC buffer **275** is prevented.

[0117] Alternatively, the control program **282** can also be implemented to follow a "retractable ball-point pen" paradigm. Under this paradigm, the user controls a local stylus mode of the stylus, such that inking occurs when the stylus is set to be in the local pen mode, and no inking occurs when the stylus is in the local mouse mode. If the local stylus mode conforms with the mode expected by Pen Windows, the image seen on the LCD display of the video display subsystem **113** is the same as described above with respect to state **287** of the control program **282**. If the local stylus mode is the mouse mode, and Pen Windows software expects stylus **110** to be in the pen mode, the subsequent video events from host computer **101** would provide the required inking. Finally, if the local stylus mode is the pen mode and Pen Windows software expects the stylus to be in the mouse mode, inking would be left on the screen of video display subsystem **113**. Under this paradigm, the user would eliminate the erroneous inking by issuing a redraw command to Pen Windows.

[0118] 5. Detailed Description of the Schematic Diagrams

[0119] One embodiment of the invention is illustrated in the schematic drawings, FIGS. **11-30**. Referring to **FIG. 11**, the system may include a CPU **112**, such as an AMD Model No. AM386DXLV microprocessor. The CPU **112** includes a 32-bit data bus D[0 . . . 31] as well as a 32-bit address bus A[2 . . . 31]. Both the data bus D[0 . . . 31] as well as the address bus A[2 . . . 31] are connected to the processor bus **150** (**FIG. 4**), for example, an AT bus. As will be discussed in more detail below, the system controller **129** (**FIG. 4**) performs various functions including management of the processor bus **150**. In order to conserve power, a 3-volt microprocessor may be used for the CPU **112**. As such, a 3-volt supply 3V CPU is applied to the power supply VCC pins on the CPU **112**. The 3-volt supply 3V_CPU is available from a DC-to-DC converter **300** (**FIG. 26**) by way of a ferrite bead inductor **302**. In particular, the DC-to-DC converter **300** includes a 3-volt output, 3V_CORE. This output, 3V_CORE, is applied to the ferrite bead inductor **302** and, in turn, to the power supply pins VCC of the CPU **112**. In order to prevent noise and fluctuations in the power supply voltage from affecting the operation of the CPU **112**, the power supply voltage 3V CPU is filtered by a plurality of bypass capacitors **304** through **330**.

[0120] The 3-volt supply 3V_CPU is also used to disable unused inputs as well as to pull various control pins high for proper operation. For example, the 3-volt power supply 3V_CPU is applied to the active low N/A and BS16 pins of the CPU **112** by way of a pull-up resistor **332**. In addition, the signals BE[0 . . . 3], W/R, D/C, M/IO and ADS are pulled up by a plurality of pull-up resistors **334** through **348**.

[0121] The CPU **112** is adapted to operate at 25 megahertz (MHz) at 3.0 volts. A 25 MHz clock signal, identified as CPU CLK, available from a clock generator **398** (**FIG. 13**), is applied to a clock input CLK2 on the CPU **112** by way of a resistor **349** and a pair of capacitors **351** and **353**. The AMD Model No. AMD386DXLV microprocessor supports a static state, which enables the clock to be halted and restarted at any time.

[0122] The wireless interface device **100** includes a speaker **355**. The speaker **355** is under the control of the system controller **129** (**FIG. 12**). In particular, a speaker control signal SPKR from the system controller **129** is applied to a source terminal of a field-effect transistor (FET) **357** for direct control of the speaker **355**. The drain terminal is connected to the speaker **355** by way of a current-limiting resistor **359** and a bypass capacitor **371**. Normally, the speaker **355** is active all the time. In particular, the gate terminal of the FET **357** is connected to the system ground by way of a resistor **373**. The gate terminal of the FET **357** is also under the control of a speaker disable signal SPKRDISABLE, available from the keyboard controller **125** (**FIG. 15**). The speaker disable signal SPKRDISABLE is active high. Thus, when the speaker disable signal SPKRDISABLE signal is low, the FET **357** is turned on to enable the speaker signal SPKR from the system controller **129** to control the speaker **355**. When the speaker disable signal SPKRDISABLE is high, the FET **357** is turned off to disable the speaker **355**.

[0123] Referring to **FIG. 12**, the system controller **129** is connected between the local processor or AT bus **150** and the system ISA bus **151**. The system controller **129** performs a variety of functions including that of system controller, DRAM controller, power management, battery management and management of the local AT bus **150**. The system controller **129**, preferably a PicoPower Pine Evergreen 3, Model No. 86C368 system controller, is a 208-pin device that operates at 33 MHz with a full 5-volt input or a hybrid

5-volt/3.3-volt input. At 3.3 volts the system controller **129** is adapted to reliably operate at 20 Mhz and perhaps up to 25 Mhz.

[**0124**] The system controller **129** includes several system features including support of several clock speeds from 16 to 33 MHz. In addition, the system controller **129** includes two programmable non-cacheable regions and two programmable chip selects, used for universal asynchronous receiver transmitter (UART) interface **134** and the radio interface **114**B as discussed below.

[**0125**] The system controller **129** supports both fast GATE A20 and a fast reset control of the CPU **112**. In particular, the system controller **129** includes a 32-bit address bus A[0 . . . 31] that is connected to the local AT bus **150**. The address line A[20] is used to develop a signal CPUA20, which is applied to the A20 pin on the CPU **112** and also applied to an AND gate **379** (**FIG. 11**) to support a port **92**H for a fast GATE A20 signal. A fast reset signal RSTCPU is also generated by the system controller **129**. The fast reset signal RSTCPU is applied to the reset pin RESET of the CPU **112** for fast reset control.

[**0126**] The system controller **129** also provides various other system level functions. For example, the system controller **129** includes a register at address **300**H. By setting bit 12 of this register, a ROM chip select signal ROMCS is generated, which enables writes to the flash memory system **117** (**FIG. 25**), which will be discussed below. A keyboard controller chip select signal KBDCS for the keyboard controller **125** (**FIG. 15**), as well as general purpose chip select signals GPCS1 and GPCS2 for selecting between the RF controller **114**A, the UART **134** (**FIG. 16**) or the pen controller **110**A (**FIG. 21**), are generated by the system controller **129**.

[**0127**] The system controller **129** is connected to the system ISA bus **151** by way of a 16-bit system data bus SD[0 . . . 15] and a 24-bit system address bus SA[0 . . . 23] of which only 8-bits SA[0 . . . 7] are used. The system controller **129** is also connected to the 32-bit local processor data bus D[0 . . . 31], as well as the local processor address bus A[0 . . . 31].

[**0128**] All of the ground pins GND on the system controller **129** are tied to the system ground. Both 3-volt and 5-volt power supplies are applied to the system controller **129**. In particular, a 5-volt supply 5V_EG is applied to the power supply pins VDD of the system controller **129**. The 5-volt supply 5V_EG is available from DC-to-DC converter **300** (**FIG. 26**) by way of a ferrite bead inductor **381** (**FIG. 12**). More particularly, a 5-volt supply signal 5V_CORE from the DC-to-DC converter is applied to the ferrite bead inductor **381**, which, in turn, is used to generate the 5-volt supply signal 5V_EG. In order to stabilize the 5-volt supply signal 5V_EG, a plurality of bypass capacitors **1101**-**1111** (**FIG. 13**) are connected between the 5-volt supply 5V_EG and system ground.

[**0129**] A 3-volt power supply 3V_EG is also applied to the system controller **129** and, in particular, to the power supply pins VDD/3V. This 3-volt supply 3V_EG is also obtained from the DC-to-DC converter **300** (**FIG. 26**) by way of a ferrite bead inductor **358**. More particularly, 3-volt supply 3V_CORE, available at the DC-to-DC converter **300**, is applied to the ferrite bead inductor **358**, which, in turn, is used to generate the 3-volt power supply signal 3V-EG. A plurality of bypass capacitors **360**, **362** and **364** are connected between the 3-volt supply 3V_EG and system ground for stabilizing.

[**0130**] The system controller **129** is reset by a reset signal RCRST (**FIG. 20**) on power up. The reset signal RCRST is developed by the 3-volt power supply 3V_EG, available from the DC-to-DC converter **300** (**FIG. 26**) and circuitry which includes a resistor **359**, a capacitor **361** and a diode **363**. Initially on power up, the capacitor **361** begins charging up from the 3-volt supply 3V_EG through the resistor **359**. During this state, the diode **363** is non-conducting. As the capacitor charges, the level of the reset signal RCRST rises to reset the system controller **129**. Should the system be turned off or the 3-volt supply 3V_EG be lost, the diode **363** provides a discharge path for the capacitor **361**.

[**0131**] In order to assure proper operation of the system controller **129**, a number of signals are pulled up to either five volts or three volts or pulled down by way of various pull-down resistors. More specifically, the signals IOCS16, MASTER, MEMCS16, REFRESH, ZWS, IOCHCK, GPI01/MDDIR and GPI02/MDEN are pulled up to the 5-volt supply 5V_EG by way of a plurality of pull-up resistors **1113**-**1129**, respectively. Similarly, the signals BUSY, FERR, LOCAL, SMIADS and RDY are pulled up by a plurality of pull-up resistors **1131** through **1139**. In addition, the general purpose chip select signals GPCS1 and GPCS2 are pulled up to the 5-volt power supply signal 5V_EG by way of a pair of pull-up resistors **375** and **377**. Certain signals are pulled low by way of pull-down resistors in order to assure their operating state. In particular, the signals KBC-PO4, LB/EXTACT, RING, EXTACT/VLCLK and HRQ206 are pulled down by the pull-down resistors **388** to **396**. The signal BLAST is tied directly to the system ground.

[**0132**] As mentioned above, the system controller **129** is capable of running at different clock frequencies, depending upon the voltage applied, while supplying a clock signal to the CPU **112**. Even though the system controller **129** can supply either a 1× or a 2× clock signal to the CPU **112**, the system controller **129** requires a 2× clock for proper operation. Thus, a 2× clock signal CLK2IN, available from a clock generator circuit **398** (**FIG. 13**), is applied to the clock 2× pin CLK2IN of the system controller **129**. In addition, 32 kilohertz (KHz) and 14 megahertz (MHz) clock signals are also applied to the system controller **129**, available from the clock generator circuit **398**, for proper operation. The system controller **129**, in turn, provides a CPU clock signal CPUCLK to the CPU **112** and in particular to its clock 2-pin CLK2 by way of a resistor **1141** and the capacitors **1143** and **1145**.

[**0133**] The system controller **129** is adapted to be configured during an RC-RESET mode. In particular, the DRAM memory address lines MA[0 . . . 10], normally used for addressing the DRAM **111**A (**FIGS. 18 and 24**), are pulled high or low in order to configure the system controller **129**. More particularly, the DRAM memory address lines MA[0 . . . 10] are applied to either pull-up or pull-down resistors for configuration as illustrated in **FIG. 17**. Table 2 below illustrates the configuration shown.

TABLE 2

System Controller Configuration Table

NAME	FUNCTION	DEFAULT STATE
MA0	386 Select (Low = 46)	High
MA1	Low Power Select (High Selects Intel LP CPU, Low For Other)	Low
MA2	1× CPU Clock Select Low = 2× CPU CLK	Low
MA3	Not Used	Low
MA4	Not Used	Low
MA5	368 Pin Select (Low = pin compatible with 268)	High
MA6	Miscellaneous Configuration - 0	Low
MA7	Not Used	High
MA8	Not Used	Low
MA9	Not Used	Low
MA10	Not Used	Low

[0134] As shown, the DRAM memory address lines MA[0 . . . 10] are shown with bits MA0, MA5 and MA7 pulled high to the 3-volt power supply voltage 3V_EG by way of a plurality of pull-up resistors **400**, **402** and **404**. The remaining DRAM address line bits MA1, MA2, MA3, MA4, MA6, MA8, MA9 and MA10 are pulled low by a plurality of pull-down resistors **406** through **420**, respectively. The DRAM memory address lines MA[0 . . . 8] are also coupled to a plurality of coupling resistors **422** to **438** form a 9-bit DRAM address bus BMA[0 . . . 8].

[0135] The system controller **129** functions as a DRAM controller and is capable of supporting up to 64 megabytes of memory, divided among one of four banks and can support 256K, 512K, 1M, 2M and 4M of memory in any width. The system controller **129** includes a pair of registers associated with each bank of DRAM. The first register stores the total amount of DRAM connected to the system while the second identifies the starting address for each bank. Referring to **FIGS. 18 and 24**, two 1 Mbyte banks are connected to the DRAM memory address bus BMA[0 . . . 8] and to the processor data bus **150**, D[0 . . . 31].

[0136] In order to conserve power, 3-volt DRAM **111**A is used. The 3-volt power supply 3V_RAM is applied to the VCC terminals of each of the DRAMS **111**A. The 3-volt power supply 3V_RAM is available from the DC-to-DC converter **300** (**FIG. 26**) by way of a ferrite bead inductor **440** (**FIG. 18**). In particular, a 3-volt supply 3V_CORE available at the DC-to-DC converter **300** is applied to the ferrite bead inductor **440** to generate the 3-volt DRAM supply 3V_RAM. A plurality of bypass capacitors **425-439** (**FIG. 18**) are connected between the DRAM supply voltage 3V_RAM and system ground.

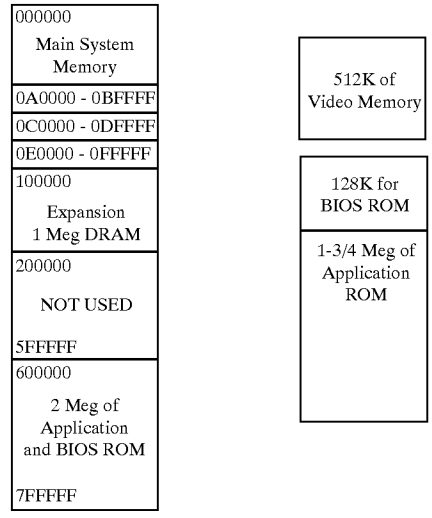
[0137] The system controller **129** generates the appropriate row address strobes (RAS) and column address strobes for the DRAM **111**A. In particular, the column address strobe lines CAS**0**[0 . . . 3] are applied to the upper and lower column address strobe pins (UCAS and LCAS) on the DRAM **111**A by way of a plurality of coupling resistors **442** to **450** (**FIG. 12**). Similarly, the row address signals RAS0 and RAS1 are applied to the row address strobe pins on the DRAM **111**A by way of a plurality of coupling resistors **448** and **450**. Writing to the DRAMS **111**A is under the control of a DRAM write enable signal BRAMW, applied to the write enable pin WE on the DRAM **111**A. The DRAM write enable signal BRAMW is generated by the system controller **129** by way of a coupling resistor **452**.

[0138] An EEPROM or NVRAM **111**B (**FIG. 12**) may be used to maintain system configuration parameters when the system is powered off. All user changeable parameters are stored in the EEPROM **111**B. For example, pen calibration data and passwords, used during boot up, may be used in the EEPROM **452**. The contents of the EEPROM **111**B may be shadowed into a CMOS memory when the system is active. Communication with the EEPROM **111**B is under the control of the system controller **129** and in particular, a pair of programmable input/output pins GPI01 and GPI02. The GPI01 provides a clock signal to the EEPROM **111**B while the pin GPI02 is used for data transfer.

[0139] As discussed above, the wireless interface device **100** also includes the flash memory **117** (**FIG. 25**), which is used for storing the BIOS. The system controller **129** allows for direct shadowing of the BIOS by enabling the appropriate address space to read the FLASH/DRAM write mode which allows all reads to come from the flash device with writes to the DRAM **111**A memory devices.

[0140] A main memory map as well as an I/O memory map are provided in Tables 3 and 4.

TABLE 3



[0141]

TABLE 4

I/O MEMORY MAP

Memory Space Description	Memory Locations (HEX)
DMA Controller #1	00–0F
Not Used	10–1F
Interrupt Controller #1	20–21
Not Used	22–23
Evergreen Configuration Address	24
Not Used	25
Evergreen Configuration Data	26

TABLE 4-continued

I/O MEMORY MAP

Memory Space Description	Memory Locations (HEX)
Not Used	27–3F
Counter/Timer	40–43
Not Used	44–5F
Keyboard Controller	60
Port B	61
Not Used	62–63
Keyboard Controller	64
Not Used	65–6F
NMI Enable, Real-Time Clock	70, 71
Not Used	72–7F
DMA Page Registers	80–8F
Not Used	90–91
Port A	92
Not Used	93–9F
Interrupt Controller #2	A0–A1
Not Used	A2–CF
DMA Controller #2	D0–DE
Not Used	DF–2FF
Pen Controller	300
Not Used	301–3AF
Graphics Controller	3B0–3DF
RF Controller	3E0–3E7
UART COM1	3E8–3EF
Not Used	3F0–3FF

[0142] In addition to system control features and DRAM control, the system controller **129** provides various other functions. The power management function and NVRAM controller have been discussed above. The system controller **129** also controls all operations on the local AT bus **150**. The AT bus clock is derived from the clock CLK2IN pin that is divided to achieve an 8 MHz bus rate.

[0143] The system controller **129** also includes a number of programmable pins which enhance its flexibility. For example, four general purpose input/output pins GPIO[0 . . . 3] are provided; each of which may be independently set for input or output. The GPIO1 and GPIO2 pins are used for the EEPROM **111**B as discussed above. The GPIO0 pin and GPIO3 pin may be used for various purposes. In addition to the programmable input/output pins, the system controller **129** includes two general purpose chip select pins GPCS1 and GPCS2 as well as a plurality of programmable output pins PC[0 . . . 9]. The programmable chip selects GPCS1 and GPCS2 are used for the pen controller **110**A, UART **134** and the radio interface **114**B.

[0144] Peripheral devices connected to the system ISA bus **151** are controlled by an integrated peripheral controller **128** as discussed above. The integrated peripheral controller **128** may be a PicoPower Model No. PT82C206F which can be operated at either 3.3 or 5 volts. As will be discussed in more detail below, the integrated peripheral controller **128** includes several subsystems such as: DMA Control; Interrupt Control; Timer Counter; RTC Controller; CMOS RAM and Memory Mapper.

[0145] The IPC **128** includes two type 8259A compatible interrupt controllers which provide 16 channels of interrupt levels, one of which is used for cascading. The interrupt controller processes all incoming interrupts in order as set forth in Table 5.

TABLE 5

INTERRUPT TABLE

INTERRUPT	DESCRIPTION
Level 0	Timer Channel 0
Level 1	Keyboard Controller 2 Cascade
Level 2	Second Interrupt Controller
Level 3	Not Used
Level 4	COM1
Level 5	Pen Controller
Level 6	Not Used
Level 7	Not Used
Level 8	RTC Controller
Level 9	Not Used
Level 10	Radio Controller
Level 11	Not Used
Level 12	Not Used
Level 13	Not Used
Level 14	Not Used
Level 15	Not Used

[0146] The integrated peripheral controller (IPC) **128** (**FIG. 14**) is connected to the system data bus SD[0 . . . 15]. Addressing of the IPC **128** is accomplished by two bits SA0 and SA1 from the system address bus SA[0 . . . 23] and eight bits A[2 . . . 9] from the local address bus A[0 . . . 31]. The address bits from the local address bus A[2 . . . 8] are converted to 5 volts by way of a 3- to 5-volt signal converter **453** (**FIG. 14**) to develop the 5-volt address signals XA[2 . . . 8]. A 32-kilohertz clock signal 32-KHz from the clock generator **398** (**FIG. 13**) is applied to the clock input OSC1 of the IPC **128**.

[0147] Referring to **FIG. 20**, in order to prevent spurious operation of the IPC **128** before the system power supply is stabilized, a power good signal PWRGOOD is applied to a power good pin PWRGD. The power good signal PWRGOOD is a delayed signal which assures that the 5-volt power supply has stabilized before the IPC **128** is activated. In particular, a 5-volt power supply 5V_CORE is applied to a delay circuit which includes a resistor **454**, a diode **456** and a capacitor **458**. Initially, the 5-volt power supply signal 5V_CORE is dropped across the resistor **454**. While the capacitor **458** is charging, the diode **456** is in a non-conducting state. As the capacitor **458** begins to charge, the voltage at the anode of the diode **456** increases as a function of the RC time constant. When the capacitor **458** is fully charged, it approaches the value of the power supply voltage 5V_CORE. When the capacitor **458** becomes fully charged, the power good signal PWRGOOD is applied to a power good pin PWRGD at the IPC **128** for enabling the IPC **128** after the power supply has stabilized. The diode **456** provides a discharge path for the capacitor **458** when the power supply is shut off. The power good signal PWRGOOD is also used to reset the keyboard controller **125**.

[0148] A 5-volt power supply 5V_CORE from the DC-to-DC converter **300** (**FIG. 26**) is applied to a ferrite bead inductor **460** (**FIG. 13**) to develop a 5-volt power supply 5V_**206**, which, in turn, is applied to the power supply pins VCC of the IPC **128**. In order to delay application of the 5-volt power supply 5V_**206** as discussed below, a charging circuit which includes a serially coupled resistor **462** and a capacitor **464** are connected between the power supply voltage 5V_**206** and the system ground. A power supply reset signal PSRSTB, an active low signal, is applied to the

junction between the resistor **462** and the capacitor **464** to discharge the capacitor **464** when the power supply is reset. Moreover, in order to stabilize the voltage of the power supply 5V_**206**, a plurality of bypass capacitors **466** and **468** are connected between the power supply 5V_**206** and system ground.

[**0149**] In order to assure proper operation of the circuit, various pins of the IPC **128** are pulled low while various other pins are pulled high. In particular, the input/output read and write signals IOR and IOW are pulled up to the power supply voltage 5V_**206** by a pair of pull-up resistors **470** and **472**. In addition, the interrupt request pin IRQ10 is pulled up to the power supply voltage 5V_CORE by a pull-up resistor **474**. The signals OUT2, REFREQ, AEN16 and AEN8 are pulled low by pull-down resistors **455-461** while the signal TEST_MODE2 is pulled up to the supply voltage 5V_CORE by a pull-up resistor **463**.

[**0150**] Even though the IPC **128** includes a direct memory access (DMA) controller, this function is not required by the system. As such, the direct memory access request pins DREQ[0 . . . 7] are pulled low by a pull-down resistor **476** to system ground. In addition, as set forth in Table 5 above, various interrupt levels are unused. For example, as shown in Table 5, interrupt levels IRQ3, IRQ6, IRQ7, IRQ9, IRQ11, IRQ12, IRQ14, and IRQ15 are not used. Thus, these interrupt levels are pulled low by a pull-down resistor **478**.

[**0151**] As illustrated in Table 5, interrupt levels IRQ4 and IRQ5 are used for the COM1 and pen controller interrupt levels, IRQ4 and IRQ5. To assure that these levels are proper, the IRQ4 and IRQ5, which are active high, are pulled low by pull-down resistors **480** and **482**.

[**0152**] Interrupts by the system controller **129** and IPC **128** INTR_EG and INTR206 are applied to the CPU **112** by way of a diode **479** and pull-up resistor **481** (**FIG. 14**). In particular, the interrupt signals INTR_EG and INTR206 from the system controller **129** and IPC **128**, respectively, are applied to the cathode of the diode **479** while the anode is pulled up to the power supply voltage 3V_CORE by the pull-up resistor **481**. The logic level of the anode is set by the interrupt signal INTR, which is applied to the CPU **112**. When the interrupt signals INTR206 and INTR_EG are high, the diode **479** does not conduct and the CPU **112** interrupt signal INTP will be high. When either of the interrupt signals INTR_EG or INTR206 are low, the diode **479** conducts, forcing the CPU **112** interrupt signal INTR low.

[**0153**] The IPC **128** also includes a type 8254 compatible counter/timer which, in turn, contains three 16-bit counters that can be programmed to count in either binary or binary-coded decimal. The zero counter output is tied internally to the highest interrupt request level IRQ0 so that the CPU **112** is interrupted at regular intervals. The outputs of the timers **1** and **2** are available for external connection. In particular, internal timer **1** generates one signal, OUT1, which is used to generate a DRAM refresh request signal REFREQ to the CPU **112**. The internal timer 2 generates an output signal OUT2 that is used to generate speaker timing. All three internal timers are clocked from a timer clock input TMR-CLK at 1.2 megahertz from the system controller **129**.

[**0154**] As mentioned above, the IPC **128** includes a real time clock (RTC) controller which maintains the real time. The real operational time is maintained in a CMOS RAM that can be accessed through registers **70**H and **71**H. The memory map for the CMOS memory is provided in Table 6 as shown below:

TABLE 6

CMOS MEMORY MAP

INDEX	FUNCTION
00H	Seconds
01H	Seconds Alarm
02H	Minutes
03H	Minutes Alarm
04H	Hours
05H	Hours Alarm
06H	Day of Week
07H	Day of Month
08H	Month
09H	Year
0AH	Registry
0BH	Register B
0CH	Register C
0DH	Register D
OEH–7EH	User RAM

[**0155**] The area designated as User RAM is used by the system BIOS to save the status of the system configuration registers. The alarm bytes may be used to set and generate an interrupt at a specific time. When periodic interrupt is required, the two most significant bits in the alarm register can be set high.

[**0156**] The various clock signals used for the system are provided by the clock generator circuit **398** (**FIG. 13**). The clock circuit **398** includes a clock generator, for example, an Integrated Circuit Designs Model No. ICD2028. A 14.318 MHz crystal **484** and a 32.768 KHz crystal **486** are applied to the clock generator **488**. In particular, the crystal **484** is applied to a pair of X1 and X2 input pins along with a plurality of capacitors **489**, **490**, **492** and an input resistor **494**. Similarly, the crystal **486** is applied to input pins XSYSB1 and XSYSB2. A pair of capacitors **496** and **498** are connected across the crystal **486**.

[**0157**] The clock generator IC **488** provides three clock outputs CLKA, CLKB and CLKD. The clock A output CLKA is used to develop an 8-MHz clock signal for the keyboard controller **125** by way of a resistor **500** and capacitors **502** and **504**. The clock B output CLKB is used to develop a clock 2× output signal CLK2IN for the system controller **129** by way the resistors **506**, **508** and **510** and a pair of capacitors **512** and **514**. The clock D output signal CLKD is used to generate a 1.84 MHz signal for use by the Universal Asynchronous Receiver Transmitter (UART) **134** by way of a resistor **516** and capacitors **518** and **520**. As mentioned above, the system controller **129** also requires a 14 MHz clock signal. This clock signal is developed by way of a system bus output pin SYSBUS, a resistor **522** and a pair of capacitors **524** and **526**.

[**0158**] Selection of the various clock output signals is available by way of the select pins S0, S1 and S2. These pins S0, S1 and S2 are pulled up to the 3-volt power supply 3V_CORE by way of pull-up resistors **521**, **523** and **525**. The 3-volt power supply signal 3V_CORE is available from the DC-DC converter **300** (**FIG. 26**).

[0159] The clock generator **488** utilizes a 3-volt power supply CLOCK_VCC (**FIG. 13**). The 3-volt power supply CLOCK_VCC is available from the DC-to-DC converter **300** (**FIG. 26**) by way of an in-line ferrite bead inductor **530**. In particular, the 3-volt power supply 3V_CORE is applied to the ferrite bead inductor **530** to generate the power supply for the CLOCK_VCC for the clock generator **488**. This power supply CLOCK_VCC is applied to the power supply pin VDD. The power supply signal CLOCK_VCC is also used as analog supply AVDD to the clock generator IC **488** and is applied to the analog supply AVDD by way of the resistor **532** and a pair of capacitors **534** and **536**. The power supply signal CLOCK_VCC is also applied to the battery pin VBATT of the clock generator IC **488** by way of a diode **537** to prevent any back feeding.

[0160] A number of the circuits in the system operate at either 3.3 volts or 5 volts. Thus, a plurality of bi-directional signal level translators **542** and **544** (**FIG. 14**) are provided, as well as the translator **453** previously discussed. The signal level translators **453**, **542** and **544** may be as supplied by Integrated Circuit Technology, Model No. FCT164245T. Each of the signal level translators **453**, **542** and **544** includes a 3-volt supply 3V_CORE and a 5-volt supply 5V_CORE, available from the DC-to-DC converter **300** (**FIG. 26**). In order to stabilize the voltage of the 3- and 5-volt power supplies, 3V_CORE and 5V_CORE, a plurality of bypass capacitors are utilized. In particular, the bypass capacitors **546** through **552** are connected between the 3-volt supply 3V_CORE and system ground. Similarly, the bypass capacitors **554** through **560** are connected between the 5-volt supply 5V_CORE and system ground. The ground terminals of each of the signal level translators **542**, **544** and **453** are also tied to system ground.

[0161] Each of the signal level translators **542**, **544** and **453** includes two 8-bit programmable input/output pins. More particularly, the first 8-bit group 1A/1B[1 . . . 8] is under the control of an operate/enable pin 1OE, which is active low, while the second bank 2A/2B[1 . . . 8] is under the control of an output/enable pin 2OE, also active low. The direction of the input pins and output pins (i.e., A relative to B) is under the control of direction pins 1DIR and 2DIR. The direction pin 1DIR controls the direction of the pins 1A/1B[1 . . . 8], while the pin 2DIR controls the direction of the pins 2A/2B[1 . . . 8].

[0162] The signal level translator **453** is used to convert the local data bus bits D[16 . . . 31] and the system data bus bits SD[0 . . . 15]. Both the local data bus D[16 . . . 31]as well as the system data bus SD[0 . . . 15] are bi-directional. In this application the processor bus **150** data bits D[31 . . . 16] are being mapped to the system data bus bits SD[15 . . . 0].

[0163] The direction of the signal level translator **542** is under the control of a signal direction signal SDIR, available at the system controller **129**. The signal direction signal SDIR is applied to both the direction control pins 1DIR and 2DIR of the signal level translator **542**. The operate/enable inputs 1OE and 2OE are under the control of system data enable inputs signals, SDEN3 and SDEN**2**, respectively; also under the control of the system controller **129**.

[0164] The signal level translator **544** is used to map the signal levels of the local address bus bits A[23 . . . 8] to the system address bus bits SA[23 . . . 8]. More particularly, the local address bits A[23 . . . 16] are applied to pins 1A[1 . . . 8] while the local address bits A[15 . . . 8] are applied to the pins 2A[1 . . . 8]. Similarly, the system address bits SA[23 . . . 16] are connected to the pins 1B[1 . . .], while the system address bits SA[15 . . . 8] are applied to the pins 2B[1 . . . 8]. In this case, the operate/enable pins 1OE and 2OE, both active low, are connected to system ground in order to permanently enable the signal level translator **544**. The direction control pins 1DIR and 2DIR are permanently set such that the data always flows from A to B. In particular, the directional pins 1DIR and 2DIR are connected to the 3-volt power supply 3V_CORE by way of a pull-up resistor **562**.

[0165] The signal level translator **542** is used to convert the signal levels of the 3-volt clock output signals 14 Mhz, 1.84 Mhz, 32 Khz and 8 Mhz to 5-volt levels, as well as to convert the 3-volt local address bits A[2 . . . 8] to 5-volt address bits XA[2 . . . 8] for use by the IPC **128**, as discussed above. More particularly, the system address bits, A[2 . . . 8] are applied to the pins 1A[1 . . . 8]. The clock signals 14 MHz, 1.84 MHz, 32 KHz and 8 MHz are applied to the pins 2A1, 2A3, 2A6 and 2A8, respectively, to produce corresponding 5-volt level signals 14 MHz_5V, 1.84 MHz_5V, 32 KHz_5V and 8 MHz_5V signals at pins 2B1, 2B3, 2B6 and 2B8, respectively. The unused pins 1A8 and 2B8 are pulled low by way of pull-down resistors **564** and **565**, respectively. The operate/enable pins 1OE and 2OE are tied to system ground to permanently enable the signal level translator **542**. The directional pins 1DIR and 2DIR are pulled up to the 3-volt power supply voltage 3V_CORE by way of a pull-up resistor **566** to permanently force the direction from A to B.

[0166] Referring to **FIG. 15**, the system includes a keyboard controller **125**, which performs several functions, including battery monitoring, LCD status control, brightness and contrast control, as well as keyboard control. In addition, the system also maintains the status of the remaining battery life, and also provides information to the system controller **129** when the battery voltage is low or other critical battery condition has occurred. In operation, the keyboard controller **125** will maintain the current status of the battery level until data is requested. When a critical battery condition event occurs, the keyboard controller **125** generates an SMI interrupt. As discussed above, the intelligent battery pack (IBP) **130** provides an indication of the percentage of remaining battery capacity. Communication between the IBP **130** and the keyboard controller **125** is by way of a bi-directional serial data bus, which includes a clock line BATCLK and a data line BATDATA. The data line BATDATA is a bi-directional line, which allows for bi-directional communication with the IBP **130**. The clock line BATCLK is driven by the IBP **130**, but may be pulled low by the keyboard controller **125**.

[0167] The bi-directional serial data bus is connected to the port pins P4.2 and P4.3 on the keyboard controller **125**. In particular, the port pin P4.2 is used for the serial battery data BATTDATA. An NPN transistor **570** is connected to the port pin P4.2 to disconnect the keyboard controller **125** from the IBP **130** during power down. In particular, the collector terminal of the NPN transistor **570** is connected to the port pin P4.2, while the emitter terminal forms a battery data signal BATTDATA. The base of the NPN transistor **570** is biased on by way of a biasing resistor **572** that is connected

to a 5-volt power supply 5V_KBD. The collector is pulled high by way of a pull-up resistor **574** connected to the 5-volt power supply 5V_KBD.

[**0168**] Similarly, the battery clock signal BATTCLK is connected to the port 4.3 on the keyboard controller **125** by way of an NPN transistor **576**. The collector terminal of the NPN transistor **576** is connected to the port 4.3 as well as to a pull-up resistor **578** and the 5-volt power supply 5V_KBD. The NPN transistor **576** is turned on anytime the power supply to the keyboard 5V_KBD is powered up by way of a biasing resistor **580**. The emitter of the NPN transistor **576** forms the battery clock signal BATTCLK.

[**0169**] In addition to battery management, the keyboard controller **125** also supports an external PS/2-type keyboard, as well as a PS/2-type bar code reader, connected to a keyboard connector **140** (**FIG. 29**). Communication between the keyboard or bar code reader (not shown) is by way of a standard type PS-2 two-wire bus connected to serial ports P4.6 and P4.7. In particular, the keyboard data KDATA is pulled up to the 5-volt voltage supply 5V_CORE by way of a pull-up resistor **582** while the keyboard clock signal KCLK is pulled up the 5-volt supply 5V_CORE by way of a pull-up resistor **584**.

[**0170**] Referring to **FIG. 29**, the keyboard connector **140** may be a 6-pin MINI-DIN connector or a DB-8 connector as shown. Pins 6-9 are connected to system ground. Pin 4 of the connector **140** is pulled up to the power supply voltage 5V_CORE by way of a fuse **579** and is filtered by a capacitor **581** and an inductor **583**. The data signal KDATA is applied to pin 1 by way of a current-limiting resistor **585**, while the clock signal KCLK is applied to pin 5 by way of a current-limiting resistor **587** and a pair of capacitors **589** and **591**. These clock and data signals KCLK and KDATA are connected to the ports P4.6 and P4.7, respectively, for serial communication with an external keyboard or bar code reader.

[**0171**] Additionally, the keyboard controller **125** may be used to control the brightness level as well as the contrast level of the LCD display. More particularly, referring to **FIG. 27, a** contrast signal CONTRAST, available at port 0, pin 1 of the keyboard controller **125** (**FIG. 15**) is used to adjust the contrast level of the LCD display. The contrast signal CONTRAST is applied to an adjustment terminal ADJ of a negative 24-volt DC voltage supply, which can be incrementally adjusted in steps by a 24-volt DC supply **586** (**FIG. 27**), for example, a Maxim Model No. 749, which provides for 64-step adjustment. Thus, each high pulse will increment the contrast of the LCD display by one step. With a 64-step device, sixty-three pulses rolls the counter over and decreases the contrast by 1. The 24-volt DC supply **586** is under the control of an enable signal ENAVEE, available from the video controller **113**A (**FIG. 19**).

[**0172**] In order to assure proper operation, the 24-volt supply **586** is connected in a circuit as shown in **FIG. 27**, which includes a plurality of capacitors **588**, **590**, **592**, **594**; a plurality of resistors **596**, **598**, **600** an inductor **602**; a PNP transistor **604**; and a zener diode **606**. The output of the circuitry is a nominal negative 24-volt signal LCDVEE, which is adjustable in 64 increments by way of the CONTRAST signal, as discussed above, to vary the contrast level of the LCD display.

[**0173**] The keyboard controller **125** also controls the brightness of the LCD display. In particular, brightness adjustment signals BRIGHTNESS_UP, BRIGHTNESS_DOWN (**FIG. 15**) are available at port 1, pins 6 and 7. These signals BRIGHTNESS_UP and BRIGHTNESS_DOWN are normally pulled up to the 5-volt supply 5V_KBD by way of a pair of pull-up resistors **608** and **610**. These signals BRIGHTNESS_UP and BRIGHTNESS_DOWN are applied to a digital output potentiometer **612** (**FIG. 27**), for example a Dallas Semiconductor Model No. DS1669-50. The digital output potentiometer **612** is powered by a 5-volt power supply 5V_CORE, which is also used to pull up an unused output terminal, RH.

[**0174**] The brightness control signals BRIGHTNESS_UP and BRIGHTNESS_DOWN are applied to the increment and decrement terminals, UC and DC of the digital output potentiometer **612**. The output of the digital output potentiometer **612** is a variable resistance signal, which forms the brightness control signal BRIGHTNESS. This brightness control signal BRIGHTNESS is pulled down by a pull-down resistor **614**.

[**0175**] The brightness control signal BRIGHTNESS from the digital output potentiometer **612**, as well as a backlight control signal BACKLITEON and a backlight power signal BACKLITEPOWER are connected to the system by way of a 6-pin connector **615** (**FIG. 27**). The backlight control signal BACKLITEON is connected to pin 4 of the connector **615** and pulled low by way of a pull-down resistor **617**. The power control signal BACKLITEPOWER is applied to pins 1 and 2 while the backlight brightness control signal BRIGHTNESS is applied to pin 3. The backlight control signal BACKLITEON is available from the video controller **113**A (**FIG. 19**) and is used to power the backlight on the LCD. The backlight power signal BACKLITEPOWER, available from an FET **619** (**FIG. 20**), is under the control of the backlight power control signal BACKLITEON, available from the video controller **113**A (**FIG. 19**).

[**0176**] The FET **619** (**FIG. 20**) is used to control power to both the LCD as well as the backlight. In particular, referring to **FIG. 20**, the backlight power control BACKLITEON, is used to control an NPN transistor **617** by way of a current-limiting resistor **621**. The NPN transistor **621**, in turn, is used to control the FET **619** to generate the backlight power signal BACKLITEPOWER at the drain terminal D1. The main power signal POWER (**FIG. 28**) is connected to the collector of the NPN transistor **617** by way of a resistor **623**. The main power signal POWER is also applied to a source terminal **51** of the FET **615**. A gate terminal G1 of the FET **615** is connected between the resistor **623** and the collector of the NPN transistor **625**. The backlight power control signal BACKLITEON is used to conserve power under certain power management conditions discussed above. This signal BACKLITEON controls the NPN transistor **625**. In particular, in a normal state, the backlight power control signal BACKLITEON is high, which turns ON the NPN transistor **625**. When the NPN transistor **625** is ON, the gate terminal G1 of the FET **619** is connected to system ground, which turns the FET **619** ON, thereby connecting the main power signal POWER to the drain terminal D1 of the FET **619** to provide a power signal BACKLITEIN, which is filtered by a ferrite bead inductor **625** (**FIG. 28**) to provide the backlight power signal BACKLITEPOWER, that is applied to the LCD by way of the connector **615** (**FIG. 27**). When the backlight power control signal is low, for example, during a power management mode, the NPN transistor **625**

turns OFF, thereby connecting the gate G1 of the FET **619** to the main power signal POWER by way of the resistor **623**, thereby turning the FET **619** OFF, disconnecting power to the LCD.

[**0177**] The FET **619** may be supplied as a dual element with two FETs in a single package. As shown in **FIG. 20**, the gate G2, source S2 and drain D2 terminals of the FET **619** are used to control power to the LCD, under the control of an LCD enable signal ENAVDD, available from the video controller **113**A (**FIG. 19**). In particular, the LCD enable signal ENAVDD is normally high and is de-asserted to disable the LCD power supply LCD_POWER. This LCD enable signal ENAVDD is pulled low by a pull-down resistor **627** and applied to an inverter **629**, whose output is connected to the gate terminal G2 of the FET **619**. The LCD power supply signal LCD_VCC (**FIG. 19**) is applied to the source terminal S2 of the FET **619**, while the drain terminal D2 represents the LCD power signal LCD_POWER, filtered by an inductor **629** and a capacitor **631**. The LCD power signal LCD_POWER is connected to the LCD by way of the connectors **732** or **734** (**FIG. 22**). In operation, the LCD power enable signal ENAVDD is high, which turns on the FET **619** to enable the LCD power supply LCD_POWER. When the LCD power enable signal ENAVDD is de-asserted, the FET **619** is turned OFF.

[**0178**] The keyboard controller **125** (**FIG. 15**) is connected to the system data bus SD[0 . . . 7]. The system address bit SA2 is used for addressing the keyboard controller **125**. In particular, the address terminal of the keyboard controller **125** is connected to bit SA2 of the system address bus SA[0 . . . 23].

[**0179**] Power to the keyboard controller **125** is provided by way of a 5-volt supply 5V_KBD, supplied to the power supply terminal VCC. The 5-volt supply 5V_KBD, provided by the DC-to-DC converter **300** (**FIG. 26**) by way of an in-line ferrite bead inductor **618**. In addition to supplying power to the keyboard controller **125**, the 5-volt supply 5V_KBD is used to pull-up various pins by way of pull-up resistors **620**, **622**, **624**, **626**, **628**, **630**, **632** and **634**. In order to stabilize the 5-volt power supply 5V_KBD, a plurality of bypass capacitors **636** and **638** are connected between the power supply 5V_KBD and system ground.

[**0180**] As mentioned above, the keyboard controller **125** has various functions. One of those functions is to monitor when AC power is plugged into the machine from an AC adapter plug **633** (**FIG. 29**), connected to the external power supply signal AC/DCIN by way of a pair of EM1 filters **641** and **643**, and a connector **645**. In particular, an AC power signal ACPWR, available from an FET **635** (**FIG. 20**), is applied to port 3, pin 1 (**FIG. 15**) by way of an inverter **636**. The external power supply signal AC/DCIN, available from the AC plug **633**, is used to control the gate terminal of the FET **635**, normally pulled down a pull-down resistor **637**. A 5-volt supply 5V_CORE is connected to the drain terminal while the source terminal is used for the AC power signal ACPWR, pulled down by a pull-down resistor **639**. When an external power source is not connected to the FET **635**, the signal ACPWR will be low. Once external power is connected to the connector **633**, the signal AC/DCIN from the IBP **130** goes low, which, in turn, turns on the FET **635** to cause the signal ACPWR to go high.

[**0181**] The keyboard controller **125** also monitors the status of the radio. As such, an output from the radio TX/RX_LED pin is applied to pin 2 of port 3 of the keyboard controller **125** by way of an inverter **638**. When pin 1 of port 3 is high, the keyboard controller **125** interprets that the radio is in a transmit mode. Another signal from the radio CD_LED is used to provide an indication to the keyboard controller **125** that that radio is in a receive mode. This signal CD_LED is applied to pin 2 of port 3.

[**0182**] An 8 MHz clock signal 8 MHz_5V is used to drive the keyboard controller **125**. The clock signal 8 MHz_5V is developed by the clock generator **398** and converted to a 5-volt level by way of the translator signal level translator **452**.

[**0183**] The video controller **113**A (**FIG. 19**) controls the video functions. The video controller **113**A, for example, a model number CL-GD 6205 from Cirrus Logic, can support various video modes including a mono STN and a color TFT panel with up to 640×480 with 64 shades of gray. In addition, the video controller **113**A will support 1024 by 768 resolution with 16 colors on a CRT through the aid of its on-board digital to analog converter.

[**0184**] The video controller **113**A utilizes two clock sources for timing, generated by an internal clock generator to produce the required frequencies for the display and memory timing. Two separate analog power supply sources AVCCMCLK and AVCCVCLK are provided to the analog power supply inputs AVCC1VCLK and AVCC4MCOK on the video controller **113**A. These analog power supply sources AVCCMCLK and AVCCVCLK are derived from the 3-volt power supply 3V_CORE, available at the DC-to-DC converter **300** (**FIG. 26**). In particular, the 3-volt power supply 3V_CORE is used to develop a 3-volt power supply VGA_VCC by way of an in-line ferrite bead inductor **642**. The power supply VGA_VCC, in turn, is filtered by a plurality of bypass capacitors **644**-**642**, connected between the power supply VGA_VCC and system ground. The 3-volt power supply VGA_VCC is used to develop the analog power supplies AVCCMCLK and AVCCVCLK by way of a plurality of resistors **654** and **656** as well as a plurality of by pass capacitors **658** to **664**, connected to an analog ground AGND. The analog ground AGND is tied to the digital ground GND by way of a ferrite bead conductor **664**.

[**0185**] The keyboard controller **125** also provides various miscellaneous system functions by way of its I/O ports 0, 1, and 3. Five port bits P0.0-P0.5 of port 0 are used for system control. Bit 0 is used to generate a signal KBC-P00, an active high signal, which disables the general purpose chip select signals GPCS1 and GPCS2, available at the system controller **129** (**FIG. 12**) during boot-up, until the signals GPCS1 and GPCS2 are properly configured. As discussed above, the general purpose chip select signals GPCS1 and GPCS2 are used for selecting the pen controller **110**A (**FIG. 21**), the radio interface **114**B (**FIG. 16**) and the UART (**134**). Bit P0.1 is used to generate a contrast signal CONTRAST, normally pulled low down by a pull-down resistor **639** (**FIG. 5**) for contrast control of the LCD as discussed above. Briefly, the contrast signal CONTRAST is used to step the 24-volt supply **586** (**FIG. 27**). Bit P0.2 is used to generate a keyboard shutdown signal KBSHUTDOWN. This signal KBSHUTDOWN, discussed below, is active low, and in conjunction a pen shutdown signal PEN_SHUTDOWN, available at the pen controller **110**A (**FIG. 21**), is used to generate a shutdown signal SHUTDOWN to shutdown the

AC-to-DC converter **300** (**FIG. 26**) during low power conditions. More particularly, the keyboard shutdown signal KBSHUTDOWN, pulled up by a pull-up resistor **641**, and the pen shutdown signal PEN_SHUTDOWN, pulled low by a pull-down resistor **643**, are diode ORed by a pair of diodes **645** and **647**. The cathodes of the diodes **645** and **647** are joined to form the active low shutdown signal SHUTDOWN. If the keyboard shutdown signal KBSHUTDOWN is asserted, the shutdown signal SHUTDOWN will be forced low, which, in turn, is used to disable the DC-to-DC converter **300** (**FIG. 26**). Bit P0.3 is used to generate a signal FLASHVPP to enable the flash memory devices **742-748** (**FIG. 25**) to be programmed. In particular, when the signal FLASHVPP is low, the flash memory devices **742-748** can be programmed. Bit P0.4 is used to generate a signal KBC_P04. The signal KBC_P04 is an active high signal and is used to indicate to the system controller **129** (**FIG. 12**) that a low battery condition has occurred. Bit P0.5 is used for speaker control as discussed above. The pen P0.5 is used to generate the speaker disable signal SPKRDISABLE, an active high signal.

[**0186**] Port 1, bits P1.1, P1.5, P1.6, and P1.7 of the keyboard controller **125** are used for system functions. Bit P1.1 is configured as an input and is used to indicate to the keyboard controller **125** that the system is in a test mode. As discussed above, the test mode signal TEST_MODE is used to enable the flash memory device **742** (**FIG. 25**) to be programmed. In particular, as discussed above, the test mode signal TEST_MODE is used to generate a decode signal FLIP_SA18 (**FIG. 17**) for decoding of the flash memory device **742**. Port 1, bits P1.5, P1.6, and P1.7 are used for LCD control. In particular, the pen P1.5 may be used for LCD status control. the pens P1.6 and P1.7 are used for brightness control of the LCD as discussed above.

[**0187**] Port 3, bits P3.1, P3.2, P3.3, P3.4, P3.5, and P3.7 are configured as inputs. As discussed above, a signal ACPWR, available from the source of the FET **635** (**FIG. 20**), is applied to the pin P3.1. This signal ACPWR notifies the keyboard controller **125** that an external power source is connected to the system. The signal CD_LED is applied to the pin P3.2. This signal, CD_LED, available from the radio interface (**FIG. 16**), indicates that the radio is receiving a signal. A signal TX/RX_LED, also available from the radio interface, is applied to the pin P3.3. This signal TX/RX_LED indicates that the radio is in a transmit mode. A signal DOCKACK/: may be applied to the pin P3.4. This signal may be used to indicate to the keyboard controller **125** that a device is docked to the UART **134**. The development of the signal DOCKACK/: does not form a part of the present invention. A second test mode signal TEST MODE_2 may be applied to the pin P3.5 for added functions. A signal PC5_P37 is applied to the pen P3.7. This signal PC5_P37 is available from the system controller **129** (**FIG. 12**) and indicates that the system is in a sleep state as discussed above.

[**0188**] The video controller **113**A is connected to the system database SD[0 . . . 15] as well as the system address bus SA[0 . . . 23] and is adapted to support the video memory **113**B of either 256K by 16-bit or 256K by 4-bit video memory chips **666** or **668**. These video memory chips **666** and **668**, for example 256K by 16 dram memory chips, as manufactured by Toshiba Model No. NE4244170-70, are connected to a 16-bit video memory databus VMDATA[0 . . 15] and the 9-bit video memory address bus VMADR[0 . . . 8]. The video memory chips **666** and **668** are accessed in the range from A000H-BFFFFH and are switched to allow access to a full 512 kilobyte range. The video memory chips **666** and **668** are provided with dual column address strobe (CAS) pins to allow byte selection. The video memory column address strobes LCAS and UCAS are under the control of the high and low video memory column address strobe low and high signals, VMCASL and VMCASH, which are applied to the LCAS and UCAS pins by way of a pair of current-limiting resistors **670** and **672** to generate the buffered CAS the lower and high CAS signals VMCISLBUF and VMCASHBUF. The row address strobe signal VMRAS from the video controller **113**A, as well as the write/enable signal VMWE, are also applied to the video memory **666** and **668** by way of current limiting resistors **674** and **676** respectively. The output/enable pin on the video memory chips **666** and **668** is under the control of a video memory operate/enable signal VMOE. This video memory operate enable signal VMOE is generated by the video controller **113** and is applied directly to the video memory chip **666** and **668**.

[**0189**] Various power supply signals VGA_VCC, LCD_VCC, VGABUS_VCC and VMEM_VCC are applied to the video controller **113**A. The power supply VMEM_VCC is applied to the VMEM_VCC pins on the video controller **113**A and is also used as the power supply for the video memory chips **666** and **668**. The video memory power supply VMEM_VCC may be supplied as either a 3-volt or 5-volt power supply. More particularly, both a 3-volt and 5-volt power supply 3V_CORE and 5V_CORE. Depending on whether 3-volt or 5-volt operation is selected, only one of the component positions illustrated as ferrite bead inductors **680** or **682** will be populated to produce the power supply VMEM_VCC.

[**0190**] As will be discussed in more detail below, the system also includes an LCD controller to control the LCD screen **113**C. The power supply for the LCD controller LCD_VCC can likewise be supplied as either three volt or five volt by way of the 3- and 5-volt power supply voltages 3V_CORE and 5V_CORE, available at the DC-to-DC converter **320** (**FIG. 26**). Depending on the voltage selected, only one of the component locations **684** and **686** will be populated to provide the LCD power supply voltage LCD_VCC. In addition, a power supply voltage VGABUS_VCC is used for the VGA bus. This power supply voltage VGABUS_VCC is generated by the DC-to-DC converter **320** by way of a ferrite bead inductor **688**.

[**0191**] In order to filter noise out of the power supply signals, various bypass capacitors are connected between the power supply signals and system ground. For example, a plurality bypass capacitors **690-696** are coupled between the power supply signal VMEM_VCC and the system ground. Similarly, a pair of bypass capacitors **698** and **700** are connected between the power supply signal LCD_VCC and the system ground. Lastly, a plurality of bypass capacitors **702** to **706** is connected between the power supply signal VGABUS_VCC and the system ground.

[**0192**] Additional filtering is provided for the analog subsystem. In particular, a filter consisting of a pair of capacitors **708** and **710** and a resistor **712** is connected to a filter terminal VFILTER and analog ground AGND. Similarly,

another pair of capacitors **714** and **716** and a resistor **718** are connected between a signal MFILTER and analog ground AGND.

[**0193**] The video controller **113**A requires two separate clock signals: 14 MHz; and 32 KHz. The 14 MHz clock signal is used for most timing including the LCD panel memory and the bus cycle while the 32 KHz clock signal is used for video memory refreshing when the system is suspended. These clock signals are supplied by the clock generator **398** (**FIG. 13**) by way of the signal level translator **452** (**FIG. 14**). More particularly, 32 KHz and 14 MHz clock signals 32 KHz and 14 MHz from the clock generator **398**, respectively, are applied to the signal level translator **452** to transform these respective signals into 5-volt signals 32 KHz_5V an 14 MHz_5V to provide a suitable clock signal voltage for the video controller **113**A.

[**0194**] RGB data from the video controller **113**A (**FIG. 19**) is supplied to the LCD screen **113**C by way of a data bus PDATA[0 . . . 17]. This data bus PDATA[0 . . . 17] is applied to a plurality of current limiting resistors **708-742**, respectively, to generate the buffer signals PDBUF[0 . . . 17]. These buffer signals PDBUF[0 . . . 17] are connected to the LCD panel **113** along with various control signals by way of a pair of connectors **732** and **734**.

[**0195**] The BIOS as well as other data is stored in flash memory, for example, 512K by 8-bit memory devices **742-748** (**FIG. 25**). These flash memory devices **742-748** are connected to the local ISA bus **150** by way of the system address bus SA[0 . . . 23] and the system data bus SD[0 . . . 15]. The chip enable pins CE of the flash memory devices **742-748** are selected by a decoder circuit (**FIG. 17**), as will be discussed in more detail below. The output enable pins OE on the flash memory devices **742-748** are under the control of a memory read signal MEMR. The memory read signal MEMR is under the control of the system controller **129**. The write/enable pins WE, which are active low, are under the control of a memory right gate signal MEMWGATE. This signal MEMWGATE is only enabled when the flash memory devices **742-748** are being programmed. As discussed above, programming of the flash memory devices **742-748** is under the control of a flash program signal FLASHVPP, available at port 0.3 of the keyboard controller **125** (**FIG. 15**). This programming signal FLASHVPP, normally pulled high by a pull-up resistor **749** (**FIG. 17**), is ORed with a memory write signal MEMW by way of an OR gate **751** to generate a signal MEMGATE, an active low signal.

[**0196**] The power supply for the flash memory devices **742-748** is developed by a 5-volt power supply signal 5V_ROM. The 5-volt power supply signal 5V_ROM is available from the DC converter **300** (**FIG. 20**) by way of a ferrite bead inductor **751**. This power supply signal 5V_ROM is also connected to a plurality of by-pass capacitors **752-758**, for stabilization.

[**0197**] Decoding of the flash memory devices **742-748** is provided by the circuitry that includes the buffers **760**, **762**, the inverters, **764**, **766**, and **768** and OR **770** and a 3- to 8-bit multiplexer, Model No. 74HCT138, for example, as manufactured by Motorola and a pair of resistors **772** and **774** (**FIG. 17**). In particular, the system address bits SA[19 . . . 21] are applied to a 3- to 8-bit multiplexer **776**. The system address bit SA18 is applied to the inverter **760** to develop a FLIP_SA18 signal that is pulled down by the pull-down resistor **774**. During a normal boot-up, the FLIP_SA18 signal will be same as the system address bit SA18. However, during a test mode boot-up, the FLIP_SA18 signal will be low until a control signal available at the control signal GPI00, available at the system controller **129**, goes low in order to enable the system to boot from the BIOS in the flash memory device **742** as will be discussed in more detail below. Once the GPI00 signal goes low, the FLIP_SA18 signal will be the same as the system address bit SA18.

[**0198**] The multiplexer **776** is under the control of a flash memory rewrite signal MRW. This signal MRW and the system address bit SA[23]. The flash memory read write signal MRW is under the control of an OR gate **780**. The OR gate **780**, in turn, is under the control of memory read and write signals MEMW and MER, which are applied to a pair of inverters **782** and **784**, respectively, and, in turn, to the OR gate **780**. The memory read MEMR and memory write MEMW signals are available from the system controller **129**.

[**0199**] The output of the multiplexer **776** is used to generate the chip select signals CS60, CS68 and CS70. In order to provide the ability of the flash memory device **742** to be addressed during a test mode, the chip select signal CS78 is under the control of an OR gate **770** and a plurality of inverters **764-768**. During a normal mode of operation, the chip select signal CS78 will be under the control of the multiplexer **776**. During a normal boot up, the chip select signal CS78 for the flash memory device **742** will be under the control of a ROM chip select signal ROMCS, available at the system controller **129** in order to enable the system BIOS to be shadowed into the DRAM **111**A.

[**0200**] In order to provide the ability of the system to update the BIOS in the flash memory device **742** and to recover from a corruption of the BIOS data in the flash memory device **742**, a uniform asynchronous receiver transmitter (UART) **788** (**FIG. 23**) is provided. The UART **788** is connected to the system data bus SD[0 . . . 15] and the system address bus bits SA[0 . . . 2]. The UART **788** is powered by the 5-volt power signal 5V_CORE, available at the DC-to-DC converter **320** (**FIG. 26**). A 1.84 MHz clock signal, 1.84 MHz_5V, available at the signal level translator **452**, is used to drive the UART **788**.

[**0201**] A serial interface **790** (**FIG. 30**), consisting of a standard DB-9 connector, enables external serial data to be received by the UART **788** (**FIG. 23**). The UART signals are filtered by way of a plurality of resistors **792-806** and bypass capacitors **802-822** and applied to an optional disaster recovery adapter **824**, an RS-232 interface, connected to the rear of the DB-9 connector **790** and permits the flash memory devices **742-748** (**FIG. 25**) to be updated by an external source in the event of a flash disaster. The flash recovery adapter **824** may be implemented as a DB-9 connector and is connected to the 5-volt power supply 5V_CORE, which, in turn, is connected to a plurality of bypass capacitors **826** and **828**. An additional four capacitors **830-836** are connected to the module **824** as shown.

[**0202**] The power supply for the system includes the DC-to-DC converter **300** which has the ability to provide both 3-volt and 5-volt power supplies signals to the various subsystems as discussed. The DC-to-DC converter includes a switching power supply **850**, for example, a Maxim type

786. One source of power to the DC-to-DC converter **300** is the IBP **130**, for example, 7.2 volts nominal, as well as from an external source of AC power connected to the plug **633** **(FIG. 29)**.

[**0203**] Input power to the DC-to-DC converter **300** may be from an AC/DC converter (not shown) connected to the plug **633**, which has a DC output voltage between 5.5-15 volts DC, applied to a power supply terminal AC/DCIN **(FIG. 28)** as well as internal batteries, for example, the IBP **130**, connected to the system by way of a connector **850** **(FIG. 26)**. The battery supply voltage from the IBP **130** is connected to the battery positive terminal BATT **(FIG. 28)**. The two supplies BATT and AC/DCIN are alternatively used to develop a main power signal POWER **(FIG. 28)**, that is applied to a switching power supply **851**, for example, a Maxim type **786** by way of a pair of FETS **854** and **856** (IL. 26), under the control of a main power switch **855** **(FIG. 28)**. The main power signal POWER is applied to a drain input D2 on each of the FETS **854** and **856**. A bypass capacitor **860** is connected to the drain terminal D2 of the FET **856** and system ground. The source terminals S2 of each of the FETS **854** and **856** is connected to the switching power supply **851** to provide 5- and 3-volt references by way of the zener diodes **860** and **862**, respectively. The gate terminals G1 and G2 of the FETS **854** and **856** are under the control of the switching power supply **851**.

[**0204**] The switching power supply **851** provides both a 3-volt and 5-volt output voltages 3V-CORE and 5V-CORE by way of filters which include a plurality of resistors **866** and **868**, a plurality of inductors **870** and **872**, and a plurality of capacitors **874-882** as well as a capacitor **879**. For proper operation, the D1 and D2 terminals on the switching power supply **851** are connected to the system ground along with the ground pins PGND and GND. The SS3 and SS5 pins are connected to system ground by way of a pair of capacitors **884** and **886**.

[**0205**] The frequency of the switching power supply **851** is under the control of a pair resistors **888** and **890** and a capacitor **892**, connected to the SYNC and reference terminals on the switching power supply **851**. A HOOK-VCC signal is applied to the VH and VL pins of the switching power supply **851**. This signal HOOK-VCC is available from the module **894** **(FIG. 29)**, discussed above. The signal HOOK-VCC signal is connected to the switching power supply **851** by way of a resistor **896** **(FIG. 26)**; a plurality of capacitors **898**, **900** and **902**; and an FET **904**.

[**0206**] As mentioned above, both the pen controller **110A** **(FIG. 21)** and keyboard controller **125** **(FIG. 15)** are used to develop a shutdown signal SHUTDOWN. The shutdown signal SHUTDOWN is pulled low by a pull-down resistor **906** and applied to an active low shutdown pen SHDN* on the switching power supply **851**. The shutdown signal SHUTDOWN **(FIG. 20)** is indicative of a shutdown by the keyboard controller **125** **(FIG. 15)**.

[**0207**] As mentioned above, one source of power for the system is the IBP **130** which accounts for temperature and discharge rates and sends it to the keyboard controller **125** **(FIG. 15)**. Two predefined levels are set in the IBP **130** to indicate low battery and critical battery. The IBP **130** will inform the keyboard controller **125** of a low battery when there is approximately five minutes left. When the battery charge is between 5 minutes to 2 minutes, the IBP **130** will report a battery critical condition. Within the final thirty seconds the IBP **130** will force an immediate shutdown. The IBP **130** will report the battery status approximately once every 2.5 seconds. If the system is changing to a power savings mode, a command will be sent to the IBP **130** to put the IBP **130** into a power-saving state. The IBP **130** will tri-state its communication lines and discontinue reporting battery status to the system.

[**0208**] A charge control signal CHGCTRL from the IBP **130** is used to control charging. Referring to **FIG. 28**, the charge control signal CHGCTRL is applied to a zener diode **910**, for example, a 5.1V zener diode. The zener diode **910** controls whether the IBP **130** is fast charged or trickle charged as a function of the magnitude of the charge control signal CHGCTRL.

[**0209**] In particular, if the magnitude of the charge control signal CHGCRL is less than the zener breakdown voltage (i.e., less than 5.1 volts), the IBP **130** is trickle-charged by way of series pass transistor **912**, a pair of resistors **914** and **916** from the external power signal POWER by way of a diode **918**, a fuse **920** and a filter consisting of an inductor **922** and a capacitor **924**.

[**0210**] Should the charge control signal CHGCTRL be greater than the zener breakdown voltage of the zener diode **910**, the IBP **130** will be fast charged by way of an FET **928** whose source terminal is connected to the AC/DC converter by way of the diode **918** and drain terminal, connected to the battery positive terminal BATT by way of the fuse **920** and the inductor **922**.

[**0211**] The series pass transistor **912** that controls trickle charging is under the control of an FET **930**. The drain terminal of the FET **930** is connected to the system ground while the source terminal is connected to the base terminal of the PNP series pass transistor .**912**. Normally, the series pass transistor **912** is turned off with its base terminal being high by way of its connection to a pair of biasing resistors **932** and **934**, which, in turn, are connected to the main power signal POWER by way of the diode **918**. When the charge control signal CHGCTRL is less than the breakdown voltage of the zener diode **910**, the charge control signal CHGCTRL turns on the FET **930** by way of the biasing resistors **936** and **938** a coupling capacitor, connected to its gate terminal. Once the FET **930** is turned on, it, turns on the series pass transistor **912** to provide a charging path between the main power signal POWER and the battery positive terminal BATT.

[**0212**] As mentioned above, fast charging of the battery is under the control of the FET **928**. The FET **928**, in turn, lo is under the control of a PNP transistor **926**. The PNP transistor **926**, which includes a pair of biasing resistors **940** and **942**, is connected to the collector terminal of an NPN transistor **942**. The base of the NPN transistor **942** is connected to a pair of biasing resistors **944** and **946** and, in turn, to a collector terminal of another NPN transistor **948** and the main power signal POWER. The NPN transistor **948** is biased by way of a pair of biasing resistors **950** and **952** and, in turn, to the anode of the zener diode **910**.

[**0213**] In operation, when the charge control signal CHGCTRL exceeds the breakdown voltage of the zener diode **910**, the zener diode **910** conducts thereby biasing the NPN transistors **942** and **948**, turning them ON. Once the

NPN transistor **942** is turned ON, the base terminal of the PNP transistor **926** is connected to ground, thereby turning the PNP transistor **926** ON. The PNP transistor **926**, in turn, connects the main power signals POWER to the gate terminal of the FET **928** by way of the diode **918**, thereby turning the FET **928** ON to enable the battery positive terminal BATT to be fast charged from the AC-to-DC converter.

[**0214**] As mentioned above, the wireless interface device **100** includes a radio system which allows for wireless interfacing with a host computer and also wireless interfacing to both a wired local area network (LAN) and a wireless LAN. The radio subsystem has been discussed above. It is implemented by way of an interface **960** (**FIG. 16**), implemented by way of a 25×2 header, which connects the radio subsystem to the balance of the circuitry in the wireless interface device **100**. In particular, the system data bus SD[0 . . . 15], as well as the system address bus bits SA[0 . . . 2] are connected to the interface **960**. The radio interface **960** is under the control of the system controller **129** (**FIG. 12**), such as I/O write (IOW), I/O read (IOR) and an address enable signal (AEN).

[**0215**] Output signals from the radio interface **960** include the signals CD_LED, TX/RX_LED, IRQ10 and IOCS16. As discussed above, the signal CD_LED indicates a connection has been made with a host computer **101**. The signal TX/RX_LED indicates that a signal is either being sent or received through the radio interface **960**. As mentioned above, the peripheral controller **128** (**FIG. 13**) is responsible for interrupt control. Thus, the radio subsystem interrupt IRQ10 is applied to the peripheral controller **128**. Power supply for the radio interface **960** is by way of a 5-volt power supply signal 5V_CORE, available at the DC-to-DC converter **300** (**FIG. 26**), which is filtered by a pair of bypass capacitors **962** and **964**.

[**0216**] The interrupts for both the radio interface **960** IRQ10, as well as the UART **788** (**FIG. 23**) IRQ4, are formed into a common signal IRQ10/4 and applied to the system controller **129** by way of a resistor **966**. In particular, the radio interface interrupt signal IRQ10 is applied to an inverter **962**, whose output is ORed by way of the OR gate **964** with the UART **788** interrupt signal IRQ4. The output of the OR gate **964** forms the combined interrupt signal IRQ10/4.

[**0217**] The radio interface **960**, as well as the UART **788** (**FIG. 23**), are selected by the chip select signals RADIOCS and URTCS. These signals are available at the output of a pair of the OR gates **968** and **970**, respectively. The system address bit SA3 is inverted by way of an inverter **972** and ORed with a general purpose chip select gate signal GPCS1GATE by way of the OR gate **970** to generate the UART chip select signal UARTCS. The system address bit SA3 is applied directly to the OR gate **968** and ORed with the general purpose chip select gate signal GPCS1GATE to generate the radio chip select signal RADIOCS. The general purpose chip select signal gate signal GPCS1GATE is available at the output of an OR gate **974**. In particular, a general purpose chip select signal GPCS1, available from the system controller **129** (**FIG. 12**), is ORed with an output from pin 0 of port 0 of the keyboard controller **125** (**FIG. 15**) to cause the radio interface **960** to be addressed at addressed 3EO-3E7 and the UART **788** to be addressed at address 3EA-3EF. The signal KBC_P00 is normally pulled up to the 5-volt power supply voltage 5V_CORE by way of a pull-up resistor **976**.

[**0218**] The pen controller **110**A is illustrated in **FIG. 21** and is adapted to cooperate with an analog-resistive type digitizer **106**. The pen controller **110**A includes a controller **980**, for example a Motorola type MC68HC705J2 microcontroller, with the firmware being programmed within the part. The controller **980** communicates with the system by way of the system data bus SD[0 . . . 15]. In particular, serial data from a port PB6 on the controller **980** is applied to a shift register **982**, which, in turn, is connected to an 8-bit parallel buffer **984**, which, in turn, is connected to the serial data bus SD[0 . . . 15]. The controller **980** is adapted to be used with an analog-resistive touch screen digitizer, for example a drawing No. 8313-34 Rev. C4, as manufactured by Dynapro. XY information from the digitizer **106** is received by the controller **980** by way of a connector **986**. The X and Y information from the digitizer is connected to a 12-bit analog-to-digital (A/D) converter and also applied to port PA5 of the microcontroller **980**. In particular, the X− data from the digitizer is applied to the A1 terminal of the A/D converter **988** by way of a pull-up resistor **990** and an FET **992**. The FET **992** is under the control of a charge pump **994**, for example a Linear Technology Model No. LTC1157C58.

[**0219**] The Y− data from the digitizer is applied to the terminal A1 of the A/D converter **988** by way of a current-limiting resistor **994**. A pair of bypass capacitors **996** and **998** are tied between the terminals A0 and A1 of the A/D converter **988** and an analog ground PEN_AGND. The X+, Y+, X−, Y− inputs from the digitizer are also applied to the controller ports PA[0 . . . 4] by way of a plurality of transistors **1000**, **1006**, **1010**, **1016** and **1018**; a plurality of resistors **1002**, **1008**, **1012**, **1014**, **1020**, **1022**, **1028**, **1032** and **1034**; an inductor **1004**; and a plurality of capacitors **1024** and **1026**. The transistor **1018**, as well as the transistors **992** and **998**, are used to prevent leakage in a suspend state.

[**0220**] Power from both analog and digital power supply and grounds are supplied to the system. In particular, a 5-volt digital power supply PEN_VCC, developed from the 5-volt supply 5V_CORE, is available from the DC-to-DC converter **300** (**FIG. 26**) by way of an in-line ferrite bead inductor **1028**. An analog power supply PEN_AVCC is developed from the digital supply PEN_VCC by way of an in-line ferrite bead inductor **1030**. The digital power supply PEN_VCC is applied to the microcontroller **980** and filtered by a bypass capacitor **1030**. The analog supply PEN_AVC is utilized by the 12-bit analog-to-digital converter **988** and filtered by way of a bypass capacitor **1032**.

[**0221**] A separate clock supply is used for the microcontroller **980**. This clock supply includes a 4.0 MHz crystal **1034**, a resistor **1036** and a pair of parallel coupled capacitors **1038** and **1040**. The clock supply is applied to the oscillator terminals OSC1 and OSC2 of the microcontroller **980**.

[**0222**] A 5-volt signal PENACT_5V, available at the port P5V pin of the microcontroller is converted to a 3-volt signal PENACT_3V by way of a pair of voltage dividing resistors **1042** and **1044**. This signal PENACT_3V is applied to a 3-volt terminal of the system controller **129** (**FIG. 12**). As discussed above, the power supply for the FETs **992** and

1018 is provided by the charge pump **994**. The power supply for the charge pump **994** is a 5-volt power supply signal 5V_CORE, available at the DC-to-DC converter **300** (**FIG. 26**). A ground terminal of the charge pump **994** is connected to system ground by way of a pull-down resistor **1050**. The 5-volt power supply PEN_VCC is also utilized by the shift register **982** and the data buffer **984** and buffered by way of a pair of bypass capacitors **985** and **987**.

[**0223**] The chip select signal PENCS for the data buffer **984** is generated by an OR gate **1052**. The general purpose chip select signal GPCS2 is available from the system controller **129** (**FIG. 12**), as well as a signal KBC_P00, available from the keyboard controller **125** (**FIG. 15**) are applied to the inputs of the OR gate **1052**.

[**0224**] A pen shut-down signal PEN_SHUTDOWN is used to develop a shut-down signal SHUTDOWN as discussed above for turning on the switching power supply **851** (**FIG. 26**). The pen shutdown signal PEN_SHUTDOWN is developed by the circuit that includes the transistors **1060**, **1062** and **1064**; a plurality of resistors **1066**, **1068**, **1069**, **1070** and **1072**; and a capacitor **1074**. In particular, a 5-volt power supply signal 5V_CORE is applied to a pair of voltage-dividing resistors **1070** and **1072**, which, in turn, is used to bias the transistor **1064** on. The base-emitter voltage is held fairly constant by the capacitor **1074**. Once the transistor **1064** is turned on, it is used to control the FET **1062**. A main power supply signal POWER is applied to the gate of the FET **1062** by way of the resistor **1069**. Wake up of the system by way of the pen subsystem is discussed below.

[**0225**] 6. Flash Disaster Recovery

[**0226**] As mentioned above, the wireless interface device **100** includes the flash memory devices **742-748** (**FIG. 25**). As will be discussed in more detail below, the flash memory devices enable user software upgrades by way of the radio interface **960** (**FIG. 16**). Should power be lost during the programming, the data within the flash memory devices **742-748** will be corrupted, which could result in the system failing to boot.

[**0227**] In order to enable recovery from such a condition, recovery BIOS is stored in a protected sector of the flash memory device **742**, which will be unaffected during reprogramming. In addition, a serial port interface **790** (**FIG. 30**) is provided to enable the flash memory devices **742-748** to be programmed in such a condition by an alternative wired source following a normal boot-up. Unfortunately, the configuration of the flash memory device **742** may result in the system failing to boot. More particularly, disaster recovery BIOS is not stored at the uppermost address of the flash memory device **742**. Each flash memory device **742-748** are 512K×8-bit devices. With reference to Table 5 above, the flash memory device **742** is mapped to the address range $0C0000-$0FFFFF. The recovery BIOS is contained in the lower half of that range (i.e. $0E0000-$0FFFF).

[**0228**] On a normal boot-up, the system begins executing code at the top of the address range (i.e. $0CD000-ODFFFF) flash memory device **742** by way of the system address bit SA18. More particularly, on a normal boot-up a test mode signal TEST_MODE, available at port 1.1 of the keyboard controller **125** (**FIG. 15**) is pulled high by the keyboard controller **125** during boot-up, which enables the buffer **762** (**FIG. 17**) which, in turn, enables another buffer **760** to enable the system address bit SA18 during boot-up. When the system address bit SA18 is enabled, the system begins executing code at the top of the address range ($0C0000) of the flash memory device **742**. However, during a condition when the data in the top half of the address range ($0C00000-0DFFFFF) becomes corrupt as a result of a problem occurring during reprogramming, the system may not boot during such a condition.

[**0229**] In order to solve this problem, the system address bit SA18 is forced low. By forcing the system address bit SA18 low, the system will begin executing code from the protected area of the flash device **742** in the address range ($0E0000-$0FFFF) during such a condition where the disaster recovery BIOS resides in a protected sector. In particular, the system address bit SA18 is applied to the buffer **760** (**FIG. 17**), which is under the control of the test mode signal TEST_MODE by way of the buffer **762**. The output of the buffer **760** is a signal FLIP_SA18, , which is applied to the address pin A18 (**FIG. 25**) on the flash memory device **742**.

[**0230**] During a normal boot-up, the test mode signal TEST_MODE will enable the buffer **762** (**FIG. 17**) and, in turn, the buffer **760** to cause the system address bit SA18 to drive the signal FLIP_SA18. . During a condition when the code in the flash memory device **742** becomes corrupt, the test mode signal TEST_MODE is forced low, which, in turn, forces the signal FLIP_SA18 low, resulting in the system executing code from the protected area (i.e. $0E0000-0FFFF) of the flash memory device **742** during such a condition to enable the flash memory device **742** (**FIG. 25**) to be reprogrammed by way of the serial interface **790** (**FIG. 30**).

[**0231**] There are various ways in which to force the test mode signal TEST_MODE low during reprogramming of the flash memory device **742** by way of the serial interface **790**. One way is to externally ground the test mode signal TEST_MODE during such a condition. In particular, the test mode signal TEST_MODE may be connected to one pin of a two-pin header **1100** (**FIG. 30**). The other pin of the header **1100** is connected to system ground. During reprogramming of the flash memory device **742**, an external jumper (not shown) is inserted into the header **1100** to shunt the test mode signal TEST_MODE to system ground to enable the system to execute code from the protected or boot block area of the flash memory device **742** in order to enable the system to be booted. Once the system is booted, the flash memory device **742** is reprogrammed by way of the serial interface **894** (**FIG. 29**). Once reprogramming is complete, the shunt is removed from the header **1100** (**FIG. 30**) and the adapter plug **790** is removed, restoring the system to normal operation.

[**0232**] 7. Resume on Pen Contact

[**0233**] In order to conserve battery power, the wireless interface device **100** goes into a suspend mode when the system is not in use. As discussed above, a shut down signal SHUTDOWN (**FIGS. 20 and 26**) is used to shut down the power supply **851** (**FIG. 26**) during such a condition, which essentially disables the power to all but the circuitry required to detect a pen down event by way of the main power signal POWER (**FIG. 28**).

[**0234**] Three sources control the shut down signal SHUTDOWN: the keyboard controller **125** (**FIG. 15**); the pen

controller **110** A (**FIG. 21**) and a signal HOOK_VCC, connected to the switching power supply **851** (**FIG. 26**) by way of the FET **904**. These sources are diode ORed to the shut down signal SHUTDOWN by way of the diodes **645** and **647** (**FIG. 20**) and a diode **1102** (**FIG. 28**). During a normal state, the shut down signal SHUTDOWN is high, which enables the power supply **851** (**FIG. 26**). When the shut down signal SHUTDOWN goes low, the power supply **851** goes into an inactive state. During the inactive state, minimum power is supplied to the pen detection circuitry as discussed above.

[**0235**] As will be discussed in more detail below, once the system is turned on by the main power switch **855** (**FIG. 28**), the shut down signal SHUTDOWN will be under the control of the pen shutdown signal PEN_SHUTDOWN, available from the pen controller **110**A (**FIG. 21**) and the keyboard controller shut down signal KBSHUTDOWN (**FIG. 20**).

[**0236**] The keyboard controller **125** (**FIG. 15**) can place the system in a suspend state by way of a command, which, in turn, causes the keyboard controller shut down signal KBSHUTDOWN, available at port P0.2, to go low. More particularly, during normal operation, only the keyboard shutdown signal KBSHUTDOWN is high, placing control of the suspend state solely in the keyboard controller **125**. The keyboard controller **125** can then force the system into a suspend state by forcing port P0.2 low, which, in turn, places the power supply **851** (**FIG. 26**) in an inactive state.

[**0237**] The pen shut down control signal PEN_SHUTDOWN is used to wake the system from a suspend state. More particularly, as mentioned above, during a suspend state, power from the main power supply POWER (**FIG. 28**) is applied to the collector of the transistor **1064** (**FIG. 21**) and to the drain of the FET **1062**. Since the 5-volt power supply 5V_CORE is unavailable during a suspend state, the transistor **1064** will be OFF, allowing power to appear at the gate of the FET **1062**, thus turning the FET **1062** ON. Once the FET **1062** is turned ON, the main power signal POWER is applied to the XPLUS terminal of the digitizer panel. Thus, a pen (or finger) down event will result in the YPLUS terminal being connected to the XPLUS terminal by way of a finite resistance (i.e. 500-1500 Ohms) to apply power to the YPLUS terminal, which, in turn, is connected to the drain of the P-channel FET **1060** while its source is used as the pen shutdown signal PEN_SHUTDOWN. The FET **1060** is under the control of a leakage signal LEAKAGE, available at the output of the charge pump **994**. Since the leakage signal LEAKAGE will be low during a suspend state, the FET **1060** will turn on in response to the pen down event, thereby connecting the YPLUS terminal to the pen shut down signal PEN_SHUTDOWN. As mentioned above, the YPLUS terminal will be high in response to a pen down event following a suspend state. As such, the pen shut down signal PEN_SHUTDOWN will go high. Since the pen shut down signal PEN_SHUTDOWN is diode ORed with the shut down signal SHUTDOWN, the shut down signal SHUTDOWN will thus be forced high in response to a pen down event following a suspend state, which, in turn, will wake up the power supply **851** (**FIG. 26**). Once the system is wakened, the keyboard controller shutdown line KB_SHUTDOWN goes high, latching the system ON. The resistors **1070**, **1072** and the capacitor **1074** are used to delay turning ON the transistor **1064** and the turning OFF of the FET **1062** before the keyboard shutdown signal KB_SHUTDOWN is pulled high which would cause the pen shut down signal PEN_SHUTDOWN to go low before the keyboard shutdown signal KB_SHUTDOWN goes high.

[**0238**] The FETs **992**, **998** and **1018** are used to prevent current leakage in a suspend state. In particular, these FETs **992**, **998** and **1018** are under the control of the leakage control signal LEAKAGE, available at the charge pump **994**, which turns the FETs **992**, **998** and **1018** ON in normal operate and OFF in a suspend state.

[**0239**] The sensing of suspend state is done by the charge pump **994**, which monitors the 5-volt power supply signal 5V_CORE. When the 5-volt power supply signal 5V_CORE goes low, indicating a suspend state, the leakage control signal LEAKAGE goes high, turning off the FETs **992**, **998** and **1018**, blocking leakage into the pen circuitry from the XPLUS terminal.

[**0240**] 8. RC Time Constant

[**0241**] The system ON/OFF switch **855** (**FIG. 28**) enables the system to be completely shut off. When the switch **855** is closed, power from either the IBP **130** or the external AC-to-DC converter supplies power to the system. In order to wake up the system from an OFF state, a shutdown line SHUTDOWN must be held high until the keyboard controller **125** pulls its shutdown pin KB_SHUTDOWN high. As discussed above, the keyboard shutdown signal KB_SHUTDOWN is diode ORed relative to the shutdown signal SHUTDOWN, which controls the power supply **851** (**FIG. 26**). Until the time when the keyboard shutdown signal KB_SHUTDOWN is pulled high, a signal HOOK_VCC is used to force the shut down signal SHUTDOWN high. As mentioned above, the HOOK_VCC signal is also diode ORed relative to the shutdown signal SHUTDOWN by way of the diode **1102** (**FIG. 28**). However, for proper operation of the system, the shutdown signal SHUTDOWN will be under the control of the keyboard controller **125** (**FIG. 15**) after the system is turned on. Thus, a 5-volt power supply signal HOOK_VCC, available at the power supply **851** (**FIG. 26**), forces the shut down signal SHUTDOWN high until the keyboard controller **125** (**FIG. 15**) has time to pull its keyboard shutdown signal KB_SHUTDOWN high. The 5-volt power supply signal HOOK_VCC is always high when the main power switch **855** is turned on. On power-up, the 5-volt power supply signal HOOK_VCC forces the shutdown signal SHUTDOWN (**FIG. 28**) high by way of an FET **1104** and the diode **1102**, which, in turn, wakes up the power supply **851** (**FIG. 26**). Once the power supply **851** is enabled, a power supply signal MAX **786**_VCC is used to turn off the FET **1104** to place the control of the shut down signal SHUTDOWN under the control of the keyboard controller **125** as discussed above. In order to provide sufficient time for the keyboard controller **125** to pull its keyboard shutdown signal KB_SHUTDOWN high, the turn OFF of the FET **1104** is delayed by way of a resistor **1106** and a capacitor **1108**. In particular, once the main power switch **855** is closed, the power supply signal MAX **786**_VCC will be low, thereby causing the FET **1104** to be turned ON, which connects the power supply signal HOOK_VCC to the shutdown signal SHUTDOWN by way of the diode **1107**. Once the power supply **851** is enabled, the signal MAX **786**_VCC, applied to the gate of the FET **1104**, turns off the FET **1104**, placing the shutdown signal SHUTDOWN under the control of the keyboard controller shut-

down signal KB_SHUTDOWN as discussed above. The resistor **1106** and capacitor **1108** delay the turning off of the FET **1104** after the signal MAX **786**_VCC goes high for a sufficient time to allow the keyboard controller **125** to pull its keyboard shut down signal KB_SHUTDOWN high.

[**0242**] An inhibit circuit (**FIG. 26**), which includes a plurality of resistors **1110-1120**, a diode **1122**, a transistor **1124** and an FET **1126**, is used to prevent the system from being turned ON during low battery conditions when the system is being supplied solely by the IBP **130**. During a normal condition (i.e, when the system is being supplied power by the AC/DC converter or by the battery, the signal MAX **786**_VCC is connected to the main power signal POWER by way of the FET **1126**. The FET **1126** is under the control of the transistor **1124**. During conditions when the AC/DC converter is supplying power to the system, a signal AC/DCIN will be high, thereby turning ON the transistor **1124**, which, in turn, turns ON the FET **1126**, connecting the main power signal POWER to the signal MAX **786**_VCC. The collector of the transistor **1124**, in turn, controls the FET **904**, which connects the power supply signal HOOK_VCC to the enable terminals ON3 and ON5 on the power supply **851**. When AC power is not available, the AC/DCIN goes low, leaving the control of the transistor **1124** under the control of an inhibit signal INHIBIT, available from the IBP **130** by way of the connector **850**. During a normal battery condition, the inhibit signal is high, keeping the transistor **1124** turned ON, thereby enabling the power supply **851** by way of the FET **904**. Should a low battery condition occur, the inhibit signal goes low, turning OFF the transistors **904**, **1124**, as well as the FET **1126**, to prevent the system from being turned ON.

[**0243**] 9. Mouse Emulation with Passive Pen

[**0244**] As mentioned above, the wireless interface device **100** includes a digitizer **110**B and utilizes a passive pen as an input device. FIGS. **31-35** illustrate a method for emulating the functions of a mouse, for example a two-button mouse, to provide standard mouse functions with the passive pen.

[**0245**] There are three aspects of the mouse emulation. One aspect relates to emulation of a double click of a mouse button, required by some application programs. Another aspect relates to emulating both the left and right buttons of a two-button mouse. The third aspect relates to emulating both the movement of the mouse (MOVE MODE) and the clicking of a mouse button (TOUCH MODE) with a passive pen as an input device.

[**0246**] Referring first to **FIG. 31**, the mouse emulation system is event-driven by the passive pen. Initially the system checks to see if the passive pen has touched anywhere on the LCD **113**C (**FIG. 36**), which includes a display area **1200** and a hot icon area **1202**. If a pen-down event has been detected, the system checks in step **1204** if the wireless interface device **100** has been placed in a calibration mode. If so, a calibration handler is called in step **1206**. The calibration handler does not form part of the present invention. If the wireless interface device **100** is not in the calibration mode, the system then checks to determine if the pen has been lifted from the LCD **113**C in step **1208**. If a pen-up event occurs subsequent to a pen-down event, control is passed to a hot icon identification (ID) processor (**FIG. 32**) in step **1210**, which, as will be discussed below, processes the pen position to determine which of the hot icons in the hot icon area **1202** of the LCD screen **113**C was selected. If the pen was not lifted from the LCD **113**C, the system checks in step **1212** if the previous event in a previous cycle was a pen-up event. If the previous pen event in the previous cycle was a pen-down event, the current pen event is processed by a mouse mode handler (**FIG. 33**) in step **1214**, which, as will be discussed in more detail below, determines if the pen is being used in a mouse MOVE or mouse TOUCH MODE. In step **1216**, the coordinates of the current pen-down event are processed to determine if the current pen-down event occurred in the hot icon area **1202** of the LCD **113**C. If the pen-down event occurred in the hot icon area **1202** (**FIG. 36**), a flag is turned on indicating the hot icon area **1202** was selected in step **1218**. If the system determines the current pen-down event occurred in the display area **1200** (**FIG. 36**) of the LCD screen **113**C, an audio click is generated in step **1220**; different from the hot icon audio click.

[**0247**] Steps **1204-1220** are driven by each pen event in order to determine the location of the pen-down event (i.e. hot icon area **1202** or display area **1200**). Once the system determines where the pen event occurred, the pen data is converted to mouse data in step **1222** and a cursor is displayed in the viewing area **1200**, corresponding to the location of the pen touch in step **1224**. After the cursor is displayed, the system determines in step **1226** whether the mouse data is to be used locally by the wireless interface device **100** for local applications or the application running on the host computer **101**. As mentioned above, the wireless interface device **100**, through its graphical user interface, provides a virtual or on-screen keyboard (OSK). Thus, if the OSK has been activated and the pen event occurs in the OSK area, the mouse data is used locally by the wireless interface device **100** in step **1228**. If the wireless interface device **100** is running a host application, the mouse data is sent to the host computer **101** application over the wireless interface as discussed above in step **1230**.

[**0248**] As mentioned above, the system is able to emulate both left and right mouse buttons. This emulation is accomplished by way of left/right mouse button hot icon **1232** (**FIG. 37**). A left mouse button is configured to be the default setting. This hot icon **1232** is set up as a toggle. Thus, when the system is first turned on, the pen events from the mouse mode handler are translated to be left mouse button events. Anytime the left/right mouse button hot icon **1232** is selected, the system will toggle and translate subsequent pen events to be right mouse button events. A subsequent pen-down event on the hot icon **1232** causes subsequent pen events from the mouse mode handler to be translated as left mouse button events and so on.

[**0249**] The hot icons in the hot icon area **1202** (**FIG. 36**) are triggered by a pen-down event followed by a pen-up event. As discussed above, such a sequence of pen events is processed by hot icon ID processor **1210**, illustrated in **FIG. 32**. The hot icon ID processor **1210** first determines if the pen event occurred in the viewing area **1200** (**FIG. 36**) of the LCD **113**C by determining from the mouse mode handler **1214** (**FIG. 33**) whether the system is in the TOUCH in step **1234**, since this mode only occurs for pen events in the viewing area **1200** of the LCD display **113**C. If the system is not in a TOUCH mode, the system checks in step **1236** whether the system is in the MOVE mode. If the pen event

(i.e. pen-down followed by a pen-up event) did not occur in the viewing area **1200** of the LCD display **113**C, the system compares the coordinates of the pen-down event with the locations of the various hot icons displayed in **FIG. 37** in step **1238**. In step **1240** (**FIG. 32**), the system determines if the left/right mouse button hot icon **1232** was selected. If not, the system proceeds directly to step **1242** to uplevel software for processing. If the system determines that the left/right mouse hot icon **1232** was selected, the system emulates a left or right mouse button in step **1244**, depending on the last status of the left/right mouse button emulation and utilizes the emulated left or right mouse button status in the uplevel software in step **1242**.

[**0250**] Pen events in the hot icon area **1202** of the LCD display **113**C are handled by the hot icon ID processor **1210** (**FIG. 32**), while pen events in the viewing area **1200** are handled by the mouse mode handler **1214** (**FIG. 33**). The mouse mode handler **1214** emulates two mouse actions: moving without either button being depressed and released (MOVE); and button depression and release events (TOUCH). As discussed above, both left and right mouse button events can be emulated in the TOUCH.

[**0251**] As discussed above, a current pen-down event preceded by a pen-down event activates the mouse mode handler **1214** (**FIG. 33**). In step **1246**, the system first determines if the hot icon flag is on. As discussed above, the hot icon flag is turned on anytime a pen-down event occurs in the hot icon area **1202** (**FIG. 36**) of the LCD display **113**C. If the hot icon flag is not on, the pen-down event is translated to a mouse button down event by a mouse TOUCH handler in step **1248**. If the hot icon flag is on, the system determines in step **1250** whether the coordinates of the current pen-down event to determine if the current pen-down event occurred in the hot icon area **1202**. If so, the pen coordinate data is dropped in step **1252** since such data will be processed by the hot icon ID processor **1210** (**FIG. 32**), discussed above. If the current pen event occurred in the viewing area **1200**, the pen coordinate data is translated to mouse move data.

[**0252**] A mouse button double click is emulated by two pen-down events separated by a pen-up event in the viewing area **1200** of the LCD **113**C. In particular, when the host computer **101** is running a Windows application, a pen driver translates the two pen-down events separated by a pen-up event and passes four mouse messages: mouse button down; mouse button release, mouse button down and mouse button release to the host Windows application.

[**0253**] As will be discussed in more detail below, the host manager Windows module **1260** modifies a Windows configuration file. (WIN.INI) and, in particular, the distance and time limitations for a mouse button double click. In particular, the Windows system checks the Windows configuration file WIN.INI in order to compare the distance between the mouse locations for each of the clicks as well as the time between clicks. More particularly, the Windows systems will only pass double click data to a Windows application program if the distance (i.e. height and width) between mouse locations for the two clicks is less than 16 for both height and width and the time between the clicks is less than 1.0 seconds.

[**0254**] With a pen-based system two pen-down events separated by a pen-up event normally take longer and occur at greater distances between pen-down events than allowed by the Windows system to generate a double click. Thus, the host manager Windows module **1260** modifies the time and distance parameters to enable two pen-down events separated by a pen-up event to enable Windows to emulate a mouse double click that can be passed on to the Windows application program running in the host computer **101**. In particular, the host manager Windows module **1260** includes an initializer **1262** which loads the host manager Windows module **1260**, and an initial icon displayer **1264**, which displays that the host manager Windows module **1264** has been loaded. The host manager Windows module **1260** also includes a double click configuration modifier **1266**. The double click configuration modifier **1266** modifies the configuration of the Windows systems file WIN.INI by modifying the time or speed in step **1268**. The distance, broken down into width and length, between the successive pen-down events, is modified by a double click width modifier and a double click height modifier in steps **1270** and **1272**. The modified speed, width and height parameters are set in the Windows system file WIN.INI running in the host computer **101** in step **1274** to enable a mouse button double click to be emulated by two successive pen-down events.

[**0255**] Normally, the Window system file WIN.INI is in cache. The host manager Windows manager disables the in cache copy of the Windows system file WIN.INI, which allows the Windows system to go to the modified configuration file with the modified parameters.

[**0256**] 10. Disable Screen Saver to Reduce LAN Traffic

[**0257**] As mentioned above, the wireless interface device **100** connects to a host computer **101** and displays whatever is being displayed on the host computer **101**. In particular, after a connection is made, all of the screen images on the host computer **101** are passed on to the LCD display **113**C on the wireless interface device **100**. Whenever the host computer **101** is running a screen saver, the host display will continually change, passing on all of the images to the LCD **113**C on the wireless interface **100**, which creates a lot of unnecessary traffic on the LAN. In order to reduce this unnecessary LAN traffic, a host manager Windows module **1278** (**FIG. 39**) disables the screen saver on the host computer **101** anytime a connection is made between the host computer **101** and the wireless interface device **100**. Anytime the connection between the host computer **101** and the wireless interface device **100** is broken, the host manager Windows module re-enables the screen saver on the host computer **101**.

[**0258**] The connection status between the host computer **101** and the wireless interface device **100** is under the control of a host manager DOS module **1280** (**FIG. 38**), a terminate and stay resident program. The host manager DOS module **1280** is driven by a timer tick interrupt and checks the connection status at each timer tick interrupt. If the connection status has changed, the host manager DOS module **1280** calls a host manager communicator **1282**, which passes the new status to the host manager Windows module **1278**.

[**0259**] Referring to **FIG. 39**, anytime the connection status between the host computer **101** and the wireless interface device **100** changes, the host manager Windows module **1278** checks the new status in step **1284**. If the connection has been lost, a screen saver disable module **1286** is called,

which, in turn, calls several Windows modules: Windows Software Development kit functions; SystemParametersInfo; and WritePrivateProfileString to disable the screen saver. Should the current status indicate that the wireless interface device **100** is connected to the host computer **101**, the system proceeds to step **1288**, which calls the various Windows module.

[**0260**] Referring to **FIG. 40**, anytime the host manager DOS module **1280** is loaded, an initial connection status checker **1290** calls the host manager DOS module **1280** to obtain the current connection status between the wireless interface device **100** and the host computer **101**. Next, the system checks in step **1292** whether a connection exists between the host computer **101** and the wireless interface device **100**. If not, the system returns. If there is a connection, a virtual key poster **1294** posts a virtual key V_TAB into the Windows Systems queue to force the Windows program to disable the current active screen saver automatically, which, in essence, simulates the press of a key on a keyboard. Once the current active screen saver is disabled, the screen saver on/off flag in a Windows configuration file is turned off in step **1296** to disable the screen saver until there is a change in the connection status.

[**0261**] 11. Host Access Protection Password

[**0262**] Whenever a connection is made between wireless interface device **100** and the host computer **101**, the user can optionally blank the screen on the host computer **101** and disable the keyboard and mouse inputs connected to the host computer **101**. These features prevent the host computer **101** from being accessed while the host computer **101** is under the control of the wireless interface device **100** at a remote location. Once the connection between the host computer **101** and the wireless interface device **100** is lost, the keyboard and mouse inputs on the host computer **101** are re-enabled under the control of the host manager program residing in the host computer **101**.

[**0263**] There are certain situations where the screen to the host computer **101** may not be enabled on disconnection, for example, when the disconnection occurs because the wireless interface device **100** is either out of power or out of range. In order to enable the user to access the host computer **101** in such a situation, a host manager **1300** (**FIG. 40A**) first checks whether the connection status has changed in step **1302** in the manner as discussed above. If the system is connected, no action is required. However, if the connection has been broken, the system checks in step **1304** whether the screen is enabled. If not, the user will have normal access to the host computer **101**. If so, the latest log-in password by the user is stored in by the system in step **1306**. Since the host manager DOS module controls the screen, the system checks in step **1308** to determine whether Windows is running in the host computer **101**. If DOS is running, the system compares the password entered on the keyboard with the latest log-in password in steps **1310** and **1312**. If the password entered does not match the correct password, the system returns to step **1310** and awaits another keyboard input. If the correct password is entered, the screen is turned on in step **1314**.

[**0264**] Should the host computer **101** be running Windows, as determined in step **1308**, the latest log-in password is passed to a host manager Windows module in step **1316**. The system next checks in steps **1318** and **1320** whether the correct password was entered in a similar manner as discussed above. If so, since DOS handles the enabling of the screen on the host computer **101**, the host manager DOS module is notified that the correct password was entered in step **1322**, which, in turn, enables the screen in step **1314**.

[**0265**] 12. Double Pen-Up Events

[**0266**] The pen controller **110** A (**FIG. 21**) normally generates a series of interrupts and, in turn, a series of pen packets whenever the pen touches the LCD **113**C (a pen-down event) and is lifted from the LCD **113**C (a pen-up event) and generates an interrupt. For each interrupt, a single packet is generated. The format of the possible packets is illustrated in Table 7 below, where x0 is bit 0 of the x coordinate of the pen location and y0 is bit 0 of the y coordinate of the pen location, etc.

TABLE 7

PACKET NAME	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
P1	1	1	0	x11	x10	x9	x8	x7
P2	0	x6	x5	x4	x3	x2	x1	x0
P3	0	0	0	y11	y10	y9	y8	y7
P4	0	y6	y5	y4	y3	y2	y1	y0
P5	1	0	0	0	0	0	0	0

[**0267**] The packets are generated in the following sequence (p1, p2, p3, p4), (p1, p2, p3, p4) . . . (p1, p2, p3, p4), (p5). The packets p1, p2, p3, p4 relate to pen-down events (a pen point); each group of packets (p1, p3, p3, p4) relating to one x-y coordinate of the pen. The packet p5 relates to a pen-up event. Thus, anytime the pen is lifted from the digitizer, one packet p5 is generated. Thus, when the pen first touches the digitizer panel and is moved across the digitizer, a plurality of pen points (p1, p2, p3, p4) are generated which correspond to the x, y locations of the points touched by the pen. Normally **110** pen points per second are generated by the pen controller **110**A.

[**0268**] Whenever a 12-bit serial pen packet is generated by the pen controller **110**A and read by a firmware module in step **1330** (**FIG. 41**), an interrupt is generated in step **1332**. A pen packet assembler assembles the packets into pen points (p1, p2, p3, p4). These pen points (p1, p2, p3, p4) are processed and passed to the applications program. In order to process each pen point (p1, p2, p3, p4), the interrupts must be disabled. During the time when the interrupts are disabled, the pen point packets (p1, p2, p3, p4) and the pen-up packets p5 are generated by the pen controller **110**A but not processed and thus are garbled or lost. Lost or garbled pen point packets (p1, p2, p3, p4) do not affect mouse emulation. However, since mouse emulation is based on both pen-down and pen-up events, lost pen-up packets p5 can result in the mouse emulation being hampered, possibly resulting in the system being stuck in the state preceding the pen-up event.

[**0269**] In order to solve this problem, a firmware module **1330** generates two pen-up packets p5. More particularly, with reference to **FIG. 42**, the firmware module **1330** reads in the 12-bit serial data from the pen controller **110**A into packets in step **1334**. Next, the system checks in step **1336** whether the packet was a pen-up packet p5. If not, the system proceeds to the pen driver in step **1332** (**FIG. 41**). If the packet is a pen-up packet p5, the system checks to

determine if the pen-up packet p5 is the first pen-up packet in step **1338**. If not, the system passes the packet to the pen driver in step **1332** as discussed above. If the system determines in step **1338** that the pen-up packet p5 is the first pen-up packet p5, the serial data for second pen-up packet p5 is generated in step **1340** and assembled in step **1334**. In addition, the first pen-up packet p5 is passed to the pen driver.

[**0270**] The pen driver **1332** (**FIG. 43**) is responsive to an interrupt that is generated each time a packet is assembled. In response to an interrupt, the pen driver reads the packet in step **1342**. In step **1344**, the pen driver determines whether the packet is a pen-up packet p5. If not, the pen packet assembler processes the packet in step **1346**. If the system determines in step **1344** that the packet is a pen-up packet, it next checks in step **1346** whether the packet is the second pen-up packet. If so, indicating that the first pen-up packet was processed, the second pen-up packet is dropped in step **1348**. If not, the packet is determined to be a first pen packet, which is processed by the pen packet assembler in step **1346**.

[**0271**] 13. Seamless Integration of Wired and Wireless LANS

[**0272**] The wireless interface device **100** may be connected to host computer **101** by way of a wireless LAN. The wireless LAN protocol is Novell open data link interface IPXODI protocol. Since the IPXODI protocol is also used for wired LAN's, it would be desirable to connect the wireless interface device **100** to a wired LAN system and utilize the Novell IPXODI protocol. Unfortunately, the IPXODI protocol can only communicate with a single LAN card at a time, either a wired LAN card or a wireless LAN card at one time.

[**0273**] The standard Novell LAN stack configuration is illustrated in **FIG. 45**. The LAN card is identified with the reference numeral **1352**. Communication between the LAN card **1352** and the IPXODI protocol is by way of a driver **1354**. The driver **1354** communicates with the IPXODI protocol (IPXODI.COM) **1355** by way of a link support layer LSL.COM **1356**. The Novell IPXODI protocol passes data between the applications programs **1358** and the link support layer LSL.COM **1356**. Even though the link support layer LSL.COM can support multiple LAN cards, the IPXODI protocol only supports a single LAN card.

[**0274**] In order to enable the Novell IPXODI protocol to support a configuration as illustrated in **FIG. 44** to enable the wireless interface device **100** to connect to both a wired LAN card **1352** and a wireless LAN card **1360**, an additional layer IPXMUX.COM (**FIG. 46**) is provided for multiplexing incoming and outgoing packets to and from the wired LAN card **1352** and the wireless LAN card **1360**. The multiplexer IPXMUX.COM manipulates the data packet source and destination addresses to simulate a single LAN card so as to be compatible with the IPXODI protocol. By providing the additional layer IPXMUX.COM, the host computer **101**, as well as the wireless interface device **100**, will be able to access all of the LAN resources **1350** (**FIG. 44**).

[**0275**] Referring to **FIG. 46**, the additional layer IPXMUX.COM is stacked between the Novell IPXODI protocol IPXODI.COM **1355** and the link support layer LSL.COM **1356**. As mentioned above, the link support layer LSL.COM **1356** can support two LAN cards. Thus, a wireless LAN card **1360** and a corresponding wireless LAN card driver **1362**, which communicates with the link support layer LSL.COM **1356** along with the wired LAN card **1352** and its corresponding driver **1354**, can communicate with IPXODI.COM by way of the driver.

[**0276**] The multiplexer IPXMUX.COM **1364** multiplexes or interleaves the data from both the wireless LAN card driver **1354** and the wired LAN card driver **1362** to the IPXODI protocol by manipulating the source and destination addresses of incoming and outgoing packets, so that as far as the Novell IPXODI protocol is concerned, it is only communicating with a single LAN card. Similarly, communication from the host computer **101**, as well as applications **1358**, which may be running on the wireless interface device **100**, to both the wired LAN card **1352** and the wireless LAN card is formatted by the IPXODI.COM and multiplexed to either the wireless LAN card **1360** or wired LAN card **1352** by the multiplexer IPXMUX.COM by way of the link support layer. The multiplexer IPYMUX.COM **1364** is loaded after the wired LAN card driver **1354** and the wireless LAN card driver **1362** are loaded and before IPXODI.COM **1355**.

[**0277**] The Novell LAN software includes a configuration file which checks the particular LAN cards **1352** being run by the LAN card driver **1354**. The system is initialized by the routine illustrated in **FIG. 47**, which is run each time the multiplexer IPXMUX.COM **1364** is loaded. Initially, a command line parser **1366** is used to determine whether the user has issued commands to either load or unload IPXMUX.COM command in step **1368**. If the command is an unload command, the system checks whether IPXMUX-.COM **1364** has already been loaded in step **1370**. If so, the system unloads IPXMUX.COM **1364** in step **1372**. If IPXMUX.COM **1364** has not been loaded, the system exits the initialization routine.

[**0278**] If the command was to load IPXMUX, the system checks in step **1374** to determine if the link support layer LSL.COM **1356** has been loaded. If not, the system exits the initialization routine since IPXMUX.COM cannot be loaded until the link support layer LSL.COM has been loaded. If the link support layer LSL.COM **1356** was loaded, control is passed to a LAN configuration browser in step **1376** to browse the LAN configuration for the number of LAN cards and the frame types of the cards and the number of frame types (i.e. IEEE 802.2, 802.3, etc.) to find out which LAN card drivers are running. In addition, the browser finds and saves all relevant application program interface entry points to the link support layer LSL.COM and sets to those supported by IPXMUX.COM. The browser also sets the LSL interrupt vector to the interrupt vector supported by IPXMUX.COM, as well as finds and saves all logical board numbers.

[**0279**] In order to interleave the data from the wired LAN card **1352** (**FIG. 46**) and the wireless LAN card **1360** to IPXODI.COM to emulate a single LAN card, 2F interrupt calls from the application program by way of IPXODI.COM are trapped and handled by a separate routine. In particular, 2F interrupt calls are checked in step **1378** to determine if such calls are interrupt calls to LSL.COM. If not, the system exits. If so, the address of the LSL protocol support API handler supported by IPXMUX.COM is returned. Interrupt

calls to LSL.COM from an application program are handled by a special interrupt handler. If the interrupt call is to LSL.COM, a LSL initialization entry point, supported by IPXMUX.COM is returned in step **1380**. The LSL initialization entry point represents an address of the protocol initialization routine into LSL.COM.

[**0280**] Once the address of the LSL initialization entry point is known by the IPXODI protocol, the IPXODI protocol will call that address for service. Thus, all LSL service calls are checked in step **1382** (**FIG. 49**) to determine if the call is a request for protocol support API entry point. If not, the multiplexer IPXMUX.COM will direct that call into LSL.COM. If so, an address of a special 2F interrupt handler (LSL Protocol Support API Handler) supported by IPXMUX.COM is returned to IPXODI.COM in step **1384**.

[**0281**] The special interrupt handler, LSL Protocol Support API Handler, which forms a part of IPXMUX.COM, is illustrated in **FIG. 50**. Three services are handled by the LSL Protocol Support Handler, which is supported by the multiplexer IPXMUX.COM to set up an address for communication with a host on the network. These services are register protocol stack, bind stack and send a packet. The balance of the services are handled by LSL.COM.

[**0282**] The entry point of the LSL Protocol Support API Handler in IPMMUX.COM from the standpoint of IPXODI-.COM is the protocol support API within the link support layer LSL. Since the link support layer LSL.COM supports various protocols, such as IPXODI and TCPIP, registration of the IPXODI.COM protocol is checked in step **1386**. If the call to the link support layer LSL is to register a protocol stack, an IPXMUX register protocol stack application program interface (API) handler in step **1388** checks whether the protocol stack is IPXODI. If the protocol stack is IPXODI, the protocol stack handler sets a packet receive handler, supported by IPXMUX.COM and calls LSL.COM's protocol stack API to register the protocol. The protocol stack handler also saves the stack ID. Subsequently, in step **1390**, an IPXMUX Receive Routine Linker sets the protocol stack IPXODI's receive routine address to the packet receive address supported by IPXMUX.COM.

[**0283**] If the protocol API call is not to register the protocol stack, the system then checks in step **1392** whether a special registration service, a bind stack service, is requested. A bind stack service, normally done before registration, is used to set up a protocol for communication, i.e. packet length, etc. If bind stack service is requested, an IPXMUX Bind Stack API handler in step **1394** is called, which forces IPXODI to bind to the wired LAN card **1352** to which IPXODI is bound before the wireless LAN card **1360** was installed in order to be compatible with the IPXODI protocol. The IPXMUX bind stack handler also saves the process ID of the binding for sending and receiving packets.

[**0284**] If the protocol API call is not a register protocol stack or a bind stack service, the system checks in step **1396** whether send packet service is requested. If not, the system exits and the service call is handled by LSL.COM. If so, an IPXMUX send packet routine is called in step **1398** and **1400** (**FIG. 51**), which sets the address of the wireless LAN card **1360** as the source node address in step **1402**. The packet modifier also sets the node address of the wireless interface device **100** as the packet's destination mode address in step **1400** (**FIG. 51**). The send event service routine address is set to the address of the send event service routine in IPXMUX.COM before it returns.

[**0285**] Incoming packets are handled by an incoming packet handler illustrated in **FIG. 32**. In particular, incoming packets are checked in step **1404** whether the source address of the packet is from the wireless LAN card **1360**. If not, the system returns. If so, the packet's source mode address is saved and set to the mode address of the wireless LAN card **1360** while the pocket destination address is set to the address of the wired LAN card **1352** to which IPOXDI is bound.

[**0286**] 14. Host Control Mode

[**0287**] The wireless interface device **100** includes a hot icon **1408** (**FIG. 37**) in the hot icon area **1202** (**FIG. 36**) of the LCD **113**C for switching control of the host computer **101** from the wireless interface device **100** and the host computer **101**. While the wireless interface device **100** has control of the host computer **101**, the user has the option to dim the screen of the host computer **101**, as well as lock out the keyboard and mouse inputs. In particular, with reference to **FIG. 37, a** set-up window hot icon **1410** may be selected. Activation of the set-up window icon causes one of five selectable set-up dialog boxes to be displayed in the viewing area **1200** (**FIG. 36**) of the LCD **113**C on the wireless interface device **100**. These dialog boxes are illustrated in FIGS. **53-57**, which can be selected by a graphical button bar **1412** (**FIG. 53**). When the "host" button is selected, a list of host computer groups that are accessible by the wireless interface device **100** as well as the specific host to which the wireless interface device **100** is connected are displayed. When the wireless interface device **100** has control of the host computer **101**, the host computer screen can be dimmed and the host keyboard and mouse can be locked out by placing the pen down in the box next to those functions in the dialog box illustrated in **FIG. 53**. **FIG. 54** relates to setting up remote keyboard macros. **FIG. 55** is a maintenance dialog box which enables various maintenance functions, such as calibration of the pen, rebooting of the host, and the like. **FIG. 56** relates to power settings, and in particular includes an inactivity timer for timing periods of inactivity in order to place the wireless interface device **100** in a low-power state. **FIG. 57** is selectable by the screen button and enables the brightness and contrast of the LCD **113**C on the wireless interface device **100** to be adjusted.

[**0288**] **FIG. 58** illustrates a method for disconnecting the host computer **101** from the wireless interface device **100** and automatically returning control of host screen, keyboard and mouse to the host computer **101**. In addition, any configuration settings of the wireless interface device, such as contrast and brightness adjustment, are also saved in order to obviate the need to readjust the wireless interface device **100**, the next time it is connected.

[**0289**] Initially in step **1414** (**FIG. 58**), the system determines if the hot icon area **1202** of the LCD **113**C on the wireless interface device **100** was pressed. As illustrated in **FIG. 37**, the hot icon area **1202** includes several hot icons. Thus, the system checks in step **1416** whether the host control mode hot icon **1408** (**FIG. 37**) was selected. If not, the system loops back to step **1414** and waits for the hot icon area to be pressed. If the host control mode hot icon **1408**

was selected, the wireless interface device **100** sends a private message (i.e. pocket) to the host computer **101** in step **1418**, requesting host control mode.

[**0290**] The system then checks in step **1420** whether the host computer **101** returned an acknowledgement that the private message was received. If an acknowledgement of the private message is not received by the wireless interface device **100**, the attempt to enter the host control mode is aborted in step **1422**. If an acknowledgement is received, the system checks in step **1424** if the mouse keyboard and mouse had been previously locked out by the wireless interface device **100** as discussed above. If so, the host keyboard and mouse are unlocked. Subsequently in step **1426**, an internal flag is set indicating a request for termination of the connection with the host computer **101** in step **1428**. The request for termination initiates a timer, which, when timed out, disconnects the wireless interface device **100** from the host computer **101**. Thus, the system checks to determine if the host computer **101** is still connected to the wireless interface device **100** in step **1430**. If so, the system determines if the request for termination has timed out in step **1432**. If not, the system waits for the timer to time out and disconnects the wireless interface device **100** from the host computer **100**. Once the wireless interface device **100** is disconnected, control of the host computer **101** is returned to the host computer **101**.

[**0291**] In order to obviate the need to reconfigure the wireless interface device **100** the next time the wireless interface device **100** is connected to the host computer **101**, the system checks in step **1434** whether any of the configuration data (i.e. contrast, brightness (**FIG. 57**) was changed. If not, the wireless interface device **100** is placed in a suspend mode in step **1436**. If the configuration data did change, the new configuration data is saved in the EEPROM **111**B (**FIG. 12**) in step **1438**.

[**0292**] 15. Broadcast for Available Hosts

[**0293**] The wireless interface device **100** can determine the available hosts within range for wireless connection. The user can then select a host by way of a dialog box (**FIG. 53**), which will be discussed in more detail below. An important aspect of the wireless interface device **100** is that it can be connected to virtually any available hosts without any physical connections and without knowing the host address or node address beforehand, unlike known wireless and wired LAN systems where the node addresses of each of the personal computers in the network have a preassigned node address and are therefore known prior to any communications being established.

[**0294**] In order to initiate connection of the wireless interface device **100** to an available host **101**, the set-up hot icon **1410** (**FIG. 37**) is selected in step **1439** (**FIG. 59**) which causes a set-up dialog box, as illustrated in **FIG. 53** to be displayed in the viewing area **1202** (**FIG. 36**) of the LCD **113**C. Subsequently, in step **1440**, the wireless interface device **100** broadcasts network packets to be received by all available hosts **101** in range that are on the same channel and domain as the wireless interface device **100**. After the network packets are broadcast, the wireless interface device **100** listens for a predetermined time period in steps **1442** and **1444** for return acknowledgement packets from the available hosts **101**, which contain, among other things, the node addresses of the available hosts **101**. After the time-out period the wireless interface device **100** terminates listening for responses from the available hosts **101** in step **1446**. After listening is terminated, the system checks the number of responses received in step **1448**. If no responses are received, the wireless interface device **100** repeats the cycle (i.e. returns to step **1440**) for a predetermined number of retries as determined in step **1450**.

[**0295**] If a response is received, the system identifies the unique node address from the responding hosts **101** in step **1452** and saves the unique host node addresses in step **1454**. The list of available hosts **101** is searched in step **1456** for duplicate serial numbers. Should duplicate serial numbers be found in step **1458**, a warning is generated in step **1460**, warning the user that a duplicate copy of software is running on one of the responding hosts **101**. In step **1462**, the currently connected host is forced to appear as unavailable on the dialog box illustrated in **FIG. 53**.

[**0296**] The responding hosts **101** are sorted first by group name and then by host name in step **1464**. After the sorting, an internal status list of the available hosts **101** in designated as available in step **1466**. Subsequently, the available hosts and groups are displayed in the dialog box illustrated in **FIG. 53** in step **1468**. Movement of the cursor (by a pen-down event) to the desired host **101** selects that host **101**. A "connect" button on the dialog box is then selected to connect the wireless interface device **100** to the selected host **101**.

[**0297**] 16. Remote Keyboard Macros

[**0298**] **FIGS. 60 and 61** relate to remote keyboard macros on the wireless interface device **100**. An important aspect of the wireless interface device **100** is that the remote keyboard macros are provided by way of a wireless connection. **FIG. 60** relates to developing the macros while **FIG. 61** is directed to using the macro.

[**0299**] Referring to **FIG. 37**, the wireless interface device **100** includes two user-defined hot icons **1472** and **1474**, located in the hot icon area **1202** (**FIG. 36**) of the LCD **113**C, that can be used for the macros. These hot icons **1472** and **1474** are configurable in a set-up mode, which, as discussed above, is under the control of the set-up hot icon **1410** (**FIG. 37**). Once the set-up hot icon **1410** is selected, a hot key button **1470** on the dialog box illustrated in **FIG. 54** is selected. As noted in **FIG. 54**, the dialog box includes two configurable macros. These macros are configured by way of the two edit fields **1472** and **1474** (**FIG. 54**). In order to configure the macros, the icon for the desired edit field **1472** or **1474** is selected. These edit fields **1472** and **1474** are configurable by way of a virtual on-screen keyboard (OSK), selectable by way of a hot icon **1480** (**FIG. 37**).

[**0300**] Referring to **FIG. 60**, the system checks in step **1476** whether there has been a pen-down event in the viewing area **1202** (**FIG. 36**) of the LCD **113**C and, in step **1478**, whether the OSK hot icon **1480** (**FIG. 37**) was selected. If not, the system loops back to step **1476**. If so, the selected key on the OSK is translated into a keyboard scan code in step **1480** and a visual indication of the key selected in the edit field **1472** or **1474** in step **1482**. The process is repeated until the macro (i.e. WIN, DIR), followed by a carriage return **1486**, is complete and the macro is saved in the EEPROM **111**B (**FIG. 12**) in step **1484**. A clear button **1486** is provided in the dialog box illustrated in **FIG. 54** for

each edit field **1472** and **1474**. These clear buttons **1486** enable the edit fields to be cleared in the EEPROM **111**B **(FIG. 12)**.

[**0301**] Activation of the remote keyboard macros is accomplished by pressing down on the user-defined hot icons **1472** or **1474**, located in the hot icon area **1202 (FIG. 36)** of the LCD **113**C. The system checks in steps **1486** and **1488**, whether the user defined hot icons **1472** or **1474** are selected. If the user-defined hot icons **1472** or **1474** are not selected, the system returns to step **1486**. Once one of the user-defined hot icons **1472** or **1474** is selected, the keyboard scan code sequence, stored in the EEPROM **111**B **(FIG. 12)**, is retrieved for the selected hot icon **1472** or **1474** in step **1490**, which are then individually transmitted to the host **101** in step **1492**. These scan codes are then written to the keyboard buffer on the host **101** in step **1494**. Subsequently, in step **1496**, the host **101** processes the scan codes as though they originated from the host keyboard.

[**0302**] 17. Wireless Flash Programmer

[**0303**] As mentioned above, the wireless interface device **100** includes several flash memory devices **742-748 (FIG. 25)**. The flash memory device **742** includes a protected area which contains the system BIOS, and a sufficient amount of functionality to enable the wireless interface device **100** to be rebooted to enable reprogramming of the flash memory devices **742-748** by way of the serial port **788 (FIG. 23)** in the event of a flash disaster.

[**0304**] In order to upgrade the flash memory devices **742-748**, the upgrade disks are installed in an available host computer **101**. In particular, the flash upgrade software is written to a predetermined directory on the host's **101** hard disk. After the flash upgrade disks are installed, the wireless interface device **100** is turned on in step **1498 (FIG. 62A)** by way of the main power switch **855 (FIG. 28)**. Subsequently, in step **1500**, a connection between the host computer **101** and wireless interface device **100** is initiated in step **1500** by first selecting the configuration hot icon **1410 (FIG. 37)**.

[**0305**] Subsequently, the maintenance button on the dialog box is selected to get to the dialog box illustrated in **FIG. 55**. An upgrade button **1502** on the dialog box illustrated in **FIG. 55** is selected in step **1504**. In order to prevent programming errors, the radio quality is checked in step **1506** before proceeding. If the radio quality is poor, the upgrade is aborted. If the radio quality is adequate, power management is disabled in step **1508** to prevent the wireless interface device **100** from going into a reduced power state as discussed above during programming of the flash memory devices **742-748**. After the power management is disabled, a portion of the DRAM memory **111**A **(FIGS. 18 and 24)** in the wireless interface device **100** is set aside to receive a flash sector from the host computer **101** in step **1510**. Subsequently, the wireless interface device **100** polls the host computer **101** to determine the correct numbers of sectors in the flash update and whether the sectors are available on the hard disk of the host computer **101** in steps **1512** and **1514**. If the flash update files are not on the host hard drive or an incorrect number of sectors are available on the host hard disk, the update is aborted. Otherwise, the system requests the path/file data from the host computer **101** in step **1516**. Subsequently, each sector (file) in the flash update is read by the host computer **101** and uploaded over the radio to the DRAM **111**A in the wireless interface device **100** in step **1518**. After the sectors are written to the DRAM **111**A in the wireless interface device **100**, a BIOS call is made to write the sectors in the DRAM **111**A to the flash memory devices **742-748** in step **1520**.

[**0306**] In step **1522** the system checks for errors in writing to the flash memory devices **742-748**. Should any errors be detected, the update is aborted. If no errors are detected, the system checks in step **1524** whether all of the sectors from the DRAM **111**A have been written to the flash memory devices **742-748** in the wireless interface device **100**. If not, the system loops back to step **1516**. Once all of the files have been transferred to the flash memory devices **742-748**, the wireless interface device **100** is rebooted in step **1526**. Once the wireless interface device is rebooted, the system will be able to utilize the updated software in the flash memory devices **742-748**.

[**0307**] **FIGS. 63A and 63B** illustrate the routine for writing the flash update sectors from the DRAM **111**A to the flash memory devices **742-748**. Since the flash updates are stored in the DRAM memory **111**A, the programming is aborted if the AC power is turned off as determined in step **1528** since the flash update data in the DRAM **111**A will be lost when the battery is exhausted. In order to prevent errors during programming, interrupts, as well as the power management, are disabled on the wireless interface device **100** in steps **1530** and **1532**. After the interrupts and the power management are disabled, the flash memory device is erased in step **1534**. If errors occur during erasure, as determined in step **1536**, updating of the particular flash memory device **742-748** is aborted. If not, a sector from the DRAM **111**A is written to the flash memory devices **742-748** in step **1538**. After the sector is written to the flash memory devices **742-748**, the system checks in step **1540** whether any errors occurred. If so, the update is aborted. If not, the interrupts, as well as the power management, are enabled in step **1542** when all sectors have been reflashed.

[**0308**] 18. Automatic Reconnect

[**0309**] As mentioned above, the wireless interface device **100** can be connected to any of the available hosts **101** that appear in the dialog box illustrated in **FIG. 53** in the manner described above. The system illustrated in **FIGS. 64A and 64B** obviates the need for the user to select a host **101** for connection each time the wireless interface device **100** is powered up, by automatically connecting the wireless interface device **100** to the last host **101** to which it was successfully connected. As will be discussed in more detail below, when a host **101** is selected from the dialog box illustrated in **FIG. 53** for connection to the wireless interface device **100** and a connection is successfully achieved, the node address of that host **101** is stored in the EEPROM **111**B **(FIG. 12)**. Subsequently, once the wireless interface device **100** is powered up in step **1544**, the system reads the node address from the EEPROM **111**B, and reads it to a specific location in DRAM **111**A **(FIGS. 18 and 24)** in step **1546**. After the node address is written to the DRAM **111**A, the system checks the node address to determine whether it is valid in step **1548**. Invalid node addresses occur anytime the wireless interface device **100** makes an attempt to connect to a host **101**, which fails during automatic reconnecting or is later disconnected by the end user. Thus, if a successful connection is not made or if there is a manual disconnection, the node address is cleared from the DRAM **111**A in step

1550 and thus will be invalid. Subsequently, if the automatic reconnect fails in order to facilitate connection of the wireless interface device **100** to another available host **101**, the set-up dialog box illustrated in **FIG. 53** is displayed on the display **113**C of the wireless interface device **100** in step **1552**. After the host selection set-up dialog box is displayed on the wireless interface device **100**, the system checks in step **1554** whether the wireless interface device **100** is connected to an available host **101**. Normally, if an invalid address is found in step **1548** and the host selection set-up dialog box appears on the display **113**C of the wireless interface device **100**, there will be no connection to an available host **101** and the system will jump to step **1556**, where it checks if the hot icon area **1202** (**FIG. 37**) has been depressed. Normally in this situation, since the host selection dialog box is already being displayed on the screen **113**C of the wireless interface device **100**, the only hot icon that can affect the situation is a sleep-face hot icon **1558** (**FIG. 37**), which places the wireless interface device **100** in a low-power sleep mode. In a normal situation when the wireless interface device **100** is first powered up, the sleep-faced hot icon **1558** is not depressed and the system waits for the user to select an available host **101** from the host set-up dialog box illustrated in **FIG. 53** as discussed above in step **1560**. Once an available host **101** is selected, the system loops back to step **1562** and attempts to establish connection with the selected host **101**.

[**0310**] In step **1564** the system checks whether or not the connection was successful. If not, the system goes to step **1550** and clears the node address for the selected host **101** from the DRAM **111**A and displays the host selection set-up dialog box in step **1552**. If the connection between the wireless interface device **100** and the host **101** is successful, the node address of the host **101** is saved in a specific DRAM location in step **1566**, and in turn, written to the EEPROM **111**B (**FIG. 12**) in step **1568**. After the node address of the selected host **101** is stored in EEPROM **111**B, the wireless interface device **100** will display whatever is being displayed on the host **101** in step **1570**.

[**0311**] After a connection is established between the host **101** and the wireless interface device **100**, the system continuously checks for hot icons being selected in step **1572**. If no hot icons are selected, the system will loop back and continue to check for the selection of a hot icon. If the system determines that a hot icon is selected, the system checks in step **1574** whether the set-up dialog hot icon **1410** (**FIG. 37**) was selected. If so, the system loops back to step **1552** and displays the host selection set-up dialog box illustrated in **FIG. 53** on the display **113**C of the wireless interface device **100**. If the set-up dialog hot icon **1410** is not selected, the system checks in step **1576** whether the sleep-face hot icon **1558** is selected in step **1576**. If not, the system checks in step **1578** whether other hot icons in the hot icon area **1202** (**FIG. 36**) were selected and the appropriate action is taken. The system then goes to step **1570** and, in turn, and continually checks for the selection of other hot icons in step **1572**.

[**0312**] If it is determined in step **1576** that the sleep-face hot icon **1410** is selected, the system checks in step **1580** whether a double pen-down event occurred at the location of the sleep-face hot icon **1410**. As mentioned above, the sleep-face hot icon **1410** causes the wireless interface device **100** to go into a low-power mode. However, before placing the wireless interface device **100** in a low-power mode, the node address of the host **101** to which the wireless interface device **100** is connected is saved in a specific location of the DRAM **111**A and, in turn, written to the EEPROM **111**B in step **1582**. After the node address is saved, the wireless interface device **100** is powered down in step **1584**.

[**0313**] The system discussed above is thus able to automatically connect the wireless interface device **100** to the last host **101** to which it was connected. After the automatic reconnect, should the set-up window hot icon **1410** (**FIG. 37**) be selected, the host selection set-up dialog box illustrated in **FIG. 53** will be displayed on the screen **113**C of the wireless interface device **100**. Subsequently, the system will go to step **1554** and check whether the wireless interface device **100** is connected to a host **101**. In this case, since the wireless interface device **100** will still be connected to the available host, the system then checks in step **1586** whether a disconnect button on the host selection dialog box illustrated in **FIG. 53** has been depressed. If not, the system goes to step **1556** and continuously waits for a hot icon in the hot icon area **1202** (**FIG. 36**) of the LCD **113**C to be depressed. If the disconnect button in the host selection set-up dialog box illustrated in **FIG. 53** is depressed, the node address for the host **101** to which the wireless interface device **100** is connected is erased from the specific location in the DRAM **111**B in step **1588**. Subsequently, the system goes to step **1556** and waits for a hot icon in the hot icon area **1202** (**FIG. 37**) to be depressed.

[**0314**] 19. Remote Occlusion Region

[**0315**] As mentioned above, the wireless interface device **100** includes a virtual on-screen keyboard (OSK), as illustrated in **FIG. 66**. More particularly, the OSK is configurable by the buttons **1590**, **1592**, **1594** and **1596** in a control box located at the top of the OSK. These buttons **1590**, **1592**, **1594** and **1596** enable the OSK to be configured. For example, a button **1590** displays the OSK as illustrated in **FIG. 66A** with a full keyboard and numeric keypad. The button **1592** is a toggle which displays the keyboard without the numeric keyboard as illustrated in **FIG. 66B**. The button **1594** displays the numeric keypad with the NUM LOCK off as illustrated in **FIG. 66**C, or alternatively displays the OSK as a numeric keyboard NUM LOCK on as illustrated in **FIG. 66D**. The button **1596** allows the size of the OSK to be varied. The "X" button closes the window displaying the OSK.

[**0316**] As mentioned above, the display **113**C on the wireless interface device **100** displays whatever is being displayed on the host **101** when a connection is made. Since the graphics for the OSK is generated locally at the wireless interface device **100**, a remote occlusion region is generated at the host **101** to prevent the host **101** from painting over the OSK on the display **113**C of the wireless interface device **100**. The remote occlusion region is analogous to a window in the display of the host **101** in which the host **101** is prevented from using.

[**0317**] Referring to **FIG. 65**A, the system monitors the hot icon area **1202** (**FIG. 36**) to determine if any of the hot icons have been pressed. As discussed above, the system includes an OSK hot icon **1480** (**FIG. 37**), which displays the OSK on the LCD **113**C of the wireless interface device **100** when depressed. If the system determines in step **1598** that a hot icon has been depressed, it checks in step **1600** whether the

OSK hot icon **1480** was pressed. If not, the system loops back to **1598** and continually checks for hot icons being pressed. If the OSK hot icon **1480** has been depressed, the system determines the last configuration for the OSK in step **1602** (i.e. FIGS. **66**A-**66**D). Once the configuration of the last OSK is determined in step **1602**, the system then checks the operating system and video mode of the host **101** in step **1604**. Depending on whether the host **101** is in text or graphics mode will determine whether the OSK image on the wireless interface device **100** is merely shadowed onto the display of the host **101** by way of a private message, as will be discussed in more detail below, or whether the remote occlusion region at the host **101** is established by drivers in the host software, which create the remote occlusion region by way of ASCII characters. Thus, in step **1606**, if the system determines that the host **101** is in the text mode, an occlusion region on the display of the host **101** is created using the host control drivers in step **1608**. In step **1610**, the system checks whether the occlusion region was successfully established. If not, the system then checks in step **1612** whether the OSK is currently visible on the display **113**C of the wireless interface device **100**. If not, the display of the OSK is aborted in step **1614**. If it is determined in step **1612** that the OSK is currently visible on the LCD **113**C of the wireless interface device **100**, any reconfiguration of the OSK is ignored and the configuration of the last OSK is continuously displayed in step **1614**. If it is determined in step **1610** that the remote occlusion region is successfully established, the system goes to step **1616**, which enables the OSK to be used.

[**0318**] If it is determined in step **1606** that the host **101** is not in a text mode, the system checks in step **1618** whether the host **101** is in a graphics mode. If not, the system goes to step **1620** and sets the video mode to VGA graphics in the wireless interface device **100** and subsequently proceeds to step **1608** to establish the occlusion region in the host **101** by host control drivers. If the host is in a graphics mode, the system next checks in step **1622** whether the host **101** is running a Windows application. If not, the system returns to step **1608** and establishes the occlusion region on the display of the host **101** using the host control drivers.

[**0319**] If it is determined in step **1622** that the host **101** is running a Windows application, the occlusion region on the host **101** is established by way of a private message sent by the wireless interface device **100** to the host **101** in step **1624**. After the private message is sent, the system checks in step **1626** to determine if it was successfully sent. If not, the system proceeds to step **1612** and checks to determine if an OSK is currently visible. If the private message is successfully sent, the system checks in step **1628** whether the private message was successfully received by the host **101**. If so, the system goes to step **1630** and checks whether the private message was acknowledged by the host **101**. If so, the system goes to step **1616** and draws the OSK at the user-requested coordinates. If not, the system goes to **1612**. If it is determined in step **1628** that the private message has not been received, the system continually checks for receipt of the private message for a predetermined time-out period in step **1632**. Should a time-out occur before the private message is acknowledged by the host **101**, the system again will go to step **1612**.

[**0320**] The OSK includes a control bar **1632** (**FIG. 66A**). The control bar **1632** enables the location of the OSK on the LCD **113**C of the wireless interface device **100** to be changed by touching the control bar **1632** with the pen and dragging it to the desired location on the LCD **113**C of the wireless interface device **100**. Anytime the user changes the location of the OSK on the LCD **113**C of the wireless interface device **100** as acknowledged by the system in step **1634**, the system then returns to step **1604** to determine the video mode of the host computer **101**. As discussed above, the video mode determines whether the remote occlusion region on the display of the host **100** is created by shadowing the OSK on the display of the host by way of the private message or whether the occlusion region on the display of the host is created by local drivers using ASCII characters. The system then goes to step **1606**.

[**0321**] 20. Multiple Wireless Interfaces to a Single Server

[**0322**] The alternate embodiments of the invention discussed heretofore all relate to a single wireless interface device **100** interfaced to a single host implemented as a personal computer or to a local area network by way of an access point **109**. The following embodiments illustrated in FIGS. **67**-**112** primarily relate to a system in which multiple wireless interface devices **100** interface in real time with a multi-device server which forms a portion of either a wired LAN or a wireless LAN, or multiple servers connected together by routers, as will be discussed in more detail below. The system for enabling multiple wireless interface devices **100** to interface in real time with a multi-device server or plurality of servers is generally identified with the reference numeral **1700** and illustrated in **FIG. 67**. In this system **1700**, a plurality of wireless interface devices **100***a*, **100***b*, **100***c*, **100***d*, etc. communicate with one or more local area network (LAN) segments **1702** and **1704**, by way of an access point **109** (discussed above). Each LAN segment **1702**, **1704** includes a multi-device server **1708**, **1710** with an extended Windows NT operating system, as discussed below. The LAN segments **1702** and **1704** are connected together by a router **1706**, discussed in more detail below. Only four wireless interface devices, identified in **FIG. 67** as **100***a*, **100***b*, **100***c* and **100***d*, are shown for example. However, more wireless interface devices **100** can be connected to the System **1700**.

[**0323**] Various server platforms are suitable for use with the system **1700**. For example, server platforms which include one to four microprocessors, for example, 32-bit x86 or Pentium Intel Microprocessors or RISC-based systems of at least 100 MHz or faster are suitable. Examples of suitable servers **1708**, **1710** include: ZDS Z-Server MX Server (up to 4 Pentium microprocessors); ZDS Z-Server WG Server (up to 2 Pentium microprocessors); and Z-Station GT Desktop Server (single Pentium microprocessor); and the ZDS P60E Server; all available from Zenith Data Systems, Sacramento, Calif. Each server should have at least 90 MB of free hard disk space and 16-32 MB of RAM; preferably 16 MB plus 4 MB per user.

[**0324**] As mentioned above, each server **1708**, **1710** utilizes an extended Windows NT Operating System. The Windows NT operating system is described in detail in "Windows NT Server Professional Reference", by K. P. Siyan, *New Writers Publishing,* 1995; "Programming Windows 95", by C. Pelzold and P. Yao, *Microsoft Press,* 1996; "WINDOWS 95 WIN 32 Programming API Bible", by R. Simon, M. Gauher and B. Barnes, *Waite Group Press,* 1996,

hereby incorporated by reference. In order to enable remote control access of the servers **1708** and **1710** by the wireless interface devices **100**, an additional layer of software, for example, WinFrame by Citrix Systems, Inc. is used in both the servers **1708**, **1710**, as generally shown in **FIG. 68**. The Citrix WinFrame software is described in detail in Citrix WinFrame, published by Citrix Systems, Inc., copyright 1995, hereby incorporated by reference. The WinFrame software supports Windows 95, Windows NT, Windows 3.X, as well as MS-DOS text applications.

[**0325**] The access point **109** allows multiple wireless interface devices **100** to be connected to one or more LAN segments **1702**, **1704**. Various devices are suitable for use as the access point **109**. For example, a wireless LAN adapter, such as the CruiseLAN wireless LAN adapter, as manufactured by Zenith Data Systems, Sacramento, Calif., is suitable, as described in detail in "CruiseLAN PCMCIA SPECIFICATIONS", published by Zenith Data Systems, copyright 1994, hereby incorporated by reference.

[**0326**] The CruiseLAN LAN adapter is adapted to be installed in a PCMCIA Type 2 interface or ISA interface, available on various desktop and portable personal computers. The CruiseLAN wireless LAN adapter is based on a frequency hopping spread spectrum technology in the 2.4-2.4835 GHz band, and can be used in both client server and pier-to-pier network architecture systems. The CruiseLAN wireless LAN adapter supports NetWare 2.x, 3.x, 4.x, NetWare Lite, Microsoft Windows for Work Groups, as well as Microsoft LAN Manager.

[**0327**] Various other wireless LAN adapters are suitable for use as the access point **109**, as long as the data rate requirements of standard PC LAN applications are exceeded, for example, 1.6 Mbps, and suitable at a reasonable operating distance. Moreover, various configurations are intended to be within the broad scope of the invention. For example, the router **1706** can be used to connect the LAN **1702** to a gateway (not shown). Also, the router **1706** can be used to connect the LAN **1702** to a LAN **1704** which includes its own access point (not shown).

[**0328**] As mentioned above, the system **1700** may include multiple LAN segments **1702**, **1704** connected together by a router **1206**. Various commercially available devices are suitable for use as the router **1706**, for example, as manufactured by CISCO Systems, Inc.

[**0329**] The hardware for the wireless interface device **100** is described in detail above and illustrated in FIGS. **11-30** with the exception of the audio input subsystem, described below. The software for the wireless interface devices **100** for use with the multi-device servers **1708**, **1710**, as well as the software for the multi-device servers **1708** and **1710**, is described below and included in Appendix 2.

[**0330**] 21. Wireless Enumeration of Available Servers

[**0331**] As mentioned above, the servers **1708**, **1710** may be provided with the service advertising protocol (SAP), a Windows NT service as described in a CD-ROM entitled "Microsoft Developer Network Development Library January 96", published by Microsoft Corporation, copyright 1996, hereby incorporated by reference. The SAP enables the servers **1708**, **1710** to provide a broadcast function for broadcasting its server name and node address to the network. The servers with the broadcast function may or may not be in the same LAN segment **1702**, **1704**, with the access point **109** through which the wireless interface device **100** communicates. If the server is not on the same LAN segment **1702**, **1704**, the enumeration will be across the network router **1706**.

[**0332**] The system for enabling wireless enumeration of the servers available for connection to a wireless interface device **100** is illustrated in FIGS. **67-74**. **FIG. 67** is an overall flow chart for both the servers **1708**, **1710** and wireless interface devices **100**. The software for the wireless interface device **100** is illustrated in **FIGS. 71***a*-**71***c*, while the server software is illustrated in FIGS. **72-74**. **FIG. 70** illustrates a set-up dialog box, available at the wireless interface device **100** for initiating the wireless enumeration of the servers and connecting to one of the servers.

[**0333**] Turning to **FIG. 69**, the servers **1708**, **1710**, which, as mentioned above, utilize a Windows NT operating system, are provided with the Service Advertising Protocol (SAP), which allows the servers **1708**, **1710** to advertise their server names and node addresses. As shown in step **1720**, the SAP uses the IPX Protocol, supported by Windows NT operating system, to transmit a SAP packet every 60 seconds to inform the other servers **1708**, **1710**, as well as routers **1706**, on the network of their availability. When a wireless interface device **100** is seeking a server **1708**, **1710** to connect to, the wireless interface device **100** sends a SAP query packet, as indicated in step **1724**. The SAP query packet is received by those servers **1708**, **1710** and routers which support SAP. The servers **1708**, **1710** that support SAP return their server names and node address, as indicated in step **1726**.

[**0334**] Referring to **FIG. 69**, after the server name and node address information is received by the wireless interface device **100**, an IPX packet is directed to the server **1708**, **1710** to request the domain name, software version, as indicated in step **1740**. (Steps **1740** and **1746** may also include information whether a particular application is supported, which is part of a load balancing function described below.) The IPX packet is received by the server **1708**, **1710**, which, in turn, requests its domain name, as illustrated in steps **1742** and **1744**. In a server running the Windows NT operating system, all domain names must be authenticated to a primary domain controller. The server then sets up packets identifying its server domain name and software version, in step **1746**. This information is returned to the wireless interface device **100** and then put into a server list buffer in step **1748** and displayed in the dialog box **1732** (**FIG. 70**). Control is then transferred to the client manager for the wireless interface device **100** in step **1750** in the wireless interface device **100**. The wireless interface device **100** may be then connected to the selected server by depressing the connect button **1738** in the set-up dialog box illustrated in **FIG. 70**.

[**0335**] The SAP query packet is initiated by way of the wireless interface device **100** by way of the set-up dialog box illustrated in **FIG. 70**. As discussed above, the set-up dialog box can be accessed by depressing the hot icon **1410** (**FIG. 37**) in the hot icon area **1202** (**FIG. 36**) of the wireless interface device **100**. As illustrated in **FIG. 70**, the set-up dialog box includes a server button **1728**, as well as dialog boxes **1730** and **1732** which identify the server domain names, as well as server name for those servers which

broadcast a SAP advertising packet. The set-up dialog box also includes a disconnect button **1734** and update list dialog button **1736**, as well as a connect button **1738**. In order for the wireless interface device **100** to issue a SAP query packet, as discussed above, the update list button **1736** on the set-up dialog box is depressed. As mentioned above, the servers **1708**, **1710** then return their server names and node addresses **1708**, **1710**, on the network. This information is communicated to the wireless interface devices **100** wirelessly. The server name and domain name is displayed in the dialog boxes **1730** and **1732**. The dialog box **1730** displays the group or domain information—all of the servers in a particular group—while the dialog box **1732** displays the individual servers within each of the groups.

[**0336**] The software for the enumeration service for the wireless interface device **100** is illustrated in **FIGS. 71***a-c*. As discussed above, and illustrated in **FIG. 3**, the wireless interface devices **100** may include application software **105 (FIG. 3)**; for example, Novell NetWare. Referring to **FIG. 71***a*, initially, the IPX protocol is initialized in step **1752** when the update list button **1736 (FIG. 70)** is depressed in the set-up dialog box illustrated in **FIG. 70**. The IPX protocol (Internet Packet Exchange) is part of Novell NetWare's Protocol Stack and is used in this application to transfer data between the servers **1708**, **1710** on the network and the various wireless interface devices **100**. Once the IPX protocol is initialized, an IPX socket is opened for listening in step **1754**. Once the IPX socket is opened for listening, event control blocks (ECBs) are set up for listening for the expected IPX packets by calling an application programming interface (API), known as an IPXListenForPacket. The event control blocks (ECBs) are used for controlling the communication between wireless interface device **100** and the server **1700**, **1708**. Once the ECBs are set up for listening, additional ECBs are set up for sending the SAP query packet in step **1758**. Once the ECBs for the SAP query packet are set up, the SAP query packet is directed to the wireless network. As mentioned above, the servers running the SAP service broadcast a SAP advertising packet every 60 seconds. The wireless interface device **100** continues to receive these packets during a predetermined time-out period, as indicated in step **1762**. Since the servers **1708**, **1710**, which can support multiple wireless interface devices **100**, as well as personal computers, which can only support a single wireless interface device **100**, respond to the SAP query packets, in step **1762** during a predetermined time-out period, the wireless interface device **100** checks in step **1764** whether the responding servers can support multiple wireless interface devices. If not, the system returns to step **1762** and continues to wait for a response from a server that can support multiple wireless interface devices **100** during the time-out period. Once a response is received during the time-out period from a server **1708**, **1710** which can support multiple wireless interface devices, the server name and node address is written to a list buffer in step **1766**. Once the time-out period has expired, the listen ECBs are removed in step **1768** and the IPX socket is closed in step **1770**. In other words, the servers **1708**, **1710** on the network only have within the time-out period to respond to a SAP query packet from a requesting wireless interface device **106**. Whatever servers respond during the time-out period are identified by server name and node address in the list buffer. After that, the listen ECBs are removed and the IPX listening socket is closed in steps **1768** and **1770**.

[**0337**] The server list buffer at this point contains the names of the servers connected to the network. The wireless interface device **100** then determines the domain names of the various servers, as illustrated in **FIG. 71***b*. In particular, in step **1772**, an IPX packet is initialized for a domain query to determine the domain name and software version and may also be used to determine whether a particular application is supported. Once the IPX packet is initialized, a socket is opened in step **1774** as well as an event control block (ECB) for setting up an IPX packet for the domain query in step **1776**, in order for the IPX packet to be sent to the wireless network **100** in step **1778**. The domain query packet is sent out to the wireless interface device **100** in step **1778**. Then ECBs are set up for listening for the domain packets and for the expected packets by calling IPXListenForPacket service in step **1780**. The system waits for servers **1708**, **1710** to respond and checks in step **1782** whether all of the servers have responded. For each of the responses, the domain and software version number is written to the server list buffer in step **1784** by the wireless interface device **100**. The complete list buffer is displayed in the dialog box, as discussed above.

[**0338**] The software for the servers **1708**, **1710** equipped with the enumeration service is illustrated in FIGS. **72-74**. **FIG. 72** relates to the enumeration service initialization, while **FIGS. 73 and 74** relate to the enumeration service.

[**0339**] Initially, the particular server **1708**, **1710** in which the enumeration service is to be installed is initialized by calling a Windows NT API, known as an open service control manager in step **1792**, used for installing services on the servers **1708**, **1710**. In order to determine whether the enumeration service is being installed or removed, a parameter of the installation program is checked in step **1794** to determine whether the enumeration service is being installed or removed. If the parameter indicates that the enumeration service is to be installed, the enumeration service is installed on the server **1708**, **1710** in step **1796**. If the particular parameter in the installation program indicates that the enumeration service is to be removed, the enumeration service is removed in step **1798**.

[**0340**] **FIG. 73** indicates the initialization of the enumeration service on server **1708**, **1710**. In order to install the enumeration service on a particular server **1708**, **1710**, the service is registered in the Windows NT registry in step **1800**. Once the service is registered in the Windows NT registry, the service control manager, is notified of start-up in step **1802**. In step **1804**, the enumeration service is spun off as a thread within the Windows NT Operating System. A thread is the smallest unit of a task that can be scheduled. Thus, once the enumeration service is spun off as a thread, the server **1708**, **1710** is able to provide the domain name and software version information, as discussed above, to respond to IPX packets from the wireless interface device **100**. Subsequently, the running status of the enumeration service is set up in step **1806**. Whenever service is registered in the NT service register, various resources of the server are utilized, thus, the system resources are released in step **1808**.

[**0341**] The operation of the enumeration service at the server side is illustrated in **FIG. 74**. In particular, **FIG. 74** illustrates the software that enables the server **1708**, **1710** to respond to an IPX packet from the wireless interface device **100** regarding the server domain name and software version. In order to enable a server **1708**, **1710** to respond to an IPX

packet from the wireless interface device **100**, as set forth above, the global variables for an IPX socket at the server **1708**, **1710** are initialized in step **1810**. Subsequently, in step **1812**, a WIN socket is initialized. After the WIN socket is initialized, an IPX socket is created in step **1814** to enable the servers **1708**, **1710** to communicate with the wireless interface device **100**. The system then checks in step **1816** whether there are any errors in creating the IPX socket for enumeration. If so, the enumeration service is stopped and removed, as discussed above. If there are no errors, the WIN socket API is called in step **1820** to retrieve a datagram RecvFrom (API call which retrieves packets sent from the wireless interface device **100** to server from the network indicating a request packet has been sent by client). Subsequently, in step **1822**, the network Application Program Interface (API) is called to get the primary domain name of the server. If this process fails, the primary domain name is obtained from the NT registry under key WINLOGON.

[**0342**] As will be discussed below in connection with the load balancing function, the system may obtain certain other information, including the server software version, the number of current log-in users per processor, whether the specified application is supported by the server in step **1828**. The server software version, number of current log-in users per processor, and whether the specified application is supported by the server, is combined with the domain name, and used to build and send a reply message in step **1830** which, as discussed above, is returned to the wireless interface device **100** and stored in a server list buffer.

[**0343**] 22. Dynamic Server Allocated for Load Balancing Wireless Remote Interface Processing

[**0344**] In accordance with another important aspect of the invention, the system can provide for dynamic server allocation for load balancing the wireless interface devices **100**. In order to provide dynamic load balancing, the system checks the number of users per processor on each server and passes this information to the wireless interface device **100** directly. In one embodiment, only the server with the smallest load is identified in the server list buffer made available and displayed in the dialog box on the wireless interface device **100**, as discussed above.

[**0345**] In this application, the software is essentially the same as discussed above for the enumeration service, with the exceptions noted below. Since only one server will be made available to the wireless interface device, the wireless interface device **100** initiates a request to launch a specific application by name, in addition to requesting the server domain name and version in steps **1740** (**FIG. 69**) and **1772** (**FIG. 71B**). The responding server **1708**, **1710** indicates whether the specified application is supported in addition to providing its domain name and version in steps **1746** (**FIG. 69**) and **1828** (**FIG. 74**). Once the server with the smallest load is detected which supports the application specified by the wireless interface device **100**, the number of hops for each server and number of log-in users per processor on each server is multiplied to obtain a product in step **1786** (**FIG. 71C**). Each hop is identified as the number of links (LAN segments or routers) between a source node to a destination node. For example, in **FIG. 67**, there is one hop between the source node (i.e., a wireless interface device **100**) and the server **1708**, while there are two hops between the source node and the server **1710**. The product of the number of hops and the number of log-in users per processor provides an indication of the amount of load per server. In order to select the server with the smallest load, the server with the smallest product result is selected in step **1788**. Thus, for the selected server group, as illustrated in the dialog box **1730** in the set-up dialog box illustrated in **FIG. 70**, the server with the smallest load is identified in the dialog box **1732**, while passing control to the client manager in the wireless interface device in step **1790**. After the server with the smallest load is identified and control is passed to the client manager in the wireless interface device **100**, connection between the selected server and the wireless interface device **100** can be initiated by depressing the connect button **1738** (**FIG. 70**) on the set-up screen.

[**0346**] 23. Data Compression Loader

[**0347**] In order to minimize memory storage space, local software for the wireless interface device **100** is stored in a compressed format, for example, in a read only memory device (ROM), such as the flash memory devices **742-748** (**FIG. 25**), then decompressed, written and executed from the DRAM memory devices **111A** (**FIG. 18**). As will be discussed in more detail below, both .EXE files and .COM files, as well as various other types of files are compressed and decompressed. An .EXE file is any executable file with an extension .EXE, i.e., FIND.EXE, MSD.EXE. A .COM file is any executable file with an extension .COM, i.e., EDIT.COM, SYS.COM. Such files, as known by those of ordinary skill in the art, include a header portion as well as a data, or code portion, where either data or a software program is stored. An exemplary header for an .EXE file is illustrated in Table 8 below.

TABLE 8

Exemplary .EXE File Header	
.EXE size (bytes)	602d6
Magic number:	5a4d
Bytes on last page:	01a4
Pages in file:	0171
Relocations:	051a
Paragraphs in header:	0160
Extra paragraphs needed:	0000
Extra paragraphs wanted:	ffff
Initial stack location:	2cb4:0064
Word checksum:	5a3a
Entry point:	00b8:0000
Relocation table address:	001e
Memory needed:	179K

[**0348**] As shown in Table 8, an executable file header identifies the various attributes of an .EXE file, including the size of the file, the required memory storage space for the file, as well as various attributes of the header file, such as the number of bytes in the header. Utilizing the example of Table 8, the exemplary header file indicates that there are $160 or 352 paragraphs in the header. Since there are 16 bytes per paragraph, the exemplary header file illustrated in Table 8 is a 5632 byte file.

[**0349**] With known data compression techniques, the data, or code portion, of both .COM files, as well as .EXE files, are compressed by various techniques, for example, as disclosed in "DATA COMPRESSION", by James A. Storer, *Computer Science Press,* Copyright 1988, pps. 146-163, hereby incorporated by reference. However, due to the

complexity of the structure of the headers for an .EXE file, for example, as shown in Table 8, such header files have not heretofore been known to be compressed. Thus, using the example illustrated in Table 8, the entire 5632 byte header for the .EXE file would be stored in a decompressed format, while the code, or data portion of the file is stored in a compressed format.

[0350] For applications to be run locally on the wireless interface device **100**, which include a number of .EXE files, the header for such an .EXE file can occupy a relatively substantial portion of the available memory storage space provided by the flash memory devices **742-748** (**FIG. 25**). In order to reduce the required memory storage space in the flash memory devices **742-748** in the wireless interface device **100**, the headers for the .EXE files are at least partially compressed, in accordance with an important aspect of the invention. As will be discussed in more detail below, the header for such .EXE file is transformed into a customized header **1882** (**FIG. 79**), which may include an uncompressed portion **1884** and a compressed portion **1886**. The data or code portion **1888** is totally compressed, as discussed above.

[0351] The uncompressed portion **1884** of the header, for example, the first **100** bytes, may be used for various attributes of the file which may be used either before or during the decompression process, in order to speed it up. For example, the uncompressed portion **1884** of the header **1882** may include an attribute of the original header, such as the length of the original header. Various other types of information may also be included in the uncompressed portion **1884** of the customized header **1882**. For example, the uncompressed portion **1884** of the customized header **1882** may include a signature field **1890**. The signature field can be used to indicate whether the file is a .COM file or an .EXE file, as well as the version of the compression software. Such information can be used to speed up the decompression process.

[0352] The overall flow chart for the compression/decompression process is illustrated in **FIG. 75**. The flow diagram for the compression process is llustrated in **FIGS. 76***a* and **76***b*, while **FIG. 77** illustrates he flow diagram for the decompression process.

[0353] New software to be loaded into the wireless interface device **100** may be loaded by way of the UART **788** (**FIG. 23**) by way of the serial port **790** (**FIG. 30**), or by ay of the radio interface **960** (**FIG. 16**). In particular, in order to load software into the wireless interface device **100** wirelessly in a system in which multiple wireless interface devices **100** are supported by a single server, the software is first loaded into an available server **1708**, **1710** (**FIG. 67**). In such an application, the wireless interface device **100** is placed in a set-up mode of operation. In particular, the hot icon **1410** (**FIG. 37**) is initially selected from the hot icons **1202** (**FIG. 36**) illustrated in **FIG. 55**. The MAINTENANCE BUTTON **1392** is then depressed to provide the dialog box as illustrated in **FIG. 55**.

[0354] The overall flow chart for the compression/decompression process is shown in **FIG. 75**. Initially, files are compressed and transmitted to the wireless interface device **100**. In particular, the compressed files are written directly to the flash memory devices **742**. In order to execute the file, the compressed file from the flash memory device **742** is written to a temporary file within the DRAM memory devices **111***a* (**FIG. 18**) in the memory space 10000 to 1FFFFF. In such an application, the flash memory devices **742** act as input files, while the temporary file in the DRAM memory devices **111***a* serves as an output file. Alternatively, new files to be written to the flash memory devices **742** are initially uncompressed and stored in an external input file **1896**, external from said wireless interface device **100**. The input file **1896** is then compressed and stored in an output file **1898**. The compressed output file **1898** is then transferred to the flash memory devices **742** within the wireless interface device **100** over a radio link. Thus, in step **1900**, depending upon whether compressed data is being written to the flash memory devices **742**, or whether the compressed data within the flash memory device is being executed, input and/or output files **1896**, **1898** are opened in step **1900** as generally discussed above. If the file is to be transferred to the flash memory devices **742** in the wireless interface device, the file is compressed and written to an output file **1898** and transferred to the flash memory devices **742**, as indicated by steps **1902** and **1904**. For files that are currently stored in the flash memory devices **742** in a compressed format, these files are decompressed and written to an output file **1898** for execution as indicated in steps **1902** and **1904**.

[0355] The software for compressing the various software to be stored in the wireless interface device **100** is illustrated in **FIGS. 76***a* and **76***b*. Files to be compressed are read to determine whether the file is an .EXE file or a .COM file in step **1910**. The system then sets up a signature field **1890** (**FIG. 79**). As discussed above, the signature field **1890** is stored in the uncompressed portion **1884** of the customized header **1882** and may include information as to whether the file is an .EXE file or a .COM. Thus, in step **1910**, the input file **1396** is read to determine the type of file written to the input file **1896** (**FIG. 80**). If the file is an .EXE file, a signature flag for an .EXE file is set in the signature field **1390**, as illustrated in step **1912**. On the other hand, if the file is a .COM file, the signature flag within the signature field **1890** (**FIG. 70**) is set to represent a .COM file in step **1914**. Once the signature flag is set, other signature information may be added to the signature field **1890** in step **1916**. For example, as discussed above, the software version of the compression software may be included in the signature field **1890** in order to speed up the decompression process. Once the signature field is set up, the signature field is written to the output file **1898** in step **1918**.

[0356] As mentioned above, due to the complexity of the headers for the .EXE files, for example, as illustrated in Table 8, a customized header **1882** (**FIG. 79**) is set up for both an .EXE file and a .COM file. Once the signature field **1890** is written to the output file **1898** (**FIG. 78**), the system determines in step **1920** whether the file is an .EXE file or a .COM file. If the file is a .COM file, a customized file header for a .COM file is set up in step **1922**. As such, in step **1922**, the entire header **1882** and the data or code portion **1888** for the .COM file is compressed, after which the system goes to step **1938**. Since the headers for .COM files may rather easily be compressed, the customized header for a .COM file may merely indicate the size of the header and store it in an uncompressed portion **1884** of the customized header **1882**. The customized header file **1882** is then written to the output file **1898** in step **1924**. After the customized file header **1882** is set up, the system checks in step **1926** whether the file is an .EXE file or a .COM file.

[0357] If the file is a .COM file, the entire file, including the header, is compressed. If it is determined in step **1920** that the file is an .EXE file, the system reads the file block by block in order to determine the size for the customized file header **1882**. As indicated above, the customized file header for .EXE files may include an uncompressed portion **1884**, as well as a compressed portion **1886** (**FIG. 79**). Once the signature field **1890** is set up, the system can then begin processing the header for the .EXE file block by block in order to form the customized file header **1882**, as discussed above. As shown in Table 8, .EXE files include various types of information. Thus, in steps **1928** through **1936**, the system reads portions of the header on a block by block basis for such .EXE files in order to form the customized header **1882**, which includes the uncompressed portion **1884**, as well as the compressed portion **1886**, as generally illustrated in **FIG. 79**. As mentioned above, by the time the system reaches step **1920**, the signature field has already been set up. The system continually loops from step **1926** to step **1936**, until all of the blocks of data in the file header, for example, as illustrated in Table 8, is transformed, for example, as indicated above, into a customized file header **1882**, which includes an uncompressed portion **1884** and a compressed portion **1886**. The system constantly checks in step **1926** whether the entire header (i.e., all of the blocks) for the .EXE file has been written to the output file **1898**.

[0358] As mentioned above, the header for an .EXE file indicates the size of the header. For example, as illustrated in Table 8, the exemplary header is 5632 bytes long. Once the uncompressed portion **1884** is formed, the amount of space for the compressed portion **1886** can be determined in step **1928**. Once the size of the compressed portion **1886** of the customized file header **1882** is determined, space for the size of the compressed block of the customized header **1882** is reserved in the output file **1898** in step **1928**. A first block of data from the header in the input file **1896** is read in step **1930**. The first block of data is then compressed in step **1932** and written to the output file **1898** in step **1934**. The total length of the compressed block of data is written to the output file **1898** in step **1936**. The system then loops back to step **1926** to determine of additional data from the original header written to the input file **1896** needs to be processed.

[0359] After the customized file header **1882** is formed and written to the output file **1898**, the data or code portion **1888** (**FIG. 79**) for both .EXE and .COM files, is read, compressed and written to the output file **1898** in steps **1938-1944**. In order to identify the beginning of the data or code portion **1888**, the signature field **1890** may include a data image index which indicates the memory location of the data or code portion **1888** in the input file **1896**. Since the customized header **1882** may be at least partially compressed, the address location in the output file **1898** of the beginning of the data or code portion **1888** is modified in the signature field **1890** in the output file **1898** in step **1938**. Subsequently, space is reserved in the output file **1898** for the data or code portion **1888** of the file in step **1940**. The data or code portion **1888** is then read from the input file and compressed according to known compression techniques, for example, as discussed above, and written to the output file **1898** in step **1942**. After the compressed data is written to the output file **1898**, the size of the compressed data or code portion **1888** is written to the output file **1898** in step **1944**.

[0360] The flow chart for decompressing stored compressed files in the flash memory devices **742-748** is illustrated in **FIG. 77**. Initially, any file to be executed is in a compressed format as discussed above. Initially, as indicated by step **1946**, the signature field **1890** (**FIG. 78**) is read from the input file **1896**. After the signature field **1890** is read from the input file **1896**, the customized file header **1882** is read in step **1948**. As mentioned above, the signature field **1890** identifies whether the particular file is an .EXE file or a .COM file. Thus, the system ascertains in step **1950** whether the file is an .EXE file or a .COM file. As indicated above, the signature field **1890** (**FIG. 79**) may include data regarding the file as to whether it is an .EXE file or a .COM file, as well as the software version of the compression software in order to speed up the decompression process. Before the file can be decompressed, the size of the compressed data or code portion **1888** (**FIG. 79**) must be ascertained. As indicated above, for .EXE files, the size of the header may be ascertained directly from the customized file header **1882** (**FIG. 79**). Since the header for a .COM file is compressed in the same manner as the code portion **1888** for the .COM file, the header portion **1882** is treated the same as the code portion **1888**. Thus, the entire .COM file, header portion **1882** and code portion **1888** are written directly into the output file **1898** (**FIG. 78**) in step **1952**. In the case of .EXE files, the customized file header **1882** is written to the output file **1898**. The system then reads the size of the block in step **1954**. In the case of a .COM file, the size of the compressed data or code block may be read directly from the flash memory device **742**. In the case of an .EXE file, the file header is partially compressed, as indicated above, in data blocks. Thus, in steps **1954-1958**, the system reads decompressed blocks of data from the input file **1896** and writes the decompressed data to the output file **1898**. Both the headers portions **1882**, as well as the data or code portions **1888** are decompressed one data block at a time by the loop consisting of the steps **1954-1958**. Once all of the data has been decompressed, including the header, the decompressed file may be executed directly from the output file **1898**, which may be a part of the DRAM **111**A.

[0361] 24. Multi-User Radio Flash Memory Device Update

[0362] As previously indicated, the wireless interface devices **100** may include one or more flash memory devices **742-748** (**FIG. 25**). However, the present invention also applies to other electronically programmable memory storage devices, such as electronically erasable programmable read only memory (EEPROM). For a "single user" system, as indicated above, any software updates to the wireless interface device **100** may be accomplished by loading the software onto an available host **101** and then establishing a connection between a host computer **101** and the wireless interface device **100**. For a "single user" wireless interface device, as discussed above, the user simply goes to the set-up dialog box, as indicated in **FIG. 55**, and depresses the upgrade button for automatic, wireless loading of the software to the wireless interface device **100**. In a multi-user environment, for example, as illustrated in **FIG. 67**, each of the wireless interface devices **100** can individually initiate an upgrade from the available server **1708**, **1710**. In such an application, the server, and, in particular the network administrator notifies all of the various wireless interface devices **100***a*-**100***d* users connected to the network **1700** that the local software within the wireless interface device needs to

be updated. Each of the individual wireless interface devices **100** can then be updated from the server **1708** wirelessly, as illustrated in FIGS. **80-85** and discussed below.

[**0363**] More particularly, initially, each of the wireless interface devices **100***a*-**100***d* are turned on in step **1960** (**FIG. 80***a*) and a connection is established with the system servers **1708** in step **1962** as discussed above. Once the connection with the server **1708** is established, each of the individual wireless interface devices **100***a*-**100***d* is notified by the network administrator regarding the need for a local software update. The software in each of the individual wireless interface devices **100***a*-**100***d* can be initiated by a local user interface as indicated in step **1964**. In particular, the flash upgrade is initiated by going to the set-up dialog box on the wireless interface device **100** and depressing the MAINTENANCE BUTTON to arrive at the dialog box as indicated in **FIG. 55**. The user depresses the upgrade button to initiate automatic wireless installation of the software into the flash memory devices **742-748** in the wireless interface device. In order to prevent programming errors, the radio quality is checked in step **1966** before proceeding. If the radio link quality is poor, the upgrade is aborted, as indicated by step **1968**. If the radio link quality is sufficient, any power management functions in the wireless interface device **100** is disabled in step **1970** to prevent the wireless interface device **100** from going into a reduced power state, as discussed above, during programming of the flash memory devices **742-748**. After the power management function is disabled, a portion of the DRAM memory **111**A (FIGS. **18-24**) in the wireless interface device **100** is set aside to receive a flash sector from the server **1708** (**FIG. 67**) in step **1972**. Subsequently, in step **1974**, wireless interface device **100** polls the servers **1708**, **1710** to determine the total number of sectors in the flash update over the radio link in step **1974**. After the total number of sectors is obtained for the upgrade, the system checks in step **1976** whether there have been any errors in the data transmission from the server **1708**. The errors may be checked, for example, by checking whether cyclic redundancy checking (CRC) code matches a specified CRC code for each file or whether there are any other server errors. Thus, if the value resulting from the CRC at the wireless interface device **100** does not match the value of the CRC of the server **1708**, the flash upgrade is aborted in step **1968**. Otherwise, the system proceeds to step **1978** and sets up a receiving buffer in the DRAM memory devices **111**A and requests a sector of the upgrade from the server **1708**. Once a request for a sector is initiated, the sector is transmitted from the servers **1708**, **1710** over the radio link to the DRAM memory devices **111**A. A BIOS routine is called in step **1982** to write the flash sector from the DRAM memory device **111**A to the flash memory devices **742-748** in step **1982**. In step **1984**, the system checks for any errors in writing the flash sectors to the flash memory devices **742-748**. Should any errors be detected, the flash upgrade is aborted and the system returns to step **1968**. If no errors are detected, the system checks in step **1986** whether additional sectors need to be requested from the server **1708**. If so, the system loops back to step **1978**. If all of the sectors have been requested, the system goes to step **1988** and reboots the wireless interface device **100**.

[**0364**] **FIGS. 81 and 82** illustrate the routine for writing the flash update sectors from the DRAM **111**A to the flash memory devices **742-748**. Since the flash sector updates are stored in the DRAM memory devices **111**A, programming is aborted if AC power is turned off as determined in step **1990**, since the flash update data in the DRAM **111**A will be lost when the battery power goes down. In order to prevent any errors during programming, interrupts, as well as power management functions are disabled in the wireless interface device in steps **1992** and **1994**. After the interrupts and the power management functions have been disabled, a sector of the flash memory device is erased in step **1996**. If any errors occur during erasure as determined in step **1998**, the flash upgrade is aborted and the system returns to step **1991**. If not, a sector from the DRAM **111**A is written to the flash memory devices **742-748** in step **2000**. After the sector is copied to the flash memory devices **742-748**, the system checks for errors in step **2002**. If any errors occurred during the upgrade of the flash memory devices **742-748**, the system returns to step **1991** and the upgrade is aborted. If there are no errors in the transfer of the data to the flash memory devices **742-748**, interrupts are restored in step **2004**.

[**0365**] FIGS. **82-85** illustrate the software at the server **1708**, **1710** for the wireless update of the flash memory devices **742-748**. Initially, the files to be updated are identified by file name and path in the server registry and assigned a value, for example, USERINIT, in step **2006**. By placing the file name in the path of the software in the server's registry, the software will be launched in the user's context, whenever the user logs in, as discussed above. Since there may be multiple wireless interface devices **100***a*-**100***d* (**FIG. 67**) connected to the network, each wireless interface device **100** must individually request an update by requesting the file name and providing the path.

[**0366**] As mentioned above, updating of the software in the flash memory devices **742-748** may be initiated depressing the upgrade button in the set-up dialog box (**FIG. 55**) in the individual wireless interface devices **100***a*-**100***d*. **FIG. 83** illustrates the method for installing the upgrade files onto the server to be wirelessly transferred to the wireless interface devices **100**. In particular, in order to prevent unauthorized updating of files in the server **1708**, the system checks in step **2008** whether the current log-in user of the servers **1708**, **1710** has administrative privilege. If not, the flash upgrade is aborted in step **2010**. If the log-in user to the server **1708** has administrative privilege, the flash upgrade binary files, for example, from a floppy disk, may be loaded onto the server, for example, by way of a floppy disk, and recorded in the server registry in step **2014**.

[**0367**] **FIG. 84** represents the overall flow diagram for the software within the server **1708**, **1710** for handling flash updates with the wireless interface devices **100**. As shown by the block **2016**, a communication driver channel is opened by the server **1708** for each of the individual wireless interface devices **100** connected to the server **1708**. The flash upgrade variables are initiated in step **2018**, in order to set up the system for a wireless flash upgrade. The wireless flash upgrade is set up as a thread in step **2020**.

[**0368**] The thread for the wireless flash upgrade is illustrated in more detail in connection with **FIG. 85**. Once a wireless interface device **100** is connected to a particular server **1708**, a communication channel is set up between the server **1708**, **1710** and the wireless interface device **100** requesting an update. Initially, in step **2022**, the server continuously reads the communication driver channel for

requests from the various wireless interface devices **100** connected to the servers **1708, 1710**. In steps **2024** through **2032**, the server ascertains the type of request from the wireless interface device. For example, in step **2024**, the system ascertains whether the wireless interface device **100** is initiating an upgrade of the flash memory devices **742-748**. If so, the system ascertains in step **2024** whether the wireless interface device **100** has initiated an upgrade by way of the set-up dialog box illustrated in **FIG. 55** as discussed above. If so, the server **1708** initiates a flash upgrade by processing the overhead associated with a flash update, such as obtaining sector numbers and getting the CRC code for the number of sectors as well as the sectors themselves in step **2034**. If the request from the wireless interface device **100** is not an initiate flash upgrade request, the system checks in step **2026** whether the request is for a flash upgrade name. If so, the system checks with the server registry for the latest flash upgrade name and passes it on to the wireless interface device in step **2036**. If not, the system checks in step **2028** whether the request is a request for a packet of binary file data associated with the flash update. If so, the server **1708** sends data packets to the wireless interface device **100** for the various sectors of the flash upgrade in step **2038**, as discussed above. In step **2030**, after reading the communication driver channel, the server checks to determine if the request from the wireless interface device **100** is a request to cancel the flash upgrade or that the flash upgrade is complete. If so, the flash upgrade clears or frees up all resources it utilized. In step **2032**, the system checks whether there is any other type of request from the wireless interface device **100**. If not, the system loops back to step **2022** and continues to read the communication driver channel. If there is a request from the wireless interface device other than as enumerated in steps **2024** to **2030**, the server posts a message to other threads associated with that request in step **2042**.

[**0369**] 25. Audio Compression in a Wireless Interface Device

[**0370**] The wireless interface device **100** is adapted to support multi-media applications features running on the server **1708**, wirelessly transmitted to the wireless interface device **100** by way of the access point **109**. In support of the multi-media applications, the wireless interface device may be provided with a speaker **2045** as well as a microphone **2046 (FIG. 89B)**. In order to receive audio input data as well as broadcast audio at to the wireless interface device **100** to receive audio data, an audio processing system **2047 (FIG. 89B)** is provided which includes a speaker **2045** and a microphone **2046**. The audio processing system **2047** processes input audio data from the microphone **2046** to simulate that the audio input is directly received by the server **1708**. As will be discussed in more detail below, audio data received by the wireless interface device **100** is compressed and wirelessly transmitted to the servers **1708, 1710**. The audio data is decompressed by a decompressor at the servers **1708, 1710** and formulated by a kernel-mode driver, forcing the server to assume that the audio data was input directly into the server **1708**.

[**0371**] FIGS. **86-89** relate to the audio input processing system **2047**. The audio input processing system **2047** includes an input path which, in turn, is connected to the microphone **2046** and an outpath which is connected to a speaker **2045**. Audio input data is received by the microphone **2046** and filtered, for example, by a low-pass filter **2047** selected to pass signals of 3 Khz or less to only permit data in the voice range to be amplified by an amplifier **2049** and converted to a digital signal by an A-D converter **2051**. The amplifier **2049** is used to increase the amplitude of the signal to produce a voltage reference to maximize the range of the analog-to-digital converter **251**. The output of the A-D converter **2051** may be applied directly to the data bus, as discussed above, or may be applied to a digital signal processor **2053**, for example, a Model No. CS 4237B or CS 4236B, as manufactured by Crystal Semiconductor; a Model No. ES-5510, as manufactured by Ensonic; or a Model No. SAA7710T, as manufactured by Phillip Semiconductor, all preloaded with factory installed firmware.

[**0372**] As mentioned above, the audio input processing system **2047** includes an output path, which includes the speaker **2045** for supporting various multimedia applications. Referring to **FIG. 89**B, digital audio signals, either from the ISA bus, as discussed above, or the digital signal processor **2053**, are applied to a D-A converter **2055** which are, in turn, filtered and amplified by a filter **2057** and amplifier **2059** and broadcast through the speaker **2045**.

[**0373**] Referring to **FIG. 86**, input audio data is converted to a digital signal by the A-D converter **2051** and applied to an audio driver, such as the digital signal processor **2053** in step **2048**. The audio signals are then compressed in step **2050**. Control of the compressed audio data is then turned over to the client manager for the wireless interface device **100** which reformulates the compressed audio data for data transmission over the radio link, as indicated by step **2054**. On the server side, the compressed audio signals from the wireless interface device **100** are received over the radio link by the server **1708, 1710**, as indicated by step **2056**. Control of the compressed audio signals at the server side is turned over to the server manager in step **2058**, which formulates the data for decompression in step **2060**. In order to simulate that the original audio input was input directly into the server **1708**, the uncompressed audio data is fed into a kernel-mode driver in step **2062** running in the Windows NT kernel to simulate that the audio input is directly to the server **1708, 1710**. The algorithms for compressing and decompressing the audio data are discussed in detail in "DATA COMPRESSION", by James A. Storer, *Computer Science Press,* copyright 1988, hereby incorporated by reference.

[**0374**] An important aspect of the invention relates to the manner in which the audio data is compressed. Referring to **FIGS. 87 and 88**, audio data, prior to being compressed, is stored in a temporary buffer in the wireless interface device **100**. Uncompressed data, as illustrated in **FIG. 88**, is sampled every predetermined time period, or when the volume is below a predetermined level as illustrated and stored in a temporary buffer. As illustrated in **FIG. 88**, the sample points on the horizontal axes marked with the 'X' are exemplary data points stored in the temporary buffer. As shown, the points 1 and 2 are at predetermined time intervals, while the point between 2 and 3 seconds is a point where the amplitude or volume is below a predetermined level. Thus, as indicated in step **2064**, the system samples the audio data points at every predetermined time period or when the volume has reached a predetermined level and places the data in a temporary buffer in step **2066**. The system loops back to step **2064** and continues sampling data points until the buffer is full, as ascertained in step **2068**.

Once the temporary audio buffer is full, the entire buffer is compressed at one time, as indicated by step **2070**. The compressed audio data is then passed to the wireless interface device client manager in order to pass the data over the radio link to the server **1708** in step **2072**.

[**0375**] 26. Multi-User On-Screen Keyboard

[**0376**] As mentioned above, in a single user mode, the wireless interface device is provided with an on-screen keyboard (OSK) which can be actuated by pressing the hot icon **1480** (**FIG. 37**) in the hot icon area **1202** (**FIG. 36**). In such an application, once the OSK is selected, a remote occlusion area on the host **101** is created to prevent the host **101** from painting over the OSK on the wireless interface device **100**. The operation of the OSKs in a single user environment have been discussed above and illustrated in **FIGS. 66***a*-**66***d*.

[**0377**] In a system where a plurality of wireless interface devices **100***a*-**100***d* are connected to servers **1708**, **1710** by way of a single access point **109**, for example, as illustrated in **FIG. 67**, each of the wireless interface devices **100** in such a multi-user environment, can be provided with an OSK in much the same manner, as discussed above. In fact, the software for the OSK at the side of the wireless interface device **100** is essentially the same, with the exception that in this application, rather than a single wireless interface device **100** communicating with a single host, a plurality of wireless interface devices **100***a*-**100***d* communicate with servers **1708**, **1710**. Thus, the software for the multi-user application for the wireless interface devices is essentially as illustrated in **FIGS. 65***a* and **65***b*. The server side software for the multi-user OSK is illustrated in FIGS. **90**-**94**. The server software is used to prevent overwriting of the OSK on the display of the wireless interface device by the server.

[**0378**] **FIG. 90** relates to registering an occlusion window on the servers **1708**, **1710**. In particular, an occlusion window is registered to prevent the server from overwriting the OSK on the wireless interface device **100**. The occlusion window, for example, in a Windows NT server, relates to a no-paint window within a portion of the viewing area **1260** (**FIG. 36**) of the LCD **113***c* for the wireless interface device **100**. The occlusion window corresponds to the window displayed on the wireless interface device **100** for the on-screen keyboard (OSK). For each window in a network system, the window is registered with the server window system in step **2076**. The occlusion window is registered by registering the class of the window, as indicated in step **2078** by calling the Register Class API. The class of the window refers to the various attributes of the window, for example, a dialog box or no-paint window. Once the class of the window is registered with the server window system, in order to make the occlusion window visible to all windows running on the system **1708**, **1710** at one time, memory space in the servers **1708**, **1710** is created for the occlusion window global data in step **2080**. The global data relates to the position and dimensions of the on-screen keyboard. Thus, the OSK can be utilized on the wireless interface device **100** during conditions when multiple windows are running and even overlapping windows, as indicated in **FIG. 95**. As such, the OSK program may be formulated as a dynamic link library (DLL) that can be used by any windows running in the system.

[**0379**] Once the shared memory is created, global data, i.e., position and dimension of the OSK, is initialized for a default position. In particular, when the OSK hot icon **1480** (**FIG. 37**) is depressed, the OSK will appear in a predetermined position on the display. Thus, in step **2080**, the initial position of the OSK is identified. As will be discussed in more detail below, the OSK can be moved around the display.

[**0380**] **FIG. 91** illustrates the process for creating and moving the occlusion window. Initially, the system checks in step **2082** whether an occlusion window has already been requested. If so, the system assumes that the OSK will be moved and, thus, calls a Windows support function SetWindowPos to move the occlusion window in step **2084**. After the window is moved in step **2084**, the occlusion window global data is updated in step **2086**. As indicated above, the global data relates to the XY position relative to the screen on the wireless interface device **100** of the OSK. After the global data is updated in step **2086**, the success and failure status of the operation is determined in step **2088** by the return value of the API call.

[**0381**] If an occlusion window does not exist, steps **2090**-**2094** are used to create the occlusion window. The occlusion window is created in response to a private message sent by the, wireless interface device **100**. In particular, a no-paint occlusion window is created in step **2090**. A no-paint window is a window in which the background is not painted during movement. In addition to the no-paint window, a holder window may be created in step **2092**. A holder window is simply a wire frame which prevents the original no-paint window from being painted while the no-paint is being moved. Both the no-paint window as well as the holder window are registered in steps **2076**-**2080**, as set forth above. In step **2094**, a system-wide WH_CALLWNDPROC hook is created by way of an API call. A system-wide hook is called for any system-wide messages in order to coordinate with pop-up menus, as well as keyboard and mouse messages. In particular, the system-wide hook is registered with the Window NT system such that during conditions when the OSK is running, certain Windows messages, such as a pop-up menu, will automatically disable the OSK. Once the window and the hook are created, the X-Y position of the OSK is updated in step **2086**, and a success or failure rate is checked in'step **2088**.

[**0382**] The procedure for closing the occlusion window is illustrated in **FIG. 92**. Initially, an API call is made in step **2090** to uninstall the WH_CALLWNDPROC hook in order to remove it from the system. After the Windows WN_CALLWNDPROC hook is uninstalled, the holder window and no-paint window data are destroyed by removing these windows from the system in step **2092**. Subsequently, in step **1594**, the occlusion region global data is destroyed.

[**0383**] The process illustrated in **FIG. 92** is initiated any time the hot icon **1480** (**FIG. 37**) is toggled to disable the on-screen keyboard. The software for creating the occlusion window, as indicated in steps **2090** and **2092**, is illustrated in **FIG. 94**.

[**0384**] Referring to **FIG. 93** in a Windows environment, all windows have procedures for processing keyboard and mouse inputs for that window. Initially, the system determines whether a window is being created in step **2090** by checking for a WM_CREATE Windows message. The WM CREATE Windows message, as well as other Windows messages, are described in detail in "Programming Windows

95", by C. Petzold, *Microsoft Press,* 1996. If a new OSK window is being created, the no-paint and holder windows are set up in step **2092**, as discussed above. In particular, the no-paint and holder windows are set up by registering the windows with respect to the class and the shared memory. Once the no-paint and holder windows are set up, the system exits to step **2095**.

[**0385**] If a new OSK window is not being created, the system determines in step **2096** whether there are any messages for painting, in step **2096** by checking for WM_PAINT messages. The WM_PAINT message indicates that the window needs to repaint itself. If so, a ValidateRect function is called to cause the client area of the no-paint window to be repainted.

[**0386**] The function identifies the window whose update region is to be modified.

[**0387**] The ValidateRect function is specified below.

```
        BOOL ValidateRect (
    HWND hWnd,        //handle of window
    CONST RECT *IpR  //address of validation rectangle coordinates
);
Parameters
hWnd.
```

[**0388**] The hWnd parameter in the ValidateRect function identifies the Window whose update region is to be modified. If this parameter is null, the Windows program invalidates and redraws all windows and sends a message WM_ERASEBKGND and WM_NCPAINT messages to the window procedure before the function returns. The IpRect parameter points to a rectangular structure which contains the client coordinates of the rectangle to be removed from the update region. If the parameter is null, the entire client area is removed. The return values are used to identify whether the function is a success or a failure. 'True' is normally used to indicate a success, while 'false' is used to indicate a failure. As mentioned above, if the message is a WM_PAINT message from the Windows NT operating system, the ValidateRect function is called to update the content of the window in step **2098**.

[**0389**] The system continually checks the Windows messages and checks in step **2100** whether the message is a window position change message WM_WINDOWPOSCHANGING. If the message is a WM_WINDOWPOSCHANGING message, a holder window is shown and the no-paint window is hidden in step **2102** while the position is changing. Afterwards, in step **2104**, a message is posted that the window position has changed. In response to a window position change message WM WINDOWPOSCHANGED, as ascertained in step **2106**, the no-paint window is relocated and shown in step **2108**, while the holder window is relocated and hidden in step **2110**. In step **2112**, the system checks for any window destroy messages WM_DESTROY. These messages are usually sent by the system when the windows are closed. In the case of the OSK, the WM_DESTROY message is sent anytime the OSK on the wireless interface device **100** is disabled by the hot icon. In response to a window-destroy message WM_DESTROY, the system closes the occlusion region and releases the shared memory in step **2114**. If there are no Windows messages as set forth in steps **2090**, **2096**, **2100**, **2106** or **2112**, then the default window processing function, DEFWINDOWPROC, is called in step **2116**.

[**0390**] The flow chart for installing a hook is illustrated in **FIG. 94**. A standard Windows function call is used to set up a WH_CALLWNDPROC hook. This hook is used to avail the occlusion window to any window messages on the system. Thus, in step **2118**, in order to access various Windows messages on the system, the pointer for the occlusion region global data shared memory is obtained in step **2118**. Subsequently, in step **2120**, the system ascertains whether the message is a window position changing message. If not, the message is passed on to the next hook by calling a standard API called CALLNEXTHOOKEX in step **2122**. The CALLNEXTHOOKEX function is used to pass information to the next hook procedure in the chain. The system then exits in step **2124**. If the message is a window-position-changing message, the system then checks the window to determine any overlap in step **2126**. Essentially, if a pop-up window or other window will conflict with the OSK, the OSK, as well as the occlusion window, is closed in step **2128**. The global data for the occlusion window is updated in step **2130**. If the window being tracked does not conflict with the position of the OSK, the system exits in step **2124**.

[**0391**] 27. Ink Trails on a Wireless Remote Interface Tablet: Wireless Remote Interface Ink Field Object; and Distributed Pen Support of Ink Trails

[**0392**] As discussed above, on power-up, the wireless interface device **100** comes up in a mouse mode with a left mouse button default. The hot icon **1232** (**FIG. 37**) allows the pen events to be converted to right mouse button events. In the mouse mode, all pen events are translated as mouse messages back to the servers **1708**, **1710**, as either right mouse button or left mouse button data, depending on the status of the hot icon **1232** (**FIG. 37**). As mentioned above, the wireless interface device **100** is also adapted to operate in a pen mode. In a pen mode, the pen events are translated into pen data and transmitted back to the servers **1708**, **1710**. Ink trails are created on the wireless interface device **100** to follow the pen wherever it is moved within the ink field **2142**.

[**0393**] There are various methods for transferring the mode of operation of the wireless interface device **100** from a mouse mode to a pen mode. For example, the pen mode may be entered by depressing a hot icon (not shown), as discussed above. Alternatively, an active stylus can be used which to enable the wireless interface device **100** to switch between a mouse mode and a pen mode by depressing a barrel switch on the stylus, as discussed above. Alternatively, as will be discussed below, the pen mode can be initiated by way of an application program such as: Microsoft VISUAL BASIC; MICROSOFT ACCESS; MICROSOFT VISUAL; FOXPRO; or BORLAND DELPHI. Such application programs are used to create custom forms or containers for embedding controls. The form is customized by way of the various controls placed on the container. An OLE 2.0 control (object linking and embedding) can be implemented as an ink field control to support the ink trails on the wireless interface device **100**. In particular, with reference to **FIG. 96, a** sample container application **2140** with an ink field **2142** is illustrated. In such

an application, any time a pen event is detected in the ink field **2142**, data is interpreted as pen data. The pen data is passed to the server **1708**, **1710** over the wireless radio link which, in turn, transmits the information back to the wireless interface device **100** for display. More particularly, each point which the pen moves across in the ink field **2142** within the container application **2140** is formulated into a data packet and transmitted back to the server **1708**, **1710** over the wireless radio link. The server **1708**, **1710** then processes the data packets for all the pen points and causes lines to be drawn between successive pen points. This data is transmitted back to the wireless interface device **100** for display within the ink field **2142**.

[**0394**] A data flow diagram for the system is illustrated in **FIG. 97**. The container application **2140** is under the control of the application program discussed above, i.e., VISUAL BASIC, etc. The ink field object provides the ink field control for one or more ink fields **2142** within the container application **2140**. As mentioned above, an OLE 2.0 (object linking and embedding) object is implemented as the ink field object by registering the OLE 2.0 object in the registry in the Windows NT servers **1708**, **1710**. After the OLE 2.0 object is registered in the registry, the ink field control can be added to a tool box in the application program, such as VISUAL BASIC, to provide ink field control for the ink field **2142**. Ink field data is processed by the servers **1708**, **1710**. In particular, each point within the ink field **2142** over which the pen passes is converted to pen data packets in the wireless interface device **100** by way of a virtual communication channel **2146**. The server **1708**, **1710**, in turn, processes the pen packets and communicates back with the wireless interface device **100** to draw lines between successive pen points within the ink field object in order to display the ink within the ink field **2142** in the container application **2140**.

[**0395**] The ink field **2142** within the container application **2140** is activated as illustrated in **FIG. 98**. As mentioned above, the pen mode is initiated by a pen down event within the ink field **2142** (**FIG. 96**) within the container application **2140**, as indicated by step **2148**. Following a pen down event within the ink field **2142**, the system checks in step **2150** whether the ink field **2142** is already active. If so, the system proceeds directly to step **2160** and provides for local inking for all pen down events within the ink field **2142**. If the ink field **2142** is not previously activated, the system is assumed to be in a mouse mode, as discussed above. In such a mode, the left mouse button is the default button state in the mouse mode. Thus, as indicated in step **2152**, a mouse left button message WM_LBUTTONDOWN is passed to the server **1708**, **1710** from the wireless interface device **100**. If the pen down events are within the ink field **1642** and the container application **1644**, the ink field object enables the pen mode for the system. In particular, a private message is sent by the servers **1708**, **1710** to the wireless interface device **100** to enable the pen mode in step **2154**. The pen driver processes the private message to enable local inking. Prior to the pen mode being enabled, all pen down events within the ink field **2142** are stored as mouse data points. All points interpreted as mouse data points within the ink field **2142** are inked locally, as indicated in step **2158**. Once the system is in a pen mode, all points within the ink field **2142** are inked locally immediately.

[**0396**] The ink field is enabled as illustrated in **FIG. 99**. As mentioned above, in step **2152** (**FIG. 98**), a mouse left button down message WM_LBUTTONDOWN is sent from the wireless interface device **100** to the servers **1708**, **1710** anytime a pen down event occurs in the ink field **2142** (**FIG. 92**). In response to the left button down message WM_L-BUTTONDOWN, the window handle, for the ink control window (i.e., ink field **2142**) is obtained in step **2162** by calling the member function GETHWND( ) for the OLE 2.0 control in step **2162**. After the window handle of the ink field **2142** is obtained, shared memory is set up by the server for sending private messages to the wireless interface device **100** in step **2164**. In step **2166**, the window position and size of the ink field **2142** window is obtained. After the window position and size is obtained, a private message is sent by the servers **1708**, **1710** to the wireless interface device to enable inking by posting the message on a message handler thread of the server manager in step **2168**. After the private message is sent to the wireless interface device **100**, a mouse button up event is simulated in step **2170**.

[**0397**] FIGS. **100-102** indicate situations in which the ink control is disabled. For example, any time either the ALTERNATE key or any other key on the keyboard is depressed, for example, on the on-screen keyboard, ink control field is disabled. In addition, certain ambient property changes (i.e., area within the container application **2140** outside of the ink field **2142**) disable the ink control. Also, closing the Windows program will also disable the ink field control.

[**0398**] Referring to **FIG. 100**, an active ink control disabler **2172** is responsive to standard Windows messages, as well as certain ambient property changes, such as changes in the UIDead and user mode status as discussed below. A WM_SYSKEYDOWN message is transmitted to the active ink control disabler anytime the ALTERNATE key is depressed, as indicated by step **2174**. A WM_KEYDOWN message is sent to the active ink control disabler **2172** anytime any other keyboard key is depressed, as indicated by step **2176**. A WM_KILLFOCUS message **2178** indicates that the ink control field **2142** has lost its focus, for example, when a model dialog box pops up. Lastly, the ambient property changes of the container application **2140**, as indicated by the block **2180** cause the ink field to be disabled.

[**0399**] **FIGS. 101 and 102** are detailed flow charts for the system illustrated in **FIG. 100**. Referring first to **FIG. 101**, as mentioned above, anytime the ALTERNATE key is depressed, for example, to activate the menu, as indicated in step **2182**, an ink control window message handler is called in response to a WM_SYSKEYDOWN message. In response to the WM_SYSKEYDOWN message, the active ink control is disabled, as indicated in step **2186**. Other keyboard strokes, other than the ALT key, also cause the ink control to be disabled. In particular, as indicated in step **2188** and **2190**, anytime a key other than the ALTERNATE key is depressed, the ink control windows message handler is called in response to a WM_KEYDOWN message. This message is then received by the message handler for the ink field control. As discussed above, modal dialog boxes also cause a deactivation of the ink control. For example, any time a modal dialog box pops up, as indicated in step **2194**, a WM_KILLFOCUS message is received by the ink control window message handler in **2196** to indicate that the con-

tainer application **2140** no longer has focus. In such a situation, focus is transferred to the other window overlaying the container application **2140**. In response to the WM_KILLFOCUS message, active ink control is disabled in step **2198**.

[**0400**] As mentioned above, ambient property changes also disable the ink field. These events, as indicated in step **2200**, cause the system to switch to mouse mode as indicated in step **2202**. In particular, with reference to **FIG. 101**, any changes in the ambient property, as indicated in step **2204** cause the ambient property handler to be called in step **2206**, which, in turn, calls the active ink control disabler in step **2208**.

[**0401**] The ambient property handler is illustrated in **FIG. 102**, while the Windows message handler is illustrated in **FIG. 103**. The ambient property handler, illustrated in **FIG. 102**, determines if there are any changes in the application program, such as VISUAL BASIC, to the inking control in step **2210**. In particular, controls for the container are set up by the application program as is illustrated in **FIG. 96**. The ink control software checks in step **2210** whether the UIDead status is true (i.e., ink control cannot receive input). If the UIDead status has changed to true, the active ink control disabler is called to disable the ink control. The user mode relates to either a design mode for setting up the controls on the container application **2140** or a run mode for utilizing the container application **2140**. Otherwise, the user mode is checked in step **2214**. If the user mode changes to false, which means a switch to the design mode, the ink control is disabled in step **2214**. Otherwise the default handler of the On-Ambient PropertyChange processes the ambient property changes.

[**0402**] As mentioned above, various Windows messages such as WM_SYSKEYDOWN; WM_KILLFOCUS; and WM_KEYDOWN all cause disabling of the ink control. In response to any of the standard Windows messages, the active ink control disabler is called in step **2218 (FIG. 103)**. After the active ink control disabler is called, the default handler for the corresponding message is called in step **2220** to process the particular message.

[**0403**] 28. Ink Trails on a Wireless Remote Object

[**0404**] **FIG. 104** illustrates the process when the ink field **2142** is drawn. In such a situation, the system checks in step **2222** to determine whether the UIDead is true, as discussed above. If so, the ink control disabler is called in step **2224**. If the UIDead status is false, the user mode is checked to determine whether it is false in step **2226** to determine whether the container is in a design mode or a run mode. If the container is in a design mode, the active ink control disabler is called in step **2224**. If not, the system redraws whatever was in the ink field **1642** by continuously checking for ink data in the pen data buffer in step **2228**. As long as there is ink data in the pen data buffer, the system proceeds one point at a time and inks one point or segment in step **2230** and **2232**, and loops back to step **2228**. After all of the ink data in the pen data buffer is redrawn, the system goes to step **2224**.

[**0405**] Inking within the ink field **2142** of the container application **2140** can be cleared by way of a right mouse button double click. In particular, as discussed above, certain ambient property changes disable the inking function and return the system to a mouse mode. Once the mouse button has been toggled to the right mouse button state, a double click, as discussed above, is used to clear the ink in the ink field **2142**. In particular, in response to the right mouse button double click event, a Windows WM_RBUTTONDBCLK message is sent by the Windows message handler, which clears the ink data buffer, as indicated in step **2234 (FIG. 105)**. Once the ink data buffer is cleared, a member function, InvalidateControl, is called, to cause redrawing of the ink field **2142**, which clears all inking in step **2236**.

[**0406**] The pen data processor and pen data buffer manager are illustrated in **FIGS. 106 and 107**. The pen data processor is shown in **FIG. 106**. The pen data processor manages pen data sent by the wireless interface device **100** to the servers **1708**, **1710**. As discussed above, once the system is determined to be in a pen mode, pen data packets are formulated for each point in the ink field **2142** touched by the pen. These pen data packets are stored in a message buffer. Thus, in step **2238**, the system ascertains whether there are any pen data packets in the message buffer. If there are pen data packets in the message buffer, one pen data packet is processed at a time. In particular, in step **2242**, one pen data packet is retrieved from the message buffer in step **2242** and converted to a VGA point in step **2244**. The VGA point is then stored in the message buffer in step **2246** by calling the pen data buffer manager. After each point is processed, the system checks in step **2246** to determine whether the inking field has been disabled by way of the user interface in the application program and whether the mode of the application program is in a run mode as opposed to a design mode in step **2250**. If not, one point or segment is inked in step **2252**. The system continues looping between step **2238** and step **2252** until all of the pen data packets in the message buffer have been processed.

[**0407**] The pen data buffer manager is illustrated in **FIG. 107**. Initially, in step **2254**, the system ascertains whether the pen data buffer is full. If so, a larger buffer is allocated in step **2256**. Once a larger buffer is allocated, the contents of the previous buffer are copied into the new buffer in step **2258** to enable the previous buffer to be freed in step **2260**.

[**0408**] The buffer manager, in order to conserve space, stores the offsets between the various points. Thus, in step **2262**, the offset from the previous point is calculated and stored in the pen data buffer.

[**0409**] **FIGS. 108 and 109** illustrate the software at the wireless interface device for processing pen points. All points touched by the pen are stored in a buffer. Initially, the wireless interface device **100** powers up in a mouse mode and interprets all pen down events as mouse left button down points and assembled into data packets. Once it is determined that the system is in a pen mode, for example, when a pen down event occurs within an ink field **1642**, the pen data points are assembled into pen data points and stored in a pen data buffer in the wireless interface device **100** and wirelessly transmitted to the server **1708**, **1710**, and, in particular, to the pen data buffer manager and the pen data processor at the servers **1708**, **1710**. As indicated in step **2262 (FIG. 108)**, pen down and pen up events are assembled into pen data packets and stored in a pen data buffer in the wireless interface device **100**. After each point is stored in the pen data buffer, the point is sent to a router module for processing. Thus, after a pen data packet is assembled, the

system checks in step **2264** to determine whether the router is busy. If so, this module will return. If the router is not busy, the router is called in step **2266** to process the pen data point.

[**0410**] The flow chart for the router is illustrated in **FIG. 109**. Initially, in step **2268**, the system determines whether the wireless interface device **100** is in an ink mode, as discussed above. If the wireless interface device **100** is not in an ink mode, the system assumes that the wireless interface device **100** is in a mouse mode and proceeds to get the packet for the point from the data buffer in step **2270**. This point is pushed onto the router stack in step **2272**. The mouse manager is called in step **2274** to process the point as a mouse data point, as discussed above. The system continuously processes the points in the buffer while the system is in a mouse mode, until it is determined in step **2276** that the buffer is empty, at which point the system exits the router in step **2278**.

[**0411**] If it is determined in step **2268** that the wireless interface device **100** is in an ink mode, the system checks in step **2280** whether the router stack is empty. Thus, if it is determined in step **2280** that the stack is empty, a pen data packet is obtained from the buffer in step **2282**. If the buffer is empty, as determined in step **2284**, the system exits. If the buffer is not empty, the system proceeds to step **2286** to determine if the packet represents the first pen down event. If the pen data point is not the first pen down event, the system checks in step **2288** whether the pen data point was in the ink field **2142** in step **2288**. If not, the system ignores the point in step **2290** and returns to step **2268** for processing further packets. If it is determined in step **2288** that the data packet was within the ink field **2142**, the data packet is placed into a transmit buffer in step **2292** for a wireless transmission to the servers **1708**, **1710**. After the data packet is placed into the transmit buffer, a local inker is called to ink the point on the screen of the wireless interface device **100** in step **2294**. The system then returns to step **2268** for processing additional data packets.

[**0412**] If it is determined in step **2280** that the router stack is not empty, one data packet is popped from the stack in step **2296**. After the data packet is popped from the router stack in step **2296**, the system ascertains in step **2298** whether the data packet represents the first input ink point. If not, the data packet is placed in the transmit buffer in step for a wireless transmission to the servers **1708**, **1710**. Subsequently, a video manipulation module, included in Appendix 2, is called to draw the point in step **2302**. The system then proceeds to empty the router stack, as indicated in step **2304**, and subsequently returns to step **2268** for a further data packet processing.

[**0413**] If it is determined in step **2286** that the data packet represents the first pen down point, the system then checks in step **2306** whether the data packet is a stack point. If not, the system checks whether the point was within the ink field **2142** in step **2308**. If not, the ink field is disabled in step **2310**, and the mouse data packets are pushed into the router stack in step **2312**. After the mouse data packets are pushed into the router stack, the mouse manager is called in step **2314** to process the data packet as a mouse data packet in step **2314**. Subsequently, the system returns to step **2268** for processing.

[**0414**] If it is determined in step **2306** that the data packet is a stack point, the system then checks in step **2316** whether the data packet was within the ink field **2142** in step **2316**. If not, the point is ignored in step **2318**, and the system returns to step **2268** for further data packet processing. If it is determined in step **2316** that the data packet in the stack was within the ink field **2142**, the data packet is put into the transmit buffer in step **2320** for wireless transmission to the server **1708**, **1710**. After the data packet is placed into the transmit buffer, the point is inked on the display of the wireless interface device in step **2322**.

[**0415**] 28. Local Handwriting Recognition in a Wireless Remote Interface Tablet

[**0416**] As mentioned above, the wireless interface device is provided with an ink field **2142** (**FIG. 96**). As mentioned above, wireless interface device **100** powers up in a left button down mouse mode. A pen down event within the ink field **2142** causes the wireless interface device **100** to switch to a pen mode. As mentioned above, all pen down events are formulated into pen data packets and stored in a buffer. Initially, the system determines in step **2324** (**FIG. 110**) whether the wireless interface device **100** is in a handwriting recognition mode, which, as will be discussed below, may be controlled in a manner as discussed above by pen events in the ink control field running on the servers **1708**, **1710**. If the system is not in a handwriting recognition mode, the system calls the default pen point handler which processes pen data, as discussed above. If the system is in a handwriting recognition mode, the system calls the handwriting recognizer in step **2328**, which takes the pen data and converts it to characters and passes it onto the client manager in step **2330** for transmission to the servers **1708**, **1710**, by way of the radio link. The character data is received by the servers **1708**, **1710** in step **2334** and converted to a keyboard input in step **2336**.

[**0417**] As indicated above, a pen events in an ink control field may be used to place the system in a handwriting recognition mode, as indicated in step **2338**. This information is transmitted to the server manager in step **2340** for wireless transmission to the wireless interface device in step **2342**. The wireless interface device **100** receives this data in step **2344** and passes it to the pen driver in step **2346**.

[**0418**] The handwriting recognizer is illustrated in **FIG. 112**. Initially, pen data from the pen interrupt handler is analyzed in step **2348** to determine whether the pen data represents the first pen down event. If so, as mentioned above, a mouse left button down message is formulated in step **2350**. If not, the pen data is converted into relative movement format in step **2352**. In step **2354**, a pen data packet is built by adding pressure, angle and move direction in the buffer. Default values may be used for the pressure and angle data. The system then checks in step **2356** whether there were any pen up events or a time out. If not, the system returns in step **2358**. If so, the system calls a handwriting recognition engine in step **2360**. Various handwriting recognition systems are suitable for use with the system. For example, the handwriter recognition system by CIC Products and Services, of Tokyo, Japan, is suitable. As mentioned above, a handwriting recognition engine converts the pen data to characters for transmission to the servers **1708**, **1710**.

[**0419**] Obviously, many modifications and variations of the present invention are possible in light of the above teachings. Thus, it is to be understood that, within the scope of the appended claims, the invention may be practiced otherwise than as specifically described above.

What is claimed and desired to be secured by Letters Patent of the United States is:

1. A computer system comprising:

one or more wireless interface devices, each wireless interface device being a pen-based system and including a digitizer responsive to pen events, said wireless interface devices also including means for enabling radio communication with a remote host and means for translating pen events into pen data packets and transmitting said pen data packets to a remote host for processing; and

a host for communicating with said one or more wireless interface devices, said host including means for enabling communication with said one or more wireless interface devices by way of a radio link, said host also including means for receiving and processing said pen data packets.

2. The system as recited in claim 1, wherein said one or more wireless interface devices include means for providing local inking of said pen events at said one or more wireless interface devices.

3. The system as recited in claim 1, wherein said translating means includes an embedded ink field control wherein pen events within said embedded ink field control are translated into pen data packets for transmission to a remote host.

4. The system as recited in claim 1, wherein said host is a server connected to a local area network (LAN) defining a LAN segment.

5. The system as recited in claim 1, wherein said host includes means for communicating with a single wireless interface device.

6. The system as recited in claim 1, wherein said host includes means for communicating with a plurality of wireless interface devices.

7. The system as recited in claim 1, wherein said enabling means includes one or more wireless LAN adapters.

8. The system as recited in claim 1, further including switching means which, in turn, includes an embedded ink field control which enables the wireless interface device to be switched to and from a pen mode from a second mode of operation as a function of pen events relative to the ink field control.

9. The system as recited in claim 8, further including means for establishing a predetermined default state for the mode of operation during predetermined conditions.

10. The system as recited in claim 9, wherein predetermined default state is a non-pen mode.

11. The system as recited in claim 9, wherein said predetermined conditions include power-up of said wireless interface device.

12. The system as recited in claim 8, wherein said switching means includes a predetermined default state on power-up of said wireless interface device.

13. The system as recited in claim 11, wherein said predetermined default state is a mouse mode.

14. The system as recited in claim 11, wherein said predetermined default state is a pen mode.

15. The system as recited in claim 8, further including means for disabling said ink field control.

16. The system as recited in claim 14, wherein said disabling means includes means for automatically disabling said ink field control as a result of predetermined events.

17. The system as recited in claim 15, wherein said wireless interface device includes a keyboard and said disabling means including means for monitoring said keyboard and disabling said ink field control when one or more predetermined keys are selected.

18. The system as recited in claim 15, wherein said keyboard is an on-screen keyboard.

19. The system as recited in claim 16, wherein said keyboard includes an ALTERNATE key and said disabling means disables said ink field control when said ALTERNATE key is selected.

20. The system as recited in claim 6, wherein said disabling means disables said ink field control when any key on said keyboard is selected.

21. The system as recited in claim 15, wherein said predetermined event includes pen-down events outside said ink field control.

22. A wireless interface device comprising:

means for enabling radio communication with a remote host;

a digitizer panel for receiving input data from a passive stylus;

means for translating pen events relative to said digitizer panel to pen data defining a pen mode; and

means for transmitting said pen data to a remote host for processing by way of a radio link during a pen mode; and

means for providing local inking of said pen events.

23. The system as recited in claim 21, wherein said enabling means includes one or more wireless LAN adapters.

24. The system as recited in claim 21, wherein said wireless interface device includes an ink field control which enables pen events relative thereto to be translated into pen data.

25. The system as recited in claim 21, wherein said wireless interface device has multiple modes of operation, further including means for establishing a predetermined default state for the mode of operation during predetermined conditions.

26. The system as recited in claim 21, wherein predetermined default state is a non-pen mode.

27. The system as recited in claim 21, wherein said predetermined conditions include power-up of said wireless interface device.

28. The system as recited in claim 21, wherein said switching means includes a predetermined default state on power-up of said wireless interface device.

29. The system as recited in claim 21, wherein said predetermined default state is a non-pen mode.

30. The system as recited in claim 24, wherein said predetermined default state is a pen mode.

31. The system as recited in claim 23, further including means for disabling said ink field control.

32. The system as recited in claim 30, wherein said disabling means includes means for automatically disabling said ink field control as a result of predetermined events.

33. The system as recited in claim 23, wherein said wireless interface device includes a keyboard and said disabling means including means for monitoring said keyboard and disabling said ink field control when one or more predetermined keys are selected.

34. The system as recited in claim 23, wherein said keyboard is an on-screen keyboard.

35. The system as recited in claim 23, wherein said keyboard includes an ALTERNATE key and said disabling means disables said ink field control when said ALTERNATE key is selected.

36. The system as recited in claim 23, wherein said disabling means disables said ink field control when any key on said keyboard is selected.

37. The system as recited in claim 23, wherein said predetermined event includes pen-down events outside said ink field control.

* * * * *