




(86) Date de dépôt PCT/PCT Filing Date: 1999/08/20
 (87) Date publication PCT/PCT Publication Date: 2000/03/09
 (45) Date de délivrance/Issue Date: 2004/03/23
 (85) Entrée phase nationale/National Entry: 2000/04/20
 (86) N° demande PCT/PCT Application No.: JP 1999/004467
 (87) N° publication PCT/PCT Publication No.: 2000/013342
 (30) Priorité/Priority: 1998/08/28 (10-243744) JP

(51) Cl.Int.⁶/Int.Cl.⁶ H04Q 7/36, H04B 7/26
 (72) Inventeurs/Inventors:
HIRAMATSU, KATSUHIKO, JP;
MIYA, KAZUYUKI, JP
 (73) Propriétaire/Owner:
MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD., JP
 (74) Agent: OSLER, HOSKIN & HARCOURT LLP

(54) Titre : TERMINAL DE COMMUNICATION RADIO ET PROCEDE DE COMMANDE DE PUISSANCE D'EMISSION
 (54) Title: RADIO COMMUNICATION TERMINAL APPARATUS AND TRANSMISSION POWER CONTROL METHOD

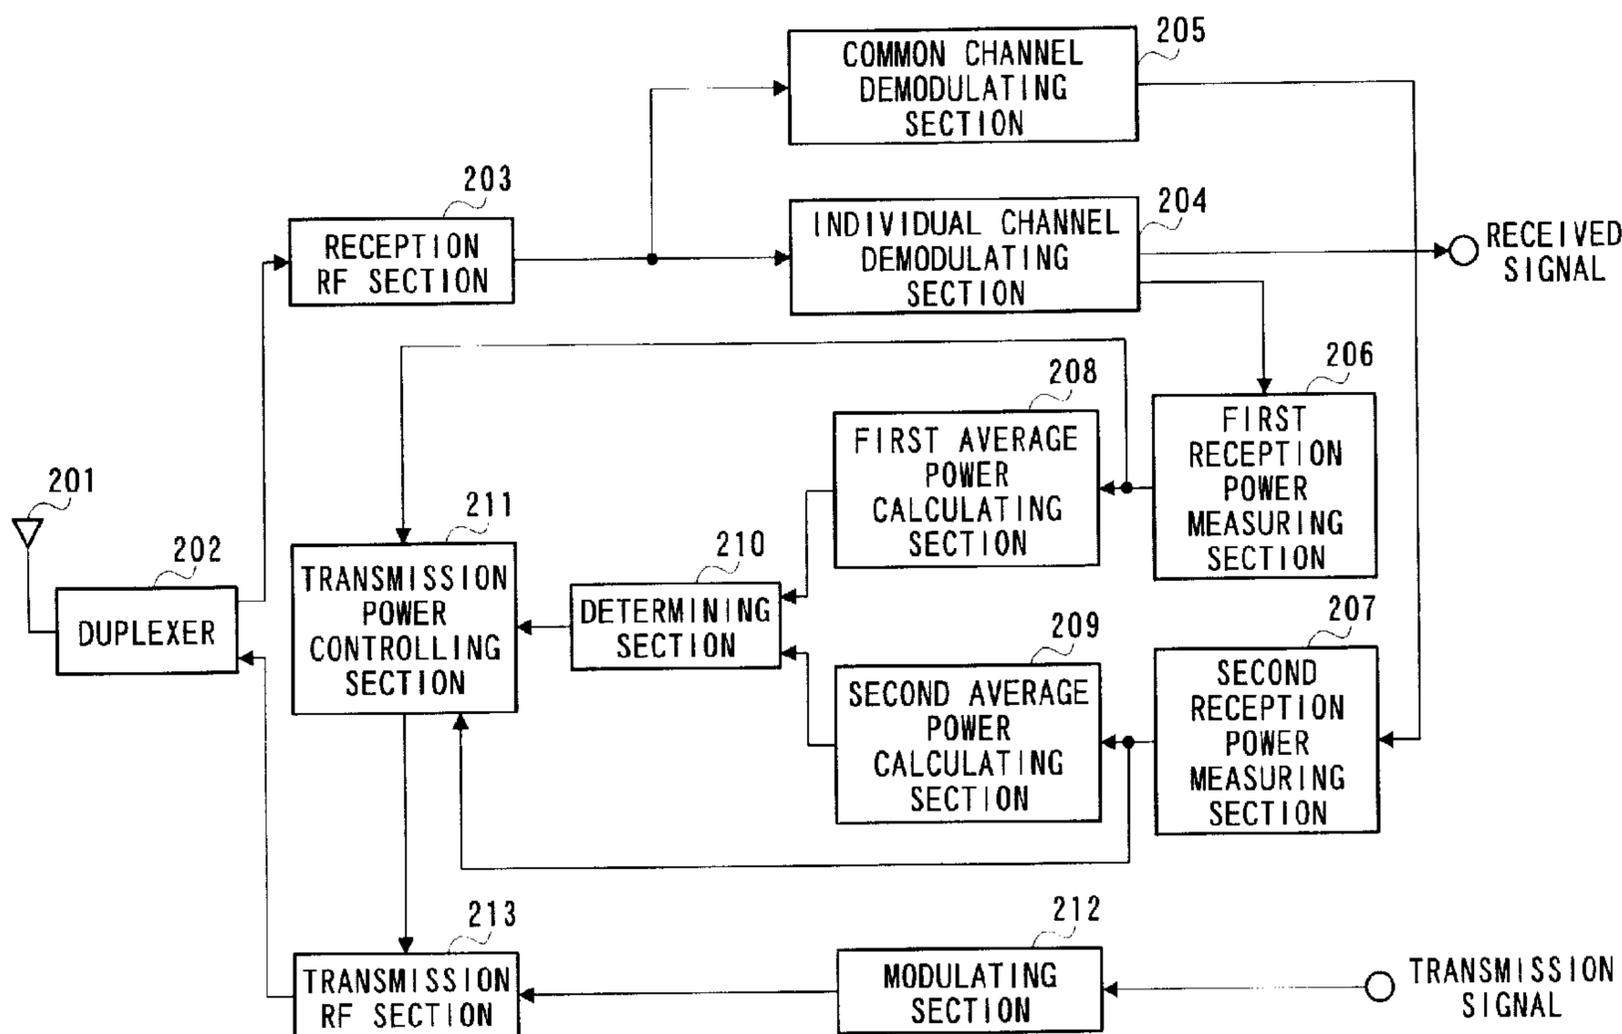

(57) Abrégé/Abstract:

A first reception power measuring section 206 measures reception power of individual channel signals transmitted with a narrow directivity, and a second reception power measuring section 207 measures reception power of common channel signals transmitted with a wide directivity. A determining section 210 determines the presence or absence of a directional shift based on an average reception power of the individual channel signals and an average reception power of the common channel signals. A transmission power controlling means 211 performs transmission power control based on the determination result. This makes it possible to correctly determine the cause of a reduction in reception power and to control transmission power accurately.

Abstract

A first reception power measuring section 206 measures reception power of individual channel signals transmitted with a narrow directivity, and
5 a second reception power measuring section 207 measures reception power of common channel signals transmitted with a wide directivity. A determining section 210 determines the presence or absence of a directional shift based on an average reception
10 power of the individual channel signals and an average reception power of the common channel signals. A transmission power controlling means 211 performs transmission power control based on the determination result. This makes it possible to
15 correctly determine the cause of a reduction in reception power and to control transmission power accurately.

DESCRIPTION

RADIO COMMUNICATION TERMINAL APPARATUS AND
TRANSMISSION POWER CONTROL METHOD

5 Technical Field

The present invention relates to a radio communication terminal apparatus for use in a radio communication system such as a cellular phone, a car phone, etc., and relates to a transmission power control method.

10

Background Art

In order to perform favorable communications in a radio communication system such as a cellular phone, a car phone, etc., which have come into widespread rapidly in recent years, precise control of transmission power is an absolute necessity for a base station apparatus and a radio communication terminal apparatus (hereinafter simply referred to as "terminal apparatus").

20

The following will explain the action of a conventional terminal apparatus with reference to the drawing. FIG. 1 is a block diagram showing a configuration of the conventional terminal apparatus.

25

A signal received by an antenna 11 is input to a reception RF section 13 via a duplexer 12, power of the received signal is amplified, and the

frequency of the received signal is converted, and a baseband signal is extracted. This baseband signal is demodulated by a demodulating section 14, and an individual channel signal of the terminal apparatus is picked up.

Also, reception power of the individual channel of the terminal apparatus output from the demodulating section 14 is measured by a reception power measuring section 15, and a gain of a transmission amplifier is calculated by a transmission power control section 15 based on the reception power.

A transmission signal is modulated by a modulating section 17, and the frequency thereof is converted by a transmission RF section 18, and power thereof is amplified based on the gain of the transmission amplifier, and the resultant is transmitted from the antenna 11 via the duplexer 12.

Here, it is required that the communication apparatus controls transmission power in consideration an amount of attenuation such that the radio transmitted signal is attenuated at a propagation path. The terminal apparatus controls transmission power such that reception power becomes constant in the base station apparatus.

At time t_1 , it is assumed that the gain of the transmission amplifier of the base station apparatus is set to $GB(t_1)$ and that an amount of attenuation

of a forward link is set to $LD(t1)$. Reception power $RM(t1)$ of the individual channel received by the terminal apparatus can be calculated by equation (1) shown below.

5 Also, at time $t2$, it is assumed that the gain of the transmission amplifier of the terminal apparatus is set to $GM(t2)$ and that an amount of attenuation of a reverse link is set to $LU(t2)$. Reception power $RB(t2)$ of the base station apparatus
 10 can be calculated by equation (2) shown below. In this case, the respective power values explained below are unified by an expression dB and calculated by addition and subtraction since they treat the gain.

$$15 \quad RM(t1) = GB(t1) - LD(t1) \quad \dots (1)$$

$$RB(t2) = GM(t2) - LU(t2) \quad \dots (2)$$

Here, in a TDD (Time Division Duplex) communication system, since the same frequency is used in the reverse link and the forward link, if
 20 a time distance between a reception slot and a transmission slot is short, the propagation paths of these slots can be regarded as the same. Then, the amount of attenuation $LD(t1)$ of the forward link at time $t1$ and that of attenuation $LU(t2)$ of the
 25 reverse link at time $t2$ can be treated as the same.

Therefore, the gain $GM(t2)$ of the transmission amplifier of the terminal apparatus results in a value, which is obtained by adding the amount of

attenuation $LD(t1)$ of the forward link to the reception power $RB(t2)$ of the base station apparatus, which is a predicted target gain, and this can be expressed by equation (3) shown below.

5
$$GM(t2) = RB(t2) + LD(t1) \quad \dots (3)$$

Here, in a case where the gain $GM(t1)$ of the transmission amplifier of the base station apparatus is constant and the predictive reception power $RB(t2)$ of the base station apparatus is constantly controlled, it is assumed that these added values are set to a fixed gain $G0$. In this case, $GM(t2)$ of the transmission amplifier of the terminal apparatus can be calculated from equations (1) and (3) by equation (4) shown below.

10
$$GM(t2) = G0 - RM(t1) \quad \dots (4)$$

Thus, the conventional terminal apparatus controls the gain $GM(t2)$ of the transmission amplifier such that the reception power $RB(t2)$ of the base station apparatus becomes constant on the basis of the measured reception power $RM(t1)$.

Here, in a case where the base station apparatus transmits the signal with a narrow directivity, the reception power is lowered by the directional shift with respect to the terminal apparatus in addition to the attenuation of reception power at the propagation path.

25 In this case, even if the received signal is lowered by the directional shift, the aforementioned

conventional terminal apparatus determines as
attenuation at the propagation path and transmits
the signal with an excessive power, and this causes
problems wherein an amount of interference to the
5 other peripheral terminal apparatuses increases to
make it impossible to perform communications with
the other peripheral terminal apparatuses and a
battery lifetime shortens.

10 Disclosure of Invention

It is an object of the present invention is to
provide a terminal apparatus, which can correctly
determine the cause of a reduction in reception power
and control transmission power precisely, and to
15 provide a transmission power control method.

The above object can be attained by calculating
a transmission gain from reception power of
individual channels, determining the presence or
absence of a directional shift from a ratio between
20 an average reception power of individual channels
and an average reception power of common channels,
and calculating a correction value in the case of
the presence of the direction shift, whereby
correcting the transmission gain.

25

Brief Description of Drawings

FIG. 1 is a block diagram showing a
configuration of a conventional radio communication

terminal apparatus;

FIG. 2 is a system configuration view including a radio communication terminal apparatus of the present invention;

5 FIG. 3 is a block diagram showing a configuration of a radio communication terminal apparatus according to a first embodiment;

10 FIG. 4 is a flowchart showing transmission power control of the radio communication terminal apparatus according to the first embodiment;

FIG. 5 is a flowchart showing transmission power control of a radio communication terminal apparatus according to a second embodiment; and

15 FIG. 6 is a flowchart showing transmission power control of a radio communication terminal apparatus according to a third first embodiment.

Best Mode for Carrying Out the Invention

20 The following will specifically explain embodiments of the present invention with reference to the drawings attached herewith.

25 FIG. 2 is a system configuration view including a radio communication terminal apparatus of the present invention (hereinafter simply referred to as "terminal apparatus"). A base station apparatus 100 transmits a common channel signal with a wide transmission directivity from an antenna 101 and an individual channel signal to each terminal apparatus

with a narrow directivity simultaneously. In accordance with the system, a perch channel, a broadcast channel, and the like are used as a common channel.

5 A terminal apparatus 200 receives the common channel with a wide transmission directivity and the individual channel signal with a narrow directivity from an antenna 201.

The following embodiments will explain the case
10 in which communications are performed using a CDMA system. The CDMA system assigns spreading codes, which are orthogonal to each other, to the respective terminal apparatuses, and despreads transmitting data using the spreading codes and transmit it. The
15 use of the codes orthogonal to each other between the plurality of terminal apparatuses makes it possible to perform communications with the plurality of terminal apparatuses with the same frequency and at the same time.

20 (First embodiment)

FIG. 3 is a block diagram showing a configuration of a radio communication terminal apparatus according to the first embodiment.

A duplexer 202 changes a path through which the
25 signal is passed at a transmitting time and a receiving time, outputs a signal from the antenna 201 to a reception RF section 203, and outputs a transmission signal output from a transmission RF

section 213 to the antenna 201.

The reception RF section 203 amplifies reception power, converts a frequency of the received signal, and outputs a baseband signal. An individual channel demodulating section 204 despreads the baseband signal by an individual channel spreading code, demodulates it, and picks up a signal of an individual channel of the terminal apparatus. A common channel demodulating section 205 despreads the baseband signal by use of a common channel desreading code.

A first reception power measuring section 206 measures reception power $RMD(t1)$ of the despread individual channels. A second reception power measuring section 207 measures reception power $RMC(t1)$ of the despread common channels. A first average power calculating section 208 calculates an average value $ARMD(t1)$ of measured reception power $RMD(t1)$ of the individual channels. A second average power calculating section 209 calculates an average value $ARMC(t1)$ of measured reception power $RMC(t1)$ of the common channels.

A determining section 210 determines whether or not the directivity of the individual channel is shifted with respected to the terminal apparatus based on whether or not a difference between the average reception power $ARMD(t1)$ of the individual channels and the average reception power $ARMC(t1)$

of the common channels is larger than a threshold value C. The threshold value C can be set as a system, or provided from the base station apparatus at an individual channel communication starting time.

5 If the difference between the average reception power $ARMC(t1)$ of the common channels and the average reception power $ARMD(t1)$ of the individual channels is smaller than the threshold value C, it can be detected that the directivity of the individual
10 channel matches the terminal apparatus. While, if the difference between the average reception power $ARMC(t1)$ of the common channels and the average reception power $ARMD(t1)$ of the individual channels is larger than the threshold value C, it can be
15 detected that the directivity of the individual channel is shifted with respect to the terminal apparatus.

The reason why the average reception power is used in determining the presence or absence of
20 directivity is to suppress an instantaneous variation due to fading.

A transmission power controlling section 211 calculates a gain $MG(t2)$ of a transmission amplifier on the basis of the determination result of the
25 determining section 210 by use of the reception power of the individual channels and that of the common channels, and controls the amplifier at a transmission RF section 213.

Here, since the base station apparatus generally receives the signals with a plurality of directivities and combines the received signals, the signals can be correctly received even if the directivity at the forward link is shifted.

In case where the directivity of the individual channel matches the terminal apparatus and the directional gain is large, the reception power of individual channel becomes larger than a predictive arrival power. Accordingly, there occurs a problem in which reception power at the base station apparatus becomes small and the signal cannot be correctly received if transmission power control is performed based on the reception power of individual channel.

Therefore, if it is determined that the directivity of the individual channel matches the terminal apparatus, the transmission power controlling section 211 controls the gain $MG(t2)$ of the transmission amplifier by equation (5) shown below based on the fixed gain $G0$ and the reception power $RMD(t1)$ of the individual channel of the terminal apparatus. The fixed gain $G0$ is an added value of the gain $GB(t1)$ of the transmission amplifier of the base station apparatus and the predictive reception power $RB(t2)$ of the base station apparatus.

$$GM(t2) = G0 - RMD(t1) \quad \dots (5)$$

While, in the case where the directivity of the individual channel is shifted and the directional gain is small, the reception power of the individual channel is smaller than the predictive arrival power. Accordingly, if transmission power control is performed based on the reception power of the individual channels, power arriving the base station apparatus will be increased by the amount of the reduction in the received signals caused by the directional shift.

Therefore, if it is determined that the directivity of the individual channel is shifted, the transmission power control section 211 sets the gain $GM(t2)$ of the transmission amplifier of the terminal apparatus to be small by a constant $G1$ as shown by the following equation (6) as compared with the case in which the directivity of the individual channel matches the terminal apparatus.

$$GM(t2) = G0 - RMD(t1) - G1 \quad \dots (6)$$

A modulating section 212 provides a primary modulation such as PSK, QAM and the like, to the transmission signal, and a secondary modulation thereto by use of spreading codes. A transmission RF section 213 converts the frequency of the modulated transmission signal, and amplifies transmission power based on the gain $GM(t2)$ of the transmission amplifier.

The following will explain the flow of the

signals at the terminal apparatus according to the first embodiment.

The signal received by the antenna 201 is input to the reception RF section 203 via the duplexer 202 and the reception RF section 203 amplifies power of the received signal, the frequency of the received signal is converted, and a baseband signal is picked up.

The individual channel demodulating section 204 despreads the baseband signal by use of the individual channel spreading code so as to be demodulated, and the individual channel signal of the terminal apparatus is picked up. Also, the common channel demodulating section 205 despreads the baseband signal by use of the common channel spreading code.

Then, transmission power control to be described later is made from reception power $RMD(t1)$ of the individual channel and reception power $RMC(t1)$ of the common channel by the first reception power measuring section 206, the reception power measuring section 207, first average power calculating section 208, second average power calculating section 209, determining section 210, and transmission power control section 211.

The transmission signal is modulated by the modulation section 212, the frequency thereof is converted by the transmission RF section 213, and

the resultant is amplified based on the gain $GM(t_2)$ of the transmission amplifier and transmitted from the antenna 201 via the duplexer 202.

Next, an explanation will be given of the transmission power control of the terminal according to the first embodiment with reference to the flowchart of FIG. 4.

First of all, the first reception power measuring section 206 measures reception power $RMD(t_1)$ of the individual channel of the terminal apparatus (ST301), and the second reception power measuring section 207 also measures reception power $RMC(t_1)$ of despread common channel (ST302).

Next, the first average power calculating section 208 calculates average reception power $ARMD(t_1)$ of the individual channels (ST303), and the second average power calculating section 209 calculates the average reception power $ARMC(t_1)$ of the common channel (ST304).

Next, the determining section 210 determines whether or not the directivity of the individual channel is shifted based on whether or not a value, which is obtained by subtracting the average reception power $ARMD(t_d)$ of the individual channels from the average reception power $ARMC(t_1)$ of the common channels, is larger than the threshold value C (ST305).

Then, if it is determined that the directivity

of the individual channel matches the terminal apparatus, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (5) (ST306), and if it is
5 determined that the directivity is shifted, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (6) (ST307).

Thus, the presence or absence of the directional
10 shift is determined from the average reception power of the common channels and the average reception power of the individual channels, and the transmission gain is corrected by the constant if the directivity of the individual channel is shifted,
15 whereby making it possible to prevent transmission power from being increased excessively, to suppress interference with the other stations, and to extend the battery lifetime of the terminal apparatus.
(Second embodiment)

20 The second embodiment shows a specific aspect in which the transmission gain is corrected based on the average reception power of the common channels and the average reception power of the individual channels in the case where the directivity of the
25 individual channel is shifted.

The configuration of the terminal apparatus in the second embodiment is the same as that of the terminal apparatus shown in FIG. 2 and the

explanation is omitted.

If it is determined that the directivity of the individual channel is shifted, the transmission power control section 211 sets the gain $GM(t2)$ of the transmission amplifier of the terminal apparatus to be small by a value, which is obtained by subtracting the difference between the average reception power $ARMC(t1)$ of the common channels and the average reception power $ARMD(t1)$ of the individual channels from the threshold value C as shown by the following equation (7) as compared with the case in which the directivity of the individual channel matches the terminal apparatus.

$$GM(t2) = G0 - RMD(t1) - (C - (ARMC(t1) - ARMD(t1))) \dots (7)$$

The following will explain the flow of the transmission power control of the terminal apparatus according to the second embodiment with reference to the flowchart shown in FIG. 5.

First of all, the first reception power measuring section 206 measures reception power of the despread individual channel of the terminal apparatus (ST401), and the second reception power measuring section 207 also measures reception power of despread common channel (ST402).

Next, the first average power calculating section 208 calculates the average reception power of the individual channels (ST403), and the second average power calculating section 209 calculates

average reception power of the common channels (ST404).

Next, the determining section 210 determines whether or not the directivity of the individual channel is shifted based on whether or not a value, which is obtained by subtracting the average reception power of the individual channels from the average reception power of the common channels, is larger than the threshold value (ST405).

Then, if it is determined that the directivity of the individual channel matches the terminal apparatus, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (5) (ST406), and if it is determined that the directivity is shifted, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (8) (ST407).

Thus, the transmission gain is corrected based on the difference in the average reception power between the common channel and the individual channel due to the directional shift, whereby making it possible to increase accuracy in transmission power control as compared with the case the correction is performed by use of the constant.

(Third embodiment)

The third embodiment shows a specific aspect in which the transmission gain is calculated based on

the reception power of the common channel in the case where the directivity of the individual channel is shifted.

The configuration of the terminal apparatus according to the third embodiment is the same as that of the terminal apparatus shown in FIG. 2 and the explanation is omitted.

If it is determined that the directivity of the individual channel is shifted, the transmission power controlling section 211 controls the gain $MG(t2)$ of the transmission amplifier by equation (8) shown below based on the fixed gain $G0$ and the measured reception power $RMC(t1)$ of the individual channel.

$$GM(t2) = G0 - RMC(t1) \quad \dots (8)$$

First of all, the first reception power measuring section 206 measures reception power of the despread individual channel of the terminal apparatus (ST501), and the second reception power measuring section 207 also measures reception power of despread common channel (ST502).

Next, the first average power calculating section 208 calculates the average reception power of the individual channels (ST503), and the second average power calculating section 209 calculates the average reception power of the common channels (ST504).

Next, the determining section 210 determines

whether or not the directivity of the individual channel is shifted based on whether or not a value, which is obtained by subtracting the average reception power of the individual channels from the average reception power of the common channels, is larger than the threshold value (ST505).

Then, if it is determined that the directivity of the individual channel matches the terminal apparatus, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (5) (ST506), and if it is determined that the directivity is shifted, the transmission power control section 211 calculates the gain $GM(t2)$ of the transmission amplifier from equation (8) (ST507).

Thus, in the case where the directivity of the individual channel is shifted, the transmission gain is calculated based on the reception power of the common channel, whereby allowing the terminal apparatus to execute transmission power control even if the directivity is largely shifted and the signal with a variable directivity cannot be received.

Moreover, the above embodiments explained the case of communications using DCMA. However, the present invention is not limited to these embodiments and the same effect as the above embodiments can be obtained even if the other multiple access system is used.

As explained above, according to the terminal apparatus of the present invention and the transmission power control method, in a case where the base station apparatus transmits the signal with a narrow directivity, it is possible to correctly determine the cause of the reduction in reception power and to control transmission power accurately.

This application is based on the Japanese Patent Publication No. 2000-78076, filed on August 28, 1998.

Claims

1. A radio communication terminal apparatus comprising:

5 first power measuring means for measuring reception power of a common channel signal transmitted from a base station with a wide directivity;

second power measuring means for measuring reception power of an individual channel signal transmitted from the base station with a narrow directivity;

10 determining means for determining the presence of a directional shift if the difference between result of said first power measuring means and result of said second power measuring means is smaller than threshold value, or determining the absence of a directional shift if the
15 difference between result of said first power measuring means and result of said second power measuring means is larger than threshold value;

transmission power controlling means for controlling transmission power based on the determination result of
20 said determining means; and

transmission means for transmitting a power controlled signal to the base station.

2. The radio communication terminal apparatus according to claim 1, wherein said determining means
25 determines that the directivity is shifted when a value, which is obtained by subtracting an average reception power of the individual channel signals from an average reception power of the common channel signals, exceeds a threshold value.

30 3. The radio communication terminal apparatus according to claim 1, wherein said transmission power controlling means sets a value, which is obtained by subtracting the reception power of the individual channel

signals from an initial setting gain, as a transmission gain when said directivity is not shifted from said terminal apparatus.

4. The radio communication terminal apparatus according to claim 1, wherein said transmission power controlling means sets a value, which is obtained by subtracting the reception power of the individual channel signals from an initial setting gain and further subtracting a correction value therefrom, as a transmission gain when said directivity is shifted from said terminal apparatus.

5. The radio communication terminal apparatus according to claim 4, wherein said transmission power controlling means sets a value, which is obtained by adding the average reception power of the individual channel signals to the threshold value and subtracting the average reception value of the common channel signals therefrom, as a correction value.

6. The radio communication terminal apparatus according to claim 1, wherein said transmission power controlling means sets a value, which is obtained by subtracting the reception power of the common channel signals from an initial setting gain, as a transmission gain when said directivity is shifted from said terminal apparatus.

7. The radio communication terminal apparatus according to claim 1, further comprising multiplexing means for multiplexing information of the directional shift into a transmission signal.

8. A transmission power controlling method of a radio communication terminal apparatus, comprising the steps of:

determining the presence of a directional shift if the difference between reception power of a common channel signal transmitted from a base station with a wide directivity and reception power of an individual channel signal transmitted from the base station with a narrow directivity is smaller than threshold value, or determining the absence of a directional shift if the difference between reception power of a common channel signal transmitted from a base station with a wide directivity and reception power of an individual channel signal transmitted from the base station with a narrow directivity is larger than threshold value; and

performing transmission power control based on the determination result.

9. The transmission power controlling method of a radio communication terminal apparatus according to claim 8, wherein it is determined that the directivity is shifted from said terminal apparatus when a value, which is obtained by subtracting an average reception power of the individual channel signals from an average reception power of the common channel signals, exceeds a threshold value.

10. The transmission power controlling method of a radio communication terminal apparatus according to claim 8, wherein a value, which is obtained by subtracting the reception power of the individual channel signals from an initial setting gain, is set as a transmission gain when said directivity is not shifted from said terminal apparatus.

11. The transmission power controlling method of a radio communication terminal apparatus according to claim 8, wherein a value, which is obtained by subtracting the reception power of the individual channel signals from an initial setting gain and further subtracting a correction

value therefrom, is set as a transmission gain when said directivity is shifted from said terminal apparatus.

12. The transmission power controlling method of a radio communication terminal apparatus according to claim 5 11, wherein a value, which is obtained by adding the average reception power of the individual channel signals to the threshold value and subtracting the average reception value of the common channel signals therefrom, is set as a correction value.

10 13. The transmission power controlling method of a radio communication terminal apparatus according to claim 8, wherein sets a value, which is obtained by subtracting the reception power of the common channel signals from an initial setting gain, is set as a transmission gain when 15 said directivity is shifted from said terminal apparatus.

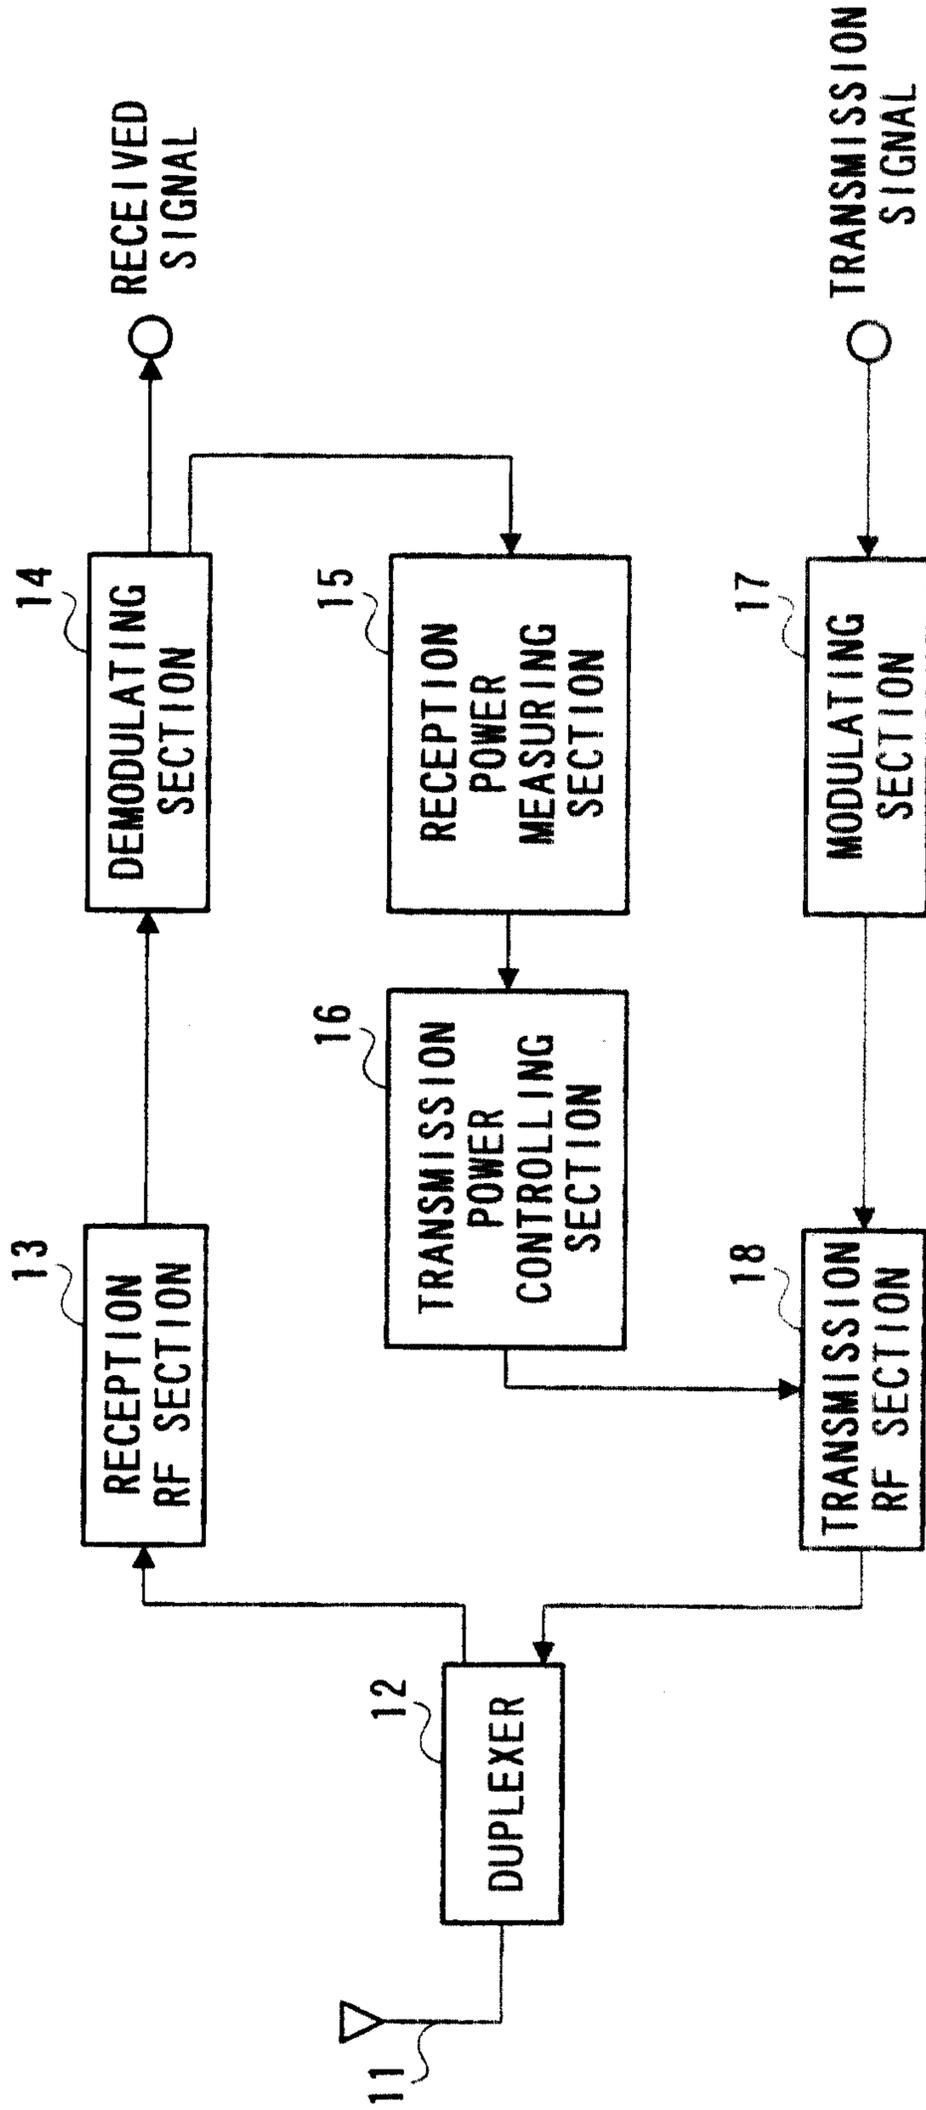


FIG. 1
PRIOR ART

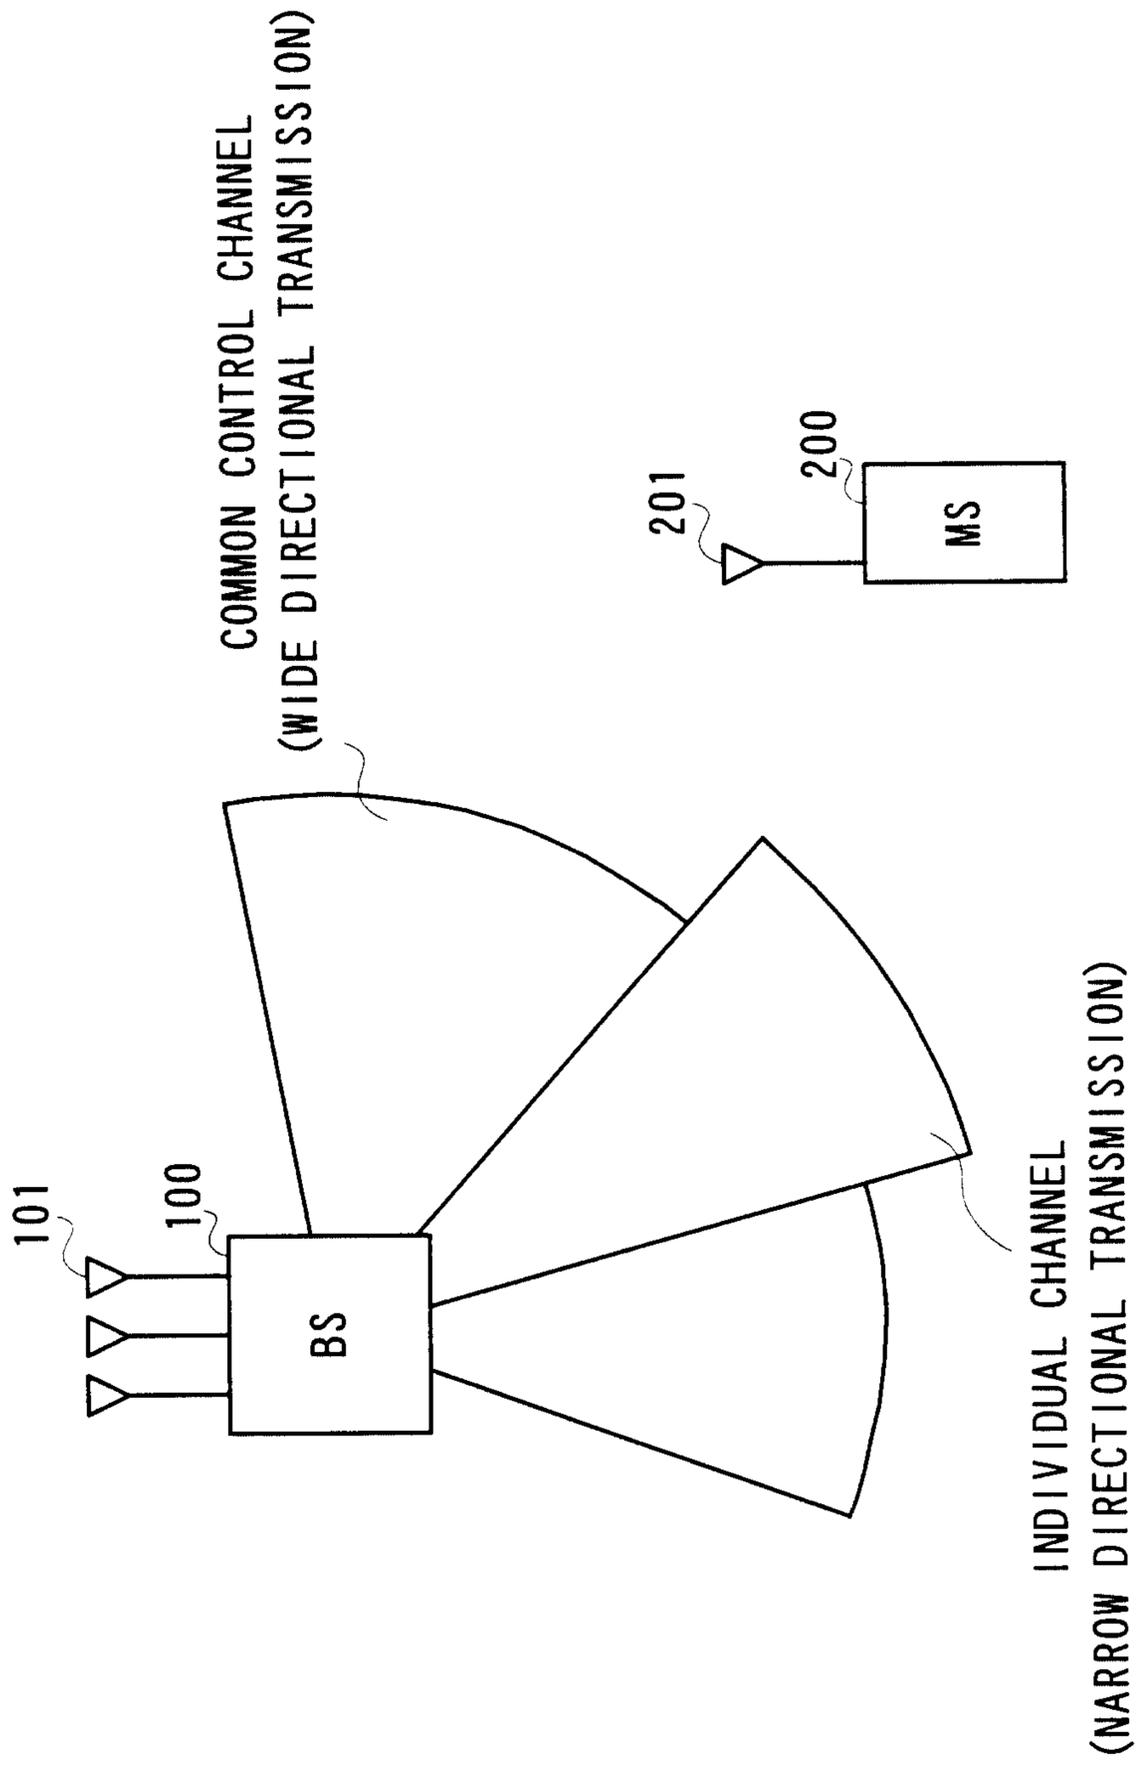


FIG. 2

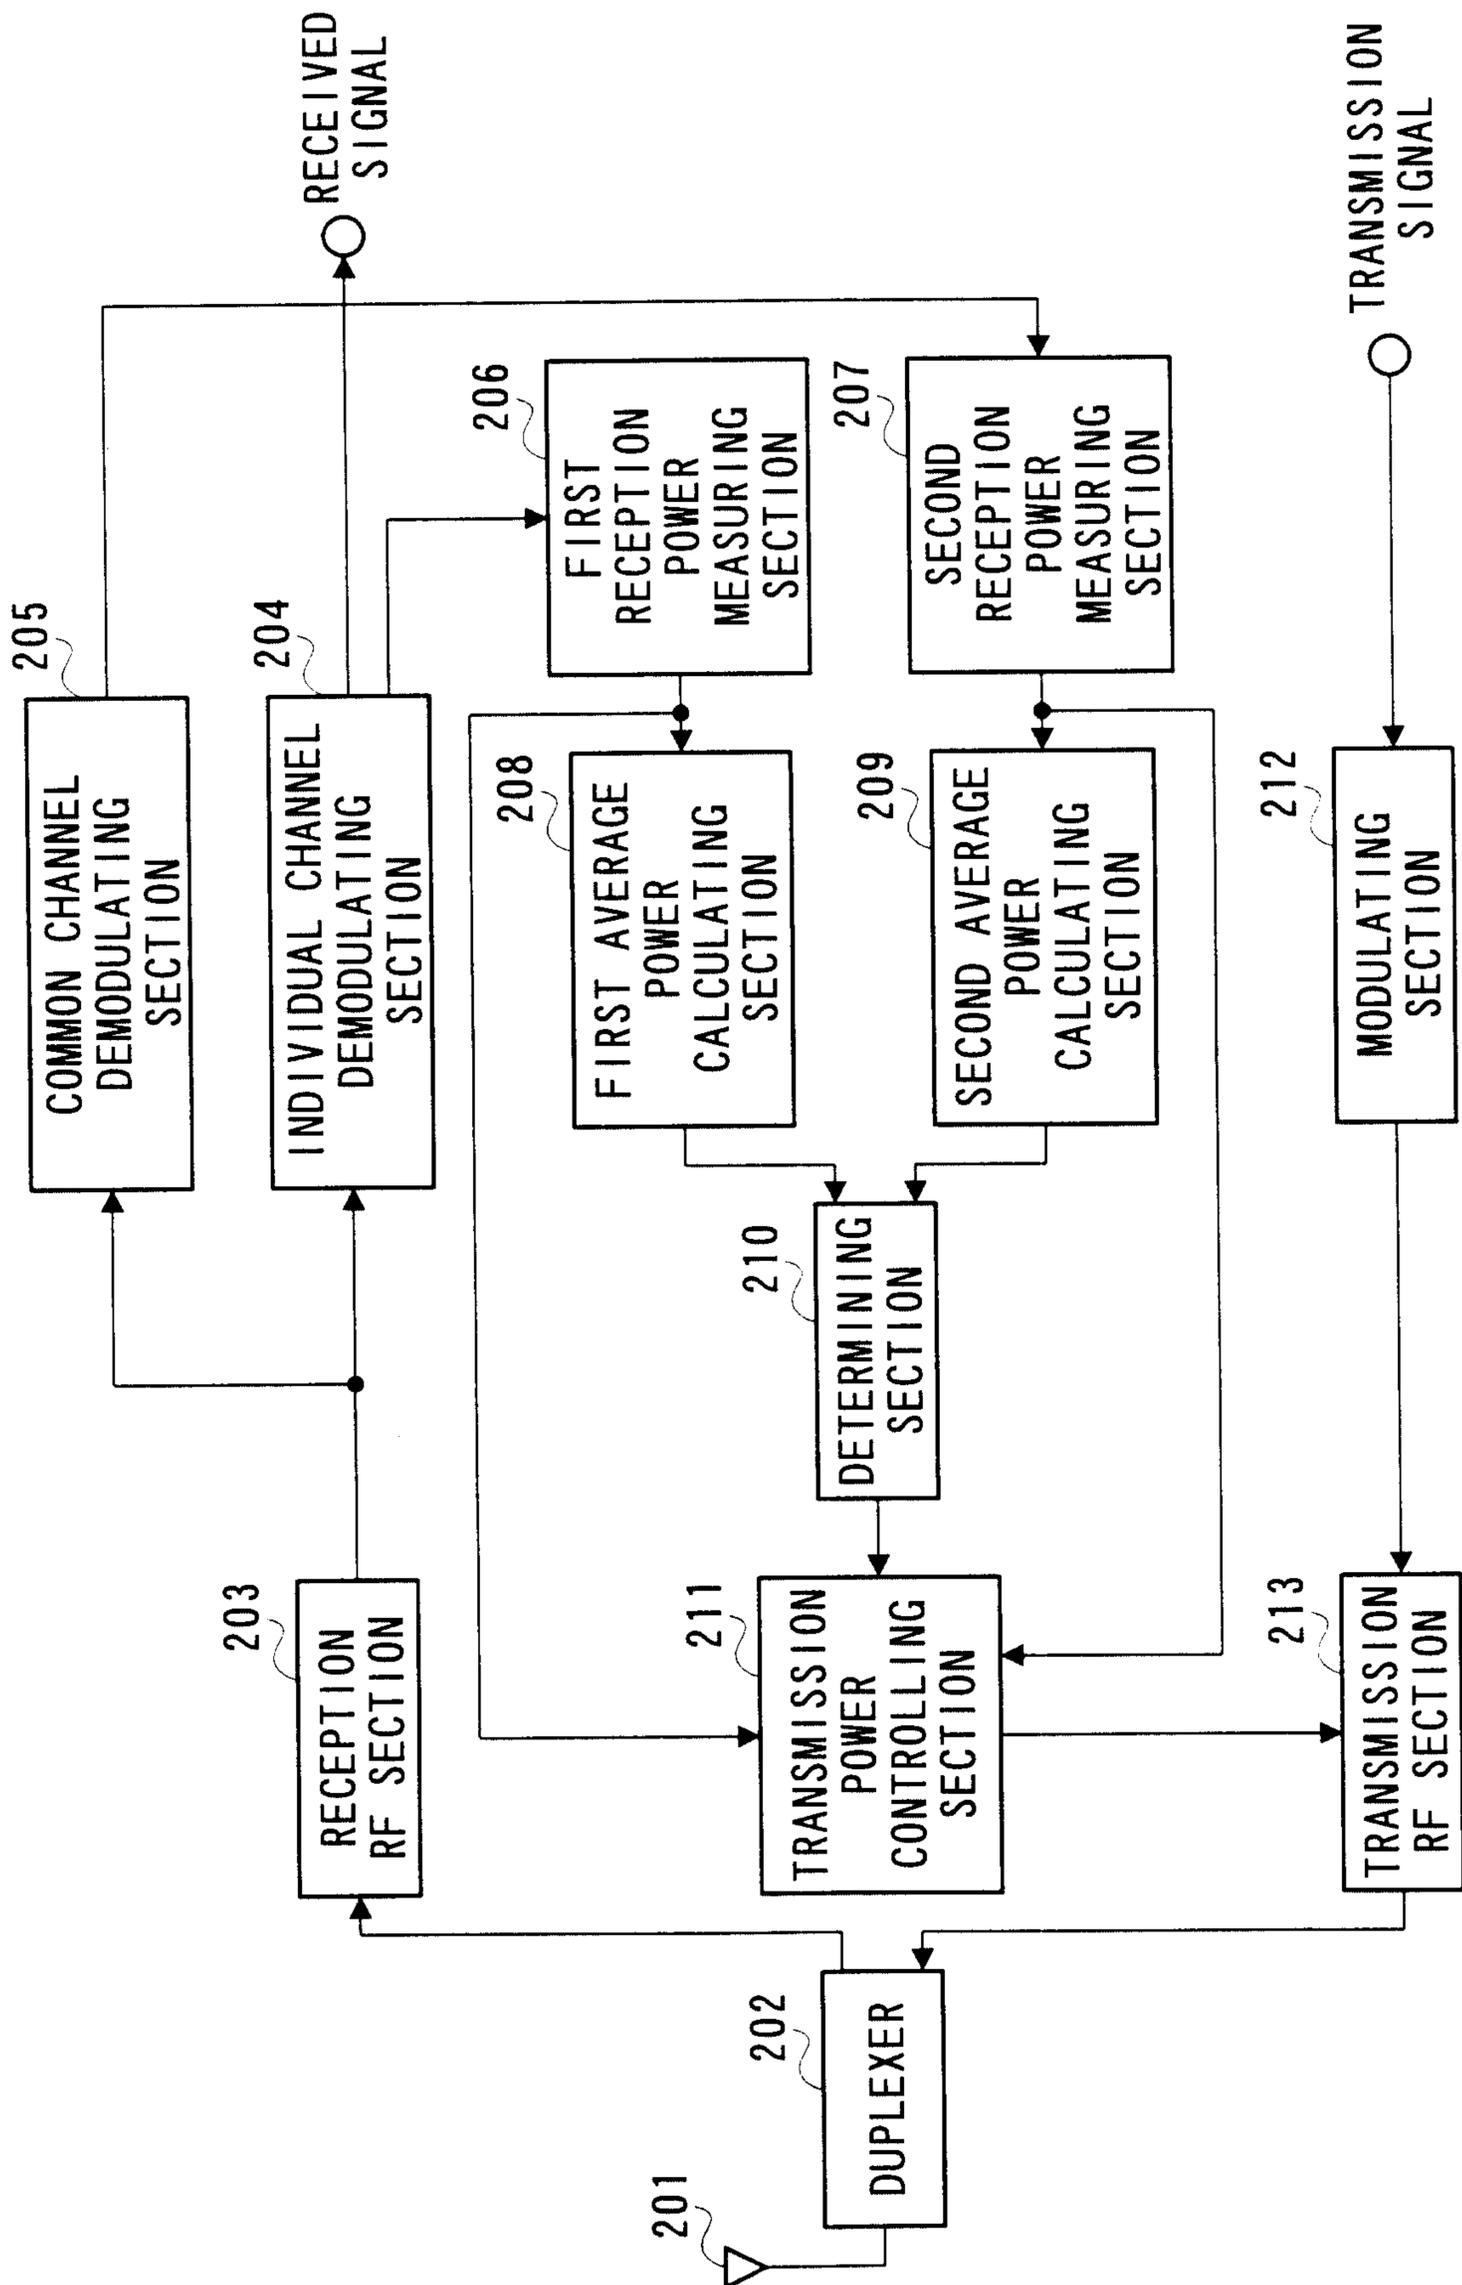


FIG. 3

4/6

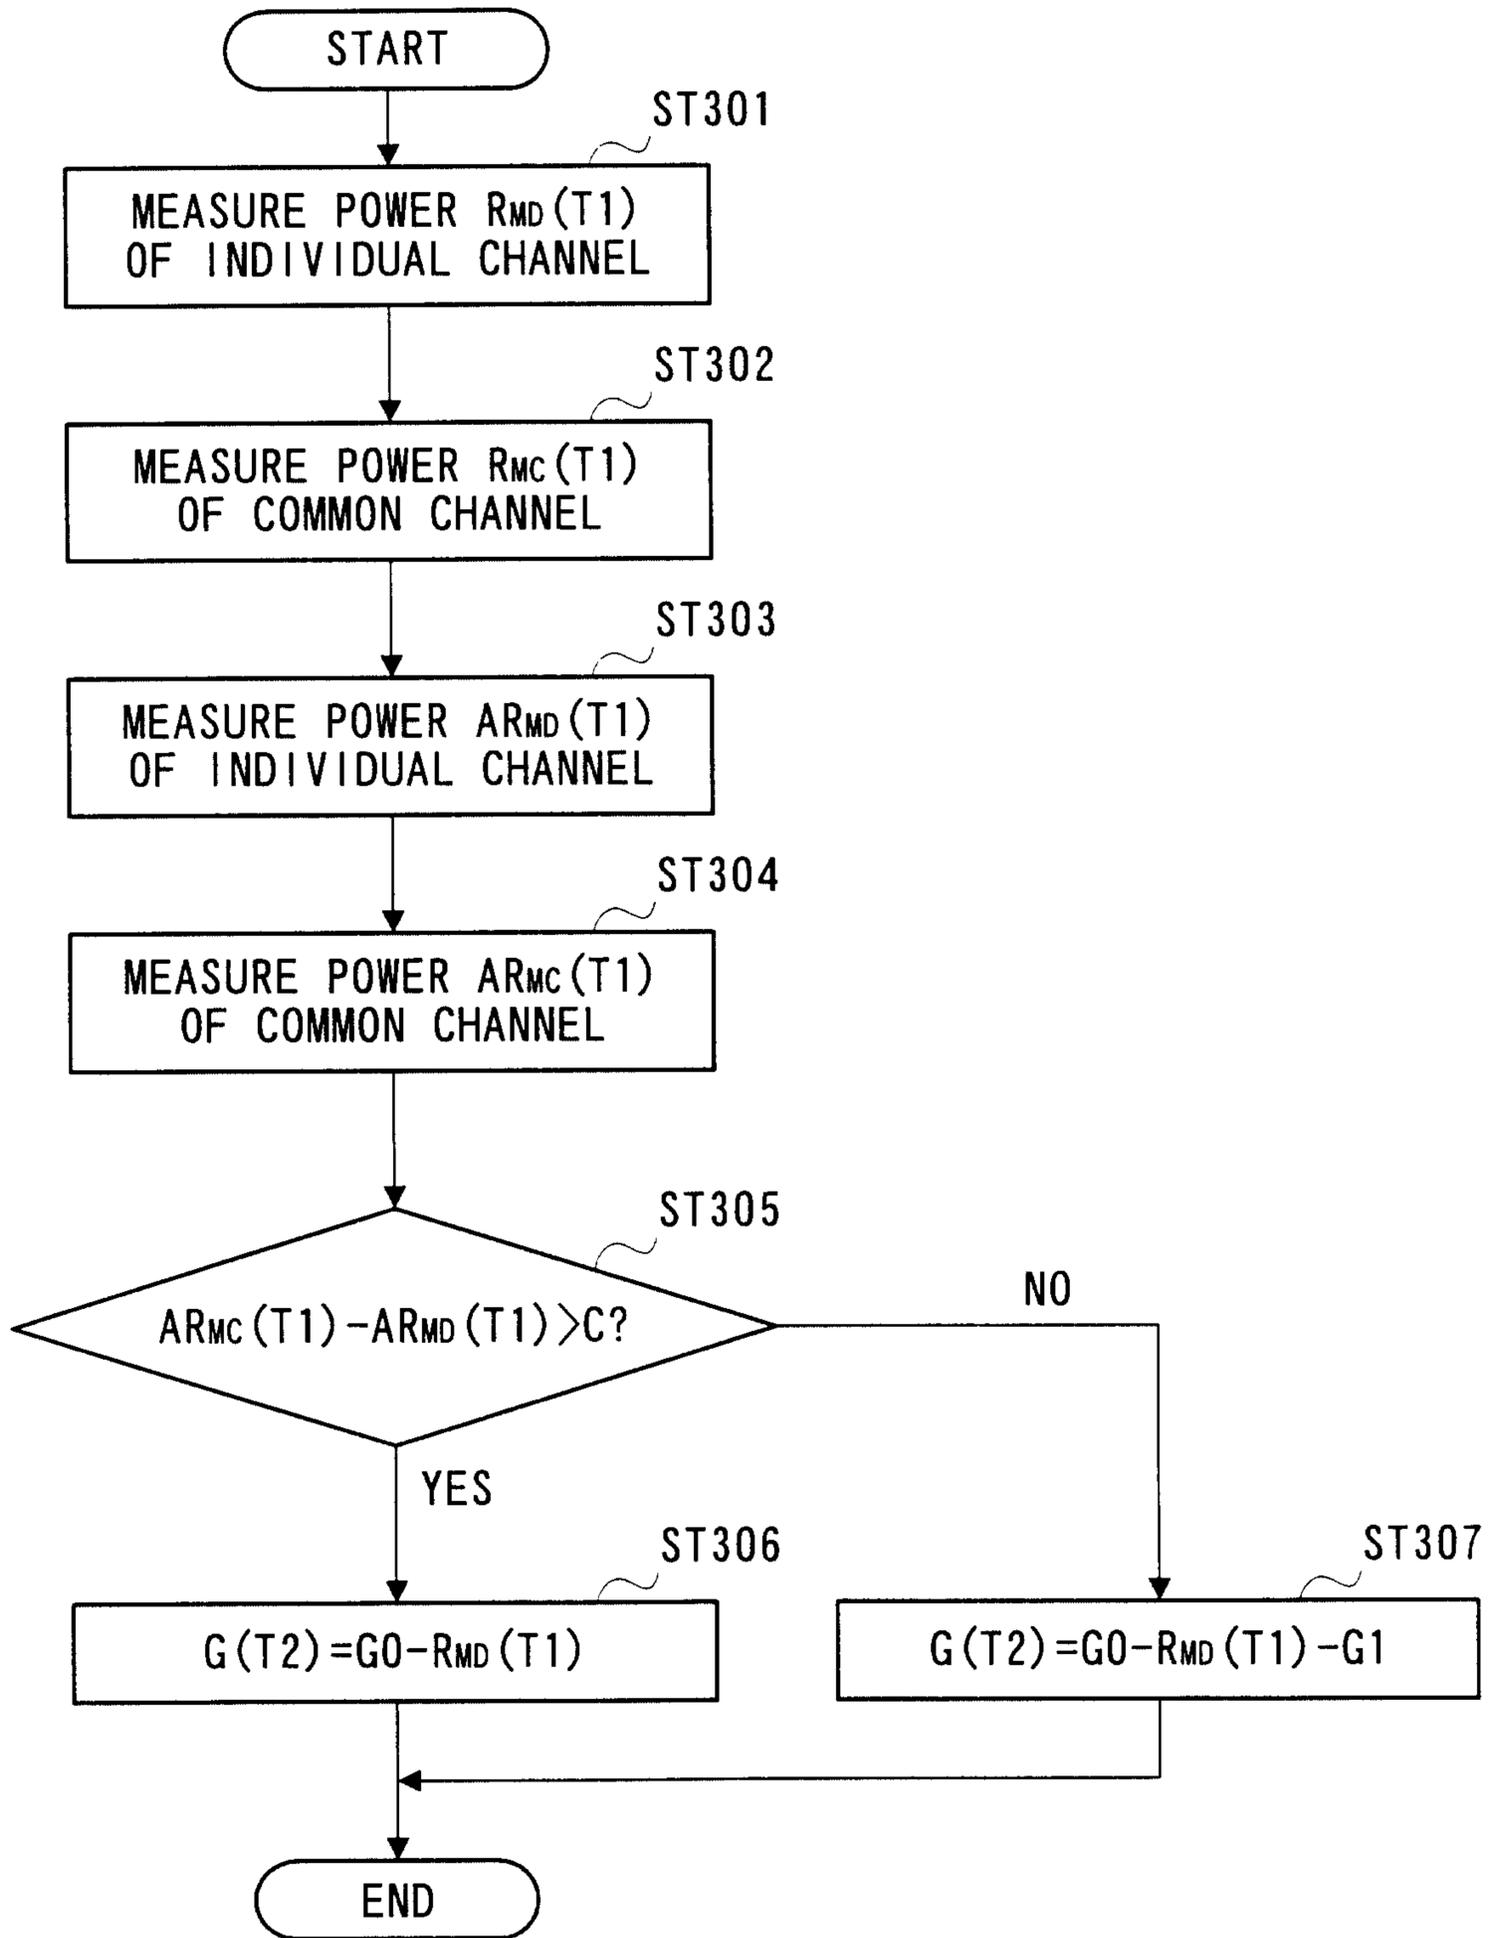


FIG. 4

5/6

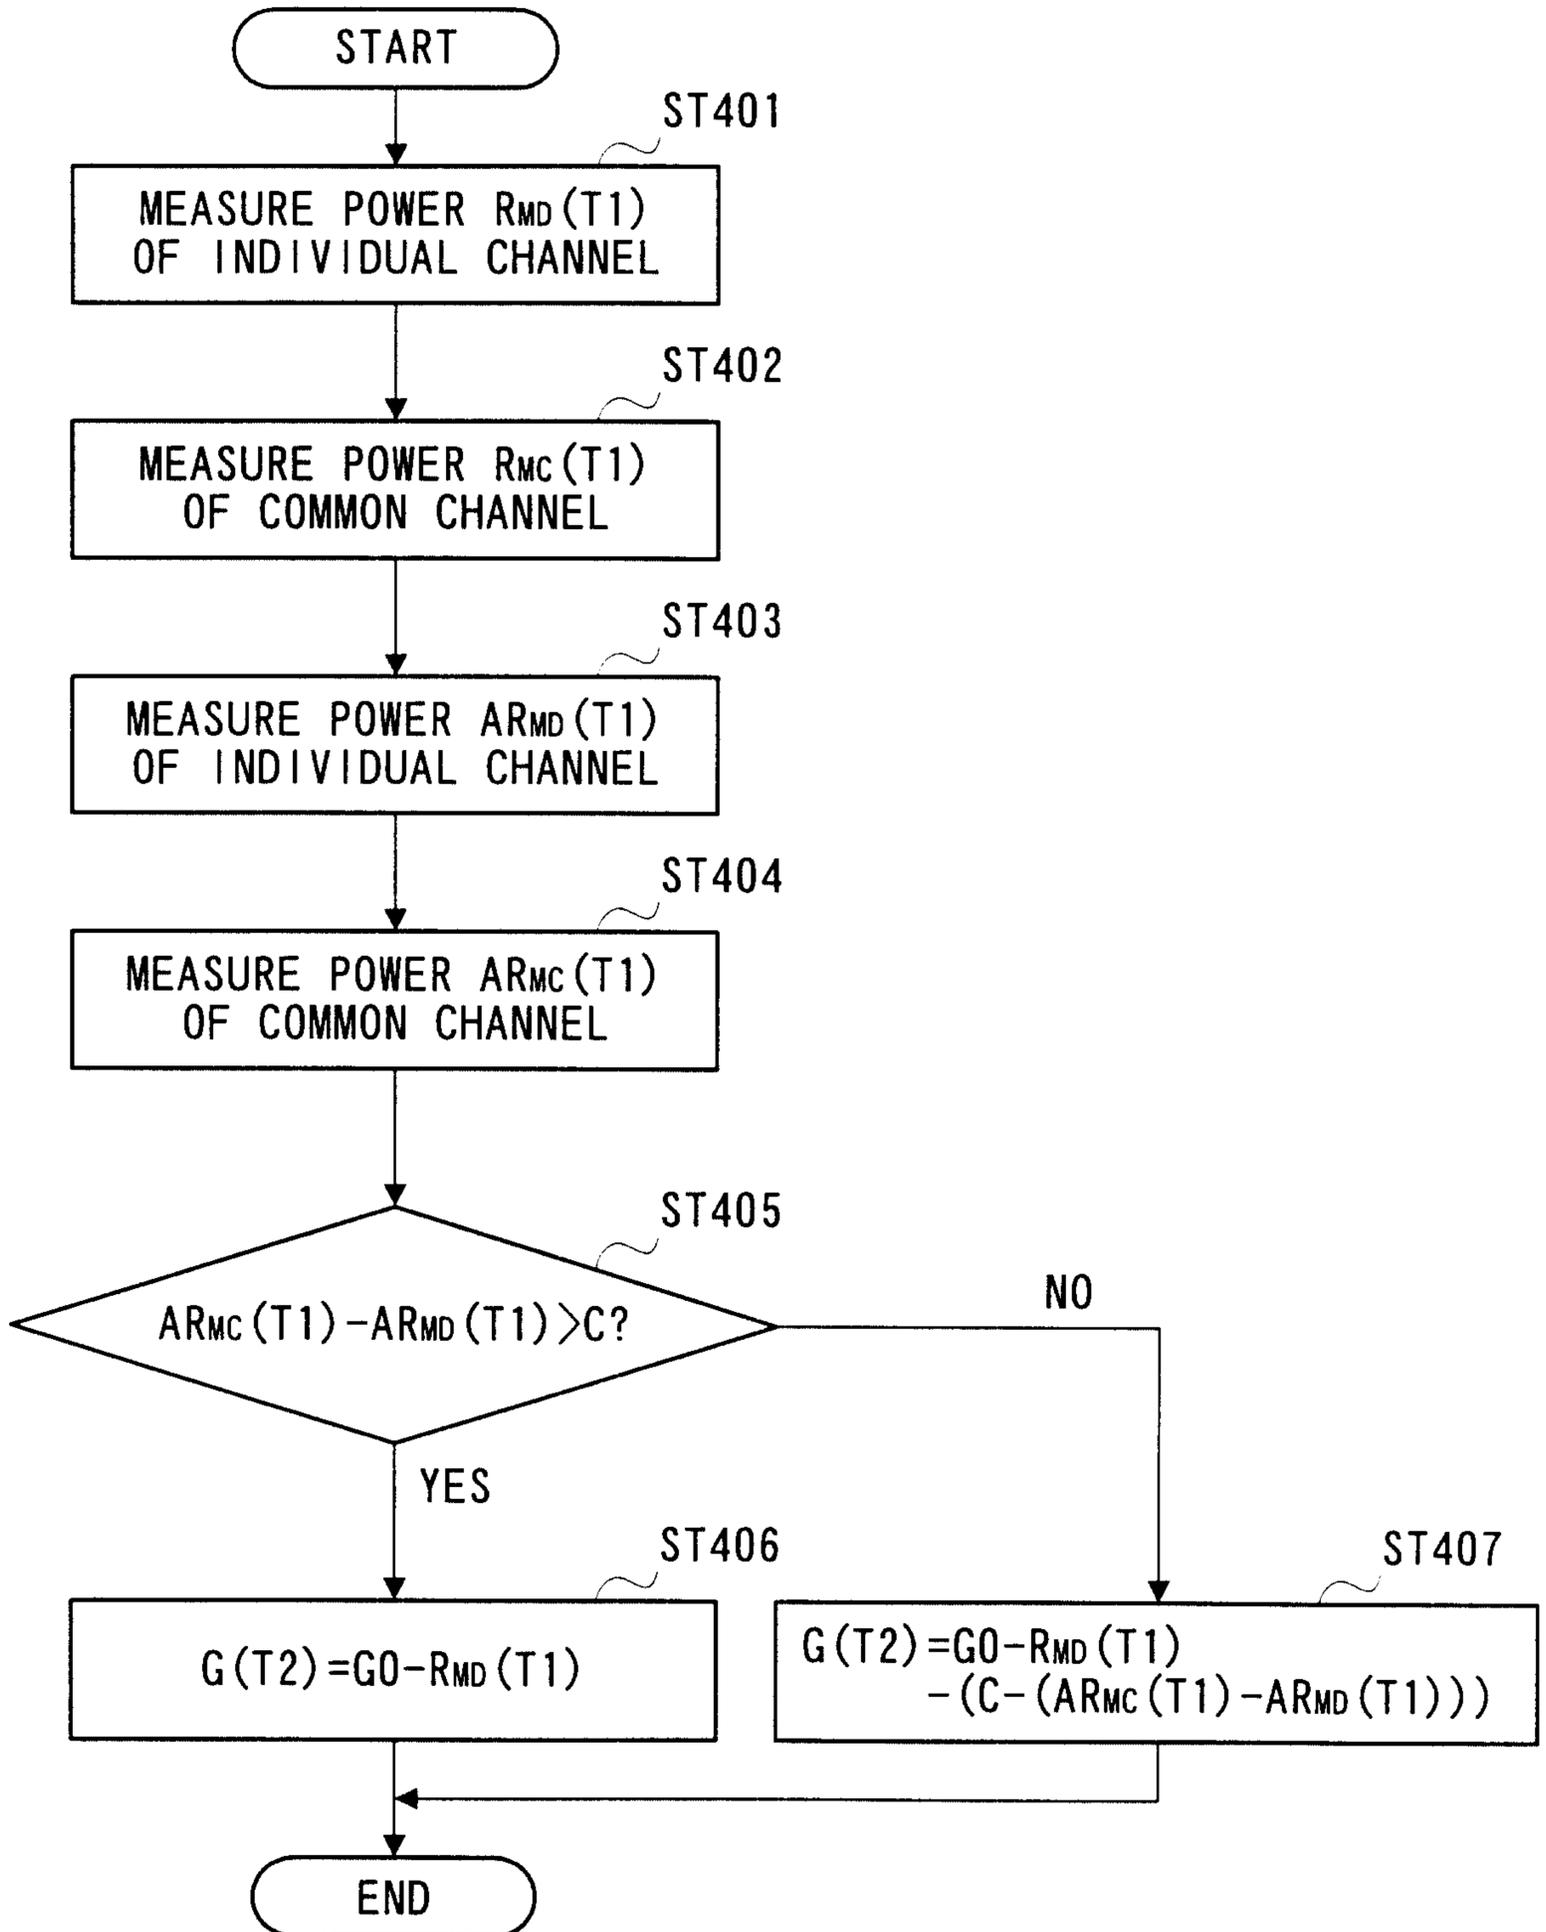


FIG. 5

6/6

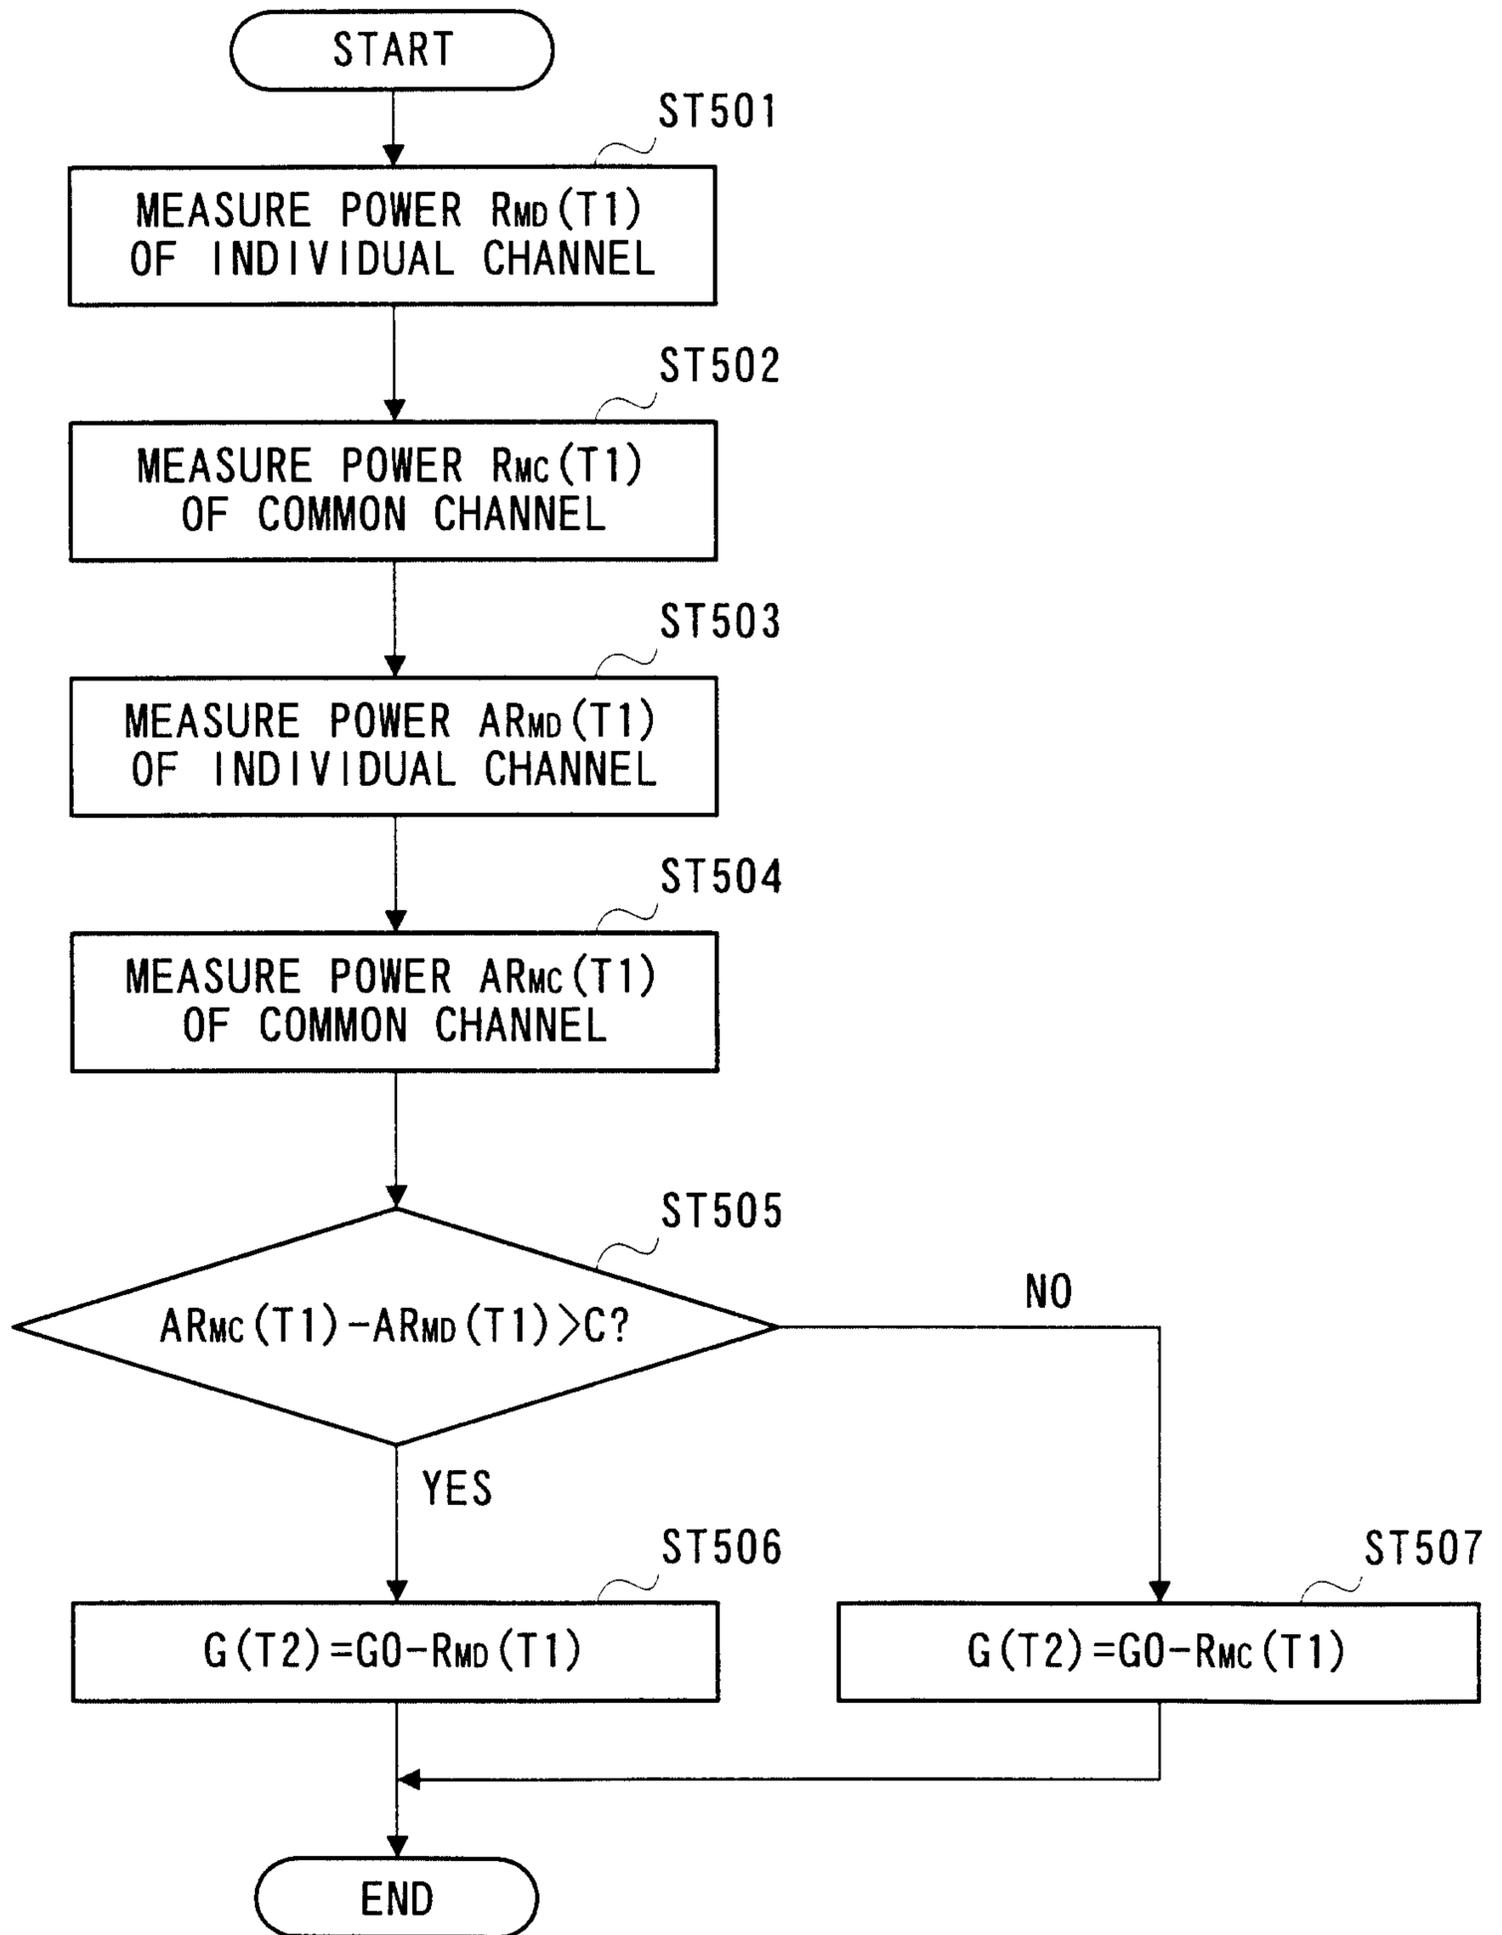


FIG. 6

