

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 May 2003 (22.05.2003)

PCT

(10) International Publication Number
WO 03/043261 A1

(51) International Patent Classification⁷: H04L 1/18, 27/34

(21) International Application Number: PCT/EP02/12837

(22) International Filing Date:
15 November 2002 (15.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01127245.7 16 November 2001 (16.11.2001) EP

(71) Applicant (for all designated States except US): MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. [JP/JP]; 1006 Kadoma, Kadoma City, Osaka 571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): GOLITSCHKE EDLER VON ELBWARD, Alexander [DE/DE]; Wilhelmstrasse 32, 64285 Darmstadt (DE). SEIDEL, Eiko [DE/DE]; Gruener Weg 1, 64283 Darmstadt (DE).

WENGERTER, Christian [DE/DE]; Bahnhofstrasse 10 d, 63924 Kleinheubach (DE).


(74) Agent: KUHLM, Dietmar; Grünecker, Kinkeldey, Stockmair & Schwanhäusser, Maximilianstrasse 58, 80538 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HYBRID ARQ METHOD FOR DATA TRANSMISSION

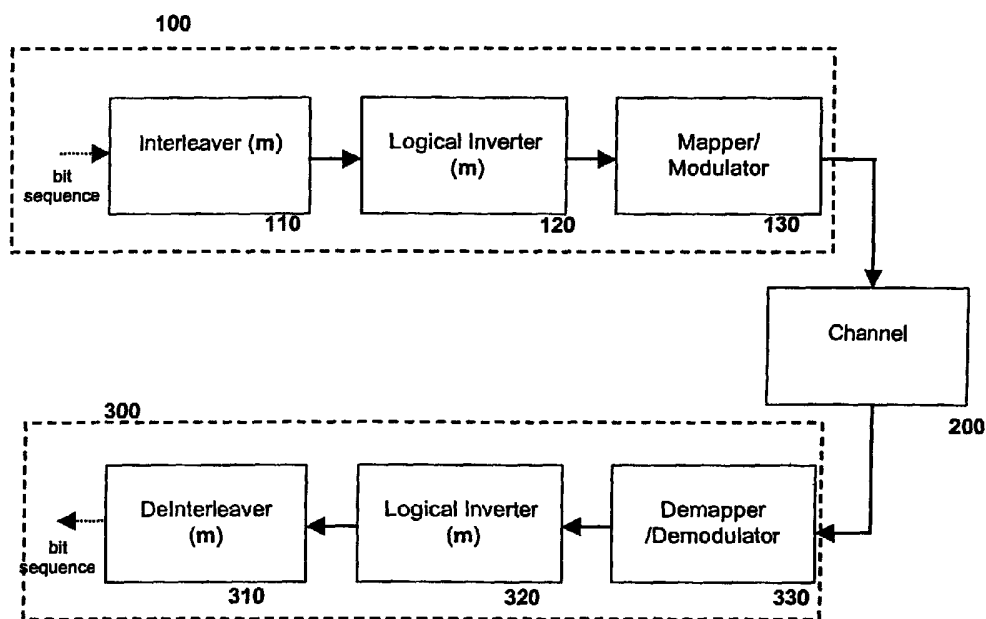

(57) Abstract: An ARQ transmission method in a communication system, wherein data packets comprising modulation symbols are transmitted based on an automatic repeat request and subsequently combined with previously received data packets. The symbols of the transmitted data packets are modulated in a mapping entity employing at least a first and second signal constellation. The method further comprises the step of obtaining the second signal constellation from the first signal constellation by exchanging a logical bit position and/or inverting a logical bit. The invention further relates to a corresponding transmitter and receiver



WO 03/043261 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HYBRID ARQ METHOD FOR DATA TRANSMISSION

The present invention relates to a method for modifying a bit sequence in an ARQ retransmission in a communication system. Further, the invention concerns a corresponding receiver and transmitter.

A common technique in communication systems with unreliable and time-varying channel conditions is to correct errors based on automatic repeat request (ARQ) schemes together with a forward error correction (FEC) technique called hybrid ARQ (HARQ). If an error is detected by a commonly used cyclic redundancy check (CRC), the receiver of the communication system requests the transmitter to resend the erroneously received data packets.

S. Kallel, *Analysis of a type II hybrid ARQ scheme with code combining*, IEEE Transactions on Communications, Vol.38, No. 8, August 1990 and S. Kallel, R. Link, S. Bakhtiyari, *Throughput performance of Memory ARQ schemes*, IEEE Transactions on Vehicular Technology, Vol.48, No. 3, May 1999 define three different types of ARQ schemes:

- Type I: The erroneous received packets are discarded and a new copy of the same packet is retransmitted and decoded separately. There is no combining of earlier and later received versions of that packet.
- Type II: The erroneous received packets are not discarded, but are combined with additional retransmissions for subsequent decoding. Retransmitted packets sometimes have higher coding rates (coding gain) and are combined at the receiver with the stored soft-information from previous transmissions.
- Type III: Is the same as Type II with the constraint each retransmitted packet is now self-decodable. This implies that the transmitted packet is decodable without the combination with previous packets. This is useful if some packets are damaged in such a way that almost no information is reusable. If all transmissions carry identified data, this can be seen as a special case called HARQ Type III with a single redundancy version.

Types II and III schemes are obviously more intelligent and show a performance gain with respect to Type I, because they provide the ability to reuse information from of previously received erroneous packets. There exist basically three schemes of reusing the redundancy of previously transmitted packets:

- Soft-Combining
- Code-Combining
- Combination of Soft- and Code-Combining

Soft-Combining

Employing soft-combining the retransmission packets carry identical information compared with the previously received information. In this case the multiple received packets are combined either by a symbol-by-symbol or by a bit-by-bit basis as for example disclosed in D. Chase, *Code combining: A maximum-likelihood decoding approach for combining an arbitrary number of noisy packets*, IEEE Trans. Commun., Vol. COM-33, pp. 385-393, May 1985 or B.A. Harvey and S. Wicker, *Packet Combining Systems based on the Viterbi Decoder*, IEEE Transactions on Communications, Vol. 42, No. 2/3/4, April 1994. By combining this soft-decision values from all received packets the reliabilities of the transmitted bits will increase linearly with the number and power of received packets. From a decoder point of view the same FEC scheme (with constant code rate) will be employed over all transmissions. Hence, the decoder does not need to know how many retransmissions have been performed, since it sees only the combined soft-decision values. In this scheme all transmitted packets will have to carry the same number of symbols.

Code-Combining

Code-combining concatenates the received packets in order to generate a new code word (decreasing code rate with increasing number of transmission). Hence, the decoder has to be aware of the FEC scheme to apply at each retransmission instant. Code-combining offers a higher flexibility with respect to soft-combining, since the length of the retransmitted packets can be altered to adapt to channel conditions. However, this requires more signaling data to be transmitted with respect to soft-combining.

Combination of Soft- and Code-Combining

In case the retransmitted packets carry some symbols identical to previously transmitted symbols and some code-symbols different from these, the identical code-symbols are combined using soft-combining as described in the section titled "Soft Combining" while the remaining code-symbols will be combined using code-combining. Here, the signaling requirements will be similar to code-combining.

As it has been shown in M.P. Schmitt, *Hybrid ARQ Scheme employing TCM and Packet Combining*, Electronics Letters Vol. 34, No. 18, September 1998 that HARQ performance for Trellis Coded Modulation (TCM) can be enhanced by rearranging the symbol constellation for the retransmissions. There, the performance gain results from the maximizing the Euclidean distances between the mapped symbols over the retransmissions, because the rearrangement has been performed on a symbol basis.

Considering high-order modulation schemes (with modulation symbols carrying more than two bits) the combining methods employing soft-combining have a major drawback: The bit reliabilities within soft-combined symbols will be in a constant ratio over all retransmissions, i.e. bits which have been less reliable from previous received transmissions will still be less reliable after having received further transmissions and, analogous, bits which have been more reliable from previous received transmissions will still be more reliable after having received further transmissions.

The varying bit reliabilities evolve from the constraint of two-dimensional signal constellation mapping, where modulation schemes carrying more than 2 bits per symbol cannot have the same mean reliabilities for all bits under the assumption that all symbols are transmitted equally likely. The term mean reliabilities is consequently meant as the reliability of a particular bit over all symbols of a signal constellation.

Employing a signal constellation for a 16 QAM modulation scheme according to Figure 1 showing a Gray encoded signal constellation with a given bit-mapping order $i_1q_1i_2q_2$, the bits mapped onto the symbols differ from each other in mean reliability in the first transmission of the packet. In more detail, bits i_1 and q_1 have a high mean reliability, as these bits are mapped to half spaces of the signal constellation diagram

with the consequences that their reliability is independent from the fact of whether the bit transmits a *one* or a *zero*.

In contrast thereto, bits i_2 and q_2 have a low mean reliability, as their reliability depends on the fact of whether they transmit a *one* or a *zero*. For example, for bit i_2 , ones are mapped to outer columns, whereas zeros are mapped to inner columns. Similarly, for bit q_2 , ones are mapped to outer rows, whereas zeros are mapped to inner rows.

For the second and each further retransmissions the bit reliabilities will stay in a constant ratio to each other, which is defined by the signal constellation employed in the first transmission, i.e. bits i_1 and q_1 will always have a higher mean reliability than bits i_2 and q_2 after any number of retransmissions.

In co-pending PCT/EP01/01982 a method has been suggested that in order to enhance the decoder performance, it would be quite beneficial to have equal or near to equal mean bit reliabilities after each received transmission of a packet. Hence, the bit reliabilities are tailored over the retransmissions in a way that the mean bit reliabilities get averaged out. This is achieved by choosing a predetermined first and at least second signal constellation for the transmissions, such that the combined mean bit reliabilities for the respective bits of all transmissions are nearly equal.

Hence, the signal constellation rearrangement results in a changed bit mapping, wherein the Euclidean distances between the modulation symbols can be altered from retransmission to retransmission due to the movement of the constellation points. As a result, the mean bit reliabilities can be manipulated in a desired manner and averaged out to increase the performance the FEC decoder at the receiver.

In the solution proposed above, the benefits of the constellation rearrangement are realized through a parameterized bit-to-symbol mapping entity. For complexity or efficient implementational reasons, it may be advantageous for a communication system to have a non-parameterized standard mapping entity.

Consequently, the object of the present invention resides in providing an ARQ transmission method, a transmitter and a receiver with an improved error correction performance without a parameterized bit-to-symbol mapping entity.

This object is solved by a method comprising the steps as defined in claim 1. Further, the object is solved by a transmitter and receiver as defined by the independent claims.

The idea underlying the present invention is to modify the input bit sequence prior to entry of same into the mapping entity. This modification of the signal constellation can be achieved by using an interleaver and a logical bit inverter, which invert and/or exchange the positions of the signal constellation bits dependent on the retransmission number parameter m . Hence, the beneficial effects of a constellation rearrangement are achieved without the need for a parameterized bit to symbol mapping entity. As a result, the sequence which is output after processing by the interleaver, the logical bit inverter and a non-parameterized standard mapping entity is indistinguishable from the output of a parameterized bit to symbol mapping entity employing various constellation rearrangement schemes.

For a better understanding of the invention, preferred embodiments will be described in the following with reference to the accompanying drawings.

Figure 1 is an exemplary signal constellation for illustrating a 16 QAM modulation scheme with Gray encoded bit symbols,

figure 2 shows four examples for signal constellations for a 16 QAM modulation scheme with Gray encoded bit symbols, and

figure 3 is an exemplary embodiment of a communication system in which the method underlying the invention is employed.

In the following the concept of a Log-Likelihood-Ratio (LLR) will be described as a metric for the bit reliabilities. First the straight forward calculation of the bit $LLRs$

within the mapped symbols for a single transmission will be shown. Then the *LLR* calculation will be extended to the multiple transmission case.

Single Transmission

The mean *LLR* of the *i*-th bit b_n^i under the constraint that symbol s_n has been transmitted for a transmission over a channel with additive white gaussian noise (AWGN) and equally likely symbols yields

$$LLR_{b_n^i|r_n}(r_n) = \log \left[\sum_{(m|b_m^i=b_n^i)} e^{-\frac{E_S}{N_0} \cdot d_{n,m}^2} \right] - \log \left[\sum_{(m|b_m^i \neq b_n^i)} e^{-\frac{E_S}{N_0} \cdot d_{n,m}^2} \right], \quad (1)$$

where $r_n = s_n$ denotes the mean received symbol under the constraint the symbol s_n has been transmitted (AWGN case), $d_{n,m}^2$ denotes the square of the Euclidean distance between the received symbol r_n and the symbol s_m , and E_S/N_0 denotes the observed signal-to-noise ratio.

It can be seen from Equation (1) that the *LLR* depends on the signal-to-noise ratio E_S/N_0 and the Euclidean distances $d_{n,m}$ between the signal constellation points.

Multiple Transmissions

Considering multiple transmissions the mean *LLR* after the *k*-th transmission of the *i*-th bit b_n^i under the constraint that symbols $s_n^{(j)}$ have been transmitted over independent AWGN channels and equally likely symbols yields

$$LLR_{b_n^i | \bigcap_{j=1}^k r_n^{(j)}}(r_n^{(1)}, r_n^{(2)}, \dots, r_n^{(k)}) = \log \left[\sum_{(m|b_m^i=b_n^i)} e^{-\sum_{j=1}^k \left(\frac{E_S}{N_0}\right)^{(j)} \cdot (d_{n,m}^{(j)})^2} \right] - \log \left[\sum_{(m|b_m^i \neq b_n^i)} e^{-\sum_{j=1}^k \left(\frac{E_S}{N_0}\right)^{(j)} \cdot (d_{n,m}^{(j)})^2} \right], \quad (2)$$

where *j* denotes the *j*-th transmission ((*j* - 1)-th retransmission). Analogous to the single transmission case the mean *LLRs* depend on the signal-to-noise ratios and the Euclidean distances at each transmission time.

If no constellation rearrangement is performed the Euclidean distances $d_{n,m}^{(j)} = d_{n,m}^{(1)}$ are constant for all transmissions and, hence, the bit reliabilities (*LLRs*) after k transmissions will be defined by the observed signal-to-noise ratio at each transmission time and the signal constellation points from the first transmission. For higher level modulation schemes (more than 2 bits per symbol) this results in varying mean *LLRs* for the bits, which in turn leads to different mean bit reliabilities. The differences in mean reliabilities remain over all retransmissions and lead to a degradation in decoder performance.

In the following, the case of a 16-QAM system will be exemplarily considered resulting in 2 high reliable and 2 low reliable bits, where for the low reliable bits the reliability depends on transmitting a *one* or a *zero* (see Figure 1). Hence, overall there exist 2 levels of mean reliabilities, whereby the second is further subdivided.

Level 1 (High Reliability, 2 bits): Bit mapping for *ones* (*zeros*) separated into the positive (negative) real half space for the *i*-bits and the imaginary half space the *q*-bits. Here, there is no difference whether the *ones* are mapped to the positive or to the negative half space.

Level 2 (Low Reliability, 2 bits): *Ones* (*zeros*) are mapped to inner (outer) columns for the *i*-bits or to inner (outer) rows for the *q*-bits. Since there is a difference for the *LLR* depending on the mapping to the inner (outer) columns and rows, Level 2 is further classified:

Level 2a: Mapping of i_n to inner columns and q_n to inner rows respectively.

Level 2b: Inverted mapping of Level 2a: Mapping of i_n to outer columns and q_n to outer rows respectively.

To ensure an optimal averaging process over the transmissions for all bits the levels of reliabilities have to be altered.

It has to be considered that the bit-mapping order is open prior initial transmission, but has to remain through retransmissions, e.g. bit-mapping for initial transmission: $i_1q_1i_2q_2 \Rightarrow$ bit-mapping all retransmissions: $i_1q_1i_2q_2$.

Some examples for possible constellations are shown in Figure 2. The resulting bit reliabilities according to Figure 2 are given in Table 1.

Constellation	bit i_1	bit q_1	bit i_2	bit q_2
1	High Reliability (Level 1)	High Reliability (Level 1)	Low Reliability (Level 2b)	Low Reliability (Level 2b)
2	Low Reliability (Level 2a)	Low Reliability (Level 2a)	High Reliability (Level 1)	High Reliability (Level 1)
3	Low Reliability (Level 2b)	Low Reliability (Level 2b)	High Reliability (Level 1)	High Reliability (Level 1)
4	High Reliability (Level 1)	High Reliability (Level 1)	Low Reliability (Level 2a)	Low Reliability (Level 2a)

Table 1

In the following, it is assumed that m denotes the retransmission number parameter, with $m=0$ denoting the first transmission of a packet in the ARQ context. Further let b denote the number of bits that form a symbol in the mapping entity. Typically, b can be any integer number, where the most often used values for communication systems are an integer power of 2.

Without loss of generality it can be further assumed that the number of bits n that are used as input to the interleaving process is dividable by b , i.e. n is an integer multiple of b . Those skilled in the art will perceive that if this should not be the case, then the sequence of input bits can be easily appended by dummy bits until the above condition is met.

As described above, for a given modulation, several reliability levels can be identified. The interleaving process should thus average out the reliabilities of the b bits over the retransmissions such that all b bits are in average equally reliable. This means that the interleaver has to change the positions of the b bits within a symbol (also termed "wrapping" in the art) such that each of the original bits is mapped as

often to all reliability levels as every other of the b bits. This means that the interleaving is an intra-symbol bit interleaving process.

Additionally, there can be several bit positions for which the reliabilities depend on the logical bit value (low or high). When a bit is mapped for the non-first time on such a position, this bit should also be logically inverted.

With these rules, patterns can be constructed which determine the interleaver and inverter process for a retransmission number m .

In theory, the perfect averaging out of the reliabilities might be possible only after an infinite or very high number of retransmissions. In these cases, there might thus be several alternatives which differ in the sequence of interleaver or inverter patterns. Which of these alternatives is chosen is left open to the choice of the system designer, since it will mean no difference in performance.

If the signal constellation as in Figure 1 is to be kept, in order to get constellation 2 from constellation 1 in Figure 2, the following processes have to be executed, where the order is irrelevant:

- exchange positions of original bits i_1 and i_2
- exchange positions of original bits q_1 and q_2
- logical bit inversion of original bits i_1 and q_1

Alternatively, those bits that end in positions 1 and 2 can also be inverted.

An example dependent on the transmission number is given in the following table, where the bits always refer to the first transmission, and a long dash above a character denotes logical bit inversion of that bit:

Constellation number	Interleaver and Inverter functionality
1	$i_1 q_1 i_2 q_2$
2	$i_2 q_2 \bar{i}_1 \bar{q}_1$ or $\bar{i}_2 \bar{q}_2 \bar{i}_1 \bar{q}_1$
3	$\bar{i}_2 \bar{q}_2 i_1 q_1$ or $i_2 q_2 i_1 q_1$
4	$i_1 q_1 \bar{i}_2 \bar{q}_2$ or $\bar{i}_1 \bar{q}_1 \bar{i}_2 \bar{q}_2$

Table 2

The first given examples in each row of table 2 correspond to the constellations given in Figure 2. As readily apparent from table 2, signal constellation 2 is obtained from constellation 1 by exchanging (swapping) the positions of bits i_1 and i_2 as well as that of bits q_1 and q_2 and by inverting either bit pair i_1, q_1 or all bits. Similarly, signal constellation 3 is obtained from constellation 1 by exchanging positions of bits i_1 and i_2 as well as that of bits q_1 and q_2 with each other respectively and by inverting bit pair i_2, q_2 in one alternative. In the other alternative, only the bit positions are exchanged and no inversion is necessary. Finally, signal constellation 4 is obtained from constellation 1 by inverting either bit pair i_2, q_2 or all bits of the symbol without exchanging any bit position.

From this, it can be chosen between different strategies for transmission numbers (non-exhaustive):

Transmission Number	Constellation Number	Constellation Number	Constellation Number	Constellation Number	Constellation Number	Constellation Number
1	1	1	1	1	1	1
2	2	2	3	4	4	3
3	3	4	2	2	3	4
4	4	3	4	3	2	2

Table 3

Figure 3 shows an exemplary embodiment of a communication system in which the method underlying the invention is employed.

At the transmitter 100, a bit sequence is obtained from a forward error correction (FEC) encoder (not shown) and subsequently input into an interleaver 110 and a logical bit inverter 120. The interleaver 110 and logical bit inverter are each dependent on the retransmission number parameter m and modify the input bit sequence. Subsequently, the bit sequence is input into the mapper/modulator 130 being a non-parameterized standard mapping entity. The mapper typically uses one of the signal constellations shown in figure 2 and maps the b bits onto a symbol which is transmitted over the communication channel 200. The communication channel is typically a radio communication channel experiencing unreliable and time-varying channel conditions.

The interleaving/inverting patterns is either stored at both, the transmitter and the receiver or stored at the transmitter and signalled to the receiver.

At the receiver 300, the complex symbols are first input into a de-mapper/demodulator 330 which demodulates the received symbols into a corresponding bit domain sequence (e.g. sequence of LLRs). This sequence is then input into a logical inverter 320 and subsequently into a de-interleaver 310 from which the obtained bit domain sequence is output.

The interleaver and de-interleaver operate in accordance with the well known technique of interleaving/deinterleaving by applying a determined, pseudo-random or random permutation of the input bit or symbol sequences, i.e. exchange (swap) the positions of the bits or symbols within a sequence. In the above described embodiment, the interleaver is a intra-symbol bit interleaver which changes the position of the bits that form a symbol in the mapping entity.

The logical bit inverter operates in accordance with a well known technique of inverting the logical value of a bit, i.e. turns a logical low to a logical high value and vice versa. In a practical realization for a receiver working with log likelihood ratios, this inverting operation is equivalent to a sign inversion of the log likelihood ratio.

If a retransmission is launched by an automatic repeat request issued by an error detector (not shown) with the result that an identical data packet is transmitted from the transmitter 100, in the de-mapper/demodulator 330, the previously received erroneous data packets are soft-combined with the retransmitted data packets. Due to the modification of the bit sequence by the interleaver and the logical bit inverter, the mean bit reliabilities are averaged out resulting in an increased performance in the receiver.

Although the method described above has been described using Gray-encoded signals and a QAM modulation scheme, it is clear to a skilled person that other suitable encoding and modulation schemes can be equally used in obtaining the benefits of the invention.

CLAIMS

1. An ARQ transmission method in a communication system, wherein data packets comprising modulation symbols are transmitted based on an automatic repeat request and subsequently combined with previously received data packets, comprising the steps of:

modulating the symbols of the transmitted data packets in a mapping entity employing at least a first and second signal constellation; and

obtaining the second signal constellation from the first signal constellation by exchanging bit positions and/or inverting a logical bit value.
2. The transmission method according to claim 1, wherein the step of exchanging the positions of the bits within a symbol results in that each of the bits is mapped as often to all reliability levels as every other of the symbol bits.
3. The transmission method according to claim 1, wherein the sequence which is interleaved and/or inverted is identical over the retransmissions.
4. The transmission method according to claim 1, wherein when a bit is mapped for a non-first time on a bit position for which the reliability depends on the logical bit value, this bit is logically inverted.
5. The transmission method according to claim 1, wherein the modulation scheme employed by the mapping entity is quadrature amplitude modulation (QAM) of a higher order wherein more than two bits are mapped onto one symbol.
6. The transmission method according to claim 1, wherein the symbol bits of the data packets are Gray encoded.
7. The transmission method according to claim 1, wherein the modulation scheme employed by the mapping entity is 16 QAM and that during modulation, one of two levels of mean bit reliabilities defined by the individual bits reli-

ability level over all symbols of a predetermined signal constellation are assigned to each of the four symbol bits.

8. A transmission method according to claim 1, wherein the modulation scheme used is 16 QAM having symbols consisting of four data bits and four different signal constellations are used for transmission of data and wherein the first signal constellation is a predetermined one, the second signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit without inverting any bits, the third signal constellation is obtained from the first signal constellation by inverting the third and fourth bit and the fourth signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit and thereafter inverting the bits at the third and fourth bit positions.
9. The transmission method according to claim 1, wherein the modulation scheme employed by the mapping entity is 64 QAM and that during modulation, one of three levels of mean bit reliabilities defined by the individual bits reliability level over all symbols of a predetermined signal constellation are assigned to each of the six symbol bits.
10. The transmission method according to one of claims, wherein a pattern which determines the interleaving and inverting process is stored at the receiver and the transmitter of the communication system.
11. A transmitter of an ARQ communication system for transmitting data packets consisting of modulation symbols, employing at least a first and second signal constellation, comprising:
 - a mapping entity for modulating data bits onto symbols employing a predetermined signal constellation;
 - a logical bit inverter for inverting data bits prior to supplying same to the mapping entity, and/or

an interleaver for exchanging the positions of data bits within a symbol prior to supplying same to the mapping entity.

12. The transmitter according to claim 11, wherein the modulation scheme used is 16 QAM having symbols consisting of four data bits and four different signal constellations are used for transmission of data, wherein the first signal constellation is a predetermined one, the second signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit, without inverting any bits, the third signal constellation is obtained from the first signal constellation by inverting the third and fourth bit and the fourth signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit and thereafter inverting the bits at the third and fourth bit positions.
13. A receiver of an ARQ communication system for receiving data packets consisting of modulation symbols modulated with at least a first and second signal constellation comprising:
 - a demapping entity for demodulating the received symbols modulated with a predetermined signal constellation;
 - a logical bit inverter for inverting data bits output from the demapping entity; and
 - a de-interleaver for exchanging the positions of data bits within a symbol after outputting same from the mapping entity.
14. The receiver according to claim 13, wherein the modulation scheme used is 16 QAM having symbols consisting of four data bits and four different signal constellations are used for transmission of data, wherein the first signal constellation is a predetermined one, the second signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit, without inverting any bits, the third

signal constellation is obtained from the first signal constellation by inverting the third and fourth bit and the fourth signal constellation is obtained from the first signal constellation by exchanging the positions of the first and third bit as well as that of the second and fourth bit and thereafter inverting the bits at the third and fourth bit positions.


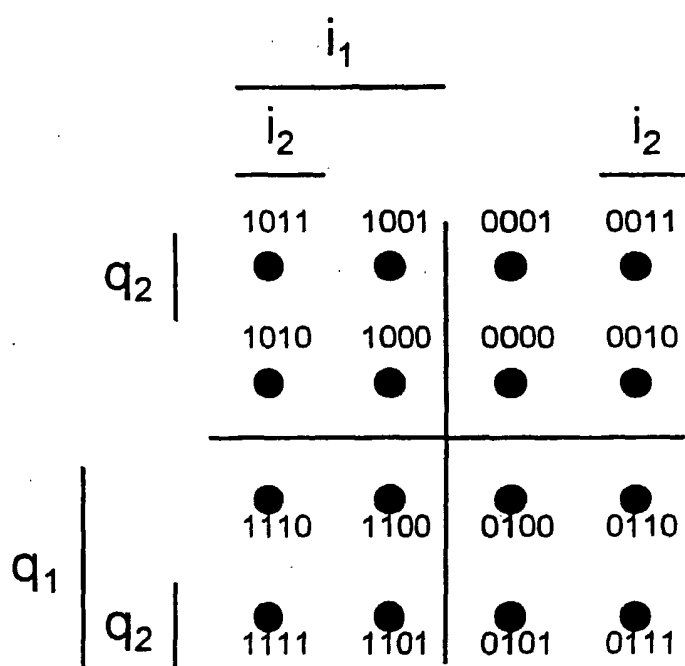


Figure 1

Constellation 1

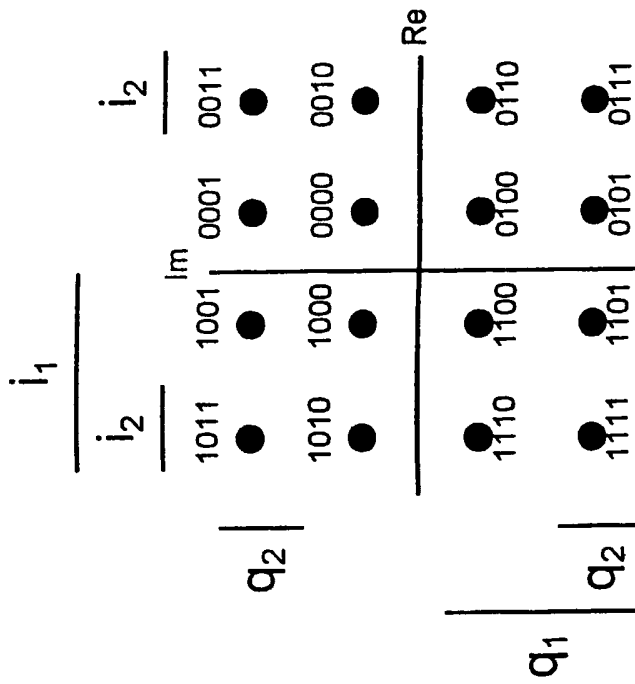

Constellation 2


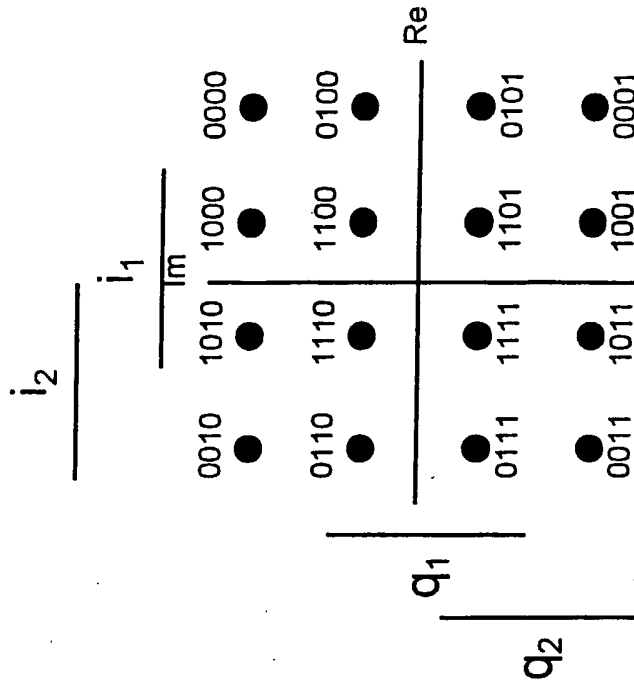


Figure 2 a

Constellation 4

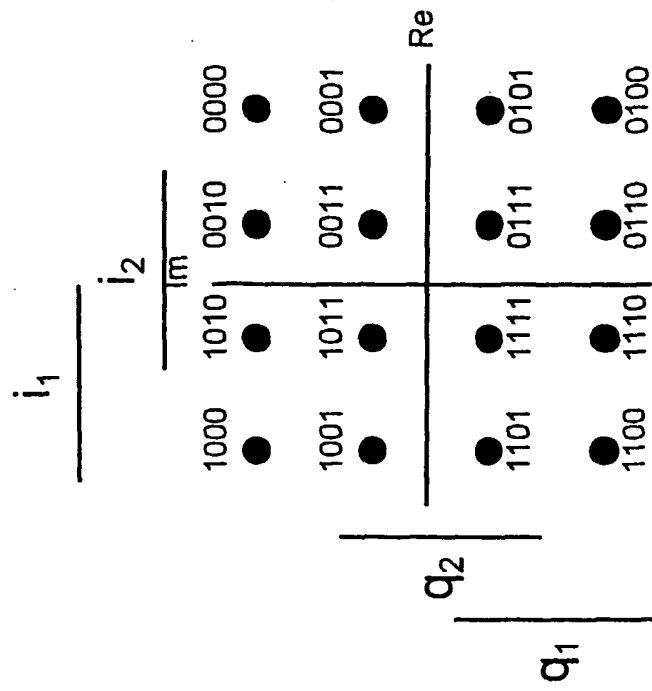

Constellation 3

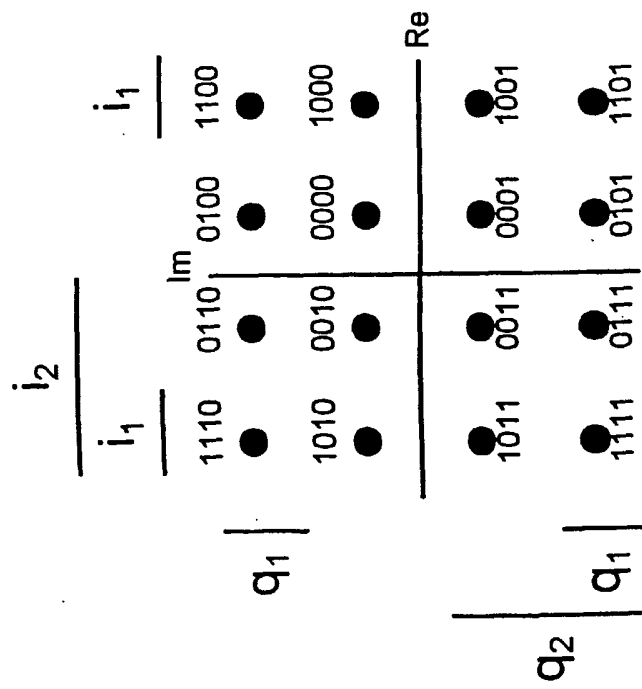


Figure 2 b

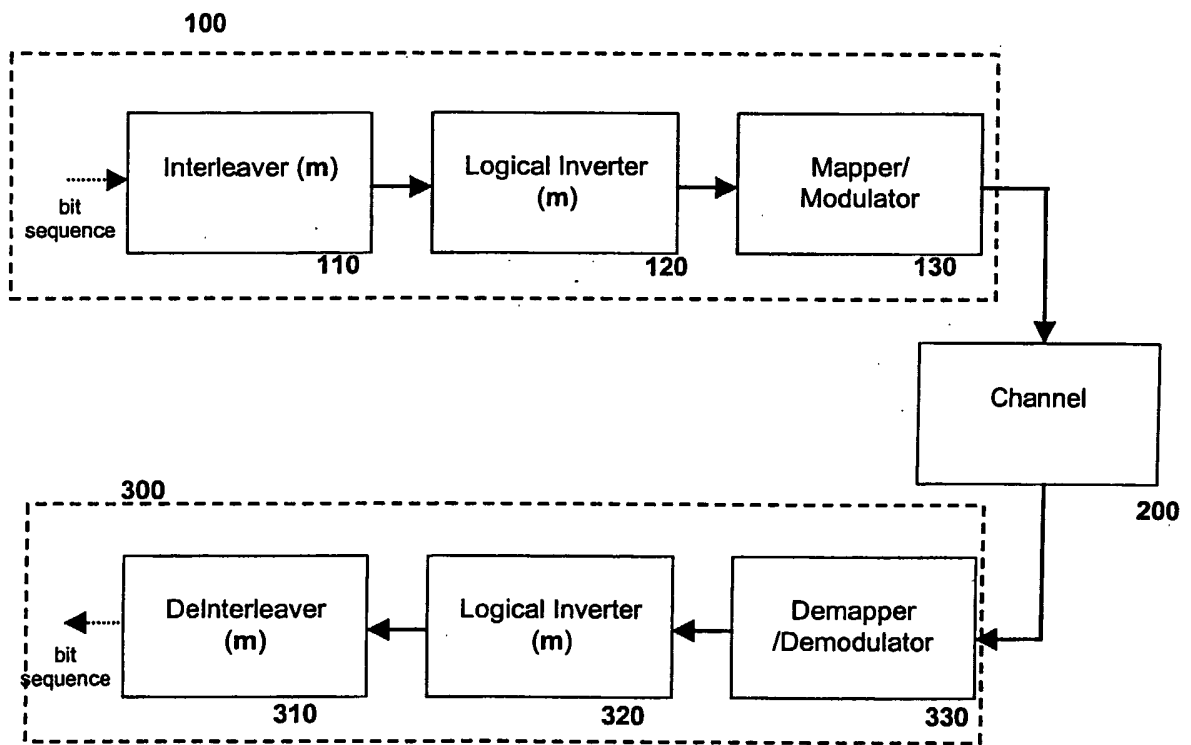


Figure 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 02/12837

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L1/18 H04L27/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PANASONIC, 3GPP, TSG-RAN WORKING GROUP 1 MEETING #19: "Enhanced HARQ Method with Signal Constellation Rearrangement" DOWNLOADED FROM THE INTERNET: HTTP://WWW.3GPP.ORG/FTP/TSG_RAN/WG1_RL1/TS GR1_19/DOCS/PDFS, 27 February 2001 (2001-02-27) - 2 March 2001 (2001-03-02), XP002229383 Las Vegas, USA the whole document	1-14
A	US 6 126 310 A (OSTHOFF HARRO ET AL) 3 October 2000 (2000-10-03) abstract column 3, line 19 -column 5, line 18 column 5, line 59 -column 13, line 21	1-14

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

31 January 2003

Date of mailing of the international search report

17/02/2003

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Toumpoulidis, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/12837

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SCHMITT M P: "Hybrid ARQ scheme employing TCM and packet combining" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 34, no. 18, 3 September 1998 (1998-09-03), pages 1725-1726, XP006010263 ISSN: 0013-5194 cited in the application the whole document -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/12837

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6126310	A	03-10-2000	DE 19630343 A1	05-02-1998
			AU 3941097 A	20-02-1998
			BR 9710573 A	17-08-1999
			CN 1287734 A	14-03-2001
			EE 9900033 A	16-08-1999
			WO 9805140 A1	05-02-1998
			EP 0917777 A1	26-05-1999
