

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11)



EP 1 388 937 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.02.2004 Bulletin 2004/07

(51) Int Cl. 7: H03G 11/04

(21) Application number: 03022851.4

(22) Date of filing: 23.08.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

- Kiernan, Brian
Voorhees, NJ 08043 (US)

(30) Priority: 31.08.1999 US 386876

(74) Representative: Tomlinson, Edward James
Frohwitter
Patent- und Rechtsanwälte
Possartstrasse 20
81679 München (DE)

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
00957794.1 / 1 210 768

(71) Applicant: INTERDIGITAL TECHNOLOGY
CORPORATION
Wilmington, DE 19801 (US)

Remarks:
This application was filed on 08 - 10 - 2003 as a
divisional application to the application mentioned
under INID code 62.

(72) Inventors:
• Ozlaturk, Fatih, M.
Port Washington, NY 11050 (US)

(54) Adaptive RF amplifier prelmiter

(57) The invention provides a base station for transmitting signals employing a CDMA technique, comprising: means for combining a plurality of spread spectrum data signals; means for measuring a characteristic of

the output of said combining means for a given time period; and means for adaptively limiting an output of the combining means responsive at least partially to an output of said measuring means.

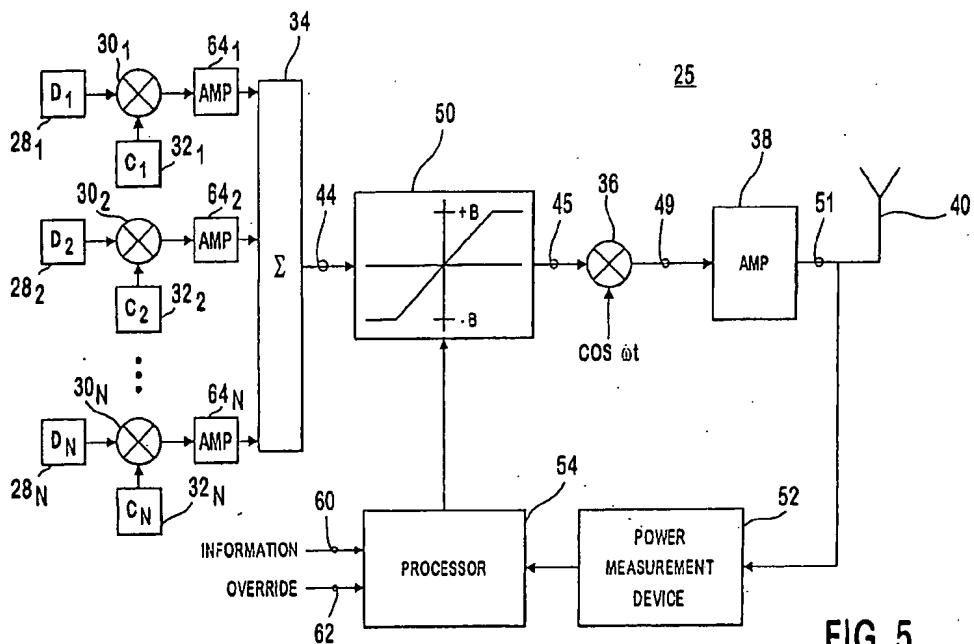


FIG. 5

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] This invention generally relates to spread spectrum code division multiple access (CDMA) communication systems. More particularly, the present invention relates to a system and method for adaptively limiting forward and reverse link transmission power within CDMA communication systems.

Description of the Prior Art

[0002] Wireless communication systems using spread spectrum modulation techniques represent the state of the art in digital communications and are increasing in popularity. In code division multiple access (CDMA) systems, data is transmitted using a wide bandwidth (spread spectrum) by modulating the data with a pseudo random chip code sequence. The advantage gained is that CDMA systems are more resistant to signal distortion and interfering frequencies in the transmission channel than communication systems using other multiple access techniques such as time division multiple access (TDMA) or frequency division multiple access (FDMA).

[0003] One indicator used to measure the performance of a communication system is the signal-to-noise ratio (SNR). At the receiver, the magnitude of the desired received signal is compared to the magnitude of the received noise. The data within a transmitted signal received with a high SNR is readily recovered at the receiver. A low SNR leads to loss of data.

[0004] A prior art CDMA communication system is shown in **Figure 1**. The communication system has a plurality of base stations $20_1, 20_2 \dots 20_N$ connected together through a local Public Switched Telephone Network (PSTN) exchange. Each base station $20_1, 20_2 \dots 20_N$ communicates using spread spectrum CDMA with mobile and fixed subscriber units $22_1, 22_2 \dots 22_N$ within its cellular area.

[0005] Shown in **Figure 2** is a simplified CDMA transmitter 24 and receiver 26 . A data signal having a given bandwidth is mixed with a spreading code generated by a pseudo random chip code sequence generator producing a digital spread spectrum signal for transmission. Upon reception, the data is reproduced after correlation with the same pseudo random chip code sequence used to transmit the data. By using different pseudo random chip code sequences, many data signals or subchannels can share the same channel bandwidth. In particular, a base station 20_1 can communicate with a group of subscriber units $22_1, 22_2 \dots 22_N$ using the same bandwidth. Forward link communications are from the base station 20_1 to the subscriber unit $22_1, 22_2 \dots 22_N$, and reverse link communications are from the subscriber

unit $22_1, 22_2 \dots 22_N$ to the base station 20_1 .

[0006] For timing synchronization with a receiver 26 , an unmodulated pilot signal is used. The pilot signal allows respective receivers 26 to synchronize with a given transmitter 24 , allowing despreading of a traffic signal at the receiver 26 . In a typical CDMA system, each base station $20_1, 20_2 \dots 20_N$ sends a unique global pilot signal, received by all subscriber units $22_1, 22_2 \dots 22_N$ within communicating range to synchronize forward link transmissions. Conversely, in some CDMA systems for example in the B-CDMA™ air interface each subscriber unit $22_1, 22_2 \dots 22_N$ transmits a unique assigned pilot signal to synchronize reverse link transmissions.

[0007] **Figure 3** is an example of a prior art transmitter 24 . Data signals $28_1, 28_2 \dots 28_N$ including traffic, pilot and maintenance signals are spread using respective mixers $30_1, 30_2 \dots 30_N$ with unique chip code sequences $32_1, 32_2 \dots 32_N$, respectively. Each mixers' output is coupled to a combiner 34 which adds the individual mixed signals as a combined signal 44 . The combined signal 44 is modulated up to radio frequency (RF) by a mixer 36 mixing the combined signal 44 with an RF carrier, shown in **Figure 3** as $\text{COS } \omega t$. The modulated signal is amplified to a predetermined transmission power level (TLP) by an amplifier 38 and radiated by an antenna 40 .

[0008] Most CDMA systems use some form of adaptive power control. In a CDMA system, many signals share the same bandwidth. When a subscriber unit $22_1, 22_2 \dots 22_N$ or base station $20_1, 20_2 \dots 20_N$ is receiving a specific signal, all the other signals within the same bandwidth are noise like in relation to the specific signal. Increasing the power level of one signal degrades all other signals within the same bandwidth. However, reducing TLP too far results in undesirable SNRs at the receivers 26 . To maintain a desired SNR at the minimum transmission power level, adaptive power control is used.

[0009] Typically, a transmitter 24 will send a signal to a particular receiver 26 . Upon reception, the SNR is determined. The determined SNR is compared to a desired SNR. Based on the comparison, a signal is sent in the reverse link to the transmitter 24 , either increasing or decreasing transmit power. This is known as forward channel power control. Conversely, power control from the subscriber unit 22 , to the base station 20 , is known as reverse channel power control.

[0010] Amplifiers $64_1, 64_2 \dots 64_n$ are used for adaptive power control in **Figure 3**. The amplifiers $64_1, 64_2 \dots 64_n$ are coupled to the inputs of the combiner 34 to individually control each signal's power level.

[0011] **Figure 4a, 4b, 4c and 4d** show a simplified illustration of three spread spectrum signals $42_1, 42_2, 42_3$ and a resultant combined signal 44 . Although each signal $42_1, 42_2, 42_3$ is spread with a different pseudo random chip code sequence, each signal $42_1, 42_2, 42_3$ is synchronous at the chipping rate. When the individual chips within the sequences are summed, the combined signal may have extreme transients $46, 48$ where the

chip energies combine or low transients 47 where they subtract.

[0012] High transient peaks are undesirable. For every 3 dB peak increase, twice the base amplification power in Watts is required. Not only does the transient burden the amplifier, but the power sourcing the amplifier must have a capacity greater than the maximum transient that may be expected. This is particularly undesirable in hand-held battery operated devices. Additionally, to design for higher power levels resulting from high transients, more complex amplifier circuitry is required or compromises between amplifier gain, battery life and communication time result. High valued transients force the amplifier 38 into the nonlinear region of its dynamic range resulting in increased out-of-band emissions and reduced amplifier efficiency. Accordingly, there exists a need for an adaptive RF transmitter system that addresses the problems associated with the prior art.

SUMMARY OF THE INVENTION

[0013] The invention reduces transient peaks in signals transmitted in CDMA communication systems. A plurality of spread spectrum data signals are combined into a combined signal having fluctuating power level corresponding to the combination of the data signals. The combined signal is modulated to produce an RF signal for transmission. The average power of the combined signal is measured over a selected time period. The combined signal power level is adaptively limited to a calculated power level based at least in part on the measured power.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014]

Figure 1 is an illustration of a prior art CDMA system.

Figure 2 is an illustration of a prior art CDMA transmitter and receiver.

Figure 3 is a system block diagram of a prior art transmitter.

Figure 4a is an illustration of a first pseudo random chip code sequence.

Figure 4b is an illustration of a second pseudo random chip code sequence.

Figure 4c is an illustration of a third pseudo random chip code sequence.

Figure 4d is an illustration of the combined chip code sequences of **Figures 4a - 4c**.

Figure 5 is a system block diagram of an embodiment of the invention with the power measurement device coupled to the amplifier.

Figure 6 is a system block diagram of an alternate embodiment of the invention with the power measurement device coupled to the modulator.

Figure 7 is an illustration of the probability distribu-

tion function of the power levels of a combined signal.

Figure 8 is a plot of the loss in the received signal to noise ratio versus the clipping level.

Figure 9 is a plot of the loss in the received signal to noise ratio versus the clipping level in a CDMA communication system using adaptive power control.

Figure 10 is a system block diagram of an alternate embodiment of the invention with the processor controlling the amplifier gain.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0015] The preferred embodiments will be described with reference to the drawing figures where like numerals represent like elements throughout.

[0016] **Figures 5 and 6** depict transmitter systems of the invention. A group of data signals $28_1, 28_2 \dots 28_N$ that include traffic, pilot and maintenance signals are mixed with different chip code sequences $32_1, 32_2 \dots 32_N$ and are summed together in a combiner 34 as a combined signal 44. The combiner 34 is coupled to an adjustable signal limiter 50 (clipper) where signal power levels are hard limited to $+\beta$ and $-\beta$ dB. Power levels in between $+\beta$ and $-\beta$ are not affected. The limited signal 45 is modulated up to RF by a mixer 36. The modulated signal is amplified by an amplifier 38 to a predetermined power level and radiated by antenna 40.

[0017] **Figure 7** illustrates a typical probability distribution function of the combined signal power level. A combined chip 46, 47, 48 as shown in **Figure 4d** will have an associated power level. The probability of a given combined chip having a particular power level is shown in **Figure 7**. The two extreme power levels are $+K$ and $-K$. As shown in **Figure 7**, the probability of a given combined chip having a power level of $+K$ or $-K$ is extremely low. Whereas, the probability of a combined chip having a power level in the middle of the two extremes is high. Since a spread spectrum signal is spread across a wide communication bandwidth and there is a low probability that a combined chip will have a power level at the ends of the distribution, the combined signal 44 can be clipped below these extremes with insignificant loss.

[0018] The transmitter system adjusts the clipping levels, β , to eliminate the signal transients with only a small decrease in the transmittal signal-to-noise ratio (SNR). **Figure 8** is a graph illustrating the relationship between SNR and clipping levels for a system not using adaptive power control. The solid line, dash line and dotted line depict communication channels with different operating SNRs. As shown in **Figure 8**, for a β set at a clipping level of two standard deviations the loss in SNR is negligible and at a clipping level of one standard deviation the loss is only approximately 0.2 dB.

[0019] For a system using adaptive power control,

Figure 9 is a graph of SNR versus the clipping level. The results are similar to those obtained in a system not using adaptive power control. As shown in **Figure 9**, with a clipping level of two standard deviations, the loss in SNR is again negligible. Accordingly, the clipping circuitry is applicable to systems utilizing adaptive power control and systems not using adaptive power control.

[0020] Referring back to **Figure 5**, to determine β , the invention uses a power measurement device 52 and a processor 54. The power measurement device 52 is coupled to either the output of the RF amplifier 38 as shown in **Figure 5** or the mixer 36 as shown in **Figure 6**. Preferably, the power measurement device 52 determines the average of the square of the magnitude of the transmitted signal over a predetermined time period. The output of the preferred power measurement device 52 approximates the variance of the mixed signal 49 or the signal 51 being transmitted. Alternatively, the power measurement device 52 determines an approximation of the standard deviation by taking the average of the absolute value of the signal 49, 51 or the power measurement device 52 measures the magnitude of the signal 49, 51 with the processor determining either the variance or standard deviation.

[0021] The output of the power measurement device 52 is coupled to a processor 54. If the power measurement device 52 is coupled to the output of the amplifier 38, the processor 54 scales down the output of the power measurement device 52 by the gain of the amplifier 38. The processor 54 determines the proper clipping level for β . Depending on the desired SNR and bandwidth, the value for β will be a multiple of the standard deviation. If the power measurement device 52 approximates the variance, the processor 54 will take the square root of the device's output as the standard deviation. In the preferred embodiment, β will be two times the standard deviation.

[0022] In certain situations, the processor 54 overrides the determined value of β . For instance, if the transmitter 25 was used in a base station $20_1, 20_2 \dots 20_N$, a large increase in the number of users may result in β being temporarily set too low. This will result in an undesirable received SNR. As supplied to the processor 54 through the line 60, the number of users currently in communication with the base station $20_1, 20_2 \dots 20_N$, is used to either change β or temporarily disable the clipper 50 to allow all signals to pass unaltered when appropriate.

[0023] Additionally, since the probability distribution function assumes a large sample size, a small number of users may result in an undesired received SNR. Accordingly, if only a few users were in communication with the base station $20_1, 20_2 \dots 20_N$, the clipper 50 may be disabled. In addition, when there are only a small number of users active, the amplifier's dynamic range is not reached. Accordingly, there is no need to clip the combined signal. Under other situations, it may be necessary to override the clipper 50. For instance, in some

CDMA systems short codes are used during initial power ramp up. Since these codes are not long enough to approximate a random signal, by chance one code may result in a large number of high transient peaks within the signal. Clipping these transmissions may dramatically decrease the received SNR and unnecessarily delay the initial power ramp up procedure. In these situations, a signal will be sent to the processor 54 through the line 62 to override the clipper 50.

[0024] In an alternate embodiment shown in **Figure 10**, the processor 54 is also used to control the gain of the amplifier 38 through the line 58. Stored in the processor is the amplifier gain characteristic. The amplifier gain is adjusted to keep the amplifier from going into the nonlinear operating region. Accordingly, out-of-band emissions and interference to services in adjoining frequency bands is reduced.

[0025] Although the invention has been described in part by making detailed reference to certain specific embodiments, such detail is intended to be instructive rather than restrictive. It will be appreciated by those skilled in the art that many variations may be made in the structure and mode of operation without departing from the scope of the invention as disclosed in the teachings herein.

In a preferred aspect of the invention there is provided: a transmitter for use in a CDMA communication system station, the transmitter comprising: means for combining a plurality of spread spectrum data signals into a combined signal having a fluctuating power level corresponding to the combination of the data signals; means for modulating the combined signal to produce an RF signal for transmission; means for measuring average power of the combined signal over a selected time period; and means for adaptively limiting the combined signal power to a calculated power level based at least in part on said measured power.

[0026] The transmitter as defined above wherein said measuring means measures an average power of the RF signal over the selected time period.

[0027] The transmitter as defined above further comprising an amplifier for amplifying the RF signal prior to transmission; wherein said measuring means measures an average power of the amplified RF signal over the selected time period.

[0028] The transmitter as defined above wherein said measuring means determines a variance of the combined signal power wherein said adaptively limiting means limits the combined signal power to the calculated power level based in part on the approximation of the variance. The transmitter as defined above wherein said measuring means determines an average of a square of the combined signal power; wherein said adaptively limiting means limits the combined signal power to the calculated power level based in part on the average of the square. The transmitter as defined above wherein said measuring means determines an average of an absolute value of the combined signal power; wherein said adaptively limiting means limits the combined signal

power to the calculated power level based in part on the average of the absolute value. The transmitter as defined above wherein said measuring means determines a magnitude of the combined signal power and said measuring means having processing means for determining a variance of the combined signal power based on the determined magnitude; wherein said adaptively limiting means limits the combined signal power to the calculated power level based in part on the determined variance. The transmitter as defined above wherein said measuring means having processing means for determining a standard deviation of the combined signal power and said adaptively limiting means limits the combined signal power to the calculated power level based in part on the determined standard deviation. The transmitter as defined above wherein the calculated power level is two of the determined standard deviations. The transmitter as defined above wherein the calculated power level is the determined standard deviation. The transmitter as defined above wherein said processing means disables said adaptively limited means in response to a number of active users. The transmitter as defined above wherein said processing means disables said adaptively limiting means during transmission of short codes. The transmitter as defined above further comprising an amplifier for amplifying the RF signal prior to transmission and processing means for determining the calculated power level; wherein a gain of said amplifier is adjusted by said processing means in response to the calculated power level and stored gain characteristics of said amplifier. In a preferred aspect there is also provided a method for transmission in a CDMA communication system, the method comprising: combining a plurality of spread spectrum data signals into a combined signal having a fluctuating power level corresponding to the combination of the data signals; modulating the combined signal to produce an RF signal; measuring average power of the combined signal over a selected time period; adaptively limited the combined signal power to a calculated power level based at least in part on said measured power; and transmitting the RF signal. The method as defined above wherein the measuring is of an average power of the RF signal over a selected time period. The method as defined above further comprising amplifying the RF signal prior to transmission; wherein the measuring is of an average power of the amplified RF signal over the selected time period. The method as defined above wherein the calculated power is based on a variance of the combined signal. The method as defined above wherein the calculated power is based on standard deviation of the combined signal. The method as defined above wherein the calculated power is one of the standard deviations. The method as defined above wherein the calculated power is two of the standard deviations. The method as defined above wherein the step of adaptively limiting is not performed in response to a number of active users. The method as defined above wherein the step of adaptively limiting is not performed in response to a number of active users. The method as defined above wherein the step of adaptively limiting is not performed in response to a number of active users.

tively limiting is not performed in response a transmission of short codes. The method as defined above further comprising: amplifying by an amplifier the RF signal by a gain factor prior to transmission; and adjusting the gain factor in response to the calculated power level and stored gain characteristics of the amplifier.

Claims

- 10 1. A base station for transmitting signals employing a CDMA technique, comprising:
 - 15 means for combining a plurality of spread spectrum data signals;
 - means for measuring a characteristic of the output of said combining means for a given time period; and
 - means for adaptively limiting an output of the combining means responsive at least partially to an output of said measuring means.
- 20 2. The base station of claim 1 further comprising means for modulating the output of said combining means to produce an RF signal, wherein said measuring means measures an output of the modulating means over the given time period.
- 30 3. The base station of claim 2 further comprising an amplifier for amplifying the RF signal, and wherein said measuring means measures an output of the amplifier over the given time period.
- 35 4. The base station of claim 1 wherein said measuring means determines a variance of the output of said combining means, and wherein said adaptive limiting means limits the output to a given power level based in part on an approximation of the variance.
- 40 5. The base station of claim 1 wherein said measuring means determines an average of a square of said output, and wherein said adaptive limiting means limits the output to a given power level based in part on the average of the square of said output.
- 45 6. The base station of claim 1 wherein said measuring means determines an average of an absolute value of said output; and
 - 50 said adaptive limiting means limits said output to a given power level based in part on the average of the absolute value of said output.
- 55 7. The base station of claim 1 wherein said measuring means determines the magnitude of said output, said measuring means having processing means for determining a variance of said output based on the determined magnitude of said output; and
 - 56 wherein said adaptive limiting means limits said output to a given power level based in part on the average of the absolute value of said output.

put to a calculated power level based in part on the determined variance.

8. The base station of claim 1 wherein said measuring means has processing means for determining a standard deviation of said output; and
said adaptive limiting means limits said output to a given power level based in part on the determined standard deviation. 5

9. The base station of claim 8 wherein the calculated power level is twice as great as a standard deviation. 10

10. The base station of claim 8 wherein the calculated power level is at least one standard deviation. 15

11. The base station of claim 8 wherein said processing mean disables said adaptive limiting means when a number of active users reaches a given value. 20

12. The base station of claim 8 wherein said processing means disables said adaptive limiting means during transmission of short codes. 25

13. The base station of claim 1 further comprising a modulator for modulating said output to produce an RF signal and an amplifier for amplifying the RF signal prior to transmission, said measuring means determining a power level of said output; wherein a gain of said amplifier is adjusted by a processing means in response to the calculated power level and stored gain characteristics of said amplifier. 30

35


40

45

50

55

FIG. 1
PRIOR ART

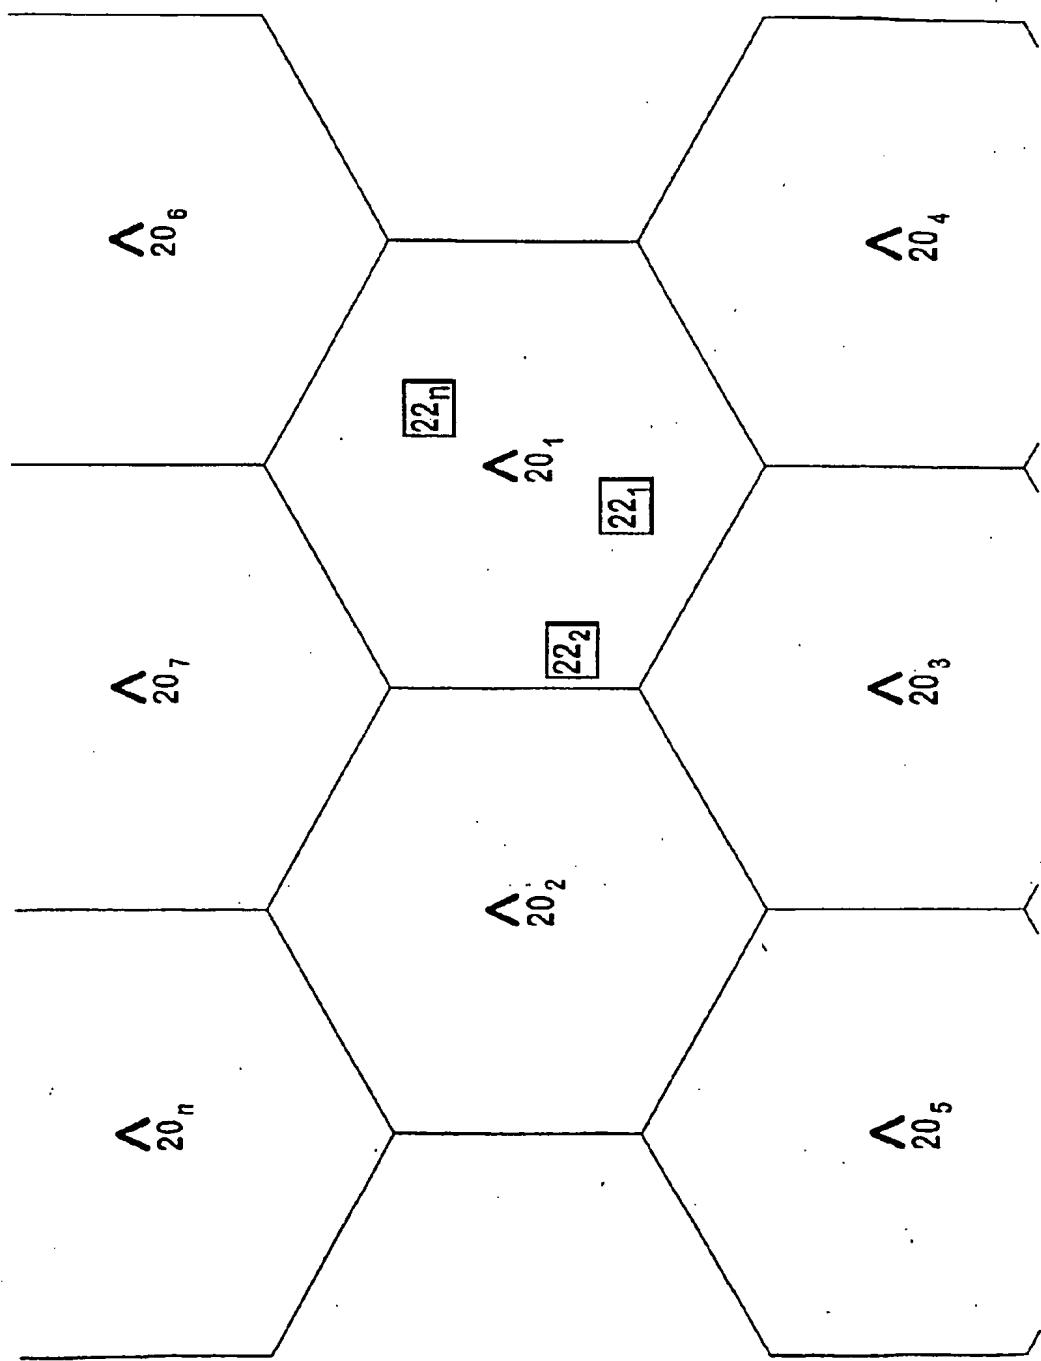

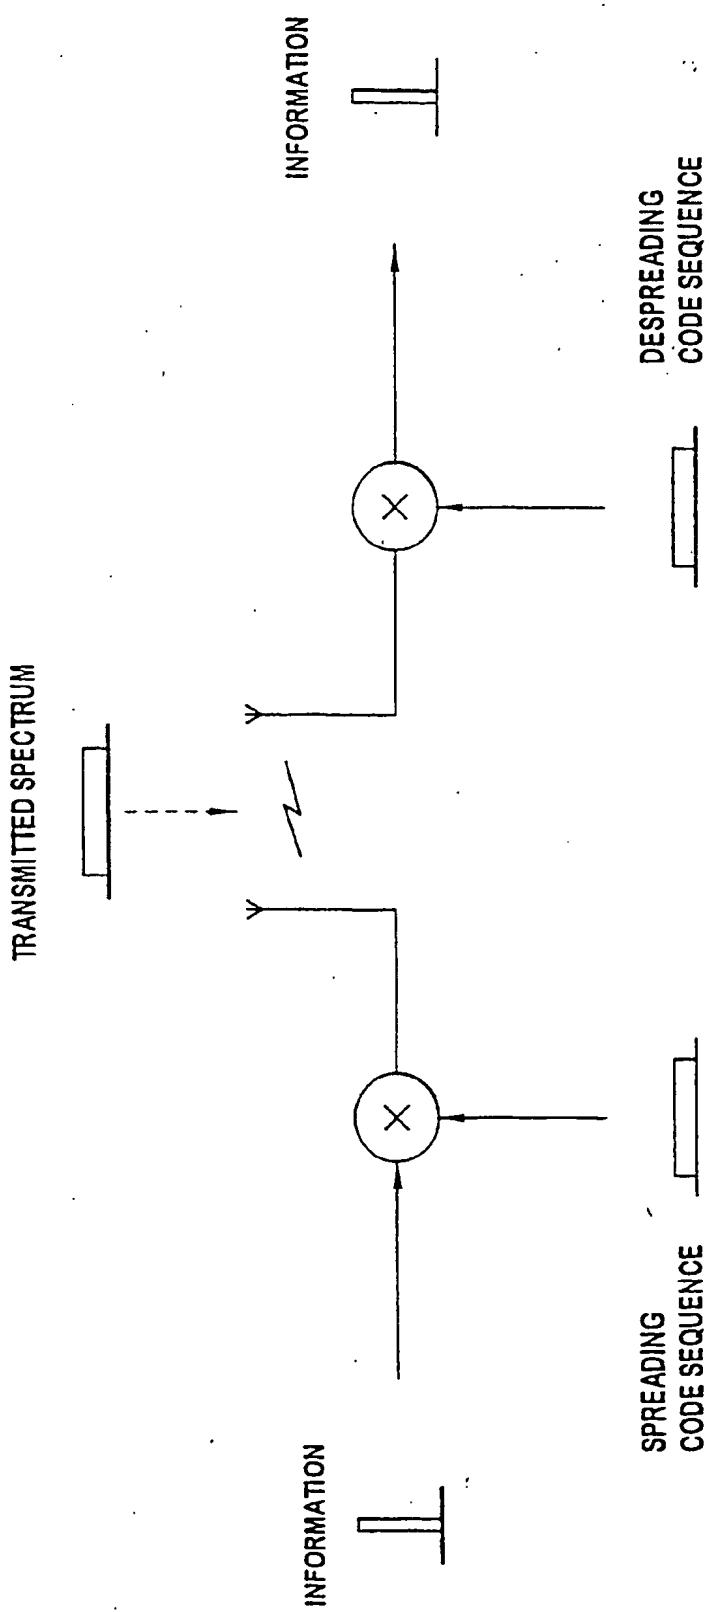
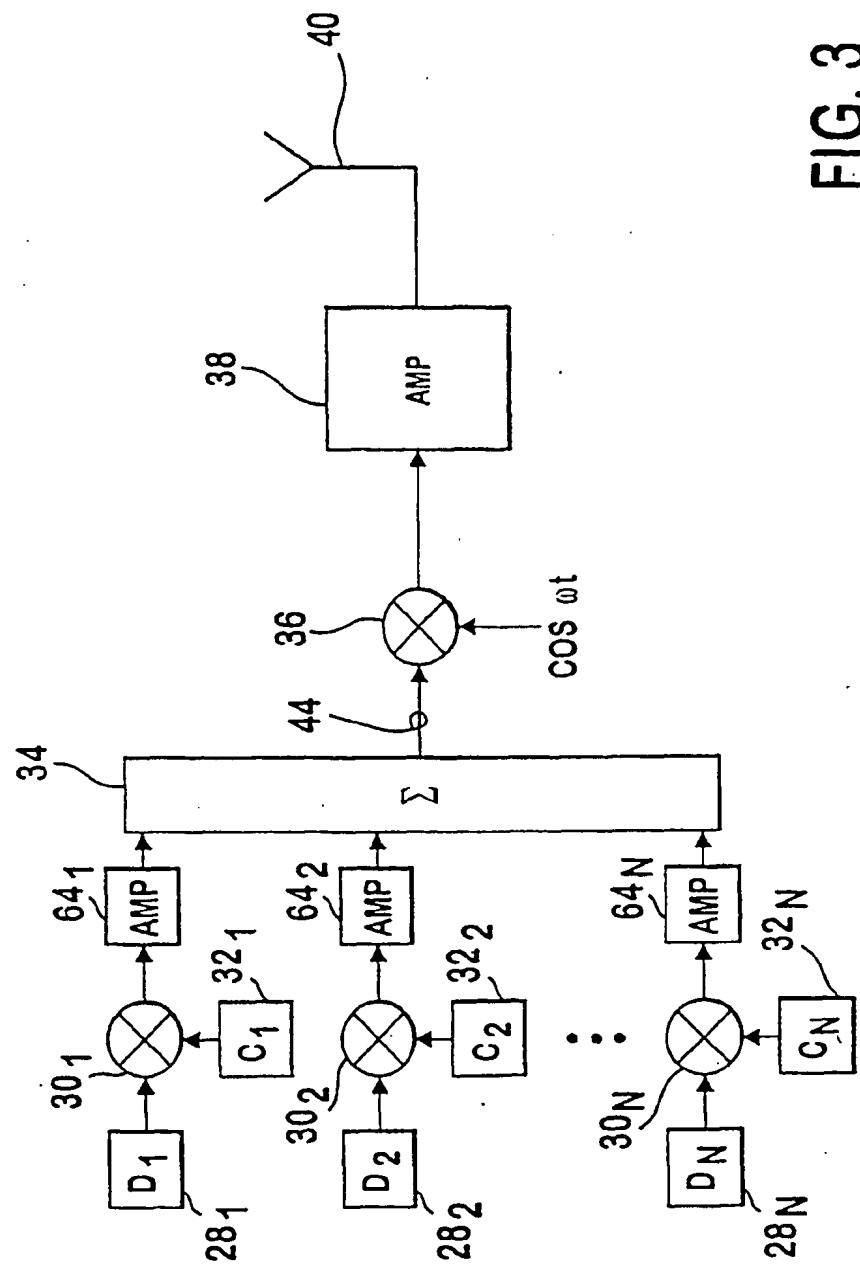
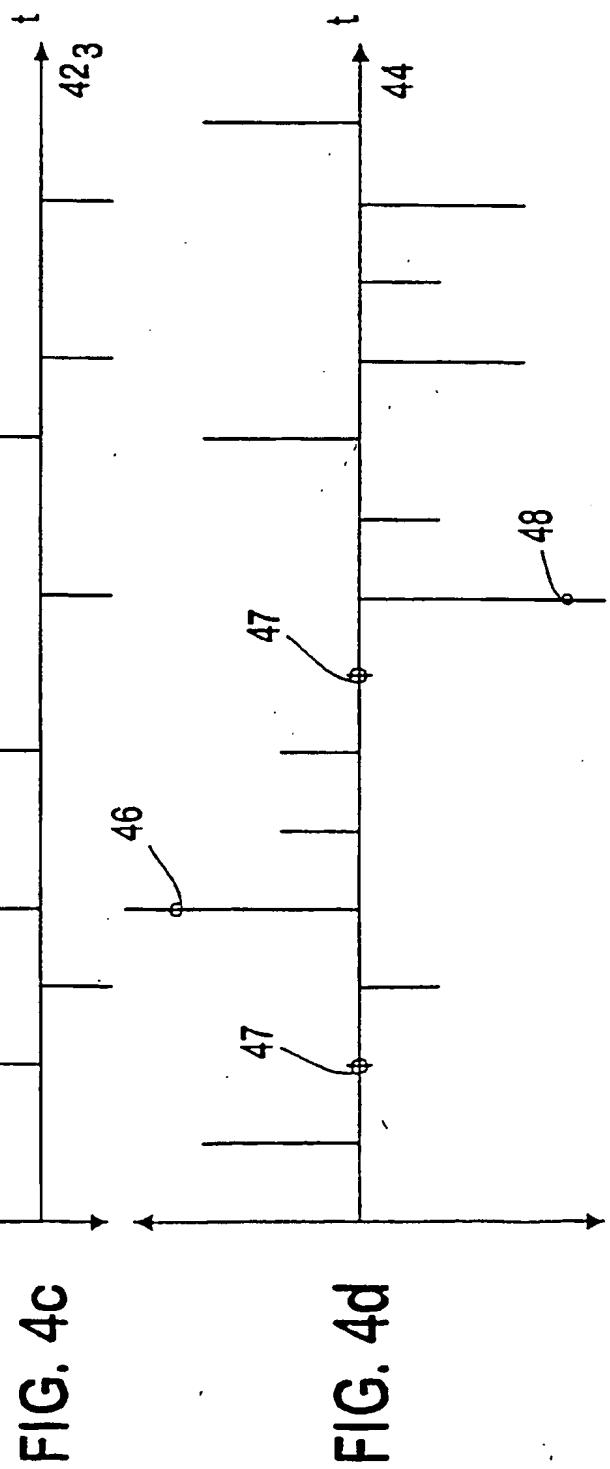
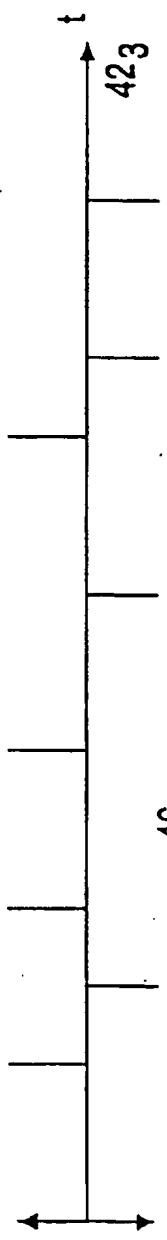
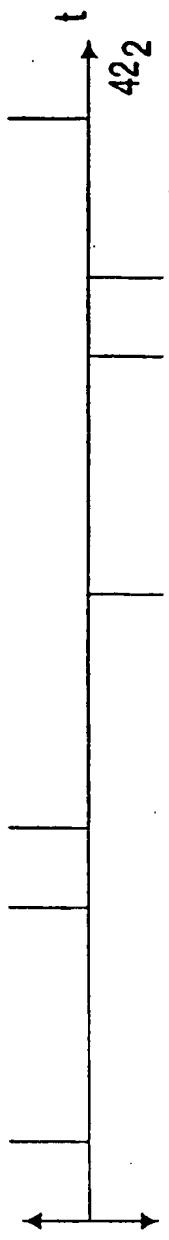
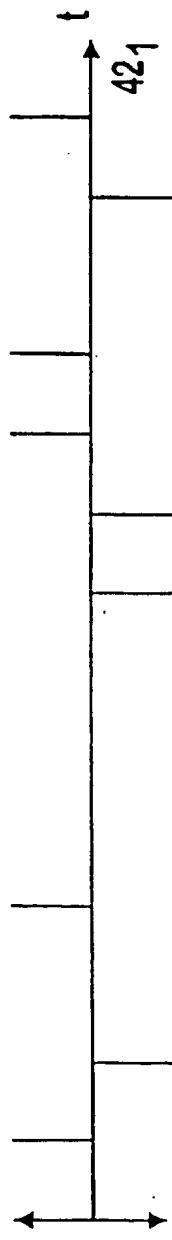


FIG. 2
PRIOR ART

FIG. 3
PRIOR ART





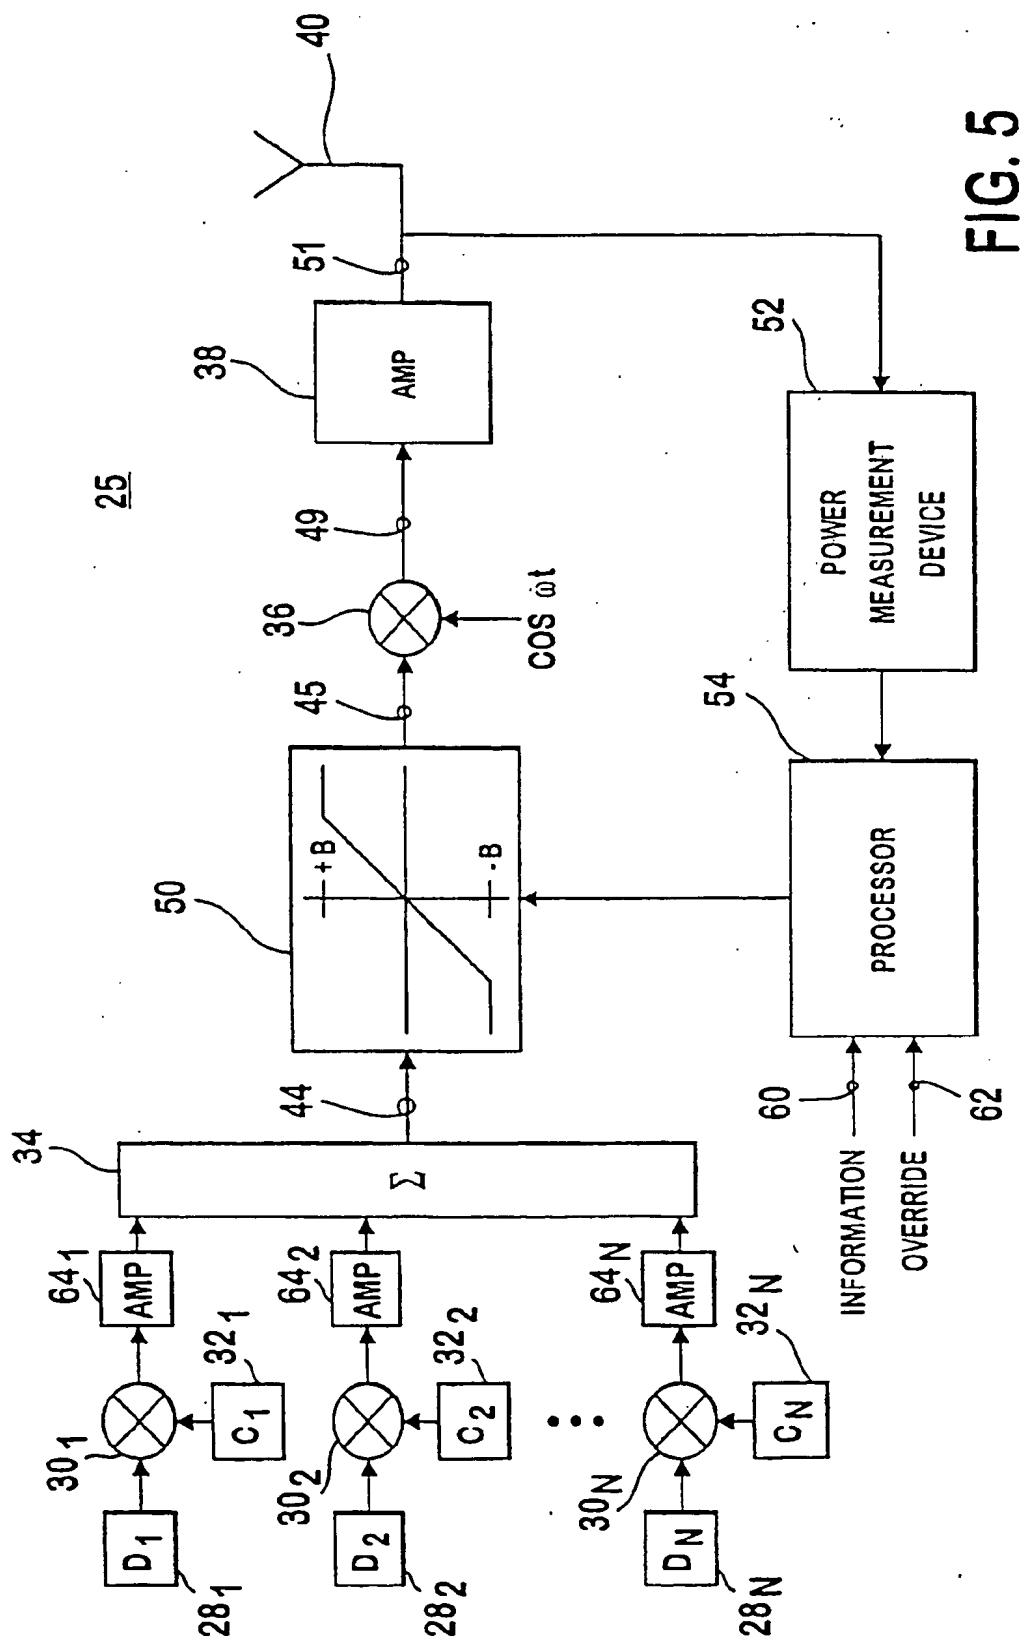
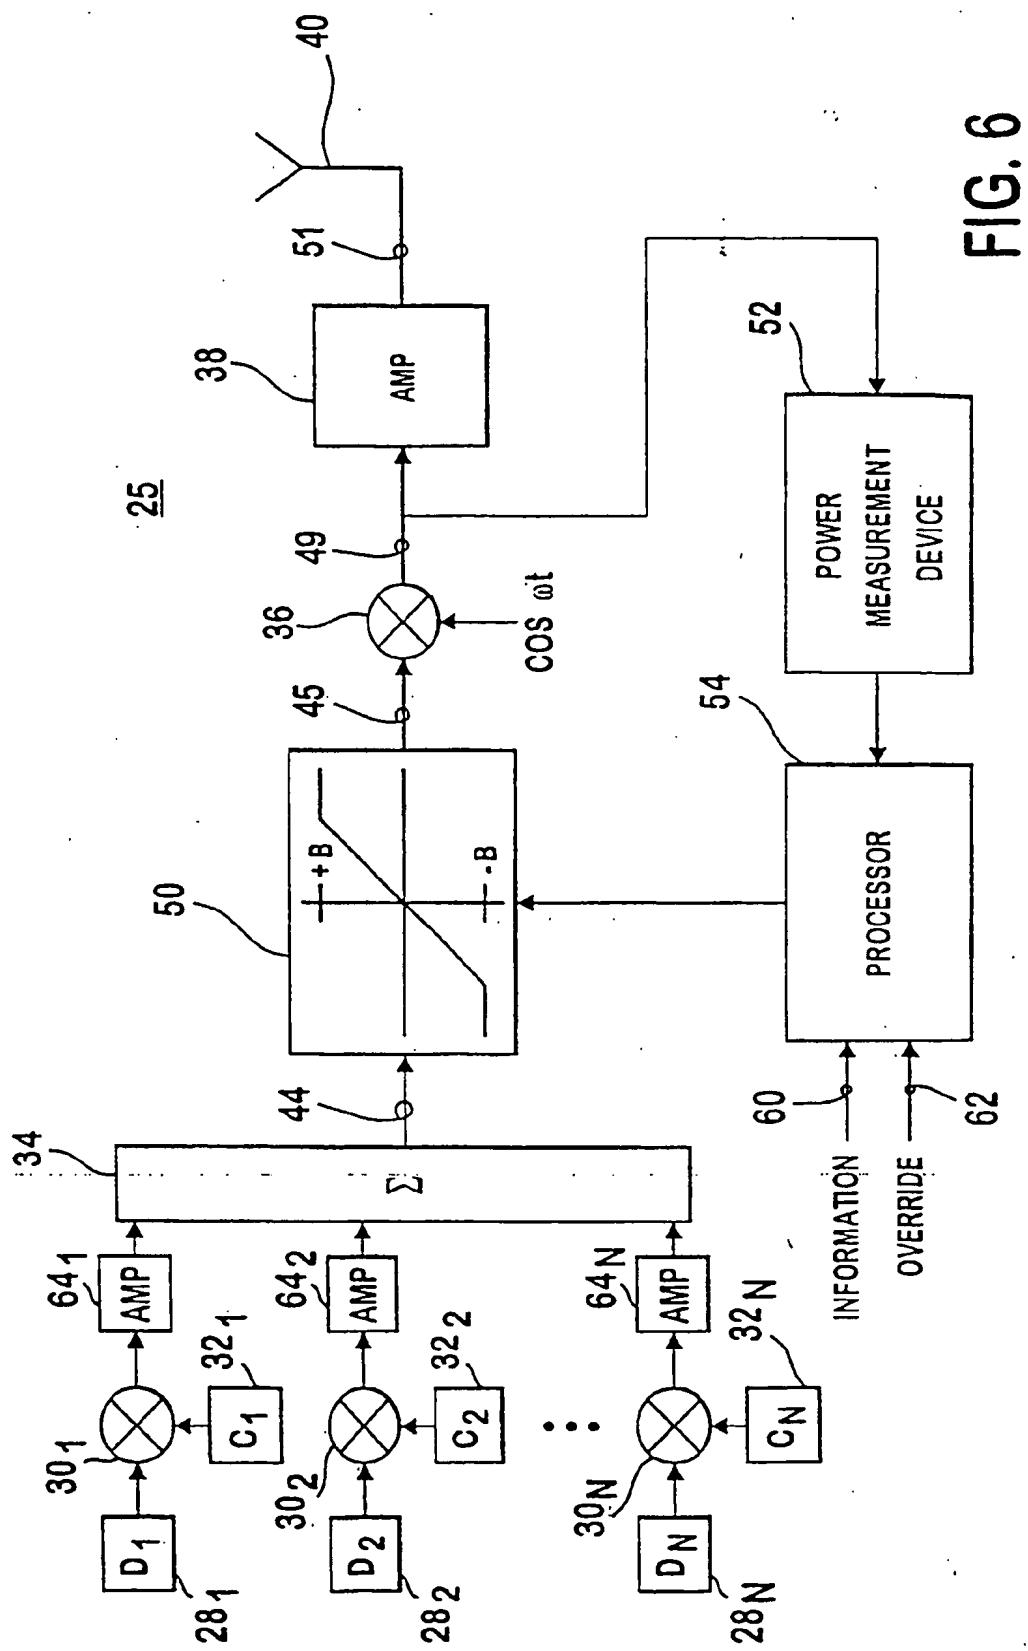


FIG. 5



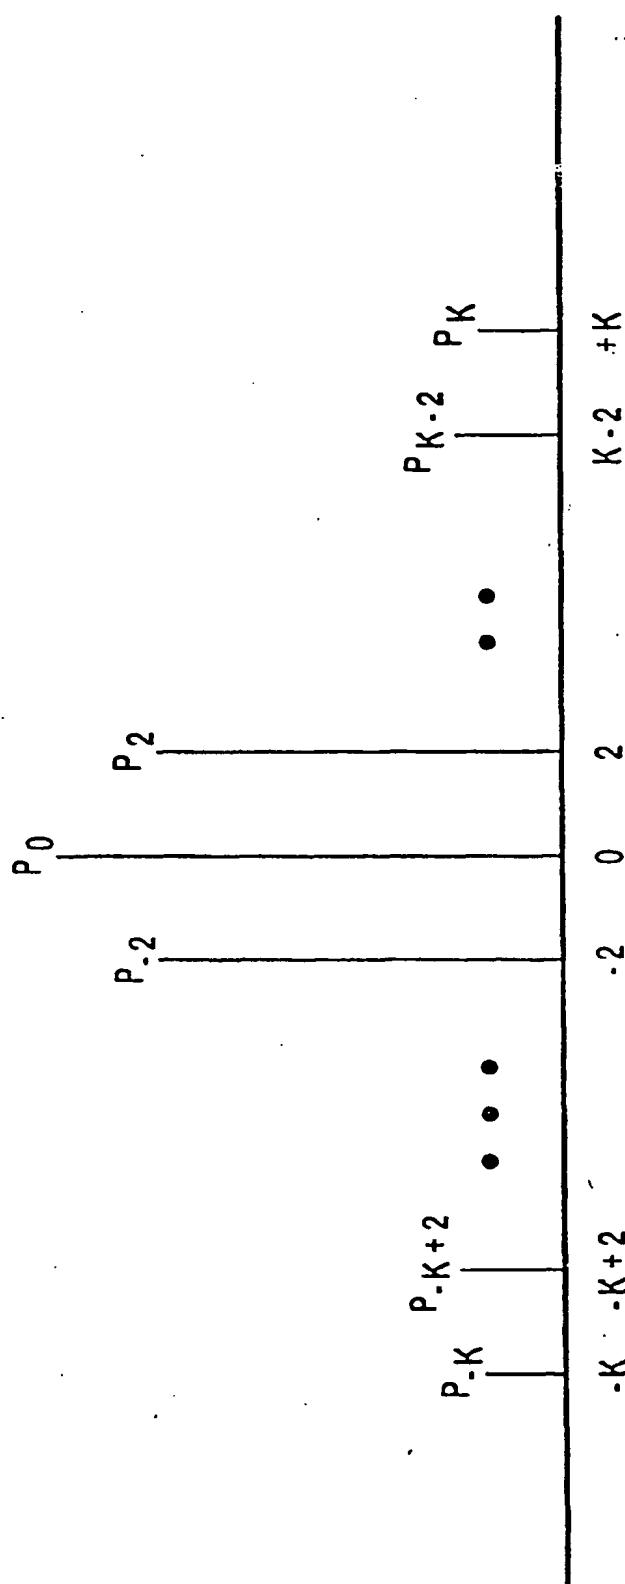


FIG. 7

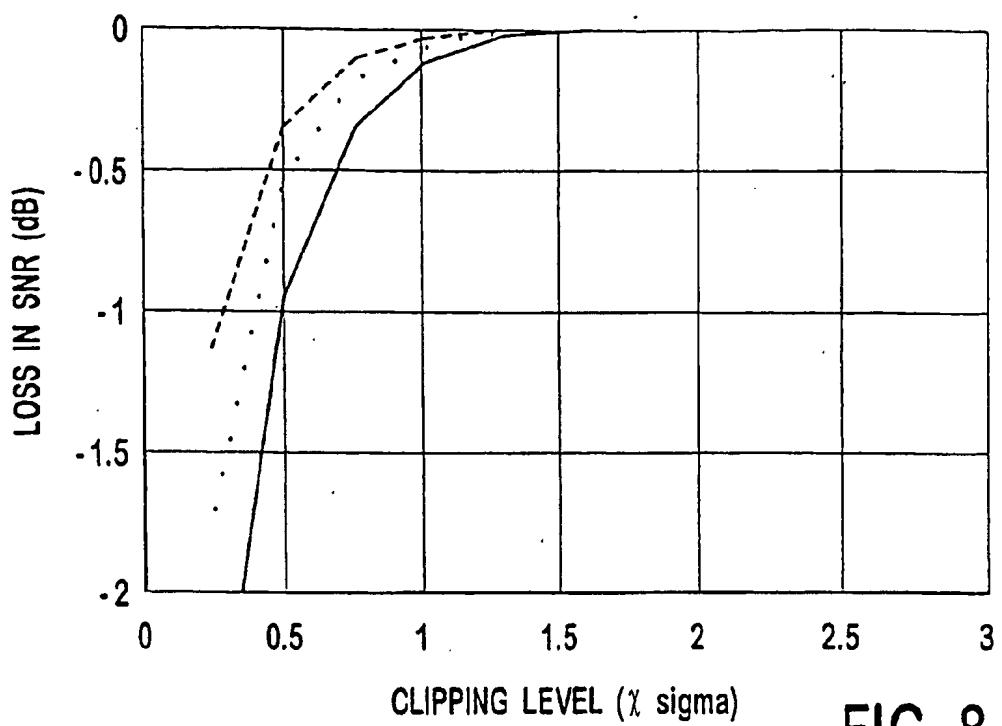


FIG. 8


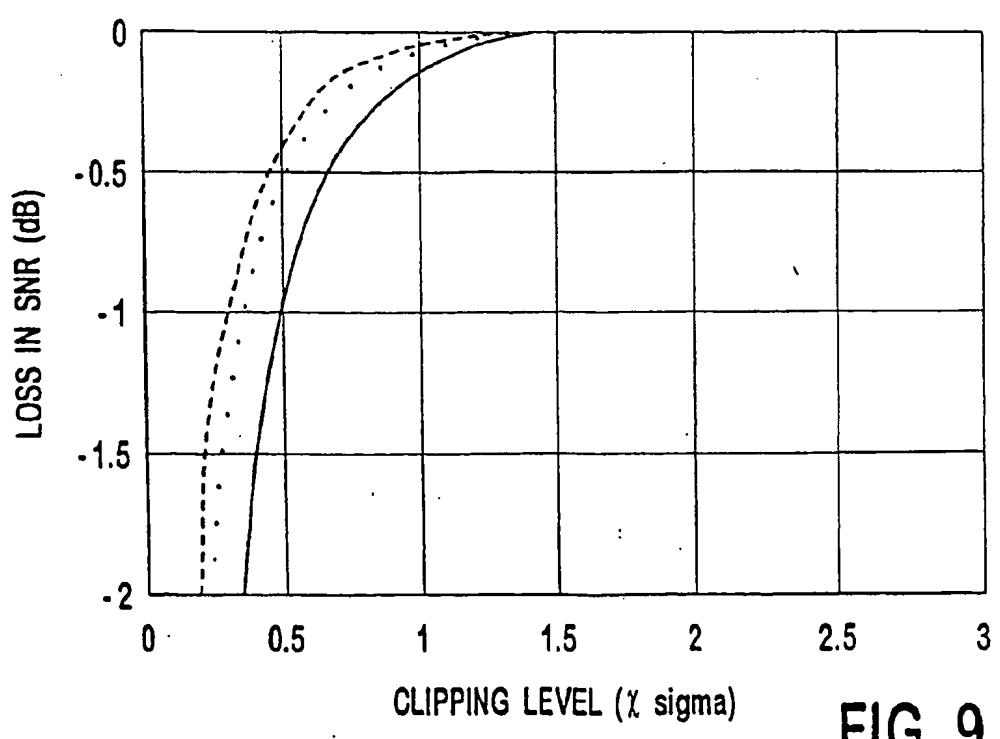


FIG. 9

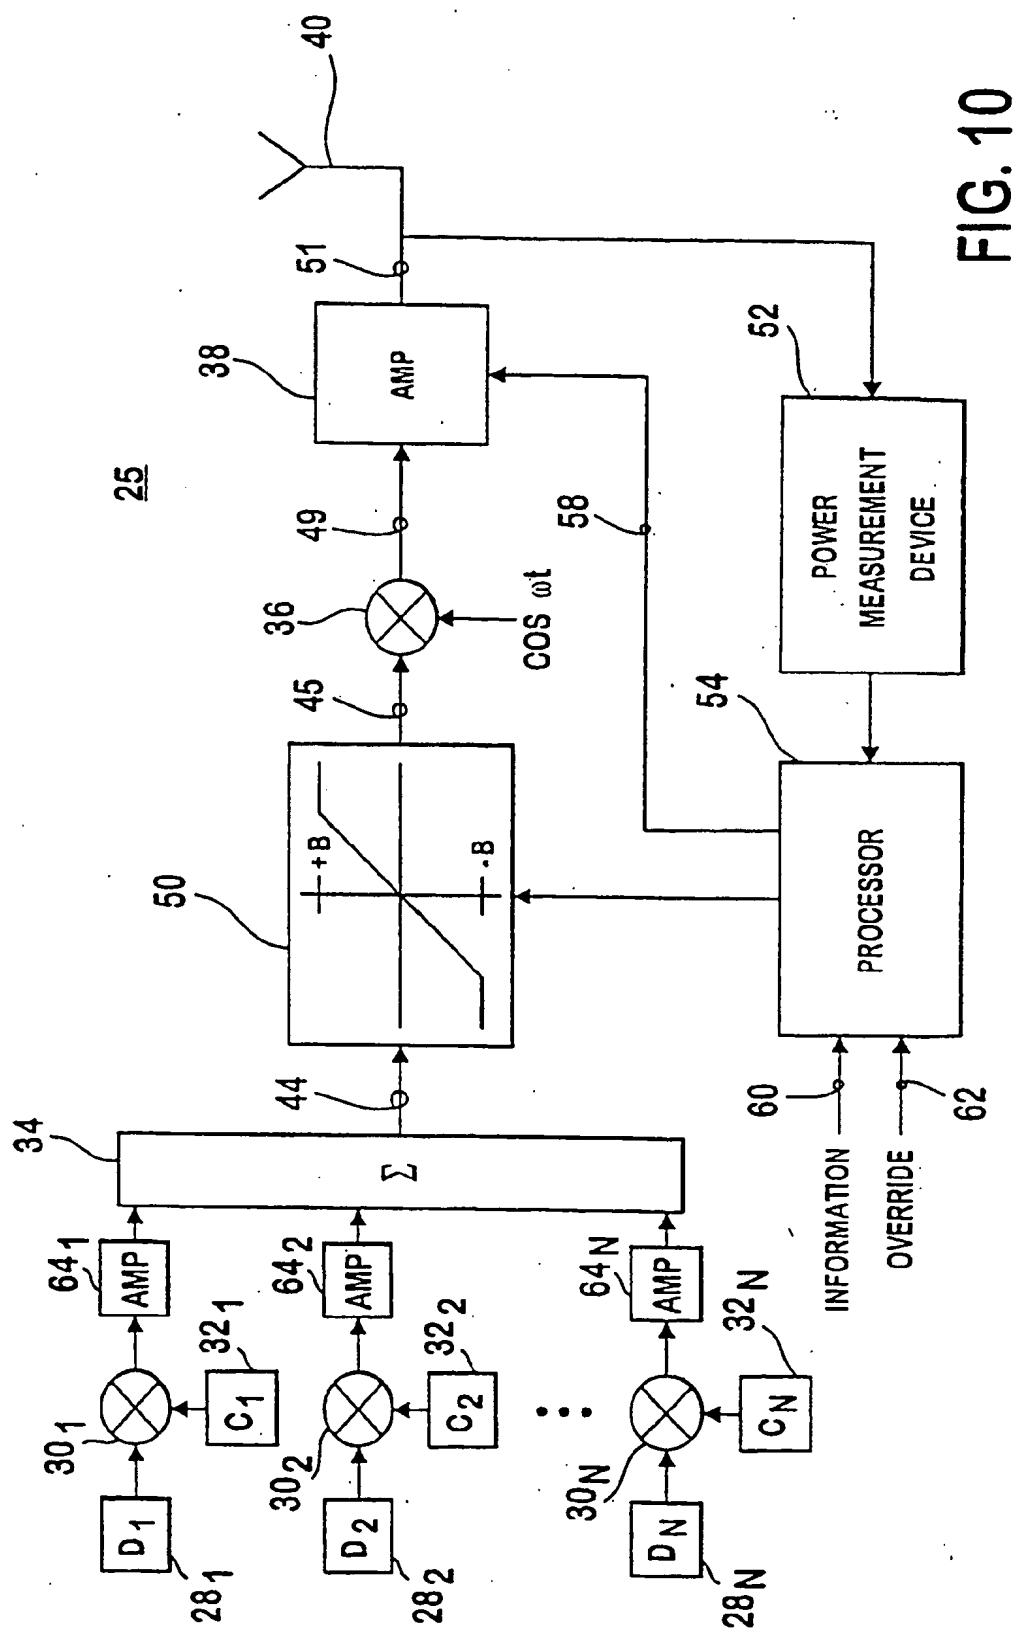

自適應射頻放大器預限制器

攝錄

本發明系於 CDMA 傳輸系統中，減少傳輸信號中之暫態峰值。多個擴譜數據信號系組合成一組合信號，其具有波動功率電平，對應於該數據信號之組合。調制該組合信號以產生一 RF 信號而傳輸。該組合信號之平均功率系於一選擇的時間周期上測量。至少部分基於該測量的功率上，該組合信號功率電平系被自適應限制至一計算的功率電平。